



US012405402B2

(12) **United States Patent**
Koruga

(10) **Patent No.:** **US 12,405,402 B2**

(45) **Date of Patent:** **Sep. 2, 2025**

(54) **OPTICAL FILTER BASED ON
LIGHT-MATTER COUPLING IN
QUANTUM-CONFINED CAVITY SPACES**

(71) Applicant: **Fieldpoint (Cyprus) Limited**, Nicosia
(CY)

(72) Inventor: **Djuro Koruga**, Belgrade (RS)

(73) Assignee: **Fieldpoint (Cyprus) Limited**, Nicosia
(CY)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 753 days.

(21) Appl. No.: **17/595,615**

(22) PCT Filed: **Jun. 12, 2019**

(86) PCT No.: **PCT/EP2019/065365**

§ 371 (c)(1),

(2) Date: **Nov. 19, 2021**

(87) PCT Pub. No.: **WO2020/249207**

PCT Pub. Date: **Dec. 17, 2020**

(65) **Prior Publication Data**

US 2022/0260755 A1 Aug. 18, 2022

(51) **Int. Cl.**

G02B 1/00 (2006.01)

G02B 5/20 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **G02B 1/005** (2013.01); **G02B 5/20**
(2013.01); **G11C 13/025** (2013.01); **B82Y**
20/00 (2013.01); **G02B 2207/101** (2013.01)

(58) **Field of Classification Search**

CPC **G02B 1/005**; **G02B 5/20**; **G02B 2207/101**;
G11C 13/025; **B82Y 20/00**; **H01L**
2031/0344; **C01B 32/156**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,640,705 A 6/1997 Koruga
2008/0286453 A1* 11/2008 Koruga A61K 8/671
351/44

(Continued)

FOREIGN PATENT DOCUMENTS

CN 109564307 A 4/2019
WO 9604958 A1 2/1996

(Continued)

OTHER PUBLICATIONS

Office Action issued in Egyptian Patent Application No. PCT
1914/2021, undated.

(Continued)

Primary Examiner — Karen Kusumakar

Assistant Examiner — Shawn Shaw Muslim


(74) *Attorney, Agent, or Firm* — Barnes & Thornburg
LLP

(57)

ABSTRACT

An optical filter may comprise a layer structure comprising
a plurality of layers stacked in a thickness direction of the
layer structure and including: a plurality of nano-photonics
layers formed of a nano-photonics material with icosahedral
or dodecahedral symmetry and at least one substrate layer
formed of an optically transparent material, wherein one of
the at least one substrate layer is positioned between two of
the plurality nano-photonics layers in the thickness direction
of the layer structure.

25 Claims, 26 Drawing Sheets

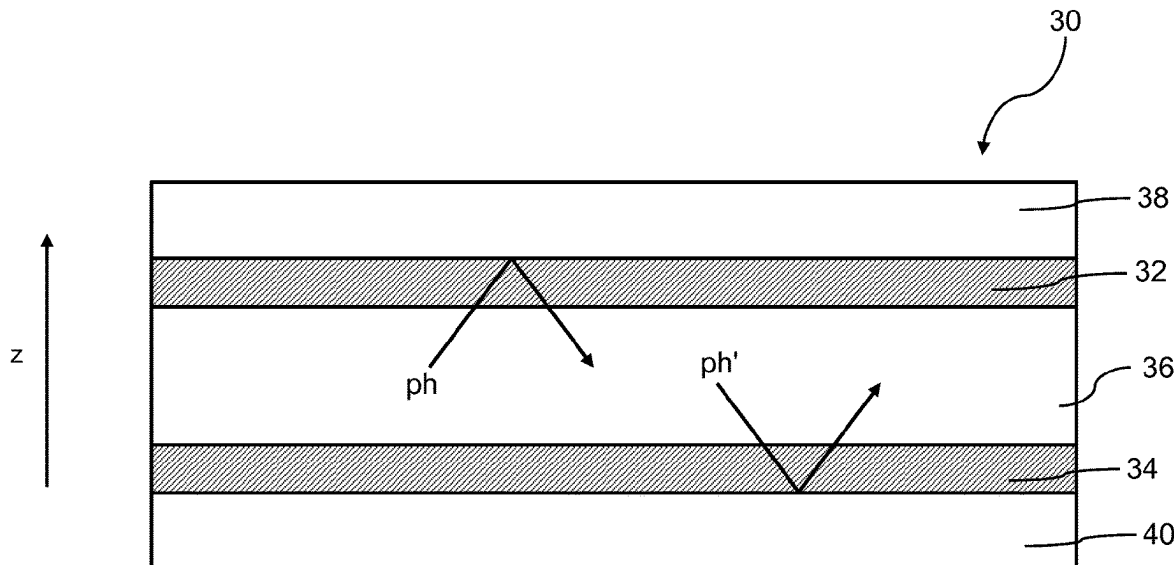

(51) **Int. Cl.**

GIIC 13/02 (2006.01)
B82Y 20/00 (2011.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2014/0225063 A1* 8/2014 Klem H10K 30/10
 257/14
 2017/0276849 A1* 9/2017 Langner G01J 3/26

FOREIGN PATENT DOCUMENTS

WO 9604959 A1 2/1996
 WO 2016/136722 A1 9/2016
 WO 2017211420 A1 12/2017

OTHER PUBLICATIONS

Office Action issued by the Indian Patent Office dated Mar. 28, 2022, application No. 202217000853.

Office Action issued by the Eurasian Patent Organization dated Aug. 16, 2022, application No. 202193106.

Office Action dated Nov. 8, 2022, issued by the Japanese Patent Office for Patent Application No. 2021-569920. English translation included.

Wang et al. "Recent advances on optical vortex generation", *Nanophotonics* 2018: 7(9), 1533-1556. English translation included.
 Auffeves, A., et al., "Strong Light-Matter Coupling, From Atoms to Solid-State Systems, Exciton-Polaritons in Bulk Semiconductors and in Confined Electron and Photon Systems", World Scientific, Chapter 2, 47 pages.

Carusotto, I., "Quantum fluids of light", arXiv:1205.6500v3, [cond-mat.quant-gas], Oct. 17, 2012, 76 pages.

Castelletto, S., et al., "A silicon carbide room-temperature single-photon source", *Nature Materials, Letters*, Published Online: Nov. 17, 2013, pp. 1-6.

Dal Negro, L., "Light Transport through the Band-Edge States of Fibonacci Quasicrystals", *Physical Review Letters*, vol. 90, No. 5, week ending Feb. 7, 2003, pp. 1-4.

Kavokin, A., et al., "Microcavities", Second Edition, Oxford Science Publications, pp. 208-217.

Lounis, B., et al., "Single photons on demand from a single molecule at room temperature", *Letters to Nature*, vol. 407, Sep. 28, 2000, pp. 491-493.

Koruga, D., "Hyperpolarized Light, Fundamentals of Nanobiomedical Photonics", Zepter Book World, 2018, pp. 19-22, 33-39, 43-47, 159-166.

Michler, P., et al., "Quantum correlation among photons from a single quantum dot at room temperature", *Letters to Nature*, vol. 406, Aug. 31, 2000, pp. 968-970.

Moradi, A., "Electromagnetic wave propagation in a random distribution of C60 molecules", *Physics of Plasmas*, (1994-present), 21, 4 pages.

Merino, P., et al., "Exciton dynamics of C60-based single-photon emitters explored by Hanbury Brown-Twiss scanning tunnelling microscopy", *Nature Communications*, Published Sep. 29, 2015, pp. 1-6.

Zhao, G. L., et al., "Electronic structure of C60 semiconductors under controlled doping with B, N, and Co atoms", *Science Direct, Diamond and Related Materials*, 7 (2008), pp. 749-752.

Rotkin, V. V., et al., "Calculation of the Polariton Effect in the Fullerene Monolayer", *Fullerenes, Recent Advances in the Chemistry and Physics of Fullerenes and Related Materials*, vol. IV, PV 97-14, pp. 943-955 (Apr. 25, 1997).

Lof, R. W., et al., "Band Gap, Excitons, and Coulomb Interaction in Solid C60", *Physical Review Letters*, vol. 68, No. 26, Jun. 29, 1992, pp. 3924-3927.

Dresselhaus, M. S., et al., "Science of Fullerenes and Carbon Nanotubes", Academic Press, 2 pages.

Basche, TH., et al., "Photon Antibunching in the Fluorescence of a Single Dye Molecule Trapped in a Solid", *Physical Review Letters*, vol. 69, No. 10, Sep. 7, 1992, pp. 1516-1519.

Kuhnke, K., et al., "C60 Exciton Quenching near Metal Surfaces", *Physical Review Letters*, vol. 79, No. 17, Oct. 27, 1997, pp. 3246-3249.

Long, J. P., et al., "Photoelectron spectroscopy and dynamics of excitons in C60 and photopolymerized C60 films", *Chemical Physics Letters*, 347 (2001), pp. 29-35.

Kuhnke, K., et al., "Versatile optical access to the tunnel gap in a low-temperature scanning tunneling microscope", *AIP, Review of Scientific Instruments*, 81, 113102 (2010), 8 pages.

Wang, T., et al., "Excitation of propagating surface plasmons with a scanning tunnelling microscope", *Nanotechnology* 22 (2011) 175201, 6 pages.

Office Action issued by the Brazilian Patent Office for Application No. BR112021025135-9, dated Mar. 20, 2024.

Office Action issued by the Egyptian Patent Office for Application No. PCT 1914/2021, dated Oct. 27, 2024. For informational purposes only.

* cited by examiner

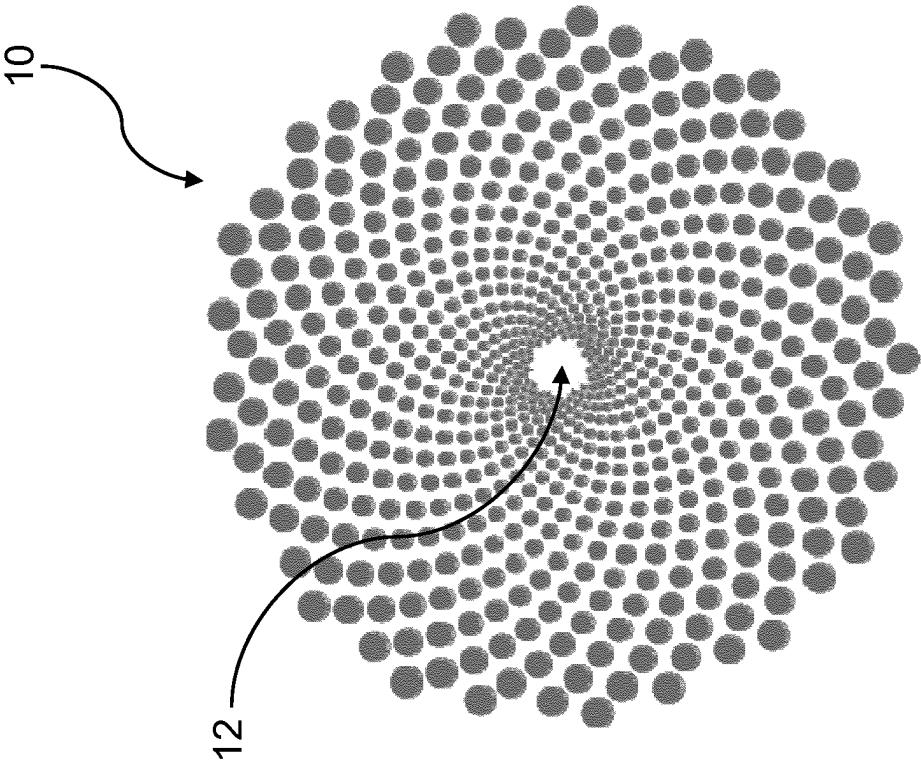


FIG. 1

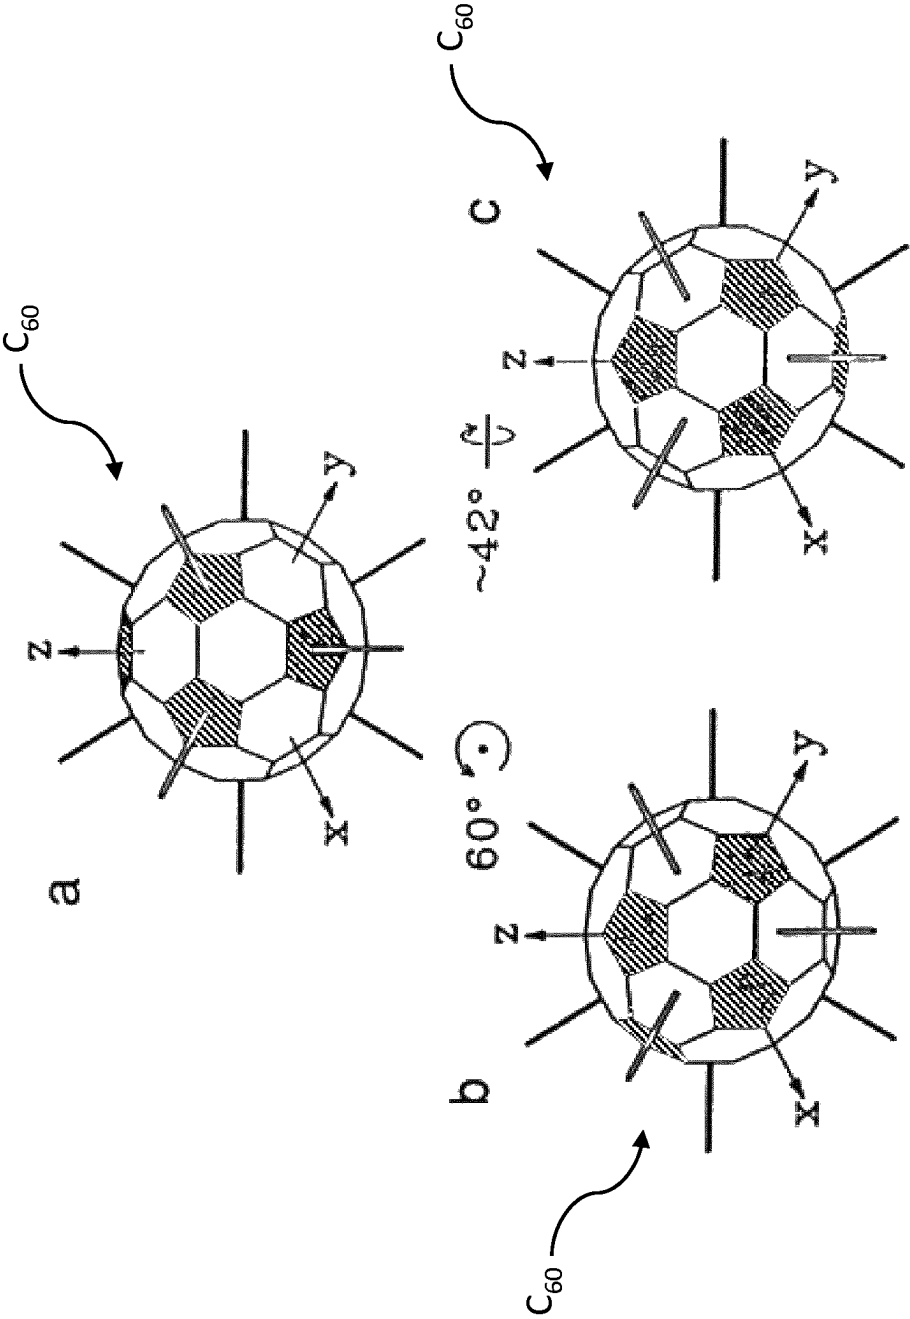
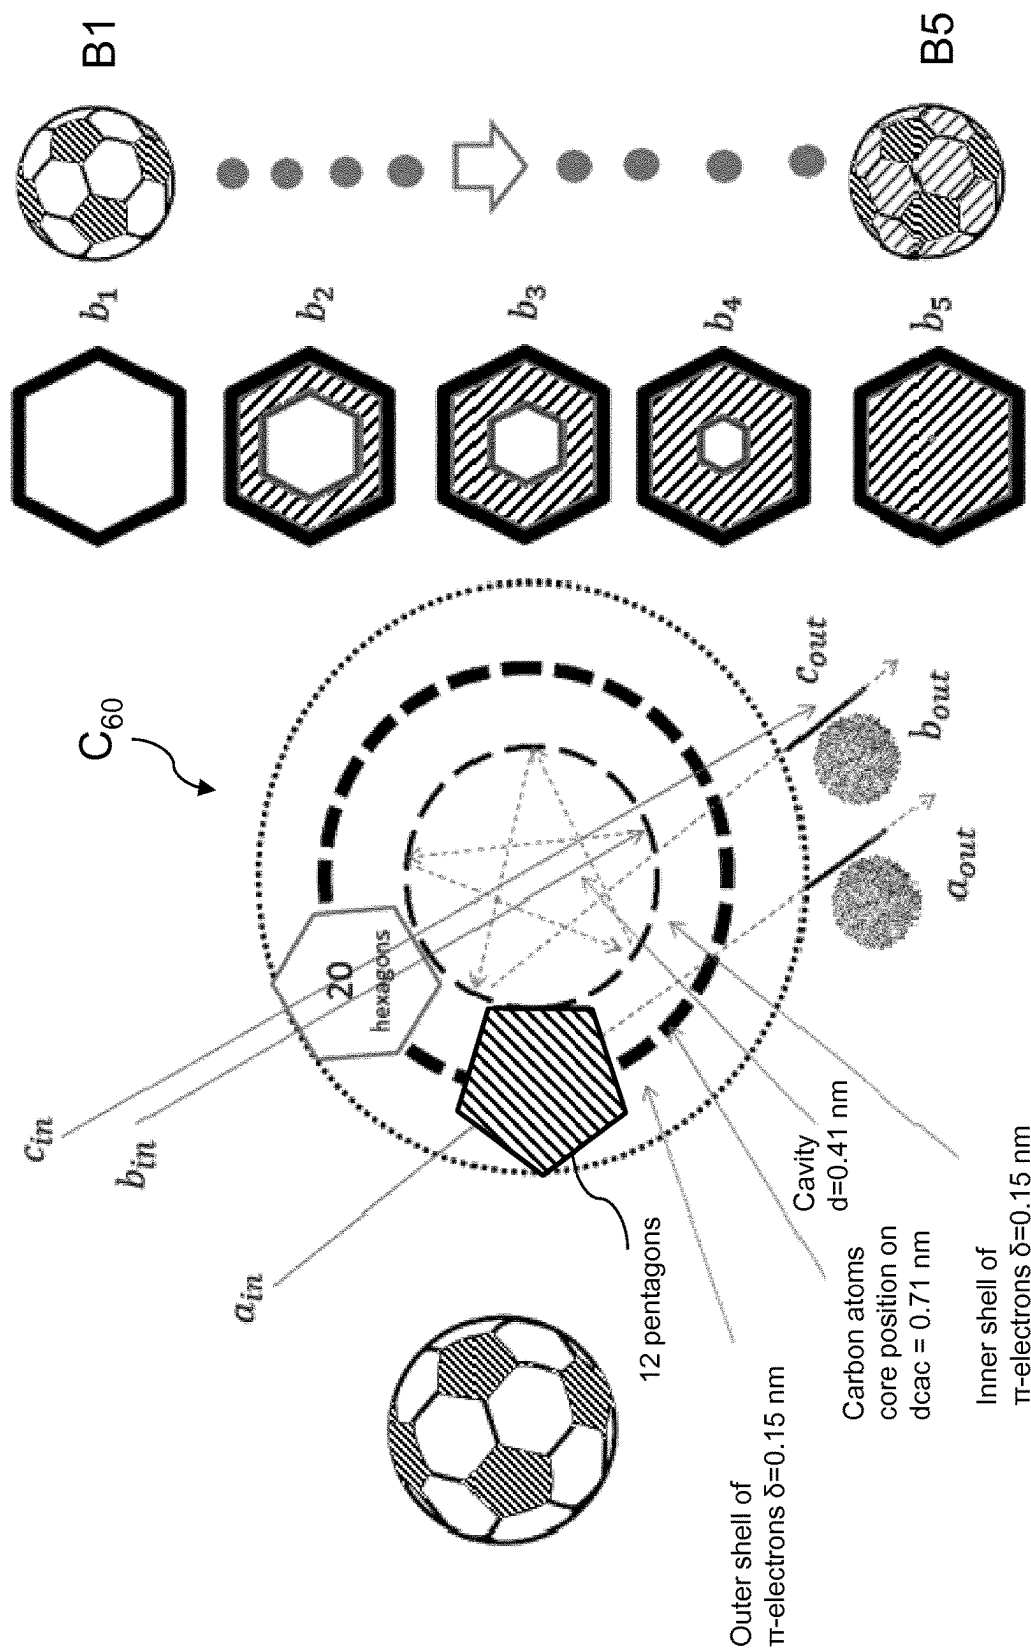


FIG. 2



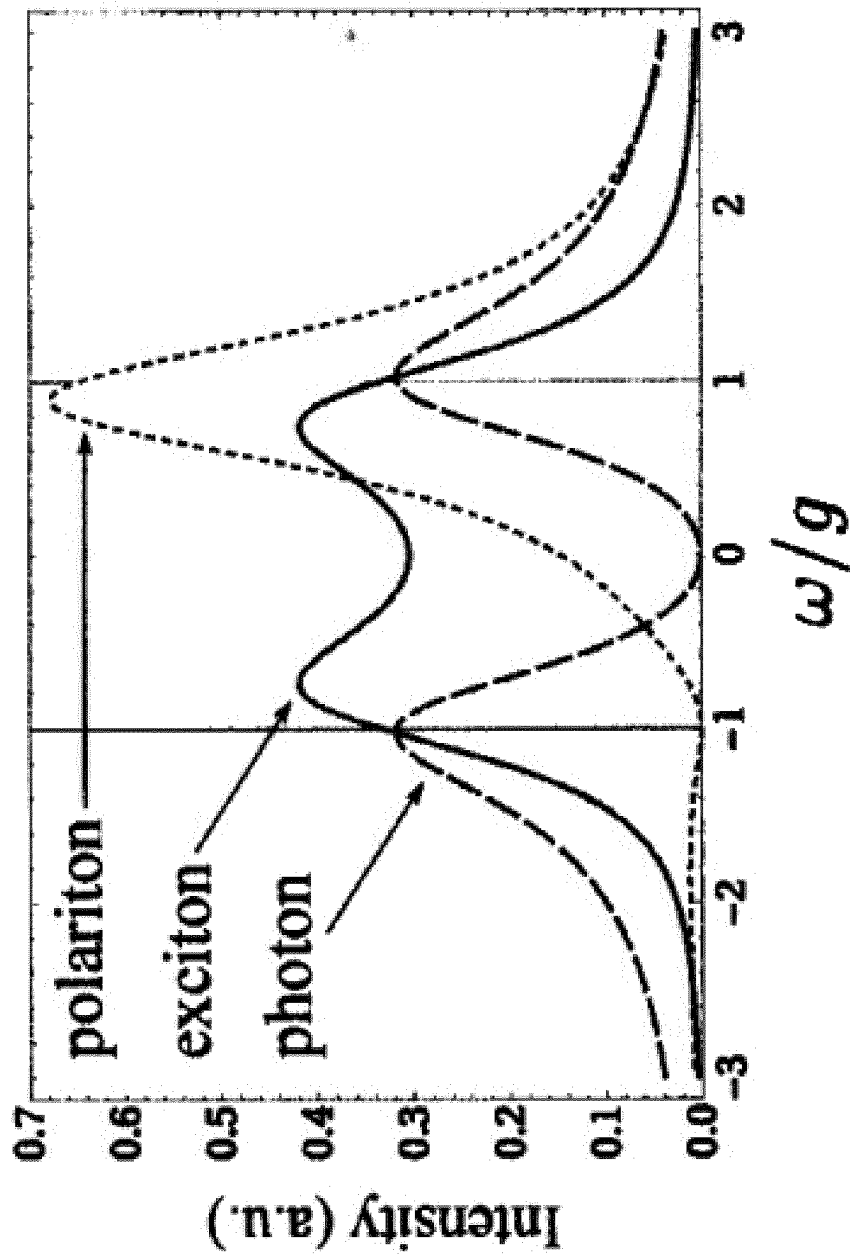


FIG. 4a

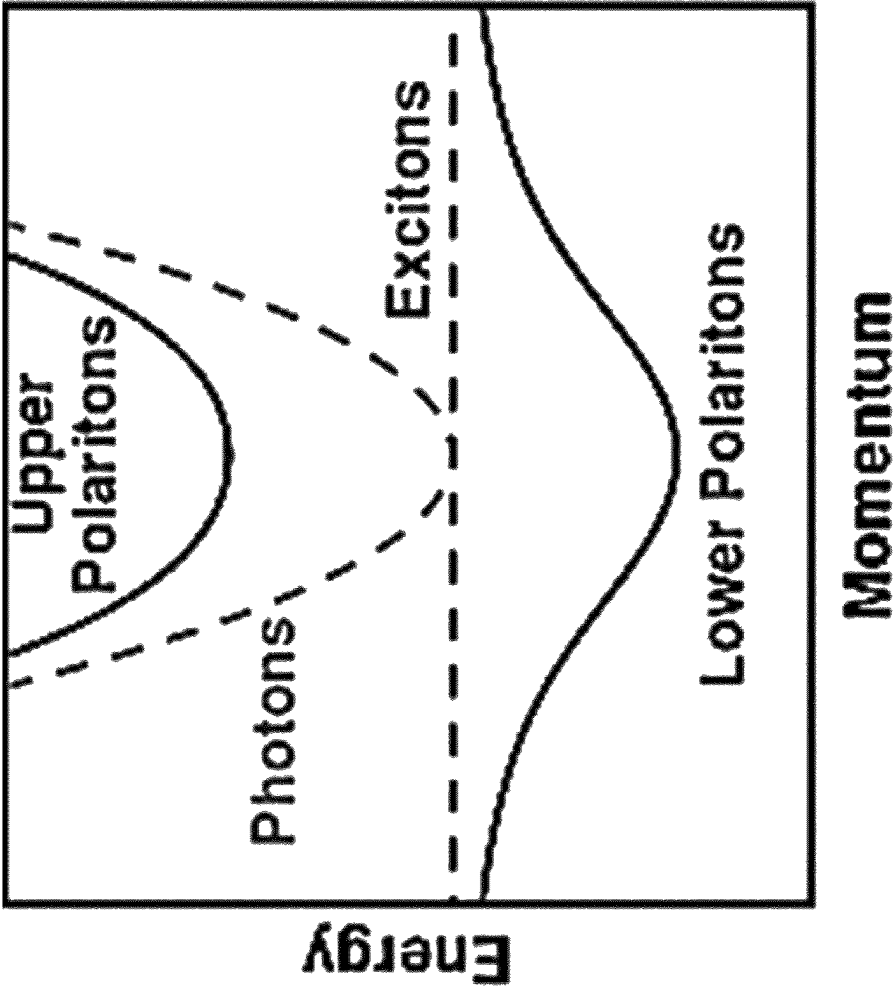


FIG. 4b

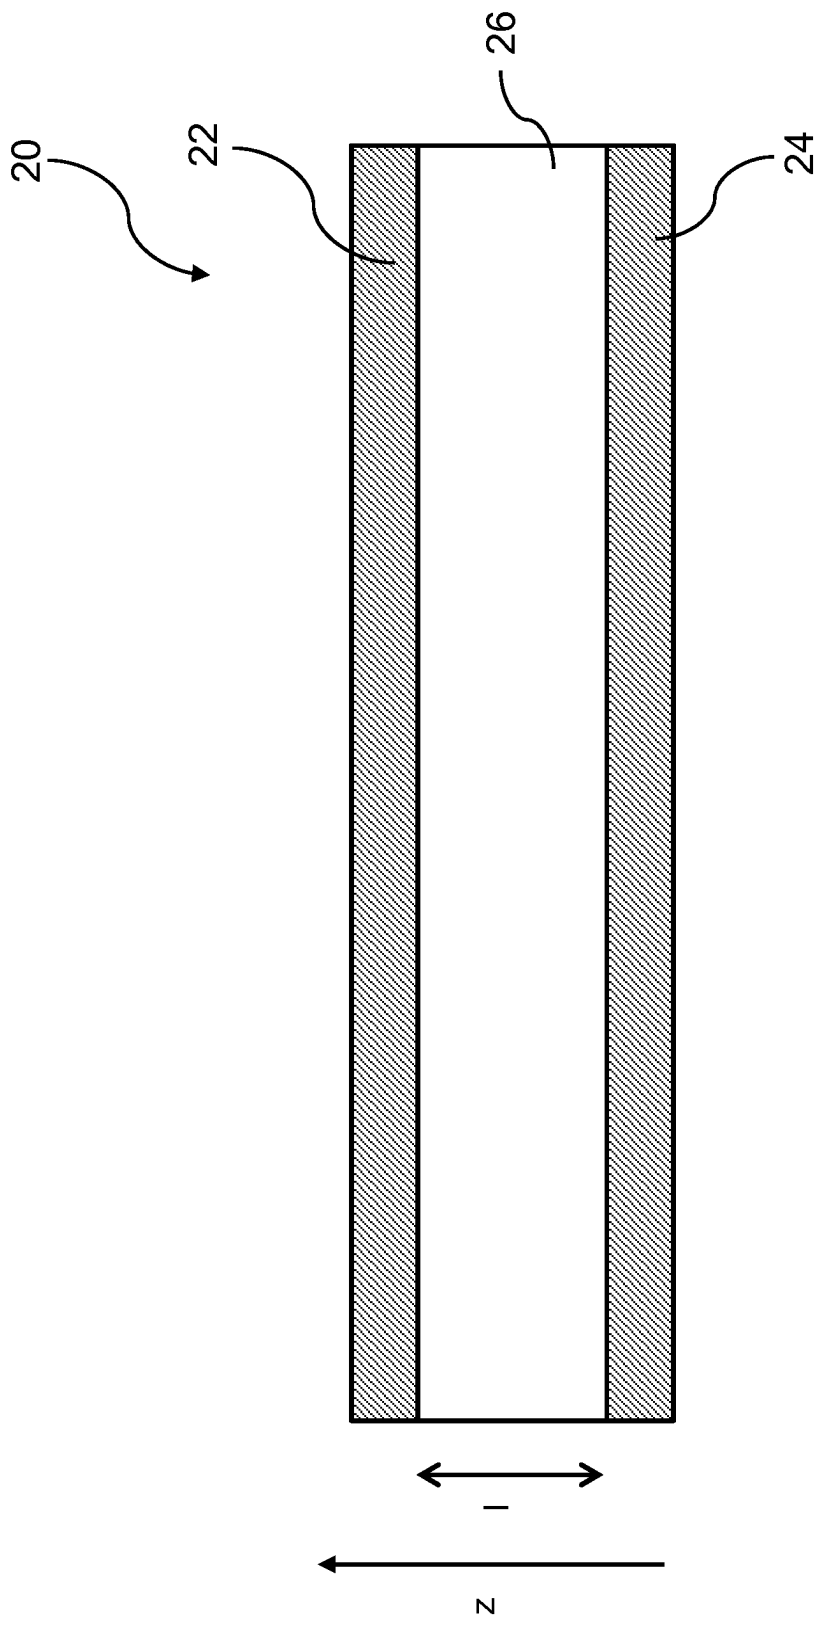


FIG. 5

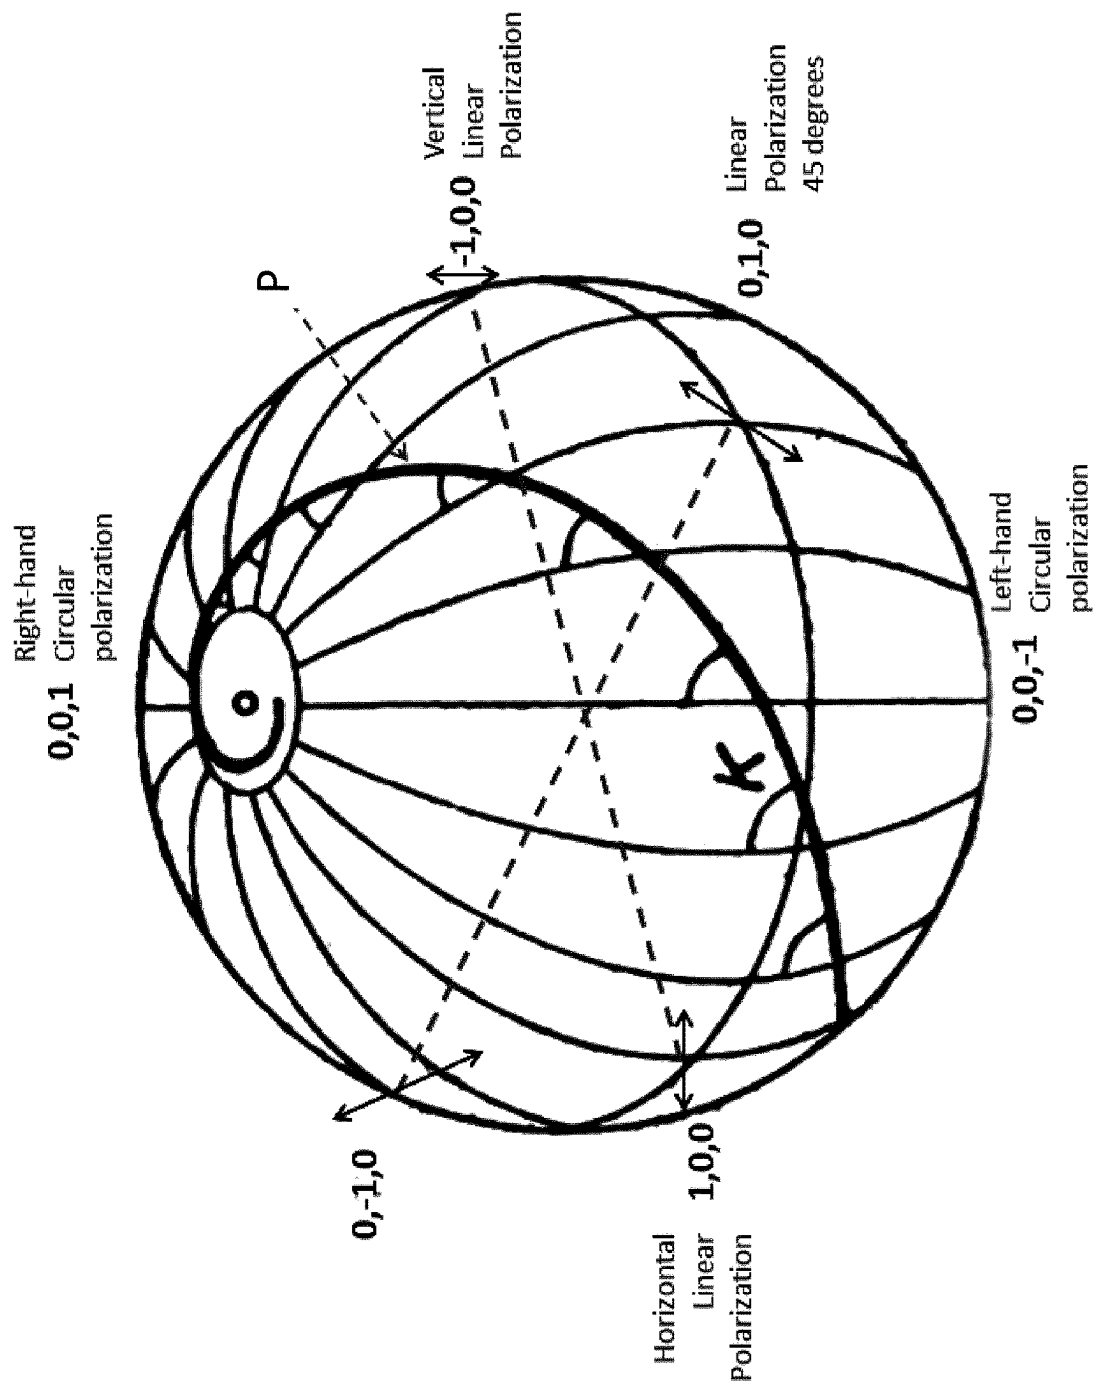


FIG. 6

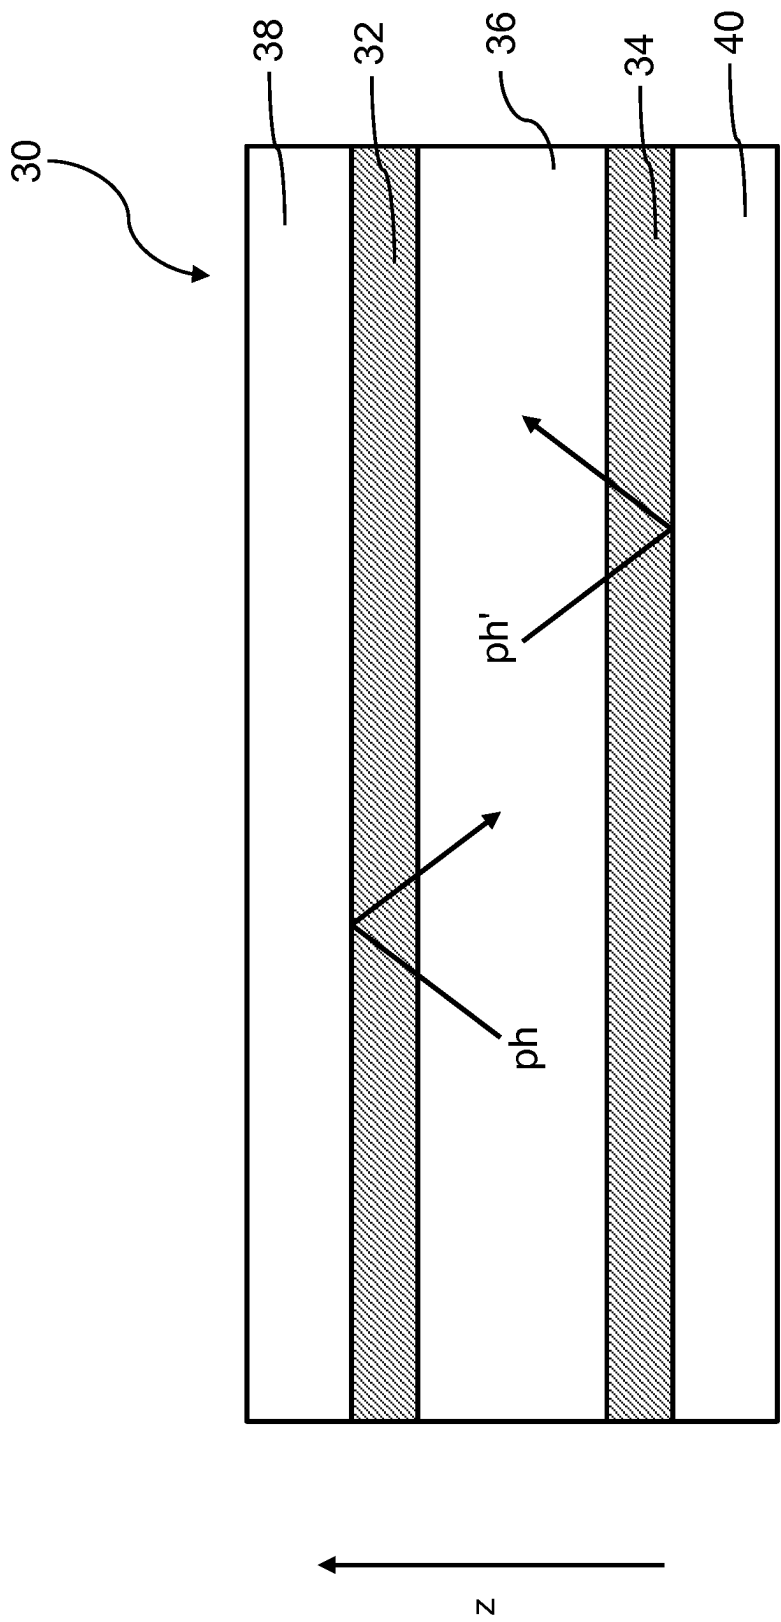


FIG. 7

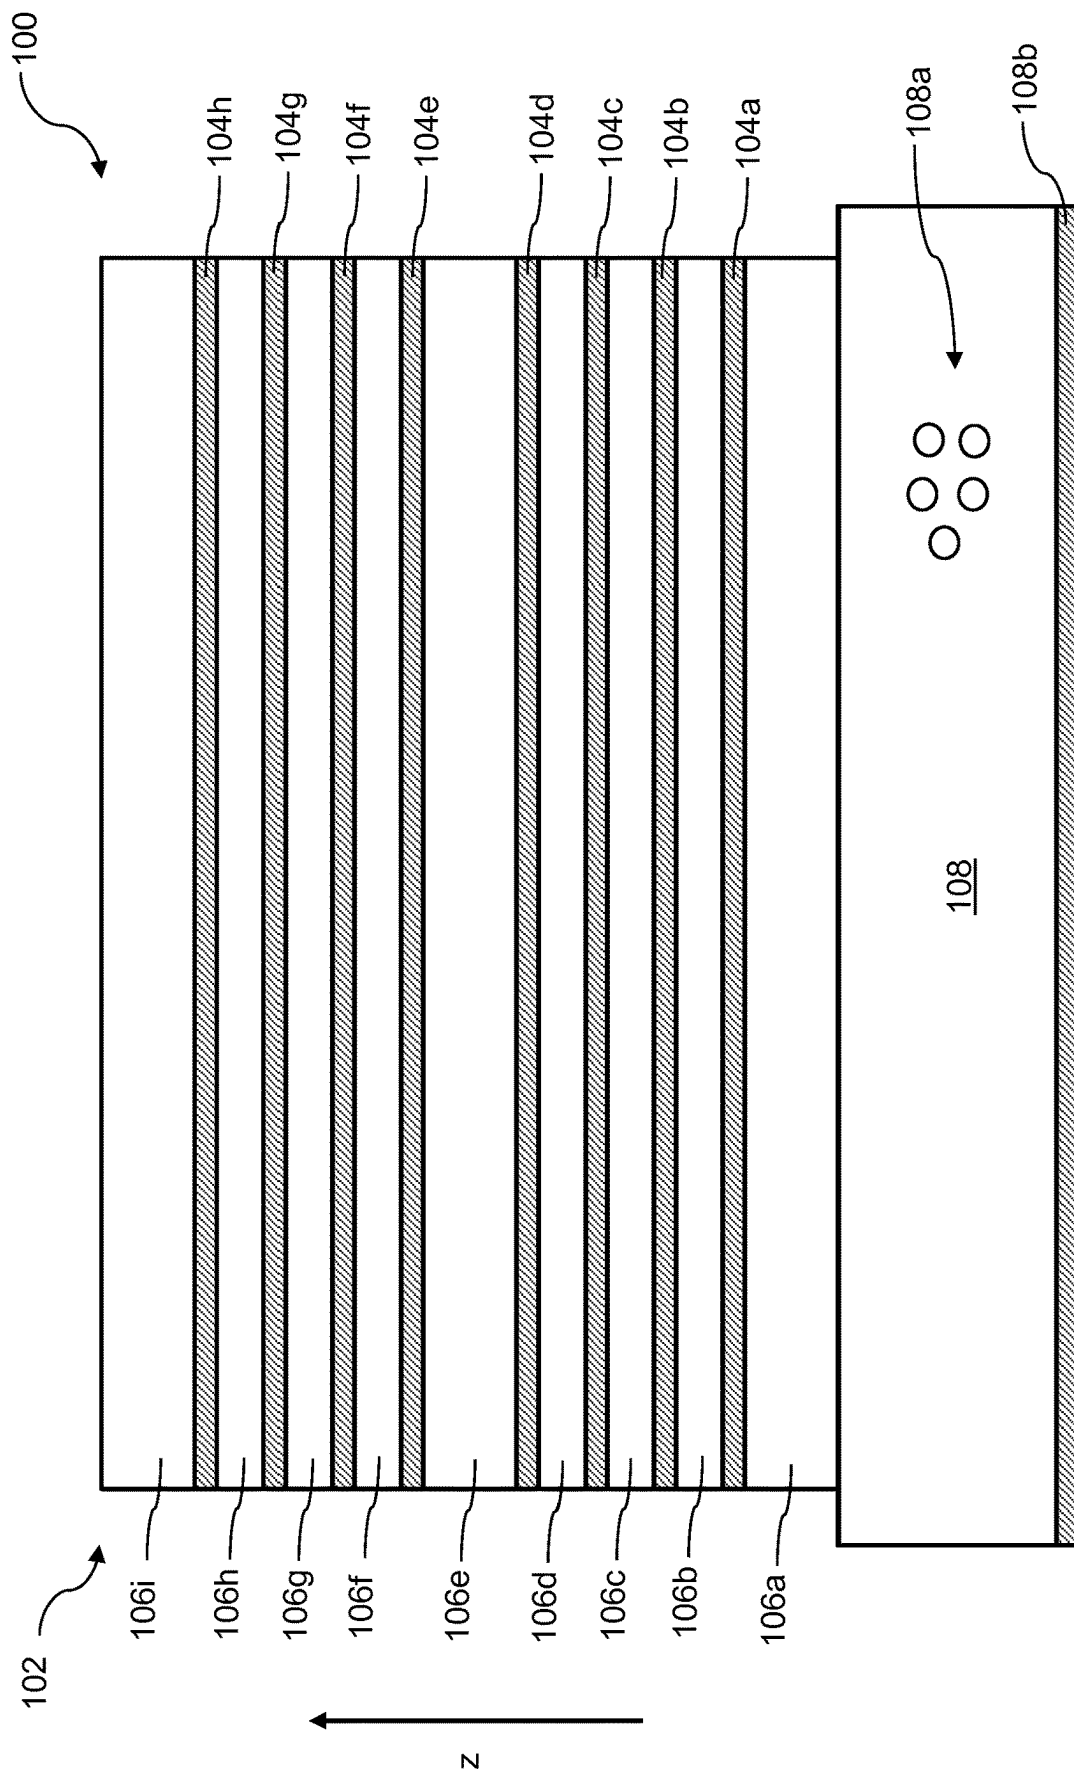


FIG. 8

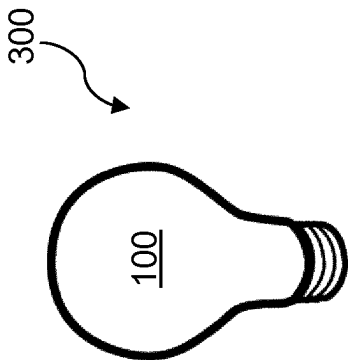


FIG. 9b

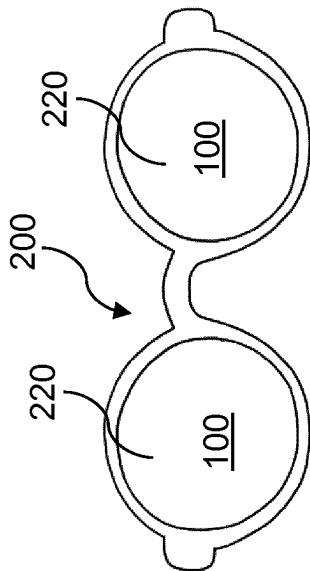


FIG. 9a

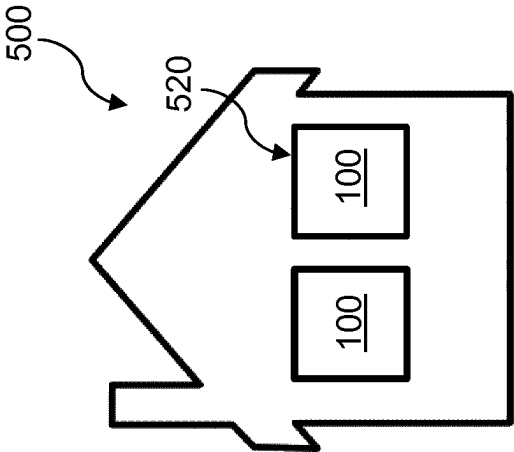


FIG. 9d

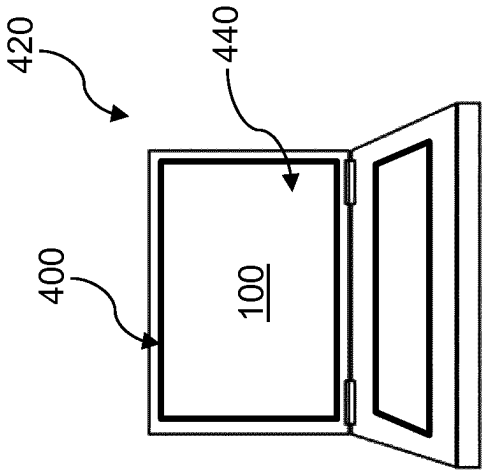


FIG. 9c

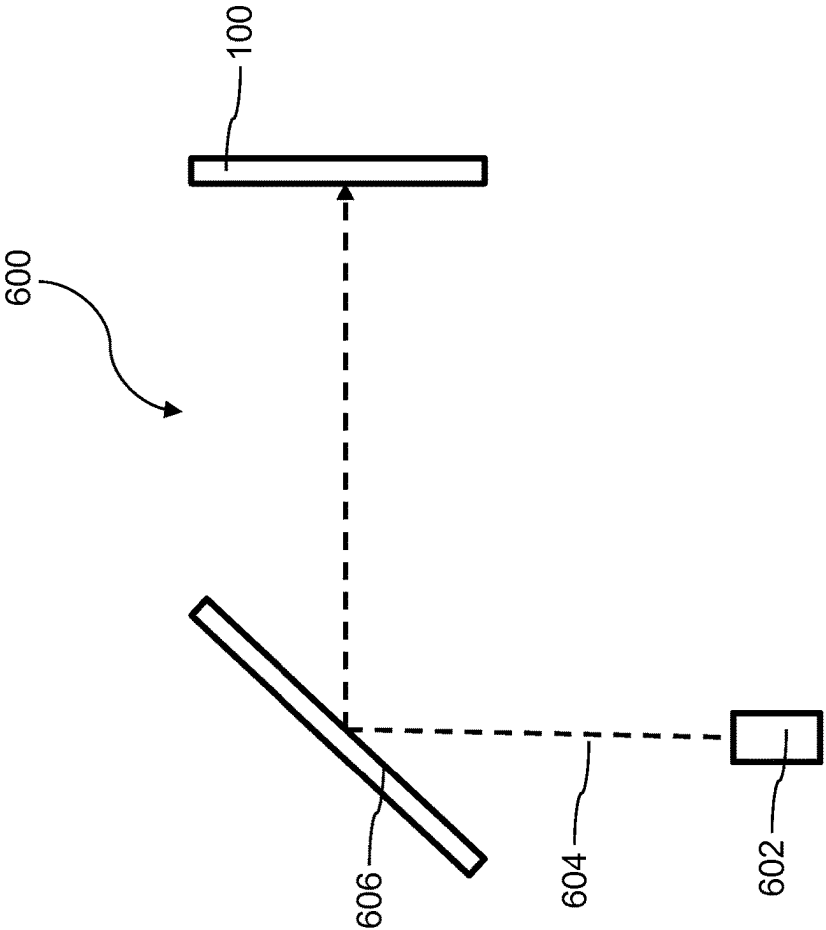


FIG. 10

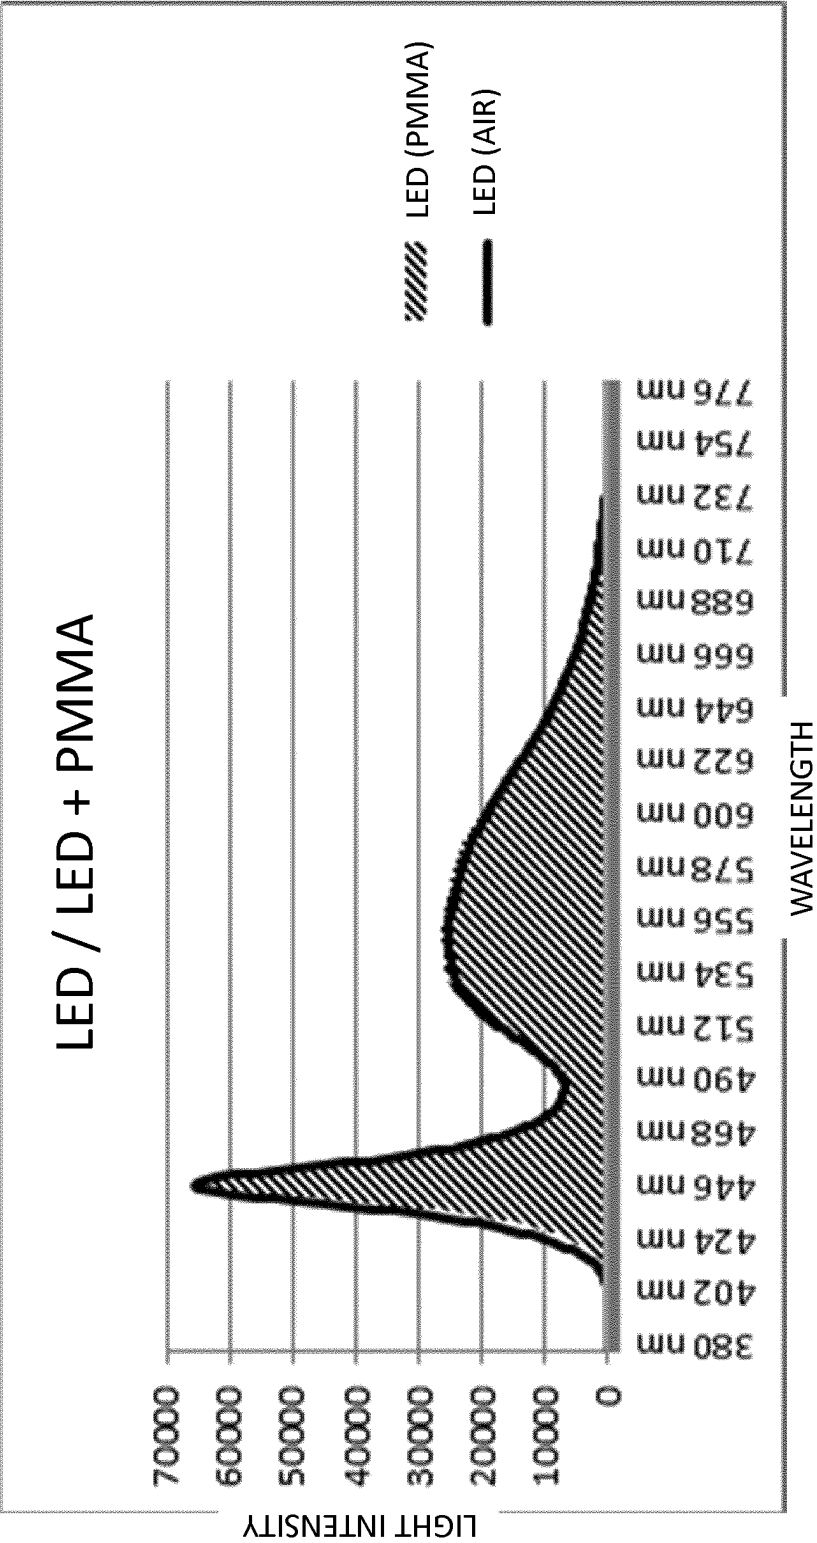


FIG. 11

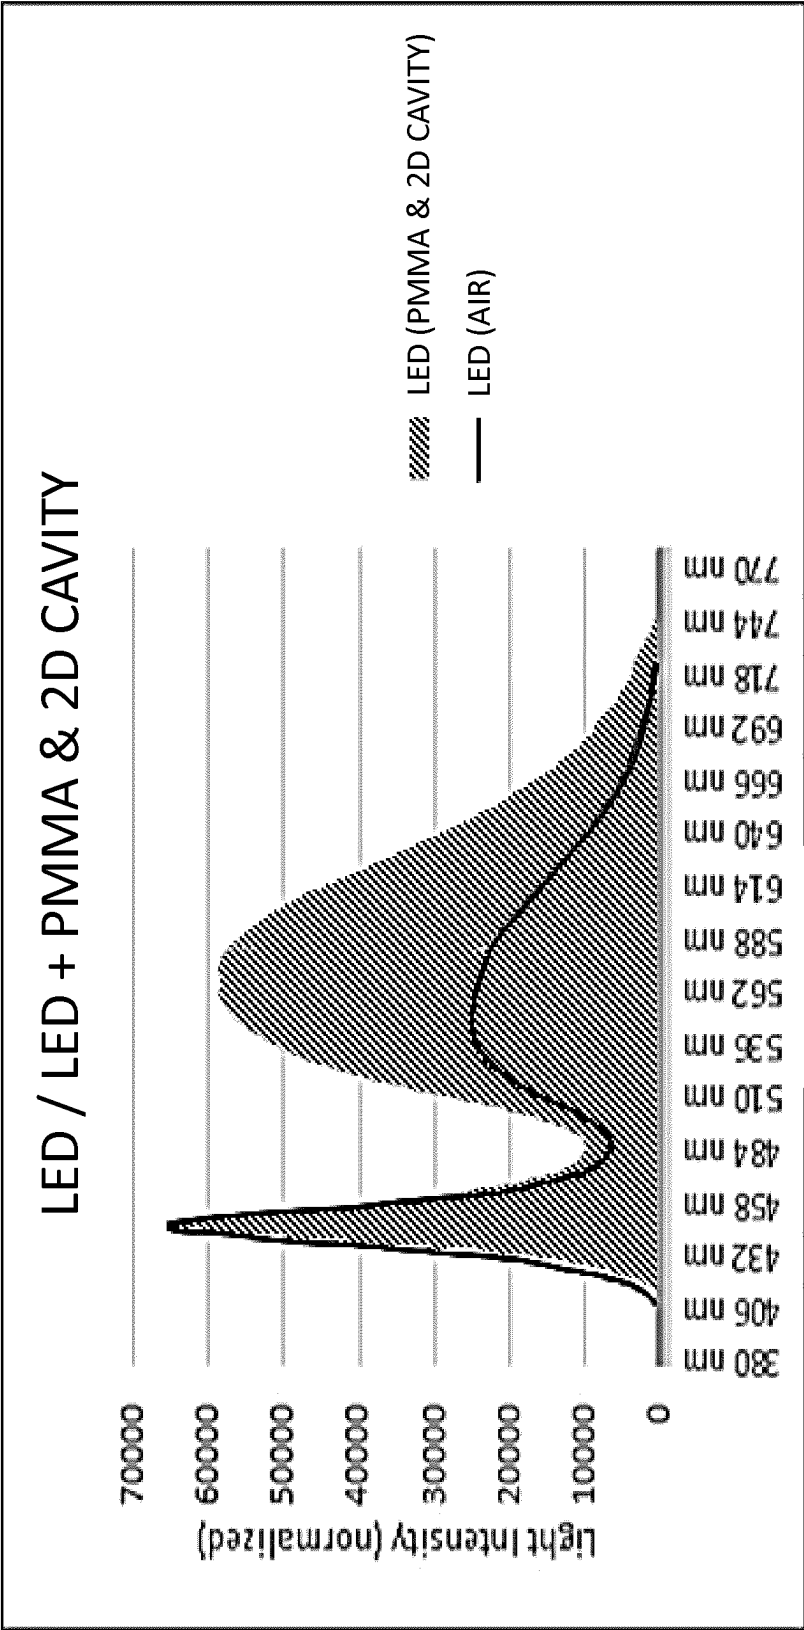


FIG. 12

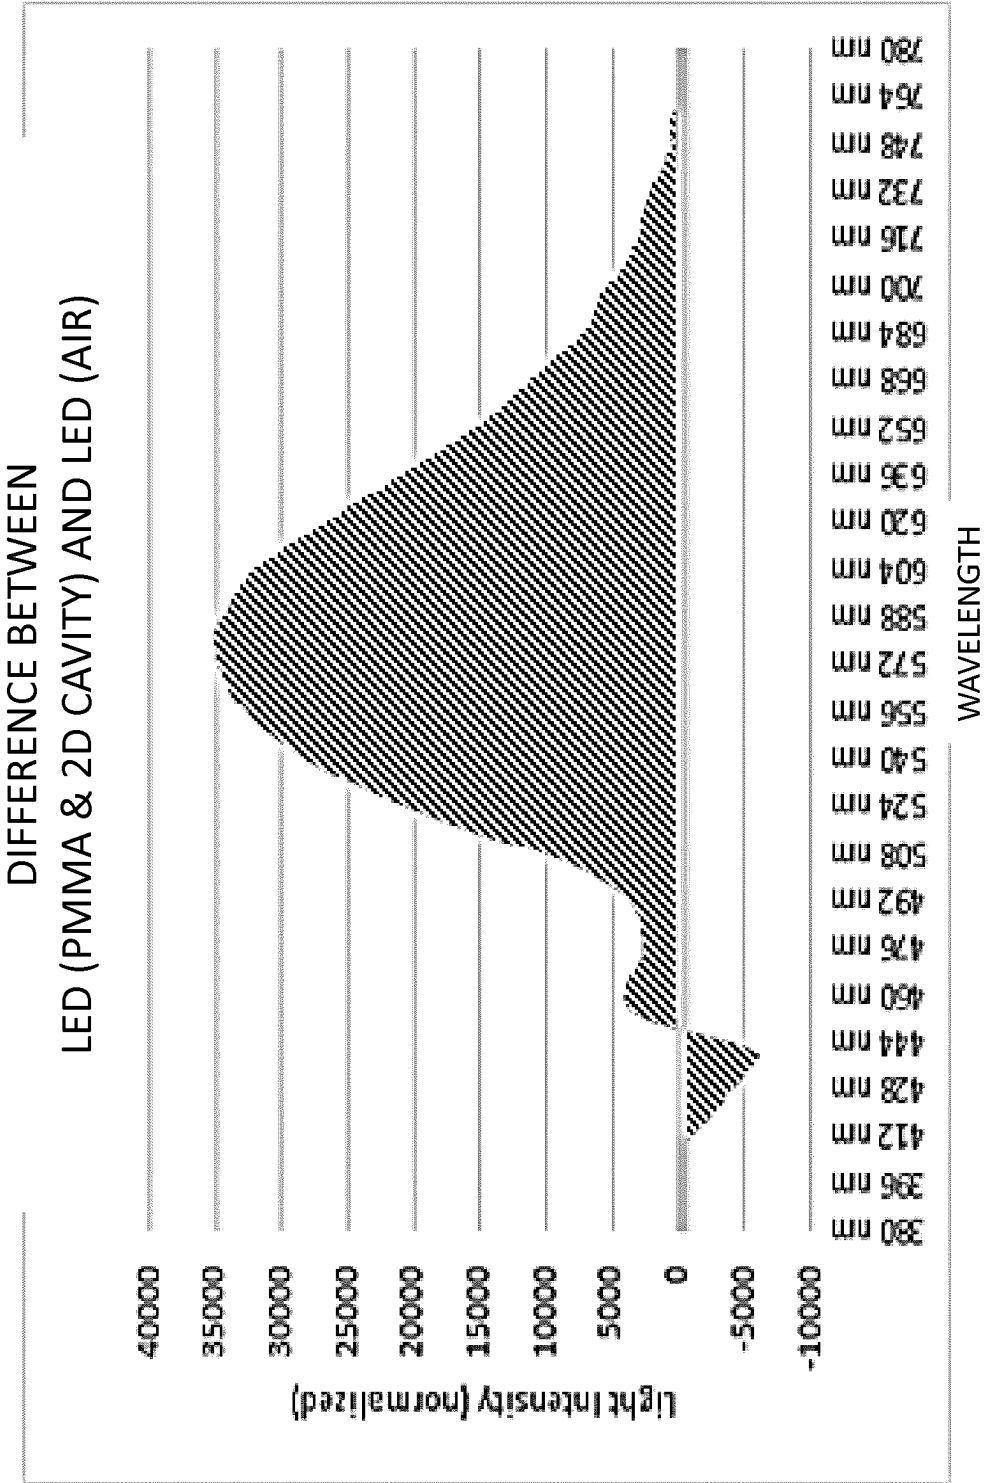


FIG. 13

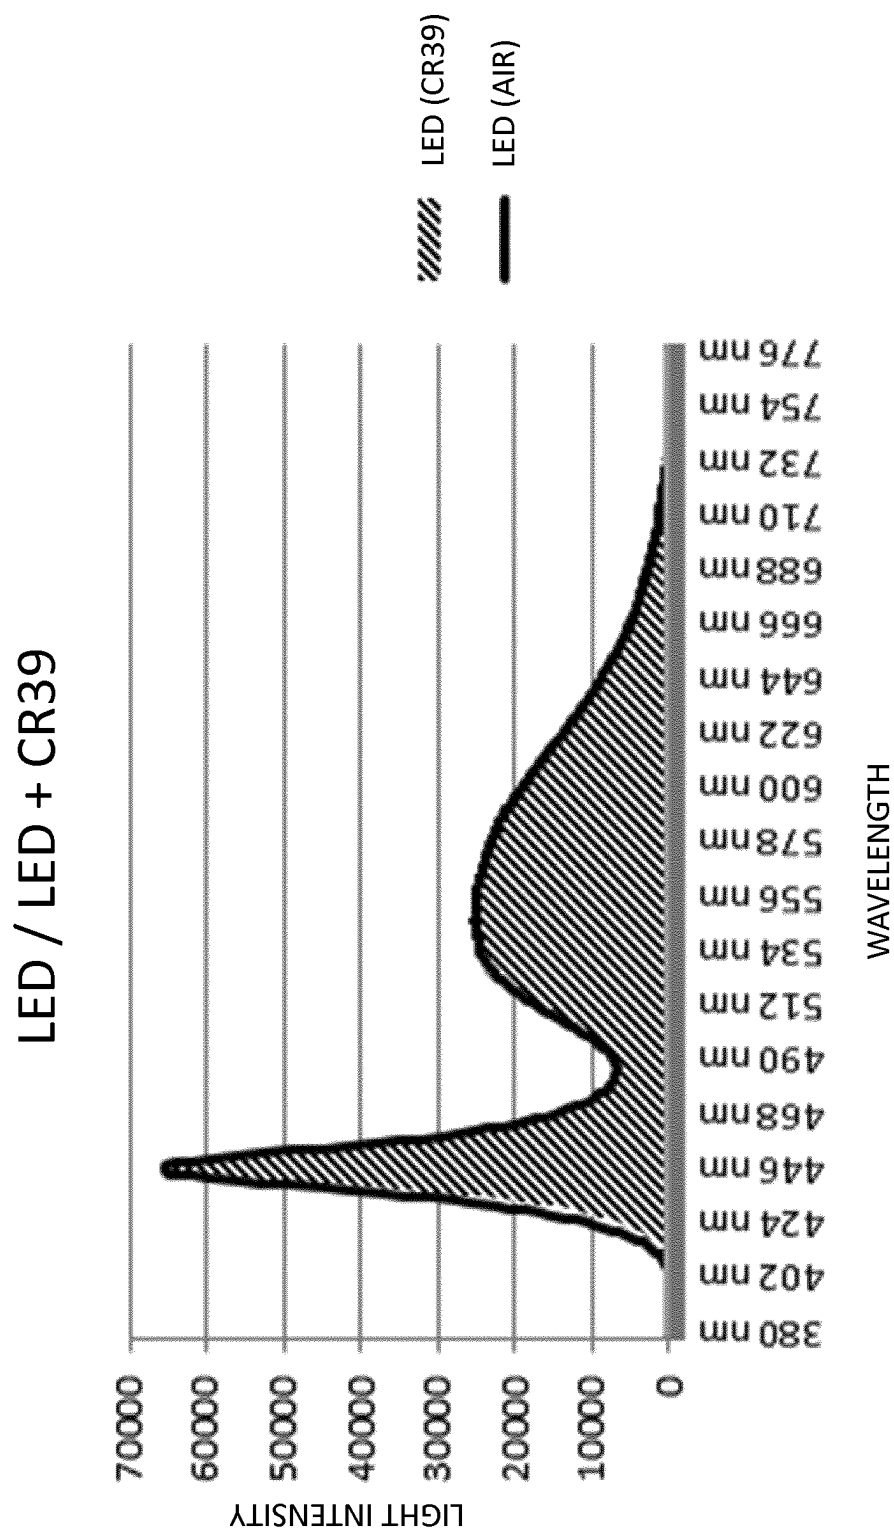


FIG. 14

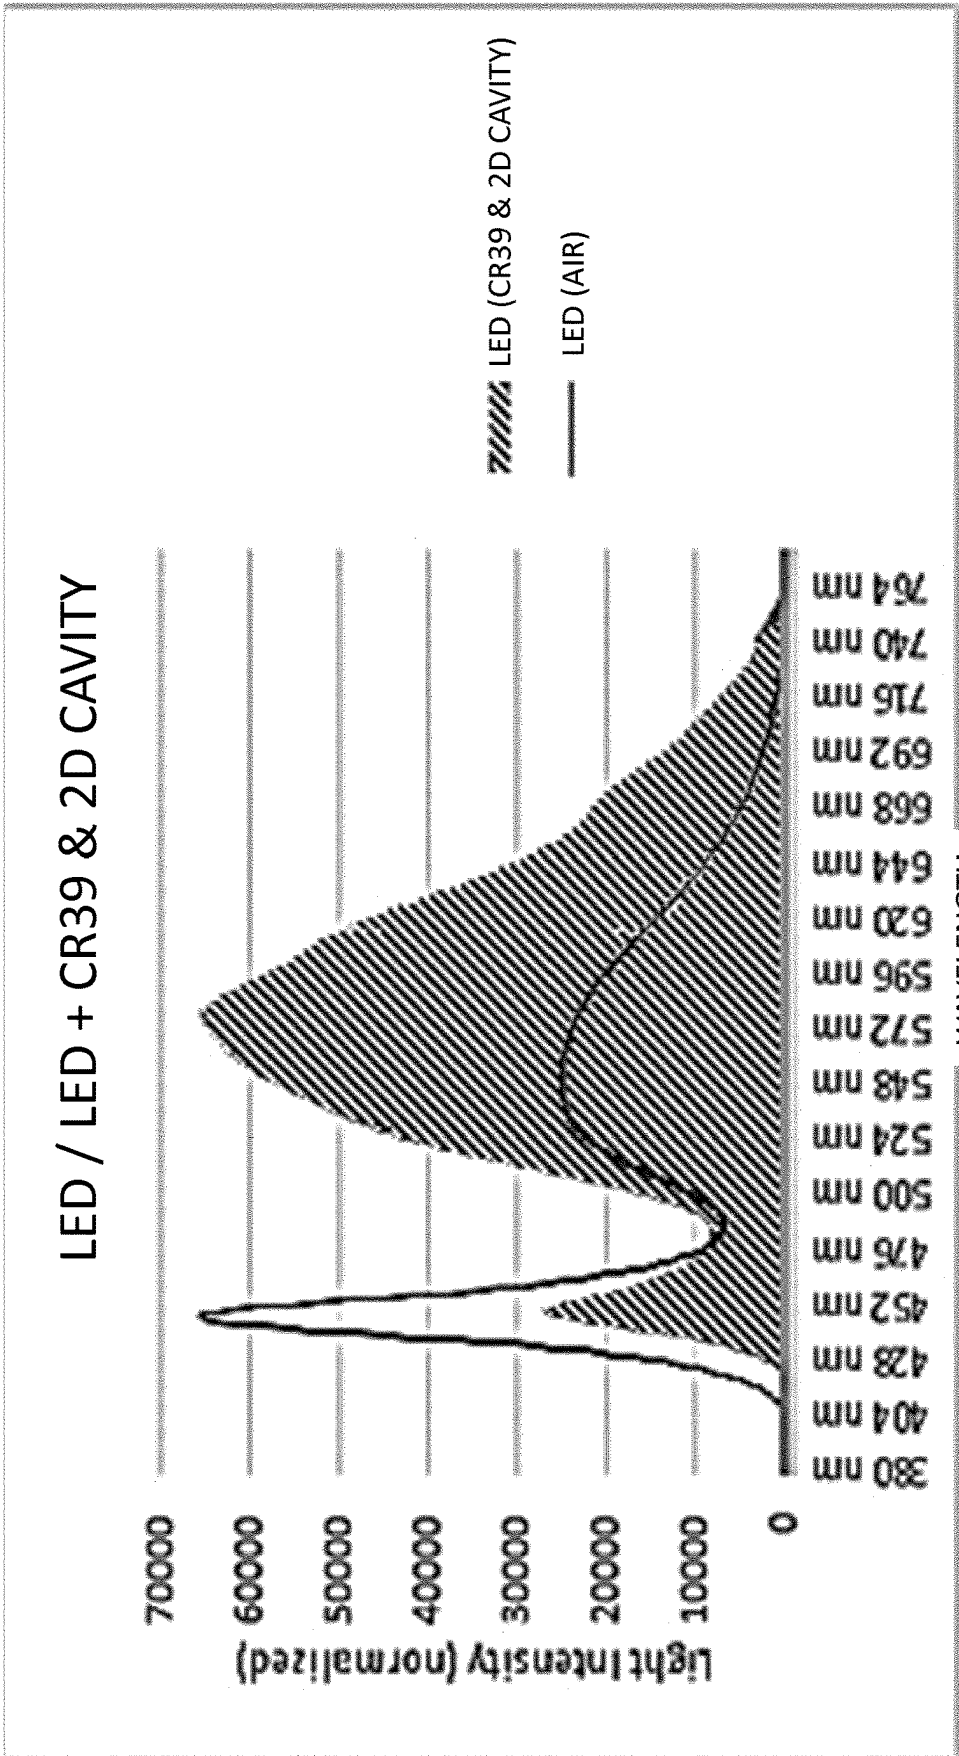


FIG. 15

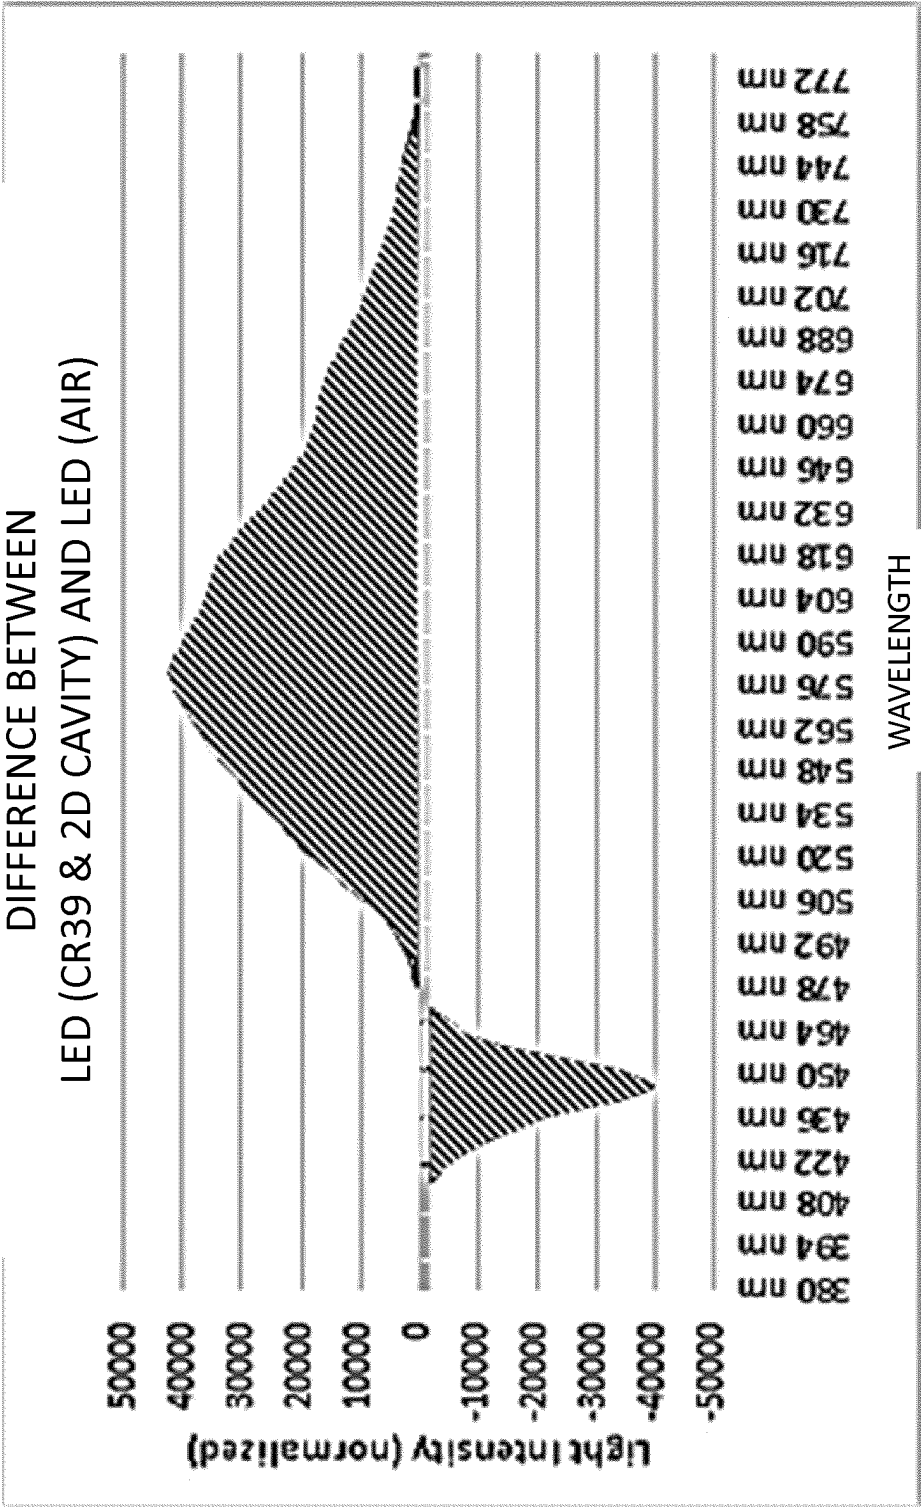


FIG. 16

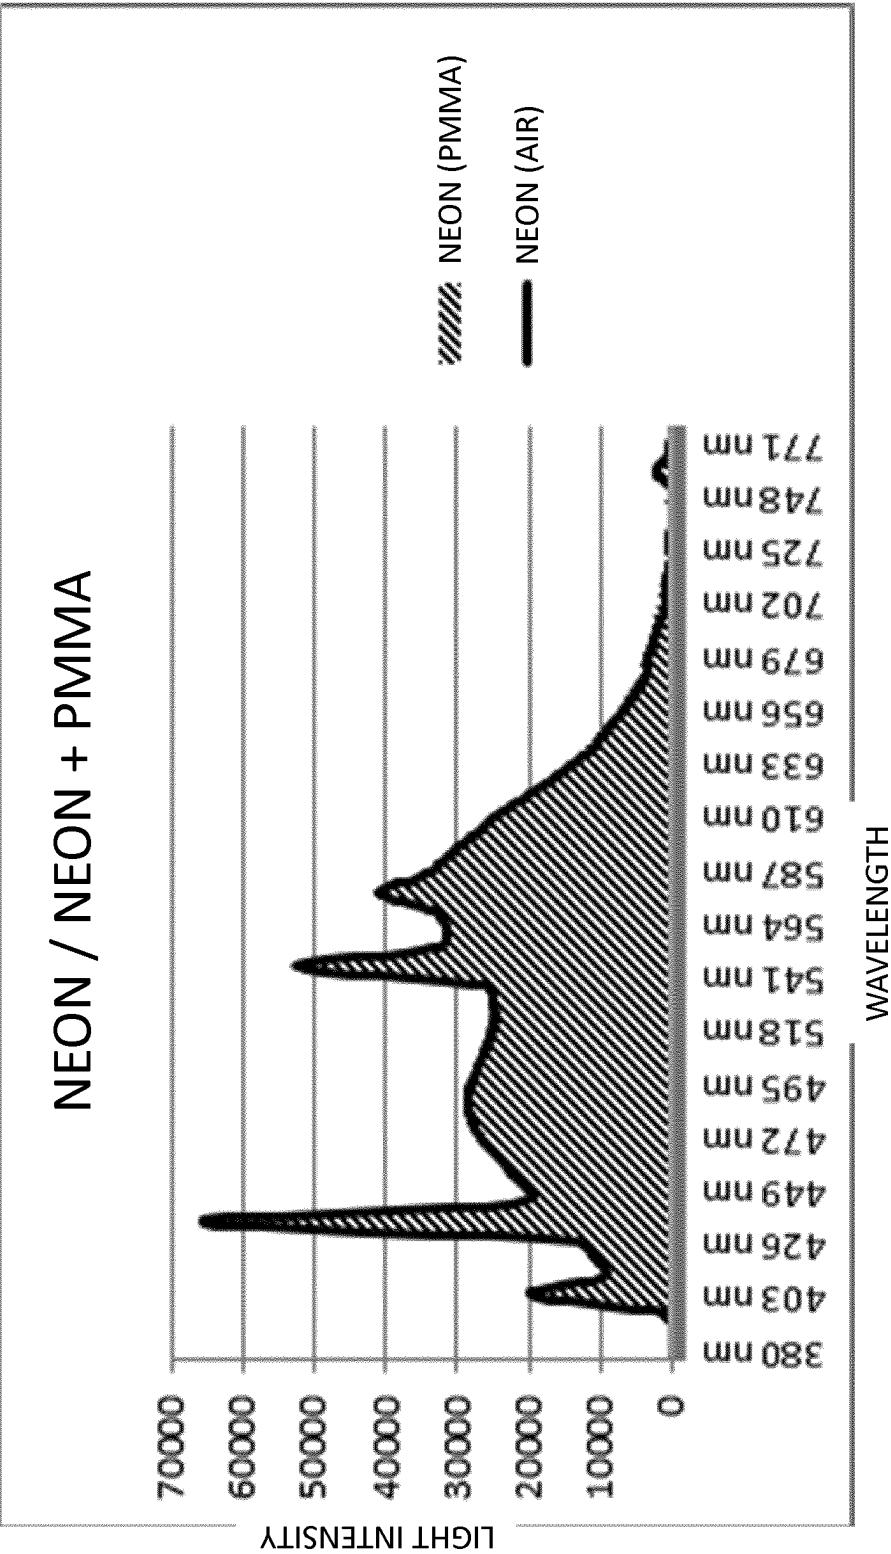


FIG. 17

NEON / NEON + PMMA & 2D CAVITY

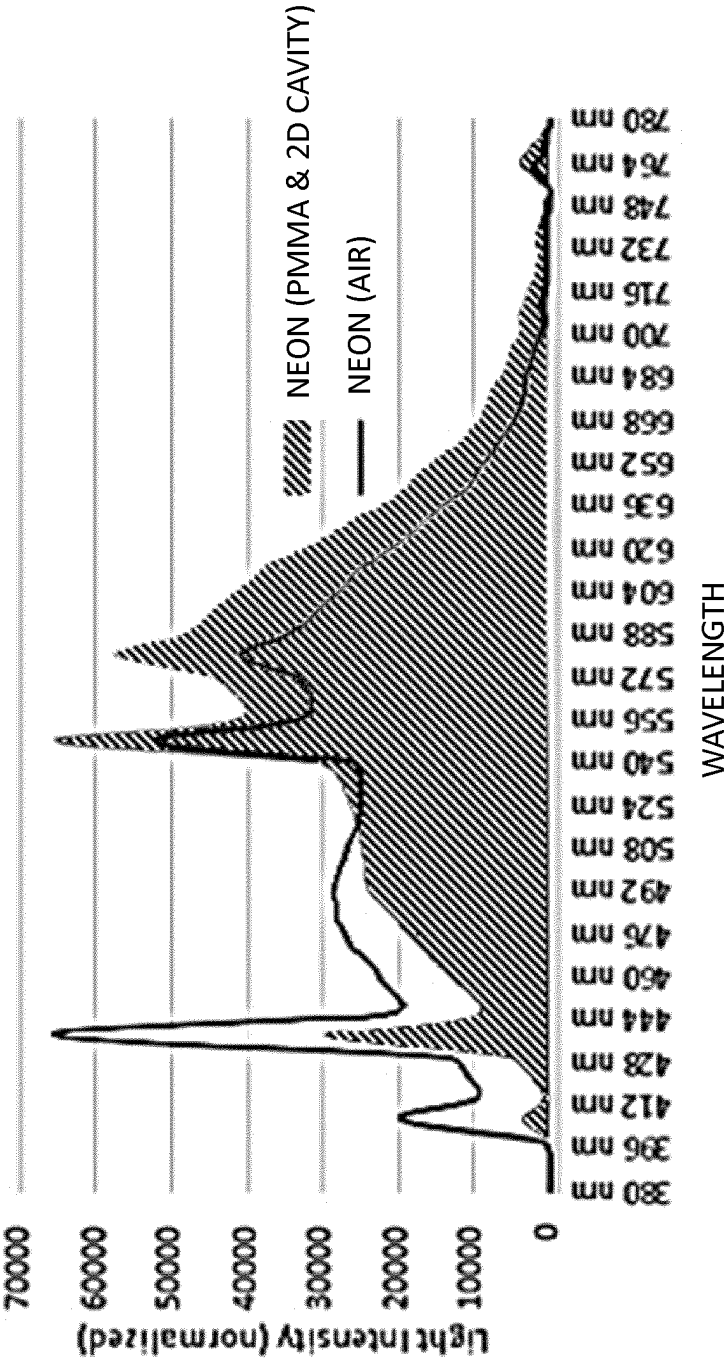


FIG. 18

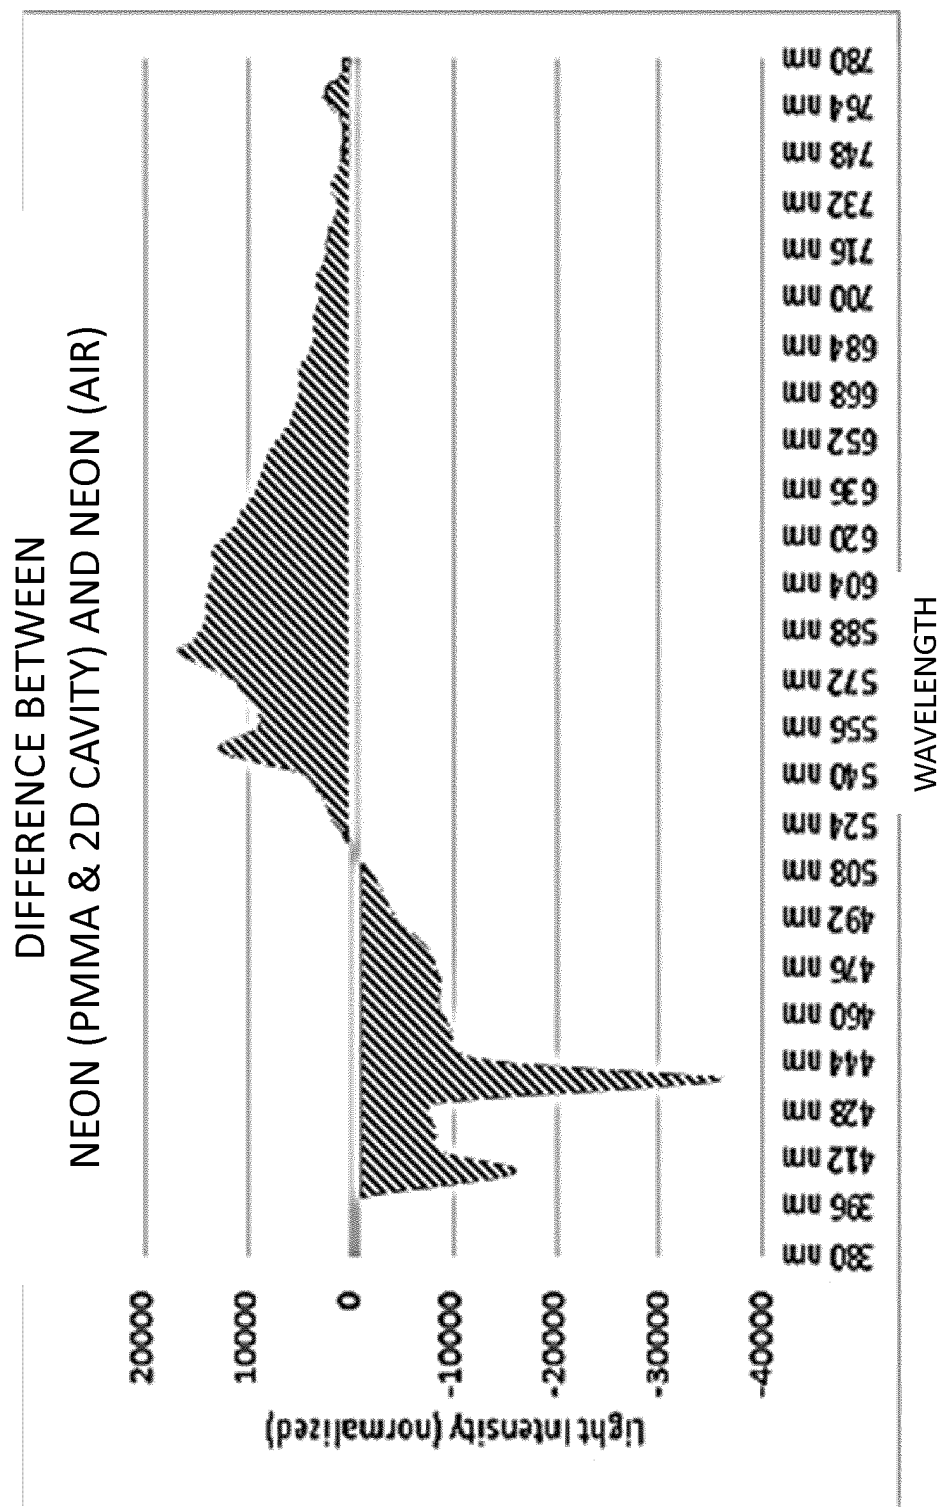


FIG. 19

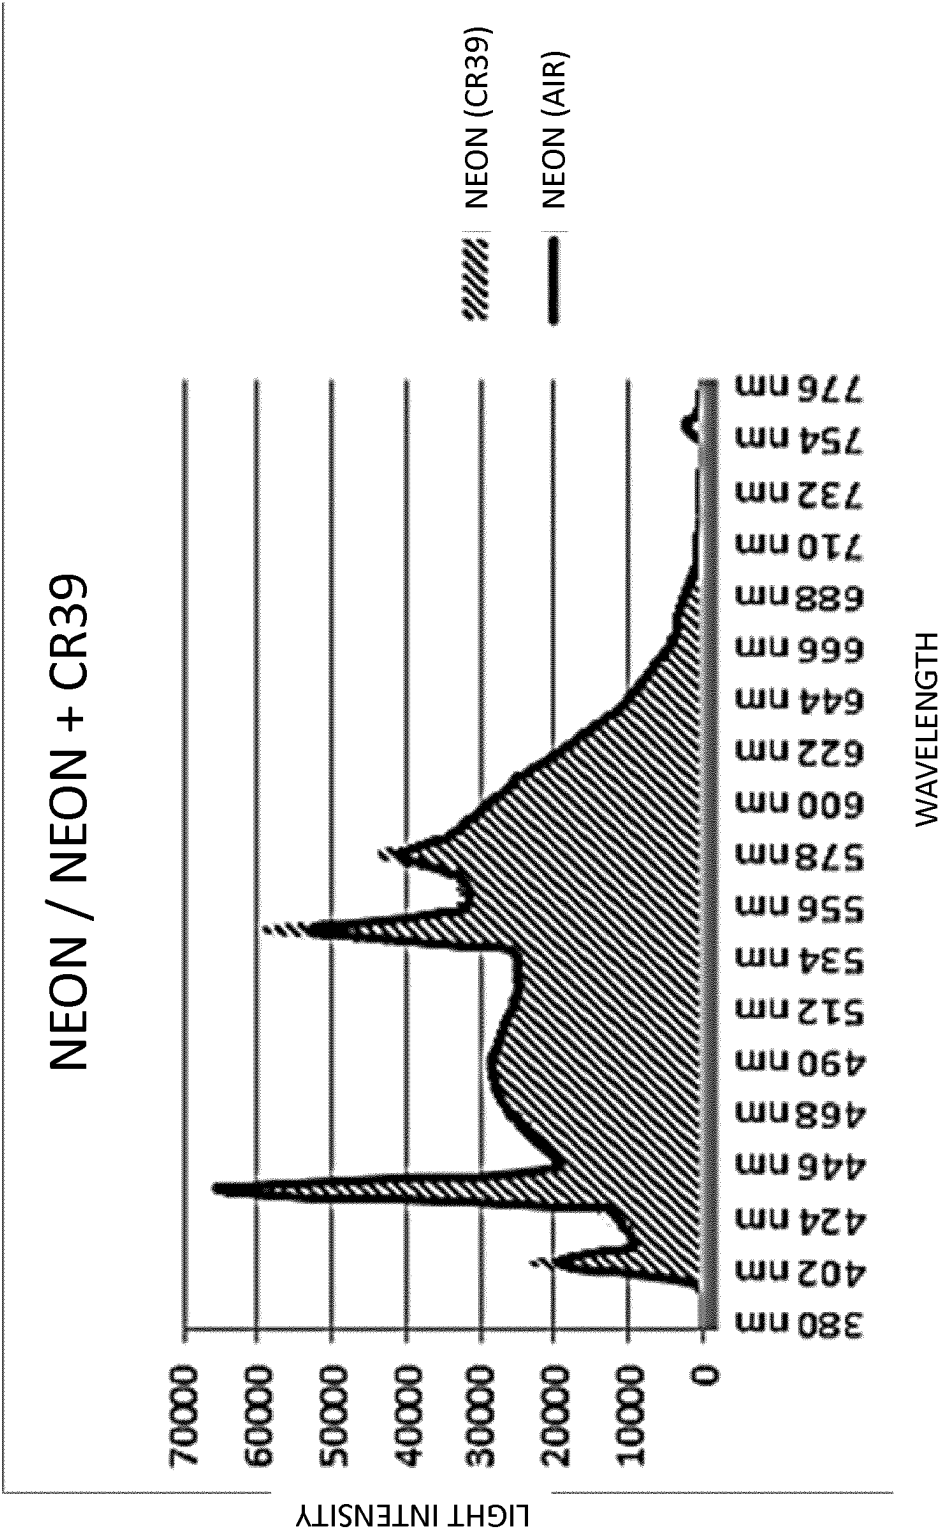


FIG. 20

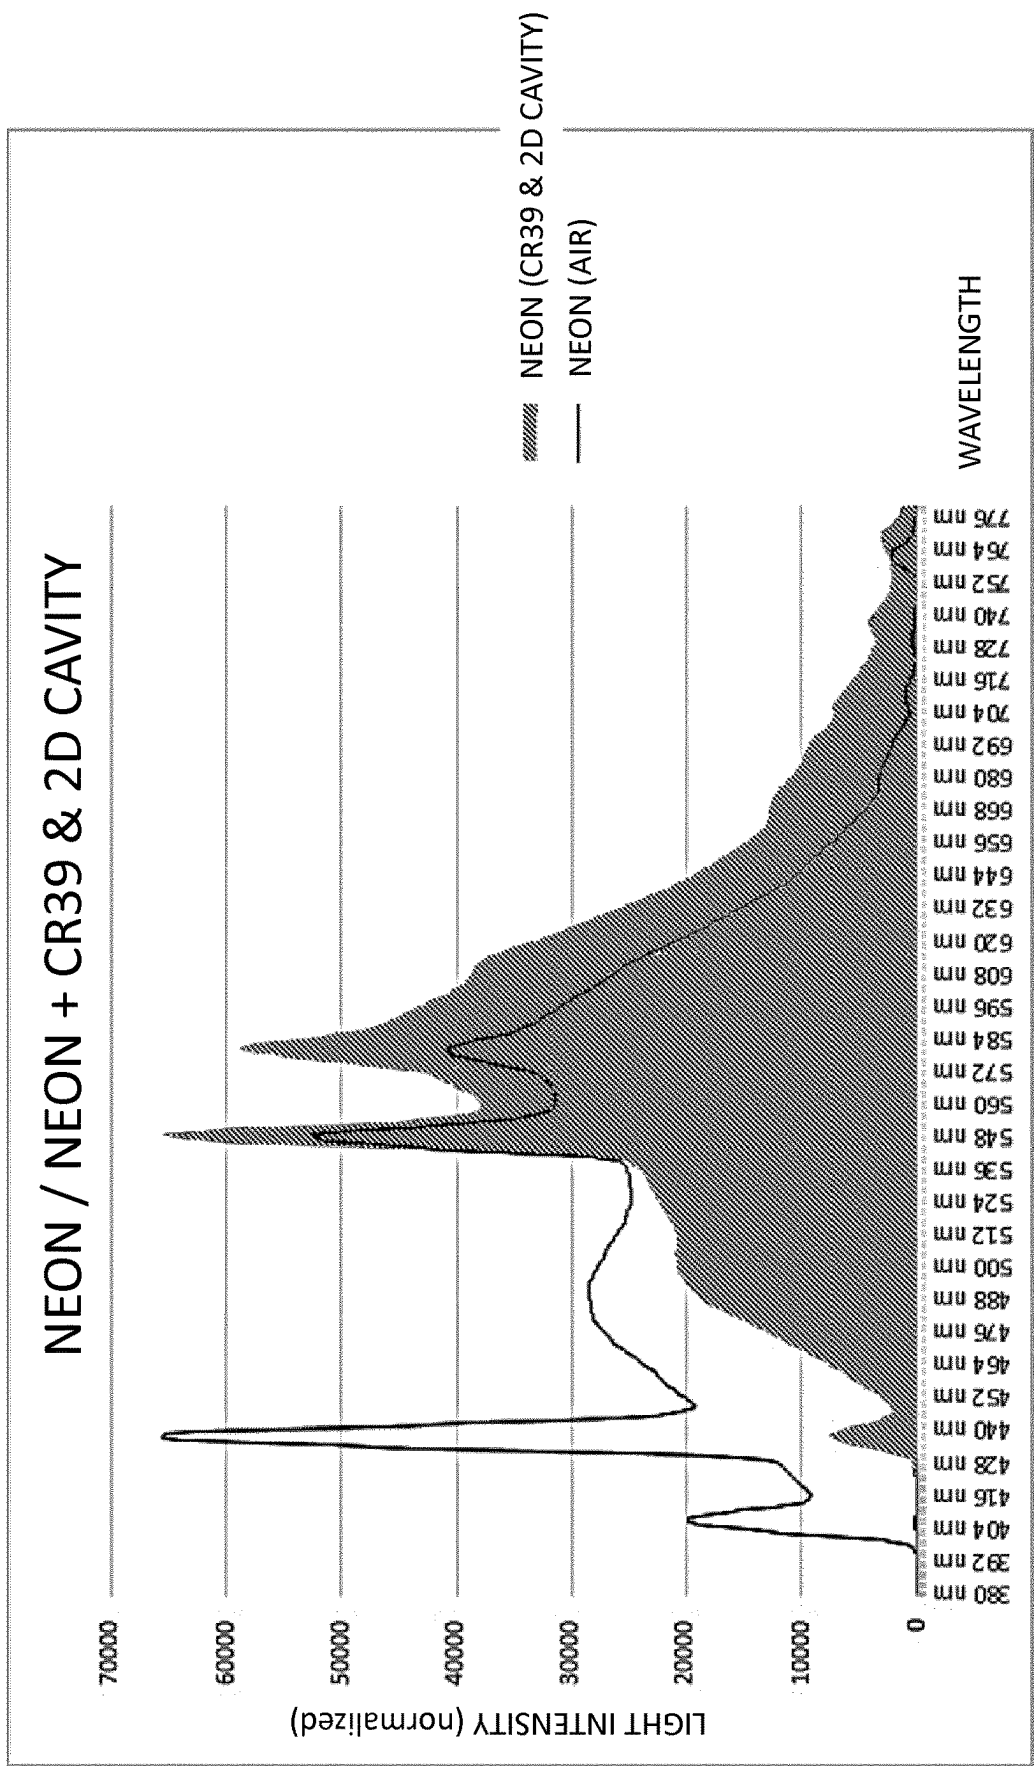


FIG. 21

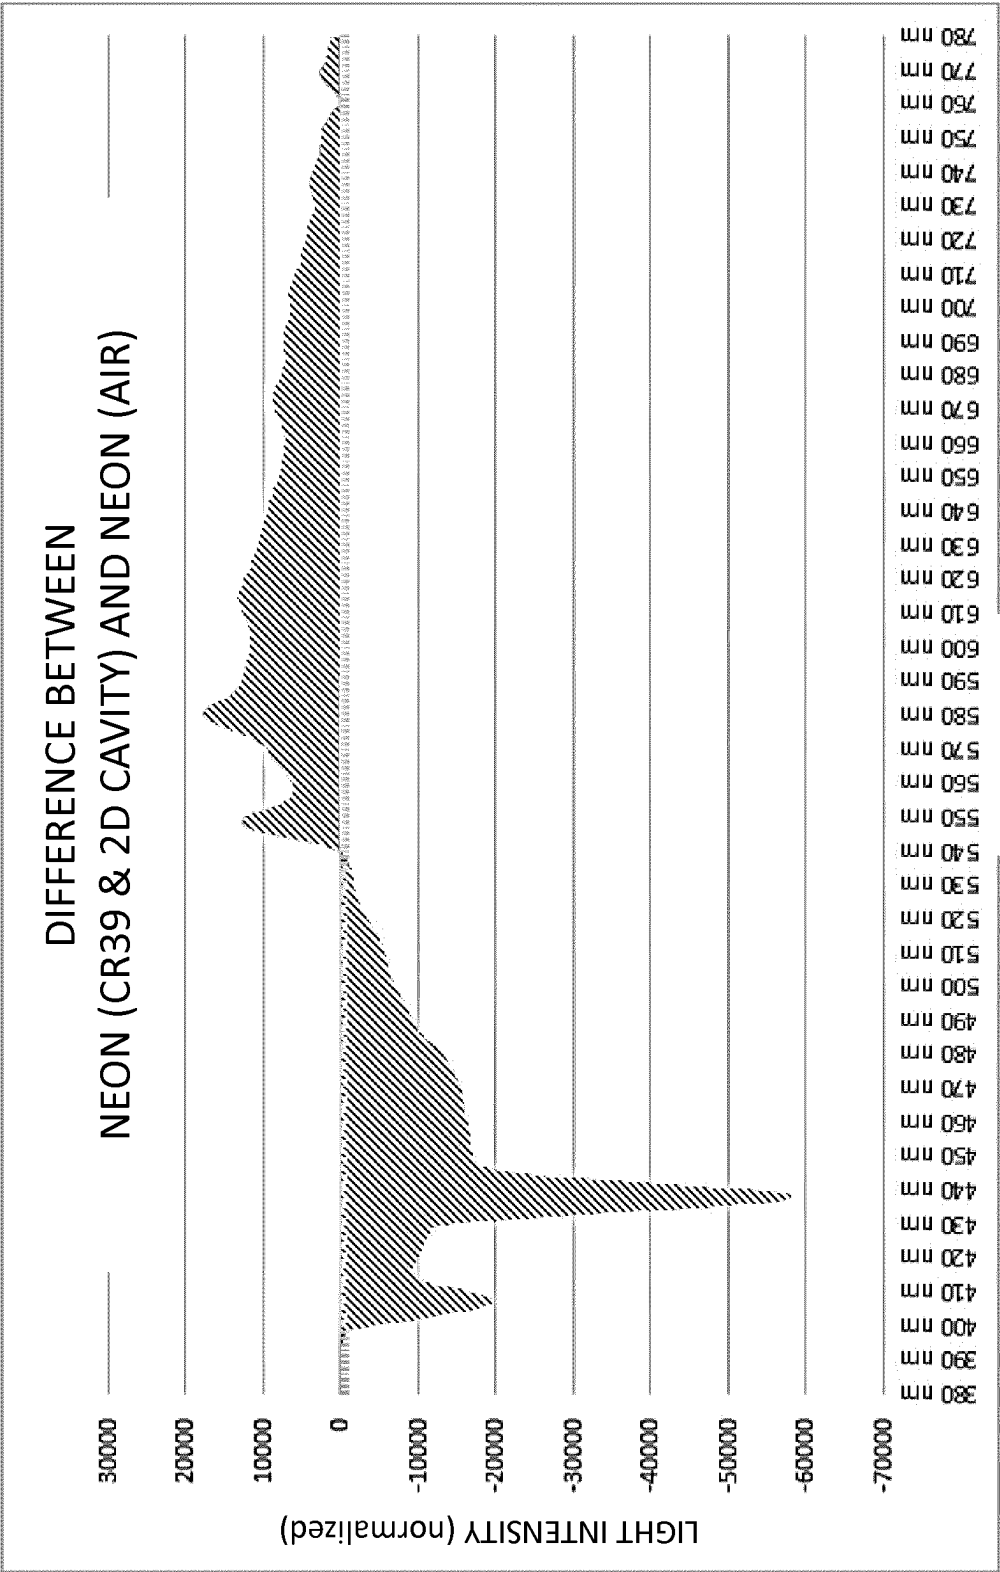


FIG. 22

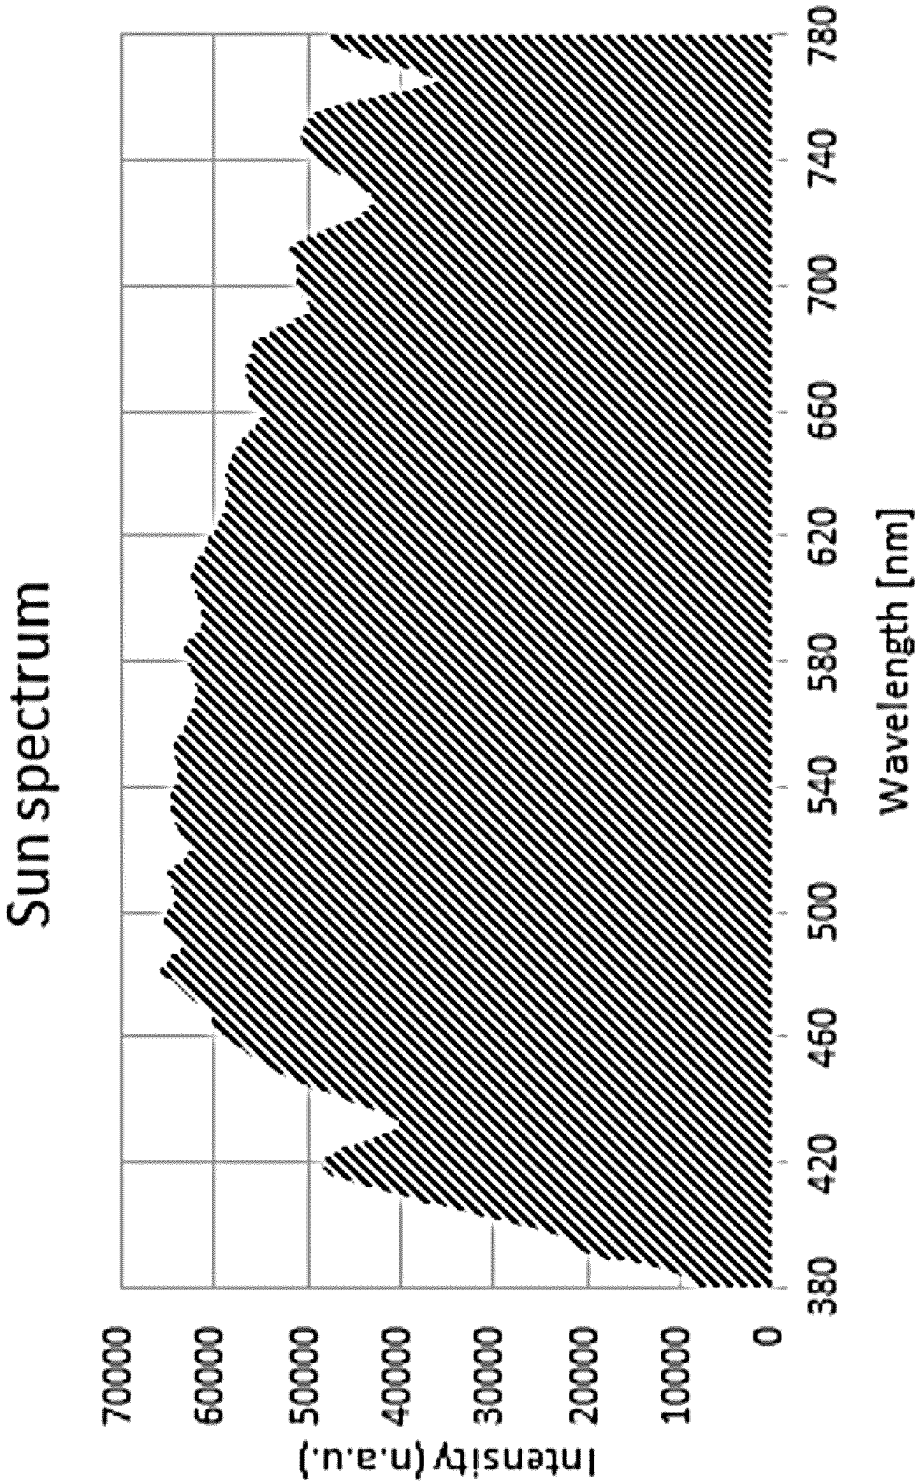


FIG. 23

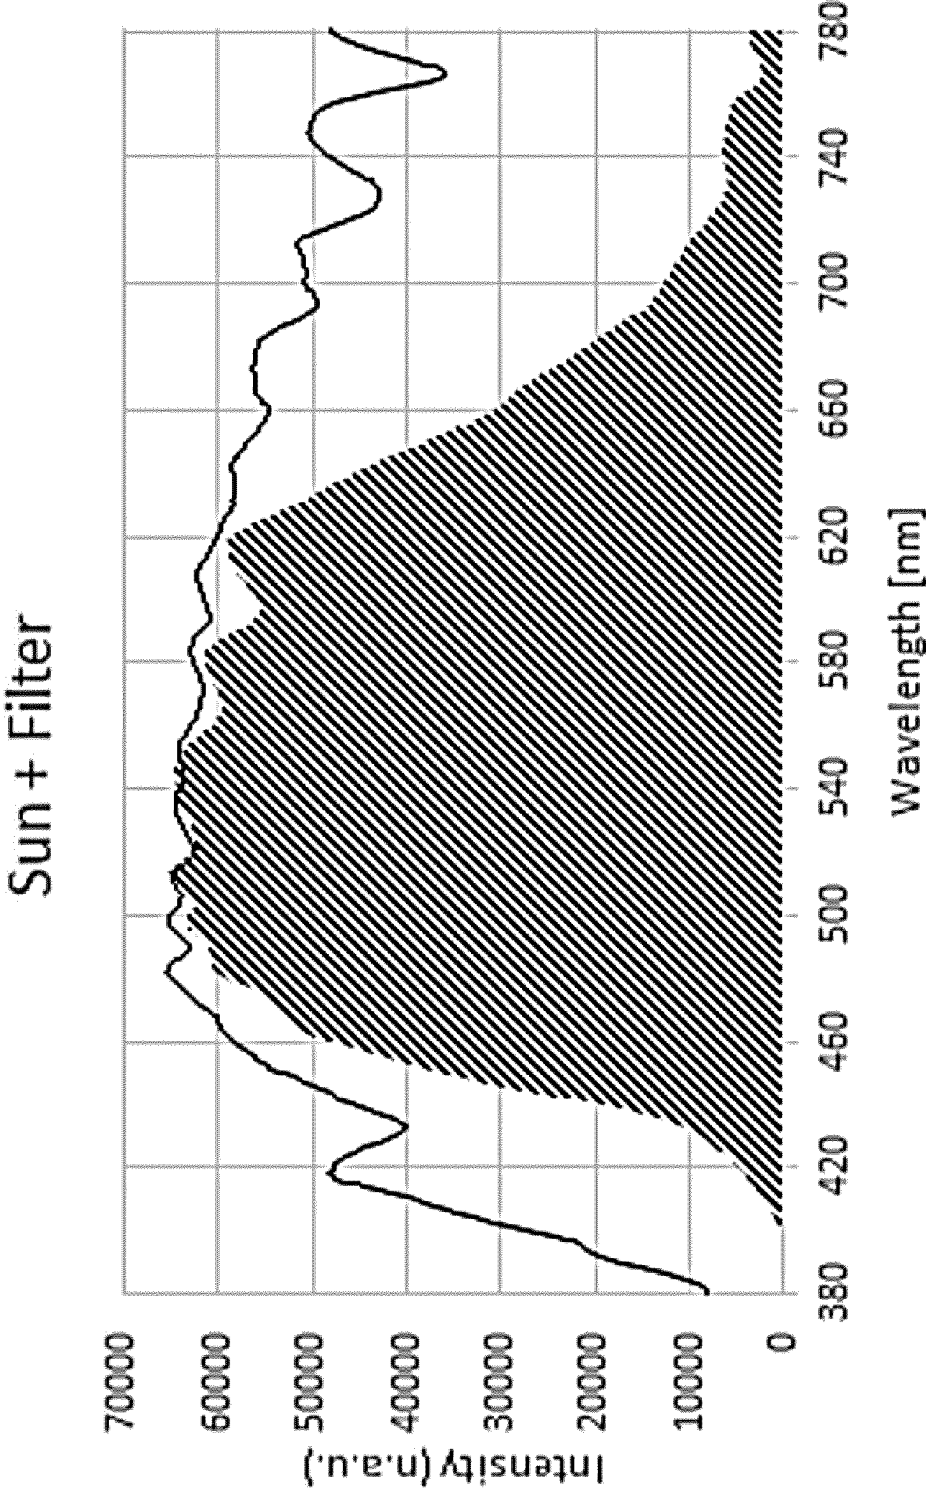


FIG. 24

	Light Source	E_v (lux)	T_{cp} (lux)	λ_d (nm)	CIE 1931	P_e (%)	SDE (W/m ²) 380-780 nm	SDE (W/m ²) 400-500 nm	SDE (W/m ²) 500-600 nm	SDE (W/m ²) 600-700 nm
	1	2	3	4	5	6	7	8	9	10
A0	LED light	2440.1	8285	476	x=0.29 y=0.26	16.6	8.30 1.00	3.22	3.56	1.50
A01	LED/PMMA	2380.4	7248	481	x=0.30 y=0.31	12.0	7.82 0.94	2.74	3.40	1.45
A011	LED / PMMA C60 (@)	1201.1	4333	574	x=0.37 y=0.30	27.4	3.42 0.41	0.71	1.73	0.94
A02	LED/CR39	2395.3	7387	480	x=0.30 y=0.30	12.7	7.95 0.96	2.78	3.46	1.38
A021	LED/CR39 C60 (nf)	949.9	3618	575	x=0.42 y=0.45	61.8	2.55 0.30	0.26	1.37	0.85
B0	NEON light	444.2	5842	529	x=0.32 y=0.35	4.7	1.38 1.00	0.49	0.65	0.24
B01	NEON/PMMA	434.6	5818	530	x=0.32 y=0.35	4.8	1.34 0.97	0.48	0.64	0.24
B011	NEON/PMMA C60 (@)	259.4	3956	573	x=0.39 y=0.43	49.2	0.70 0.50	0.13	0.37	0.19
B02	NEON/CR39	431.4	5830	532	x=0.31 y=0.34	5.4	1.32 0.98	0.47	0.63	0.22
B021	NEON/CR39 C60 (nf)	145.3	3539	575	x=0.43 y=0.47	72.2	0.38 0.27	0.04	0.20	0.12

FIG. 25

OPTICAL FILTER BASED ON LIGHT-MATTER COUPLING IN QUANTUM-CONFINED CAVITY SPACES

TECHNICAL FIELD

Various embodiments relate generally to optical filters as well as to spectacles and hyperlight devices including optical filters. Further embodiments relate to optical lenses, room lighting means, street lighting means, laptop foils, mobile phones, vehicle glazing (cars and trucks), aircraft glazing, windows in general such as building windows, and toys, respectively including optical filters.

BACKGROUND

Light therapy has gained significant importance in the past few years, in particular in the therapy of—but not limited to—skin diseases. In this field, it is generally recognized that the therapeutic effect is closely related to the characteristics of the light used for therapy including not only the wavelength range of the light but also characteristics related to the spatial distribution of the photons depending on, e.g. the angular momentum. The influence on the therapeutic effect of these characteristics has become the subject of intense research in the past years. Examples of developments in this field are disclosed inter alia in US 2008/286453 A1 and WO 2017/211420 A1.

Further aspects related to the present disclosure can be found in: U.S. Pat. No. 5,640,705; Andreani, C. L., “Exciton-Polaritons in Bulk Semiconductors and in Confined Electron and Photon Systems”, p. 37-82, 2014 in book Eds. Auffeves. A et al, “Strong Light-matter coupling: From atoms to solid-state systems”, Word Scientific, ISBN 978-981-4460-34-7; Carusotto, I. and Ciuti, C., “Quantum fluids of light”, arXiv:1205.6500v3, 17 Oct. 2012; Castelletto, S, et al.: “A silicon carbide room temperature single-photon source”, *Nature Materials*, 13, 151-156, 2014; Del Negro, et. al. “Light transport trough the band—edge states of Fibonacci quasicrystals, *Physical Review Letters*, 90 (5):055501-1-4, 2003; Kavokin, A. V. et al., “Microcavities”, Oxford University Press, Oxford, 2017; Lounis, B., and Moerner, W. E. “Single photons on demand from a single molecule at room temperature”, *Nature*, 407: 491-493, 2000; Koruga, D j., “Hyperpolarized light”: *Fundamentals of nanobiomedical photonics*”, Zepter Book World, Belgrade 2018; Michler, P., et al., “Quantum correlation among photons from a single quantum dot at room temperature”, *Nature*, 406: 968-970, 2000; Moradi A., “Electromagnetic wave propagation in a random distribution of C_{60} molecules”, *Physics of Plasmas* 21, 104508, 2014; WO 9604958 A1; and WO 9604959 A1.

The efficient conversion of light emitted by conventional light sources employed for light therapy into light with predetermined characteristics such as a predetermined spatial distribution of the photons depending on their angular momenta is of huge importance for a highly efficient light therapy.

SUMMARY

According to the present invention, an optical filter is provided. The optical filter may include a layer structure comprising a plurality of layers stacked in a thickness direction of the layer structure and including: a plurality of nano-photonic layers formed of a nano-photonic material with icosahedral or dodecahedral symmetry, and at least one substrate layer formed of an optically transparent material,

wherein the at least one substrate layer is positioned between two of the plurality nano-photonic layers in the thickness direction of the layer structure.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings, like reference characters generally refer to the same parts throughout the different views. The drawings are not necessarily to scale, emphasis instead generally being placed upon illustrating the principles of the invention. In the following description, various embodiments of the invention will be described with reference to the following drawings, in which:

FIG. 1 is a schematic drawing illustrating the main characteristics of hyperlight;

FIG. 2 shows three rotational states of a C_{60} molecule;

FIG. 3 schematically illustrates different interaction mechanisms of light with a C_{60} molecule as a 0D cavity;

FIG. 4a is a graph showing the power spectra of a photon, of an exciton, and of a polariton as a function of an effective coupling strength;

FIG. 4b is a graph showing the power spectra of a photon, of an exciton, and of polaritons as a function of momentum;

FIG. 5 is a schematic drawing illustrating an optical filter according to an exemplary embodiment of the present disclosure;

FIG. 6 illustrates the influence of a 2D cavity according to the present disclosure on the polarization states of incident light on the basis of a Poincaré sphere;

FIG. 7 is a schematic drawing illustrating an optical filter according to another exemplary embodiment of the present disclosure;

FIG. 8 is a schematic drawing illustrating an optical filter according to yet another exemplary embodiment of the present disclosure;

FIGS. 9a-9d are schematic drawings illustrating possible applications of optical filters according to the present disclosure;

FIG. 10 is a schematic drawing illustrating an exemplary therapeutic lamp including an optical filter according to the present disclosure;

FIGS. 11-24 are graphs illustrating characteristics of filters according to the present disclosure; and

FIG. 25 is a table summarizing results of measurements carried out with optical filters according to the present disclosure.

DESCRIPTION

The following detailed description refers to the accompanying drawings that show, by way of illustration, specific details and embodiments in which the invention may be practiced.

The word “exemplary” is used herein to mean “serving as an example, instance, or illustration”. Any embodiment or design described herein as “exemplary” is not necessarily to be construed as preferred or advantageous over other embodiments or designs.

Intense research during the past years has revealed that the therapeutic effect of light therapy can be significantly increased by using light, the photons of which are spatially ordered by angular momentum. This kind of light will be referred to as “hyperlight” in the subsequent description. The characteristics of hyperlight will be briefly described in the following with reference to FIG. 1.

FIG. 1 schematically illustrates the characteristics of hyperlight 10. In FIG. 1, photons emanate from a central point 12 and are ordered by angular momentum along respective spirals.

The spiral pattern of photons with different angular momenta is similar to a sunflower seed pattern. The seeds in a sunflower are arranged in spirals, one set of spirals being left handed and one set of spirals being right handed. The ratio of the number of right-handed spirals to the number of left-handed spirals is given by the golden ratio $\Phi = (1 + \sqrt{5}) / 2 \approx 1.62$.

The number of right-handed spirals and left-handed spirals associated with angular momenta in the hyperlight shown in FIG. 1 is also determined by the golden ratio. In detail, in FIG. 1, 21 left-handed and 34 right-handed spirals can be identified, the ratio of which is given by the golden ratio Φ .

Hyperlight can be generated by resonant emission of the energy eigenstates T_{1g} , T_{2g} , T_{1u} , and T_{2u} of C_{60} . This, however, means that there are some restrictions in view of the energy of incident light.

The present disclosure proposes an alternative way of generating hyperlight which is based on polaritons, i.e. photon-exciton pairs, in a cavity formed by nano-photonics material with icosahedral or dodecahedral symmetry. This will be explained in detail in the following starting with a brief discussion of the characteristics of nano-photonics material with icosahedral or dodecahedral symmetry.

As an example of such a nano-photonics material with icosahedral symmetry C_{60} fullerenes will be exemplarily discussed. C_{60} is composed of 60 carbon atoms ordered in 12 pentagons and 20 hexagons. C_{60} has two bond lengths. A first bond length is defined by the length of an edge between two adjacent hexagons and the second bond length is defined by the length of an edge between a hexagon and an adjacent pentagon, the first bond length being greater than the second bond length. C_{60} molecules have a diameter of about 1 nm and rotate in a solid about 1.8 to $3 \cdot 10^{10}$ times per second around one of 31 axes of rotation which can be characterized in terms of their symmetry. In detail, in C_{60} a total of 6 axes of rotation C_5 with a 5-fold symmetry, a total of 10 axes of rotation C_3 with a 3-fold symmetry, and a total of 15 axes of rotation C_2 with a 2-fold symmetry can be identified. A C_{60} molecule rotates alternately and randomly around these axes of rotation.

In FIG. 2 three possible orientations of a C_{60} molecule with respect to a fixed set of axes C_5 , C_3 , and C_2 is shown. The plane of each drawing is orthogonal to a $[111]$ direction. The thin rods represent $[110]$ directions that are orthogonal to the $[111]$ direction. The transformation from state "a" to state "b" in FIG. 2 involves a 60° rotation about the $[111]$ direction, while a transformation from state "a" to state "c" in FIG. 2 involves a $\sim 42^\circ$ rotation about the $[110]$ direction.

Incident photons may interact with a C_{60} molecule in different ways: (a) with the outer surface of the molecule and (b) with the inner surface of the molecules. The interaction probability of incident photons passing through the pentagons with the inner surface is zero. Therefore, the areas of the pentagons can be considered to be "closed" for this specific interaction.

The probability of an interaction of photons passing through the hexagons with the inner surface is larger than zero. However, this specific interaction probability depends on the dynamic state of a particular C_{60} molecule determined inter alia by the previously described random rotation of the respective C_{60} molecules around the above-mentioned axes of rotation, meaning that the interaction probability changes

with time. This probability can be expressed in terms of effective areas of the hexagons which are exemplarily shown in FIG. 3.

In FIG. 3, a C_{60} molecule is schematically shown. Among the 12 pentagons only one is exemplarily shown. The representative pentagon is hatched in FIG. 3 which hatching indicates that an incident photon a_{in} passing through a pentagon does not interact with the inner surface of the C_{60} molecule, i.e. it does not interact with the cavity defined within the molecule. In FIG. 3, a_{out} denotes such a photon that has passed through the C_{60} molecule.

Similarly, among the 20 hexagons only one is shown in FIG. 3. Due to the above-described dynamics of a C_{60} molecule, a hexagon may have different effective areas, meaning that depending on a specific vibrational and/or rotational state of a C_{60} molecule, the probability of interaction of a photon with the inner surface of a C_{60} molecule after having passed through a hexagon is different. The different states of a hexagon are indicated in FIG. 3 by means of the different hatchings. In detail, one hexagon is shown in five different states b_1 , b_2 , b_3 , b_4 , and b_5 , wherein in the state b_1 the hexagon is shown to be fully open indicating the highest interaction probability of an incident photon passing through this hexagon with the inner surface of the C_{60} molecule, whereas in the state b_5 the area of the hexagon is shown to be fully closed indicating a corresponding interaction probability of zero. The states b_2 , b_3 , and b_4 are intermediate states corresponding to interaction probabilities between zero and the highest probability associated with the state b_1 .

In addition, in FIG. 3, B1 shows a state of the entire molecule in which all hexagons are in the state b_1 . As mentioned above, the pentagons are always fully closed. Therefore, the pentagons are depicted as entirely hatched areas.

B5 shows a state of the entire molecule in which all hexagons are in the state b_5 . Therefore, both the pentagons and the hexagons are depicted as entirely hatched areas, meaning that in this state of the molecule no incident photon will interact with the cavity inside of the molecule.

In FIG. 3, b_{in} denotes a photon passing through a hexagon, i.e. entering the cavity inside of a C_{60} molecule, and interacting with the inner surface thereof, i.e. with the cavity. A photon leaving the C_{60} molecule after such an interaction is denoted by b_{out} . As further indicated by c_{in} and c_{out} , there are also photons that pass through hexagons, i.e. which enter the cavity, without interacting with the cavity.

In FIG. 3 the respective dimensions of the cavity as well as of the inner and outer shells of the π electrons, and the carbon atom core positions are also shown.

The 12 pentagons make up about 38% of the entire surface of a C_{60} molecule. The 20 hexagons make up about 62% of the surface of a C_{60} molecule. As previously mentioned, the effective areas of the hexagons change due to the above-discussed dynamic behavior of the respective C_{60} molecules. Therefore, the effective probability of an interaction of an incident photon with the inner surface of a C_{60} molecule is lower.

An incident photon interacting with the inner surface of a C_{60} molecule may generate a bound electron-hole pair, i.e. an exciton, or may couple to an existing exciton to form a polariton. Decaying excitons may also emit a photon (radiative recombination) which can also couple to another existing exciton to form a polariton. Calculations have revealed that the probability for the generation of an exciton is about 38%, whereas the probability of forming a polariton is lower. Calculations and experiments with different sources

5

of light have revealed probabilities for the generation of a polariton in the range of about 15-25%.

By means of the interaction of incident photons with the cavities formed in the C_{60} molecules to thereby form polaritons, the spectral characteristics of the light is changed and the spatial distribution of the photons depending on their angular momenta is converted into the configuration shown in FIG. 1, meaning that hyperlight is generated in this way.

The power spectra of a photon, an exciton, and a polariton as a function of an effective coupling strength g are shown in FIG. 4a. The intensity (power) in FIG. 4a is given in arbitrary units. ω is the optical frequency, and g is an effective coupling strength. The value of $\omega/g=1$ corresponds to the Rabi resonance condition where a so-called “upper polariton” is formed. As shown in FIG. 4a, an upper polariton has a higher power as compared to the uncoupled photon and exciton. At $\omega/g=-1$ a so-called “lower polariton” having a lower power as compared to the uncoupled photon and exciton is formed. The energies of upper polaritons, lower polaritons, photons, and excitons as a function of momentum are shown in FIG. 4b. For further details thereon see e.g. Kavokin, A. V. et al., “Microcavities”, Oxford University Press, Oxford, 2017.

The conversion efficiency of incident light into hyperlight is determined inter alia by the radiative exciton decay rate which depends on the dimension of the cavity. A cavity defined by a C_{60} molecule is referred to as a 0D cavity, i.e. a zero-dimensional cavity. The radiative decay rate Γ_{0D} associated with a 0D cavity is given by the following expression:

$$\Gamma_{0D} = \frac{1}{4\pi\epsilon_0} \frac{2\pi}{3} \frac{e^2}{m_0 c} \frac{\omega^2}{c^2} f.$$

In the above expression, ϵ_0 denotes the permittivity in vacuum, n denotes the electron density, e denotes the elementary charge, m_0 denotes the free electron mass, ω denotes the optical frequency, c denotes the speed of light, and f denotes a coupling strength.

Higher radiative decay rates and, hence, higher rates of conversion of incident light into hyperlight can be achieved by means of a 2D cavity (two-dimensional cavity). A 2D cavity can be configured by a layer structure 20 shown in FIG. 5.

As shown in FIG. 5, the layer structure 20 may include a plurality of layers 22, 24, 26 stacked in a thickness direction z of the layer structure 20. The plurality of layers includes a plurality of nano-photon layers 22 and 24, and a substrate layer 26 interposed between the nano-photon layers 22, 24 in the thickness direction z . The nano-photon layers 22, 24 may include or may be formed of nano-photon material with icosahedral or dodecahedral symmetry, e.g. of fullerenes, in particular C_{60} fullerenes. The nano-photon layers 22, 24 may have thicknesses of 1-10 nm, optionally of 1-5 nm, further optionally of 3-5 nm.

The substrate layer 26 may be formed of an optically transparent material, e.g. of SiO_2 and/or TiO_2 . The substrate layer 26 may have a thickness of 1-15 nm, optionally of 5-10 nm, further optionally of 10-15 nm.

The substrate layer 26 may be substantially free of nano-photon material. A layer structure 20 including a substrate layer of this kind may be fabricated in a very simple way and may have a well-defined 2D cavity geometry.

6

Since each of the nano-photon layers 22, 24 is formed of nano-photon material, a 2D cavity can also be referred to as a combined 0D/2D cavity here.

The radiative decay rate Γ_{2D} in a 2D cavity is given by the following expression

$$\Gamma_{2D} = \frac{1}{4\pi\epsilon_0} \frac{2\pi}{n} \frac{e^2}{m_0 c} \frac{f_{xy}}{S}.$$

In this expression, f_{xy} denotes a coupling strength and S a unit area which is determined by the size of a C_{60} molecule. Hence, the radiative decay rate Γ_{2D} in a two-dimensional cavity (2D cavity of 0D/2D cavity) can be expressed in terms of the radiative decay rate in a 0D cavity Γ_{0D} .

$$\Gamma_{2D} = \left(\frac{\lambda}{2\pi l} \right)^2 \Gamma_{0D}.$$

In this expression, l represents the dimension of the 2D cavity, which may be identified as or may be related to the thickness of the substrate layer 26 in FIG. 5.

This expression clearly shows that by selecting the dimensions of the cavity, i.e. the value “ l ”, to be small as compared to the wavelength of the incident light the radiative decay rate of excitons in a 2D cavity can be significantly increased as compared to a 0D cavity.

The effect of a combined 0D/2D cavity on incident light can be described using a Poincaré sphere. The Poincaré sphere is a tool for representing the polarization states of electromagnetic waves, such as light. Each polarization state corresponds to a point on the sphere, with fully polarized states on the surface, partially polarized states within the sphere, and the unpolarized state in the center. Linear polarizations are located at the equator of the sphere, circular polarizations at the poles, and elliptical polarizations in between. Orthogonal polarizations are located on the sphere surface opposite each other.

As shown in the Poincaré sphere depicted in FIG. 6, the effect of the cavity on the polarized part of the incident light can be described by the trajectory P having a curvature defined by the crossing angle κ relative to the meridians of the Poincaré sphere. The trajectory P is one of 31 possible solutions of surface distributions of the cavity dynamics. A projection of the 31 trajectories onto a plane perpendicular to the line connecting the poles yields a sunflower pattern similar to that shown in FIG. 1 which is characteristic for hyperlight.

The term “2D cavity” used here refers to a configuration including a space delimited by layers of nano-photon material. This means for example that reflecting mirrors like in a conventional cavity are not necessary. However, having in mind that only a certain fraction of the incident photons interact with the cavity to form polaritons, it may be advantageous to provide additional substrate layers on the sides of the nano-photon layers 22 and/or 24 opposite to the substrate layer 26 in the thickness direction z of the layer structure 20. A correspondingly configured layer structure (filter) 30 is shown in FIG. 7.

The layer structure 30 shown in FIG. 7 includes: a first nano-photon layer 32 made of a nano-photon material with icosahedral or dodecahedral symmetry such as C_{60} , a second nano-photon layer 34 made of a nano-photon material with icosahedral or dodecahedral symmetry such as C_{60} , a first substrate layer 36 made of an optically transpar-

ent material such as SiO₂ or TiO₂, a second substrate layer **38** made of an optically transparent material such as SiO₂ or TiO₂ and positioned on a side of the first nano-photon layer **32** opposite to the first substrate layer **36** in the thickness direction *z* of the layer structure **30**, and a third substrate layer **40** made of an optically transparent material such as SiO₂ or TiO₂ and positioned on a side of the second nano-photon layer **34** in the thickness direction *z* of the layer structure **30** opposite to the first substrate layer **36**.

The second and third substrate layers **38** and **40** may act, on the one hand, as protective layers to protect the first and second nano-photon layers **32** and **34** against external influences. In addition, as indicated above, the second and third substrate layers **38** and **40** may act as mirrors, by means of which a part of the photons *ph*, *ph'* is reflected back into the first substrate layer **36** through the first nano-photon layer **32** and the second nano-photon layer **34**, respectively. In this way, the respective photons *ph*, *ph'* can be made to traverse the respective nano-photon layers **32** and **34** and, hence the 2D cavity, a plurality of times which in turn increases the interaction probability of these photons with the cavity and, hence, the conversion efficiency of incident light into hyperlight.

As previously mentioned, the first to third substrate layers **36**, **38**, **40** are made of an optically transparent material. They may be made of the same material or of mutually different materials. For example, the second and third substrate layers **38** and **40** may be made of the same material, e.g. TiO₂, which may be different from the material of the first substrate layer **36**, which may be made of, e.g. SiO₂.

The materials of the substrate layers **36**, **38**, **40** may be selected depending on the spectral characteristics of the incident light in order to adjust the reflection characteristics depending on the wavelengths of interest.

In the following, an exemplary optical filter **100** configured according to the above principles will be described with reference to FIG. 8.

The optical filter **100** may include a layer structure **102** including a plurality of layers **104a-104h** and **106a-106i** stacked in a thickness direction *z* of the layer structure **102**. The plurality of layers **104a-104h** and **106a-106i** may include a plurality of nano-photon layers **104a-104h** formed of a nano-photon material with icosahedral or dodecahedral symmetry and a plurality of substrate layers **106a-106i** formed of an optically transparent material.

As shown in FIG. 8, the plurality of nano-photon layers **104a-104h** and the plurality of substrate layers **106a-106i** may be alternately arranged in the thickness direction *z* of the layer structure **102**. Consequently, in this structure each of the substrate layers **106b-106h** interposed between respective two adjacent nano-photon layers **104a-104h** defines with the adjacent nano-photon layers a 2D cavity structure shown in FIG. 5. In addition, three consecutive substrate layers and the respective nano-photon layers interposed therebetween correspond to the layer structure shown in FIG. 7. Hence, the description of the layer structures shown in FIG. 5 and FIG. 7 applies also to the optical filter **100** shown in FIG. 8.

As set forth above, the nano-photon material may comprise fullerene molecules, in particular C₆₀ fullerene molecules.

Having in mind that the radiative decay rate of excitons in a 2D cavity is given by the expression

$$\Gamma_{2D} = \left(\frac{\lambda}{2\pi l} \right)^2 \Gamma_{0D},$$

it may be advantageous to select the dimensions of at least one of the cavities to be much smaller than the wavelengths of interest. For wavelengths in the visible frequency range, at least one of the substrate layers **106a-106i** may have a thickness in a range selected from 5-30 nm, 5-15 nm, and 5-10 nm.

In an exemplary embodiment, the thicknesses of the substrate layers **106a-106i** may be selected as follows: substrate layer **106a** (formed of, e.g. SiO₂): 50-100 nm, substrate layer **106b** (formed of, e.g. TiO₂): 5-10 nm, substrate layer **106c** (formed of, e.g. SiO₂): 10-15 nm, substrate layer **106d** (formed of, e.g. TiO₂): 5-10 nm, substrate layer **106e** (formed of, e.g. SiO₂): 10-15 nm, substrate layer **106f** (formed of, e.g. TiO₂): 5-10 nm, substrate layer **106g** (formed of, e.g. SiO₂): 5-10 nm, substrate layer **106h** (formed of, e.g. TiO₂): 5-10 nm, and substrate layer **106i** (formed of, e.g. SiO₂): 50-100 nm. Here, the thicknesses of the outermost substrate layers **106a** and **106i** in the thickness direction *z* of the layer structure **102** may have significantly higher thicknesses than the other substrate layers **106b-106h**. These substrate layers **106a** and **106i** may, hence, serve as protective layers of the layer structure **102**.

Hence, as can be seen from this example in a layer structure of an optical filter according to the present disclosure, the substrate layers may be provided with different thicknesses for example to control the propagation direction of light in the layer structure.

At least one of the substrate layers **106a-106i**, optionally a plurality thereof, or further optionally all of the substrate layers **106a-106i**, may be substantially free of nano-photon material in order to ensure a well-defined cavity geometry in which the exciton decay rate can be precisely adjusted for a specific wavelength.

In addition, at least one of the nano-photon layers **104a-104h**, optionally a plurality thereof, or further optionally all of the nano-photon layers **104a-104h**, may be substantially free of the optically transparent material of the substrate layers **106a-106i**. In an exemplary embodiment, the weight fraction of nano-photon material in at least one of the nano-photon layers **104a-104h**, optionally in a plurality of the nano-photon layers **104a-104h**, further optionally in all of the nano-photon layers **104a-104h**, is higher than 99%. In this way, a high conversion efficiency of incident light into hyperlight can be ensured.

The substrate layers **106a-106i** may be made of the same optically transparent material. Alternatively, at least two of the plurality of substrate layers **106a-106i** may be made of mutually different materials with mutually different refractive indices. As explained in the foregoing, in this way the reflection characteristics of the layer structures at the respective interfaces between the substrate layers may be adjusted for the wavelengths of interest.

To avoid an excessive absorption of light in the nano-photon layers **104a-104h**, their thicknesses may be in a range selected from: 3-10 nm, 3-7 nm, and 3-5 nm. In the exemplary embodiment shown in FIG. 8, all nano-photon layers **104a-104h** may have thicknesses in a range of 3-5 nm.

The layer structures disclosed herein may be fabricated for example by means of chemical or physical vapor deposition.

As shown in FIG. 8, the filter **100** may further include a carrier **108** supporting the layer structure **102**. The carrier **108** may be made of an optically transparent material such as PMMA, CR39, or glass. The carrier may have a transmittance for visible light of at least 70%.

Even though not shown in FIG. 8, the carrier **108** may be provided on opposite sides thereof with a layer structure **102**. In addition, the carrier **108** may include nano-photonic material **108a** with icosahedral or dodecahedral symmetry, such as C_{60} , dispersed therein or deposited as a layer **108b** on a surface thereof. In this way, the carrier **108** may also contribute to the generation of hyperlight, e.g. by means of resonant emission of the energy eigenstates T_{1g} , T_{2g} , T_{1u} , and T_{2u} of C_{60} . In this way, the conversion efficiency of incident light into hyperlight may be increased. The weight concentration of the nano-photonic material **108a** in the carrier **108** may range between 0.001-0.050.

The carrier **108** does not have to be configured as a planar member as exemplarily shown in FIG. 8, but may be alternatively configured as a curved body, e.g. as a lens, in particular as a spectacle lens. Exemplary spectacles **200** including a pair of lenses **220** equipped with optical filters **100** described above are shown in FIG. 9a. By means of the spectacles depicted in FIG. 9a, incident light is converted into hyperlight the characteristics of which are determined by the golden ratio, as explained on the basis of FIG. 1. It is known, e.g. from US 2008/286453 A1, that the clock cycle of the human brain obeys the golden ratio. Experiments have shown that by exposing the eyes of a test person to light the characteristics of which are determined by the golden ratio, the brain function can be normalized. Hence, wearing spectacles like those shown in FIG. 9a may help normalizing the brain function, thereby improving the general wellbeing.

The spectacles **200** shown in FIG. 9a may be subjected to sun light. However, since the optical filter according to the present invention is configured to convert any type of light (i.e. any wavelength) into hyperlight, a harmonization (normalization) of the brain function can be also achieved by means of artificial light generated by lighting means **300** equipped with an optical filter **100** according to the present disclosure, as shown in FIG. 9b. In this case no spectacles need to be carried to achieve the above effect.

A similar effect can be achieved by means of light emitted by other artificial light sources such as a display **400**, e.g. of a portable computer or of a toy **420**. In an exemplary embodiment, the optical filter **100** may be configured as a display protective foil **440**, as exemplarily indicated in FIG. 9c.

In another exemplary embodiment, an optical filter **100** may be provided as or on a window **520** of a building **500** or may be configured as part of said window **520**. In this way, a significant part of the light (e.g. sun light or artificial light) entering the building **500** may be converted into hyperlight. Filters **100** according to the present disclosure may be applied to any kind of windows including road vehicle windows, aircraft windows, and watercraft windows.

A filter **100** according to the present disclosure may also be employed in a therapeutic lamp **600** which will be referred to in the following as a hyperlight generation device or hyperlight device. An exemplary hyperlight device **600** is shown in FIG. 10. The hyperlight device **600** may include a light source **602** and an optical filter **100** described above. The light source **602** may be configured as a source adapted to emit visible light, e.g. as a halogen lamp.

The hyperlight device **600** may further include a polarizer **606** positioned along a light path **604** between the light source **602** and the filter **100**. The polarizer **606** may be configured as a linear polarizer adapted to convert the light emitted by the light source **602** into linearly polarized light.

The polarizer **606** may be configured as a beam-splitting polarizer such as a Brewster polarizer as indicated in FIG. 10.

By means of a hyperlight device **600** depicted in FIG. 10, light emitted by the light source **602** may be first converted into polarized light by means of the polarizer **606**, and then into hyperlight by means of the filter **100**, i.e. into polarized hyperlight which is also referred to as “hyperpolarized light” in the art. The photons of hyperpolarized light are ordered both by energy and angular momentum. It should be noted that in the hyperlight device **600** the polarizer **606** is not mandatory.

The interaction of light with a filter according to the present disclosure does not only affect the spatial distribution of photons according to their angular momenta, but may also change the spectral characteristics of the light. Experimental results showing this aspect of the filters according to the present disclosure, in particular of the filter shown in FIG. 8, will be explained in the following with reference to FIGS. 11 to 25.

FIG. 11 shows the spectrum of light emitted by an LED after passage through air. This spectrum is indicated by the solid black line in FIG. 11 and is referred to as “LED (AIR)”. In addition, the spectrum of light emitted by the same LED after passage through a PMMA substrate, which does not include nano-photonic material, is shown as a hatched area in FIG. 11. This spectrum is referred to as “LED (PMMA)” in FIG. 11.

As can clearly be seen in FIG. 11, in the wavelength range of ~400-700 nm there is no significant difference between both spectra, meaning that the PMMA does not significantly change the spectral characteristics of the light emitted by the LED.

FIG. 12 shows the spectrum of the light emitted by the LED after passage through air. This spectrum is indicated by the solid black line in FIG. 12 and is referred to as “LED (AIR)”. In addition, the spectrum of light emitted by the same LED after passage through a PMMA substrate equipped with a 0D/2D cavity (filter) described in the foregoing is shown as a hatched area. This spectrum is referred to as “LED (PMMA & 2D CAVITY)” in FIG. 12. The PMMA substrate corresponds to a previously described carrier and may optionally include C_{60} molecules dispersed therein.

The difference between the spectra shown in FIG. 12, i.e. between LED (PMMA & 2D CAVITY) and LED (AIR) is depicted in FIG. 13 as a hatched area.

As can clearly be seen from the spectra shown in FIGS. 12 and 13, by means of the 2D cavity high frequencies in the LED spectrum are converted into frequency components with lower energy in the visible spectrum. Consequently, the effect of the 2D cavity on the light spectrum significantly differs from the effect exerted by a conventional filter that simply suppresses certain spectral components by absorption and, hence, reduces the integral light intensity. More specifically, since a filter according to the present disclosure is configured to convert high-energetic light into low-energetic light, the integral intensity in the visible range is not affected at all or at least to a much lesser extent as compared to conventional optical filters.

For these reasons, optical filters according to the present disclosure may be employed as filters in spectacles, since they are configured to reduce the intensity of incident light in a spectral range potentially harmful for the human eye, while keeping the integral intensity high.

FIG. 14 shows the spectrum of light emitted by an LED after passage through air. This spectrum is indicated by the

solid black line in FIG. 14 and is referred to as "LED (AIR)". In addition, the spectrum of light emitted by the same LED after passage through a CR39 substrate, that does not include nano-photonic material, is shown as a hatched area. This spectrum is referred to as "LED (CR39)" in FIG. 14. CR39 (allyl diglycol carbonate (ADC)) is a plastic polymer commonly used in the manufacture of eyeglass lenses. The CR39 substrate corresponds to a previously described carrier and may optionally include C_{60} molecules dispersed therein or deposited as a thin layer on one of its surfaces.

As can clearly be seen, in the wavelength range of ~400-700 nm there is no significant difference between both spectra, meaning that the CR39 substrate does not significantly change the spectral characteristics of the light emitted by the LED.

FIG. 15 shows again the spectrum of the light emitted by the LED after passage through air. This spectrum is indicated by the solid black line in FIG. 15 and is referred to as "LED (AIR)". In addition, the spectrum of light emitted by the same LED after passage through a CR39 substrate equipped with a 2D cavity (filter) described in the foregoing is shown as a hatched area. This spectrum is referred to as "LED (CR39 & 2D CAVITY)" in FIG. 15. The difference between the spectra shown in FIG. 15, i.e. between the spectra referred to as "LED (CR39 & 2D CAVITY)" and "LED (AIR)" in FIG. 15, is depicted in FIG. 16 as a hatched area.

These measurements confirm the results obtained on the basis of an optical filter including a PMMA substrate, i.e. by means of the 2D cavity the power of incident light in the high-energetic wavelength range of 400-470 nm is converted into light with a lower energy in the wavelength range of between 470-770 nm.

The above results do not depend on the specific light source used. This will be set forth in the following with respect to FIGS. 17 to 22 showing measurements obtained on the basis of Neon light emitted by conventional Neon lamps (tubes) as used, e.g. in offices.

In detail, FIG. 17 shows the spectrum of Neon light after passage through air. This spectrum is indicated by the solid black line in FIG. 17 and is referred to as "NEON (AIR)". In addition, the spectrum of the Neon light after passage through a PMMA substrate, that does not include nano-photonic material, is shown as a hatched area. This spectrum is referred to as "NEON (PMMA)" in FIG. 17.

As can clearly be seen in FIG. 17, in the wavelength range of ~400-700 nm there is no significant difference between both spectra, meaning that the PMMA substrate does not significantly change the spectral characteristics of the Neon light.

FIG. 18 shows again the spectrum of the Neon light after passage through air. This spectrum is indicated by the solid black line in FIG. 18 and is referred to as "NEON (AIR)". In addition, the spectrum of the Neon light after passage through a PMMA substrate equipped with a 2D cavity, i.e. an optical filter, described in the foregoing is shown as a hatched area. This spectrum is referred to as "NEON (PMMA & 2D CAVITY)" in FIG. 18. The difference between the spectra shown in FIG. 18, i.e. between NEON (PMMA & 2D CAVITY) and NEON (AIR), is depicted in FIG. 19 as a hatched area.

FIGS. 18 and 19 confirm the results obtained on the basis of LED light, i.e. the filter attenuates the intensity of the high-energetic light by conversion into lower energetic light.

FIG. 20 shows the spectrum of Neon light after passage through air. This spectrum is indicated by the solid black line in FIG. 20 and is referred to as "NEON (AIR)". In addition,

the spectrum of the Neon light after passage through a CR39 substrate, that does not include nano-photonic material, is shown as a hatched area. This spectrum is referred to as "NEON (CR39)" in FIG. 20.

As can clearly be seen, in the wavelength range of ~400-700 nm there is no significant difference between both spectra, meaning that the CR39 substrate does not significantly change the spectral characteristics of the Neon light.

FIG. 21 shows again the spectrum of the Neon light after passage through air. This spectrum is indicated by the solid black line in FIG. 21 and is referred to as "NEON (AIR)". In addition, the spectrum of the Neon light after passage through a CR39 substrate equipped with a 2D cavity (filter) described in the foregoing is shown as a hatched area. This spectrum is referred to as "NEON (CR39 & 2D CAVITY)" in FIG. 21. The difference between the spectra shown in FIG. 21, i.e. between NEON (CR39 & 2D CAVITY) and NEON (AIR), is depicted in FIG. 22 as a hatched area.

The results of the measurements shown in FIGS. 14 to 22 consistently show that the filters according to the present disclosure are configured to convert high-energetic light into lower energetic light in the visible spectral range, and that this effect does not depend on the light source. This in turn clearly demonstrates the high versatility of the optical filters according to the present disclosure.

As can be seen from the above spectra, the light sources used in the above-discussed measurements do not comprise spectral components with significant intensities at wavelengths higher than 700 nm, i.e. in the IR regime. Therefore, to analyze the influence of an optical filter according to the present disclosure on infrared light (IR), additional measurements have been carried out using sun light as incident light.

The raw spectrum of sun light in the range of 380-780 nm is shown in FIG. 23 as a hatched area (irradiance of 396.24 W/m² and CIE 1931 color coordinates: $x=0.3437$, $y=0.3590$). As can be seen in this figure, the power in the IR regime is more significant as compared to LED and NEON light.

In FIG. 24 both the raw sun light spectrum (indicated by the solid black line) and the sun light spectrum filtered by an optical filter according to the present disclosure (indicated by the hatched area) are shown in the wavelength range of 380-780 nm (irradiance of 153.61 W/m², CIE 1931 color coordinates: $x=0.3192$, $y=0.3934$). As can be seen from these spectra, both the high-energetic and the low-energetic spectral components are suppressed by an optical filter according to the present disclosure. In this way, the sun light spectrum is adjusted to the spectral sensitivity characteristics of the human eye (match of about 97%).

In the table shown in FIG. 25, the results of various measurements with different light sources (LED, Neon) and different carrier materials (PMMA, CR39) are summarized.

In detail, in the lines of the table shown in FIG. 25 the characteristics of different light spectra are shown. These characteristics include: the illuminance E_v (lux=lm/m²), the color temperature T_{cp} (K=Kelvin), the dominant wavelength λ_d (nm), the color coordinates in the CIE 1931 color space, the excitation effect or probability Pe (%) at the dominant wavelength λ_d , and the irradiance SDE (W/m²) in different wavelength ranges. "C60 (@)" further indicates that the carrier includes C_{60} molecules dispersed therein. "C60 (nf)" indicates that the carrier has a C_{60} layer deposited thereon.

In line A0 of the table shown in FIG. 25 the characteristics of light emitted by an LED are summarized.

In line A01, the characteristics of the LED light after passage through a PMMA substrate that does not include nano-photonic material are summarized.

In line A011, the characteristics of the LED light after passage through an optical filter according to the present disclosure including a PMMA carrier with C_{60} molecules incorporated therein are summarized.

In line A02, the characteristics of the LED light after passage through a CR39 substrate that does not include nano-photonic material are summarized.

In line A021, the characteristics of the LED light after passage through an optical filter according to the present disclosure including a CR39 carrier with a C_{60} film provided thereon are summarized.

In line B0 of the table shown in FIG. 25 the characteristics of Neon light are summarized.

In line B01, the characteristics of the Neon light after passage through a PMMA substrate that is free of nano-photonic material are summarized.

In line B011, the characteristics of the Neon light after passage through an optical filter according to the present disclosure including a PMMA carrier with C_{60} molecules incorporated therein are summarized.

In line B02, the characteristics of the Neon light after passage through a CR39 substrate that is free of nano-photonic material are summarized.

In line B021, the characteristics of the Neon light after passage through an optical filter according to the present disclosure including a CR39 carrier with a C_{60} film provided thereon are summarized.

In the following, several Examples according to the present disclosure will be described.

Example 1 is an optical filter comprising a layer structure comprising a plurality of layers stacked in a thickness direction of the layer structure and including: a plurality of nano-photonic layers formed of a nano-photonic material with icosahedral or dodecahedral symmetry, and at least one substrate layer formed of an optically transparent material, wherein one of the at least one substrate layer is positioned between two of the plurality nano-photonic layers in the thickness direction of the layer structure.

In Example 2, the subject matter of Example 1 can optionally further include that the nano-photonic material comprises fullerene molecules.

In Example 3, the subject matter of Example 2 can optionally further include that the nano-photonic material comprises C_{60} fullerene molecules.

In Example 4, the subject matter of any one of Examples 1 to 3 can optionally further include that the at least one substrate has a thickness in a range selected from: 5-30 nm, 5-20 nm, 5-15 nm, and 5-10 nm.

In Example 5, the optical filter of any one of Examples 1 to 4 can optionally further include that at least one of the plurality of nano-photonic layers has a thickness in a range selected from: 3-10 nm, 3-7 nm, and 3-5 nm.

In Example 6, the subject matter of any one of Examples 1 to 5 can optionally further include that the at least one substrate layer is free of nano-photonic material.

In Example 7, the subject matter of any one of Examples 1 to 6 can optionally further include that at least one of the plurality of nano-photonic layers is free of optically transparent material, e.g. of optically transparent material of the type included in the at least one substrate layer. Optionally, a plurality of the nano-photonic layers or even all nano-photonic layers may be free of the optically transparent material of the at least one substrate layer.

In Example 8, the subject matter of any one of Examples 1 to 7 can optionally further include that the layer structure includes a plurality of substrate layers.

In Example 9, the subject matter of Example 8 can optionally further include that the plurality of substrate layers and the plurality of nano-photonic layers are alternately arranged in the thickness direction of the layer structure.

In Example 10, the subject matter of Example 8 or 9 can optionally further include that at least two of the plurality of substrate layers have mutually different refractive indices.

In Example 11, the subject matter of any one of Examples 8 to 10 can optionally further include that at least two of the plurality of substrate layers have mutually different dimensions in the thickness direction of the layer structure.

In Example 12, the subject matter of any one of Examples 1 to 11 can optionally further comprise a carrier supporting the layer structure.

In Example 13, the subject matter of Example 12 can optionally further include that the carrier is made of an optically transparent material and is configured as a carrier layer stacked on the layer structure.

In Example 14, the subject matter of Example 13 can optionally further include that the carrier is configured as a lens.

In Example 15, the subject matter of Example 13 or 14 can optionally further include that the carrier includes nano-photonic material with icosahedral or dodecahedral symmetry.

According to an Example 16, spectacles comprising an optical filter of any one of Examples 1 to 15 are provided.

Example 17 is a therapeutic lamp, comprising a light source and an optical filter of any one of Examples 1 to 15.

In Example 18, the therapeutic lamp of Example 17 can optionally further include a polarizer positioned on a light path between the light source and the optical filter and configured to polarize light emitted by the light source.

In Example 19, the therapeutic lamp of Example 18 can optionally further include that the polarizer is configured as a linear polarizer configured to convert incident light into linearly polarized light.

In Example 20, the subject matter of Example 19 can optionally further include that the polarizer comprises or is configured as a Brewster polarizer.

Example 21 is a lighting means including an optical filter that includes nano-photonic material with icosahedral or dodecahedral symmetry, in particular an optical filter of any one of Examples 1 to 15. These lighting means may include room lighting means such as light bulbs or neon tubes, and street lighting means.

Example 22 is a display including an optical filter that includes nano-photonic material with icosahedral or dodecahedral symmetry, in particular an optical filter of any one of Examples 1 to 15. The display may be the display of a computer, a TV, a mobile phone etc.

Example 23 is a display protective foil configured as or including an optical filter that includes nano-photonic material with icosahedral or dodecahedral symmetry, in particular an optical filter of any one of Examples 1 to 15.

Example 24 is a window including an optical filter that includes nano-photonic material with icosahedral or dodecahedral symmetry, in particular an optical filter of any one of Examples 1 to 15. The window may be configured as a window of a building, a vehicle, an aircraft, a watercraft etc.

Example 25 is a toy including an optical filter that includes nano-photonic material with icosahedral or dodeca-

15

hedral symmetry, in particular an optical filter of any one of Examples 1 to 15. The toy may be configured as a gaming computer.

Example 26 is an optical lens including an optical filter that includes nano-photonics material with icosahedral or dodecahedral symmetry, in particular an optical filter of any one of Examples 1 to 15. The optical lens may be configured as a spectacle lens.

Example 27 defines the use of an optical filter of any one of Examples 1 to 15 for filtering light.

In Example 28, the subject matter of Example 27 can optionally further include that the light is sun light or artificial light.

The invention claimed is:

1. An optical filter based on light-matter coupling in quantum confined cavity spaces comprising a layer structure comprising a plurality of layers stacked in a thickness direction of the layer structure and including:

a plurality of nano-photonics layers formed of a nano-photonics material with icosahedral or dodecahedral symmetry, and at least one substrate layer formed of an optically transparent material, the at least one substrate layer being free of nano-photonics material, wherein one of the at least one substrate layer is positioned between two of the plurality of nano-photonics layers in the thickness direction of the layer structure such that a 2D cavity is defined by the layer structure, wherein the 2D cavity is defined by the layer structure satisfying the condition:

$$\frac{\lambda}{2\pi l} > 1,$$

wherein λ is a wavelength of visible incident light and l is a thickness of the at least one substrate layer.

2. The optical filter of claim 1, wherein the nano-photonics material comprises fullerene molecules.

3. The optical filter of claim 2, wherein the nano-photonics material comprises C₆₀ fullerene molecules.

4. The optical filter of claim 1, wherein the at least one substrate layer has a thickness in a range from 5-30 nm.

5. The optical filter of claim 1, wherein at least one of the plurality of nano-photonics layers has a thickness in a range from 3-10 nm.

16

6. The optical filter of claim 1, wherein at least one of the plurality of nano-photonics layers is free of the optically transparent material of the at least one substrate layer.

7. The optical filter of claim 1, wherein the layer structure includes a plurality of substrate layers.

8. The optical filter of claim 7, wherein the plurality of substrate layers and the plurality of nano-photonics layers are alternately arranged in the thickness direction of the layer structure.

9. The optical filter of claim 7, wherein at least two of the plurality of substrate layers have mutually different refractive indices.

10. The optical filter of claim 7, wherein at least two of the plurality of substrate layers have mutually different dimensions in the thickness direction of the layer structure.

11. The optical filter of claim 1, further comprising a carrier supporting the layer structure.

12. The optical filter of claim 11, wherein the carrier is made of an optically transparent material and is configured as a carrier layer stacked on the layer structure.

13. The optical filter of claim 12, wherein the carrier is configured as a lens.

14. The optical filter of claim 12, wherein the carrier includes nano-photonics material.

15. Spectacles comprising an optical filter of claim 1.

16. A therapeutic lamp, comprising a light source and an optical filter of claim 1.

17. The therapeutic lamp of claim 16, further comprising a polarizer positioned on a light path between the light source and the optical filter and configured to polarize light emitted by the light source.

18. The therapeutic lamp of claim 17, wherein the polarizer is configured as a linear polarizer configured to convert incident light into linearly polarized light.

19. The therapeutic lamp of claim 18, wherein the polarizer comprises or is configured as a Brewster polarizer.

20. A lighting means including an optical filter of claim 1.

21. A display including an optical filter of claim 1.

22. A display protective foil configured as or including an optical filter of claim 1.

23. A window including an optical filter of claim 1.

24. A toy including an optical filter of claim 1.

25. An optical lens including an optical filter of claim 1.

* * * * *