



US012396760B2

(12) **United States Patent**
Beyer

(10) **Patent No.:** **US 12,396,760 B2**
(45) **Date of Patent:** **Aug. 26, 2025**

(54) **ORTHOPEDIC IMPLANT KIT**

(71) Applicant: **Neo Medical SA**, La Villette (CH)

(72) Inventor: **Morten Beyer**, Rødkaersbro (DK)

(73) Assignee: **NEO MEDICAL S.A.**, La Villette (CH)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 1238 days.

(21) Appl. No.: **17/105,683**

(22) Filed: **Nov. 27, 2020**

(65) **Prior Publication Data**

US 2021/0077155 A1 Mar. 18, 2021

Related U.S. Application Data

(60) Division of application No. 15/939,338, filed on Mar. 29, 2018, now Pat. No. 10,888,356, which is a continuation of application No. 14/890,631, filed as application No. PCT/IB2014/060979 on Apr. 24, 2014, now Pat. No. 10,058,355.

(30) **Foreign Application Priority Data**

May 13, 2013 (WO) PCT/IB2013/053892

(51) **Int. Cl.**

A61B 17/70 (2006.01)

A61B 17/88 (2006.01)

(52) **U.S. Cl.**

CPC **A61B 17/7037** (2013.01); **A61B 17/7002** (2013.01); **A61B 17/7032** (2013.01); **A61B 17/7038** (2013.01); **A61B 17/708** (2013.01); **A61B 17/7085** (2013.01); **A61B 17/7086** (2013.01); **A61B 17/7091** (2013.01); **A61B 17/8875** (2013.01)

(58) **Field of Classification Search**

CPC A61B 17/7074; A61B 17/7076; A61B 17/708; A61B 17/7082; A61B 17/7083; A61B 17/7085; A61B 17/3439
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,650,393 A 3/1972 Reiss
4,834,757 A 5/1989 Brantigan
5,263,937 A * 11/1993 Shipp A61B 17/3417
606/167

(Continued)

FOREIGN PATENT DOCUMENTS

CN 102026584 4/2011
CN 102026584 A 4/2011

(Continued)

OTHER PUBLICATIONS

First Office Action of May 3, 2017 for the State Intellectual Property Office of China (SIPA) for the counterpart application with the Serial No. 201480027310.0—EN translation.

(Continued)


Primary Examiner — Lynnsy M Summitt

(74) *Attorney, Agent, or Firm* — NIXON & VANDERHYE

(57) **ABSTRACT**

An orthopedic implant kit comprising a lockable poly-axial screw, a tissue dilatation sleeve, a screw driver, a screw extender, a rod, rod-reduction device, a set screw driver, a torque limiting device and a screw releasing device.

9 Claims, 24 Drawing Sheets

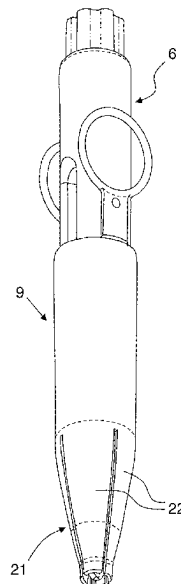

US 12,396,760 B2

Page 2

(56)	References Cited			7,874,981 B2 *	1/2011	Whitman	A61B 17/3468
	U.S. PATENT DOCUMENTS			7,892,238 B2 *	2/2011	DiPoto	600/184
							A61B 17/7002
							606/103
	5,304,119 A *	4/1994	Balaban	A61M 31/00	7,892,259 B2	2/2011	Biedermann et al.
				604/511	7,922,725 B2	4/2011	Darst Rice et al.
	5,354,302 A *	10/1994	Ko	A61B 1/00087	7,931,673 B2	4/2011	Hestad et al.
				604/161	7,951,172 B2	5/2011	Chao
	5,669,909 A	9/1997	Zdeblick		7,967,821 B2	6/2011	Sicvol et al.
	5,728,098 A	3/1998	Sherman		8,016,832 B2	9/2011	Vonwiller et al.
	5,752,970 A *	5/1998	Yoon	A61B 17/3498	8,016,862 B2	9/2011	Felix et al.
				604/167.03	8,034,086 B2	10/2011	Iott
	5,797,918 A	8/1998	McGuire		8,043,343 B2 *	10/2011	Miller
	5,814,073 A *	9/1998	Bonutti	A61B 17/3439			A61B 17/7038
				606/232			606/279
	5,904,685 A *	5/1999	Walawalkar	A61F 2/0805	8,052,724 B2	11/2011	Jackson
				606/104	8,088,163 B1	1/2012	Kleiner
	5,913,860 A	6/1999	Scholl		8,114,085 B2	2/2012	Von Jako
	6,113,601 A	9/2000	Tatar		8,128,667 B2	3/2012	Jackson
	6,368,321 B1	4/2002	Jackson		8,137,356 B2	3/2012	Hestad et al.
	6,371,968 B1	4/2002	Kogasaka et al.		8,152,810 B2	4/2012	Jackson
	6,423,064 B1	7/2002	Kluger		8,167,911 B2	5/2012	Shluzas et al.
	6,551,316 B1	4/2003	Rinner		8,197,519 B2	6/2012	Schlaepfer
	6,644,087 B1	11/2003	Ralph		8,246,538 B2 *	8/2012	Gorek
	6,716,214 B1	4/2004	Jackson				A61B 17/0293
	6,726,699 B1 *	4/2004	Wright	A61B 17/3421	8,246,665 B2	8/2012	Butler et al.
				606/185	8,262,662 B2	9/2012	Beardsley
	6,743,231 B1	6/2004	Gray		8,262,704 B2	9/2012	Matthis et al.
	6,849,064 B2 *	2/2005	Hamada	A61B 17/3439	8,282,604 B2 *	10/2012	Gresham
				604/164.01			A61B 17/3421
	6,929,606 B2 *	8/2005	Ritland	A61B 17/1757	8,317,796 B2	11/2012	Stihl et al.
				600/210	8,366,747 B2	2/2013	Shluzas
	6,939,318 B2 *	9/2005	Stenzel	A61B 17/3468	8,372,121 B2	2/2013	Capote
				604/60	8,372,131 B2 *	2/2013	Hestad
	7,056,329 B2 *	6/2006	Kerr	A61B 17/3496			A61F 2/966
				606/190	8,382,805 B2	2/2013	623/1.2
	7,066,937 B2	6/2006	Shluzas		8,394,109 B2	3/2013	Wang et al.
	7,079,883 B2 *	7/2006	Marino	A61B 17/3423	8,409,083 B2 *	4/2013	Hutton et al.
				128/898			Mangiardi
	7,144,393 B2 *	12/2006	DiPoto	A61B 17/3439	8,465,546 B2	6/2013	Jodaitis
				606/1	8,469,960 B2	6/2013	Hutton
	7,160,300 B2	1/2007	Jackson		8,562,652 B2	10/2013	Biedermann
	7,179,225 B2	2/2007	Shluzas et al.		8,602,984 B2 *	12/2013	Raymond
	7,204,851 B2 *	4/2007	Trieu	A61F 2/4611			A61B 17/02
				623/17.11	8,603,094 B2	12/2013	600/219
	7,250,052 B2 *	7/2007	Landry	A61B 17/7085	8,603,145 B2	12/2013	Walker et al.
				606/86 A	8,608,746 B2	12/2013	Forton
	7,374,534 B2 *	5/2008	Dalton	A61B 17/3439	8,617,218 B2	12/2013	Kolb et al.
				600/222	8,636,783 B2	1/2014	Justis et al.
	7,473,256 B2 *	1/2009	Assell	A61B 17/1757	8,734,515 B2 *	5/2014	Crall et al.
				606/90			Frey
	7,491,168 B2	2/2009	Raymond et al.		8,747,407 B2 *	6/2014	Gorek
	7,520,879 B2	4/2009	Justis				A61B 17/0206
	7,527,638 B2	5/2009	Anderson		8,834,527 B2 *	9/2014	606/267
	7,588,575 B2	9/2009	Colleran				A61B 17/7037
	7,588,588 B2 *	9/2009	Spitler	A61B 17/7082	8,858,621 B2 *	10/2014	606/279
				606/279			A61B 17/3468
	7,604,655 B2	10/2009	Warnick		8,870,878 B2	10/2014	623/2.11
	7,651,502 B2	1/2010	Jackson		8,876,710 B2 *	11/2014	Gorek
	7,666,189 B2	2/2010	Gerber et al.				Ferreira
	7,691,129 B2	4/2010	Felix		9,050,139 B2	6/2015	A61B 17/3439
	7,691,132 B2	4/2010	Landry		9,066,758 B2	6/2015	600/206
	7,708,744 B2 *	5/2010	Soma	A61M 25/09041	9,066,761 B2	6/2015	Jackson
				606/108	9,078,769 B2 *	7/2015	Justis et al.
	7,744,629 B2	6/2010	Hestad et al.		9,101,401 B2	8/2015	McBride et al.
	7,749,232 B2	7/2010	Salerni		9,138,261 B2	9/2015	Farin
	7,749,233 B2 *	7/2010	Farr	A61B 17/7085	9,204,909 B2	12/2015	A61F 2/4465
				606/86 A	9,211,143 B2	12/2015	Dalton et al.
	7,758,617 B2 *	7/2010	Lott	A61B 17/7086	9,211,149 B2	12/2015	Di Lauro et al.
				606/255	9,326,798 B2	5/2016	Rezach et al.
	7,766,920 B2 *	8/2010	Ciccone	A61B 17/862	9,408,649 B2	8/2016	Barry
				606/86 R	9,492,209 B2	11/2016	Hoefler et al.
	7,811,288 B2	10/2010	Jones		9,526,537 B2	12/2016	Kolb et al.
	7,842,044 B2	11/2010	Runco et al.		9,554,789 B2 *	1/2017	Felix et al.
	7,846,093 B2 *	12/2010	Gorek	A61B 17/7002	9,585,702 B2	3/2017	Biedermann et al.
				600/206	9,655,653 B2	5/2017	Meyer et al.
	7,862,587 B2	1/2011	Jackson		9,668,754 B2 *	6/2017	Overes
					9,707,019 B2	7/2017	A61B 90/57
					9,795,771 B2 *	10/2017	Hutton
							Lindner et al.
							Pfeiffer
							A61B 17/1604
							Miller et al.
							Trieu
							A61M 29/02

US 12,396,760 B2

Page 3

(56)	References Cited				2009/0306586	A1 *	12/2009	Ross	A61B 17/3439	
	U.S. PATENT DOCUMENTS				2010/0049003	A1 *	2/2010	Levy	604/93.01 A61B 17/3439 600/199	
	9,814,488	B2 *	11/2017	Tatsumi	A61B 17/3421	2010/0152785	A1	6/2010	Forton et al.	
	9,924,982	B2	3/2018	Jackson		2010/0292742	A1	11/2010	Stad	
	9,962,197	B2	5/2018	Dandaniopoulos et al.		2010/0312103	A1	12/2010	Gorek	
	9,968,378	B1	5/2018	Johnson		2011/0040328	A1	2/2011	Miller et al.	
	10,194,967	B2 *	2/2019	Baynham	A61B 17/7004	2011/0106179	A1	5/2011	Prevost	
	10,258,228	B2 *	4/2019	Genovese	A61B 1/32	2011/0166606	A1	7/2011	Stihl et al.	
	10,398,543	B1 *	9/2019	Solar	A61F 2/12	2011/0172718	A1	7/2011	Felix et al.	
	10,925,592	B2 *	2/2021	Sandhu	A61B 17/3468	2011/0184465	A1 *	7/2011	Boehm	A61B 17/7037 606/264
	11,154,286	B2 *	10/2021	Seifert	A61B 17/3462					
	11,272,835	B2 *	3/2022	Hsu	A61B 1/00135	2011/0245883	A1	10/2011	Dall	
	11,464,577	B2 *	10/2022	Bush, Jr.	A61B 17/162	2011/0263945	A1	10/2011	Peterson et al.	
	11,590,326	B2 *	2/2023	Wheeler	A61M 25/0668	2011/0313460	A1	12/2011	McLean et al.	
	11,707,267	B2 *	7/2023	Sweeney	A61B 50/30 600/201	2011/0319896	A1	12/2011	Papenfuss	
	11,744,447	B2 *	9/2023	Thommen	A61B 1/00154 606/90	2012/0022575	A1 *	1/2012	Mire	A61B 17/0293 606/198
	11,903,620	B2 *	2/2024	Richter	A61B 17/7091	2012/0022597	A1 *	1/2012	Gephart	A61B 17/7091 606/279
	2002/0193822	A1 *	12/2002	Hung	A61B 17/3439 606/198	2012/0031792	A1	2/2012	Petit	
	2003/0114860	A1	6/2003	Cavagna		2012/0186411	A1	7/2012	Lodahi	
	2003/0191371	A1 *	10/2003	Smith	A61B 17/02 600/210	2013/0012955	A1 *	1/2013	Lin	A61M 29/00 606/104
	2004/0144149	A1	7/2004	Strippgen		2013/0012999	A1	1/2013	Petit	
	2004/0243139	A1 *	12/2004	Lewis	A61B 17/8891 606/301	2013/0023941	A1	1/2013	Jackson et al.	
	2005/0131408	A1	6/2005	Sicvol		2013/0053896	A1 *	2/2013	Voyadzis	A61B 17/1671 606/279
	2005/0192570	A1	9/2005	Jackson		2013/0096624	A1	4/2013	Di Lauro et al.	
	2005/0192579	A1	9/2005	Jackson		2014/0031828	A1	1/2014	Patel	
	2005/0240197	A1	10/2005	Kmiec		2014/0046385	A1	2/2014	Asaad	
	2005/0245928	A1	11/2005	Colleran		2014/0052187	A1	2/2014	McBride	
	2006/0036244	A1	2/2006	Spitler et al.		2014/0100613	A1	4/2014	Iott et al.	
	2006/0079903	A1 *	4/2006	Wong	A61B 17/8891 606/328	2014/0128878	A1	5/2014	O'Neil	
	2006/0089644	A1	4/2006	Felix		2014/0171955	A1	6/2014	Smith	
	2006/0106415	A1 *	5/2006	Gabbay	A61B 17/3468 606/198	2014/0277203	A1	9/2014	Atoulikian	
	2006/0111712	A1	5/2006	Jackson		2014/0288655	A1	9/2014	Parry	
	2006/0111715	A1	5/2006	Jackson		2015/0066042	A1	3/2015	Cummins et al.	
	2006/0212062	A1 *	9/2006	Farascioni	A61B 17/3439 606/191	2015/0265322	A1	9/2015	Jackson	
	2006/0217719	A1	9/2006	Albert		2015/0351810	A1	12/2015	Lindner et al.	
	2006/0235427	A1	10/2006	Thomas		2016/0089186	A1	3/2016	Beyer	
	2006/0241599	A1	10/2006	Konieczynski		2016/0166304	A1	6/2016	Stad	
	2007/0078460	A1	4/2007	Frigg		2016/0287294	A1	10/2016	Kubo	
	2007/0106123	A1	5/2007	Gorek		2016/0346026	A1	12/2016	Bootwala	
	2007/0198045	A1 *	8/2007	Morton	A61M 29/00 606/191	2016/0374825	A1	12/2016	Kleiner	
	2007/0233091	A1	10/2007	Naifeh		2017/0095272	A1	4/2017	Hutton et al.	
	2007/0239159	A1	10/2007	Altarac		2017/0143384	A1	5/2017	Hutton et al.	
	2007/0261868	A1	11/2007	Gross		2017/0181774	A1	6/2017	Cahill	
	2007/0270866	A1	11/2007	Von Jako		2017/0181775	A1	6/2017	Jackson	
	2007/0270875	A1 *	11/2007	Bacher	A61B 17/025 606/90	2017/0189082	A1	7/2017	Petit	
	2008/0012111	A1	1/2008	Pu		2017/0265892	A1 *	9/2017	Winegar	A61B 17/3415
	2008/0039839	A1	2/2008	Songer		2017/0348037	A1	12/2017	Sexson	
	2008/0114403	A1 *	5/2008	Kuester	A61B 17/7037 606/264	2018/0146990	A1 *	5/2018	Manzanares	A61B 17/7092
	2008/0119852	A1	5/2008	Dalton		2018/0214186	A1	8/2018	Beyer	
	2008/0147129	A1	6/2008	Biedermann		2018/0303631	A1	10/2018	Phan	
	2008/0154279	A1	6/2008	Schumacher		2021/0153968	A1 *	5/2021	Peterson	A61B 17/7082
	2008/0200918	A1	8/2008	Spitler		2022/0023513	A1 *	1/2022	Wheeler	A61M 1/04
	2008/0243189	A1	10/2008	Purcell		FOREIGN PATENT DOCUMENTS				
	2008/0262318	A1	10/2008	Gorek		CN	202446242	9/2012		
	2008/0294172	A1	11/2008	Baumgart		CN	202497225	U	10/2012	
	2008/0294203	A1	11/2008	Kovach		CN	203777040		8/2014	
2009/0171391	A1	7/2009	Hutton		CN	203777040	U	8/2014		
2009/0204159	A1	8/2009	Justis		CN	105662662	A	6/2016		
2009/0221879	A1 *	9/2009	Gorek	A61B 17/708 606/279	CN	1005662662		6/2016		
2009/0222044	A1 *	9/2009	Gorek	A61B 17/0218 606/279	EP	1/26264	A1	11/2006		
2009/0222045	A1	9/2009	Gorek		EP	1726264	A1	11/2006		
2009/0281571	A1	11/2009	Weaver		EP	1854587	A2	11/2007		
					EP	1994892	A1	11/2008		
					EP	1994902		11/2008		
					EP	1994902	A2	11/2008		
					EP	2198793	A2	6/2010		
					EP	2283787		2/2011		
					EP	2283787	A1	2/2011		
					EP	2522287		11/2012		
					EP	2522287	A1	11/2012		

(56)

References Cited

FOREIGN PATENT DOCUMENTS

EP	2692304	A1	2/2014
FR	2712521	A1	5/1995
JP	2007283101		11/2007
JP	2011500267		1/2011
JP	2011500267	A	1/2011
JP	2012507316		3/2012
JP	2013515580		5/2013
TW	M273326	U	8/2005
WO	9819616	A1	5/1998
WO	WO 9819616		5/1998
WO	2005060837	A2	7/2005
WO	WO 2005060837		7/2005
WO	2006045089	A2	4/2006
WO	WO 2006045089		4/2006
WO	2006091863	A2	8/2006
WO	WO 2006091863		8/2006
WO	2006130179	A2	12/2006
WO	WO 2006130179		12/2006
WO	2007092870	A2	8/2007
WO	WO 2007092870		8/2007
WO	2007117366	A2	10/2007
WO	WO 2007117366		10/2007
WO	2008097974	A2	8/2008
WO	WO 2008097974		8/2008
WO	2009055026	A1	4/2009
WO	2009055034	A1	4/2009
WO	WO 2009055026		4/2009
WO	WO 2009055034		4/2009
WO	2009114422	A2	9/2009
WO	WO 2009114422		9/2009
WO	2009137246	A1	11/2009
WO	WO 2009137246		11/2009
WO	WO 2010052462		5/2010
WO	WO 2011080426		7/2011

OTHER PUBLICATIONS

Indian first Office Action dated Sep. 10, 2020 for Application IN 10594/DELNP/2015.

International Search Report mailed Nov. 25, 2014 in International Application No. PCT/IB2014/060979, 5 pages.

Japanese Appeal Decision dated Aug. 18, 2020 for Application No. 2016-513463—translation EN.

Japanese Office Action issued by the Japanese Patent Office in the counterpart Japanese Application No. 2016-513463 Feb. 6, 2018, 9 pages + English translation.

Japanese Office Action issued by the Japanese Patent Office in the counterpart Japanese Application No. 2016-513463 of Aug. 14, 2018 and English translation thereof.

Notification of granting patent right of Jun. 6, 2019 for the State Intellectual Property Office of China (SIPA) for the counterpart application with the Serial No. 201480027310.0.

Office Action of Aug. 20, 2019 from the Japanese Patent Office (“JPO”) for counterpart application with Application Serial No. JP2018-199618 with English Translation.

Opposition against European Patent No. 2 526 888 (EPO Application No. 12 177 688.4) of Apr. 21, 2018, EP counterpart of U.S. Pat. Pub. No. 2017/0189082.

Opposition against European Patent No. 2 526 888, Oppnment Response of Mar. 31, 2020.

Second Office Action issued from the European Patent Office (EPO) as an Article 94(3) EPC Communication of Aug. 29, 2018 in the counterpart application with the Serial No. 14 734 227.3.

Second Office Action of Feb. 5, 2018 for the State Intellectual Property Office of China (SIPA) for the counterpart application with the Serial No. 201480027310.0.

Third Office Action issued from the European Patent Office (EPO) as an Article 94(3) EPC Communication of May 3, 2019 for Serial No. 14 734 227.3.

Third Party Observation filed on Jun. 26, 2019 against EPO Patent Application No. EP20100810769 (Publication No. EP2519180, corresponding to U.S. Pat. Pub. No. 2017/0189082).

Written Opinion of the ISA, mailed Nov. 25, 2014 for International Application No. PCT/IB2014/060979.

International Search Report, mailed Aug. 21, 2020 for International Application No. PCT/IB2020/052857.

Written Opinion of the ISA, mailed Aug. 21, 2020 for International Application No. PCT/IB2020/052857.

Indian Office Action mailed on Feb. 21, 2022, for Divisional Application No. IN 202118009679.

European Search Opinion for Application EP20196814.6 dated Jan. 14, 2021.

European Search Opinion for Application EP20196821.1 dated Jan. 19, 2021.

European Search Report for Application EP20196814.6 dated Jan. 14, 2021.

European Search Report for Application EP20196821.1 dated Jan. 19, 2021.

Japanese Office Action for Application No. JP 2020-073757 dated May 11, 2021 (in JP with translation in EN).

* cited by examiner

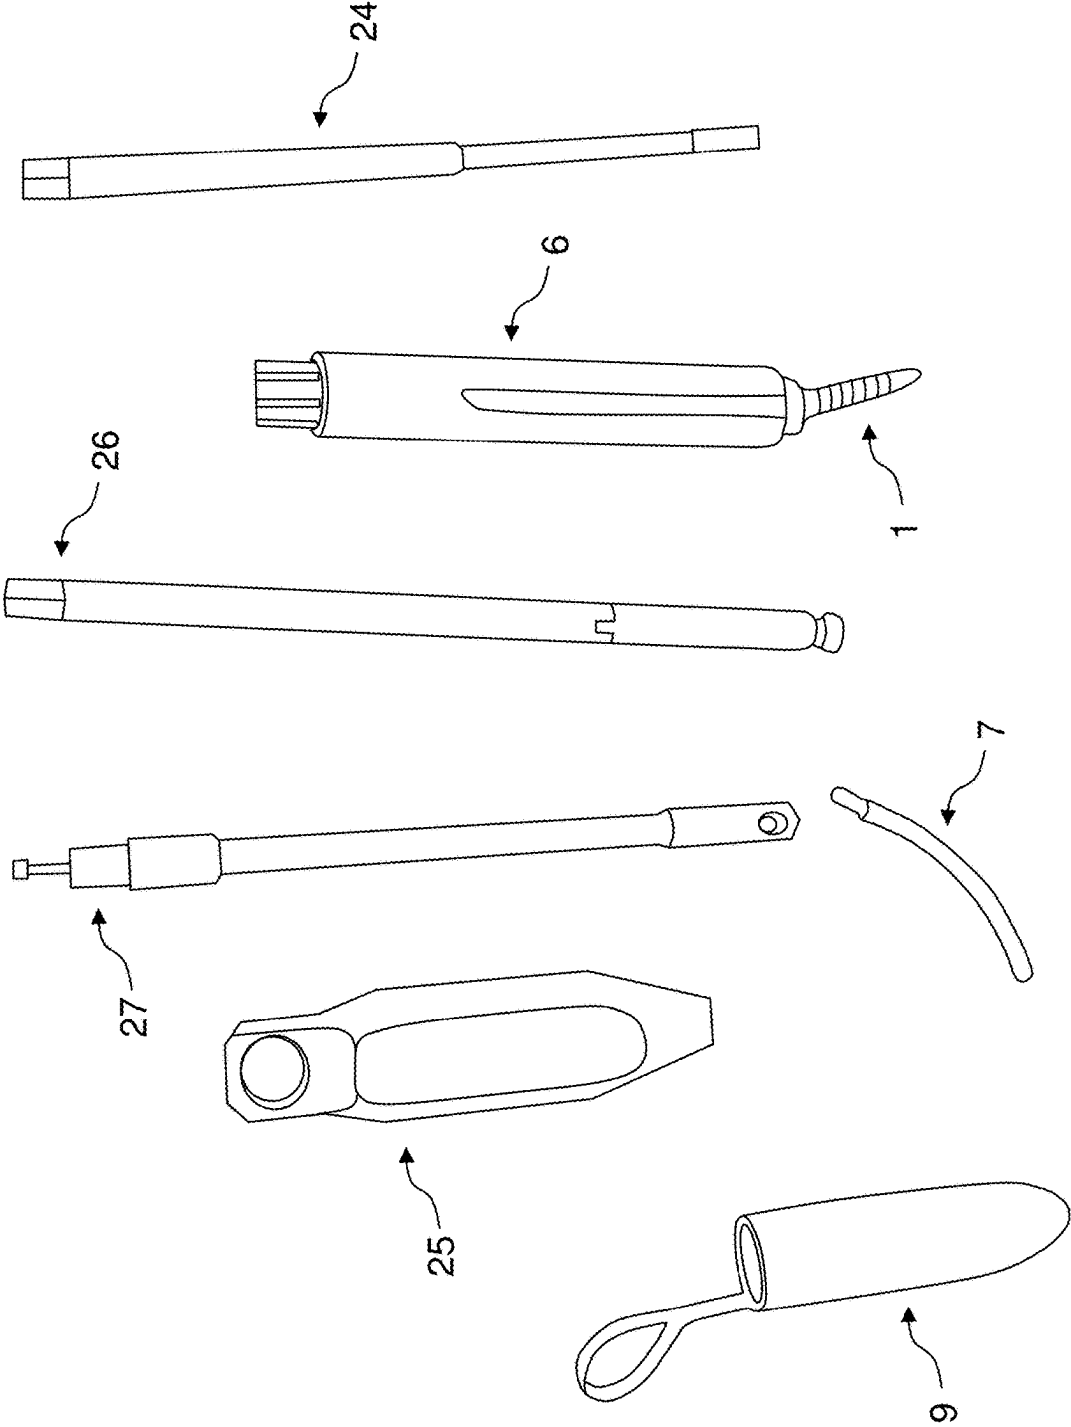


FIG.1

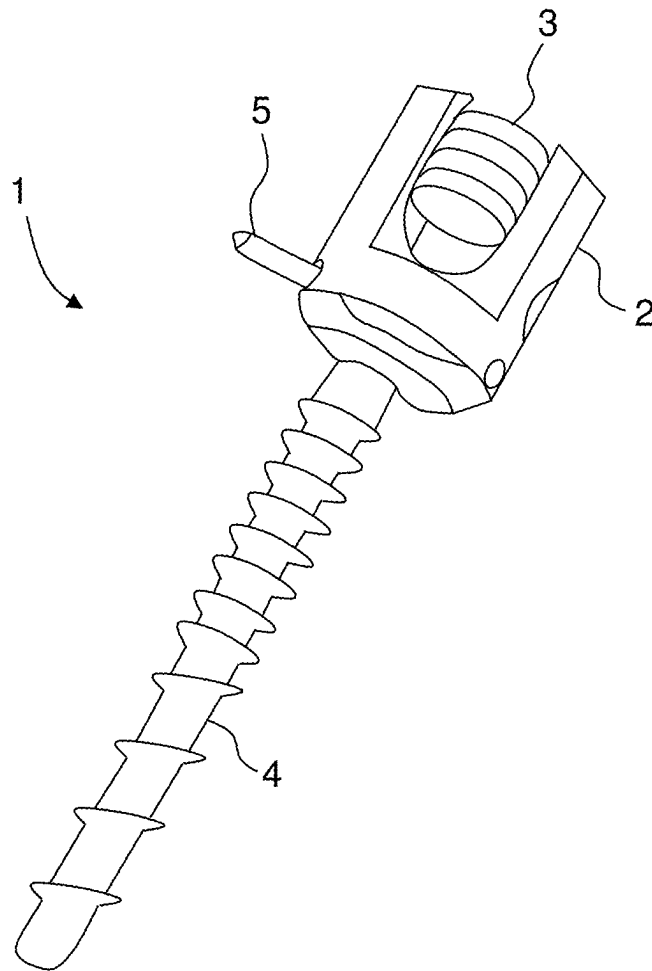


FIG.2

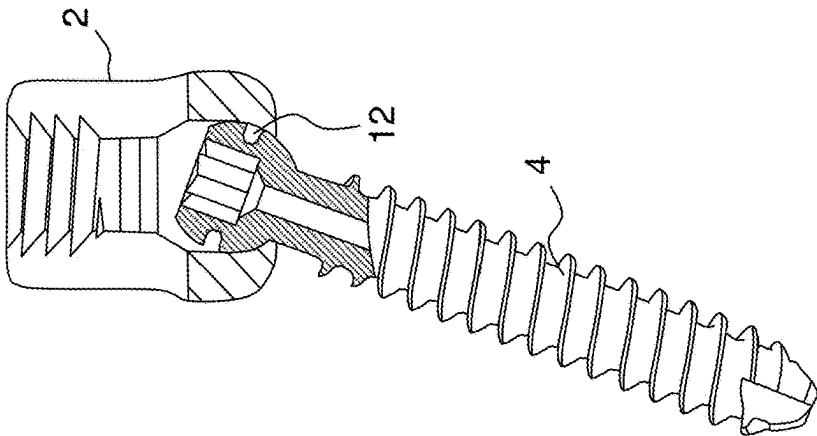


FIG.3C

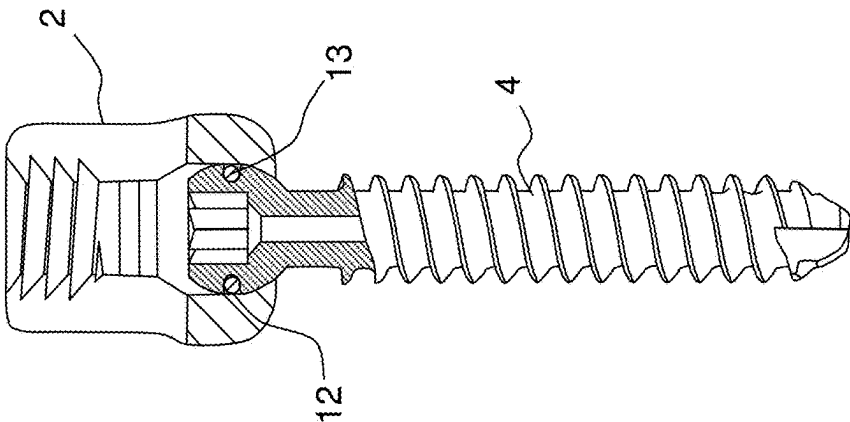


FIG.3B

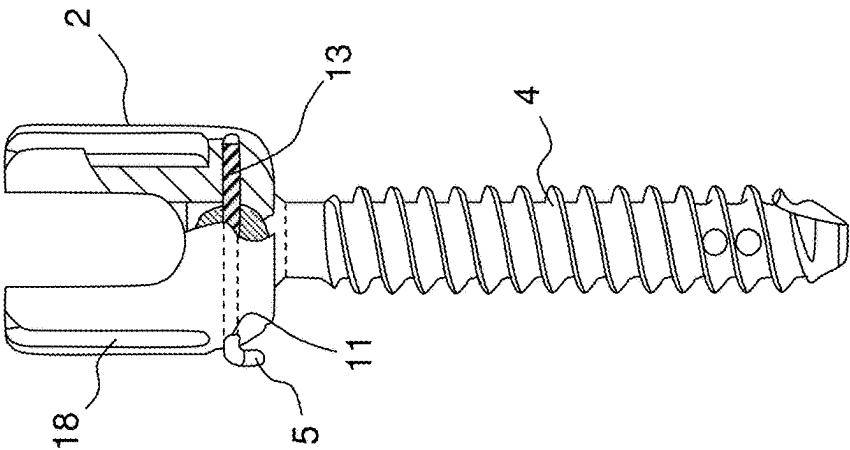


FIG.3A

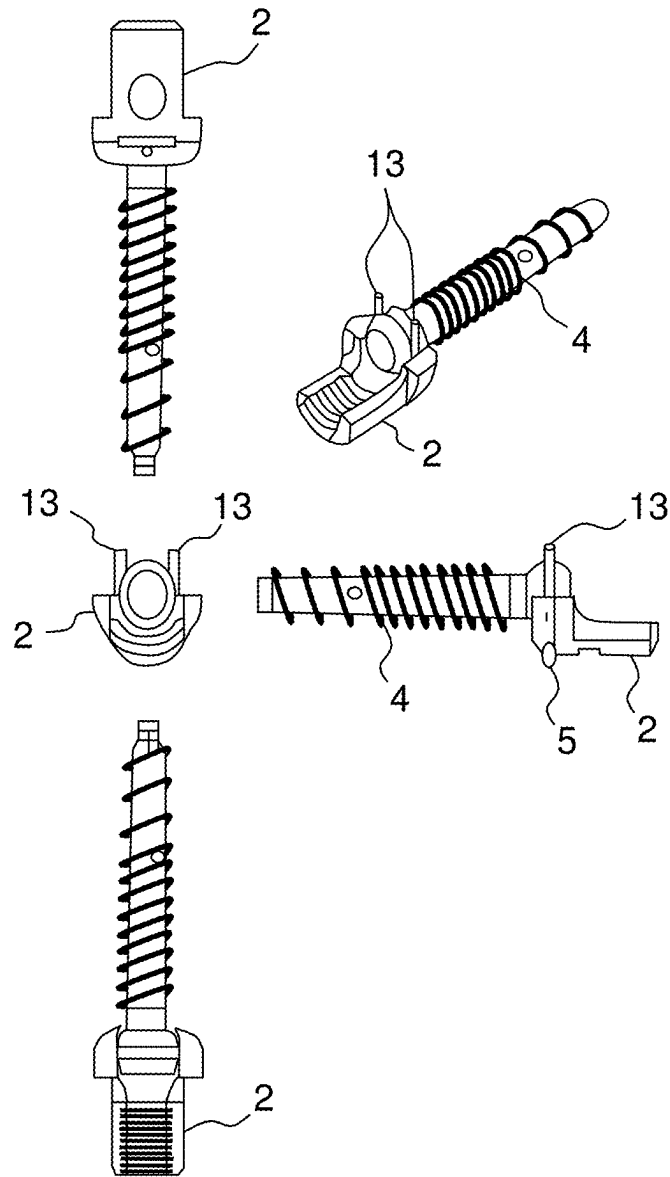
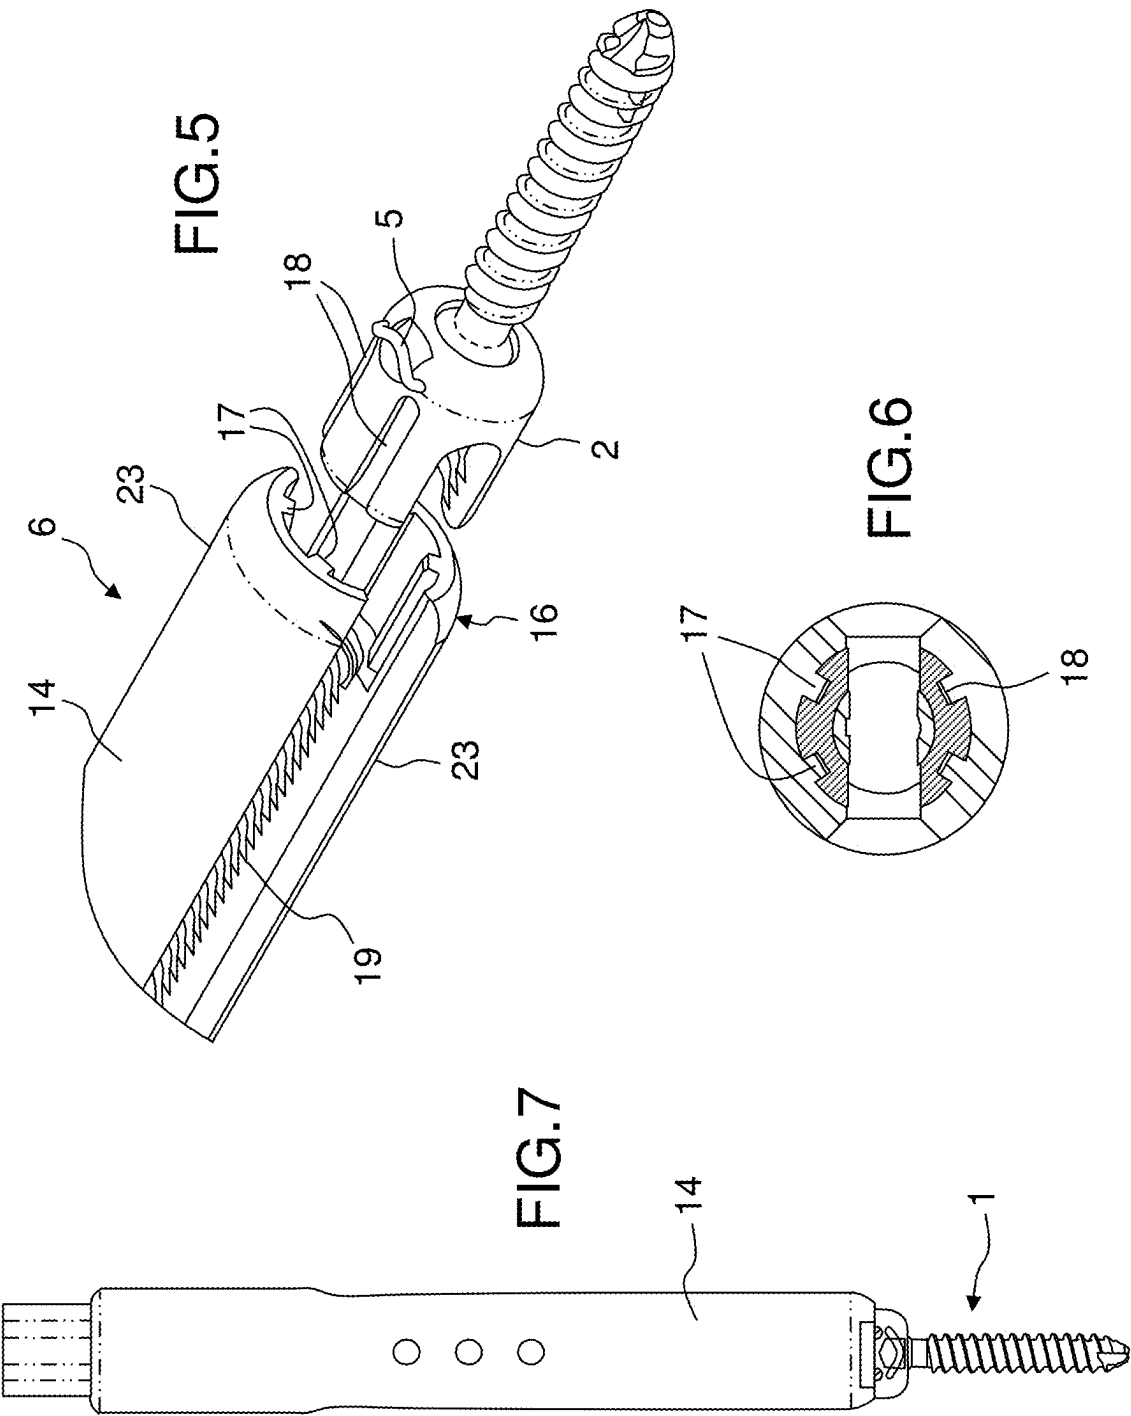


FIG.4



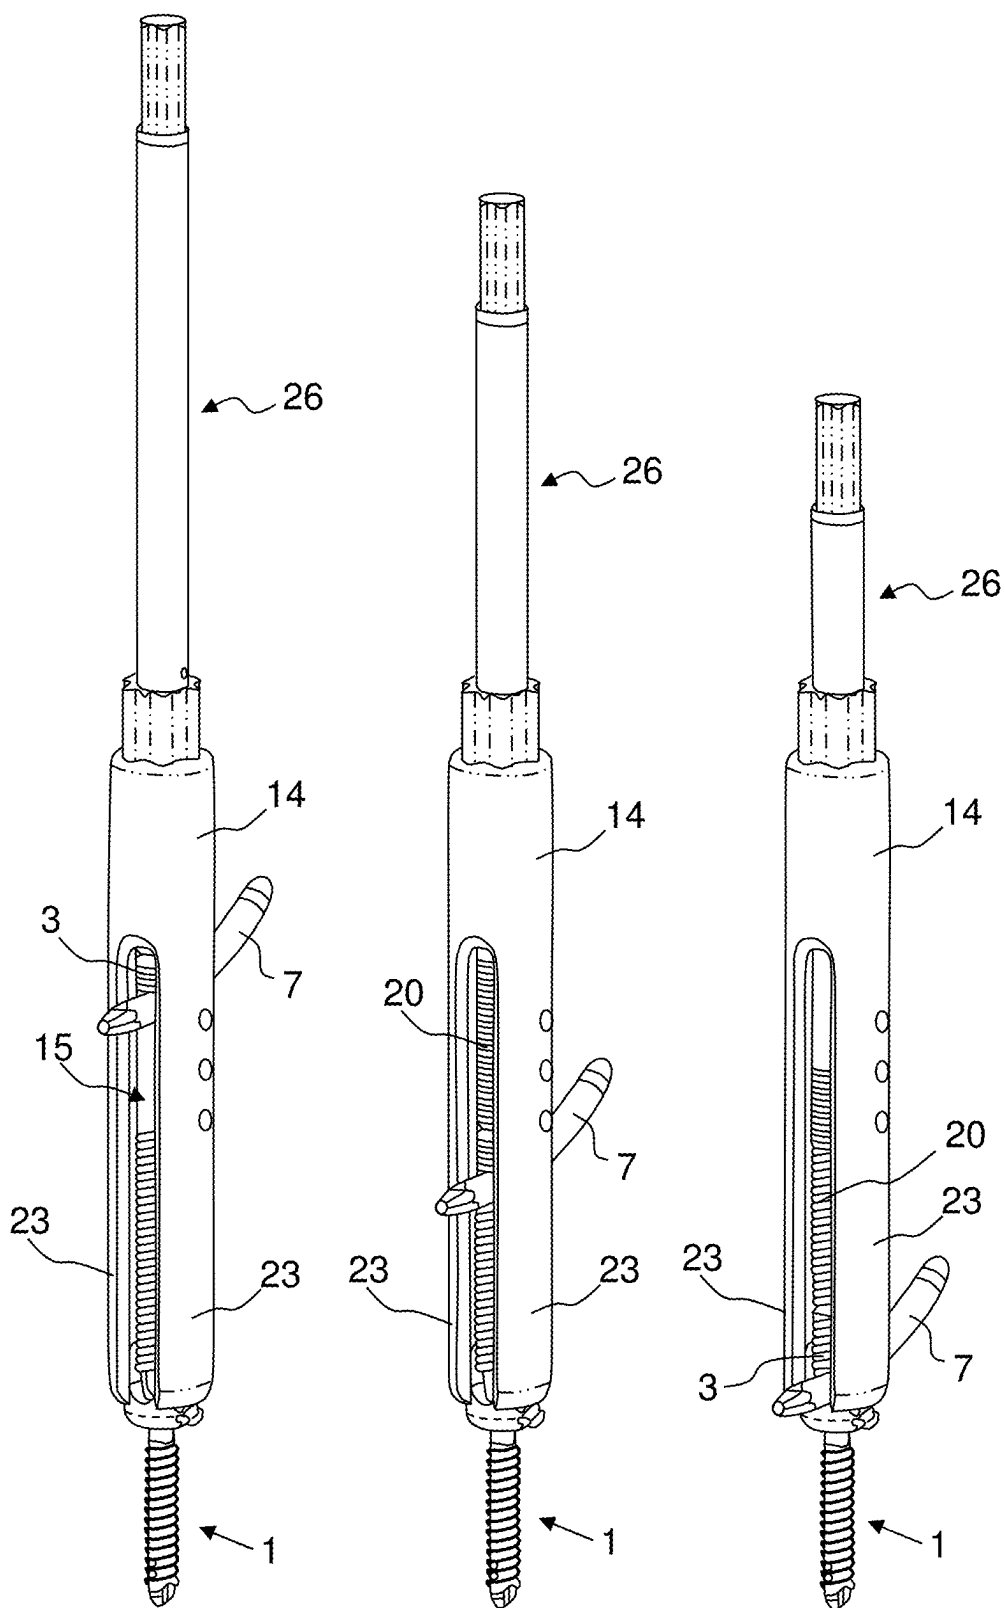


FIG.8A

FIG.8B

FIG.8C

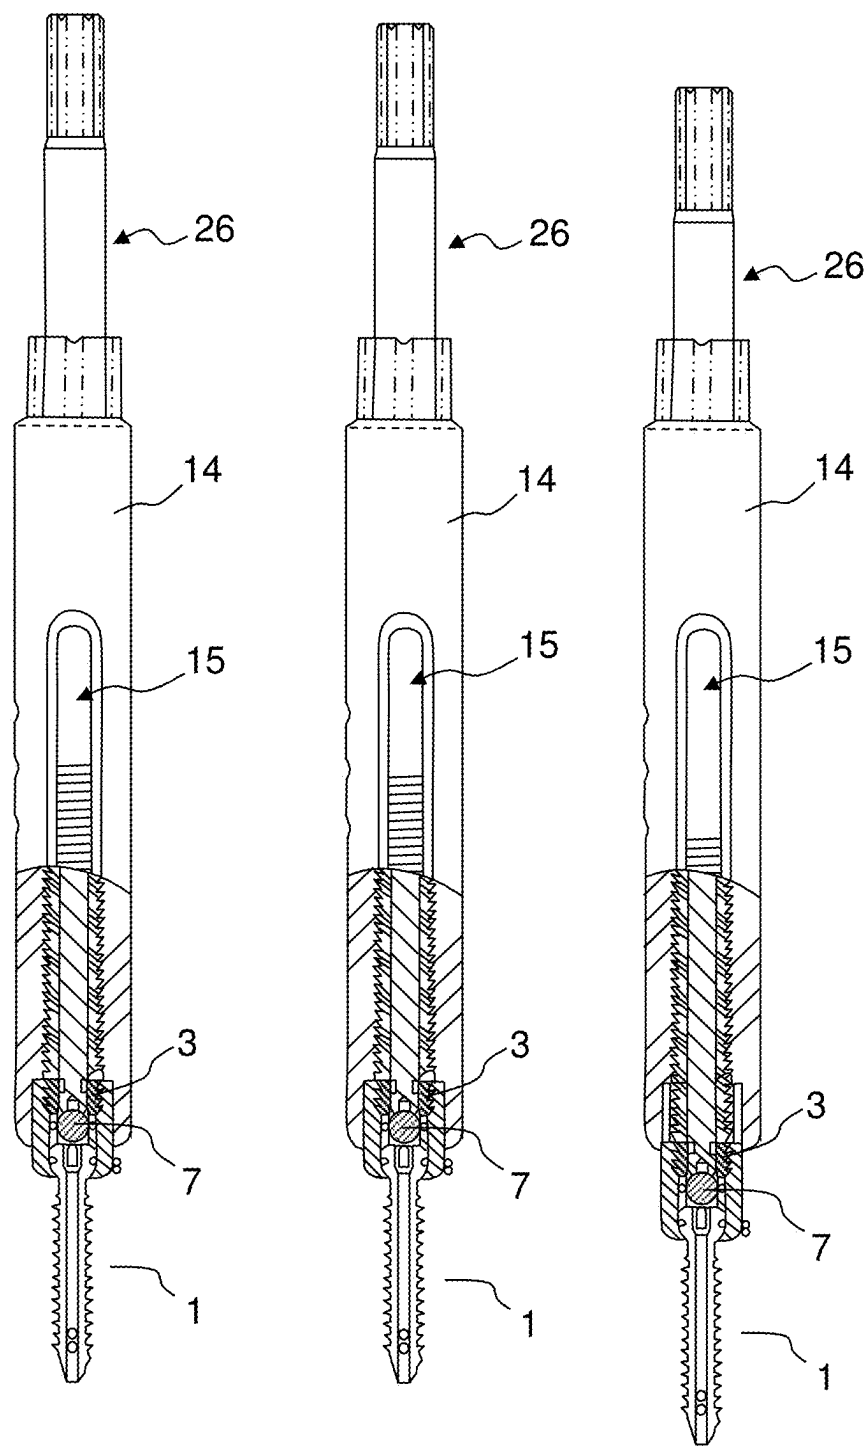


FIG.9A

FIG.9B

FIG.9C

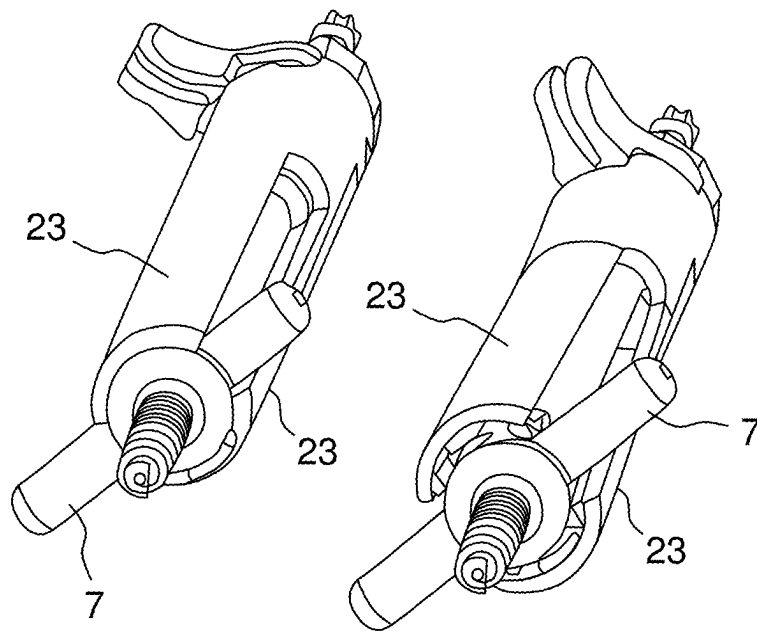


FIG.10

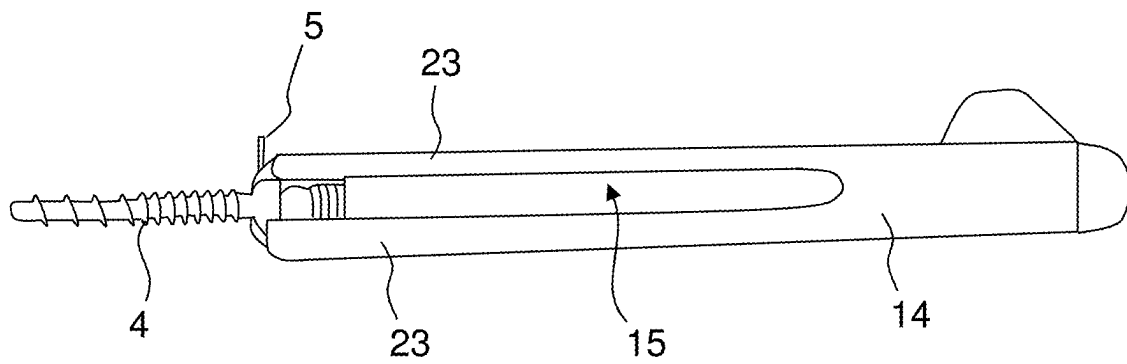


FIG.11

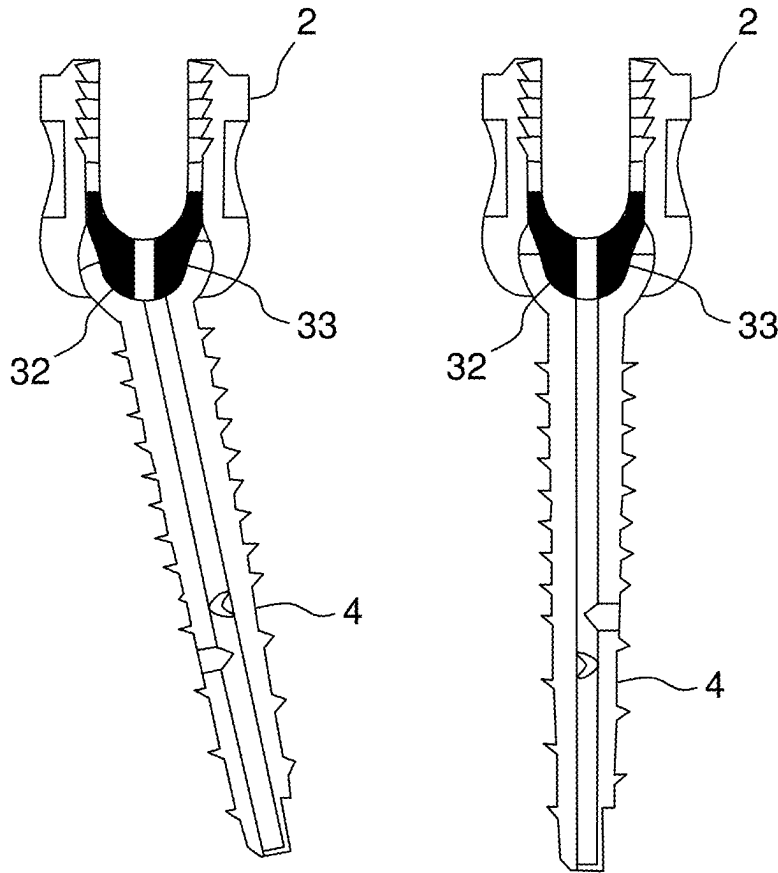


FIG.12

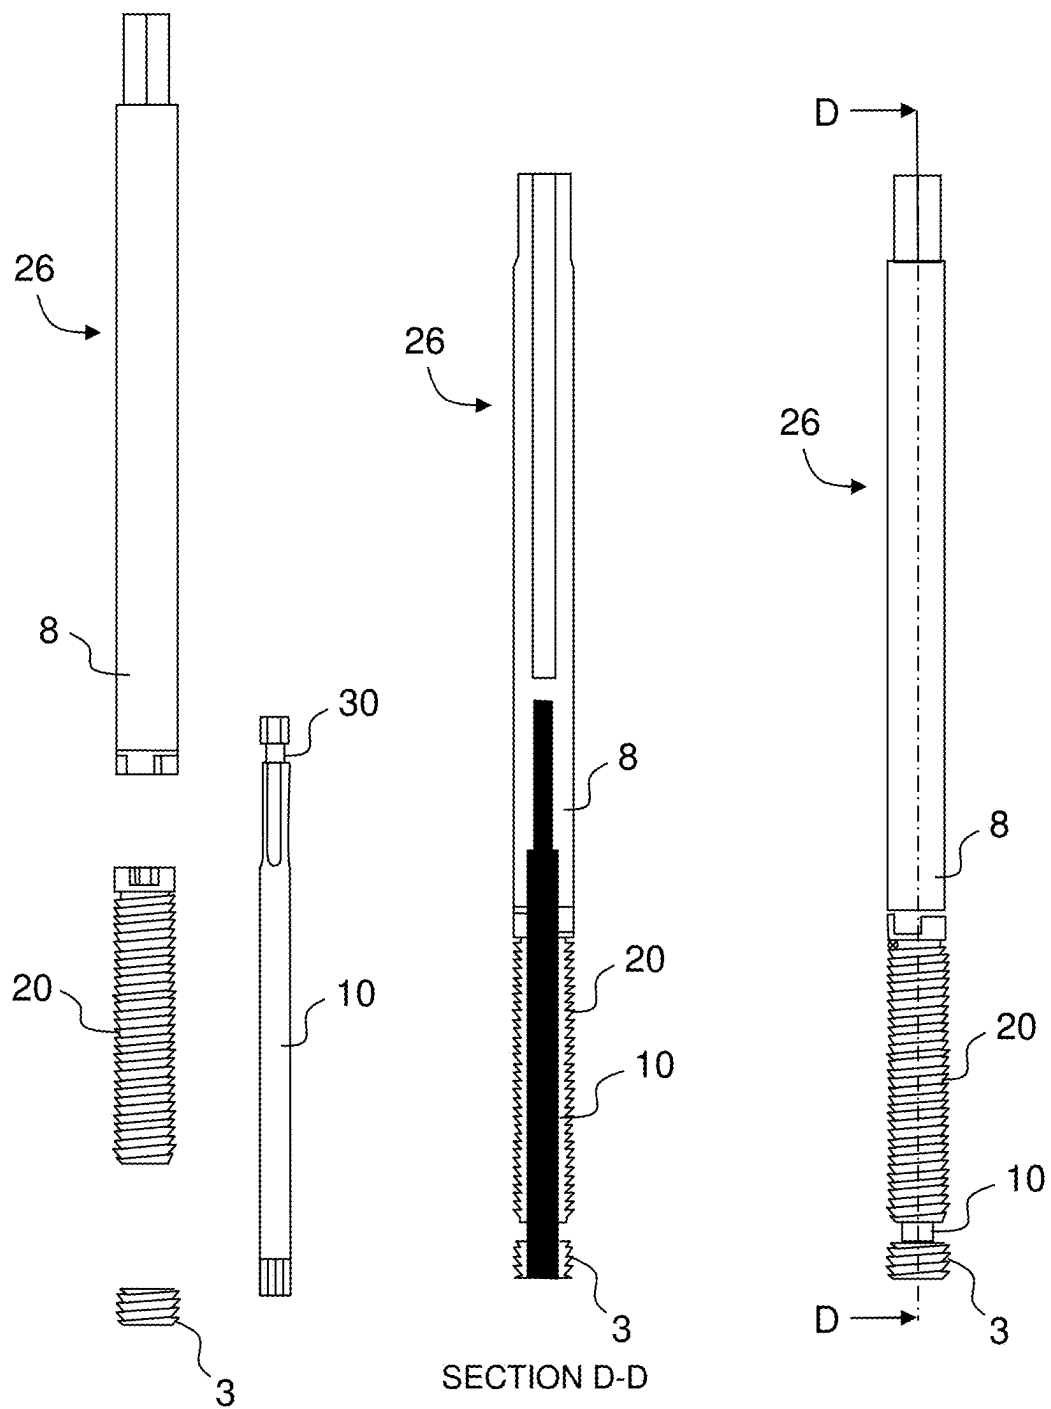


FIG.13A

FIG.13B

FIG.13C

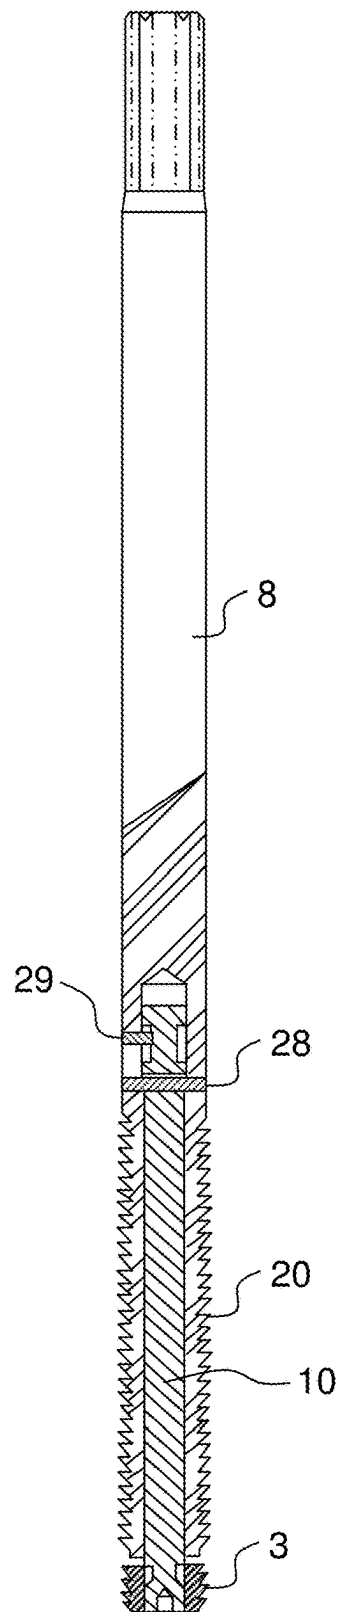


FIG.14

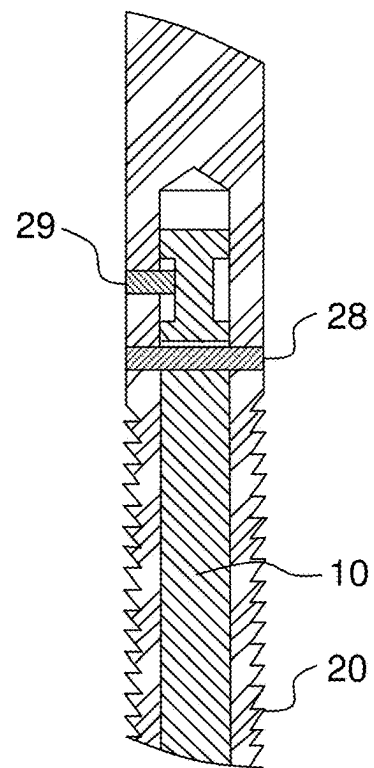


FIG.15

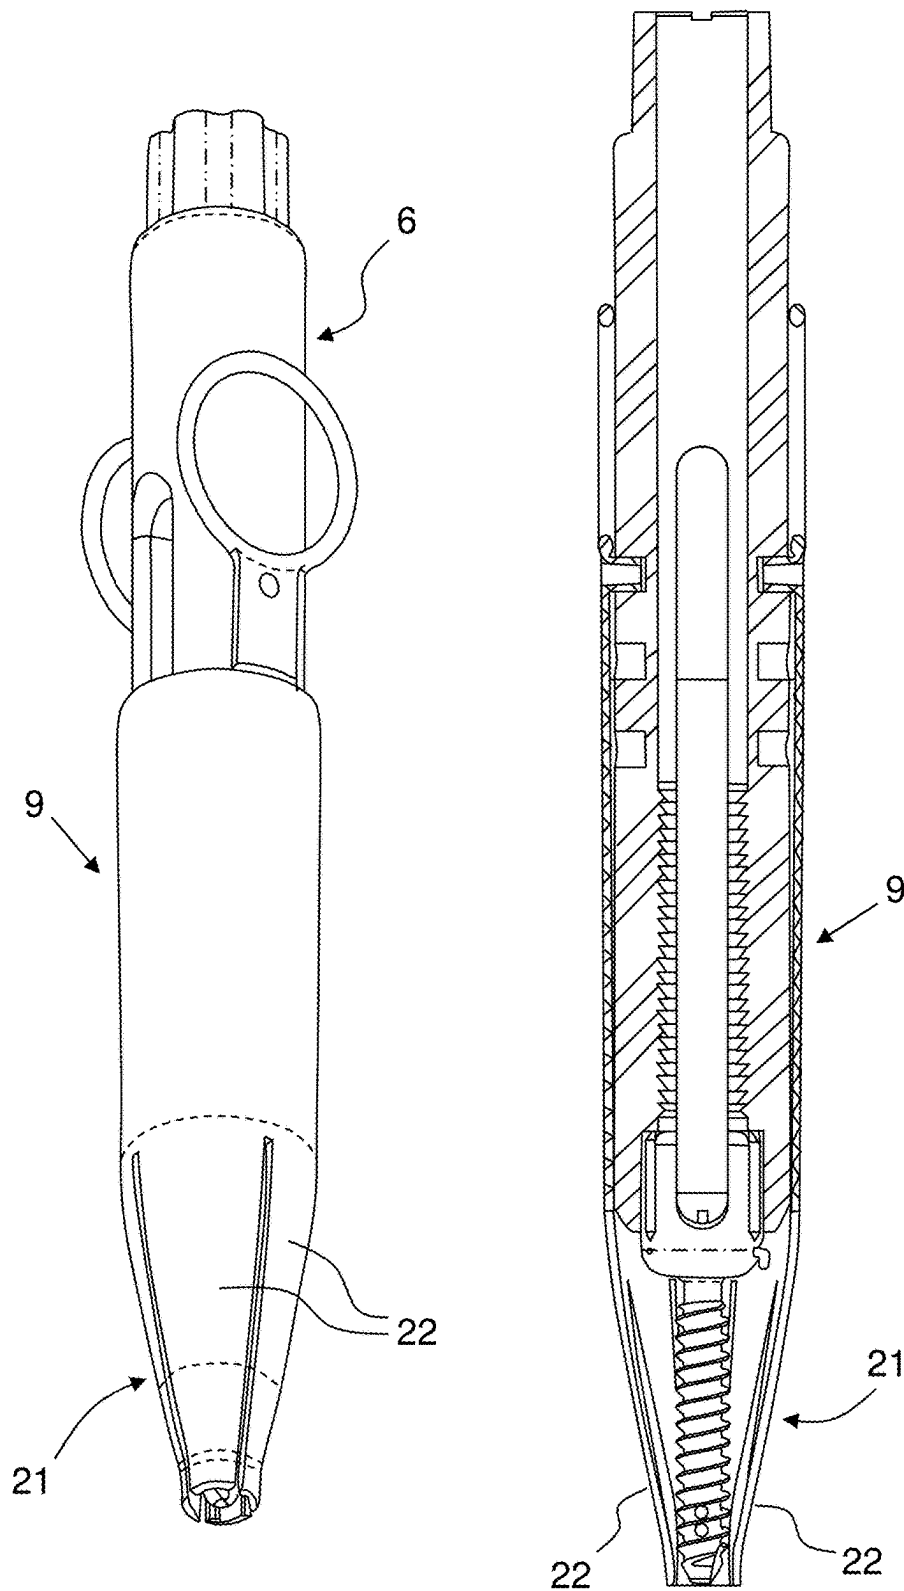


FIG.16

FIG.17

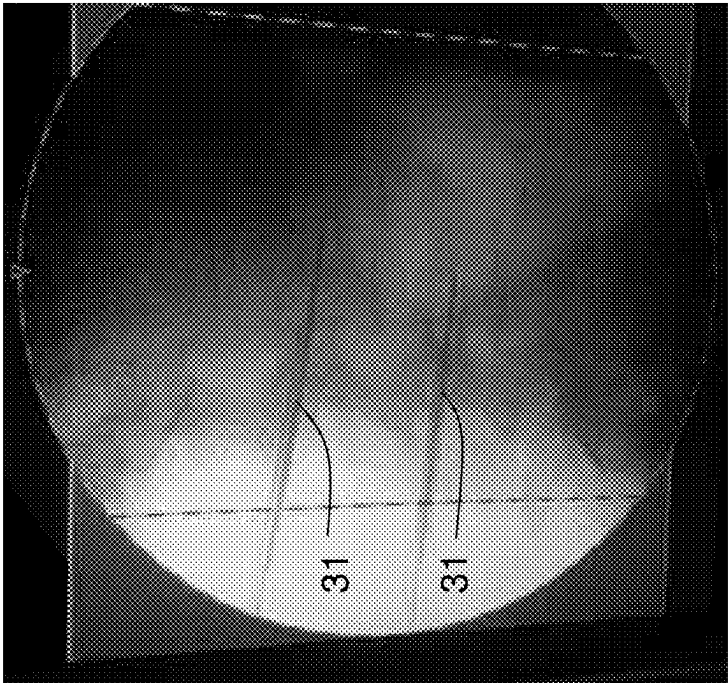


FIG.19

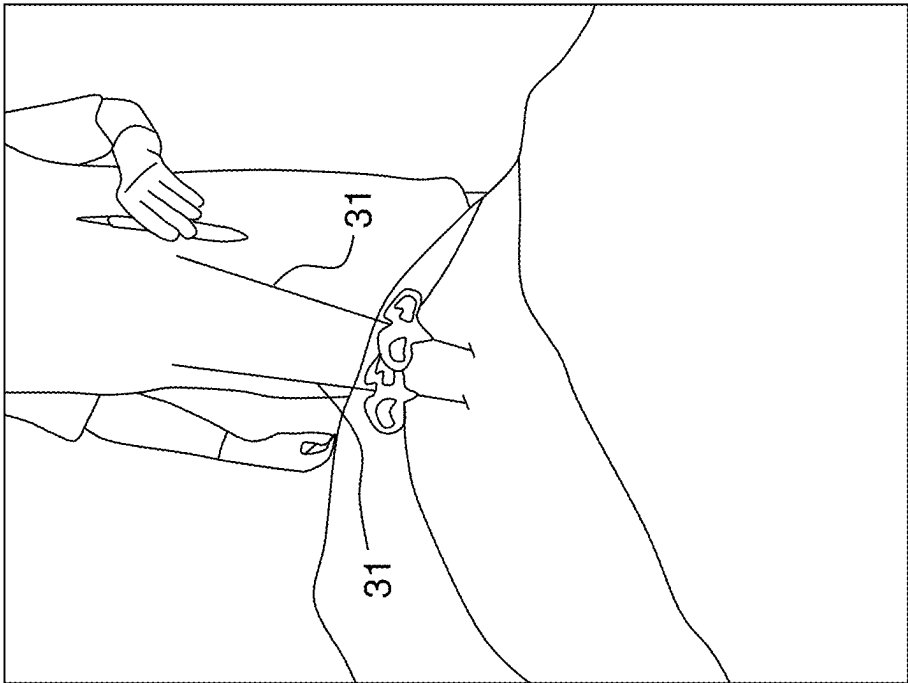


FIG.18

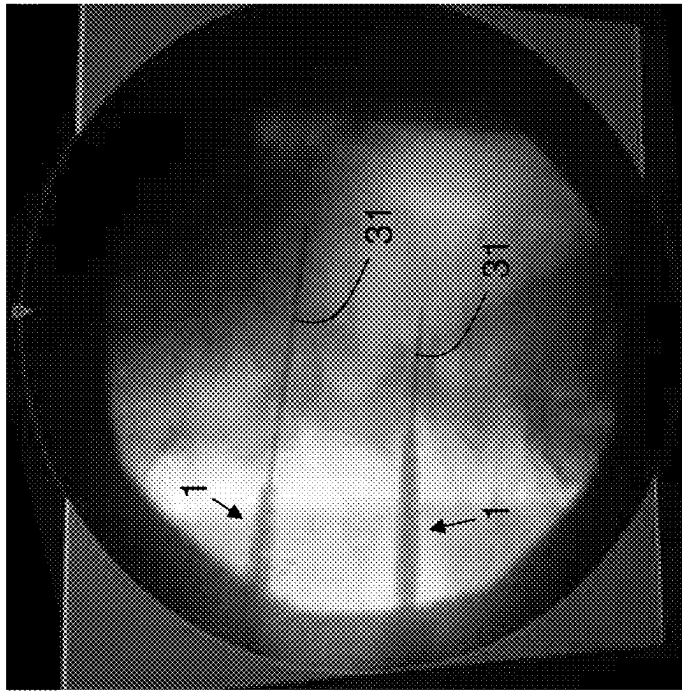


FIG. 21

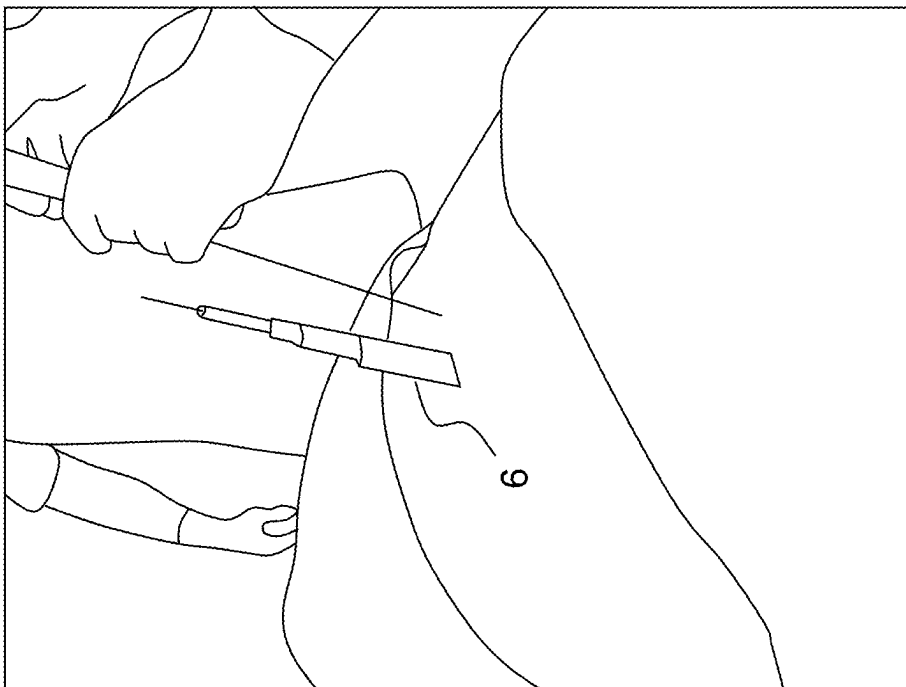


FIG. 20

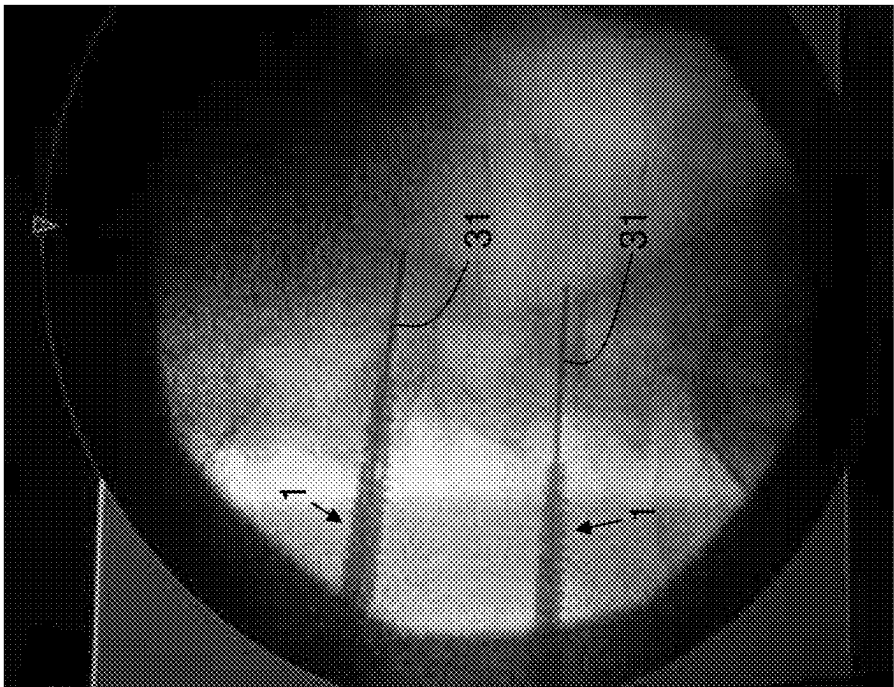


FIG.23

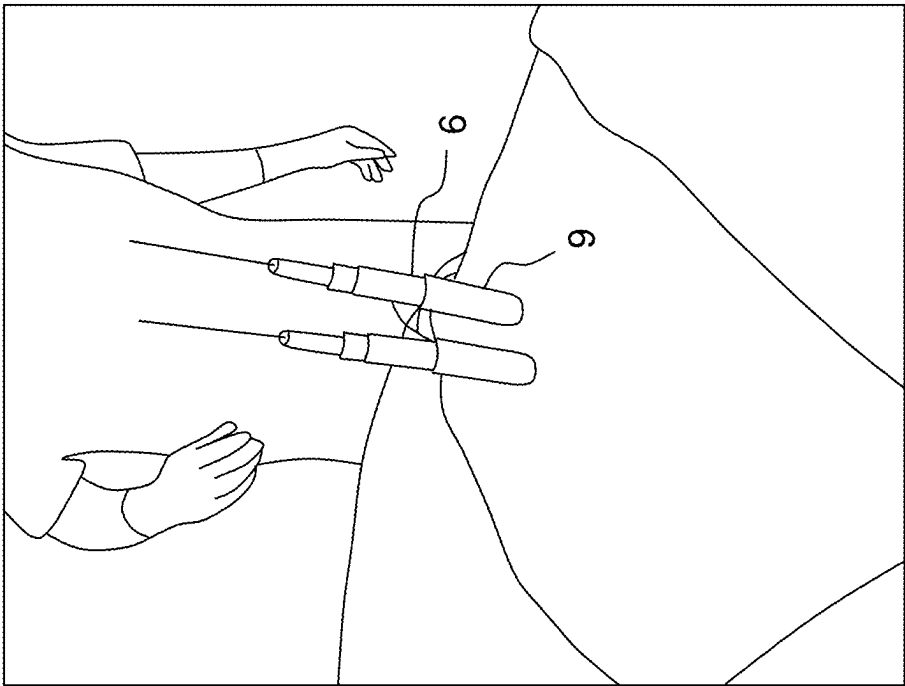


FIG.22

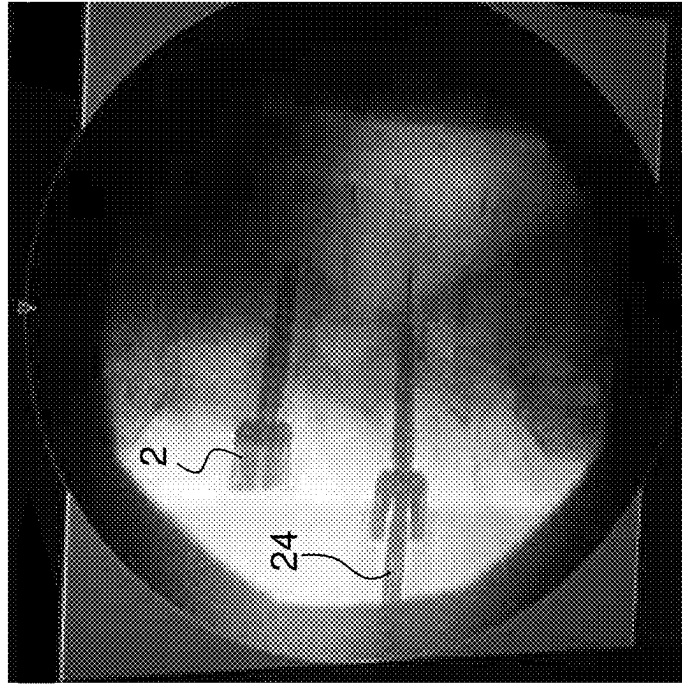


FIG. 25

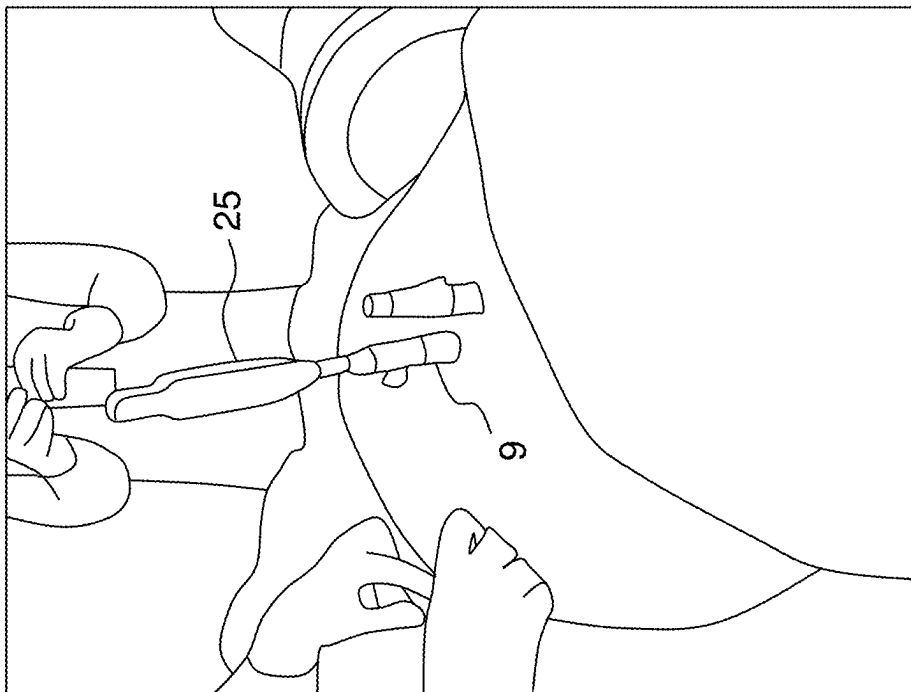


FIG. 24

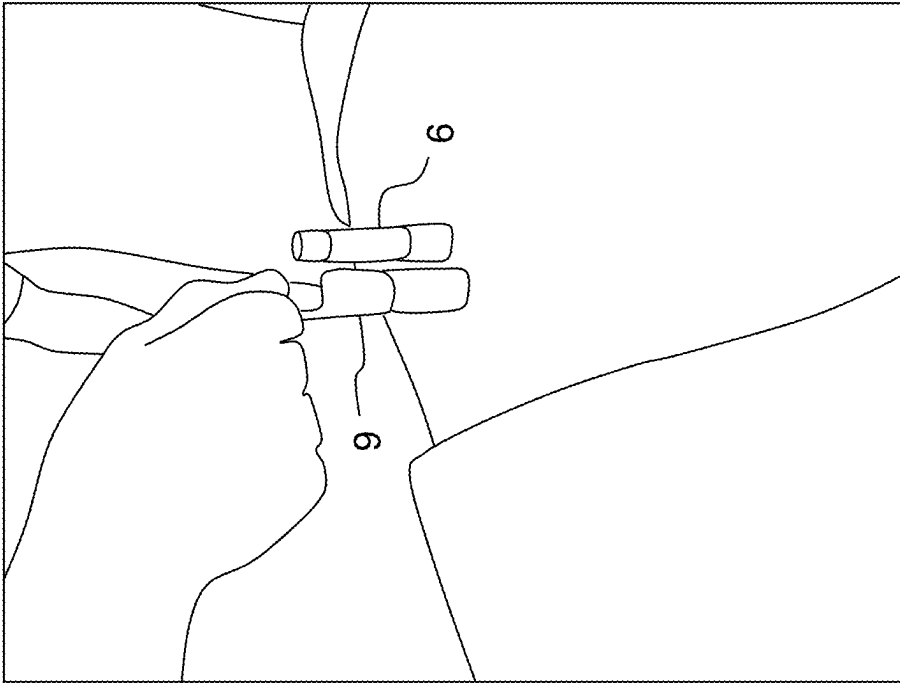


FIG. 27

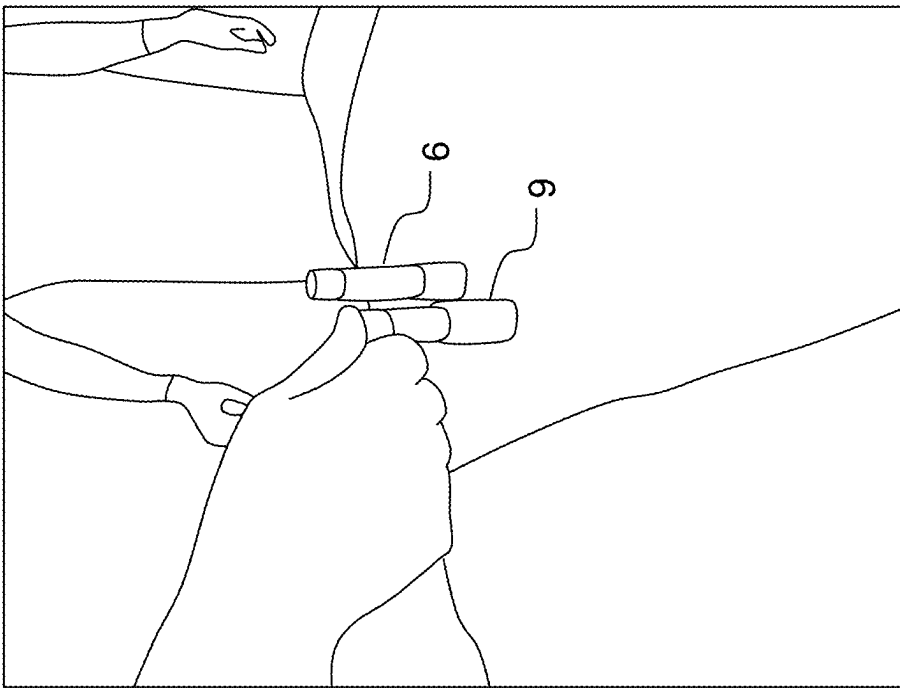


FIG. 26

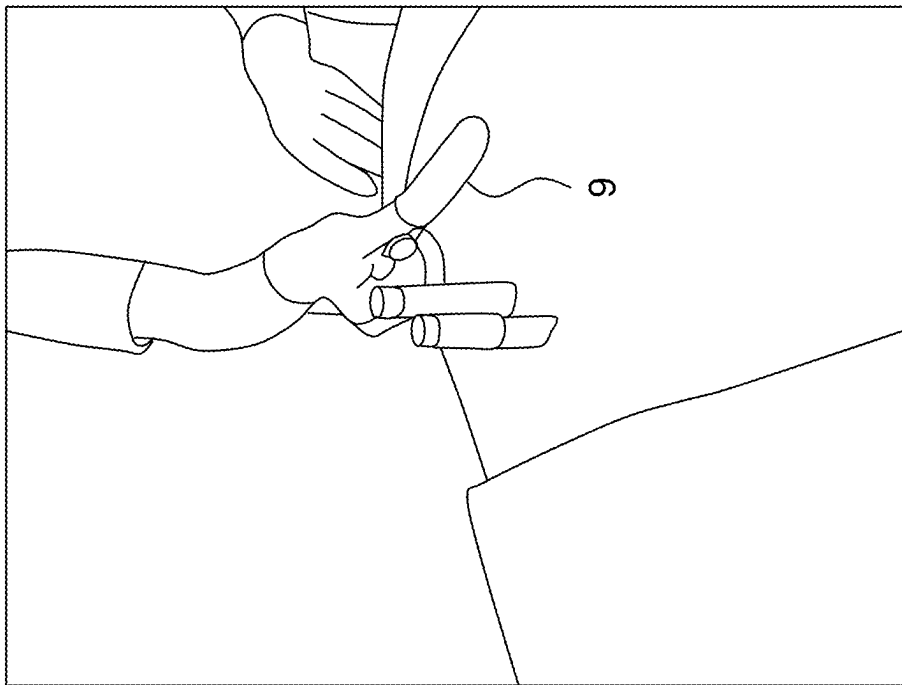


FIG. 28

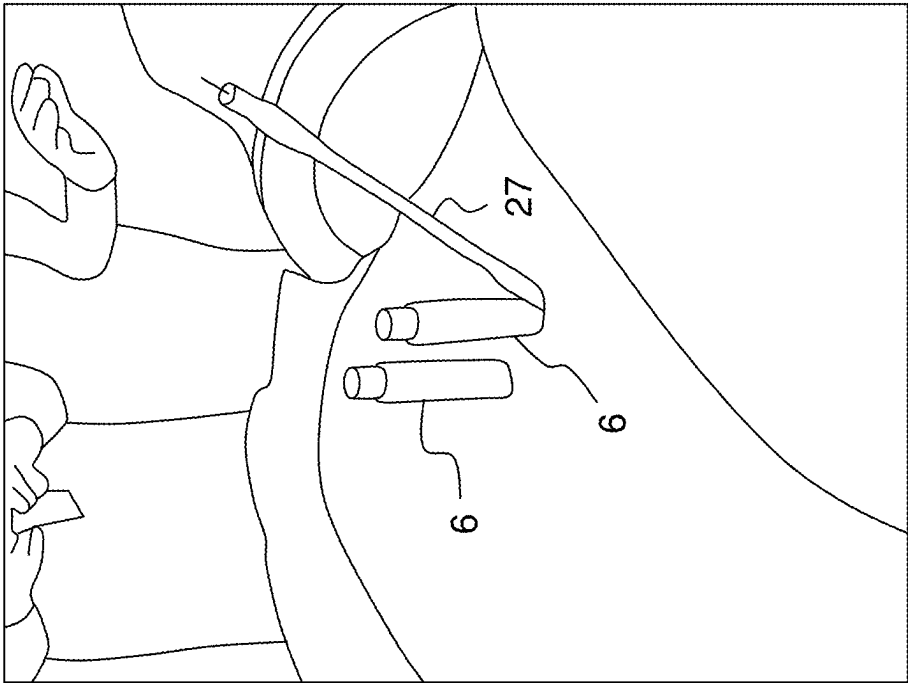


FIG.30

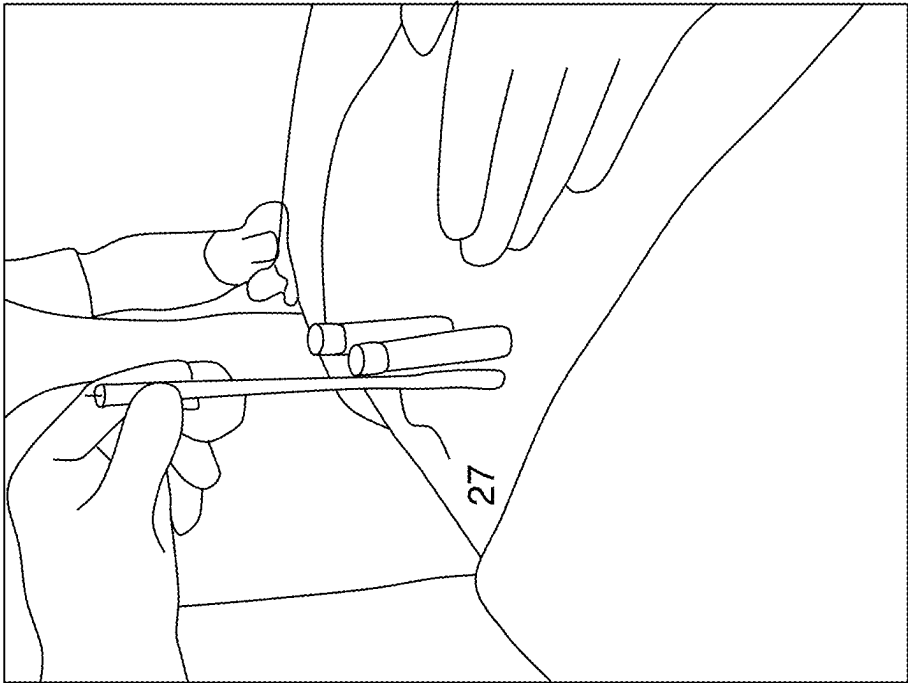


FIG.29

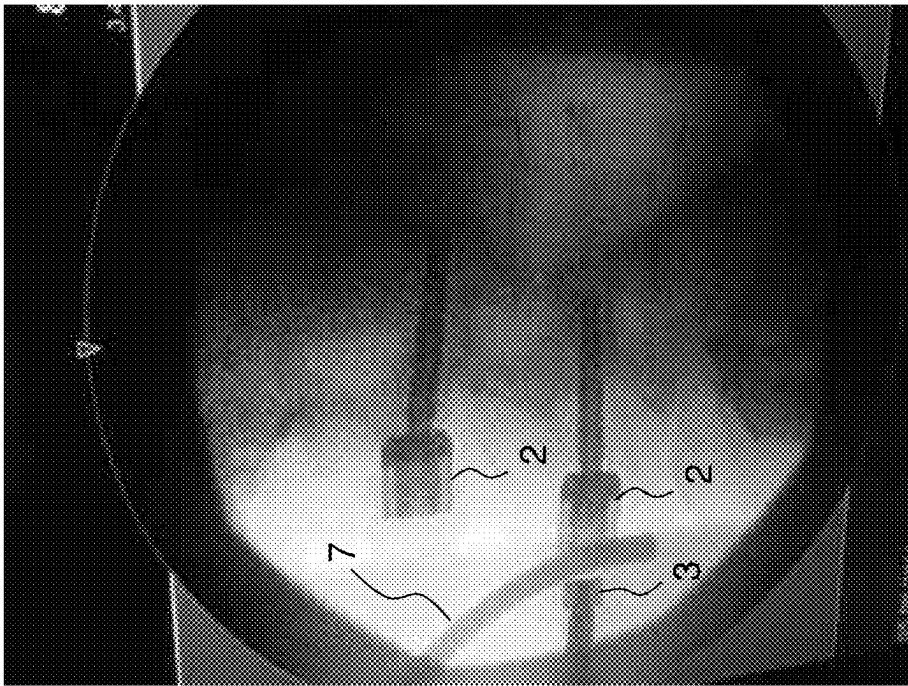


FIG.32

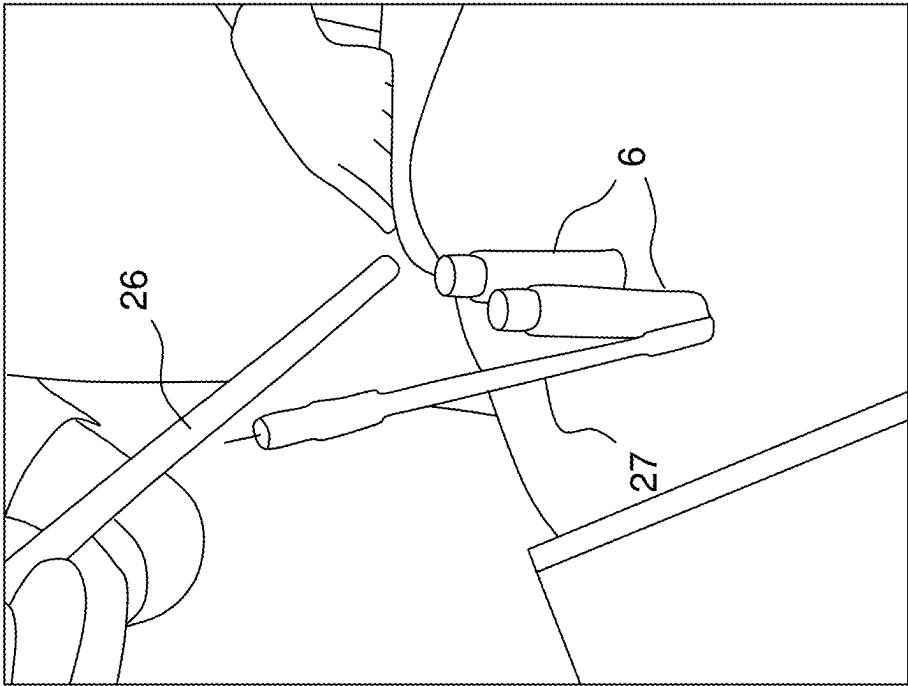


FIG.31

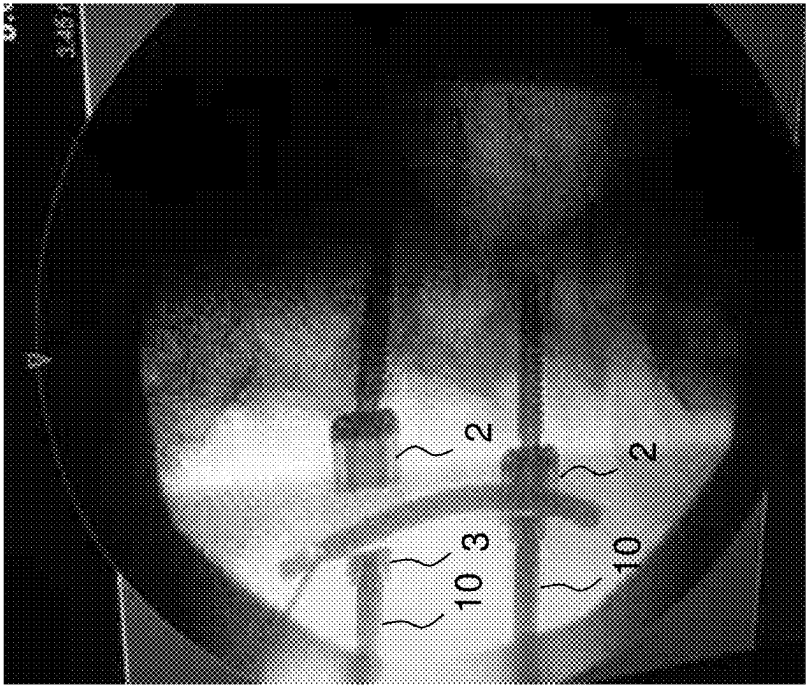


FIG.34

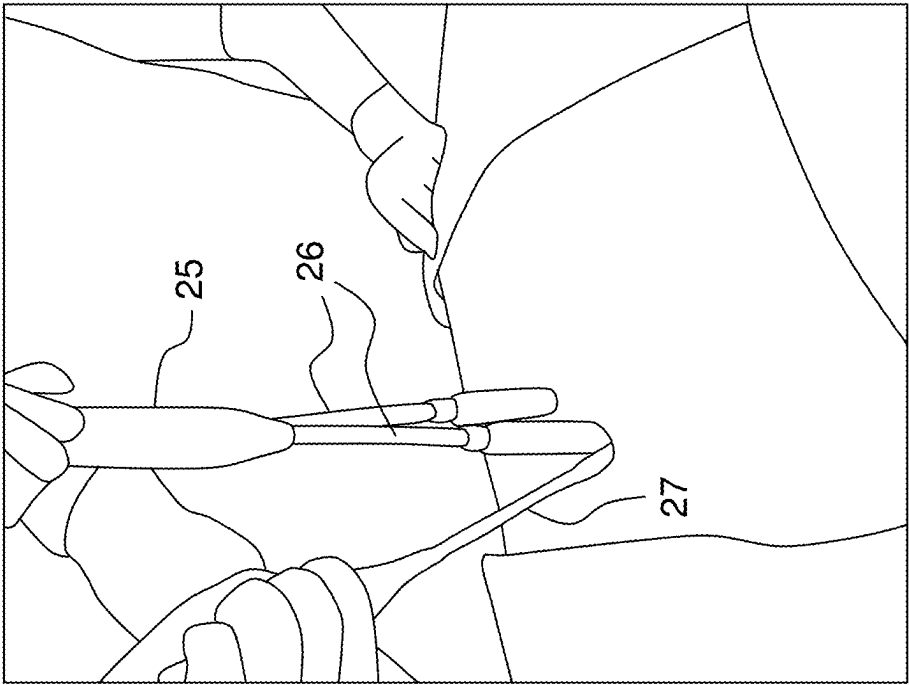


FIG.33

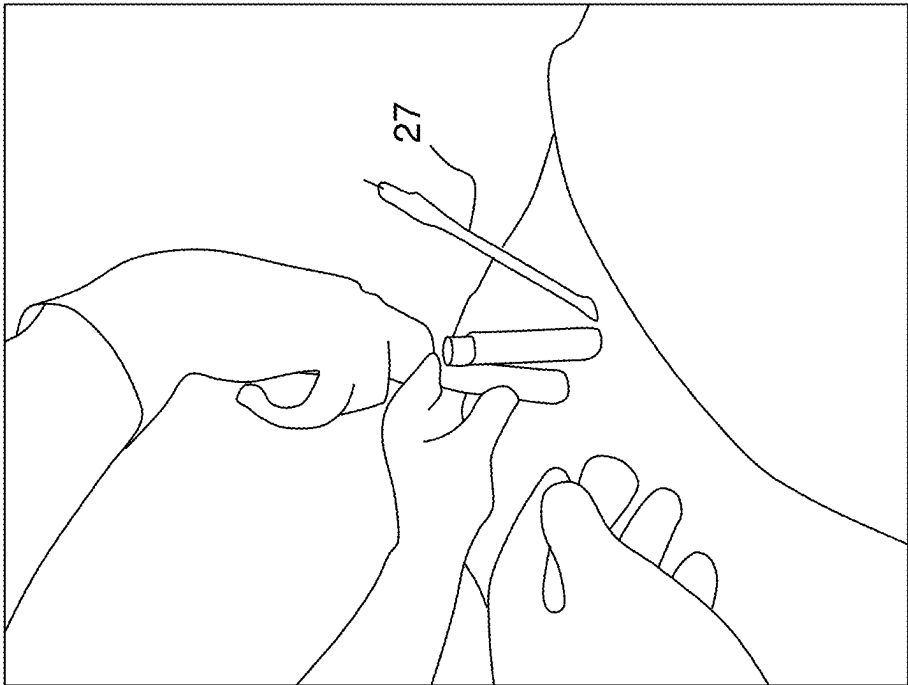


FIG.36

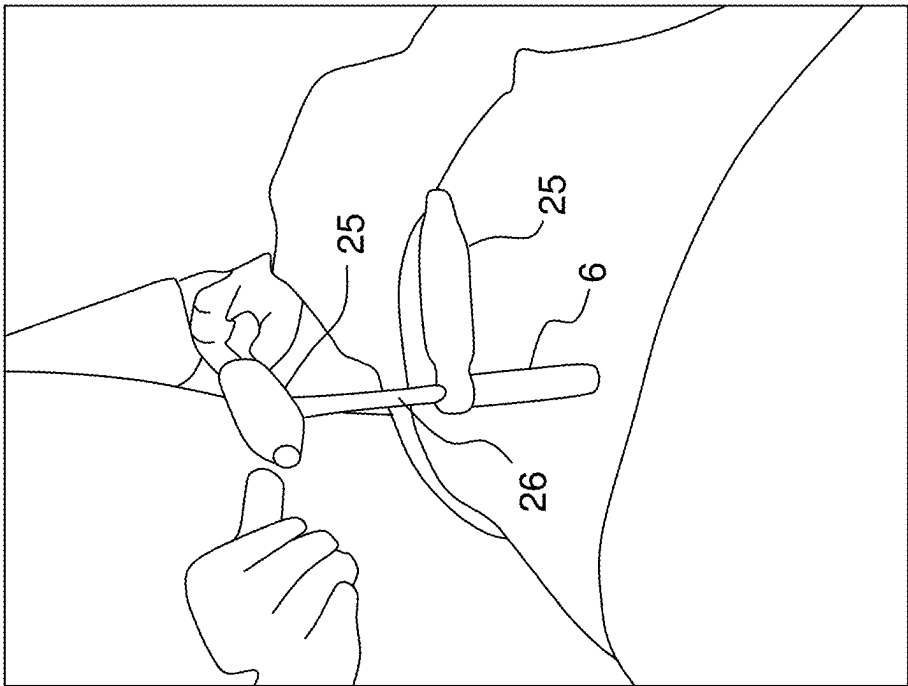


FIG.35

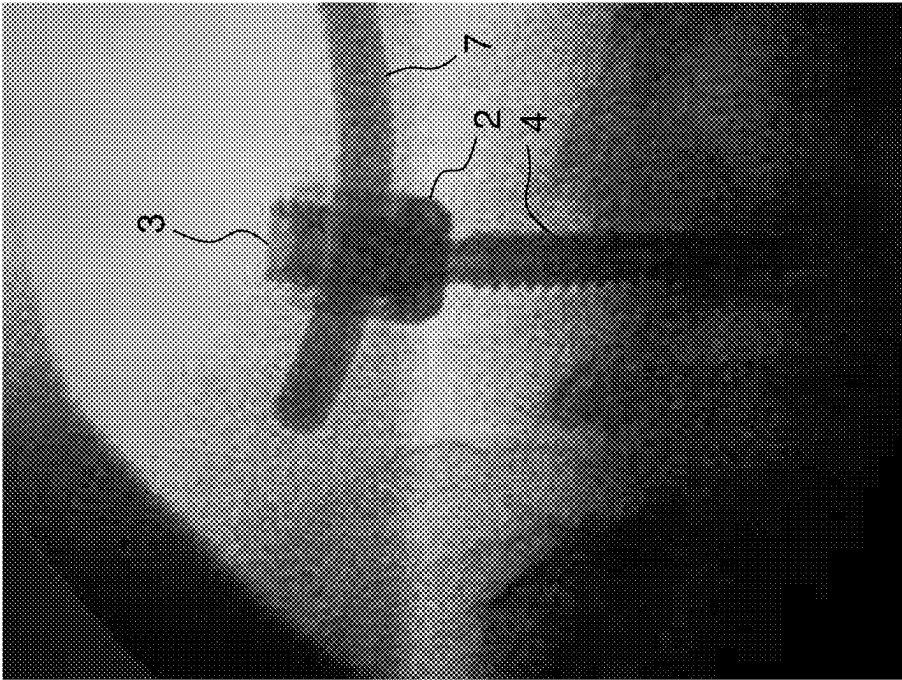


FIG.38

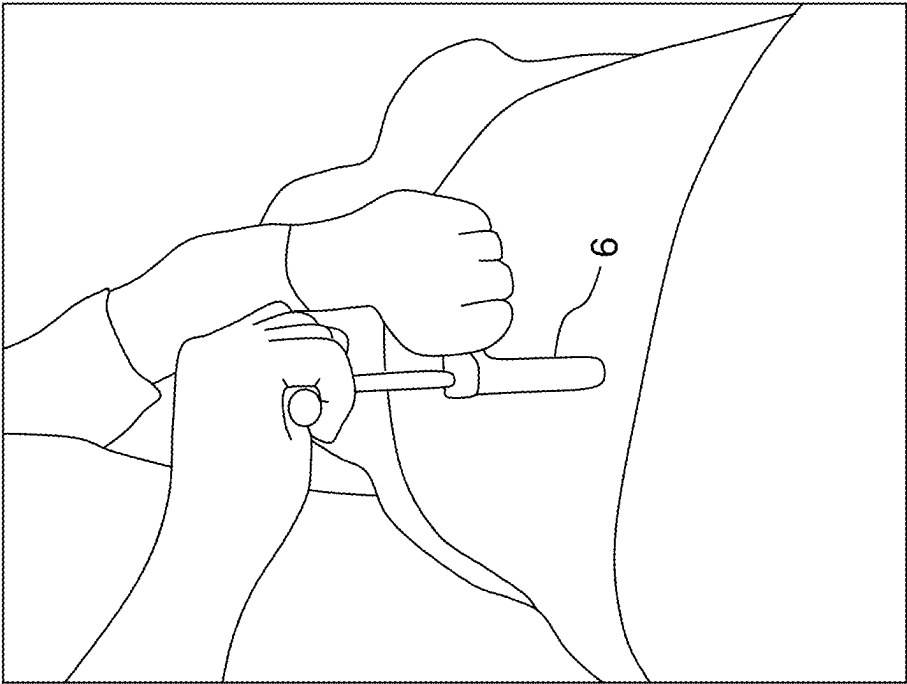


FIG.37

1

ORTHOPEDIC IMPLANT KIT**CROSS-REFERENCE TO RELATED APPLICATIONS**

The present application is a divisional application of U.S. Ser. No. 15/939,338, now U.S. Pat. No. 10,888,356, that was filed on Mar. 29, 2018, which is in turn a continuation application of U.S. Ser. No. 14/890,631, now U.S. Pat. No. 10,058,355, that was filed on Nov. 12, 2015, which is a United States national stage application of International patent application PCT/IB2014/060979, filed on Apr. 24, 2014, which designated the United States, and claims foreign priority to International patent application PCT/IB2013/053892, filed on May 13, 2013, the entire contents of all four (4) documents being herewith incorporated by reference.

FIELD OF INVENTION

The present invention relates to orthopedics and more precisely to orthopedic items such as pedicle screws, rods and spine cages. The invention also relates to instruments which are used for manipulating those items.

BACKGROUND

US 2013/0012999 discloses an orthopedic implant kit comprising several items, in particular a pedicle screw fixed to a mounting tube made of two half-shells which can be easily disassembled. Pedicle screws of the prior art can be divided in two main groups:

Mono-axial screws: The direction of the screw main axis is fixed with respect to the screw head;

Poly-axial screws: The orientation of the screw main axis can be freely modified with respect to the screw head.

When implanting a pedicle screw into a bone several steps are needed. For almost each of those steps a dedicated instrument is used.

GENERAL DESCRIPTION OF THE INVENTION

An objective of the present invention is to reduce the number of items which are required for manipulating and fixing an orthopedic implant (pedicle screw, nut, rod, etc. . . .).

Another objective is to reduce the number of instruments for manipulating those items.

Another objective is to facilitate the handling of the instruments.

Those objectives are met with the implant kit and the related items and instruments which are defined in the claims.

In a first embodiment the invention consists in an orthopedic implant kit comprising a lockable poly-axial screw, a tissue dilatation sleeve, a screw driver, a screw extender, a rod, rod-reduction means, a set screw driver, a torque limiting mechanism and a screw releasing instrument.

The lockable poly-axial orthopedic screw according to the invention comprises a head and a threaded portion which form two separate elements, fixed to each other but each element may be independently oriented along a specific direction. The threaded portion may, for instance, rotate around the screw head and may adopt several possible orientations. More precisely, the threaded portion may be

2

oriented anywhere within a conical volume, the top of the cone corresponding to the contact point between the head and the threaded portion.

The screw furthermore comprises a locking element which, when activated, suppresses the relative movement between the threaded portion and the head. This configuration is named "mono-axial" because the threaded portion may be oriented along a single (fixed) axis with respect to the head. According one embodiment the locking element is a clip having a U-shape. In this case the head and the threaded portion contains cavities which are adapted to receive the branches of the U-shape clip.

Preferably, in the mono-axial mode the head may still freely rotate around its own axis, with respect to the threaded portion. Such a mechanism may be obtained with a U-shape clip and with an annular groove located around the upper part of the threaded portion. In this case the branches of the clip are sliding within the annular groove.

In another embodiment the screw head contains at least one longitudinal relief, such as a groove or a ridge, which is dimensioned in a way as to receive a corresponding relief, such as a ridge or a groove, which is located within the distal end of a screw extender.

In another embodiment the screw comprises a concave seat located in the proximal end of the threaded portion and a corresponding convex shape located at the distal part of the screw head. This configuration reduces the screw length and increases the strength and the rigidity of the system.

The screw extender according to the invention comprises a hollow cylindrical body made of two half tubes separated by two opposite longitudinal slots having an open end towards the cylindrical body distal part, this later one being dimensioned to receive and hold a screw head. The cylindrical body furthermore comprises an internal threaded part.

According to one embodiment the cylindrical body is made of a single piece and the distal part is radially expandable by its own elasticity, in such a way as to allow an easy clipping and subsequent releasing of a screw head.

To facilitate its radial expansion, the screw extender may include expanding means, for instance an internal rotatable tube which, when rotated pushes away the two half tubes from each other.

In a preferred embodiment the internal part of the cylindrical body distal end contains at least one relief, such as a ridge or a groove, which is dimensioned to be received within the longitudinal relief of a screw head which includes a corresponding relief, as mentioned previously. With this configuration it hinders the distal part of the half tubes to separate from each other by its own elasticity thus making a very strong attachment between the screw extender and the screw head. An additional benefit is that the relative rotation between the screw head and the cylindrical body is avoided.

In a preferred embodiment a rod reduction instrument is located within the cylindrical body. Advantageously the rod reduction instrument is essentially made of a shaft with a threaded distal part which is the counterpart of the cylindrical body internal threaded part. So when it is rotated within the cylindrical body the shaft may move along the cylindrical body main axis.

In another embodiment a set screw driver is (also or alternatively) located within said cylindrical body. In this case also, the set screw driver may also essentially be made of a shaft with a threaded distal part.

Advantageously the set screw driver comprises a torque limiting mechanism.

In one embodiment this mechanism includes a breakable pin and a thread free rotatable shaft. The pin is laterally

3

crossing the rotatable shaft and its ends are fixed within the threaded rotatable shaft. The threaded and the threaded free shafts are rotatably linked to each other but when a certain torque is reached the pin breaks and each shaft may freely rotates with respect to the other shaft.

In another embodiment a screw releasing instrument is (also or alternatively) located within said cylindrical body.

Advantageously the screw releasing instrument is essentially made of a shaft with a threaded distal part.

In a particularly interesting embodiment, the same shaft with a threaded distal part is used for the rod reduction instrument (and potential spondylolisthesis), the set screw driver and the screw releasing mechanism.

The tissue dilatation sleeve according to the invention comprises a flexible conical part which is adapted to be temporarily fixed to the distal part of an instrument such as a screw extender as defined in the previous claims.

In one embodiment the conical part is made of several longitudinal flexible blades having each a substantially triangular shape.

DETAILED DESCRIPTION OF THE INVENTION

The invention will be better understood in the following part of this document, with non-limiting examples illustrated by the following figures:

FIG. 1 shows an implant kit according to the invention.

FIG. 2 shows an example of a lockable poly-axial pedicle screw according to the invention.

FIGS. 3A to 3C are cross-sections and partial cut views of the screw of FIG. 2.

FIG. 4 represents different views (complete and partial) of the screw of FIG. 2.

FIG. 5 shows the distal part of a screw extender according to the invention, together with the screw of FIG. 2.

FIG. 6 is a cross section of the screw extender distal part.

FIG. 7 is a global view of a screw extender with a screw.

FIGS. 8A to 8C represent the positioning of the rod in the screw head, rod reduction and the tightening of the set screw.

FIGS. 9A to 9C illustrate the release of the screw with respect to the screw extender.

FIG. 10 shows a screw extender which includes a mechanism for laterally expanding the screw extender distal part.

FIG. 11 is another representation of the screw extender of FIG. 10.

FIG. 12 shows another embodiment of a pedicle screw according to the invention.

FIGS. 13A to 13C show different views of a rotatable shaft which is used in a rod reduction instrument, a set screw driver and a screw releasing instrument.

FIGS. 14 and 15 illustrate a torque limiting mechanism.

FIGS. 16 and 17 show the use of a tissue dilatation sleeve.

FIGS. 18 to 38 show a procedure using an implant kit according to the invention.

NUMERICAL REFERENCES USED IN THE FIGURES

1. Pedicle screw
2. Head
3. Set screw
4. Threaded portion
5. Locking element
6. Screw extender
7. Rod
8. Multi-use instrument upper part

4

9. Tissue dilatation sleeve

10. Torque driver

11. Head passage

12. Threaded portion passage

13. Branch

14. Cylindrical body

15. Slot

16. Cylindrical body distal part

17. Ridge

18. Groove

19. Screw extender internal threaded part

20. Multi-use instrument lower part

21. Conical part

22. Blade

23. Half tube

24. Screw driver

25. Handle

26. Multi-use instrument (Rod reduction/Set screw driver/screw release)

27. Rod inserting instrument

28. Breakable pin

29. Lateral pin

30. Circular groove

31. Puncturing needle/Guide wire

32. Concave screw top

33. Convex upper half ball

The examples below more precisely relate to a thoracolumbar fusion system consisting of pedicle screws and rods combined with single use instruments. A typical pedicle screw system consists of the screw implants and the instruments for placing the screws.

FIG. 1 shows an example of an implant kit according to the invention.

This kit contains a tissue dilatation sleeve 9, a handle 25, a rod 7, a rod inserting instrument 27, a shaft 26 which can be used as a rod reduction instrument and/or a set screw driver and/or a screw releasing instrument, a pedicle screw 1, a screw extender 6 and a screw driver 24.

The lockable poly-axial screw 1 illustrated in particular in FIGS. 2 to 4 includes a head 2 and a threaded portion 4. FIG. 2 also shows a set screw 3 which may be fixed to the head after the insertion of a rod 7. The screw 1 furthermore comprises a locking element 5 having a U-shape. When the locking element 5 is fully inserted in the screw head 2 the orientation of threaded portion 4 is blocked with respect to the head 2. Inversely, when the locking element is retrieved, the threaded portion 4 can be freely oriented with respect to the screw head 2.

The lockable poly-axial screw according to the invention may therefore be transformed into a mono-axial screw, thus allowing having mono-axial and poly-axial capability in the same product. A blocking system defined previously allows the surgeon to choose if he/she wants to use the screw in mono-axial or poly-axial mode. As mentioned mono-axial capability is achieved by pushing the locking element (clip) 5 and poly-axial capability is achieved by removing the clip 5. The clip 5 is just an example of a blocking system; other technical solutions can also be imagined such as a pin.

Preferably, in the mono-axial mode the head may still freely rotate around its own axis, with respect to the threaded portion. Such a mechanism may be obtained with a U-shape clip and with an annular groove located around the upper part of the threaded portion. In this case the branches of the clip are sliding within the annular groove.

Any orientation of the axis can be considered when the mono-axial is used, i.e. the screw axis and the screw head may be oriented along different directions.

5

FIGS. 5 to 7 represent the attachment of a pedicle screw 1 to the distal end 16 of a screw extender 6, by inserting the screw head 2 within the distal end 16. In this operation the head 2 is guided with a plurality of ridges 17 located within the distal end 16 and grooves located on the head 2. With such a system the screw head is better retained within the screw extender 6.

Any suitable material can be used for the screw extender 6 (plastic, polymer, metal, etc. . . .).

FIGS. 8A to 8C represent the positioning of the rod 7 in the screw head 2, a rod reduction and the tightening of the set screw 3 in the screw head 2.

The multi-use instrument 26 (see also FIGS. 13A to 13B) is defined by an upper part 8 and a lower (threaded) part 20.

The rod 7 may be pushed downwards by rotating the multi-use instrument 26 within the cylindrical body 14.

After the rod insertion within the head 2, the set screw 3 is fixed to the head 2 by further rotating the multi-use instrument 26.

The multi-use instrument 26 is also provided with a torque limiting mechanism (see FIGS. 14 and 15). When the set screw 3 is fixed within the head 2 and the multi-use instrument 26 further rotated, the torque increases, up to a point where the pin 28 breaks. A further rotation of the multi-use instrument 26 has therefore no more effect on the set screw 3. From that point the further rotation of the multi-use instrument 26 only induces a downwards pressure on the screw head 2. The screw 1 is therefore progressively separated from the screw extender (see FIGS. 9A to 9C).

This screw releasing mechanism from an instrument offers the possibility to release the screw 1 from the screw extender without laterally expanding the screw extender 6.

It should be mentioned at this stage that this mechanism is not limited to the release of pedicle screws. Any other item may be used.

To summarize, the same instrument 26 can be used for rod reduction, for fixing a set screw to a screw head and for releasing a screw from a screw extender.

It should be underlined that the invention is not limited to this triple use of the same instrument. A double use is also comprised, for instance rod-reduction and fixation of the screw set to the screw head.

FIGS. 10 and 11 show an alternative solution to attach a pedicle screw to an screw extender, by rotating an inside tube (not illustrated) the half-tubes 23 are expanded by their own elasticity. This allows a screw to be inserted and fixed to it by for example clamping the outer surface around the screw. The same principle can be used as an alternative to detach the screw extender from a screw.

The clamping system also achieves part of its rigidity, by resting on support surfaces on the screw head.

FIG. 12 shows a concave screw top 32, inside a convex upper half ball 33, allowing the rod 7 and the set screw 3 to be set lower in the screw head 2, thus decreasing the total build height, and increasing the strength and rigidity of the system.

FIGS. 16 and 17 represents a tissue dilatation sleeve 9 containing four triangular flexible blades 22 intervened into each other and forming a cone 21. The cone 21 is mounted at the tip of a screw extender 6, with a tear off spiral. This allows the tissue to be pushed aside as the screw extender 6 is inserted into a body. Once in place, the surgeon may remove the sleeve 9 while the screw extender remains in the body. Any suitable number of blades can be used for forming the cone.

FIGS. 18 to 38 show a procedure using the items which have been previously presented.

6

In a first step (FIGS. 18 and 19) two puncturing guide wires 31 are positioned in the spine.

A first screw extender 6 with a screw 1 attached and surrounded by a dilatation sleeve is then inserted through the tissue (FIGS. 20 and 21), and along the guide wire 31. The screw extender 6 is rotated and/or pushed.

A similar operation is carried out with a second screw extender 6 and screw 1 (FIGS. 22 and 23).

A screw driver 24 is inserted within the screw extender 6. Its distal end is introduced within the upper part of the screw threaded portion 4. The screws 1 are then rotated and enter the vertebrae (FIGS. 24 and 25).

The tissue dilatation sleeves 9 are removed (FIGS. 26 to 28).

A rod inserting instrument 27 with a rod 7 at its end is transversally crossing the tissue (FIGS. 29 and 30).

The rod 7 is positioned above the screw head 2 (FIG. 32) and the multi-use instrument 26 is introduced within the screw extender 6, to such an extent that the set screw 3 is positioned above the rod 7, in line with the screw head 2 (FIGS. 31 and 32).

FIGS. 33 to 36 show the rod placement within the screw heads 2 and the fixation of the set screw 3 within the screw head 2.

FIGS. 37 and 38 illustrate the screw release from the screw extender 6 and the screw 1, the rod 7 and the screw set 3 in their definitive location.

The invention is of course not limited to those illustrated examples.

The screw extender according to the invention may be used with mono-axial, poly-axial or lockable poly-axial screws.

The invention claimed is:

1. An orthopedic implant kit comprising:

a screw extender for holding a screw;

a tissue dilatation sleeve for removable attachment to the screw extender, the tissue dilatation sleeve comprising: a cylindrical part for surrounding the screw extender, a flexible conical part attached to one end of the cylindrical part, the flexible conical part tapering in direction away from the cylindrical part, and a handle attached to the other end of the cylindrical part for manually pulling and removing the tissue dilatation sleeve from the screw extender along a longitudinal axis of the screw extender,

wherein the cylindrical part includes a first opening at said other end of the cylindrical part and the screw extender extends through the first opening, and

the handle includes a second opening configured to receive a finger of a user inside the second opening to grip the handle inside the second opening by said finger to pull and remove the tissue dilatation sleeve from the screw extender along a longitudinal axis of the screw extender, the second opening being perpendicular to the first opening when the tissue dilatation sleeve is assembled to the screw extender.

2. The orthopedic implant kit according to claim 1, wherein the flexible conical part is made of a plurality of longitudinal flexible blades having each a substantially triangular shape, adjacent flexible blades being separated from each other by a gap.

3. The orthopedic implant kit according to claim 1, wherein the flexible conical part is configured to cover the screw held by a distal part of the screw extender, when the tissue dilatation sleeve is attached to the screw extender.

4. The orthopedic implant kit according to claim 1, wherein the second opening is formed within a ring that is

attached to the other end of the cylindrical part, the ring configured to engage with the finger of the user for pulling and removing the tissue dilatation sleeve from the screw extender along the longitudinal axis.

5. The orthopedic implant kit according to claim 2, 5 wherein upon manually pulling and removing the tissue dilatation sleeve from the screw extender by the handle, the flexible blades of the conical part are configured to radially bend away from the screw extender, such that the tissue dilatation sleeve can be pulled and removed from the screw 10 extender along the longitudinal axis.

6. The orthopedic implant kit according to claim 1, wherein the second opening passes fully through the handle.

7. The orthopedic implant kit according to claim 1, wherein the second opening extends laterally with respect to 15 the screw extender to permit the screw extender to be located inside the first opening and outside the second opening.

8. The orthopedic implant kit according to claim 1, wherein said one end of the cylindrical part is located at a distal end of the tissue dilatation sleeve, and said other end 20 of the cylindrical part is located at a proximal end of the tissue dilatation sleeve.

9. The orthopedic implant kit according to claim 1, wherein a longitudinal axis of the second opening of the handle is transverse to a longitudinal axis of the first opening 25 of the cylindrical part.

* * * * *