



US012415947B2

(12) **United States Patent**
Zhao et al.

(10) **Patent No.:** **US 12,415,947 B2**

(45) **Date of Patent:** **Sep. 16, 2025**

(54) **SINGLE-PHASE RETARDED ACID SYSTEMS USING AMINO ACIDS**

(71) Applicant: **Schlumberger Technology Corporation**, Sugar Land, TX (US)

(72) Inventors: **Haiyan Zhao**, Sugar Land, TX (US); **Murtaza Ziauddin**, Katy, TX (US); **Philippe Enkababian**, Abu Dhabi (AE); **Temiloluwa Yusuf**, Sugar Land, TX (US); **Patrice Abivin**, Houston, TX (US); **Abraham Ryan**, Abu Dhabi (AE)

(73) Assignee: **Schlumberger Technology Corporation**, Sugar Land, TX (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **18/689,334**

(22) PCT Filed: **Sep. 23, 2022**

(86) PCT No.: **PCT/US2022/044553**

§ 371 (c)(1),

(2) Date: **Mar. 5, 2024**

(87) PCT Pub. No.: **WO2023/049360**

PCT Pub. Date: **Mar. 30, 2023**

(65) **Prior Publication Data**

US 2024/0271034 A1 Aug. 15, 2024

Related U.S. Application Data

(60) Provisional application No. 63/248,223, filed on Sep. 24, 2021.

(51) **Int. Cl.**

E21B 43/27 (2006.01)

C09K 8/60 (2006.01)

C09K 8/74 (2006.01)

(52) **U.S. Cl.**

CPC **C09K 8/74** (2013.01); **C09K 8/602** (2013.01); **E21B 43/27** (2020.05); **C09K 2208/30** (2013.01)

(58) **Field of Classification Search**

CPC **C09K 8/74**; **C09K 8/602**; **C09K 2208/30**; **E21B 43/27**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,485,529 A 10/1949 Cardwell
3,681,240 A 8/1972 Fast
3,826,312 A 7/1974 Richardson et al.
3,920,566 A 11/1975 Richardson et al.
4,140,640 A 2/1979 Scherubel
4,368,136 A 1/1983 Murphey
4,420,414 A 12/1983 Valone
4,466,893 A 8/1984 Dill
4,702,848 A 10/1987 Payne

4,703,797 A 11/1987 Djabbarah
4,730,676 A 3/1988 Luers
4,747,975 A 5/1988 Ritter
4,807,703 A 2/1989 Jennings, Jr.
5,120,471 A 6/1992 Jasinski
5,220,960 A 6/1993 Totten
5,310,002 A 5/1994 Blauch
5,327,973 A 7/1994 Jennings, Jr.
5,547,022 A 8/1996 Juprasert
5,773,024 A 6/1998 Unger
5,990,051 A 11/1999 Ischy
6,117,364 A 9/2000 Vorderbruggen
6,196,318 B1 3/2001 Gong
6,436,880 B1 8/2002 Frenier
7,148,184 B2 12/2006 Francini
7,237,608 B2 7/2007 Fu
7,350,572 B2 4/2008 Fredd
7,603,261 B2 10/2009 Tardy
7,615,516 B2 11/2009 Yang
7,635,028 B2 12/2009 Li
7,696,393 B2 4/2010 Rivers
7,774,183 B2 8/2010 Tardy
7,833,947 B1 11/2010 Kubala
7,915,205 B2 3/2011 Smith
8,163,102 B1 4/2012 MacDonald
8,551,926 B2 10/2013 Huang
8,580,047 B1 11/2013 MacDonald

(Continued)

FOREIGN PATENT DOCUMENTS

CN 105670599 6/2016
CN 110564398 12/2019

(Continued)

OTHER PUBLICATIONS

Search Report and Written Opinion of International Patent Application No. PCT/US2022/044553 dated Jan. 18, 2023, 6 pages.

Al-Ghamdi, A. H.; Mahmoud, M. A.; Wang, G.; Hill, A. D.; Nasr-El-Din, H. A. "Acid Diversion by Use of Viscoelastic Surfactants: The Effects of Flow Rate and Initial Permeability Contrast." SPE 142564, Dec. 2014, SPE Journal, pp. 1203-1216.

Baker, B. D. et al., "Stimulation Practices Using Alcoholic Acidizing and Fracturing Fluids for Gas Reservoirs", SPE-4836-MS presented at the SPE European Spring Meeting, 1974, 7 pages.

Bonn, M.; Bakker, H. J.; Rago, G.; Pouzy, F.; Siekierzycka, J. R.; Brouwer, A. M.; Bonn, D. "Suppression of Proton Mobility by Hydrophobic Hydration" J. Am. Chem. Soc. 2009, 131, 17070-17071.

(Continued)

Primary Examiner — Silvana C Runyan

(74) Attorney, Agent, or Firm — Jeffrey D. Frantz

(57)

ABSTRACT

Treatment of hydrocarbon formations using single-phase aqueous acid blends that contain arginine is described herein. The single-phase aqueous fluid includes one or more strong acid molecules and arginine in water, wherein the one or more strong acid molecules are present in a concentration range of 7.5 wt % to 28 wt %, based on the weight of the aqueous fluid, and arginine is present in a molar ratio of arginine to the one or more strong acid molecules that is from 1:100 to 1:5.

17 Claims, 3 Drawing Sheets

(56)

References Cited

U.S. PATENT DOCUMENTS

8,940,106	B1	1/2015	MacDonald	
9,034,806	B2	5/2015	Gurmen	
9,085,975	B2	7/2015	Abad	
9,376,611	B2	6/2016	Berry	
9,573,808	B2	2/2017	Jiang et al.	
9,796,490	B2	10/2017	Jiang et al.	
9,809,716	B2	11/2017	Beuterbaugh et al.	
9,920,606	B2	3/2018	Jiang et al.	
10,035,944	B2	7/2018	Purdy et al.	
10,131,831	B2	11/2018	Rimassa et al.	
10,378,325	B2	8/2019	Panga et al.	
10,703,957	B2	7/2020	Al-Yami et al.	
10,767,474	B2	9/2020	Feng	
10,787,606	B2 *	9/2020	Weider	C09K 8/74
10,954,432	B2	3/2021	Panga et al.	
10,982,133	B2	4/2021	Purdy et al.	
11,091,689	B2	8/2021	Daeffler	
11,098,241	B2	8/2021	Purdy	
11,168,244	B2	11/2021	Phan	
2002/0023752	A1	2/2002	Qu	
2002/0147114	A1	10/2002	Dobson	
2004/0009880	A1	1/2004	Fu	
2004/0129418	A1	7/2004	Jee	
2005/0124500	A1	6/2005	Chen	
2006/0042797	A1	3/2006	Fredd	
2006/0102349	A1	5/2006	Brady	
2006/0180308	A1	8/2006	Welton	
2007/0235189	A1	10/2007	Milne	
2007/0293404	A1	12/2007	Hutchins	
2008/0139412	A1	6/2008	Fuller	
2008/0200353	A1	8/2008	Dahayanake	
2008/0269081	A1	10/2008	Lin	
2008/0289828	A1	11/2008	Hutchins	
2008/0314594	A1 *	12/2008	Still	C09K 8/72 166/307
2009/0247431	A1	10/2009	Gupta	
2010/0010106	A1 *	1/2010	Crews	B01J 13/0069 516/135
2010/0022418	A1	1/2010	Milne	
2010/0224365	A1	9/2010	Abad	
2010/0243242	A1	9/2010	Boney	
2010/0248996	A1	9/2010	Sawdon	
2010/0331223	A1	12/2010	Li	
2011/0036583	A1	2/2011	Willberg	
2012/0238479	A1	9/2012	Choudhary	
2013/0025870	A1	1/2013	Berry	
2013/0032345	A1	2/2013	Freese	
2013/0261032	A1	10/2013	Ladva	
2013/0327531	A1	12/2013	Dahayanake	
2014/0116708	A1	5/2014	Wadekar	
2014/0166291	A1	6/2014	Friesen	
2014/0166589	A1	6/2014	Hicks	
2014/0171345	A1	6/2014	Steiner	
2014/0174742	A1	6/2014	Mirakyan	
2014/0212006	A1	7/2014	Zhao	
2014/0246198	A1	9/2014	Pandya	
2014/0256604	A1	9/2014	Wadekar	
2014/0329725	A1	11/2014	Karale	
2014/0367100	A1	12/2014	Oliveira	
2015/0034315	A1	2/2015	Jiang	
2015/0034318	A1	2/2015	Jiang et al.	
2015/0080271	A1	3/2015	De Wolf	
2015/0114647	A1 *	4/2015	Jiang	C09K 8/74 166/305.1
2015/0200147	A1	7/2015	Lien	
2015/0240147	A1	8/2015	Jiang et al.	
2015/0260021	A1	9/2015	Reyes	
2015/0322762	A1	11/2015	Varadaraj	
2015/0344771	A1	12/2015	Jiang	
2016/0024370	A1	1/2016	Ba geri	
2016/0025895	A1 *	1/2016	Ziauddin	G01V 20/00 702/11
2016/0146964	A1	5/2016	Badri	
2016/0237340	A1	8/2016	Pandya	
2016/0298024	A1 *	10/2016	Panga	C09K 8/845

2017/0037304	A1	2/2017	Rimassa	
2017/0267918	A1	9/2017	Daeffler et al.	
2018/0244981	A1	8/2018	Panga et al.	
2018/0244982	A1	8/2018	Yakovlev et al.	
2018/0273834	A1	9/2018	Qiu et al.	
2018/0282613	A1 *	10/2018	Blackbourn	C09K 8/74
2019/0010385	A1	1/2019	Sayed et al.	
2019/0194528	A1	6/2019	Purdy et al.	
2019/0292440	A1	9/2019	Purdy	
2020/0224085	A1	7/2020	Purdy et al.	
2020/0224086	A1	7/2020	Purdy et al.	
2020/0318009	A1 *	10/2020	Purdy	C09K 8/528
2020/0399530	A1	12/2020	Zakaria et al.	
2021/0002543	A1	1/2021	Jin	
2021/0130680	A1	5/2021	Purdy	
2021/0189226	A1 *	6/2021	Purdy	C09K 8/74
2021/0198561	A1	7/2021	Purdy et al.	
2021/0253936	A1	8/2021	Purdy	
2021/0277302	A1	9/2021	Qiu	
2021/0380872	A1	12/2021	Daeffler	
2023/0257645	A1	8/2023	Daeffler	
2023/0279284	A1	9/2023	Qiu	
2024/0309266	A1	9/2024	Fernandez Del Valle	

FOREIGN PATENT DOCUMENTS

EP	2524017	6/2015
KR	20200108408	9/2020
RU	2247833	3/2005
WO	2000019062	A1 4/2000
WO	2004005672	A1 1/2004
WO	2006136262	A1 12/2006
WO	2009077958	A1 6/2009
WO	2011148282	A1 12/2011
WO	2014193546	A1 12/2014
WO	2015020688	A1 2/2015
WO	2015154977	A1 10/2015
WO	2016105996	A1 6/2016
WO	2016164056	A1 10/2016
WO	2017040434	A1 3/2017
WO	2017040553	A1 3/2017
WO	2017040562	A1 3/2017
WO	2018018129	A1 2/2018
WO	2019245983	A1 12/2019
WO	2021126303	A1 6/2021
WO	2023283480	A1 1/2023
WO	2023287746	A1 1/2023
WO	2023102001	A1 6/2023
WO	2023183462	A1 9/2023
WO	2023183465	A1 9/2023

OTHER PUBLICATIONS

Buijse, "Understanding wormholing mechanisms can improve acid treatments in carbonate formations", SPE Production Facilities, vol. 15, No. 3, 2000, pp. 168-175.

Callahan et al., "Solvation of Magnesium Dication: Molecular Dynamics Simulation and Vibrational Spectroscopic Study of Magnesium Chloride in Aqueous Solution", J. Phys. Chem. A. 2010, 114, 5141-5148.

Chemicalland21, "Lauryl alcohol ethoxylates", <http://www.chemicalland21.com/specialtychem/perchem/lauryl%20alcohol%20ethoxylate.htm>, Jan. 17, 2015, 5 pages.

Crowe, C.W.; McGowan, G. R.; Baranet, S. E. "Investigation of Retarded Acids Provides Better Understanding of Their Effectiveness and Potential Benefits", SPE 18222, SPE Production Engineering, May 1990, pp. 166-170.

Edward et al., "the Dielectric Increments of Amino Acids", J. Am. Chem. Soc. 1974, 96, 902-906.

Fredd et al., "Influence of transport and reaction on wormhole formation in carbonate porous media", AIChE Journal, vol. 44, No. 9, Sep. 1998, pp. 1933-1949.

Ghommem et al., "Carbonate Acidizing: Modeling, Analysis, and Characterization of Wormhole Formation and Propagation", Journal of Petroleum Science and Engineering, vol. 131, Jul. 2015, pp. 18-33.

(56)

References Cited**OTHER PUBLICATIONS**

Liu et al., "Wormhole propagation behavior under reservoir condition in carbonate acidizing", *Transport in porous Media*, vol. 96, Issue 1, Jan. 2013, pp. 203-220.

Lungwitz, B.; Fredd, C.; Brady, M.; Miller, M.; Ali, S.; Hughes, K. "Diversion and Cleanup Studies of Viscoelastic Surfactant-Based Self-Diverting Acid", SPE 86504, SPE International Symposium and Exhibition on Formation Damage Control, Feb. 18-20, 2004, 10 pages.

Mou, J.; Liu, M.; Zheng, K.; Zhang, S. "Diversion Conditions for Viscoelastic-Surfactant-Based Self-Diversion Acid in Carbonate Acidizing" SPE 173898, May 2015, SPE Production Operations, pp. 121-129.

P. M. J Tardy, B. Lecr, Y. Christanti "An Experimentally Validated Wormhole Model for Self-Diverting and Conventional Acids in Carbonate Rocks Under Radial Flow Conditions" paper SPE 107854, presented at the European Formation Damage Conference held in Scheveningen, The Netherlands, May 30-Jun. 1, 2007; 17 pages.

Panga et al., "Two-Scale Continuum Model for Simulation of Wormholes in Carbonate Acidization", *AIChE J.* 2005, 51, 3231-3248.

Petrov et al., "An Integrated approach to the treatment of the bottom-hole zone of the formation as a method for intensification of production", *Scientific and technical journal Georesources*, No. 1,(33), 2010, pp. 7-10.

Scherubel, G. A.; Crowe, C. W. "Foamed Acid, A New Concept in Fracture Acidizing" paper SPE 7568, presented at the Annual Fall Technical Conference and Exhibition, Houston, TX, USA, Oct. 1978, 8 pages.

Travalani-Louvisse, A.M. et al., "The use of ethanol in oil well stimulation fluids", *Journal of Petroleum Science and Engineering*, 1990, 4(3), pp. 257-272.

Wyman, "Dielectric Constant: Ethanol-Diethyl Ether and Urea-Water Solutions between 0 and 50", *J. Am. Chem. Soc.* 1933, 55, 4116-4121.

Xu et al., "On the Origin of Proton Mobility Suppression in Aqueous Solutions in Amphiphiles", *J. Phys. Chem. B.* 2013, 117, 15426-15435.

Office Action issued in U.S. Appl. No. 18/691,989 dated Oct. 11, 2024, 22 pages.

Office Action issued in U.S. Appl. No. 18/577,787 dated Nov. 8, 2024, 39 pages.

Examination Report issued in GCC Patent Appl. No. GC 2016-31138 on Jul. 17, 2018; 4 pages.

International Search Report issued in PCT Application PCT/US2016/025967 on Jul. 14, 2016; 3 pages.

Written Opinion issued in PCT Application PCT/US2016/025967 on Jul. 14, 2016; 3 pages.

Office Action issued in U.S. Appl. No. 18/305,765 dated Dec. 21, 2023, 18 pages.

International Search Report and Written Opinion issued in International Patent Appl. No. PCT/US2016/049335 on Nov. 17, 2016; 9 pages.

PCT International Preliminary Report on Patentability; Application No. PCT/US2016/049335; Dated Mar. 15, 2018; 8 pages.

Eurasian Office Action issued in Eurasian Patent Application No. 201890638 (IS15.1123-EA-EAT) on Oct. 2, 2018; 6 pages (with English Translation).

Examination Report issued in related GC Application GC 2016-39640 on Jul. 8, 2021; 5 pages.

Examination Report issued in the related GC Application GC/2016/31967 (IS15.1123-GC-NP) dated Nov. 20, 2018 (4 pages).

Third Examination Report issued in the related GC Application GC/2016/31967 (IS15.1123-GC-NP) dated Feb. 17, 2021, 4 pages.

Eurasian Office Action issued in Eurasian Patent Application No. 201890637 (IS15.1163-EA-EAT) Mar. 27, 2019; 12 pages (with English Translation).

Examination Report issued in the related GC Application GC/2016/31966 (IS15.1163-GC-NP) dated Nov. 26, 2018 (4 pages).

International Search Report and Written Opinion issued in International Patent Application No. PCT/US2016/049538 on Nov. 10, 2016; 10 pages.

International Preliminary Report on Patentability issued in International Patent Application No. PCT/US2018/024439 on Oct. 10, 2019; 11 pages.

Extended European Search Report issued in European Patent Appl. No. 18776307.3 on Dec. 10, 2020; 9 pages.

Exam Report Issued in Qatar Patent Application No. QA/201909/000510 dated Oct. 29, 2023, 5 pages with English translation.

Office Action issued in Kazakhstan Patent Appl. No. 2019/0788.1 on Nov. 2, 2020; 15 pages (with English translation).

International Search Report and Written Opinion issued in International Patent Appl. No. PCT/US2018/024439 on Jul. 12, 2018; 14 pages.

Substantive Exam issued in Saudi Arabian Patent Application No. 519410203 dated May 24, 2022, 10 pages with English translation.

International Search Report and Written Opinion issued in the PCT Application No. PCT/US2022/036641 dated Nov. 4, 2022, 13 pages.

Search Report and Written Opinion of International Patent Application No. PCT/US2022/051322 dated Apr. 14, 2023, 7 pages.

Search Report and Written Opinion of International Patent Application No. PCT/US2023/016026 dated Jul. 7, 2023, 8 pages.

Search Report and Written Opinion of International Patent Application No. PCT/US2023/016032 dated Jul. 18, 2023, 9 pages.

* cited by examiner

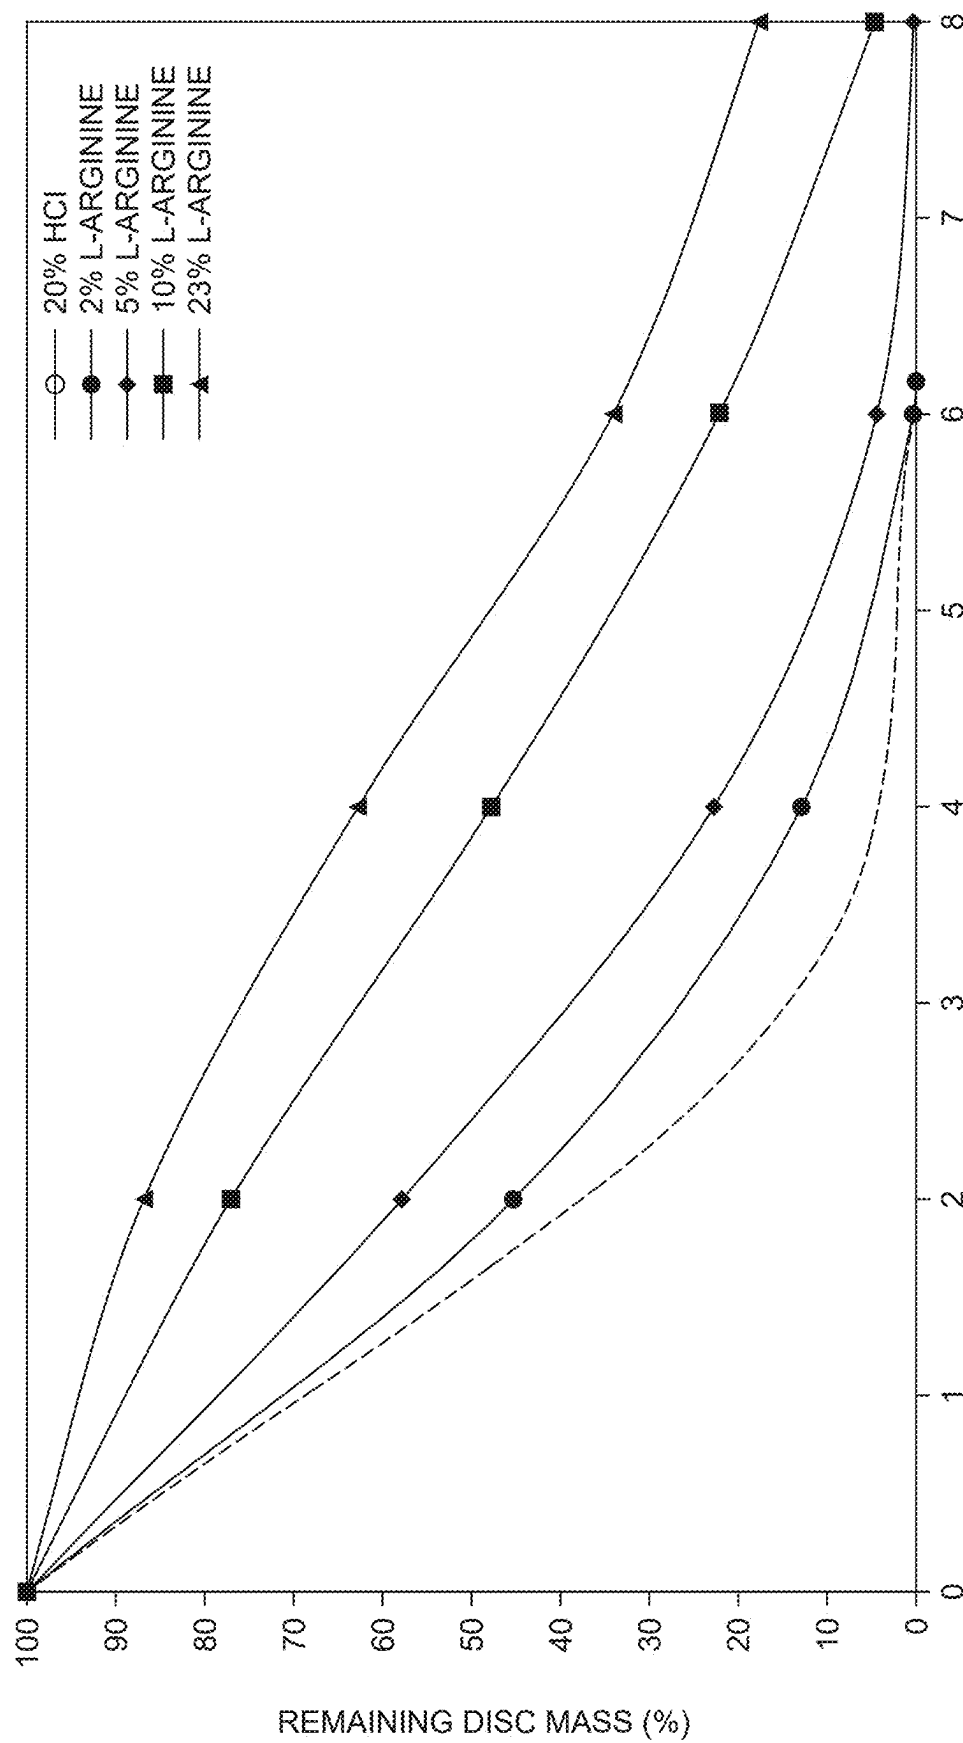


Fig. 1

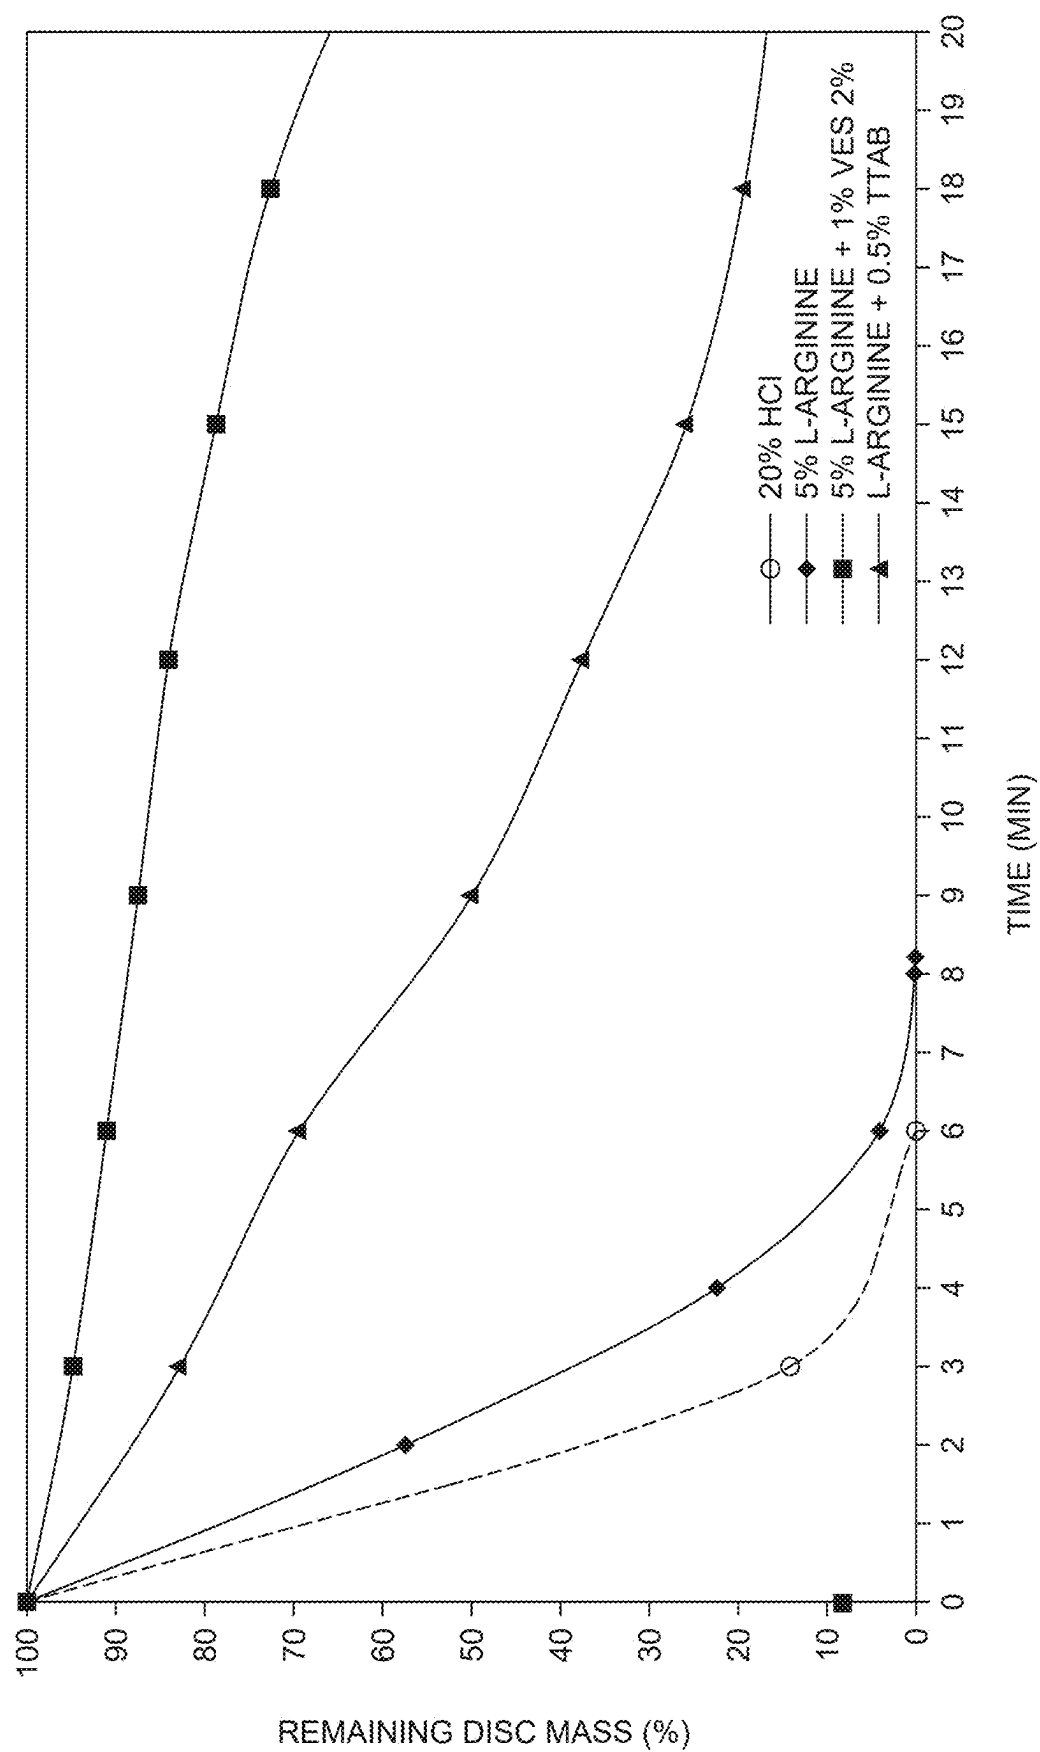


Fig. 2

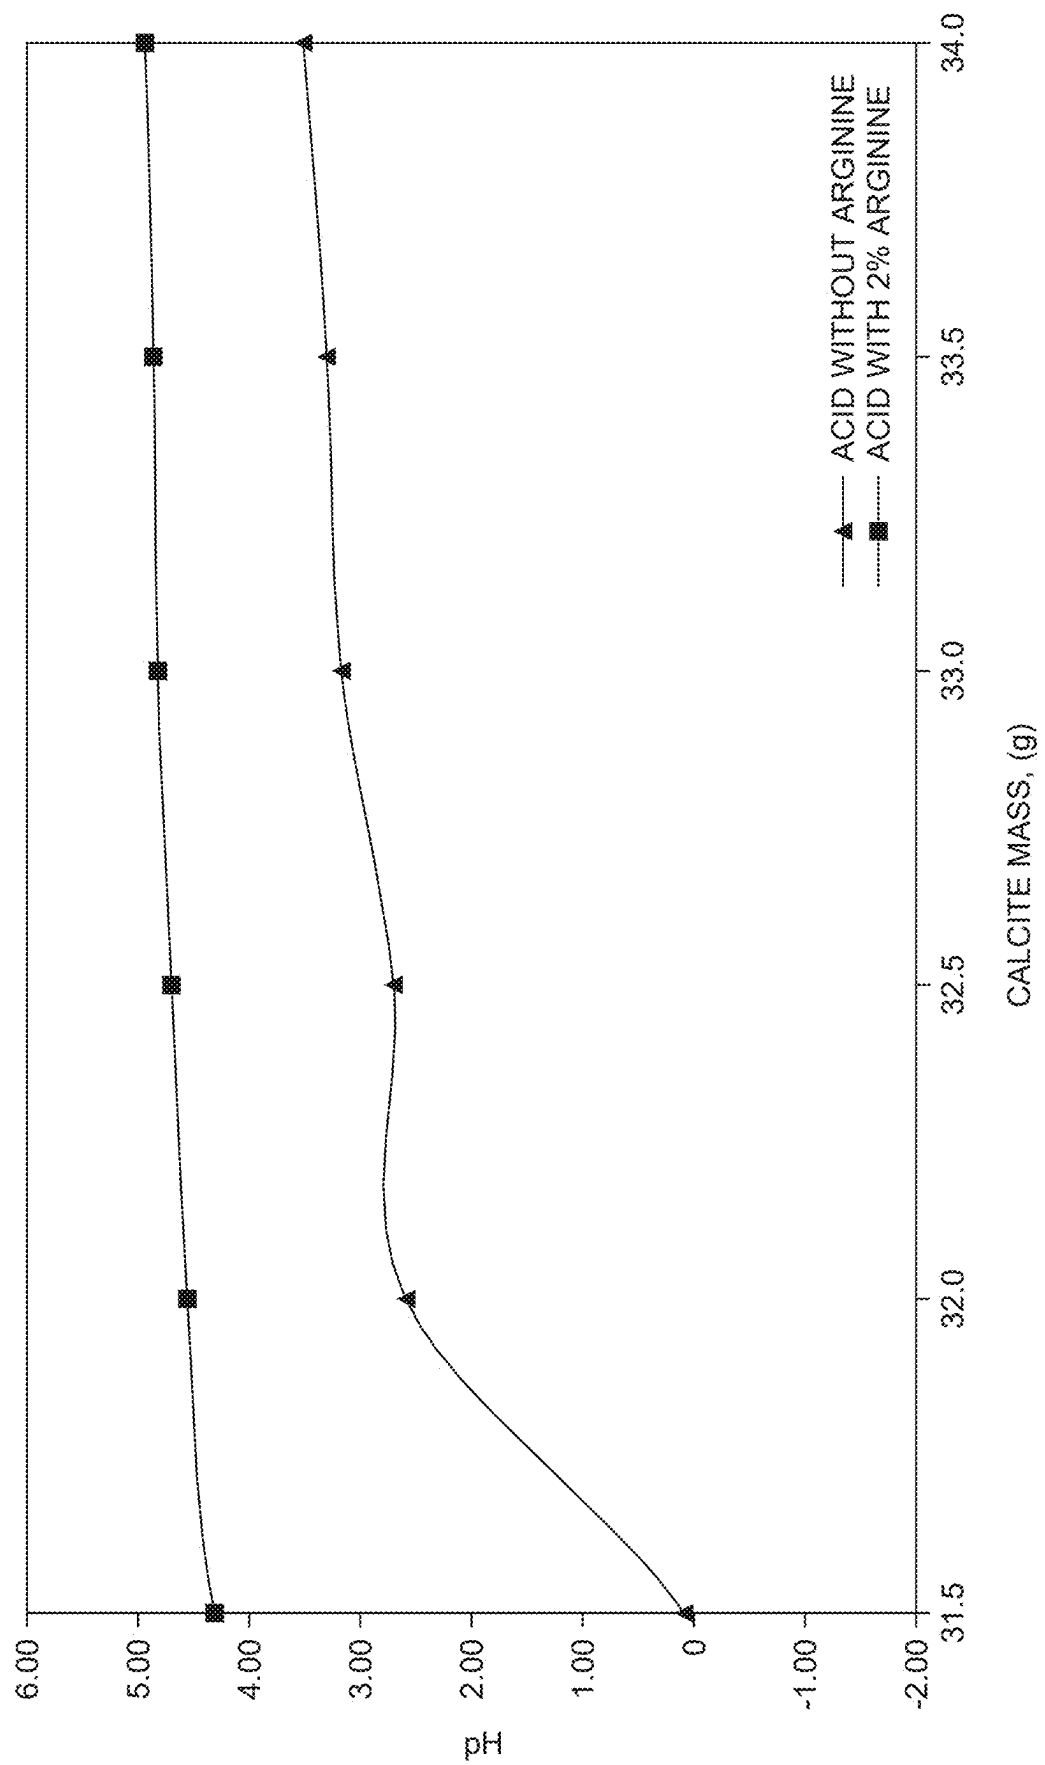


Fig. 3

1

SINGLE-PHASE RETARDED ACID SYSTEMS USING AMINO ACIDS

CROSS-REFERENCE TO RELATED APPLICATIONS

This patent application is a National Stage Entry of PCT/US2022/044553, filed Sep. 23, 2022, which claims the benefit of U.S. Provisional Patent Application Ser. No. 63/248,223, filed Sep. 24, 2021, which is entirely incorporated herein by reference.

FIELD

This patent application describes methods and apparatus for stimulating hydrocarbon reservoirs. Specifically, methods and materials for acid treating hydrocarbon formations is described.

BACKGROUND

Almost two-thirds of the world's remaining oil reserves are contained in carbonate reservoirs. Carbonate formations have a tendency to be highly heterogeneous, with complex porosity and permeability variations, barriers, and irregular flow paths. In order to increase the productivity of wells in a calcareous formation, a range of stimulation techniques can be applied. One of the most common techniques involves the stimulation of a well with acids.

Acids can be injected into the formation to boost production or increase injectivity in oil and gas fields. Stimulation of carbonate rocks typically involves the reaction between an acid and the minerals calcite (CaCO_3) and dolomite [$\text{CaMg}(\text{CO}_3)_2$] to enhance the flow properties of the rock. The reaction removes solid material from the rock structure into solution, creating openings in the rock formation for fluid flow.

Optimal acid treatment involves finding a balance between acid reacting too quickly with rock materials, thereby depleting before openings can be formed, and acid reacting too slowly, causing uniform dissolution of rock material, not the formation of openings. To manage the extremes, retarded acid systems are commonly used to extend reactivity of acid such that reactive acid can be delivered into the formation before being expended. One common type of retarded acid is emulsified acid, which is formed by suspending small acid droplets in a continuous hydrocarbon phase to form an emulsion. Emulsified acid can slow down the reaction rate between hydrochloric acid (HCl) and carbonate. However, emulsions typically have high viscosity and friction pressure, and are challenging to prepare at the wellsite. Single-phase retarded acid systems do not have the challenges of emulsions, but balancing the reactivity of the acid can be challenging. Single-phase acid systems also commonly result in flowback composition with low pH, for example, from a pH of 0 to 3, which can corrode equipment.

Improved single-phase retarded acid systems are needed for stimulation of carbonate reservoirs.

SUMMARY

Embodiments described herein provide a single-phase aqueous fluid that has one or more strong acid molecules and arginine in water, wherein the strong acid is present at a concentration in a range of 7.5 percentage by weight (wt %) to 28 wt %, based on the weight of the aqueous fluid, and

2

arginine is present in a molar ratio of arginine to the strong acid that is from 1:100 to 1:5.

Other embodiments described herein provide a method of treating a subterranean formation penetrated by a wellbore by preparing a single-phase aqueous fluid having one or more strong acid molecules at a concentration in a range of 7.5 wt % to 28 wt % and arginine in range of concentration such that a molar ratio of arginine to acid is between 1:100 and 1:5 and contacting the subterranean formation with the single-phase aqueous fluid at a pressure less than the fracture initiation pressure.

Other embodiments described herein provide a method of treating a subterranean formation penetrated by a wellbore. The method includes obtaining a single-phase aqueous fluid comprising one or more strong acid molecules at a concentration in a range of 7.5 wt % to 28 wt % and an amino acid mixture, including arginine, in a range of concentration such that a molar ratio of amino acids to acid molecules is from 1:100 to 1:5, and contacting the subterranean formation with the single-phase aqueous fluid at a pressure less than the fracture initiation pressure.

Various refinements of the features noted above may be undertaken in relation to various aspects of the present disclosure. Further features may also be incorporated in these various aspects as well. These refinements and additional features may exist individually or in any combination. For instance, various features discussed below in relation to one or more of the illustrated embodiments may be incorporated into any of the above-described aspects of the present disclosure alone or in any combination. The brief summary presented above is intended to familiarize the reader with certain aspects and contexts of embodiments of the present disclosure without limitation to the claimed subject matter.

BRIEF DESCRIPTION OF THE DRAWINGS

Various aspects of this disclosure may be better understood upon reading the following detailed description and upon reference to the drawings, in which:

FIG. 1 is a graph showing rotating disc test results of aqueous fluids containing only HCl and L-arginine, in accordance with embodiments of the present disclosure;

FIG. 2 is a graph showing rotating disc test results of aqueous fluids containing HCl, L-arginine, and different surfactants, in accordance with embodiments of the present disclosure; and

FIG. 3 is a graph showing the pH effect of using arginine in an acid treatment fluid, in accordance with embodiments of the present disclosure.

DETAILED DESCRIPTION

One or more specific embodiments of the present disclosure will be described below. These described embodiments are only examples of the presently disclosed techniques. Additionally, in an effort to provide a concise description of these embodiments, all features of an actual implementation may not be described in the specification. It should be appreciated that in the development of any such actual implementation, as in any engineering or design project, numerous implementation-specific decisions must be made to achieve the developers' specific goals, such as compliance with system-related and business-related constraints, which may vary from one implementation to another. Moreover, it should be appreciated that such a development effort might be complex and time consuming, but would never

theless be a routine undertaking of design, fabrication, and manufacture for those of ordinary skill having the benefit of this disclosure.

When introducing elements of various embodiments of the present disclosure, the articles “a,” “an,” and “the” are intended to mean that there are one or more of the elements. The terms “comprising,” “including,” and “having” are intended to be inclusive and mean that there may be additional elements other than the listed elements. Additionally, it should be understood that references to “one embodiment” or “an embodiment” of the present disclosure are not intended to be interpreted as excluding the existence of additional embodiments that also incorporate the recited features.

Blending one or more strong acid molecules with arginine in an aqueous fluid has been found to yield an acid system with reduced reactivity rate that is useful for acid treating acid-susceptible hydrocarbon reservoirs. Arginine is functional as an acid retardant for strong acid molecules such as hydrogen chloride (HCl, also called hydrochloric acid), hydrogen bromide in water (HBr, also called hydrobromic acid), hydrogen iodide (HI, also called hydroiodic acid), hydrogen fluoride in water (HF, also called hydrofluoric acid), sulfuric acid (H_2SO_4), nitric acid (HNO_3), phosphoric acid (H_3PO_4), any alkanesulfonic acid (RSO_3H , where R is an alkyl group), any arylsulfonic acid (ArSO_3 , where Ar is an aromatic or aryl group), or a combination thereof, in water solution. Because it is believed that the amino acid functionality of arginine provides acid retarding functionality, other amino acids, such as valine, serine, aspartate (also called aspartic acid), asparagine, glutamate (also called glutamic acid), glutamine, cysteine, and threonine can also be used in similar concentrations as arginine. Substituted versions of these amino acids can also be used. One or more substitutable hydrogen atoms on any of the above amino acids can be replaced by substituents, which may be, for example, aromatic or aliphatic organic groups such as phenyl groups, smaller alkyl groups, and/or smaller alkenyl groups. A mixture of the amino acids described above can also be used, where the mixture is present in these concentrations. One or more strong acid molecules and arginine (or another amino acid, or a mixture of amino acids), in water solution, form a single-phase aqueous fluid that can be used for acid treatment. The fluids described herein are retarded acid fluids that can be used to penetrate acid-susceptible formations for acid treatment, and provide flowback compositions that are less corrosive than conventional treatment fluids. For example, where conventional treatment fluids generally result in flowback at a pH of 0 to 3, the retarded acid fluids described herein generally provide flowback composition of pH from about 3 to about 5.5, resulting in reduced flowback time.

The strong acid molecule or molecules are generally present in the single-phase aqueous fluid at a concentration in a range of 7.5 wt % to 28 wt %, based on the weight of the single-phase aqueous fluid, and arginine is generally present in a molar ratio of arginine to the one or more strong acid molecules that is from 1:100 to 1:5, such as from 1:75 to 1:10, or from 1:70 to 1:15, for example about 1:47 or 1:19. In some cases, arginine is present in the single-phase aqueous fluid at a concentration of 10 wt %, or 5 wt %, or as low as 2 wt %.

Surfactants can also be used in acid-arginine blends to enhance acid retardation. Surfactants are generally used to modify surface properties of liquids. In the applications described herein, surfactants are generally believed to occupy sites where acid might react with acid-susceptible

species in rock formations. Any surfactant that has affinity for acid-susceptible species in rock formations can be used. Such surfactants may be amphoteric, nonionic, cationic, or anionic. Surfactants that can be used include, but are not limited to, betaine-based materials such as erucic amidopropyl dimethyl betaine (EADB) and cocamidopropyl betaine (CAPB); alkyl ammonium bromide materials such as hexadecyltrimethyl ammonium bromide (CTAB, for cetyl trimethyl ammonium bromide) and tetradecyltrimethylammonium bromide (TTAB); and dodecylbenzene sulfonic acid. Combinations of surfactants can be used to tune the effect of acid and alcohol on the acid-susceptible species of the rock formation. The surfactant, or combination of surfactants, is generally added to a mixture of acid and alcohol to complete a single-phase treatment mixture.

Other components can be added to the single-phase acid mixtures described above for use in acid treatment of hydrocarbon formations. Such components include corrosion inhibitors, friction reducers, iron control reagents, diversion agents, viscosifiers, chelating reagents, solvents, clay stabilizers, and calcium inhibitors. These reagents can be added to the mixture neat or dissolved in water or another compatible solvent. For example, such reagents can be added to an alcohol to form a premix, and the premix can then be added to an acid solution to form a single-phase treatment mixture.

The single-phase aqueous mixtures described above can be used as acid treatment compositions with no further additional components, and can be used in a single-step acid treatment process, wherein the single-phase aqueous mixture consisting of water-miscible components and comprising one or more strong acid molecules, arginine (optionally mixed with other amino acids as described above), and a surfactant is pumped into a well to acidify the interior of a hydrocarbon formation adjacent to the well. Additional components can be added to the single-phase aqueous mixture to enhance the properties and performance thereof. Adding these components may result in a multi-phase mixture in some cases, or the mixture may remain single-phase after the additional components are added. Acid treatment mixtures described herein may also be used in multi-step processes that might include pre-treatment operations to flush the formation with flush compositions that may be liquid, gas, or a mixture thereof, and may be aqueous, oleaginous, or a mixture thereof. In some instances, a dilute acid flush may be used prior to acid treatment to remove any unwanted components from the formation prior to acid treatment.

Examples

To evaluate the performance of single-phase aqueous treatment fluids with strong acids and arginine, optionally including surfactants, mass loss rotating disk experiments were conducted. The mass loss experiments used a control fluid of 20 wt % HCl in water to compare to test fluids containing 20 wt % HCl and different concentrations of arginine and different surfactants. The mass loss experiments used marble discs of 1-inch diameter and 1/4-inch thickness, with disc mass recorded every three minutes. Coreflow tests were also conducted using limestone cores.

FIG. 1 is a graph showing rotating disk test results of aqueous fluids containing only HCl and L-arginine (compared to an HCl solution). As seen in FIG. 1, adding arginine to a 20 wt % HCl solution results in slower dissolution of a marble disc, indicating acid retardation.

5

FIG. 2 is a graph showing rotating disc test results of aqueous fluids containing HCl, L-arginine, and different surfactants. As shown in FIG. 2, reaction rate of a solution of 20 wt % HCl and 5 wt % L-arginine is further retarded by including 1 wt % VES (viscoelastic surfactant). Also, in FIG. 2, a 20 wt % HCl solution containing 2 wt % L-arginine and 0.5 wt % TTAB reacts more slowly than the 5 wt % L-arginine solution with no surfactant.

Coreflow tests are summarized in Table 1. The coreflow test compared the performance of a 20 wt % HCl solution injected into 1-inch cores with performance of a 20 wt % HCl solution containing 10 wt % L-arginine and 1 wt % EADB injected into 1.5 inch cores. Table 1 indicates pore volume to breakthrough (PV_{BT}), which is a volume of injection needed to create wormholes in the core.

TABLE 1

PVBT Values of Retarded and Control Acid Fluids	
Acid System	PV_{BT}
20 wt % HCl	8.3
Retarded acid (20 wt % HCl, 10 wt % L-arginine, 1 wt % EADB)	0.25

As shown in Table 1, much less (specifically about 90% less) acid treatment fluid volume is needed to create wormholes in the limestone cores using the retarded acid versus the control fluid.

FIG. 3 is a graph showing the pH effect of using arginine in an acid treatment fluid. As acid is spent in an acid treatment fluid, pH will rise at a rate that indicates how fast the acid is consumed. FIG. 3 compares adding carbonate to a 20 wt % HCl solution, as control, and to a 20 wt % HCl solution containing 2 wt % arginine. As shown in FIG. 3, pH rises quickly with the control fluid and slowly with the arginine-containing fluid, indicating retardation of acid reaction rate. Also notable from the data shown in FIG. 3 is the higher pH of the spent acid. Depending on the mass of calcite added, pH of the 2 wt % arginine solution is 1.5-2 units of pH higher than the arginine-free solution.

The specific embodiments described above have been illustrated by way of example, and it should be understood that these embodiments may be susceptible to various modifications and alternative forms. It should be further understood that the claims are not intended to be limited to the particular forms disclosed, but rather to cover all modifications, equivalents, and alternatives falling within the spirit and scope of this disclosure.

The invention claimed is:

1. A single-phase aqueous fluid for treating a subterranean formation, the single-phase aqueous fluid comprising:

water;

one or more strong acid molecules, wherein the one or more strong acid molecules are present at a concentration in a range of 7.5 wt % to 28 wt %, based on the weight of the single-phase aqueous fluid;

an amino acid component comprising arginine, wherein the amino acid component is present in a molar ratio of the amino acid component to the one or more strong acid molecules that is from 1:70 to 1:19; and

a surfactant having an affinity for acid-susceptible species in the subterranean formation, the surfactant cooperating with the amino acid component to retard an acid reaction rate of the one or more strong acid molecules with the subterranean formation, wherein the surfactant is selected from the group consisting of betaine-based

6

materials, alkyl ammonium bromide materials, dodecylbenzene sulfonic acid, and combinations thereof.

2. The single-phase aqueous fluid of claim 1, wherein the one or more strong acid molecules comprise hydrogen chloride.

3. The single-phase aqueous fluid of claim 1, wherein the one or more strong acid molecules are selected from the group consisting of hydrogen bromide, hydrogen iodide, hydrogen fluoride, sulfuric acid, nitric acid, phosphoric acid, an alkanesulfonic acid, an arylsulfonic acid, and combinations thereof.

4. The single-phase aqueous fluid of claim 1, wherein the surfactant is a viscoelastic surfactant.

5. The single-phase aqueous fluid of claim 1, wherein the surfactant is a cationic surfactant.

6. The single-phase aqueous fluid of claim 1, wherein the amino acid component is present in a molar ratio of the amino acid component to the one or more strong acid molecules that is from 1:47 to 1:19.

7. The single-phase aqueous fluid of claim 1, wherein the surfactant is selected from the group consisting of erucic amidopropyl dimethyl betaine (EADB), cocamidopropyl betaine (CAPB), hexadecyltrimethyl ammonium bromide (CTAB), tetradecyltrimethylammonium bromide (TTAB), dodecylbenzene sulfonic acid, and combinations thereof.

8. The single-phase aqueous fluid of claim 1, wherein the amino acid component comprises arginine and at least one additional amino acid selected from the group consisting of valine, serine, aspartate, asparagine, glutamate, glutamine, cysteine, and threonine.

9. The single-phase aqueous fluid of claim 1 consisting of the water, the one or more strong acid molecules, the amino acid component, the surfactant, and at least one additional component selected from the group consisting of corrosion inhibitors, friction reducers, iron control reagents, diversion agents, viscosifiers, chelating reagents, solvents, clay stabilizers, and calcium inhibitors.

10. The single-phase aqueous fluid of claim 1 consisting of the water, the one or more strong acid molecules, the amino acid component, and the surfactant.

11. The single-phase aqueous fluid of claim 1, wherein the surfactant comprises erucic amidopropyl dimethyl betaine (EADB).

12. A method of treating a subterranean formation penetrated by a wellbore, the method comprising:

obtaining the single-phase aqueous fluid of claim 1; and contacting the subterranean formation with the single-phase aqueous fluid at a pressure less than a fracture initiation pressure, wherein the surfactant cooperates with the amino acid component to retard an acid reaction rate of the one or more strong acid molecules with the subterranean formation.

13. The method of claim 12, wherein the one or more strong acid molecules is hydrogen chloride.

14. The method of claim 12, wherein the one or more strong acid molecules are selected from the group consisting of hydrogen bromide, hydrogen iodide, hydrogen fluoride, sulfuric acid, nitric acid, phosphoric acid, an alkanesulfonic acid, an arylsulfonic acid, and combinations thereof.

15. The method of claim 12, wherein the surfactant is a viscoelastic surfactant.

16. The method of claim 12, wherein the surfactant is a cationic surfactant.

17. The method of claim 12, wherein the amino acid component is present in the single-phase aqueous fluid in a

7

molar ratio of the amino acid component to the one or more strong acid molecules that is from 1:47 to 1:19.

* * * * *

8