



US 20250282323A1

(19) **United States**

(12) **Patent Application Publication**
JOHANSSON et al.

(10) **Pub. No.: US 2025/0282323 A1**

(43) **Pub. Date: Sep. 11, 2025**

(54) **METHOD FOR ACTIVATING A VEHICLE ALARM SYSTEM FOR LIGHTING UP A TARGET VEHICLE, VEHICLE ALARM SYSTEM AND VEHICLE COMPRISING AN ALARM SYSTEM**

Publication Classification

(51) **Int. Cl.**
B60R 25/104 (2013.01)
B60R 25/10 (2013.01)
B60R 25/30 (2013.01)
H04W 4/46 (2018.01)
(52) **U.S. Cl.**
CPC *B60R 25/104* (2013.01); *B60R 25/30* (2013.01); *H04W 4/46* (2018.02); *B60R 2025/1013* (2013.01)

(71) Applicants: **Ningbo Geely Automobile Research & Development Co., Ltd.**, Ningbo (CN);
Zhejiang Geely Holding Group Co., Ltd., Zhejiang (CN)

(72) Inventors: **Jonathan JOHANSSON**, Göteborg (SE); **Erik LINDBERG NILSSON**, Göteborg (SE)

(21) Appl. No.: **19/218,257**

(22) Filed: **May 24, 2025**

Related U.S. Application Data


(63) Continuation of application No. PCT/CN2023/132945, filed on Nov. 21, 2023.

Foreign Application Priority Data

Nov. 29, 2022 (EP) 22210204

(57) **ABSTRACT**

A vehicle alarm system includes an alarm signal detection unit configured for detecting an alarm signal of a target vehicle. An alarm signal of the target vehicle is detected by means of the alarm signal detection unit upon activation of an intruder alarm of the target vehicle. An angular direction of the vehicle in relation to the target vehicle and a distance between the vehicle and the target vehicle are determined upon detection of the alarm signal. A light source of the vehicle is activated to light up the target vehicle and/or a light source of a device associated with the vehicle is activated to light up the target vehicle when the determined angular direction is within a predetermined angular direction range and the determined distance is within a predetermined distance range.

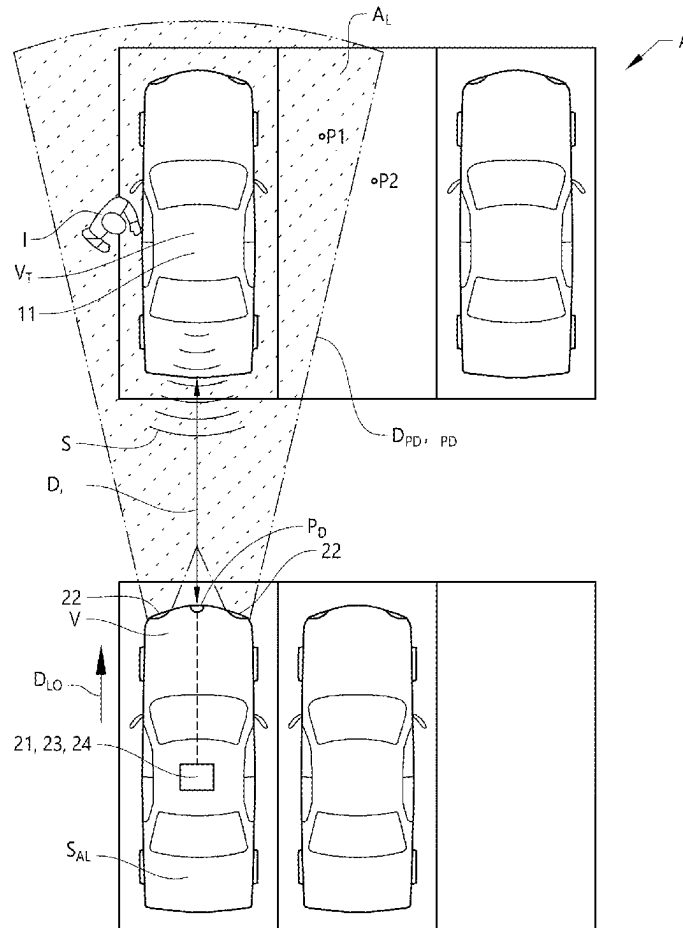

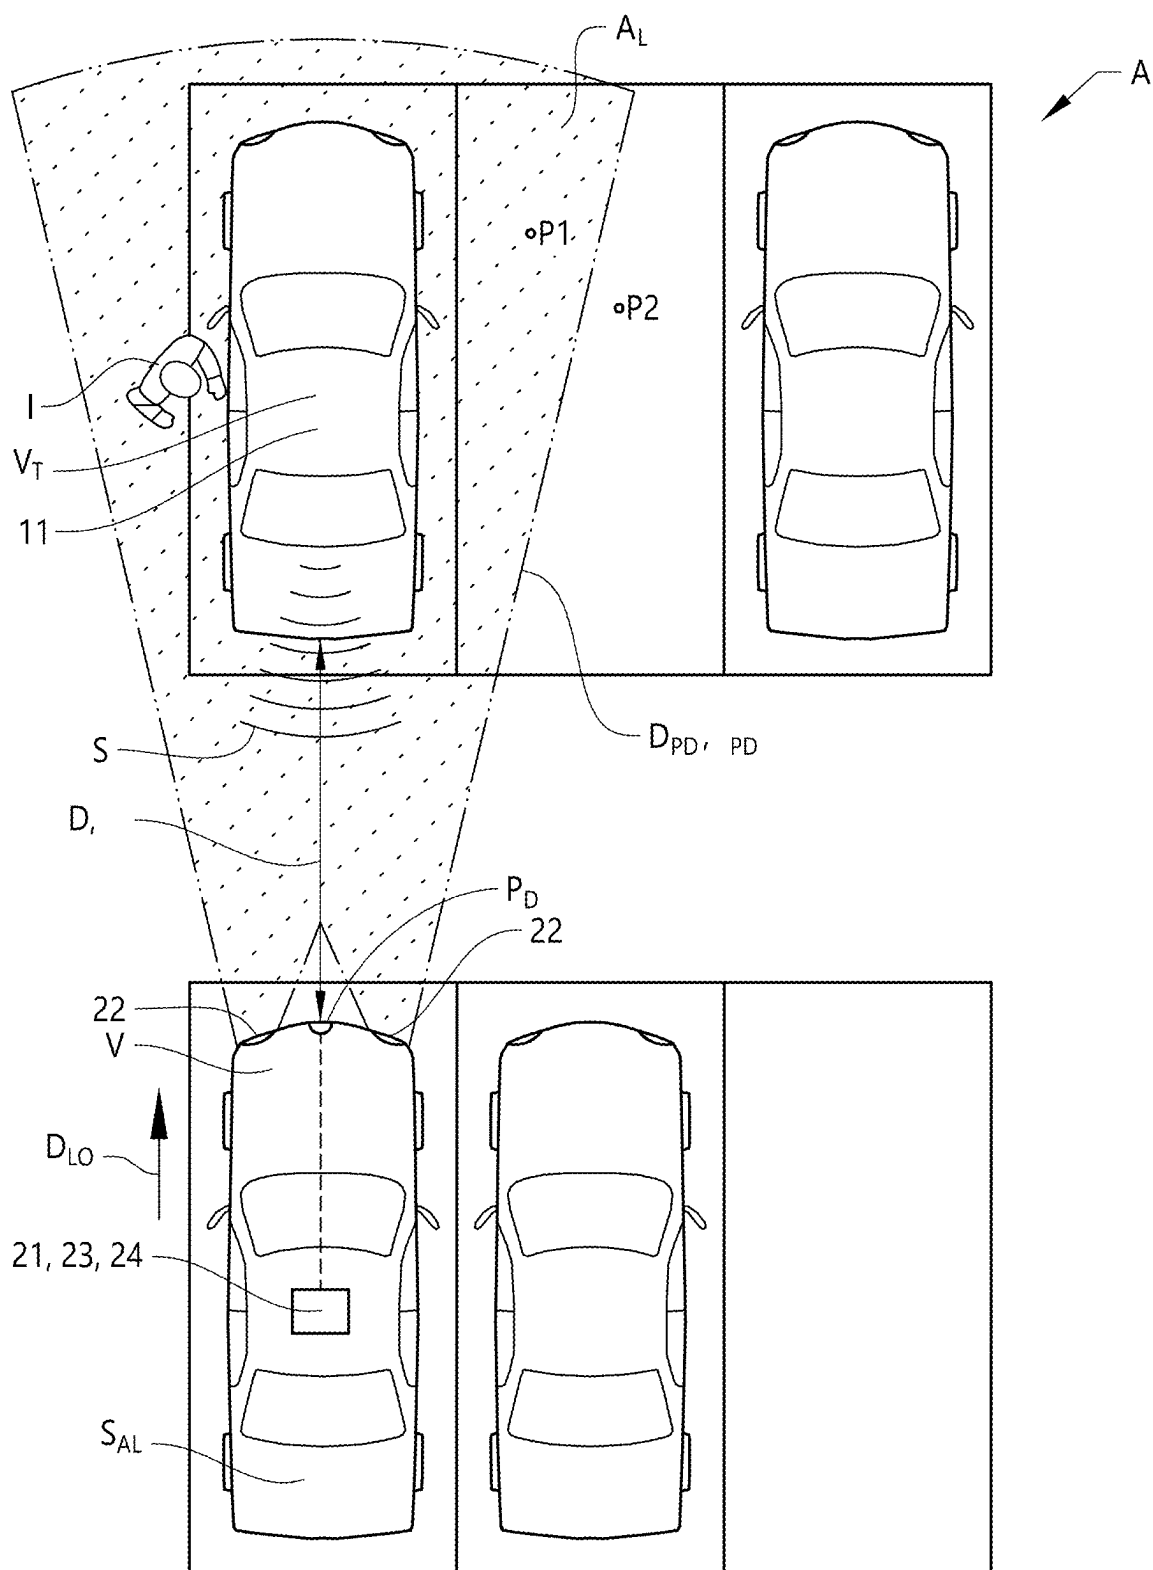


FIG. 1A

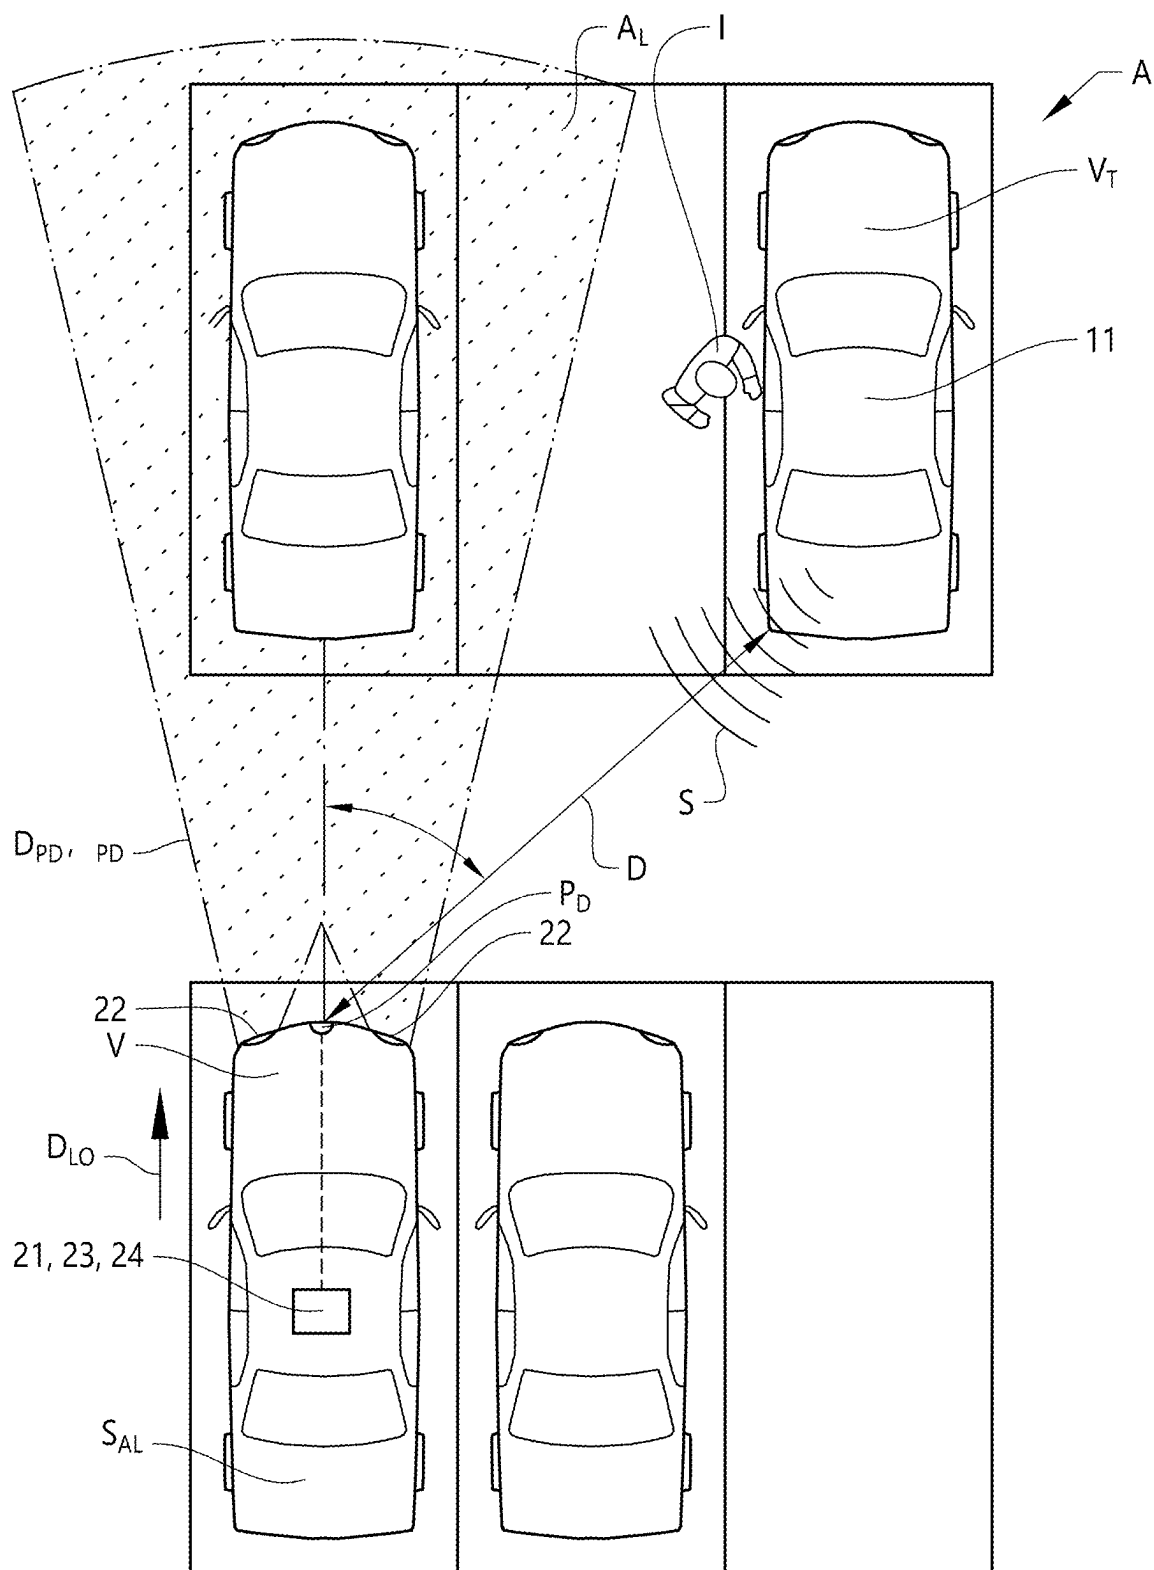


FIG. 1B

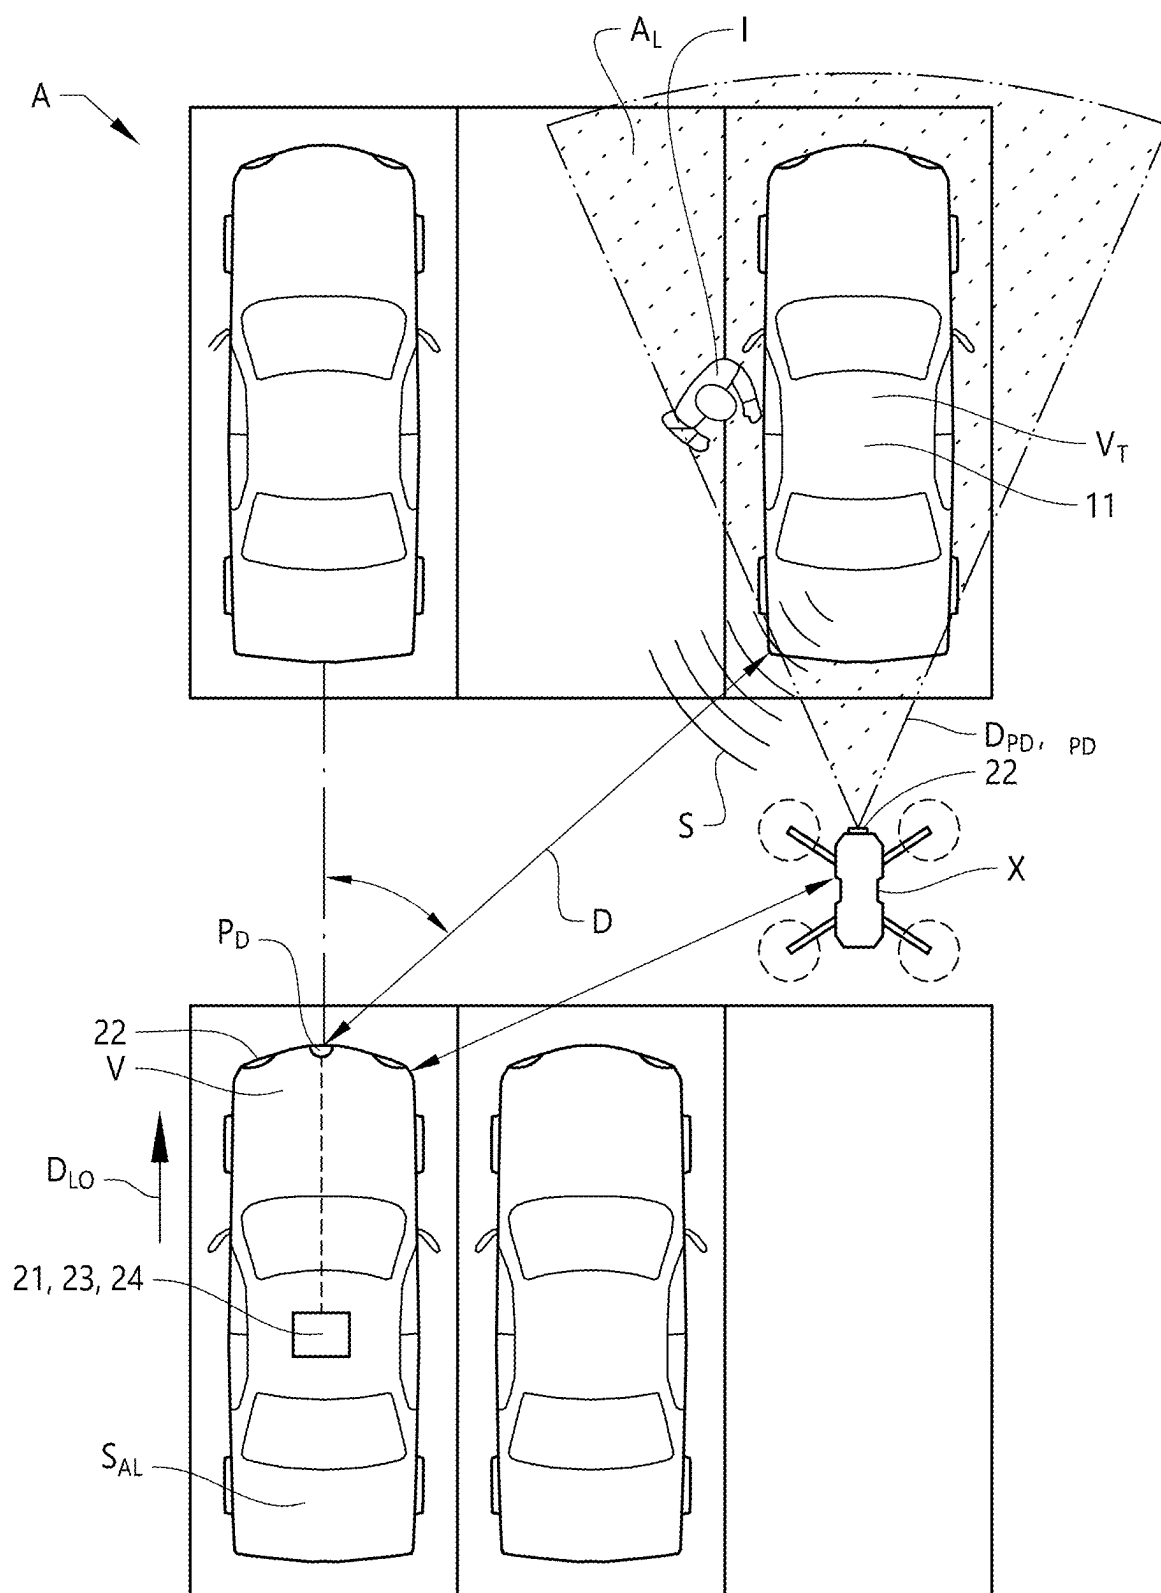


FIG. 1C


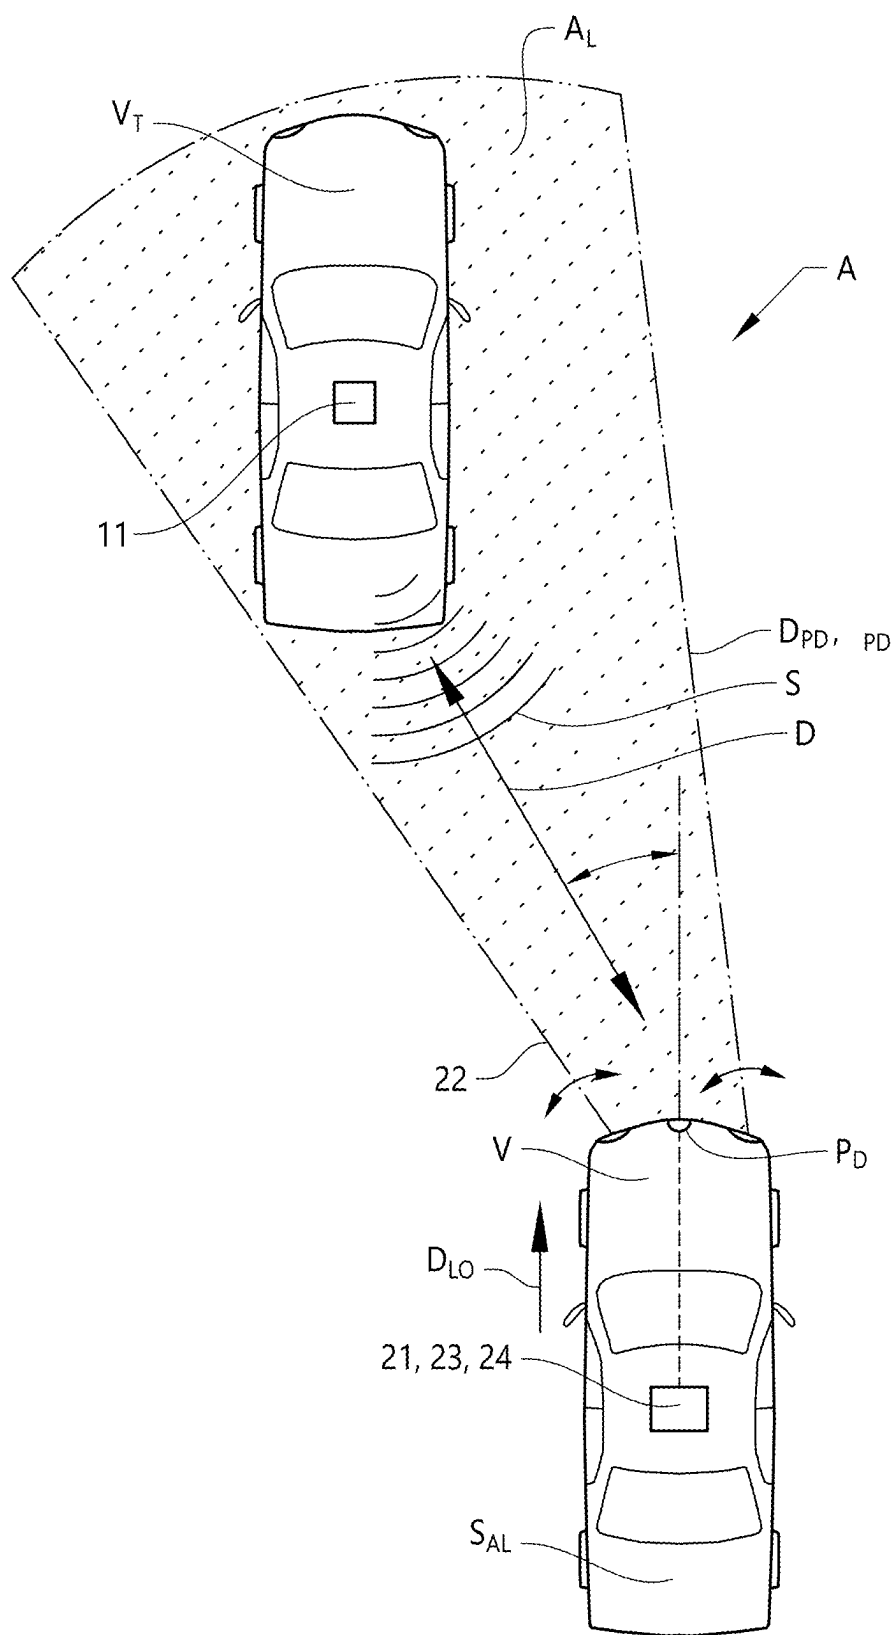


FIG. 2

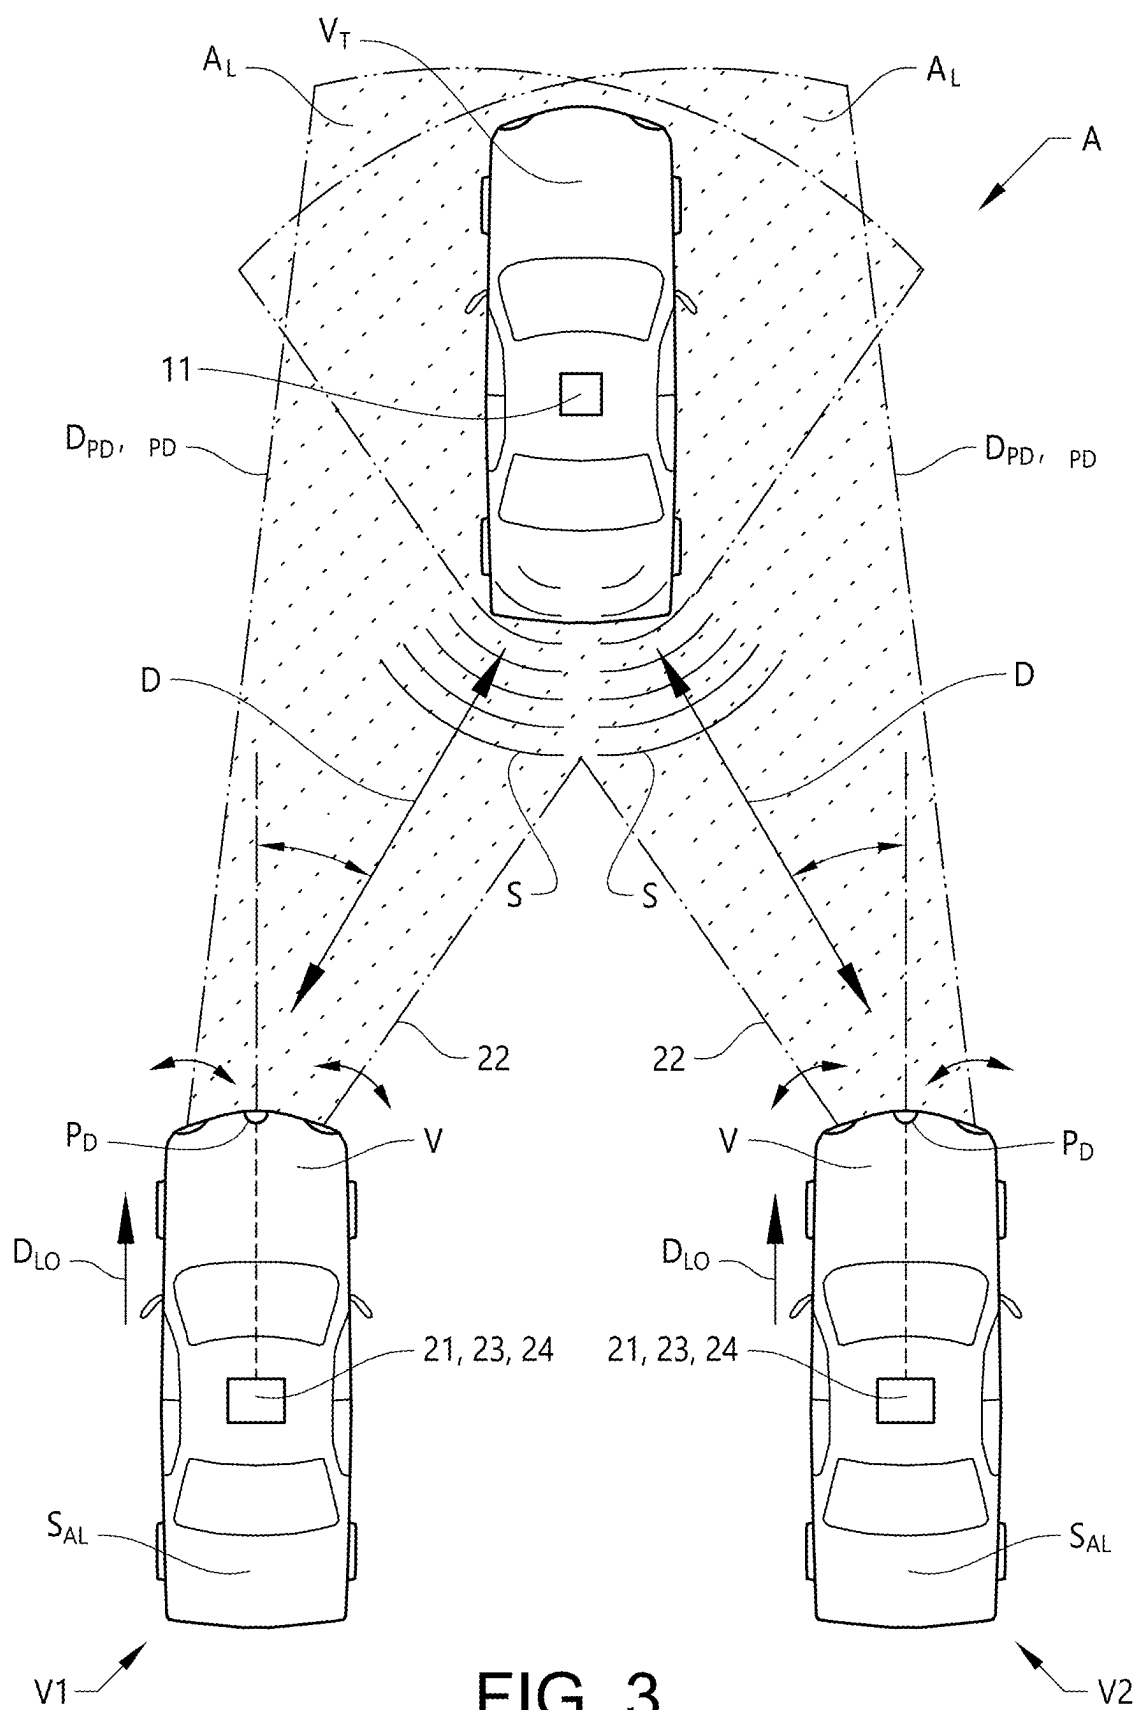

**METHOD FOR ACTIVATING A VEHICLE
ALARM SYSTEM FOR LIGHTING UP A
TARGET VEHICLE, VEHICLE ALARM
SYSTEM AND VEHICLE COMPRISING AN
ALARM SYSTEM**

RELATED APPLICATION DATA

[0001] This application is a continuation of International Patent Application No. PCT/CN2023/132945, filed Nov. 21, 2023, and claims the benefit of European Patent Application No. 22210204.8, filed Nov. 29, 2022, the disclosures of which are incorporated herein by reference in their entireties.

TECHNICAL FIELD

[0002] The present disclosure relates to a method for activating a vehicle alarm system for lighting up a target vehicle. The vehicle alarm system comprises an alarm signal detection unit, where the alarm signal detection unit is configured for detecting an alarm signal of the target vehicle. The disclosure further relates to a vehicle alarm system for lighting up a target vehicle and a vehicle comprising a vehicle alarm system for lighting up a target vehicle.

BACKGROUND

[0003] Alarm systems are commonly used in vehicle applications, where vehicles are equipped with an intruder alarm. The intruder alarm is emitting an alarm signal when an intruder is triggering one or more sensors of the intruder alarm. The sensors of the intruder alarm may for example be shock sensors, door sensors, pressure sensors, motion detection sensors, tilt sensors, glass-break sensors, or other suitable sensors used in the intruder alarm system. When a sensor is triggered, the intruder alarm system is emitting the alarm signal, which for example may be an audible signal, a visible signal and/or a communication signal. Most intruder alarms for vehicle are using flashing light alarm signals and horn alarm signals when the intruder alarm is triggered, but other communication signals may be used.

[0004] In dark conditions, such as during night, an intruder may however operate without being seen despite the alarm signal triggered.

[0005] There is thus a need for an improved vehicle alarm system, where the intruder may be more easily detected.

SUMMARY

[0006] An object of the present disclosure is to provide a method for activating a vehicle alarm system for lighting up a target vehicle, a vehicle alarm system for lighting up a target vehicle, and a vehicle comprising a vehicle alarm system for lighting up a target vehicle, where the previously mentioned problems are avoided.

[0007] The disclosure concerns a method for activating a vehicle alarm system arranged in a vehicle for lighting up a target vehicle. The vehicle alarm system comprises an alarm signal detection unit, where the alarm signal detection unit is configured for detecting an alarm signal of the target vehicle. The method comprises the steps: detecting an alarm signal of the target vehicle by means of the alarm signal detection unit upon activation of an intruder alarm of the target vehicle; determining an angular direction of the vehicle in relation to the target vehicle and a distance between the vehicle and the target vehicle upon detection of

the alarm signal; activating a light source of the vehicle to light up the target vehicle and/or activating a light source of a device associated with the vehicle to light up the target vehicle, when the determined angular direction is within a predetermined angular direction range and the determined distance is within a predetermined distance range.

[0008] Advantages with these features are that in dark conditions, such as during night, it will be more difficult for an intruder to operate without being seen, and thus the intruder is more easily detected. With the vehicle alarm system, the target vehicle is efficiently lit up by the vehicle when the alarm signal of the target vehicle is detected by the alarm signal detection unit of the vehicle. The light source can be used for scaring an intruder triggering the intruder alarm of the target vehicle.

[0009] In one embodiment, the alarm signal is a sound signal emitted by the target vehicle upon activation of the intruder alarm. The method further comprises the step: detecting the emitted sound signal by means of the alarm signal detection unit. The alarm signal detection unit suitably comprises a microphone sensor to detect the sound signal emitted by the target vehicle.

[0010] In one embodiment, the alarm signal is a light signal emitted by the target vehicle upon activation of the intruder alarm. The method further comprises the step: detecting the emitted light signal by means of the alarm signal detection unit. The alarm signal detection unit suitably comprises a camera sensor to detect the light signal emitted by the target vehicle.

[0011] In one embodiment, the alarm signal is a V2V communication signal emitted by the target vehicle upon activation of the intruder alarm. The method further comprises the step: detecting the emitted V2V communication signal by means of the alarm signal detection unit. The alarm signal detection unit suitably comprises a V2V signal sensor to detect the V2V communication signal emitted by the target vehicle.

[0012] In one embodiment, the method further comprises the step: actively directing the light source of the vehicle towards the target vehicle and/or actively directing the light source of the device to light up the target vehicle. The vehicle may be equipped with a movably arranged light source that could be directed in different positions. Suitably, the light source of the vehicle is arranged as active or adaptive headlights, and used for changing direction of the light source. In this way, the light source is directed towards the target vehicle for higher light intensity. The light source of the device may be actively directed towards the target vehicle to light up the target vehicle. The light source of the device may be movably arranged relative to the device, or the device may per se change position for actively directing the light source. By using the light source of the device, the target vehicle may be efficiently lit up by the device in situations where the light from the headlights of the vehicle will not reach the target vehicle.

[0013] In one embodiment, the vehicle alarm system further comprises a distance and direction determination unit arranged in the vehicle. The method further comprises the step: determining the angular direction and the distance to the target vehicle by means of the distance and direction determination unit. The distance and direction determination unit may be arranged as a suitable control unit. The angular direction of the vehicle in relation to the target vehicle may be measured and estimated between different parts of the

vehicle and the target vehicle depending on the configurations of the vehicle alarm system and the distance and direction determination unit. The distance between the vehicle and the target vehicle may be measured and estimated between different parts of the vehicle and the target vehicle depending on the configurations of the vehicle alarm system and the distance and direction determination unit.

[0014] In one embodiment, the vehicle alarm system further comprises a light determination unit arranged in the vehicle, where the light determination unit is configured for determining how the target vehicle is lit up by the light source. The method further comprises the step: determining the difference between light reflected by the target vehicle before and after activation of the light source by means of the light determination unit. The light determination unit may be arranged as a camera unit in the vehicle. Image detection and analysing software is suitably used for determining the difference in reflected light. When the vehicle has activated the light source, the light determination unit may use picture frame-to-frame comparison to compare if the light source has significantly changed how the target vehicle is lit up by the light source. The light determination unit may in this way secure that the target vehicle is sufficiently lit up by the light source. If the vehicle alarm system is arranged in more than one vehicle in the same area, the light determination unit can be used for controlling the number of light sources of different vehicles that need to be activated, or determine if the target vehicle is positioned underneath a streetlight.

[0015] The disclosure further concerns a vehicle alarm system arranged in a vehicle for lighting up a target vehicle. The vehicle alarm system comprises an alarm signal detection unit, where upon activation of an intruder alarm of the target vehicle the alarm signal detection unit is configured for detecting an alarm signal of the target vehicle. The vehicle alarm system is configured for determining an angular direction of the vehicle in relation to the target vehicle and a distance between the vehicle and the target vehicle upon detection of the alarm signal. When the determined angular direction is within a predetermined angular direction range and the determined distance is within a predetermined distance range, the vehicle is configured for activating a light source to light up the target vehicle and/or the vehicle is configured for activating a light source of a device associated with the vehicle to light up the target vehicle.

[0016] Advantages with the vehicle alarm system are that in dark conditions, such as during night, it will be more difficult for an intruder to operate without being seen, and thus the intruder is more easily detected. The target vehicle is efficiently lit up by the vehicle when the alarm signal of the target vehicle is detected by the alarm signal detection unit of the vehicle. The light source can be used for scaring an intruder triggering the intruder alarm of the target vehicle.

[0017] In one embodiment, the alarm signal is a sound signal emitted by the target vehicle upon activation of the intruder alarm. The alarm signal detection unit is configured for detecting the emitted sound signal. The alarm signal detection unit suitably comprises a microphone sensor to detect the sound signal emitted by the target vehicle.

[0018] In one embodiment, the alarm signal is a light signal emitted by the target vehicle upon activation of the intruder alarm. The alarm signal detection unit is configured for detecting the emitted light signal. The alarm signal

detection unit suitably comprises a camera sensor to detect the light signal emitted by the target vehicle.

[0019] In one embodiment, the alarm signal is a V2V communication signal emitted by the target vehicle upon activation of the intruder alarm. The alarm signal detection unit is configured for detecting the emitted V2V communication signal. The alarm signal detection unit suitably comprises a V2V signal sensor to detect the V2V communication signal emitted by the target vehicle.

[0020] In one embodiment, the vehicle alarm system is configured for actively directing the light source of the vehicle and/or the light source of the device towards the target vehicle upon receipt of the alarm signal. The vehicle may be equipped with a movably arranged light source that could be directed in different positions. Suitable, the light source is arranged as active or adaptive headlights, and used for changing direction of the light source. In this way, the light source is directed towards the target vehicle for higher light intensity. The light source of the device may be actively directed towards the target vehicle to light up the target vehicle. The light source of the device may be movably arranged or the device may per se change position for actively directing the light source. By using the light source of the device, the target vehicle may be efficiently lit up by the device in situations where the light from the headlights of the vehicle will not reach the target vehicle.

[0021] In one embodiment, the light source is a headlight of the vehicle, and/or the light source is a light unit of the device associated with the vehicle.

[0022] In one embodiment, the vehicle alarm system further comprises a distance and direction determination unit arranged in the vehicle. The distance and direction determination unit is configured for determining the angular direction and the distance to the target vehicle. The distance and direction determination unit may be arranged as a suitable control unit. The angular direction of the vehicle in relation to the target vehicle may be measured and estimated between different parts of the vehicle and the target vehicle depending on the configurations of the vehicle alarm system and the distance and direction determination unit. The distance between the vehicle and the target vehicle may be measured and estimated between different parts of the vehicle and the target vehicle depending on the configurations of the vehicle alarm system and the distance and direction determination unit.

[0023] In one embodiment, the vehicle alarm system further comprises a light determination unit arranged in the vehicle, where the light determination unit is configured for determining how the target vehicle is lit up by the light source. The light determination unit is configured for determining the difference between light reflected by the target vehicle before and after activation of the light source. The light determination unit may be arranged as a camera unit in the vehicle. Image detection and analysing software is suitably used for determining the difference in reflected light. When the vehicle has activated the light source, the light determination unit may use picture frame-to-frame comparison to compare if the light source has significantly changed how the target vehicle is lit up by the light source.

[0024] In one embodiment, the distance and direction determination unit is arranged as a camera unit, a microphone unit, and/or a V2V unit in the vehicle; and/or the light determination unit is arranged as a camera unit in the vehicle.

[0025] The light determination unit may be arranged as a camera unit in the vehicle. Image detection and analysing software is suitably used for determining the difference in reflected light. When the vehicle has activated the light source, the light determination unit may use picture frame-to-frame comparison to compare if the light source has significantly changed how the target vehicle is lit up by the light source.

[0026] In one embodiment, the vehicle alarm system is arranged in two or more vehicles, where the two or more vehicles are configured for communicating with each other for activating at least one light source of the two or more vehicles to light up the target vehicle and/or activating at least one light source of at least one device associated the two or more vehicles to light up the target vehicle. In this way, the vehicle alarm system is made more efficient by the involvement of more than one vehicle only. The vehicles may be arranged to communicate with each other via suitable communication means, and each of the vehicles comprises alarm system components for an efficient system setup.

[0027] The disclosure further concerns a vehicle comprising the vehicle alarm system described above.

BRIEF DESCRIPTION OF THE DRAWINGS

[0028] The disclosure will be described in detail in the following, with reference to the attached drawings, in which

[0029] FIGS. 1A-1C show schematically, in views from above, different operational situations of a vehicle comprising a vehicle alarm system for lighting up a target vehicle, and a device associated with the vehicle to light up the target vehicle,

[0030] FIG. 2 shows schematically, in a view from above, the vehicle comprising a vehicle alarm system for lighting up a target vehicle, and a target vehicle, and

[0031] FIG. 3 shows schematically, in a view from above, two vehicles comprising a vehicle alarm system for lighting up a target vehicle, and a target vehicle.

DETAILED DESCRIPTION OF EXAMPLE EMBODIMENTS

[0032] Various aspects of the disclosure will hereinafter be described in conjunction with the appended drawings to illustrate and not to limit the disclosure, wherein like designations denote like elements, and variations of the described aspects are not restricted to the specifically shown embodiments, but are applicable on other variations of the disclosure.

[0033] FIGS. 1A-1C schematically show in different embodiments a vehicle V parked in an area A. The area A may for example be a defined parking area, such as a parking lot or a car park, a parking garage, a street area, or other suitable area for parking two or more vehicles.

[0034] The vehicle V comprises a vehicle alarm system S_{AL} , and the vehicle alarm system S_{AL} is arranged for lighting up a target vehicle V_T upon detection of an alarm signal S of an intruder alarm 11 of the target vehicle V_T . The target vehicle V_T is thus equipped with an intruder alarm 11, where the intruder alarm 11 of the target vehicle V_T is configured for emitting an alarm signal S when an intruder I is triggering one or more sensors of the intruder alarm 11. The sensors of the intruder alarm 11 may for example be shock sensors, door sensors, pressure sensors, motion detec-

tion sensors, tilt sensors, glass-break sensors, or other suitable sensors used in vehicle intruder alarm systems. When a sensor is triggered, the intruder alarm 11 is emitting the alarm signal S, which for example may be an audible signal, a visible signal and/or a communication signal. Most intruder alarms 11 for vehicle are using flashing light alarm signals and horn alarm signals when the intruder alarm 11 is triggered, but other communication signals such as a transferred V2V intruder alarm signal or a V2X intruder alarm signal may be used. A V2V intruder alarm signal may be sent from the target vehicle V_T and detected directly by the vehicle alarm system S_{AL} of the vehicle V. A V2X intruder alarm signal may be sent from the target vehicle V_T and transferred to a remote source, and thereafter the remote source may transfer a signal to an area where that target vehicle is located for detection by the vehicle alarm system S_{AL} of the vehicle V. The remote source may for example be a service centre, a node, and/or a repeater. The V2V signal or V2X signal may be transferred as a wireless communication signal, for example through a mobile communication network, a Wi-Fi network, or a Bluetooth network.

[0035] The vehicle alarm system S_{AL} comprises an alarm signal detection unit 21. The alarm signal detection unit 21 is arranged in the vehicle V and configured for detecting an alarm signal S of the target vehicle V_T upon activation of the intruder alarm 11 of the target vehicle V_T . The alarm signal detection unit 21 arranged in the vehicle V is in this way detecting the alarm signal S emitted from the target vehicle V_T . The alarm signal detection unit 21 is equipped with suitable sensors or other detection means for detecting the alarm signal S, such as sensors or detecting units configured for detecting an audible signal, a visible signal and/or a communication signal. The sensors or detecting units of the alarm signal detection unit 21 may thus be arranged for detecting flashing light alarm signals, horn alarm signals, V2V alarm signals and/or V2X alarm signals.

[0036] In one example embodiment, the alarm signal S is a sound signal emitted by the target vehicle V_T upon activation of the intruder alarm 11, and the alarm signal detection unit 21 is configured for detecting the emitted sound signal. In this embodiment, the alarm signal detection unit 21 suitably comprises a microphone sensor to detect the sound signal emitted by the target vehicle V_T .

[0037] In one example embodiment, the alarm signal S is a light signal emitted by the target vehicle V_T upon activation of the intruder alarm 11, and the alarm signal detection unit 21 is configured for detecting the emitted light signal. In this embodiment, the alarm signal detection unit 21 suitably comprises a camera sensor to detect the light signal emitted by the target vehicle V_T .

[0038] In one example embodiment, the alarm signal S is a V2V communication signal emitted by the target vehicle V_T upon activation of the intruder alarm 11, and the alarm signal detection unit 21 is configured for detecting the emitted V2V communication signal. In this embodiment, the alarm signal detection unit 21 suitably comprises a V2V signal sensor to detect the V2V communication signal emitted by the target vehicle V_T .

[0039] The vehicle alarm system S_{AL} is configured for determining an angular direction α of the vehicle V in relation to the target vehicle V_T and a distance D between the vehicle V and the target vehicle V_T upon detection of the alarm signal S. The angular direction α is suitably determined as a measured angular direction between a longitu-

dinal direction D_{LO} of the vehicle V and the position of the target vehicle V_T , as understood from for example FIGS. 1A-1B. The distance D is suitably determined as a measured distance from the vehicle V to the target vehicle V_T , as indicated with the arrow in for example FIGS. 1A-1B.

[0040] The vehicle alarm system S_{AL} further comprises a distance and direction determination unit 23 arranged in the vehicle V. The distance and direction determination unit 23 may be arranged as a suitable control unit, and the distance and direction determination unit 23 is configured for determining the angular direction α and the distance D to the target vehicle V_T .

[0041] The angular direction α of the vehicle V in relation to the target vehicle V_T may be measured and estimated between different parts of the vehicle V and the target vehicle V_T depending on the configurations of the vehicle alarm system S_{AL} and the distance and direction determination unit 23. Therefore, the angular direction α may be presented as an angular range. The distance D between the vehicle V and the target vehicle V_T may be measured and estimated between different parts of the vehicle V and the target vehicle V_T depending on the configurations of the vehicle alarm system S_{AL} and the distance and direction determination unit 23. Therefore, the distance D may be presented as a distance range.

[0042] The distance and direction determination unit 23 of the vehicle alarm system S_{AL} may determine and calculate the distance D and the angular direction α from a determined point P_D in the vehicle V to a part of the target vehicle V_T positioned closest to the vehicle V, as indicated in the figures. The determined point P_D may for example be any suitable point in the vehicle V where one or more sensors forming part of the distance and direction determination unit 23, and used for determining the distance D and the angular direction α , are located in the vehicle V.

[0043] The distance and direction determination unit 23 may for example be arranged as a camera unit, a microphone unit, and/or a V2V unit in the vehicle V. The distance and direction determination unit 23, may for example use triangulation technologies and/or image detecting and analysing technologies for determining the angular direction α and the distance D to the target vehicle V_T . The sensors used for determining the distance D and the angular direction α may for example be one or more of camera sensors, microphone sensors, ultrasonic sensors, radar sensors, LIDAR sensors, laser sensors and/or signal receiving sensor units. The type of sensor or sensors used may be depending on the alarm signal S emitted from the target vehicle V_T , the configuration of the distance and direction determination unit 23, and the position of the target vehicle V_T relative to the vehicle V.

[0044] Upon detection of the alarm signal S and determination that the determined angular direction α is within a predetermined angular direction range α_{PD} and the determined distance D is within a predetermined distance range D_{DP} , a light source 22 of the vehicle V is activated to light up the target vehicle V_T and/or a light source 22 of a device X associated with the vehicle V is activated to light up the target vehicle V_T , as will be further described below. The vehicle V and/or the device X associated with the vehicle V has a light-up area A_L determined by the light source 22, and the light-up area A_L is determined as an area possible to be lit-up by the light source 22. The light-up area is dependent on the configuration of the light source 22 and may vary between different vehicles and devices, depending on the

design, construction, and positioning of the light source 22. The light source 22 may use any suitable type of light to light up the target vehicle V_T , such as for example visible light or near infrared light.

[0045] The predetermined angular direction range α_{PD} and the predetermined distance range D_{DP} are correlated to the light-up area A_L . The light-up area A_L of the vehicle V is determining possible predetermined angular direction ranges α_{PD} and predetermined distance ranges D_{DP} depending on the position of the target vehicle V_T in relation to the vehicle V. As an example, a first point P1 in FIG. 1A is arranged within the light-up area A_L of the vehicle V, and the first point P1 is possible to be lit up by the light source 22 of the vehicle V. A second point P2 in FIG. 1A is arranged outside the light-up area A_L of the vehicle V, and the second point P2 is thus not possible to be lit up by the light source 22 of the vehicle V.

[0046] The distance and direction determination unit 23 suitably comprises one or more sensors located in the determined point P_D of the vehicle V, as described above. Suitably, the predetermined angular direction range α_{PD} and the predetermined distance range D_{DP} are set as distance and direction threshold values where the vehicle V and/or the device X associated with the vehicle V efficiently can light up the target vehicle V_T .

[0047] Depending on the configuration and design of the light sources 22, the light-up area A_L may be a three-dimensional light body having complex geometrical shapes in three dimensions, and the predetermined distance range D_{DP} may vary depending on the angular direction α between the vehicle V, or the device associated with the vehicle V, and the target vehicle V_T . The predetermined angular direction ranges α_{PD} and predetermined distance ranges D_{DP} of the vehicle alarm system S_{AL} , are therefore suitably calibrated relative to each other for the specific light source 22 used in the vehicle V and/or the device X associated with the vehicle V. The vehicle alarm system S_{AL} is with this configuration suitably determining the distance D and the angular direction α from the determined point P_D in the vehicle V to a part of the target vehicle V_T positioned closest to the vehicle V. When the distance and direction determination unit 23 arranged in the vehicle V is determining the angular direction α in relation to the target vehicle V_T and the distance D to the target vehicle V_T , and when the determined angular direction α is within the predetermined angular direction range α_{PD} and the determined distance D is within the predetermined distance range D_{DP} , the vehicle V and/or the device X associated with the vehicle V is activating the light source 22 to light up the target vehicle V_T .

[0048] The vehicle alarm system S_{AL} is thus only activating the light source 22 upon detection of the alarm signal S when the determined angular direction α is within the predetermined angular direction range α_{PD} and the determined distance D is within the predetermined distance range D_{DP} . If the determined angular direction α is outside the predetermined angular direction range α_{PD} , the light source 22 is not activated upon detection of the alarm signal S emitted from the target vehicle V_T . If the determined distance D is outside the predetermined distance range D_{DP} , the light source 22 is not activated upon detection of the alarm signal S emitted from the target vehicle V_T .

[0049] In FIG. 1A, an exemplified operational situation of the vehicle alarm system S_{AL} is schematically illustrated. A vehicle V and a target vehicle V_T are parked in an area A, and

the target vehicle V_T is parked in a direction straight ahead of the vehicle V, as understood from the figure.

[0050] In the example embodiment shown in FIG. 1A, a distance and direction determination unit **23** of the vehicle alarm system S_{AL} is determining the distance D and the angular direction α from a determined point P_D arranged at a mid-front-end of the vehicle V to a part of the target vehicle V_T positioned closest to the vehicle V, as indicated in the figure. In the illustrated embodiment, the distance D and the angular direction α are measured from the mid-front-end of the vehicle V to a rear end of the target vehicle V_T in a direction parallel to the longitudinal direction D_{LO} of the vehicle V upon detection of the alarm signal S emitted from the target vehicle V_T . As described above, the target vehicle V_T is parked in a direction straight ahead of the vehicle V and with the positions shown in FIG. 1A, the angular direction α between the longitudinal direction D_{LO} of the vehicle V and the position of the target vehicle V_T is zero degrees. Thus, the angular direction α is the same as the longitudinal direction D_{LO} of the vehicle V.

[0051] The vehicle V comprises a light source **22**, and in the embodiment illustrated in FIG. 1A, the light source **22** is arranged as two headlights of the vehicle V. The vehicle V has a light-up area A_L determined by the light source **22**, and the light-up area A_L is as explained above determined as an area possible to be lit-up by the light source **22**. The light-up area is dependent on the configuration of the light source **22** and may vary between different vehicles, depending on the design, construction, and positioning of the light source **22**.

[0052] When an intruder I is triggering one or more sensors of the intruder alarm **11** of the target vehicle V_T , the intruder alarm **11** of the target vehicle V_T is activated and an alarm signal S is emitted, as indicated in FIG. 1A. When the emitted alarm signal S of the target vehicle V_T is detected by means of the alarm signal detection unit **21** of the vehicle V, upon activation of the intruder alarm **11** of the target vehicle V_T , the angular direction α of the vehicle V in relation to the target vehicle V_T and the distance D between the vehicle V and the target vehicle V_T is determined by means of the distance and direction determination unit **23** arranged in the vehicle V. When it is determined that the angular direction α is within the predetermined angular direction range α_{PD} and the distance D is within the predetermined distance range D_{DP} , the vehicle V is activating the light source **22** to light up the target vehicle V_T . The target vehicle V_T is in this way efficiently lit up by the vehicle V when the alarm signal S of the target vehicle V_T is detected by the alarm signal detection unit **21** of the vehicle V, and the light source **22** can thus be used for scaring the intruder I that was triggering the intruder alarm **11** of the target vehicle V_T .

[0053] The predetermined angular direction range α_{PD} and the predetermined distance range D_{DP} are correlated to the light-up area A_L . The light-up area A_L of the vehicle V is determining possible predetermined angular direction ranges α_{PD} and predetermined distance ranges D_{DP} depending on the position of the target vehicle V_T in relation to the vehicle V. As understood from FIG. 1A, the target vehicle V_T is arranged within the light-up area A_L of the vehicle V, and the target vehicle V_T is possible to be lit up by the light source **22** of the vehicle V.

[0054] The distance and direction determination unit **23** comprises one or more sensors located in the determined point P_D of the vehicle V. In the embodiment shown in FIG. 1A, the predetermined angular direction range α_{PD} and the

predetermined distance range D_{DP} are set as distance and direction threshold values where the vehicle V efficiently can light up the target vehicle V_T . Depending on the configuration and design of the light sources, the light-up area **22** may be a three-dimensional light body having complex geometrical shapes in three dimensions, and the predetermined distance range D_{DP} may vary depending on the angular direction α between the vehicle V and the target vehicle V_T . The predetermined angular direction ranges α_{PD} and the predetermined distance ranges D_{DP} of the vehicle alarm system S_{AL} , are calibrated relative to each other for the light source **22** used in the vehicle V. The vehicle alarm system S_{AL} is determining the distance D and the angular direction α from the determined point P_D in the vehicle V to a part of the target vehicle V_T positioned closest to the vehicle V, as indicated with the arrow in FIG. 1A. In the illustrated embodiment in FIG. 1A, the target vehicle V_T is positioned within possible ranges for the predetermined angular direction α_{PD} and the predetermined distance D_{DP} , and the target vehicle V_T can be efficiently lit up by the vehicle V. Thus, when the distance and direction determination unit **23** arranged in the vehicle V is determining the angular direction α in relation to the target vehicle V_T and the distance D to the target vehicle V_T , and when the determined angular direction α is within the predetermined angular direction range α_{PD} and the determined distance D is within the predetermined distance range D_{DP} , the vehicle V is activating the light source **22** to efficiently light up the target vehicle V_T .

[0055] The vehicle alarm system S_{AL} of the embodiment shown in FIG. 1A is only activating the light source **22** upon detection of the alarm signal S when the determined angular direction α is within the predetermined angular direction range α_{PD} and the determined distance D is within the predetermined distance range D_{DP} . If the determined angular direction α is outside the predetermined angular direction range α_{PD} , the light source **22** is not activated upon detection of the alarm signal S emitted from the target vehicle V_T . If the determined distance D is outside the predetermined distance range D_{DP} , the light source **22** is not activated upon detection of the alarm signal S emitted from the target vehicle V_T .

[0056] In FIG. 1B, another exemplified operational situation of the vehicle alarm system S_{AL} is schematically illustrated. A vehicle V and a target vehicle V_T are parked in an area A. In this embodiment, the target vehicle V_T is parked ahead of and in a direction to the right from the vehicle V. The target vehicle V_T is parked at an angular direction α non-parallel to the longitudinal direction D_{LO} of the vehicle V and the angular direction α is thus not the same as the longitudinal direction D_{LO} of the vehicle V.

[0057] In the example embodiment shown in FIG. 1B, a distance and direction determination unit **23** of the vehicle alarm system S_{AL} is determining the distance D and the angular direction α from a determined point P_D arranged at a mid-front-end of the vehicle V to a part of the target vehicle V_T positioned closest to the vehicle V, as indicated in the figure. The distance D and the angular direction α are with the positions shown in FIG. 1B, measured from a mid-front-end of the vehicle V to a rear left corner of the target vehicle V_T upon detection of the alarm signal S emitted from the target vehicle V_T .

[0058] The vehicle V comprises a light source **22**, and in the embodiment illustrated in FIG. 1B, the light source **22** is

arranged as two headlights of the vehicle V. The vehicle V has a light-up area A_L determined by the light source 22, and the light-up area A_L is as explained above determined as an area possible to be lit-up by the light source 22.

[0059] The light source 22 of the vehicle shown in FIG. 1B has a light-up area A_L . The light-up area A_L of the vehicle V is determining possible predetermined angular direction ranges α_{PD} and predetermined distance ranges D_{DP} depending on the position of the target vehicle V_T in relation to the vehicle V. The predetermined angular direction range α_{PD} and the predetermined distance range D_{DP} are correlated to the light-up area A_L . As understood from FIG. 1B, the target vehicle V_T is arranged outside the light-up area A_L of the vehicle V, and the target vehicle V_T is not possible to be lit up by the light source 22 of the vehicle V.

[0060] When an intruder I is triggering one or more sensors of the intruder alarm 11 of the target vehicle V_T , the intruder alarm 11 of the target vehicle V_T is activated and an alarm signal S is emitted, as indicated in FIG. 1B. When the emitted alarm signal S of the target vehicle V_T is detected by means of the alarm signal detection unit 21 of the vehicle V, upon activation of the intruder alarm 11 of the target vehicle V_T , the angular direction α of the vehicle V in relation to the target vehicle V_T and the distance D between the vehicle V and the target vehicle V_T is determined by means of the distance and direction determination unit 23 arranged in the vehicle V. In the embodiment shown in FIG. 1B, it is determined that the angular direction α is outside the predetermined angular direction range α_{PD} and consequently the distance D is outside the predetermined distance range D_{DP} . The vehicle V is therefore not activating the light source 22 to light up the target vehicle V_T .

[0061] The distance and direction determination unit 23 comprises one or more sensors located in the determined point P_D of the vehicle V. In the embodiment shown in FIG. 1B, the predetermined angular direction range α_{PD} and the predetermined distance range D_{DP} are set as distance and direction threshold values where the vehicle V efficiently can light up the target vehicle V_T . Depending on the configuration and design of the light sources, the light-up area 22 may be a three-dimensional light body having complex geometrical shapes in three dimensions, and the predetermined distance range D_{DP} may vary depending on the angular direction α between the vehicle V and the target vehicle V_T . The predetermined angular direction ranges α_{PD} and the predetermined distance ranges D_{DP} of the vehicle alarm system S_{AL} , are calibrated relative to each other for the light source 22 used in the vehicle V. The vehicle alarm system S_{AL} is determining the distance D and the angular direction α from the determined point P_D in the vehicle V to a part of the target vehicle V_T positioned closest to the vehicle V, as indicated with the arrow in FIG. 1B. In the illustrated embodiment in FIG. 1B, the target vehicle V_T is positioned outside possible ranges for the predetermined angular direction α_{PD} and/or the predetermined distance D_{DP} , and the target vehicle V_T cannot be lit up by the vehicle V. The vehicle V is therefore not activating the light source 22.

[0062] The vehicle alarm system S_{AL} of the embodiment shown in FIG. 1B is only activating the light source 22 upon detection of the alarm signal S when the determined angular direction α is within the predetermined angular direction range α_{PD} and the determined distance D is within the predetermined distance range D_{DP} . Since the determined

angular direction α is outside the predetermined angular direction range α_{PD} , the light source 22 is not activated upon detection of the alarm signal S emitted from the target vehicle V_T .

[0063] In FIG. 1C, a further exemplified operational situation of the vehicle alarm system S_{AL} is schematically illustrated. A vehicle V and a target vehicle V_T are parked in an area A. In this embodiment, the target vehicle V_T is parked ahead of and in a direction to the right from the vehicle V. The target vehicle V_T is parked at an angular direction a non-parallel to the longitudinal direction D_{LO} of the vehicle V and the angular direction α is thus not the same as the longitudinal direction D_{LO} of the vehicle V.

[0064] In the embodiment shown in FIG. 1C, the vehicle V is equipped with a device X associated with the vehicle V. In this case, the device X is arranged as a remotely controlled drone or an unmanned aerial vehicle (UAV) that is operatively connected to the vehicle V. The device X is controlled and operated by the vehicle V through suitable wireless communication protocols. Suitably, the vehicle V is arranged with a non-illustrated docking area or landing area for the device X. It should be understood that the device X in other embodiments could be arranged as a remotely controlled ground vehicle associated with the vehicle V, or other suitable remotely controlled vehicle associated with the vehicle V.

[0065] In the example embodiment shown in FIG. 1C, a distance and direction determination unit 23 of the vehicle alarm system S_{AL} is determining the distance D and the angular direction α from a determined point P_D arranged at a mid-front-end of the vehicle V to a part of the target vehicle V_T positioned closest to the vehicle V, as indicated in the figure. The distance D and the angular direction α are with the positions shown in FIG. 1C, measured from a mid-front-end of the vehicle V to a rear left corner of the target vehicle V_T upon detection of the alarm signal S emitted from the target vehicle V_T .

[0066] The vehicle V and the device X each comprises a light source 22. In the embodiment illustrated in FIG. 1C, the light source 22 of the vehicle V is arranged as two headlights of the vehicle V. The vehicle V has a light-up area A_L determined by the light source 22, and the light-up area A_L is as explained above determined as an area possible to be lit-up by the light source 22. The light up area of the vehicle V in the embodiment shown in FIG. 1C is exemplified to be the same as in FIG. 1B. In the embodiment illustrated in FIG. 1C, the light source 22 of the device X is arranged as a light unit arranged in or connected to the device X. The device V has a light-up area A_L determined by the light source 22, as schematically shown in FIG. 1C, and the light-up area A_L of the device X is determined as an area possible to be lit-up by the light source 22 of the device X. It should be understood that the light-up area A_L of the device X is determined by the operational range of the device X relative to the vehicle V to which the device X is associated.

[0067] When an intruder I is triggering one or more sensors of the intruder alarm 11 of the target vehicle V_T , the intruder alarm 11 of the target vehicle V_T is activated and an alarm signal S is emitted, as indicated in FIG. 1C. When the emitted alarm signal S of the target vehicle V_T is detected by means of the alarm signal detection unit 21 of the vehicle V, upon activation of the intruder alarm 11 of the target vehicle V_T , the angular direction α of the vehicle V in relation to the

target vehicle V_T and the distance D between the vehicle V and the target vehicle V_T is determined by means of the distance and direction determination unit **23** arranged in the vehicle V .

[0068] In the embodiment shown in FIG. 1C, the target vehicle V_T is positioned outside the light-up area A_L of the vehicle V in the same way as described above in connection to FIG. 1B. The vehicle V is therefore not activating the light source **22** to light up the target vehicle V_T upon detection of the alarm signal S emitted from the target vehicle V_T .

[0069] However, in the embodiment shown in FIG. 1C, the target vehicle V_T is positioned within the light-up area A_L of the device X . The device X may therefore activate its light source **22** to light up the target vehicle V_T upon detection of the alarm signal S emitted from the target vehicle V_T .

[0070] The distance and direction determination unit **23** comprises one or more sensors located in the determined point P_D of the vehicle V . In the embodiment shown in FIG. 1C, the predetermined angular direction range α_{PD} and the predetermined distance range D_{DP} are set as distance and direction threshold values where the vehicle V and the device X within its operational range efficiently can light up the target vehicle V_T . Depending on the configuration and design of the light sources, the light-up area **22** may be a three-dimensional light body having complex geometrical shapes in three dimensions, and the predetermined distance range D_{DP} may vary depending on the angular direction α between the vehicle V and the target vehicle V_T , as well as the operational range of the device X . The predetermined angular direction ranges α_{PD} and the predetermined distance ranges D_{DP} of the vehicle alarm system S_{AL} , are calibrated relative to each other for the light source **22** used in the vehicle V and the light source used in the device X . The vehicle alarm system S_{AL} is determining the distance D and the angular direction α from the determined point P_D in the vehicle V to a part of the target vehicle V_T positioned closest to the vehicle V , as indicated with the arrow in FIG. 1C. The target vehicle V_T is positioned outside possible ranges for the light-up area A_L of the vehicle V , as shown in FIG. 1B, and the target vehicle V_T cannot be lit up by the vehicle V . The vehicle V is therefore not activating the light source **22**. The target vehicle V_T is however positioned within possible ranges for the light-up area A_L of the device X , as shown in FIG. 1C, and the target vehicle V_T can instead be lit up by the device X . The device X may therefore activate the light source **22**.

[0071] The vehicle alarm system S_{AL} of the embodiment shown in FIG. 1C is only activating the light source **22** of the vehicle V and/or the light source **22** of the device X upon detection of the alarm signal S when the determined angular direction α is within the predetermined angular direction range α_{PD} and the determined distance D is within the predetermined distance range D_{DP} . It should be understood that it is possible for the vehicle alarm system S_{AL} to activate the light sources **22** of both the vehicle V and the device X when the target vehicle V_T is positioned within possible light-up areas A_L of both the vehicle V and the device X . The vehicle alarm system S_{AL} will not activate any of the light sources **22** of the vehicle V and the device X when the target vehicle V_T is positioned outside possible light-up areas A_L of both the vehicle V and the device X .

[0072] In FIG. 2, an alternative embodiment of the vehicle alarm system S_{AL} is schematically illustrated. A vehicle V and a target vehicle V_T are parked in an area A . In this

embodiment, the target vehicle V_T is parked ahead of and in a direction to the left from the vehicle V . The target vehicle V_T is parked at an angular direction α non-parallel to the longitudinal direction D_{LO} of the vehicle V and the angular direction α is thus not the same as the longitudinal direction D_{LO} of the vehicle V . In this embodiment, the vehicle V is equipped with a movably arranged light source **22** that may be directed in different positions. Suitable, the light source **22** is arranged as active or adaptive headlights. Such headlights may be configured for being adapted to changing roadway conditions, such as curves, to better help illuminating a roadway along a driving path. The active or adaptive headlights may also be connected to the vehicle alarm system S_{AL} and used for changing direction of the light source **22**. In this way, the light-up area A_L may be considerably larger compared to traditional non-movably arranged headlights or the light source **22** may be directed towards the target vehicle V_T for higher light intensity. With exception of the movably arranged light source **22**, the alarm system S_{AL} may as such be arranged and configured as described in the embodiments above. With this configuration of the light source **22**, the vehicle alarm system S_{AL} is actively directing the light source **22** of the vehicle V towards the target vehicle V_T to light up the target vehicle V_T upon receipt of the alarm signal S . In this exemplified operational situation, where the movably arranged light source **22** of the vehicle V is lighting up the target vehicle V_T , it is assumed that the determined angular direction α is within the predetermined angular direction range α_{PD} and the determined distance D is within the predetermined distance range D_{DP} .

[0073] In an alternative embodiment, the light source **22** is arranged at a device X associated with the vehicle V . The device X may be of a suitable configuration as described above. The light source **22** of the device X may be actively directed towards the target vehicle V_T to light up the target vehicle V_T upon receipt of the alarm signal S . The light source **22** of the device X may be movably arranged or the device X may per se change position for actively directing the light source. In this exemplified operational situation, where the light source **22** of the device X is lighting up the target vehicle V_T , it is assumed that the determined angular direction α is within the predetermined angular direction range α_{PD} and the determined distance D is within the predetermined distance range D_{DP} .

[0074] In other embodiments, the vehicle alarm system S_{AL} may instead be arranged in two or more vehicles V . With such a system setup, the two or more vehicles V are configured for communicating with each other for activating at least one light source **22** of the two or more vehicles V to light up the target vehicle V_T and/or activating at least one light source **22** of at least one device X associated with the two or more vehicles V to light up the target vehicle V_T . In this way, the vehicle alarm system S_{AL} is made more efficient by the involvement of more than one vehicle only. The vehicles V may be arranged to communicate with each other via suitable communication means, and each of the vehicles comprises alarm system components for an efficient system setup.

[0075] In FIG. 3, a further alternative embodiment of the vehicle alarm system S_{AL} is schematically illustrated. Two vehicles V and a target vehicle V_T are parked in an area A . In this embodiment, the target vehicle V_T is parked ahead of the two vehicles V . The target vehicle V_T is parked ahead of

a first vehicle V1 and in a direction to the right from the first vehicle V1. The target vehicle V_T is parked ahead of a second vehicle V2 and in a direction to the left from the second vehicle V2. The target vehicle V_T is parked at an angular direction α non-parallel to the longitudinal direction D_{LO} of the first vehicle V1 and the second vehicle V2 respectively. In this embodiment, the first vehicle V1 and the second vehicle V2 are each equipped with a movably arranged light source 22 that may be directed in different positions, as described above in connection to FIG. 2 above. With exception of the movably arranged light sources 22, the alarm system S_{AL} may for each of the two vehicles as such be arranged and configured as described in the embodiments above in connection to FIGS. 1A-1C. With this configuration of the light sources 22 of the first vehicle V1 and the second vehicle V2, the vehicle alarm system S_{AL} may actively direct the light sources 22 of any of the two vehicles V towards the target vehicle V_T to light up the target vehicle V_T upon receipt of the alarm signal S. In order for the light source 22 of the first vehicle V1 to light up the target vehicle V_T , the determined angular direction α of the first vehicle V1 in relation to the target vehicle V_T is within the predetermined angular direction range α_{PD} and the determined distance D between the first vehicle V1 and the target vehicle V_T is within the predetermined distance range D_{DP} . In order for the light source 22 of the second vehicle V2 to light up the target vehicle V_T , the determined angular direction α of the second vehicle V2 in relation to the target vehicle V_T is within the predetermined angular direction range α_{PD} and the determined distance D between the second vehicle V2 and the target vehicle V_T is within the predetermined distance range D_{DP} . In one specific embodiment, the target vehicle may activate V2V communication asking for the location and direction of nearby vehicles, such as the first vehicle V1 and the second vehicle V2. If it is determined that the first vehicle V1 and the second vehicle V2 are within close proximity to the target vehicle V_T , V2V communication may be used between the first vehicle V1 and the second vehicle V2 to determine if one or both vehicles should light up the target vehicle V_T .

[0076] For the different embodiments, the vehicle alarm system S_{AL} may further comprise a light determination unit 24 arranged in the vehicle V. The light determination unit 24 is configured for determining how the target vehicle V_T is lit up by the light source 22. The light determination unit 24 may be determining the difference between light reflected by the target vehicle V_T before and after activation of the light source 22, and the light determination unit 24 may be arranged as a camera unit in the vehicle V. Image detection and analysing software is suitably used for determining the difference in reflected light. When the vehicle V has activated the light source 22, the light determination unit 24 may use picture frame-to-frame comparison to compare if the light source 22 has significantly changed how the target vehicle V_T is lit up by the light source 22. If the vehicle alarm system S_{AL} is arranged in more than one vehicle V in the same area A, the light determination unit 24 can be used for controlling the number of light sources of different vehicles V that need to be activated, or determine if the target vehicle V_T is positioned underneath a streetlight.

[0077] For the different embodiments, when the target vehicle V_T is lit up by the light source 22, a camera in the vehicle V may be used for capturing still images or video

sequences of the target vehicle V_T and the intruder I. If being lit up by near infrared light, suitable night vision cameras may be used.

[0078] It will be appreciated that the above description is merely exemplary in nature and is not intended to limit the present disclosure, its application or uses. While specific examples have been described in the specification and illustrated in the drawings, it will be understood by those of ordinary skill in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the present disclosure. Furthermore, modifications may be made to adapt a particular situation or material to the teachings of the present disclosure without departing from the essential scope thereof. Therefore, it is intended that the present disclosure not be limited to the particular examples illustrated by the drawings and described in the specification as the best mode presently contemplated for carrying out the teachings of the present disclosure, but that the scope of the present disclosure will include any embodiments falling within the foregoing description and the appended claims. Reference signs mentioned in the claims should not be seen as limiting the extent of the matter protected by the claims, and their sole function is to make claims easier to understand.

REFERENCE SIGNS

[0079]	11: Intruder alarm
[0080]	21: Alarm signal detection unit
[0081]	22: Light source
[0082]	23: Distance and direction determination unit
[0083]	24: Light determination unit
[0084]	A: Parking area
[0085]	A_L : Light-up area
[0086]	α : Angular direction
[0087]	α_{PD} : Predetermined angular direction range
[0088]	D: Distance
[0089]	D_{DP} : Predetermined distance range
[0090]	I: Intruder
[0091]	PD: Determined point
[0092]	S: Alarm signal
[0093]	S_{AL} : Vehicle alarm system
[0094]	V: Vehicle
[0095]	V_T : Target vehicle
[0096]	X: Device

What is claimed is:

1. A method for activating a vehicle alarm system arranged in a vehicle for lighting up a target vehicle, wherein the vehicle alarm system comprises an alarm signal detection unit, wherein the alarm signal detection unit is configured for detecting an alarm signal of the target vehicle, wherein the method comprises the steps:

detecting an alarm signal of the target vehicle by means of the alarm signal detection unit upon activation of an intruder alarm of the target vehicle;

determining an angular direction of the vehicle in relation to the target vehicle and a distance between the vehicle and the target vehicle, upon detection of the alarm signal;

activating a light source of the vehicle to light up the target vehicle and/or activating a light source of a device associated with the vehicle to light up the target vehicle, when the determined angular direction is

within a predetermined angular direction range and the determined distance is within a predetermined distance range.

2. The method according to claim 1, wherein the alarm signal is a sound signal emitted by the target vehicle upon activation of the intruder alarm, wherein the method further comprises the step: detecting the emitted sound signal by means of the alarm signal detection unit.

3. The method according to claim 1, wherein the alarm signal is a light signal emitted by the target vehicle upon activation of the intruder alarm, wherein the method further comprises the step: detecting the emitted light signal by means of the alarm signal detection unit.

4. The method according to claim 1, wherein the alarm signal is a V2V communication signal emitted by the target vehicle upon activation of the intruder alarm, wherein the method further comprises the step: detecting the emitted V2V communication signal by means of the alarm signal detection unit.

5. The method according to claim 1, wherein the method further comprises the step:

actively directing the light source of the vehicle towards the target vehicle and/or actively directing the light source of the device to light up the target vehicle.

6. The method according to claim 1, wherein the vehicle alarm system (S_{AL}) further comprises a distance and direction determination unit arranged in the vehicle, wherein the method further comprises the step: determining the angular direction and the distance to the target vehicle by means of the distance and direction determination unit.

7. The method according to claim 1, wherein the vehicle alarm system further comprises a light determination unit arranged in the vehicle, wherein the light determination unit is configured for determining how the target vehicle is lit up by the light source, wherein the method further comprises the step: determining the difference between light reflected by the target vehicle before and after activation of the light source by means of the light determination unit.

8. A vehicle alarm system arranged in a vehicle for lighting up a target vehicle, wherein the vehicle alarm system comprises an alarm signal detection unit, wherein upon activation of an intruder alarm of the target vehicle the alarm signal detection unit is configured for detecting an alarm signal of the target vehicle,

wherein the vehicle alarm system is configured for determining an angular direction of the vehicle in relation to the target vehicle and a distance between the vehicle and the target vehicle upon detection of the alarm signal, wherein when the determined angular direction is within a predetermined angular direction range and the determined distance is within a predetermined distance range, the vehicle is configured for activating a light source to light up the target vehicle and/or the vehicle is configured for activating a light source of a device associated with the vehicle to light up the target vehicle.

9. The vehicle alarm system according to claim 8, wherein the alarm signal is a sound signal emitted by the target vehicle upon activation of the intruder alarm, wherein the alarm signal detection unit is configured for detecting the emitted sound signal.

10. The vehicle alarm system according to claim 8, wherein the alarm signal is a light signal emitted by the target vehicle upon activation of the intruder alarm, wherein the alarm signal detection unit is configured for detecting the emitted light signal.

11. The vehicle alarm system according to claim 8, wherein the alarm signal is a V2V communication signal emitted by the target vehicle upon activation of the intruder alarm, wherein the alarm signal detection unit is configured for detecting the emitted V2V communication signal.

12. The vehicle alarm system according to claim 8, wherein the vehicle alarm system is configured for actively directing the light source of the vehicle and/or the light source of the device towards the target vehicle upon receipt of the alarm signal.

13. The vehicle alarm system according to claim 8, wherein the light source is a headlight of the vehicle, and/or wherein the light source is a light unit of the device associated with the vehicle.

14. The vehicle alarm system according to claim 8, wherein the vehicle alarm system further comprises a distance and direction determination unit arranged in the vehicle, wherein the distance and direction determination unit is configured for determining the angular direction and the distance to the target vehicle.

15. The vehicle alarm system according to claim 8, wherein the vehicle alarm system further comprises a light determination unit arranged in the vehicle, wherein the light determination unit is configured for determining how the target vehicle is lit up by the light source, wherein the light determination unit is configured for determining the difference between light reflected by the target vehicle before and after activation of the light source.

16. The vehicle alarm system according to claim 14, wherein the distance and direction determination unit is arranged as a camera unit, a microphone unit, and/or a V2V unit in the vehicle; and/or wherein the light determination unit is arranged as a camera unit in the vehicle.

17. The vehicle alarm system according to claim 8, wherein the vehicle alarm system is arranged in two or more vehicles, wherein the two or more vehicles are configured for communicating with each other for activating at least one light source of the two or more vehicles to light up the target vehicle and/or activating at least one light source of at least one device associated the two or more vehicles to light up the target vehicle.

18. A vehicle comprising the vehicle alarm system according to claim 7.

* * * * *