



US012408929B2

(12) **United States Patent**
Chappuis et al.

(10) **Patent No.:** **US 12,408,929 B2**

(45) **Date of Patent:** **Sep. 9, 2025**

(54) **SYSTEMS AND METHODS FOR
NAVIGATING A PIN GUIDE DRIVER**

(71) Applicant: **GLOBUS MEDICAL, INC.**, Audubon,
PA (US)

(72) Inventors: **Olivier Chappuis**, Lutry (CH); **Szymon
Kostrzewski**, Lausanne (CH); **Timothy
Blackwell**, Ft. Pierce, FL (US); **Hayden
Cameron**, Philadelphia, PA (US); **Stephen
Cicchini**, North Wales, PA
(US); **Peter Eckert**, Renens (CH);
Keerthighaan Kanagasegar,
Norristown, PA (US); **Jason
Zappacosta**, Philadelphia, PA (US);
Khiem Pham, Chalfont, PA (US)

(73) Assignee: **Globus Medical, Inc.**, Audubon, PA
(US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 250 days.

(21) Appl. No.: **17/657,387**

(22) Filed: **Mar. 31, 2022**

(65) **Prior Publication Data**

US 2022/0257263 A1 Aug. 18, 2022

Related U.S. Application Data

(60) Division of application No. 16/841,927, filed on Apr.
7, 2020, now Pat. No. 11,426,178, which is a
(Continued)

(51) **Int. Cl.**

A61B 17/15 (2006.01)
A61B 34/20 (2016.01)

(52) **U.S. Cl.**

CPC **A61B 17/154** (2013.01); **A61B 34/20**
(2016.02); **A61B 2034/2055** (2016.02)

(58) **Field of Classification Search**

CPC **A61B 17/154**; **A61B 34/20**; **A61B**
2034/2055

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,068,626 A 7/1913 Buck
4,150,293 A 4/1979 Franke
(Continued)

FOREIGN PATENT DOCUMENTS

CN 1974094 A 6/2007
CN 101160104 A 4/2008
(Continued)

OTHER PUBLICATIONS


US 8,231,638 B2, 07/2012, Swarup et al. (withdrawn)
(Continued)

Primary Examiner — Sameh R Boles

(57) **ABSTRACT**

Systems and methods for resecting a knee joint using a
navigated pin guide driver system. The navigated pin guide
driver system communicates with a navigation system to aid
a user in placing cut block pins into the knee joint. The
navigated pin guide driver system may include a handle, a
reference element that electronically communicates with the
navigation system, one or more pin guide tubes that may
correspond to one or more cut blocks, and a distal tip that is
configured to attach to the bone.

19 Claims, 42 Drawing Sheets

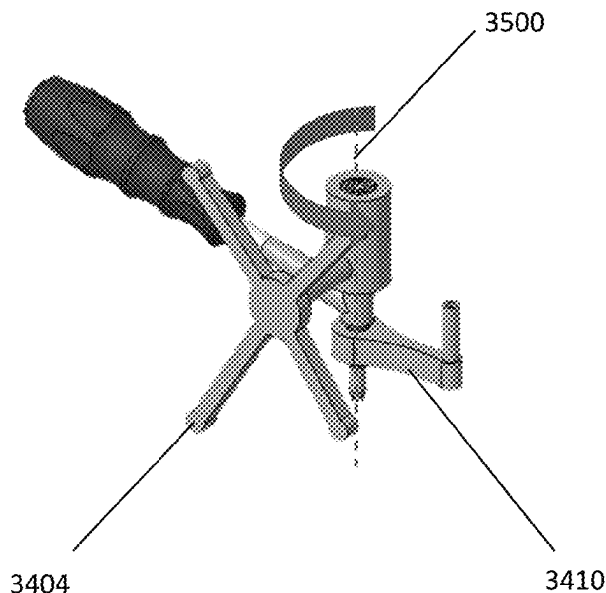

Related U.S. Application Data

continuation-in-part of application No. 16/737,054, filed on Jan. 8, 2020, now Pat. No. 11,864,857, which is a continuation-in-part of application No. 16/587,203, filed on Sep. 30, 2019, now Pat. No. 11,890,066.

- (60) Provisional application No. 62/906,831, filed on Sep. 27, 2019.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,402,481	A	9/1983	Sasaki	6,560,354	B1	5/2003	Maurer, Jr. et al.
4,737,038	A	4/1988	Dostoomian	6,565,554	B1	5/2003	Niemeyer
4,757,710	A	7/1988	Haynes	6,587,750	B2	7/2003	Gerbi et al.
4,979,949	A	12/1990	Matsen, III et al.	6,614,453	B1	9/2003	Suri et al.
5,017,139	A	5/1991	Mushabac	6,614,871	B1	9/2003	Kobiki et al.
5,085,556	A	2/1992	Ohtomi	6,619,840	B2	9/2003	Rasche et al.
5,184,601	A	2/1993	Putman	6,632,170	B1	10/2003	Bohanan et al.
5,246,010	A	9/1993	Gazzara et al.	6,636,757	B1	10/2003	Jascob et al.
5,354,314	A	10/1994	Hardy et al.	6,645,196	B1	11/2003	Nixon et al.
5,397,323	A	3/1995	Taylor et al.	6,666,579	B2	12/2003	Jensen
5,571,110	A	11/1996	Matsen, III et al.	6,669,635	B2	12/2003	Kessman et al.
5,598,453	A	1/1997	Baba et al.	6,685,706	B2	2/2004	Padget et al.
5,630,431	A	5/1997	Taylor	6,701,173	B2	3/2004	Nowinski et al.
5,772,594	A	6/1998	Barrick	6,719,757	B2	4/2004	Neubauer et al.
5,791,908	A	8/1998	Gillio	6,757,068	B2	6/2004	Foxlin
5,820,559	A	10/1998	Ng et al.	6,782,287	B2	8/2004	Grzeszczuk et al.
5,825,982	A	10/1998	Wright et al.	6,783,524	B2	8/2004	Anderson et al.
5,841,950	A	11/1998	Wang et al.	6,786,896	B1	9/2004	Madhani et al.
5,876,325	A	3/1999	Mizumo et al.	6,788,018	B1	9/2004	Blumenkranz
5,887,121	A	3/1999	Funda et al.	6,804,581	B2	10/2004	Wang et al.
5,911,449	A	6/1999	Daniele et al.	6,823,207	B1	11/2004	Jensen et al.
5,951,475	A	9/1999	Guezic et al.	6,827,351	B2	12/2004	Graziani et al.
5,987,960	A	11/1999	Messner et al.	6,837,892	B2	1/2005	Shoham
6,012,216	A	1/2000	Esteves et al.	6,839,612	B2	1/2005	Sanchez et al.
6,031,888	A	2/2000	Ivan et al.	6,856,826	B2	2/2005	Seeley et al.
6,033,415	A	3/2000	Mittelstadt et al.	6,856,827	B2	2/2005	Seeley et al.
6,080,181	A	6/2000	Jensen et al.	6,856,828	B2	2/2005	Cossette et al.
6,106,511	A	8/2000	Jensen	6,879,880	B2	4/2005	Nowlin et al.
6,122,541	A	9/2000	Cosman et al.	6,892,090	B2	5/2005	Verard et al.
6,144,875	A	11/2000	Schweikard et al.	6,920,347	B2	7/2005	Simon et al.
6,157,853	A	12/2000	Blume et al.	6,922,632	B2	7/2005	Foxlin
6,167,145	A	12/2000	Foley et al.	6,968,224	B2	11/2005	Kessman et al.
6,167,292	A	12/2000	Badano et al.	6,978,166	B2	12/2005	Foley et al.
6,201,984	B1	3/2001	Funda et al.	6,988,009	B2	1/2006	Grimm et al.
6,203,196	B1	3/2001	Meyer et al.	6,991,627	B2	1/2006	Madhani et al.
6,203,543	B1	3/2001	Glossop	6,993,374	B2	1/2006	Sasso
6,205,411	B1	3/2001	DiGioia, III et al.	6,996,487	B2	2/2006	Jutras et al.
6,212,419	B1	4/2001	Blume et al.	6,999,852	B2	2/2006	Green
6,231,565	B1	5/2001	Tovey et al.	7,007,699	B2	3/2006	Martinelli et al.
6,236,875	B1	5/2001	Bucholz et al.	7,016,457	B1	3/2006	Senzig et al.
6,246,900	B1	6/2001	Cosman et al.	7,035,716	B2	4/2006	Harris et al.
6,301,495	B1	10/2001	Guezic et al.	7,043,961	B2	5/2006	Pandey et al.
6,306,126	B1	10/2001	Montezuma	7,062,006	B1	6/2006	Pelc et al.
6,312,435	B1	11/2001	Wallace et al.	7,063,705	B2	6/2006	Young et al.
6,314,311	B1	11/2001	Williams et al.	7,072,707	B2	7/2006	Galloway, Jr. et al.
6,320,929	B1	11/2001	Von Der Haar	7,083,615	B2	8/2006	Peterson et al.
6,322,567	B1	11/2001	Mittelstadt et al.	7,097,640	B2	8/2006	Wang et al.
6,325,808	B1	12/2001	Bernard et al.	7,099,428	B2	8/2006	Clinthorne et al.
6,340,363	B1	1/2002	Bolger et al.	7,108,421	B2	9/2006	Gregerson et al.
6,377,011	B1	4/2002	Ben-Ur	7,130,676	B2	10/2006	Barrick
6,379,302	B1	4/2002	Kessman et al.	7,139,418	B2	11/2006	Abovitz et al.
6,402,762	B2	6/2002	Hunter et al.	7,139,601	B2	11/2006	Bucholz et al.
6,424,885	B1	7/2002	Niemeyer et al.	7,155,316	B2	12/2006	Sutherland et al.
6,447,503	B1	9/2002	Wynne et al.	7,164,968	B2	1/2007	Treat et al.
6,451,027	B1	9/2002	Cooper et al.	7,167,738	B2	1/2007	Schweikard et al.
6,477,400	B1	11/2002	Barrick	7,169,141	B2	1/2007	Brock et al.
6,484,049	B1	11/2002	Seeley et al.	7,172,627	B2	2/2007	Fiere et al.
6,487,267	B1	11/2002	Wolter	7,194,120	B2	3/2007	Wicker et al.
6,490,467	B1	12/2002	Bucholz et al.	7,197,107	B2	3/2007	Arai et al.
6,490,475	B1	12/2002	Seeley et al.	7,231,014	B2	6/2007	Levy
6,499,488	B1	12/2002	Hunter et al.	7,231,063	B2	6/2007	Naimark et al.
6,501,981	B1	12/2002	Schweikard et al.	7,239,940	B2	7/2007	Wang et al.
6,507,751	B2	1/2003	Blume et al.	7,248,914	B2	7/2007	Hastings et al.
6,535,756	B1	3/2003	Simon et al.	7,301,648	B2	11/2007	Foxlin
				7,302,288	B1	11/2007	Schellenberg
				7,313,430	B2	12/2007	Urquhart et al.
				7,318,805	B2	1/2008	Schweikard et al.
				7,318,827	B2	1/2008	Leitner et al.
				7,319,897	B2	1/2008	Leitner et al.
				7,324,623	B2	1/2008	Heuscher et al.
				7,327,865	B2	2/2008	Fu et al.
				7,331,967	B2	2/2008	Lee et al.
				7,333,642	B2	2/2008	Green
				7,339,341	B2	3/2008	Oleynikov et al.
				7,366,562	B2	4/2008	Dukeshher et al.
				7,379,790	B2	5/2008	Toth et al.
				7,386,365	B2	6/2008	Nixon
				7,422,592	B2	9/2008	Morley et al.
				7,435,216	B2	10/2008	Kwon et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

7,440,793 B2	10/2008	Chauhan et al.	7,974,677 B2	7/2011	Mire et al.
7,460,637 B2	12/2008	Clinthorne et al.	7,974,681 B2	7/2011	Wallace et al.
7,466,303 B2	12/2008	Yi et al.	7,979,157 B2	7/2011	Anvari
7,493,153 B2	2/2009	Ahmed et al.	7,983,733 B2	7/2011	Viswanathan
7,505,617 B2	3/2009	Fu et al.	7,988,215 B2	8/2011	Seibold
7,533,892 B2	5/2009	Schena et al.	7,996,110 B2	8/2011	Lipow et al.
7,542,791 B2	6/2009	Mire et al.	8,004,121 B2	8/2011	Sartor
7,555,331 B2	6/2009	Viswanathan	8,004,229 B2	8/2011	Nowlin et al.
7,567,834 B2	7/2009	Clayton et al.	8,010,177 B2	8/2011	Csavoy et al.
7,594,912 B2	9/2009	Cooper et al.	8,010,180 B2	8/2011	Quaid et al.
7,606,613 B2	10/2009	Simon et al.	8,019,045 B2	9/2011	Kato
7,607,440 B2	10/2009	Coste-Maniere et al.	8,021,310 B2	9/2011	Sanborn et al.
7,623,902 B2	11/2009	Pacheco	8,035,685 B2	10/2011	Jensen
7,630,752 B2	12/2009	Viswanathan	8,046,054 B2	10/2011	Kim et al.
7,630,753 B2	12/2009	Simon et al.	8,046,057 B2	10/2011	Clarke
7,643,862 B2	1/2010	Schoenefeld	8,052,688 B2	11/2011	Wolf, II
7,660,623 B2	2/2010	Hunter et al.	8,054,184 B2	11/2011	Cline et al.
7,661,881 B2	2/2010	Gregerson et al.	8,054,752 B2	11/2011	Druke et al.
7,670,345 B2	3/2010	Plassky et al.	8,057,397 B2	11/2011	Li et al.
7,683,331 B2	3/2010	Chang	8,057,407 B2	11/2011	Martinelli et al.
7,683,332 B2	3/2010	Chang	8,062,288 B2	11/2011	Cooper et al.
7,689,320 B2	3/2010	Prisco et al.	8,062,375 B2	11/2011	Glerum et al.
7,691,098 B2	4/2010	Wallace et al.	8,066,524 B2	11/2011	Burbank et al.
7,702,379 B2	4/2010	Avinash et al.	8,073,335 B2	12/2011	Labonville et al.
7,702,477 B2	4/2010	Tuemmler et al.	8,079,950 B2	12/2011	Stern et al.
7,711,083 B2	5/2010	Heigl et al.	8,086,299 B2	12/2011	Adler et al.
7,711,406 B2	5/2010	Kuhn et al.	8,092,370 B2	1/2012	Roberts et al.
7,720,523 B2	5/2010	Omernick et al.	8,098,914 B2	1/2012	Liao et al.
7,725,253 B2	5/2010	Foxlin	8,100,950 B2	1/2012	St. Clair et al.
7,726,171 B2	6/2010	Langlotz et al.	8,105,320 B2	1/2012	Manzo
7,742,801 B2	6/2010	Neubauer et al.	8,108,025 B2	1/2012	Csavoy et al.
7,751,865 B2	7/2010	Jascob et al.	8,109,877 B2	2/2012	Moctezuma de la Barrera et al.
7,753,910 B2	7/2010	Ritland	8,112,292 B2	2/2012	Simon
7,760,849 B2	7/2010	Zhang	8,116,430 B1	2/2012	Shapiro et al.
7,762,825 B2	7/2010	Burbank et al.	8,120,301 B2	2/2012	Goldberg et al.
7,763,015 B2	7/2010	Cooper et al.	8,121,249 B2	2/2012	Wang et al.
7,787,699 B2	8/2010	Mahesh et al.	8,123,675 B2	2/2012	Funda et al.
7,796,728 B2	9/2010	Bergfjord	8,133,229 B1	3/2012	Bonutti
7,813,838 B2	10/2010	Sommer	8,142,420 B2	3/2012	Schena
7,818,044 B2	10/2010	Dukesherer et al.	8,142,447 B2	3/2012	Cooper et al.
7,819,859 B2	10/2010	Prisco et al.	8,147,494 B2	4/2012	Leitner et al.
7,824,401 B2	11/2010	Manzo et al.	8,150,494 B2	4/2012	Simon et al.
7,831,294 B2	11/2010	Viswanathan	8,150,497 B2	4/2012	Gielen et al.
7,834,484 B2	11/2010	Sartor	8,150,498 B2	4/2012	Gielen et al.
7,835,557 B2	11/2010	Kendrick et al.	8,165,658 B2	4/2012	Waynik et al.
7,835,778 B2	11/2010	Foley et al.	8,170,313 B2	5/2012	Kendrick et al.
7,835,784 B2	11/2010	Mire et al.	8,179,073 B2	5/2012	Farritor et al.
7,840,253 B2	11/2010	Tremblay et al.	8,180,429 B2	5/2012	Sasso
7,840,256 B2	11/2010	Lakin et al.	8,182,476 B2	5/2012	Julian et al.
7,843,158 B2	11/2010	Prisco	8,184,880 B2	5/2012	Zhao et al.
7,844,320 B2	11/2010	Shahidi	8,202,278 B2	6/2012	Orban et al.
7,853,305 B2	12/2010	Simon et al.	8,208,708 B2	6/2012	Homan et al.
7,853,313 B2	12/2010	Thompson	8,208,988 B2	6/2012	Jenser
7,865,269 B2	1/2011	Prisco et al.	8,219,177 B2	7/2012	Smith et al.
D631,966 S	2/2011	Perloff et al.	8,219,178 B2	7/2012	Smith et al.
7,879,045 B2	2/2011	Gielen et al.	8,220,468 B2	7/2012	Cooper et al.
7,881,767 B2	2/2011	Strommer et al.	8,224,024 B2	7/2012	Foxlin et al.
7,881,770 B2	2/2011	Melkent et al.	8,224,484 B2	7/2012	Swarup et al.
7,885,705 B2	2/2011	Murphy	8,225,798 B2	7/2012	Baldwin et al.
7,886,743 B2	2/2011	Cooper et al.	8,228,368 B2	7/2012	Zhao et al.
RE42,194 E	3/2011	Foley et al.	8,231,610 B2	7/2012	Jo et al.
RE42,226 E	3/2011	Foley et al.	8,239,001 B2	8/2012	Verard et al.
7,900,524 B2	3/2011	Calloway et al.	8,241,271 B2	8/2012	Millman et al.
7,907,166 B2	3/2011	Lamprecht et al.	8,248,413 B2	8/2012	Gattani et al.
7,909,122 B2	3/2011	Schena et al.	8,256,319 B2	9/2012	Cooper et al.
7,925,653 B2	4/2011	Saptharishi	8,263,933 B2	9/2012	Zeile
7,930,065 B2	4/2011	Larkin et al.	8,271,069 B2	9/2012	Jascob et al.
7,935,130 B2	5/2011	Williams	8,271,130 B2	9/2012	Hourtash
7,940,999 B2	5/2011	Liao et al.	8,281,670 B2	10/2012	Larkin et al.
7,945,012 B2	5/2011	Ye et al.	8,282,653 B2	10/2012	Nelson et al.
7,945,021 B2	5/2011	Shapiro et al.	8,301,226 B2	10/2012	Csavoy et al.
7,953,470 B2	5/2011	Vetter et al.	8,303,575 B2	11/2012	Baena
7,954,397 B2	6/2011	Choi et al.	8,311,611 B2	11/2012	Csavoy et al.
7,971,341 B2	7/2011	Dukesherer et al.	8,320,991 B2	11/2012	Jascob et al.
7,974,674 B2	7/2011	Hauck et al.	8,332,012 B2	12/2012	Kienzle, III
			8,333,755 B2	12/2012	Cooper et al.
			8,335,552 B2	12/2012	Stiles
			8,335,557 B2	12/2012	Maschke
			8,348,931 B2	1/2013	Cooper et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

8,353,963 B2	1/2013	Glerum	8,644,907 B2	2/2014	Hartmann et al.
8,358,818 B2	1/2013	Miga et al.	8,657,809 B2	2/2014	Schoepp
8,359,730 B2	1/2013	Burg et al.	8,660,635 B2	2/2014	Simon et al.
8,374,673 B2	2/2013	Adcox et al.	8,666,544 B2	3/2014	Moll et al.
8,374,723 B2	2/2013	Zhao et al.	8,675,939 B2	3/2014	Moctezuma de la Barrera
8,379,791 B2	2/2013	Forthmann et al.	8,678,647 B2	3/2014	Gregerson et al.
8,386,019 B2	2/2013	Camus et al.	8,679,125 B2	3/2014	Smith et al.
8,392,022 B2	3/2013	Ortmaier et al.	8,679,183 B2	3/2014	Glerum et al.
8,394,099 B2	3/2013	Patwardhan	8,682,413 B2	3/2014	Lloyd
8,395,342 B2	3/2013	Prisco	8,684,253 B2	4/2014	Giordano et al.
8,398,634 B2	3/2013	Manzo et al.	8,685,098 B2	4/2014	Glerum et al.
8,400,094 B2	3/2013	Schena	8,693,730 B2	4/2014	Umasuthan et al.
8,414,957 B2	4/2013	Enzerink et al.	8,694,075 B2	4/2014	Groszmann et al.
8,418,073 B2	4/2013	Mohr et al.	8,696,458 B2	4/2014	Foxlin et al.
8,450,694 B2	5/2013	Baviera et al.	8,700,123 B2	4/2014	Okamura et al.
8,452,447 B2	5/2013	Nixon	8,706,086 B2	4/2014	Glerum
RE44,305 E	6/2013	Foley et al.	8,706,185 B2	4/2014	Foley et al.
8,462,911 B2	6/2013	Vesel et al.	8,706,301 B2	4/2014	Zhao et al.
8,465,476 B2	6/2013	Rogers et al.	8,717,430 B2	5/2014	Simon et al.
8,465,771 B2	6/2013	Wan et al.	8,727,618 B2	5/2014	Maschke et al.
8,467,851 B2	6/2013	Mire et al.	8,734,432 B2	5/2014	Tuma et al.
8,467,852 B2	6/2013	Csavoy et al.	8,738,115 B2	5/2014	Amberg et al.
8,469,947 B2	6/2013	Devengenzo et al.	8,738,181 B2	5/2014	Greer et al.
RE44,392 E	7/2013	Hynes	8,740,882 B2	6/2014	Jun et al.
8,483,434 B2	7/2013	Buehner et al.	8,746,252 B2	6/2014	McGrogan et al.
8,483,800 B2	7/2013	Jensen et al.	8,749,189 B2	6/2014	Nowlin et al.
8,486,532 B2	7/2013	Enzerink et al.	8,749,190 B2	6/2014	Nowlin et al.
8,489,235 B2	7/2013	Voll et al.	8,761,930 B2	6/2014	Nixon
8,498,744 B2	7/2013	Odermatt et al.	8,764,448 B2	7/2014	Yang et al.
8,500,722 B2	8/2013	Cooper	8,771,170 B2	7/2014	Mesallum et al.
8,500,728 B2	8/2013	Newton et al.	8,781,186 B2	7/2014	Clements et al.
8,504,201 B2	8/2013	Moll et al.	8,781,630 B2	7/2014	Banks et al.
8,506,555 B2	8/2013	Ruiz Morales	8,784,385 B2	7/2014	Boyden et al.
8,506,556 B2	8/2013	Schena	8,786,241 B2	7/2014	Nowlin et al.
8,508,173 B2	8/2013	Goldberg et al.	8,787,520 B2	7/2014	Baba
8,512,318 B2	8/2013	Tovey et al.	8,792,704 B2	7/2014	Isaacs
8,515,576 B2	8/2013	Lipow et al.	8,798,231 B2	8/2014	Notohara et al.
8,518,120 B2	8/2013	Glerum et al.	8,800,838 B2	8/2014	Shelton, IV
8,521,331 B2	8/2013	Itkowitz	8,808,164 B2	8/2014	Hoffman et al.
8,526,688 B2	9/2013	Groszmann et al.	8,812,077 B2	8/2014	Dempsey
8,526,700 B2	9/2013	Issacs	8,814,793 B2	8/2014	Brabrand
8,527,094 B2	9/2013	Kumar et al.	8,816,628 B2	8/2014	Nowlin et al.
8,528,440 B2	9/2013	Morley et al.	8,818,105 B2	8/2014	Myronenko et al.
8,532,741 B2	9/2013	Heruth et al.	8,820,605 B2	9/2014	Shelton, IV
8,535,329 B2	9/2013	Sarin et al.	8,821,511 B2	9/2014	von Jako et al.
8,541,970 B2	9/2013	Nowlin et al.	8,823,308 B2	9/2014	Nowlin et al.
8,548,563 B2	10/2013	Simon et al.	8,827,996 B2	9/2014	Scott et al.
8,549,732 B2	10/2013	Burg et al.	8,828,024 B2	9/2014	Farritor et al.
8,551,114 B2	10/2013	Ramos de la Pena	8,830,224 B2	9/2014	Zhao et al.
8,551,116 B2	10/2013	Julian et al.	8,834,489 B2	9/2014	Cooper et al.
8,556,807 B2	10/2013	Scott et al.	8,834,490 B2	9/2014	Bonutti
8,556,979 B2	10/2013	Glerum et al.	8,838,270 B2	9/2014	Druke et al.
8,560,118 B2	10/2013	Green et al.	8,844,789 B2	9/2014	Shelton, IV et al.
8,561,473 B2	10/2013	Blumenkranz	8,852,210 B2	10/2014	Selover et al.
8,562,594 B2	10/2013	Cooper et al.	8,855,822 B2	10/2014	Bartol et al.
8,571,638 B2	10/2013	Shoham	8,858,598 B2	10/2014	Seifert et al.
8,571,710 B2	10/2013	Coste-Maniere et al.	8,860,753 B2	10/2014	Bhandarkar et al.
8,573,465 B2	11/2013	Shelton, IV	8,864,751 B2	10/2014	Prisco et al.
8,574,303 B2	11/2013	Sharkey et al.	8,864,798 B2	10/2014	Weiman et al.
8,585,420 B2	11/2013	Burbank et al.	8,864,833 B2	10/2014	Glerum et al.
8,594,841 B2	11/2013	Zhao et al.	8,867,703 B2	10/2014	Shapiro et al.
8,597,198 B2	12/2013	Sanborn et al.	8,870,880 B2	10/2014	Himmelberger et al.
8,600,478 B2	12/2013	Verard et al.	8,876,866 B2	11/2014	Zappacosta et al.
8,603,077 B2	12/2013	Cooper et al.	8,880,223 B2	11/2014	Raj et al.
8,611,985 B2	12/2013	Lavallee et al.	8,882,803 B2	11/2014	Iott et al.
8,613,230 B2	12/2013	Blumenkranz et al.	8,883,210 B1	11/2014	Truncala et al.
8,621,939 B2	1/2014	Blumenkranz et al.	8,888,821 B2	11/2014	Rezach et al.
8,624,537 B2	1/2014	Nowlin et al.	8,888,853 B2	11/2014	Glerum et al.
8,630,389 B2	1/2014	Kato	8,888,854 B2	11/2014	Glerum et al.
8,634,897 B2	1/2014	Simon et al.	8,894,652 B2	11/2014	Seifert et al.
8,634,957 B2	1/2014	Toth et al.	8,894,688 B2	11/2014	Suh
8,638,056 B2	1/2014	Goldberg et al.	8,894,691 B2	11/2014	Iott et al.
8,638,057 B2	1/2014	Goldberg et al.	8,906,069 B2	12/2014	Hansell et al.
8,639,000 B2	1/2014	Zhao et al.	8,961,537 B2	2/2015	Leung et al.
8,641,726 B2	2/2014	Bonutti	8,964,934 B2	2/2015	Ein-Gal
			8,992,580 B2	3/2015	Bar et al.
			8,996,169 B2	3/2015	Lightcap et al.
			9,001,963 B2	4/2015	Sowards-Emmerd et al.
			9,002,076 B2	4/2015	Khadem et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

9,005,113	B2	4/2015	Scott et al.	2007/0156121	A1	7/2007	Millman et al.
9,019,078	B2	4/2015	Hamelin et al.	2007/0156157	A1	7/2007	Nahum et al.
9,023,060	B2	5/2015	Cooper et al.	2007/0167712	A1	7/2007	Keglovich et al.
9,044,190	B2	6/2015	Rubner et al.	2007/0233238	A1	10/2007	Huynh et al.
9,048,613	B2	6/2015	Kong et al.	2008/0004523	A1	1/2008	Jensen
9,066,751	B2	6/2015	Sasso	2008/0013809	A1	1/2008	Zhu et al.
9,066,755	B1	6/2015	Jacobs et al.	2008/0033283	A1	2/2008	Dellaca et al.
9,095,376	B2	8/2015	Plabky et al.	2008/0046122	A1	2/2008	Manzo et al.
9,107,683	B2	8/2015	Hourtash et al.	2008/0082109	A1	4/2008	Moll et al.
9,125,556	B2	9/2015	Zehavi et al.	2008/0108912	A1	5/2008	Node-Langlois
9,131,986	B2	9/2015	Greer et al.	2008/0108991	A1	5/2008	von Jako
9,161,760	B2	10/2015	Saurez et al.	2008/0109012	A1	5/2008	Falco et al.
9,215,968	B2	12/2015	Schostek et al.	2008/0144906	A1	6/2008	Allred et al.
9,271,633	B2	3/2016	Scott et al.	2008/0161680	A1	7/2008	von Jako et al.
9,271,847	B2	3/2016	Murphy	2008/0161682	A1	7/2008	Kendrick et al.
9,308,050	B2	4/2016	Kostrzewski et al.	2008/0177203	A1	7/2008	von Jako
9,339,277	B2	5/2016	Jansen et al.	2008/0214922	A1	9/2008	Hartmann et al.
9,380,984	B2	7/2016	Li et al.	2008/0228068	A1	9/2008	Viswanathan et al.
9,393,039	B2	7/2016	Lechner et al.	2008/0228196	A1	9/2008	Wang et al.
9,398,886	B2	7/2016	Gregerson et al.	2008/0235052	A1	9/2008	Node-Langlois et al.
9,398,890	B2	7/2016	Dong et al.	2008/0269596	A1	10/2008	Revie et al.
9,414,859	B2	8/2016	Ballard et al.	2008/0287771	A1	11/2008	Anderson
9,420,975	B2	8/2016	Gutfleisch et al.	2008/0287781	A1	11/2008	Revie et al.
9,421,019	B2	8/2016	Plaskos et al.	2008/0300477	A1	12/2008	Lloyd et al.
9,492,235	B2	11/2016	Hourtash et al.	2008/0300478	A1	12/2008	Zuhars et al.
9,565,997	B2	2/2017	Scott et al.	2008/0302950	A1	12/2008	Park et al.
9,566,120	B2	2/2017	Malackowski et al.	2008/0306490	A1	12/2008	Lakin et al.
9,592,096	B2	3/2017	Maillet et al.	2008/0319311	A1	12/2008	Hamadeh
9,592,100	B2	3/2017	Olson et al.	2009/0012509	A1	1/2009	Csavoy et al.
9,603,621	B2	3/2017	Zhou	2009/0030428	A1	1/2009	Omori et al.
9,629,687	B2	4/2017	Bonutti	2009/0080737	A1	3/2009	Battle et al.
9,713,506	B2	7/2017	Fanson et al.	2009/0185655	A1	7/2009	Koken et al.
9,750,465	B2	9/2017	Engel et al.	2009/0198121	A1	8/2009	Hoheisel
9,757,203	B2	9/2017	Hourtash et al.	2009/0216113	A1	8/2009	Meier et al.
9,795,354	B2	10/2017	Menegaz et al.	2009/0228019	A1	9/2009	Gross et al.
9,808,318	B2	11/2017	Bonutti	2009/0259123	A1	10/2009	Navab et al.
9,814,535	B2	11/2017	Bar et al.	2009/0259230	A1	10/2009	Khadem et al.
9,820,783	B2	11/2017	Donner et al.	2009/0264899	A1	10/2009	Appenrodt et al.
9,833,265	B2	12/2017	Donner et al.	2009/0281417	A1	11/2009	Hartmann et al.
9,848,922	B2	12/2017	Tohmeh et al.	2010/0022874	A1	1/2010	Wang et al.
9,925,011	B2	3/2018	Gombert et al.	2010/0039506	A1	2/2010	Sarvestani et al.
9,931,025	B1	4/2018	Graetzel et al.	2010/0125286	A1	5/2010	Wang et al.
9,962,069	B2	5/2018	Scott et al.	2010/0130986	A1	5/2010	Mailloux et al.
9,968,405	B2	5/2018	Cooper et al.	2010/0228117	A1	9/2010	Hartmann
9,993,273	B2	6/2018	Moctezuma de la Barrera et al.	2010/0228265	A1	9/2010	Prisco
10,034,717	B2	7/2018	Miller et al.	2010/0249571	A1	9/2010	Jensen et al.
10,045,828	B2	8/2018	Abbasi et al.	2010/0274120	A1	10/2010	Heuscher
10,154,239	B2	12/2018	Casas	2010/0280363	A1	11/2010	Skarda et al.
10,194,131	B2	1/2019	Casas	2010/0331858	A1	12/2010	Simaan et al.
10,194,990	B2	2/2019	Amanatullah et al.	2011/0022229	A1	1/2011	Jang et al.
10,219,865	B2	3/2019	Jansen et al.	2011/0077504	A1	3/2011	Fischer et al.
10,292,768	B2	5/2019	Lang	2011/0098553	A1	4/2011	Robbins et al.
10,326,975	B2	6/2019	Casas	2011/0137152	A1	6/2011	Li
10,398,449	B2	9/2019	Otto et al.	2011/0213384	A1	9/2011	Jeong
2001/0036302	A1	11/2001	Miller	2011/0224684	A1	9/2011	Larkin et al.
2002/0035321	A1	3/2002	Bucholz et al.	2011/0224685	A1	9/2011	Larkin et al.
2002/0107518	A1	8/2002	Neubauer et al.	2011/0224686	A1	9/2011	Larkin et al.
2004/0068172	A1	4/2004	Nowinski et al.	2011/0224687	A1	9/2011	Larkin et al.
2004/0076259	A1	4/2004	Jensen et al.	2011/0224688	A1	9/2011	Larkin et al.
2005/0096502	A1	5/2005	Khalili	2011/0224689	A1	9/2011	Larkin et al.
2005/0143651	A1	6/2005	Verard et al.	2011/0224825	A1	9/2011	Larkin et al.
2005/0171558	A1	8/2005	Abovitz et al.	2011/0230967	A1	9/2011	O'Halloran et al.
2006/0069324	A1*	3/2006	Block	2011/0238080	A1	9/2011	Ranjit et al.
			A61B 17/864	2011/0276058	A1	11/2011	Choi et al.
			600/595	2011/0282189	A1	11/2011	Graumann
2006/0100610	A1	5/2006	Wallace et al.	2011/0286573	A1	11/2011	Schretter et al.
2006/0142656	A1	6/2006	Malackowski et al.	2011/0295062	A1	12/2011	Gratacos Solsona et al.
2006/0173329	A1	8/2006	Marquart et al.	2011/0295370	A1	12/2011	Suh et al.
2006/0177295	A1	8/2006	Frueh et al.	2011/0306986	A1	12/2011	Lee et al.
2006/0184396	A1	8/2006	Dennis et al.	2012/0035507	A1	2/2012	George et al.
2006/0241416	A1	10/2006	Marquart et al.	2012/0046668	A1	2/2012	Gantes
2006/0291612	A1	12/2006	Nishide et al.	2012/0051498	A1	3/2012	Koishi
2007/0015987	A1	1/2007	Benlloch Baviera et al.	2012/0053597	A1	3/2012	Anvari et al.
2007/0021738	A1	1/2007	Hasser et al.	2012/0059248	A1	3/2012	Holsing et al.
2007/0038059	A1	2/2007	Sheffer et al.	2012/0071753	A1	3/2012	Hunter et al.
2007/0073133	A1	3/2007	Schoenefeld	2012/0089012	A1	4/2012	Baur et al.
				2012/0108954	A1	5/2012	Schulhauser et al.
				2012/0136372	A1	5/2012	Amat Girbau et al.
				2012/0143084	A1	6/2012	Shoham

(56)

References Cited

U.S. PATENT DOCUMENTS

2012/0165706 A1	6/2012	Lavallee	2014/0121676 A1	5/2014	Kostrzewski et al.
2012/0184839 A1	7/2012	Woerlein	2014/0128882 A1	5/2014	Kwak et al.
2012/0197182 A1	8/2012	Millman et al.	2014/0130810 A1	5/2014	Azizian et al.
2012/0226145 A1	9/2012	Chang et al.	2014/0135796 A1	5/2014	Simon et al.
2012/0235909 A1	9/2012	Birkenbach et al.	2014/0142591 A1	5/2014	Alvarez et al.
2012/0245596 A1	9/2012	Meenink	2014/0142592 A1	5/2014	Moon et al.
2012/0253332 A1	10/2012	Moll	2014/0148692 A1	5/2014	Hartmann et al.
2012/0253360 A1	10/2012	White et al.	2014/0163581 A1	6/2014	Devengenzo et al.
2012/0256092 A1	10/2012	Zingerman	2014/0171781 A1	6/2014	Stiles
2012/0294498 A1	11/2012	Popovic	2014/0171900 A1	6/2014	Stiles
2012/0296203 A1	11/2012	Hartmann et al.	2014/0171965 A1	6/2014	Loh et al.
2013/0006267 A1	1/2013	Odermatt et al.	2014/0180290 A1	6/2014	Otto et al.
2013/0016889 A1	1/2013	Myronenko et al.	2014/0180308 A1	6/2014	von Grunberg
2013/0030571 A1	1/2013	Ruiz Morales et al.	2014/0180309 A1	6/2014	Seeber et al.
2013/0035583 A1	2/2013	Park et al.	2014/0187915 A1	7/2014	Yaroshenko et al.
2013/0060146 A1	3/2013	Yang et al.	2014/0188132 A1	7/2014	Kang
2013/0060337 A1	3/2013	Petersheim et al.	2014/0194699 A1	7/2014	Roh et al.
2013/0094742 A1	4/2013	Feilkas	2014/0221819 A1	8/2014	Sarment
2013/0096574 A1	4/2013	Kang et al.	2014/0222023 A1	8/2014	Kim et al.
2013/0113791 A1	5/2013	Isaacs et al.	2014/0228631 A1	8/2014	Kwak et al.
2013/0116706 A1	5/2013	Lee et al.	2014/0234804 A1	8/2014	Huang et al.
2013/0131695 A1	5/2013	Scarfogliero et al.	2014/0257328 A1	9/2014	Kim et al.
2013/0144307 A1	6/2013	Jeong et al.	2014/0257329 A1	9/2014	Jang et al.
2013/0158542 A1	6/2013	Manzo et al.	2014/0257330 A1	9/2014	Choi et al.
2013/0165937 A1	6/2013	Patwardhan	2014/0275760 A1	9/2014	Lee et al.
2013/0172682 A1	7/2013	Ransden et al.	2014/0275985 A1	9/2014	Walker et al.
2013/0178867 A1	7/2013	Farritor et al.	2014/0276931 A1	9/2014	Parihar et al.
2013/0178868 A1	7/2013	Roh	2014/0276940 A1	9/2014	Seo
2013/0178870 A1	7/2013	Schena	2014/0276944 A1	9/2014	Farritor et al.
2013/0204271 A1	8/2013	Brisson et al.	2014/0288413 A1	9/2014	Hwang et al.
2013/0211419 A1	8/2013	Jensen	2014/0299648 A1	10/2014	Shelton, IV et al.
2013/0211420 A1	8/2013	Jensen	2014/0303434 A1	10/2014	Farritor et al.
2013/0218142 A1	8/2013	Tuma et al.	2014/0303643 A1	10/2014	Ha et al.
2013/0218163 A1	8/2013	Frey	2014/0305995 A1	10/2014	Shelton, IV et al.
2013/0223702 A1	8/2013	Holsing et al.	2014/0309659 A1	10/2014	Roh et al.
2013/0225942 A1	8/2013	Holsing et al.	2014/0316436 A1	10/2014	Bar et al.
2013/0225943 A1	8/2013	Holsing et al.	2014/0323803 A1	10/2014	Hoffman et al.
2013/0231556 A1	9/2013	Holsing et al.	2014/0324070 A1	10/2014	Min et al.
2013/0237995 A1	9/2013	Lee et al.	2014/0330288 A1	11/2014	Date et al.
2013/0245375 A1	9/2013	DiMaio et al.	2014/0364720 A1	12/2014	Darrow et al.
2013/0261640 A1	10/2013	Kim et al.	2014/0371577 A1	12/2014	Maillet et al.
2013/0272488 A1	10/2013	Bailey et al.	2015/0039034 A1	2/2015	Frankel et al.
2013/0272489 A1	10/2013	Dickman et al.	2015/0085970 A1	3/2015	Bouhnik et al.
2013/0274761 A1	10/2013	Devengenzo et al.	2015/0146847 A1	5/2015	Liu
2013/0281821 A1	10/2013	Liu et al.	2015/0150524 A1	6/2015	Yorkston et al.
2013/0296884 A1	11/2013	Taylor et al.	2015/0196261 A1	7/2015	Funk
2013/0303887 A1	11/2013	Holsing et al.	2015/0213633 A1	7/2015	Chang et al.
2013/0307955 A1	11/2013	Deitz et al.	2015/0335480 A1	11/2015	Alvarez et al.
2013/0317521 A1	11/2013	Choi et al.	2015/0342647 A1	12/2015	Frankel et al.
2013/0325033 A1	12/2013	Schena et al.	2015/0342691 A1	12/2015	Otto et al.
2013/0325035 A1	12/2013	Hauck et al.	2015/0366556 A1	12/2015	Khairkahan et al.
2013/0331686 A1	12/2013	Freysinger et al.	2016/0005194 A1	1/2016	Schretter et al.
2013/0331858 A1	12/2013	Devengenzo et al.	2016/0120606 A1	5/2016	Geiger et al.
2013/0331861 A1	12/2013	Yoon	2016/0166329 A1	6/2016	Langan et al.
2013/0342578 A1	12/2013	Isaacs	2016/0192949 A1	7/2016	Robichaud et al.
2013/0345717 A1	12/2013	Markvicka et al.	2016/0235480 A1	8/2016	Scholl et al.
2013/0345757 A1	12/2013	Stad	2016/0249990 A1	9/2016	Glozman et al.
2014/0001235 A1	1/2014	Shelton, IV	2016/0302871 A1	10/2016	Gregerson et al.
2014/0012131 A1	1/2014	Heruth et al.	2016/0320322 A1	11/2016	Suzuki
2014/0031664 A1	1/2014	Kang et al.	2016/0331335 A1	11/2016	Gregerson et al.
2014/0046128 A1	2/2014	Lee et al.	2017/0128136 A1	5/2017	Post
2014/0046132 A1	2/2014	Hoeg et al.	2017/0128142 A1	5/2017	Still et al.
2014/0046340 A1	2/2014	Wilson et al.	2017/0135770 A1	5/2017	Scholl et al.
2014/0049629 A1	2/2014	Siewerdsen et al.	2017/0143284 A1	5/2017	Sehnert et al.
2014/0052149 A1	2/2014	van der Walt et al.	2017/0143426 A1	5/2017	Isaacs et al.
2014/0058406 A1	2/2014	Tsekos	2017/0156816 A1	6/2017	Ibrahim
2014/0073914 A1	3/2014	Avallee et al.	2017/0202629 A1	7/2017	Maillet et al.
2014/0080086 A1	3/2014	Chen	2017/0212723 A1	7/2017	Atarot et al.
2014/0081128 A1	3/2014	Verard et al.	2017/0215825 A1	8/2017	Johnson et al.
2014/0088612 A1	3/2014	Bartol et al.	2017/0215826 A1	8/2017	Johnson et al.
2014/0094694 A1	4/2014	Moctezuma de la Barrera	2017/0215827 A1	8/2017	Johnson et al.
2014/0094851 A1	4/2014	Gordon	2017/0231710 A1	8/2017	Scholl et al.
2014/0096369 A1	4/2014	Matsumoto et al.	2017/0258426 A1	9/2017	Risher-Kelly et al.
2014/0100587 A1	4/2014	Farritor et al.	2017/0265872 A1	9/2017	Otto et al.
2014/0121675 A1	5/2014	Bax et al.	2017/0273748 A1	9/2017	Hourtash et al.
			2017/0296277 A1	10/2017	Hourtash et al.
			2017/0312032 A1	11/2017	Amanatullah et al.
			2017/0348007 A1	12/2017	Shiels
			2017/0360493 A1	12/2017	Zucher et al.

(56)

References Cited**U.S. PATENT DOCUMENTS**

2017/0367766	A1	12/2017	Mahfouz	
2018/0014891	A1	1/2018	Krebs et al.	
2018/0049622	A1	2/2018	Ryan et al.	
2018/0132839	A1	5/2018	Friedrich et al.	
2018/0157238	A1	6/2018	Gogarty et al.	
2018/0168740	A1	6/2018	Ryan et al.	
2018/0228351	A1	8/2018	Scott et al.	
2018/0256270	A1	9/2018	Cooper et al.	
2018/0271732	A1	9/2018	Yano et al.	
2018/0296284	A1	10/2018	Miller et al.	
2018/0303561	A1	10/2018	McCabe et al.	
2018/0344409	A1*	12/2018	Bonny	A61B 34/20
2018/0353055	A1	12/2018	Geiger et al.	
2019/0083191	A1	3/2019	Gilhooley et al.	
2019/0133791	A1	5/2019	Yadav et al.	
2019/0142518	A1	5/2019	Viscardi et al.	
2019/0142519	A1	5/2019	Siemionow et al.	
2019/0167352	A1	6/2019	Mahfouz	
2019/0175285	A1	6/2019	Siemionow et al.	
2019/0231436	A1	8/2019	Panse et al.	
2019/0246088	A1	8/2019	Casas	
2019/0307509	A1	10/2019	Jansen et al.	
2020/0281733	A1*	9/2020	Termanini	A61B 17/1764

FOREIGN PATENT DOCUMENTS

CN	104363826	A	2/2015
CN	107072784	A	8/2017
JP	2002523170	A	7/2002
JP	2002535068	A	10/2002
JP	2004500916	A	1/2004
JP	2004512136	A	4/2004
JP	2005013737	A	1/2005
JP	2006509609	A	3/2006
JP	2006102501	A	4/2006
JP	2008538184	A	10/2008
JP	2009515650	A	4/2009
JP	2010540180	A	12/2010
JP	2011172920	A	9/2011

JP	2013541966	A	11/2013
JP	2018509277	A	4/2018
JP	2019088781	A	6/2019
WO	2007096322	A2	8/2007
WO	2018103945	A1	6/2018
WO	2018104439	A1	6/2018
WO	2018104523	A1	6/2018
WO	2019032849	A2	2/2019

OTHER PUBLICATIONS

Hubert Gotte: "Forschungsberichte iwb", Band 165, "Entwicklung eines Assistenzrobotersystems für die Knieendoprothetik", 263 pages.
 Hubert Gotte: Google translation of the above NPL, 227 pages—attached.

M. Jakopeć, et al.; "The First Clinical Application of Hands-On" Robotic Knee Surgery System, Computer Aided Surgery, 6:6 329-339, DOI: 10.3109/10929080109146302, <https://doi.org/10.3109/10929080109146302> (2001).

Malvisi et al.; "Milling versus Sawing: Comparison of Temperature Elevation and Clinical Performance During Bone Cutting. <http://www.ior.it/biomec/>, 7 pages.

M. Martelli et al: Computer- and Robot-Assisted Total Knee Replacement: Analysis of a New Surgical Procedure, Annals of Biomedical Engineering, vol. 28, pp. 1146-1153, 2000.


C. Plaskos et al.; "Praxiteles: a miniature bone-mounted robot for minimal access total knee arthroplasty", Omt. J Medical Robotics and Computer Assisted Surgery, 2005;1(4) 67-79.

A. Malvisi et al.; "A Robotic System for Total Knee Replacement", 2001 IEEE/ASME, International Conference on Advanced Intelligent Mechatronics Proceedings, 8-12, Jul. 2001, pp. 1047-1052, Como, Italy.

M. Roth et al.; "A New Less Invasive Approach to Knee Surgery Using Vision-Guided Manipulator", Article, Dec. 2000, 9 pages.

D. Schneider, Ph.D. and J. Troccaz Ph.D.: "A Six-Degree-of-Freedom Passive Arm with Dynamic Constraints (PADyC) for Cardiac Surgery Application: Preliminary Experiments", Biomedical Paper, Computer Aided Surgery, 6:340-351 (2001).

* cited by examiner

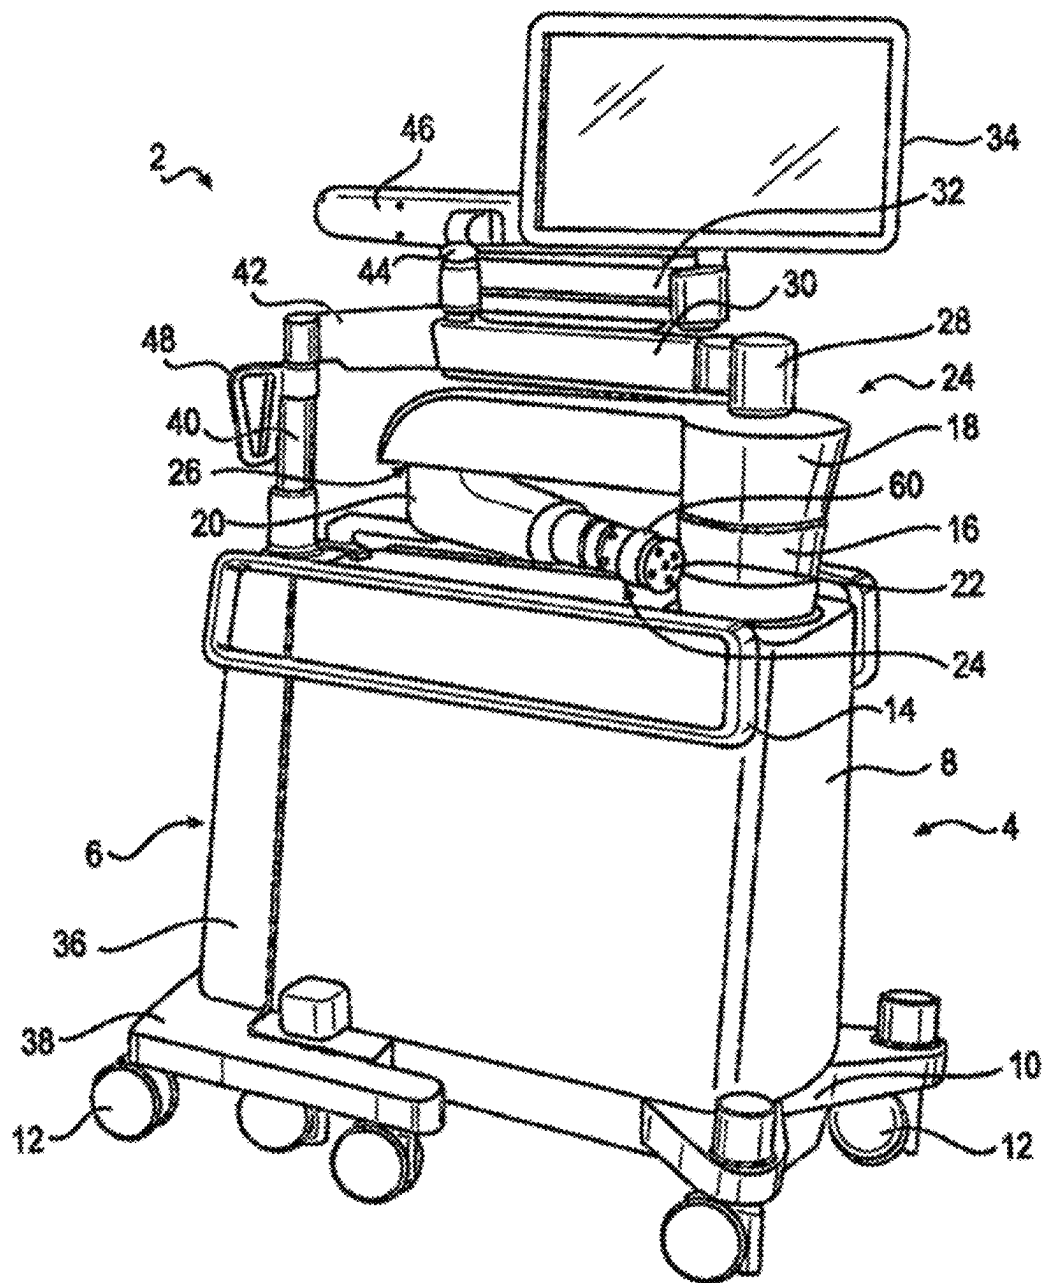**Figure 1**

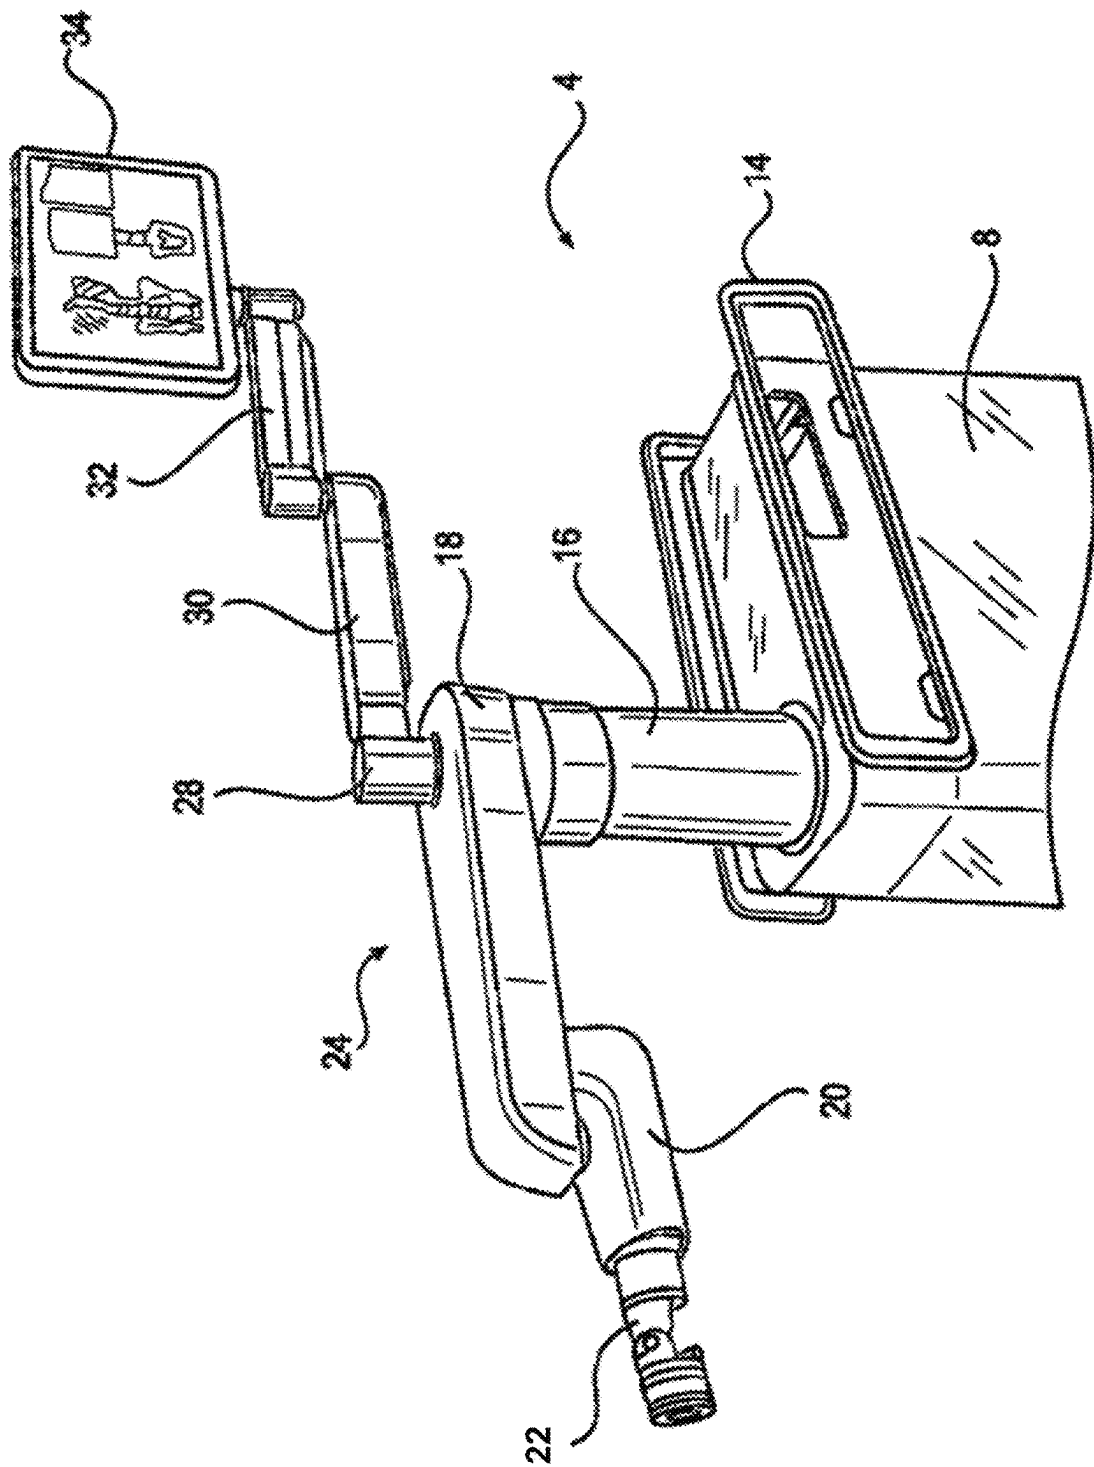


Figure 2

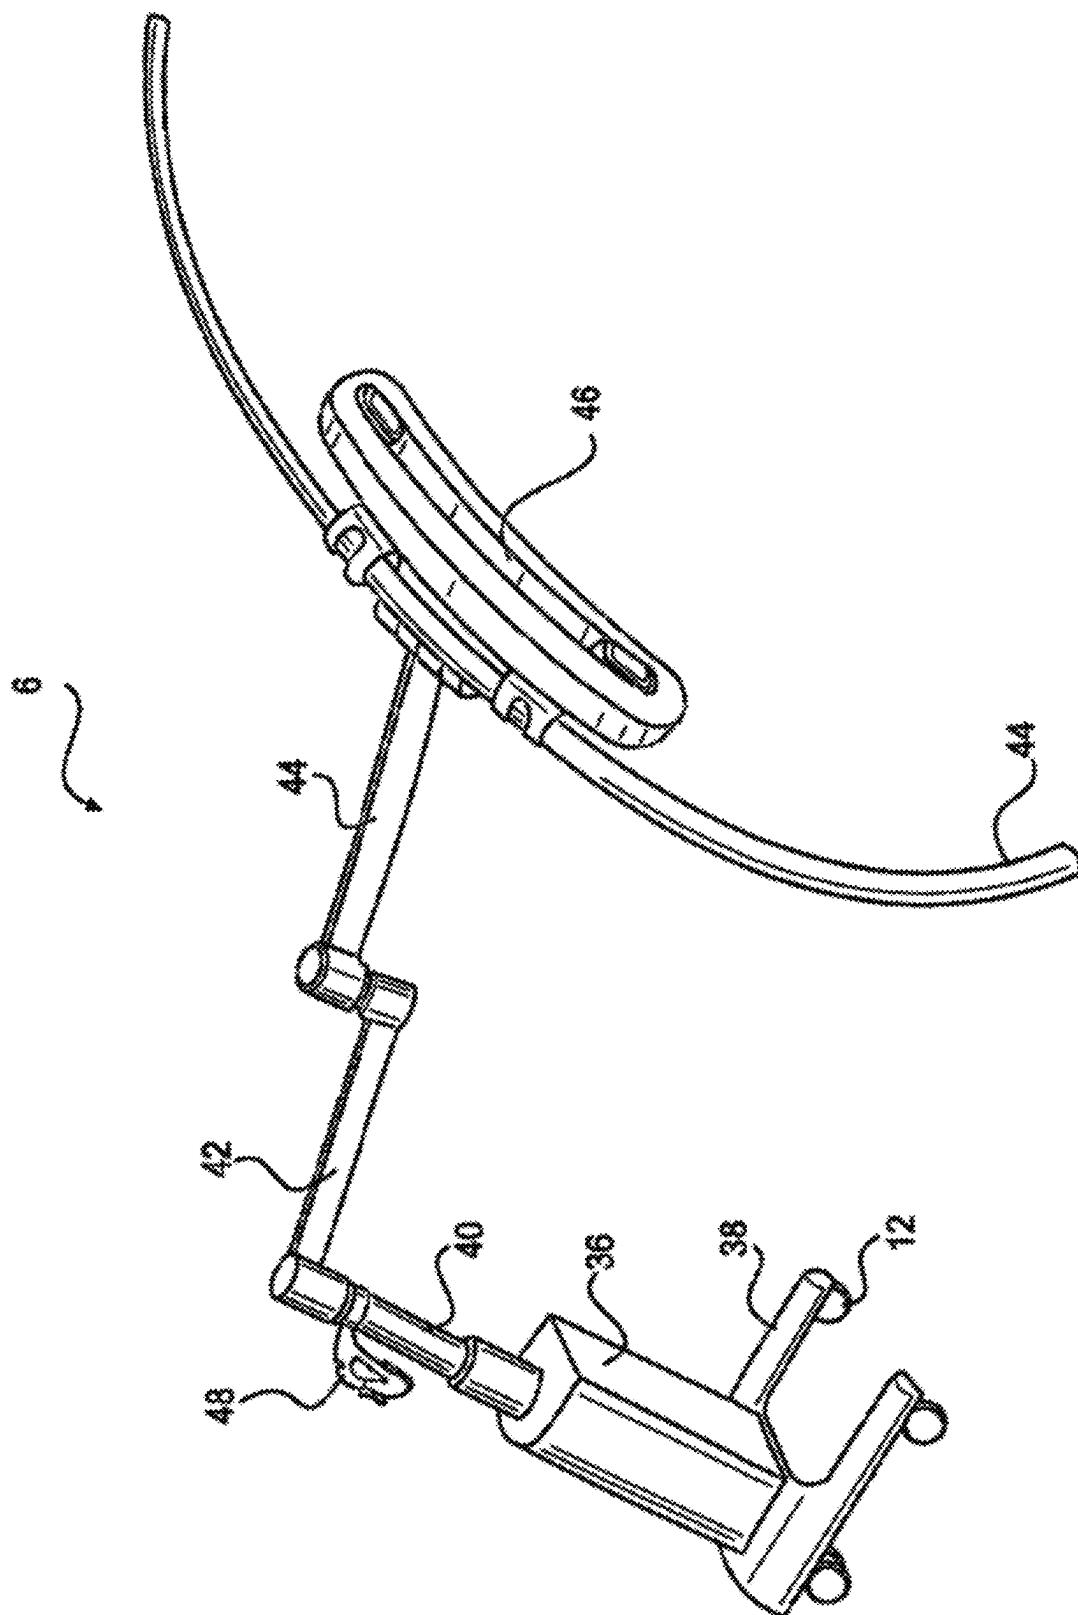
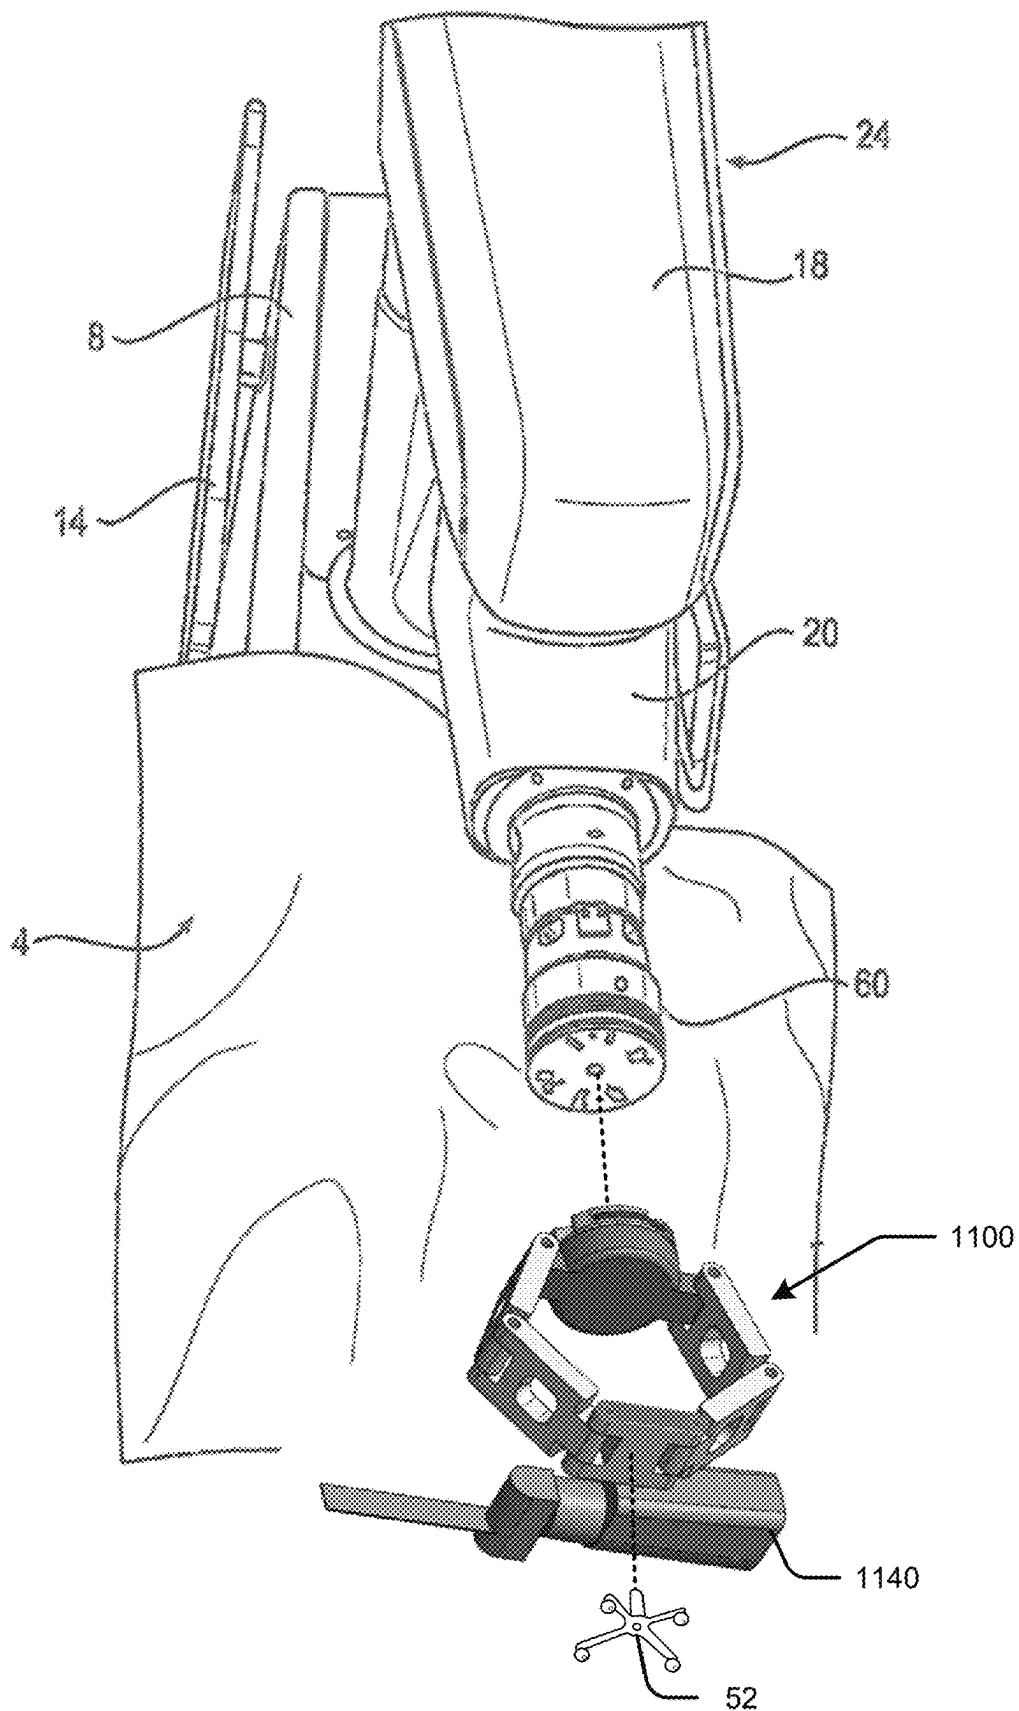


Figure 3

**Figure 4**

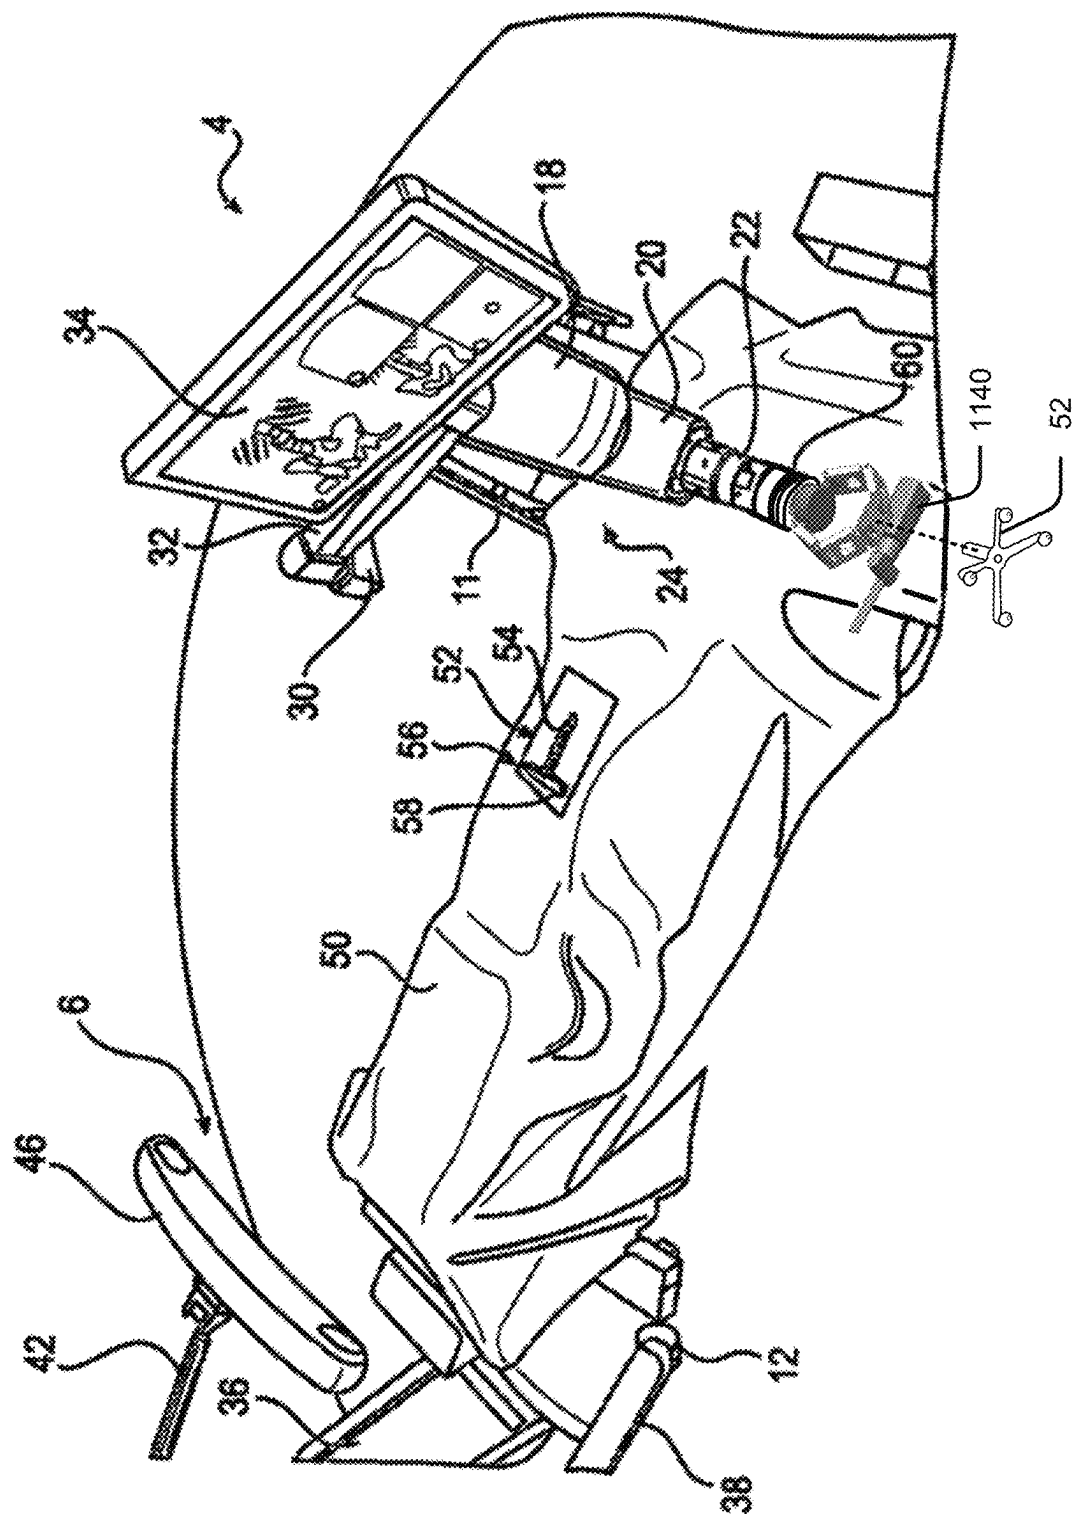


Figure 5

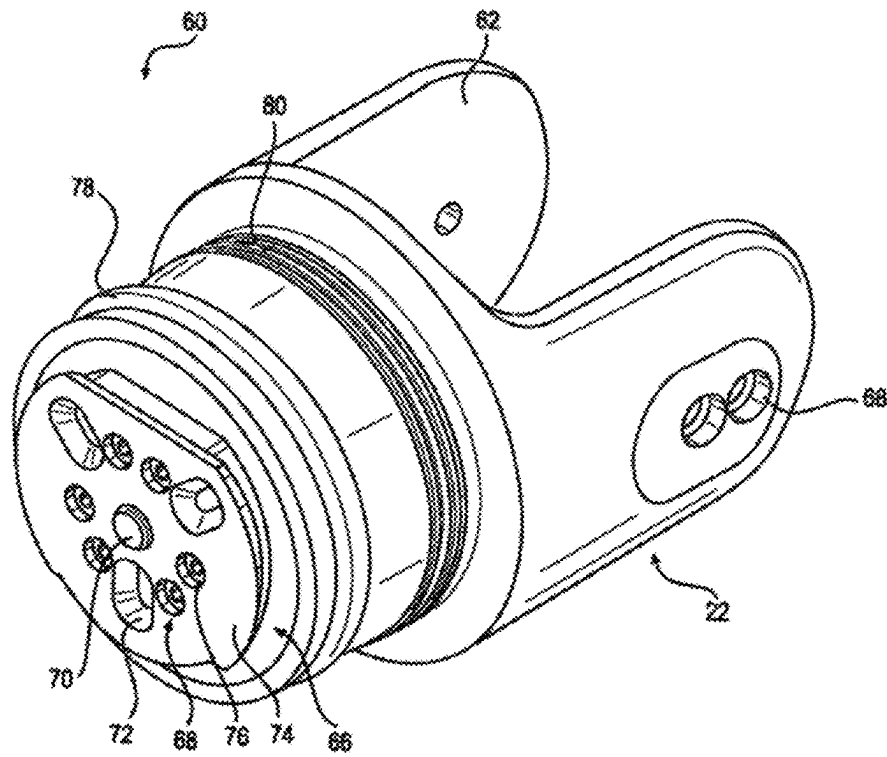


Figure 6

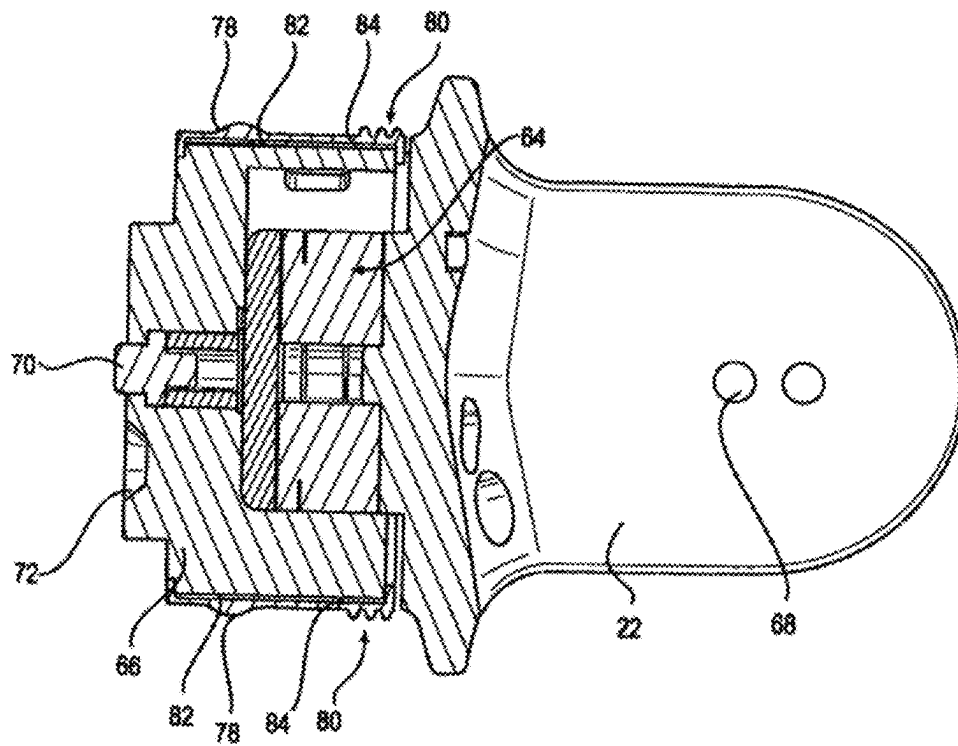


Figure 7

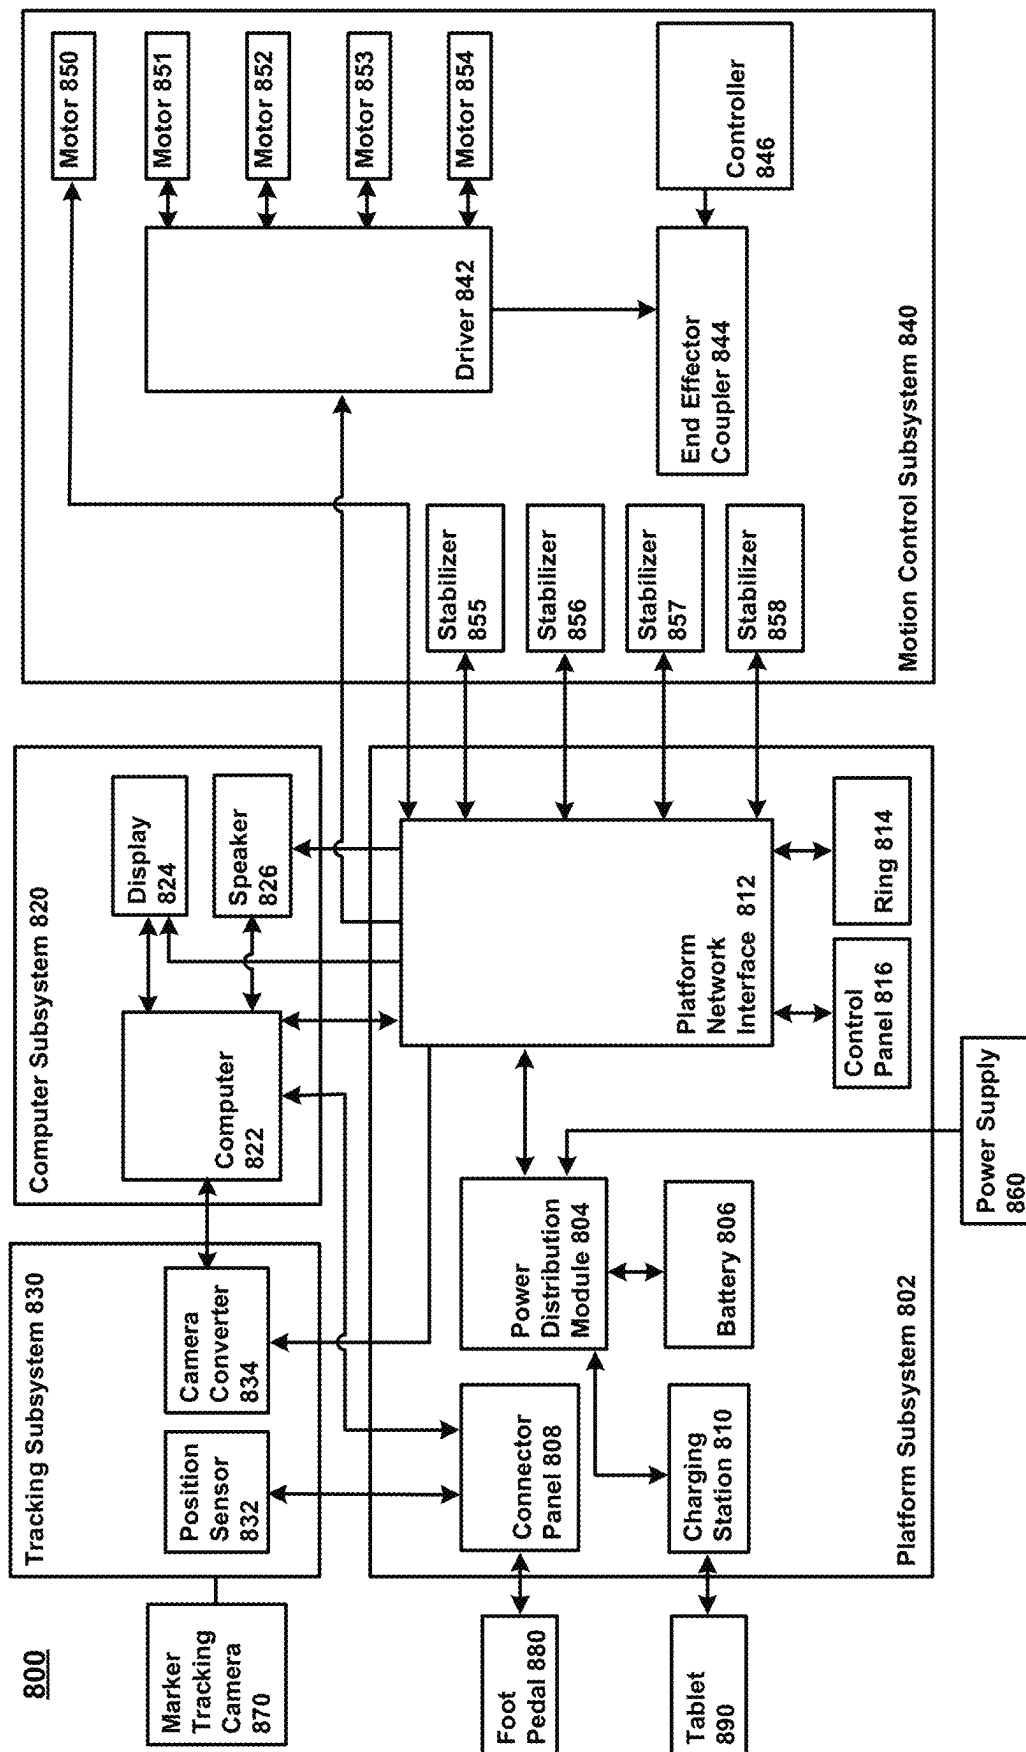
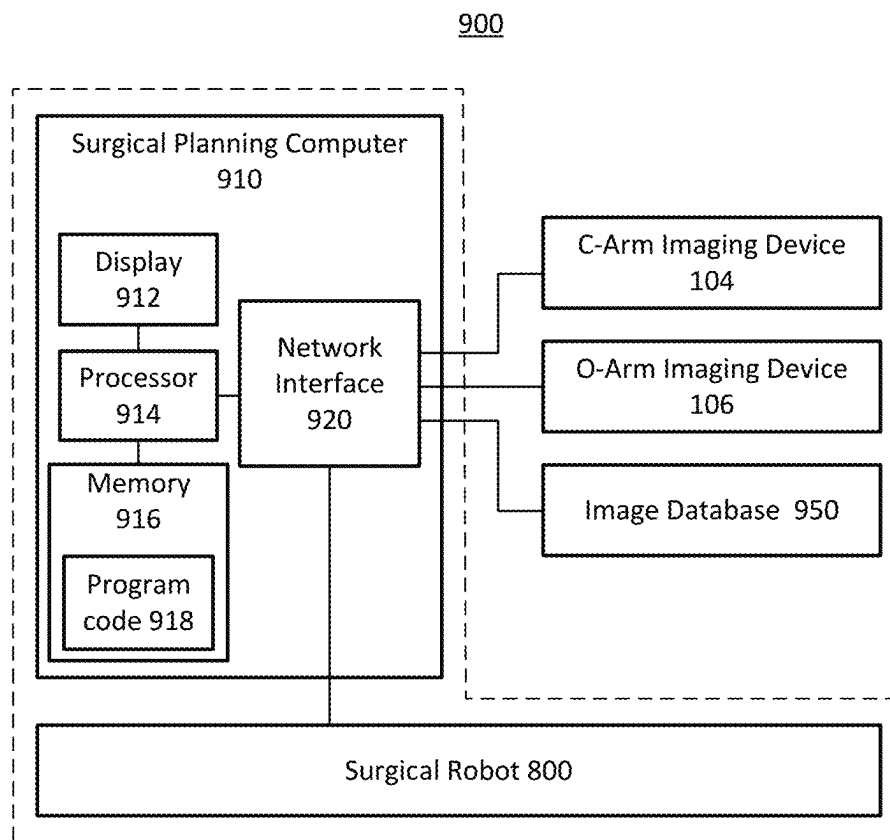


Figure 8

**Figure 9**

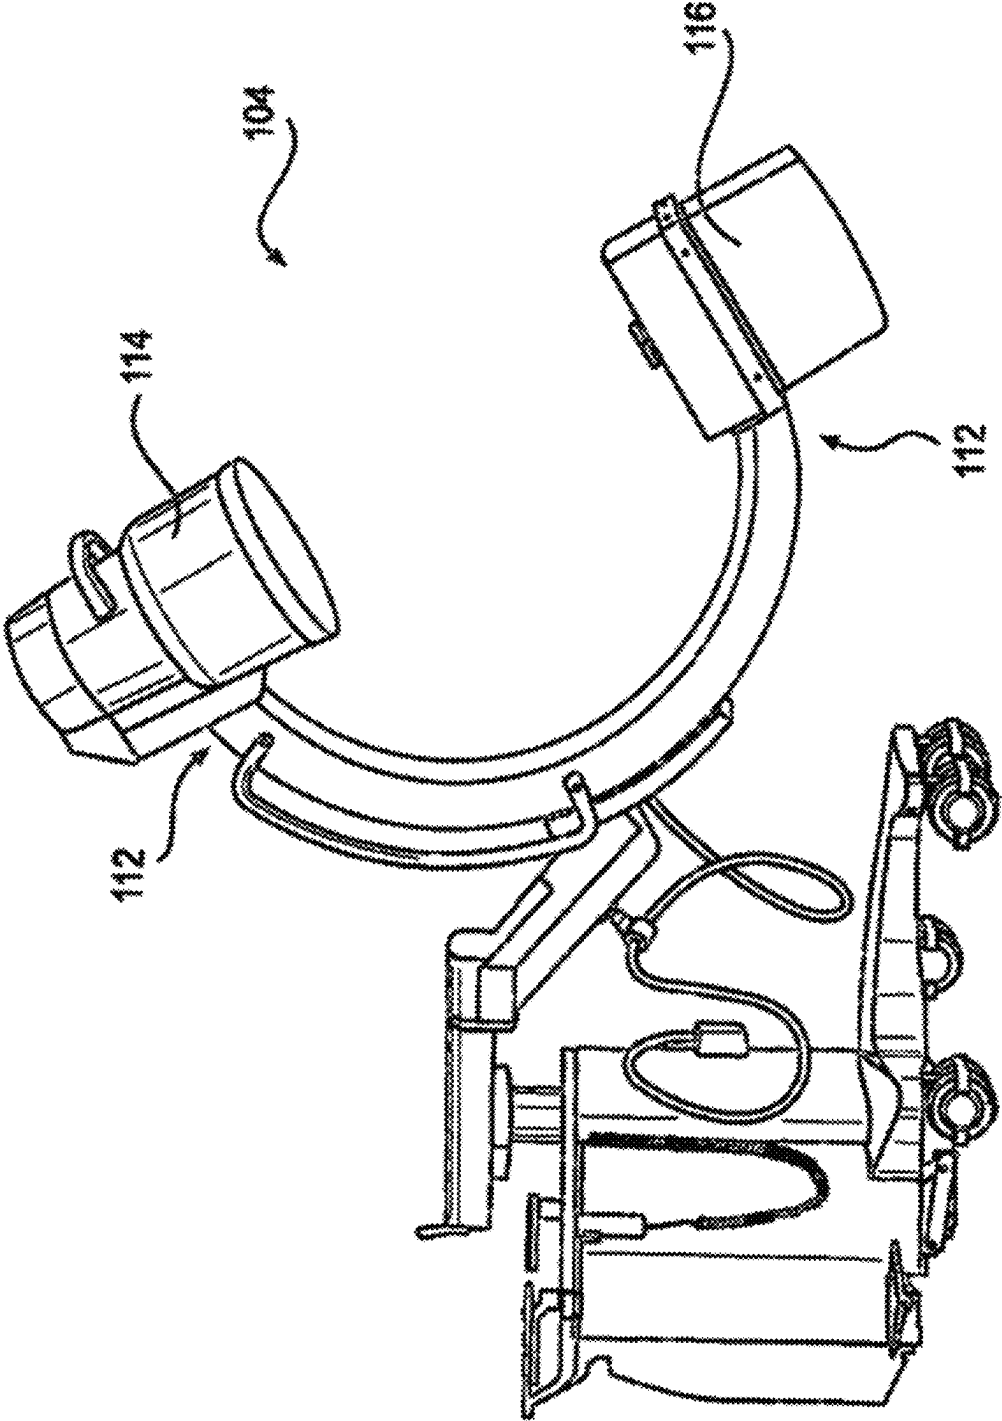


Figure 10

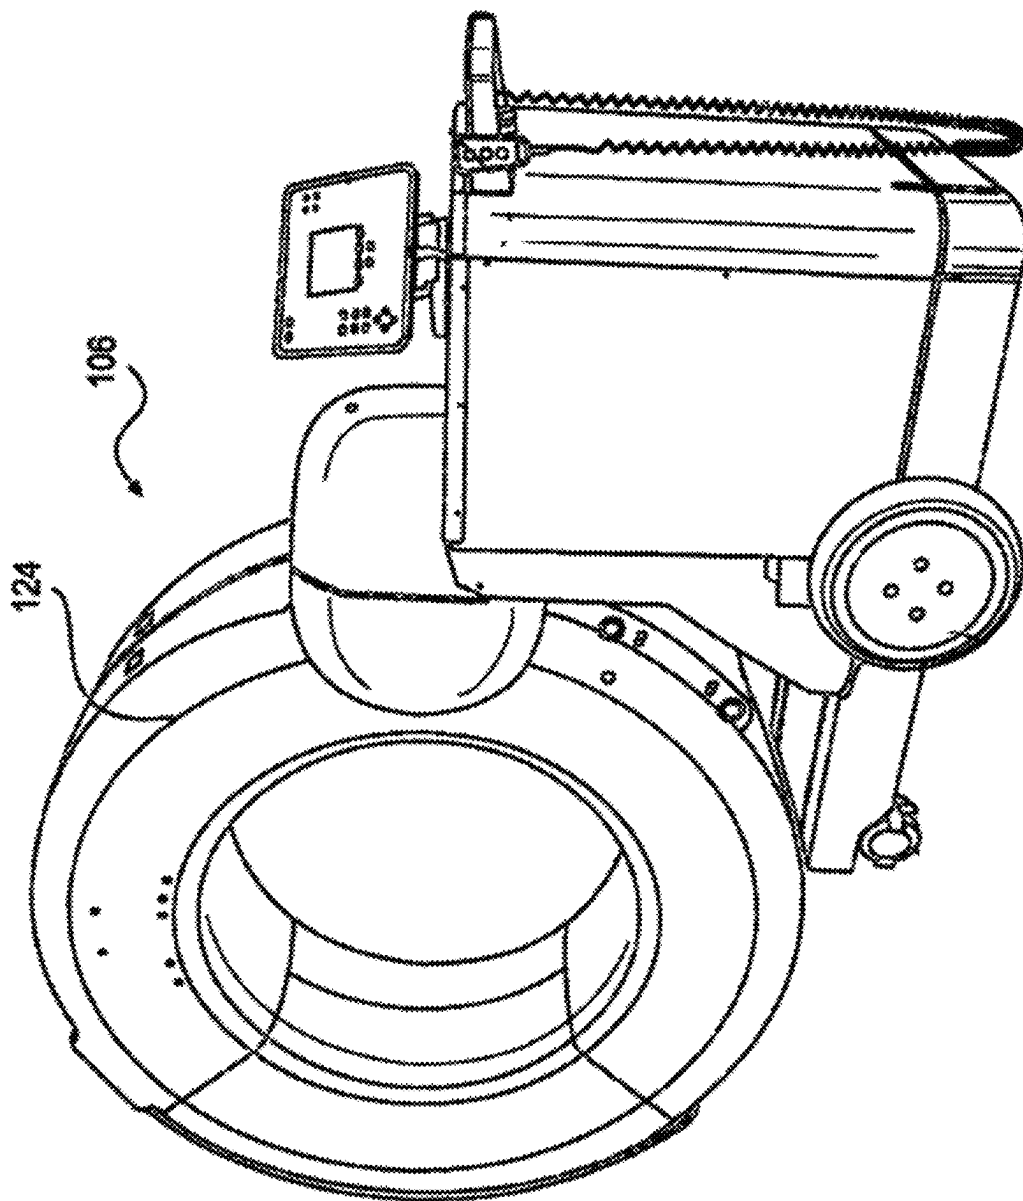


Figure 11

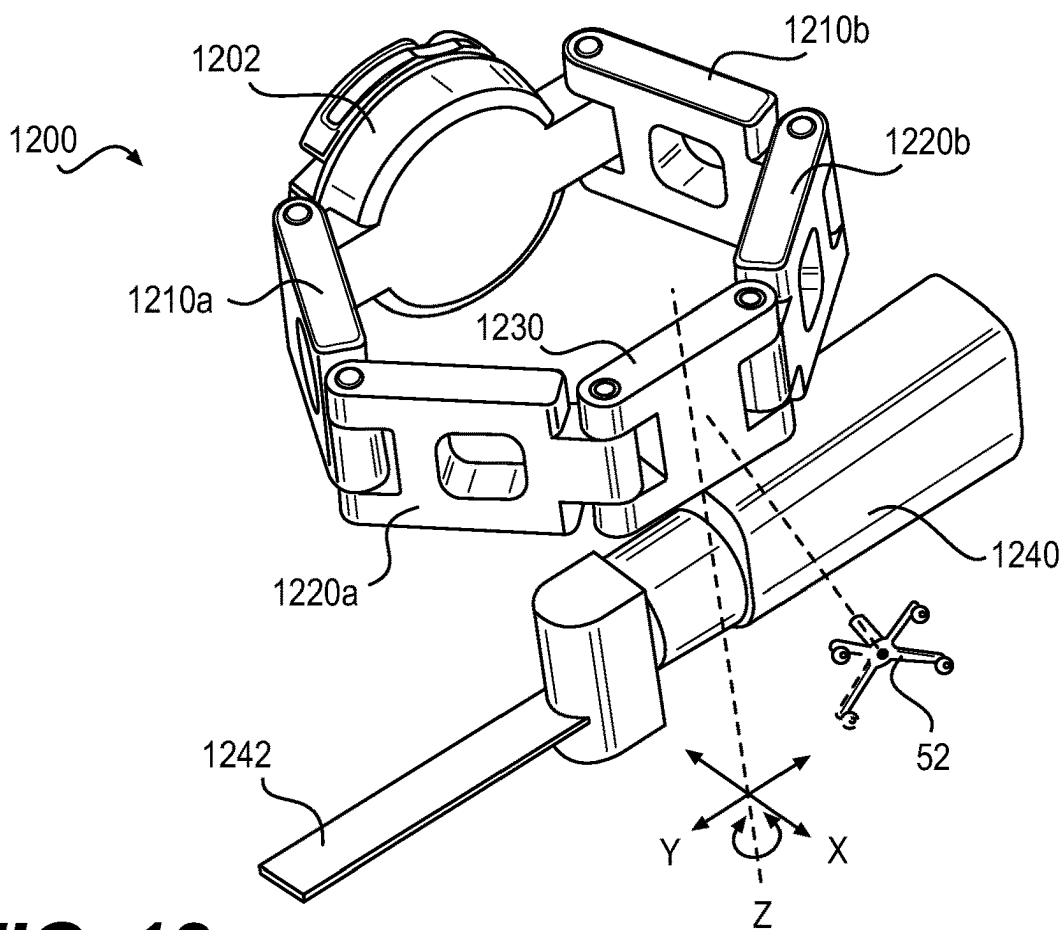


FIG. 12

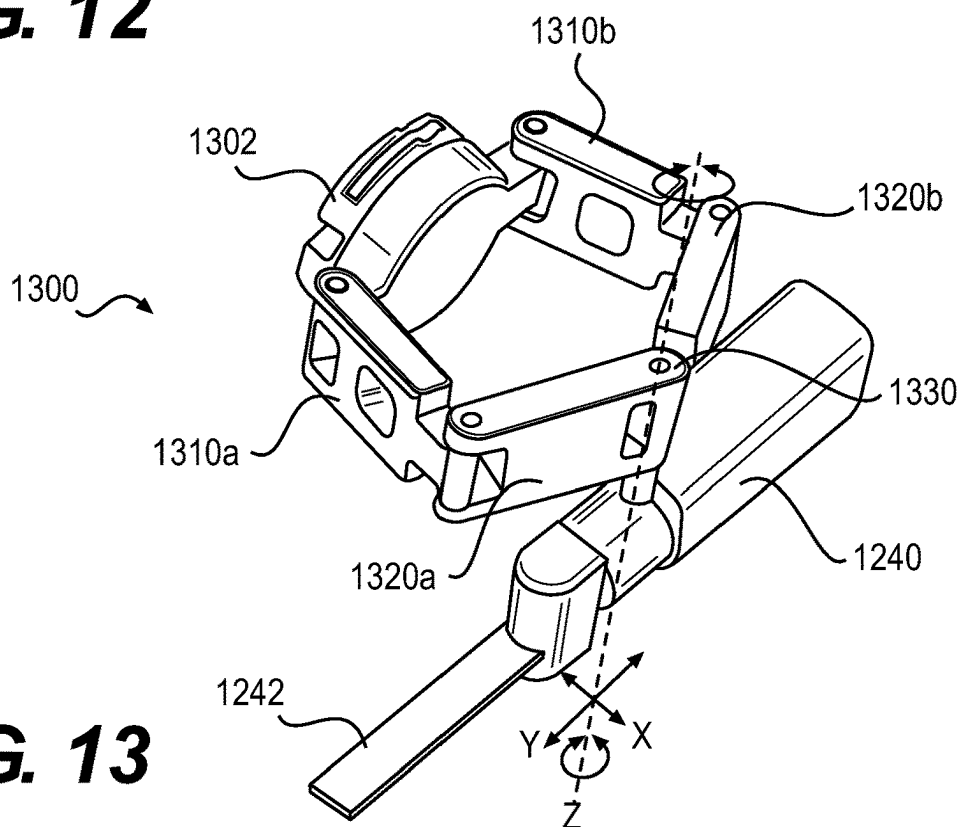
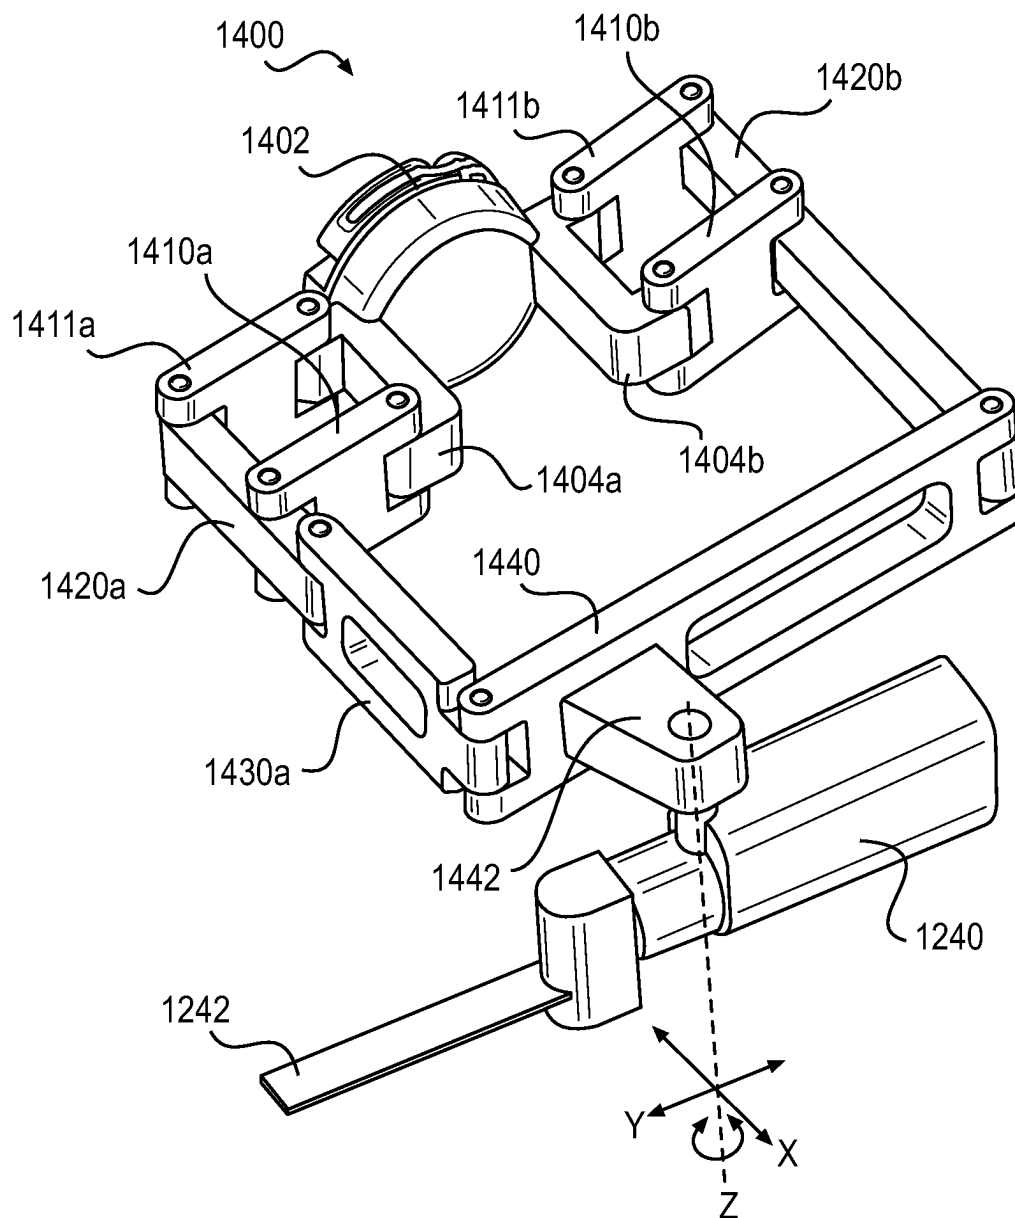
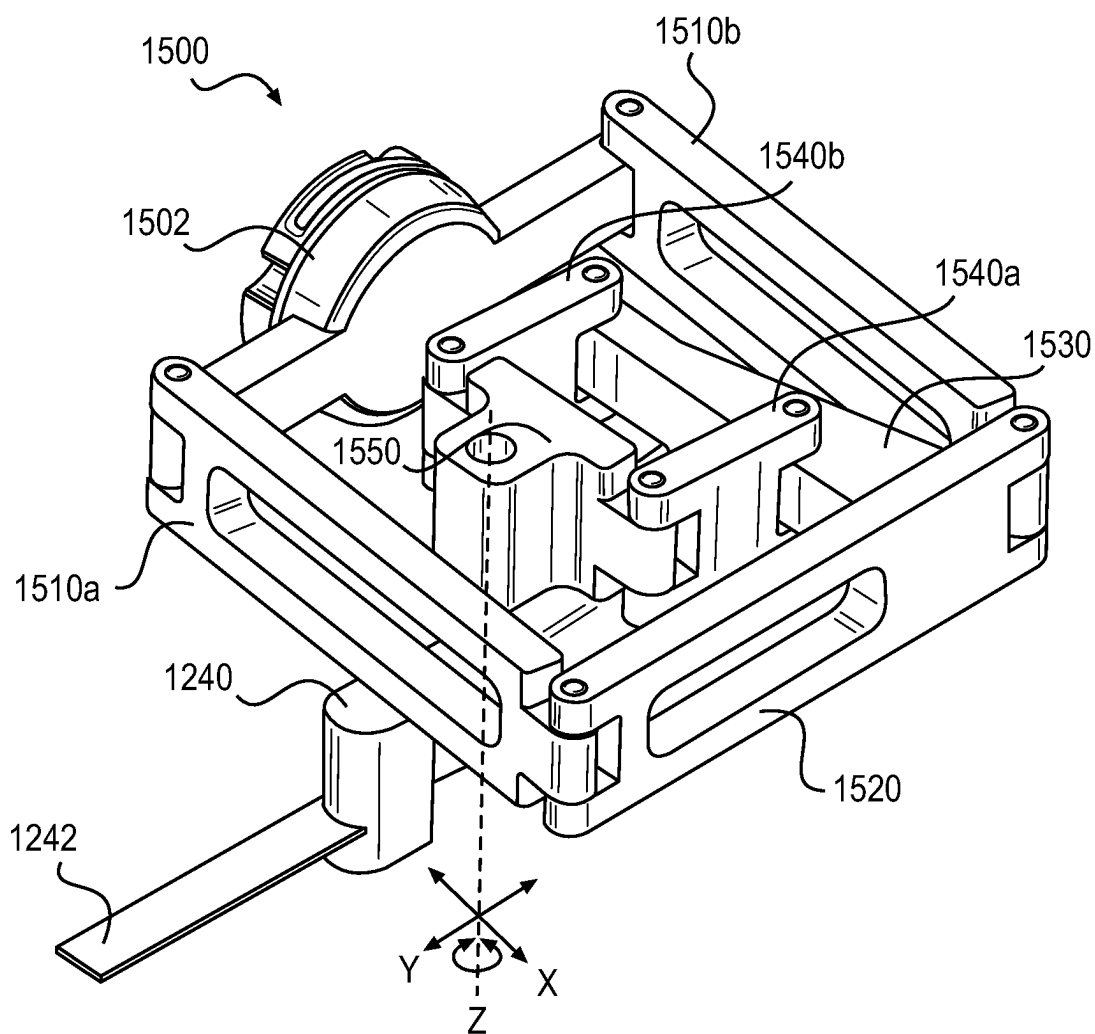
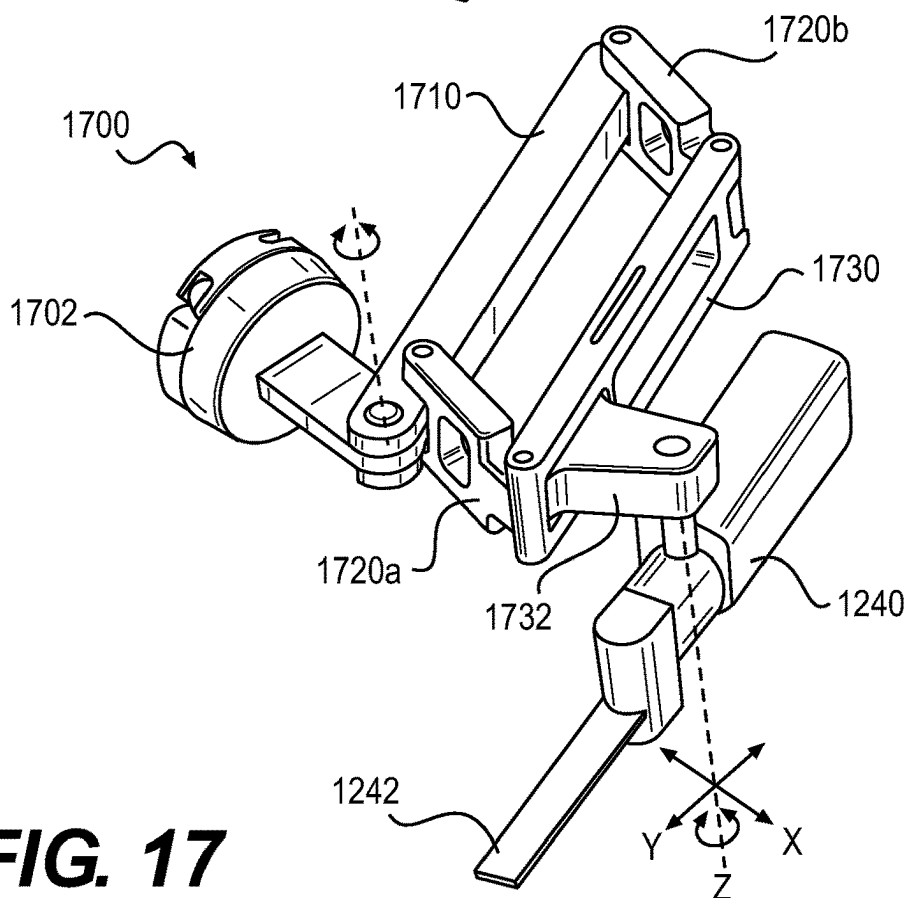
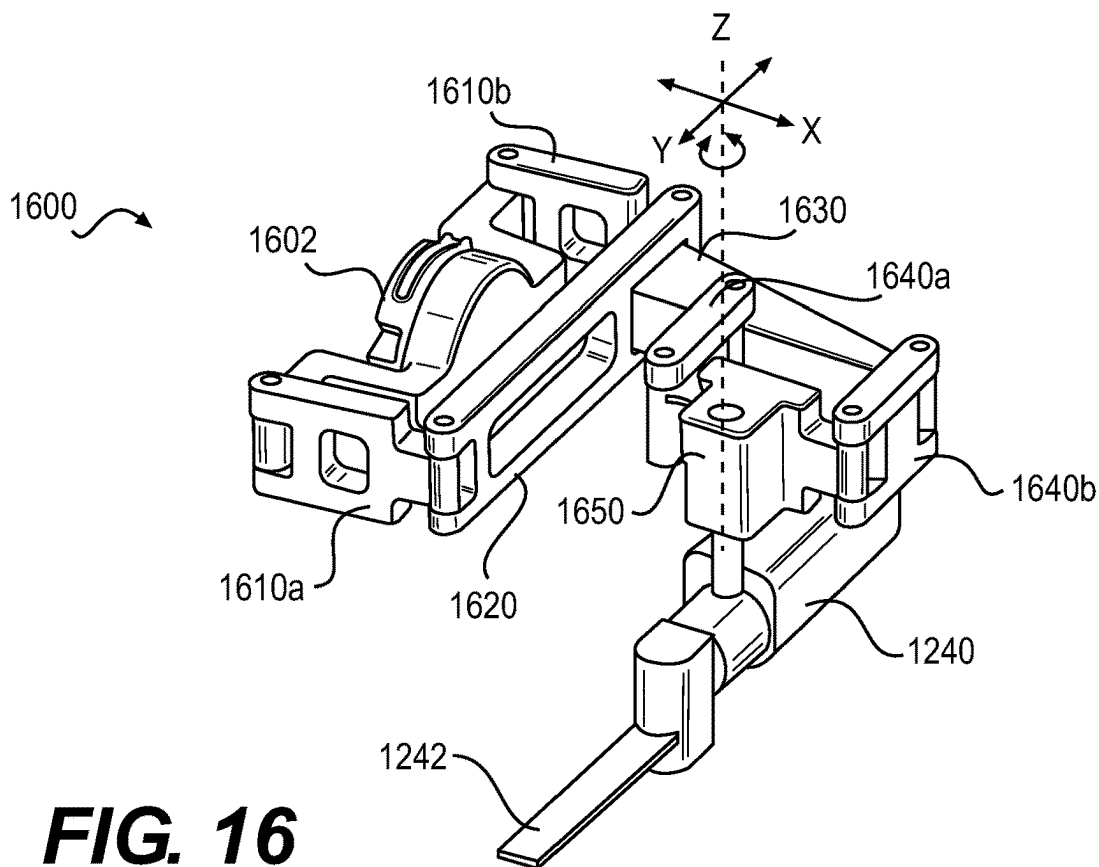
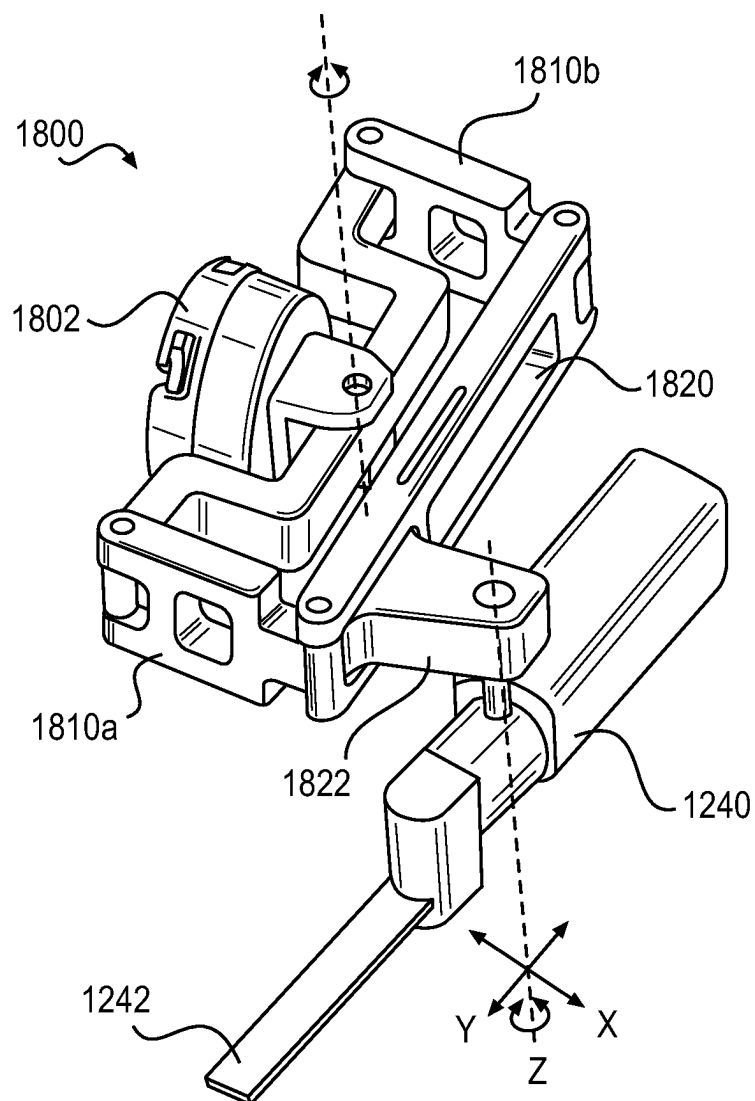


FIG. 13

**FIG. 14**

**FIG. 15**



**FIG. 18**

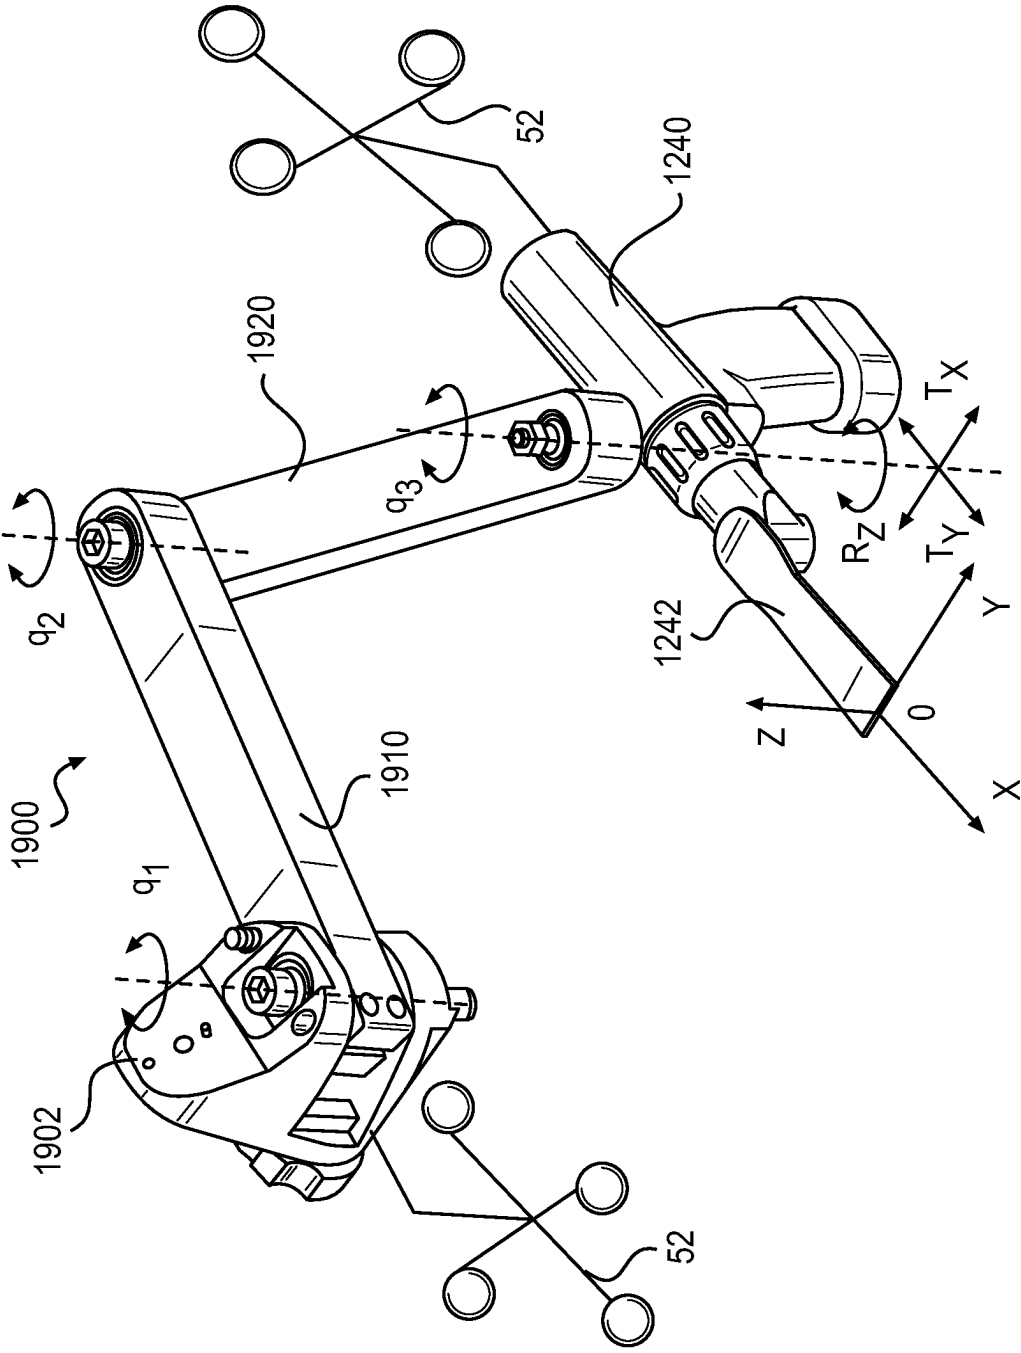


FIG. 19

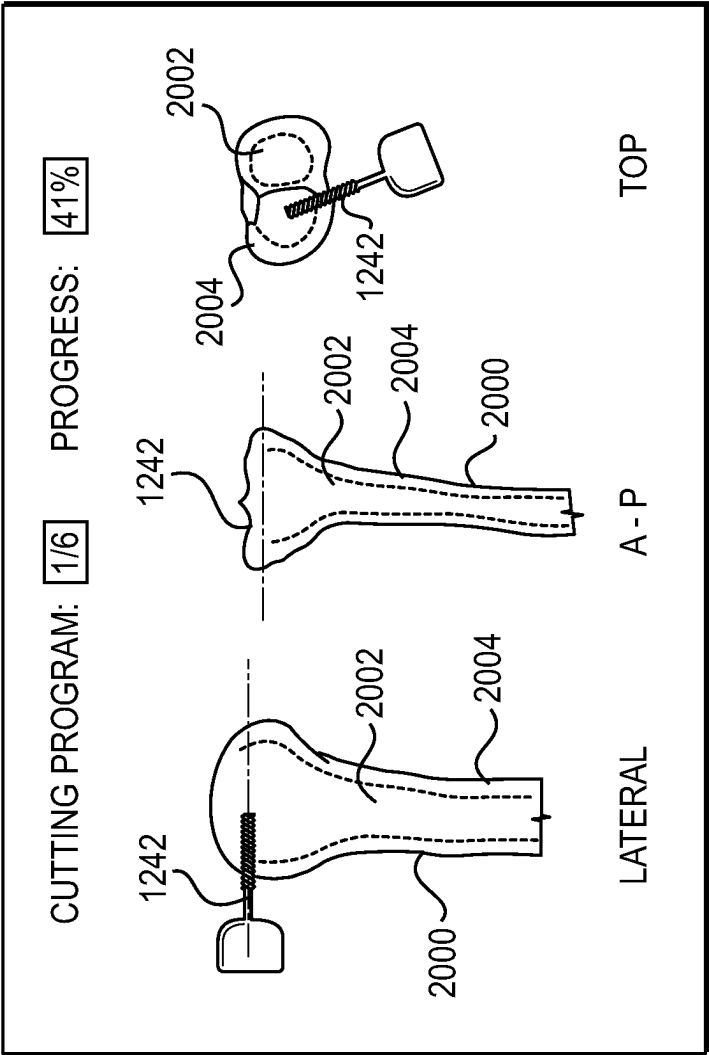


FIG. 20

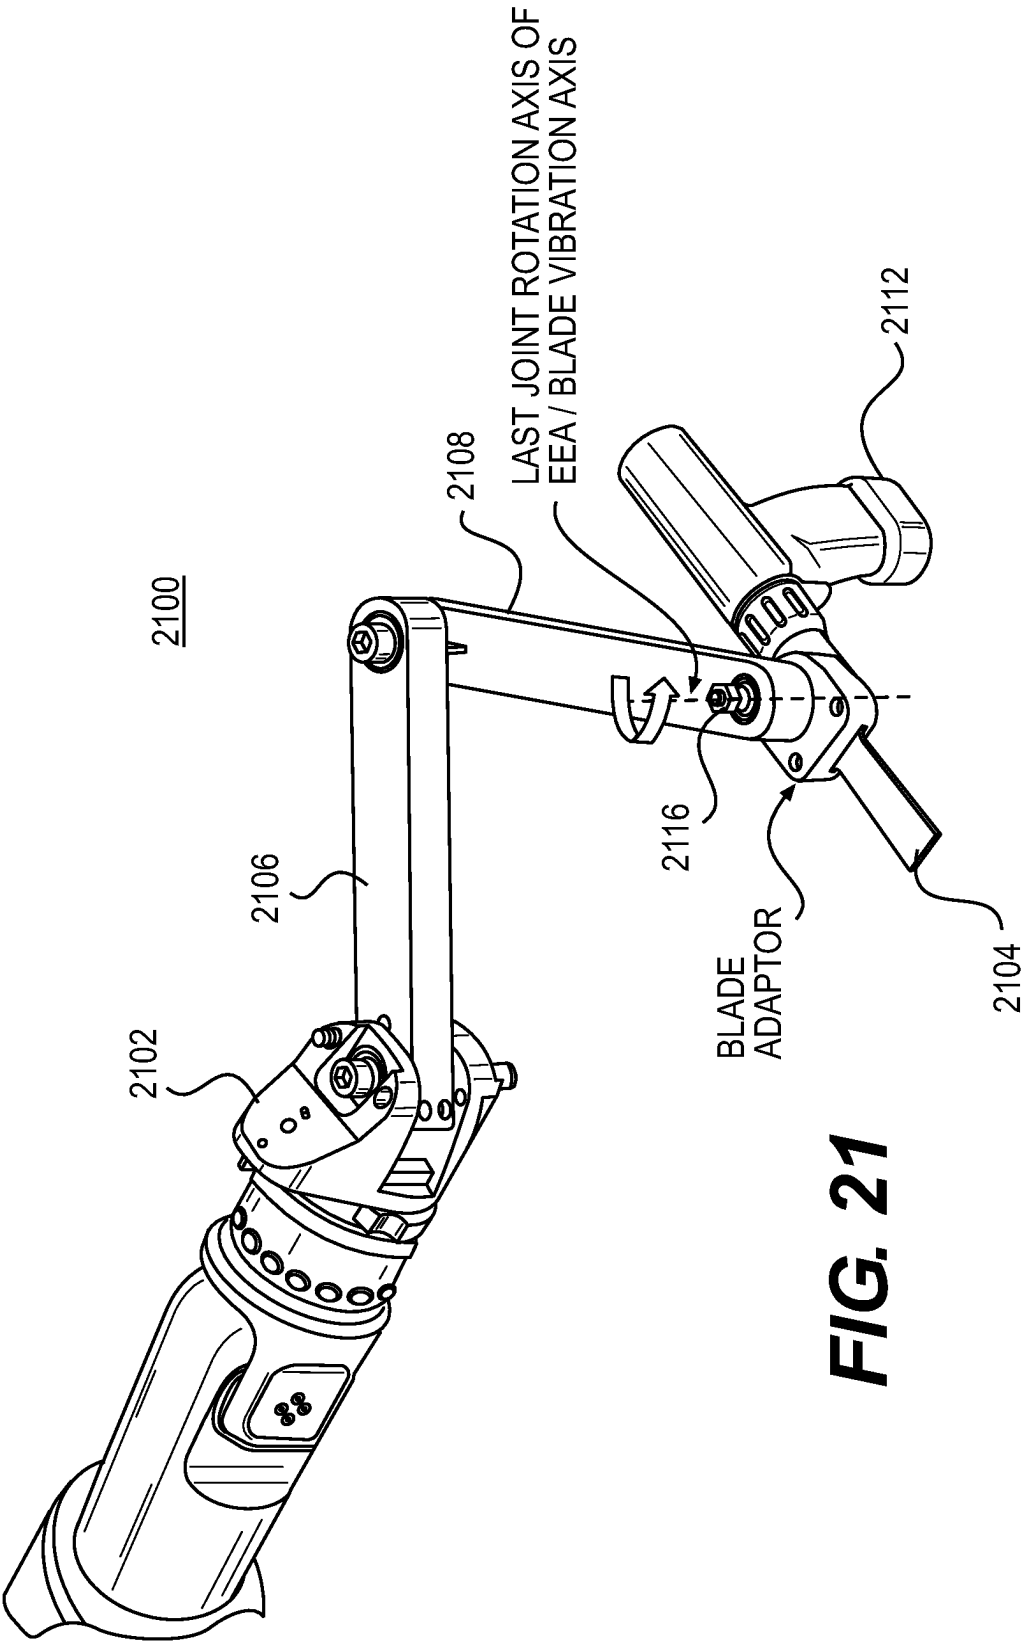


FIG. 21

2200

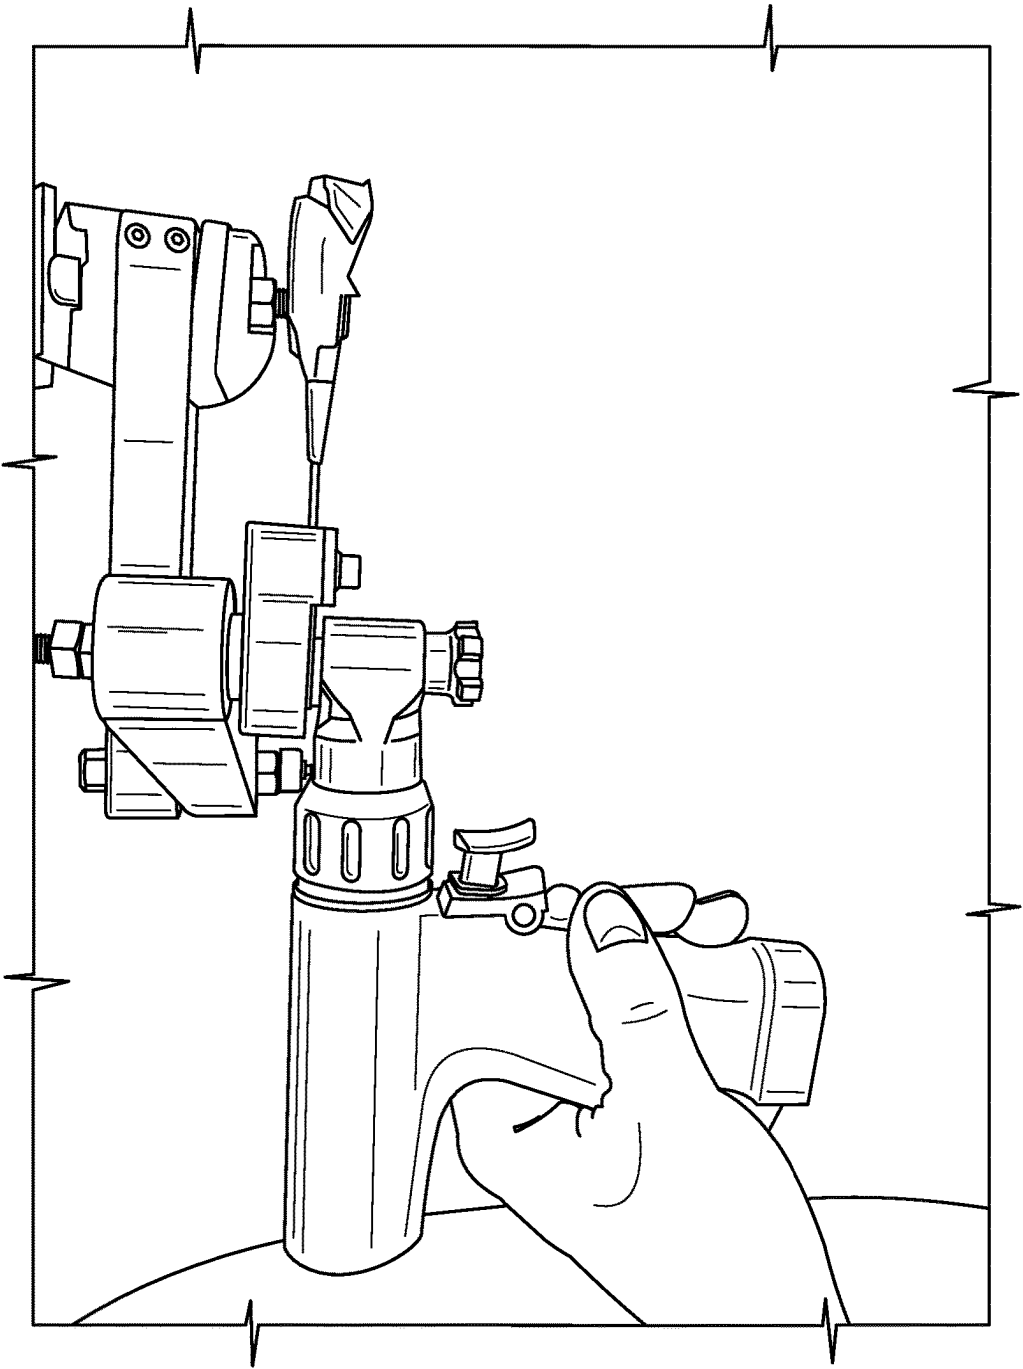


FIG. 22

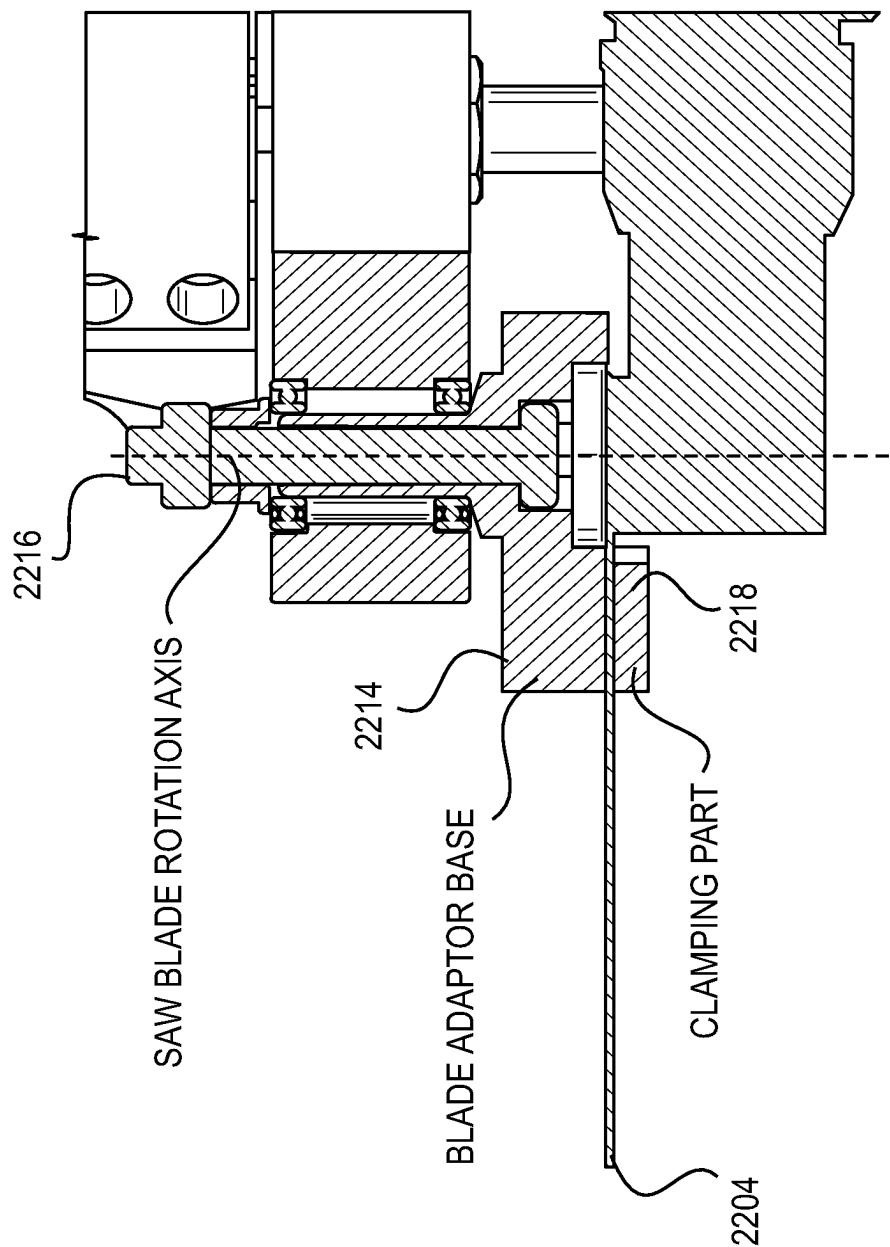


FIG. 23

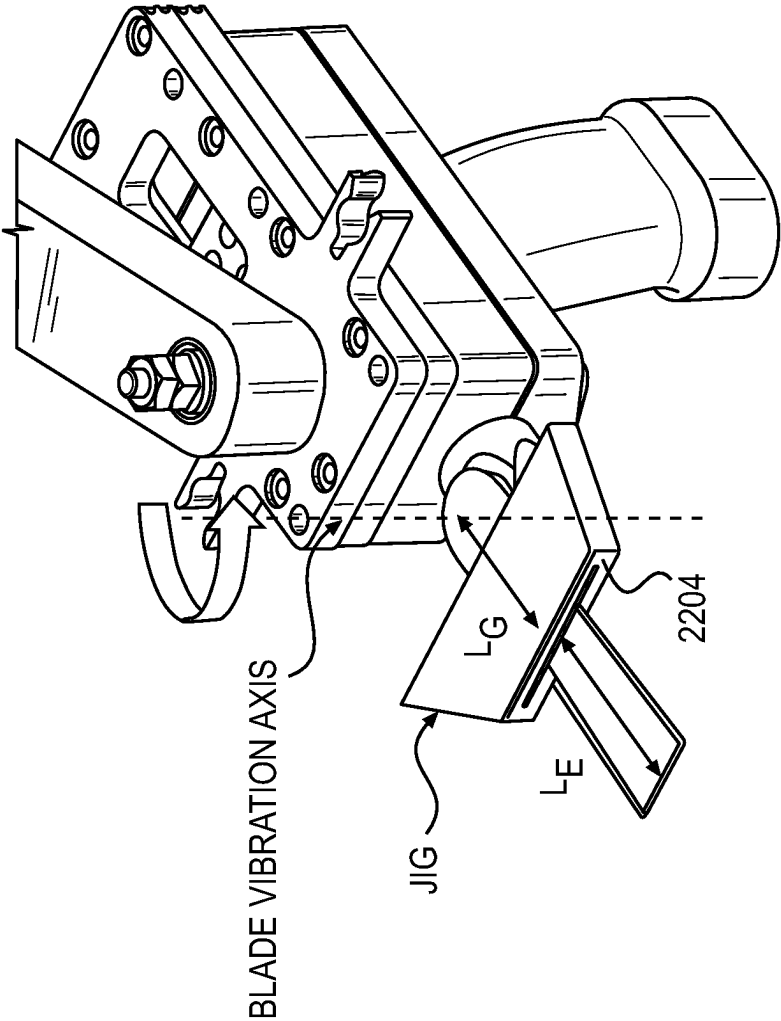


FIG. 24

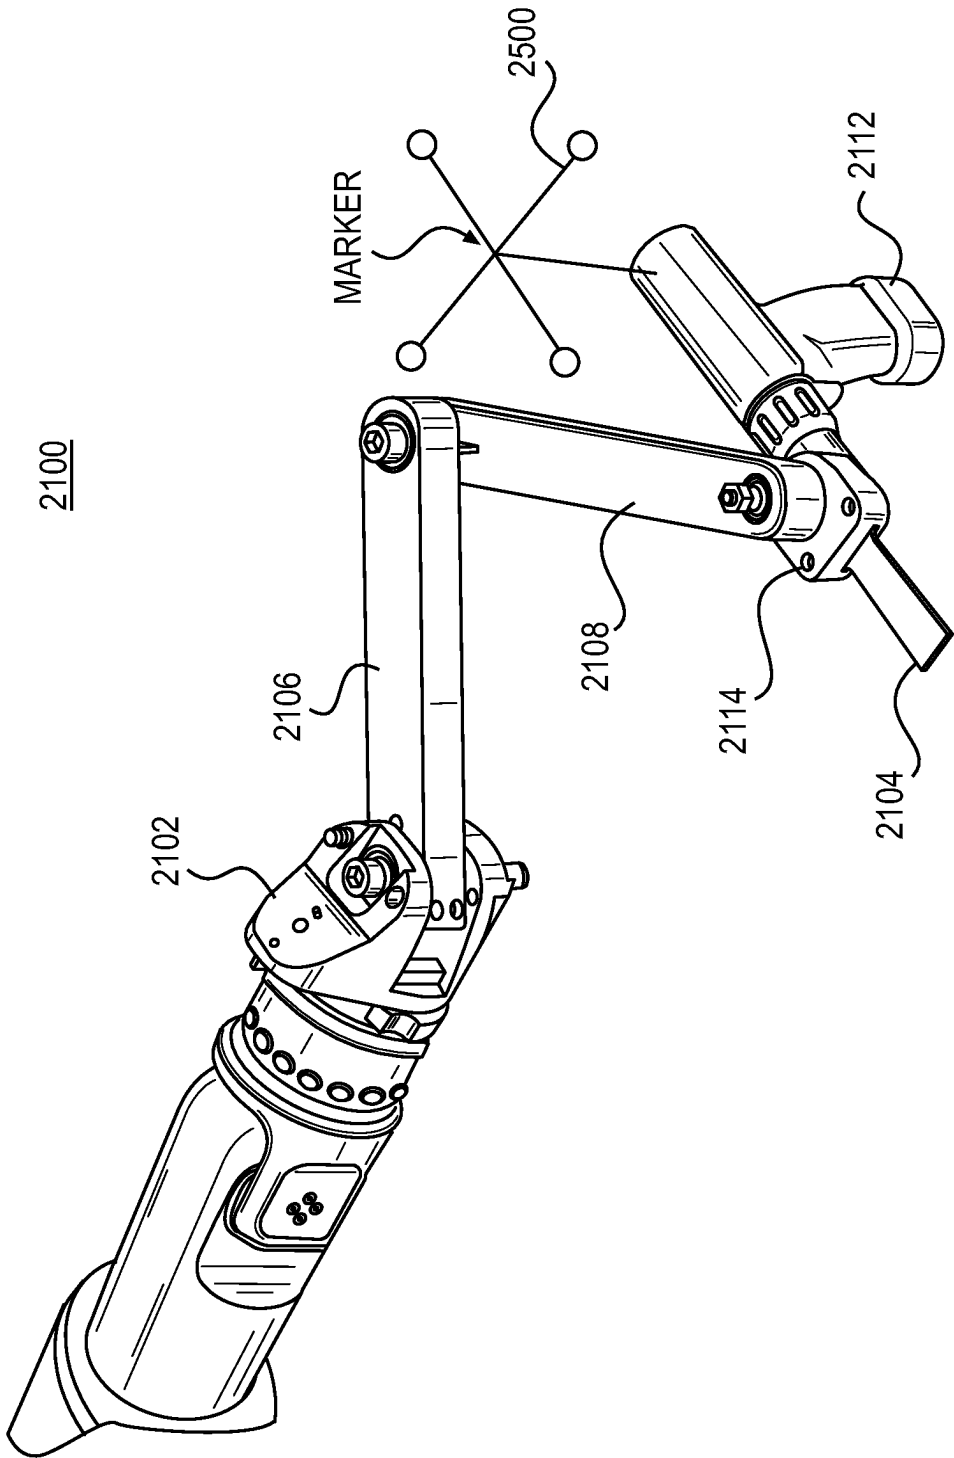
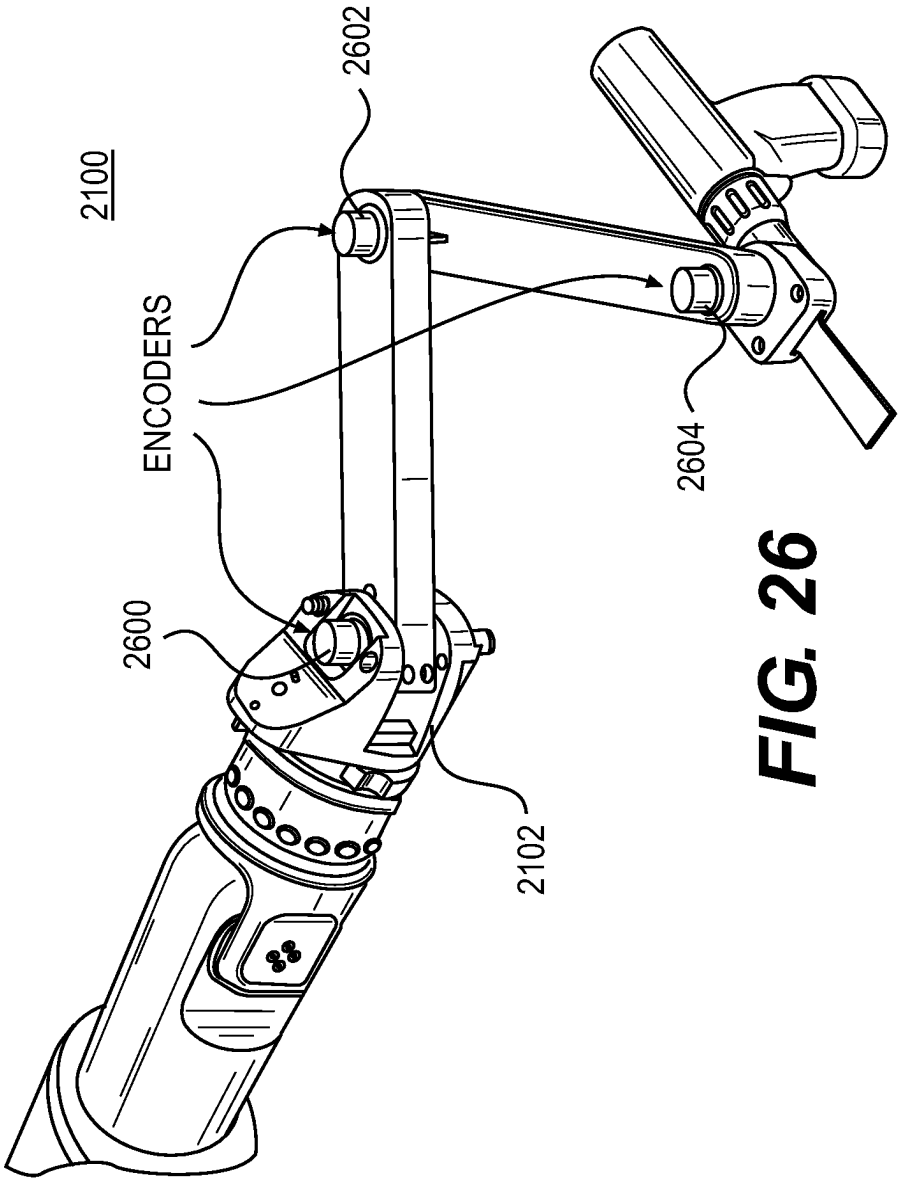


FIG. 25



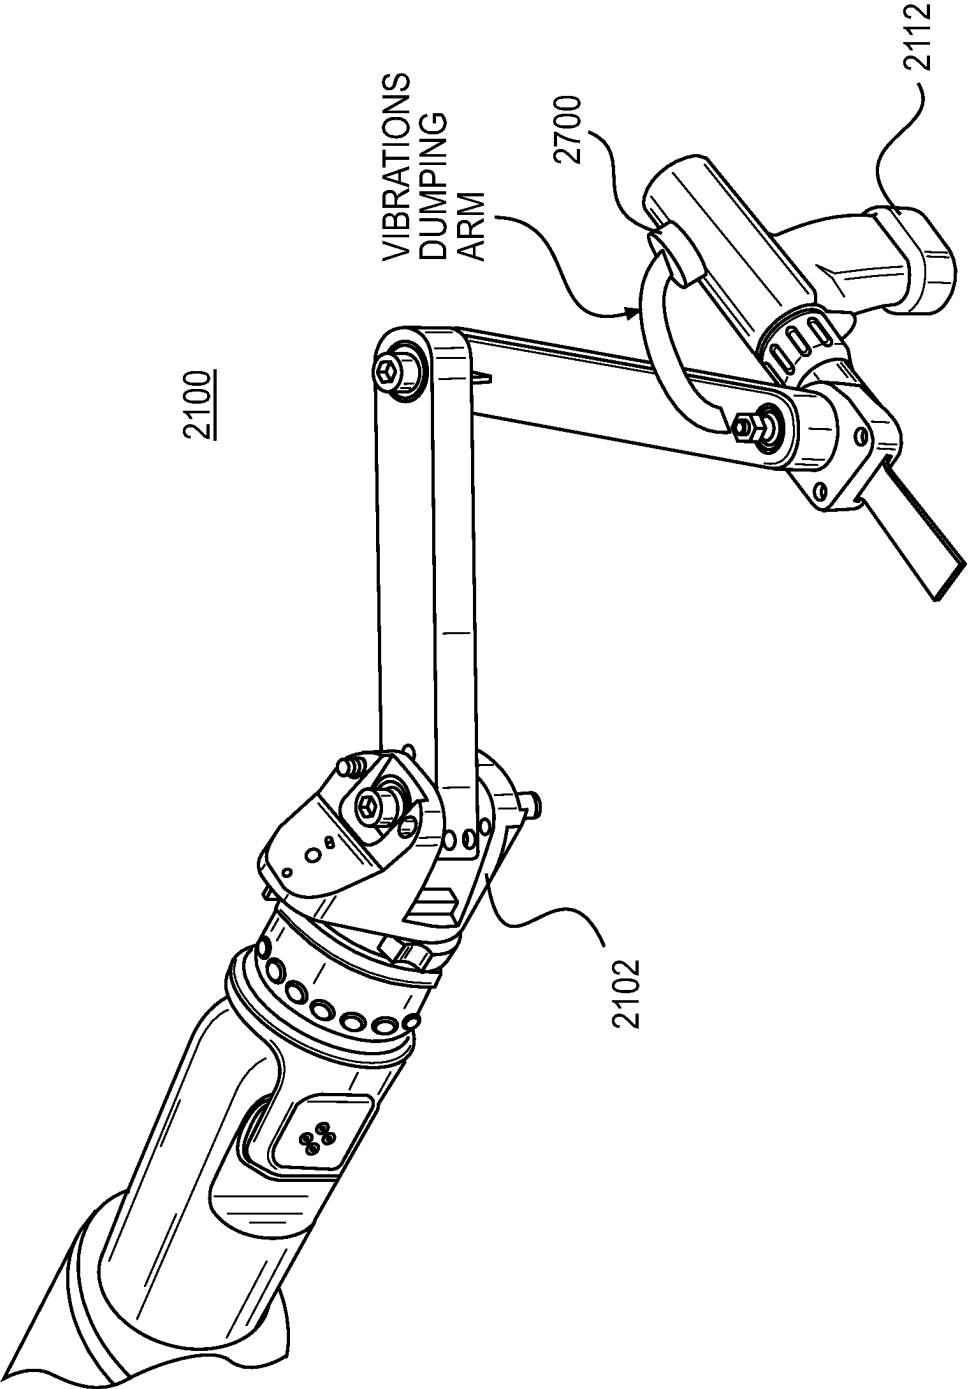


FIG. 27

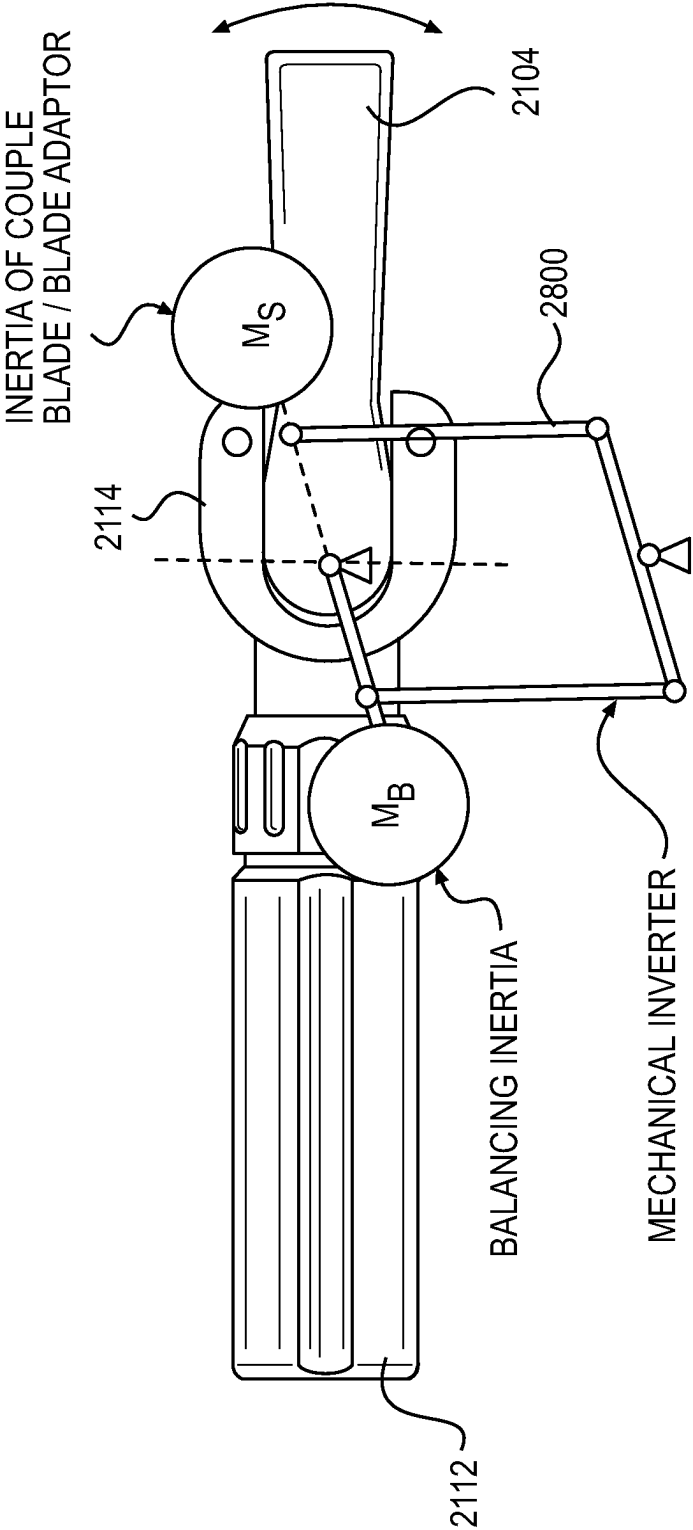


FIG. 28

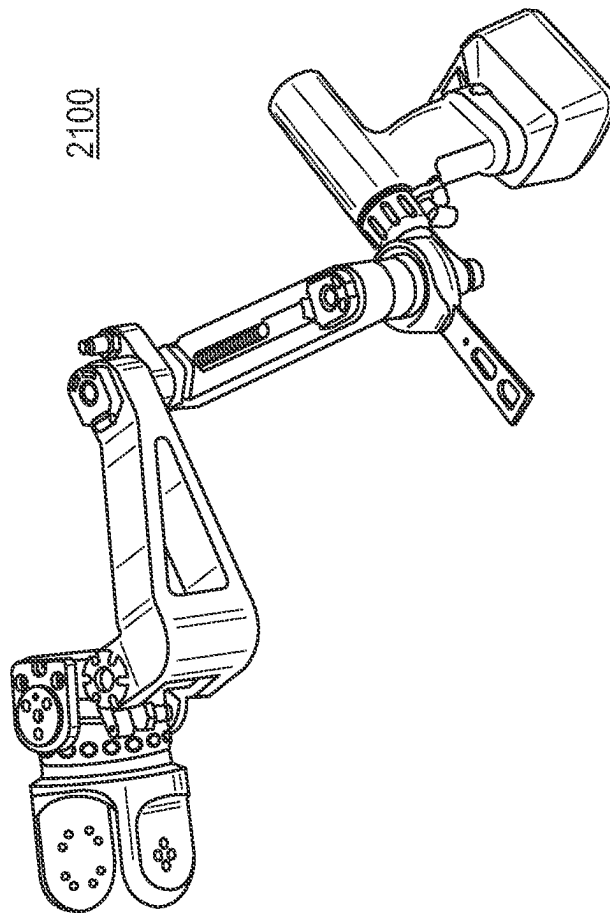


FIG. 29


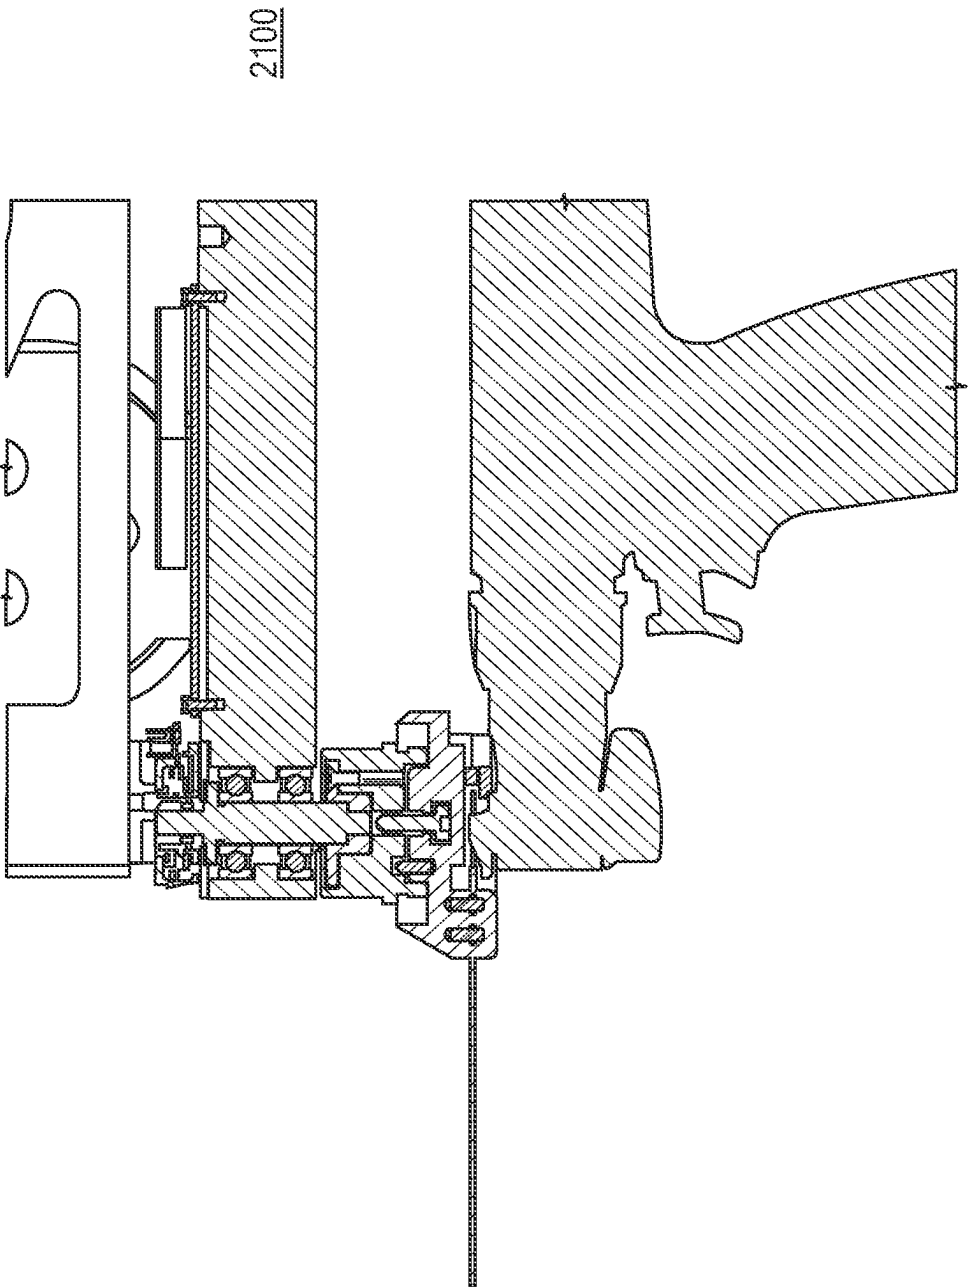


FIG. 30

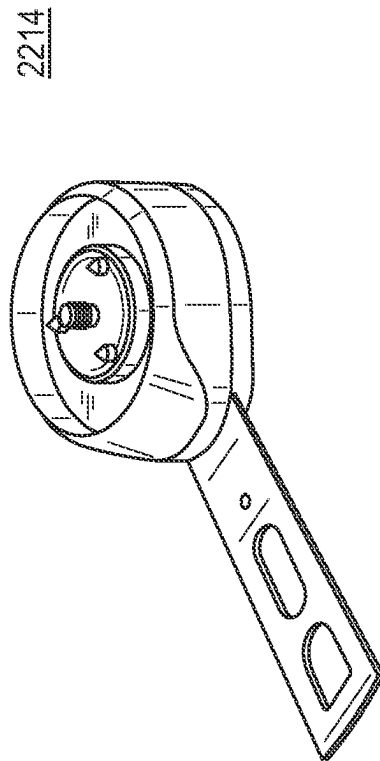

BALANCED IF: $I_{B,A} = I_{S,A}$

MATERIAL AND GEOMETRY OF BALANCING
INERTIA CAN BE ADAPTED TO BLADE + BLADE
ADAPTOR INERTIA

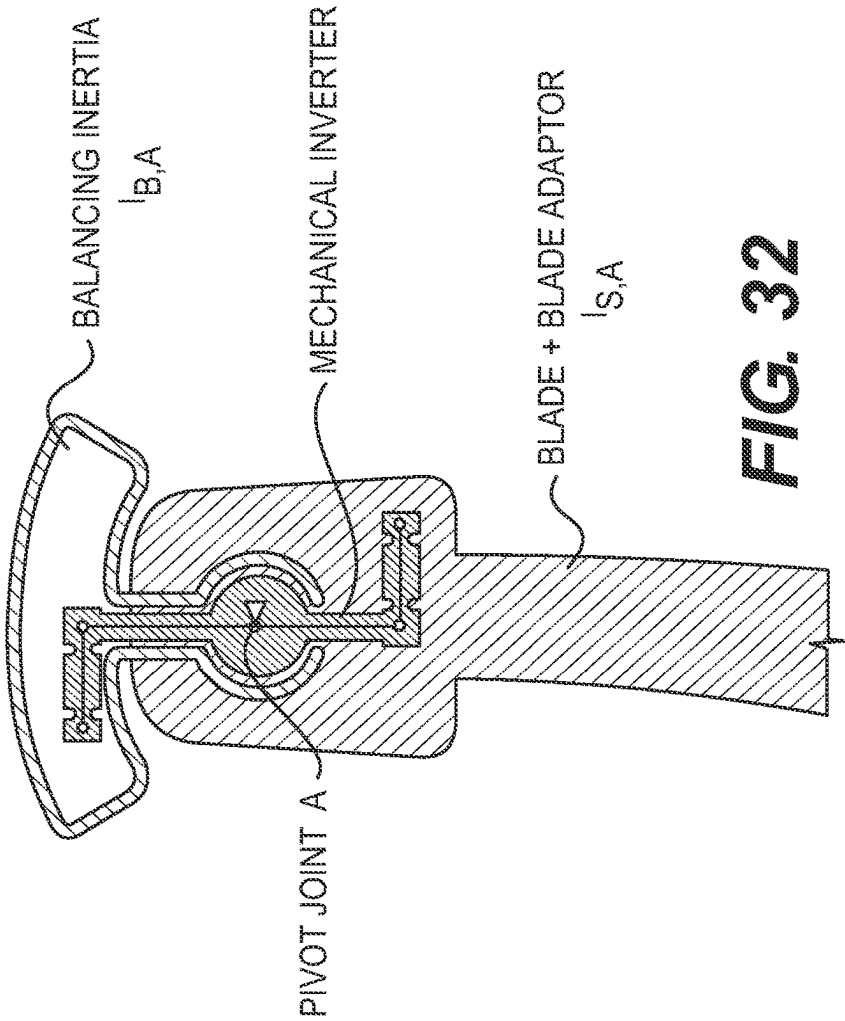
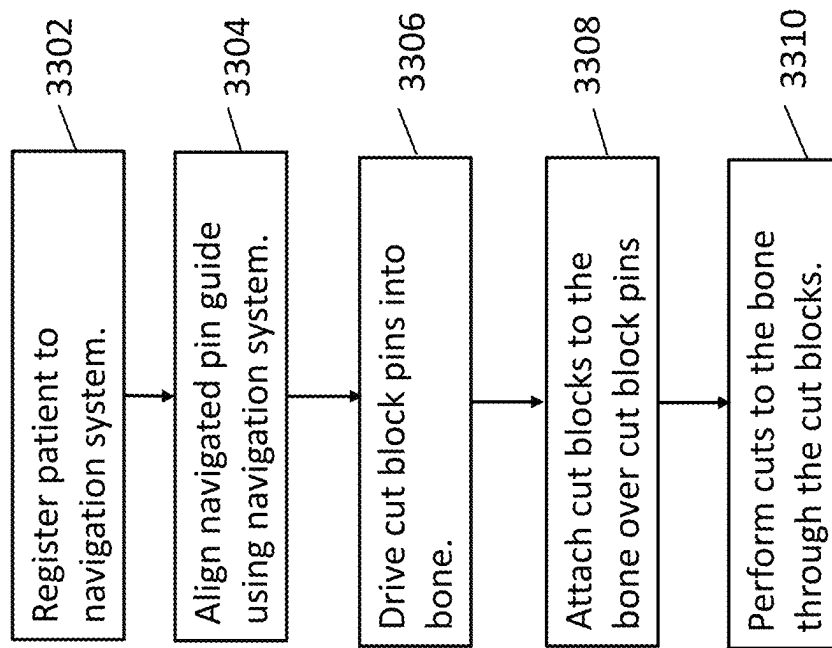


FIG. 32

**FIG. 33**

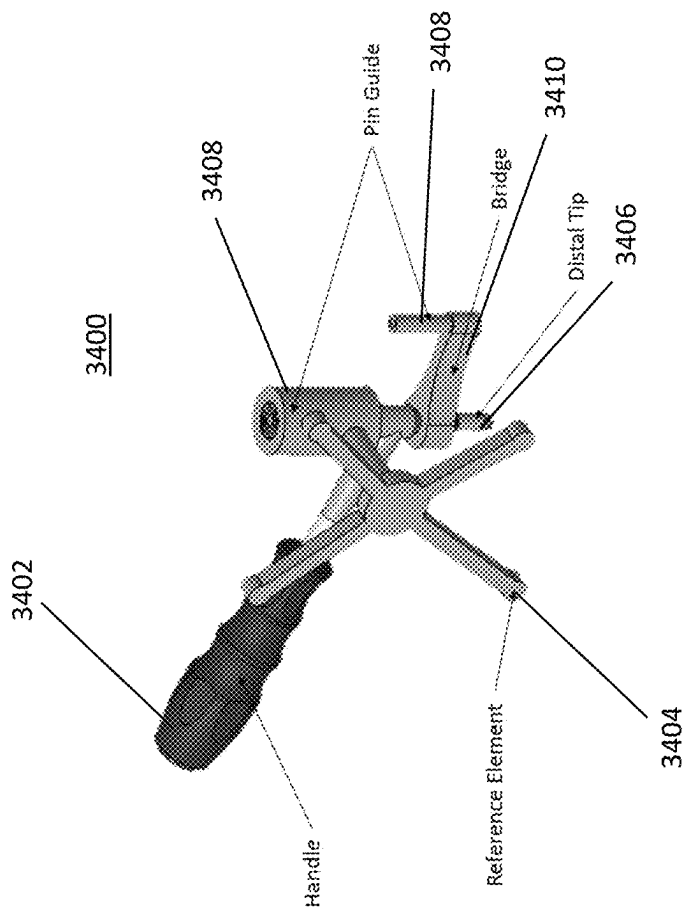
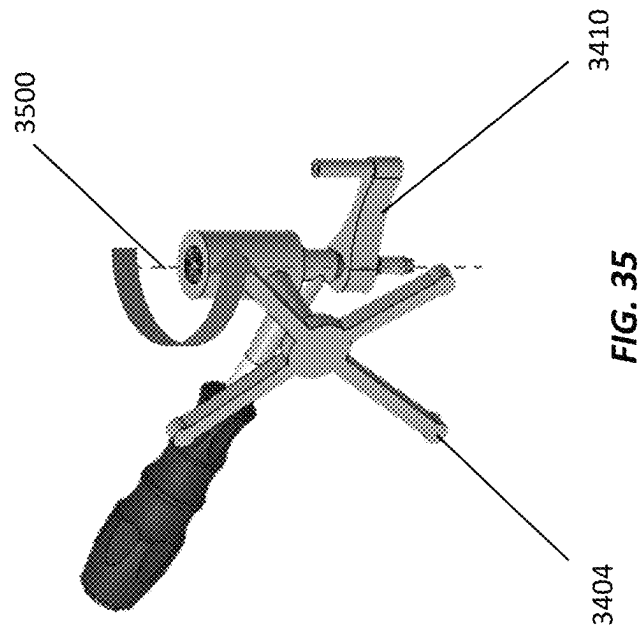


FIG. 34



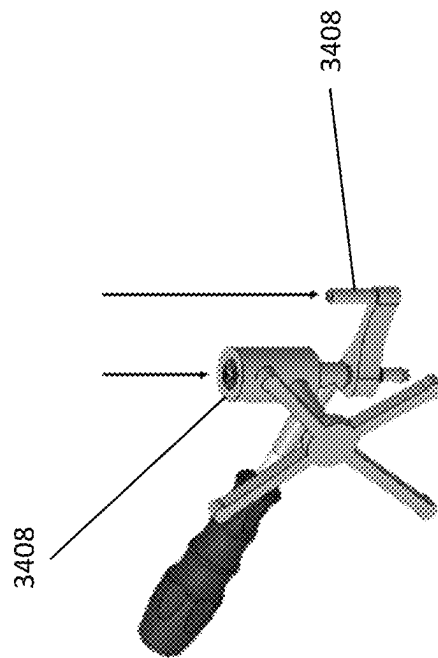
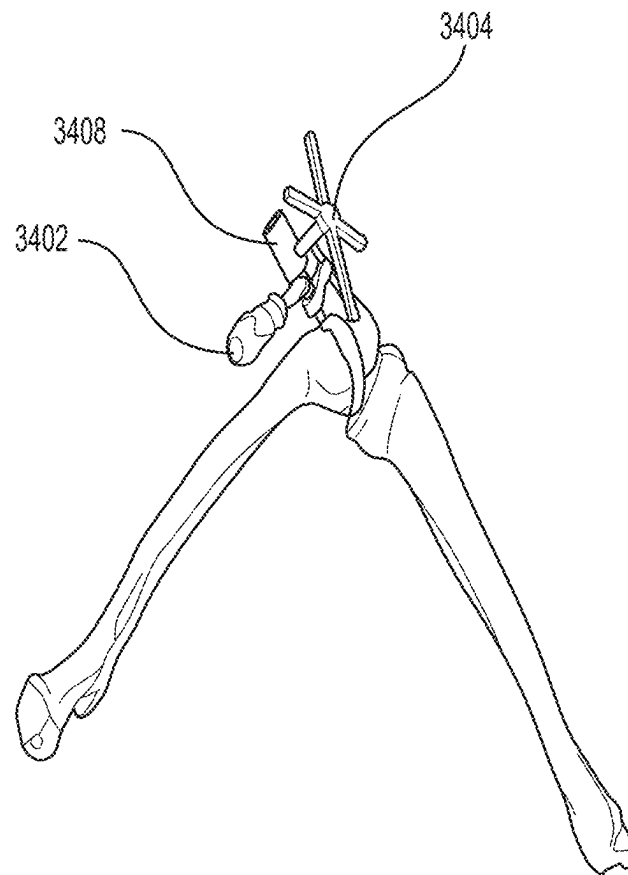


FIG. 36

**FIG. 37**

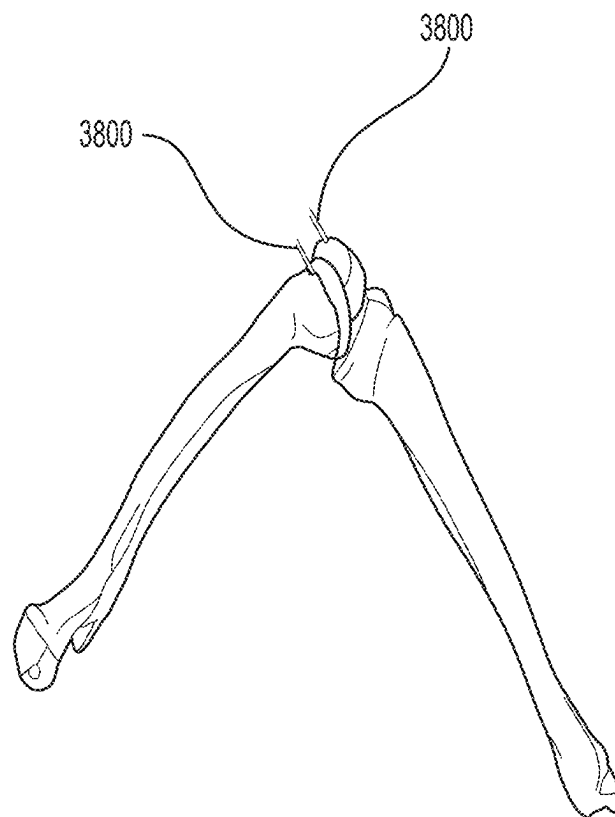


FIG. 38

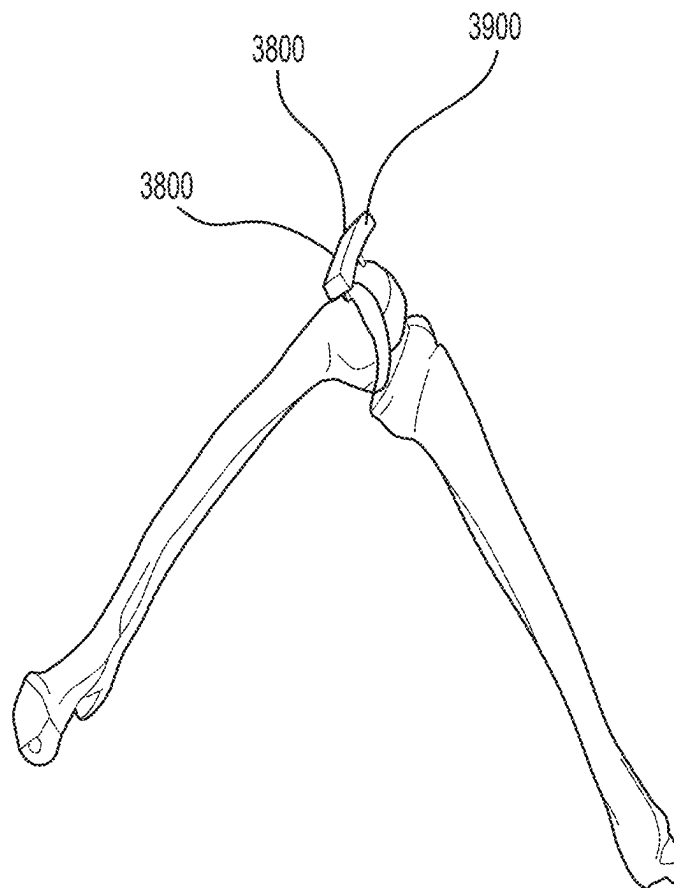


FIG. 39

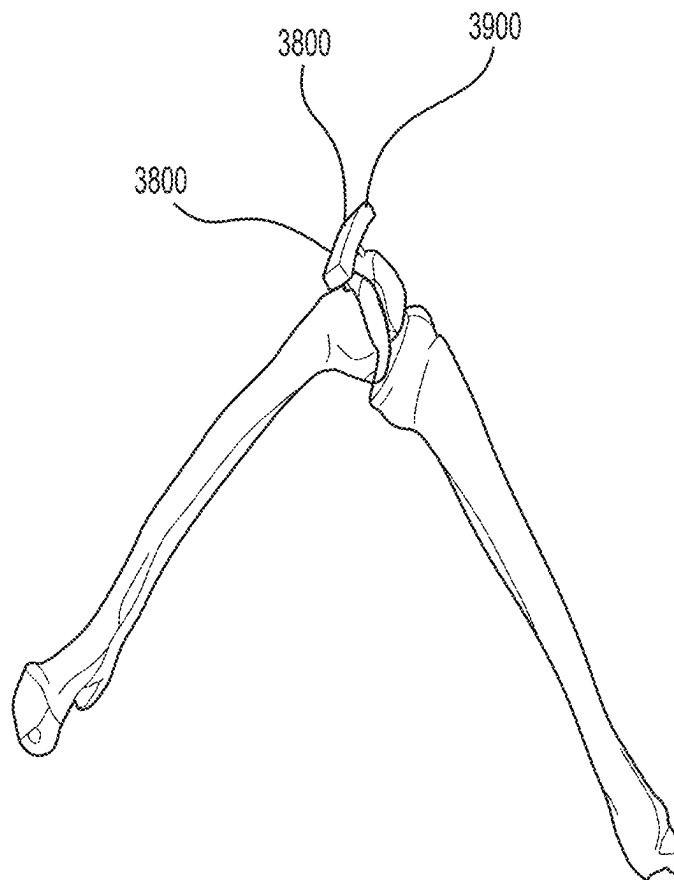


FIG. 40

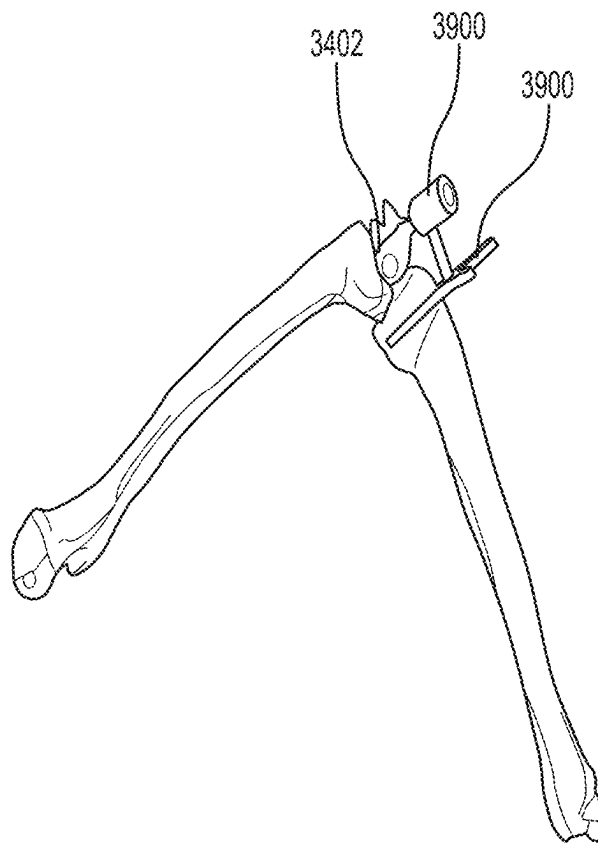


FIG. 41

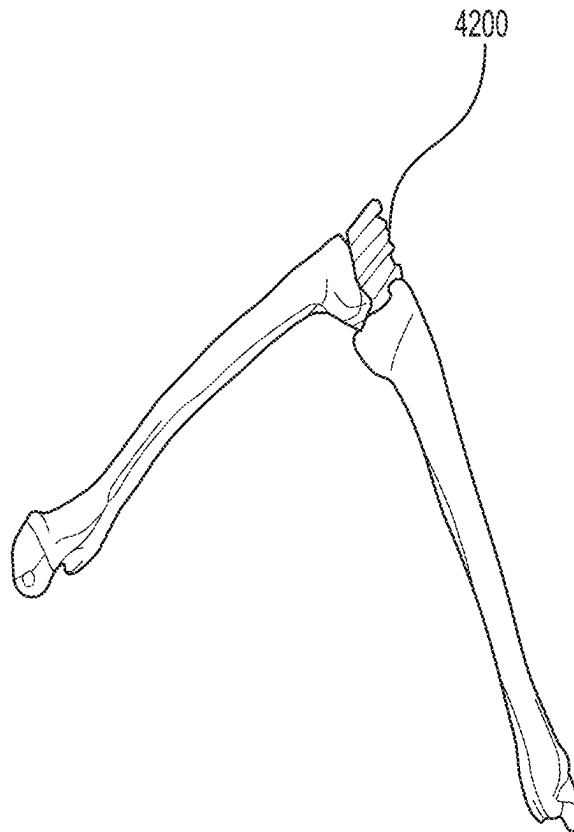


FIG. 42

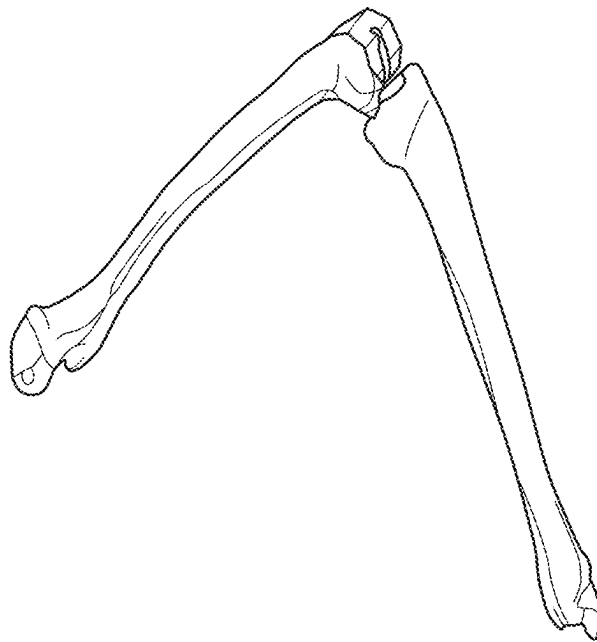


FIG. 43

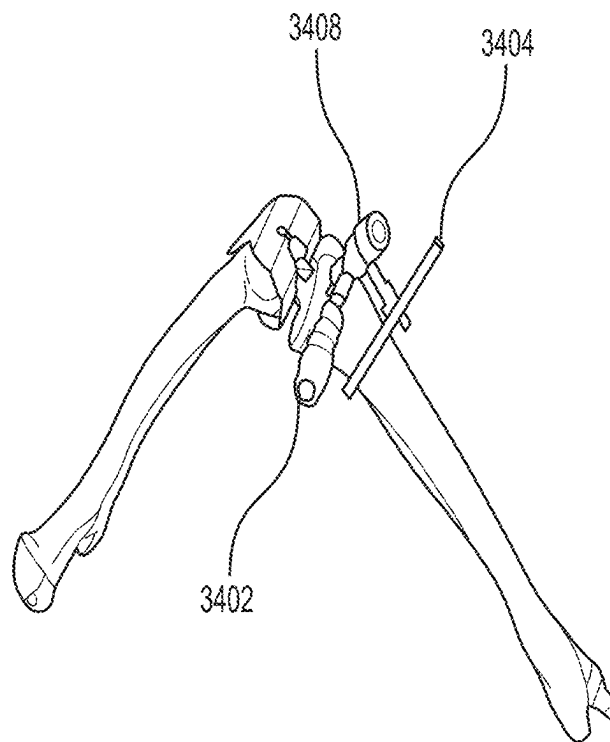


FIG. 44

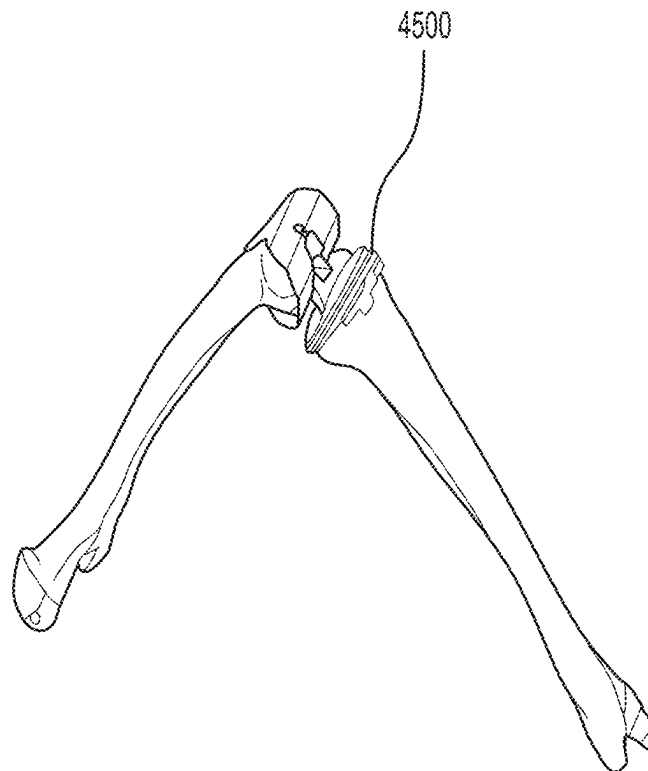


FIG. 45

1

SYSTEMS AND METHODS FOR NAVIGATING A PIN GUIDE DRIVER

CROSS-REFERENCE TO RELATED APPLICATIONS

The present application is a division of U.S. application Ser. No. 16/841,927, filed on Apr. 7, 2020, which is a continuation-in-part of U.S. application Ser. No. 16/737,054, filed on Jan. 8, 2020, which is a continuation-in-part of U.S. application Ser. No. 16/587,203, filed on Sep. 30, 2019. U.S. application Ser. No. 16/737,054 also claims the benefit of U.S. Provisional Application No. 62/906,831, filed on Sep. 27, 2019. The contents of each of these applications are incorporated herein by reference in their entirety for all purposes.

FIELD

The present disclosure relates to medical devices and systems, and more particularly, robotic systems and related end effectors for controlling cutting of anatomical structures of a patient, and related methods and devices.

BACKGROUND

Total Knee Arthroplasty (TKA) involves placing implants on resected surfaces on the distal femur and proximal tibia. The location and orientation of the resection plans defines the location and orientation of the implant which in turn impacts patient outcomes. There is a desire among surgeons to place implants using navigation techniques, which enables them to precisely plan and place the implant more in accordance with the patient's existing anatomy. The Navigated Pin Guide addresses the challenge of using a navigation system to localize cut plans used in total knee surgery.

In the manual process, cuts are performed using the following general workflow: (1) cut block placement instruments are applied to bone; (2) the placement instrument is adjusted using touch points, visual and tactile feedback; (3) cut block pins are driven into bone and the placement instruments are removed; (4) cut blocks are attached to the bone over the cut block pins; and (5) cuts are performed through the cut blocks.

Currently, using navigated components may add the following to the above-noted work flow: (6) register the patient to the navigation system; (7) navigated cut block placement instruments are applied and secured to bone using pins; (8) the placement instrument is adjusted using navigation feedback; (9) cut block pins are driven into bone and the placement instruments are removed; (10) cut blocks are attached to the bone over the cut block pins; and (11) cuts are performed through the cut blocks.

Current navigation technique may suffer from the disadvantage of using a bulky navigated placement instrument, which requires additional holes in bone and follows an undesirable workflow. What is needed is a design that bypasses the need for a placement instrument and instead navigates the insertion of the pins directly.

SUMMARY

Some embodiments of the present disclosure are directed to a navigated pin guide driver system. The navigated pin guide driver system may include a handle, a first pin guide tube and a reference element attached to first pin guide tube. The reference element may be configured to be in electronic

2

communication with a navigation system. The navigated pin guide driver system may include a distal tip configured to dock into cortical bone.

Some embodiments of the present disclosure are directed to a method for performing a total knee arthroplasty surgery using a navigated pin guide driver system. The method may include registering a patient to a navigation system, aligning the navigated pin guide driver system to a target area of a knee of the patient using the navigation system, driving at least one cut block pin into the target area using the navigated pin guide driver system, attaching at least one cut block over the at least one cut block pin, and performing cuts to the target area corresponding to the at least one cut block. The navigated pin guide driver system of the above-noted method may include a handle, a first pin guide tube and a reference element attached to first pin guide tube. The reference element may be configured to be in electronic communication with a navigation system. The navigated pin guide driver system may include a distal tip configured to dock into cortical bone.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the disclosure and are incorporated in a constitute a part of this application, illustrate certain non-limiting embodiments of inventive concepts. In the drawings:

FIG. 1 illustrates an embodiment of a surgical system according to some embodiments of the present disclosure;

FIG. 2 illustrates a surgical robot component of the surgical system of FIG. 1 according to some embodiments of the present disclosure;

FIG. 3 illustrates a camera tracking system component of the surgical system of FIG. 1 according to some embodiments of the present disclosure;

FIG. 4 illustrates an embodiment of a passive end effector that is connectable to a robot arm and configured according to some embodiments of the present disclosure;

FIG. 5 illustrates a medical operation in which a surgical robot and a camera system are disposed around a patient;

FIG. 6 illustrates an embodiment of an end effector coupler of a robot arm configured for connection to a passive end effector according to some embodiments of the present disclosure;

FIG. 7 illustrates an embodiment of a cut away of the end effector coupler of FIG. 6;

FIG. 8 illustrates a block diagram of components of a surgical system according to some embodiments of the present disclosure;

FIG. 9 illustrates a block diagram of a surgical system computer platform that includes a surgical planning computer which may be separate from and operationally connected to a surgical robot or at least partially incorporated therein according to some embodiments of the present disclosure;

FIG. 10 illustrates an embodiment of a C-Arm imaging device that can be used in combination with the surgical robot and passive end effector in accordance with some embodiments of the present disclosure;

FIG. 11 illustrates an embodiment of an O-Arm imaging device that can be used in combination with the surgical robot and passive end effector in accordance with some embodiments of the present disclosure; and

FIGS. 12-19 illustrate alternative embodiments of passive end effectors which are configured in accordance with some embodiments of the present disclosure.

3

FIG. 20 is a screenshot of a display showing the progress of bone cuts during a surgical procedure.

FIG. 21 illustrates an exemplary embodiment of a direct blade guidance system consistent with the principles of the present disclosure.

FIG. 22 illustrates an exemplary of a direct blade guidance system consistent with the principles of the present disclosure.

FIGS. 23-24 illustrate an exemplary embodiment of a portion of a direct blade guidance system consistent with the principles of the present disclosure.

FIG. 25 illustrates an exemplary embodiment of a direct blade guidance system consistent with the principles of the present disclosure.

FIG. 26 illustrates an exemplary embodiment of a direct blade guidance system consistent with the principles of the present disclosure.

FIG. 27 illustrates an exemplary embodiment of a direct blade guidance system consistent with the principles of the present disclosure.

FIG. 28 illustrates an exemplary embodiment of a portion of a direct blade guidance system consistent with the principles of the present disclosure.

FIGS. 29-30 illustrate an exemplary embodiment of a direct blade guidance system consistent with the principles of the present disclosure.

FIG. 31 illustrates an exemplary embodiment of a blade adapter consistent with the principles of the present disclosure.

FIG. 32 illustrates an exemplary embodiment of a direct blade guidance system consistent with the principles of the present disclosure.

FIG. 33 illustrates a flowchart for a method of performing a knee surgery consistent with the principles of the present disclosure.

FIGS. 34-37 illustrate a navigated pin guide driver system consistent with the principles of the present disclosure.

FIG. 38 illustrates cut block pin inserted using a navigated pin guide driver system consistent with the principles of the present disclosure.

FIGS. 39-40 illustrates a cut block inserted using a navigated pin guide driver system consistent with the principles of the present disclosure.

FIG. 41 illustrates a navigated pin guide driver system consistent with the principles of the present disclosure.

FIG. 42 illustrates a cut block inserted using a navigated pin guide driver system consistent with the principles of the present disclosure.

FIG. 43 illustrates a resected knee joint using a navigated pin guide driver system consistent with the principles of the present disclosure.

FIG. 44 illustrates a navigated pin guide driver system consistent with the principles of the present disclosure.

FIG. 45 illustrates a cut block inserted using a navigated pin guide driver system consistent with the principles of the present disclosure.

DETAILED DESCRIPTION

Inventive concepts will now be described more fully hereinafter with reference to the accompanying drawings, in which examples of embodiments of inventive concepts are shown. Inventive concepts may, however, be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of various

4

present inventive concepts to those skilled in the art. It should also be noted that these embodiments are not mutually exclusive. Components from one embodiment may be tacitly assumed to be present or used in another embodiment.

Various embodiments disclosed herein are directed to improvements in operation of a surgical system when performing surgical interventions requiring osteotomy. Passive end effectors are disclosed that are connectable to a robot arm positioned by a surgical robot. The passive end effectors have pairs of mechanisms that constrain movement of a tool attachment mechanism to a range of movement. The tool attachment is connectable to a surgical saw for cutting, such as a sagittal saw having an oscillating saw blade. The mechanisms may be configured to constrain a cutting plane of the saw blade to be parallel to the working plane. The surgical robot can determine a pose of the target plane based on a surgical plan defining where an anatomical structure is to be cut and based on a pose of the anatomical structure, and can generate steering information based on comparison of the pose of the target plane and the pose of the surgical saw. The steering information indicates where the passive end effector needs to be moved so the cutting plane of the saw blade becomes aligned with the target plane and the saw blade becomes positioned a distance from the anatomical structure to be cut that is within the range of movement of the tool attachment mechanism of the passive end effector.

These and other related embodiments can operate to improve the precision of the guidance of the saw blade compared to other robotic and manual (e.g., jigs) solutions for surgeries. The mechanisms of the passive end effector can allow the surgeon to concentrate on interpreting the direct force feedback while cutting bones using a surgical saw that is guided by the passive end effector. The mechanisms may be planar mechanism, e.g., having 1 to 3 adequately selected degrees of freedom (e.g. one translation or rotation, two rotations, three rotations, or other combinations, etc.) end joint that is configured to constrain the cutting plane to be aligned with the target plane. The surgeon may also more accurately monitor and control the speed of bone removal based on audio and/or visual notification feedback provided through the surgical robot.

These embodiments can provide guidance during joint surgeries and especially knee surgery with high precision, high rigidity, sufficient workspace and direct force feedback. As will be explained in detail below, a tracking system can be used to precisely align the cutting plane with the target plane for cutting a bone. High precision cuts may be achieved by the planar mechanisms constraining the cutting plane to remaining aligned with the target plane while a surgeon moves the saw blade along the cutting plane and directly senses force feedback of the saw blade cutting bone. Moreover, these embodiments can be rapidly deployed into surgical practices through defined changes in existing accepted surgery workflows.

FIG. 1 illustrates an embodiment of a surgical system 2 according to some embodiments of the present disclosure. Prior to performance of an orthopedic surgical procedure, a three-dimensional ("3D") image scan may be taken of a planned surgical area of a patient using, e.g., the C-Arm imaging device 104 of FIG. 10 or O-Arm imaging device 106 of FIG. 11, or from another medical imaging device such as a computed tomography (CT) image or MRI. This scan can be taken pre-operatively (e.g. few weeks before procedure, most common) or intra-operatively. However, any known 3D or 2D image scan may be used in accordance with various embodiments of the surgical system 2. The

5

image scan is sent to a computer platform in communication with the surgical system 2, such as the surgical system computer platform 900 of FIG. 9 which includes the surgical robot 800 (e.g., robot 2 in FIG. 1) and a surgical planning computer 910. A surgeon reviewing the image scan(s) on a display device of the surgical planning computer 910 (FIG. 9) generates a surgical plan defining a target plane where an anatomical structure of the patient is to be cut. This plane is a function of patient anatomy constraints, selected implant and its size. In some embodiments, the surgical plan defining the target plane is planned on the 3D image scan displayed on a display device.

The surgical system 2 of FIG. 1 can assist surgeons during medical procedures by, for example, holding tools, aligning tools, using tools, guiding tools, and/or positioning tools for use. In some embodiments, surgical system 2 includes a surgical robot 4 and a camera tracking system 6. Both systems may be mechanically coupled together by any various mechanisms. Suitable mechanisms can include, but are not limited to, mechanical latches, ties, clamps, or buttresses, or magnetic or magnetized surfaces. The ability to mechanically couple surgical robot 4 and camera tracking system 6 can allow for surgical system 2 to maneuver and move as a single unit, and allow surgical system 2 to have a small footprint in an area, allow easier movement through narrow passages and around turns, and allow storage within a smaller area.

An orthopedic surgical procedure may begin with the surgical system 2 moving from medical storage to a medical procedure room. The surgical system 2 may be maneuvered through doorways, halls, and elevators to reach a medical procedure room. Within the room, the surgical system 2 may be physically separated into two separate and distinct systems, the surgical robot 4 and the camera tracking system 6. Surgical robot 4 may be positioned adjacent the patient at any suitable location to properly assist medical personnel. Camera tracking system 6 may be positioned at the base of the patient, at patient shoulders or any other location suitable to track the present pose and movement of the pose of tracks portions of the surgical robot 4 and the patient. Surgical robot 4 and camera tracking system 6 may be powered by an onboard power source and/or plugged into an external wall outlet.

Surgical robot 4 may be used to assist a surgeon by holding and/or using tools during a medical procedure. To properly utilize and hold tools, surgical robot 4 may rely on a plurality of motors, computers, and/or actuators to function properly. Illustrated in FIG. 1, robot body 8 may act as the structure in which the plurality of motors, computers, and/or actuators may be secured within surgical robot 4. Robot body 8 may also provide support for robot telescoping support arm 16. In some embodiments, robot body 8 may be made of any suitable material. Suitable material may be, but is not limited to, metal such as titanium, aluminum, or stainless steel, carbon fiber, fiberglass, or heavy-duty plastic. The size of robot body 8 may provide a solid platform supporting attached components, and may house, conceal, and protect the plurality of motors, computers, and/or actuators that may operate attached components.

Robot base 10 may act as a lower support for surgical robot 4. In some embodiments, robot base 10 may support robot body 8 and may attach robot body 8 to a plurality of powered wheels 12. This attachment to wheels may allow robot body 8 to move in space efficiently. Robot base 10 may run the length and width of robot body 8. Robot base 10 may be about two inches to about 10 inches tall. Robot base 10 may be made of any suitable material. Suitable material may

6

be, but is not limited to, metal such as titanium, aluminum, or stainless steel, carbon fiber, fiberglass, or heavy-duty plastic or resin. Robot base 10 may cover, protect, and support powered wheels 12.

In some embodiments, as illustrated in FIG. 1, at least one powered wheel 12 may be attached to robot base 10. Powered wheels 12 may attach to robot base 10 at any location. Each individual powered wheel 12 may rotate about a vertical axis in any direction. A motor may be disposed above, within, or adjacent to powered wheel 12. This motor may allow for surgical system 2 to maneuver into any location and stabilize and/or level surgical system 2. A rod, located within or adjacent to powered wheel 12, may be pressed into a surface by the motor. The rod, not pictured, may be made of any suitable metal to lift surgical system 2. Suitable metal may be, but is not limited to, stainless steel, aluminum, or titanium. Additionally, the rod may comprise at the contact-surface-side end a buffer, not pictured, which may prevent the rod from slipping and/or create a suitable contact surface. The material may be any suitable material to act as a buffer. Suitable material may be, but is not limited to, a plastic, neoprene, rubber, or textured metal. The rod may lift powered wheel 10, which may lift surgical system 2, to any height required to level or otherwise fix the orientation of the surgical system 2 in relation to a patient. The weight of surgical system 2, supported through small contact areas by the rod on each wheel, prevents surgical system 2 from moving during a medical procedure. This rigid positioning may prevent objects and/or people from moving surgical system 2 by accident.

Moving surgical system 2 may be facilitated using robot railing 14. Robot railing 14 provides a person with the ability to move surgical system 2 without grasping robot body 8. As illustrated in FIG. 1, robot railing 14 may run the length of robot body 8, shorter than robot body 8, and/or may run longer the length of robot body 8. Robot railing 14 may be made of any suitable material. Suitable material may be, but is not limited to, metal such as titanium, aluminum, or stainless steel, carbon fiber, fiberglass, or heavy-duty plastic. Robot railing 14 may further provide protection to robot body 8, preventing objects and or personnel from touching, hitting, or bumping into robot body 8.

Robot body 8 may provide support for a Selective Compliance Articulated Robot Arm, hereafter referred to as a "SCARA." A SCARA 24 may be beneficial to use within the surgical system 2 due to the repeatability and compactness of the robotic arm. The compactness of a SCARA may provide additional space within a medical procedure, which may allow medical professionals to perform medical procedures free of excess clutter and confining areas. SCARA 24 may comprise robot telescoping support 16, robot support arm 18, and/or robot arm 20. Robot telescoping support 16 may be disposed along robot body 8. As illustrated in FIG. 1, robot telescoping support 16 may provide support for the SCARA 24 and display 34. In some embodiments, robot telescoping support 16 may extend and contract in a vertical direction. Robot telescoping support 16 may be made of any suitable material. Suitable material may be, but is not limited to, metal such as titanium or stainless steel, carbon fiber, fiberglass, or heavy-duty plastic. The body of robot telescoping support 16 may be any width and/or height in which to support the stress and weight placed upon it.

In some embodiments, medical personnel may move SCARA 24 through a command submitted by the medical personnel. The command may originate from input received on display 34 and/or a tablet. The command may come from the depression of a switch and/or the depression of a

plurality of switches. Best illustrated in FIGS. 4 and 5, an activation assembly 60 may include a switch and/or a plurality of switches. The activation assembly 60 may be operable to transmit a move command to the SCARA 24 allowing an operator to manually manipulate the SCARA 24. When the switch, or plurality of switches, is depressed the medical personnel may have the ability to move SCARA 24 easily. Additionally, when the SCARA 24 is not receiving a command to move, the SCARA 24 may lock in place to prevent accidental movement by personnel and/or other objects. By locking in place, the SCARA 24 provides a solid platform upon which a passive end effector 1100 and connected surgical saw 1140, shown in FIGS. 4 and 5, are ready for use in a medical operation.

Robot support arm 18 may be disposed on robot telescoping support 16 by various mechanisms. In some embodiments, best seen in FIGS. 1 and 2, robot support arm 18 rotates in any direction in regard to robot telescoping support 16. Robot support arm 18 may rotate three hundred and sixty degrees around robot telescoping support 16. Robot arm 20 may connect to robot support arm 18 at any suitable location. Robot arm 20 may attach to robot support arm 16 by various mechanisms. Suitable mechanisms may be, but is not limited to, nuts and bolts, ball and socket fitting, press fitting, weld, adhesion, screws, rivets, clamps, latches, and/or any combination thereof. Robot arm 20 may rotate in any direction in regards to robot support arm 18, in embodiments, robot arm 20 may rotate three hundred and sixty degrees in regards to robot support arm 18. This free rotation may allow an operator to position robot arm 20 as planned.

The passive end effector 1100 in FIGS. 4 and 5 may attach to robot arm 20 in any suitable location. As will be explained in further detail below, the passive end effector 1100 includes a base, a first mechanism, and a second mechanism. The base is configured to attach to an end effector coupler 22 of the robot arm 20 positioned by the surgical robot 4. Various mechanisms by which the base can attach to the end effector coupler 22 can include, but are not limited to, latch, clamp, nuts and bolts, ball and socket fitting, press fitting, weld, adhesion, screws, rivets, and/or any combination thereof. The first mechanism extends between a rotatable connection to the base and a rotatable connection to a tool attachment mechanism. The second mechanism extends between a rotatable connection to the base and a rotatable connection to the tool attachment mechanism. The first and second mechanisms pivot about the rotatable connections, and may be configured to constrain movement of the tool attachment mechanism to a range of movement within a working plane. The rotatable connections may be pivot joints allowing 1 degree-of-freedom (DOF) motion, universal joints allowing 2 DOF motions, or ball joints allowing 3 DOF motions. The tool attachment mechanism is configured to connect to a surgical saw 1140 having a saw blade or saw blade directly. The surgical saw 1140 may be configured to oscillate the saw blade for cutting. The first and second mechanisms may be configured to constrain a cutting plane of the saw blade to be parallel to the working plane. Pivot joints may be preferably used for connecting the planar mechanisms when the passive end effector is to be configured to constrain motion of the saw blade to the cutting plane.

The tool attachment mechanism may connect to the surgical saw 1140 or saw blade through various mechanisms that can include, but are not limited to, a screw, nut and bolt, clamp, latch, tie, press fit, or magnet. In some embodiments, a dynamic reference array 52 is attached to the passive end

effector 1100, e.g., to the tool attachment mechanism, and/or is attached to the surgical saw 1140. Dynamic reference arrays, also referred to as "DRAs" herein, are rigid bodies which may be disposed on a patient, the surgical robot, the passive end effector, and/or the surgical saw in a navigated surgical procedure. The camera tracking system 6 or other 3D localization system is configured to track in real-time the pose (e.g., positions and rotational orientations) of tracking markers of the DRA. The tracking markers may include the illustrated arrangement of balls or other optical markers. This tracking of 3D coordinates of tracking markers can allow the surgical system 2 to determine the pose of the DRA 52 in any space in relation to the target anatomical structure of the patient 50 in FIG. 5.

As illustrated in FIG. 1, a light indicator 28 may be positioned on top of the SCARA 24. Light indicator 28 may illuminate as any type of light to indicate "conditions" in which surgical system 2 is currently operating. For example, the illumination of green may indicate that all systems are normal. Illuminating red may indicate that surgical system 2 is not operating normally. A pulsating light may mean surgical system 2 is performing a function. Combinations of light and pulsation may create a nearly limitless amount of combinations in which to communicate the current operating conditions, states, or other operational indications. In some embodiments, the light may be produced by LED bulbs, which may form a ring around light indicator 28. Light indicator 28 may comprise a fully permeable material that may let light shine through the entirety of light indicator 28.

Light indicator 28 may be attached to lower display support 30. Lower display support 30, as illustrated in FIG. 2 may allow an operator to maneuver display 34 to any suitable location. Lower display support 30 may attach to light indicator 28 by any suitable mechanism. In embodiments, lower display support 30 may rotate about light indicator 28. In embodiments, lower display support 30 may attach rigidly to light indicator 28. Light indicator 28 may then rotate three hundred and sixty degrees about robot support arm 18. Lower display support 30 may be of any suitable length, a suitable length may be about eight inches to about thirty four inches. Lower display support 30 may act as a base for upper display support 32.

Upper display support 32 may attach to lower display support 30 by any suitable mechanism. Upper display support 32 may be of any suitable length, a suitable length may be about eight inches to about thirty four inches. In embodiments, as illustrated in FIG. 1, upper display support 32 may allow display 34 to rotate three hundred and sixty degrees in relation to upper display support 32. Likewise, upper display support 32 may rotate three hundred and sixty degrees in relation to lower display support 30.

Display 34 may be any device which may be supported by upper display support 32. In embodiments, as illustrated in FIG. 2, display 34 may produce color and/or black and white images. The width of display 34 may be about eight inches to about thirty inches wide. The height of display 34 may be about six inches to about twenty two inches tall. The depth of display 34 may be about one-half inch to about four inches.

In embodiments, a tablet may be used in conjunction with display 34 and/or without display 34. In embodiments, the table may be disposed on upper display support 32, in place of display 34, and may be removable from upper display support 32 during a medical operation. In addition the tablet may communicate with display 34. The tablet may be able to connect to surgical robot 4 by any suitable wireless and/or wired connection. In some embodiments, the tablet may be

able to program and/or control surgical system 2 during a medical operation. When controlling surgical system 2 with the tablet, all input and output commands may be duplicated on display 34. The use of a tablet may allow an operator to manipulate surgical robot 4 without having to move around patient 50 and/or to surgical robot 4.

As illustrated in FIG. 5, camera tracking system 6 works in conjunction with surgical robot 4 through wired or wireless communication networks. Referring to FIGS. 1 and 5, camera tracking system 6 can include some similar components to the surgical robot 4. For example, camera body 36 may provide the functionality found in robot body 8. Robot body 8 may provide the structure upon which camera 46 is mounted. The structure within robot body 8 may also provide support for the electronics, communication devices, and power supplies used to operate camera tracking system 6. Camera body 36 may be made of the same material as robot body 8. Camera tracking system 6 may communicate directly to the tablet and/or display 34 by a wireless and/or wired network to enable the tablet and/or display 34 to control the functions of camera tracking system 6.

Camera body 36 is supported by camera base 38. Camera base 38 may function as robot base 10. In the embodiment of FIG. 1, camera base 38 may be wider than robot base 10. The width of camera base 38 may allow for camera tracking system 6 to connect with surgical robot 4. As illustrated in FIG. 1, the width of camera base 38 may be large enough to fit outside robot base 10. When camera tracking system 6 and surgical robot 4 are connected, the additional width of camera base 38 may allow surgical system 2 additional maneuverability and support for surgical system 2.

As with robot base 10, a plurality of powered wheels 12 may attach to camera base 38. Powered wheel 12 may allow camera tracking system 6 to stabilize and level or set fixed orientation in regards to patient 50, similar to the operation of robot base 10 and powered wheels 12. This stabilization may prevent camera tracking system 6 from moving during a medical procedure and may keep camera 46 from losing track of one or more DRAs 52 connected to an anatomical structure 54 and/or tool 58 within a designated area 56 as shown in FIG. 5. This stability and maintenance of tracking enhances the ability of surgical robot 4 to operate effectively with camera tracking system 6. Additionally, the wide camera base 38 may provide additional support to camera tracking system 6. Specifically, a wide camera base 38 may prevent camera tracking system 6 from tipping over when camera 46 is disposed over a patient, as illustrated in FIG. 5. Without the wide camera base 38, the outstretched camera 46 may unbalance camera tracking system 6, which may result in camera tracking system 6 falling over.

Camera telescoping support 40 may support camera 46. In embodiments, telescoping support 40 may move camera 46 higher or lower in the vertical direction. Telescoping support 40 may be made of any suitable material in which to support camera 46. Suitable material may be, but is not limited to, metal such as titanium, aluminum, or stainless steel, carbon fiber, fiberglass, or heavy-duty plastic. Camera handle 48 may be attached to camera telescoping support 40 at any suitable location. Camera handle 48 may be any suitable handle configuration. A suitable configuration may be, but is not limited to, a bar, circular, triangular, square, and/or any combination thereof. As illustrated in FIG. 1, camera handle 48 may be triangular, allowing an operator to move camera tracking system 6 into a planned position before a medical operation. In embodiments, camera handle 48 may be used to lower and raise camera telescoping support 40. Camera

handle 48 may perform the raising and lowering of camera telescoping support 40 through the depression of a button, switch, lever, and/or any combination thereof.

Lower camera support arm 42 may attach to camera telescoping support 40 at any suitable location, in embodiments, as illustrated in FIG. 1, lower camera support arm 42 may rotate three hundred and sixty degrees around telescoping support 40. This free rotation may allow an operator to position camera 46 in any suitable location. Lower camera support arm 42 may be made of any suitable material in which to support camera 46. Suitable material may be, but is not limited to, metal such as titanium, aluminum, or stainless steel, carbon fiber, fiberglass, or heavy-duty plastic. Cross-section of lower camera support arm 42 may be any suitable shape. Suitable cross-sectional shape may be, but is not limited to, circle, square, rectangle, hexagon, octagon, or i-beam. The cross-sectional length and width may be about one to ten inches. Length of the lower camera support arm may be about four inches to about thirty-six inches. Lower camera support arm 42 may connect to telescoping support 40 by any suitable mechanism. Suitable mechanism may be, but is not limited to, nuts and bolts, ball and socket fitting, press fitting, weld, adhesion, screws, rivets, clamps, latches, and/or any combination thereof. Lower camera support arm 42 may be used to provide support for camera 46. Camera 46 may be attached to lower camera support arm 42 by any suitable mechanism. Suitable mechanism may be, but is not limited to, nuts and bolts, ball and socket fitting, press fitting, weld, adhesion, screws, rivets, and/or any combination thereof. Camera 46 may pivot in any direction at the attachment area between camera 46 and lower camera support arm 42. In embodiments a curved rail 44 may be disposed on lower camera support arm 42.

Curved rail 44 may be disposed at any suitable location on lower camera support arm 42. As illustrated in FIG. 3, curved rail 44 may attach to lower camera support arm 42 by any suitable mechanism. Suitable mechanism may be, but are not limited to nuts and bolts, ball and socket fitting, press fitting, weld, adhesion, screws, rivets, clamps, latches, and/or any combination thereof. Curved rail 44 may be of any suitable shape, a suitable shape may be a crescent, circular, oval, elliptical, and/or any combination thereof. In embodiments, curved rail 44 may be any appropriate length. An appropriate length may be about one foot to about six feet. Camera 46 may be moveably disposed along curved rail 44. Camera 46 may attach to curved rail 44 by any suitable mechanism. Suitable mechanism may be, but are not limited to rollers, brackets, braces, motors, and/or any combination thereof. Motors and rollers, not illustrated, may be used to move camera 46 along curved rail 44. As illustrated in FIG. 3, during a medical procedure, if an object prevents camera 46 from viewing one or more DRAs 52, the motors may move camera 46 along curved rail 44 using rollers. This motorized movement may allow camera 46 to move to a new position that is no longer obstructed by the object without moving camera tracking system 6. While camera 46 is obstructed from viewing DRAs 52, camera tracking system 6 may send a stop signal to surgical robot 4, display 34, and/or a tablet. The stop signal may prevent SCARA 24 from moving until camera 46 has reacquired DRAs 52. This stoppage may prevent SCARA 24 and/or end effector coupler 22 from moving and/or using medical tools without being tracked by surgical system 2.

End effector coupler 22, as illustrated in FIG. 6, is configured to connect various types of passive end effectors to surgical robot 4. End effector coupler 22 can include a saddle joint 62, an activation assembly 60, a load cell 64

11

(FIG. 7), and a connector 66. Saddle joint 62 may attach end effector coupler 22 to SCARA 24. Saddle joint 62 may be made of any suitable material. Suitable material may be, but is not limited to metal such as titanium, aluminum, or stainless steel, carbon fiber, fiberglass, or heavy-duty plastic. Saddle joint 62 may be made of a single piece of metal which may provide end effector with additional strength and durability. The saddle joint 62 may attach to SCARA 24 by an attachment point 68. There may be a plurality of attachment points 68 disposed about saddle joint 62. Attachment points 68 may be sunk, flush, and/or disposed upon saddle joint 62. In some examples, screws, nuts and bolts, and/or any combination thereof may pass through attachment point 68 and secure saddle joint 62 to SCARA 24. The nuts and bolts may connect saddle joint 62 to a motor, not illustrated, within SCARA 24. The motor may move saddle joint 62 in any direction. The motor may further prevent saddle joint 62 from moving from accidental bumps and/or accidental touches by actively servoing at the current location or passively by applying spring actuated brakes.

The end effector coupler 22 can include a load cell 64 interposed between the saddle joint 62 and a connected passive end effector. Load cell 64, as illustrated in FIG. 7 may attach to saddle joint 62 by any suitable mechanism. Suitable mechanism may be, but is not limited to, screws, nuts and bolts, threading, press fitting, and/or any combination thereof.

FIG. 8 illustrates a block diagram of components of a surgical system 800 according to some embodiments of the present disclosure. Referring to FIGS. 7 and 8, load cell 64 may be any suitable instrument used to detect and measure forces. In some examples, load cell 64 may be a six axis load cell, a three-axis load cell or a uniaxial load cell. Load cell 64 may be used to track the force applied to end effector coupler 22. In some embodiments the load cell 64 may communicate with a plurality of motors 850, 851, 852, 853, and/or 854. As load cell 64 senses force, information as to the amount of force applied may be distributed from a switch array and/or a plurality of switch arrays to a controller 846. Controller 846 may take the force information from load cell 64 and process it with a switch algorithm. The switch algorithm is used by the controller 846 to control a motor driver 842. The motor driver 842 controls operation of one or more of the motors. Motor driver 842 may direct a specific motor to produce, for example, an equal amount of force measured by load cell 64 through the motor. In some embodiments, the force produced may come from a plurality of motors, e.g., 850-854, as directed by controller 846. Additionally, motor driver 842 may receive input from controller 846. Controller 846 may receive information from load cell 64 as to the direction of force sensed by load cell 64. Controller 846 may process this information using a motion controller algorithm. The algorithm may be used to provide information to specific motor drivers 842. To replicate the direction of force, controller 846 may activate and/or deactivate certain motor drivers 842. Controller 846 may control one or more motors, e.g. one or more of 850-854, to induce motion of passive end effector 1100 in the direction of force sensed by load cell 64. This force-controlled motion may allow an operator to move SCARA 24 and passive end effector 1100 effortlessly and/or with very little resistance. Movement of passive end effector 1100 can be performed to position passive end effector 1100 in any suitable pose (i.e., location and angular orientation relative to defined three-dimensional (3D) orthogonal reference axes) for use by medical personnel.

12

Connector 66 is configured to be connectable to the base of the passive end effector 1100 and is connected to load cell 64. Connector 66 can include attachment points 68, a sensory button 70, tool guides 72, and/or tool connections 74. Best illustrated in FIGS. 6 and 8, there may be a plurality of attachment points 68. Attachment points 68 may connect connector 66 to load cell 64. Attachment points 68 may be sunk, flush, and/or disposed upon connector 66. Attachment points 68 and 76 can be used to attach connector 66 to load cell 64 and/or to passive end effector 1100. In some examples, Attachment points 68 and 76 may include screws, nuts and bolts, press fittings, magnetic attachments, and/or any combination thereof.

As illustrated in FIG. 6, a sensory button 70 may be disposed about center of connector 66. Sensory button 70 may be depressed when a passive end effector 1100 is connected to SCARA 24. Depression of sensory button 70 may alert surgical robot 4, and in turn medical personnel, that a passive end effector 1100 has been attached to SCARA 24. As illustrated in FIG. 6, guides 72 may be used to facilitate proper attachment of passive end effector 1100 to SCARA 24. Guides 72 may be sunk, flush, and/or disposed upon connector 66. In some examples there may be a plurality of guides 72 and may have any suitable patterns and may be oriented in any suitable direction. Guides 72 may be any suitable shape to facilitate attachment of passive end effector 1100 to SCARA 24. A suitable shape may be, but is not limited to, circular, oval, square, polyhedral, and/or any combination thereof. Additionally, guides 72 may be cut with a bevel, straight, and/or any combination thereof.

Connector 66 may have attachment points 74. As illustrated in FIG. 6, attachment points 74 may form a ledge and/or a plurality of ledges. Attachment points 74 may provide connector 66 a surface upon which passive end effector 1100 may clamp. In some embodiments, attachment points 74 are disposed about any surface of connector 66 and oriented in any suitable manner in relation to connector 66.

Activation assembly 60, best illustrated in FIGS. 6 and 7, may encircle connector 66. In some embodiments, activation assembly 60 may take the form of a bracelet that wraps around connector 66. In some embodiments, activation assembly 60, may be located in any suitable area within surgical system 2. In some examples, activation assembly 60 may be located on any part of SCARA 24, any part of end effector coupler 22, may be worn by medical personnel (and communicate wirelessly), and/or any combination thereof. Activation assembly 60 may be made of any suitable material. Suitable material may be, but is not limited to neoprene, plastic, rubber, gel, carbon fiber, fabric, and/or any combination thereof. Activation assembly 60 may comprise of a primary button 78 and a secondary button 80. Primary button 78 and secondary button 80 may encircle the entirety of connector 66.

Primary button 78 may be a single ridge, as illustrated in FIG. 6, which may encircle connector 66. In some examples, primary button 78 may be disposed upon activation assembly 60 along the end farthest away from saddle joint 62. Primary button 78 may be disposed upon primary activation switch 82, best illustrated on FIG. 7. Primary activation switch 82 may be disposed between connector 66 and activation assembly 60. In some examples, there may be a plurality of primary activation switches 82, which may be disposed adjacent and beneath primary button 78 along the entire length of primary button 78. Depressing primary button 78 upon primary activation switch 82 may allow an operator to move SCARA 24 and end effector coupler 22. As discussed above, once set in place, SCARA 24 and end

13

effector coupler 22 may not move until an operator programs surgical robot 4 to move SCARA 24 and end effector coupler 22, or is moved using primary button 78 and primary activation switch 82. In some examples, it may require the depression of at least two non-adjacent primary activation switches 82 before SCARA 24 and end effector coupler 22 will respond to operator commands. Depression of at least two primary activation switches 82 may prevent the accidental movement of SCARA 24 and end effector coupler 22 during a medical procedure.

Activated by primary button 78 and primary activation switch 82, load cell 64 may measure the force magnitude and/or direction exerted upon end effector coupler 22 by an operator, i.e. medical personnel. This information may be transferred to motors within SCARA 24 that may be used to move SCARA 24 and end effector coupler 22. Information as to the magnitude and direction of force measured by load cell 64 may cause the motors to move SCARA 24 and end effector coupler 22 in the same direction as sensed by load cell 64. This force-controlled movement may allow the operator to move SCARA 24 and end effector coupler 22 easily and without large amounts of exertion due to the motors moving SCARA 24 and end effector coupler 22 at the same time the operator is moving SCARA 24 and end effector coupler 22.

Secondary button 80, as illustrated in FIG. 6, may be disposed upon the end of activation assembly 60 closest to saddle joint 62. In some examples secondary button 80 may comprise a plurality of ridges. The plurality of ridges may be disposed adjacent to each other and may encircle connector 66. Additionally, secondary button 80 may be disposed upon secondary activation switch 84. Secondary activation switch 84, as illustrated in FIG. 7, may be disposed between secondary button 80 and connector 66. In some examples, secondary button 80 may be used by an operator as a “selection” device. During a medical operation, surgical robot 4 may notify medical personnel to certain conditions by display 34 and/or light indicator 28. Medical personnel may be prompted by surgical robot 4 to select a function, mode, and/or assess the condition of surgical system 2. Depressing secondary button 80 upon secondary activation switch 84 a single time may activate certain functions, modes, and/or acknowledge information communicated to medical personnel through display 34 and/or light indicator 28. Additionally, depressing secondary button 80 upon secondary activation switch 84 multiple times in rapid succession may activate additional functions, modes, and/or select information communicated to medical personnel through display 34 and/or light indicator 28. In some examples, at least two non-adjacent secondary activation switches 84 may be depressed before secondary button 80 may function properly. This requirement may prevent unintended use of secondary button 80 from accidental bumping by medical personnel upon activation assembly 60. Primary button 78 and secondary button 80 may use software architecture 86 to communicate commands of medical personnel to surgical system 2.

FIG. 8 illustrates a block diagram of components of a surgical system 800 configured according to some embodiments of the present disclosure, and which may correspond to the surgical system 2 above. Surgical system 800 includes platform subsystem 802, computer subsystem 820, motion control subsystem 840, and tracking subsystem 830. Platform subsystem 802 includes battery 806, power distribution module 804, connector panel 808, and charging station 810. Computer subsystem 820 includes computer 822, display 824, and speaker 826. Motion control subsystem 840

14

includes driver circuit 842, motors 850, 851, 852, 853, 854, stabilizers 855, 856, 857, 858, end effector connector 844, and controller 846. Tracking subsystem 830 includes position sensor 832 and camera converter 834. Surgical system 800 may also include a removable foot pedal 880 and removable tablet computer 890.

Input power is supplied to surgical system 800 via a power source which may be provided to power distribution module 804. Power distribution module 804 receives input power and is configured to generate different power supply voltages that are provided to other modules, components, and subsystems of surgical system 800. Power distribution module 804 may be configured to provide different voltage supplies to connector panel 808, which may be provided to other components such as computer 822, display 824, speaker 826, driver 842 to, for example, power motors 850-854 and end effector coupler 844, and provided to camera converter 834 and other components for surgical system 800. Power distribution module 804 may also be connected to battery 806, which serves as temporary power source in the event that power distribution module 804 does not receive power from an input power. At other times, power distribution module 804 may serve to charge battery 806.

Connector panel 808 may serve to connect different devices and components to surgical system 800 and/or associated components and modules. Connector panel 808 may contain one or more ports that receive lines or connections from different components. For example, connector panel 808 may have a ground terminal port that may ground surgical system 800 to other equipment, a port to connect foot pedal 880, a port to connect to tracking subsystem 830, which may include position sensor 832, camera converter 834, and marker tracking cameras 870. Connector panel 808 may also include other ports to allow USB, Ethernet, HDMI communications to other components, such as computer 822.

Control panel 816 may provide various buttons or indicators that control operation of surgical system 800 and/or provide information from surgical system 800 for observation by an operator. For example, control panel 816 may include buttons to power on or off surgical system 800, lift or lower vertical column 16, and lift or lower stabilizers 855-858 that may be designed to engage casters 12 to lock surgical system 800 from physically moving. Other buttons may stop surgical system 800 in the event of an emergency, which may remove all motor power and apply mechanical brakes to stop all motion from occurring. Control panel 816 may also have indicators notifying the operator of certain system conditions such as a line power indicator or status of charge for battery 806.

Computer 822 of computer subsystem 820 includes an operating system and software to operate assigned functions of surgical system 800. Computer 822 may receive and process information from other components (for example, tracking subsystem 830, platform subsystem 802, and/or motion control subsystem 840) in order to display information to the operator. Further, computer subsystem 820 may provide output through the speaker 826 for the operator. The speaker may be part of the surgical robot, part of a head-mounted display component, or within another component of the surgical system 2. The display 824 may correspond to the display 34 shown in FIGS. 1 and 2, or may be a head-mounted display which projects images onto a see-through display screen which forms an augmented reality (AR) image that is overlaid on real-world objects viewable through the see-through display screen.

15

Tracking subsystem **830** may include position sensor **832** and camera converter **834**. Tracking subsystem **830** may correspond to the camera tracking system **6** of FIG. **3**. The marker tracking cameras **870** operate with the position sensor **832** to determine the pose of DRAs **52**. This tracking may be conducted in a manner consistent with the present disclosure including the use of infrared or visible light technology that tracks the location of active or passive elements of DRAs **52**, such as LEDs or reflective markers, respectively. The location, orientation, and position of structures having these types of markers, such as DRAs **52**, is provided to computer **822** and which may be shown to an operator on display **824**. For example, as shown in FIGS. **4** and **5**, a surgical saw **1240** having a DRA **52** or which is connected to an end effector coupler **22** having a DRA **52** tracked in this manner (which may be referred to as a navigational space) may be shown to an operator in relation to a three dimensional image of a patient's anatomical structure.

Motion control subsystem **840** may be configured to physically move vertical column **16**, upper arm **18**, lower arm **20**, or rotate end effector coupler **22**. The physical movement may be conducted through the use of one or more motors **850-854**. For example, motor **850** may be configured to vertically lift or lower vertical column **16**. Motor **851** may be configured to laterally move upper arm **18** around a point of engagement with vertical column **16** as shown in FIG. **2**. Motor **852** may be configured to laterally move lower arm **20** around a point of engagement with upper arm **18** as shown in FIG. **2**. Motors **853** and **854** may be configured to move end effector coupler **22** to provide translational movement and rotation along in about three-dimensional axes. The surgical planning computer **910** shown in FIG. **9** can provide control input to the controller **846** that guides movement of the end effector coupler **22** to position a passive end effector, which is connected thereto, with a planned pose (i.e., location and angular orientation relative to defined 3D orthogonal reference axes) relative to an anatomical structure that is to be cut during a surgical procedure. Motion control subsystem **840** may be configured to measure position of the passive end effector structure using integrated position sensors (e.g. encoders). In one of the embodiments, position sensors are directly connected to at least one joint of the passive end effector structure, but may also be positioned in another location in the structure and remotely measure the joint position by interconnection of a timing belt, a wire, or any other synchronous transmission interconnection.

FIG. **9** illustrates a block diagram of a surgical system computer platform **900** that includes a surgical planning computer **910** which may be separate from and operationally connected to a surgical robot **800** or at least partially incorporated therein according to some embodiments of the present disclosure. Alternatively, at least a portion of operations disclosed herein for the surgical planning computer **910** may be performed by components of the surgical robot **800** such as by the computer subsystem **820**.

Referring to FIG. **9**, the surgical planning computer **910** includes a display **912**, at least one processor circuit **914** (also referred to as a processor for brevity), at least one memory circuit **916** (also referred to as a memory for brevity) containing computer readable program code **918**, and at least one network interface **920** (also referred to as a network interface for brevity). The network interface **920** can be configured to connect to a C-Arm imaging device **104** in FIG. **10**, an O-Arm imaging device **106** in FIG. **11**, another medical imaging device, an image database **950** of

16

medical images, components of the surgical robot **800**, and/or other electronic equipment.

When the surgical planning computer **910** is at least partially integrated within the surgical robot **800**, the display **912** may correspond to the display **34** of FIG. **2** and/or the tablet **890** of FIG. **8** and/or a head-mounted display, the network interface **920** may correspond to the platform network interface **812** of FIG. **8**, and the processor **914** may correspond to the computer **822** of FIG. **8**.

The processor **914** may include one or more data processing circuits, such as a general purpose and/or special purpose processor, e.g., microprocessor and/or digital signal processor. The processor **914** is configured to execute the computer readable program code **918** in the memory **916** to perform operations, which may include some or all of the operations described herein as being performed by a surgical planning computer.

The processor **914** can operate to display on the display device **912** an image of a bone that is received from one of the imaging devices **104** and **106** and/or from the image database **950** through the network interface **920**. The processor **914** receives an operator's definition of where an anatomical structure, i.e. one or more bones, shown in one or more images is to be cut, such as by an operator touch selecting locations on the display **912** for planned surgical cuts or using a mouse-based cursor to define locations for planned surgical cuts.

The surgical planning computer **910** enables anatomy measurement, useful for knee surgery, like measurement of various angles determining center of hip, center of angles, natural landmarks (e.g. transepicondylar line, Whitesides line, posterior condylar line etc.), etc. Some measurements can be automatic while some others involve human input or assistance. This surgical planning computer **910** allows an operator to choose the correct implant for a patient, including choice of size and alignment. The surgical planning computer **910** enables automatic or semi-automatic (involving human input) segmentation (image processing) for CT images or other medical images. The surgical plan for a patient may be stored in a cloud-based server for retrieval by the surgical robot **800**. During the surgery, the surgeon will choose which cut to make (e.g. posterior femur, proximal tibia etc.) using a computer screen (e.g. touchscreen) or augmented reality interaction via, e.g., a head-mounted display. The surgical robot **4** may automatically move the surgical saw blade to a planned position so that a target plane of planned cut is optimally placed within a workspace of the passive end effector interconnecting the surgical saw blade and the robot arm **20**. Command enabling movement can be given by user using various modalities, e.g. foot pedal.

In some embodiments, the surgical system computer platform **900** can use two DRAs to tracking patient anatomy position: one on patient tibia and one on patient femur. The platform **900** may use standard navigated instruments for the registration and checks (e.g., a pointer similar to the one used in Globus ExcelsiusGPS system for spine surgery). Tracking markers allowing for detection of DRAs movement in reference to tracked anatomy can be used as well.

An important difficulty in knee surgery is how to plan the position of the implant in the knee and many surgeons struggle with to do it on a computer screen which is a 2D representation of 3D anatomy. The platform **900** could address this problem by using an augmented reality (AR) head-mounted display to generate an implant overlay around the actual patient knee. For example, the surgeon can be operationally displayed a virtual handle to grab and move the implant to a desired pose and adjust planned implant

placement. Afterward, during surgery, the platform **900** could render the navigation through the AR head-mounted display to show surgeon what is not directly visible. Also, the progress of bone removal, e.g., depth or cut, can be displayed in real-time. Other features that may be displayed through AR can include, without limitation, gap or ligament balance along a range of joint motion, contact line on the implant along the range of joint motion, ligament tension and/or laxity through color or other graphical overlays, etc.

The surgical planning computer **910**, in some embodiments, can allow planning for use of standard implants, e.g., posterior stabilized implants and cruciate retaining implants, cemented and cementless implants, revision systems for surgeries related to, for example, total or partial knee and/or hip replacement and/or trauma.

The processor **912** may graphically illustrate on the display **912** one or more cutting planes intersecting the displayed anatomical structure at the locations selected by the operator for cutting the anatomical structure. The processor **912** also determines one or more sets of angular orientations and locations where the end effector coupler **22** must be positioned so a cutting plane of the surgical saw blade will be aligned with a target plane to perform the operator defined cuts, and stores the sets of angular orientations and locations as data in a surgical plan data structure. The processor **912** uses the known range of movement of the tool attachment mechanism of the passive end effector to determine where the end effector coupler **22** attached to the robot arm **20** needs to be positioned.

The computer subsystem **820** of the surgical robot **800** receives data from the surgical plan data structure and receives information from the camera tracking system **6** indicating a present pose of an anatomical structure that is to be cut and indicating a present pose of the passive end effector and/or surgical saw tracked through DRAs. The computer subsystem **820** determines a pose of the target plane based on the surgical plan defining where the anatomical structure is to be cut and based on the pose of the anatomical structure. The computer subsystem **820** generates steering information based on comparison of the pose of the target plane and the pose of the surgical saw. The steering information indicates where the passive end effector needs to be moved so the cutting plane of the saw blade becomes aligned with the target plane and the saw blade becomes positioned a distance from the anatomical structure to be cut that is within the range of movement of the tool attachment mechanism of the passive end effector.

As explained above, a surgical robot includes a robot base, a robot arm connected to the robot base, and at least one motor operatively connected to move the robot arm relative to the robot base. The surgical robot also includes at least one controller, e.g. the computer subsystem **820** and the motion control subsystem **840**, connected to the at least one motor and configured to perform operations.

As will be explained in further detail below with regard to FIGS. **12-19**, a passive end effector includes a base configured to attach to an activation assembly of the robot arm, a first mechanism, and a second mechanism. The first mechanism extends between a rotatable connection to the base and a rotatable connection to a tool attachment mechanism. The second mechanism extends between a rotatable connection to the base and a rotatable connection to the tool attachment mechanism. The first and second mechanisms pivot about the rotatable connections which may be configured to constrain movement of the tool attachment mechanism to a range of movement within a working plane. The rotatable connections may be pivot joints allowing 1 degree-of-

freedom (DOF) motion, universal joints allowing 2 DOF motions, or ball joints allowing 3 DOF motions. The tool attachment mechanism is configured to connect to the surgical saw comprising a saw blade for cutting. The first and second mechanisms may be configured to constrain a cutting plane of the saw blade to be parallel to the working plane.

In some embodiments, the operations performed by the at least one controller of the surgical robot also includes controlling movement of the at least one motor based on the steering information to reposition the passive end effector so the cutting plane of the saw blade becomes aligned with the target plane and the saw blade becomes positioned the distance from the anatomical structure to be cut that is within the range of movement of the tool attachment mechanism of the passive end effector. The steering information may be displayed to guide an operator's movement of the surgical saw and/or may be used by the at least one controller to automatically move the surgical saw.

In one embodiment, the operations performed by the at least one controller of the surgical robot also includes providing the steering information to a display device for display to guide operator movement of the passive end effector so the cutting plane of the saw blade becomes aligned with the target plane and so the saw blade becomes positioned the distance from the anatomical structure, which is to be cut, that is within the range of movement of the tool attachment mechanism of the passive end effector. The display device may correspond to the display **824** (FIG. **8**), the display **34** of FIG. **1**, and/or a head-mounted display.

For example, the steering information may be displayed on a head-mounted display which projects images onto a see-through display screen which forms an augmented reality image that is overlaid on real-world objects viewable through the see-through display screen. The operations may display a graphical representation of the target plane with a pose overlaid on a bone and with a relative orientation there between corresponding to the surgical plan for how the bone is planned to be cut. The operations may alternatively or additionally display a graphical representation of the cutting plane of the saw blade so that an operator may more easily align the cutting plane with the planned target plane for cutting the bone. The operator may thereby visually observe and perform movements to align the cutting plane of the saw blade with the target plane so the saw blade becomes positioned at the planned pose relative to the bone and within a range of movement of the tool attachment mechanism of the passive end effector.

An automated imaging system can be used in conjunction with the surgical planning computer **910** and/or the surgical system **2** to acquire pre-operative, intra-operative, post-operative, and/or real-time image data of a patient. Example automated imaging systems are illustrated in FIGS. **10** and **11**. In some embodiments, the automated imaging system is a C-arm **104** (FIG. **10**) imaging device or an O-arm® **106** (FIG. **11**). (O-arm® is copyrighted by Medtronic Navigation, Inc. having a place of business in Louisville, Colo., USA) It may be desirable to take x-rays of a patient from a number of different positions, without the need for frequent manual repositioning of the patient which may be required in an x-ray system. C-arm **104** x-ray diagnostic equipment may solve the problems of frequent manual repositioning and may be well known in the medical art of surgical and other interventional procedures. As illustrated in FIG. **10**, a C-arm includes an elongated C-shaped member terminating in opposing distal ends **112** of the "C" shape. C-shaped member is attached to an x-ray source **114** and an image receptor **116**. The space within C-arm **104** of the arm

provides room for the physician to attend to the patient substantially free of interference from the x-ray support structure.

The C-arm is mounted to enable rotational movement of the arm in two degrees of freedom, (i.e. about two perpendicular axes in a spherical motion). C-arm is slidably mounted to an x-ray support structure, which allows orbiting rotational movement of the C-arm about its center of curvature, which may permit selective orientation of x-ray source **114** and image receptor **116** vertically and/or horizontally. The C-arm may also be laterally rotatable, (i.e. in a perpendicular direction relative to the orbiting direction to enable selectively adjustable positioning of x-ray source **114** and image receptor **116** relative to both the width and length of the patient). Spherically rotational aspects of the C-arm apparatus allow physicians to take x-rays of the patient at an optimal angle as determined with respect to the particular anatomical condition being imaged.

The O-arm® **106** illustrated in FIG. **11** includes a gantry housing **124** which may enclose an image capturing portion, not illustrated. The image capturing portion includes an x-ray source and/or emission portion and an x-ray receiving and/or image receiving portion, which may be disposed about one hundred and eighty degrees from each other and mounted on a rotor (not illustrated) relative to a track of the image capturing portion. The image capturing portion may be operable to rotate three hundred and sixty degrees during image acquisition. The image capturing portion may rotate around a central point and/or axis, allowing image data of the patient to be acquired from multiple directions or in multiple planes.

The O-arm® **106** with the gantry housing **124** has a central opening for positioning around an object to be imaged, a source of radiation that is rotatable around the interior of gantry housing **124**, which may be adapted to project radiation from a plurality of different projection angles. A detector system is adapted to detect the radiation at each projection angle to acquire object images from multiple projection planes in a quasi-simultaneous manner. The gantry may be attached to a support structure O-arm® support structure, such as a wheeled mobile cart with wheels, in a cantilevered fashion. A positioning unit translates and/or tilts the gantry to a planned position and orientation, preferably under control of a computerized motion control system. The gantry may include a source and detector disposed opposite one another on the gantry. The source and detector may be secured to a motorized rotor, which may rotate the source and detector around the interior of the gantry in coordination with one another. The source may be pulsed at multiple positions and orientations over a partial and/or full three hundred and sixty degree rotation for multi-planar imaging of a targeted object located inside the gantry. The gantry may further comprise a rail and bearing system for guiding the rotor as it rotates, which may carry the source and detector. Both and/or either O-arm® **106** and C-arm **104** may be used as automated imaging system to scan a patient and send information to the surgical system **2**.

Images captured by the automated imaging system can be displayed a display device of the surgical planning computer **910**, the surgical robot **800**, and/or another component of the surgical system **2**.

Various embodiments of passive end effectors that are configured for use with a surgical system are now described in the context of FIGS. **12-19**.

As will be explained in further detail below, the various passive end effectors illustrated in FIGS. **12-19** each include a base, a first planer mechanism, and a second planer

mechanism. The base is configured to attach to an end effector coupler (e.g., end effector coupler **22** in FIGS. **4** and **5**) of a robot arm (e.g., robot arm **18** in FIGS. **1** and **2**) positioned by a surgical robot. Various clamping mechanisms may be used to firmly attach the base to the end effector coupler, removing backlash and ensuring suitable stiffness. Irreversible clamping mechanisms which may be used to attach the base to the end effector coupler can include but are not limited to toggle joint mechanisms or irreversible locking screw(s). A user may use an additional tool, such as but not limited to, a screwdriver, torque wrench, or driver to activate or tighten the clamping mechanism. The first mechanism extends between a rotatable connection to the base of a two and a rotatable connection to a tool attachment mechanism. The second mechanism extends between a rotatable connection to the base and a rotatable connection to the tool attachment mechanism. The first and second mechanisms pivot about the rotatable connections. The rotatable connections may be pivot joints allowing 1 degree-of-freedom (DOF) motion, universal joints allowing 2 DOF motions, or ball joints allowing 3 DOF motions. When pivot joints are used the first and second mechanisms can be configured to constrain movement of the tool attachment mechanism to a range of movement within a working plane. The tool attachment mechanism is configured to connect to a surgical saw having a saw blade that is configured to oscillate for cutting. The first and second mechanisms may be configured, e.g., via pivot joints having 1 DOF motion, to constrain a cutting plane of the saw blade to be parallel to the working plane. The tool attachment mechanism may connect to the surgical saw or saw blade through various mechanisms that can include, but are not limited to, a screw, nut and bolt, clamp, latch, tie, press fit, or magnet. A DRA can be connected to the tool attachment mechanism or the surgical saw to enable tracking of a pose of the saw blade by the camera tracking system **6** (FIG. **3**).

As explained above, a surgical system (e.g., surgical system **2** in FIGS. **1** and **2**) includes a surgical robot (e.g., surgical robot **4** in FIGS. **1** and **2**) and a tracking system (e.g., camera tracking system **6** in FIGS. **1** and **3**) that is configured to determine a pose of an anatomical structure that is to be cut by the saw blade and to determine a pose of the saw blade. The surgical robot includes a robot base, a robot arm that is rotatably connected to the robot base and configured to position the passive end effector. At least one motor is operatively connected to move the robot arm relative to the robot base. At least one controller is connected to the at least one motor and configured to perform operations that include determining a pose of a target plane based on a surgical plan defining where the anatomical structure is to be cut and based on the pose of the anatomical structure, where the surgical plan may be generated by the surgical planning computer **910** of FIG. **9** based on input from an operator, e.g., surgeon or other surgery personnel. The operations further include generating steering information based on comparison of the pose of the target plane and the pose of the surgical saw. The steering information indicates where the passive end effector needs to be moved to position the working plane of the passive end effector so the cutting plane of the saw blade is aligned with the target plane.

In some further embodiments, the operations performed by the at least one controller further include controlling movement of the at least one motor based on the steering information to reposition the passive end effector so the cutting plane of the saw blade becomes aligned with the target plane and the saw blade becomes positioned a distance

from the anatomical structure to be cut that is within the range of movement of the tool attachment mechanism of the passive end effector.

The operations may include providing the steering information to a display device for display to guide operator movement of the passive end effector so the cutting plane of the saw blade becomes aligned with the target plane and so the saw blade becomes positioned a distance from the anatomical structure, which is to be cut, that is within the range of movement of the tool attachment mechanism of the passive end effector.

As explained above, some surgical systems can include head-mounted display devices that can be worn by a surgeon, nurse practitioner, and/or other persons assisting with the surgical procedure. The surgical systems can display information that allows the wearer to position the passive end effector more accurately and/or to confirm that it has been positioned accurately with the saw blade aligned with the target plane for cutting a planned location on an anatomical structure. The operation to provide the steering information to the display device, may include configuring the steering information for display on a head-mounted display device having a see-through display screen that displays the steering information as an overlay on the anatomical structure that is to be cut to guide operator movement of the passive end effector so the cutting plane of the saw blade becomes aligned with the target plane and the saw blade becomes positioned the distance from the anatomical structure within the range of movement of the tool attachment mechanism of the passive end effector.

The operation to configure the steering information for display on the head-mounted display device, may include generating a graphical representation of the target plane that is displayed as an overlay anchored to and aligned with the anatomical structure that is to be cut, and generating another graphical representation of the cutting plane of the saw blade that is displayed as an overlay anchored to and aligned with the saw blade. A wearer may thereby move the surgical saw to provide visually observed alignment between the graphically rendered target plane and the graphically rendered cutting plane.

The operation to configure the steering information for display on the head-mounted display device, may include generating a graphical representation a depth of cut made by the saw blade into a graphical representation of the anatomical structure being cut. Thus, the wearer can use the graphical representation of depth of cut to better monitor how the saw blade is cutting through bone despite direct observation of the cutting being obstructed by tissue or other structure.

The tracking system can be configured to determine the pose of the anatomical structure that is to be cut by the saw blade based on determining a pose of tracking markers, e.g., DRAs, that are attached to the anatomical structure, and can be configured to determine a pose of the surgical saw based on determining a pose of tracking markers connected to at least one of the surgical saw and the passive end effector. The tracking system can be configured to determine the pose of the surgical saw based on rotary position sensors which are configured to measure rotational positions of the first and second mechanisms during movement of the tool attachment mechanism within the working plane. As explained above, position sensors may be directly connected to at least one joint of the passive end effector structure, but may also be positioned in another location in the structure and remotely measure the joint position by interconnection of a timing belt, a wire, or any other synchronous transmission inter-

connection. Additionally the pose of the saw blade can be determined based on the tracking markers attached to the structure base, position sensors in the passive structure and kinematic model of the structure.

The various passive end effectors disclosed herein can be sterilizable or non-sterile (covered by a sterile drape) passive 3 DOF (Degree Of Freedom) mechanical structures allowing mechanical guidance of a surgical saw or saw blade, such as a sagittal saw, along two translations in a plane parallel to the saw blade (defining the cut plane), and one rotation perpendicular to this cut plane (instrument orientation). During the surgery, the surgical robot 4 moves the end effector coupler 22, and the passive end effector and surgical saw attached there, automatically to a position close to a knee or other anatomical structure, so that all bone to be cut is within the workspace of the passive end effector. This position depends on the cut to be made and the surgery planning and implant construction. The passive end effector can have 3 DOF to guide sagittal saw or saw blade on the cutting plane providing two translation (X and Y directions) and a rotation (around Z axis) as shown in FIG. 12.

When the surgical robot 4 achieves a planned position, it holds the position (either on brakes or active motor control) and does not move during the particular bone cut. It is the passive end effector that allows movement of the saw blade of the surgical saw along the planned target plane. Such planar cuts are particularly useful for classical total knee arthroplasty where all bone cuts are planar. In partial knee arthroplasty there are special types of implants, called "on-lay" which can be used in conjunction with saw-prepared bone surfaces. The various passive end effectors have mechanical structure that can ensure precision of guidance during cuts, with higher precision than classical jigs, and provide sufficient range of workspace range to cut all the bone that is planned and while provide sufficient transverse stiffness (corresponding to locked DOF) despite possibly significant amount of vibrations originating from the surgical saw in addition to forces applied by the surgeon and bone reactionary forces.

As the same time, it is preferable to measure the passive end effector position because it enables the surgical robot 4 to inform the surgeon how much bone has been removed (procedure advancement). One way to provide real-time information on bone removal is for the surgical robot 4 to measure where the saw blade passed in reference to the bone because the blade can pass only where the bone has been cut. To measure saw blade position a DRA can be mounted to the surgical saw and/or the passive end effector. This enables direct or indirect measurement of the saw position in 3D space. An alternative way to measure saw blade position is to integrate position (rotation or translation) sensors (e.g. encoders, resolvers) into position information of the passive end effector in order to calculate position of the saw blade using a mathematical model of a defined relationship between location of the passive end effector geometry and the tip of the saw blade.

In one embodiment, a conventional sagittal saw mechanism can be used with the surgical system computer platform 900 with little or no changes. The potential changes would involve adapting an external shield to enable easy attachment of the surgical saw to the passive end effector but would not necessarily involve changes in the internal mechanics. The passive end effector may be configured to connect to a conventional sagittal saw provided by, for example, DeSoutter company. In addition, the saw blade may be directly attached to the passive end effector without the saw handpiece.

23

To prevent the saw from unintentional passive end effector movement when the surgical robot **4** positions the passive end effector, e.g., to prevent the surgical saw from falling on the patient due to gravitational forces, the passive end effector can include a lock mechanism that moves between engaged and disengaged operations. While engaged, the lock mechanism prevents movement of the saw blade with respect to the robot end effector coupler, either directly by locking the degree of freedoms (DOFs) of the surgical saw, or indirectly by braking or locking specific joints of the passive end effector. While disengaged, the first and second mechanisms of the passive end effector can be moved relative to the base without interference from the lock mechanism. The lock mechanism may also be used when a surgeon holds the surgical saw and controls the surgical robot **4** movement by applying forces and torques to the surgical saw. The surgical robot **4**, using the load cell **64** of FIGS. **6** and **7** integrated in the distal end of the robot arm **22**, measures forces and torques that are applied and generates responsive forces and torques on the robot arm **22** so the surgeon can more easily move the passive end effector back and forth, left and right, apply rotations around various axes.

A first embodiment of a passive end effector is shown in FIG. **12**. Referring to FIG. **12**, the passive end effector **1200** includes a base **1202** configured to attach to an end effector coupler (e.g., end effector coupler **22** in FIGS. **4** and **5**) of a robot arm (e.g., robot arm **18** in FIGS. **1** and **2**) positioned by a surgical robot. The passive end effector **1200** further includes first and second mechanisms that extend between rotatable connections to the base **1202** and rotatable connections to a tool attachment mechanism. The rotatable connections may be pivot joints allowing 1 degree-of-freedom (DOF) motion, universal joints allowing 2 DOF motions, or ball joints allowing 3 DOF motions. The first and second mechanisms form a parallel architecture that positions the surgical saw rotation axis in the cut plane.

First and second link segments **1210a** and **1220a** form the first planer mechanism, and third and fourth link segments **1210b** and **1220b** form the second planer mechanism. The first link segment **1210a** extends between a rotatable connection to a first location on the base **1202** and a rotatable connection to an end of the second link segment **1220a**. The third link segment **1210b** extends between a rotatable connection to a second location on the base **1202** and a rotatable connection to an end of the fourth link segment **1220b**. The first and second locations on the base **1202** are spaced apart on opposite sides of a rotational axis of the base color to when rotated by the robot arm. The tool attachment mechanism is formed by a fifth link segment that extends between rotatable connections to distal ends of the second link segment **1220a** and the fourth link segment **1220b** relative to the base **1202**. The first and second mechanisms (first and second link segments **1210a-1220a** and third and fourth link segments **1210b-1220b**) pivot about their rotatable connections to constrain movement of the tool attachment mechanism **1230** to a range of movement within a working plane. The tool attachment mechanism **1230** is configured to connect to a surgical saw **1240** having a saw blade **1242** that is configured to oscillate for cutting. The first and second mechanisms (first and second link segments **1210a-1220a** and third and fourth link segments **1210b-1220b**) may be configured, e.g., via pivot joints having 1 DOF motion, to constrain a cutting plane of the saw blade **1242** to be parallel to the working plane. The tool attachment mechanism **1230** may connect to the surgical saw **1240** through various mechanisms that can include, but are not limited to, a screw,

24

nut and bolt, clamp, latch, tie, press fit, or magnet. A DRA **52** can be connected to the tool attachment mechanism **1230** or the surgical saw **1240** to enable tracking of a pose of the saw blade **1242** by the camera tracking system **6** (FIG. **3**).

The passive end effector **1200** provides passive guidance of the surgical saw **1240** to constrain the saw blade **1242** to a defined cutting plane and reduce its mobility to three degrees of freedom (DOF): two translations Tx and Ty in a plane parallel to the cutting plane of the saw blade **1242**; and one rotational Rz around an axis perpendicular to the cutting plane.

In some embodiments, a tracking system is configured to determine the pose of the saw blade **1242** based on rotary position sensors connected to the rotational joints of at least some of the link segments of the passive end effector **1200**. The rotary position sensors are configured to measure rotational positions of the joined link segments during movement of the tool attachment mechanism within the working plane. For example, a rotary position sensor can be configured to measure rotation of the first link segment **1210a** relative to the base **1202**, another rotary position sensor can be configured to measure rotation of the second link segment **1220a** relative to the first link segment **1210a**, and another rotary position sensor can be configured to measure rotation of the tool attachment mechanism **1230** relative to the second link segment **1220a**. The surgical saw **1240** can be connected to have a fixed orientation relative to the tool attachment mechanism **1230**. A serial kinematic chain of the passive end effector **1200** connecting the saw blade **1242** and the robot arm **22**, having serialized link segments and pivoting joints, provides the required mobility to the surgical saw **1240**. The position of the tip of the saw blade **1242** in the plane defined by the passive kinematic chain can be fully determined by the joint angles, sensed through the rotary position sensors, and the structural geometry of the interconnected link segments. Therefore, by measuring the relative angle between each connected link segment, for example along one or more interconnected paths between the base **1202** and the surgical saw **1240**, the position of the tip of the saw blade **1242** in the cut space can be computed using the proposed forward kinematic model. When the position and orientation of robot arm **22** distal end position and orientation with respect to the bone is known, the position and orientation of the saw blade **1242** with respect to the bone can be computed and displayed as feedback to the surgeon. For exemplary implementations where the saw blade is directly attached to the passive end effector, the frequency of measurement provided by rotary position sensors may be at least two times higher than saw blade oscillation frequency in order to measure saw blade position even during oscillations.

Example types of rotary position sensors that can be used with passive end effectors herein can include, but are not limited to: potentiometers; optical; capacitive; rotary variable differential transformer (RVDT); linear variable differential transformer (LVDT); Hall effect; and inductor.

A potentiometer based sensor is a passive electronic component. Potentiometers work by varying the position of a sliding contact across a uniform resistance. In a potentiometer, the entire input voltage is applied across the whole length of the resistor, and the output voltage is the voltage drop between the fixed and sliding contact. To receive and absolute position, a calibration-position is needed. Potentiometers may have a measurement range smaller 360°.

An optical encoder can include a rotating disk, a light source, and a photo detector (light sensor). The disk, which is mounted on the rotating shaft, has patterns of opaque and

transparent sectors coded into the disk. As the disk rotates, these patterns interrupt the light emitted onto the photo detector, generating a digital or pulse signal output. Through signal encoding on the disk absolute and relative as well as multi-turn measurements are possible.

A capacitive encoder detects changes in capacitance using a high-frequency reference signal. This is accomplished with the three main parts: a stationary transmitter, a rotor, and a stationary receiver. Capacitive encoders can also be provided in a two-part configuration, with a rotor and a combined transmitter/receiver. The rotor can be etched with a sinusoidal pattern, and as it rotates, this pattern modulates the high-frequency signal of the transmitter in a predictable way. The encoder can be multi-turn, but absolute measurement is difficult to realize. Calibration at startup is needed.

RVDT and LVDT sensors operate where the core of the transformer is in null position, the output voltages of the two, primary and secondary, windings are equal in magnitude, however opposite in direction. The overall output of the null position is always zero. An angular displacement from the null position is inducing a total differential output voltage. Therefore, the total angular displacement is directly proportional to the linear differential output voltage. The differential output voltages increase with clockwise and decrease with anti-clockwise direction. This encoder works in absolute measurement and may not be multi-turn compatible. Calibration during assembly is needed.

In a Hall effect sensors, a thin strip of metal has a current applied along it. In the presence of a magnetic field, the electrons in the metal strip are deflected toward one edge, producing a voltage gradient across the short side of the strip, i.e., perpendicular to the feed current. In its simplest form, the sensor operates as an analog transducer, directly returning a voltage. With a known magnetic field, its distance from the Hall plate can be determined. Using groups of sensors, the relative position of the magnet can be deduced. By combining multiple sensor elements with a patterned magnet-plate, position can be detected absolute and relative similar to optical encoders.

An inductor sensor works in a similar way to rotary variable transformer sensor, brushless resolvers or synchros. The stator receives DC power and produces a low power AC electromagnetic field between the stator and rotor. This field is modified by the rotor depending on its angle. The stator senses the resulting field and outputs the rotation angle as an analogue or digital signal. Unlike resolvers, inductors use laminar circuits rather than wound wire spools. This technology enables inductors compact form, low mass, low inertia and high accuracy without high precision installation. A signal (Z) to count one full rotation is transmitted. Multi-turn and absolute sensing is possible.

A second embodiment of a passive end effector is shown in FIG. 13. Referring to FIG. 13, the passive end effector 1300 includes a base 1302 that is configured to attach to an end effector coupler (e.g., end effector coupler 22 in FIGS. 4 and 5) of a robot arm (e.g., robot arm 18 in FIGS. 1 and 2) positioned by a surgical robot. The passive end effector 1300 further includes first and second mechanisms that extend between rotatable connections to the base 1302 and rotatable connections to a tool attachment mechanism. The rotatable connections may be pivot joints allowing 1 DOF motion, universal joints allowing 2 DOF motions, or ball joints allowing 3 DOF motions. First and second link segments 1310a and 1320a form the first planer mechanism, and third and fourth link segments 1310b and 1320b form the second planer mechanism. The first link segment 1310a extends between a rotatable connection to a first location on

the base 1302 and a rotatable connection to an end of the second link segment 1320a. The third link segment 1310b extends between a rotatable connection to a second location on the base 1302 and a rotatable connection to an end of the fourth link segment 1320b. The first and second locations on the base 1302 are spaced apart on opposite sides of a rotational axis of the base color to when rotated by the robot arm. Distal ends of the second link segment 1320a and the fourth link segment 1320b from the base 1302 are rotatably connected to each other and to the tool attachment mechanism 1330. The first and second mechanisms (first and second link segments 1310a-1320a and third and fourth link segments 1310b-1320b) may be configured, e.g., via pivot joints having 1 DOF motion, to rotate about their rotatable connections to constrain movement of the tool attachment mechanism 1330 to a range of movement within a working plane. The tool attachment mechanism 1330 is configured to connect to a surgical saw 1240 having a saw blade 1242 that is configured to oscillate for cutting. The first and second mechanisms (first and second link segments 1310a-1320a and third and fourth link segments 1310b-1320b) constrain a cutting plane of the saw blade 1242 to be parallel to the working plane. The tool attachment mechanism 1330 may connect to the surgical saw 1240 through various mechanisms that can include, but are not limited to, a screw, nut and bolt, clamp, latch, tie, press fit, or magnet. A DRA can be connected to the tool attachment mechanism 1330 or the surgical saw 1240 to enable tracking of a pose of the saw blade 1242 by the camera tracking system 6 (FIG. 3).

A third embodiment of a passive end effector is shown in FIG. 14. Referring to FIG. 14, the passive end effector 1400 includes a base 1402 that is configured to attach to an end effector coupler (e.g., end effector coupler 22 in FIGS. 4 and 5) of a robot arm (e.g., robot arm 18 in FIGS. 1 and 2) positioned by a surgical robot. The base 1402 includes first and second elongated base segments 1404a and 1404b that extend from spaced apart locations on opposite sides of a rotational axis of the base 1402 when rotated by the robot arm. The first and second elongated base segments 1404a and 1404b extend in a direction away from the end effector coupler of the robot arm when attached to the passive end effector 1400. The passive end effector 1400 further includes first and second mechanisms that extend between rotatable connections to the elongated base segments 1404a and 1404b and rotatable connections to a tool attachment mechanism. One or more of the rotatable connections disclosed for this embodiment may be pivot joints allowing 1 DOF motion, universal joints allowing 2 DOF motions, or ball joints allowing 3 DOF motions.

The first mechanism includes a first link segment 1411a, the second link segment 1410a, a third link segment 1420a, and a fourth link segment 1430a. The first and second link segments 1411a and 1410a extend parallel to each other between rotatable connections to spaced apart locations on the first elongated base segment 1404a and spaced apart locations on the third link segment 1420a. An end of the third link segment 1420a is rotatably connected to an end of the fourth link segment 1430a.

The second mechanism includes a fifth link segment 1411b, a sixth link segment 1410b, and a seventh link segment 1420b. The fifth and sixth link segments 1411b and 1410b extend parallel to each other between rotatable connections to spaced apart locations on the second elongated base segment 1404b and spaced apart locations on the seventh link segment 1420b. The tool attachment mechanism includes an eighth link segment 1440 that extends between rotatable connections to distal ends of the fourth

27

and seventh link segments **1430a** and **1420b** from the base **1402**. In a further embodiment, the eighth link segment **1440** of the tool attachment mechanism includes an attachment member **1442** that extends in a direction away from the base **1402** to a rotatable connector that is configured to connect to the surgical saw **1240**. The attachment member **1442** extends from a location on the eighth link segment **1440** that is closer to the fourth link segment **1430a** than to the seventh link segment **1420b**.

The first and second mechanisms (set of link segments **1411a**, **1410a**, **1420a**, **1430a** and set of link segments **1411b**, **1410b**, **1420b**) may be configured to pivot about their rotatable connections to constrain movement of the tool attachment mechanism **1440** to a range of movement within a working plane. The tool attachment mechanism **1440** is configured to connect to the surgical saw **1240** having the saw blade **1242** that is configured to oscillate for cutting. The first and second mechanisms may be configured, e.g., via pivot joints having 1 DOF motion, to constrain a cutting plane of the saw blade **1242** to be parallel to the working plane. The tool attachment mechanism **1440** may connect to the surgical saw **1240** through various mechanisms that can include, but are not limited to, a screw, nut and bolt, clamp, latch, tie, press fit, or magnet. A DRA can be connected to the tool attachment mechanism **1440**, such as to the attachment member **1442**, or the surgical saw **1240** to enable tracking of a pose of the saw blade **1242** by the camera tracking system **6** (FIG. 3).

The passive end effector **1400** of FIG. 14 has a parallel architecture enabling positioning of the surgical saw about a rotation axis in the cut plane. Synchronized and/or different motion of lateral parallelograms allow positioning of the surgical saw rotation axis in the cut plane.

A fourth embodiment of a passive end effector is shown in FIG. 15. The passive end effector **1500** includes a base **1502** that is configured to attach to an end effector coupler (e.g., end effector coupler **22** in FIGS. 4 and 5) of a robot arm (e.g., robot arm **18** in FIGS. 1 and 2) positioned by a surgical robot. The base **1502** may include first and second elongated base segments that extend from spaced apart locations on opposite sides of a rotational axis of the base **1502** when rotated by the robot arm. The first and second elongated base segments extend away from each other. The passive end effector **1500** further includes first and second mechanisms that extend between rotatable connections to the base **1502** and rotatable connections to a tool attachment mechanism. One or more of the rotatable connections disclosed for this embodiment may be pivot joints allowing 1 DOF motion, universal joints allowing 2 DOF motions, or ball joints allowing 3 DOF motions.

The first mechanism includes a first link segment **1510a**. The second mechanism includes a second segment **1510b**. The tool attachment mechanism includes a third link segment **1520**, a fourth link segment **1530**, a fifth link segment **1540a**, a sixth link segment **1540b**, and a seventh link segment **1550**. The first and second link segments **1510a** and **1510b** extend between rotatable connections to first and second locations, respectively, on the base **1502**, e.g., to first and second elongated base segments extending away from the base **1502**, to rotatable connections at opposite ends of the third link segment **1520**. The first and second locations on the base **1502** are spaced apart on opposite sides of a rotational axis of the base when rotated by the robot arm. The fourth link segment **1530** extends from the third link segment **1520** in a direction towards the base **1502**. The fifth and sixth link segments **1540a** and **1540b** extend parallel to each other between rotatable connections to spaced apart

28

locations on the fourth link segment **1530** and spaced apart locations on the seventh link segment **1550**. The seventh link segment **1550** is configured to have a rotatable connector that is configured to connect to the surgical saw **1240**.

The first through sixth link segments **1510a-b**, **1520**, **1530**, and **1540a-b** may be configured to pivot about their rotatable connections to constrain movement of the seventh link segment **1550** to a range of movement within a working plane. The seventh link segment **1550** is configured to connect to the surgical saw **1240** having the saw blade **1242** that is configured to oscillate for cutting. The first through sixth link segments **1510a-b**, **1520**, **1530**, and **1540a-b** may be configured to constrain a cutting plane of the saw blade **1242** to be parallel to the working plane, e.g., via pivot joints having 1 DOF motion. The seventh link segment **1550** may connect to the surgical saw **1240** through various mechanisms that can include, but are not limited to, a screw, nut and bolt, clamp, latch, tie, press fit, or magnet. A DRA can be connected to the seventh link segment **1550** or the surgical saw **1240** to enable tracking of a pose of the saw blade **1242** by the camera tracking system **6** (FIG. 3).

A fifth embodiment of a passive end effector is shown in FIG. 16. The passive end effector **1600** includes a base **1602** that is configured to attach to an end effector coupler (e.g., end effector coupler **22** in FIGS. 4 and 5) of a robot arm (e.g., robot arm **18** in FIGS. 1 and 2) positioned by a surgical robot. The passive end effector **1600** further includes first and second mechanisms that extend between rotatable connections to the base **1502** and rotatable connections to a tool attachment mechanism. The first mechanism includes a first link segment **1610a**. The second mechanism includes a second segment **1610b**. The tool attachment mechanism includes a third link segment **1620**, a fourth link segment **1630**, a fifth link segment **1640a**, a sixth link segment **1640b**, and a seventh link segment **1650**. One or more of the rotatable connections disclosed for this embodiment may be pivot joints allowing 1 DOF motion, universal joints allowing 2 DOF motions, or ball joints allowing 3 DOF motions.

The first and second link segments **1610a** and **1610b** extend between rotatable connections to first and second locations, respectively, on the base **1602** to rotatable connections at opposite ends of the third link segment **1620**. The first and second locations on the base **1602** are spaced apart on opposite sides of a rotational axis of the base **1602** when rotated by the robot arm. The fourth link segment **1630** extends from the third link segment **1620** in a direction away from the base **1602**. The fifth and sixth link segments **1640a** and **1640b** extend parallel to each other between rotatable connections to spaced apart locations on the fourth link segment **1630** and spaced apart locations on the seventh link segment **1650**. The seventh link segment **1650** is configured to have a rotatable connector that is configured to connect to the surgical saw **1240**.

The first through sixth link segments **1610a-b**, **1620**, **1630**, and **1640a-b** may be configured to pivot about their rotatable connections to constrain movement of the seventh link segment **1650** to a range of movement within a working plane. The seventh link segment **1650** is configured to connect to the surgical saw **1240** having the saw blade **1242** that is configured to oscillate for cutting. The first through sixth link segments **1610a-b**, **1620**, **1630**, and **1640a-b** may be configured to pivot while constraining a cutting plane of the saw blade **1242** to be parallel to the working plane. The seventh link segment **1650** may connect to the surgical saw **1240** through various mechanisms that can include, but are not limited to, a screw, nut and bolt, clamp, latch, tie, press fit, or magnet. A DRA can be connected to the seventh link

29

segment **1650** or the surgical saw **1240** to enable tracking of a pose of the saw blade **1242** by the camera tracking system **6** (FIG. 3).

The passive end effector **1600** provides two perpendicular translational movements for positioning the surgical saw rotation axis in the cutting plane, and where the two translations are implemented by parallelograms.

A sixth embodiment of a passive end effector is shown in FIG. 17. The passive end effector **1700** includes a base **1702** that is configured to attach to an end effector coupler (e.g., end effector coupler **22** in FIGS. 4 and 5) of a robot arm (e.g., robot arm **18** in FIGS. 1 and 2) positioned by a surgical robot. The passive end effector **1700** further includes first and second mechanisms that extend between rotatable connections to the base **1702** and rotatable connections to a tool attachment mechanism. One or more of the rotatable connections disclosed for this embodiment may be pivot joints allowing 1 DOF motion, universal joints allowing 2 DOF motions, or ball joints allowing 3 DOF motions. The first and second mechanisms are connected to provide translation along the radius of a parallelogram. The first mechanism includes first and second link segments **1710** and **1720b**. The first link segment **1710** extends between a rotatable connection to the base **1702** and a rotatable connection to an end of the second link segment **1720b**. The second mechanism includes a third link segment **1720a**. The tool attachment mechanism includes a fourth link segment **1730**. The second and third link segments **1720b** and **1720a** extend away from the base **1702** and parallel to each other between rotatable connections to spaced apart locations on the first link segment **1710** and spaced apart locations on the fourth link segment **1730**. The fourth link segment **1730** comprises an attachment member **1732** that extends in a direction away from the base to a rotatable connector that is configured to connect to the surgical saw **1240**. The attachment member **1732** extends from a location on the fourth link segment **1730** that is closer to the third link segment **1720a** than to the second link segment **1720b**.

The first through third link segments **1710**, **1720b**, **1720a** may be configured to pivot about their rotatable connections to constrain movement of the fourth link segment **1730** to a range of movement within a working plane. The fourth link segment **1730** is configured to connect to the surgical saw **1240** having the saw blade **1242** that is configured to oscillate for cutting. The first through third link segments **1710**, **1720b**, **1720a** pivot and may be configured to constrain a cutting plane of the saw blade **1242** to be parallel to the working plane. The fourth link segment **1730**, e.g., the attachment member **1732** thereof, may connect to the surgical saw **1240** through various mechanisms that can include, but are not limited to, a screw, nut and bolt, clamp, latch, tie, press fit, or magnet. A DRA can be connected to the fourth link segment **1730**, e.g., to the attachment member **1732**, or the surgical saw **1240** to enable tracking of a pose of the saw blade **1242** by the camera tracking system **6** (FIG. 3).

A seventh embodiment of a passive end effector is shown in FIG. 18. The passive end effector **1800** includes a base **1802** that is configured to attach to an end effector coupler (e.g., end effector coupler **22** in FIGS. 4 and 5) of a robot arm (e.g., robot arm **18** in FIGS. 1 and 2) positioned by a surgical robot. The passive end effector **1800** further includes first and second mechanisms that extend between rotatable connections to the base **1802** and rotatable connections to a tool attachment mechanism. One or more of the rotatable connections disclosed for this embodiment may be pivot joints allowing 1 DOF motion, universal joints allow-

30

ing 2 DOF motions, or ball joints allowing 3 DOF motions. The first mechanism includes a first link segment **1810a**. The second mechanism includes a second link segment **1810b**. The tool attachment mechanism includes a third link segment **1820**. The first and second link segments **1810a** and **1810b** extend between rotatable connections to first and second locations, respectively, on the base **1802** to rotatable connections at opposite ends of the third link segment **1820**. The first and second locations on the base **1802** are spaced apart on opposite sides of a rotational axis of the base **1802** when rotated by the robot arm. The third link segment **1820** includes an attachment member **1822** that extends in a direction away from the base **1802** to a rotatable connector that is configured to connect to the surgical saw **1240**. The attachment member **1822** extends from a location on the third link segment **1820** that is closer to the first link segment **1810a** than to the second link segment **1810b**. One or more of the rotatable connections disclosed for this embodiment may be pivot joints allowing 1 DOF motion, universal joints allowing 2 DOF motions, or ball joints allowing 3 DOF motions.

The first and second link segments **1810a** and **1810b** may be configured to pivot about their rotatable connections between the base **1802** and the third link segment **1820** to constrain movement of the attachment member **1822** to a range of movement within a working plane. In some other embodiments one or more of the rotatable connections can be universal joints allowing 2 DOF motions or ball joints allowing 3 DOF motions such that the movement is not constrained to the working plane. The attachment member **1822** is configured to connect to the surgical saw **1240** having the saw blade **1242** that is configured to oscillate for cutting. The first and second link segments **1810a** and **1810b** pivot while constraining a cutting plane of the saw blade **1242** to be parallel to the working plane. The attachment member **1822** may connect to the surgical saw **1240** through various mechanisms that can include, but are not limited to, a screw, nut and bolt, clamp, latch, tie, press fit, or magnet. A DRA can be connected to the third link segment **1820**, e.g., to the attachment member **1822**, or the surgical saw **1240** to enable tracking of a pose of the saw blade **1242** by the camera tracking system **6** (FIG. 3).

An eighth embodiment of a passive end effector is shown in FIG. 19. The passive end effector **1900** includes a base **1902** that is configured to attach to an end effector coupler (e.g., end effector coupler **22** in FIGS. 4 and 5) of a robot arm (e.g., robot arm **18** in FIGS. 1 and 2) positioned by a surgical robot. The passive end effector **1900** further includes a first link segment **1910** and a second link segment **1920**. The first link segment **1910** extends between a rotatable connection to the base **1902** and a rotatable connection to one end of the second link segment **1920**. Another end of the second link segment **1920** is rotatably connected to a tool attachment mechanism. The rotational axes q_1 , q_2 and q_3 are parallel to each other so as to provide a planar cutting plane for the blade **1242**. Thus, the 3 DOF motion of the saw **1240** includes x-direction T_x , y-direction T_y and rotational direction about z-axis R_z . One or more of the rotatable connections disclosed for this embodiment may be pivot joints allowing 1 DOF motion, universal joints allowing 2 DOF motions, or ball joints allowing 3 DOF motions.

The tracking markers **52** attached to the end effector base **1902** and the saw **1240** along with the tracking markers on the bones (e.g., tibia and femur) can be used to precisely and continuously monitor the real-time location of the blade **1242** and blade tip relative to the patient bone being cut. Although not explicitly shown in other figures, the tracking

markers can be attached to the saw **1240** and all end effectors **1902** in all embodiments to track the location of the blade relative to the patient bone being cut. Although not shown, alternatively or in addition to the tracking markers, encoders can be positioned in each of the link segments **1910** and **1920** to determine precisely where the saw blade tip is at all times.

Example Surgical Procedure

An example surgical procedure using the surgical robot **4** in an Operating Room (OR) can include:

Optional step: surgery is pre-operatively planned based on medical images

1. The surgical robot **4** system is outside the Operating Room (OR). The nurse brings the system to the OR when patient is being prepared for the surgery.
2. The nurse powers on the robot and deploys the robot arm. Nurse verifies precision of robotic and tracking systems.
3. In the case of a sterilized passive end effector, the scrub nurse puts a sterile drape on the robot arm and mounts the passive end effector with the sagittal saw on the robot arm. The scrub nurse locks the passive end effector with a lock mechanism. Scrub nurse attached DRAs to passive structure through the drape (if necessary). For a non-sterilized passive end effector, the drape is placed after attachment of the passive end effector on the robot arm, the DRAs are attached to the passive end effector with the drape intervening therebetween, and a sterile saw or saw blade is attached to the passive end effector with the drape intervening therebetween. The lock mechanism is engaged, in order to fix position of the saw blade with respect to the end effector coupler.
4. The surgeon attaches navigation markers to the patient's bone(s), e.g., tibia and femur. The bones are registered with the camera tracking system **6** using, e.g., Horn point-to-point algorithm, surface matching or other algorithms. A soft-tissue balance assessment may be performed, whereby the system allows surgeon to assess balance of soft tissue in the operating room, e.g., by tracking relative movement of femur and tibia when surgeon applies forces in different directions (e.g. varus/valgus stress). Soft-tissue balance information can be used to alter surgical plan (e.g. move implant parts, change implant type etc.).
5. When surgeon is ready to cut the bone, the scrub nurse brings the surgical robot **4** to the operating table close to the knee to be operated and stabilizes the surgical robot **4** on the floor. The system may operate to guide nurse in finding robot **4** position so that all cut planes are in robot and passive structure workspace.
6. The surgeon selects on the screen of the surgical robot **4** the different parameters according to the planning of the surgery to do the first cut (bone to be cut, cutting plan desired, etc.).
7. The surgical robot **4** automatically moves the robot arm **22** to reposition the passive end effector so the cutting plane of the saw blade becomes aligned with the target plane and the saw blade becomes positioned a distance from the anatomical structure to be cut that is within the range of movement of the tool attachment mechanism of the passive end effector.
8. The surgeon unlocks the passive end effector.
9. The surgeon performs the cut constrained to the cutting plane provide by the passive end effector. The surgical robot **4** may provide real-time display of the tracked location of the saw blade relative to bone so the surgeon

can monitor progress of bone removal. In one way, the tracking subsystem processes in real-time the location of the saw relative to the bone based on camera images and various tracking markers attached to the saw, robot arm, end effector, femur and tibia. The surgeon can then lock the passive end effector using the lock mechanism upon completion of the cut.

10. The surgeon selects on the screen the next cut to be executed and proceeds as before.
11. The surgeon may perform a trial implant placement and intermediate soft-tissue balance assessment and based thereon may change the implant plan and associated cuts.
12. Following completion of all cuts, the nurse removes the surgical robot **4** from the operating table and unmounts the passive end effector from the robot arm.
13. The surgeon places the implants and finishes the surgery.

In step 9 above, a physician may have a difficult time to visually confirm the progress of the cut due to tissue and ligaments around the bone and debris being created from the cut, and other surgical instruments near the bone. Even if the visual confirmation may be acceptable, there are areas of the bone the physician cannot see such as the posterior portion of the bone being cut.

Advantageously, one robotic system embodiment of the present invention provides a way for the physician to confirm the progress of the bone being cut in multiple dimensions. The camera tracking system **6** along with the tracking markers attached to the end effector base (**1100**, **1202**, **1302**, **1402**, **1502**, **1602**, **1702**, **1802**, **1902**), robotic arm **20** and saw (**1140**, **1240**) allows the tracking subsystem **830** and the computer subsystem **820** to calculate in real-time the precise position of the saw blade relative to bone so the surgeon can monitor progress of bone removal.

FIG. **20** is a screenshot of a display showing the progress of bone cuts during a surgical procedure. FIG. **20** shows the subsystems **830** and **820** displaying three images: lateral, A-P and top views. In each image, the real-time location of the saw blade **1242** relative to the bone (e.g., tibia **2000**) is displayed on the display **34**. The lateral and top views can be especially useful for the physician as they display the saw blade position which cannot be easily seen. At the top portion of the display, the computer subsystem **830**, **820** displays the number of cutting programs and what program it is currently running. For example as the screenshot shows, the physician may have programmed **6** planar cuts and the current cutting program is the first one. Also, because the subsystems **830** and **820** can track with tracking markers where the blade may have travelled, it can determine how much of the bone cutting (area that was cut) for a particular cutting program has been completed and the percentage of progress is displayed in the display **34**. The bone image itself is preferably derived from actual images of the patient's body for a more accurate representation. The bone image is augmented by the subsystem **820** with a contour line that shows the cortical bone **2004** and spongy bone **2002**. This can be important for a physician as the amount of resistance to cutting varies greatly between the two types of bones.

If an augmented reality (AR) head-mounted display is used, the computer subsystem **820** can generate the same contour line showing the cortical and spongy bones and superimpose it over the actual leg continuously as the physician moves his/her head. The area that has been already cut can be overlaid over the actual bone in a dark shade. Moreover, the implant to be inserted over the cut area can also be overlaid on the bone to show the physician that the

33

cutting is being done correctly along the plane of the implant. This is all possible because the subsystems **830** and **820** can track the position of the blade and history of its movement relative to the bone with the tracking markers and the camera subsystem.

Referring now to FIGS. **21-32**, an exemplary embodiment of a direct blade guidance system in the context of orthopedic surgery is described. As shown in FIGS. **21, 22, 29, and 30** a direct blade guidance system **2100** may include a robotic system holding an end effector arm (EEA) **2102**. EEA **2102** may include a base configured to attach to an end effector coupler of a robot arm. Other exemplary embodiments of an end effector arm consistent with the principles of this disclosure are described with regard to FIGS. **12-19**. In order to achieve planar cuts, a saw blade **2104** should be guided in the plane in which it vibrates. Saw blade high vibration frequency (e.g. 200-300 Hz) makes it difficult to realize mechanical guidance. EEA **2102** may include several joints and linkages **2106, 2108** that may be used to realize movement on the plane of a tip **2110** of EEA **2102**. Similar to embodiments of FIGS. **12-18**, tip **2110** of EEA **2102** may have three (3) degrees of freedom: movement in two directions on the plane and rotation around the axis normal to that plane. EEA **2102** may allow planar cuts and approach the target bone from all angles. System **2100** may also include a handpiece **2112** and a blade adaptor **2114** each connected to EEA **2102** and blade **2104**.

The concept of directly guiding saw blade **2104** includes aligning the rotation axis of a distal end of linkage **2110** (distal rotational joint **2116** of EEA **2102**) with a blade vibration axis. Sagittal saws are in the majority of implementation mechanisms which generate small rotational movement of the saw blade (vibration/oscillation) around an axis close to the saw blade attachment. By aligning the rotation axis with the distal rotational joint **2116** of EEA **2102** (at a distal end of linkage **2108**), joint **2116** may be configured to enable general saw handpiece rotation and enable saw blade vibration.

Saw blade **2104** may be configured to be linked to the distal joint rotation axis of EEA **2102** by blade adaptor **2114**. Blade adaptor **2114** may be configured to tighten saw blade **2104**. By adapting the blade adaptor **2114**, different sagittal saws can be integrated into system **2100**. Exemplary configurations for blade adaptor **2114** consistent with the present disclosure are discussed below. An exemplary blade adaptor is illustrated in FIG. **31**.

Permanent Fixation

In a permanent fixation configuration, blade **2104** may be permanently clamped to blade adaptor **2114**. A user (e.g., a scrub nurse) can assemble blade **2104** to blade adaptor **2114** while a surgeon is preparing a surgical field. Exemplary permanent fixation configurations may include the following.

Blade **2104** may be firmly clamped to blade adaptor **2114** using a component such as screws or spring loaded latches configured to provide a clamping force against blade **2104**.

Blade **2104** may include an interface, such as through holes, that are configured to fix blade **2104** to blade adaptor **2114**.

Blade **2104** and blade adaptor **2114** may be manufactured as a single reusable device that is then provided on EEA **2102**. Example implementation involves a metal blade attached to a PEEK or Stainless steel blade adapter. Assembly of the blade to the blade adapter is performed by the scrub nurse.

34

Blade **2104** and blade adaptor may also be manufactured as a disposable (single use) device delivered sterile. Example implementation involves a metal blade which is overmolded using plastic injection molding technology.

FIG. **22** illustrates system **2200**, which is an exemplary embodiment consistent with the principles of the present disclosure. In this embodiment, the blade adaptor is permanently affixed to the saw blade in a base that can rotate around the saw blade rotation axis and a clamping component that clamps the blade to the blade adaptor base by means of screws. FIG. **23** illustrates a blade **2204**, a blade adaptor **2214**, a distal rotational joint **2216**, and a clamp **2218** consistent with this configuration. These components can be the same or similar to components previously described with regard to FIG. **21**.

Detachable Fixation

In a detachable fixation configuration, the blade can be quickly attached to and detached from the blade adapter in the field. The blade adaptor integrates a clamping mechanism that might be either active (normally closed clamping mechanism that is open by electrical signal) or passive (quick-coupling and/or quick-release mechanism).

Moment of Inertia

Blade adaptor **2114** may significantly increase the moment of inertia of the coupled "blade/blade adapter" rotating around blade rotation axis. As soon as blade adaptor **2114** vibrates together with saw blade **2104**, the unbalanced inertia generates dynamic forces and torques that are exported to the mechanical structure as well as a surgeon's hand. To optimize the implementation, the inertia of the vibrating elements around the vibration axis may be minimized. That means the lighter and closer the mass of the vibrating elements to the vibration axis, the better. The moment of inertia of the saw blade elements about the vibration axis for the handpiece guidance concept is:

$$\bullet I_h - I_d + MD^2$$

With D the distance between the blade vibration axis and the distal joint rotation axis, M the weight of the blade (weight of the saw blade elements) and I_d the moment of inertia of the saw blade elements about the blade vibration axis. The moment of inertia is then reduced by MD^2 with the direct blade guidance concept, which is the minimum as the distance between the vibration axis and the blade vibration axis is 0 (the axes are combined).

FIG. **24** illustrates a system using a standard jig **2402**. Under the principles discussed herein, direct blade guidance may provide more blade effective cutting length than those provided by standard jigs, such as jig **2402** illustrated in FIG. **24**. L_G represents the guiding length (length on which the saw blade is guided) and L_E represents the blade effective length. As the guiding length can be made shorter with the direct blade guidance concept, the blade effective length is consequently longer. This is may be more comfortable for a surgeon and the surgeon may cut through more bone.

The precision of the cut is given by the rigidity of the different elements composing the robotic system from the floor to the tip of the saw blade, including the robot system, EEA **2102**, a handpiece sagittal saw, a saw blade oscillation mechanism (such as blade adaptor **2114** or **2214**), and saw blade **2104, 2204**. With the direct blade guidance, the backlash and imprecisions of the handpiece may be signifi-

35

cantly minimized or prevented altogether because the saw blade is directly tightened with the blade adaptor.

Moreover, the direct blade guidance concept may be easier to integrate with various existing sagittal saws. There may be no need to build a component which is specific to the shape of the sagittal saw (manufacturer specific) because the blade adaptor is an element which only needs to tighten the saw blade whose shape may be simple. In addition, the blade adaptor is easy to sterilize. It is a small, light and relatively simple mechanical element which can be made in such a way that it does not have any narrow spaces and can be easily disassembled. As previously mentioned, blade including blade adaptor might be delivered as single reusable device.

Tracking

FIG. 25 illustrates a direct blade guidance system **2100** that may include a navigation marker or array of markers **2500** attached to handpiece **2112** of a sagittal saw. Marker **2500** allows the sagittal saw to be tracked by the camera, such as camera tracking system **6**. Optical tracking enables measurement of the saw position but may it may be difficult to measure a direct saw blade position during cutting (high frequency of blade vibration). Moreover, the tracking would directly measure the deflection of the saw handpiece **2112** with respect blade **2104**, due to the poor stiffness of the blade/saw handpiece connection.

To measure a direct saw blade position, FIG. 26 illustrates system **2100** with encoders **2600**, **2602**, and **2604** integrated to the joints of EEA **2102**. Encoder measurement can be usually made at higher frequency and rotational precision than using optical tracking. For example, the measurement frequency can be at least two times higher than saw blade oscillation. With a blade position signal, additional useful information may be extracted, such as saw vibration frequency, on/off state, saw blade blocking in bone (for example by interpreting the signal and its derivatives) and others.

In exemplary embodiments consistent with the principles of this disclosure, vibrations of the sagittal saw handpiece held by the surgeon may be reduced. By decreasing vibrations of the handpiece, tactile feedback could be improved and cutting efficiency could be increased. As previously described, the vibrations exported to surgeon's hand result from the exported dynamic forces and torques generated by the unbalanced inertia of couple blade/blade adaptor around blade rotation axis.

One approach to reduce the vibrations may be achieved by filtering the vibrations. In FIG. 27, a damping element **2700** may be connected between handpiece **2112** and the EEA **2102**. This might be implemented using pieces of rubber, pneumatic or hydraulic cylinder.

Another approach to reduce the vibrations may be achieved by dynamically balancing the inertia of the coupled saw/saw adaptor around the saw rotation axis. This can be implemented by dynamically compensating the exported forces and torques generated by the vibrating saw blade using a compensation inertia that performs the exact opposite movement with the same dynamics. FIGS. 28 and 32 illustrates exemplary embodiments where compensation inertia can be coupled to the main inertia to be balanced using a mechanical inverter **2800**.

Referring now to FIGS. 33-45, consistent with the principles of the present disclosure, a navigated pin guide driver with a handle and an attached reference element may be used to obviate the need for using a placement instrument and navigating a placement instrument. For example, a surgeon may hold the handle and the navigation system may track the

36

reference element. The navigation system provides real-time feedback on the placement of the pins and a visual representation of the cuts, or a visual representation of the cut block with respect to the patient anatomy. The surgeon may use the navigated pin handle free hand or in conjunction with the passive end effector as previously described herein.

A proposed workflow consistent with the principles of the present embodiment is illustrated in FIG. 33 as method **3300**. At step **3302**, a patient may be registered to the navigation system. At step **3304**, a navigated pin guide driver system is aligned to a targeted area of a bone using navigation system feedback. At step **3306**, cut block pins are driven into bone. At step **3308**, cut blocks are attached to the bone over the cut block pins and at step **3310** cuts are performed through the cut blocks.

Referring to FIG. 34, an exemplary schematic of a navigated pin driver system **3400** is illustrated. Navigated pin guide driver system **3400** may include a handle **3402** for the user to hold, a reference element **3404**, a distal tip **3406** for docking onto cortical bone, and 2 parallel pin guides (or guide tubes) **3408** separated by a bridge **3410**. Bridge **3410** maintains spacing to ensure that pin spacing matches that of the corresponding cut block. While FIG. 34 is illustrated with a single instrument that has two parallel pin guides **3408**, system **3400** may be constructed with only one pin guide **3408**. In order to optimize the viewing angle and ergonomics for a user, bridge **3410** and reference element **3404** can be rotated about an axis **3500** as shown in FIG. 35. Reference element may include markers configured to be tracked by a navigation system, for example, optical markers detectable by an infrared camera.

When using system **3400**, a user may register the patient to a navigation system and make an initial incision to expose the knee joint. Once exposed the user can position the navigated pin driver system as indicated by the navigation system. The user may then insert cut block pins, which can be conventional style pins, through pin guide tubes **3408** as shown in FIG. 36.

An example of how the navigated pin guide driver system **3400** can be used clinically is as follows: (1) plan the implant placement; (2) register the patient to the navigation system; (3) expose the knee; and (4) use the navigated pin driver system **3500** to insert pins **3800** for the distal femur cut block as shown in FIGS. 37-38.

After steps (1)-(4) noted above, at step (5) a distal cutting block **3900** may be attached over pins **3800** as shown in FIG. 39. As shown in FIG. 40, at step (6) a distal resection may be performed. Shown in FIG. 41, at step (7), using system **3400**, pins are inserted or holes created for localizing a 4 in 1 cut block **4200** which is attached to the resected section at step (8) and shown in FIG. 42.

After the 4 in 1 cut block **42** is attached, at step (9), anterior femoral, femoral chamfer, posterior femoral, posterior chamfer resections are made using 4 in 1 cut block **4200**. At step (10), using navigated pin guide driver system **3400**, pins are placed for proximal tibial cut block **4500**. At step (11), proximal tibial cut block **4500** is put in place and a resection is performed. At step (12), the total knee arthroplasty may be completed by inserting the appropriate implants. Alternatively and without departing from the principles of this disclosure, resection may be performed on the tibia prior to resection of the femur.

Consistent with the principles of the present disclosure, navigated pin driver system **3500** may include a conforming style gripper instead of a serrated distal tip. The gripper may use granular jamming and be activated by a vacuum already present in the operating room.

In an alternative for the user to directly position the pin guide and to simplify navigated pin guide placement, software may assist the user as explained in the following workflow.

- (1) Showing, via software, the target position of one pin guide (e.g. distal tip) on the bone to the user, for example a computer screen, an augmented reality (AR) headset, and a laser pointer.
 - (a) Showing only a position or entry point, i.e. correct instrument rotation is not required at this stage.
 - (b) Distal tip teeth/sharp edges help user for finding and maintaining correct entry point.
 - (c) Once the position of instrument distal tip is within predefined safety limit from the target one (e.g. 1 mm), indicating to the user via software (e.g. showing green color) and moving to the next step.
- (2) Showing, via software, a target rotation of the pin guide allowing the user to find a correct trajectory for the first pin.
- (3) User places first pin.
- (4) Showing, via software, a target rotation around the first pin to define the correct trajectory for the second pin.
- (5) User places second pin and retracts guide along the pins

FURTHER DEFINITIONS AND EMBODIMENTS

In the above-description of various embodiments of present inventive concepts, it is to be understood that the terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of present inventive concepts. Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which present inventive concepts belongs. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of this specification and the relevant art and will not be interpreted in an idealized or overly formal sense expressly so defined herein.

When an element is referred to as being “connected”, “coupled”, “responsive”, or variants thereof to another element, it can be directly connected, coupled, or responsive to the other element or intervening elements may be present. In contrast, when an element is referred to as being “directly connected”, “directly coupled”, “directly responsive”, or variants thereof to another element, there are no intervening elements present. Like numbers refer to like elements throughout. Furthermore, “coupled”, “connected”, “responsive”, or variants thereof as used herein may include wirelessly coupled, connected, or responsive. As used herein, the singular forms “a”, “an” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. Well-known functions or constructions may not be described in detail for brevity and/or clarity. The term “and/or” includes any and all combinations of one or more of the associated listed items.

It will be understood that although the terms first, second, third, etc. may be used herein to describe various elements/operations, these elements/operations should not be limited by these terms. These terms are only used to distinguish one element/operation from another element/operation. Thus, a first element/operation in some embodiments could be termed a second element/operation in other embodiments without departing from the teachings of present inventive

concepts. The same reference numerals or the same reference designators denote the same or similar elements throughout the specification.

As used herein, the terms “comprise”, “comprising”, “comprises”, “include”, “including”, “includes”, “have”, “has”, “having”, or variants thereof are open-ended, and include one or more stated features, integers, elements, steps, components or functions but does not preclude the presence or addition of one or more other features, integers, elements, steps, components, functions or groups thereof. Furthermore, as used herein, the common abbreviation “e.g.”, which derives from the Latin phrase “*exempli gratia*,” may be used to introduce or specify a general example or examples of a previously mentioned item, and is not intended to be limiting of such item. The common abbreviation “i.e.”, which derives from the Latin phrase “*id est*,” may be used to specify a particular item from a more general recitation.

Example embodiments are described herein with reference to block diagrams and/or flowchart illustrations of computer-implemented methods, apparatus (systems and/or devices) and/or computer program products. It is understood that a block of the block diagrams and/or flowchart illustrations, and combinations of blocks in the block diagrams and/or flowchart illustrations, can be implemented by computer program instructions that are performed by one or more computer circuits. These computer program instructions may be provided to a processor circuit of a general purpose computer circuit, special purpose computer circuit, and/or other programmable data processing circuit to produce a machine, such that the instructions, which execute via the processor of the computer and/or other programmable data processing apparatus, transform and control transistors, values stored in memory locations, and other hardware components within such circuitry to implement the functions/acts specified in the block diagrams and/or flowchart block or blocks, and thereby create means (functionality) and/or structure for implementing the functions/acts specified in the block diagrams and/or flowchart block(s).

These computer program instructions may also be stored in a tangible computer-readable medium that can direct a computer or other programmable data processing apparatus to function in a particular manner, such that the instructions stored in the computer-readable medium produce an article of manufacture including instructions which implement the functions/acts specified in the block diagrams and/or flowchart block or blocks. Accordingly, embodiments of present inventive concepts may be embodied in hardware and/or in software (including firmware, resident software, micro-code, etc.) that runs on a processor such as a digital signal processor, which may collectively be referred to as “circuitry,” “a module” or variants thereof.

It should also be noted that in some alternate implementations, the functions/acts noted in the blocks may occur out of the order noted in the flowcharts. For example, two blocks shown in succession may in fact be executed substantially concurrently or the blocks may sometimes be executed in the reverse order, depending upon the functionality/acts involved. Moreover, the functionality of a given block of the flowcharts and/or block diagrams may be separated into multiple blocks and/or the functionality of two or more blocks of the flowcharts and/or block diagrams may be at least partially integrated. Finally, other blocks may be added/inserted between the blocks that are illustrated, and/or blocks/operations may be omitted without departing from the scope of inventive concepts. Moreover, although some of the diagrams include arrows on communication paths to

show a primary direction of communication, it is to be understood that communication may occur in the opposite direction to the depicted arrows.

Many variations and modifications can be made to the embodiments without substantially departing from the principles of the present inventive concepts. All such variations and modifications are intended to be included herein within the scope of present inventive concepts. Accordingly, the above disclosed subject matter is to be considered illustrative, and not restrictive, and the appended examples of embodiments are intended to cover all such modifications, enhancements, and other embodiments, which fall within the spirit and scope of present inventive concepts. Thus, to the maximum extent allowed by law, the scope of present inventive concepts are to be determined by the broadest permissible interpretation of the present disclosure including the following examples of embodiments and their equivalents, and shall not be restricted or limited by the foregoing detailed description.

What is claimed is:

1. A method for performing a total knee arthroplasty surgery using a navigated pin guide driver system, the method comprising: registering a knee of a patient to a navigation system for tracking position of the knee; aligning the navigated pin guide driver system to a target area of the knee of the patient using the navigation system, the navigated pin guide driver system including: a handle; a first pin guide tube attached to the handle and having a through hole for receiving a first pin, the through hole extending along a longitudinal axis of the first pin guide tube; a reference array of markers arranged in a predetermined pattern and attached to the first pin guide tube, the reference array configured to be tracked by the navigation system; and a tubular distal tip coupled to a distal end of the first pin guide tube, the tubular distal tip having a through hole for receiving the first pin and configured to dock into cortical bone; a bridge having a first end attached to the first pin guide tube; and a second pin guide tube attached to other end of the bridge, and having a through hole for receiving a second pin and spaced from the first pin guide tube such that the first and second pins receive corresponding holes in a cut block for cutting a femur or tibia, wherein the bridge and the reference array are configured to rotate about the longitudinal axis of the first pin guide tube; driving the first and second pins into the knee through the first and second pin guide tubes while being guided by the navigation system; placing the cut block over the driven pins; and performing cuts to the target area using the placed cut block.

2. The method of claim 1, wherein the first pin guide tube is parallel to the second pin guide tube.

3. The method of claim 2, wherein the second pin guide tube extends upwardly from the bridge without extending downwardly from the bridge.

4. The method of claim 3, wherein the tubular distal tip extends downwardly from the bridge.

5. The method of claim 4, wherein the bridge is configured to maintain a spacing between the first pin guide tube and the second pin guide tube.

6. The method of claim 1, wherein the cut block is a 4 in 1 cut block.

7. The method of claim 1, wherein the cut block is a proximal tibial cut block.

8. The method of claim 1, wherein the reference array includes a plurality of optical tracking markers that are visible to the navigation system.

9. The method of claim 8, wherein the reference array includes four tracking markers visible to the navigation system.

10. The method of claim 1, wherein the handle extends laterally from the longitudinal axis of the first pin guide tube.

11. A method for performing a total knee arthroplasty surgery using a navigated pin guide driver system, the method comprising: registering a knee of a patient to a navigation system for tracking position of the knee; aligning the navigated pin guide driver system to a target area of the knee of the patient using the navigation system, the navigated pin guide driver system including: a handle; a first pin guide tube attached to the handle and having a through hole for receiving a first pin, the through hole extending along a longitudinal axis of the first pin guide tube; a reference array of markers arranged in a predetermined pattern and rigidly attached to the first pin guide tube, the reference array configured to be tracked by the navigation system; and a tubular distal tip coupled to a distal end of the first pin guide tube, the tubular distal tip having a through hole for receiving the first pin and configured to dock into cortical bone; a bridge having a first end attached to the first pin guide tube; a second pin guide tube attached to a second end of the bridge and spaced from the first pin guide and having a through hole for receiving a second pin such that the first and second pins receive corresponding holes in a cut block for cutting a femur or tibia, wherein the bridge and the reference array are configured to rotate about the longitudinal axis of the first pin guide tube; driving the first and second pins into the knee through the first and second pin guide tubes while being guided by the navigation system; placing the cut block over the driven pins; and performing cuts to the target area using the placed cut block.

12. The method of claim 11, wherein the navigated pin guide driver system includes a bridge connected between first and second pin guide tubes, and the second pin guide tube extends upwardly from the bridge without extending downwardly from the bridge.

13. The method of claim 12, wherein the tubular distal tip extends downwardly from the bridge.

14. The method of claim 13, wherein the bridge is configured to maintain a spacing between the first pin guide tube and the second pin guide tube.

15. The method of claim 11, wherein the cut block is a 4 in 1 cut block.

16. The method of claim 11, wherein the cut block is a proximal tibial cut block.

17. The method of claim 11, wherein the reference array includes a plurality of optical tracking markers that are visible to the navigation system.

18. The method of claim 17, wherein the reference array includes four and only four tracking markers arranged in a predetermined pattern and visible to the navigation system.

19. The method of claim 11, wherein the handle extends laterally from the longitudinal axis of the first pin guide tube.

* * * * *