

(12) **United States Patent**
Kim et al.

(10) **Patent No.:** **US 12,405,050 B2**
(45) **Date of Patent:** **Sep. 2, 2025**

(54) **STEEL SHEET, REFRIGERATOR INCLUDING THE SAME, AND MANUFACTURING METHOD OF STEEL SHEET**

(71) Applicant: **SAMSUNG ELECTRONICS CO., LTD.**, Suwon-si (KR)

(72) Inventors: **Choongkeon Kim**, Suwon-si (KR);
Youngdeog Koh, Suwon-si (KR);
Kwangjoo Kim, Suwon-si (KR);
Daeyoung Kim, Suwon-si (KR);
Youngtae Kim, Suwon-si (KR);
Joohyun Jung, Suwon-si (KR)

(73) Assignee: **SAMSUNG ELECTRONICS CO., LTD.**, Suwon-si (KR)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 147 days.

(21) Appl. No.: **18/217,792**

(22) Filed: **Jul. 3, 2023**

(65) **Prior Publication Data**
US 2023/0341172 A1 Oct. 26, 2023

Related U.S. Application Data
(63) Continuation of application No. PCT/KR2022/004120, filed on Mar. 24, 2022.

(30) **Foreign Application Priority Data**
Apr. 15, 2021 (KR) 10-2021-0049479

(51) **Int. Cl.**
F25D 23/02 (2006.01)
B05D 5/02 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **F25D 23/028** (2013.01); **B05D 5/02** (2013.01); **B05D 7/53** (2013.01); **C08K 3/36** (2013.01);
(Continued)

(58) **Field of Classification Search**
None
See application file for complete search history.

(56) **References Cited**
U.S. PATENT DOCUMENTS

8,500,225 B2 8/2013 Kim et al.
8,956,734 B2 2/2015 Song et al.
(Continued)

FOREIGN PATENT DOCUMENTS

EP 0522454 A1 * 1/1993
EP 3327097 A1 * 5/2018 C08J 7/0427
(Continued)

OTHER PUBLICATIONS

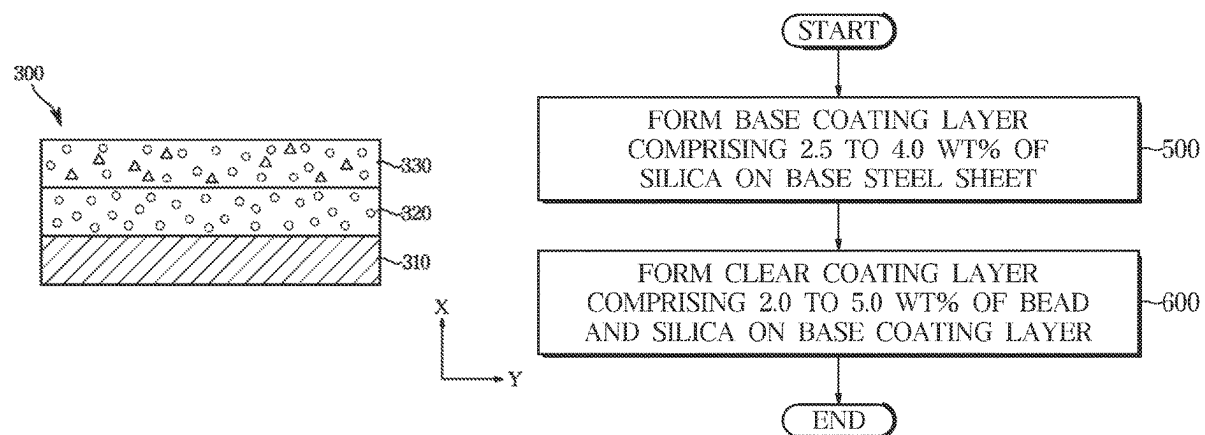
International Search Report (PCT/ISA/210) issued by the International Searching Authority on Mar. 25, 2022 in corresponding International Application No. PCT/KR2022/004120.
(Continued)

Primary Examiner — Hanh V Tran
(74) *Attorney, Agent, or Firm* — Sughrue Mion, PLLC

(57) **ABSTRACT**

Provided is a steel sheet having lowered visibility of the curvature of the outer surface by lowering the glossiness of the steel sheet used on a refrigerator body, a refrigerator comprising same, and a manufacturing method of the steel sheet. The refrigerator includes: the body; and a door rotatably coupled to the body. The body includes: a base steel sheet, a base coating layer provided on the base steel sheet and comprising 2.5 to 4.0 weight % of silica relative to the total weight of the base coating layer, and a clear coating layer provided on the base coating layer and comprising silica and 2.0 to 5.0 weight % of beads relative to the total weight of the clear coating layer.

16 Claims, 5 Drawing Sheets



- (51) **Int. Cl.**
B05D 7/00 (2006.01)
C08K 3/36 (2006.01)
C08K 9/08 (2006.01)
C09D 5/03 (2006.01)

- (52) **U.S. Cl.**
CPC **C08K 9/08** (2013.01); **C09D 5/032**
(2013.01); **B05D 2202/10** (2013.01); **B05D**
2601/22 (2013.01); **C08K 2201/003** (2013.01);
F25D 2400/18 (2013.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

9,043,900 B1 5/2015 Kim et al.
10,739,057 B2 * 8/2020 Segawa F25D 17/045
10,760,849 B2 * 9/2020 Jung F25D 23/064
10,808,989 B2 * 10/2020 Yoon F25D 11/00
2005/0240878 A1 10/2005 Anthony et al.
2010/0190531 A1 7/2010 Hasegawa
2012/0054838 A1 3/2012 Kim et al.
2012/0074227 A1 3/2012 Ferren et al.
2014/0040373 A1 2/2014 Takamatsu
2014/0344954 A1 11/2014 Kim et al.
2015/0106765 A1 4/2015 Lee et al.
2015/0199523 A1 7/2015 Hamilton et al.
2015/0356304 A1 12/2015 You
2017/0316250 A1 11/2017 Roh et al.
2018/0014198 A1 1/2018 Suh et al.
2018/0307855 A1 10/2018 Dogu et al.
2020/0032399 A1 * 1/2020 Shibao B32B 15/09
2020/0255687 A1 8/2020 Kim et al.
2021/0388460 A1 * 12/2021 Teipel C21D 6/002

FOREIGN PATENT DOCUMENTS

EP 3447415 A1 2/2019
JP 11-156291 A 6/1999
JP 2005-165777 A 6/2005

JP 2006-289930 A 10/2006
JP 2007-004383 A 1/2007
JP 2010-177972 A 8/2010
JP 4700921 B2 6/2011
JP 2011136566 A * 7/2011
JP 2014-29587 A 2/2014
KR 10-2008-0024531 A 3/2008
KR 10-2011-0059080 A 6/2011
KR 10-1056943 B1 8/2011
KR 10-2012-0014013 A 2/2012
KR 10-2012-0066085 A 6/2012
KR 10-2012-0089936 A 8/2012
KR 20130004167 U * 7/2013
KR 10-1310758 B1 9/2013
KR 10-1314135 B1 10/2013
KR 10-2014-0046102 A 4/2014
KR 10-2014-0098544 A 8/2014
KR 10-2015-0045264 A 4/2015
KR 10-1510555 B1 4/2015
KR 10-2015-0092480 A 8/2015
KR 10-1586979 B1 1/2016
KR 10-2016-0089711 A 7/2016
KR 10-2016-0110384 A 9/2016
KR 10-2016-0114316 A 10/2016
KR 10-2017-0122386 A 11/2017
KR 10-2019-0023158 A 3/2019
KR 10-2019-0061465 A 6/2019
KR 10-1998956 B1 9/2019
KR 10-2022-0039412 A 3/2022
WO 2011/048930 A1 4/2011

OTHER PUBLICATIONS

Written Opinion (PCT/ISA/237) issued by the International Search-
ing Authority on Mar. 25, 2022 in corresponding International
Application No. PCT/KR2022/004120.

International Search Report (PCT/ISA/210) issued by the Interna-
tional Searching Authority on Jul. 21, 2022 in corresponding
International Application No. PCT/KR2022/004120.

* cited by examiner

FIG. 1

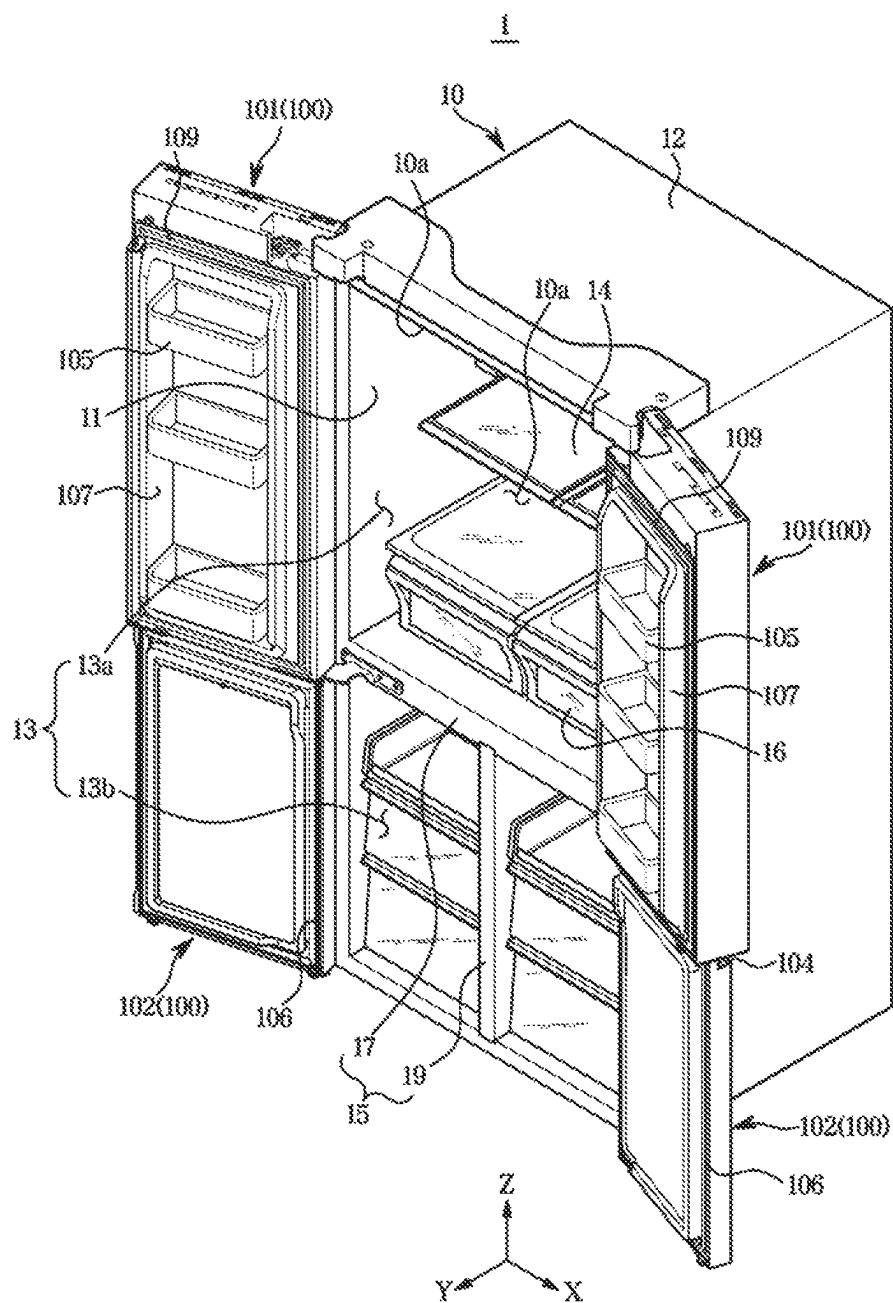


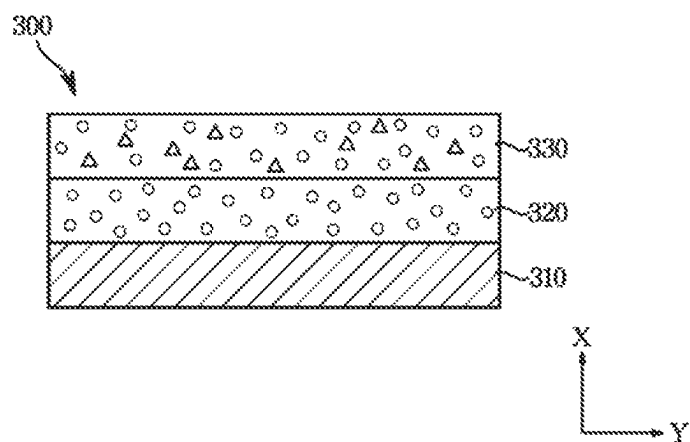
FIG. 2

FIG. 3

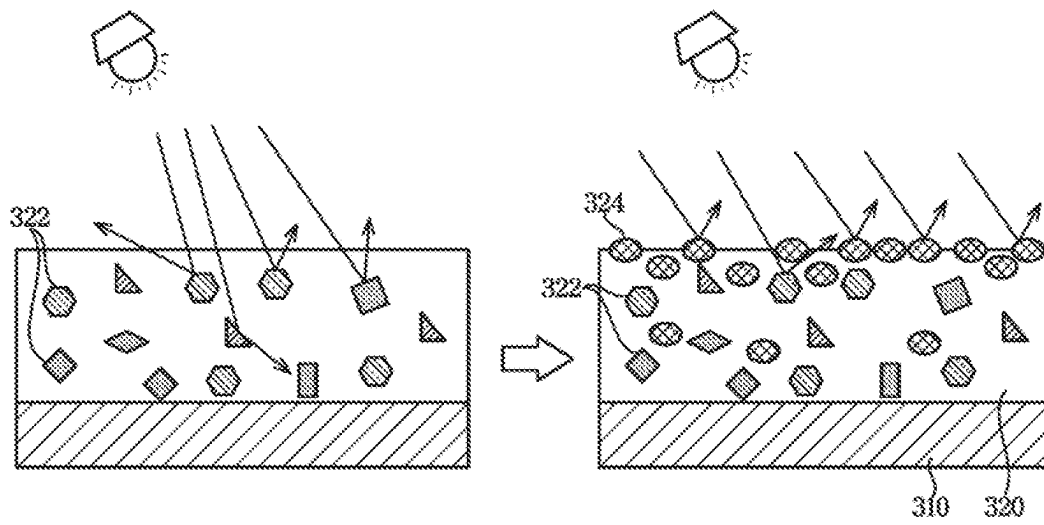


FIG. 4

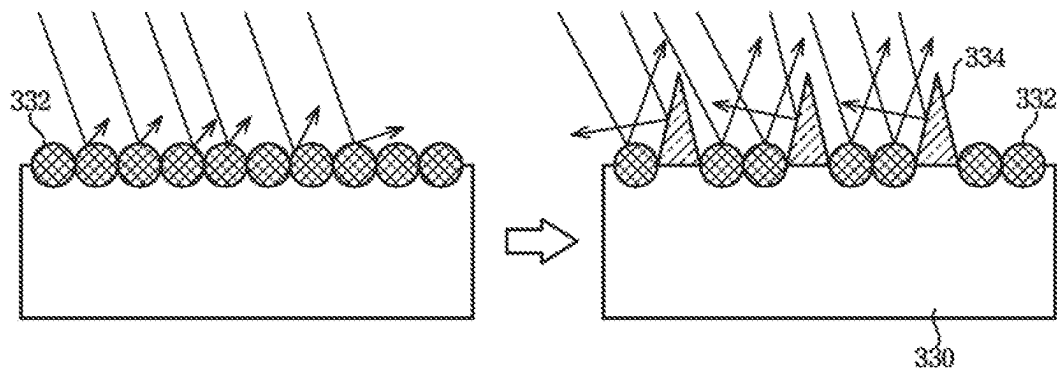
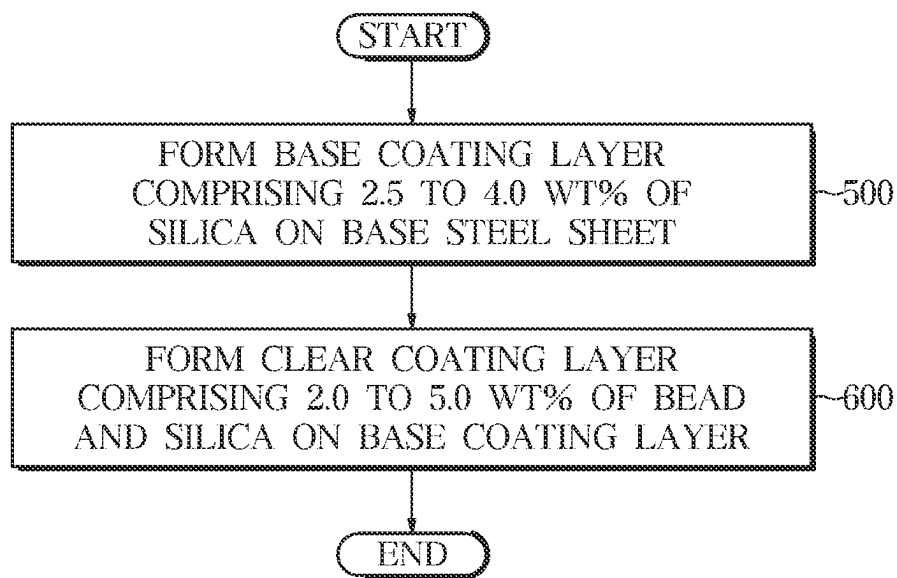


FIG. 5

1

STEEL SHEET, REFRIGERATOR INCLUDING THE SAME, AND MANUFACTURING METHOD OF STEEL SHEET

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is by-pass continuation application of International Application No. PCT/KR2022/004120, filed on Mar. 24, 2022, which based on and claims priority to Korean Patent Application No. 10-2021-0049479, filed on Apr. 15, 2021, in the Korean Intellectual Property Office, the disclosures of which are incorporated by reference herein in their entireties.

BACKGROUND

1. Field

The disclosure relates to a refrigerator, and more specifically, to a steel sheet for a refrigerator body and a refrigerator including the same.

2. Description of Related Art

Refrigerators are home appliances that keep food cool by including a body having a storage compartment and a cold air supply device provided to supply cold air to the storage compartment.

The storage compartment includes a refrigerator compartment that refrigerates food while being maintained at about 0 to 5° C. and a freezer compartment that keeps food frozen while being maintained at about 0 to -30° C. The storage compartment is provided so that a front surface is open for food input and output, and the front surface of the storage compartment is opened and closed by a door.

SUMMARY

Provided are a steel sheet, in which the visibility of the curvature of the outer surface of a steel sheet used in a refrigerator body is decreased by lowering the side glossiness of the steel sheet, a refrigerator including the same, and a method of manufacturing the steel sheet.

According to an aspect of the disclosure, a refrigerator includes: a body; and a door rotatably coupled to the body, and the body includes: a base steel sheet; a base coating layer provided on the base steel sheet and comprising 2.5 to 4.0 wt % of a silica based on a total weight of the base coating layer; and a clear coating layer provided on the base coating layer and comprising a silica and 2.0 to 5.0 wt % of beads based on a total weight of the clear coating layer.

The base coating layer may include 3.5 wt % of the silica based on the total weight of the base coating layer.

The silica of the base coating layer may include acrylic-coated organic silica.

The clear coating layer may include 2.0 wt % of beads based on the total weight of the clear coating layer.

The beads of the clear coating layer may include a size of 20 to 50 μm in diameter.

The beads of the clear coating layer may include a size of 20 μm in diameter.

The clear coating layer may include 5.0 wt % of the second silica based on the total weight of the clear coating layer.

2

The body may include an 85° gloss measurement value of 10 or less.

The 85° gloss measurement value may be less than a 60° gloss measurement value of the body.

According to an aspect of the disclosure, a steel sheet include a base steel sheet; a base coating layer provided on the base steel sheet and comprising 2.5 to 4.0 wt % of a silica based on a total weight of the base coating layer; and a clear coating layer provided on the base coating layer and comprising a silica and 2.0 to 5.0 wt % of beads based on a total weight of the clear coating layer.

The base coating layer may include 3.5 wt % of the first silica based on the total weight of the base coating layer.

The clear coating layer may include 2.0 wt % of beads based on the total weight of the clear coating layer.

The steel sheet may include an 85° gloss measurement value of 10 or less.

The 85° gloss measurement value may be less than a 60° gloss measurement value of the steel sheet.

According to an aspect of the disclosure, a method of manufacturing a steel sheet includes: forming, on a base steel sheet, a base coating layer comprising 2.5 to 4.0 wt % of a silica based on a total weight of the base coating layer; and forming, on the base coating layer, a clear coating layer comprising a silica and 2.0 to 5.0 wt % of beads based on a total weight of the clear coating layer.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other aspects, features, and advantages of specific embodiments of the present disclosure will be more apparent from the following description with reference to the accompanying drawings, in which:

FIG. 1 is a perspective view of a refrigerator according to an embodiment;

FIG. 2 is a sectional side view of a laminated structure of a steel sheet according to an embodiment;

FIG. 3 is a schematic diagram of a mechanism in which the side glossiness of a steel sheet according to an embodiment is lowered;

FIG. 4 is a schematic diagram of a mechanism in which the side glossiness of a steel sheet according to an embodiment is lowered; and

FIG. 5 is a flow chart of a method of manufacturing a steel sheet according to an embodiment.

DETAILED DESCRIPTION

Like reference numerals refer to like elements throughout the specification. Not all details of embodiments of the disclosure are described herein, and description of general art to which the disclosure pertains or overlapping descriptions between embodiments are omitted. Terms, such as “unit,” “module,” “member,” and “block,” used herein may be implemented by software or hardware. According to different embodiments, a plurality of units, modules, members, and blocks may be implemented by a single element, or each of a single unit, a single module, a single member, and a single block may include a plurality of elements.

Throughout the specification, a certain part being “connected” to another part includes the certain part being directly connected to the other part or being indirectly connected to the other part by another element. Indirect connection includes connection through a wireless communication network or electrical connection through an electric wire.

In addition, a certain part “including” a certain element signifies that the certain part may further include another element instead of excluding the other element unless particularly indicated otherwise.

Throughout the specification, when a certain member is referred to as being “on” another member, this encompasses not only the case in which the two members are in contact with each another but also the case in which the two members have a third member therebetween.

Throughout the specification, when a certain element transmits or sends a signal or data to another element, this does not exclude transmission or sending through a third element present between the two elements unless particularly indicated otherwise.

Throughout the specification, ordinal numbers such as “first” and “second” are used to distinguish a plurality of elements from each other, and the ordinal numbers used do not indicate an arrangement order, manufacturing order, or importance among elements.

A singular expression includes a plural expression unless clearly indicated otherwise in the context.

A reference numeral given to each step is used to identify each step. The reference numerals are not for limiting an order of the steps, and the steps may be performed in an order different from that shown in the drawings unless a specific order is clearly described in the context.

Hereinafter, a steel sheet, a refrigerator including the same, and a method of manufacturing the steel sheet will be described in detail with reference to the accompanying drawings.

FIG. 1 is a perspective view of a refrigerator 1 according to an embodiment.

Referring to FIG. 1, a refrigerator 1 includes a body 10, a storage compartment 13 formed to have upper and lower sections inside the body 10, a door 100 which allows the storage compartment 13 to be opened and closed, and a cold air supply device which supplies cold air to the storage compartment 13.

The body 10 may be configured to include an inner case 11 forming the storage compartment 13, an outer case 12 coupled to an outside of the inner case 11 to form an exterior, and a body insulating material that is filled between the inner case 11 and the outer case 12 to insulate the storage compartment 13. The outer case 12 may be manufactured using a pre-coated-metal (PCM) steel sheet 300, and a further description thereof is described below.

The cold air supply device may generate cold air using a circulating cooling cycle of compressing, condensing, expanding, and evaporating a refrigerant.

The storage compartment 13 may be divided into a plurality of sections by a partition 15, and a plurality of shelves 14 and storage containers 16 may be provided inside the storage compartment 13 so that storage of food and the like is possible.

The storage compartment 13 may be divided into a plurality of storage compartments, such as a first storage compartment 13a and a second storage compartment 13b, by the partition 15, and the partition 15 includes a first partition 17 horizontally disposed to divide the inside of the storage compartment 13 in the vertical direction and a second partition 19 vertically disposed to divide the inside of the storage compartment 13 in the horizontal direction.

The division of the storage compartment 13 as described above is provided as one example, and the storage compartment 13 may also be divided in other ways than the above-described example.

The storage compartment 13 may be opened and closed by the door 100. The door 100 may include a pair of first doors (or upper doors 101) which allow the upper storage compartment 13a to be opened and closed and a pair of second doors (or lower doors 102) which allow the lower storage compartment 13b to be opened and closed.

The pair of first doors 101 and the pair of second doors 102 may allow a body opening 10a of the opened body 10 to be opened and closed. The first door 101 and the second door 102 may be provided with a handle, and a user can open and close the first door 101 and the second door 102 using the handles provided on the first door 101 and the second door 102.

A door shelf 105 capable of storing food may be provided on the rear surface of the first door 101. The door shelf 105 may include a shelf support 107 formed to vertically extend from the first door 101 so that the shelf support supports the door shelf 105 at both sides of the door shelf 105. The shelf support 107 may be detachably provided on the first door 101 as a separate component, and in the embodiment, is provided so as to protrude backward from the rear surface of the first door 101 and extend in the vertical direction.

A first gasket 109 may be provided at the edge of the rear surface of the first door 101 so that a gap between the first door 101 and the body 10 is sealed when the first door 101 is closed. The first gasket 109 may be installed in the form of a loop along the edge of the rear surface of the first door 101 and may include a first magnet therein.

The lower storage compartment 13b may be opened and closed by the second door 102 rotatably coupled to the body 10. A second gasket 106 may be provided at the edge of the rear surface of the second door 102 so that a gap between the second door 102 and the body 10 is sealed when the second door 102 is closed. The second gasket 106 may be installed in the form of a loop along the edge of the rear surface of the second door 102 and may include a second magnet therein.

Meanwhile, the outer case forming an outer surface of a refrigerator body may be made of a PCM steel sheet as described above. The rear surface of a steel sheet used in the outer surface of a refrigerator body may be subjected to urethane foam filling treatment for insulation and soundproofing. The filling treatment is required for insulation, soundproofing, and sound absorption, but there is a problem in that an irregular curvature occurs on the outer surface of the steel sheet after the filling treatment.

The curvature formed on the outer surface of the steel sheet is perceived by a user and acts as an element that degrades the aesthetic quality of a product, and thus commerciality is lowered.

Accordingly, the disclosed embodiments are directed to providing a steel sheet in which the visibility of the curvature of the outer surface of a body which degrades the aesthetic quality of a product is decreased, a refrigerator including the same, and a method of manufacturing the steel sheet.

More specifically, continuous attempts have been made to lower the surface glossiness of a steel sheet for decreasing the visibility of such curvature. However, surface glossiness, which is improved by the attempts, was front glossiness, that is, 60° glossiness. In addition, in the case of a steel sheet, a matting agent may be added to only an upper coating layer to lower surface glossiness. As a result, as the surface glossiness of a steel sheet is lowered, the visibility of the curvature is decreased, but the decrease was insignificant, and there was no fundamental improvement thereby.

The present inventors found that the curvature is not perceived well from the front but perceived well from the

5

side. As a result of measuring the glossiness of a curved steel sheet at each angle (20°, 60°, and 85°) using a gloss meter, the present inventors found that, as an 85° glossiness is lower, the visibility of the curvature is decreased. Particular, the inventors found that, when an 85° glossiness is 10 or less, the visibility of the curvature is decreased to a desired level. Also, the inventors found that, as an 85° glossiness is lower than a 60° glossiness, the visibility of the curvature is further decreased.

Accordingly, an embodiment may solve degradation of commerciality by providing a steel sheet whose visibility of the curvature is decreased by lowering an 85° glossiness, at which the curvature is perceived, to 10 or less.

Hereinafter, the steel sheet for a refrigerator body according to an embodiment will be described with reference to FIG. 2, FIG. 3, and FIG. 4. FIG. 2 shows a laminated structure of a steel sheet **300** according to an embodiment, and FIGS. 3 and 4 are schematic diagrams of a mechanism in which the side glossiness of a steel sheet **300** according to an embodiment is lowered.

Referring to FIG. 2, a steel sheet **300** according to the disclosed embodiment includes a base steel sheet **310**, a base coating layer **320** formed on the base steel sheet **310**, and a clear coating layer **330** formed on the base coating layer **320**.

The steel sheet **300** for a refrigerator body according to the disclosed embodiment is a pre-coated-metal (PCM) steel sheet and is obtained by coating a base steel sheet **310** such as electrolytic galvanized iron (EGI), a hot-dip galvanized steel sheet (GI), or the like.

The hot-dip galvanized steel sheet is a steel sheet plated by melting a full hard sheet obtained by subjecting a hot-rolled steel sheet to pickling and rolling and passing the molten sheet through a zinc pot. The hot-dip galvanized steel sheet can secure excellent corrosion resistance because thicker plating is possible as compared to electrolytic galvanized iron.

Electrolytic galvanized iron is a product whose corrosion resistance is improved by subjecting a cold-rolled steel sheet to electrolytic galvanization. Although a plating amount is small compared to the hot-dip galvanized steel sheet, electrolytic galvanized iron has a uniform plating layer thickness and an aesthetically pleasing surface and is plated at low temperature, and thus mechanical properties of the cold-rolled steel sheet, which is a material, are maintained as they are.

The PCM steel sheet **300** may be manufactured by a 2 coating-2 baking (2C-2B) method including forming a base coating layer **320** and a clear coating layer **330** on a base steel sheet **310** and performing firing after the formation of each coating layer. Alternatively, the PCM steel sheet **300** may be manufactured by a 3 coating-3 baking (3C-3B) method including forming a primer coating layer, a base coating layer **320**, and a clear coating layer **330** on a base steel sheet **310** and performing firing after the formation of each coating layer. Hereinafter, in the disclosed embodiment, a steel sheet manufactured by the 2C-2B method will be described as an example.

The base coating layer **320** is formed on the above-described base steel sheet **310**. The base coating layer **320** includes a polyester resin as a main resin and may include a leveling agent, a pigment, and the like. The base coating layer **320** of the steel sheet **300** according to the disclosed embodiment includes silica **324** as a matting agent in addition to the above-described components.

The matting agent is an additive added to decrease the glossiness of the steel sheet **300**, and the base coating layer **320** of the steel sheet **300** according to the disclosed embodi-

6

ment may comprise 2.5 to 3.5 wt % of silica **324**, and more preferably, 3.5 wt % of silica **324** based on the total weight of the base coating layer **320**. As silica **324**, acrylic-coated organic silica may be used, but the disclosure is not limited thereto.

Referring to FIG. 3, metallic particles **322** of the pigment included in the base coating layer **320** causes diffuse reflection of light incident from the outside, and accordingly, side glossiness, that is, 85° glossiness, is increased. As described above, when side glossiness is increased, the visibility of the curvature of the outer surface of the steel sheet **300** is also increased. Accordingly, in the disclosed embodiment, silica **324** is added as a matting agent to interfere with diffuse reflection caused by the metallic particles **322** of the pigment, and thus visibility according to 85° glossiness is decreased.

As a result of 85° glossiness measurement, the base coating layer **320** including 3.5 wt % of silica **324** exhibits a gloss measurement value of 5.2, and a base coating layer including no silica **324** or a small amount (0.8 wt %) of silica exhibits a high 85° gloss measurement value of 62.4.

In other words, since the base coating layer **320** including silica **324** in the content range according to the disclosed embodiment exhibits a lower 85° gloss measurement value than a base coating layer including silica outside the content range, side visibility with respect to the curvature can be decreased.

As described above, the side glossiness of the steel sheet **300** may be degraded by including silica **324** as a matting agent in not only the clear coating layer **330** to be described below but also the base coating layer **320**.

The clear coating layer **330** is formed on the base coating layer **320**. The clear coating layer **330** includes a polyester resin as a main resin and may include a leveling agent and the like. The clear coating layer **330** of the steel sheet **300** according to the disclosed embodiment includes silica **332** and beads **334** as a matting agent in addition to the above-described components.

The clear coating layer **330** of the steel sheet **300** according to the disclosed embodiment may include 2.0 to 5.0 wt % of beads **334**, and more preferably, 2.0 wt % of beads **334** based on the total weight of the clear coating layer **330**. As the beads **334**, acrylic beads may be used, but the disclosure is not limited thereto. Also, the beads **334** may have a size of 20 to 50 μm , and preferably, 20 μm in diameter.

Along with the above-described beads **334**, silica **332** may also be included as a matting agent. Silica **332** may be included in an amount of 5 wt % based on the total weight of the clear coating layer **330**.

Referring to FIG. 4, when both silica **332** and acrylic beads **334** having a rough particle shape are used as matting agents in the clear coating layer **330**, diffuse reflection of light is maximized, and thus side glossiness, that is, 85° glossiness, is decreased. Therefore, visibility according to 85° glossiness can be decreased.

The degree of decrease in side glossiness of the steel sheet **300** according to an embodiment will be described below in detail with reference to Table 1.

FIG. 5 is a flow chart of a method of manufacturing a steel sheet according to an embodiment.

Referring to FIG. 5, a method of manufacturing the steel sheet **300** according to an embodiment includes: forming a base coating layer **320** on a base steel sheet **310** (at operation **500**); and forming a clear coating layer **330** on the base coating layer **320** (at operation **600**).

The steel sheet **300** for a refrigerator body according to the disclosed embodiment is a pre-coated-metal (PCM) steel

sheet and is obtained by coating a base steel sheet **310** such as electrolytic galvanized iron (EGI), a hot-dip galvanized steel sheet (GI), or the like.

The base coating layer **320** is formed on the above-described base steel sheet **310**. The base coating layer **320** includes a polyester resin as a main resin and may include a leveling agent, a pigment, and the like. The base coating layer **320** of the steel sheet **300** according to the disclosed embodiment includes silica **324** as a matting agent in addition to the above-described components.

The matting agent is an additive added to decrease the glossiness of the steel sheet **300**, and the base coating layer **320** of the steel sheet **300** according to the disclosed embodiment may include 2.5 to 3.5 wt % of silica **324**, and more preferably, 3.5 wt % of silica **324** based on the total weight of the base coating layer **320**. As silica **324**, acrylic-coated organic silica may be used, but the disclosure is not limited thereto.

The clear coating layer **330** is formed on the base coating layer **320**. The clear coating layer **330** includes a polyester resin as a main resin and may include a leveling agent and the like. The clear coating layer **330** of the steel sheet **300** according to the disclosed embodiment includes silica **332** and beads **334** as matting agents in addition to the above-described component.

The clear coating layer **330** of the steel sheet **300** according to the disclosed embodiment may include 2.0 to 5.0 wt % of beads **334**, and more preferably, 2.0 wt % of beads **334** based on the total weight of the clear coating layer **330**. As the beads **334**, acrylic beads may be used, but the disclosure is not limited thereto. Also, the beads **334** may have a size of 20 to 50 μm , and preferably, 20 μm in diameter.

Along with the above-described beads **334**, silica **332** may also be included as a matting agent. Silica **332** may be included in an amount of 5 wt % based on the total weight of the clear coating layer **330**.

Referring to FIG. 4, when both silica **332** and acrylic beads **334** having a rough particle shape are used as matting agents in the clear coating layer **330**, diffuse reflection of light is maximized, and thus side glossiness, that is, 85° glossiness, is decreased. Therefore, visibility according to 85° glossiness can be decreased.

Hereinafter, referring to Table 1, the gloss measurement value of the steel sheet **300** including the base coating layer **320** and the clear coating layer **330** according to an embodiment will be compared with those of comparative examples.

TABLE 1

Classification		Comparative Example 1		Comparative Example 2		Comparative Example 3		Example	
Coating layer		Base	Clear	Base	Clear	Base	Clear	Base	Clear
Content (wt %)	Silica	0.8%	5.0%	3.5%	5.0%	0.8%	5.0%	3.5%	5.0%
회광 (중량 %)	Beads	—	—	—	—	—	2.0%	—	2.0%
Gloss measurement value	20°	1.5		0.8		1.2		1.0	
광택측정값	60°	7.0		5.2		5.3		5.9	
광택측정값	85°	28.0		11.9		10.6		4.2	

Referring to Table 1, in the case of the steel sheet **300** according to the example, the base coating layer **320** included 3.5 wt % of silica **324**, and the clear coating layer **330** included 5.0 wt % of silica **332** and 2.0 wt % of beads **334**. The steel sheet **300** according to the example exhibited an 85° gloss measurement value of 4.2, which is 10 or less

and smaller than a 60° gloss measurement value of 5.9. In the case of Comparative Example 1, the content of silica included in a base coating layer was below the lower limit of the content range according to the disclosed embodiment, and beads were not included in a clear coating layer. The steel sheet according to Comparative Example 1 exhibited an 85° gloss measurement value of 28.0, which exceeds 10 and is larger than a 60° gloss measurement value of 7.0. In other words, when the content of silica included in a base coating layer is below the lower limit of the content range according to the disclosed embodiment and beads are not included in a clear coating layer, the visibility of the curvature of the outer surface of the steel sheet is not decreased.

In the case of Comparative Example 2, the content of silica included in a base coating layer fell within the content range according to the disclosed embodiment, but beads were not included in a clear coating layer. The steel sheet according to Comparative Example 2 exhibited an 85° gloss measurement value of 11.9, which exceeds 10 and is larger than a 60° gloss measurement value of 5.2. In other words, when beads are not included in a clear coating layer even though the content of silica included in a base coating layer falls within the content range according to the disclosed embodiment, the visibility of the curvature of the outer surface of the steel sheet is not decreased to a desired level.

In the case of Comparative Example 3, beads were included in an amount of 2.0 wt %, which falls within the bead content range according to the disclosed embodiment, in a clear coating layer, but the content of silica included in a base coating layer was below the lower limit of the content range according to the disclosed embodiment. The steel sheet according to Comparative Example 3 exhibited an 85° gloss measurement value of 10.6, which exceeds 10 and is larger than a 60° gloss measurement value of 5.3. In other words, when the content of silica included in a base coating layer is below the lower limit of the content range according to the disclosed embodiment even though the content of beads included in a clear coating layer falls within the content range according to the disclosed embodiment, the visibility of the curvature of the outer surface of the steel sheet is not decreased to a desired level.

As described above, when the base coating layer **320** of the steel sheet **300** includes 2.5 to 4.0 wt %, and preferably, 3.5 wt % of silica **324** and the clear coating layer **330** includes 2.0 to 5.0 wt %, and preferably, 2.0 wt % of beads **334**, and silica **332**, an 85° gloss measurement value of 10

or less is exhibited, and thus the visibility of the curvature of the outer surface of the steel sheet **300** is decreased. Also since the 85° gloss measurement value becomes smaller than a 60° gloss measurement value, the visibility of the curvature of the outer surface of the steel sheet **300** is further decreased.

9

While certain example embodiments have been described above, the disclosure is not limited thereto, and it may be understood by those skilled in the art that various modifications and alterations may be made without departing from the concept and scope of the following claims.

What is claimed is:

1. A refrigerator comprising:
a body; and
a door rotatably coupled to the body,
wherein the body comprises:
a base steel sheet;
a base coating layer provided on the base steel sheet
and comprising 2.5 to 4.0 wt % of a silica based on
a total weight of the base coating layer; and
a clear coating layer provided on the base coating layer
and comprising a silica and 2.0 to 5.0 wt % of beads
based on a total weight of the clear coating layer.
2. The refrigerator of claim 1, wherein the base coating
layer comprises 3.5 wt % of the silica based on the total
weight of the base coating layer.
3. The refrigerator of claim 1, wherein the silica of the
base coating layer comprises acrylic-coated organic silica.
4. The refrigerator of claim 1, wherein the clear coating
layer comprises 2.0 wt % of the beads based on the total
weight of the clear coating layer.
5. The refrigerator of claim 1, wherein the beads of the
clear coating layer have a size of 20 to 50 μm in diameter.
6. The refrigerator of claim 1, wherein the beads of the
clear coating layer have a size of 20 μm in diameter.
7. The refrigerator of claim 1, wherein the clear coating
layer comprises 5.0 wt % of the silica based on the total
weight of the clear coating layer.
8. The refrigerator of claim 1, wherein an 85° gloss
measurement value of the body is 10 or less gloss units
(GU).
9. The refrigerator of claim 8, wherein the 85° gloss
measurement value is less than a 60° gloss measurement
value of the body.

10

10. The refrigerator of claim 1,
wherein the clear coating layer comprises 2.0 wt % of the
beads based on the total weight of the clear coating
layer, and
wherein the clear coating layer further comprises 5.0 wt
% of the silica based on the total weight of the clear
coating layer.
11. A steel sheet comprising:
a base steel sheet;
a base coating layer provided on the base steel sheet and
comprising 2.5 to 4.0 wt % of a silica based on a total
weight of the base coating layer; and
a clear coating layer provided on the base coating layer
and comprising a silica and 2.0 to 5.0 wt % of beads
based on a total weight of the clear coating layer.
12. The steel sheet of claim 11, wherein the base coating
layer comprises 3.5 wt % of the silica based on the total
weight of the base coating layer.
13. The steel sheet of claim 11, wherein the clear coating
layer comprises 2.0 wt % of the beads based on the total
weight of the clear coating layer.
14. The steel sheet of claim 11, wherein an 85° gloss
measurement value of the steel sheet is 10 or less gloss units
(GU).
15. The steel sheet of claim 14, wherein the 85° gloss
measurement value is less than a 60° gloss measurement
value of the steel sheet.
16. A method of manufacturing a steel sheet, comprising:
forming, on a base steel sheet, a base coating layer
comprising 2.5 to 4.0 wt % of a silica based on a total
weight of the base coating layer; and
forming, on the base coating layer, a clear coating layer
comprising a silica and 2.0 to 5.0 wt % of beads based
on a total weight of the clear coating layer.

* * * * *