



US012407508B2

(12) **United States Patent**
Xie et al.

(10) **Patent No.:** **US 12,407,508 B2**
(45) **Date of Patent:** **Sep. 2, 2025**

(54) **TRAFFIC ACCIDENT FORENSICS METHOD
BASED ON BLOCKCHAIN**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **Hangzhou Normal University,**
Hangzhou (CN)

7,359,821 B1 * 4/2008 Smith G01L 5/0052
702/113
9,665,995 B2 * 5/2017 Chowdhury G08G 1/0112
9,704,391 B2 * 7/2017 Emura G08G 1/04
10,168,703 B1 * 1/2019 Konrardy G08G 1/148
10,246,037 B1 * 4/2019 Shea G07C 5/008
10,521,780 B1 * 12/2019 Hopkins, III G06Q 20/3825
10,643,407 B1 * 5/2020 Tang G01S 13/931
10,832,699 B1 * 11/2020 McFarland, Jr. G06F 16/487
10,853,882 B1 * 12/2020 Leise G06T 5/50
11,308,800 B2 * 4/2022 McFarland, Jr. G10L 25/51

(72) Inventors: **Qi Xie**, Hangzhou (CN); **Xiumei Li**,
Hangzhou (CN); **Zixuan Ding**,
Hangzhou (CN); **Bin Hu**, Hangzhou
(CN); **Xiao Tan**, Hangzhou (CN)

(73) Assignee: **Hangzhou Normal University,**
Hangzhou (CN)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 262 days.

(Continued)

Primary Examiner — Olugbenga O Idowu

(74) *Attorney, Agent, or Firm* — Hemisphere Law, PLLC;
Zhigang Ma

(21) Appl. No.: **18/363,040**

(22) Filed: **Aug. 1, 2023**

(65) **Prior Publication Data**

US 2024/0056299 A1 Feb. 15, 2024

(30) **Foreign Application Priority Data**

Aug. 3, 2022 (CN) 202210928554.2

(51) **Int. Cl.**
H04L 9/30 (2006.01)
G06Q 50/26 (2024.01)
H04L 9/00 (2022.01)

(52) **U.S. Cl.**
CPC **H04L 9/3066** (2013.01); **G06Q 50/265**
(2013.01); **H04L 9/50** (2022.05)


(58) **Field of Classification Search**
CPC . G06Q 50/265; H04L 2209/84; H04L 9/0869;
H04L 9/3066; H04L 9/3239; H04L
9/3247; H04L 9/50

See application file for complete search history.

ABSTRACT

A traffic accident forensics method based on a blockchain is provided. After a traffic accident, the method allows vehicles to carry out a mutual verification and sign a respective accident report. After one of the vehicles verifies with a road side unit, the signed accident report is submitted to the road side unit and uploaded to the blockchain, so as to record the accident report and preventing the accident report from being tampered, and an efficient mutual verification between the vehicle and the road side unit is achieved. The key parameters in the mutual verification process are encrypted based on an elliptic curve algorithm, and thus the security of the whole mutual verification process is improved. A batch verification way for signatures is designed to reduce the compute pressure of a wireless device. Vehicles use dynamic anonymity policies to protect privacy in the forensics method.

3 Claims, 2 Drawing Sheets

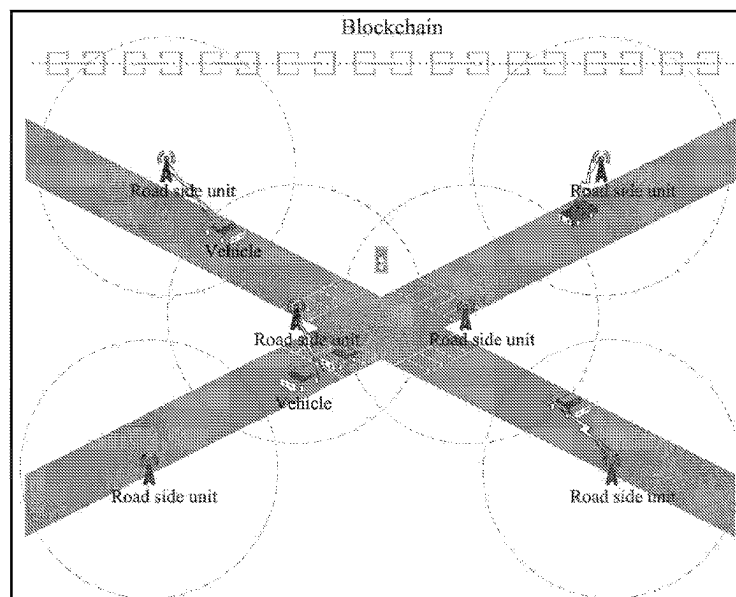

(56)

References Cited

U.S. PATENT DOCUMENTS

11,341,847	B1 *	5/2022	Beaurepaire	G08G 1/0133
11,966,994	B2 *	4/2024	Zheng	H04L 9/32
12,205,456	B1 *	1/2025	White	G07C 5/008
2010/0030540	A1 *	2/2010	Choi	G01S 5/0027
				342/357.31
2010/0106417	A1 *	4/2010	Bauchot	G07C 5/085
				701/469
2012/0095646	A1 *	4/2012	Ghazarian	G01S 19/17
				340/905
2013/0086109	A1 *	4/2013	Huang	G06F 16/487
				707/E17.014
2014/0176347	A1 *	6/2014	Kim	G08G 1/096791
				340/907
2018/0332364	A1 *	11/2018	Sim	H04N 21/84
2020/0034945	A1 *	1/2020	Soundararajan	H04L 9/3271
2020/0219336	A1 *	7/2020	Huffman	G08G 1/0129
2020/0226853	A1 *	7/2020	Ahmed	H04L 9/0618
2021/0136572	A1 *	5/2021	Ingraham	H04W 12/069
2021/0216949	A1 *	7/2021	Nordmann	G06Q 20/36
2022/0169287	A1 *	6/2022	Beaurepaire	G01C 21/3492
2022/0309602	A1 *	9/2022	Okabe	G06T 7/0008
2022/0335535	A1 *	10/2022	Li	G08G 1/0133

* cited by examiner

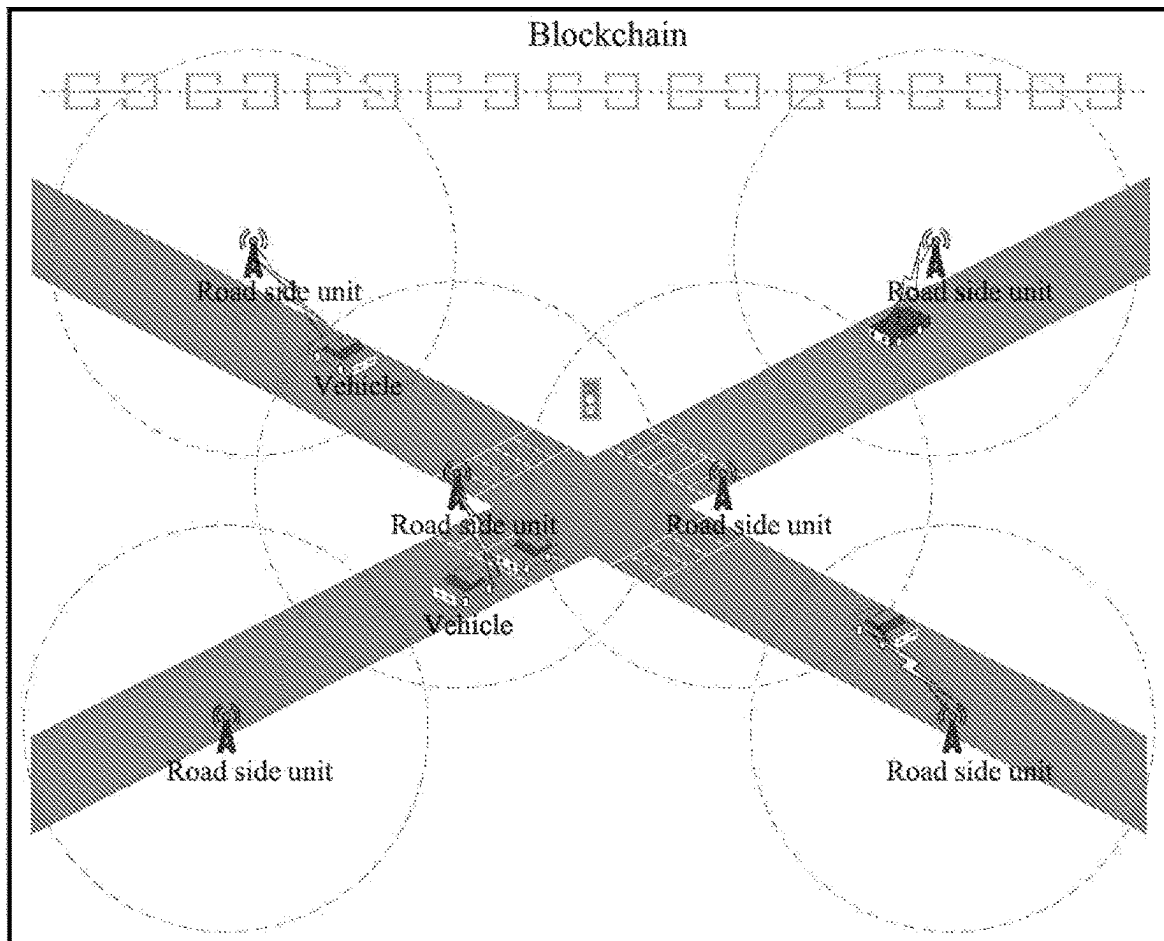


FIG. 1

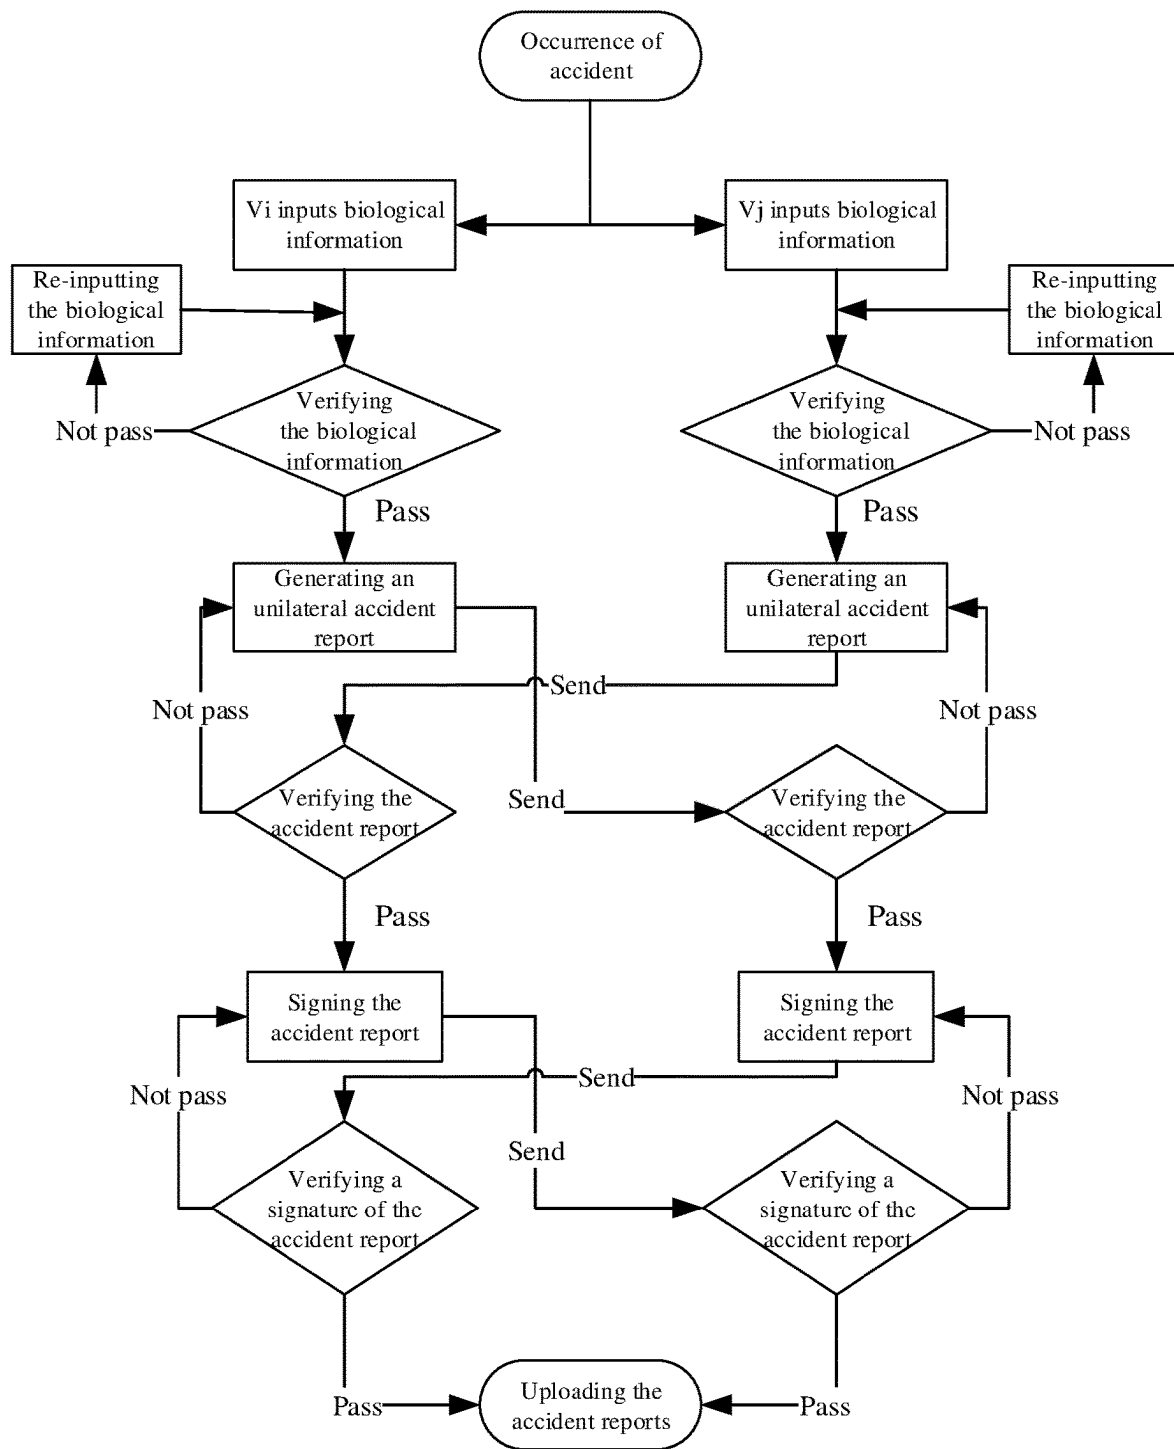


FIG. 2

TRAFFIC ACCIDENT FORENSICS METHOD BASED ON BLOCKCHAIN

TECHNICAL FIELD

The disclosure relates to the field of information security technology, in particular to a traffic accident forensics method based on a blockchain.

BACKGROUND

With the help of the new generation of information and communication technology, the Internet of vehicles realizes the connection between vehicles or between vehicles and other entities, improves the overall intelligent driving level of vehicles, provides users with a safe, comfortable, intelligent, and efficient driving experience and traffic services, improves the efficiency of traffic operation, and improves the intelligent level of social traffic services. Blockchain technology has the characteristics of decentralization, non-tampering and non-forgery, and the use of blockchain for the storage of vehicle accident reports can ensure the security and tamper-proof of the vehicle accident reports.

The disclosure provides a traffic accident forensics method based on a blockchain, after an accident occurs, vehicles provide information such as images or videos recorded in a respective driving recorder to each other. If each party of drivers of the vehicles agrees with a respective accident information report provided by the other party, the drivers sign the accident information reports and aggregate two signatures into one signature. Finally, one of the vehicles carries out an identity verification with a road side unit (also abbreviated as RSU, and which generally is a communication gateway deployed on the roadside), and the road side unit carries out batch verification on the identities of the vehicles and the signature of the accident information report. After the batch verification passes, the road side unit signs key parameters, and then accident information is generated into a block and uploaded to the blockchain. After that, owners of the vehicles can go to a third-party insurance company or a traffic management bureau for follow-up treatment of the accident within a limited date. With the help of the Internet of vehicles, efficient accident forensics can be achieved to facilitate the follow-up treatment, thereby avoiding impacts on normal traffic and avoiding secondary accidents.

SUMMARY

A purpose of the disclosure is to provide a traffic accident forensics method based on a blockchain. The disclosure is used to solve a problem of accident report negotiation between accident parties in a current scenario of the Internet of vehicles. When multiple vehicles on the road are involved in traffic accidents, video or photos are respectively provided as accident information and uploaded to the blockchain to facilitate traffic police law enforcement and insurance company claims settlement.

After a traffic accident, vehicles carry out verification to each other and sign a respective accident report. After one of the vehicles verifies with a road side unit, the signed accident report is submitted to the road side unit and uploaded to the blockchain based on blockchain technology, so as to record the accident report and preventing the accident report from being tampered, and efficient mutual verification between the vehicle and the road side unit is achieved. The key parameters in the mutual verification

process are encrypted based on an elliptic curve algorithm, and thus the security of the whole mutual verification process is improved. A batch verification way for signatures is provided to reduce the compute pressure of a wireless device.

After a traffic accident occurs, vehicles mutually verify each other and sign a respective accident report, then the road side unit uploads the accident information to the blockchain.

The traffic accident forensics method based on the blockchain includes following steps.

Step S1, initialization of a trust authority: selecting, by the trust authority, an elliptic curve $E(\bullet)$ with a generator P , a secure one-way Hash function $h(\bullet)$, a fuzzy extraction function $Gen(\bullet)$, and a recovery function $Rep(\bullet)$; and selecting random numbers (SK_{TA}, K_{TA}) as a long-term private key of the trust authority, and determining a point multiplication result based on an elliptic curve algorithm as a public key $PK_{TA}=SK_{TA} \cdot P$ of the trust authority; and publishing parameters $\{P, E(\bullet), h(\bullet), Gen(\bullet), Rep(\bullet), PK_{TA}\}$.

Step S2, submitting, by vehicles and road side units, registration requests to the trust authority; after identities of the vehicles and the road side units are verified by the trust authority, feeding, by the trust authority, registration information of the vehicles and registration information of the road side units to the vehicles and the road side units respectively, and storing the registration information of the vehicles and the registration information of the road side devices in corresponding on-board circuits of the vehicles and corresponding storage circuits of the road side units, respectively; wherein for a vehicle V_i of the vehicles and a road side unit of the road side units, the step S2 further includes:

sub-step S2.1, selecting, by the vehicle V_i , a random number SK_{Vi} as a long-term private key of the vehicle V_i , and determining a point multiplication result based on the elliptic curve algorithm as a public key $PK_{Vi}=SK_{Vi} \cdot P$ of the vehicle V_i ; sending, by the vehicle V_i , an unique identity number VID_i (such as an engine number) of the vehicle V_i , the public key PK_{Vi} of the vehicle V_i , and vehicle appearance information Val_i of the vehicle V_i to the trust authority through a secure message channel;

sub-step S2.2, after the identity number VID_i of the vehicle V_i is verified by the trust authority, calculating, by the trust authority, an identity-verification parameter b_i of the vehicle V_i , selecting a random number r_i and a random number a_i , calculating a point multiplication result $A_i=a_i \cdot P$ based on the elliptic curve algorithm of the random number a_i , determining a pseudonym $PID_i=E_{K_{TA}}(VID_i, Val_i, r_i)$ of the vehicle V_i , $E_{K_{TA}}(VID_i, Val_i, r_i)$ representing a function that uses the long-term private key K_{TA} to encrypt the identity number VID_i , the vehicle appearance information Val_i , and the random number r_i based on the elliptic curve algorithm; then returning parameters $\{PID_i, A_i, b_i, PK_{TA}, r_i\}$ to the vehicle V_i , where the identity-verification parameter b_i is expressed as $b_i=h(PID_i||PK_{Vi}||A_i)*SK_{TA}+a_i$;

sub-step S2.3, verifying, by the vehicle V_i , correctness of a point multiplication result $b_i \cdot P=h(PID_i||PK_{Vi}||A_i) \cdot PK_{TA}+A_i$ of the identity-verification parameter b_i based on the elliptic curve algorithm; when the point multiplication result $b_i \cdot P=h(PID_i||PK_{Vi}||A_i) \cdot PK_{TA}+A_i$ is correct, inputting, by a driver of the vehicle V_i , biological information Bio_i of the driver of the vehicle V_i ; calculating, by the vehicle V_i , a biological key σ_i and a key recovery parameter τ_i using $(\sigma_i, \tau_i)=Gen(Bio_i)$,

3

calculating a login-verification parameter $V_i = h(\sigma_i || \text{Val}_i)$, $S_{i1} = b_i \oplus h(\sigma_i || V_i)$ used to encrypt and store the identity-verification parameter b_i , $S_{i2} = \text{SK}_{V_i} \oplus h(V_i || \sigma_i)$ used to encrypt and store the long-term private key SK_{V_i} , and $S_{i3} = r_i \oplus h(\text{VID}_i || \sigma_i)$ used to encrypt and store the random number r_i ; and storing, by the vehicle V_i , the registration information $\{P, V_i, S_{i1}, S_{i2}, S_{i3}, A_i, \text{PK}_{V_i}, \text{PK}_{TA}, \text{PID}_i, \text{Rep}(\bullet), \text{Val}_i, \tau_i\}$ of the vehicle V_i in the on-board circuit of the vehicle V_i ;

sub-step S2.4, selecting, by the trust authority, an identity mark RID_r , a private key SK_{Rr} and a random number z_r for the road side unit; calculating a public key $\text{PK}_{Rr} = \text{SK}_{Rr} \cdot P$ of the road side unit based on the elliptic curve algorithm, calculating a point multiplication result $Z_r = z_r \cdot P$ of the random number z_r based on the elliptic curve algorithm, and calculating an identity-verification parameter $y_r = h(\text{RID}_r || \text{PK}_{Rr} || Z_r) * \text{SK}_{TA} + Z_r$ of the road side unit; and sending, by the trust authority, the registration information $\{\text{RID}_r, y_r, Z_r, \text{SK}_{Rr}, \text{PK}_{Rr}, \text{PK}_{TA}\}$ of the road side unit to the road side unit through the secure message channel; and

sub-step S2.5, after the road side unit receives the registration information $\{\text{RID}_r, y_r, Z_r, \text{SK}_{Rr}, \text{PK}_{Rr}, \text{PK}_{TA}\}$, verifying correctness of a point multiplication result $y_r \cdot P = h(\text{RID}_r || \text{PK}_{Rr} || Z_r) * \text{PK}_{TA} + Z_r$ of the identity-verification parameter y_r based on the elliptic curve algorithm; when the point multiplication result $y_r \cdot P$ is wrong, resubmitting a registration request by the road side unit, otherwise storing the registration information $\{\text{RID}_r, y_r, Z_r, \text{SK}_{Rr}, \text{PK}_{Rr}, \text{PK}_{TA}\}$ to the storage circuit of the road side unit.

Step S3, after an accident occurs between the vehicle V_i and a vehicle V_j , performing, by the vehicle V_i and the vehicle V_j , processes of mutually confirming accident information and signing accident reports, and the processes including:

sub-step S3.1, inputting, by a driver of the vehicle V_i , the biological information Bio_i to the vehicle V_i ; recovering, by the vehicle V_i , the biological key $\sigma_i = \text{Rep}(\text{Bio}_i, \tau_i)$; calculating the login-verification parameter $V_i = h(\sigma_i || \text{Val}_i)$, and verifying correctness of the login-verification parameter $V_i = h(\sigma_i || \text{Val}_i)$; when the login-verification parameter $V_i = h(\sigma_i || \text{Val}_i)$ is correct, determining that identity verification of the driver is successful; then decrypting, by the vehicle V_i , the identity-verification parameter $b_i = S_{i1} \oplus h(\sigma_i || V_i)$ and the long-term private key $\text{SK}_{V_i} = S_{i2} \oplus h(V_i || \sigma_i)$, and generating, by the vehicle V_i , a random number d_{i1} , a random number d_{i2} , a time stamp T_1 , and accident information D1 including an image or a video;

calculating a point multiplication result $D_{i1} = d_{i1} \cdot P$ of the random number d_{i1} , a point multiplication result $D_{i2} = d_{i2} \cdot P$ of the random number d_{i2} , and an accident report verification parameter $c_{i1} = \text{SK}_{V_i} + h(D1 || D_{i1} || D_{i2} || T_1 || \text{PID}_i || \text{Val}_i) * d_{i1}$ based on the elliptic curve algorithm; and sending, by the vehicle V_i , an accident report $M_{i1} = \{D1, b_i, \text{PID}_i, A_i, D_{i1}, D_{i2}, \text{PK}_{V_i}, c_{i1}, \text{Val}_i, T_1\}$ to the vehicle V_j ;

sub-step 3.2, inputting, a driver of the vehicle V_j , biological information Bio_j of the driver of the vehicle V_j to the vehicle V_j , recovering, by the vehicle V_j , a biological key $\sigma_j = \text{Rep}(\text{Bio}_j, \tau_j)$, calculating a login-verification parameter $V_j = h(\sigma_j || \text{Val}_j)$ of the vehicle V_j , and verifying correctness of the login-verification parameter $V_j = h(\sigma_j || \text{Val}_j)$; when the login-verification parameter $V_j = h(\sigma_j || \text{Val}_j)$ is correct, determining that identity verification of the driver is successful; then

4

decrypting, by the vehicle V_j , an identity-verification parameter $b_j = S_{j1} \oplus h(\sigma_j || V_j)$ of the vehicle V_j and a long-term private key $\text{SK}_{V_j} = S_{j2} \oplus h(V_j || \sigma_j)$ of the vehicle V_j , and generating, by the vehicle V_j , a random number d_{j1} , a random number d_{j2} , a time stamp T_2 , and accident information D2 including an image or a video; calculating a point multiplication result $D_{j1} = d_{j1} \cdot P$ of the random number d_{j1} based on the elliptic curve algorithm, calculating a point multiplication result $D_{j2} = d_{j2} \cdot P$ of the random number d_{j2} based on the elliptic curve algorithm, and calculating an accident report verification parameter $c_{j1} = \text{SK}_{V_j} + h(D2 || D_{j1} || D_{j2} || T_1 || \text{PID}_j || \text{Val}_j) * d_{j1}$; and

sending, by the vehicle V_j , an accident report $M_{j1} = \{D2, b_j, \text{PID}_j, A_j, D_{j1}, D_{j2}, \text{PK}_{V_j}, c_{j1}, \text{Val}_j, T_2\}$ to the vehicle V_i ;

sub-step 3.3, after the vehicle V_i receives the accident report M_{j1} from the vehicle V_j , performing, by the vehicle V_i , first verifications on freshness of the time stamp T_2 , correctness of a point multiplication result $b_j \cdot P = h(\text{PID}_j || \text{PK}_{V_j} || A_j) * \text{PK}_{TA} + A_j$ of the identity-verification parameter b_j based on the elliptic curve algorithm, and correctness of a point multiplication result $c_{j1} \cdot P = \text{PK}_{V_j} + h(D2 || D_{j1} || D_{j2} || \text{PID}_j || \text{Val}_j) * D_{j1}$ of the accident report verification parameter c_{j1} based on the elliptic curve algorithm; after the first verifications are passed, confirming, by the vehicle V_i , the accident information D2, when the driver of the vehicle V_i agrees that the accident information D2 sent by the accident vehicle V_j is reasonable, signing the accident information D2 by:

calculating, by the vehicle V_i , a point addition result $D_{ij} = D_{i2} + D_{j2}$ of the point multiplication result D_{i2} and the point multiplication result D_{j2} based on the elliptic curve algorithm, and calculating, by the vehicle V_i , an accident report verification parameter $c_{i2} = \text{SK}_{V_i} + h(D1 || D2 || D_{ij} || T_1 || \text{PID}_i || T_2 || \text{PID}_j || \text{Val}_i || \text{Val}_j) * d_{i2}$; and

sending, by the vehicle V_i , an signed accident report $M_{i2} = \{c_{i2}, \text{PID}_i, \text{Val}_i, \text{PID}_j\}$ to the vehicle V_j ;

sub-step S3.4, after the vehicle V_j receives the accident report M_{i1} from the vehicle V_i , performing, by the vehicle V_j , second verifications on freshness of the time stamp T_1 , correctness of a point multiplication result $b_i \cdot P = h(\text{PID}_i || \text{PK}_{V_i} || A_i) * \text{PK}_{TA} + A_i$ of the identity-verification parameter b_i based on the elliptic curve algorithm, and correctness of a point multiplication result $c_{i1} \cdot P = \text{PK}_{V_i} + h(D1 || D_{i1} || D_{i2} || T_1 || \text{PID}_i || \text{Val}_i) * D_{i1}$ of the accident report verification parameter c_{i1} based on the elliptic curve algorithm; after the second verifications are passed, confirming, by the vehicle V_j , the accident information D1; when the driver of the vehicle V_j agrees that the accident information D1 sent by the accident vehicle V_i is reasonable, signing the accident information D1 by:

calculating, by the vehicle V_j , the point addition result $D_{ij} = D_{i2} + D_{j2}$ of the point multiplication result D_{i2} and the point multiplication result D_{j2} based on the elliptic curve algorithm, and calculating, by the vehicle V_j , an accident report verification parameter $c_{j2} = \text{SK}_{V_j} + h(D1 || D2 || D_{ij} || T_1 || \text{PID}_i || T_2 || \text{PID}_j || \text{Val}_i || \text{Val}_j) * d_{j2}$; and

sending, by the vehicle V_j , an signed accident report $M_{j2} = \{c_{j2}, \text{PID}_j, \text{Val}_j, \text{PID}_i\}$ to the vehicle V_i ;

sub-step 3.5, after the vehicle V_i receives the signed accident report M_{j2} from the vehicle V_j , calculating, by the vehicle V_i , a sum $c_{ij} = c_{j2} + c_{i2}$ of the accident report

5

verification parameter c_{j2} and the accident report verification parameter c_{i2} , then verifying correctness of a point multiplication result $c_{ij} \cdot P = PK_{vj} + PK_{vi} + h(D1 \| D2 \| D_{ij} \| T_1 \| PID_i \| T_2 \| PID_j \| Val_i \| Val_j) D_{ij}$ of the sum c_{ij} based on the elliptic curve algorithm, and when the point multiplication result $c_{ij} \cdot P$ is correct, determining that the corresponding accident reports are signed by the vehicle Vi and the vehicle Vj; and

sub-step 3.6, after the vehicle Vj receives the signed accident report M_{i2} from the vehicle Vj, calculating, by the vehicle Vj, the sum $c_{ij} = c_{j2} + c_{i2}$ of the accident report verification parameter c_{j2} and the accident report verification parameter c_{i2} , then verifying correctness of the point multiplication result $c_{ij} \cdot P = PK_{vj} + PK_{vi} + h(D1 \| D2 \| D_{ij} \| T_1 \| PID_i \| T_2 \| PID_j \| Val_i \| Val_j) D_{ij}$ of the sum c_{ij} based on the elliptic curve algorithm, and when the point multiplication result $c_{ij} \cdot P$ is correct, determining that the corresponding accident reports are signed by the vehicle Vi and the vehicle Vj.

Step S4, uploading, by the road side unit, accident information Tx to the blockchain after the road side unit identifies the vehicle Vi and the vehicle Vj; and wherein the uploading includes:

sub-step S4.1, sending, by the vehicle Vi, a message $M1 = \{PID_i, b_i, PK_{vi}, A_i, PID_j, b_j, PK_{vj}, A_j\}$ to the road side unit, and the message M1 including a parameter set;

sub-step S4.2, after the road side unit receives the message M1, verifying, by the road side unit, correctness of a point multiplication result $(b_i + b_j) \cdot P = (h(PID_i \| PK_{vi} \| A_i) + h(PID_j \| PK_{vj} \| A_j)) PK_{TA} + (A_i + A_j)$ of a sum of the identity-verification parameter b_i and the identity-verification parameter b_j based on the elliptic curve algorithm; and when the point multiplication result $(b_i + b_j) \cdot P$ is correct, sending, by the road side unit, a message $M2 = \{RID_r, y_r, Z_r, PK_{Rr}\}$ to the vehicle Vi;

sub-step S4.3, after the vehicle Vi receives the message M2, verifying, by the vehicle Vi, correctness of a point multiplication result $y_r \cdot P = h(RID_r \| PK_{Rr} \| Z_r) PK_{TA} + Z_r$ of the identity-verification parameter y_r of the road side unit based on the elliptic curve algorithm; and when the point multiplication result $y_r \cdot P$ is correct, sending, by the vehicle Vi, a message $M3 = \{c_{ij}, PK_{vi}, PK_{vj}, D1, D2, D_{ij}, T_1, PID_i, T_2, PID_j, Val_i, Val_j\}$ to the road side unit; and

sub-step S4.4, after the road side unit receives the message M3, verifying, by the road side unit, correctness of a point multiplication result $c_{ij} \cdot P = PK_{vj} + PK_{vi} + h(D1 \| D2 \| D_{ij} \| T_1 \| PID_i \| T_2 \| PID_j \| Val_i \| Val_j) D_{ij}$ of the sum c_{ij} based on the elliptic curve algorithm; and when the point multiplication result $c_{ij} \cdot P$ is correct, selecting, by the road side unit, a random number d_i and calculating a point multiplication result $D_i = d_i \cdot P$ of the random number d_i based on the elliptic curve algorithm, generating a signature parameter $c_i = SK_{Rr} + h(c_{ij} \| T_3 \| D_i) d_i$ by the road side unit, T_3 of the signature parameter c_i representing a time stamp, and unloading, by the road side unit, the accident information $Tx = \{c_{ij}, PK_{vi}, PK_{vj}, D1, D2, D_{ij}, T_1, PID_i, T_2, PID_j, Val_i, Val_j, RID_r, PK_{Rr}, T_3, c_r, D_r\}$ to the blockchain.

Step S5, updating, by the vehicle Vi, a temporary identity to prevent identity tracking attacks, and wherein the updating includes:

sub-step S5.1, inputting, by the driver of the vehicle Vi, the biological information Bio_i of the driver of the vehicle Vi to the vehicle Vi; recovering, by the vehicle Vi, the biological key $\sigma_i = Rep(Bio_i, \tau_i)$, calculating the

6

login-verification parameter $V_i = h(\sigma_i \| Val_i)$, and verifying the correctness of the login-verification parameter $V_i = h(\sigma_i \| Val_i)$; and when $V_i \neq h(\sigma_i \| Val_i)$, determining that the login-verification parameter $V_i = h(\sigma_i \| Val_i)$ is wrong, otherwise decrypting, by the vehicle Vi, the random number $r_i = S_{i3} \oplus h(VID_i \| \sigma_i)$;

sub-step 5.2, reselecting, by the vehicle Vi, a random number SK_{vi}^* as a private key; and generating a time stamp T_4 , calculating a point multiplication result $PK_{vi}^* = SK_{vi}^* \cdot P$ of the random number SK_{vi}^* based on the elliptic curve algorithm, and the point multiplication result PK_{vi}^* representing a public key; encrypting, by the vehicle Vi, a message $M_1 = E_{r_i}(VID_i, PK_{vi}^*, PID_i, T_4)$, and sending, by the vehicle Vi, a first message set $\{PID_i, M_1, T_4\}$ to the trust authority for an update request;

sub-step 5.3, after the trust authority receives the update request, verifying, by the trust authority, freshness of the time stamp T_4 , when the freshness of the time stamp T_4 passes a verification of the trust authority, decrypting, by the trust authority, the message M_1 by $(VID_i, Val_i, r_i) = D_{K_{TA}}(PID_i)$ and $(VID_i^*, PK_{vi}^*, PID_i^*, T_4^*) = D_{r_i}(M_1)$; verifying, by the trust authority, equations $VID_i^* = VID_i$, $PID_i^* = PID_i$, and $T_4^* = T_4$; when the equations hold, generating, by the trust authority, a random number r_i^* and a random number a_i^* ; calculating, by the trust authority, a point multiplication result $A_i^* = a_i^* \cdot P$ of the random number a_i^* based on the elliptic curve algorithm; calculating, by the trust authority, a pseudonym $PID_i^* = E_{K_{TA}}(VID_i \| Val_i \| r_i^*)$ of the vehicle Vi; calculating, by the trust authority, an identity-verification parameter $b_i^* = h(PID_i^* \| PK_{vi}^* \| A_i^*) SK_{TA} + a_i^*$ of the vehicle Vi; generating, by the trust authority, a time stamp T_5 ; calculating a message $M2 = E_{r_i}(VID_i, A_i^*, PID_i^*, b_i^*, r_i^*, T_5)$, and sending a second message set $\{PID_i, M2, T_5\}$ to the vehicle Vi; and

sub-step S5.4, after the vehicle Vi receives the second message set $\{PID_i, M2, T_5\}$, verifying, by the vehicle Vi, freshness of the time stamp T_5 ; when the freshness of the time stamp T_5 passes a verification of the vehicle Vi, decrypting, by the vehicle Vi, the message $M2$ by $(VID_i^{**}, A_i^*, PID_i^*, b_i^*, T_5^*) = D_{r_i}(M2)$; verifying, by the vehicle Vi, correctness of a point multiplication result $b_i^* \cdot P = h(PID_i^* \| PK_{vi}^* \| A_i^*) PK_{TA} + A_i^*$ of the identity-verification parameter b_i^* based on the elliptic curve algorithm; when the point multiplication result $b_i^* \cdot P$ is correct, $VID_i^{**} = VID_i$, and $T_5^* = T_5$, calculating, by the vehicle Vi, a login-verification parameter $V_i^* = h(\sigma_i \| Val_i)$, $S_{i1}^* = b_i^* \oplus h(\sigma_i \| V_i)$ used to encrypt and store the identity-verification parameter b_i^* , $S_{i2}^* = SK_{vi}^* \oplus h(V_i \| \sigma_i)$ used to encrypt and store the long-term private key SK_{vi}^* , and $S_{i3}^* = r_i^* \oplus h(VID_i \| \sigma_i)$ used to encrypt and store the random number r_i^* ; and replacing, by the vehicle Vi, the registration information $\{P, V_i, S_{i1}, S_{i2}, S_{i3}, A_i, PK_{vi}, PK_{TA}, PID_i, Rep(\bullet), Val_i, \tau_i\}$ of the vehicle Vi stored in the on-board circuit with $\{P, V_i, S_{i1}^*, S_{i2}^*, S_{i3}^*, A_i^*, PK_{vi}^*, PK_{TA}, PID_i^*, Rep(\bullet), Val_i, \tau_i\}$.

A time stamp is verified by $|T_n' - T_n| \leq \Delta T$, where T_n represents a time stamp contained in a target message, and T_n' represents a current time stamp when a device receives the target message, and ΔT represents a preset threshold time allowed in a communication process; when a time difference between T_n and T_n' exceeds the preset threshold time, verification of the time stamp is terminated; when the time

difference between T_n and T_n' does not exceeds the preset threshold time, a next step to the verification of the time stamp is performed.

The accident report M_{i1} , the accident report M_{j1} , the signed accident report M_{i2} , the signed accident report M_{j2} , the message M_1 , the message M_2 , and the message M_3 are transmitted within a common channel.

Compared with the related art, the disclosure has following effects.

After the accident, the verification of the accident report agreement between the vehicles is mutual, and the verification between the vehicle and the road side unit is also mutual, so as to ensure the reliability and identity traceability of the verification of both parties.

The disclosure pays attention to the privacy protection of vehicles. The true identity of a vehicle can only be obtained by the vehicle itself and the trust authority. During interaction with other entities, the vehicle uses a temporary identity to protect privacy.

Vehicle records and messages cannot be forged, tampered with, or maliciously traced. The disclosure is designed based on the blockchain and the temporary identity, and the disclosure verifies the integrity of messages during a process of message generation and upload, thereby to ensure the aforementioned properties.

When multiple vehicles are involved in an accident, any one vehicle can carry out batch verifications on other vehicles, and the road side unit can also carry out batch verification on the identities of vehicles and signatures of accident information of all vehicles.

Elliptic curves are used, the elliptic curve cryptosystem has advantages such as short keys, high strength, few parameters, fast digital signatures, and small computational data, making it particularly suitable for devices with limited computing and storage resources.

BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 illustrates a relationship diagram among vehicles, road side units, and a blockchain.

FIG. 2 illustrates a flowchart of mutual confirmation and signing accident when an accident occurs between two vehicles.

DETAILED DESCRIPTION OF EMBODIMENTS

As shown in FIG. 1, a traffic accident forensics method based on a blockchain is implemented based on vehicles, a trust authority and road side units and a blockchain. An embedded control unit of Internet of vehicles is installed in each vehicle, and the embedded control unit of Internet of vehicles is used to control and track a vehicle status, an on-board intelligent operating system realizes an interaction between a driver and the vehicle, and a remote communication terminal Tbox provides functions of networking and information upload. Each of the road side unit is equipped with an encryption chip and a wireless communication system. The communication between the vehicle and the road side unit is based on the cellular communication technology used in the Internet of vehicles. An on-board circuit of the vehicle and a storage circuit of the road side unit are configured to store information, and the vehicle and road side unit are first registered in the trust authority. Multiple road side units jointly maintain a blockchain. After a vehicle accident occurs, the accident vehicles first verify to each other and sign corresponding accident reports. Then,

one of the vehicles verifies with the road side unit, and the road side unit uploads resultant accident information to the blockchain.

As shown in FIG. 2, a process of mutual confirmation of an accident between vehicles and signing accident reports is as follows.

After the accident, the driver of the accident vehicle P inputs his/her biological information, and the vehicle P verifies the biological information. If the biological information is correct, the identity verification of the driver is successful. Otherwise, the vehicle P requires the driver to re-verify the biological information. The vehicle P generates an accident report and send it to the accident vehicle Vj.

At the same time, the driver of the accident vehicle Vj inputs his/her biological information, and the vehicle Vj verifies the biological information. If the biological information is correct, the identity verification of the driver is successful. Otherwise, the vehicle Vj requires the driver to re-verify the biological information. The vehicle Vj generates an accident report and send it to the vehicle Vi. Both vehicles Vi and Vj verify a respective received report and verify its impartiality. If both vehicles Vi and Vj verify the respective received report, the respective received report is signed. Otherwise, it is required to regenerate new reports. Both vehicles Vi and Vj will send a respective signed report to each other, verify and upload the respective signed report to the road side unit.

Refer to two vehicle accident for the handling of a multiple vehicle accident (i.e., three or more vehicles occur an accident), multiple accident vehicle groups are formed based on the fault of the accident, and each group uploads accident information separately. Due to the complexity of the multiple vehicle accident, a complex accident usually handled directly by traffic police on site. The disclosure is particularly suitable for simple traffic accidents, facilitating rapid handling in case of simple accidents, and avoiding the impact of simple accidents on traffic.

What is claimed is:

1. A traffic accident forensics method based on a blockchain, comprising:

step S1, initialization of a trust authority: selecting, by the trust authority, an elliptic curve $E(\bullet)$ with a generator P, a secure one-way Hash function $h(\bullet)$, a fuzzy extraction function $Gen(\bullet)$, and a recovery function $Rep(\bullet)$; and selecting random numbers (SK_{TA}, K_{TA}) as a long-term private key of the trust authority, and determining a point multiplication result based on an elliptic curve algorithm as a public key $PK_{TA}=SK_{TA} \cdot P$ of the trust authority; and publishing parameters $\{P, E(\bullet), h(\bullet), Gen(\bullet), Rep(\bullet), PK_{TA}\}$;

step S2, submitting, by vehicles and road side units, registration requests to the trust authority; after identities of the vehicles and the road side units are verified by the trust authority, feeding, by the trust authority, registration information of the vehicles and registration information of the road side units to the vehicles and the road side units respectively, and storing the registration information of the vehicles and the registration information of the road side devices in corresponding on-board circuits of the vehicles and corresponding storage circuits of the road side units, respectively; wherein for a vehicle Vi of the vehicles and a road side unit of the road side units, the step S2 further comprises:

sub-step S2.1, selecting, by the vehicle Vi, a random number SK_{Vi} as a long-term private key of the vehicle Vi, and determining a point multiplication

result based on the elliptic curve algorithm as a public key $PK_{Vi}=SK_{Vi} \cdot P$ of the vehicle Vi ; sending, by the vehicle Vi , an identity number VID_i of the vehicle Vi , the public key PK_{Vi} of the vehicle Vi , and vehicle appearance information Val_i of the vehicle Vi to the trust authority through a secure message channel;

sub-step S2.2, after the identity number VID_i of the vehicle Vi is verified by the trust authority, calculating, by the trust authority, an identity-verification parameter b_i of the vehicle Vi , selecting a random number r_i and a random number a_i , calculating a point multiplication result $A_i=a_i \cdot P$ based on the elliptic curve algorithm of the random number a_i , determining a pseudonym $PID_i=E_{KTA}(VID_i, Val_i, r_i)$ of the vehicle Vi , $E_{KTA}(VID_i, Val_i, r_i)$ representing a function that uses the long-term private key K_{TA} to encrypt the identity number VID_i , the vehicle appearance information Val_i , and the random number r_i based on the elliptic curve algorithm; then returning parameters $\{PID_i, A_i, b_i, PK_{TA}, r_i\}$ to the vehicle Vi , where the identity-verification parameter b_i is expressed as $b_i=h(PID_i||PK_{Vi}||A_i)*SK_{TA}+a_i$;

sub-step S2.3, verifying, by the vehicle Vi , correctness of a point multiplication result $b_i \cdot P=h(PID_i||PK_{Vi}||A_i) \cdot PK_{TA}+A_i$ of the identity-verification parameter b_i based on the elliptic curve algorithm; when the point multiplication result $b_i \cdot P=h(PID_i||PK_{Vi}||A_i) \cdot PK_{TA}+A_i$ is correct, inputting, by a driver of the vehicle Vi , biological information Bio_i of the driver of the vehicle Vi ; calculating, by the vehicle Vi , a biological key σ_i and a key recovery parameter τ_i using $(\sigma_i, \tau_i)=Gen(Bio_i)$, calculating a login-verification parameter $V_i=h(\sigma_i||Val_i)$, $S_{i1}=b_i \oplus h(\sigma_i||V_i)$ used to encrypt and store the identity-verification parameter b_i , $S_{i2}=SK_{Vi} \oplus h(V_i||\sigma_i)$ used to encrypt and store the long-term private key SK_{Vi} , and $S_{i3}=r_i \oplus h(VID_i||\sigma_i)$ used to encrypt and store the random number r_i ; and storing, by the vehicle Vi , the registration information $\{P, V_i, S_{i1}, S_{i2}, S_{i3}, A_i, PK_{Vi}, PK_{TA}, PID_i, Rep(\bullet), Val_i, \tau_i\}$ of the vehicle Vi in the on-board circuit of the vehicle Vi ;

sub-step S2.4, selecting, by the trust authority, an identity mark RID_r , a private key SK_{Rr} , and a random number z_r for the road side unit; calculating a public key $PK_{Rr}=SK_{Rr} \cdot P$ of the road side unit based on the elliptic curve algorithm, calculating a point multiplication result $Z_r=z_r \cdot P$ of the random number z_r based on the elliptic curve algorithm, and calculating an identity-verification parameter $y_r=h(RID_r||PK_{Rr}||Z_r)*SK_{TA}+Z_r$ of the road side unit; and sending, by the trust authority, the registration information $\{RID_r, y_r, Z_r, SK_{Rr}, PK_{Rr}, PK_{TA}\}$ of the road side unit to the road side unit through the secure message channel; and

sub-step S2.5, after the road side unit receives the registration information $\{RID_r, y_r, Z_r, SK_{Rr}, PK_{Rr}, PK_{TA}\}$, verifying correctness of a point multiplication result $y_r \cdot P=h(RID_r||PK_{Rr}||Z_r)*PK_{TA}+Z_r$ of the identity-verification parameter y_r based on the elliptic curve algorithm; when the point multiplication result $y_r \cdot P$ is wrong, resubmitting a registration request by the road side unit, otherwise storing the registration information $\{RID_r, y_r, Z_r, SK_{Rr}, PK_{Rr}, PK_{TA}\}$ to the storage circuit of the road side unit;

step S3, after an accident occurs between the vehicle Vi and a vehicle Vj , performing, by the vehicle Vi and the

vehicle Vj , processes of mutually confirming accident information and signing accident reports, and the processes comprising:

sub-step S3.1, inputting, by a driver of the vehicle Vi , the biological information Bio_i to the vehicle Vi ; recovering, by the vehicle Vi , the biological key $\sigma_i=Rep(Bio_i, \tau_i)$; calculating the login-verification parameter $V_i=h(\sigma_i||Val_i)$, and verifying correctness of the login-verification parameter $V_i=h(\sigma_i||Val_i)$; when the login-verification parameter $V_i=h(\sigma_i||Val_i)$ is correct, determining that identity verification of the driver is successful; then decrypting, by the vehicle Vi , the identity-verification parameter $b_i=S_{i1} \oplus h(\sigma_i||V_i)$ and the long-term private key $SK_{Vi}=S_{i2} \oplus h(V_i||\sigma_i)$, and generating, by the vehicle Vi , a random number d_{i1} , a random number d_{i2} , a time stamp T_i , and accident information $D1$ comprising an image or a video;

calculating a point multiplication result $D_{i1}=d_{i1} \cdot P$ of the random number d_{i1} , a point multiplication result $D_{i2}=d_{i2} \cdot P$ of the random number d_{i2} , and an accident report verification parameter $c_{i1}=SK_{Vi}+h(D1||D_{i1}||D_{i2}||T_i||PID_i||Val_i)*d_{i1}$ based on the elliptic curve algorithm; and sending, by the vehicle Vi , an accident report $M_{i1}=\{D1, b_i, PID_i, A_i, D_{i1}, D_{i2}, PK_{Vi}, c_{i1}, Val_i, T_i\}$ to the vehicle Vj ;

sub-step 3.2, inputting, a driver of the vehicle Vj , biological information Bio_j of the driver of the vehicle Vj to the vehicle Vj , recovering, by the vehicle Vj , a biological key $\sigma_j=Rep(Bio_j, \tau_j)$, calculating a login-verification parameter $V_j=h(\sigma_j||Val_j)$ of the vehicle Vj , and verifying correctness of the login-verification parameter $V_j=h(\sigma_j||Val_j)$; when the login-verification parameter $V_j=h(\sigma_j||Val_j)$ is correct, determining that identity verification of the driver is successful; then decrypting, by the vehicle Vj , an identity-verification parameter $b_j=S_{j1} \oplus h(\sigma_j||V_j)$ of the vehicle Vj and a long-term private key $SK_{Vj}=S_{j2} \oplus h(V_j||\sigma_j)$ of the vehicle Vj , and generating, by the vehicle Vj , a random number d_{j1} , a random number d_{j2} , a time stamp T_2 , and accident information $D2$ comprising an image or a video;

calculating a point multiplication result $D_{j1}=d_{j1} \cdot P$ of the random number d_{j1} based on the elliptic curve algorithm, calculating a point multiplication result $D_{j2}=d_{j2} \cdot P$ of the random number d_{j2} based on the elliptic curve algorithm, and calculating an accident report verification parameter $c_{j1}=SK_{Vj}+h(D2||D_{j1}||D_{j2}||T_2||PID_j||Val_j)*d_{j1}$; and

sending, by the vehicle Vj , an accident report $M_{j1}=\{D2, b_j, PID_j, A_j, D_{j1}, D_{j2}, PK_{Vj}, c_{j1}, Val_j, T_2\}$ to the vehicle Vi ;

sub-step 3.3, after the vehicle Vi receives the accident report M_{j1} from the vehicle Vj , performing, by the vehicle Vi , first verifications on freshness of the time stamp T_2 , correctness of a point multiplication result $b_j \cdot P=h(PID_j||PK_{Vj}||A_j)*PK_{TA}+A_j$ of the identity-verification parameter b_j based on the elliptic curve algorithm, and correctness of a point multiplication result $c_{j1} \cdot P=PK_{Vj}+h(D2||D_{j1}||D_{j2}||T_2||PID_j||Val_j)*D_{j1}$ of the accident report verification parameter c_{j1} based on the elliptic curve algorithm; after the first verifications are passed, confirming, by the vehicle Vi , the accident information $D2$, when the driver of the vehicle Vi agrees that the accident information $D2$ sent by the accident vehicle Vj is reasonable, signing the accident information $D2$ by:

11

calculating, by the vehicle Vi, a point addition result $D_{ij}=D_{i2}+D_{j2}$ of the point multiplication result D_{i2} and the point multiplication result D_{j2} based on the elliptic curve algorithm, and calculating, by the vehicle Vi, an accident report verification parameter $c_{i2}=SK_{vi}+h(D1||D2||D_{ij}||T_1||PID_i||T_2||PID_j||Val_i||Val_j)*d_{i2}$; and sending, by the vehicle Vi, an signed accident report $M_{i2}=\{c_{i2}, PID_i, Val_i, PID_j\}$ to the vehicle Vj;

sub-step S3.4, after the vehicle Vj receives the accident report M_{i1} from the vehicle Vi, performing, by the vehicle Vj, second verifications on freshness of the time stamp T_1 , correctness of a point multiplication result $b_i \cdot P = h(PID_i||PK_{vi}||A_i)*PK_{Ta}+A_i$ of the identity-verification parameter b_i based on the elliptic curve algorithm, and correctness of a point multiplication result $c_{i1} \cdot P = PK_{vj}+h(D1||D_{i1}||D_{i2}||T_1||PID_i||Val_i)*D_{i1}$ of the accident report verification parameter c_{i1} based on the elliptic curve algorithm; after the second verifications are passed, confirming, by the vehicle Vj, the accident information D1; when the driver of the vehicle Vj agrees that the accident information D1 sent by the accident vehicle Vi is reasonable, signing the accident information D1 by:

calculating, by the vehicle Vj, the point addition result $D_{ij}=D_{i2}+D_{j2}$ of the point multiplication result D_{i2} and the point multiplication result D_{j2} based on the elliptic curve algorithm, and calculating, by the vehicle Vj, an accident report verification parameter $c_{j2}=SK_{vj}+h(D1||D2||D_{ij}||T_1||PID_i||T_2||PID_j||Val_i||Val_j)*d_{j2}$; and sending, by the vehicle Vj, an signed accident report $M_{j2}=\{c_{j2}, PID_i, Val_i, PID_j\}$ to the vehicle Vi;

sub-step 3.5, after the vehicle Vi receives the signed accident report M_{j2} from the vehicle Vj, calculating, by the vehicle Vi, a sum $c_{ij}=c_{j2}+c_{i2}$ of the accident report verification parameter c_{j2} and the accident report verification parameter c_{i2} , then verifying correctness of a point multiplication result $c_{ij} \cdot P = PK_{vj}+PK_{vi}+h(D1||D2||D_{ij}||T_1||PID_i||T_2||PID_j||Val_i||Val_j)D_{ij}$ of the sum c_{ij} based on the elliptic curve algorithm, and when the point multiplication result $c_{ij} \cdot P$ is correct, determining that the corresponding accident reports are signed by the vehicle Vi and the vehicle Vj; and

sub-step 3.6, after the vehicle Vj receives the signed accident report M_{i2} from the vehicle Vi, calculating, by the vehicle Vj, the sum $c_{ij}=c_{j2}+c_{i2}$ of the accident report verification parameter c_{j2} and the accident report verification parameter c_{i2} , then verifying correctness of the point multiplication result $c_{ij} \cdot P = PK_{vj}+PK_{vi}+h(D1||D2||D_{ij}||T_1||PID_i||T_2||PID_j||Val_i||Val_j)D_{ij}$ of the sum c_{ij} based on the elliptic curve algorithm, and when the point multiplication result $c_{ij} \cdot P$ is correct, determining that the corresponding accident reports are signed by the vehicle Vi and the vehicle Vj;

step S4, unloading, by the road side unit, accident information Tx to the blockchain after the road side unit identifies the vehicle Vi and the vehicle Vj; and wherein the uploading comprises:

sub-step S4.1, sending, by the vehicle Vi, a message $M1=\{PID_i, b_i, PK_{vi}, A_i, PID_j, b_j, PK_{vj}, A_j\}$ to the road side unit, and the message M1 comprising a parameter set;

sub-step S4.2, after the road side unit receives the message M1, verifying, by the road side unit, cor-

12

rectness of a point multiplication result $(b_i+b_j) \cdot P = (h(PID_i||PK_{vi}||A_i)+h(PID_j||PK_{vj}||A_j)) \cdot PK_{Ta}+(A_i+A_j)$ of a sum of the identity-verification parameter b_i and the identity-verification parameter b_j based on the elliptic curve algorithm; and when the point multiplication result $(b_i+b_j) \cdot P$ is correct, sending, by the road side unit, a message $M2=\{RID_r, y_r, Z_r, PK_{Rr}\}$ to the vehicle Vi;

sub-step S4.3, after the vehicle Vi receives the message M2, verifying, by the vehicle Vi, correctness of a point multiplication result $y_r \cdot P = h(RID_r||PK_{Rr}||Z_r) \cdot PK_{Ta}+Z_r$ of the identity-verification parameter y_r of the road side unit based on the elliptic curve algorithm; and when the point multiplication result $y_r \cdot P$ is correct, sending, by the vehicle Vi, a message $M3=\{c_{ij}, PK_{vi}, PK_{vj}, D1, D2, D_{ij}, T_1, PID_i, T_2, PID_j, Val_i, Val_j\}$ to the road side unit; and

sub-step S4.4, after the road side unit receives the message M3, verifying, by the road side unit, correctness of a point multiplication result $c_{ij} \cdot P = PK_{vj}+PK_{vi}+h(D1||D2||D_{ij}||T_1||PID_i||T_2||PID_j||Val_i||Val_j)D_{ij}$ of the sum c_{ij} based on the elliptic curve algorithm; and when the point multiplication result $c_{ij} \cdot P$ is correct, selecting, by the road side unit, a random number d_r and calculating a point multiplication result $D_r=d_r \cdot P$ of the random number d_r based on the elliptic curve algorithm, generating a signature parameter $c_r=SK_{Rr}+h(c_{ij}||T_3||D_r)d_r$ by the road side unit, T_3 of the signature parameter c_r representing a time stamp, and unloading, by the road side unit, the accident information $Tx=\{c_{ij}, PK_{vi}, PK_{vj}, D1, D2, D_{ij}, T_1, PID_i, T_2, PID_j, Val_i, Val_j, RID_r, PK_{Rr}, T_3, c_r, D_r\}$ to the blockchain; and

step S5, updating, by the vehicle Vi, a temporary identity to prevent identity tracking attacks, and wherein the updating comprises:

sub-step S5.1, inputting, by the driver of the vehicle Vi, the biological information Bio_i of the driver of the vehicle Vi to the vehicle Vi; recovering, by the vehicle Vi, the biological key $\sigma_i=Rep(Bio_i, \tau_i)$, calculating the login-verification parameter $V_i=h(\sigma_i||Val_i)$, and verifying the correctness of the login-verification parameter $V_i=h(\sigma_i||Val_i)$; and when $V_i \neq h(\sigma_i||Val_i)$, determining that the login-verification parameter $V_i=h(\sigma_i||Val_i)$ is wrong, otherwise decrypting, by the vehicle Vi, the random number $r_i=S_{i3} \oplus h(VID_i||\sigma_i)$;

sub-step 5.2, reselecting, by the vehicle Vi, a random number SK_{vi}^* as a private key; and generating a time stamp T_4 , calculating a point multiplication result $PK_{vi}^*=SK_{vi}^* \cdot P$ of the random number SK_{vi}^* based on the elliptic curve algorithm, and the point multiplication result PK_{vi}^* representing a public key; encrypting, by the vehicle Vi, a message $M_1=E_{r_i}(VID_i, PK_{vi}^*, PID_i, T_4)$, and sending, by the vehicle Vi, a first message set $\{PID_i, M_1, T_4\}$ to the trust authority for an update request;

sub-step 5.3, after the trust authority receives the update request, verifying, by the trust authority, freshness of the time stamp T_4 , when the freshness of the time stamp T_4 passes a verification of the trust authority, decrypting, by the trust authority, the message M_1 by $(VID_i, Val_i, r_i)=D_{K_{Ta}}(PID_i)$ and $(VID_i^*, PK_{vi}^*, PID_i^*, T_4^*)=D_{r_i}(M_1)$; verifying, by the trust authority, equations $VID_i^*=VID_i$, $PID_i^*=PID_i$, and $T_4^*=T_4$; when the equations hold, generating, by the trust authority, a random number r_i^* and a random

13

number a_i^* ; calculating, by the trust authority, a point multiplication result $A_i^* = a_i^* \cdot P$ of the random number a_i^* based on the elliptic curve algorithm; calculating, by the trust authority, a pseudonym $PID_i^* = E_{K_{TA}}(VID_i \| Val_i \| r_i^*)$ of the vehicle V_i ; calculating, by the trust authority, an identity-verification parameter $b_i^* = h(PID_i^* \| PK_{Vi}^* \| A_i^*) \cdot SK_{TA} + a_i^*$ of the vehicle V_i ; generating, by the trust authority, a time stamp T_5 ; calculating a message $M_2 = E_{r_i}(VID_i, A_i^*, PID_i^*, b_i^*, r_i^*, T_5)$, and sending a second message set $\{PID_i, M_2, T_5\}$ to the vehicle V_i ; and

sub-step S5.4, after the vehicle V_i receives the second message set $\{PID_i, M_2, T_5\}$, verifying, by the vehicle V_i , freshness of the time stamp T_5 ; when the freshness of the time stamp T_5 passes a verification of the vehicle V_i , decrypting, by the vehicle V_i , the message M_2 by $(VID_i^*, A_i^*, PID_i^*, b_i^*, T_5^*) = D_{r_i}(M_2)$; verifying, by the vehicle V_i , correctness of a point multiplication result $b_i^* \cdot P = h(PID_i^* \| PK_{Vi}^* \| A_i^*) \cdot PK_{TA} + A_i^*$ of the identity-verification parameter b_i^* based on the elliptic curve algorithm; when the point multiplication result $b_i^* \cdot P$ is correct, $VID_i^{**} = VID_i$, and $T_5^* = T_5$, calculating, by the vehicle V_i , a login-verification parameter $V_i^* = h(\sigma_i \| Val_i)$, $S_1^* = b_i^* \oplus h(\sigma_i \| V_i)$ used to encrypt and store the identity-verification parameter b_i^* ,

14

$S_{i2}^* = SK_{Vi}^* \oplus h(V_i \| \sigma_i)$ used to encrypt and store the long-term private key SK_{Vi}^* , and $S_{i3}^* = r_i^* \oplus h(VID_i \| \sigma_i)$ used to encrypt and store the random number r_i^* ; and replacing, by the vehicle V_i , the registration information $\{P, V_i, S_{i1}, S_{i2}, S_{i3}, A_i, PK_{Vi}, PK_{TA}, PID_i, Rep(\bullet), Val_i, \tau_i\}$ of the vehicle V_i stored in the on-board circuit with $\{P, V_i, S_{i1}^*, S_{i2}^*, S_{i3}^*, A_i^*, PK_{Vi}^*, PK_{TA}, PID_i^*, Rep(\bullet), Val_i, \tau_i\}$.

2. The traffic accident forensics method based on the blockchain as claimed in claim 1, wherein a time stamp is verified by $|T_n' - T_n| \leq \Delta T$, where T_n represents a time stamp contained in a target message, and T_n' represents a current time stamp when a device receives the target message, and ΔT represents a preset threshold time allowed in a communication process; when a time difference between T_n and T_n' exceeds the preset threshold time, verification of the time stamp is terminated; when the time difference between T_n and T_n' does not exceeds the preset threshold time, a next step to the verification of the time stamp is performed.

3. The traffic accident forensics method based on the blockchain as claimed in claim 1, wherein the accident report M_{i1} , the accident report M_{j1} , the signed accident report M_{i2} , the signed accident report M_{j2} , the message M_1 , the message M_2 , and the message M_3 are transmitted within a common channel.

* * * * *