



US012408789B2

(12) **United States Patent**
Waggoner et al.

(10) **Patent No.:** **US 12,408,789 B2**

(45) **Date of Patent:** ***Sep. 9, 2025**

(54) **ADDITIVE DELIVERY SYSTEMS AND CONTAINERS**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **Cirkul, Inc.**, Tampa, FL (US)

715,425 A 12/1902 Schamp

933,464 A 9/1909 Kasjens

(Continued)

(72) Inventors: **Garrett S. Waggoner**, Tampa, FL (US);
Andrew Gay, Tampa, FL (US);
Christopher Jasperse, Pittsburgh, KS (US)

FOREIGN PATENT DOCUMENTS

(73) Assignee: **Cirkul, Inc.**, Tampa, FL (US)

AU 2017228456 A1 8/2018

AU 2018225178 A1 9/2019

(Continued)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 895 days.

OTHER PUBLICATIONS

This patent is subject to a terminal disclaimer.

International Search Report and Written Opinion mailed May 7, 2021 in connection with International Application No. PCT/US2020/062521.

(Continued)

(21) Appl. No.: **17/567,801**

(22) Filed: **Jan. 3, 2022**

(65) **Prior Publication Data**

US 2022/0248894 A1 Aug. 11, 2022

Primary Examiner — Steven W Crabb

Assistant Examiner — Ket D Dang

(74) *Attorney, Agent, or Firm* — Wolf, Greenfield & Sacks, P.C.

Related U.S. Application Data

(63) Continuation of application No. 17/539,833, filed on Dec. 1, 2021, now Pat. No. 12,329,307, and a (Continued)

(51) **Int. Cl.**
A47J 31/00 (2006.01)


(52) **U.S. Cl.**
CPC **A47J 31/005** (2013.01)

(58) **Field of Classification Search**
CPC A47J 31/005; A47J 43/27; A47J 41/0083;
A47J 31/401; A47J 31/41; A47J 31/46;
(Continued)

(57) **ABSTRACT**

A compact filtering and additive delivery system which is readily adaptable to a portable container, such as a sports bottle, and receives a modular additive container for the metered delivery of additive, such as flavor concentrate, to a stream of base liquid as the base liquid is drawn or dispensed from the container. The modular additive container configuration on the delivery system allows a consumer/user to experience different additives, such as different flavors or supplement compositions, for a given supply of base liquid, such as water, stored in the container. The system may be readily used with off-the-shelf containers, such as disposable water bottles. An additive container configuration provides modular additive delivery system as described herein.

19 Claims, 6 Drawing Sheets

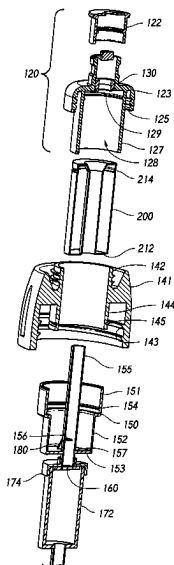

Related U.S. Application Data

continuation of application No. 15/791,348, filed on Oct. 23, 2017, now Pat. No. 11,213,159, which is a continuation of application No. 14/181,354, filed on Feb. 14, 2014, now Pat. No. 9,795,242.

- (60) Provisional application No. 61/764,861, filed on Feb. 14, 2013.

(58) Field of Classification Search

CPC A47J 31/461; A47J 31/402; A47J 31/407;
A47J 31/4464; A47J 31/521; A47J
31/5255; A47J 31/605; B01F 23/451;
B01F 33/50111; B01F 2101/14; B01F
25/31433; B01F 25/315; B01F 23/483;
B01F 25/3142; B01F 35/7162; B01F
2025/917; B01F 25/105; B01F 35/71795;
B01F 35/718; B01F 35/83; B01F
33/5011; B01F 25/314; B01F 25/316;
B01F 33/844; B01F 35/21112; B01F
35/833; B65D 47/06; B65D 51/2892;
B65D 47/2031; B65D 25/08; B65D
47/148; B65D 47/20; B65D 47/243;
B65D 47/061; B65D 47/261; B65D
51/2857; B65D 85/804; B65D 47/244;
B65D 55/16; B65D 81/3244; B65D
81/3216; A23L 2/56; A23V 2002/00
USPC 99/323
See application file for complete search history.

(56) References Cited**U.S. PATENT DOCUMENTS**

5,707,353 A	1/1998	Mazer et al.
5,839,626 A	11/1998	Gross et al.
5,890,624 A	4/1999	Klima et al.
5,899,363 A	5/1999	Bliss, III et al.
5,919,360 A	7/1999	Contaxis, III et al.
5,944,234 A	8/1999	Lampe et al.
5,984,141 A	11/1999	Gibler
5,992,690 A	11/1999	Tracy
5,993,671 A	11/1999	Peltzer
6,003,728 A *	12/1999	Elliott B65D 47/0804 222/129
6,010,034 A	1/2000	Walthers
6,116,466 A	9/2000	Gueret
6,136,189 A	10/2000	Smith et al.
6,165,523 A	12/2000	Story
6,180,149 B1	1/2001	Gramm
6,209,757 B1	4/2001	Dumont
6,224,778 B1	5/2001	Peltzer
6,230,923 B1	5/2001	Hung
6,230,937 B1	5/2001	Johnson et al.
6,263,924 B1	7/2001	Grosser
6,395,170 B1	5/2002	Hughes et al.
6,482,451 B1	11/2002	Baron
6,517,878 B2	2/2003	Heczko
6,541,055 B1	4/2003	uzenberg
6,569,329 B1	5/2003	Nohren
6,705,490 B1	3/2004	Lizerbram et al.
6,705,491 B1	3/2004	Lizerbram et al.
6,820,740 B1	11/2004	Spector
6,854,595 B2	2/2005	Kiser
6,923,568 B2	8/2005	Wilmer et al.
6,959,839 B2	11/2005	Roth et al.
6,981,962 B1	1/2006	enkersdorf
7,083,071 B1	8/2006	Crisp, III et al.
7,118,012 B2	10/2006	Butler
7,306,117 B2	12/2007	Roth et al.
7,503,453 B2	3/2009	Cronin et al.
7,533,786 B2	5/2009	Woolfson et al.
7,568,576 B2	8/2009	Sweeney, Jr. et al.
7,658,303 B2	2/2010	Woolfson et al.
7,661,561 B2	2/2010	Ophardt et al.
7,670,479 B2	3/2010	Arett et al.
7,806,294 B2	10/2010	Gatipon et al.
7,819,276 B2	10/2010	Naisje
7,909,210 B2	3/2011	Roth et al.
7,942,569 B2	5/2011	Orben et al.
7,947,316 B2	5/2011	Kirschner et al.
8,083,055 B2	12/2011	Simonian et al.
8,141,700 B2	3/2012	Simonian et al.
8,167,174 B2	5/2012	Berger
8,182,683 B1	5/2012	Allen
8,230,777 B2 *	7/2012	Anson B65D 47/243 220/501
8,302,803 B1	11/2012	Greenberg et al.
8,306,655 B2	11/2012	Newman
8,313,644 B2	11/2012	Harris et al.
8,365,960 B1	2/2013	Kalaouze
8,413,844 B2	4/2013	Arett et al.
8,453,833 B2	6/2013	Porter
8,464,633 B2	6/2013	Anson et al.
8,511,465 B2	8/2013	Seelhofer
8,541,039 B2	9/2013	Lackey et al.
8,580,753 B2	11/2013	Bondarev
8,590,753 B2	11/2013	Marina et al.
8,622,237 B2	1/2014	Choi et al.
8,641,016 B2	2/2014	Tatera
8,684,231 B2	4/2014	Lane et al.
8,684,240 B2	4/2014	Sauer et al.
8,777,182 B2	7/2014	Springer
8,893,927 B2	11/2014	Olson et al.
8,931,634 B2	1/2015	Anderson
9,010,379 B2	4/2015	Gothard et al.
9,060,592 B2	6/2015	Brosius
9,090,395 B2	7/2015	Koumans
9,174,777 B2	11/2015	Defemme et al.
9,302,831 B2	4/2016	Nilson et al.
9,498,086 B2	11/2016	Waggoner et al.
9,650,189 B1	5/2017	Lawson et al.
9,694,953 B2	7/2017	Meyers et al.
1,118,278 A	11/1914	Greathead
1,321,358 A	11/1919	Beck
1,674,233 A	6/1928	Williams
1,879,269 A	9/1932	Hutchison
1,961,321 A	6/1934	Young
2,073,273 A	3/1937	Erna et al.
2,102,105 A	12/1937	Edward
2,493,660 A	1/1950	Elkins
3,200,995 A	8/1965	Gangwisch
3,207,486 A	9/1965	Daniel
3,217,931 A	11/1965	Farrar et al.
3,255,691 A	6/1966	Marius et al.
3,325,056 A	6/1967	Lewis
3,347,403 A	10/1967	Lehrman
3,463,361 A	8/1969	Cook et al.
3,506,460 A	4/1970	Bayne
3,508,682 A	4/1970	Hollis et al.
3,641,016 A	2/1972	Korosi et al.
3,760,986 A	9/1973	Castner et al.
3,850,346 A	11/1974	Richardson et al.
3,924,741 A	12/1975	Kachur et al.
4,115,066 A	9/1978	Muhle
4,132,308 A	1/1979	Goncalves
4,221,291 A	9/1980	Hunt
4,315,570 A	2/1982	Silver et al.
4,785,974 A	11/1988	Rudick et al.
4,838,457 A	6/1989	Swahl et al.
4,892,125 A	1/1990	Rudick et al.
4,964,732 A	10/1990	Cadeo et al.
5,045,195 A	9/1991	Spangrud et al.
5,092,750 A	3/1992	Leroy et al.
5,094,861 A	3/1992	D'Auguste et al.
5,154,325 A	10/1992	Ryder et al.
5,165,569 A	11/1992	Furuhashi et al.
5,246,139 A	9/1993	Duceppe
5,325,996 A	7/1994	Bannigan
5,419,445 A	5/1995	Kaesemeyer
5,632,420 A	5/1997	Lohrman et al.
5,641,410 A	6/1997	Peltzer
5,664,702 A	9/1997	Beauchamp

(56)

References Cited

U.S. PATENT DOCUMENTS

9,771,195	B2	9/2017	Lawson et al.	
9,795,242	B2	10/2017	Waggoner et al.	
9,801,492	B1	10/2017	Lin	
9,821,288	B2	11/2017	Cerk et al.	
10,093,479	B2	10/2018	Fuchs et al.	
10,232,998	B2	3/2019	Presche	
10,349,766	B2	7/2019	Asseldonk et al.	
10,843,142	B2	11/2020	Waggoner et al.	
10,888,826	B2	1/2021	Waggoner et al.	
11,213,159	B2	1/2022	Waggoner et al.	
11,406,946	B2	8/2022	Waggoner et al.	
11,583,811	B2	2/2023	Waggoner et al.	
12,017,191	B2	6/2024	Waggoner et al.	
12,145,113	B2	11/2024	Waggoner et al.	
12,145,114	B2	11/2024	Waggoner et al.	
12,157,096	B2	12/2024	Waggoner et al.	
2001/0025859	A1	10/2001	Dumont	
2001/0055242	A1	12/2001	Deshmukh et al.	
2003/0168474	A1	9/2003	Nidgery	
2004/0007594	A1	1/2004	Esch et al.	
2004/0116036	A1	6/2004	Nugent et al.	
2004/0155061	A1*	8/2004	Roth	B65D 47/243 222/145.5
2004/0188280	A1	9/2004	Young	
2004/0262331	A1	12/2004	Noolfson et al.	
2005/0115845	A1	6/2005	Cho	
2005/0127101	A1	6/2005	Roth et al.	
2005/0182356	A1	8/2005	Dixon	
2005/0234422	A1	10/2005	Oh et al.	
2005/0258082	A1	11/2005	Lund et al.	
2006/0011664	A1	1/2006	Hammond	
2006/0021511	A1	2/2006	Paasch et al.	
2006/0021919	A1	2/2006	Olson et al.	
2006/0144244	A1	7/2006	Girard et al.	
2007/0102394	A1	5/2007	Olsen et al.	
2007/0138179	A1	6/2007	Jacobs et al.	
2007/0199955	A1	8/2007	Stalions et al.	
2007/0253280	A1	11/2007	Orben et al.	
2008/0078200	A1	4/2008	Roth et al.	
2008/0099487	A1	5/2008	Winn	
2008/0116221	A1	5/2008	Roth et al.	
2008/0149585	A1	6/2008	Valentine	
2008/0190958	A1	8/2008	Wyner et al.	
2009/0026222	A1	1/2009	Seelhofer	
2009/0226585	A1	9/2009	Wroblewski et al.	
2009/0236303	A1	9/2009	Lizerbram et al.	
2010/0012193	A1	1/2010	Anson et al.	
2010/0065584	A1	3/2010	Berger	
2010/0108715	A1	5/2010	Santagiuliana	
2010/0157723	A1	6/2010	Vega	
2010/0213223	A1	8/2010	Ballentine	
2011/0006071	A1	1/2011	Koumans	
2011/0089059	A1	4/2011	Lane et al.	
2011/0168026	A1	7/2011	Cahen et al.	
2011/0259769	A1	10/2011	Salinas	
2011/0290677	A1	12/2011	Simonian et al.	
2011/0290678	A1	12/2011	Simonian et al.	
2012/0000880	A1	1/2012	Im	
2012/0017766	A1	1/2012	Anson et al.	
2012/0031925	A1	2/2012	Greenberg	
2012/0223100	A1	9/2012	Simonian et al.	
2012/0255973	A1	10/2012	Schlueter et al.	
2013/0000733	A1	1/2013	Gothard et al.	
2013/0008919	A1	1/2013	Honan et al.	
2013/0139893	A1	6/2013	Anson et al.	
2013/0240564	A1	9/2013	Albaum	
2013/0319915	A1	12/2013	Gellibolian et al.	
2013/0334250	A1	12/2013	Albaum	
2014/0076173	A1	3/2014	Dellaud et al.	
2014/0092703	A1	4/2014	Helou et al.	
2014/0230659	A1	8/2014	Waggoner et al.	
2014/0263443	A1	9/2014	Furusawa et al.	
2015/0065587	A1	3/2015	Ochoa et al.	
2015/0128811	A1	5/2015	Durairajasivam et al.	
2015/0147430	A1	5/2015	Dzikowicz et al.	

2015/0158654	A1	6/2015	Petrov
2015/0307265	A1	10/2015	Winn et al.
2015/0336722	A1	11/2015	Brook-Chrispin et al.
2015/0336724	A1	11/2015	Simonian et al.
2016/0001936	A1	1/2016	Rap et al.
2016/0143583	A1	5/2016	Jeukendrup et al.
2016/0150914	A1	6/2016	Waggoner et al.
2016/0152408	A1	6/2016	Fuchs et al.
2016/0159632	A1	6/2016	Wheatley et al.
2016/0317985	A1	11/2016	Mutschler et al.
2017/0043999	A1	2/2017	Murison et al.
2017/0156540	A1	6/2017	Waggoner et al.
2017/0232406	A1	8/2017	Waggoner et al.
2017/0296988	A1	10/2017	Waggoner et al.
2018/0178957	A1	6/2018	Zalewski
2018/0296023	A1	10/2018	Waggoner et al.
2019/0060849	A1	2/2019	Waggoner et al.
2019/0291065	A1	9/2019	Waggoner et al.
2020/0139313	A1	5/2020	Waggoner et al.
2020/0156020	A1	5/2020	Waggoner et al.
2021/0060503	A1	3/2021	Waggoner et al.
2021/0169264	A1	6/2021	Waggoner et al.
2021/0252464	A1	8/2021	Waggoner et al.
2021/0345801	A1	11/2021	Talabot
2022/0009697	A1	1/2022	Olmstead et al.
2022/0117372	A1	4/2022	Lecchini et al.
2022/0175174	A1	6/2022	Waggoner et al.
2022/0248892	A1	8/2022	Waggoner et al.
2022/0248893	A1	8/2022	Waggoner et al.
2023/0084794	A1	3/2023	Waggoner et al.
2023/0226503	A1	7/2023	Waggoner et al.
2024/0116014	A1	4/2024	Wong et al.
2024/0138613	A1	5/2024	Waggoner et al.
2025/0033005	A1	1/2025	Waggoner et al.
2025/0041811	A1	2/2025	Waggoner et al.
2025/0072648	A1	3/2025	Waggoner et al.
2025/0073650	A1	3/2025	Waggoner et al.

FOREIGN PATENT DOCUMENTS

AU	2015349694	B2	5/2020
CA	2777990	A1	11/2013
CA	2968546	A1	5/2016
CA	3053808	A1	8/2018
CN	1213634	A	4/1999
CN	1271257	A	10/2000
CN	1607167	A	4/2005
CN	1754788	A	4/2006
CN	1953938	A	4/2007
CN	101300190	A	11/2008
CN	101432221	A	5/2009
CN	102123938	A	7/2011
CN	101068745	B	6/2012
CN	102740812	A	10/2012
CN	106132289	A	11/2016
CN	207561774	U	7/2018
CN	110612050	A	12/2019
CN	107205565	B	7/2020
CN	113396018	A	9/2021
CN	114794870	A	7/2022
EP	0 545 678	A2	6/1993
EP	0 564 208	A1	10/1993
EP	0 795 267	A2	9/1997
EP	1 407 827	A2	4/2004
EP	1 876 901	B1	11/2011
EP	3 220 783	B1	8/2019
EP	3 585 224	A1	1/2020
JP	S60-92965	U	6/1985
JP	S61-43134	U	3/1986
JP	H01-126934	U	8/1989
JP	H06-8999	A	1/1994
JP	H07-132979	A	5/1995
JP	H11-508215	A	7/1999
JP	2001-500205	A	1/2001
JP	2003-200088	A	7/2003
JP	2004-531430	A	10/2004
JP	2005-289518	A	10/2005
JP	2006-264761	A	10/2006
JP	2009-107672	A	5/2009

(56)

References Cited

FOREIGN PATENT DOCUMENTS

JP	2009-523576	A	6/2009
JP	2010-195481	A	9/2010
JP	2012-006663	A	1/2012
JP	2012-188142	A	10/2012
JP	2013-517188	A	5/2013
JP	2013-545673	A	12/2013
JP	2014-208281	A	11/2014
JP	2016-011125	A	1/2016
JP	2016-512979	A	5/2016
JP	2018-503571	A	2/2018
KR	20160116579	A	10/2016
SG	11201407344		12/2014
WO	WO 97/22530	A1	6/1997
WO	WO 98/005853	A1	2/1998
WO	WO 99/08578	A1	2/1999
WO	WO 99/47450	A1	9/1999
WO	WO 2001/000521	A1	1/2001
WO	WO 2002/074441	A2	9/2002
WO	WO 2011/149501	A1	12/2011
WO	WO 2013/169466	A1	11/2013
WO	WO 2016/081925	A1	5/2016
WO	WO 2017/152192	A1	9/2017
WO	WO 2018/156816	A1	8/2018
WO	WO 2020/046976	A3	7/2020
WO	WO 2021/108781	A1	6/2021

OTHER PUBLICATIONS

Partial Supplemental European Search Report dated Apr. 19, 2022 in connection with European Application No. 19854883.6.

International Preliminary Report on Patentability mailed Mar. 11, 2021 in connection with International Application No. PCT/US2019/048389.

International Search Report and Written Opinion mailed Jan. 17, 2020 in connection with International Application No. PCT/US2019/048389.

International Search Report and Written Opinion mailed Dec. 23, 2021 in connection with International Application No. PCT/US2021/041887.

Invitation to Pay Additional Fees mailed Oct. 6, 2021 in connection with International Application No. PCT/US2021/041887.

Chinese Office Action and English Translation thereof dated Oct. 27, 2021 in connection with Chinese Application No. 201880012762.X.

Extended European Search Report and Opinion dated Nov. 16, 2020 in connection with European Application No. 18757631.9.

International Preliminary Report on Patentability mailed Sep. 6, 2019 in connection with International Application No. PCT/US2018/019295.

International Search Report and Written Opinion mailed May 16, 2018 in connection with International Application No. PCT/US2018/019295.

Australia Office Action dated May 10, 2019 in connection with Australia Application No. Application 2015349694.

Australian Office Action dated May 17, 2022 in connection with Australian Application No. 2020217420.

Australian Office Action dated May 31, 2021 in connection with Australian Application No. 2020217420.

Chinese Office Action and English Translation thereof dated Jan. 8, 2019 in connection with Chinese Application No. 201580062670.9.

Extended European Search Report and Opinion dated Jun. 13, 2018 in connection with European Application No. 15861063.4.

Japanese Office Action and English translation thereof dated Jul. 30, 2019 in connection with Japanese Application No. 2017-545871.

Japanese Office Action and English translation thereof dated Aug. 6, 2021 in connection with Japanese Application No. 2020-113813.

International Preliminary Report on Patentability mailed Jun. 1, 2017 in connection with International Application No. PCT/US2015/062026.

International Search Report and Written Opinion mailed Feb. 5, 2016 in connection with International App. No. PCT/US2015/062026.

Australian Office Action dated Jan. 25, 2022 in connection with Australian Application No. 2017228456.

Chinese Office Action and English Translation thereof dated May 13, 2020 in connection with Chinese Application No. 201780013261.9.

Extended European Search Report dated Jul. 9, 2019 in connection with European Application 17760997.1.

Supplemental European Search Report dated Jul. 26, 2019 in connection with European Application 17760997.1.

Japanese Office Action and English translation thereof dated Mar. 30, 2021 in connection with Japanese Application No. 2018-545355.

International Preliminary Report on Patentability mailed Sep. 4, 2018 in connection with International Application No. PCT/US2017/021016.

International Search Report and Written Opinion mailed Jun. 6, 2017 in connection with International Application No. PCT/US2017/021016.

[No Author Listed], How to Clean a Draft Beer Tap Keg Coupler. Youtube.com, Leaders Beverage, Aug. 6, 2014; 1 page. (<https://www.youtube.com/watch?v=LmtdkjdEq1E>) 0:00-6:03.

[No Author Listed], Inspection Keg ½ Bbl. GW Kent, Mar. 24, 2017; 3 pages. (<https://web.archive.org/web/20170424051250/http://www.gwkent.com/inspection-keg.html>).

U.S. Appl. No. 18/371,187, filed Sep. 21, 2023, Wong et al.

PCT/IB2023/059320, Dec. 27, 2023, International Search Report and Written Opinion.

EP24177797.8, Sep. 9, 2024, Extended European Search Report.

U.S. Appl. No. 16/235,913, filed Dec. 28, 2018, Waggoner et al.

U.S. Appl. No. 18/078,080, filed Dec. 8, 2022, Waggoner et al.

U.S. Appl. No. 17/539,833, filed Dec. 1, 2021, Waggoner et al.

U.S. Appl. No. 17/567,796, filed Jan. 3, 2022, Waggoner et al.

U.S. Appl. No. 17/567,799, filed Jan. 3, 2022, Waggoner et al.

U.S. Appl. No. 17/067,546, filed Oct. 9, 2020, Waggoner et al.

U.S. Appl. No. 18/380,129, filed Oct. 13, 2023, Waggoner et al.

U.S. Appl. No. 16/436,861, filed Jun. 10, 2019, Waggoner et al.

U.S. Appl. No. 17/146,463, filed Jan. 11, 2021, Waggoner et al.

U.S. Appl. No. 17/884,553, filed Aug. 9, 2022, Waggoner et al.

PCT/US2020/062521, May 7, 2021, International Search Report and Written Opinion.

EP19854883.6, Apr. 19, 2022, Extended European Search Report.

PCT/US2019/048389, Mar. 11, 2021, International Preliminary Report on Patentability.

PCT/US2019/048389, Jan. 17, 2020, International Search Report and Written Opinion.

PCT/US2021/041887, Dec. 23, 2021, International Search Report and Written Opinion.

PCT/US2021/041887, Oct. 6, 2021, Invitation to Pay Additional Fees.

CN201880012762.X, Oct. 27, 2021, Office Action.

EP18757631.9, Nov. 16, 2020, Supplemental European Search Report.

PCT/US2018/019295, Sep. 6, 2019, International Preliminary Report on Patentability.

PCT/US2018/019295, May 16, 2018, International Search Report and Written Opinion.

AU2015349694, May 10, 2019, Office Action.

AU2020217420, May 17, 2022, Office Action.

AU2020217420, May 31, 2021, Office Action.

CN201580062670.9, Jan. 8, 2019, Office Action.

EP15861063.4, Jun. 13, 2018, Extended European Search Report and Opinion.

JP2017-545871, Jul. 30, 2019, Office Action.

JP2020-113813, Aug. 6, 2021, Office Action.

PCT/US2015/062026, Jun. 1, 2017, International Preliminary Report on Patentability.

PCT/US2015/062026, Feb. 5, 2016, International Search Report and Written Opinion.

AU2017228456, Jan. 25, 2022, Office Action.

CN201780013261.9, May 13, 2020, Office Action.

(56)

References Cited

OTHER PUBLICATIONS

EP17760997.1, Jul. 9, 2019, Extended European Search Report.
EP17760997.1, Jul. 26, 2019, Supplemental European Search Report.
JP2018-545355, Mar. 30, 2021, Office Action.
PCT/US2017/021016, Sep. 4, 2018, International Preliminary Report on Patentability.
PCT/US2017/021016, Jun. 6, 2017, International Search Report and Written Opinion.
International Search Report and Written Opinion mailed Dec. 27, 2023 in connection with International Application No. PCT/IB2023/059320.
Extended European Search Report and Opinion dated Sep. 9, 2024 in connection with European Application No. 24177797.8.
International Preliminary Report on Patentability mailed Apr. 17, 2025 in connection with International Application No. PCT/IB2023/059320.

* cited by examiner

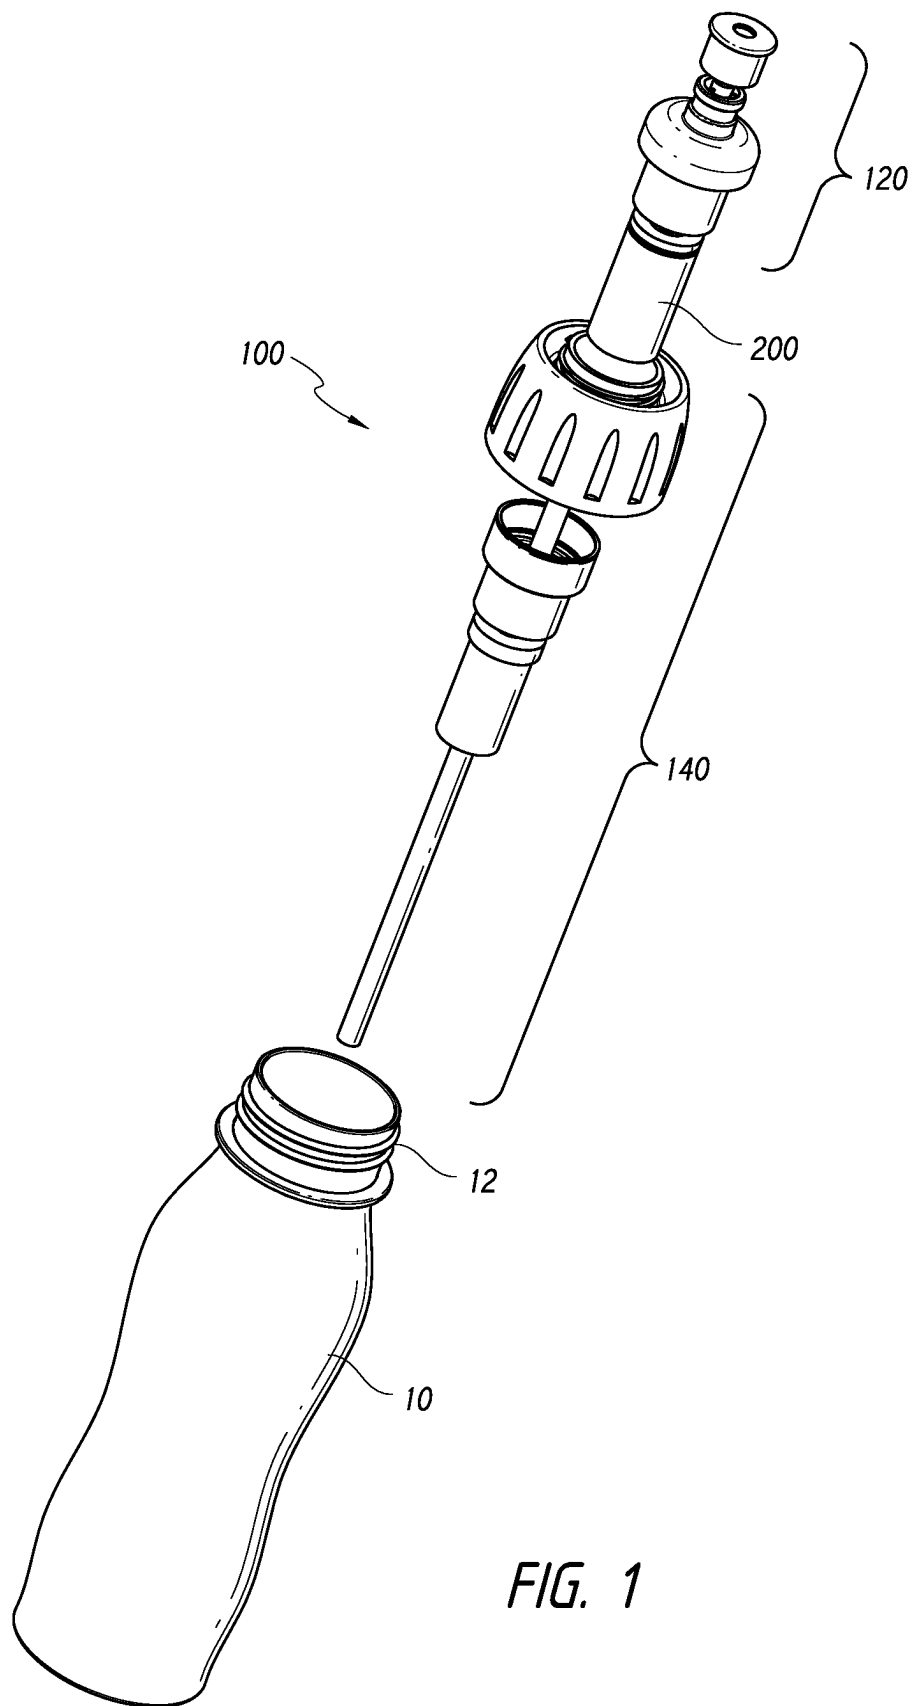


FIG. 1

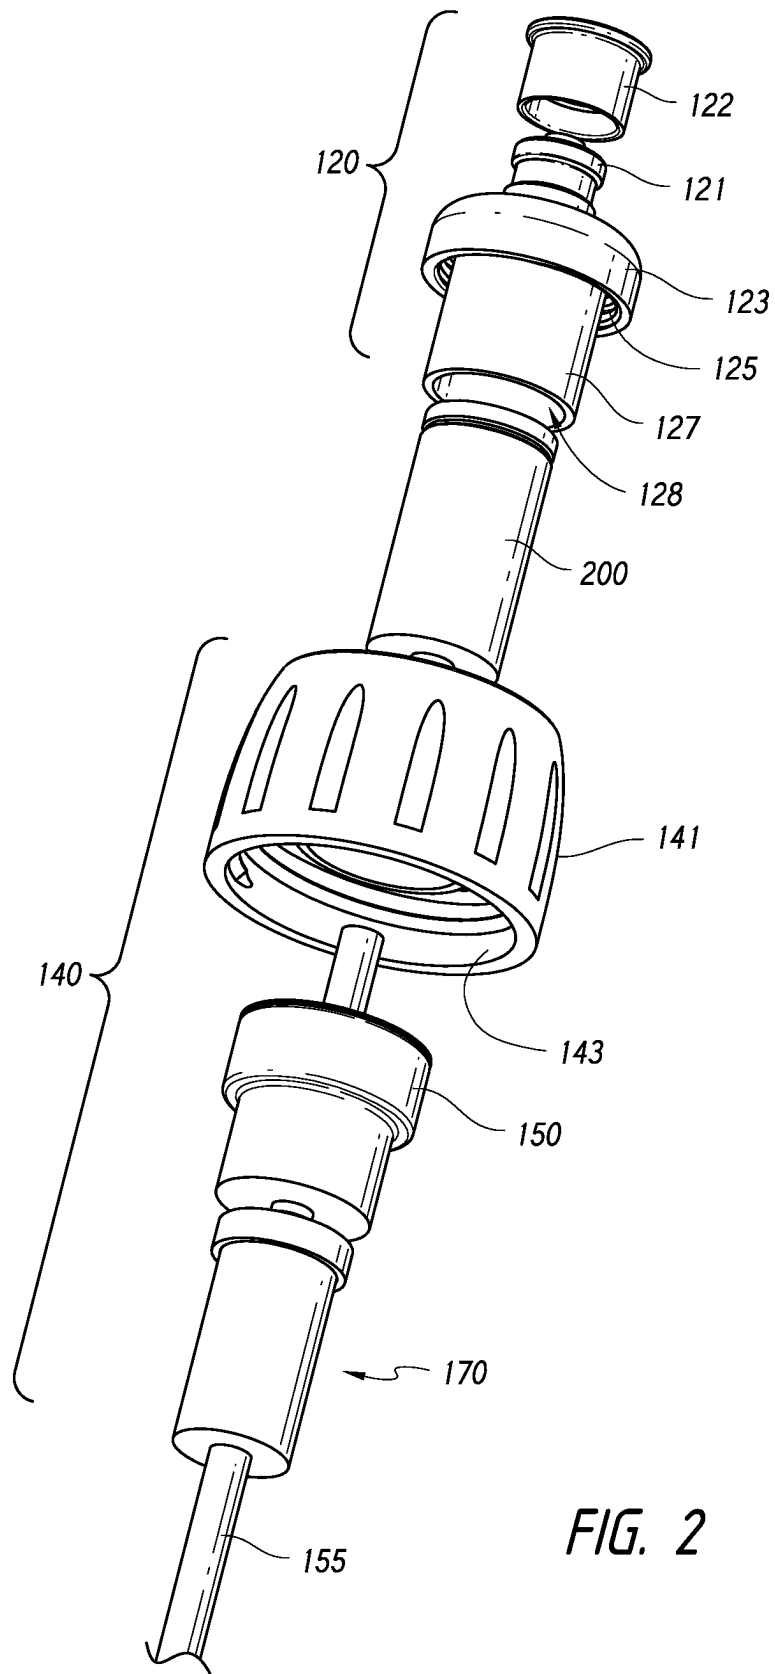


FIG. 2

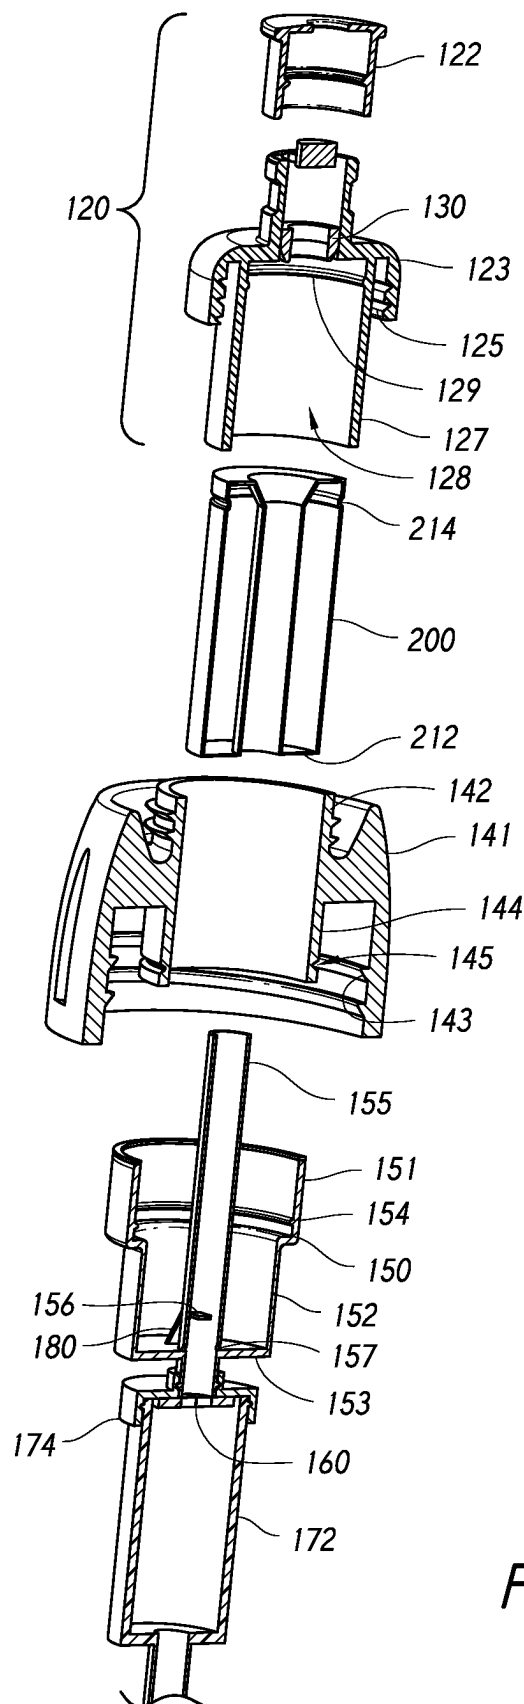
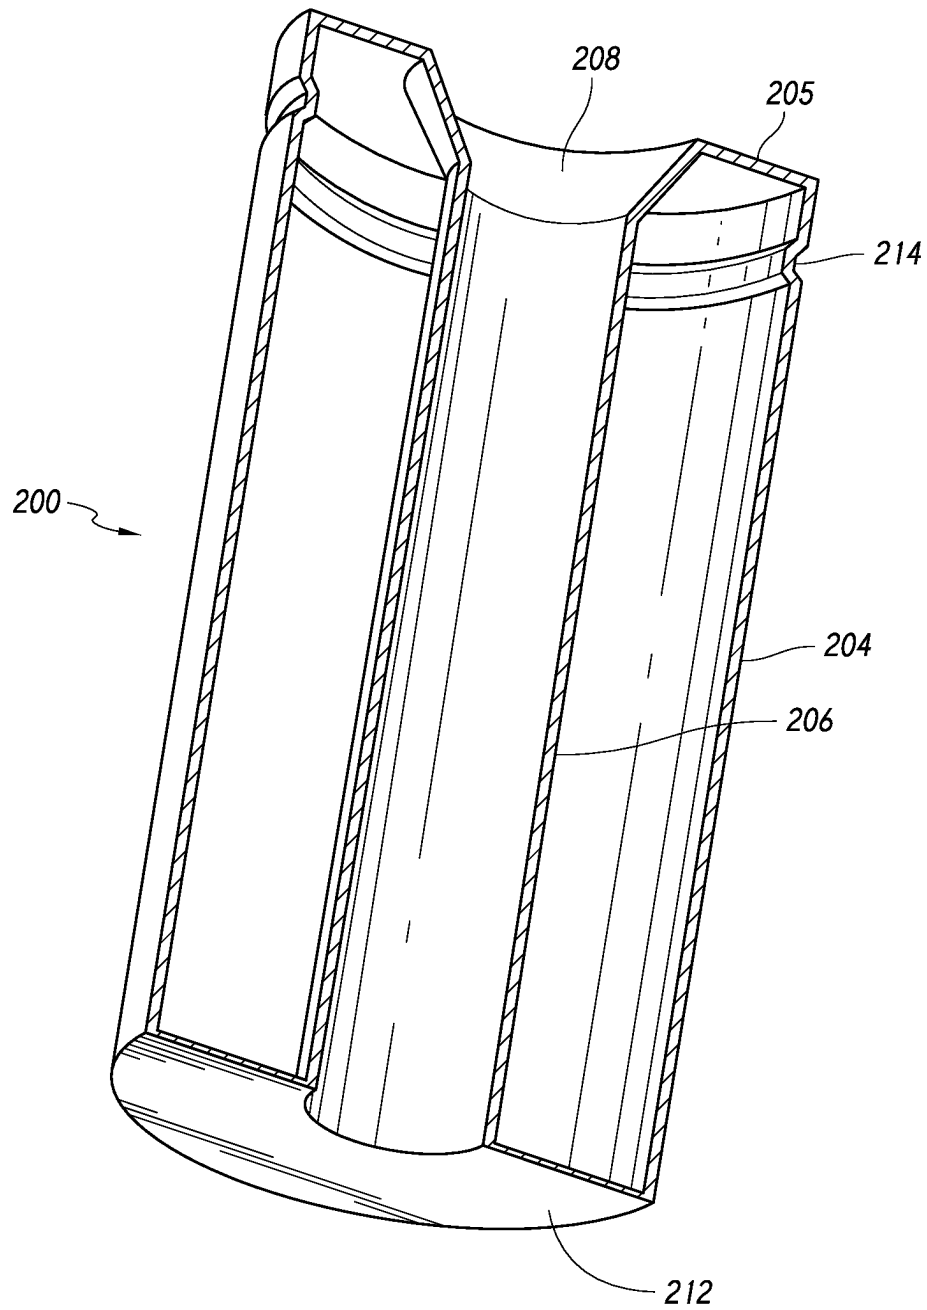
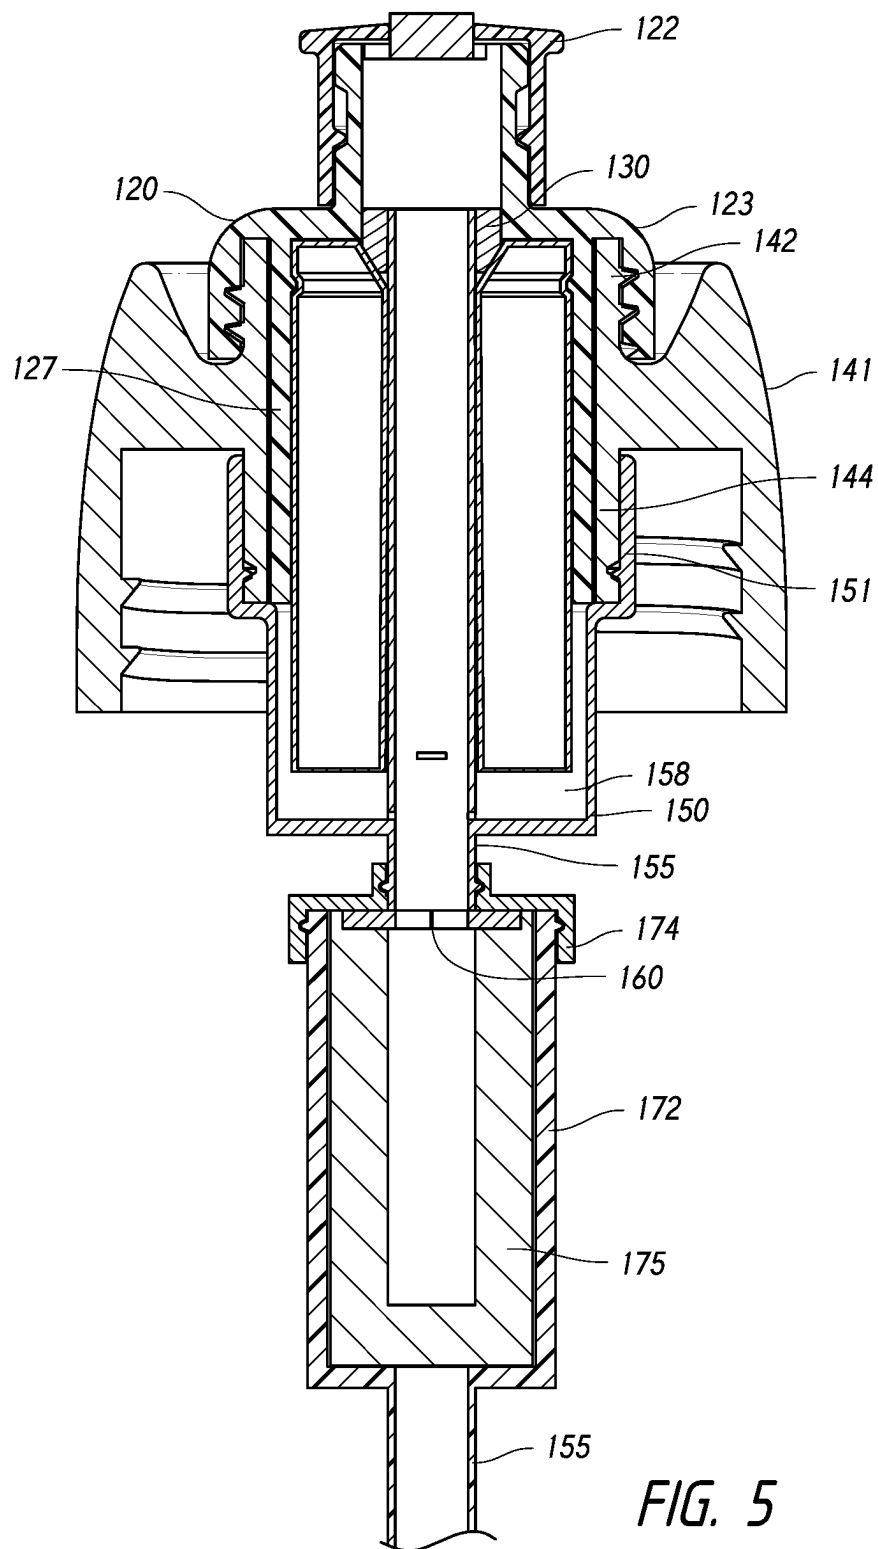


FIG. 3

**FIG. 4**



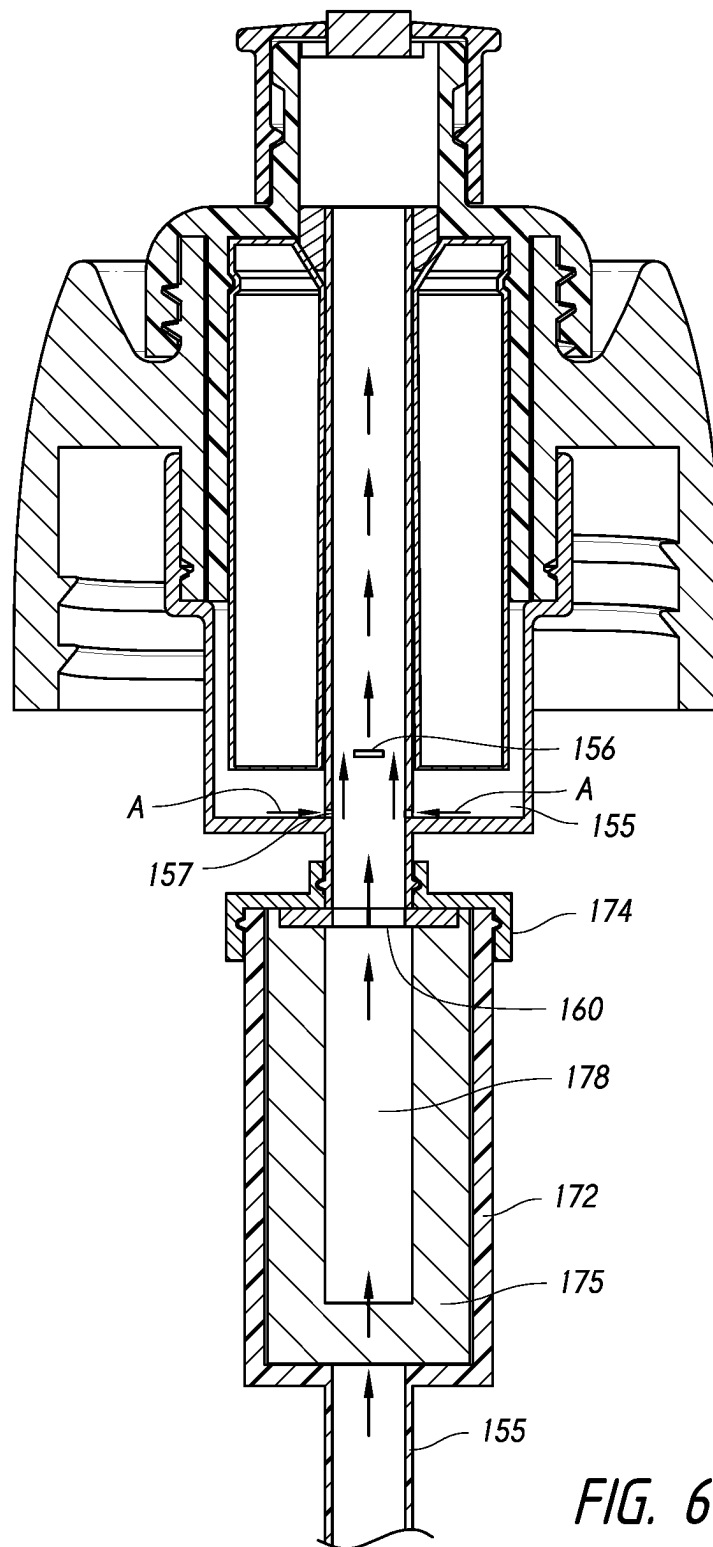


FIG. 6

1

ADDITIVE DELIVERY SYSTEMS AND CONTAINERS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation and claims the priority benefit of U.S. patent application Ser. No. 17/539,833, filed on Dec. 1, 2021. This application is a continuation and claims the priority benefit of U.S. patent application Ser. No. 15/791,348, filed on Oct. 23, 2017, which is a continuation and claims the priority benefit of U.S. patent application Ser. No. 14/181,354, filed on Feb. 14, 2014, of the same title, now U.S. Pat. No. 9,795,242, which claims the priority benefit of U.S. Provisional Patent Application Ser. No. 61/764,861, titled "BOTTLE WITH REMOVABLE FLAVOR CARTRIDGE IN WHICH FLAVOR CONCENTRATE MIXES WITH WATER AS USER DRINKS," filed on Feb. 14, 2013. The disclosures and subject matter of all of the above-described applications is incorporated by reference herein in its entirety.

BACKGROUND

1. Technical Field

The disclosure relates to dispensing and delivery systems for beverages and other products. More specifically, the disclosure relates to dispensing and delivery systems for providing an additive, such as flavoring or supplements, to a base liquid, such as water, as the base liquid is dispensed from a container. The disclosure also relates to containers for containing and storing an additive to be used in additive delivery systems.

2. Prior Art

The prior art includes various devices for providing additives to a base liquid. Such devices include pre-mix systems, such as those exemplified in U.S. Pat. No. 7,306,117, in which a predetermined amount of additive is dispensed into a base liquid within the container and mixed therewith prior to consumption.

Prior art systems also include additive delivery systems in which an additive is dispensed as a base fluid is dispensed from a container. Such delivery systems are exemplified by U.S. Pat. No. 8,230,777, which describes a dispensing system in which a base liquid flows through a supplement area containing solid supplements, and U.S. Pat. No. 8,413,844, which describes a water dispenser (pitcher) having a filter and an additive chamber in which the additive is dispensed as water is poured from the dispenser.

Such prior art systems, however, suffer from the drawbacks of requiring rather elaborate and relatively expensive dispensing systems and fail to combine filtration and additive delivery functionality in a manner that is readily adapted to portable, compact, portable containers, such as sports bottles. There is thus a need for additive delivery systems and additive containers that are readily adaptable to portable base liquid containers and which address the aforementioned and other needs in the art.

SUMMARY OF THE INVENTION

One aspect of the invention provides a compact filtering and additive delivery system, which is readily adaptable to a portable container, such as a sports bottle. The additive

2

delivery system provides filtration and additive delivery to a base liquid while maintaining a generally consistent flow direction of the base liquid. The additive delivery system may receive a modular additive container selected by the user and provides for the metered delivery of additive, such as flavor concentrate, to a stream of base liquid as the base liquid is drawn or dispensed from the bottle. The modular additive container configuration on the delivery system allows a consumer/user to experience different additives, such as different flavors or supplement compositions, for a given supply of base liquid, such as water, stored in the container.

Another aspect of the invention provides a compact filtering and additive delivery system that may be used with off-the-shelf containers, such as disposable water bottles.

Yet another aspect of the invention provides a container configuration that is suitable for a modular additive delivery system as described herein.

Yet another aspect of the invention provides for uniform mixing of additive to a base liquid as the mixture is consumed, as well as a substantially uni-directional flow of base liquid and mixed additive/base liquid composition from the container.

BRIEF DESCRIPTION OF THE DRAWINGS

The above and other attendant advantages and features of the invention will be apparent from the following detailed description together with the accompanying drawings, in which like reference numerals represent like elements throughout. It will be understood that the description and embodiments are intended as illustrative examples and are not intended to be limiting to the scope of invention, which is set forth in the claims appended hereto.

FIG. 1 is an exploded isometric view of an additive delivery system, combined with a sports bottle and filtration system according to an aspect of the invention;

FIG. 2 is a detailed exploded isometric view of an additive delivery system according to an aspect of the invention;

FIG. 3 is a cross-sectional exploded view of the additive delivery system of FIG. 2;

FIG. 4 is an isometric view of an additive container according to an aspect of the invention;

FIG. 5 is a cross-sectional view of an assembled additive delivery system according to an aspect of the invention;

FIG. 6 is a cross-sectional view showing flow paths of an additive delivery system according to an aspect of the invention.

DETAILED DESCRIPTION

Referring to FIG. 1, an additive delivery system 100 according to an aspect of the invention includes an upper cap assembly 120 and a lower cap assembly 140, in combination with a sports bottle 10. Sports bottle 10 may include an inner volume for containing a base fluid, such as water, and a threaded mouth 12 for receiving and sealingly engaging the lower cap assembly 140. As will be described in more detail below, upper cap assembly 120 and lower cap assembly 140 cooperate to house a removable additive module 200.

Referring additionally to FIG. 2, upper cap assembly 120 may include a spout 121 and a re-sealable spout closure 122 that cooperates therewith in a known manner. Upper cap assembly may also include an upper cap 123 having threaded interior wall 125 and an additive module enclosing wall 127 defining an additive module receiving space 128 for receiving additive module 200.

3

Lower cap assembly 140 may include a lower cap 141 having a container engaging female threaded portion 143 and an outer surface with gripping recesses formed therein. A lower additive module enclosure 150 cooperates with the lower cap 141 and upper cap assembly 120 to house and enclose additive module 200, as will be described below. Lower cap assembly 140 may include a filter assembly 170, which houses a filter for filtering the base liquid. A delivery tube 155 extends to the bottom of the base liquid container and provides for the travel of base liquid through the filter assembly 170, lower cap assembly 140, additive module 200 and, ultimately, to spout 121, as will be described in more detail below.

Referring additionally to the cross-sectional exploded view in FIG. 3, the additive module enclosing wall 127 of upper cap assembly 120 may include a retaining lip formed therein for engaging a retaining groove 214 on additive module 200. Lower cap assembly 140 may include an upper cap engaging male threaded portion 142 for engaging the female threads 125 on the upper cap 123. As will be recognized, this configuration allows easy removal and replacement of the additive module by the consumer as the upper cap assembly 120 may be unscrewed and removed with the additive module 200 remaining secured on the upper cap assembly 120 by way of the retaining lip 129 and retaining groove 214, which provide a snap fitting of the additive module 200 to the upper cap assembly. In addition, during removal of upper cap assembly 120, the lower cap 141 may remain secure on the container, preventing contamination or spillage of the base liquid.

According to an aspect of the invention, for safety and sanitary purposes, the additive module 200 may be provided with a transparent safety enclosure cap, which may engage the cap threads 125, and enclose the additive module 200. In this configuration, the spout 121, spout closure 122 and safety enclosure cap (and thus the additive module, snap fit within the cap) may be sealed within a frangible thermoplastic membrane for consumer safety and product freshness. The transparent safety cap allows consumers to view the details/branding of the additive module before purchase, for example.

Lower cap 141 may also be provided with an annular wall 144 for engaging and fitting within a correspondingly-shaped upper annular wall 151 on the lower additive module enclosure assembly 150. Annular wall 144 may be provided with a retaining groove 145 for receiving a cooperating retaining lip 154 formed on the interior of upper annular wall 151 of the lower additive module enclosure assembly 150. A lower annular wall 152 and bottom wall 153 define a space for receiving a lower portion of the additive module 200. One or more additive module membrane piercing projections 180 may extend upward from the bottom wall 153 to pierce a frangible membrane 212.

Tube 155 extends upward through the lower module enclosure assembly 150 to permit flow of the base liquid. One or more metering ports 157 may be formed in the tube 155 near the bottom wall 153 to permit flow of additive concentrate from the interior of lower additive module enclosure 150 to the interior of tube 155 by venturi effect as the base liquid is drawn through tube 155. One or more mixing projections 156 may extend within the interior of tube 156 to induce turbulent flow and thereby mix the additive concentrate with the base fluid.

Filter assembly 170 may include a filter housing 172, which is snapped in place on a corresponding filter housing top 174 using a lip and groove retainer. A one-way check or flapper valve 160 formed of silicone rubber may be provided

4

at the inlet of tube 155 from the interior of filter housing 172 to prevent backflow of the base fluid into the filter housing 172. An active carbon filter element (not shown in FIG. 3) may be provided on the interior of filter housing 172, as will be described in more detail below.

Referring additionally to FIG. 4, an additive module 200 according to aspects of the invention may include a generally cylindrical shape having an outer wall 204 provided with a retaining groove 214 formed therein and extending to a top wall 205 having a conical sealing surface 208. Conical surface 208 is adapted to sealingly engage a correspondingly shaped flexible seal 130 (FIG. 3), which may be made of silicone rubber or other material, and provided in upper cap assembly 120. An interior annular wall 206 defines, with upper wall 205 and outer wall 204, an interior additive containing space 210 for containing an additive, such as flavor or supplement concentrate. A frangible lower membrane 212, which may be made of foil or other material, forms a lower wall to contain and seal the additive within the module. As will be recognized, the module configuration provides for a consumer to carry and preserve a number of different additives for use with the additive delivery system and a single supply of base liquid in a container, such as a sports bottle.

FIG. 5 illustrates a cross-section of an assembled additive delivery system according to an aspect of the invention. Spout closure 122 is shown in a closed position. Upper cap 123 is shown in an engaged position (i.e., screwed on) on the male threaded portion 142 of the lower cap 141, with the additive module enclosing wall 127 of the upper cap assembly 120 extending downward into the annular opening of the lower cap 141 and securing the additive module 200 therein. The upper annular wall 151 of lower additive enclosure assembly 150 engages the module holder receiving wall 144 of the lower cap assembly 140 via lip 154 and groove 145 to provide a snap fitting. Upper cap assembly 120, lower cap assembly 140 and lower additive module enclosure assembly thereby cooperate to provide a sealed containing space for the additive module 200.

Tube 155 extends upward within the inner tube formed by inner wall 206 of additive module 200. The conical sealing surface 208 is engaged by a correspondingly shaped silicone seal 130 secured within the upper cap assembly 120. In this position, the frangible membrane 212 of additive module 200 would be pierced or ruptured by piercing projections 180 (FIG. 3) and additive concentrate stored within additive module 200 would flow into the space 158. FIG. 5 also shows a cylindrical active carbon filter element 175 housed within the filter housing 172 to filter the base fluid.

Referring additionally to FIG. 6, the base fluid is filtered as it flows from the lower portion of tube 155 to an interior space 178 defined by filter element 172, through the check valve 160, and upward into the upper portion of tube 155. Owing to a venturi effect, additive concentrate, represented by arrows "A" is drawn from the space 158, through metering ports 157 and into the interior of tube 155 where additive is mixed with the base fluid. Applicants have discovered that metering ports having a diameter of approximately 0.03 inches provide for suitable metering of additive liquid, while permitting the retention (non-leakage) of additive liquid from the additive module when flow of the base liquid is not occurring. As will be recognized, the diameter of metering ports may be varied depending on the viscosity of the additive liquid and other parameters such that flow occurs when needed but not when the base liquid is not flowing in the delivery tube. Mixing projection 156 enhances the mixing and uniform dilution of the additive

5

within the base fluid. The mixed additive and base fluid composition continues up the tube 155 through the spout

As will be recognized, the flow of fluid through the system may be facilitated by suction provided by the consumer or by the squeezing of the container, which may be made of a suitably flexible material, or by both. As will also be recognized, flow from the base liquid container, through the filter assembly, delivery tube and additive module is substantially in a single, linear direction, without diversion, thereby providing for efficient flow of base liquid and mixed additive/base-liquid composition from the container and providing a configuration that is particularly adaptable to a sports bottle or other compact, portable, handheld container.

As will also be recognized, the additive delivery system may be used with standard, disposable water or beverage bottles through suitable adaptation of the fastening implements on the lower cap assembly.

As will also be recognized, suitable thermoplastic polymers may be used to form the various aforementioned elements, including polyethylene terephthalate (PET), polycarbonate, high-density polyethylene (HDPE) and others.

It should be understood that implementation of other variations and modifications of the invention in its various aspects may be readily apparent to those of ordinary skill in the art, and that the invention is not limited by the specific embodiments described herein. It is therefore contemplated to cover, by the present invention any and all modifications, variations or equivalents that fall within the spirit and scope of the claims that follow.

What is claimed is:

1. An additive delivery system for use with a portable liquid container configured to hold a base liquid, the system comprising:

a base liquid container having an inner volume to hold a base liquid and a threaded mouth;

an additive reservoir including at least one wall defining a space holding a liquid additive and an outlet from which the liquid additive exits the additive reservoir;

a cap assembly having an upper cap portion and a lower cap portion, the lower cap portion being configured to threadedly engage with the threaded mouth, and the upper cap portion including a spout configured for movement between open and closed positions to control flow of liquid from the spout, and an upper component to which the additive reservoir is attached, the upper component configured to threadedly engage with the lower cap portion to secure the additive reservoir to the lower cap portion and to threadedly disengage from the lower cap portion permit removal of the upper cap portion and the additive reservoir from the lower cap portion; and

a base liquid flow path extending through the cap assembly to the spout, the base liquid flow path fluidly coupled to receive the liquid additive from the additive reservoir at a mixing area to mix the liquid additive with the base liquid and including a one-way valve in the base liquid flow path upstream of the mixing area that prevents backflow of base liquid into the base liquid container.

2. The system of claim 1, the cap assembly further comprising a lower component that at least partially defines an additive reservoir enclosure in which the additive reservoir is held, and a metering port configured to receive the liquid additive from the outlet of the additive reservoir and provide the liquid additive to the mixing area.

6

3. The system of claim 2, the lower component including an opening to permit the base liquid from the inner volume to flow into the additive reservoir enclosure.

4. The system of claim 2, wherein the lower component includes an opening to permit the base liquid from the inner volume to flow into the additive reservoir enclosure, and the base liquid that flows into the additive reservoir enclosure through the opening of the lower component does not contact the liquid additive in the additive reservoir.

5. The system of claim 1, wherein the upper cap portion is configured to be removed from the lower cap portion while the lower cap portion is engaged with the base liquid container.

6. The system of claim 5, wherein the upper component includes a female threaded part configured to threadedly engage with a male threaded part on the lower cap portion.

7. The system of claim 1, wherein the additive reservoir and the upper component are configured such that the additive reservoir engages the upper component with a snap fit.

8. The system of claim 1, wherein the additive reservoir is configured such that the liquid additive flows to the mixing area in response to the base liquid flowing to the spout.

9. The system of claim 1, wherein the additive reservoir includes a flexible wall.

10. The system of claim 1, wherein the additive reservoir is positioned at least partially in the inner volume when the additive reservoir is attached to the cap assembly and the cap assembly is engaged with the threaded mouth.

11. An additive delivery system for use with a portable base liquid container having a threaded mouth, an inner volume to hold a base liquid, and a cap threadedly engaged with the threaded mouth and having an opening through which the inner volume is accessible, the system comprising:

an additive reservoir including at least one wall defining a space holding a liquid additive and an outlet from which the liquid additive exits the additive reservoir;

a cap assembly including a spout configured for movement between open and closed positions to control flow of liquid from the spout, and an upper component to which the additive reservoir is attached and from which the additive reservoir depends, the upper component configured to threadedly engage with the cap at the opening to secure the additive reservoir to the cap and to threadedly disengage from the cap to permit removal of the upper component and the additive reservoir from the cap; and

a base liquid flow path extending through the cap assembly to the spout, the base liquid flow path fluidly coupled to receive the liquid additive from the additive reservoir at a mixing area to mix the liquid additive with the base liquid, and including a one-way valve in the base liquid flow path upstream of the mixing area that prevents backflow of the base liquid into the base liquid container,

wherein the additive reservoir and the cap assembly are configured to engage with the cap such that the additive reservoir is positioned at least partially in the inner volume with the upper component threadedly engaged with the cap.

12. The system of claim 11, the cap assembly further comprising a lower component that at least partially defines an additive reservoir enclosure in which the additive reservoir is held, and a metering port configured to receive the

liquid additive from the outlet of the additive reservoir and provide the liquid additive to the mixing area.

13. The system of claim 12, the lower component including an opening to permit the base liquid from the inner volume to flow into the additive reservoir enclosure. 5

14. The system of claim 12, wherein the lower component includes an opening to permit the base liquid from the inner volume to flow into the additive reservoir enclosure, and the base liquid that flows into the additive reservoir enclosure through the opening of the lower component does not 10 contact the liquid additive in the additive reservoir.

15. The system of claim 11, wherein the upper component is configured to be removed from the cap while the cap is engaged with the base liquid container.

16. The system of claim 11, wherein the upper component 15 includes a female threaded part configured to threadedly engage with a male threaded part on the cap at the opening.

17. The system of claim 11, wherein the additive reservoir and the upper component are configured such that the additive reservoir engages the upper component with a snap 20 fit.

18. The system of claim 11, wherein the additive reservoir is configured such that the liquid additive flows to the mixing area in response to the base liquid flowing to the spout. 25

19. The system of claim 11, wherein the additive reservoir includes a flexible wall.

* * * * *