

(12) **United States Patent**
Ranjan et al.

(10) **Patent No.:** **US 12,406,218 B2**
(45) **Date of Patent:** **Sep. 2, 2025**

(54) **DASHBOARD FOR MULTI SITE MANAGEMENT SYSTEM**

(71) Applicant: **Honeywell International Inc.,**
Charlotte, NC (US)

(72) Inventors: **Prabhat Ranjan**, Bangalore (IN);
Khushrav Writer, Charlotte, NC (US);
Nithin Yadalla Ramgopal, Bangalore (IN);
Gutha Stalin Sanghamitra, Bangalore (IN);
Zhongshengyun Gao, Shanghai (CN);
Foong Yeen Chan, Petaling Jaya (MY);
Sherene Kuruvilla, Charlotte, NC (US);
Ashu Rawat, Redmond, WA (US);
Nitish Chopra, Janakpuri (IN);
Gunjan Chanduka, Bangalore (IN);
Barnali Chetia, Bangalore (IN)

(73) Assignee: **HONEYWELL INTERNATIONAL INC.,** Charlotte, NC (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **18/121,357**

(22) Filed: **Mar. 14, 2023**

(65) **Prior Publication Data**

US 2023/0213923 A1 Jul. 6, 2023

Related U.S. Application Data

(63) Continuation of application No. 17/345,955, filed on Jun. 11, 2021, now abandoned.
(Continued)

(51) **Int. Cl.**
G06Q 10/0639 (2023.01)
G05B 13/02 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **G06Q 10/0639** (2013.01); **G05B 13/02** (2013.01); **G05B 23/0216** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC **G06Q 10/06312**; **G06Q 10/063114**; **G06Q 10/0639**; **G06Q 10/0637**; **G06Q 10/063**;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

191,512 A 6/1877 Bennett et al.
4,009,647 A 3/1977 Howorth
(Continued)

FOREIGN PATENT DOCUMENTS

AU 2010245746 A1 * 12/2011 G05B 15/02
CA 2387100 A1 11/2003
(Continued)

OTHER PUBLICATIONS

Johnson Controls, (2019 Smart Buildings: Solutions for Digital Transformation from Johnson Controls) <https://www.youtube.com/watch?v=JEVO-x2iAzU> (Year: 2019).*

(Continued)

Primary Examiner — Patricia H Munson


Assistant Examiner — Thea Labogin

(74) *Attorney, Agent, or Firm* — Seager, Tufte & Wickhem, LLP

(57) **ABSTRACT**

A multi-site Building Management System (BMS) monitors performance of a local BMS at each of a plurality of remote sites. The multi-site BMS includes a controller that is configured to determine a plurality of local performance metrics associated with each local BMS based on the operational data received from each local BMS and to aggregate like ones of the plurality of local performance metrics, resulting in a plurality of aggregated performance

(Continued)

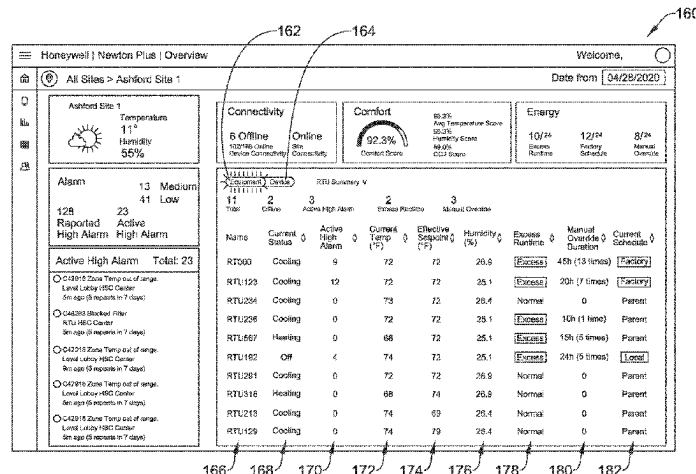

metrics. The controller is configured to display on the display a plurality of panels, to display in each of the plurality of panels the corresponding one of the plurality of aggregated performance metrics and to display in each of the plurality of panels a ranking of one or more of the remote sites by their corresponding local performance metric.

14 Claims, 11 Drawing Sheets

Related U.S. Application Data

- (60) Provisional application No. 63/039,373, filed on Jun. 15, 2020.
- (51) **Int. Cl.**
G05B 23/02 (2006.01)
G06Q 10/0631 (2023.01)
G06Q 10/0633 (2023.01)
G06Q 10/0637 (2023.01)
H04L 12/12 (2006.01)
H04L 12/28 (2006.01)
- (52) **U.S. Cl.**
 CPC **G06Q 10/063114** (2013.01); **G06Q 10/06312** (2013.01); **G06Q 10/0633** (2013.01); **G06Q 10/0637** (2013.01); **H04L 12/12** (2013.01); **H04L 12/2818** (2013.01)
- (58) **Field of Classification Search**
 CPC .. G05B 23/0216; H04L 12/12; H04L 12/2818
 See application file for complete search history.

(56) References Cited

U.S. PATENT DOCUMENTS

4,375,637	A	3/1983	Desjardins	6,993,417	B2	1/2006	Osann, Jr.
4,918,615	A	4/1990	Suzuki et al.	7,023,440	B1	4/2006	Havekost et al.
4,939,922	A	7/1990	Smalley et al.	7,031,880	B1	4/2006	Seem et al.
5,566,084	A	10/1996	Cmar	7,062,722	B1	6/2006	Carlin et al.
5,727,579	A	3/1998	Chardack	7,110,843	B2	9/2006	Pagnano et al.
5,745,126	A	4/1998	Jain et al.	7,139,685	B2	11/2006	Bascle et al.
5,751,916	A	5/1998	Kon et al.	7,164,972	B2	1/2007	Imhof et al.
5,777,598	A	7/1998	Gowda et al.	7,183,899	B2	2/2007	Behnke
5,973,662	A	10/1999	Singers et al.	7,200,639	B1	4/2007	Yoshida
6,065,842	A	5/2000	Fink	7,222,111	B1	5/2007	Budike, Jr.
6,139,177	A	10/2000	Venkatraman et al.	7,222,800	B2	5/2007	Wruck
6,144,993	A	11/2000	Fukunaga et al.	7,257,397	B2	8/2007	Shamoon et al.
6,157,943	A	12/2000	Meyer	7,280,030	B1	10/2007	Monaco
6,229,429	B1	5/2001	Horon	7,292,908	B2	11/2007	Borne et al.
6,238,337	B1	5/2001	Kambhatla et al.	7,295,116	B2	11/2007	Kumar et al.
6,334,211	B1	12/2001	Kojima et al.	7,302,313	B2	11/2007	Sharp et al.
6,353,853	B1	3/2002	Gravlin	7,308,323	B2	12/2007	Kruk et al.
6,369,695	B2	4/2002	Horon	7,308,388	B2	12/2007	Beverina et al.
6,375,038	B1	4/2002	Daansen et al.	7,313,447	B2	12/2007	Hsiung et al.
6,429,868	B1	8/2002	Dehner, Jr. et al.	7,346,433	B2	3/2008	Budike, Jr.
6,473,084	B1	10/2002	Phillips et al.	7,356,548	B1	4/2008	Culp et al.
6,487,457	B1	11/2002	Hull et al.	7,379,782	B1	5/2008	Cocco
6,580,950	B1	6/2003	Johnson et al.	7,383,148	B2	6/2008	Ahmed
6,598,056	B1	7/2003	Hull et al.	7,434,742	B2	10/2008	Mueller et al.
6,619,555	B2	9/2003	Rosen	7,447,333	B1	11/2008	Masticola et al.
6,704,012	B1	3/2004	Lefave	7,466,224	B2	12/2008	Ward et al.
6,720,874	B2	4/2004	Fufido et al.	7,496,472	B2	2/2009	Seem
6,741,915	B2	5/2004	Poth	7,512,450	B2	3/2009	Ahmed
6,796,896	B2	9/2004	Laiti	7,516,490	B2	4/2009	Riordan et al.
6,801,199	B1	10/2004	Wallman	7,548,833	B2	6/2009	Ahmed
6,816,878	B1	11/2004	Zimmers et al.	7,551,092	B1	6/2009	Henry
6,876,951	B2	4/2005	Skidmore et al.	7,557,729	B2	7/2009	Hubbard et al.
6,882,278	B2	4/2005	Winings et al.	7,567,844	B2	7/2009	Thomas et al.
6,904,385	B1	6/2005	Budike, Jr.	7,596,473	B2	9/2009	Hansen et al.
6,907,387	B1	6/2005	Reardon	7,610,910	B2	11/2009	Ahmed
6,911,177	B2	6/2005	Deal	7,626,507	B2	12/2009	LaCasse
6,993,403	B1	1/2006	Dadebo et al.	7,664,574	B2	2/2010	Imhof et al.
				7,682,464	B2	3/2010	Glenn et al.
				7,702,421	B2	4/2010	Sullivan et al.
				7,729,882	B2	6/2010	Seem
				7,755,494	B2	7/2010	Melker et al.
				7,761,310	B2	7/2010	Rodgers
				7,774,227	B2	8/2010	Srivastava
				7,797,188	B2	9/2010	Srivastava
				7,819,136	B1	10/2010	Eddy
				7,822,806	B2	10/2010	Frank et al.
				7,856,370	B2	12/2010	Katta et al.
				7,978,083	B2	7/2011	Melker et al.
				7,984,384	B2	7/2011	Chaudhri et al.
				7,986,323	B2	7/2011	Kobayashi et al.
				8,024,666	B2	9/2011	Thompson
				8,086,047	B2	12/2011	Penke et al.
				8,099,178	B2	1/2012	Mairs et al.
				8,151,280	B2	4/2012	Sather et al.
				8,176,095	B2	5/2012	Murray et al.
				8,218,871	B2	7/2012	Angell et al.
				8,219,660	B2	7/2012	McCoy et al.
				8,271,941	B2	9/2012	Zhang et al.
				8,294,585	B2	10/2012	Barnhill
				8,302,020	B2	10/2012	Louch et al.
				8,320,634	B2	11/2012	Deutsch
				8,334,422	B2	12/2012	Gutsol et al.
				8,344,893	B1	1/2013	Drammeh
				8,375,118	B2	2/2013	Hao et al.
				8,473,080	B2	6/2013	Seem et al.
				8,476,590	B2	7/2013	Stratmann et al.
				8,516,016	B2	8/2013	Park et al.
				8,558,660	B2	10/2013	Nix et al.
				8,639,527	B2	1/2014	Rensvold et al.
				8,698,637	B2	4/2014	Raichman
				8,816,860	B2	8/2014	Ophardt et al.
				8,869,027	B2	10/2014	Louch et al.
				8,904,497	B2	12/2014	Hsieh
				8,936,944	B2	1/2015	Peltz et al.
				8,947,437	B2	2/2015	Garr et al.
				8,950,019	B2	2/2015	Loberger et al.
				9,000,926	B2	4/2015	Hollock et al.
				9,002,532	B2	4/2015	Asmus
				9,030,325	B2	5/2015	Taneff

(56)

References Cited

U.S. PATENT DOCUMENTS

9,098,738 B2	8/2015	Bilet et al.	10,514,178 B2	12/2019	Willmott et al.
9,105,071 B2	8/2015	Fletcher et al.	10,514,817 B2	12/2019	Hua et al.
9,175,356 B2	11/2015	Peltz et al.	10,520,210 B2	12/2019	Park et al.
9,235,657 B1	1/2016	Wenzel et al.	10,544,955 B2	1/2020	Przybylski
9,240,111 B2	1/2016	Scott et al.	10,558,178 B2	2/2020	Willmott et al.
9,256,702 B2	2/2016	Elbsat et al.	10,559,180 B2	2/2020	Pourmohammad et al.
9,280,884 B1	3/2016	Schultz et al.	10,559,181 B2	2/2020	Pourmohammad et al.
9,292,972 B2	3/2016	Hailemariam et al.	10,565,844 B2	2/2020	Pourmohammad et al.
9,311,807 B2	4/2016	Schultz et al.	10,600,263 B2	3/2020	Park et al.
9,320,662 B2	4/2016	Hayes et al.	10,602,474 B2	3/2020	Goldstein
9,322,566 B2	4/2016	Wenzel et al.	10,605,477 B2	3/2020	Ridder
9,355,069 B2	5/2016	Elbsat et al.	10,607,147 B2	3/2020	Raykov et al.
9,370,600 B1	6/2016	DuPuis et al.	10,619,882 B2	4/2020	Chatterjee et al.
9,373,242 B1	6/2016	Conrad et al.	10,627,124 B2	4/2020	Walser et al.
9,396,638 B2	7/2016	Wildman et al.	10,673,380 B2	6/2020	Wenzel et al.
9,406,212 B2	8/2016	De Luca et al.	10,678,227 B2	6/2020	Przybylski et al.
9,418,535 B1	8/2016	Felch et al.	10,706,375 B2	7/2020	Wenzel et al.
9,418,536 B1	8/2016	Felch et al.	10,726,711 B2	7/2020	Subramanian et al.
9,436,179 B1	9/2016	Turney et al.	10,732,584 B2	8/2020	Elbsat et al.
9,447,985 B2	9/2016	Johnson, Jr.	10,767,885 B2	9/2020	Przybylski et al.
9,449,219 B2	9/2016	Bilet et al.	10,775,988 B2	9/2020	Narain et al.
9,477,543 B2	10/2016	Henley et al.	10,796,554 B2	10/2020	Vincent et al.
9,497,832 B2	11/2016	Verberkt et al.	10,809,682 B2	10/2020	Patil et al.
9,513,364 B2	12/2016	Hall et al.	10,809,705 B2	10/2020	Przybylski
9,526,380 B2	12/2016	Hamilton et al.	10,824,125 B2	11/2020	Elbsat et al.
9,526,806 B2	12/2016	Park et al.	10,854,194 B2	12/2020	Park et al.
9,536,415 B2	1/2017	De Luca et al.	10,871,298 B2	12/2020	Ridder et al.
9,558,648 B2	1/2017	Douglas	10,871,756 B2	12/2020	Johnson, Jr. et al.
9,568,204 B2	2/2017	Asmus et al.	10,876,754 B2	12/2020	Wenzel et al.
9,581,985 B2	2/2017	Walser et al.	10,890,904 B2	1/2021	Turney et al.
9,591,267 B2	3/2017	Lipton et al.	10,900,686 B2	1/2021	Willmott et al.
9,606,520 B2	3/2017	Noboa et al.	10,901,446 B2	1/2021	Nesler et al.
9,612,601 B2	4/2017	Beyhaghi et al.	10,908,578 B2	2/2021	Johnson, Jr. et al.
9,613,518 B2	4/2017	Dunn et al.	10,909,642 B2	2/2021	Elbsat et al.
9,618,224 B2	4/2017	Emmons et al.	10,915,094 B2	2/2021	Wenzel et al.
9,640,059 B2	5/2017	Hyland	10,917,740 B1	2/2021	Scott et al.
9,672,360 B2	6/2017	Barkan	10,921,768 B2	2/2021	Johnson, Jr. et al.
9,696,054 B2	7/2017	Asmus	10,921,972 B2	2/2021	Park et al.
9,710,700 B2	7/2017	Bilet et al.	10,921,973 B2	2/2021	Park et al.
9,715,242 B2	7/2017	Pillai et al.	10,928,790 B2	2/2021	Mueller et al.
9,721,452 B2	8/2017	Felch et al.	10,948,884 B2	3/2021	Beaty et al.
9,729,945 B2	8/2017	Schultz et al.	10,949,777 B2	3/2021	Elbsat et al.
9,778,639 B2	10/2017	Boettcher et al.	10,955,800 B2	3/2021	Burroughs et al.
9,784,464 B2	10/2017	Yamamoto et al.	10,956,627 B1 *	3/2021	Eckenrode G06Q 50/16
9,798,336 B2	10/2017	Przybylski	10,956,842 B2	3/2021	Wenzel et al.
9,843,743 B2	12/2017	Lewis et al.	10,962,945 B2	3/2021	Park et al.
9,852,481 B1	12/2017	Turney et al.	10,969,135 B2	4/2021	Willmott et al.
9,856,634 B2	1/2018	Rodenbeck et al.	11,002,457 B2	5/2021	Turney et al.
9,872,088 B2	1/2018	Fadell et al.	11,009,252 B2	5/2021	Turney et al.
9,875,639 B2	1/2018	Bone et al.	11,010,846 B2	5/2021	Elbsat et al.
9,911,312 B2	3/2018	Wildman et al.	11,016,648 B2	5/2021	Fala et al.
9,940,819 B2	4/2018	Ferniany	11,016,998 B2	5/2021	Park et al.
9,956,306 B2	5/2018	Brais et al.	11,022,947 B2	6/2021	Elbsat et al.
9,982,903 B1	5/2018	Ridder et al.	11,024,292 B2	6/2021	Park et al.
9,986,175 B2	5/2018	Frank et al.	11,036,249 B2	6/2021	Elbsat
10,007,259 B2	6/2018	Turney et al.	11,038,709 B2	6/2021	Park et al.
10,055,114 B2	8/2018	Shah et al.	11,042,139 B2	6/2021	Deshpande et al.
10,087,608 B2	10/2018	Dobizl et al.	11,042,924 B2	6/2021	Asmus et al.
10,101,730 B2	10/2018	Wenzel et al.	11,061,424 B2	7/2021	Elbsat et al.
10,101,731 B2	10/2018	Asmus et al.	11,068,821 B2	7/2021	Wenzel et al.
10,175,681 B2	1/2019	Wenzel et al.	11,070,389 B2	7/2021	Schuster et al.
10,222,083 B2	3/2019	Drees et al.	11,073,976 B2	7/2021	Park et al.
10,223,894 B2	3/2019	Raichman	11,080,289 B2	8/2021	Park et al.
10,228,837 B2	3/2019	Hua et al.	11,080,426 B2	8/2021	Park et al.
10,235,865 B2	3/2019	Thyroff	11,086,276 B2	8/2021	Wenzel et al.
10,251,610 B2	4/2019	Parthasarathy et al.	11,094,186 B2	8/2021	Razak
10,282,796 B2	5/2019	Elbsat et al.	11,108,587 B2	8/2021	Park et al.
10,288,306 B2	5/2019	Ridder et al.	11,113,295 B2	9/2021	Park et al.
10,303,843 B2	5/2019	Bitran et al.	11,119,458 B2	9/2021	Asp et al.
10,317,864 B2	6/2019	Boettcher et al.	11,120,012 B2	9/2021	Park et al.
10,332,382 B2	6/2019	Thyroff	11,131,473 B2	9/2021	Risbeck et al.
10,341,132 B2 *	7/2019	Schubert H04L 12/28	11,150,617 B2	10/2021	Ploegert et al.
10,359,748 B2	7/2019	Elbsat et al.	11,151,983 B2	10/2021	Park et al.
10,386,820 B2	8/2019	Wenzel et al.	11,156,978 B2	10/2021	Johnson, Jr. et al.
10,402,767 B2	9/2019	Noboa et al.	11,156,996 B2	10/2021	Schuster et al.
			11,158,306 B2	10/2021	Park et al.
			11,182,047 B2	11/2021	Nayak et al.
			11,195,401 B2	12/2021	Pourmohammad
			11,217,087 B2	1/2022	Pelski

(56)

References Cited

U.S. PATENT DOCUMENTS

11,226,126	B2	1/2022	Przybylski et al.	2008/0027885	A1	1/2008	Van Putten et al.
11,243,523	B2	2/2022	Llopis et al.	2008/0036593	A1	2/2008	Rose-Pehrsson et al.
11,268,715	B2	3/2022	Park et al.	2008/0062167	A1	3/2008	Boggs et al.
11,268,996	B2	3/2022	Vitullo et al.	2008/0099045	A1	5/2008	Glenn et al.
11,269,505	B2	3/2022	Fala et al.	2008/0103798	A1	5/2008	Domenikos et al.
11,272,011	B1	3/2022	Laughton et al.	2008/0120396	A1	5/2008	Jayaram et al.
11,272,316	B2	3/2022	Scott et al.	2008/0144885	A1	6/2008	Zucherman et al.
11,275,348	B2	3/2022	Park et al.	2008/0183424	A1	7/2008	Seem
11,275,363	B2	3/2022	Przybylski et al.	2008/0194009	A1	8/2008	Marentis
11,281,169	B2	3/2022	Chatterjee et al.	2008/0198231	A1	8/2008	Ozdemir et al.
11,288,754	B2	3/2022	Elbsat et al.	2008/0209342	A1	8/2008	Taylor et al.
11,314,726	B2	4/2022	Park et al.	2008/0222565	A1	9/2008	Taylor et al.
11,314,788	B2	4/2022	Park et al.	2008/0224862	A1	9/2008	Cirker
11,334,044	B2	5/2022	Goyal	2008/0242945	A1	10/2008	Gugliotti et al.
11,353,834	B2	6/2022	Mueller et al.	2008/0250800	A1	10/2008	Wetzel
11,356,292	B2	6/2022	Ploegert et al.	2008/0279420	A1	11/2008	Masticola et al.
11,360,451	B2	6/2022	Pancholi	2008/0280275	A1	11/2008	Collopy
11,361,123	B2	6/2022	Ploegert	2008/0303658	A1	12/2008	Melker et al.
11,616,391	B2 *	3/2023	Park	2008/0306985	A1	12/2008	Murray et al.
				2008/0320552	A1	12/2008	Kumar et al.
				2009/0001181	A1	1/2009	Siddaramanna et al.
				2009/0024944	A1	1/2009	Louch et al.
				2009/0065596	A1	3/2009	Seem et al.
				2009/0083120	A1	3/2009	Strichman et al.
				2009/0096791	A1	4/2009	Abshear et al.
				2009/0125337	A1	5/2009	Abri
				2009/0125825	A1	5/2009	Rye et al.
				2009/0144023	A1	6/2009	Seem
				2009/0157744	A1	6/2009	McConnell
				2009/0160673	A1	6/2009	Cirker
				2009/0322782	A1	12/2009	Kimchi et al.
				2010/0048167	A1	2/2010	Chow et al.
				2010/0058248	A1	3/2010	Park
				2010/0064001	A1	3/2010	Daily
				2010/0070089	A1	3/2010	Harrod et al.
				2010/0073162	A1	3/2010	Johnson et al.
				2010/0123560	A1	5/2010	Nix et al.
				2010/0134296	A1	6/2010	Hwang
				2010/0156628	A1	6/2010	Ainsbury et al.
				2010/0156630	A1	6/2010	Ainsbury
				2010/0188228	A1	7/2010	Hyland
				2010/0223198	A1	9/2010	Noureldin et al.
				2010/0249955	A1	9/2010	Sitton
				2010/0286937	A1	11/2010	Hedley et al.
				2010/0318200	A1	12/2010	Foslien et al.
				2010/0324962	A1	12/2010	Nesler et al.
				2011/0010654	A1	1/2011	Raymond et al.
				2011/0057799	A1	3/2011	Taneff
				2011/0077779	A1	3/2011	Fuller et al.
				2011/0083094	A1	4/2011	Laycock et al.
				2011/0087988	A1	4/2011	Ray et al.
				2011/0112854	A1	5/2011	Koch et al.
				2011/0126111	A1	5/2011	Gill et al.
				2011/0154426	A1	6/2011	Doser et al.
				2011/0161124	A1	6/2011	Lappinga et al.
				2011/0169646	A1	7/2011	Raichman
				2011/0184563	A1	7/2011	Foslien et al.
				2011/0202467	A1	8/2011	Hilber et al.
				2011/0273298	A1	11/2011	Snodgrass et al.
				2011/0291841	A1	12/2011	Hollock et al.
				2011/0298301	A1	12/2011	Wong et al.
				2011/0316703	A1	12/2011	Butler et al.
				2011/0320054	A1	12/2011	Brzezowski
				2012/0022700	A1	1/2012	Drees et al.
				2012/0039503	A1	2/2012	Chen et al.
				2012/0062382	A1	3/2012	Taneff
				2012/0075464	A1	3/2012	Derenne et al.
				2012/0109988	A1	5/2012	Li et al.
				2012/0112883	A1	5/2012	Wallace et al.
				2012/0131217	A1	5/2012	Delorme et al.
				2012/0158185	A1	6/2012	El-Mankabady et al.
				2012/0216243	A1	8/2012	Gill et al.
				2012/0224057	A1	9/2012	Gill et al.
				2012/0259466	A1	10/2012	Ray et al.
				2012/0262472	A1	10/2012	Garr et al.
				2012/0272146	A1	10/2012	D'souza et al.
				2012/0291068	A1	11/2012	Khushoo et al.
				2012/0303652	A1	11/2012	Tseng
				2012/0310418	A1	12/2012	Harrod et al.
11,888,093	B2	1/2024	Zhang et al.				
2002/0111698	A1	8/2002	Graziano et al.				
2002/0130868	A1	9/2002	Smith				
2003/0028269	A1	2/2003	Spriggs et al.				
2003/0030637	A1	2/2003	Grinstein et al.				
2003/0046862	A1	3/2003	Wolf et al.				
2003/0071814	A1	4/2003	Jou et al.				
2003/0078677	A1	4/2003	Hull et al.				
2003/0083957	A1	5/2003	Olefson				
2003/0103075	A1	6/2003	Rosselot				
2003/0171851	A1	9/2003	Brickfield et al.				
2003/0214400	A1	11/2003	Mizutani et al.				
2003/0233432	A1	12/2003	Davis et al.				
2004/0001009	A1	1/2004	Winings et al.				
2004/0064260	A1	4/2004	Padmanabhan et al.				
2004/0143474	A1	7/2004	Haeberle et al.				
2004/0153437	A1	8/2004	Buchan				
2004/0168115	A1	8/2004	Bauernschmidt et al.				
2004/0233192	A1	11/2004	Hopper				
2004/0260411	A1	12/2004	Cannon				
2005/0010460	A1	1/2005	Mizoguchi et al.				
2005/0119767	A1	6/2005	Kiwimagi et al.				
2005/0143863	A1	6/2005	Ruane et al.				
2005/0267900	A1	12/2005	Ahmed et al.				
2006/0004841	A1	1/2006	Heikkonen et al.				
2006/0009862	A1	1/2006	Imhof et al.				
2006/0017547	A1	1/2006	Buckingham et al.				
2006/0020177	A1	1/2006	Seo et al.				
2006/0028471	A1	2/2006	Kincaid et al.				
2006/0029256	A1	2/2006	Miyoshi et al.				
2006/0058900	A1	3/2006	Johanson et al.				
2006/0067545	A1	3/2006	Lewis et al.				
2006/0067546	A1	3/2006	Lewis et al.				
2006/0077255	A1	4/2006	Cheng				
2006/0184326	A1	8/2006	McNally et al.				
2006/0231568	A1	10/2006	Lynn et al.				
2006/0265664	A1	11/2006	Simons et al.				
2006/0279630	A1	12/2006	Aggarwal et al.				
2007/0016955	A1	1/2007	Goldberg et al.				
2007/0055757	A1	3/2007	Mairs et al.				
2007/0055760	A1	3/2007	McCoy et al.				
2007/0061046	A1	3/2007	Mairs et al.				
2007/0067062	A1	3/2007	Mairs et al.				
2007/0088534	A1	4/2007	MacArthur et al.				
2007/0090951	A1	4/2007	Chan et al.				
2007/0091091	A1	4/2007	Gardiner et al.				
2007/0101433	A1	5/2007	Louch et al.				
2007/0114295	A1	5/2007	Jenkins				
2007/0120652	A1	5/2007	Behnke				
2007/0139208	A1	6/2007	Kates				
2007/0216682	A1	9/2007	Navratil et al.				
2007/0219645	A1	9/2007	Thomas et al.				
2007/0239484	A1	10/2007	Arond et al.				
2007/0268122	A1	11/2007	Kow et al.				
2008/0001763	A1	1/2008	Raja et al.				

H02J 3/14
700/286

(56)

References Cited**U.S. PATENT DOCUMENTS**

2013/0055132 A1 2/2013 Foslien
 2013/0060794 A1 3/2013 Puttabasappa et al.
 2013/0082842 A1 4/2013 Balazs et al.
 2013/0086152 A1 4/2013 Hersche et al.
 2013/0091631 A1 4/2013 Hayes et al.
 2013/0110295 A1 5/2013 Zheng et al.
 2013/0169681 A1 7/2013 Rasane et al.
 2013/0184880 A1 7/2013 McMahon
 2013/0187775 A1 7/2013 Marsden et al.
 2013/0204402 A1 8/2013 Mezic et al.
 2013/0204570 A1 8/2013 Mendelson et al.
 2013/0229276 A1 9/2013 Hunter
 2013/0268293 A1 10/2013 Knudson et al.
 2013/0289774 A1 10/2013 Day et al.
 2014/0032157 A1 1/2014 Khiani
 2014/0040998 A1 2/2014 Hsieh
 2014/0046490 A1 2/2014 Foslien et al.
 2014/0046722 A1 2/2014 Rosenbloom et al.
 2014/0058539 A1 2/2014 Park
 2014/0167917 A2 6/2014 Wallace et al.
 2014/0207291 A1 7/2014 Golden et al.
 2014/0292518 A1 10/2014 Wildman et al.
 2014/0307076 A1 10/2014 Deutsch
 2014/0309757 A1 10/2014 Le Sant et al.
 2014/0316582 A1 10/2014 Berg-Sonne et al.
 2014/0320289 A1 10/2014 Raichman
 2014/0342724 A1 11/2014 Hill et al.
 2015/0025329 A1 1/2015 Amarasingham et al.
 2015/0032264 A1 1/2015 Emmons et al.
 2015/0056909 A1 2/2015 Chien
 2015/0070174 A1 3/2015 Douglas
 2015/0077258 A1 3/2015 Nelson et al.
 2015/0113462 A1 4/2015 Chen et al.
 2015/0153918 A1 6/2015 Chen et al.
 2015/0161874 A1 6/2015 Thyroff et al.
 2015/0167995 A1 6/2015 Fadell et al.
 2015/0168949 A1 6/2015 Hua et al.
 2015/0194043 A1 7/2015 Dunn et al.
 2015/0198707 A1 7/2015 Al-Alusi
 2015/0212717 A1 7/2015 Nair et al.
 2015/0213222 A1 7/2015 Amarasingham et al.
 2015/0213379 A1 7/2015 Nair et al.
 2015/0216369 A1 8/2015 Hamilton et al.
 2015/0253748 A1 9/2015 Brun et al.
 2015/0281287 A1 10/2015 Gill et al.
 2016/0061473 A1 3/2016 Johnson, Jr.
 2016/0061476 A1 3/2016 Schultz et al.
 2016/0061477 A1 3/2016 Schultz et al.
 2016/0061794 A1 3/2016 Schultz et al.
 2016/0061795 A1 3/2016 Schultz et al.
 2016/0063833 A1 3/2016 Schultz et al.
 2016/0066067 A1 3/2016 Schultz et al.
 2016/0116181 A1 4/2016 Aultman et al.
 2016/0139067 A1 5/2016 Grace
 2016/0253897 A1 9/2016 Wildman et al.
 2016/0255516 A1 9/2016 Hill et al.
 2016/0298864 A1 10/2016 Ekolind et al.
 2016/0306934 A1 10/2016 Sperry et al.
 2016/0314683 A1 10/2016 Felch et al.
 2016/0328948 A1 11/2016 Ferniany
 2016/0335731 A1 11/2016 Hall
 2016/0367925 A1 12/2016 Blackley
 2017/0024986 A1 1/2017 Austin
 2017/0075323 A1* 3/2017 Shrivastava G06Q 50/10
 2017/0193792 A1 7/2017 Bermudez Rodriguez et al.
 2017/0256155 A1 9/2017 Sengstaken, Jr.
 2017/0264493 A1 9/2017 Cencini et al.
 2017/0280949 A1 10/2017 Wildman et al.
 2017/0294106 A1 10/2017 Thyroff
 2017/0365024 A1 12/2017 Koch et al.
 2018/0016773 A1 1/2018 Chandler et al.
 2018/0046149 A1 2/2018 Ahmed
 2018/0151054 A1 5/2018 Pi
 2018/0218591 A1 8/2018 Easter
 2018/0259927 A1 9/2018 Przybylski et al.

2018/0293038 A1 10/2018 Meruva et al.
 2018/0301014 A1 10/2018 Worral et al.
 2018/0313695 A1 11/2018 Shim et al.
 2018/0365957 A1 12/2018 Wright et al.
 2019/0051138 A1 2/2019 Easter
 2019/0139395 A1 5/2019 Rogachev et al.
 2019/0146430 A1* 5/2019 Chatterjee F24F 3/001
 700/275

2019/0209719 A1 7/2019 Andersen et al.
 2020/0009280 A1 1/2020 Kupa et al.
 2020/0074836 A1 3/2020 Kolavennu et al.
 2020/0090089 A1 3/2020 Aston et al.
 2020/0146557 A1 5/2020 Cheung et al.
 2020/0200420 A1 6/2020 Nayak et al.
 2020/0256571 A1 8/2020 Johnson, Jr. et al.
 2021/0010701 A1 1/2021 Suindykov et al.
 2021/0011443 A1 1/2021 Mcnamara
 2021/0011444 A1 1/2021 Risbeck et al.
 2021/0302799 A1* 9/2021 Khanna G05B 19/042
 2021/0356927 A1 11/2021 Johnson, Jr. et al.
 2021/0364181 A1 11/2021 Risbeck et al.
 2021/0373519 A1 12/2021 Risbeck et al.
 2022/0011731 A1 1/2022 Risbeck et al.
 2022/0113045 A1 4/2022 Gamroth et al.
 2022/0137580 A1 5/2022 Burroughs et al.

FOREIGN PATENT DOCUMENTS

CA 2538139 A1 3/2005
 CN 103110410 A 5/2013
 CN 103970977 A 8/2014
 CN 105116848 A 12/2015
 CN 108961714 A 12/2018
 CN 110009245 A 7/2019
 CN 110084928 A 8/2019
 CN 110827457 A 2/2020
 EP 1669912 A1 6/2006
 EP 2310981 A1 4/2011
 JP 7085166 A 3/1995
 JP 11024735 A 1/1999
 JP 11317936 A 11/1999
 JP 2001356813 A 12/2001
 JP 2005242531 A 9/2005
 JP 2005311563 A 11/2005
 KR 1172747 B1 8/2012
 KR 101445367 B1 10/2014
 KR 1499081 B1 3/2015
 NO 2011123743 A1 10/2011
 WO 9621264 A3 11/1996
 WO 2004029518 A1 4/2004
 WO 2005045715 A2 5/2005
 WO 2008152433 A1 12/2008
 WO 2008157755 A1 12/2008
 WO 2009012319 A2 1/2009
 WO 2009079648 A1 6/2009
 WO 2010106474 A1 9/2010
 WO 2011025085 A1 3/2011
 WO 2011043732 A1 4/2011
 WO 2011057173 A2 5/2011
 WO 2013062725 A1 5/2013
 WO 2013178819 A1 12/2013
 WO 2014009291 A1 1/2014
 WO 2014098861 A1 6/2014
 WO 2014135517 A1 9/2014
 WO 2016123536 A1 8/2016
 WO 2017057274 A1 4/2017
 WO 2018089606 A1 5/2018
 WO 2019046580 A1 3/2019
 WO 2020024553 A1 2/2020

OTHER PUBLICATIONS

Johnson Controls, (2019 Smart Buildings: Solutions for Digital Transformation from Johnson Controls) <https://www.youtube.com/watch?v=JEVO-x2iAxU> (Year: 2019).*

Airedale International Air Conditioning Ltd., 2017, ACIS Building Management System (BMS) Demo with Jon Martinez <https://www.youtube.com/watch?v=jj3R6U6dFkk> (Year: 2017).*

(56)

References Cited**OTHER PUBLICATIONS**

- Olgyay, Victor, (2020, Connected Communities: A Multi-Building Energy Management Approach) ; www.nrel.gov/publications (Year: 2020).*
- Olken et al., "Object Lessons Learned from a Distributed System for Remote Building Monitoring and Operation," ACM Sigplan Notices, vol. 33, No. 10, pp. 284-295, Oct. 1998.
- Proliphix, Inc., "Proliphix IP Devices: HTTP API," 28 pages, Jan. 23, 2006.
- Proliphix, Inc., "Remote Management User Guide," 12 pages, prior to Aug. 27, 2007.
- Rogan et al., "Smart and Final Food Stores: A Case Study in Web Based Energy Information and Collection," Web Based Energy Information and Control Systems: Case Studies and Application, Chapter 6, p. 59-64, 2005.
- Sharp, "Actius AL3DU 3D LC Display High Performance 3D Visualization," 2 pages, prior to Mar. 17, 2006.
- So et al., "Building Automation on the Information Superhighway," ASHRAE Transactions, vol. 104, Part 2, pp. 176-191, 1998.
- So et al., "Building Automation Systems on the Internet," Facilities vol. 15, No. 5/6, pp. 125-133, May/Jun. 1997.
- Talon, "Raptor Controller," 6 pages, Oct. 2003.
- Talon, "Workstation Software," 4 pages, Nov. 2002.
- Trane, "System Programming, Tracer Summit Version 14, BMTW-SVP01D-EN," 623 pages, 2002.
- Lucid Design Group, Inc., "Building Dashboard," 2 pages, Printed May 30, 2013.
- "America's Largest Managed Security Services Provider Launches Comprehensive, Integrated Covid-19 Safety Program for Office Buildings and Suites," KastleSafeSpaces, 5 pages, May 11, 2020.
- "Biometric Door Reader With Body Temperature Detection," Kintronics, 9 pages, accessed May 21, 2020.
- "Body Surface Temperature Screening with Alarm Function TVS-200IS/TVS-500IS," Nippon Avionics Co., 3 pages, accessed May 21, 2020.
- "BriefCam announces video analytics innovation for contact tracing, physical distancing, occupancy management and face mask detection," BriefCam LTD, 11 pages, Jun. 5, 2020.
- "Thermal Imaging Smartphone Can Be used For Temperature Screening of People," CAT, 3 pages, accessed Jul. 13, 2020.
- "Contact Tracing Now Available on Identiv's Hirsch Velocity Access Control Platform," Identiv, 5 pages, May 21, 2020.
- Silva et al., "Cough localization for the detection of respiratory diseases in pig houses," ScienceDirect, 7 pages, May 28, 2008.
- Oey et al., "Evaluation of Isolation Compliance Using Real Time Video In Critical Care," North Shore University Hospital, 1 page, Oct. 9, 2015.
- "Facial Attendance System With Temperature Screening Now In India," IANS, 5 pages, Mar. 19, 2020.
- "Plan to Re-Open," EHIGH, 16 pages, accessed Jun. 13, 2020.
- "How Smarter AI-Powered Cameras Can Mitigate the Spread of Wuhan Novel," AnyConnect, 22 pages, 2020.
- "How to fight COVID-19 with machine learning," DataRevenue, 20 pages, accessed May 25, 2020.
- Honeywell, "Inncontrol 5," 2 pages, Aug. 8, 2018.
- "IP Door Access Control," Kintronics, 21 pages, 2014.
- "Kogniz AI Health Response Platform," Kogniz, 9 pages, accessed May 21, 2020.
- "Machine Learning Could Check If You're Social Distancing Properly at Work," MIT Technology Review, 7 pages, Apr. 17, 2020.
- Punn et al., "Monitoring COVID-19 social distancing with person detection and tracking via fine-tuned YOLO v3 and Deepsort techniques," 10 pages, May 6, 2020.
- Burt, "NEC launches dual face biometric and fever detection system for access control," Biometric Update, 4 pages, May 8, 2020.
- "Remote temperature monitoring," AXIS Communication, 10 pages, 2014.
- "FebriEye-AI Based Thermal Temperature Screening System," vehant, 1 page, 2020.
- "See The World In A New Way Hikvision Thermal Cameras," Hikvision, 12 pages, 2017.
- Allain, "Trying out the iPhone Infrared Camera: The FLIR One," Wired, 15 pages, 2014.
- Dasgupta, "Your voice may be able to tell you if you have Covid," Hindustan Times, 4 pages, Apr. 16, 2020.
- Ganguty, "Gurugram-based startup Staqu has modified AI-powered JARVIS to battle coronavirus," Yourstory, 7 pages, Mar. 31, 2020.
- Trane, "Creating Input/Output Objects," 196 pages, retrieved Jul. 10, 2020.
- Trane, "Using the Graphing Control Editor," 181 pages, retrieved Jul. 10, 2020.
- Examination Report No. 1 for standard patent application, AU Application No. 2021204108, Australian Patent Office, May 17, 2022 (7 pages).
- Johnson Controls Develops Industry-first AI Driven Digital Solution to Manage Clean Air, Energy, Sustainability, Comfort and Cost in Buildings, 7 pages, 2022. Accessed Aug. 29, 2022.
- Johnson Controls and Microsoft Announce Global Collaboration, Launch Integration between Open Blue Digital Twin and Azure Digital Twins, 7 pages, 2022. Accessed Aug. 29, 2022.
- Open Blue Companion Desktop User Guide, Johnson Controls, 18 pages, 2022.
- Open Blue Digital Twin: Designed for Buildings. Infused with AI, Johnson Controls, 17 pages, 2022. Accessed Aug. 29, 2022.
- Open Blue Enterprise Manager User Guide, Johnson Controls, Release 3.1, 72 pages, Jan. 28, 2021.
- Open Blue Enterprise Manager User Guide, Johnson Controls, Release 4.0, 78pages, Nov. 29, 2021.
- Open Blue Location Manager User Guide, Johnson Controls, Release 2.4.7, 28 pages, Jul. 20, 2022.
- Open Blue Enterprise Manager, Optimize Building Portfolio Performance with Advanced Data Analytics and AI, Johnson Controls, 20 pages, Accessed Aug. 29, 2022.
- Open Blue Platform, Make Smarter, Faster, More Data-Driven Decisions, Johnson Controls, 15 pages, 2022. Accessed Aug. 29, 2022.
- Open Blue, Now, Spaces have Memory and Identity, Johnson Controls, 20 pages, 2022. Accessed Feb. 10, 2022.
- Open Blue Enterprise Manager User Guide, Johnson Controls, 108 pages, Release 4.1.3, 2022, Accessed Aug. 29, 2022.
- Risbeck et al; "Modeling and Multiobjective Optimization of Indoor Airborne Disease Transmission Risk and Associated Energy Consumption for Building HVAC Systems," Energy and Buildings, vol. 253, 24 pages, 2021.
- Bocicor et al. "Wireless Sensor Network based System for the Prevention of Hospital Acquired Infections", arxiv.org, Cornell University Ithaca, NY 14853, May 2, 2017, XP080947042, (Abstract).
- Shheddi et al., "Traditional and ICT Solutions for Preventing the Hospital Acquired Infection", 2015 20th International Conference on Control Systems and Computer Science, IEEE, May 27, 2015, pp. 867-873, XP033188038.
- Extended European Search Report, EP application No. 20151295.1, pp. 13, May 26, 2020.
- U.S. Appl. No. 14/109,496, filed Dec. 17, 2013.
- "What is the GE Nucleus Home Manager? How can a Home Manager Help with Energy Conservation?" GE Nucleus, 2 pages, printed Jan. 15, 2013. www.geappliances.com/home-energy-manager/about-energy-monitors.htm.
- "Lucid Design Group—Building Dashboard Network—Apps," 7 pages, Jan. 15, 2013. www.luciddesigngroup.com/network/apps.php#homepage.
- Preveneers et al., "Intelligent Widgets for Intuitive Interaction and Coordination in Smart Home Environments," IEEE Eighth International Conference on Intelligent Environments, pp. 157-164, 2012.
- Wu et al., "A Web 2.0 Based Scientific Application Framework," 7 pages, prior to Jul. 24, 2014.
- "The Home Dashboard," CRBM info@hand website, 46 pages, prior to Apr. 25, 2013.
- "Free Facilities Dashboards," eSight Energy Website, 2 pages, prior to Apr. 25, 2013.
- Alerton Building Controls, Gallery Prints, 7 pages, Dec. 19, 2013.

(56)

References Cited**OTHER PUBLICATIONS**

- Carter, "Industrial Energy Management Dashboards Require a Toolkit," Cross Automation, 11 pages, Nov. 4, 2013.
- U.S. Appl. No. 14/169,071, filed Jan. 30, 2014.
- U.S. Appl. No. 14/169,083, filed Jan. 30, 2014.
- U.S. Appl. No. 14/461,188, filed Aug. 15, 2014.
- U.S. Appl. No. 14/482,607, filed Sep. 10, 2014.
- e-homecontrols.com, "e-Home Controls Website," link to actual website no longer works, 1 page, prior to Dec. 19, 2013.
- "C&C (/)—Omniboard," 5 pages, Dec. 19, 2013. <http://www.ccbac.com>.
- "DomController Home Automation Software—Control Anything from Anywhere," 11 pages, printed Jan. 6, 2015. <http://www.domcontroller.com/en/>.
- "Novar Opus Bas," 1 page, prior to Feb. 13, 2013. <http://www.novar.com/ems-bas/opus-building-automation-system>.
- "A 3D Interactive Environment for Automated Building Control," Master's Dissertation, Instituto Superior Tecnico, 120 pages, Nov. 2012.
- Panduit Corp., "Enable a Building Automation with Panduit Enterprise Solutions," 4 pages, Nov. 2012.
- Honeywell, "WEBs-AX Web-Enabled Building Solutions," sales brochure, Honeywell International Inc., Mar. 2009.
- Honeywell, "Attune Advisory Services," press release, Honeywell International Inc., Mar. 20, 2012.
- EnteliWEB Overview, web pages retrieved on May 9, 2013 from <http://deltacontrols.com/products/facilities-management/supervisory-software> et seq. by the Internet Archive at web.archive.org.
- "BACnet Protocol Implementation Conformance Statement" for enteliWEB, Delta Controls, Jul. 17, 2013.
- Castle, "7 Software Platforms that Make Building Energy Management Easy," <http://greentechadvocates.com/2012/11/28/7-software-platforms-that-make-building-energy-management-easy/>, Nov. 28, 2012.
- EnteliWEB "Software: Enterprise Energy Management", catalog sheet, Delta Controls, 2012.
- EnteliWEB "Software: Enterprise Energy Management", catalog sheet, Delta Controls, 2010.
- "Intelligent Building Management Systems in Miami," Advanced Control Corp., Mar. 7, 2013.
- "The Ohio State University," BACnet International Journal, vol. 5, p. 4, Jan. 2013.
- Bobker et al., "Operational Effectiveness in Use of BAS," Proceedings of the 13th International Conference for Enhanced Building Operations, Oct. 8, 2013.
- Castelo, "A 3D Interactive Environment for Automated Building Control," Elsevier, Nov. 8, 2012.
- "Creston Special Report: How Intelligent building management solutions are reducing operational costs," Creston, 2012.
- "Building Automation Software Solutions," Iconics, 2013.
- Lacey, "The Top 10 Software Vendors Connecting Smart Buildings to the Smart Grid," <http://www.greentechmedia.com/articles/read/the-top-10-companies-in-enterprise-smart-grid>, Jul. 18, 2013.
- "NiagraAX Product Model Overview," Tridium, Inc., 2005.
- "An Overview of NiagraAX: A comprehensive software platform designed to create smart device applications," Tridium, Inc., 2005.
- "Phoenix Controls Portal," Phoenix Controls, Inc., 2013.
- Quirk, "A Brief History of BIM," Arch Daily, Dec. 7, 2012.
- Samad et al., "Leveraging the Web: A Universal Framework for Building Automation," Proceedings of the 2007 American Control Conference, Jul. 11, 2007.
- Sinha et al., "9 Key attributes of energy dashboards and analytics tools," Aug. 28, 2013, <https://www.greenbiz.com/blog/2013/08/28/9-key-attributes-energy-dashboards-and-analytics-tools>.
- Sinopoli, "Dashboards For Buildings," <http://www.automatedbuildings.com/news/dec10/articles/sinopoli/101119034404sinopoli.html>, Dec. 2010.
- Sinopoli, "Modeling Building Automation and Control Systems," <http://www.automatedbuildings.com/news/jun13/articles/sinopoli/130521122303sinopoli.html>, Jun. 2013.
- Zito, "What is Tridium Part 1," <http://blog.buildingautomationmonthly.com/what-is-tridium/>, May 12, 2013.
- Zito, "What is Tridium Part 2," <http://blog.buildingautomationmonthly.com/tridium-part-2/>, Sep. 10, 2013.
- International Search Report and Written Opinion dated Jul. 17, 2018 for International PCT Application No. PCT/US2018/025189 (12 pages).
- "Data analytics and smart buildings increase comfort and energy efficiency," <https://www.microsoft.com/itsshowcase/Article/Content/845/Data-analytics-and-smart-buildings-increase-comfort-and-energy-efficiency>, Dec. 19, 2016, 8 pages.
- Donnelly, "Building Energy Management: Using Data as a Tool", <http://www.buildingefficiencyinitiative.org/sites/default/files/legacy/InstituteBE/media/Library/Resources/Existing-Building-Retrofits/Using-Building-Data-as-a-Tool.pdf>, Oct. 2012, 9 pages.
- "ASHRAE Dashboard Research Project," 29 pages, Aug. 28, 2008.
- Honeywell, "Energy Manager User Guide," Release 3.2, 180 pages, 2008.
- "Fuzzy Logic Toolbox 2.1, Design and Stimulate Fuzzy Logic Systems," The MathWorks, 2 pages, May 2004.
- "Junk Charts, Recycling Chartjunk as junk art," 3 pages, Oct. 2, 2006.
- "Model Predictive Control Toolbox 2, Develop Internal Model-Based Controllers for Constrained Multivariable Processes," The MathWorks, 4 pages, Mar. 2005.
- Honeywell, "Product Guide 2004," XP-002472407, 127 pages, 2004.
- "Statistics Toolbox, for Use with Matlab," User's Guide Version 2, The MathWorks, 408 pages, Jan. 1999.
- "Vykon Energy Suite Student Guide," Tridium Inc., 307 pages, Mar. 3, 2006.
- "Web Based Energy Information Systems for Energy Management and Demand Response in Commercial Buildings," California Energy Commission, 80 pages, Oct. 2003.
- Andover Controls, Network News, vol. 2, No. 2, 8 pages, 1997.
- Andover Controls World, 4 pages, Spring 1997.
- Bell et al., "Early Event Detection-Results from A Prototype Implementation," AICHE Spring National Meeting, 15 pages, Apr. 2005.
- Cadgraphics, "The Cadgraphics User's Guide," 198 pages, 2003.
- Carrier Comfort Network CCN Web, "Web Browser User Interface to the Carrier Comfort Network," 2 pages, 2002.
- Carrier Comfort Network CCN Web, Overview and Configuration Manual, 134 pages, Apr. 2006.
- Carrier Comfort Network CCN Web, Product Data, 2 pages, Apr. 2006.
- Carrier, "i-Vu Powerful and Intuitive Front End for Building Control," 2 pages, Aug. 2005.
- Carrier, "i-Vu Web-Based Integrated Control System," 3 pages, 2005.
- Carrier, Demo Screen Shots, 15 pages, prior to Aug. 27, 2007.
- Carrier, i-Vu CCN 4.0, Owner's Guide, 20 pages, Jul. 2007.
- Carrier, i-Vu CCN, 7 pages, 2007.
- Chan, "Rank Revealing QR Factorizations," Linear Algebra and Its Applications, vol. 88-89, p. 67-82, Apr. 1987.
- Circon, "i-Browse Web-Based Monitoring and Control for Facility Management," 2 pages, prior to Aug. 27, 2007.
- Australian Application 2009904740, Published copy, 28 pages, Application Filed on Sep. 29, 2009.
- Echelon, "Energy Control Solutions with the i.Lon SmartServer," 4 pages, 2007.
- Echelon, "i.Lon 100e3 Internet Server Models 72101R-300, 72101R-308, 72102R-300, 72103-R300 . . ." 5 pages, copyright 2002-2007.
- Echelon, "i.Lon 100e3 Internet Server New Features," 15 pages, Sep. 2006.
- Echelon, "i.Lon SmartServer," 5 pages, 2007.
- Honeywell News Release, "Honeywell's New Sysnet Facilities Integration System for Boiler Plant and Combustion Safety Processes," 4 pages, Dec. 15, 1995.
- Honeywell, "Excel Building Supervisor-Integrated R7044 and FS90 Ver. 2.0," Operator Manual, 70 pages, Apr. 1995.
- Honeywell Home and Building Control Bulletin, "Introduction of the S7350A Honeywell WebPAD Information Appliance," 2 pages,

(56)

References Cited**OTHER PUBLICATIONS**

Aug. 29, 2000; Picture of WebPad Device with touch screen, 1 Page; and screen shots of WebPad Device, 4 pages.

Honeywell, Excel 15B W7760B Building Manager Release 2.02.00, Installation Instructions, 28 pages, Dec. 2004.

Honeywell, The RapidZone Solution, Excel 5000 Open System, Application Guide, 52 pages, Jan. 2004.

"Remote Building Monitoring and Operations Home Page," 5 pages, prior to Aug. 27, 2007.

"Carrier: i-Vu CCN," 1 page, printed Mar. 11, 2008.

Carrier: 33CSCCNWEB-01 CCN Web Internet Connection to the Carrier Comfort Network, 1 page, printed Mar. 11, 2008.

"Products," 5 pages, printed Jul. 3, 2007. <http://www.docs.hvacpartners.com/idc/groups/public/documents/techlit/gs-controls-ivuccn.rtf>.

Lightstat Incorporated, "Internet Programmable Communicating Thermostats," 1 page, printed Mar. 13, 2007. <http://www.lightstat.com/products/istat.asp>.

Sharp, "Actius RD3D Desktop Replacement Notebook with Industry-Breakthrough 3D Screen," 1 page, printed Jun. 16, 2005. http://www.sharpsystems.com/products/pc_notebooks/actius/rd/3d/.

"Lights On A Wireless Lighting Control System," 11 pages, printed Mar. 22, 2007 <http://www2.sims.berkeley.edu/courses/is213/s06/projects/lightson:final.html>.

ILon 100e3 Internet Server, 1 page, prior to Aug. 27, 2007.

ILon, SmartServer, 2 pages, prior to Aug. 27, 2007.

I-stat, Demo Screen Shots, 9 pages, printed Mar. 13, 2007.

I-stat, The Internet Programmable Thermostat, 2 pages, prior to Aug. 27, 2007.

Ball, "Green Goal of 'Carbon Neutrality' Hits Limit," TheWall Street Journal, 7 pages, Dec. 30, 2008.

Network Integration Engine (NIE), Johnson Controls, 3 pages, Nov. 9, 2007.

Network Integration Engine (NIE), Product Bulletin, Johnson Controls, pp. 1-11, Jan. 30, 2008.

Kourti, "Process Analysis and Abnormal Situation Detection: From Theory to Practice," IEEE Control Systems Magazine, p. 10-25, Oct. 2002.

Mathew, "Action-Oriented Benchmarking, Using CEUS Date to Identify and Prioritize Efficiency Opportunities in California Commercial Buildings," 26 pages, Jun. 2007.

Morrison et al., "The Early Event Detection Toolkit," Honeywell Process Solutions, 14 pages, Jan. 2006.

Narang, "Webarc: Control and Monitoring of Building Systems Over the Web," 53 pages, May 1999.

Sinha et al; "Balance Infection Risk, Sustainability and Comfort with Open Blue," Johnson Controls, 2 pages, 2021.

Building Automation System in Michigan, Johnson Heating and Cooling, L.L.C., www.cooljohnson.com/Building-Automation-Systems-Michigan/Macomb-County-Michigan/Building-Automation-Confidential-Customer.html, 4 pages, Accessed Nov. 21, 2022.

Building Automation System Waterford Michigan 48328 JLA, Johnson Heating and Cooling L.L.C., www.cooljohnson.com/Building-Automation-Systems-Michigan/Waterford-Michigan/Building-Automation-System-JLA.html, 3 pages, Accessed Nov. 21, 2022.

Building Automation Systems Waterford Michigan 48330 SJMO, Johnson Heating and Cooling, L.L.C., www.cooljohnson.com/Building-Automation-Systems-Michigan/Waterford-Michigan/Building-Automation-Systems-SJMO.html, 2 pages, Accessed Nov. 21, 2022.

Building Automation Systems Michigan 48329 WIM, Johnson Heating and Cooling L.L.C., www.cooljohnson.com/Building-Automation-Systems-Michigan/Building-Automation-Systems-WIM.html, 3 pages, accessed Nov. 21, 2022.

Building Automation Clawson Michigan 2.0, Johnson Heating and Cooling L.L.C., www.cooljohnson.com/Building-Automation-Systems-Michigan/Clawson-Michigan/Building-Automation-Clawson-Manor-2.html, 6 pages, Accessed Nov. 21, 2022.

Building Automation in Detroit—Mosaic Christian, Johnson Heating and Cooling L.L.C., www.cooljohnson.com/Building-Automation-Systems-Michigan/Detroit/Mosaic-Christian.html, 5 pages, Accessed Nov. 21, 2022.

Building Automation in Michigan—Divine Grace, Johnson Heating and Cooling L.L.C., www.cooljohnson.com/Building-Automation-Systems-Michigan/Oakland-County-Michigan/Building-Automation-Divine-Grace.html, 3 pages, Accessed Nov. 21, 2022.

Building Automation System Plymouth, Michigan, Johnson Heating and Cooling L.L.C., www.cooljohnson.com/Building-Automation-Systems-Michigan/Plymouth-Michigan/Building-Automation-System-Plymouth-Michigan.html, 8 pages, Accessed Nov. 21, 2022.

Building Automation Systems Shelby Michigan 48316 SG, Johnson Heating and Cooling L.L.C., www.cooljohnson.com/Building-Automation-Systems-Michigan/Shelby-Township-Michigan/Building-Automation-Systems-SG.html, 3 pages, Accessed Nov. 21, 2022.

Building Automation System St. Clair County, Michigan, Johnson Heating and Cooling L.L.C., www.cooljohnson.com/building-Automation-Systems-Michigan/St-Clair-Michigan/Building-Automation-system-St-Clair-Michigan.html, 4 pages, Accessed Nov. 21, 2022.

Building Automation System Troy Michigan Oakland Mall, Johnson Heating and Cooling L.L.C., www.cooljohnson.com/Building-Automation-Systems-Michigan/Troy-Michigan/Building-Automation-System-Oakland-Mall.html, 4 pages, Accessed Nov. 21, 2022.

Building Automation System Waterford Michigan 48327 Excel, Johnson Heating and Cooling L.L.C., www.cooljohnson.com/Building-Automation-Systems-Michigan/Waterford-Michigan/Building-Automation-System-excel.html, 2 pages, Accessed Nov. 22, 2022.

Building Automation System Romeo Michigan 48065 RomeoPR, Johnson Heating and Cooling, L.L.C., www.cooljohnson.com/Building-Automation-Systems-Michigan/Romeo-Michigan/Building-Automation-System-RomeoPR.html, 2 pages, Accessed Nov. 21, 2022.

Johnson, Jr., "Cooling Logic™: Changing the Way You Cool," Johnson Solid State, LLC, 12 pages, Nov. 7, 2018.

Building Automation System Clawson Michigan Clawson Manor, Johnson Heating and Cooling L.L.C., www.cooljohnson.com/building-Automation-Systems-michigan/clawson-Michigan/building-Automation-System-Clawson-Manor.html, 3 pages, Accessed Nov. 21, 2022.

Johnson, Jr., "CoolingLogic™ A Method to increase HVAC System Efficiency And Decrease Energy Consumption," A White Paper, Johnson Solid State, L.L.C., 51 pages, Sep. 24, 2016.

Johnson, Jr., "CoolingLogic™: Mosaic Christian Church A Case Study," 140 pages, Feb. 2, 2019.

* cited by examiner

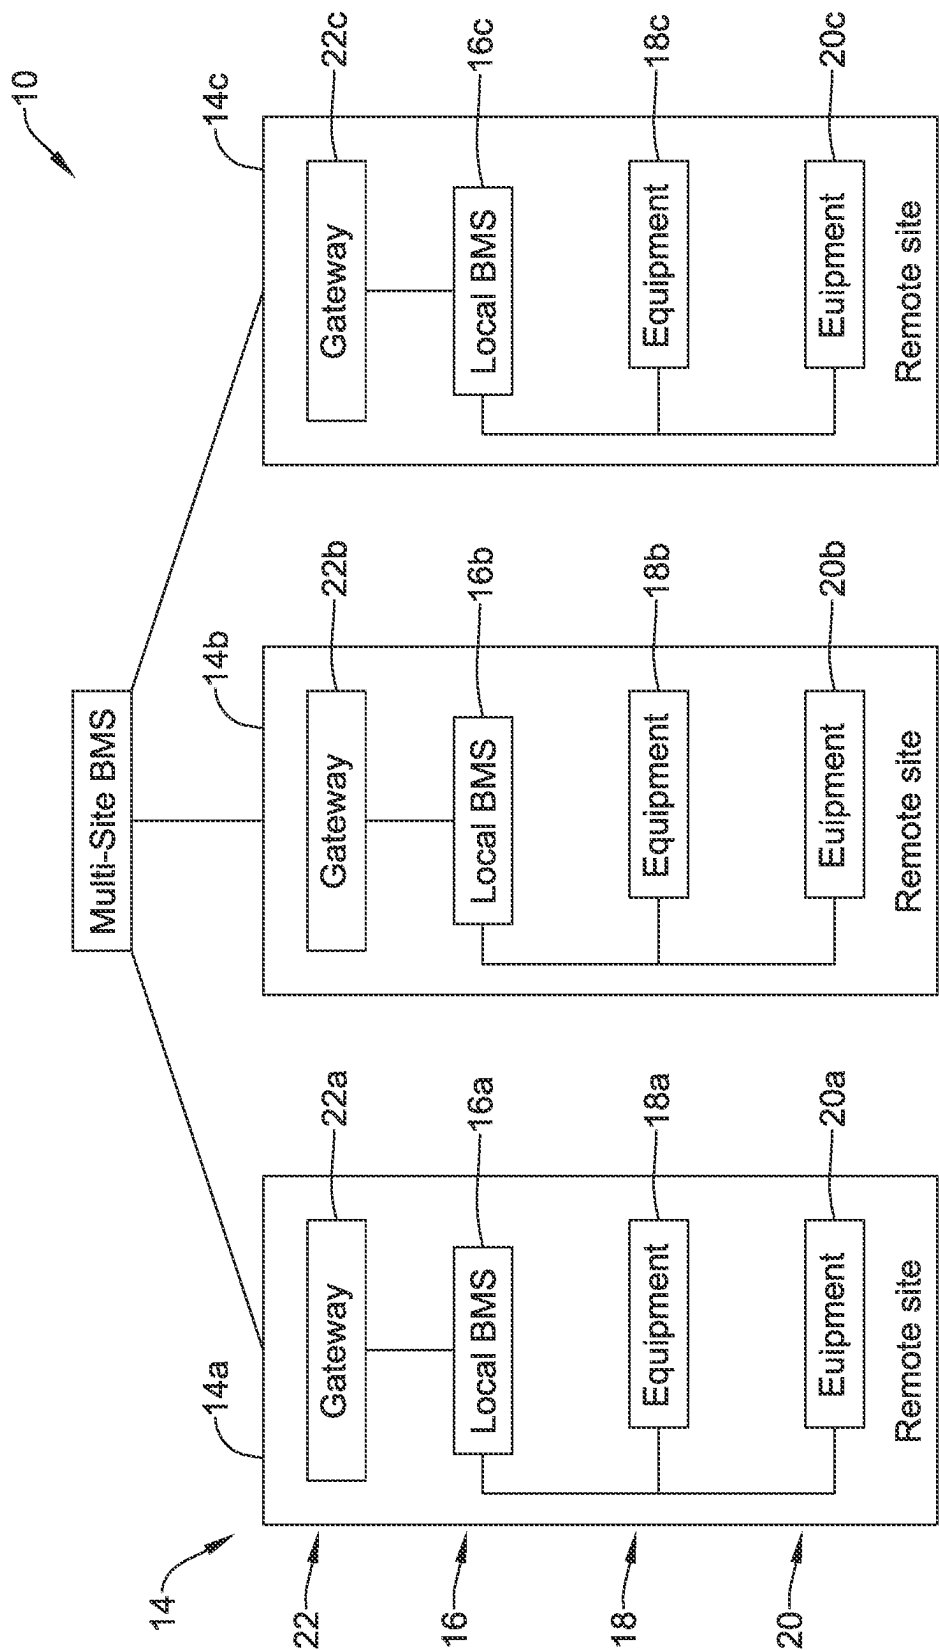


FIG. 1

12

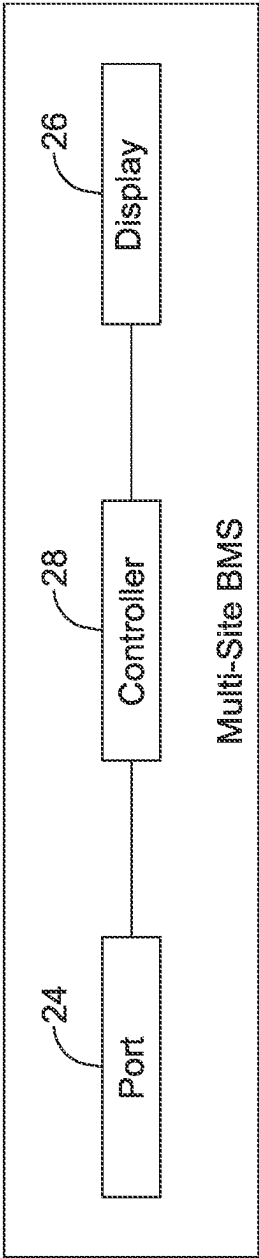


FIG. 2

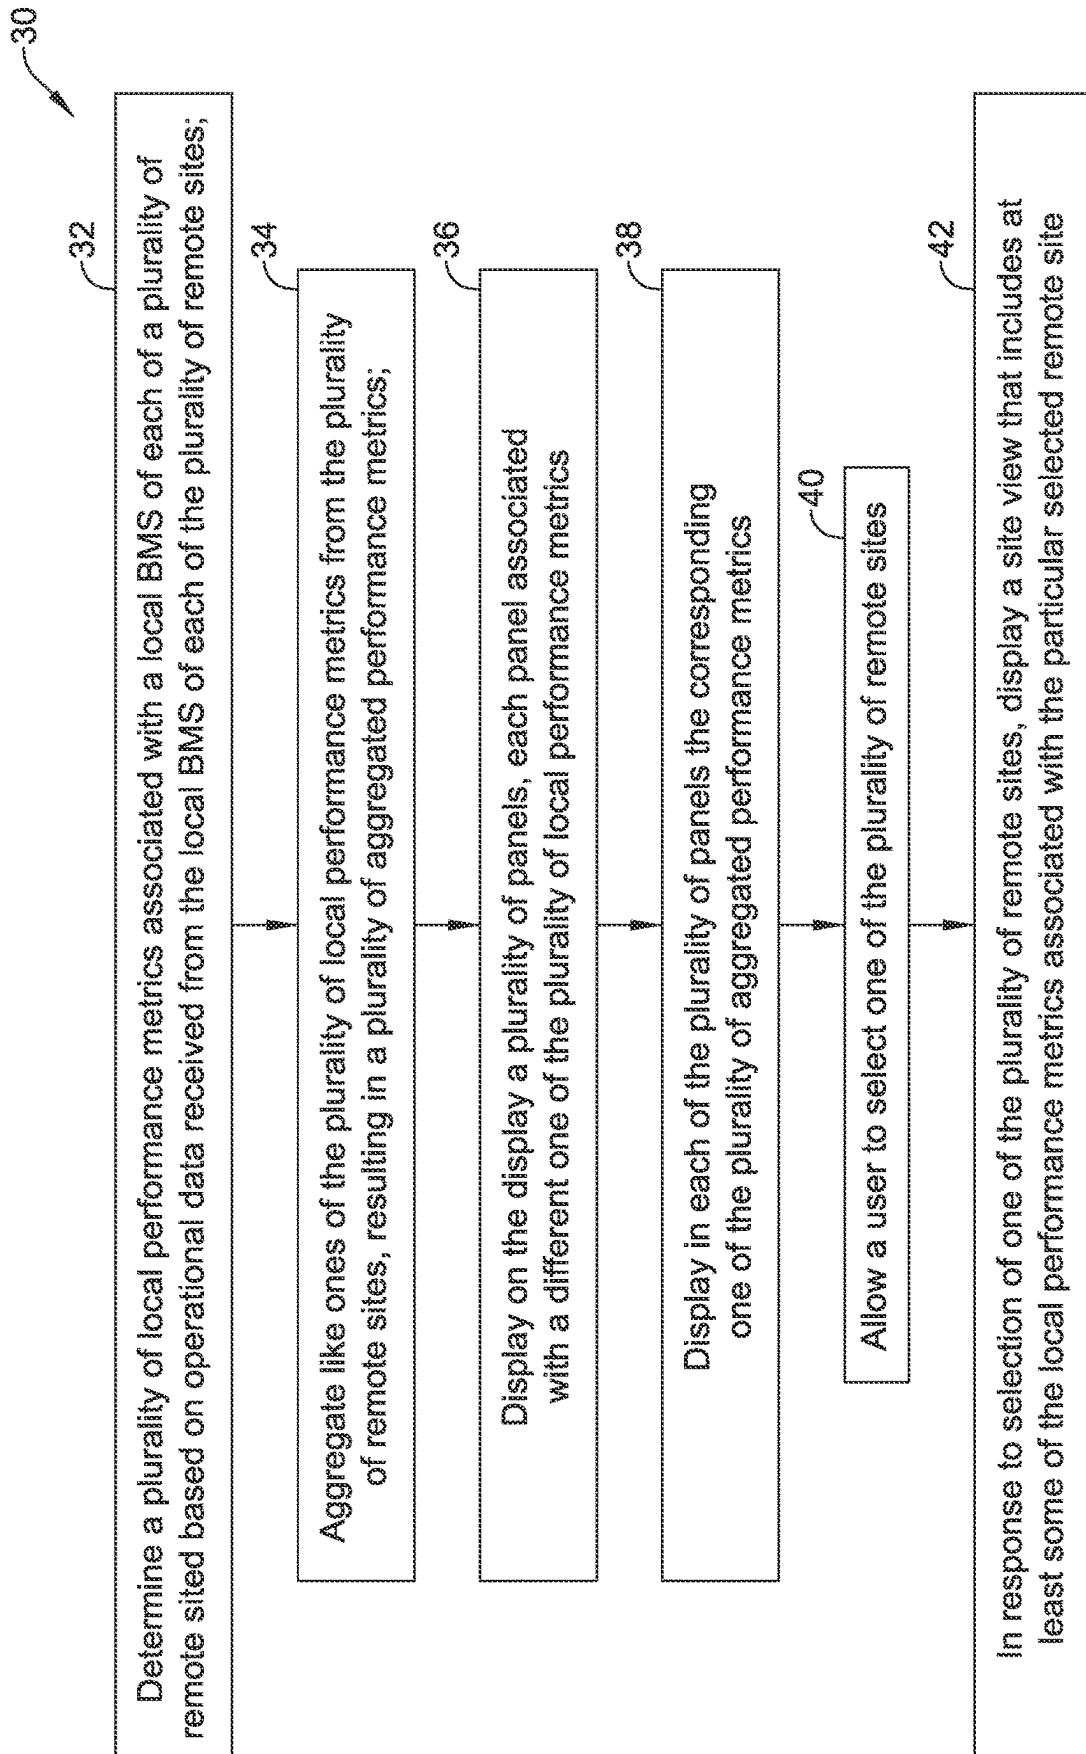
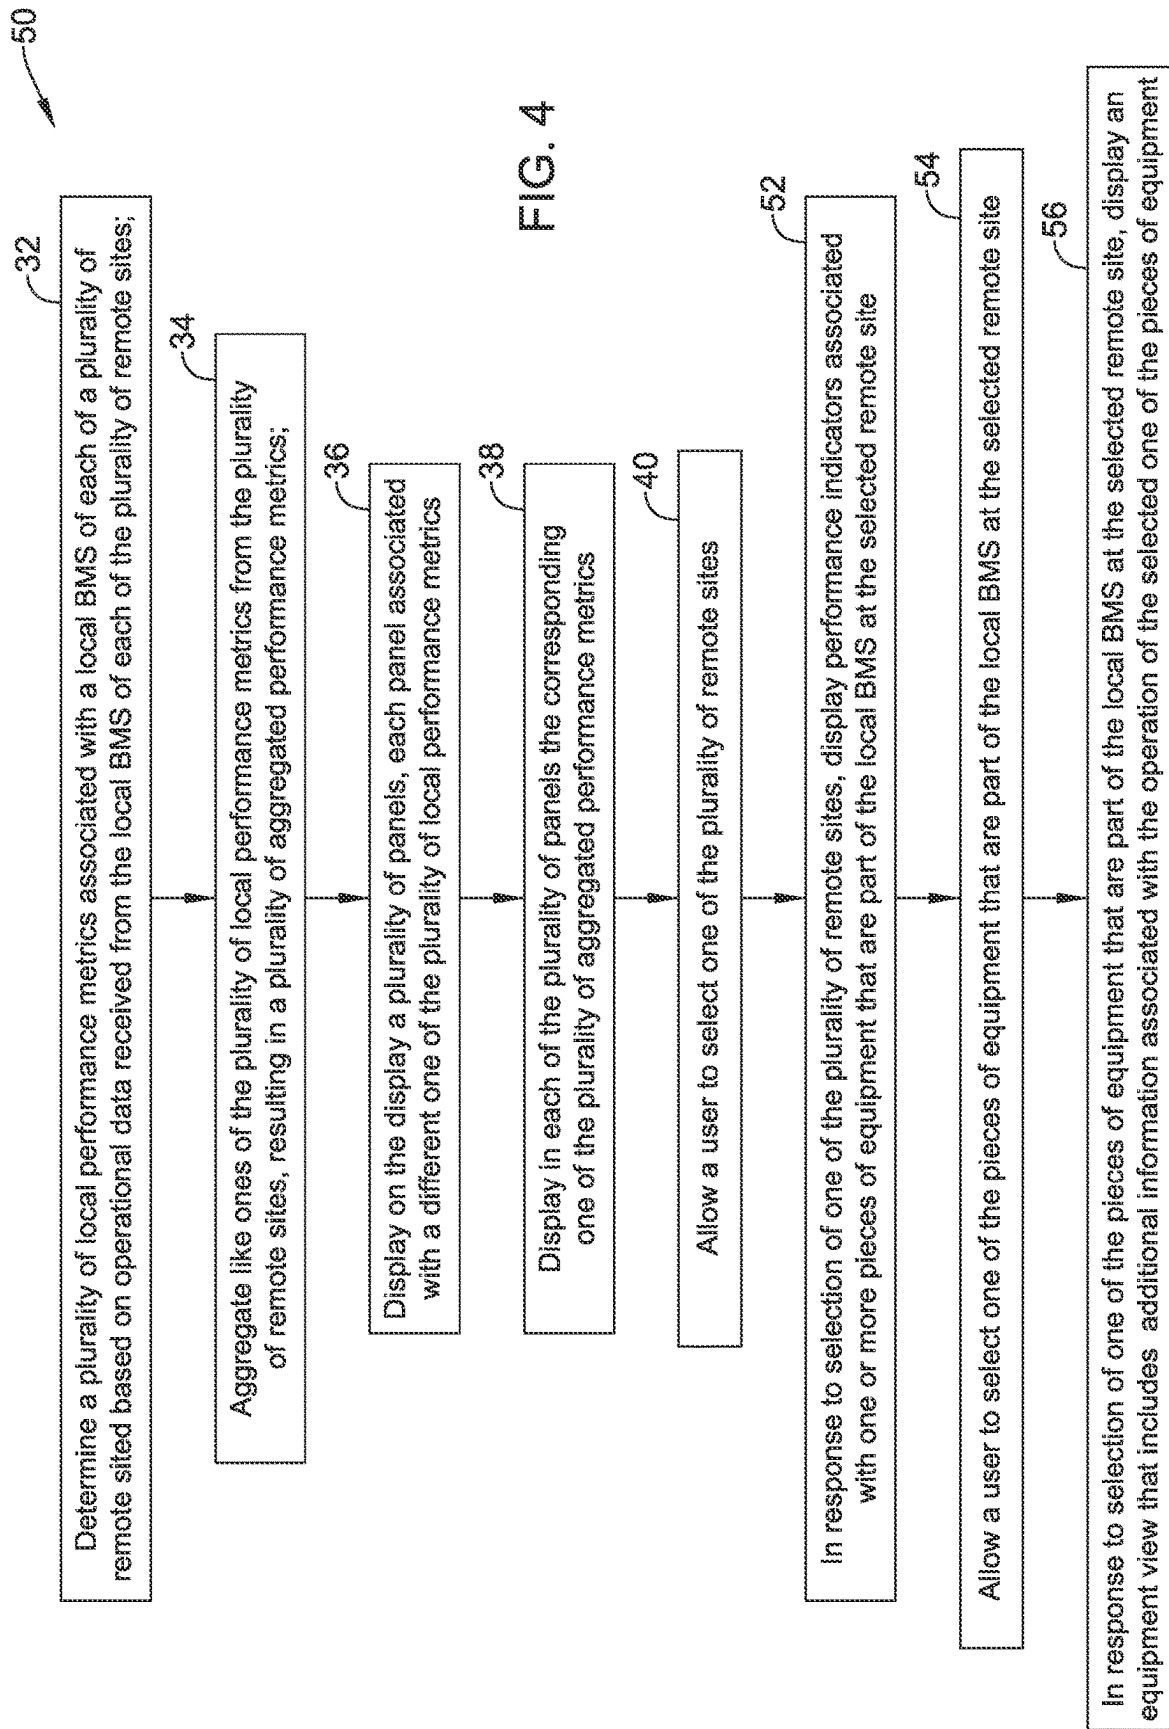


FIG. 3



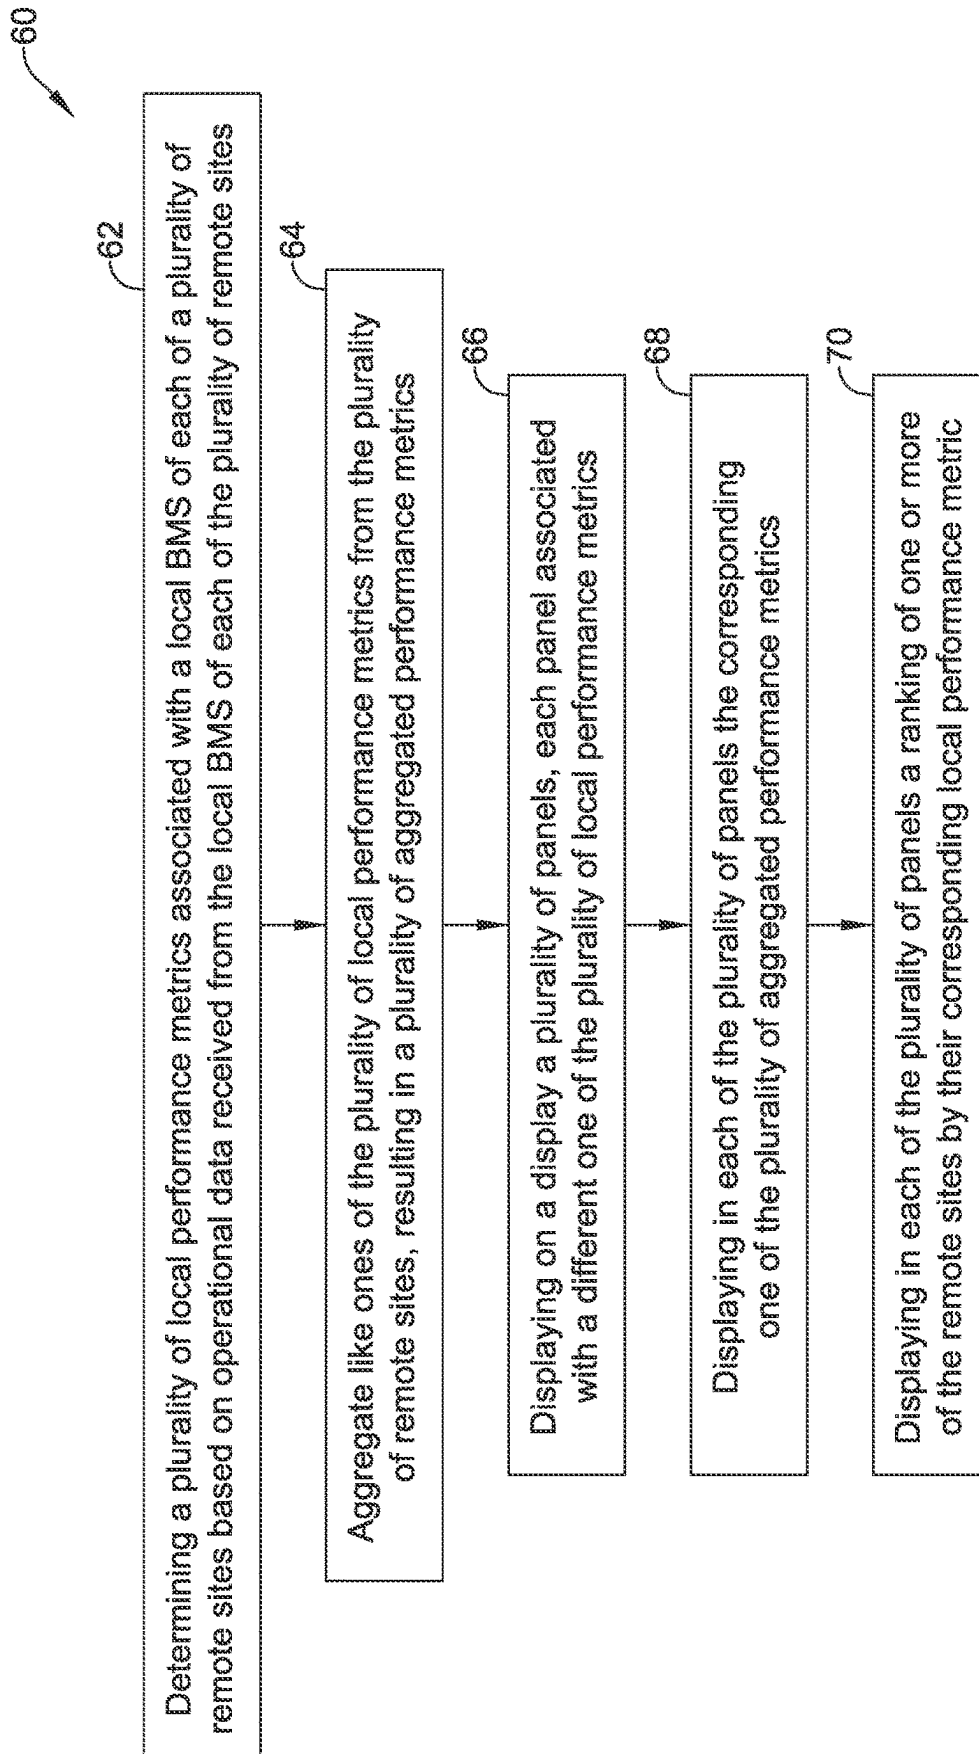


FIG. 5




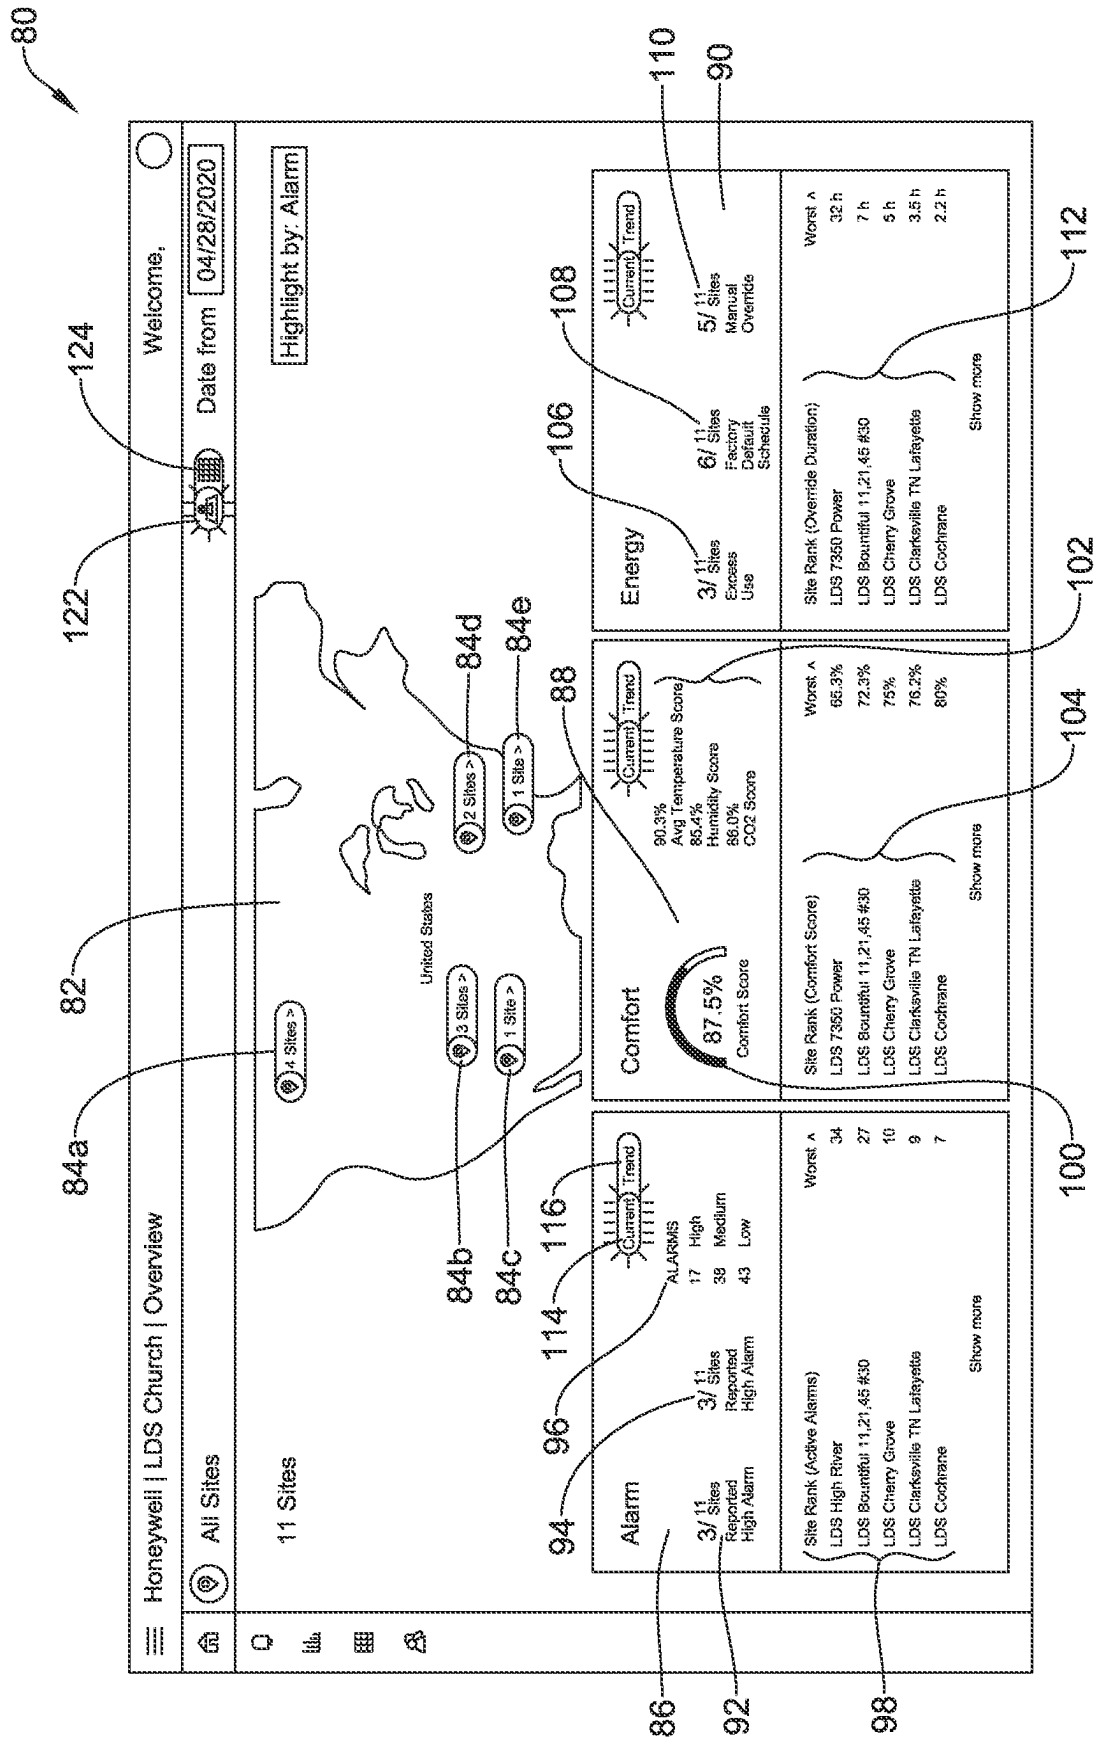


FIG. 6

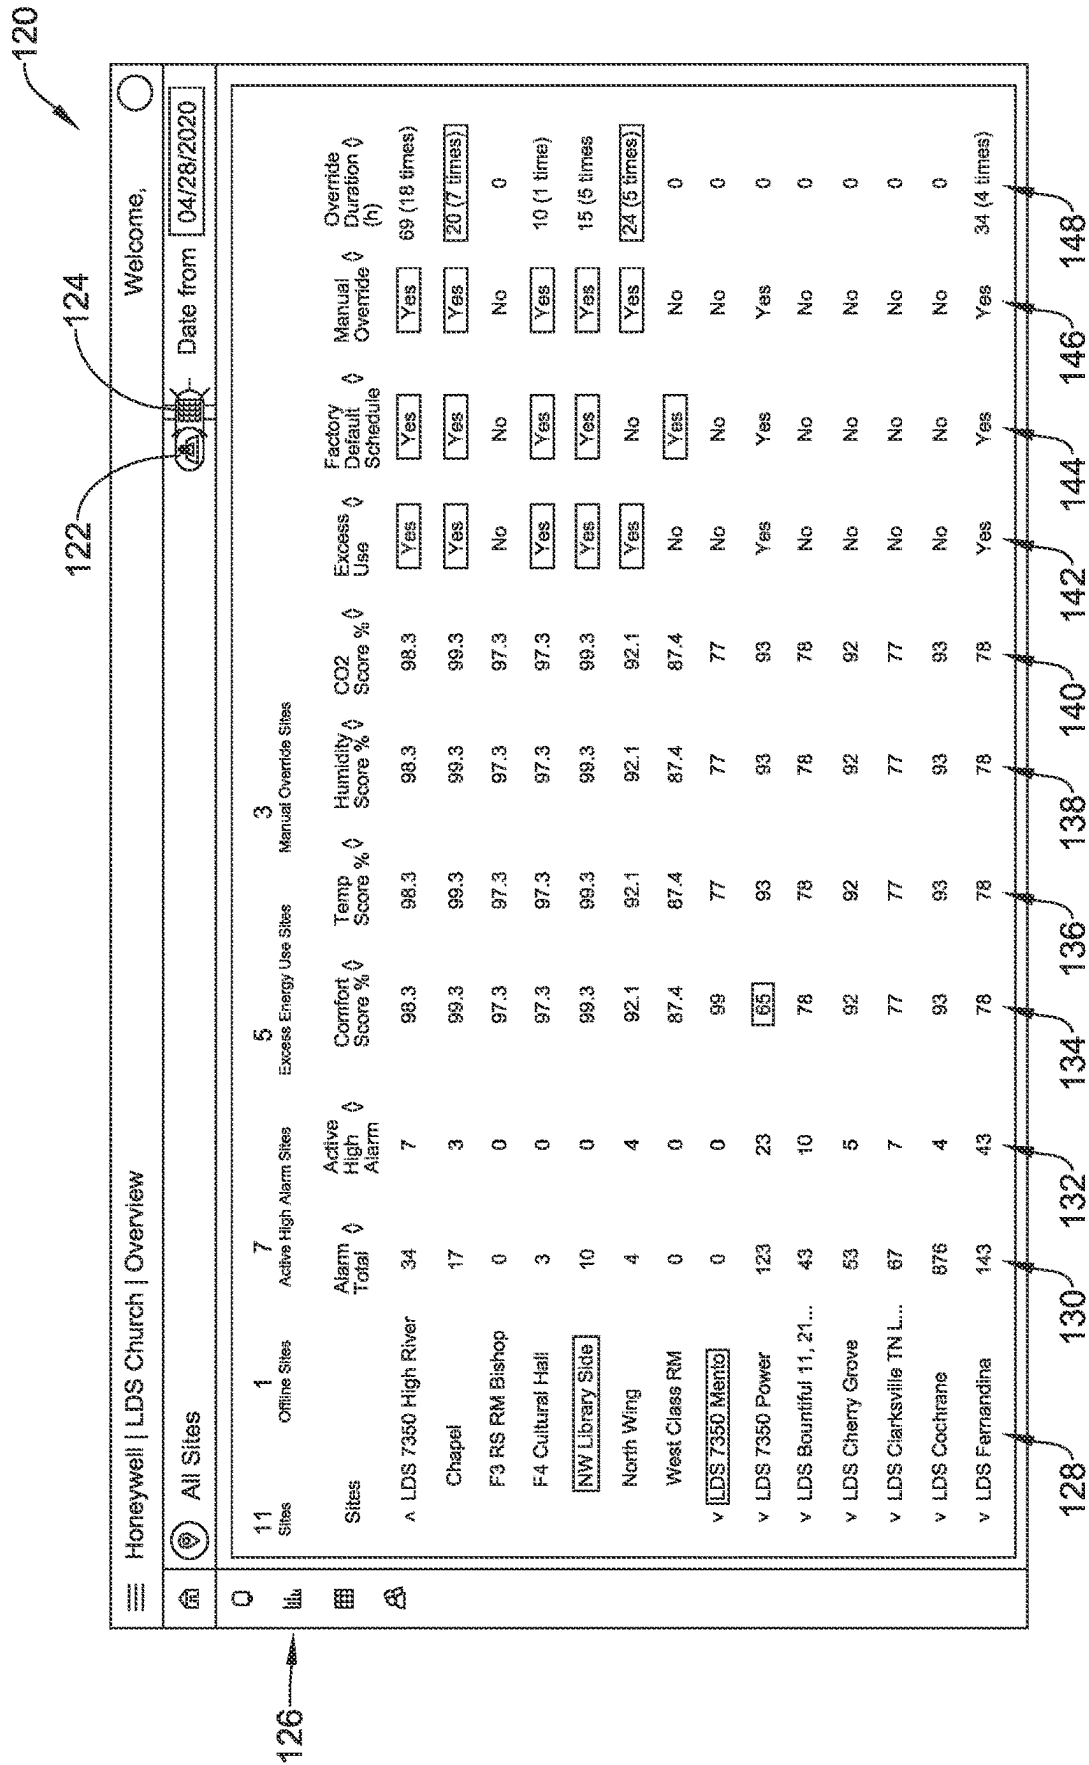

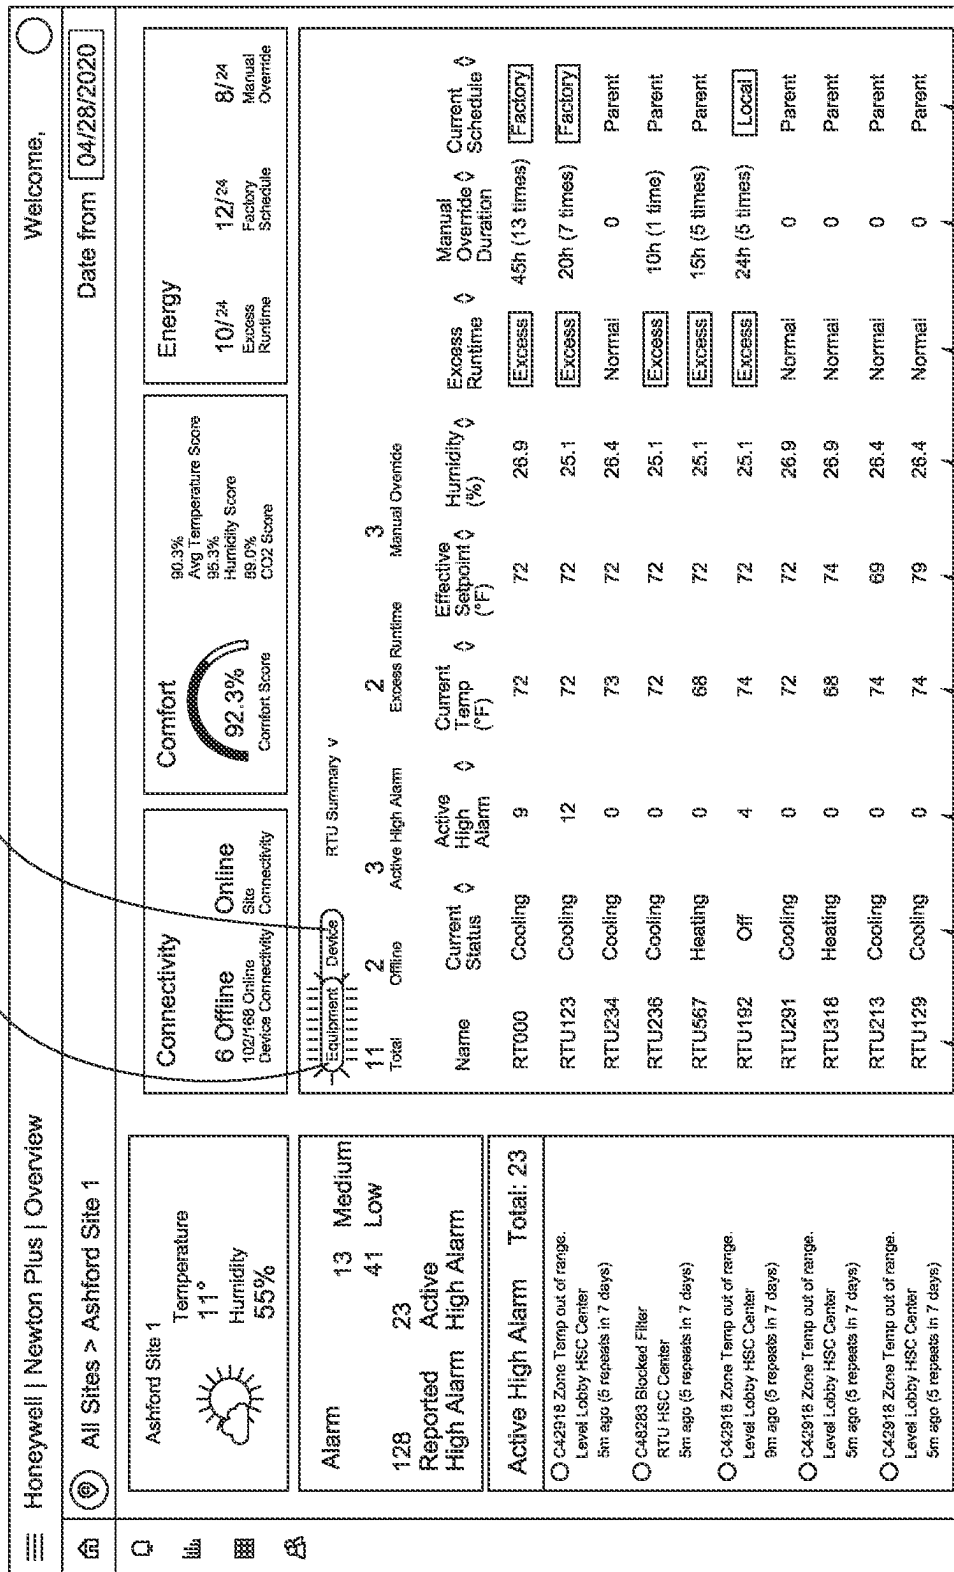

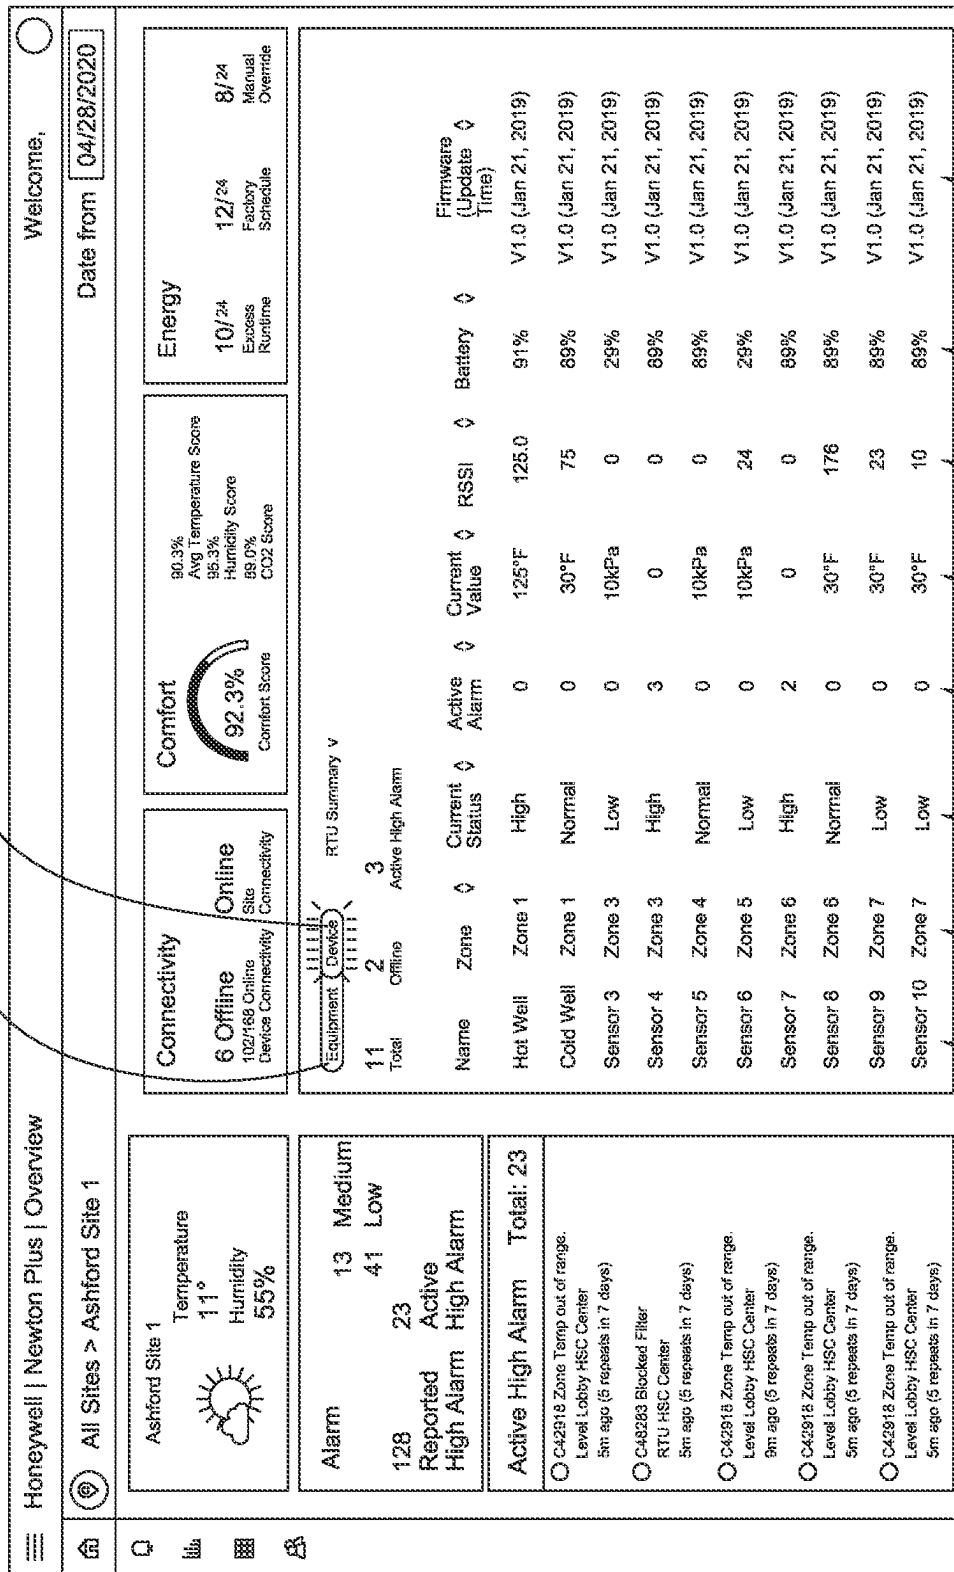

220

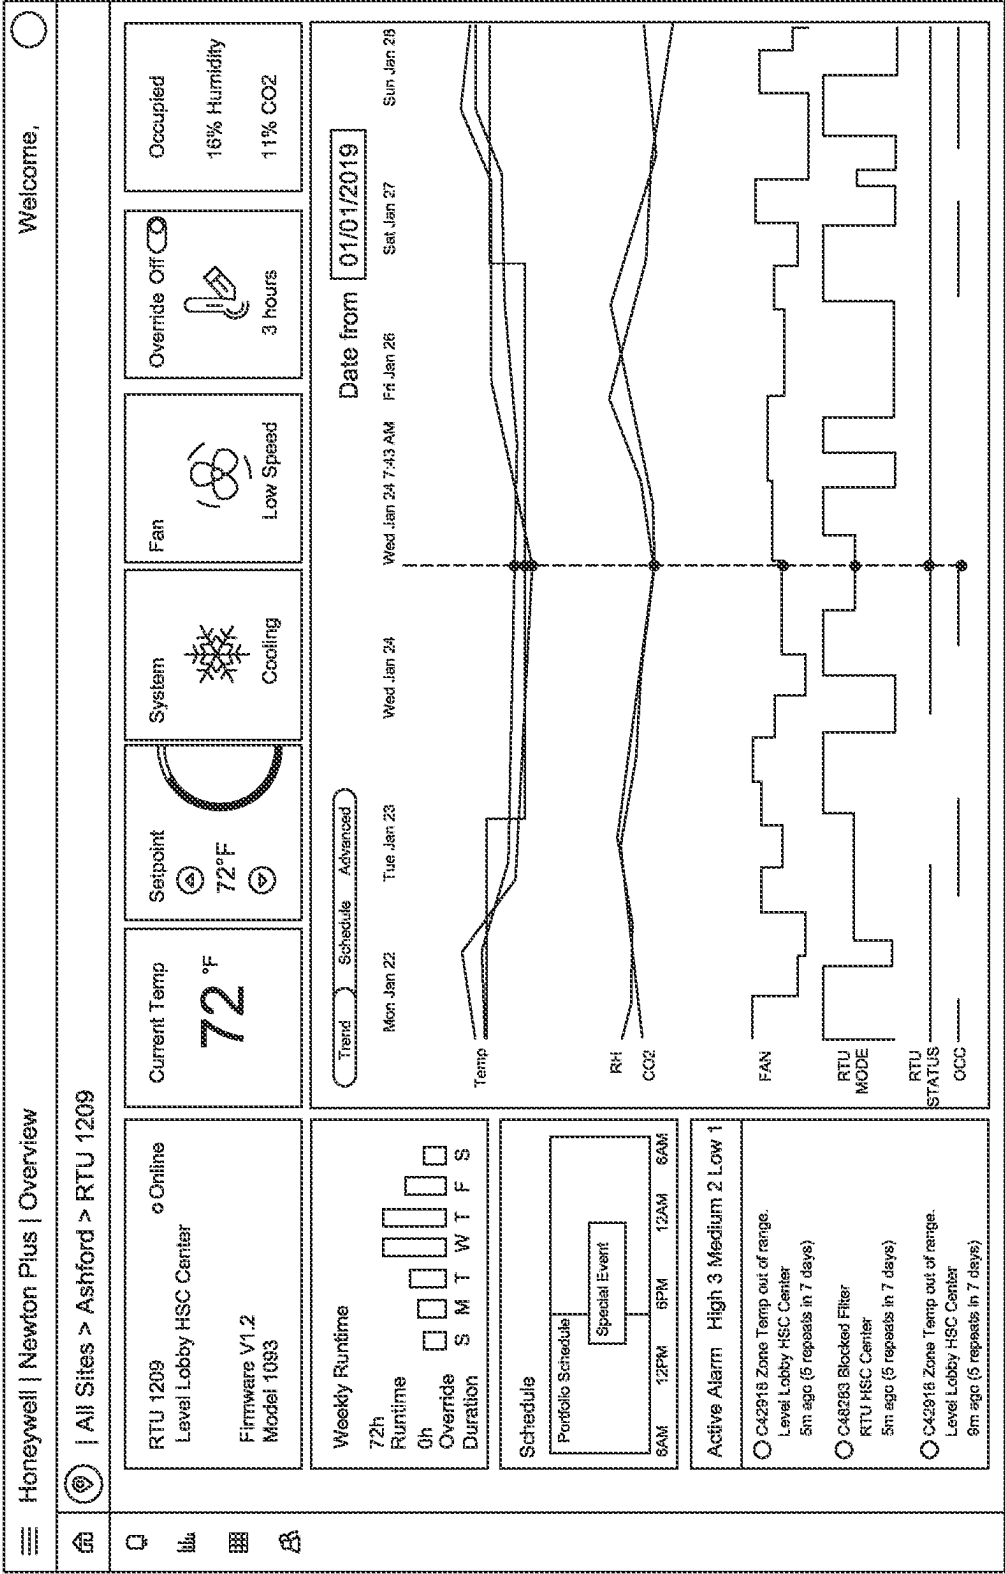


FIG. 10

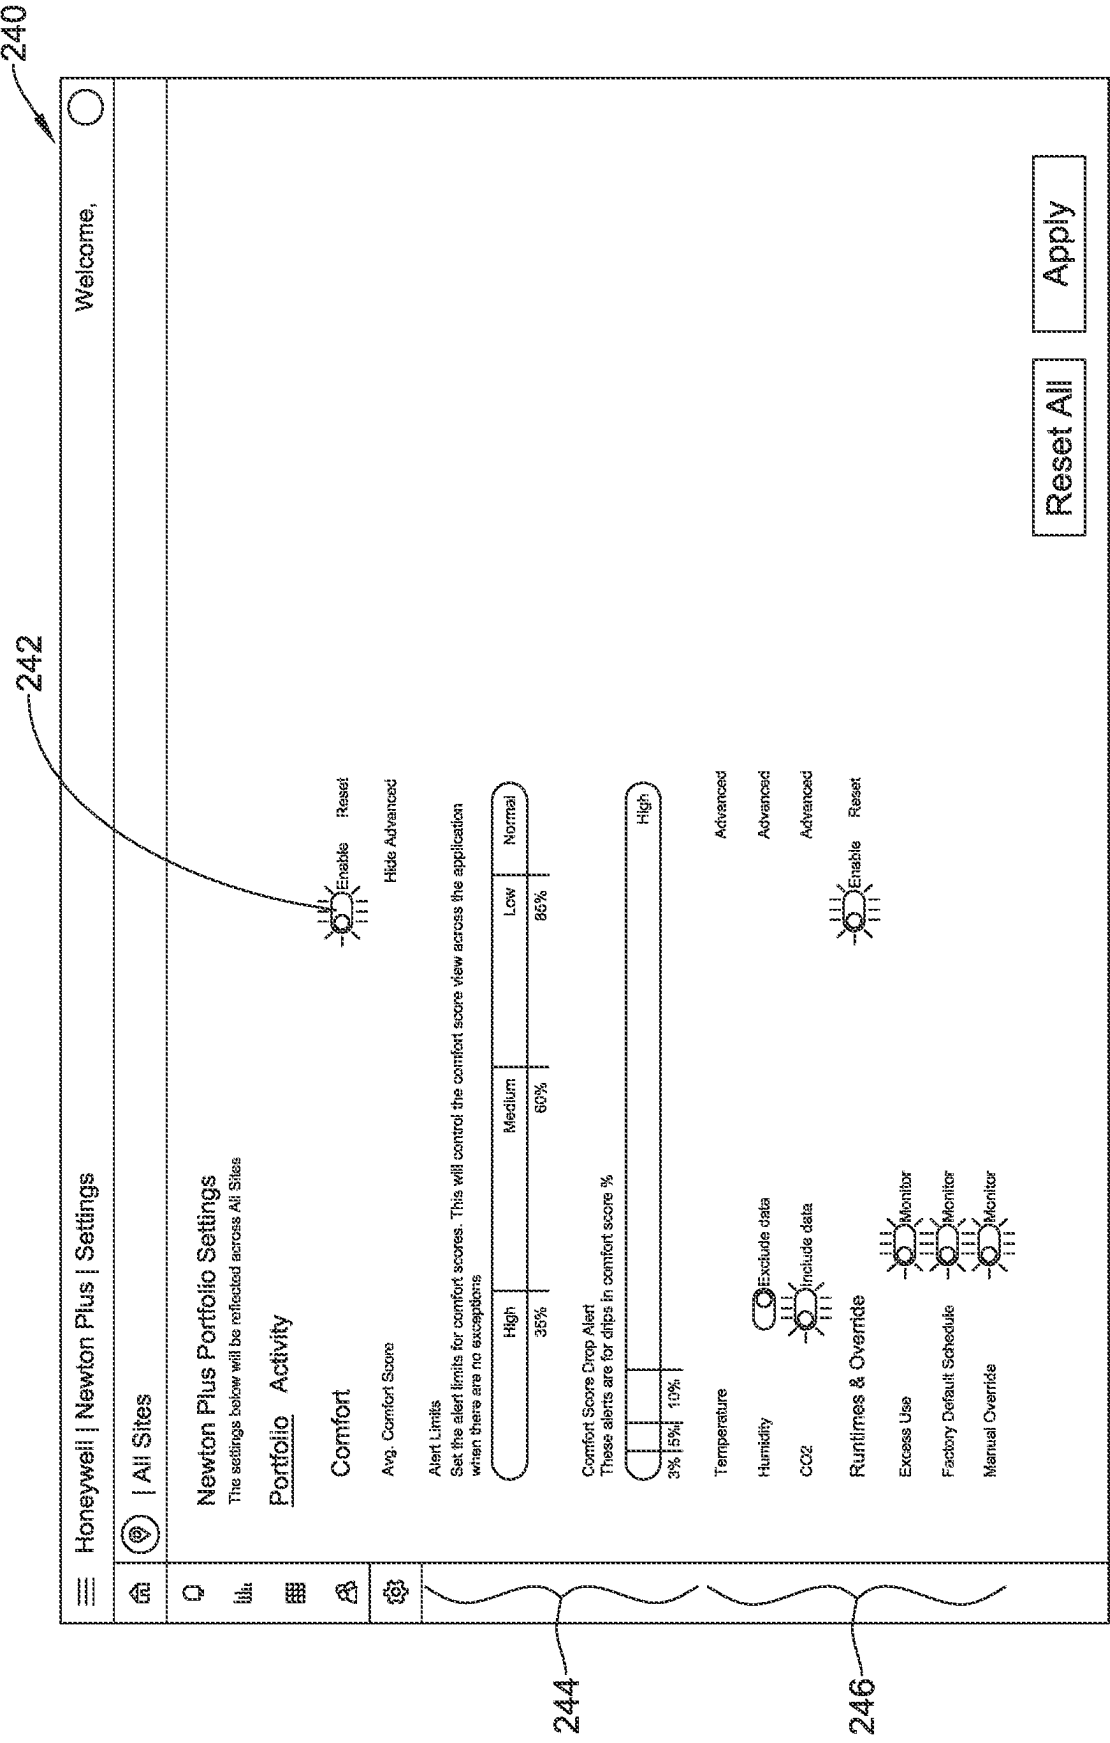


FIG. 11

1

DASHBOARD FOR MULTI SITE MANAGEMENT SYSTEM

This is a continuation of co-pending U.S. patent application Ser. No. 17/345,955, filed Jun. 11, 2021, and entitled “DASHBOARD FOR MULTI SITE MANAGEMENT SYSTEM”, which claims the benefit of U.S. Provisional Application No. 63/039,373, filed Jun. 15, 2020, both of which are hereby incorporated by reference.

TECHNICAL FIELD

The present disclosure relates generally to building management systems, and more particularly to multi-site building management systems.

BACKGROUND

Portfolio managers may be responsible for monitoring tens, hundreds or even thousands of different building locations that may be spread out across different states or even across different nations. Each of the building locations may have a local building management system that provides data on alarms, energy conservation and the like. It can be difficult to easily spot potential problems occurring at a single building location, much less from a multitude of building management systems that are spread out geographically. It will be appreciated that the sheer volume of data, even if limited for example to active alarms, can be overwhelming. What would be desirable would be a multi-site management system that can help a portfolio manager manage the data coming in from a number of different building management systems.

SUMMARY

The present disclosure relates generally to helping a portfolio manager manage the sheer volume of data coming in from a number of different building management systems and assist the portfolio manager in quickly and efficiently detecting and responding to potential issues throughout the portfolio of buildings for which they are responsible. In an example, a multi-site Building Management System (BMS) monitors performance of a local BMS at each of a plurality of remote sites. This example multi-site BMS includes a port, a display and a controller that is operatively coupled to the display and the port. The port receives operational data from the local BMS of each of the plurality of remote sites. The controller is configured to determine a plurality of local performance metrics associated with the local BMS of each of the plurality of remote sites based on the operational data received from the local BMS of each of the plurality of remote sites. The controller is further configured to aggregate like ones of the plurality of local performance metrics from the plurality of remote sites, resulting in a plurality of aggregated performance metrics. The controller is further configured to display on the display a plurality of panels, each panel associated with a different one of the plurality of local performance metrics. The controller also displays in each of the plurality of panels the corresponding one of the plurality of aggregated performance metrics. The controller also displays in each of the plurality of panels a ranking of one or more of the remote sites by their corresponding local performance metric, sometimes with outliers ranked first so they are easily identified and accessed.

In another example, a non-transient computer readable medium has instructions stored thereon. When the instruc-

2

tions are executed by a processor, the processor is caused to determine a plurality of local performance metrics associated with a local BMS of each of a plurality of remote sites based on operational data received from the local BMS of each of the plurality of remote sites. The processor is further caused to aggregate like ones of the plurality of local performance metrics from the plurality of remote sites, resulting in a plurality of aggregated performance metrics. The processor is further caused to display on the display a plurality of panels, each panel associated with a different one of the plurality of local performance metrics. The processor is further caused to display in each of the plurality of panels the corresponding one of the plurality of aggregated performance metrics. The processor is also caused to allow a user to select one of the plurality of remote sites, and in response to selection of one of the plurality of remote sites, display a site view that includes at least some of the local performance metrics associated with the particular selected remote site.

In another example, a method monitors a performance of a local BMS at each of a plurality of remote sites. A plurality of local performance metrics associated with a local BMS of each of a plurality of remote sites are determined based on operational data received from the local BMS of each of the plurality of remote sites. Like ones of the plurality of local performance metrics from the plurality of remote sites are aggregated, resulting in a plurality of aggregated performance metrics. A plurality of panels are displayed on a display, each panel associated with a different one of the plurality of local performance metrics. The corresponding one of the plurality of aggregated performance metrics are displayed in each of the plurality of panels. A ranking of one or more of the remote sites by their corresponding local performance metric is also displayed in each of the plurality of panels.

The preceding summary is provided to facilitate an understanding of some of the innovative features unique to the present disclosure and is not intended to be a full description. A full appreciation of the disclosure can be gained by taking the entire specification, claims, figures, and abstract as a whole.

BRIEF DESCRIPTION OF THE FIGURES

The disclosure may be more completely understood in consideration of the following description of various examples in connection with the accompanying drawings, in which:

FIG. 1 is a schematic block diagram of an illustrative multi-site BMS operatively coupled to a number of remote sites;

FIG. 2 is a schematic block diagram of an illustrative multi-site BMS usable in the illustrative building system of FIG. 1;

FIG. 3 is a flow diagram showing an illustrative method using the illustrative multi-site BMS of FIG. 2;

FIG. 4 is a flow diagram showing an illustrative method using the illustrative multi-site BMS of FIG. 2;

FIG. 5 is a flow diagram showing an illustrative method using the illustrative multi-site BMS of FIG. 2; and

FIGS. 6 through 11 are illustrative dashboard screens that may be generated by the illustrative multi-site BMS of FIG. 2.

While the disclosure is amenable to various modifications and alternative forms, specifics thereof have been shown by way of example in the drawings and will be described in detail. It should be understood, however, that the intention is not to limit the disclosure to the particular examples

described. On the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the disclosure.

DESCRIPTION

The following description should be read with reference to the drawings, in which like elements in different drawings are numbered in like fashion. The drawings, which are not necessarily to scale, depict examples that are not intended to limit the scope of the disclosure. Although examples are illustrated for the various elements, those skilled in the art will recognize that many of the examples provided have suitable alternatives that may be utilized.

All numbers are herein assumed to be modified by the term “about”, unless the content clearly dictates otherwise. The recitation of numerical ranges by endpoints includes all numbers subsumed within that range (e.g., 1 to 5 includes 1, 1.5, 2, 2.75, 3, 3.80, 4, and 5).

As used in this specification and the appended claims, the singular forms “a”, “an”, and “the” include the plural referents unless the content clearly dictates otherwise. As used in this specification and the appended claims, the term “or” is generally employed in its sense including “and/or” unless the content clearly dictates otherwise.

It is noted that references in the specification to “an embodiment”, “some embodiments”, “other embodiments”, etc., indicate that the embodiment described may include a particular feature, structure, or characteristic, but every embodiment may not necessarily include the particular feature, structure, or characteristic. Moreover, such phrases are not necessarily referring to the same embodiment. Further, when a particular feature, structure, or characteristic is described in connection with an embodiment, it is contemplated that the feature, structure, or characteristic is described in connection with an embodiment, it is contemplated that the feature, structure, or characteristic may be applied to other embodiments whether or not explicitly described unless clearly stated to the contrary.

FIG. 1 is a schematic block diagram of an illustrative building management system 10. In its broadest terms, the illustrative building management system 10 includes a multi-site BMS 12 and a plurality of remote sites 14 operatively coupled to the multi-site BMS. While a total of three remote sites 14 are shown, it will be appreciated that this is merely illustrative, as the multi-site BMS 12 may oversee and/or monitor operations of a large number of remote sites 14. The remote sites 14 may be distributed across a large geographic area. Each of the remote sites 14 are individually labeled as 14a, 14b, 14c and may each represent any of a variety of different types of sites. While each of the remote sites 14 may be described herein as being buildings, this is not required in all cases. For example, some of the remote sites 14 may also represent factories or other processing facilities.

In the example shown, each of the remote sites 14 include a local BMS 16, individually labeled as 16a, 16b, 16c. In some cases, some of the remote sites 14 may not include a local BMS 16. In such cases, the equipment 18, 20 and/or controllers (not illustrated) that control operation of the equipment 18, 20 may communicate directly with the gateway 22. In some cases, information pertaining to operation of the equipment 18, 20 may be accessible by logging into a local system (not illustrated), or even into the local controllers, with a local dashboard displayed on a web browser or a smart device such as a tablet or smart phone.

Each local BMS 16 may be considered as being operably coupled with a variety of different equipment 18, 20 that is located at the remote site 14. It will be appreciated that there will typically be many more pieces of equipment 18, 20 than the two that are illustrated at each remote site 14. The equipment 18, 20 is individually labeled as 18a, 20a, 18b, 20b, 18c, 20c, and may include Heating, Ventilating and Air Conditioning (HVAC) system components. The equipment 18, 20 may include lighting system components, security system components, and the like. Each BMS 16 may be configured to receive operational data from the equipment 18, 20 and to formulate control commands for the equipment 18, 20 in response to the received operational data. Each local BMS 16 may be configured to enable local control of the equipment 18, 20, as well as local monitoring of the equipment 18, 20.

In some cases, the local BMS 16 may be configured to provide operational data to the multi-site BMS 12. In order to communicate with the multi-site BMS 12, in some cases each of the remote sites 14 may include a gateway 22, individually labeled as 22a, 22b, 22c. The gateways 22, if present, may provide a way by which each local BMS 16 can communicate with the multi-site BMS 12. The gateways 22 may provide a means for operational data to be uploaded from each local BMS 16 to the multi-site BMS 12 as well as control commands to be downloaded from the multi-site BMS 12 to each local BMS 16. In some cases, the gateways 22 may be configured to download software packages from the multi-site BMS 12 that better configures each local BMS 16 for communication with the multi-site BMS 12.

FIG. 2 is a schematic block diagram of the illustrative multi-site BMS 12. The multi-site BMS 12 may be considered as being configured to monitor the performance of the local BMS 16 at each of the remote sites 14. The multi-site BMS 12 includes a port 24 that is configured to receive operational data from the local BMS 16 at each of the remote sites 14. The multi-site BMS includes a display 26 and a controller 28 that is operatively coupled to the port 24 and to the display 26. The controller 28 may be configured to determine a plurality of local performance metrics associated with the local BMS 16 of each of the plurality of remote sites 14 based on the operational data received from the local BMS 16 of each of the plurality of remote sites 14. One of the local performance metrics may be associated with alarms that are issued by the local BMS 16. Another of the local performance metrics may be associated with comfort provided by the local BMS 16. Another of the local performance metrics may be associated with energy usage by the local BMS 16. These are just examples.

The controller 28 may be configured to aggregate like ones of the plurality of local performance metrics from the plurality of remote sites 14, resulting in a plurality of aggregated performance metrics. For example, the local performance metrics associated with alarms from each of the remote sites may be rolled up or aggregated into one or more aggregated performance metrics associated with alarms. Aggregating may, for example, include one or more of averaging like ones of the plurality of local performance metrics from the plurality of remote sites 14 or summing like ones of the plurality of local performance metrics from the plurality of remote sites 14. Alternatively, or in addition, aggregating may include computing a score based on like ones of the plurality of local performance metrics from the plurality of remote sites 14 and/or ranking like ones of the plurality of local performance metrics from the plurality of remote sites 14. These are just examples.

5

The controller **28** may display on the display **26** a plurality of panels, each panel associated with a different one of the plurality of local performance metrics. The controller **28** may also display in each panel the corresponding one of the plurality of aggregated performance metrics. In some cases, the controller **28** may display in each of the plurality of panels a ranking of one or more of the remote sites **14** by their corresponding local performance metric.

In some cases, a first one of the plurality of panels that are displayed on the display **26** may be associated with a first local performance metric that is associated with alarms that are issued by the local BMS **16**. A second one of the plurality of panels that are displayed on the display **26** may be associated with a second local performance metric that is associated with comfort provided by the local BMS **16**. A third one of the plurality of panels that are displayed on the display **26** may be associated with a third local performance metric that is associated with energy usage by the local BMS **16**. These are just examples.

In some instances, the controller **28** may be configured to process each of the plurality of local performance metrics of each of the plurality of remote sites **14** to identify those that do not meet a predefined criteria. The controller **28** may be configured to classify each of the plurality of local performance metrics of each of the plurality of remote sites **14** that do not meet the predefined criteria as needing attention. In some cases, the controller **28** may be configured to aggregate like ones of the plurality of local performance metrics from the plurality of remote sites **14** that are classified as needing attention, and display an indication of the aggregation of those needing attention on the corresponding one of the plurality of panels.

In some cases, the controller **28** may be configured to display a map view adjacent the plurality of panels, wherein the map view displays a geographical location of at least some of the plurality of remote sites **14**. The controller **28** may allow a user to select a sub-set of the plurality of remote sites **14** on the map view, and in response, aggregate like ones of the plurality of local performance metrics from only the sub-set of the plurality of remote sites **14**, and display in each of the plurality of panels the corresponding one of the plurality of aggregated performance metrics for only the sub-set of the plurality of remote sites.

The controller **28** may be configured to allow a user to select one of the plurality of remote sites **14** and, in response to selection of one of the plurality of remote sites **14**, display a site view that includes at least some of the local performance metrics associated with the particular selected remote site **14**. In some cases, the controller **28** is also configured to, in response to selection of one of the plurality of remote sites **14**, display performance indicators associated with one or more pieces of equipment **18, 20** that are part of the local BMS **16** at the selected remote site and to allow a user to select one of the pieces of equipment **18, 20** that are part of the local BMS **16** at the selected remote site **14**. In response to selection of one of the pieces of equipment **18, 20** that are part of the local BMS **16** at the selected remote site **14**, the controller **28** is configured to display an equipment view that includes additional information associated with the operation of the to select one of the pieces of equipment **18, 20**. In some cases, the additional information associated with the operation of the selected one of the pieces of equipment may include one or more alarms issued by the selected one of the pieces of equipment **18, 20**, sensor values associated with the operation of the select one of the pieces of equipment **18, 20**, control signals associated with the operation of the select

6

one of the pieces of equipment **18, 20**, and/or a schedule associated with the select one of the pieces of equipment **18, 20**.

FIG. **3** is a flow diagram showing an illustrative method **30** that may be carried out by the multi-site BMS **12**. A plurality of local performance metrics associated with a local BMS of each of a plurality of remote sites **14** is determined based on operational data received from the local BMS **16** of each of the plurality of remote sites **14**, as indicated at block **32**. Like ones of the plurality of local performance metrics from the plurality of remote sites **14** are aggregated, resulting in a plurality of aggregated performance metrics, as indicated at block **34**. A plurality of panels are displayed on the display **26**, each panel being associated with a different one of the plurality of local performance metrics, as indicated at block **36**. The corresponding one of the plurality of aggregated performance metrics are displayed in each of the plurality of panels, as indicated at block **38**.

As an example, a first one of the plurality of panels may be associated with a first local performance metric such as alarms that are issued by the local BMS **16**. A second one of the plurality of panels may be associated with a second local performance metric such as comfort provided by the local BMS **16**. A third one of the plurality of panels may be associated with a third local performance metric such as energy usage by the local BMS **16**. A user is allowed to select one of the plurality of remote sites **14**, as indicated at block **40**. In response to selection of one of the plurality of remote sites **14**, a site view is displayed that includes at least some of the local performance metrics associated with the particular selected remote site **14**, as indicated at block **42**.

FIG. **4** is a flow diagram showing an illustrative method **50** that may be carried out by the multi-site BMS **12**. A plurality of local performance metrics associated with a local BMS of each of a plurality of remote sites **14** is determined based on operational data received from the local BMS **16** of each of the plurality of remote sites **14**, as indicated at block **32**. Like ones of the plurality of local performance metrics from the plurality of remote sites **14** are aggregated, resulting in a plurality of aggregated performance metrics, as indicated at block **34**. A plurality of panels are displayed on the display **26**, each panel being associated with a different one of the plurality of local performance metrics, as indicated at block **36**. The corresponding one of the plurality of aggregated performance metrics are displayed in each of the plurality of panels, as indicated at block **38**. A user is allowed to select one of the plurality of remote sites **14**, as indicated at block **40**.

In response to selection of one of the plurality of remote sites **14**, performance indicators associated with one or more pieces of equipment **18, 20** that are part of the local BMS **16** at the selected remote site **14** are displayed, as indicated at block **52**. A user is allowed to select one of the pieces of equipment **18, 20** that are part of the local BMS **16** at the selected remote site **14**, as indicated at block **54**. In response to selection of one of the pieces of equipment **18, 20** that are part of the local BMS **16** at the selected remote site **14**, an equipment view is displayed that includes additional information associated with the operation of the selected one of the pieces of equipment **18, 20**, as indicated at block **56**. In some cases, the additional information associated with the operation of the selected one of the pieces of equipment **18, 20** may include one or more of alarms issued by the selected one of the pieces of equipment **18, 20**, sensor values associated with the operation of the select one of the pieces of equipment **18, 20**, control signals associated with the

7

operation of the select one of the pieces of equipment **18, 20** and a schedule associated with the select one of the pieces of equipment **18, 20**.

FIG. 5 is a flow diagram showing an illustrative method **60** for monitoring a performance of a local BMS **16** at each of a plurality of remote sites **14**. A plurality of local performance metrics associated with a local BMS **16** of each of a plurality of remote sites **14** are determined based on operational data received from the local BMS **16** of each of the plurality of remote sites **14**, as indicated at block **62**. Like ones of the plurality of local performance metrics from the plurality of remote sites **14** are aggregated, resulting in a plurality of aggregated performance metrics, as indicated at block **64**. In some cases, aggregating includes one or more of averaging like ones of the plurality of local performance metrics from the plurality of remote sites **14** or summing like ones of the plurality of local performance metrics from the plurality of remote sites **14**. Aggregating may also include one or more of computing a score based on like ones of the plurality of local performance metrics from the plurality of remote sites **14** and ranking like ones of the plurality of local performance metrics from the plurality of remote sites **14**.

A plurality of panels are displayed on the display **26**, each panel associated with a different one of the plurality of local performance metrics, as indicated at block **66**. The corresponding one of the plurality of aggregated performance metrics are displayed in each of the plurality of panels, as indicated at block **68**. A ranking of one or more of the remote sites **14** by their corresponding local performance metric are displayed, as indicated at block **70**.

FIGS. 6 through 11 are screen shots showing examples of some of the screens that may be generated by the multi-site BMS **12**. FIG. 6 shows a portfolio level dashboard **80**. In some cases, as illustrated, the portfolio level dashboard **80** includes a map **82** that shows a geographic area in which a number of remote sites **14** are located. As shown, the map **82** includes several icons **84** that each represent one or more remote sites **14**. For example, an icon **84a** represents a total of four remote sites **14**, an icon **84b** represents a total of three remote sites **14**, an icon **84c** represents a single remote site **14**, an icon **84d** represents a total of two remote sites **14** and an icon **84e** represents a single remote site **14**. Each of the icons **84** may be selected in order to view additional information regarding the remote sites **14** that are represented by the particular icon **84**.

In some cases, the icons **84** may be color coded. For example, a first color may represent alarms, a second color may represent comfort and a third color may represent energy. In some instances, different colors may be used to represent varying degrees of seriousness. For example, red may be used to indicate that there is a serious alarm at one of the remote sites **14** while yellow may be used to indicate a less serious alarm at one of the remote sites **14**. Various colors may be used to indicate how many problems are detected at a particular remote site **14**, for example.

The portfolio level dashboard **80** includes a number of panels. As illustrated, the portfolio level dashboard **80** includes an Alarm panel **86**, a Comfort panel **88** and an Energy panel **90**. In some instances, a user may determine that they are not interested in comfort, for example, and the controller **28** may be configured to no longer display the Comfort panel **88**. This is just an example. The Alarm panel **86** may include a Reported Alarms icon **92** that shows how many alarms have been reported, an Active Alarms icon **94** that shows how many alarms are currently active and an Alarms Listing icon **96** that provides a listing of how many high alarms, how many medium alarms and how many low

8

alarms are present. The Alarm panel **86** also includes a listing **98** of the site rankings of the remote sites **14** reporting alarms. The listing **98** may be sorted, if desired, to reveal superior performing sites and/or underperforming sites based on total number of alarms, number of unresolved alarms, number of serious alarms, frequency of alarms, average time taken to resolve an alarm, and or any other suitable criteria.

In the example shown, the Comfort panel **88** includes an overall Comfort Score icon **100** that provides a visual indication of an overall comfort score of the remote sites. The Comfort panel **88** also includes a listing **102** of the parameters being used to determine the overall comfort score. As shown, the overall comfort score is based at least in part upon an average temperature score, a humidity score and a carbon dioxide (CO₂) score. The Comfort panel **88** also includes a listing **104** of particular sites contributing to the overall comfort score. The listing **104** may be sorted, if desired, to reveal superior performing sites and/or underperforming sites. For example, each remote site may have a computed local comfort score based on the performance of the local BMS, and the listing **104** may be sorted by the local comfort score of each site. This is just one example.

In the example shown, the Energy panel **90** includes an Excess Use icon **106** that shows how many sites are reporting excessive energy usage, a Factory Default Schedule icon **108** that shows how many sites are using a factory default schedule and a Manual Override icon **110** that shows how many sites are operating under a manual override. The Energy panel **90** also includes a listing **112** that shows the sites contributing to the Excess Use icon **106**, the Factory Default Schedule icon **108** and the Manual Override icon **110**. The listing **112** may be sorted, if desired, to reveal superior performing sites and/or underperforming sites.

In the example shown, each of the Alarm panel **86**, the Comfort panel **88** and the Energy panel **90** include a Current button **114** and Trend button **116**. The Current button **114** may be selected to display current information (as is shown in FIG. 6). The Trend button **116** may be selected to display historical data including historical trends. In some cases, historical data may be shown in graphical form within the appropriate panel such as the Alarm panel **86**, the Comfort panel **88** and the Energy panel **90**.

In some cases, it is possible to toggle between the portfolio level dashboard **80** shown in FIG. 6 with a map view and a portfolio dashboard **120** with a list view. An example list view is shown in FIG. 7. The portfolio level dashboards **80, 120** include a map view icon **122** and a list view icon **124**. It can be seen that in FIG. 6, the map view icon **122** has been selected while in FIG. 7, the list view icon **124** has been selected. The portfolio level dashboard **120** in list view includes a row **126** that provides information as to the number of sites, how many sites are offline, how many are currently in alarm, how many are currently using too much energy, and the like.

The portfolio level dashboard **120** in list view includes a Sites column **128**, an Alarm total column **130**, an Active High Alarm column **132**, a Comfort Score column **134**, a Temperature Score column **136**, a Humidity Score column **138**, a CO₂ Score column **140**, an Excess Use column **142**, a Factory Default Schedule column **144**, a Manual Override column **146** and an Override Duration column **148**. It will be appreciated that much of the information provided in the portfolio level dashboard **80** in map view is also shown in the portfolio level dashboard **120** in list view. A point of interest in the Site column **128** is that sites are organized in a hierarchal manner, with individual components listed

under their corresponding header. For example, the header LDS 7350 High River has been expanded to reveal Chapel, F3 RS RM Bishop, and so on. In the example shown, Chapel, F3 RS RM Bishop are each individual pieces of equipment (e.g. a rooftop unit) at the LDS 7350 High River site.

FIG. 8 shows a site level dashboard **160** that shows an equipment list view while FIG. 9 shows a site level dashboard **190** that shows a device list view. The site level dashboards **160**, **190** may be reached by selecting the site on the portfolio level dashboard. In some cases, a user may enter a search query into the multi-site BMS to identify a desired remote site, and then select the site to reach the desired site level dashboards **160**, **190**. These are just example.

In the example shown, once the site level dashboard **160**, **190** is reached, a user is able to select between the equipment list view and the device list view by toggling either an equipment view icon **162** or a device list view icon **164**. The site level dashboard **160** allows a user to see all of the equipment at a particular site in a single list that allows the user to switch between different equipment types such as but not limited to RTU (roof top units), VRF (variable refrigerant flow units) and AHU (air handling units). As illustrated, roof top units have been selected. The site level dashboard **160** includes a Name column **166**, a Current Status column **168**, an Active High Alarm column **170**, a Current Temperature column **172**, an Effective Setpoint column **174**, a Humidity column **176**, an Excess Runtime column **178**, a Manual Override Duration column **180** and a Current Schedule column **182**.

The site level dashboard **190** with the device list view icon **164** selected shows information for devices such as sensors, lighting and the like. FIG. 9 shows a sensor summary list. The site level dashboard **190** includes a Name column **192**, a Zone column **194**, a Current Status column **196**, an Active Alarm column **198**, a Current Value column **200**, an RSSI column **202**, a Battery column **204** and a Firmware Update column **206**.

FIG. 10 provides an example of an equipment level dashboard **220** that allows a user to monitor, command and control the current status, parameter values and/or control signals for a selected piece of equipment. In some cases, a multiple objects trend view allows visualization of each parameter over time. This can provide for improved user interaction and interpretation for better trouble shooting. Scheduling of the equipment can also be seen. In some cases, the equipment level dashboard **220** may be configured to have a generic design that can adapt to any of a variety of different types of equipment without requiring additional configuration. The equipment level dashboard **220** may be reached by selecting the appropriate piece of equipment on the site level dashboard **160**, for example.

As noted, in some cases, the user may be able to specify which panels are displayed on the portfolio level dashboard **80**. FIG. 11 provides a screen **240** that may be used to specify whether the Comfort panel **88** is displayed. Similar screens may be displayed (not shown) to specify whether the Alarms panel **86** and/or the Energy panel **90** will be displayed. The screen **240** includes a slider **242** that may be switched between enable and disable. If enabled, the Comfort panel **88** will be displayed. If disabled, the Comfort panel **88** will not be displayed. In some cases, if the Comfort panel **88** is not displayed, the other panels such as the Alarms panel **86** and the Energy panel **90** may be displayed over a larger portion of the screen. The screen **240** also includes a section **244** that allows the user to select alarm limits for

comfort. The screen **240** also includes a section **246** that allows the user to select which particular parameters will be included in calculating overall scores.

Having thus described several illustrative embodiments of the present disclosure, those of skill in the art will readily appreciate that yet other embodiments may be made and used within the scope of the claims hereto attached. It will be understood, however, that this disclosure is, in many respects, only illustrative. Changes may be made in details, particularly in matters of shape, size, arrangement of parts, and exclusion and order of steps, without exceeding the scope of the disclosure. The disclosure's scope is, of course, defined in the language in which the appended claims are expressed.

What is claimed is:

1. A multi-site Building Management System (BMS) for monitoring a performance of and controlling a local BMS at each of a plurality of remote sites, wherein each of the plurality of remote sites includes a local BMS, the multi-site BMS comprising:

a port for receiving operational data as the operational data is coming in from the local BMS of each of the plurality of remote sites;

a display;

a controller operatively coupled to the display and the port, the controller configured to:

determine a plurality of local performance metrics associated with the local BMS of each of the plurality of remote sites based on the operational data, wherein the plurality of local performance metrics include different local performance metric types including:

a first performance metric type that is associated with alarms issued by the corresponding local BMS;

a second performance metric type that is associated with comfort provided by the corresponding the local BMS; and

a third performance metric type that is associated with energy usage of the corresponding the local BMS;

process each of the plurality of local performance metrics of each of the plurality of remote sites to identify one or more non-compliant local performance metrics that do not meet a corresponding predefined criteria;

identify like ones of the plurality of local performance metrics of like performance metric type from the plurality of remote sites;

aggregate the like ones of the plurality of local performance metrics of like performance metric type from the plurality of remote sites, resulting in at least one aggregated performance metric for each performance metric type;

concurrently display on the display a plurality of panels, wherein each panel is defined by a visual boundary that extends around a perimeter of the respective panel, and each panel is associated with a different one of the plurality of local performance metric types;

display in each of the plurality of panels at least one of the aggregated performance metrics associated with the corresponding performance metric type;

display a map view concurrently with the plurality of panels, wherein the map view displays a geographical location of at least some of the plurality of remote sites;

11

receive via the map view a user selection of one of the plurality of remote sites via a user interface device associated with the BMS, and in response, update the display to display a site view on the display for the selected one of the plurality of remote sites, wherein the site view for the selected one of the plurality of remote sites displays at least some of the local performance metrics associated with the particular selected remote site and one or more pieces of equipment of the local BMS of the particular selected remote site;

receive via the site view of the selected one of the plurality of remote sites a selection of one or more of the pieces of equipment of the local BMS of the particular selected remote site via the user interface device associated with the BMS, and in response, update the display to display an equipment view on the display, wherein the equipment view displays additional information associated with an operation of the selected one or more pieces of equipment of the local BMS of the particular selected remote site; determine and download one or more control commands to the local BMS of the particular selected remote site by to control one or more pieces of equipment of the corresponding local BMS to improve one or more of the non-compliant local performance metrics; and

the corresponding local BMS executing the one or more downloaded control commands causing the corresponding local BMS to control one or more pieces of equipment of the corresponding local BMS to improve one or more of the non-compliant local performance metrics.

2. The multi-site Building Management System (BMS) of claim 1, wherein the controller is configured to allow a user selection of a sub-set of the plurality of remote sites via the map view, and in response, aggregate like ones of the plurality of local performance metrics of like performance metric type from only the sub-set of the plurality of remote sites, and update the display to display in each of the plurality of panels the corresponding one of the plurality of aggregated performance metrics for only the sub-set of the plurality of remote sites.

3. The multi-site Building Management System (BMS) of claim 2, wherein the sub-set of the plurality of remote sites includes two or more of the plurality of remote sites.

4. The multi-site Building Management System (BMS) of claim 1, wherein the additional information associated with the operation of the selected one of the pieces of equipment includes one or more of:

- alarms issued by the selected one of the pieces of equipment;
- sensor values associated with the operation of the select one of the pieces of equipment;
- control signals associated with the operation of the select one of the pieces of equipment; and
- a schedule associated with the select one of the pieces of equipment.

5. The multi-site Building Management System (BMS) of claim 1, wherein the controller is configured to classify each of the plurality of local performance metrics of each of the plurality of remote sites that do not meet the corresponding predefined criteria as needing attention.

6. The multi-site Building Management System (BMS) of claim 5, wherein the controller is configured to aggregate like ones of the plurality of local performance metrics of like performance metric type from the plurality of remote sites

12

that are classified as needing attention, and display an indication of the aggregation of those needing attention on the corresponding one of the plurality of panels.

7. The multi-site Building Management System (BMS) of claim 1, wherein aggregating comprises one or more of:

- averaging like ones of the plurality of local performance metrics of like performance metric type from the plurality of remote sites;
- summing like ones of the plurality of local performance metrics of like performance metric type from the plurality of remote sites; and
- computing a score based on like ones of the plurality of local performance metrics of like performance metric type from the plurality of remote sites.

8. The multi-site Building Management System (BMS) of claim 1, wherein:

- a first one of the plurality of panels is associated with the first local performance metric type; and
- a second one of the plurality of panels is associated with the second local performance metric type.

9. A non-transient computer readable medium storing thereon instructions that when executed by a processor cause the processor to:

- determine a plurality of local performance metrics associated with a local BMS of each of a plurality of remote sites based on operational data, wherein the plurality of local performance metrics include different local performance metric types including:

- a first performance metric type that is associated with alarms issued by the corresponding local BMS;
- a second performance metric type that is associated with comfort provided by the corresponding the local BMS; and
- a third performance metric type that is associated with energy usage of the corresponding the local BMS;

process each of the plurality of local performance metrics of each of the plurality of remote sites to identify one or more non-compliant local performance metrics that do not meet a corresponding predefined criteria;

identify like ones of the plurality of local performance metrics of like performance metric type from the plurality of remote sites;

aggregate like ones of the plurality of local performance metrics of like performance metric type from the plurality of remote sites, resulting in at least one aggregated performance metric for each performance metric type;

concurrently display on a display a plurality of panels, wherein each panel is defined by a visual boundary that extends around a perimeter of the respective panel, and each panel is associated with a different one of the plurality of local performance metric types;

display in each of the plurality of panels at least one of the aggregated performance metrics associated with the corresponding performance metric type;

display a map view concurrently with the plurality of panels, wherein the map view displays a geographical location of at least some of the plurality of remote sites;

allow via the map view a user selection of one of the plurality of remote sites via a user interface device; in response to selection of one of the plurality of remote sites via the map view, update the display to display a site view for the selected one of the plurality of remote sites that displays at least some of the local performance metrics associated with the particular selected remote site and one or more pieces of equipment of the local BMS of the particular selected remote site;

13

display performance indicators associated with one or more of the pieces of equipment of the local BMS of the particular selected remote site;

receive via the site view of the selected one of the plurality of remote sites a selection of one or more of the pieces of equipment of the local BMS of the particular selected remote site via the user interface device, and in response, update the display to display an equipment view that displays additional information associated with an operation of the selected one of the pieces of equipment of the local BMS of the particular selected remote site;

determine and download one or more control commands to the local BMS of the particular selected remote site to control one or more pieces of equipment of the corresponding local BMS to improve one or more of the non-compliant local performance metrics; and

the corresponding local BMS executing the one or more downloaded control commands causing the corresponding local BMS to control one or more pieces of equipment of the corresponding local BMS to improve one or more of the non-compliant local performance metrics.

10. The non-transient computer readable medium of claim 9, wherein the additional information associated with the operation of the selected one of the pieces of equipment of the local BMS of the particular selected remote site includes one or more of:

- alarms issued by the selected one of the pieces of equipment;
- sensor values associated with the operation of the select one of the pieces of equipment;
- control signals associated with the operation of the select one of the pieces of equipment; and
- a schedule associated with the select one of the pieces of equipment.

11. The non-transient computer readable medium of claim 9, wherein aggregating comprises one or more of:

- averaging like ones of the plurality of local performance metrics of like performance metric type from the plurality of remote sites;
- summing like ones of the plurality of local performance metrics of like performance metric type from the plurality of remote sites; and
- computing a score based on like ones of the plurality of local performance metrics of like performance metric type from the plurality of remote sites.

12. A method for monitoring a performance of a local BMS at each of a plurality of remote sites, wherein each of the plurality of remote sites includes a local BMS that includes one or more pieces of equipment, the method comprising:

- determining a plurality of local performance metrics associated with a local BMS of each of a plurality of remote sites based on operational data, wherein the plurality of local performance metrics include different local performance metric types including:
 - a first performance metric type that is associated with alarms issued by the corresponding local BMS;
 - a second performance metric type that is associated with comfort provided by the corresponding the local BMS; and
 - a third performance metric type that is associated with energy usage of the corresponding the local BMS;
- processing each of the plurality of local performance metrics of each of the plurality of remote sites to

14

- identify one or more non-compliant local performance metrics that do not meet a corresponding predefined criteria;
- identifying like ones of the plurality of local performance metrics of like performance metric type from the plurality of remote sites;
- aggregating the like ones of the plurality of local performance metrics of like performance metric type from the plurality of remote sites, resulting in at least one aggregated performance metric for each performance metric type;
- concurrently displaying on a display a plurality of panels, wherein each panel is defined by a visual boundary that extends around a perimeter of the respective panel, and each panel is associated with a different one of the plurality of local performance metric types;
- displaying in each of the plurality of panels at least one of the aggregated performance metrics associated with the corresponding performance metric type;
- displaying a map view concurrently with the plurality of panels, wherein the map view displays a geographical location of at least some of the plurality of remote sites;
- receiving via the map view a user selection of one of the plurality of remote sites via a user interface device, and in response, updating the display to display a site view on the display for the selected one of the plurality of remote sites, wherein the site view for the selected one of the plurality of remote sites displays at least some of the local performance metrics associated with the particular selected remote site and one or more pieces of equipment of the local BMS of the particular selected remote site;
- receiving via the site view of the selected one of the plurality of remote sites a selection of one or more of the pieces of equipment of the local BMS of the particular selected remote site via the user interface device, and in response, updating the display to display an equipment view on the display, wherein the equipment view displays additional information associated with an operation of the selected one or more pieces of equipment of the local BMS of the particular selected remote site; and
- determining and downloading one or more control commands to the local BMS of the particular selected remote site to control one or more pieces of equipment of the corresponding local BMS to improve one or more of the non-compliant local performance metrics; and
- the corresponding local BMS executing the one or more downloaded control commands causing the corresponding local BMS to control one or more pieces of equipment of the corresponding local BMS to improve one or more of the non-compliant local performance metrics.

13. The method of claim 12, comprising:

- allowing a user selection of a sub-set of the plurality of remote sites via the map view, and in response, aggregate like ones of the plurality of local performance metrics of like performance metric type from only the sub-set of the plurality of remote sites, and updating the display to display in each of the plurality of panels the corresponding one of the plurality of aggregated performance metrics for only the sub-set of the plurality of remote sites.

14. The method of claim 12, wherein the additional information includes one or more of:

15

alarms issued by the selected one of the pieces of equipment;
sensor values associated with the operation of the select
one of the pieces of equipment;
control signals associated with the operation of the select 5
one of the pieces of equipment; and
a schedule associated with the select one of the pieces of
equipment.

* * * * *

16