



US012404740B2

(12) **United States Patent**
Obaidi et al.

(10) **Patent No.:** **US 12,404,740 B2**

(45) **Date of Patent:** **Sep. 2, 2025**

(54) **SACRIFICIAL TOOL FOR PLUGGING AND
ABANDONING A WELLBORE AND
METHODS THEREOF**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **SAUDI ARABIAN OIL COMPANY,**
Dhahran (SA)

6,739,398 B1 * 5/2004 Yokley E21B 23/04
166/123
10,597,986 B2 * 3/2020 Burke E21B 43/10
11,519,244 B2 * 12/2022 Turley E21B 43/10
2014/0000911 A1 * 1/2014 Gorrara E21B 19/16
166/207
2021/0115757 A1 * 4/2021 Murray E21B 33/14

(72) Inventors: **Ibrahim A. Obaidi,** Dhahran (SA);
Nawaf S. Shammari, Dhahran (SA);
Abdulrahman K. Assiri, Dhahran (SA)

* cited by examiner

(73) Assignee: **SAUDI ARABIAN OIL COMPANY,**
Dhahran (SA)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 13 days.

Primary Examiner — William D Hutton, Jr.

Assistant Examiner — Ashish K Varma

(74) *Attorney, Agent, or Firm* — Vorys, Sater, Seymour
and Pease LLP

(21) Appl. No.: **18/181,496**

(22) Filed: **Mar. 9, 2023**

(65) **Prior Publication Data**

US 2024/0301765 A1 Sep. 12, 2024

(51) **Int. Cl.**

E21B 31/18 (2006.01)

E21B 33/14 (2006.01)

E21B 47/10 (2012.01)

(52) **U.S. Cl.**

CPC **E21B 33/14** (2013.01); **E21B 31/18**
(2013.01); **E21B 47/10** (2013.01)

(58) **Field of Classification Search**

CPC E21B 31/18; E21B 33/14


USPC 166/250.01

See application file for complete search history.

(57) **ABSTRACT**

A method includes conveying a sacrificial tool into a well-
bore on a conveyance, the wellbore penetrating one or more
subterranean formations and the sacrificial tool including an
overshot fishing tool, a tubing operatively coupled to and
extending from the overshot fishing tool, and a liner hanger
arranged at an upper end of the tubing. An uphole end of a
downhole tool is received within with the overshot fishing
tool, the downhole tool being stuck in the wellbore adjacent
the one or more subterranean formations. The uphole end of
the downhole tool is sealingly engaged, and a cement is
subsequently circulated through the sacrificial tool and the
downhole tool and discharged into an annulus defined
between the downhole tool and an inner wall of the well-
bore.

15 Claims, 5 Drawing Sheets

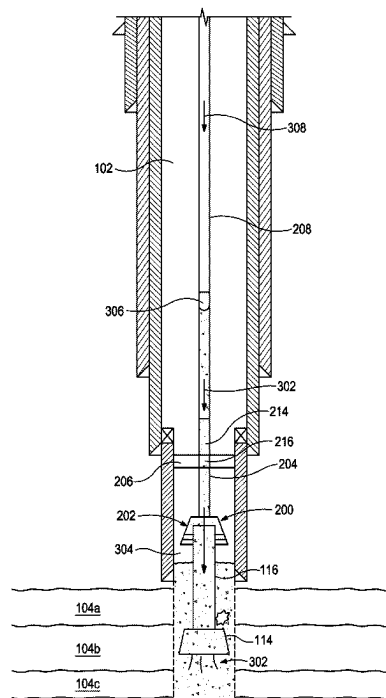

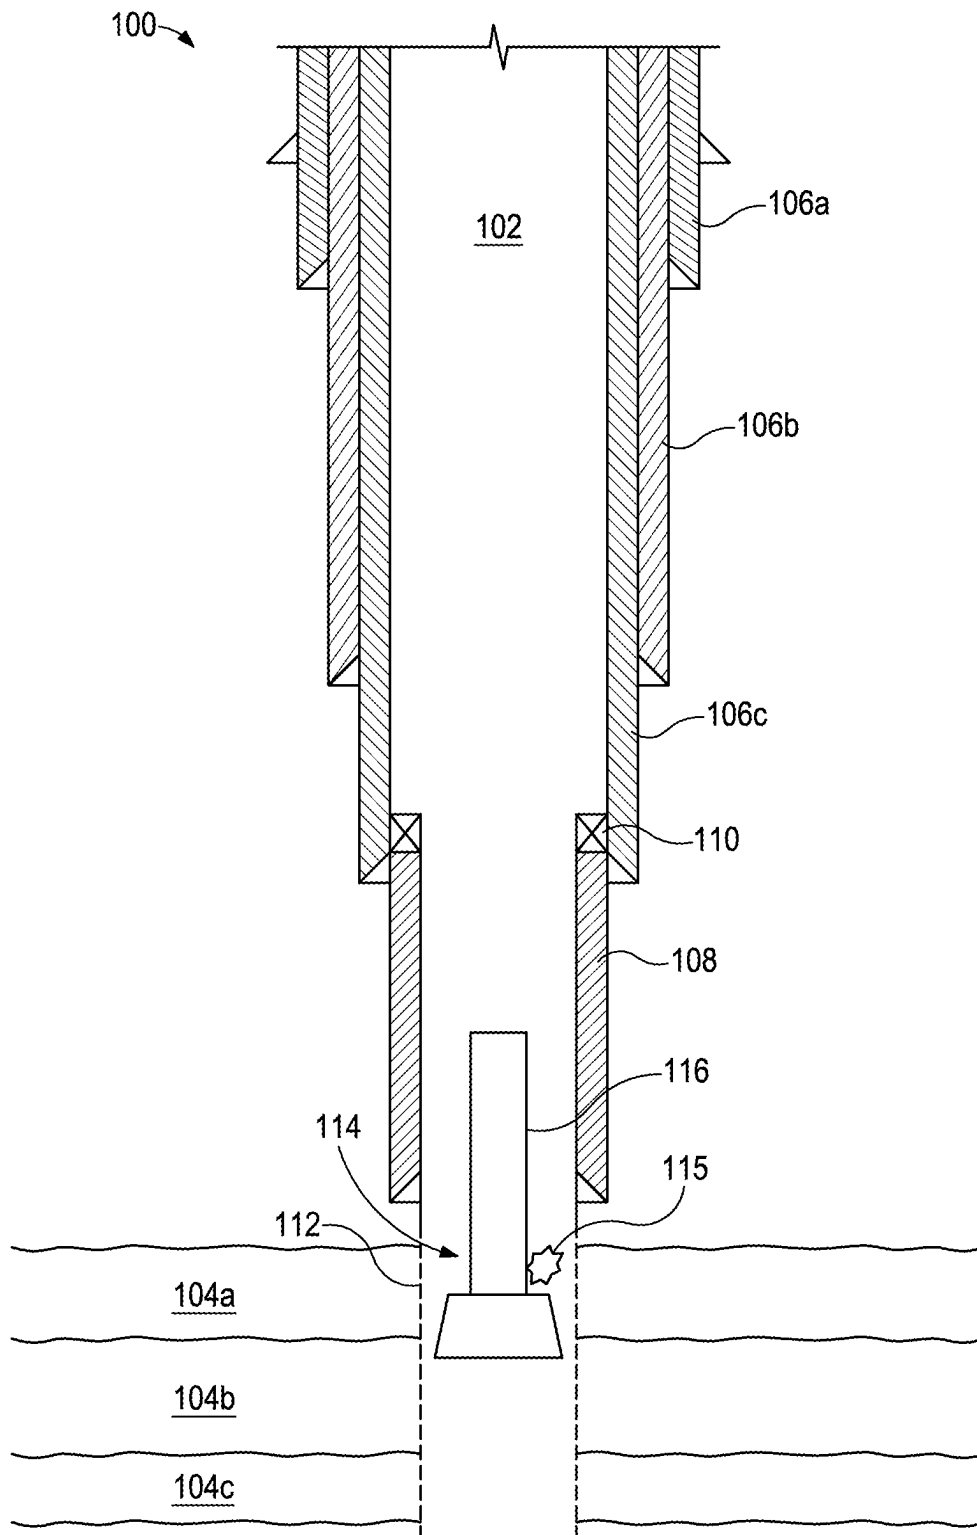


FIG. 1

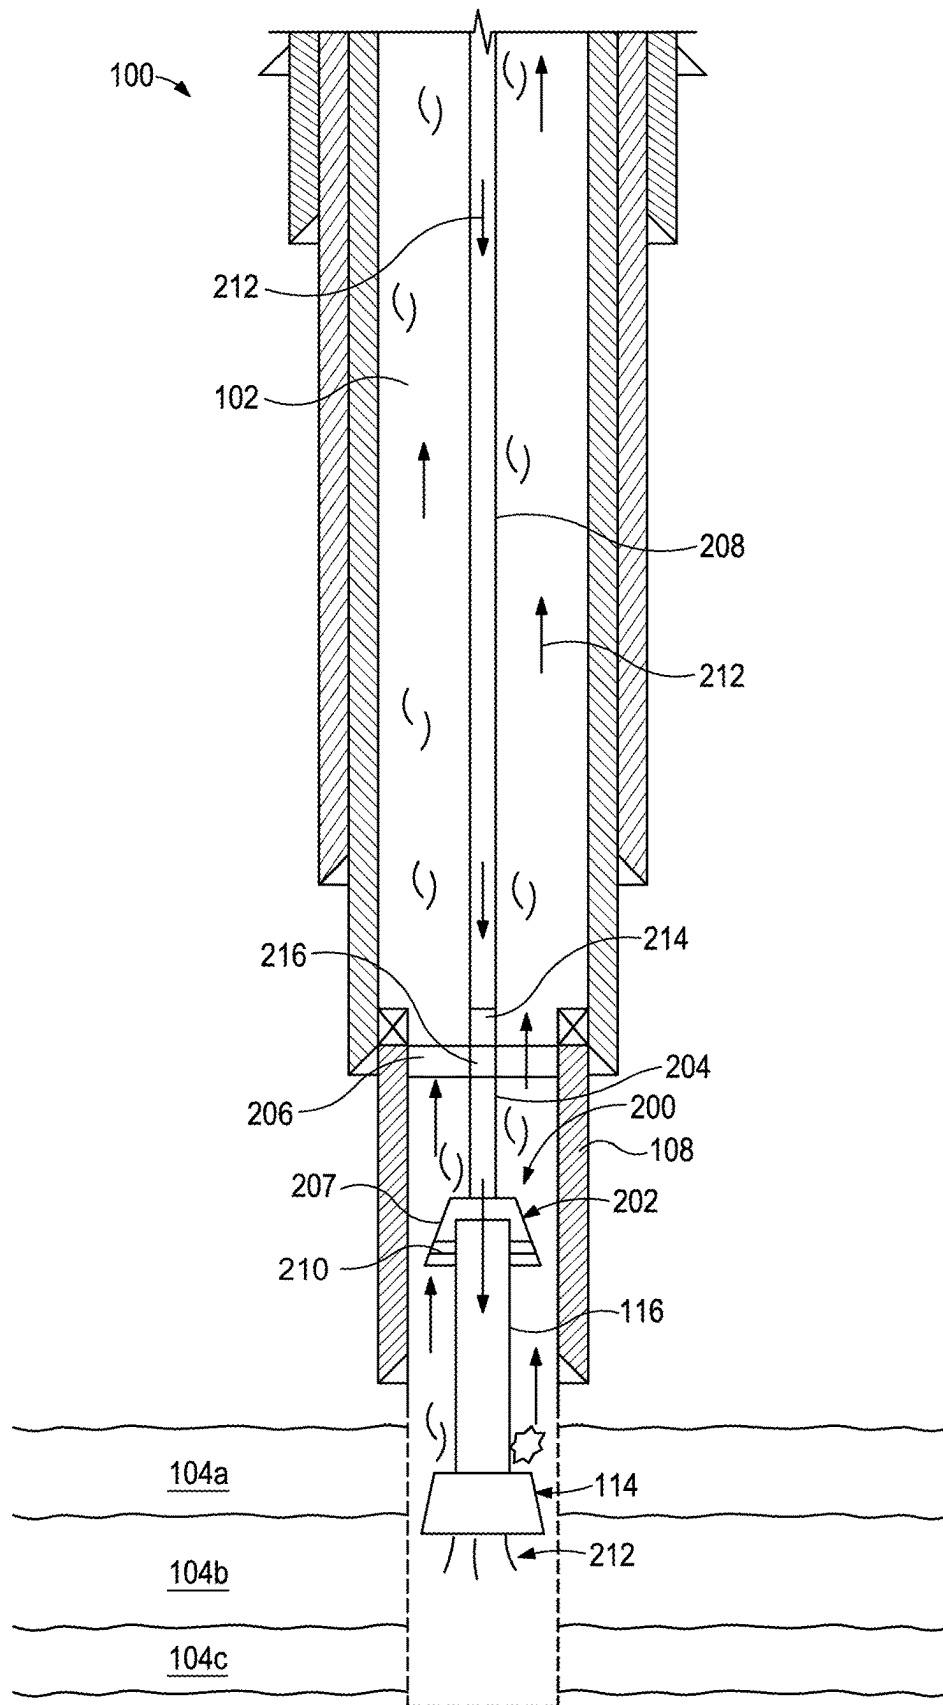


FIG. 2

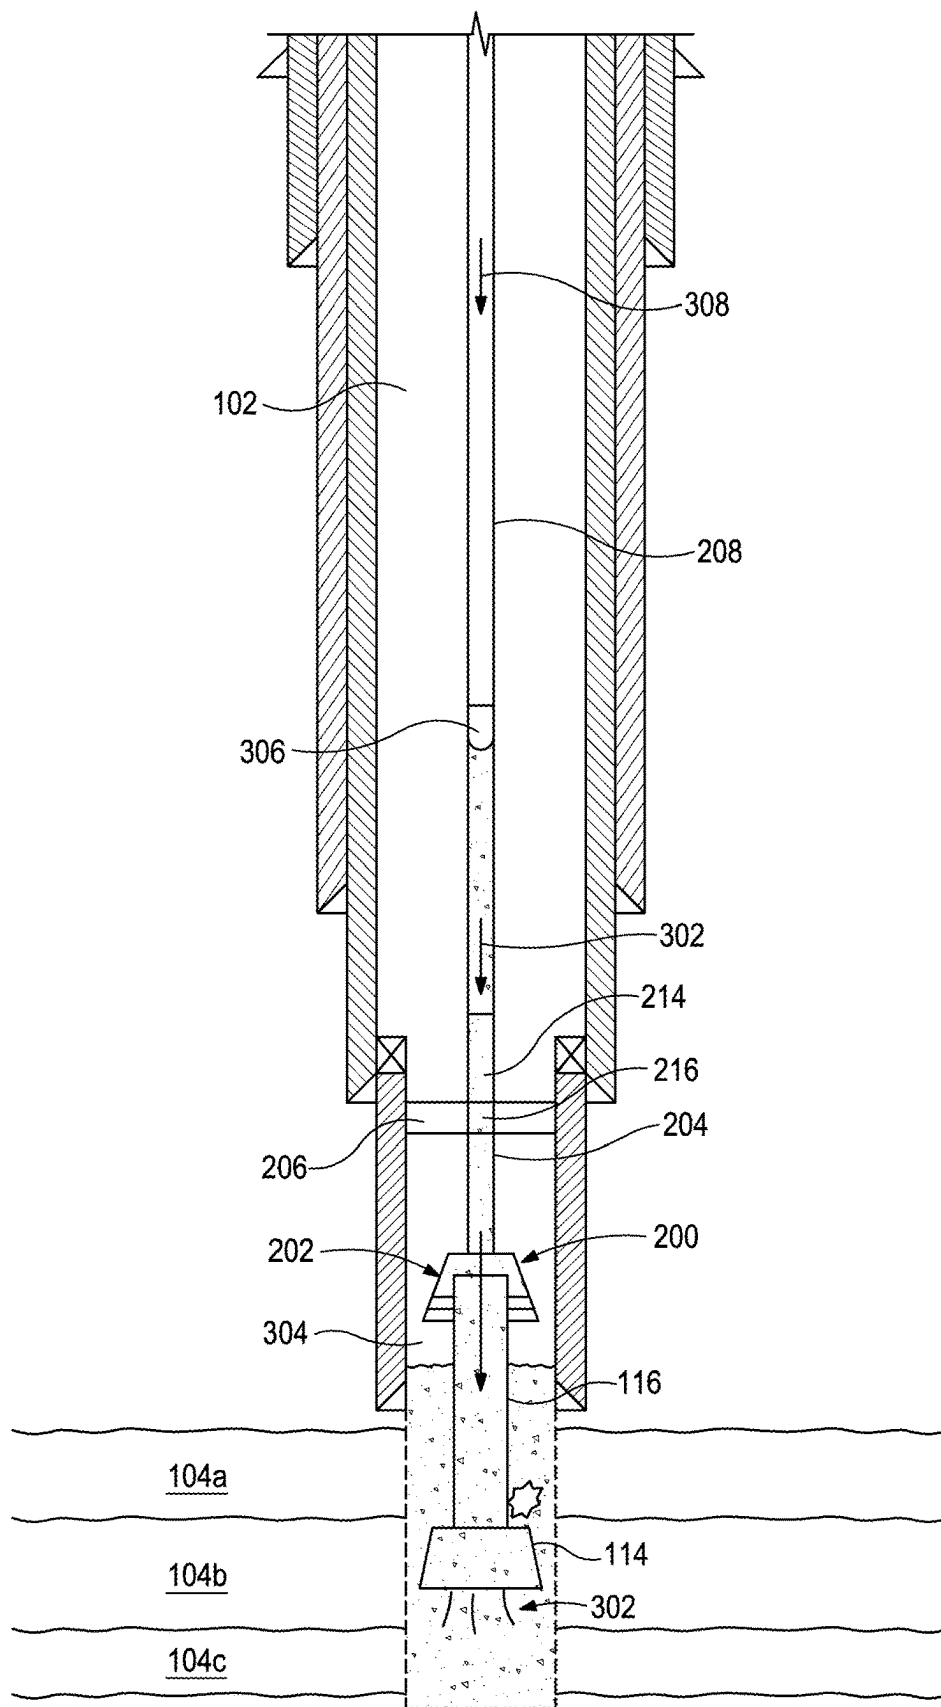


FIG. 3

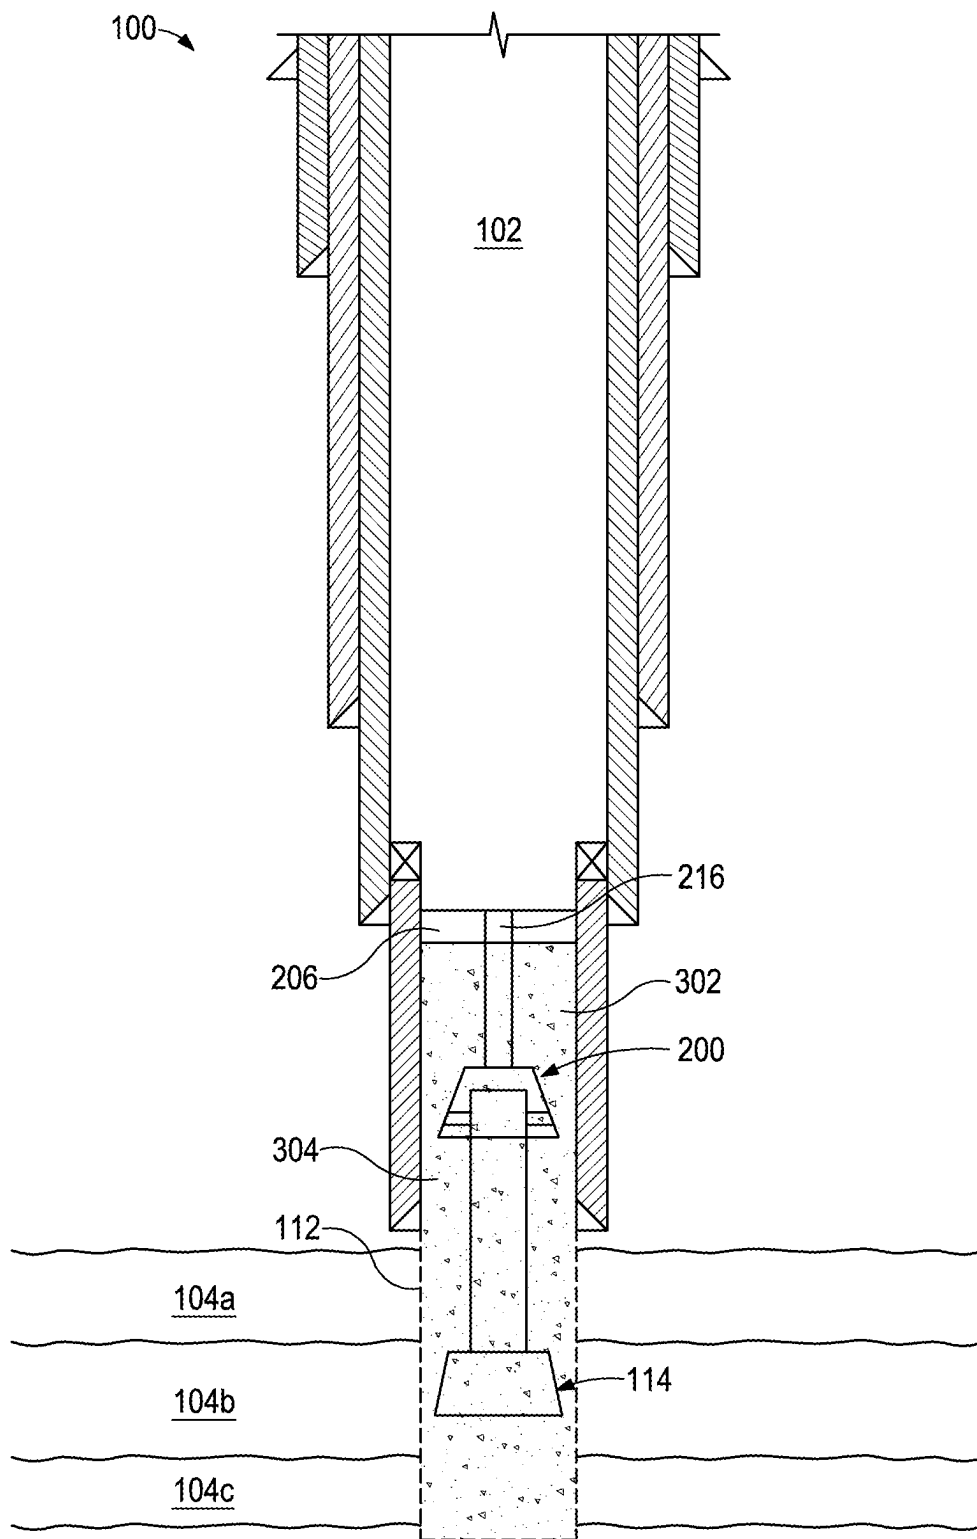


FIG. 4

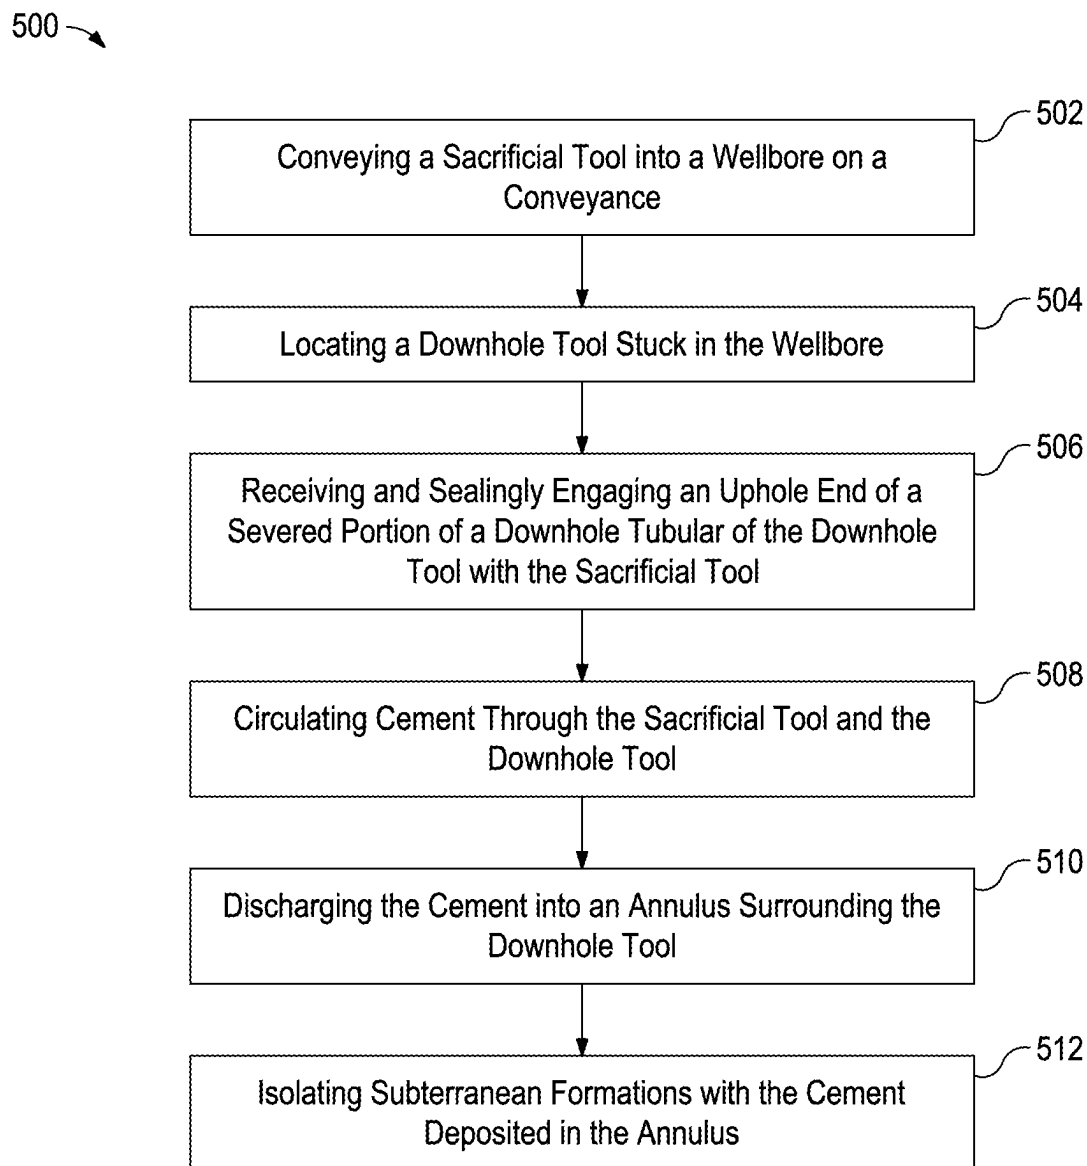


FIG. 5

1

SACRIFICIAL TOOL FOR PLUGGING AND ABANDONING A WELLBORE AND METHODS THEREOF

FIELD OF THE DISCLOSURE

The present disclosure relates generally to tools used in oil and gas wells. More particularly, the present disclosure relates to downhole tools that may be run into a wellbore and used to help assist in wellbore isolation, and systems and methods pertaining to the same. Still, more particularly, the present disclosure relates to a sacrificial tool and method for isolating subterranean reservoirs.

BACKGROUND OF THE DISCLOSURE

When a well reaches the end of its lifetime, it is often permanently plugged and abandoned (P & A) by placing one or more cement plugs in the wellbore to isolate undesired reservoirs or production zones. To help form the cement plug, a bridge plug is typically set within the wellbore downhole from the undesired reservoir or production zone, and a cement slurry is then pumped downhole and discharged on top of the bridge plug. The cement slurry is pumped until a column of cement or "cement plug" is formed within the wellbore and extends across and otherwise surpasses the undesired reservoirs or production zones.

In the event a downhole tool is stuck within the wellbore, however, forming a cement plug in the wellbore may be difficult, if not possible. In some cases, for instance, a bottom hole assembly (BHA) may be stuck within the wellbore and extend across multiple undesired reservoirs or production zones that need to be plugged. In such cases, attempts to free the stuck BHA may not be possible, and the alternative option might be to sidetrack the wellbore. Prior to drilling the sidetrack wellbore, the conveyance connected to the BHA (e.g., drill pipe) is first cut and cement is then pumped to plug the wellbore with the BHA in place. However, attempting to pump cement across multiple reservoirs with the BHA in place, and utilizing conventional balanced cement plug methods, may not be possible since the BHA will largely prevent accessibility. Moreover, squeezing cement across the undesired reservoirs or production zones to be plugged may not achieve the required isolation since the cement would likely be squeezed into the highest permeable zone.

SUMMARY OF THE DISCLOSURE

Various details of the present disclosure are hereinafter summarized to provide a basic understanding. This summary is not an extensive overview of the disclosure and is neither intended to identify certain elements of the disclosure, nor to delineate the scope thereof. Rather, the primary purpose of this summary is to present some concepts of the disclosure in a simplified form prior to the more detailed description that is presented hereinafter.

According to an embodiment consistent with the present disclosure, a method may include conveying a sacrificial tool into a wellbore on a conveyance, the wellbore penetrating one or more subterranean formations and the sacrificial tool including an overshot fishing tool, a tubing operatively coupled to and extending from the overshot fishing tool, and a liner hanger arranged at an upper end of the tubing. The method may further include receiving an uphole end of a downhole tool within with the overshot fishing tool, wherein the downhole tool is stuck in the wellbore adjacent the one

2

or more subterranean formations, sealingly engaging the uphole end of the downhole tool, and circulating a cement through the sacrificial tool and the downhole tool and discharging the cement into an annulus defined between the downhole tool and an inner wall of the wellbore.

According to another embodiment consistent with the present disclosure, a sacrificial tool for plugging and abandoning a wellbore may include an overshot fishing tool configured to locate and sealingly engage an uphole end of a downhole tool stuck within the wellbore, the wellbore penetrating one or more subterranean formations, a tubing operatively coupled to and extending from the overshot fishing tool, and a liner hanger arranged at an upper end of the tubing. Cement pumped to the sacrificial tool via a conveyance is conveyed to the downhole tool and discharged from the downhole tool into an annulus defined between the downhole tool and an inner wall of the wellbore to isolate the one or more subterranean formations.

Any combinations of the various embodiments and implementations disclosed herein can be used in a further embodiment, consistent with the disclosure. These and other aspects and features can be appreciated from the following description of certain embodiments presented herein in accordance with the disclosure and the accompanying drawings and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 depicts a schematic view of an example well system that may incorporate the principles of the present disclosure.

FIG. 2 is another schematic view of the well system of FIG. 1, including a sacrificial tool according to one or more embodiments of the present disclosure.

FIGS. 3 and 4 are schematic views of the well system of FIG. 1 showing progressive operational steps in plugging and abandoning a wellbore, according to one or more embodiments of the present disclosure.

FIG. 5 is a schematic flowchart of an example method of isolating one or more undesired subterranean formations, according to the embodiments described herein

DETAILED DESCRIPTION

Embodiments of the present disclosure will now be described in detail with reference to the accompanying Figures. Like elements in the various figures may be denoted by like reference numerals for consistency. Further, in the following detailed description of embodiments of the present disclosure, numerous specific details are set forth in order to provide a more thorough understanding of the claimed subject matter. However, it will be apparent to one of ordinary skill in the art that the embodiments disclosed herein may be practiced without these specific details. In other instances, well-known features have not been described in detail to avoid unnecessarily complicating the description. Additionally, it will be apparent to one of ordinary skill in the art that the scale of the elements presented in the accompanying Figures may vary without departing from the scope of the present disclosure.

Embodiments in accordance with the present disclosure generally relate to a sacrificial downhole tools that may be run into a wellbore to help assist in wellbore plug and abandonment operations. As disclosed herein, proper and required cement isolation of undesired subterranean formations can be achieved through the use of a sacrificial tool that includes an overshot fishing tool used to engage and estab-

3

lish circulation through a stuck downhole tool that may be arranged adjacent the undesired subterranean formations. Once circulation through the stuck downhole tool **114** is established, a liner hanger included in the sacrificial tool can be set and cement can then be pumped down through the downhole tool and displaced into the surrounding annulus. The overshot fishing tool and the stuck downhole tool **114** are left within the wellbore as the cement cures to achieve proper reservoir isolation

FIG. **1** depicts a schematic view of an example well system **100** that may incorporate the principles of the present disclosure. As illustrated, the well system **100** includes a wellbore **102** drilled into the Earth's surface and penetrating one or more subterranean formations, shown as a first formation **104a**, a second formation **104b**, and a third formation **104c**. The formations **104a-c** may be hydrocarbon-bearing formations, but could alternatively be water-bearing formations. While three formations **104a-c** are shown in FIG. **1**, more or less than three formations **104a-c** may be present in the well system **100**.

As the wellbore **102** is drilled, portions of the wellbore **102** may be progressively lined with strings of casing or wellbore liner. More specifically, a first string of casing **106a**, alternately referred to as "surface casing," may extend from the well surface. One or more strings of intermediate casing **106b** (one shown) may be concentrically arranged within the first string of casing **106a** and extend from the well surface and past the distal end of the first string of casing **106a**. A last string of casing **106c** may extend from the well surface and past the string(s) of intermediate casing **106b**. Each string of casing **106a-c** may be cemented in place and help prevent collapse of the wellbore **102** and the influx of subterranean fluids except from predetermined wellbore locations.

The well system **100** may further include a liner **108** secured to and extending from the last string of casing **106c**. The liner **108** may be secured to the casing **106c** using a liner hanger **110**, which include slips and one or more wellbore isolation devices or "packers". Similar to the strings of casing **106a-c**, the liner **108** may be cemented in place. An open hole **112** section of the wellbore **102** extends past the liner **108** and penetrates the formations **104a-c**.

For a variety of reasons, it may be desired to plug and abandon (P & A) the wellbore **102** to ensure that strata, particularly freshwater aquifers, are adequately isolated from formation fluids that may emanate from the subterranean formations **104a-c**. The P & A process essentially entails depositing a column of cement in the wellbore **102** that spans the formations **104a-c** and thereby prevents formation fluids from migrating into the wellbore **102** and potentially flowing uphole. Ideally, the wellbore **102** is free and unobstructed from any downhole obstructions or tools that may span or otherwise be located adjacent the formations **104a-c**. In such cases, a cement slurry can be pumped downhole and progressively deposited in the wellbore **102** until a column of cement forms and spans the formations **104a-c**. The solidified cement is sometimes referred to as a "cement plug".

In some cases, however, a downhole tool **114** may be stuck **115** in the wellbore **102** adjacent one or more of the formations **104a-c**, thus making it difficult to properly place (form) the cement plug. The downhole tool **114** may become stuck **115** in the wellbore **102** as a result of numerous actions or mishaps that occur downhole and have no bearing on the principles of the present disclosure. The downhole tool **114** may comprise, for example, a bottom hole assembly (BHA) for a drilling operation, or a completion string that spans all

4

or a portion of the formations **104a-c**, but could alternatively comprise other types of downhole tools, such as heavy weight drill pipe, drill pipe, or any type of downhole tubular potentially caught with an overshot.

The downhole tool **114** may be connected to or form part of a downhole tubular **116** configured to convey the downhole tool **114** into the wellbore **102** and capable of conveying fluids from the well surface to the downhole tool **114**. The downhole tubular **116** may form part of a bottom hole assembly (BHA) and may include, but is not limited to, drill pipe and production tubing. Upon determining that the downhole tool **114** is stuck **115** within the wellbore, the downhole tubular **116** may be severed or cut, leaving the downhole tool **114** and a severed portion of the downhole tubular **116** within the wellbore **102**. The stuck downhole tool **114** and severed downhole tubular **116** can be referred to as a "fish".

According to embodiments of the present disclosure, proper and required cement isolation of the formations **104a-c** may be achieved through the use of a sacrificial tool that includes an overshot fishing tool used to engage and establish circulation through the stuck downhole tool **114**. Once the overshot fishing tool is properly engaged with the stuck downhole tool **114**, circulation through the stuck downhole tool **114** is established, following which a liner hanger included in the sacrificial tool can be set and cement can then be pumped down through the downhole tool **114** and displaced enough to have the cement extend to at or level with the liner hanger. The overshot fishing tool and the stuck downhole tool **114** are left within the wellbore as the cement cures to achieve proper reservoir isolation.

FIG. **2** is another schematic view of the well system **100**, including an example sacrificial tool **200** according to one or more embodiments of the present disclosure. As described herein, the sacrificial tool **200** may be used to undertake a P & A process that isolates the subterranean formations **104a-c**. As illustrated, the sacrificial tool **200** includes an overshot fishing tool **202**, a tubing **204** of a predefined length coupled to the overshot fishing tool **202**, and a liner hanger **206** arranged at an upper end of the tubing **204**. In some applications, the combination of the overshot fishing tool **202** and the tubing **204** may be referred to or otherwise characterized as a sacrificial overshot on tubing.

The sacrificial tool **200** may be conveyed downhole on a conveyance **208**, such as drill pipe or production tubing. Once the sacrificial tool **200** is conveyed to the proper location to locate and engage the downhole tool **114**, the liner hanger **206** may be actuated to secure the sacrificial tool **200** within the wellbore **102** and, more particularly, within the liner **108**. The sacrificial tool **200** may then be used to perform cement isolation with the downhole tool **114** in place.

The overshot fishing tool **202** may include a cylindrical housing **207** sized to locate and receive an upper (uphole) end of the downhole tool **114** and, more particularly, the downhole tubular **116**. The housing **207** may include and otherwise be equipped with one or more seals **210** for sealingly engaging the uphole end of the downhole tubular **116** when received within the housing **207**. More specifically, upon receiving the uphole end of the downhole tubular **116** within the overshot fishing tool **202**, the seals **210** may sealingly engage the outer surface of the downhole tubular **116**, thus placing the sacrificial tool **200** in fluid communication with the downhole tool **114**. Consequently, fluids conveyed to and through the tubing **204** to the overshot fishing tool **202** will be conveyed into the downhole tool **114** via the downhole tubular **116**.

5

The sacrificial tool **200** is shown in FIG. 2 engaged with the downhole tool **114**. Prior to establishing communication between the sacrificial tool **200** and the downhole tool **114**, however, a fluid **212** may be conveyed downhole through the conveyance **208** and circulated through the sacrificial tool **200**. The fluid **212** may include, but is not limited to, a drilling fluid (e.g., water-based muds, oil-based muds, etc.), a completion fluid, or any combination thereof. The fluid **212** may be circulated with a predefined (known) pressure to flow through the sacrificial tool **200** and overshot fishing tool **202** discharged into the wellbore **102** via the end of the overshot fishing tool **202** to be returned to the well surface. As the fluid **212** circulates, various measurements may be recorded including, but not limited to, a surface pressure (i.e., fluid pressure of the fluid **212** returning to the well surface), pick up weight, slack off weight, and circulation flow rate. Recording such measurements will provide baseline measurements prior to the sacrificial tool **200** establishing communication with the downhole tool **114**, which may help confirm successful subsequent engagement. Moreover, circulating through the sacrificial tool **200** may also ensure that there is no blockage in the sacrificial tool **200** prior to engagement with the downhole tool **114**, and to potentially clean any debris from the uphole end of the downhole tool **114**.

Once fluid communication between the sacrificial tool **200** and the downhole tool **114** is established, the fluid **212** may continue to be circulated to further establish fluid circulation through the downhole tool **114**. The fluid **212** may be transmitted to the downhole tool **114** via the sealed interface between the sacrificial tool **200** and the downhole tool **114**. The fluid **212** may be discharged from the downhole tool **114** and into the portion of the wellbore **102** downhole from the downhole tool **114**. The fluid **212** may then be able to circulate back uphole within the annulus defined between the downhole tool **114** and the inner walls of the wellbore **102**.

To confirm proper engagement (coupling) of the sacrificial tool **200** with the downhole tool **114**, and to further confirm circulation through the downhole tool, the surface pressure, the pick-up weight, the slack off weight, and the circulation flow rate may again be measured. If an increase in the surface pressure and the pick-up weight is observed, and a decrease in the slack off weight is observed, that may provide a positive indication (confirmation) that the sacrificial tool **200** is properly engaged with the downhole tool **114** and, more particularly, that the overshot fishing tool **202** is fluidly coupled to the uphole end of the downhole tubular **116**.

After confirming that the sacrificial tool **200** is properly coupled to the downhole tool **114**, the liner hanger **206** may be activated with the conveyance **208** in tension to secure the sacrificial tool **200** within the liner **108**. More particularly, the liner hanger **206** may be conveyed downhole on a running tool **214** coupled to the distal end of the conveyance **208**. The tubing **204** may provide and otherwise define a polished bore receptacle **216**, and the distal end of the running tool **214** may be configured to be releasably coupled to the sacrificial tool **200** at the polished bore receptacle **216**. The running tool **214** may be configured to connect the conveyance **208** (e.g., tubing, drill pipe, etc.) to the liner hanger **206** and the sacrificial tool **200**. The running tool **214** may be sized to be received within the polished bore receptacle **216**.

The liner hanger **206** may include one or more sets of slips, and activating the liner hanger **206** may include manipulating the running tool **214** via the conveyance **208** to

6

force the slips into gripping engagement with the inner wall of the liner **108**. In some embodiments, the liner hanger **206** may be configured to be set using a hydraulically-actuated system. Thereafter, the pick-up weight and the slack off weight of the conveyance **208** may again be recorded to establish a new baseline prior to releasing the running tool **214**. If there is a decrease in the pick-up weight and the slack off weight, that may be an indication (confirmation) that the liner hanger **206** is properly set. Accordingly, after hanger slips are set, the pick-up weight should be less than the prior measurement recorded after engagement.

FIG. 3 is another schematic view of the well system **100** showing progressive operational steps in plugging and abandoning the wellbore **102**, according to one or more embodiments of the present disclosure. After confirming that the liner hanger **206** is properly set, as described above, the running tool **214** may be released (disengaged) from the sacrificial tool **200** without pulling the running tool **214** out of the polished bore receptacle **216** of the tubing **204**.

With the running tool **214** disengaged from the sacrificial tool **200**, cement **302** may be pumped downhole via the conveyance **208** and to the sacrificial tool **200**. The cement **302** may be conveyed into the downhole tool **114** from the sacrificial tool **200** via the sealed engagement between the overshot fishing tool **202** and the uphole end of the downhole tubular **116**. The cement **302** may then be discharged from the downhole tool **114** into the wellbore **102** and, more particularly, into an annulus **304** defined between the downhole tool **114** and an inner wall of the wellbore **102**. As the cement **302** is continuously pumped into the annulus **304**, a column of the cement **302** may begin to form and grow within the annulus **304**.

In some embodiments, a wiper plug **306** may be dropped within the conveyance **208** and hydraulically displaced along the conveyance **208** with a fluid **308** (e.g., drilling fluid) pumped from the well surface. As the wiper plug **306** is forced down the conveyance **208**, the cement **302** is progressively discharged out of the downhole tool **114** and into the annulus **304**. In some embodiments, the wiper plug **306** may be displaced sufficiently down the conveyance **208** and toward the downhole tool **114** to discharge enough cement **302** to reach the location of the liner hanger **206**. In at least one embodiment, the column of the cement **302** within the annulus **304** may stop level at the liner hanger **206**.

FIG. 4 is another schematic view of the well system **100** showing progressive operational steps in plugging and abandoning the wellbore **102**, according to one or more embodiments of the present disclosure. After pumping the cement **302** into the annulus **304**, and optionally pumping until the cement **302** reaches the liner hanger **206**, the running tool **214** (FIGS. 2 and 3) may be pulled out of the polished bore receptacle **216** to reverse out any excessive cement **302** and in preparation for final pull out of hole (POOH). This reversing process of the cement **302** enables proper isolation of the subterranean formations **104a-c** while having the ability to release the conveyance **208** (FIGS. 2 and 3).

As illustrated in FIG. 4, the cement **302** has been pumped into the annulus **304** and is allowed to cure with the downhole tool **114** and the sacrificial tool **200** remaining within the wellbore **102**. The resulting column of cement **302** spans the subterranean formations **104a-c**, which ensures isolation of the formations **104a-c**, but may also enable sidetracking the wellbore **102** instead of expending valuable resources and time attempting to recover the downhole tool **114** or accepting to leave the downhole tool **114** in the open hole **112** with improper cement isolation between

7

the formations **104a-c**. Once isolation is achieved, sidetracking from a shallow depth can commence. Consequently, less time and money may be expended attempting to retrieve the downhole tool **114** in order to properly plug and abandon the wellbore **102** before sidetrack operation.

FIG. 5 is a schematic flowchart of an example method **500** of isolating one or more undesired subterranean formations, according to the embodiments described herein. As illustrated, the method **500** may include conveying a sacrificial tool into a wellbore on a conveyance, at step **502**. The wellbore may penetrate one or more subterranean formations and the sacrificial tool may include an overshot fishing tool, a tubing operatively coupled to and extending from the overshot fishing tool, and a liner hanger arranged at an upper end of the tubing. The method **500** may further include locating with the sacrificial tool a downhole tool stuck in the wellbore, as at **504**. In some embodiments, the downhole tool may be stuck in the wellbore adjacent the one or more subterranean formations. Moreover, the sacrificial tool may be operatively coupled to or form part of a severed portion of a downhole tubular.

The method **500** may further include receiving and sealingly engaging an uphole end of the severed portion of the downhole tubular with the overshot fishing tool, as at **506**. A cement may then be circulated through the sacrificial tool and the downhole tool, as at **508**, and the cement may be discharged into an annulus defined between the downhole tool and an inner wall of the wellbore, as at **510**. In some embodiments, discharging the cement into the annulus will progressively form a column of cement within the annulus that spans the one or more subterranean formations, and thereby isolates the subterranean formations, as at **512**.

The terminology used herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used herein, for example, the singular forms “a,” “an,” and “the” are intended to include the plural forms as well, unless the context clearly indicates otherwise. It will be further understood that the terms “contains,” “containing,” “includes,” “including,” “comprises,” and/or “comprising,” and variations thereof, when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

Terms of orientation are used herein merely for purposes of convention and referencing and are not to be construed as limiting. However, it is recognized these terms could be used with reference to an operator or user. Accordingly, no limitations are implied or to be inferred. In addition, the use of ordinal numbers (e.g., first, second, third, etc.) is for distinction and not counting. For example, the use of “third” does not imply there must be a corresponding “first” or “second.” Also, if used herein, the terms “coupled” or “coupled to” or “connected” or “connected to” or “attached” or “attached to” may indicate establishing either a direct or indirect connection, and is not limited to either unless expressly referenced as such.

While the disclosure has described several exemplary embodiments, it will be understood by those skilled in the art that various changes can be made, and equivalents can be substituted for elements thereof, without departing from the spirit and scope of the invention. In addition, many modifications will be appreciated by those skilled in the art to adapt a particular instrument, situation, or material to embodiments of the disclosure without departing from the essential scope thereof. Therefore, it is intended that the

8

invention not be limited to the particular embodiments disclosed, or to the best mode contemplated for carrying out this invention, but that the invention will include all embodiments falling within the scope of the appended claims.

Moreover, reference in the appended claims to an apparatus or system or a component of an apparatus or system being adapted to, arranged to, capable of, configured to, enabled to, operable to, or operative to perform a particular function encompasses that apparatus, system, or component, whether or not it or that particular function is activated, turned on, or unlocked, as long as that apparatus, system, or component is so adapted, arranged, capable, configured, enabled, operable, or operative.

The invention claimed is:

1. A method, comprising:

conveying a sacrificial tool into a wellbore coupled to a conveyance after a downhole tool has become stuck in the wellbore, the sacrificial tool including:

an overshot fishing tool;

a tubing operatively coupled to and extending from the overshot fishing tool; and

a liner hanger arranged at an upper end of the tubing;

conveying a fluid through the conveyance and to the sacrificial tool prior to receiving an uphole end of the downhole tool within the overshot fishing tool;

discharging the fluid into the wellbore from the overshot fishing tool prior to receiving the uphole end of the downhole tool within the overshot fishing tool;

recording one or more measurements selected from the group consisting of a surface pressure, a pick up weight, a slack off weight, and circulation flow rate prior to receiving the uphole end of the downhole tool within the overshot fishing tool;

receiving the uphole end of the downhole tool within the overshot fishing tool;

sealingly engaging the uphole end of the downhole tool;

conveying the fluid through the sacrificial tool and the downhole tool after sealingly engaging the uphole end of the downhole tool;

discharging the fluid from the downhole tool into the annulus after sealingly engaging the uphole end of the downhole tool;

confirming proper engagement of the sacrificial tool with the downhole tool upon recording an increase in the surface pressure and the pick-up weight, and recording a decrease in the slack off weight after sealingly engaging the uphole end of the downhole tool; and

circulating a cement through the sacrificial tool and the downhole tool and discharging the cement into an annulus defined between the downhole tool and an inner wall of the wellbore.

2. The method of claim 1, wherein the downhole tool includes a severed downhole tubular, and wherein receiving the uphole end of the downhole tool comprises receiving an uphole end of the severed downhole tubular.

3. The method of claim 1, further comprising:

activating the liner hanger and thereby securing the sacrificial tool within the wellbore; and

confirming that the liner hanger is properly set upon recording a decrease in the pick-up weight and the slack off weight.

4. The method of claim 3, wherein a least a portion of the wellbore is lined with a liner and the liner hanger includes one or more slips, and wherein activating the liner hanger comprises forcing the one or more slips into gripping engagement with an inner surface of the liner.

9

5. The method of claim 1, wherein the liner hanger includes a running tool received within a polished bore receptacle of the tubing, and wherein circulating the cement through the sacrificial tool and the downhole tool is preceded by releasing the running tool from the sacrificial tool without pulling the running tool out of the polished bore receptacle.

6. The method of claim 1, wherein discharging the cement into the annulus comprises progressively forming a column of cement within the annulus that spans the one or more subterranean formations.

7. The method of claim 6, further comprising ceasing circulation of the cement when the column of cement reaches the liner hanger within the annulus.

8. A method, comprising:

conveying a sacrificial tool coupled to a conveyance into a wellbore penetrating one or more subterranean formations after a downhole tool has become stuck in the wellbore;

conveying a fluid through the conveyance and to the sacrificial tool prior to receiving an uphole end of the downhole tool within the sacrificial tool, and thereby discharging the fluid into the wellbore from the sacrificial tool;

recording one or more measurements selected from the group consisting of a surface pressure, a pick up weight, a slack off weight, and circulation flow rate prior to receiving the uphole end of the downhole tool within the sacrificial tool;

conveying the sacrificial tool through the wellbore to receive the uphole end of the downhole tool within the sacrificial tool in the wellbore, thereby coupling the sacrificial tool to the downhole tool;

sealingly engaging the uphole end of the downhole tool by engaging a seal coupled to an inner surface of the sacrificial tool with an outer surface of the downhole tool;

conveying the fluid through the sacrificial tool and the downhole tool after sealingly engaging the uphole end of the downhole tool;

discharging the fluid from the downhole tool into the annulus after sealingly engaging the uphole end of the downhole tool;

confirming proper engagement of the sacrificial tool with the downhole tool upon recording an increase in the surface pressure and the pick-up weight, and recording a decrease in the slack off weight after sealingly engaging the uphole end of the downhole tool; and

pumping cement through the sacrificial tool and the downhole tool coupled thereto into an annulus defined between the downhole tool and an inner wall of the wellbore.

9. The method of claim 8, wherein the sacrificial tool includes an overshot fishing tool and tubing extending from the overshot fishing tool, and wherein coupling the uphole end of the downhole tool to the sacrificial tool in the wellbore comprising coupling the uphole end of the downhole tool to the overshot fishing tool.

10

10. The method of claim 9, wherein discharging the cement comprises progressively forming a column of cement within the annulus that spans the one or more subterranean formations.

11. The method of claim 10, wherein the sacrificial tool further includes a liner hanger extending from the tubing, and the method further comprises ceasing circulation of the cement based on the column of cement reaching the liner hanger.

12. A method, comprising:

deploying a sacrificial tool into a wellbore on a conveyance after a fish becomes stuck in the wellbore, the sacrificial tool including an overshot fishing tool and a liner hanger;

conveying a fluid through the conveyance and to the sacrificial tool prior to landing the overshot fishing tool on the fish, and thereby discharging the fluid into the wellbore from the overshot fishing tool;

recording one or more measurements selected from the group consisting of a surface pressure, a pick up weight, a slack off weight, and circulation flow rate prior to landing the overshot fishing tool on the fish;

landing the overshot fishing tool on the fish stuck in the wellbore by receiving an uphole end of the fish within the overshot fishing tool;

sealingly engaging the uphole end of the fish by engaging one or more seals of the overshot fishing tool with an outer surface of the uphole end of the fish;

conveying the fluid through the sacrificial tool and the fish after sealingly engaging the uphole end of the fish;

discharging the fluid from the fish into the annulus after sealingly engaging the uphole end of the fish;

confirming proper engagement of the sacrificial tool with the fish upon recording an increase in the surface pressure and the pick-up weight, and recording a decrease in the slack off weight after sealingly engaging the uphole end of the fish;

setting the liner hanger after landing the overshot fishing tool on the fish; and

circulating a cement through the sacrificial tool and the fish to form a cement plug below the set liner hanger, thereby cementing the fish and the overshot fishing tool within the wellbore and plugging a first portion of the wellbore downhole of the cement plug from a second portion of the wellbore uphole of the cement plug.

13. The method of claim 12, further comprising:

disengaging the sacrificial tool from a running tool prior to circulating the cement; and

retrieving the running tool to the surface.

14. The method of claim 12, wherein the cement plug is at least partially formed in a bore of a casing disposed in the wellbore, wherein the cement plug blocks flow through the bore of the casing.

15. The method of claim 14, wherein the cement plug is partially disposed in an open hole section of the wellbore downhole of the casing.

* * * * *