



(12) **United States Patent**
Tadele et al.

(10) **Patent No.:** **US 12,396,686 B2**
(45) **Date of Patent:** **Aug. 26, 2025**

(54) **SENSING HEALTH PARAMETERS IN WEARABLE DEVICES**

(71) Applicant: **Apple Inc.**, Cupertino, CA (US)
(72) Inventors: **Wegene H. Tadele**, San Francisco, CA (US); **Maegan K. Spencer**, Emerald Hills, CA (US); **Riley E. Brandt**, Menlo Park, CA (US); **Siddharth Nangia**, San Francisco, CA (US)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 268 days.

(21) Appl. No.: **17/899,455**

(22) Filed: **Aug. 30, 2022**

(65) **Prior Publication Data**

US 2023/0064273 A1 Mar. 2, 2023

Related U.S. Application Data

(60) Provisional application No. 63/239,358, filed on Aug. 31, 2021.

(51) **Int. Cl.**
A61B 5/00 (2006.01)

(52) **U.S. Cl.**
CPC **A61B 5/7203** (2013.01); **A61B 5/6803** (2013.01); **A61B 5/681** (2013.01); **A61B 5/6898** (2013.01); **A61B 2560/0247** (2013.01); **A61B 2562/0204** (2013.01)

(58) **Field of Classification Search**
CPC A61B 5/7203; A61B 5/6803
USPC 600/300
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,355,873 A	12/1967	Morf
3,577,876 A	5/1971	Spadini
4,015,595 A	4/1977	Benjamin, Jr.
4,120,294 A	10/1978	Wolfe

(Continued)

FOREIGN PATENT DOCUMENTS

AU	2011252998	11/2011
AU	2014209376	7/2014

(Continued)

OTHER PUBLICATIONS

Aldinger, F. and Weberu , V.A., "An Introduction to Structures, Properties, Technologies, Methods" (2010) In: Advanced Ceramics and Future Materials 17 pages.

(Continued)


Primary Examiner — Nadia A Mahmood

(74) *Attorney, Agent, or Firm* — Brownstein Hyatt Farber Schreck, LLP

(57) **ABSTRACT**

Embodiments of this disclosure are directed to a wearable device having a housing, a display, and a sensor system. The display is at least partially surrounded by the housing. The sensor system is housed at least partially in the housing. The sensor system includes a first sensor, a second sensor, and a controller. The first sensor is configured to contact a body part of a user and generate a first signal. The second sensor is configured to sense a mechanical wave in an ambient environment of the wearable device and generate a second signal. The controller is configured to generate a resultant signal by removing noise from the first signal using the second signal, and determine a health parameter of the user from the resultant signal.

15 Claims, 8 Drawing Sheets

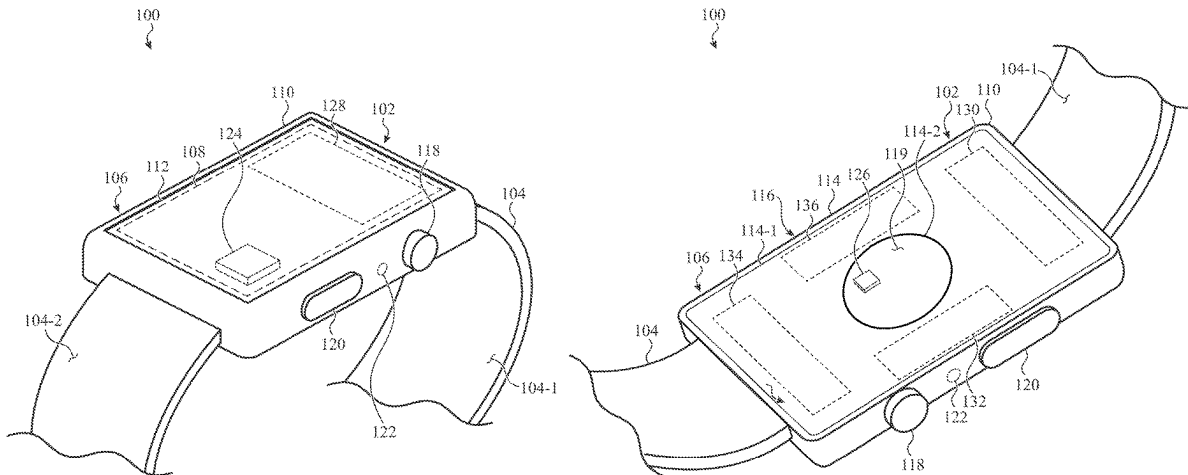

(56)

References Cited

U.S. PATENT DOCUMENTS

4,129,124	A	12/1978	Thalmann	9,632,537	B2	4/2017	Memering et al.
4,163,447	A	8/1979	Orr	9,664,556	B2	5/2017	Chu et al.
4,224,948	A	9/1980	Cramer et al.	9,687,165	B2	6/2017	Katra et al.
4,248,244	A	2/1981	Charnitski et al.	9,715,301	B2	7/2017	Kuboyama et al.
4,274,152	A	6/1981	Ikegami	9,723,997	B1	8/2017	Lamego
4,375,219	A	3/1983	Schmid	9,737,221	B2	8/2017	Sato
4,448,199	A	5/1984	Schmid	9,763,584	B2	9/2017	Freschl et al.
5,613,008	A	3/1997	Martin	9,772,605	B2	9/2017	Shim et al.
5,738,104	A	4/1998	Lo et al.	9,775,548	B2	10/2017	Sarantos
6,075,755	A	6/2000	Zarchan	9,833,159	B2	12/2017	Chu et al.
6,091,530	A	7/2000	Duckworth	9,833,164	B2	12/2017	Justice et al.
6,198,951	B1	3/2001	Kosuda	9,848,823	B2	12/2017	Raghuram et al.
6,265,789	B1	7/2001	Honda et al.	9,852,844	B2	12/2017	Golko et al.
6,428,537	B1	8/2002	Swanson et al.	9,891,098	B2	2/2018	Shedletsky
6,529,754	B2	3/2003	Kondo	9,891,590	B2	2/2018	Shim et al.
6,608,562	B1	8/2003	Kimura et al.	9,955,887	B2	5/2018	Hughes et al.
6,661,438	B1	12/2003	Shiraishi et al.	9,971,399	B2	5/2018	Lee
6,721,540	B1	4/2004	Hayakawa	10,013,075	B2	7/2018	Shipman
6,996,428	B2	2/2006	Kislov et al.	10,058,773	B2	8/2018	Huang
7,187,961	B2	3/2007	Yamashita	10,060,788	B2	8/2018	Fei
7,450,002	B2	11/2008	Choi et al.	10,092,197	B2	10/2018	Han
7,455,423	B2	11/2008	Takenaka	10,098,559	B2	10/2018	Hughes et al.
7,474,592	B2	1/2009	Lyon	10,123,710	B2	11/2018	Gassoway et al.
7,486,386	B1	2/2009	Holcombe	10,126,194	B2	11/2018	Lee
7,598,878	B2	10/2009	Goldreich	10,172,562	B2	1/2019	Lim et al.
7,646,033	B2	1/2010	Tran et al.	10,215,698	B2	2/2019	Han et al.
7,652,658	B2	1/2010	Nishi et al.	10,231,629	B1	3/2019	Pei et al.
7,682,070	B2	3/2010	Burton	10,254,804	B2	4/2019	Dusan
7,729,748	B2	6/2010	Florian	10,271,754	B2	4/2019	Bahney et al.
7,822,469	B2	10/2010	Lo	10,271,800	B2	4/2019	Lin et al.
7,894,888	B2	2/2011	Chan et al.	10,299,691	B2	5/2019	Hughes et al.
7,915,601	B2	3/2011	Setlak et al.	D852,965	S	7/2019	Bahney et al.
7,957,762	B2	6/2011	Herz et al.	D854,167	S	7/2019	Bahney et al.
8,150,502	B2	4/2012	Kumar et al.	10,405,799	B2	9/2019	Kumar et al.
8,160,682	B2	4/2012	Kumar et al.	10,488,936	B2	11/2019	Baranski
8,227,887	B2	7/2012	Brown et al.	10,517,500	B2	12/2019	Kumar et al.
8,229,535	B2	7/2012	Mensinger	10,524,671	B2	1/2020	Lamego
8,244,335	B2	8/2012	Kumar et al.	10,524,720	B2	1/2020	Newberry
8,538,503	B2	9/2013	Kumar et al.	10,534,900	B2	1/2020	Cheong et al.
8,560,046	B2	10/2013	Kumar et al.	10,551,929	B2	2/2020	Kim
8,562,489	B2	10/2013	Burton et al.	10,599,101	B2	3/2020	Rothkopf et al.
8,624,836	B1	1/2014	Miller et al.	10,610,157	B2	4/2020	Pandya et al.
8,670,819	B2	3/2014	Iwamiya et al.	10,627,783	B2	4/2020	Rothkopf
8,758,258	B2	6/2014	Takahashi et al.	10,671,222	B2	6/2020	Kuboyama et al.
8,804,993	B2	8/2014	Shukla et al.	10,690,538	B2	6/2020	Lin
8,824,245	B2	9/2014	Lau et al.	10,695,004	B2	6/2020	Gaudet et al.
8,842,848	B2	9/2014	Donaldson et al.	10,702,211	B2	7/2020	Clavelle
8,948,832	B2	2/2015	Hong et al.	10,716,478	B2	7/2020	Meer et al.
8,954,135	B2	2/2015	Yuen et al.	10,761,575	B2	9/2020	Dusan
8,988,372	B2	3/2015	Messerschmidt et al.	10,827,268	B2	11/2020	Dusan
9,001,625	B2	4/2015	Essery et al.	10,888,273	B2	1/2021	Myers et al.
9,024,250	B2	5/2015	Spraggs	10,987,054	B2	4/2021	Pandya et al.
9,030,446	B2	5/2015	Mistry et al.	11,024,423	B2	6/2021	Reykher
9,042,971	B2	5/2015	Brumback et al.	11,036,318	B2	6/2021	Kuboyama et al.
9,044,149	B2	6/2015	Richards et al.	11,076,806	B2	8/2021	Townsend et al.
9,049,998	B2	6/2015	Brumback et al.	11,123,016	B2	9/2021	Jo et al.
9,100,579	B2	8/2015	Schatvet et al.	11,166,104	B2	11/2021	Dusan
9,143,041	B2	9/2015	Itabashi et al.	11,281,262	B2	3/2022	Dusan
9,146,304	B2	9/2015	Land et al.	11,432,766	B2	9/2022	Clavelle et al.
9,173,670	B2	11/2015	Sepulveda et al.	11,474,483	B2	10/2022	Rothkopf et al.
9,241,649	B2	1/2016	Kumar et al.	11,567,457	B2	1/2023	Rothkopf et al.
9,277,880	B2	3/2016	Poeze et al.	2001/0056243	A1	12/2001	Ohsaki et al.
9,348,322	B2	5/2016	Fraser et al.	2003/0045802	A1	3/2003	Kato
9,427,191	B2	8/2016	LeBoeuf	2005/0274971	A1	12/2005	Wang et al.
9,436,645	B2	9/2016	Al-Ali et al.	2006/0069319	A1	3/2006	Elhag et al.
9,442,570	B2	9/2016	Slonneger	2007/0276270	A1	11/2007	Tran
9,451,975	B2	9/2016	Sepulveda et al.	2008/0208009	A1	8/2008	Shklarski
9,485,345	B2	11/2016	Dantu	2009/0265671	A1	10/2009	Sachs et al.
9,506,802	B2	11/2016	Chu et al.	2011/0007468	A1	1/2011	Burton et al.
9,516,442	B1	12/2016	Dusan	2011/0015496	A1	1/2011	Sherman et al.
9,557,716	B1	1/2017	Inamdar	2012/0078116	A1	3/2012	Yamashita
9,597,004	B2	3/2017	Hughes et al.	2012/0221254	A1	8/2012	Kateraas et al.
9,606,721	B2	3/2017	Park et al.	2013/0267854	A1	10/2013	Johnson et al.
9,620,312	B2	4/2017	Ely et al.	2014/0045547	A1	2/2014	Singamsetty et al.
9,627,163	B2	4/2017	Ely et al.	2014/0073486	A1	3/2014	Ahmed et al.
				2014/0135594	A1	5/2014	Yuen et al.
				2014/0275832	A1	9/2014	Muehlsteff et al.
				2014/0343371	A1	11/2014	Sowers et al.
				2015/0002088	A1	1/2015	D'Agostino

(56)

References Cited**U.S. PATENT DOCUMENTS**

2015/0124415	A1	5/2015	Goyal et al.	
2015/0157219	A1	6/2015	Lee et al.	
2015/0186609	A1	7/2015	Uitter	
2015/0195009	A1	7/2015	Wang et al.	
2015/0214749	A1	7/2015	Park et al.	
2015/0297134	A1	10/2015	Albert et al.	
2015/0355604	A1	12/2015	Fraser et al.	
2016/0058375	A1	3/2016	Rothkopf	
2016/0073914	A1	3/2016	Lapetina et al.	
2016/0120472	A1	5/2016	Kub et al.	
2016/0198966	A1	7/2016	Uematsu et al.	
2016/0228064	A1	8/2016	Jung et al.	
2016/0242659	A1	8/2016	Yamashita et al.	
2016/0338598	A1	11/2016	Kegasawa	
2016/0338642	A1	11/2016	Parara et al.	
2017/0049332	A1	2/2017	Park et al.	
2017/0164850	A1*	6/2017	Murphy	A61B 5/742
2017/0172476	A1	6/2017	Schilthuizen	
2017/0296088	A1	10/2017	Choi	
2018/0020937	A1	1/2018	Chou	
2018/0220972	A1	8/2018	Jeong	
2018/0235483	A1	8/2018	Mouradian	
2018/0235542	A1	8/2018	Yun et al.	
2018/0358119	A1	12/2018	Bhushan et al.	
2019/0025438	A1	1/2019	Venkatraman et al.	
2019/0090806	A1	3/2019	Harrison-Noonan et al.	
2019/0196411	A1	6/2019	Yuen	
2019/0209031	A1	7/2019	Ariyama et al.	
2020/0000351	A1	1/2020	Rauhala	
2020/0100684	A1	4/2020	Lamego	
2020/0233381	A1	7/2020	Yang et al.	
2021/0181692	A1	6/2021	Rothkopf et al.	
2021/0204876	A1	7/2021	Pandya et al.	
2023/0028554	A1	1/2023	Rothkopf et al.	
2023/0052087	A1	2/2023	Clavelle et al.	
2023/0097827	A1	3/2023	Rothkopf et al.	
2023/0098960	A1	3/2023	Pandya et al.	
2023/0210392	A1	7/2023	Hatanaka et al.	
2023/0210461	A1	7/2023	Pandya et al.	
2023/0213893	A1	7/2023	Rothkopf et al.	

FOREIGN PATENT DOCUMENTS

CH	188928	1/1937
CN	1572252	2/2005
CN	1985762	6/2007
CN	102246125	11/2011
CN	102483608	5/2012
CN	102867190	1/2013
CN	103191557	7/2013
CN	103645804	3/2014
CN	203564224	4/2014
CN	103919536	7/2014
CN	103956006	7/2014
CN	203693601	7/2014
CN	203732900	7/2014
CN	104050444	9/2014
CN	104510463	4/2015
CN	204515353	7/2015
CN	105339871	2/2016
CN	205041396	2/2016
CN	205121417	3/2016
CN	105556433	5/2016
CN	105955519	9/2016
CN	105980976	9/2016
CN	106236051	12/2016
CN	106388809	2/2017
CN	106462665	2/2017
CN	206209589	5/2017
CN	206324777	7/2017
EP	0165548	12/1985
EP	1981402	8/2016
EP	2568878	7/2018
JP	2001145607	5/2001
JP	2001202178	7/2001

JP	2004028979	1/2004
JP	2005270543	10/2005
JP	2009519737	5/2009
JP	2011021929	2/2011
JP	5477393	4/2014
JP	2014112222	6/2014
JP	2016148657	8/2016
KR	2019950004406	5/1995
KR	200278568	6/2002
KR	1020080028935	4/2008
KR	2020090001515	2/2009
KR	1020090099147	9/2009
KR	20110012784	2/2011
KR	20110103761	9/2011
KR	1020120028314	3/2012
KR	1020130131873	12/2013
KR	1020140051391	4/2014
KR	1020140064689	5/2014
KR	1020140104388	8/2014
KR	1020160041553	4/2016
KR	1020160145284	12/2016
KR	102136836	8/2020
TW	200632604	9/2006
TW	200633681	10/2006
TW	201610621	3/2016
TW	201621491	6/2016
TW	201632136	9/2016
WO	WO 82/000088	1/1982
WO	WO 05/092182	10/2005
WO	WO 12/140559	10/2012
WO	WO 13/103570	7/2013
WO	WO 15/030712	3/2015
WO	WO 15/034149	3/2015
WO	WO 15/039373	3/2015
WO	WO 15/116111	8/2015
WO	WO 15/150199	10/2015
WO	WO 16/036747	3/2016
WO	WO 16/055853	4/2016
WO	WO 16/204443	12/2016
WO	WO 17/165532	9/2017
WO	WO 18/119193	6/2018

OTHER PUBLICATIONS

Berbari, E.J., "Principles of Electrocardiology" (2015) In: The Biomedical Engineering Handbook—4th Edition (Eds: J.D. Bronzin & D.R. Peterson) 5 pages.

Canfield, D., "Drying and Curing Inks and Coatings on Glass" (Mar. 16, 2013) Glass Magazine 5 pages.

Doremus, R.H., "Structure, Properties, and Processing" (2008) In: Ceramic and Glass Materials (Eds: J.F. Shackelford & R.H. Doremus) 33 pages.

Francis, J., "ECG monitoring leads and special leads" (2016) Indian Pacing and Electrophysiology Journal 16:92-95.

Kingery, W.D., "Introduction to Ceramics" (1960) Eds: John Wiley & Sons, Inc. 23 pages.

Loehman, R.E., "Surfaces, Interfaces, Thin Films" (1993) In: Characterization of Ceramics, Materials Characterization Series (Eds: R.E. Loehman, J.E. Fitzpatrick) 13 pages.

Mendelson, Y. et al., "A Wearable Reflectance Pulse Oximeter for Remote Physiological Monitoring" (Aug 30-Sep. 3, 2006) Proceedings of the 28th IEEE, EMBS Annual International Conference New York City 4 pages.

Mendelson, Y., "Wearable Wireless Pulse Oximetry for Physiological Monitoring" (Aug. 4, 2008) Presentation—PPL Workshop 34 pages.

Meziane, N. et al. "Dry Electrodes for Electrocardiography"(2013) Physiol. Meas. 34:R47-R69.

Shi, F., "Progress in Modern Ceramics" (2012) In: Ceramic Materials (Ed: Feng Shi) 6 pages.

GreyB, "Google Watch: Convert your arm into a Keyboard" (2014), retrieved from the Internet: URL: <https://greybmusings.wordpress.com/2014/02/28/google-smartwatch/> [retrieved Aug. 28, 2023], 4 pages.

U.S. Appl. No. 17/987,429, filed Nov. 15, 2022, Hatanaka et al.

(56)

References Cited

OTHER PUBLICATIONS

- U.S. Appl. No. 18/075,212, filed Dec. 5, 2022, Pandya et al.
- Chen et al., "Dynamics Analysis and Simulation of the Wearable Power Assistance Robot," *Experiment Science and Technology*, 2009, 5 pages.
- Dozza et al., "A Portable Audio-biofeedback System to Improve Postural Control," Proceedings of the 26th Annual International Conference of the IEEE EMBS, San Francisco, CA, Sep. 1-5, 2004, pp. 4799-4802.
- Nirjon et al., MusicalHeart: A Hearty Way of Listening to Music, *SenSys* 2012, Nov. 6-9, 2012, Toronto, Ontario, Canada, pp. 1-14.
- Ohgi et al., "Stroke phase discrimination in breaststroke swimming using a tri-axial acceleration sensor device," *Sports Engineering*, vol. 6, No. 2, Jun. 1, 2003, pp. 113-123.
- Onizuka et al., Head Ballistocardiogram Based on Wireless Multi-Location Sensors, 2015 IEEE, pp. 1275-1278.
- Zijlstra et al., "Assessment of spatio-temporal gait parameters from trunk accelerations during human walking," *Gait & Posture*, vol. 18, No. 2, Oct. 1, 2003, pp. 1-10.

* cited by examiner

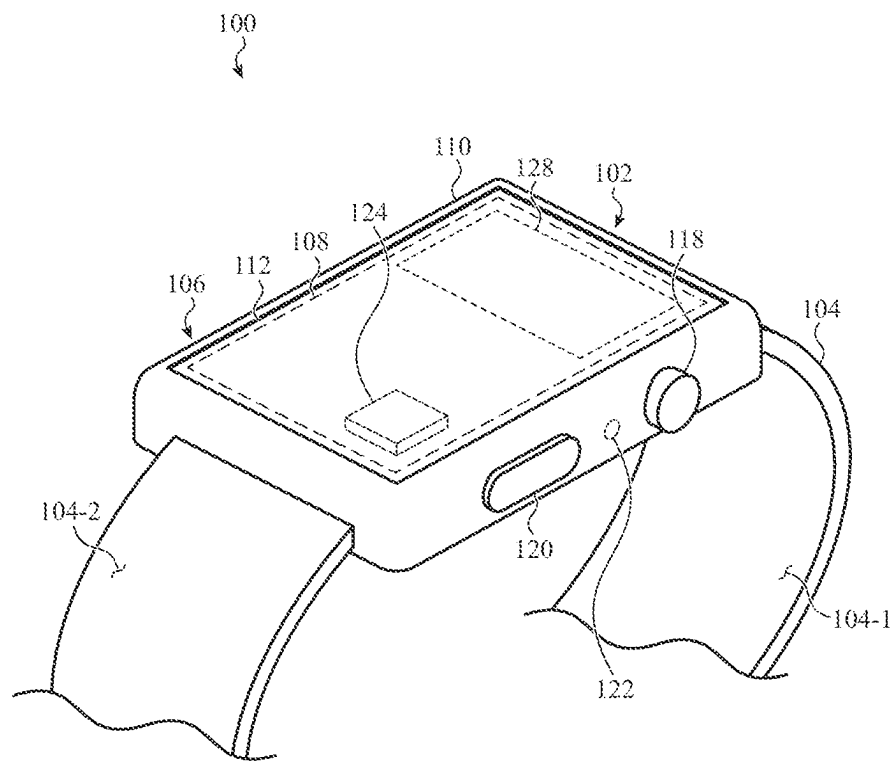


FIG. 1A

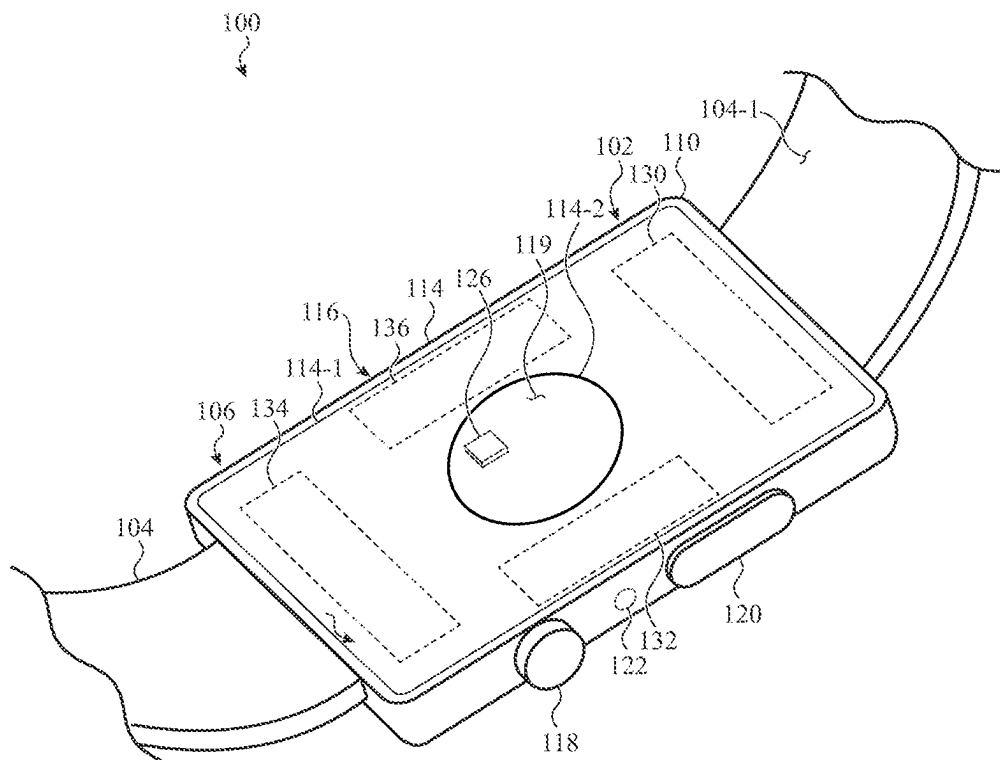


FIG. 1B

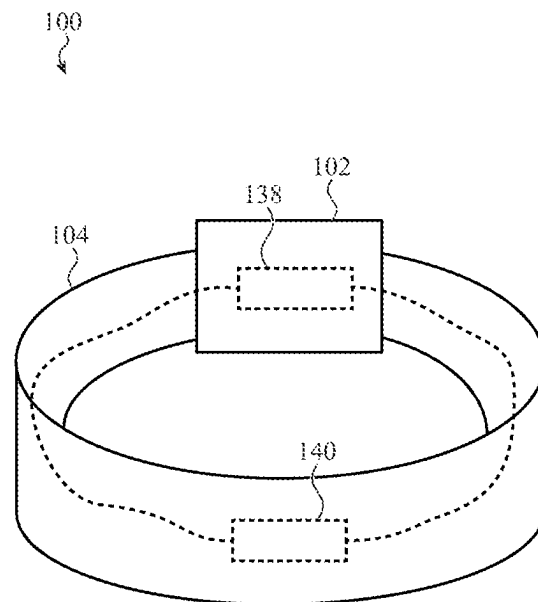


FIG. 1C

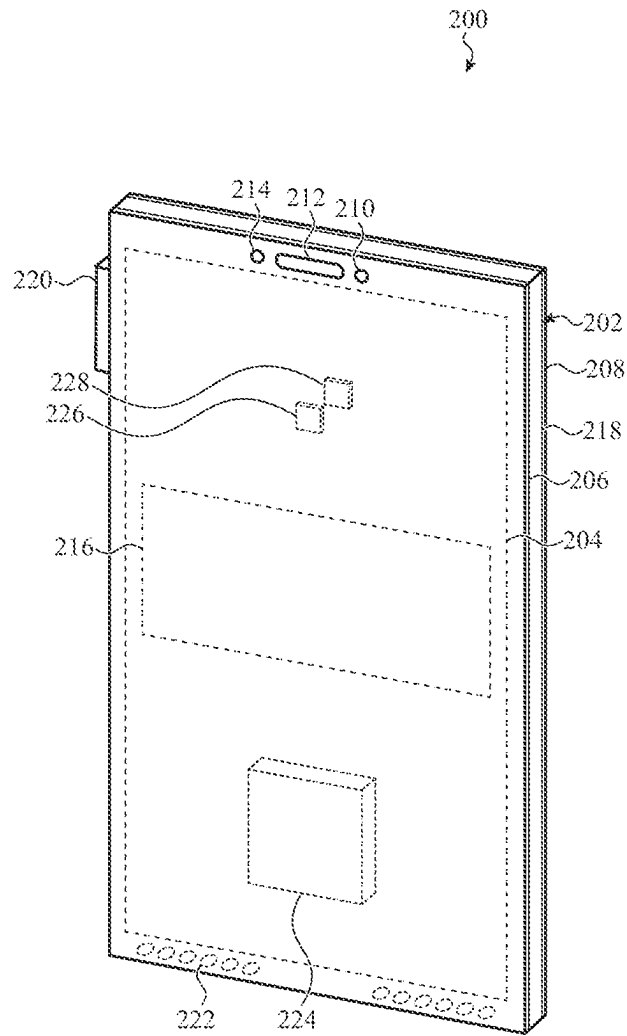


FIG. 2

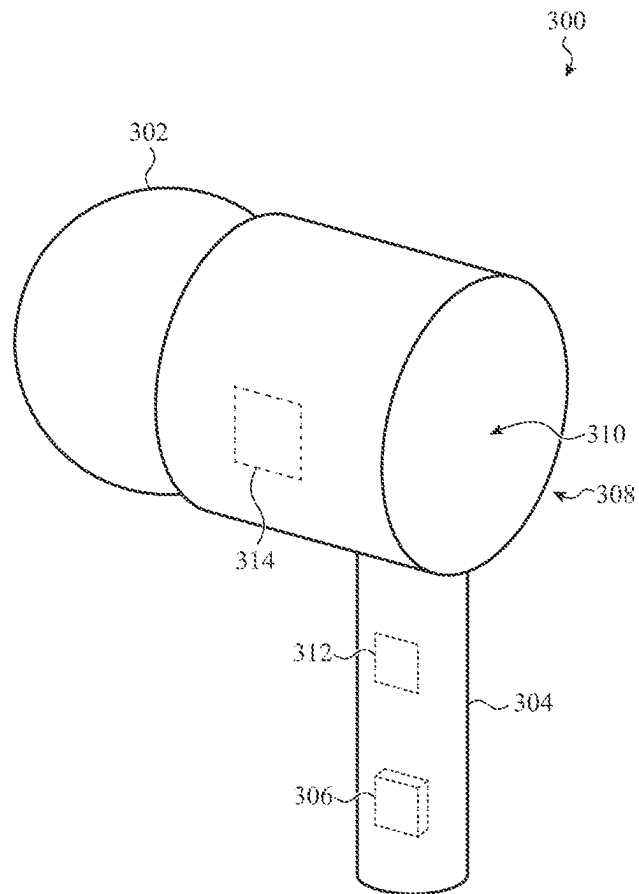


FIG. 3

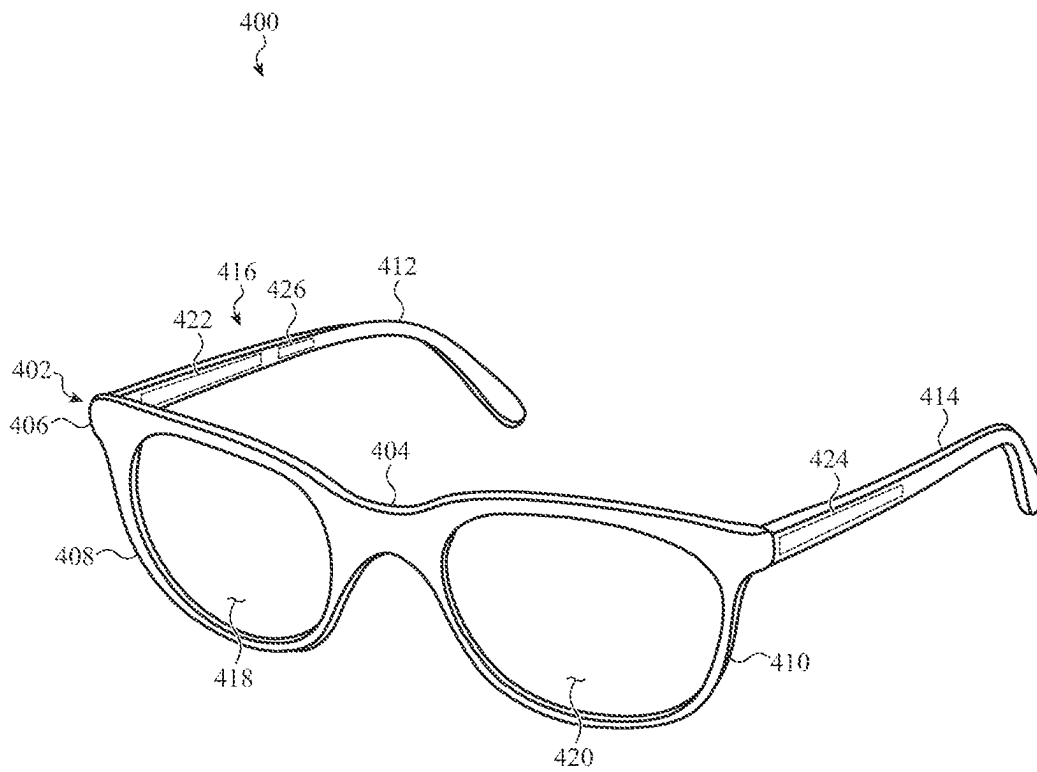
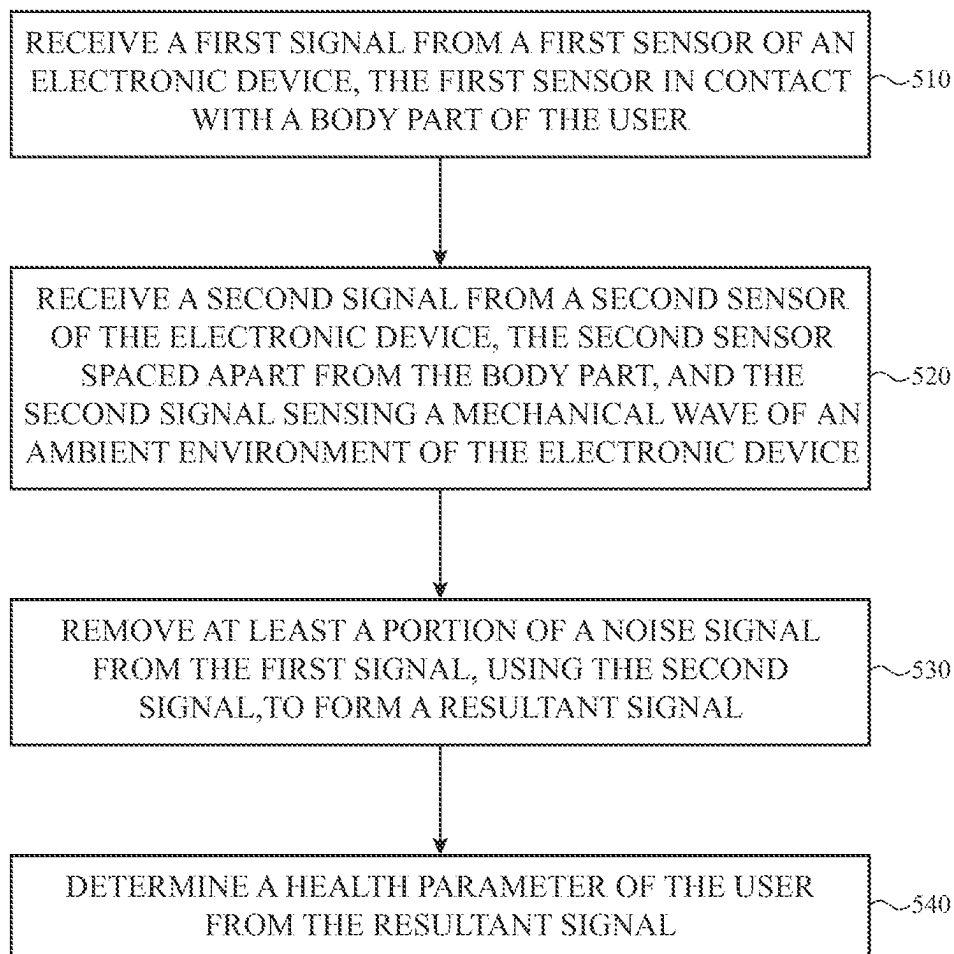


FIG. 4

500
↓*FIG. 5*

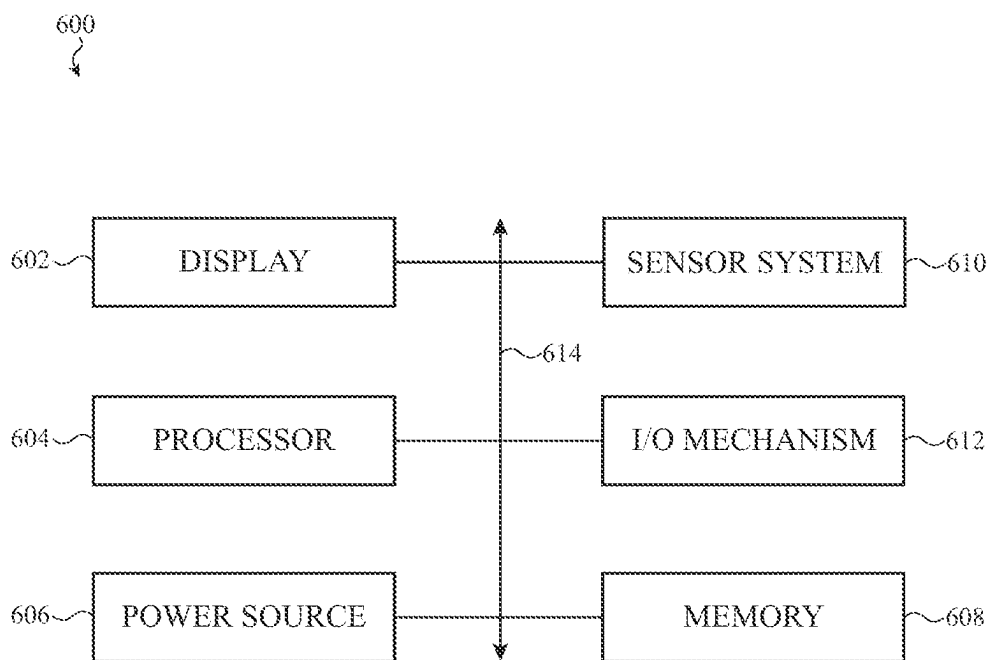


FIG. 6

1

SENSING HEALTH PARAMETERS IN WEARABLE DEVICES

CROSS-REFERENCE TO RELATED APPLICATION

This application is a nonprovisional of, and claims the benefit under 35 U.S.C. § 119(e) of and priority to U.S. Provisional Patent Application No. 63/239,358, filed Aug. 31, 2021, the contents of which are incorporated herein by reference in their entirety.

TECHNICAL FIELD

The described embodiments relate generally to wearable devices, systems, and methods thereof for determining a health parameter of a user. More particularly, the present embodiments relate to measuring health parameters with more accuracy and reliability using sensors in wearable devices.

BACKGROUND

Sensors are included in many of today's electronic devices, including electronic devices such as phones, smartphones, computers (e.g., tablet computers or laptop computers), wearable electronic devices (e.g., electronic watches, smart watches, or health or fitness monitors), game controllers, navigation systems (e.g., vehicle navigation systems or robot navigation systems), earbuds, headphones, headsets, glasses, and so on. Sensors may variously sense the presence of objects, distances to objects, proximities of objects, movements of objects (e.g., whether objects are moving, or the speed, acceleration, or direction of movement of objects), compositions of objects, a biophysical condition or status of a user (e.g., a user's health or fitness), and so on.

Given the wide range of sensor applications, any new development in the configuration or operation of a sensor can be useful. New developments that may be particularly useful are developments that reduce the cost, size, complexity, part count, or manufacture time of the sensor, or developments that improve the sensitivity, functionality, accuracy, or speed of sensor operation. It is increasingly desirable to have more accurate and reliable measurement sensors in wearable devices, and to have measurement sensors that are lower cost.

SUMMARY

The term embodiment and like terms, e.g., implementation, configuration, aspect, example, and option, are intended to refer broadly to all of the subject matter of this disclosure and the claims below. Statements containing these terms should be understood not to limit the subject matter described herein or to limit the meaning or scope of the claims below. Embodiments of the present disclosure covered herein are defined by the claims below, not this summary. This summary is a high-level overview of various aspects of the disclosure and introduces some of the concepts that are further described in the Detailed Description section below. This summary is not intended to identify key or essential features of the claimed subject matter. This summary is also not intended to be used in isolation to determine the scope of the claimed subject matter. The subject matter should be understood by reference to appro-

2

priate portions of the entire specification of this disclosure, any or all drawings, and each claim.

Embodiments of this disclosure are directed to a wearable device having a housing, a display, and a sensor system. The display may be at least partially surrounded by the housing. The sensor system may be housed at least partially in the housing. The sensor system may include a first sensor, a second sensor, and a controller. The first sensor may be configured to contact a body part of a user and generate a first signal. The second sensor may be configured to sense a mechanical wave in an ambient environment of the wearable device and generate a second signal. The controller may be configured to generate a resultant signal by removing noise from the first signal using the second signal, and determine a health parameter of the user from the resultant signal.

Embodiments of this disclosure are also directed to a wearable device having a housing and a sensor system. The housing may include a main body and at least one stem extending from the main body. The sensor system may be housed at least partially in the housing. The sensor system may include a first sensor, a second sensor, and a controller. The first sensor may be configured to sense an aspect of a body part of a user when the wearable device is worn and generate a first signal. The second sensor may be configured to sense a mechanical wave in an ambient environment of the wearable device and generate a second signal. The controller may be configured to combine the first signal and the second signal, and determine a health parameter of the user using the combined first and second signals.

Embodiments of this disclosure are also directed to a method of determining a health parameter of a user. The method may include receiving a first signal from a first sensor of an electronic device when the first sensor is in contact with a body part of the user. The method may further include receiving a second signal from a second sensor of the electronic device while the second sensor is spaced apart from the body part and sensing a mechanical wave of an ambient environment of the electronic device. The method may further include removing at least a portion of a noise signal from the first signal, using the second signal, to form a resultant signal. The method subsequently includes determining the health parameter of the user from the resultant signal.

The above summary is not intended to represent each embodiment or every aspect of the present disclosure. Rather, the foregoing summary merely provides an example of some of the novel aspects and features set forth herein. The above features and advantages, and other features and advantages of the present disclosure, will be readily apparent from the following detailed description of representative embodiments and modes for carrying out the present invention, when taken in connection with the accompanying drawings and the appended claims. Additional aspects of the disclosure will be apparent to those of ordinary skill in the art in view of the detailed description of various embodiments, which is made with reference to the drawings, a brief description of which is provided below.

BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

The disclosure will be readily understood by the following detailed description in conjunction with the accompanying drawings, wherein like reference numerals designate like structural elements, and in which:

FIG. 1A shows a perspective top view of an example wearable device having sensors for determining a health

3

parameter of the user of the wearable device, according to aspects of the present disclosure;

FIG. 1B shows a perspective rear view of the example wearable device of FIG. 1A, according to aspects of the present disclosure;

FIG. 1C shows a perspective side view of the example wearable device of FIG. 1A, according to aspects of the present disclosure;

FIG. 2 shows a perspective front view of another example wearable device having sensors for determining a health parameter of the user of the wearable device, according to aspects of the present disclosure;

FIG. 3 shows a perspective front view of an example earbud having sensors for determining a health parameter of the user of the earbud, according to aspects of the present disclosure;

FIG. 4 shows a perspective front view of an example pair of glasses having sensors for determining a health parameter of the user of the pair of glasses, according to aspects of the present disclosure;

FIG. 5 shows a block diagram of a method of determining a health parameter of a user using the wearable devices of FIGS. 1-4, according to aspects of the present disclosure; and

FIG. 6 shows an example schematic representation of an electronic system in the wearable devices of FIGS. 1-4, according to aspects of the present disclosure.

The use of cross-hatching or shading in the accompanying figures is generally provided to clarify the boundaries between adjacent elements and also to facilitate legibility of the figures. Accordingly, neither the presence nor the absence of cross-hatching or shading conveys or indicates any preference or requirement for particular materials, material properties, element proportions, element dimensions, commonalities of similarly illustrated elements, or any other characteristic, attribute, or property for any element illustrated in the accompanying figures.

The present disclosure is susceptible to various modifications and alternative forms, and some representative embodiments have been shown by way of example in the drawings and will be described in detail herein. It should be understood, however, that the invention is not intended to be limited to the particular forms disclosed. Rather, the disclosure is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

Additionally, it should be understood that the proportions and dimensions (either relative or absolute) of the various features and elements (and collections and groupings thereof) and the boundaries, separations, and positional relationships presented therebetween, are provided in the accompanying figures merely to facilitate an understanding of the various embodiments described herein and, accordingly, may not necessarily be presented or illustrated to scale, and are not intended to indicate any preference or requirement for an illustrated embodiment to the exclusion of embodiments described with reference thereto.

DETAILED DESCRIPTION

Various embodiments are described with reference to the attached figures, where like reference numerals are used throughout the figures to designate similar or equivalent elements. The figures are not necessarily drawn to scale and are provided merely to illustrate aspects and features of the present disclosure. Numerous specific details, relationships, and methods are set forth to provide a full understanding of

4

aspects and features of the present disclosure, although one having ordinary skill in the relevant art will recognize that these aspects and features can be practiced without one or more of the specific details, with other relationships, or with other methods. In some instances, well-known structures or operations are not shown in detail for illustrative purposes. The various embodiments disclosed herein are not necessarily limited by the illustrated ordering of acts or events, as some acts may occur in different orders and/or concurrently with other acts or events. Furthermore, not all illustrated acts or events are necessarily required to implement aspects and features of the present disclosure.

For purposes of the present detailed description, unless specifically disclaimed, and where appropriate, the singular includes the plural and vice versa. The word “including” means “including without limitation.” Moreover, words of approximation, such as “about,” “almost,” “substantially,” “approximately,” and the like, can be used herein to mean “at,” “near,” “nearly at,” “within 3-5% of,” “within acceptable manufacturing tolerances of,” or any logical combination thereof. Similarly, terms “vertical” or “horizontal” are intended to additionally include “within 3-5% of” a vertical or horizontal orientation, respectively.

Additionally, directional terminology, such as “top,” “bottom,” “upper,” “lower,” “front,” “back,” “over,” “under,” “above,” “below,” “left,” “right,” etc. is used with reference to the orientation of some of the components in some of the figures described below. Because components in various embodiments can be positioned in a number of different orientations, directional terminology is used for purposes of illustration only and is in no way limiting. The directional terminology is intended to be construed broadly, and therefore should not be interpreted to preclude components being oriented in different ways. These words are intended to relate to the equivalent direction as depicted in a reference illustration; as understood contextually from the object(s) or element(s) being referenced, such as from a commonly used position for the object(s) or element(s); or as otherwise described herein. Further, it is noted that the term “signal” means a waveform (e.g., electrical, optical, magnetic, mechanical or electromagnetic) capable of traveling through a medium such as DC, AC, sinusoidal-wave, triangular-wave, square-wave, vibration, and the like.

Also, as used herein, the phrase “at least one of” preceding a series of items, with the term “and” or “or” to separate any of the items, modifies the list as a whole, rather than each member of the list. The phrase “at least one of” does not require selection of at least one of each item listed; rather, the phrase allows a meaning that includes at a minimum one of any of the items, and/or at a minimum one of any combination of the items, and/or at a minimum one of each of the items. By way of example, the phrases “at least one of A, B, and C” or “at least one of A, B, or C” each refer to only A, only B, or only C; any combination of A, B, and C; and/or one or more of each of A, B, and C. Similarly, it may be appreciated that an order of elements presented for a conjunctive or disjunctive list provided herein should not be construed as limiting the disclosure to only that order provided.

Embodiments of the disclosure are directed to wearable devices, systems, and methods of determining a health parameter of a user, using sensors in the wearable devices. In some embodiments, one or more optical sensors positioned on a watch, phone, cuff, earbud, or other device can be used to measure health metrics of a user. For example, heart rate and peripheral oxygen saturation (SpO₂) can be measured using infrared (IR), red, and green light-emitting

diodes (LEDs). In other embodiments, non-optical sensors, such as piezoelectric or acoustic sensors, can also be used to measure health metrics, and can enable continuous or on-demand health metric measuring or monitoring. Non-optical sensors are interesting because of their potential to reduce power consumption requirements beyond what is possible with optical sensors. This can be advantageous in that consumer products typically face challenges in terms of size, battery life, and so on. Any reduction in a device's power consumption requirements can be beneficial in terms of extending the device's use between battery charges, and/or enabling the device to operate with a battery having a reduced size or weight.

As described herein, two or more piezoelectric polyvinylidene fluoride (PVDF) sensors and/or acoustic sensors may be integrated into a wearable device and used to obtain relevant signals for health sensing. The wearable device may be watches, phones, earbuds, glasses, tablet computers, sleep products (e.g., in-bed sensor mats), cuffs (e.g., blood pressure cuffs), chest straps, and the like. This arrangement works by measuring physiological health parameters and rejecting unrelated external noises that affect the signals associated with the physiological health parameters. This enables external noise interferences to be attenuated, thus improving signal to noise ratio (SNR) and enabling localized micro vibration sensing at low power consumption compared to optical sensors. Health metrics information can be extracted from sensed signals after subtracting out external aggressors (e.g., noise), and in some embodiments, applying filtering to an acquired signal, to determine a user's heart rate (HR), respiration rate, the presence of micro vibrations, and so on. In some embodiments, multiple types of sensors may be included in a device to improve SNR and/or reduce power consumption.

Relevant sensors to improve signal quality include microphones, piezoelectric PVDF sensors, capacitive gap sensors, strain gauges, accelophones, and accelerometers. Such sensors may increase a sensing bandwidth, sensitivity, SNR, or dynamic range or linearity of the measured physiological health parameters. Such sensors may be used to acquire a user's HR, ballistocardiogram (BCG)/seismocardiogram (SCG), respiratory motion, lung sounds, and so on. A user's respiration rate may be measured using seismocardiography. Such sensors can be less susceptible to body perspiration, environmental acoustic noise, motion artifacts, and so on. In some embodiments, such sensors may be a companion to optical sensing and may be switched ON or OFF depending on an optical SNR.

These and other wearable systems, devices, methods, and apparatus are described with reference to FIGS. 1A-6. However, those skilled in the art will readily appreciate that the detailed description given herein with respect to these figures is for explanatory purposes only and should not be construed as limiting.

FIGS. 1A-1C show a perspective top view, a perspective rear view, and a perspective side view, respectively, of an example wearable device 100 having sensors for determining a health parameter of the user of the wearable device 100. The wearable device 100 may be a smartwatch, a fitness monitor, a health diagnostic device, or alternatively, any type of wearable and portable device. The wearable device 100 includes a housing 102 including a main body 106, and a band 104 (e.g., wrist band) attached to the housing 102. The band 104 is configured to secure the wearable device 100 to a body part (e.g., an arm, wrist, leg, ankle, or waist) or skin of the user. In different embodiments, coupling

mechanisms other than the band 104 may be used to secure the wearable device 100 to at least a portion of a body of the user or a stationary object.

The housing 102 may include an input or selection device, such as a crown 118 or an input button 120. The housing 102 at least partially surrounds a display 108. In some embodiments, the housing 102 may include a sidewall 110, which sidewall 110 may support a front cover 112 (FIG. 1A) and/or a back cover 114 (FIG. 1B). The front cover 112 may be positioned over the display 108, and may provide a window through which the display 108 may be viewed. In some embodiments, the display 108 may be attached to (or abut against) the sidewall 110 and/or the front cover 112. In alternative embodiments of the wearable device 100, the display 108 may not be included and/or the housing 102 may have an alternative configuration.

The display 108 may include one or more light-emitting elements including, for example, light-emitting elements that define a light-emitting diode (LED) display, organic LED (OLED) display, liquid crystal display (LCD), electroluminescent (EL) display, or other type of display. In some embodiments, the display 108 may include, or be associated with, one or more touch and/or force sensors that are configured to detect a touch and/or a force applied to a surface of the front cover 112.

In some embodiments, the sidewall 110 of the housing 102 may be formed using one or more metals (e.g., aluminum or stainless steel), polymers (e.g., plastics), ceramics, or composites (e.g., carbon fiber). The front cover 112 may be formed, for example, using one or more of glass, a crystal (e.g., sapphire), or a transparent polymer (e.g., plastic) that enables a user to view the display 108 through the front cover 112. In some non-limiting embodiments, a portion of the front cover 112, such as a perimeter portion of the front cover 112, may be coated with an opaque ink to obscure components included within the housing 102. In some embodiments, all of the exterior components of the housing 102 may be formed from a transparent material, and components within the device 100 may or may not be obscured by an opaque ink or opaque structure within the housing 102.

The back cover 114 may be formed using the same material(s) that are used to form the sidewall 110 or the front cover 112. In some embodiments, the back cover 114 may be part of a monolithic element that also forms the sidewall 110. In other embodiments, and as shown, the back cover 114 may be a multi-part back cover, such as a back cover 114 having a first back cover portion 114-1 attached to the sidewall 110 and a second back cover portion 114-2 attached to the first back cover portion 114-1. The second back cover portion 114-2 may, in some embodiments, have a circular perimeter and an exterior surface 119 having an arcuate profile.

The front cover 112, back cover 114, or first back cover portion 114-1 may be mounted to the sidewall 110 using fasteners, adhesives, seals, gaskets, or other components. The second back cover portion 114-2, when present, may be mounted to the first back cover portion 114-1 using fasteners, adhesives, seals, gaskets, or other components.

A display stack or device stack (hereafter referred to as a "stack") including the display 108 may be attached to (or abutted against) an interior surface of the front cover 112 and extend into an interior volume of the wearable device 100. In some embodiments, the stack may include a touch sensor (e.g., a grid of capacitive, resistive, strain-based, ultrasonic, or other type of touch sensing elements), or other layers of optical, mechanical, electrical, or other types of components.

In some embodiments, the touch sensor (or part of a touch sensor system) may be configured to detect a touch applied to an outer surface of the front cover **112**, such as a display surface of the wearable device **100**.

In some embodiments, a force sensor (or part of a force sensor system) may be positioned within the interior volume below and/or to the side of the display **108** (and in some embodiments, within the device stack). The force sensor (or force sensor system) may be triggered in response to the touch sensor detecting one or more touches on the front cover **112**, or a location or locations of one or more touches on the front cover **112**, and may determine an amount of force associated with each touch, or an amount of force associated with the collection of touches as a whole. The force sensor (or force sensor system) may alternatively trigger operation of the touch sensor (or touch sensor system), or may be used independently of the touch sensor (or touch sensor system).

The wearable device **100** includes a sensor system **116** that is at least partially housed in the housing **102**. The various sensors in the sensor system **116** are capable of acquiring physiological information from the wearer or user of the wearable device **100** (e.g., a heart rate, respiration rate, blood oxygenation level, a ballistocardiogram, a seismocardiogram, blood pressure level, a blood flow rate, a blood glucose level, a partial thromboplastin time, body temperature, etc.), or to determine a status of the wearable device **100** (e.g., whether the wearable device **100** is being worn or a tightness of the wearable device **100**). The different sensors in the sensor system **116** may include a piezoelectric PVDF sensor, a strain sensor, a piezoelectric sensor, a capacitive gap sensor, an acoustic sensor, a microphone, an accelophone, an image sensor, a heat sensor, a motion sensor, a proximity sensor, an accelerometer, a gyroscope, or a pressure transducer.

In some non-limiting embodiments, one or more such sensors may include a number of electromagnetic radiation emitters, such as visible light and/or infrared (IR) emitters, and/or a number of electromagnetic radiation detectors, such as visible light and/or IR detectors, such as electromagnetic radiation detectors including any of the detector pixels described herein.

In some embodiments, the wearable device **100** may have a port **122** (or set of ports) on a side of the housing **102** (or elsewhere), and an ambient pressure sensor, ambient temperature sensor, internal/external differential pressure sensor, gas sensor, particulate matter concentration sensor, or air quality sensor may be positioned in or near the port(s) **122**. Further, in some embodiments, the wearable device **100** may include an image sensor configured for biometric authentication of the user.

The sensor system **116** in the wearable device **100** includes a first sensor **126** disposed on or attached to the back cover **114**, or alternatively, on an interior surface **104-1** of the band **104** so that the first sensor **126** is in contact of a body part or skin of the user. In non-limiting embodiments, the first sensor **126** is configured to detect a change in vibration, motion, or radiation associated with a physiological measurement of the user and generate a first signal based on the physiological measurement. In some embodiments, the first sensor **126** is a piezoelectric PVDF sensor or strain sensor. The first sensor **126** may alternatively be an optical sensor or other type of sensor. The first sensor **126** may emit or transmit signals through the housing **102** (or back cover **114**) and/or receive signals or sense conditions through the housing **102** (or back cover **114**).

Additionally, a second sensor **128** is disposed on or attached to the front cover **112** of the housing **102**, or alternatively, on an exterior surface **104-2** of the band **104**. The second sensor **128** is configured to sense a mechanical wave in an ambient environment of the wearable device **100** and generate a second signal. In some embodiments, the second sensor **128** is embedded somewhere in the band **104** to be used as a reference to measure and reject external noise aggressors. In various embodiments, the second sensor **128** may be a piezoelectric PVDF sensor, a strain sensor, a capacitive gap sensor, an acoustic sensor, a microphone, an accelophone, and the like. In some embodiments, the second sensor **128** is embedded on the display **108** for self-examination and acquisition of other stethoscope sounds. In other embodiments, the second sensor **128** may be located at a remote location from the wearable device **100**, such as on a chest strap, on blood pressure cuffs, or on an in-bed sensor mat.

Additionally or alternatively, the sensor system **116** in the wearable device **100** may include multi-pixel PVDF, strain, or capacitive gap sensors **130**, **132**, **134**, and **136** embedded in or around the back cover **114** (e.g., around the second back cover portion **114-2**) to measure alternating current (AC) lung and heart signals. This arrangement can be used to measure partial thromboplastin time (PTT), respiration rate (RR), or heart rate (HR), by measuring and rejecting external noises through the multi-location sensor arrangement. This multi-pixel arrangement can also be used to detect whether the wearable device **100** is being worn and/or a tightness of the wearable device **100** while worn, or to detect a quality of contact between the skin of the user and the wearable device **100**, or to detect any rotation, skew, or an orientation of the wearable device **100**. For example, whether the wearable device **100** is being worn, or the quality of contact with a user's skin, can be determined based at least partly based on the strengths of signals generated by the sensors **130**, **132**, **134**, **136** and, in some cases, the amount of noise in the signals. As another example, whether the wearable device **100** is skewed with respect to a user's skin (e.g., not resting flat on the user's skin) can be determined at least partly based on comparisons of, and differences in, the signals generated by the sensors **130**, **132**, **134**, **136**. These detections of device condition(s) and orientation can be useful in conjunction with measurement of biometric signals (e.g., heart rate, respiration rate, BCG, etc.) and physiological signals because they can help identify issues with signal quality. For example, when measuring SpO₂, detecting tightness of the wearable device **100**, or a quality of contact of the wearable device **100** with the user's skin is needed to accurately measure a perfusion index.

Additionally or alternatively, the wearable device **100** may include a multi-pixel sensor arrangement including sensors **138**, **140** embedded into the back cover **114** and the band **104** (or, additionally or alternatively, two or more such sensors embedded in the band **104**).

Additionally or alternatively, the sensor system **116** may include a temperature sensor (not shown) embedded on the back cover **114** for measuring a temperature of the wrist skin, and a temperature sensor (not shown) embedded on the front cover **112** for measuring an ambient temperature. The measured ambient temperature and the measured skin temperature may then be used to calculate a body temperature of the user (e.g., by adjusting a temperature acquired by the back cover temperature sensor in response to an ambient temperature measured by the front cover temperature sensor).

The wearable device **100** may include a controller **124** (e.g., a processor and/or other components) configured to determine or extract, at least partly in response to signals received directly or indirectly from the sensors **126**, **128**, physiological health parameters of the user and/or a status of the wearable device **100**, as mentioned above. As a non-limiting example, the controller **124** may receive a first signal from the first sensor **126** comprising physiological information (e.g., heart rate, respiration rate, etc.) detected through contact of the user's skin. At the same time, the controller **124** may receive a second signal from the second sensor **128**, where the second signal includes external noise aggressors in the ambient environment of the wearable device **100**. The controller **124** uses the second signal to generate a resultant signal by removing noise captured by the first signal. In some embodiments, this is accomplished by simply subtracting the second signal from the first signal. In some embodiments, the controller **124** may further apply filters to the resultant signal to extract the health parameters or statuses.

In some embodiments, the controller **124** may be configured to convey the determined or extracted health parameters or statuses via an output device of the wearable device **100**. For example, the controller **124** may cause the indication(s) to be displayed on the display **108**, indicated via audio or haptic outputs, transmitted via a wireless communications interface or other communications interface, and so on. The controller **124** may also or alternatively maintain or alter one or more settings, functions, or aspects of the wearable device **100**, including, in some embodiments, what is displayed on the display **108**.

FIG. **2** shows a perspective front view of an example wearable device **200** having sensors for determining a health parameter of the user of the wearable device **200**. The wearable device **200** may be a smartphone, a mobile device, a tablet computer, a portable electronic device, a portable computer, a portable music player, a portable terminal, a vehicle navigation system, a robot navigation system, or other portable or mobile device. The wearable device **200** could also be a device that is semi-permanently located (or installed) at a single location (e.g., a door lock, thermostat, refrigerator, or other appliance).

The wearable device **200** includes a housing **202** that at least partially surrounds a display **204**. The housing **202** may include or support a front cover **206** and/or a rear cover **208**. The front cover **206** may be positioned over the display **204**, and may provide a window through which the display **204** (including images displayed thereon) may be viewed by a user. In some embodiments, the display **204** may be attached to (or abut against) the housing **202** and/or the front cover **206**.

The display **204** may include one or more light-emitting elements or pixels, and in some embodiments, may be an LED display, an OLED display, an LCD, an EL display, a laser projector, or another type of electronic display. In some embodiments, the display **204** may include, or be associated with, one or more touch and/or force sensors that are configured to detect a touch and/or a force applied to a surface of the front cover **206**.

The various components of the housing **202** may be formed from the same or different materials. For example, a sidewall **218** of the housing **202** may be formed using one or more metals (e.g., stainless steel), polymers (e.g., plastics), ceramics, or composites (e.g., carbon fiber). In some embodiments, the sidewall **218** may be a multi-segment sidewall including a set of antennas. The antennas may form structural components of the sidewall **218**. The antennas

may be structurally coupled (to one another or to other components) and electrically isolated (from each other or from other components) by one or more non-conductive segments of the sidewall **218**. The front cover **206** may be formed, for example, using one or more of glass, a crystal (e.g., sapphire), or a transparent polymer (e.g., plastic) that enables a user to view the display **204** through the front cover **206**. In some embodiments, a portion of the front cover **206** (e.g., a perimeter portion of the front cover **206**) may be coated with an opaque ink to obscure components included within the housing **202**. The rear cover **208** may be formed using the same material(s) that are used to form the sidewall **218** or the front cover **206**, or may be formed using a different material or materials. In some embodiments, the rear cover **208** may be part of a monolithic element that also forms the sidewall **218** (or in some embodiments, where the sidewall **218** is a multi-segment sidewall, those portions of the sidewall **218** that are non-conductive). In still other embodiments, all of the exterior components of the housing **202** may be formed from a transparent material, and components within the wearable device **200** may or may not be obscured by an opaque ink or opaque structure within the housing **202**.

The front cover **206** may be mounted to the sidewall **218** to cover an opening defined by the sidewall **218** (i.e., an opening into an interior volume in which various electronic components of the wearable device **200**, including the display **204**, may be positioned). The front cover **206** may be mounted to the sidewall **218** using fasteners, adhesives, seals, gaskets, or other components.

A display stack or device stack (hereafter referred to as a "stack") including the display **204** (and in some embodiments, the front cover **206**) may be attached to (or abutted against) an interior surface of the front cover **206** and extend into the interior volume of the wearable device **200**. In some embodiments, the stack may also include a touch sensor (e.g., a grid of capacitive, resistive, strain-based, ultrasonic, or other type of touch sensing elements), or other layers of optical, mechanical, electrical, or other types of components. In some embodiments, the touch sensor (or part of a touch sensor system) may be configured to detect a touch applied to an outer surface of the front cover **206** (e.g., to a display surface of the wearable device **200**).

In some embodiments, a force sensor (or part of a force sensor system) may be positioned within the interior volume below and/or to the side of the display **204** (and in some embodiments, within the stack). The force sensor (or force sensor system) may be triggered in response to the touch sensor detecting one or more touches on the front cover **206** (or indicating a location or locations of one or more touches on the front cover **206**), and may determine an amount of force associated with each touch, or an amount of force associated with the collection of touches as a whole.

The wearable device **200** includes a sensor system **216** that is at least partially housed within the housing **202**. The various sensors in the sensor system **216** are capable of acquiring physiological information from the wearer or user of the wearable device **200** (e.g., a heart rate, a respiration rate, a blood oxygenation level, a ballistocardiogram, a seismocardiogram, a blood pressure level, a blood flow rate, a blood glucose level, a partial thromboplastin time, etc.), or to determine a status of the wearable device **200** (e.g., whether the wearable device **200** is being worn or a tightness of the wearable device **200**). The different sensors in the sensor system **216** may include a piezoelectric PVDF sensor, a strain sensor, a piezoelectric sensor, a capacitive gap sensor, an acoustic sensor, a microphone, an accelerophone, an

image sensor, a heat sensor, a motion sensor, a proximity sensor, an accelerometer, a gyroscope, or a pressure transducer.

In some embodiments, one or more such sensors may include a number of electromagnetic radiation emitters (e.g., visible light and/or IR emitters) and/or a number of electromagnetic radiation detectors (e.g., visible light and/or IR detectors, such as electromagnetic radiation detectors including any of the detector pixels described herein). In some embodiments, the wearable device **200** may have an ambient pressure sensor, an ambient temperature sensor, an internal/external differential pressure sensor, a gas sensor, a particulate matter concentration sensor, or an air quality sensor positioned at one or more locations on the housing **202**. Further, in some embodiments, the wearable device **200** may include an image sensor configured for biometric authentication of the user.

In some embodiments, the wearable device **200** may include a first sensor **226** integrated into or with the display **204**, for purposes of monitoring a user's health. In some embodiments, the first sensor **226** may be capable of sensing physiological information from a body part or skin of a user of the wearable device **200**. In non-limiting embodiments, the first sensor **226** is configured to detect a change in vibration, motion, or radiation associated with a physiological measurement of the user and generate a first signal based on the physiological measurement. In some embodiments, the first sensor **226** may be a PVDF sensor or a strain sensor. The first sensor **226** may emit or transmit signals through the housing **202** and/or receive signals or sense conditions through the housing **202**.

Additionally, a second sensor **228** is disposed on or attached to the rear cover **208** of the housing **202**. The second sensor **228** is configured to sense a mechanical wave in an ambient environment of the wearable device **200** and generate a second signal. In some embodiments, the second sensor **228** may be used as a reference to measure and reject external noise aggressors. In various embodiments, the second sensor **228** may be a PVDF sensor, a strain sensor, a piezoelectric sensor, a capacitive gap sensor, an acoustic sensor, a microphone, an accelophone, and the like. In some embodiments, the second sensor **228** is embedded on the display **108** for self-examination and acquisition of other stethoscope sounds. In other embodiments, the second sensor **228** may be located at a remote location from the wearable device **200**, such as on a chest strap, on blood pressure cuffs, or on an in-bed sensor mat.

The wearable device **200** may include a controller **224** (e.g., a processor and/or other components) configured to determine or extract, at least partly in response to signals received directly or indirectly from the sensors **226**, **228**, physiological health parameters of the user, a status of the wearable device **200**, or parameters of an environment of the wearable device **200** (e.g., air quality), or a composition of a target or object, as mentioned above. As a non-limiting example, the controller **224** may receive a first signal from the first sensor **226** comprising physiological information (e.g., heart rate, respiration rate, etc.) detected through contact of the user's skin. At the same time, the controller **224** may receive a second signal from the second sensor **228**, where the second signal includes external noise aggressors in the ambient environment of the wearable device **200**. The controller **224** uses the second signal to generate a resultant signal by removing noise captured by the first signal. In some

embodiments, the controller **224** may further apply filters to the resultant signal to extract the health parameters or statuses.

In some embodiments, the controller **224** may be configured to convey the determined or extracted health parameters or statuses via an output device of the wearable device **200**. For example, the controller **224** may cause the indication(s) to be displayed on the display **204**, indicated via audio or haptic outputs, transmitted via a wireless communications interface or other communications interface, and so on. The controller **224** may also alternatively maintain or alter one or more settings, functions, or aspects of the wearable device **200**, including, in some embodiments, what is displayed on the display **204**.

The wearable device **200** may include various other components. For example, the front of the wearable device **200** may include one or more front-facing cameras **210** (including one or more image sensors), speakers **212**, microphones **214** or other audio components (e.g., audio, imaging, and/or sensing components) that are configured to transmit or receive signals to/from the wearable device **200**. In some embodiments, a front-facing camera **210**, alone or in combination with other sensors, may be configured to operate as a bio-authentication or facial recognition sensor. Additionally or alternatively, the sensor system **216** may be configured to operate as a front-facing camera **210**, a bio-authentication sensor, or a facial recognition sensor.

The wearable device **200** may also include input buttons or other input devices positioned along the sidewall **218** and/or on a rear surface of the wearable device **200**. For example, a volume button or multipurpose button **220** may be positioned along the sidewall **218**, and in some embodiments, may extend through an aperture in the sidewall **218**. The sidewall **218** may include one or more ports **222** that allow air, but not liquids, to flow into and out of the wearable device **200**. In some embodiments, one or more sensors may be positioned in or near the port(s) **222**. For example, an ambient pressure sensor, ambient temperature sensor, internal/external differential pressure sensor, gas sensor, particulate matter concentration sensor, or air quality sensor may be positioned in or near a port **222**.

FIG. 3 shows a perspective front view of another example wearable device **300** having sensors for determining a health parameter of the user of the wearable device **300**. The wearable device **300** may be an earbud, an earphone, and the like. In the embodiment shown in FIG. 3, the wearable device **300** may include a housing **308** (i.e., an earbud housing) having a main body **310**, and a stem **304** extending from the main body **310**. In other embodiments (not shown), the wearable device **300** may have two parts, each of which is insertable in a user's ear and includes a housing with a main body and a stem. The housing **308** may hold a speaker **302** that can be inserted into a user's ear, an optional microphone **312**, and controller **306** that can be used to acquire audio from the microphone **312**, transmit audio to the speaker **302**, and communicate audio between the speaker **302**, the microphone **312**, and one or more remote devices. The controller **306** may communicate with a remote device wirelessly (e.g., via a wireless communications interface, using a Wi-Fi, BLUETOOTH®, or cellular radio communications protocol, for example) or via one or more wires (e.g., via a wired communications interface, such as a Universal Serial Bus (USB) communications interface). In addition to communicating audio, the controller **306** may transmit or receive instructions and so on.

In some embodiments, the wearable device **300** may include one or more sensors **314** (e.g., PVDF sensor or strain

13

sensor) integrated into the housing 308 for opportunistic/passive health monitoring. In non-limiting embodiments, the sensors 314 are configured to detect a change in vibration, motion, or radiation associated with a physiological measurement of the user and generate a first signal based on the physiological measurement. In some embodiments, a first one of the sensors 314 may be disposed on the main body 310, while a second one of the sensors 314 may be disposed on the stem 304. In other embodiments, all of the sensors 314 may be either located on the stem 304 or on the main body 310.

The controller 306 may include a processor and/or other components that are configured to determine or extract, at least partly in response to signals received directly or indirectly from the speaker 302, the microphone 312, the one or more of the sensors 314, information related to a proximity of a user, an input of a user, and so on. As a non-limiting example, the controller 306 may receive a first signal from one of the sensors 314 comprising physiological health parameters detected through contact of the user's skin, as described above. At the same time, the controller 306 may receive a second signal from the microphone 312, where the second signal includes external noise aggressors in the ambient environment of the wearable device 300. The controller 306 may use the second signal to generate a resultant signal by removing noise captured by the first signal. In some embodiments, this may be accomplished by simply subtracting the second signal from the first signal. In some embodiments, the controller 306 may further apply filters to the resultant signal to extract the health parameters. In some embodiments, the first signal may be received from a PVDF sensor, strain sensor, acoustic sensor, or temperature sensor 314 on the main body 310 and in contact with a user's skin, and the second signal may be received from a PVDF sensor, strain sensor, acoustic sensor, or temperature sensor 314 on the stem 304 and in contact with an ambient environment of a user's ear.

In some embodiments, a user may wear a pair of the wearable devices 300, in the form of separate earbuds, or different earphone housings of a headset, and so on. In these embodiments, environmental and/or physiological signals specific to each side of a user's head (e.g., each ear) can be measured. In such embodiments, an accurate and precise clock/crystal embedded within each wearable device 300 or housing 308 can be used to synchronize and align time-stamped and/or time series measurements obtained from the sensors 314 of different wearable devices or housings. As an example, this can enable measurement of wind direction by detecting the relative magnitude of the received signals from sensors 314 positioned on different wearable devices 300 or housings 308 on a user's ears (e.g., PVDF sensors embedded on or inside the housing 308 on each of a user's ears or on each side of the user's head). For example, timings of changes in the signals produced by the sensors 314 can indicate air movement (e.g., pressure changes or acoustic propagation). As another example, this can enable measurement of temperature between the two ears by measuring the heat flux between the two ears using temperature sensors (e.g., sensors 314) in contact with the user (e.g., flexible thermopile sensors embedded inside or on the surface of the housing 308 on each of a user's ears or on each side of the user's head), and extrapolation of the core body temperature of the user.

In some embodiments, the controller 306 may be configured to convey the determined or extracted health parameters or statuses via an output device of the wearable device 300. For example, the controller 306 may cause the indica-

14

tion(s) to be output via the speaker 302 or a haptic device, transmitted via a wireless communications interface or other communications interface, and so on. The controller 306 may also or alternatively maintain or alter one or more settings, functions, or aspects of the wearable device 300, including, in some embodiments, what is output via the speaker 302.

FIG. 4 shows a perspective front view of yet another example wearable device 400 having sensors for determining a health parameter of the user of the wearable device 400. The wearable device 400 may be a pair of glasses, smartglasses, and the like. By way of example, the wearable device 400 is shown to include a housing 402 and lenses 418, 420. The housing 402 includes a frame or main body 406 formed by a first lens rim 408, a second lens rim 410, and a bridge 404 connecting the first lens rim 408 to the second lens rim 410. Both a first stem 412 connected to the first lens rim 408 and a second stem 414 connected to the second lens rim 410 extend from the main body 406.

Each of the first lens rim 408 and the second lens rim 410 may hold a respective lens, such as the first lens 418 or the second lens 420. The lenses 418, 420 may or may not magnify, focus, or otherwise alter light passing through the lenses 418, 420. For example, the lenses 418, 420 may correct a user's vision, block bright or harmful light, or simply provide a physical barrier through which light can pass with no or minimal adjustment. In some embodiments, the first and second lenses 418, 420 may be formed of glass or plastic.

In some embodiments, a multi-pixel sensor system 416 may include a first sensor 422 and a second sensor 424 mounted to the wearable device 400. The first sensor 422 and the second sensor 424 may be respectively mounted to the stems 412, 414 or to other components of the wearable device 400. In non-limiting embodiments, the first sensor 422 is configured to detect a change in vibration, motion, or radiation associated with a physiological measurement of the user and generate a first signal based on the physiological measurement. In non-limiting embodiments, the second sensor 424 is configured to sense a mechanical wave in an ambient environment of the wearable device 400 and generate a second signal that may be used as a reference to measure and reject external noise aggressors. The first sensor 422 and the second sensor 424 may, in some embodiments, be connected to a controller 426 that monitors a user's activity or health.

The controller 426 may include a processor and/or other components that are configured to determine or extract, at least partly in response to signals received directly or indirectly from the first sensor 422 and the second sensor 424, information related to a proximity of a user, an input of a user, and so on. As a non-limiting example, the controller 426 may receive a first signal from the first sensor 422 comprising physiological health parameters detected through contact of the user's skin, as described above. At the same time, the controller 426 may receive a second signal from the second sensor 424, where the second signal includes external noise aggressors in the ambient environment of the wearable device 400. The controller 426 uses the second signal to generate a resultant signal by removing noise captured by the first signal. In some embodiments, this is accomplished by simply subtracting the second signal from the first signal. In some embodiments, the controller 426 may further apply filters to the resultant signal to extract the health parameters.

In some embodiments, the controller 426 may be configured to convey the determined or extracted health param-

15

eters or statuses via an output device of the wearable device **400**. For example, the controller **426** may cause the indication(s) to be output via a remote device or a haptic device, transmitted via a wireless communications interface or other communications interface, and so on.

FIG. **5** shows a block diagram **500** of a method of determining a health parameter of a user using the wearable devices **100**, **200**, **300**, and **400** of FIGS. **1A-4**. The method starts at block **510**, where a first signal from a first sensor of an electronic device is received. The first sensor may be positioned in contact with a body part or a portion of a skin of the user. In some embodiments, the first sensor is configured to detect a change in vibration, motion, or radiation associated with a physiological measurement of the user and generate the first signal based on the physiological measurement. In some embodiments, the first sensor may be a polyvinylidene fluoride (PVDF) sensor, as described above.

In the next step, in block **520**, a second signal from a second sensor of the electronic device is received. The second sensor is spaced apart from the body part of the user and configured to sense a mechanical wave of an ambient environment of the electronic device. In some embodiments, the second sensor may be a polyvinylidene fluoride (PVDF) sensor, as described above. In some embodiments, the second signal may be generated at the second sensor in response to receiving a mechanical wave through the ambient environment of the electronic device. This second signal may be used as a reference to measure and reject external noise aggressors.

In block **530**, at least a portion of a noise signal from the first signal from the first sensor is removed, using the second signal from the second sensor, to form a resultant signal. In some embodiments, removing at least the portion of the noise signal from the first signal may include subtracting the second signal from the first signal. In some embodiments, the controller **426** may further apply filters to the resultant signal to extract the health parameters.

Finally, in block **540**, a health parameter of the user is determined from the resultant signal. In some embodiments, the health parameter of the user is indicative of a health condition of the user such as a heart rate, a respiration rate, a blood oxygenation level, a ballistocardiogram, a seismocardiogram, a blood pressure level, a blood flow rate, a blood glucose level, a partial thromboplastin time, and the like. In some embodiments, the health parameters may be subsequently outputted through a display, an audio output, a haptic output, a wirelessly transmitted message, and the like.

FIG. **6** shows an example schematic representation of an electronic device **600** that is substantially similar to the wearable devices **100**, **200**, **300**, and **400** of FIGS. **1A-4**. The electronic device **600** may include an optional electronic display **602** (e.g., a light-emitting display), a processor **604**, a power source **606**, a memory **608** or storage device, a sensor system **610**, or an input/output (I/O) mechanism **612** (e.g., an input/output device, input/output port, or haptic input/output interface). The processor **604** may control some or all of the operations of the electronic device **600**. The processor **604** may communicate, either directly or indirectly, with some or all of the other components of the electronic device **600**. For example, a system bus or other communication mechanism **614** can provide communication between the electronic display **602**, the processor **604**, the power source **606**, the memory **608**, the sensor system **610**, and the I/O mechanism **612**.

The processor **604** may be implemented as any electronic device capable of processing, receiving, or transmitting data or instructions, whether such data or instructions is in the

16

form of software or firmware or otherwise encoded. For example, the processor **604** may include a microprocessor, a central processing unit (CPU), an application-specific integrated circuit (ASIC), a digital signal processor (DSP), a controller, or a combination of such devices. As described herein, the term “processor” is meant to encompass a single processor or processing unit, multiple processors, multiple processing units, or other suitably configured computing element or elements. In some embodiments, the processor **604** may provide part or all of the controllers described with reference to FIGS. **1A-4**.

It should be noted that the components of the electronic device **600** can be controlled by multiple processors. For example, select components of the electronic device **600** (e.g., the sensor system **610**) may be controlled by a first processor and other components of the electronic device **600** (e.g., the electronic display **602**) may be controlled by a second processor, where the first and second processors may or may not be in communication with each other.

The power source **606** can be implemented with any device capable of providing energy to the electronic device **600**. For example, the power source **606** may include one or more batteries or rechargeable batteries. Additionally or alternatively, the power source **606** may include a power connector or power cord that connects the electronic device **600** to another power source, such as a wall outlet.

The memory **608** may store electronic data that can be used by the electronic device **600**. For example, the memory **608** may store electrical data or content such as, for example, audio and video files, documents and applications, device settings and user preferences, timing signals, control signals, and data structures or databases. The memory **608** may include any type of memory. By way of example only, the memory **608** may include random access memory, read-only memory, Flash memory, removable memory, other types of storage elements, or combinations of such memory types.

The electronic device **600** includes the sensor system **610**, including sensors positioned almost anywhere on the electronic device **600**. In some embodiments, the sensor system **610** may include one or more electromagnetic radiation emitters and/or detectors, positioned and/or configured as described with reference to any of FIGS. **1A-4**. The sensor system **610** may be configured to sense one or more types of parameters, such as but not limited to, vibration; light; touch; force; heat; movement; relative motion; biometric data (e.g., physiological parameters) of a user; air quality; proximity; position; connectedness; matter type; and so on. By way of example, the sensor system **610** may include one or more of (or multiple of) a heat sensor, a position sensor, a proximity sensor, a light or optical sensor (e.g., an electromagnetic radiation emitter and/or detector), an accelerometer, a pressure transducer, a gyroscope, a magnetometer, a health monitoring sensor, an air quality sensor, and so on. Additionally, the sensor system **610** may utilize any suitable sensing technology, including, but not limited to, interferometric, magnetic, pressure, capacitive, ultrasonic, resistive, optical, acoustic, piezoelectric, PVDF, accelophone, or thermal technologies.

The I/O mechanism **612** may transmit or receive data from a user or another electronic device. The I/O mechanism **612** may include the electronic display **602**, a touch sensing input surface, a crown, one or more input buttons (e.g., a graphical user interface “home” button), one or more cameras (including an under-display camera), one or more microphones or speakers, one or more ports such as a microphone port, and/or a keyboard. Additionally or alternatively, the I/O mechanism **612** may transmit electronic

signals via a communications interface, such as a wireless, wired, and/or optical communications interface. Examples of wireless and wired communications interfaces include, but are not limited to, cellular and Wi-Fi communications interfaces.

The foregoing description, for purposes of explanation, uses specific nomenclature to provide a thorough understanding of the described embodiments. However, it will be apparent to one skilled in the art, after reading this description, that the specific details are not required in order to practice the described embodiments. Thus, the foregoing descriptions of the specific embodiments described herein are presented for purposes of illustration and description. They are not targeted to be exhaustive or to limit the embodiments to the precise forms disclosed. It will be apparent to one of ordinary skill in the art, after reading this description, that many modifications and variations are possible in view of the above teachings.

As described above, one aspect of the present technology may be the gathering and use of data available from various sources, including biometric data. The present disclosure contemplates that, in some instances, this gathered data may include personal information data that uniquely identifies or can be used to identify, locate, or contact a specific person. Such personal information data can include, for example, biometric data and data linked thereto (e.g., demographic data, location-based data, telephone numbers, email addresses, home addresses, data or records relating to a user's health or level of fitness (e.g., vital signs measurements, medication information, exercise information), date of birth, or any other identifying or personal information).

The present disclosure recognizes that the use of such personal information data, in the present technology, can be used to the benefit of users. For example, the personal information data can be used to authenticate a user to access their device, or gather performance metrics for the user's interaction with an augmented or virtual world. Further, other uses for personal information data that benefit the user are also contemplated by the present disclosure. For instance, health and fitness data may be used to provide insights into a user's general wellness, or may be used as positive feedback to individuals using technology to pursue wellness goals.

The present disclosure contemplates that the entities responsible for the collection, analysis, disclosure, transfer, storage, or other use of such personal information data will comply with well-established privacy policies and/or privacy practices. In particular, such entities should implement and consistently use privacy policies and practices that are generally recognized as meeting or exceeding industry or governmental requirements for maintaining personal information data private and secure. Such policies should be easily accessible by users, and should be updated as the collection and/or use of data changes. Personal information from users should be collected for legitimate and reasonable uses of the entity and not shared or sold outside of those legitimate uses. Further, such collection/sharing should occur after receiving the informed consent of the users. Additionally, such entities should consider taking any needed steps for safeguarding and securing access to such personal information data and ensuring that others with access to the personal information data adhere to their privacy policies and procedures. Further, such entities can subject themselves to evaluation by third parties to certify their adherence to widely accepted privacy policies and practices. In addition, policies and practices should be adapted for the particular types of personal information data

being collected and/or accessed and adapted to applicable laws and standards, including jurisdiction-specific considerations. For instance, in the US, collection of or access to some health data may be governed by federal and/or state laws, such as the Health Insurance Portability and Accountability Act (HIPAA); whereas health data in other countries may be subject to other regulations and policies and should be handled accordingly. Hence different privacy practices should be maintained for different personal data types in each country.

Despite the foregoing, the present disclosure also contemplates embodiments in which users selectively block the use of, or access to, personal information data. That is, the present disclosure contemplates that hardware and/or software elements can be provided to prevent or block access to such personal information data. For example, in the case of advertisement delivery services, the present technology can be configured to allow users to select to "opt in" or "opt out" of participation in the collection of personal information data during registration for services or anytime thereafter. In another example, users can select not to provide data to targeted content delivery services. In yet another example, users can select to limit the length of time data is maintained or entirely prohibit the development of a baseline profile for the user. In addition to providing "opt in" and "opt out" options, the present disclosure contemplates providing notifications relating to the access or use of personal information. For instance, a user may be notified upon downloading an app that their personal information data will be accessed and then reminded again just before personal information data is accessed by the app.

Moreover, it is the intent of the present disclosure that personal information data should be managed and handled in a way to minimize risks of unintentional or unauthorized access or use. Risk can be minimized by limiting the collection of data and deleting data once it is no longer needed. In addition, and when applicable, including in some health related applications, data de-identification can be used to protect a user's privacy. De-identification may be facilitated, when appropriate, by removing specific identifiers (e.g., date of birth, etc.), controlling the amount or specificity of data stored (e.g., collecting location data at a city level rather than at an address level), controlling how data is stored (e.g., aggregating data across users), and/or other methods.

Therefore, although the present disclosure broadly covers use of personal information data to implement one or more various disclosed embodiments, the present disclosure also contemplates that the various embodiments can also be implemented without the need for accessing such personal information data. That is, the various embodiments of the present technology are not rendered inoperable due to the lack of all or a portion of such personal information data. For example, content can be selected and delivered to users by inferring preferences based on non-personal information data or a bare minimum amount of personal information, such as the content being requested by the device associated with a user, other non-personal information available to the content delivery services, or publicly available information.

Although the disclosed embodiments have been illustrated and described with respect to one or more implementations, equivalent alterations and modifications will occur or be known to others skilled in the art upon the reading and understanding of this specification and the annexed drawings. In addition, while a particular feature of the invention may have been disclosed with respect to only one of several implementations, such feature may be combined with one or

19

more other features of the other implementations as may be desired and advantageous for any given or particular application.

While various embodiments of the present disclosure have been described above, it should be understood that they have been presented by way of example only, and not limitation. Numerous changes to the disclosed embodiments can be made in accordance with the disclosure herein, without departing from the spirit or scope of the disclosure. Thus, the breadth and scope of the present disclosure should not be limited by any of the above described embodiments. Rather, the scope of the disclosure should be defined in accordance with the following claims and their equivalents.

The invention claimed is:

1. A wearable device, comprising:
 - a housing;
 - a display at least partially surrounded by the housing; and
 - a sensor system housed at least partially in the housing, the sensor system including,
 - a first sensor configured to contact a body part of a user and generate a first signal;
 - a second sensor configured to sense a mechanical wave in an ambient environment of the wearable device and generate a second signal; and
 - a controller configured to,
 - generate a resultant signal by removing noise from the first signal using the second signal; and
 - determine a health parameter of the user from the resultant signal, wherein: the second sensor comprises a piezoelectric sensor.
2. The wearable device of claim 1, wherein the housing defines a smartwatch.
3. The wearable device of claim 1, wherein the housing defines a smartphone.
4. The wearable device of claim 1, wherein the health parameter of the user includes at least one of: a heart rate; a respiration rate; a blood oxygenation level; a ballistocardiogram; a seismocardiogram; a blood pressure; a blood flow rate; a blood glucose level; or a partial thromboplastin time.
5. The wearable device of claim 1, wherein the sensor system includes a plurality of same types of sensors including the first sensor and the second sensor.
6. A wearable device, comprising:
 - a housing, including,
 - a main body; and
 - at least one stem extending from the main body; and
 - a sensor system housed at least partially in the housing, the sensor system including,
 - a first sensor configured to sense an aspect of a body part of a user when the wearable device is worn, the first sensor generating a first signal;
 - a second sensor configured to sense a mechanical wave in an ambient environment of the wearable device and generate a second signal; and
 - a controller configured to,
 - combine the first signal and the second signal; and
 - determine a health parameter of the user using the combined first and second signals, wherein: the second sensor comprises a polyvinylidene fluoride (PVDF) sensor.
7. The wearable device of claim 6, wherein:
 - the wearable device is an earbud;
 - the at least one stem is one stem;
 - the first sensor is disposed on the main body; and
 - the second sensor is disposed on the one stem.

20

8. The wearable device of claim 6, wherein:

- the main body includes a glasses frame; and
- the at least one stem includes a pair of stems extending from the glasses frame.

9. The wearable device of claim 6, wherein at least one of the first sensor or the second sensor is disposed on the at least one stem.

10. A method of determining a health parameter of a user, the method comprising:

- receiving a first signal from a first sensor of an electronic device, the first sensor in contact with a body part of the user;
- receiving a second signal from a second sensor of the electronic device, the second sensor spaced apart from the body part, and the second sensor sensing a mechanical wave of an ambient environment of the electronic device;
- removing at least a portion of a noise signal from the first signal, using the second signal to form a resultant signal; and
- determining the health parameter of the user from the resultant signal,

wherein:

- the first sensor comprises a first polyvinylidene fluoride (PVDF) sensor;
- the second sensor comprises a second PVDF sensor; and
- the removing the at least the portion of the noise signal from the first signal comprises subtracting the second signal from the first signal.

11. The method of claim 10, wherein:

- the first PVDF sensor is attached to a back cover of a housing a wearable device; and
- the second PVDF sensor is attached to a front cover of the housing of the wearable device.

12. The method of claim 10, further comprising:

- generating the second signal at the second sensor in response to receiving the mechanical wave through the ambient environment of the electronic device.

13. The method of claim 10, wherein:

- the first PVDF sensor is disposed on an interior surface of a band of a wearable device; and
- the second PVDF sensor is disposed on an exterior surface of the band of the wearable device.

14. A wearable device, comprising:

- a housing;
- a display at least partially surrounded by the housing; and
- a sensor system housed at least partially in the housing, the sensor system including,
 - a first sensor configured to contact a body part of a user and generate a first signal;
 - a second sensor configured to sense a mechanical wave in an ambient environment of the wearable device and generate a second signal; and
 - a controller configured to,
 - generate a resultant signal by removing noise from the first signal using the second signal; and
 - determine a health parameter of the user from the resultant signal, wherein: the second sensor comprises a capacitive gap sensor.

15. A wearable device, comprising:

- a housing;
- a display at least partially surrounded by the housing; and
- a sensor system housed at least partially in the housing, the sensor system including,
 - a first sensor configured to contact a body part of a user and generate a first signal;

21

a second sensor configured to sense a mechanical wave
in an ambient environment of the wearable device
and generate a second signal; and

a controller configured to,
generate a resultant signal by removing noise from 5
the first signal using the second signal; and
determine a health parameter of the user from the
resultant signal, wherein: the second sensor com-
prises an acoustic sensor.

* * * * *

10

22