

(12) **United States Patent**
Rich et al.

(10) **Patent No.:** **US 12,408,969 B2**
(45) **Date of Patent:** **Sep. 9, 2025**

(54) **FORCEPS WITH LINEAR TRIGGER MECHANISM**

(71) Applicant: **Covidien LP**, Mansfield, MA (US)

(72) Inventors: **Jennifer L. Rich**, Parker, CO (US);
Craig V. Krastins, Arvada, CO (US);
Kelley D. Goodman, Erie, CO (US);
Daniel W. Mercier, Erie, CO (US);
Grant T. Sims, Boulder, CO (US)

(73) Assignee: **Covidien LP**, Mansfield, MA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 625 days.

(21) Appl. No.: **17/189,892**

(22) Filed: **Mar. 2, 2021**

(65) **Prior Publication Data**

US 2021/0282841 A1 Sep. 16, 2021

Related U.S. Application Data

(60) Provisional application No. 62/990,277, filed on Mar. 16, 2020.

(51) **Int. Cl.**
A61B 18/14 (2006.01)
A61B 18/12 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **A61B 18/1442** (2013.01); **A61B 18/1206** (2013.01); **A61B 2017/00367** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC **A61B 18/1442**; **A61B 18/1206**; **A61B 2090/0801**; **A61B 17/072**; **A61B 17/285**;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

D249,549 S 9/1978 Pike
D263,020 S 2/1982 Rau, III
(Continued)

FOREIGN PATENT DOCUMENTS

CA 2308879 A1 11/2000
CA 2308953 A1 11/2000
(Continued)

OTHER PUBLICATIONS

Extended European Search Report for Application No. 21 16 2507 dated Aug. 6, 2021.


(Continued)

Primary Examiner — Michael F Peffley
Assistant Examiner — Bo Ouyang

(57) **ABSTRACT**

A forceps includes first and second shafts each having a jaw disposed at a distal end thereof configured to rotate about a pivot to move the jaws between open and closed positions, the shafts defining a longitudinal axis therebetween. A knife deployment mechanism including a rack and pinion mechanism or a series of links is disposed within the first shaft and includes a trigger moveable along the longitudinal axis to deploy a knife between the jaws. A knife lockout is configured to move upon approximation of the first and second shafts between an engaged position preventing deployment of the knife and a disengaged position allowing deployment of the knife. A knife kickout mechanism is disposed within the first shaft in opposition to the second shaft and is configured to force the knife forward upon movement of the first and second shafts from an approximated position to a more open position.

12 Claims, 22 Drawing Sheets

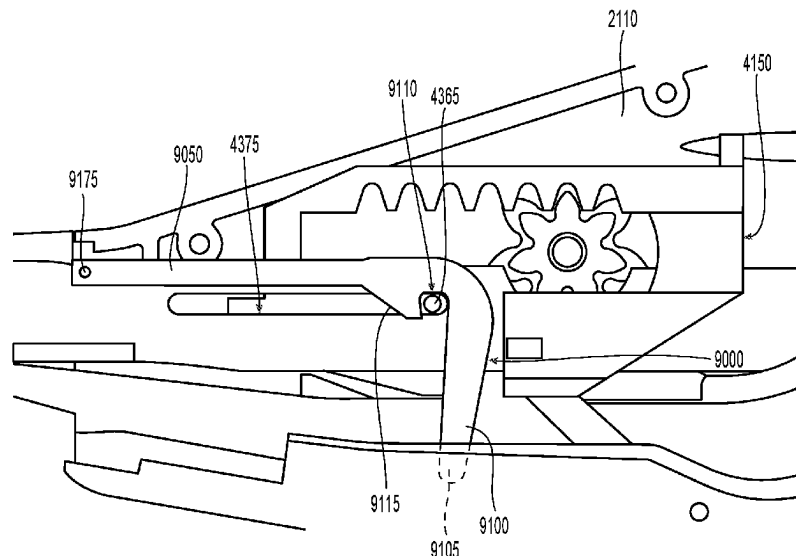

- (51) **Int. Cl.**
A61B 17/00 (2006.01)
A61B 17/072 (2006.01)
A61B 17/285 (2006.01)
A61B 18/00 (2006.01)
A61B 90/00 (2016.01)
- (52) **U.S. Cl.**
 CPC *A61B 17/072* (2013.01); *A61B 17/285* (2013.01); *A61B 2018/00202* (2013.01); *A61B 2018/00589* (2013.01); *A61B 2018/00595* (2013.01); *A61B 2018/0063* (2013.01); *A61B 2018/00708* (2013.01); *A61B 2018/00916* (2013.01); *A61B 2018/1455* (2013.01); *A61B 2018/1457* (2013.01); *A61B 2018/1475* (2013.01); *A61B 2090/0801* (2016.02)
- (58) **Field of Classification Search**
 CPC *A61B 2017/00367*; *A61B 2018/00202*; *A61B 2018/00589*; *A61B 2018/00595*; *A61B 2018/0063*; *A61B 2018/00708*; *A61B 2018/00916*; *A61B 2018/1455*; *A61B 2018/1457*; *A61B 2018/1475*
 See application file for complete search history.
- (56) **References Cited**
 U.S. PATENT DOCUMENTS
- | | | | |
|-----------|----|---------|---------------------|
| 4,657,016 | A | 4/1987 | Garito et al. |
| 4,671,274 | A | 6/1987 | Sorochenko |
| 4,706,667 | A | 11/1987 | Roos |
| D295,893 | S | 5/1988 | Sharkany et al. |
| D295,894 | S | 5/1988 | Sharkany et al. |
| 4,763,669 | A | 8/1988 | Jaeger |
| D298,353 | S | 11/1988 | Manno |
| D299,413 | S | 1/1989 | DeCarolus |
| 5,100,420 | A | 3/1992 | Green et al. |
| 5,258,001 | A | 11/1993 | Corman |
| D343,453 | S | 1/1994 | Noda |
| 5,304,203 | A | 4/1994 | El-Mallawany et al. |
| D348,930 | S | 7/1994 | Olson |
| D349,341 | S | 8/1994 | Lichtman et al. |
| 5,344,424 | A | 9/1994 | Roberts et al. |
| D354,564 | S | 1/1995 | Medema |
| D358,887 | S | 5/1995 | Feinberg |
| 5,496,317 | A | 3/1996 | Goble et al. |
| 5,540,685 | A | 7/1996 | Parins et al. |
| 5,573,541 | A | 11/1996 | Green et al. |
| 5,578,052 | A | 11/1996 | Koros et al. |
| 5,611,808 | A | 3/1997 | Hossain et al. |
| 5,618,294 | A | 4/1997 | Aust et al. |
| 5,647,869 | A | 7/1997 | Goble et al. |
| D384,413 | S | 9/1997 | Zlock et al. |
| 5,665,100 | A | 9/1997 | Yoon |
| 5,673,842 | A | 10/1997 | Bittner et al. |
| 5,688,270 | A | 11/1997 | Yates et al. |
| 5,752,644 | A | 5/1998 | Bolanos et al. |
| H1745 | H | 8/1998 | Paraschac |
| 5,797,938 | A | 8/1998 | Paraschac et al. |
| 5,814,043 | A | 9/1998 | Shapeton |
| D402,028 | S | 12/1998 | Grimm et al. |
| 5,860,975 | A | 1/1999 | Goble et al. |
| 5,876,401 | A | 3/1999 | Schulze et al. |
| D408,018 | S | 4/1999 | McNaughton |
| 5,891,142 | A | 4/1999 | Eggers et al. |
| 5,913,874 | A | 6/1999 | Berns et al. |
| 5,923,475 | A | 7/1999 | Kurtz et al. |
| 5,960,544 | A | 10/1999 | Beyers |
| D416,089 | S | 11/1999 | Barton et al. |
| 5,980,510 | A | 11/1999 | Tsonton et al. |
| 6,050,996 | A | 4/2000 | Schmaltz et al. |
| D424,694 | S | 5/2000 | Tetzlaff et al. |
| D425,201 | S | 5/2000 | Tetzlaff et al. |
| H1904 | H | 10/2000 | Yates et al. |
| 6,228,081 | B1 | 5/2001 | Goble |
| 6,270,497 | B1 | 8/2001 | Sekino et al. |
| 6,293,954 | B1 | 9/2001 | Fogarty et al. |
| D449,886 | S | 10/2001 | Tetzlaff et al. |
| 6,329,778 | B1 | 12/2001 | Culp et al. |
| 6,334,861 | B1 | 1/2002 | Chandler et al. |
| D453,923 | S | 2/2002 | Olson |
| D454,951 | S | 3/2002 | Bon |
| D457,958 | S | 5/2002 | Dycus et al. |
| D457,959 | S | 5/2002 | Tetzlaff et al. |
| 6,406,485 | B1 | 6/2002 | Hossain et al. |
| H2037 | H | 7/2002 | Yates et al. |
| 6,416,509 | B1 | 7/2002 | Goble et al. |
| 6,464,704 | B2 | 10/2002 | Schmaltz et al. |
| D465,281 | S | 11/2002 | Lang |
| D466,209 | S | 11/2002 | Bon |
| 6,511,480 | B1 | 1/2003 | Tetzlaff et al. |
| 6,673,092 | B1 | 1/2004 | Bacher |
| 6,676,660 | B2 | 1/2004 | Wampler et al. |
| D493,888 | S | 8/2004 | Reschke |
| D496,997 | S | 10/2004 | Dycus et al. |
| D499,181 | S | 11/2004 | Dycus et al. |
| D502,994 | S | 3/2005 | Blake, III |
| D509,297 | S | 9/2005 | Wells |
| D525,361 | S | 7/2006 | Hushka |
| D531,311 | S | 10/2006 | Guerra et al. |
| 7,118,570 | B2 | 10/2006 | Tetzlaff et al. |
| D533,274 | S | 12/2006 | Visconti et al. |
| D533,942 | S | 12/2006 | Kerr et al. |
| D535,027 | S | 1/2007 | James et al. |
| D538,932 | S | 3/2007 | Malik |
| D541,418 | S | 4/2007 | Schechter et al. |
| D541,611 | S | 5/2007 | Aglassinge |
| D541,938 | S | 5/2007 | Kerr et al. |
| D545,432 | S | 6/2007 | Watanabe |
| D547,154 | S | 7/2007 | Lee |
| 7,329,257 | B2 | 2/2008 | Kanehira et al. |
| D564,662 | S | 3/2008 | Moses et al. |
| D567,943 | S | 4/2008 | Moses et al. |
| D575,395 | S | 8/2008 | Hushka |
| D575,401 | S | 8/2008 | Hixson et al. |
| 7,431,730 | B2 | 10/2008 | Viola |
| D582,038 | S | 12/2008 | Swoyer et al. |
| 7,641,653 | B2 | 1/2010 | Dalla Betta et al. |
| 7,666,194 | B2 | 2/2010 | Field et al. |
| D617,900 | S | 6/2010 | Kingsley et al. |
| D617,901 | S | 6/2010 | Unger et al. |
| D617,902 | S | 6/2010 | Twomey et al. |
| D617,903 | S | 6/2010 | Unger et al. |
| D618,798 | S | 6/2010 | Olson et al. |
| D621,503 | S | 8/2010 | Otten et al. |
| 7,771,425 | B2 | 8/2010 | Dycus et al. |
| D627,462 | S | 11/2010 | Kingsley |
| D628,289 | S | 11/2010 | Romero |
| D628,290 | S | 11/2010 | Romero |
| 7,854,185 | B2 | 12/2010 | Zhang et al. |
| D630,324 | S | 1/2011 | Reschke |
| 7,896,878 | B2 | 3/2011 | Johnson et al. |
| D649,249 | S | 11/2011 | Guerra |
| D649,643 | S | 11/2011 | Allen, IV et al. |
| 8,147,489 | B2 | 4/2012 | Moses et al. |
| D661,394 | S | 6/2012 | Romero et al. |
| 8,298,233 | B2 | 10/2012 | Mueller |
| D670,808 | S | 11/2012 | Moua et al. |
| 8,366,709 | B2 | 2/2013 | Schechter et al. |
| 8,394,096 | B2 | 3/2013 | Moses et al. |
| D680,220 | S | 4/2013 | Rachlin |
| 8,409,246 | B2 | 4/2013 | Kerr et al. |
| 8,409,247 | B2 | 4/2013 | Garrison et al. |
| 8,425,504 | B2 | 4/2013 | Orton et al. |
| 8,425,511 | B2 | 4/2013 | Olson |
| 8,430,877 | B2 | 4/2013 | Kerr et al. |
| 8,439,913 | B2 | 5/2013 | Horner et al. |
| 8,469,716 | B2 | 6/2013 | Fedotov et al. |
| 8,469,991 | B2 | 6/2013 | Kerr |
| 8,469,992 | B2 | 6/2013 | Roy et al. |
| 8,480,671 | B2 | 7/2013 | Mueller |
| 8,491,624 | B2 | 7/2013 | Kerr et al. |
| 8,491,625 | B2 | 7/2013 | Horner |
| 8,491,626 | B2 | 7/2013 | Roy et al. |

(56)

References Cited

U.S. PATENT DOCUMENTS

8,512,336 B2	8/2013	Couture	9,610,246 B2	4/2017	Shiah et al.
8,540,749 B2	9/2013	Garrison et al.	9,615,877 B2	4/2017	Tyrrell et al.
8,551,091 B2	10/2013	Couture et al.	9,655,672 B2	5/2017	Artale et al.
8,556,929 B2	10/2013	Harper et al.	9,915,831 B2	3/2018	Hue
8,568,397 B2	10/2013	Horner et al.	10,973,567 B2	4/2021	Sims et al.
8,568,408 B2	10/2013	Townsend et al.	11,628,008 B2	4/2023	Rich et al.
8,585,736 B2	11/2013	Horner et al.	11,944,369 B2	4/2024	Rich et al.
8,591,510 B2	11/2013	Allen, IV et al.	2002/0111624 A1	8/2002	Witt et al.
8,597,295 B2	12/2013	Kerr	2003/0018332 A1	1/2003	Schmaltz et al.
8,623,018 B2	1/2014	Horner et al.	2003/0109875 A1	6/2003	Tetzlaff et al.
8,628,557 B2	1/2014	Collings et al.	2003/0199869 A1	10/2003	Johnson et al.
8,641,712 B2	2/2014	Couture	2003/0220637 A1	11/2003	Truckai et al.
8,647,343 B2	2/2014	Chojin et al.	2003/0229344 A1	12/2003	Dycus et al.
8,652,135 B2	2/2014	Nau, Jr.	2004/0092927 A1	5/2004	Podhajsky et al.
8,663,222 B2	3/2014	Anderson et al.	2004/0193153 A1	9/2004	Sartor et al.
8,672,939 B2	3/2014	Garrison	2005/0070889 A1	3/2005	Nobis et al.
8,679,098 B2	3/2014	Hart	2005/0107784 A1	5/2005	Moses et al.
8,685,009 B2	4/2014	Chernov et al.	2005/0113826 A1	5/2005	Johnson et al.
8,685,021 B2	4/2014	Chernov et al.	2005/0113828 A1	5/2005	Shields et al.
8,685,056 B2	4/2014	Evans et al.	2005/0154387 A1	7/2005	Moses et al.
8,702,737 B2	4/2014	Chojin et al.	2005/0159745 A1	7/2005	Truckai et al.
8,702,749 B2	4/2014	Twomey	2006/0253126 A1	11/2006	Bjerken et al.
8,734,445 B2	5/2014	Johnson et al.	2007/0062017 A1	3/2007	Dycus et al.
8,740,898 B2	6/2014	Chojin et al.	2007/0088356 A1	4/2007	Moses et al.
8,745,840 B2	6/2014	Hempstead et al.	2007/0179499 A1	8/2007	Garrison
8,747,434 B2	6/2014	Larson et al.	2007/0260241 A1	11/2007	Dalla Betta et al.
8,756,785 B2	6/2014	Allen, IV et al.	2007/0278277 A1*	12/2007	Wixey A61B 17/0686 227/176.1
8,784,418 B2	7/2014	Romero	2008/0215048 A1	9/2008	Hafner et al.
8,795,269 B2	8/2014	Garrison	2009/0131934 A1	5/2009	Odom et al.
8,808,288 B2	8/2014	Reschke	2009/0171353 A1	7/2009	Johnson et al.
8,814,864 B2	8/2014	Gilbert	2009/0182327 A1	7/2009	Unger
8,840,639 B2	9/2014	Gerhardt, Jr. et al.	2009/0240246 A1	9/2009	Deville et al.
8,845,636 B2	9/2014	Allen, IV et al.	2009/0302090 A1	12/2009	Shah
8,852,185 B2	10/2014	Twomey	2009/0308909 A1	12/2009	Nalagatla et al.
8,852,228 B2	10/2014	Nau, Jr.	2010/0016857 A1	1/2010	McKenna et al.
8,858,553 B2	10/2014	Chojin	2010/0130977 A1	5/2010	Garrison et al.
8,864,753 B2	10/2014	Nau, Jr. et al.	2010/0179545 A1	7/2010	Twomey et al.
8,864,795 B2	10/2014	Kerr et al.	2010/0179547 A1	7/2010	Cunningham et al.
8,887,373 B2	11/2014	Brandt et al.	2010/0228250 A1	9/2010	Brogna
8,888,771 B2	11/2014	Twomey	2010/0274244 A1	10/2010	Heard
8,888,775 B2	11/2014	Nau, Jr. et al.	2010/0292691 A1	11/2010	Brogna
8,898,888 B2	12/2014	Brandt et al.	2010/0305558 A1	12/2010	Kimura et al.
8,900,232 B2	12/2014	Ourada	2010/0305567 A1	12/2010	Swanson
8,906,018 B2	12/2014	Rooks et al.	2011/0054469 A1	3/2011	Kappus et al.
8,920,421 B2	12/2014	Rupp	2011/0060314 A1	3/2011	Wallace et al.
8,932,293 B2	1/2015	Chernov et al.	2011/0060356 A1	3/2011	Reschke et al.
8,936,614 B2	1/2015	Allen, IV	2011/0072638 A1	3/2011	Brandt et al.
8,939,972 B2	1/2015	Twomey	2011/0087218 A1	4/2011	Boudreaux et al.
8,945,175 B2	2/2015	Twomey	2011/0218530 A1	9/2011	Reschke
8,961,504 B2	2/2015	Hoarau et al.	2011/0238065 A1	9/2011	Hunt et al.
8,968,283 B2	3/2015	Kharin	2011/0238067 A1	9/2011	Moses et al.
8,968,305 B2	3/2015	Dumbauld et al.	2011/0257680 A1	10/2011	Reschke et al.
8,968,316 B2	3/2015	Roy et al.	2011/0270245 A1	11/2011	Horner et al.
8,968,357 B2	3/2015	Mueller	2011/0270251 A1	11/2011	Horner et al.
8,968,359 B2	3/2015	Kerr et al.	2011/0276049 A1	11/2011	Gerhardt
9,005,200 B2	4/2015	Roy et al.	2011/0295313 A1	12/2011	Kerr
9,017,372 B2	4/2015	Artale et al.	2012/0059372 A1	3/2012	Johnson
9,028,484 B2	5/2015	Craig	2012/0059409 A1	3/2012	Reschke et al.
9,028,492 B2	5/2015	Kerr et al.	2012/0083785 A1	4/2012	Roy et al.
9,028,495 B2	5/2015	Mueller et al.	2012/0083786 A1	4/2012	Artale et al.
9,039,704 B2	5/2015	Joseph	2012/0083827 A1	4/2012	Artale et al.
9,039,732 B2	5/2015	Sims et al.	2012/0123402 A1	5/2012	Chernov et al.
9,084,608 B2	7/2015	Larson et al.	2012/0123404 A1	5/2012	Craig
9,113,933 B2	8/2015	Chernova et al.	2012/0123410 A1	5/2012	Craig
9,113,934 B2	8/2015	Chernov et al.	2012/0130367 A1	5/2012	Garrison
9,161,807 B2	10/2015	Garrison	2012/0136354 A1	5/2012	Rupp
9,211,657 B2	12/2015	Ackley et al.	2012/0172868 A1	7/2012	Twomey et al.
9,265,568 B2	2/2016	Chernov et al.	2012/0172873 A1	7/2012	Artale et al.
9,333,002 B2	5/2016	Garrison	2012/0172924 A1	7/2012	Allen, IV
9,381,059 B2	7/2016	Garrison	2012/0184988 A1	7/2012	Twomey et al.
9,456,870 B2	10/2016	Chernov et al.	2012/0184989 A1	7/2012	Twomey
9,498,278 B2	11/2016	Couture et al.	2012/0184990 A1	7/2012	Twomey
9,498,279 B2	11/2016	Artale et al.	2012/0209263 A1	8/2012	Sharp et al.
9,504,519 B2	11/2016	Kerr et al.	2012/0215219 A1	8/2012	Roy et al.
9,585,709 B2	3/2017	Krapohl	2012/0239034 A1	9/2012	Horner et al.
			2012/0253344 A1	10/2012	Dumbauld et al.
			2012/0259331 A1	10/2012	Garrison
			2012/0265241 A1	10/2012	Hart et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2012/0283727 A1 11/2012 Twomey
 2012/0296205 A1 11/2012 Chernov et al.
 2012/0296238 A1 11/2012 Chernov et al.
 2012/0296239 A1 11/2012 Chernov et al.
 2012/0296317 A1 11/2012 Chernov et al.
 2012/0296323 A1 11/2012 Chernov et al.
 2012/0296324 A1 11/2012 Chernov et al.
 2012/0296334 A1 11/2012 Kharin
 2012/0303025 A1 11/2012 Garrison
 2012/0323238 A1 12/2012 Tyrrell et al.
 2012/0330308 A1 12/2012 Joseph
 2012/0330309 A1 12/2012 Joseph
 2013/0000463 A1 1/2013 Evans et al.
 2013/0018364 A1 1/2013 Chernov et al.
 2013/0018372 A1 1/2013 Sims et al.
 2013/0018411 A1 1/2013 Collings et al.
 2013/0022495 A1 1/2013 Allen, IV et al.
 2013/0030432 A1 1/2013 Garrison et al.
 2013/0041370 A1 2/2013 Unger
 2013/0046295 A1 2/2013 Kerr et al.
 2013/0046303 A1 2/2013 Evans et al.
 2013/0046306 A1 2/2013 Evans et al.
 2013/0046337 A1 2/2013 Evans et al.
 2013/0060250 A1 3/2013 Twomey et al.
 2013/0066318 A1 3/2013 Kerr
 2013/0071282 A1 3/2013 Fry
 2013/0072927 A1 3/2013 Allen, IV et al.
 2013/0079760 A1 3/2013 Twomey et al.
 2013/0079762 A1 3/2013 Twomey et al.
 2013/0079774 A1 3/2013 Whitney et al.
 2013/0085491 A1 4/2013 Twomey et al.
 2013/0085496 A1 4/2013 Unger et al.
 2013/0103030 A1 4/2013 Garrison
 2013/0103031 A1 4/2013 Garrison
 2013/0103035 A1 4/2013 Horner et al.
 2013/0123837 A1 5/2013 Roy et al.
 2013/0138101 A1 5/2013 Kerr
 2013/0138102 A1 5/2013 Twomey et al.
 2013/0138129 A1 5/2013 Garrison et al.
 2013/0144284 A1 6/2013 Behnke, II et al.
 2013/0178852 A1 7/2013 Allen, IV et al.
 2013/0185922 A1 7/2013 Twomey et al.
 2013/0190753 A1 7/2013 Garrison
 2013/0190760 A1 7/2013 Allen, IV
 2013/0197503 A1 8/2013 Orszulak
 2013/0226177 A1 8/2013 Brandt
 2014/0221994 A1 8/2014 Reschke
 2014/0221995 A1 8/2014 Guerra et al.
 2014/0221999 A1 8/2014 Cunningham et al.
 2014/0228842 A1 8/2014 Dycus et al.
 2014/0230243 A1 8/2014 Roy et al.
 2014/0236149 A1 8/2014 Kharin et al.
 2014/0243811 A1 8/2014 Reschke et al.
 2014/0243824 A1 8/2014 Gilbert
 2014/0249528 A1 9/2014 Hixson et al.
 2014/0250686 A1 9/2014 Hempstead et al.
 2014/0257274 A1 9/2014 Mccullough, Jr. et al.
 2014/0257283 A1 9/2014 Johnson et al.
 2014/0257284 A1 9/2014 Artale
 2014/0257285 A1 9/2014 Moua
 2014/0276803 A1 9/2014 Hart
 2014/0284313 A1 9/2014 Allen, IV et al.
 2014/0288549 A1 9/2014 Mckenna et al.
 2014/0288553 A1 9/2014 Johnson et al.
 2014/0330308 A1 11/2014 Hart et al.
 2014/0336635 A1 11/2014 Hart et al.
 2014/0353188 A1 12/2014 Reschke et al.
 2015/0018816 A1 1/2015 Latimer
 2015/0025528 A1 1/2015 Arts
 2015/0032106 A1 1/2015 Rachlin
 2015/0051598 A1 2/2015 Orszulak et al.
 2015/0051640 A1 2/2015 Twomey et al.
 2015/0066026 A1 3/2015 Hart et al.
 2015/0066076 A1 3/2015 Kerr et al.
 2015/0080880 A1 3/2015 Sartor et al.

2015/0080889 A1 3/2015 Cunningham et al.
 2015/0082928 A1 3/2015 Kappus et al.
 2015/0088122 A1 3/2015 Jensen
 2015/0088126 A1 3/2015 Duffin et al.
 2015/0088128 A1 3/2015 Couture
 2015/0094714 A1 4/2015 Lee et al.
 2016/0157922 A1 6/2016 Lee et al.
 2016/0157925 A1 6/2016 Artale et al.
 2016/0175030 A1* 6/2016 Boudreaux A61B 18/1442
 606/42
 2016/0175031 A1 6/2016 Boudreaux
 2017/0020601 A1 1/2017 Thomson et al.
 2017/0128120 A1* 5/2017 Cho A61B 18/1442
 2017/0181790 A1* 6/2017 Twomey A61B 17/29
 2018/0353235 A1 12/2018 Gutti
 2019/0357962 A1* 11/2019 Boudreaux A61B 18/1442
 2021/0282838 A1 9/2021 Rich et al.
 2021/0282839 A1 9/2021 Rich et al.

FOREIGN PATENT DOCUMENTS

CA 2308931 A1 12/2000
 CA 2500593 A1 4/2004
 CN 201299462 Y 9/2009
 CN 202086577 U 12/2011
 DE 2415263 A1 10/1975
 DE 2514501 A1 10/1976
 DE 2627679 A1 1/1977
 DE 3627221 A1 2/1988
 DE 8712328 U1 2/1988
 DE 4303882 C2 2/1995
 DE 4403252 A1 8/1995
 DE 19515914 C1 7/1996
 DE 19506363 A1 8/1996
 DE 29616210 U1 11/1996
 DE 19608716 C1 4/1997
 DE 19751108 A1 5/1999
 DE 19946527 C1 7/2001
 DE 20121161 U1 4/2002
 DE 10045375 C2 10/2002
 DE 202007009317 U1 8/2007
 DE 202007009318 U1 8/2007
 DE 10031773 B4 11/2007
 DE 202007016233 U1 1/2008
 DE 19738457 B4 1/2009
 DE 102008018406 B3 7/2009
 EP 529681 A1 3/1993
 EP 650701 A1 5/1995
 EP 923907 A1 6/1999
 EP 1055399 A1 11/2000
 EP 1159926 A2 12/2001
 EP 1281878 A1 2/2003
 EP 1532932 A1 5/2005
 EP 2301468 A1 3/2011
 EP 2353535 A1 8/2011
 EP 2436327 A1 4/2012
 EP 2436330 A1 4/2012
 EP 3072467 A1 9/2016
 EP 3412236 A1 12/2018
 JP H055106 U 1/1993
 JP H0540112 A 2/1993
 JP H0630945 B2 4/1994
 JP H06285078 A 10/1994
 JP H08289895 A 11/1996
 JP H09538 A 1/1997
 JP H1024051 A 1/1998
 JP H10155798 A 6/1998
 JP H1147149 A 2/1999
 JP H1147150 A 2/1999
 JP H11169381 A 6/1999
 JP 2001003400 A 1/2001
 JP 2001029355 A 2/2001
 JP 2001190564 A 7/2001
 JP 2002136525 A 5/2002
 JP 2003116871 A 4/2003
 JP 2003175052 A 6/2003
 JP 2005312807 A 11/2005
 JP 2006015078 A 1/2006
 JP 2008054926 A 3/2008

(56)

References Cited

FOREIGN PATENT DOCUMENTS

JP	2011125195	A	6/2011
SU	401367	A1	10/1973
WO	9400059	A1	1/1994
WO	9923933	A2	5/1999
WO	0024330	A1	5/2000
WO	0036986	A1	6/2000
WO	0059392	A1	10/2000
WO	0115614	A1	3/2001
WO	0154604	A1	8/2001
WO	0245589	A2	6/2002
WO	02080786	A1	10/2002
WO	02080793	A1	10/2002
WO	2005110264	A2	11/2005
WO	2006021269	A1	3/2006
WO	2008040483	A1	4/2008
WO	2009003575	A1	1/2009
WO	2011018154	A1	2/2011
WO	2013134044	A1	9/2013

OTHER PUBLICATIONS

Search Report received for Australian Patent Application No. 2018201752, mailed on Aug. 8, 2018, 10 pages.

Sengupta et al., "Use of a Computer-Controlled Bipolar Diathermy System in Radical Prostatectomies and Other Open Urological Surgery", *ANZ Journal of Surgery*, vol. 71, No. 9, 2001, pp. 538-540.

Sigel et al., "The Mechanism of Blood Vessel Closure by High Frequency Electrocoagulation", *Surgery Gynecology and Obstetrics*, Oct. 1965, 12 pages.

Sremcich et al., "Application and Filing History for U.S. Appl. No. 12/336,970, filed Dec. 17, 2008", (Copy Not Attached).

Strasberg et al., "A Phase I Study of the LigaSure Vessel Sealing System in Hepatic Surgery", Section of HPB Surger, Washington University School of Medicine, St. Louis MO, Presented at AHPBA, Feb. 2001, 1 page.

Strasberg et al., "Use of a Bipolar Vessel-Sealing Device for Parenchymal Transection During Liver Surgery", *Journal of Gastrointestinal Surgery*, vol. 6, No. 4, 2002, pp. 569-574.

Tinkler, "Combined Diathermy and Suction Forceps", *British Medical Journal*, vol. 1, No. 5431, Feb. 6, 1965, p. 361.

Tworney, "Application and Filing History for U.S. Appl. No. 13/183,856, filed Jul. 15, 2011", (Copy Not Attached).

Vällfors et al., "Automatically Controlled Bipolar Electrocoagulation—'COA-COMP'", *Neurosurgical Review*, vol. 7, 1984, pp. 187-189.

"Electrosurgery: A Historical Overview", *Innovations in Electrosurgery*, 2000, 6 pages.

"LigaSure Vessel Sealing System, the Seal of Confidence in General, Gynecologic, Urologic, and Laparoscopic Surgery", *Sales/Product Literature*, Apr. 2002, 10 page.

"Reducing Needlestick Injuries in the Operating Room", *Sales/Product Literature* 2001, 1 page.

Allen, IV et al., "Application and Filing History for U.S. Appl. No. 13/185,593, filed Jul. 15, 2011", (Copy Not Attached).

Benaron et al., "Optical Time-Of-Flight and Absorbance Imaging of Biologic Media", *Science*, vol. 259, Mar. 5, 1993, pp. 1463-1466.

Bergdahl et al., "Studies on coagulation and the development of an automatic computerized bipolar coagulator", *Journal of Neurosurgery*, vol. 75, No. 1, Jul. 1991, pp. 148-151.

Burdette et al., "In Vivo Probe Measurement Technique For Determining Dielectric Properties At VHF Through Microwave Frequencies", *IEEE Transactions on Microwave Theory and Techniques*, vol. MTT-28, No. 4, Apr. 1980, pp. 414-427.

Carbonell et al., "Comparison of the Gyrus PlasmaKinetic Sealer and the Valleylab LigaSure Device in the Hemostasis of Small, Medium, and Large-Sized Arteries", *Carolinas Laparoscopic and Advanced Surgery Program*, Carolinas Medical Center, Charlotte, NC, Aug. 2003, 1 page.

Carus et al., "Initial Experience with the LigaSure Vessel Sealing System in Abdominal Surgery", *Innovations That Work*, Jun. 2002, 4 pages.

Chandler et al., "Application and Filing History for U.S. Appl. No. 08/926,869, filed Sep. 10, 1997", (Copy Not Attached).

Choti, "Abdominoperineal Resection with the LigaSure Vessel Sealing System and LigaSure Atlas 20 cm open Instrument", *Innovations That Work*, Jun. 2003, 4 pages.

Chung et al., "Clinical Experience of Sutureless Closed Hemorrhoidectomy with LigaSure", *Diseases of the Colon and Rectum*, vol. 46, No. 1, Jan. 2003, pp. 87-92.

Crawford "Use of a Novel Vessel Sealing Technology in Management of the Dorsal Venous Complex", *Sales/Product Literature*, 2000, 1 page.

Crawford et al. "Use of the LigaSure Vessel Sealing System in Urologic Cancer Surgery", *Grand Rounds in Urology*, vol. 1, No. 4, 1999, pp. 10-17.

Crawford, "Evaluation of a New Vessel Sealing Device in Urologic Cancer Surgery", *Sales/Product Literature*, 2000, 1 page.

Crouch et al. "A Velocity-Dependent Model for Needle Insertion in Soft Tissue", *MICCAI*, 2005, pp. 624-632.

Dulemba et al. "Use of a Bipolar Electrothermal Vessel Sealer in Laparoscopically Assisted Vaginal Hysterectomy", *Sales/Product Literature*, Jan. 2004, 1 page.

Extended European Search Report received for European Patent Application No. 18171773.7, mailed on Oct. 8, 2018, 7 pages.

Frazier et al., "Application and Filing History for U.S. Appl. No. 09/177,950, filed Oct. 23, 1998", (Copy Not Attached).

Helton, "LigaSure Vessel Sealing System: Revolutionary Hemostasis Product for General Surgery", *Sales/Product Literature*, 1999, 1 page.

Heniford et al., "Initial Research and Clinical Results with an Electrothermal Bipolar Vessel Sealer", 1999, 1 page.

Heniford et al., "Initial Results with an Electrothermal Bipolar Vessel Sealer", *Surgical Endoscopy*, vol. 15, 2001, pp. 799-801.

Herman et al., "Laparoscopic Intestinal Resection with the LigaSure Vessel Sealing System: A Case Report", *Innovations That Work*, Feb. 2002, 8 pages.

Horgan, "A Novel Technique for parenchymal division during hepatectomy", *The American Journal of Surgery*, vol. 181, No. 03, 2001, pp. 236-237.

Jarrett et al., "Use of the LigaSure Vessel Sealing System for Peri-Hilar Vessels in Laparoscopic Nephrectomy", *Sales/Product Literature*, 2000, 1 page.

Johnson, "Evaluation of the LigaSure Vessel Sealing System in Hemorrhoidectomy", *American College of Surgeons (ACS) Clinica Congress Poster*, 2000, 1 page.

Johnson et al., "Evaluation of a Bipolar Electrothermal Vessel Sealing Device in Hemorrhoidectomy", *Sales/Product Literature*, Jan. 2004, 1 page.

Johnson, "Use of the LigaSure Vessel Sealing System in Bloodless Hemorrhoidectomy", *Innovations That Work*, Mar. 2000, 4 pages.

Kennedy et al., "High-burst-strength, feedback-controlled bipolar vessel sealing", *Surgical Endoscopy*, vol. 12, 1998, pp. 876-878.

Koyle et al., "Laparoscopic Palomo Varicocele Ligation in Children and Adolescents", *Pediatric Endosurgery and Innovative Techniques*, vol. 6, No. 1, 2002, pp. 15-19.

Levy et al. "Randomized Trial of Suture Versus Electrosurgical Bipolar Vessel Sealing in Vaginal Hysterectomy", *Obstetrics and Gynecology*, vol. 102, No. 1, Jul. 2003, pp. 147-151.

Levy et al. "Use of a New Energy-based Vessel Ligation Device During Vaginal Hysterectomy", *Int'l Federation of Gynecology and Obstetrics (FIGO) World Congress*, 1999, 1 page.

Levy et al., "Update on Hysterectomy New Technologies and Techniques", *OBG Management*, Feb. 2003, 15 pages.

Levy, "Use of a New Vessel Ligation Device During Vaginal Hysterectomy", *FIGO Washington, D.C.*, 2000, 1 page.

McLellan et al., "Vessel Sealing for Hemostasis During Gynecologic Surgery", *Sales/Product Literature*, 1999, 1 page.

McLellan et al., "Vessel Sealing for Hemostasis During Pelvic Surgery", *Int'l Federation of Gynecology and Obstetrics FIGO World Congress*, Washington, D.C., 2000, 1 page.

(56)

References Cited

OTHER PUBLICATIONS

Muller et al., "Extended left hemicolectomy using the LigaSure Vessel Sealing System", Innovations That Work, Sep. 1999, 4 pages.
 Non-Final Office Action received for U.S. Appl. No. 16/886,687, mailed on Sep. 13, 2022, 11 pages.
 Non-Final Office Action received for U.S. Appl. No. 16/886,696, mailed on Aug. 5, 2022, 11 pages.
 Office Action received for Canadian Patent Application No. 2,997,771, mailed on Jan. 4, 2019, 3 pages.
 Olsson et al., "Radical Cystectomy in Females", Current Surgical Techniques in Urology, vol. 14, No. 3, 2001, pp. 1-8.
 Ortenberg, "LigaSure System Used in Laparoscopic 1st and 2nd Stage Orchiopexy", Innovations That Work, Nov. 2002, 4 pages.
 Palazzo et al., "Randomized clinical trial of Ligasure versus open haemorrhoidectomy", British Journal of Surgery, vol. 89, No. 02, 2002, pp. 154-157.

Peterson et al., "Comparison of Healing Process Following Ligation with Sutures and Bipolar Vessel Sealing", Surgical Technology International X, 2001, pp. 1-6.
 Reschke, "Application and Filing History for U.S. Appl. No. 14/065,644, filed Oct. 29, 2013", (Copy Not Attached).
 Rothenberg et al., "Use of the LigaSure Vessel Sealing System in Minimally Invasive Surgery in Children", Int'l Pediatric Endosurgery Group (IPEG), 2000, 2 pages.
 Ryan, "Application and Filing History for U.S. Appl. No. 09/591,328, filed Jun. 9, 2000", (Copy Not Attached).
 Sampayan et al., "Multilayer Ultra-High Gradient Insulator Technology", Discharges and Electrical Insulation in Vacuum, 1998, pp. 740-743.
 Sayfan et al., "Sutureless Closed Hemorrhoidectomy: A New Technique", Annals of Surgery, vol. 234, No. 1, 2001, pp. 21-24.
 Schmaltz et al., "Application and Filing History for U.S. Appl. No. 09/387,883, filed Sep. 1, 1999", (Copy Not Attached).

* cited by examiner

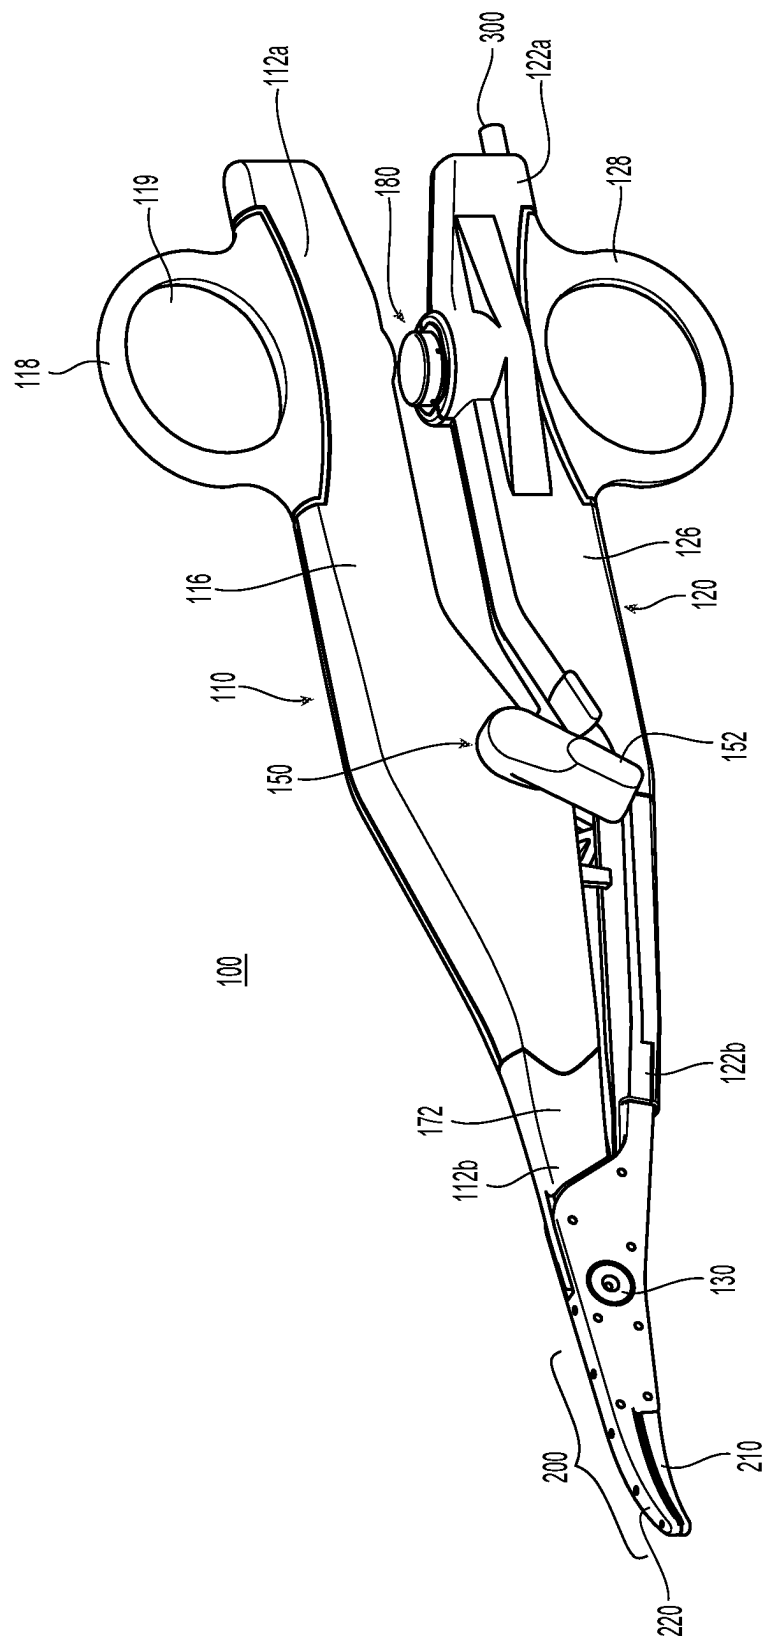


Fig. 1A
(Prior Art)

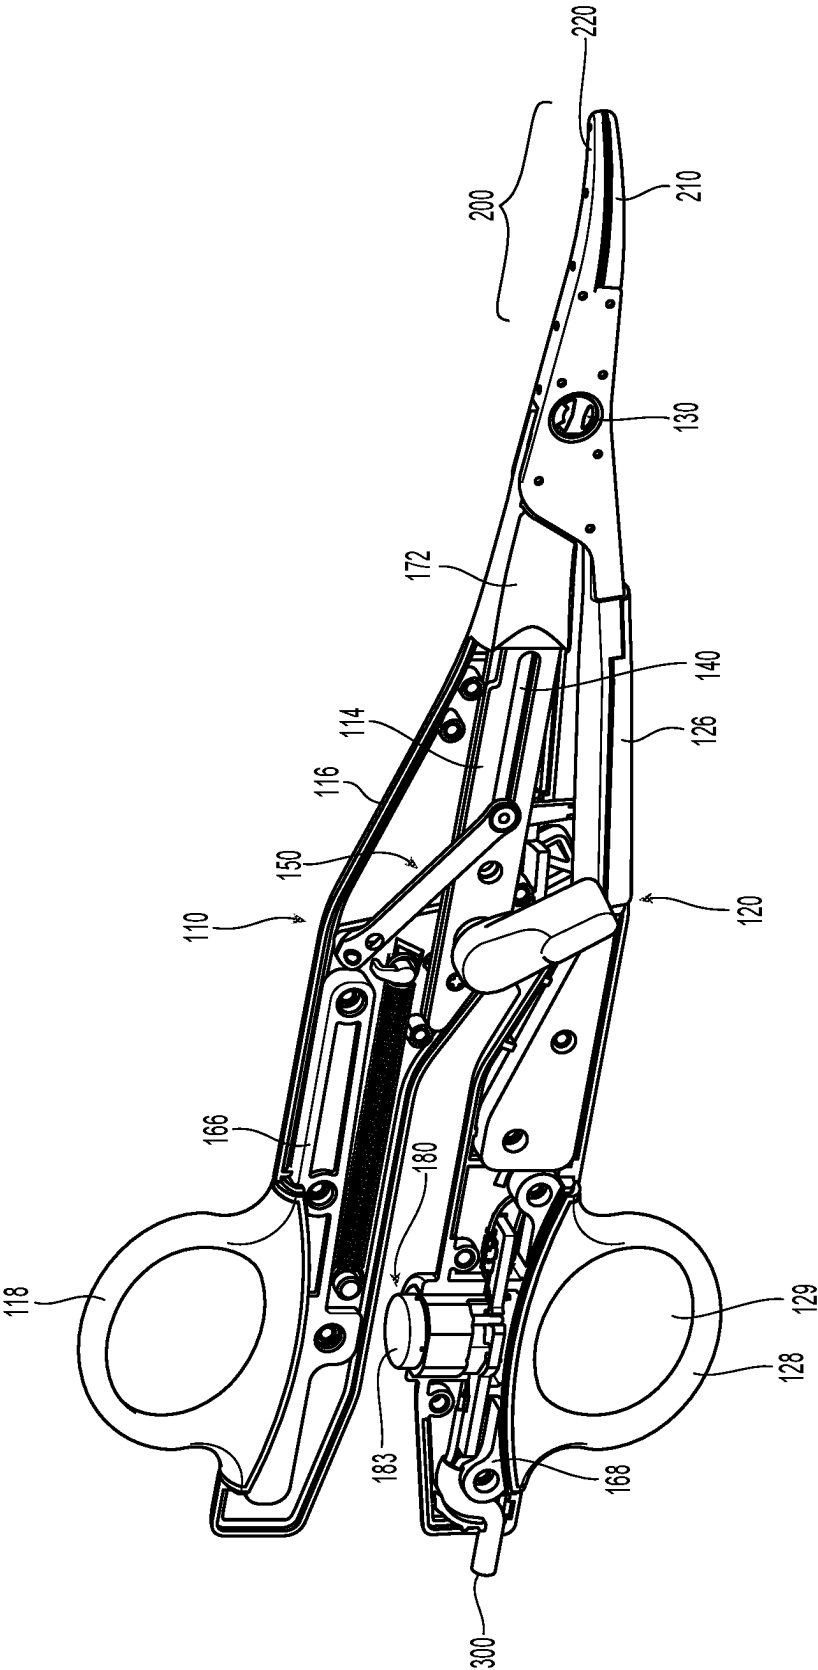


Fig. 1B

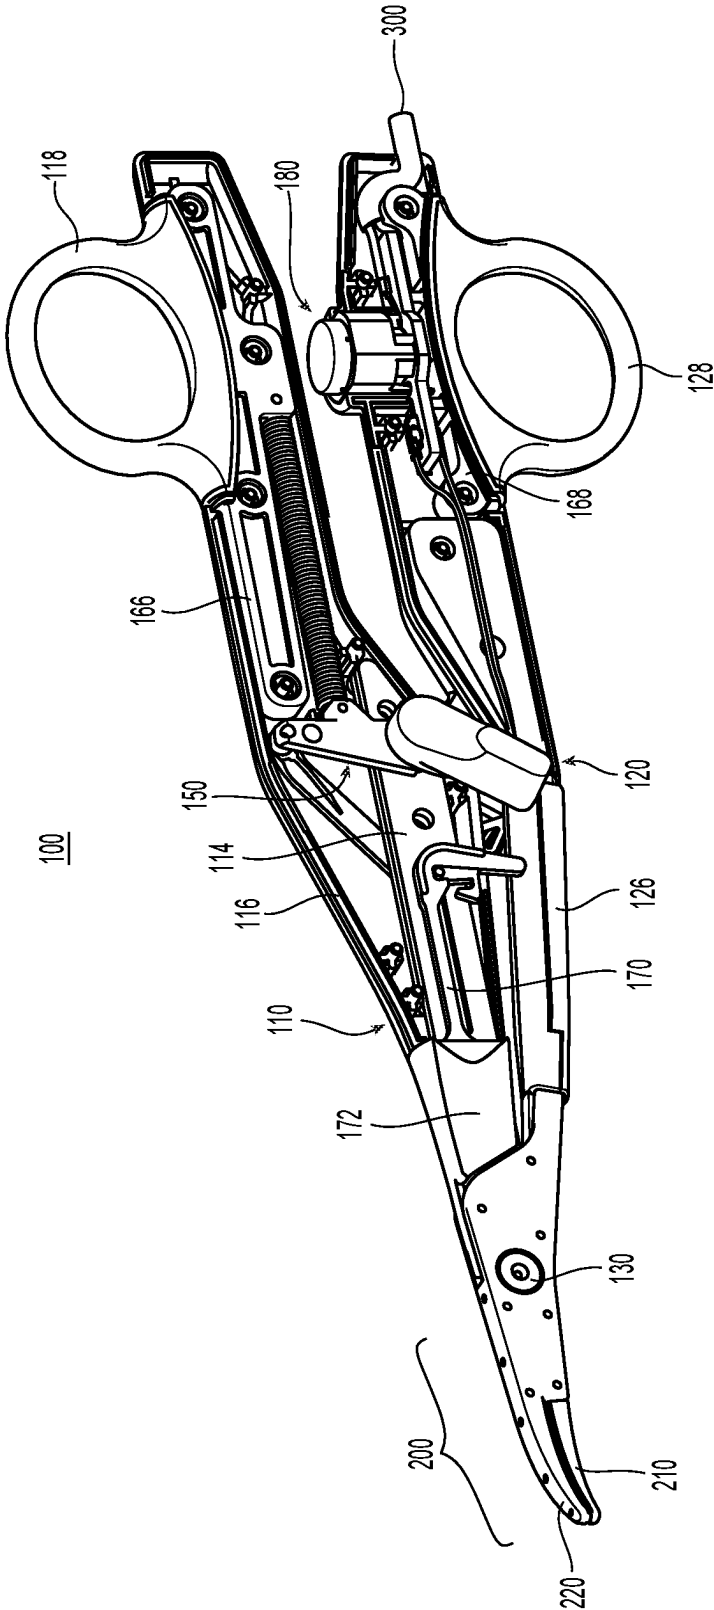


Fig. 1C

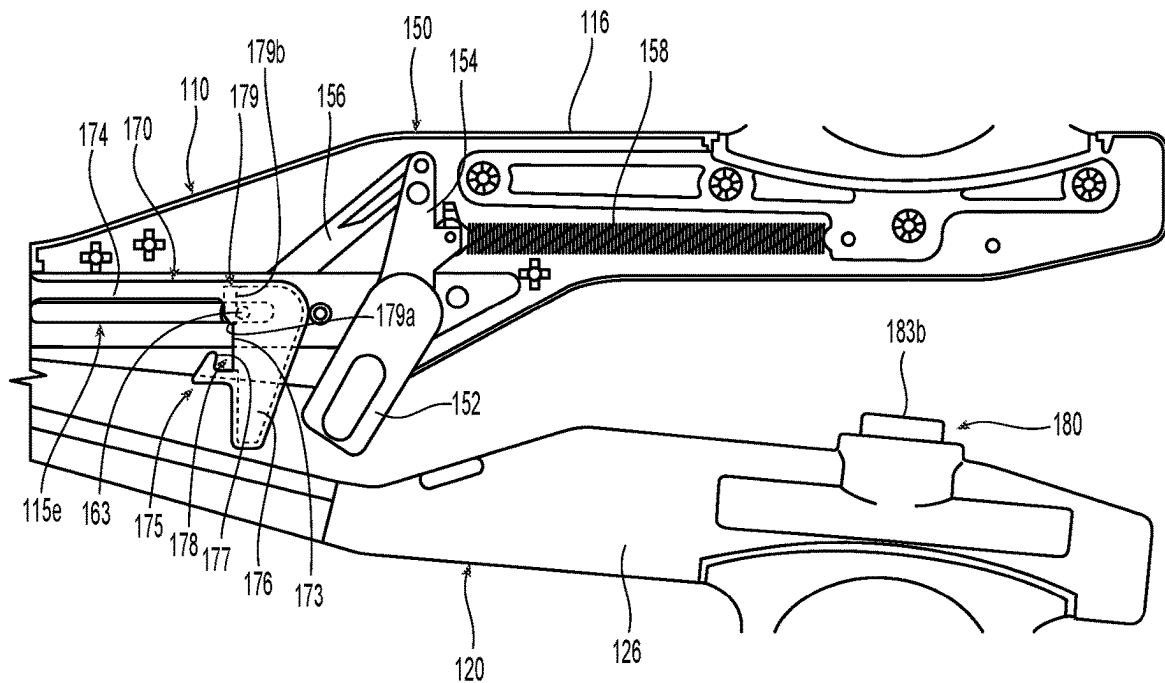


Fig. 1D

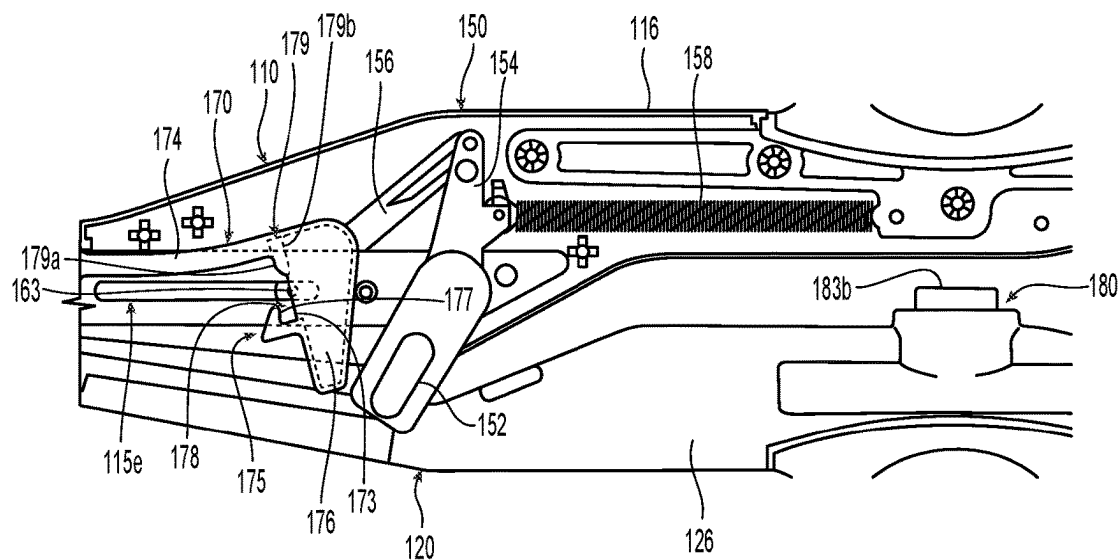


Fig. 1E

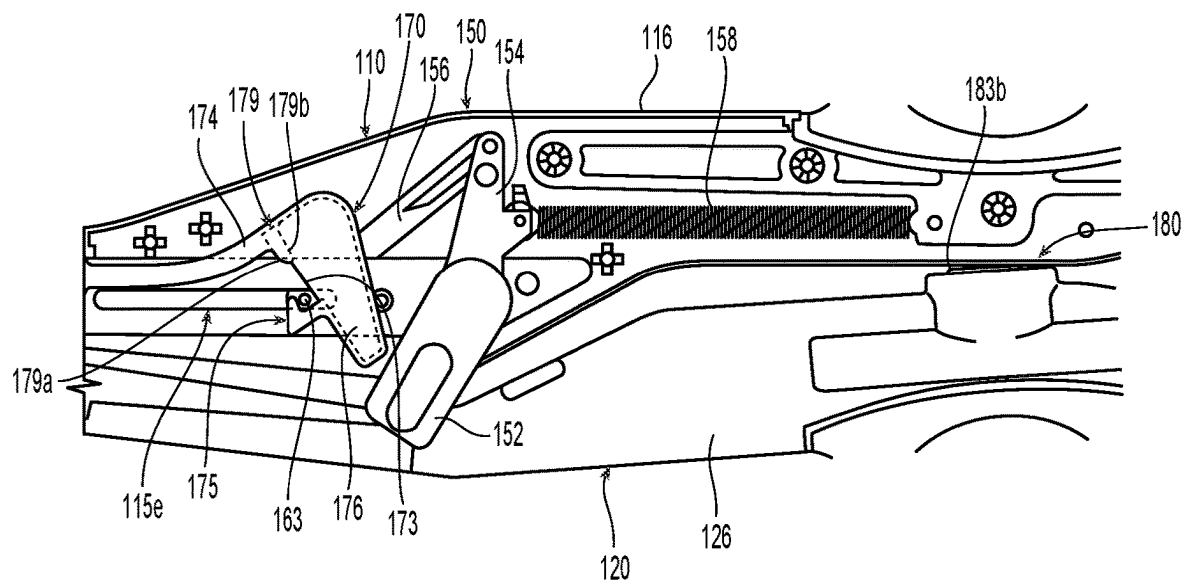


Fig. 1F

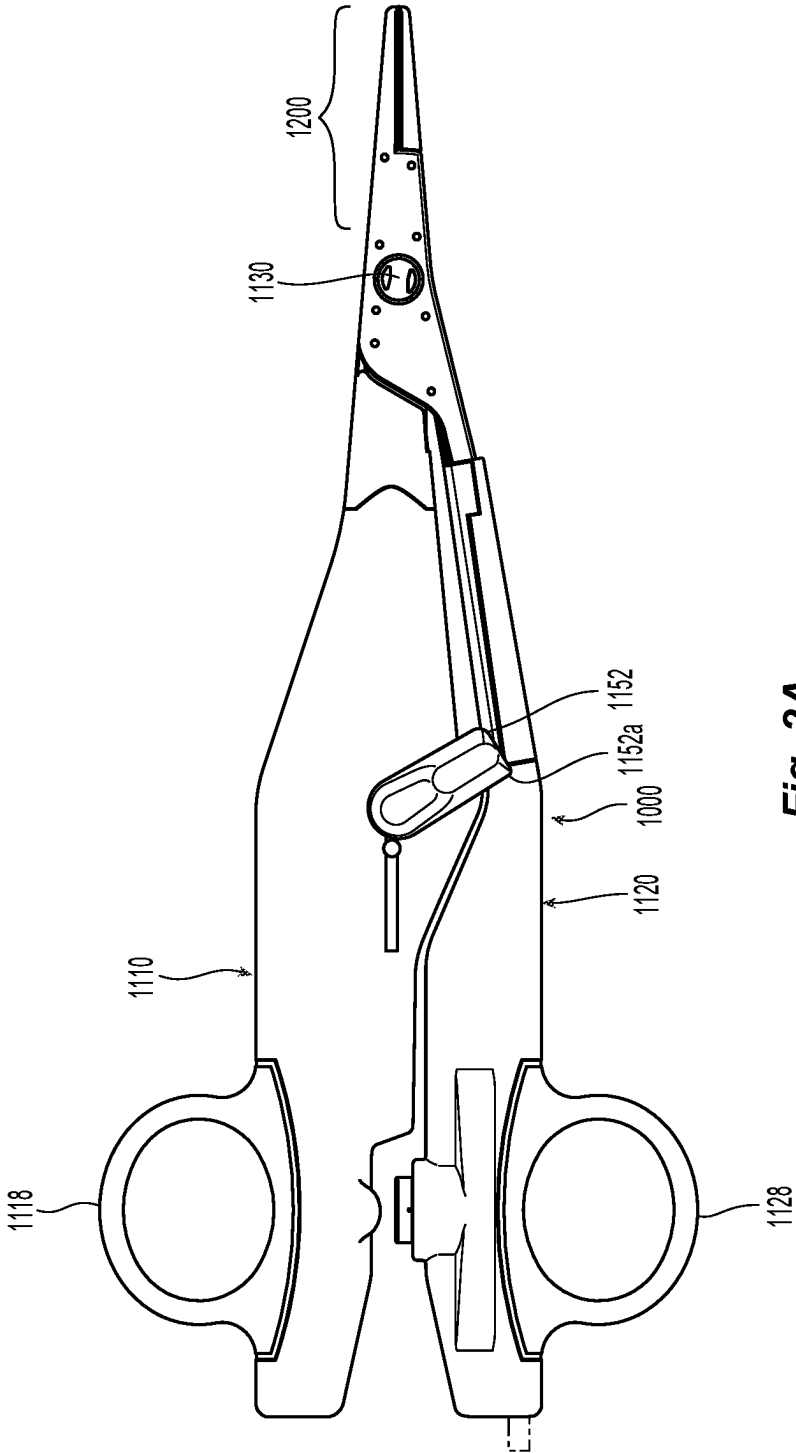


Fig. 2A

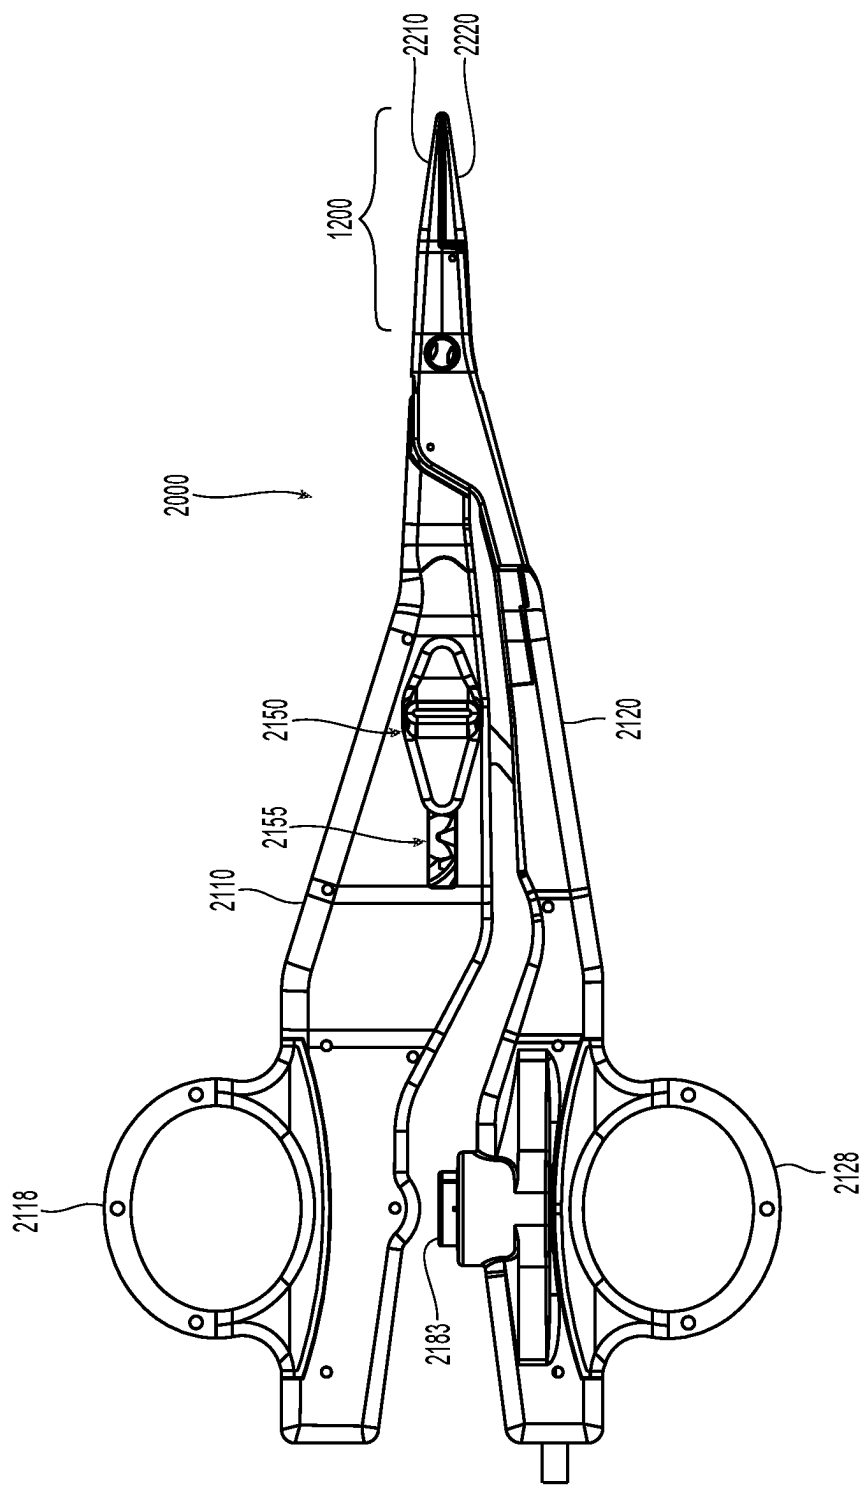


Fig. 2B

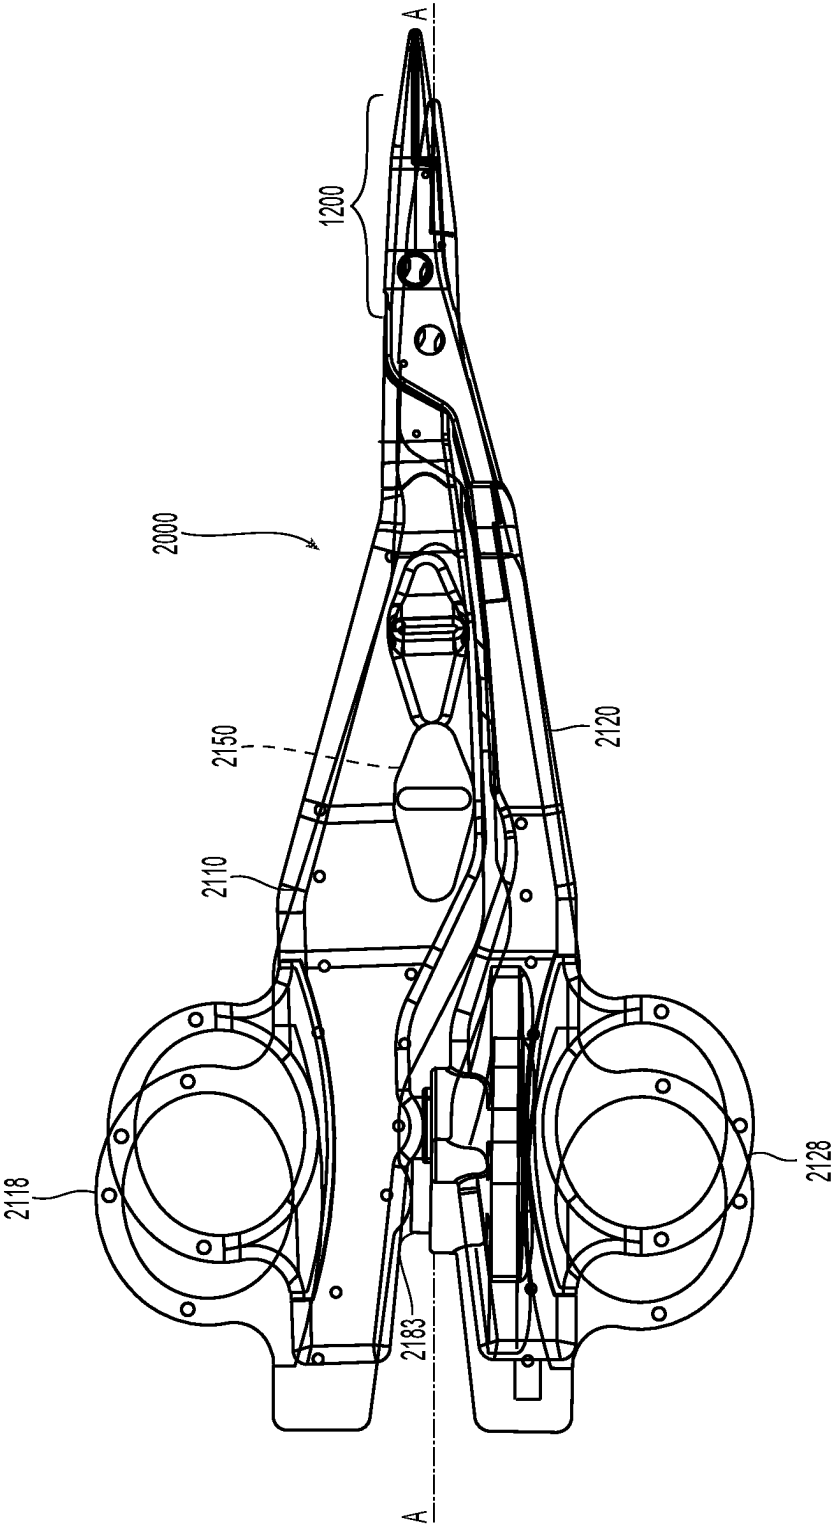


Fig. 2C

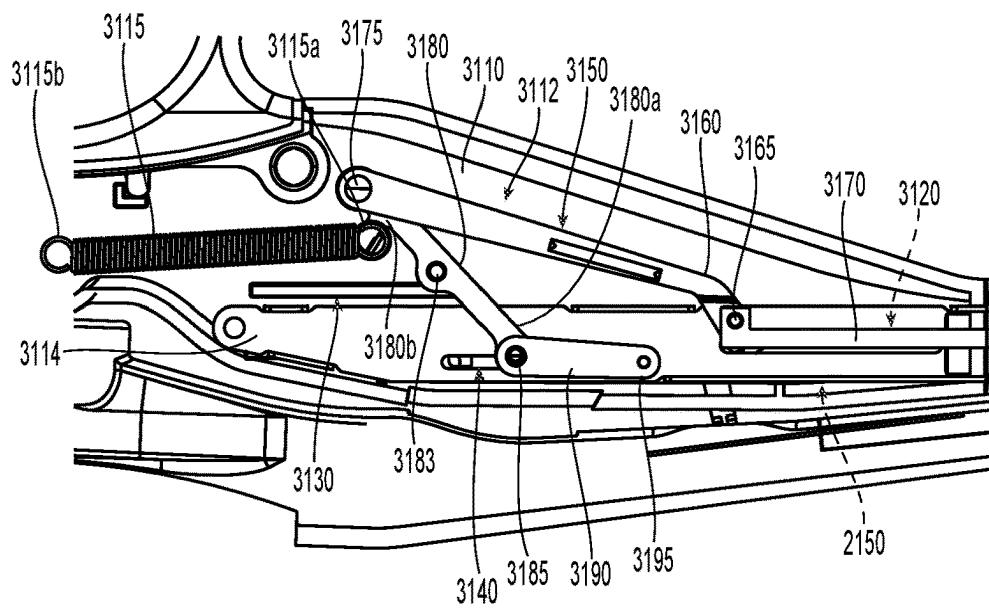


Fig. 3A

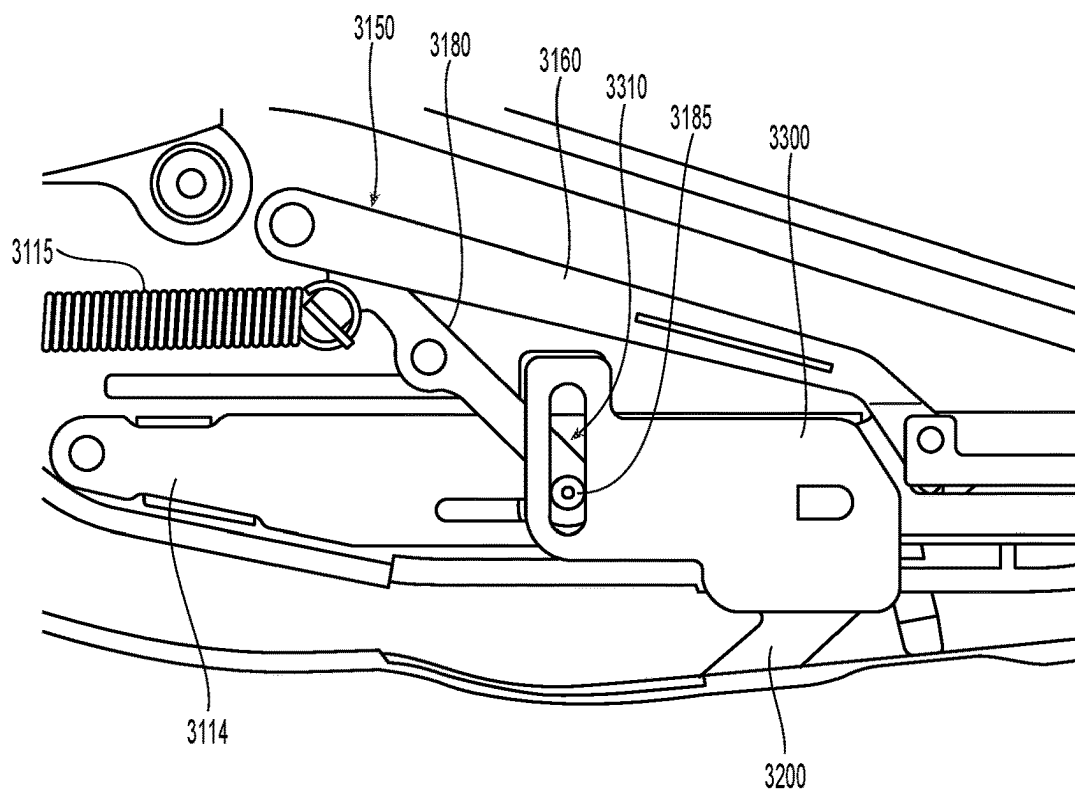


Fig. 3B

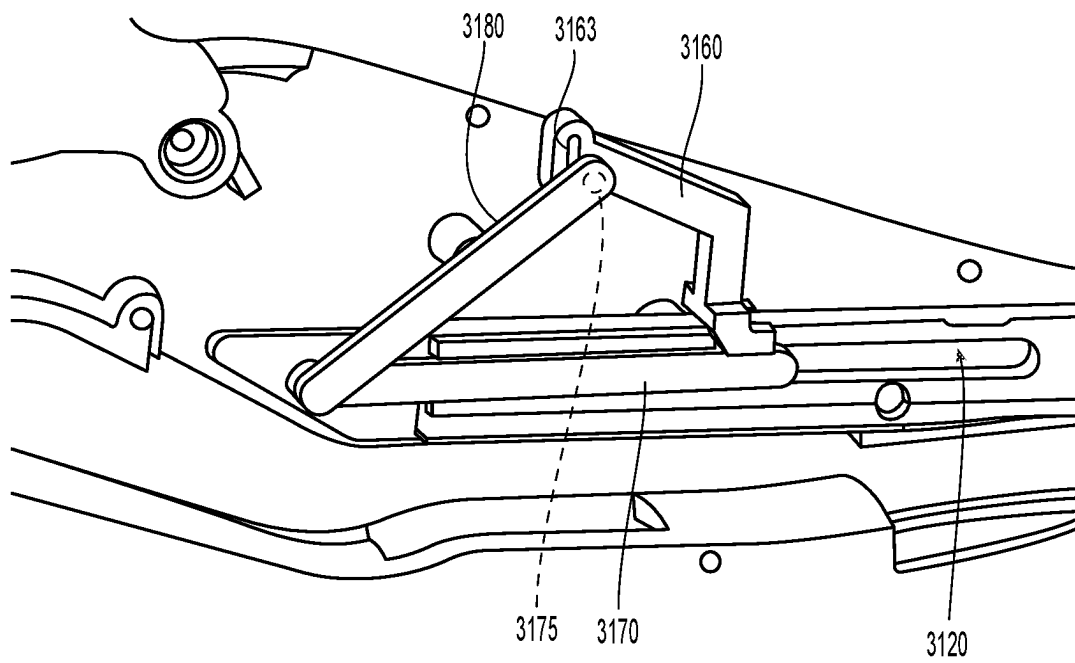


Fig. 3C

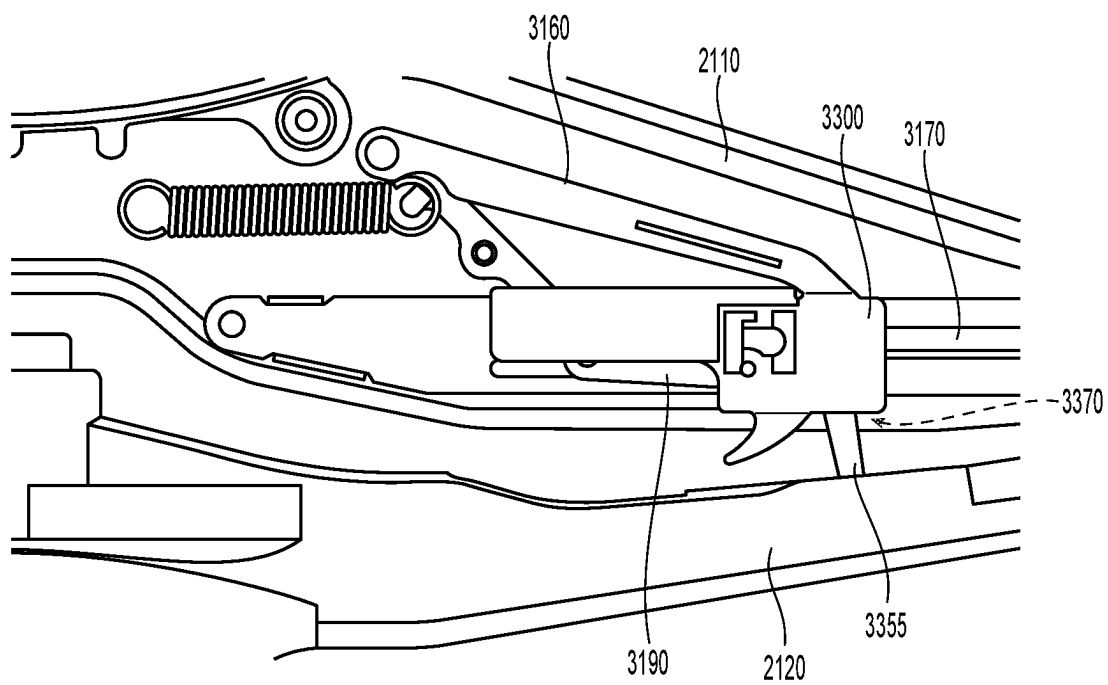


Fig. 3D

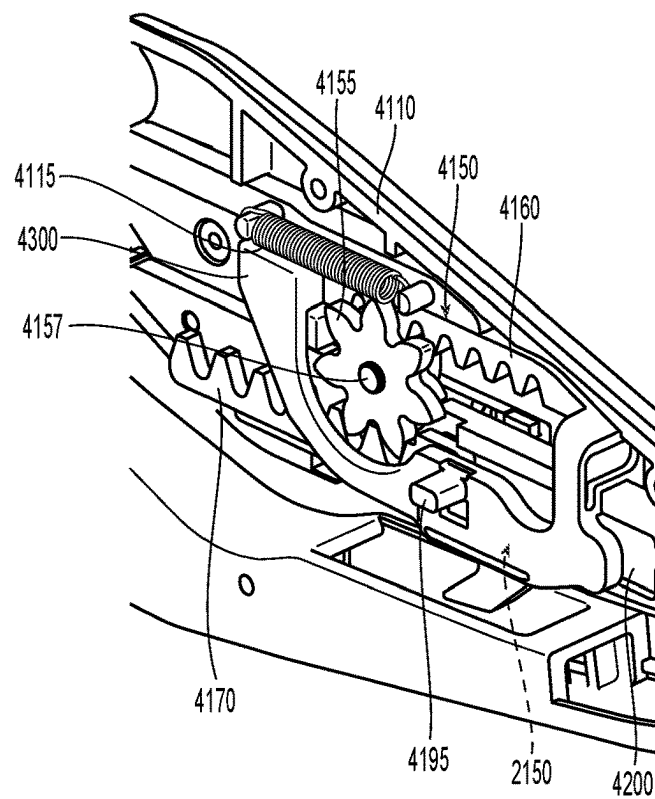


Fig. 4A

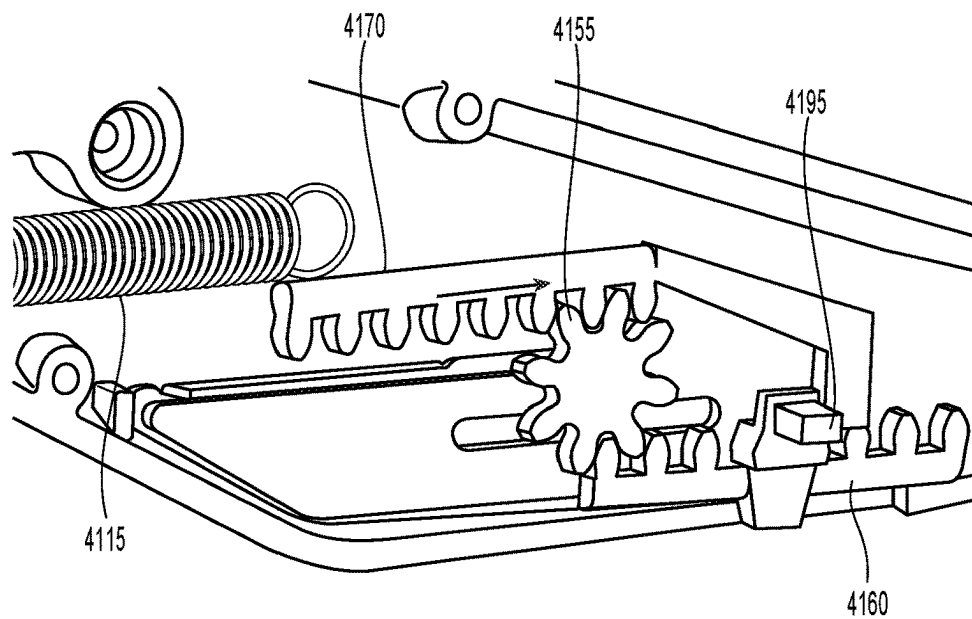


Fig. 4B

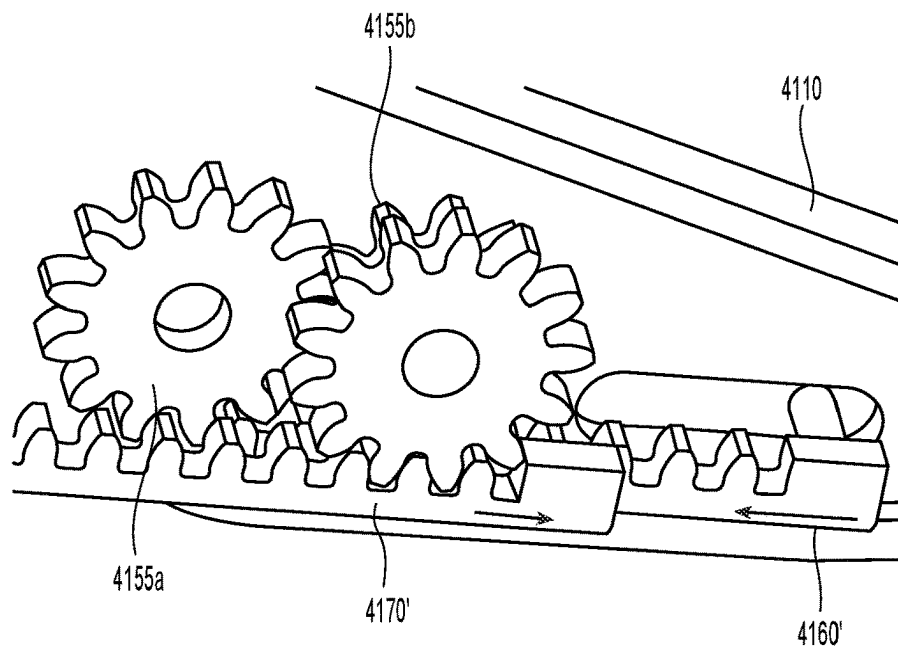


Fig. 4C

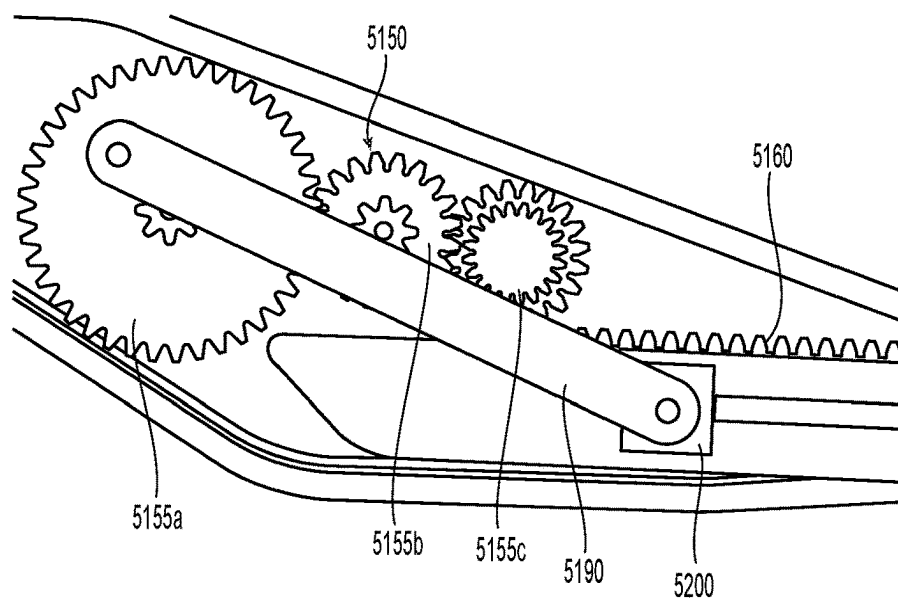


Fig. 4D

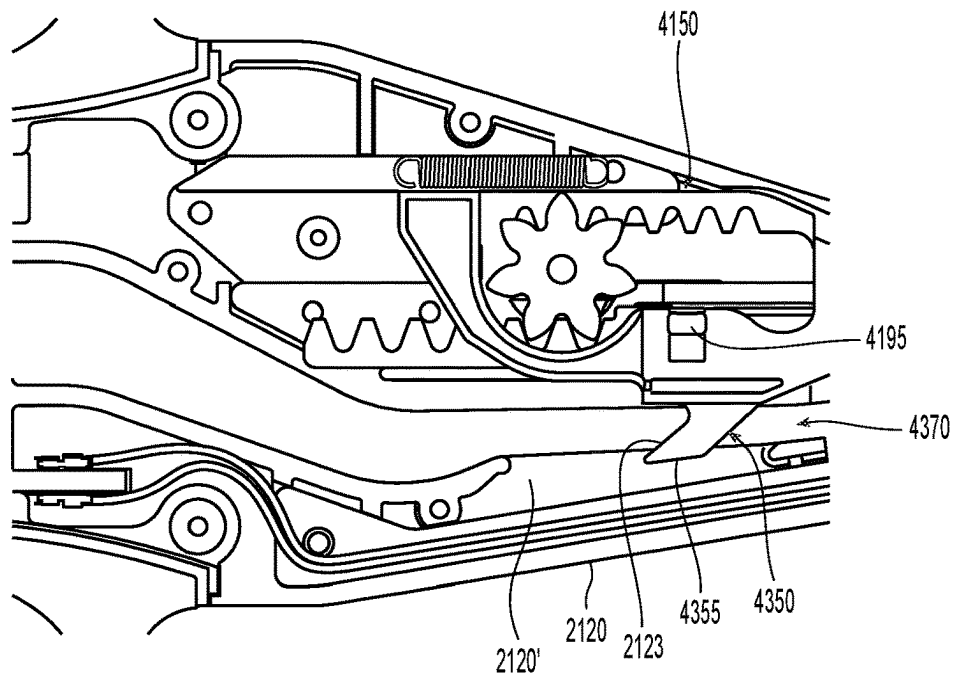


Fig. 5A

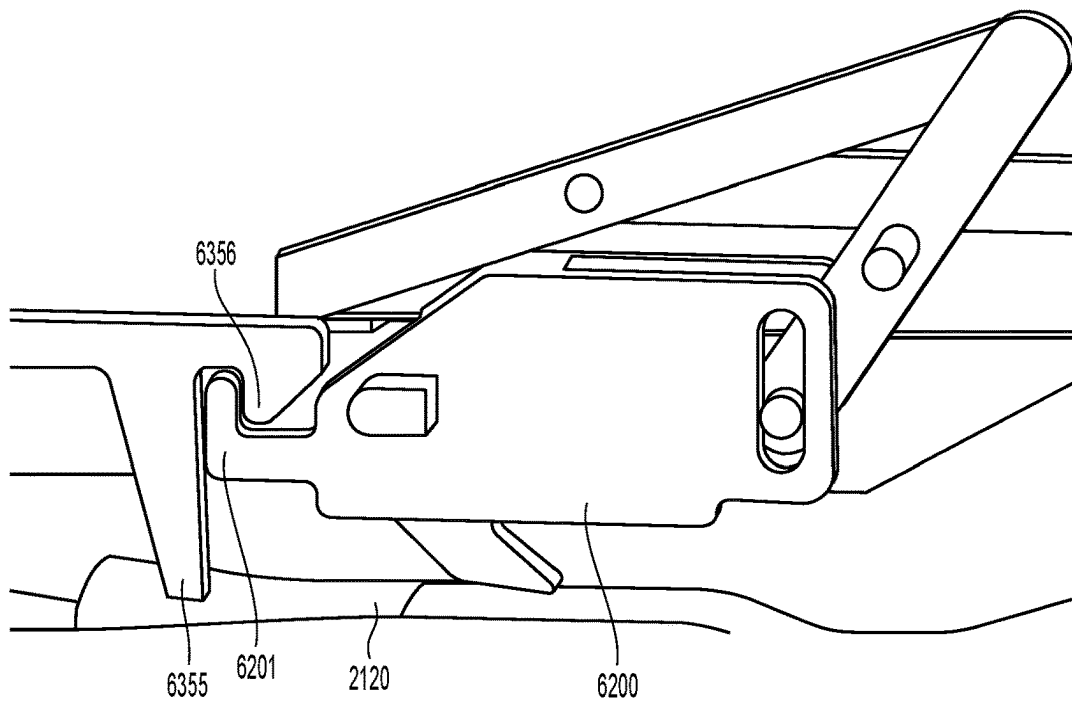


Fig. 5B

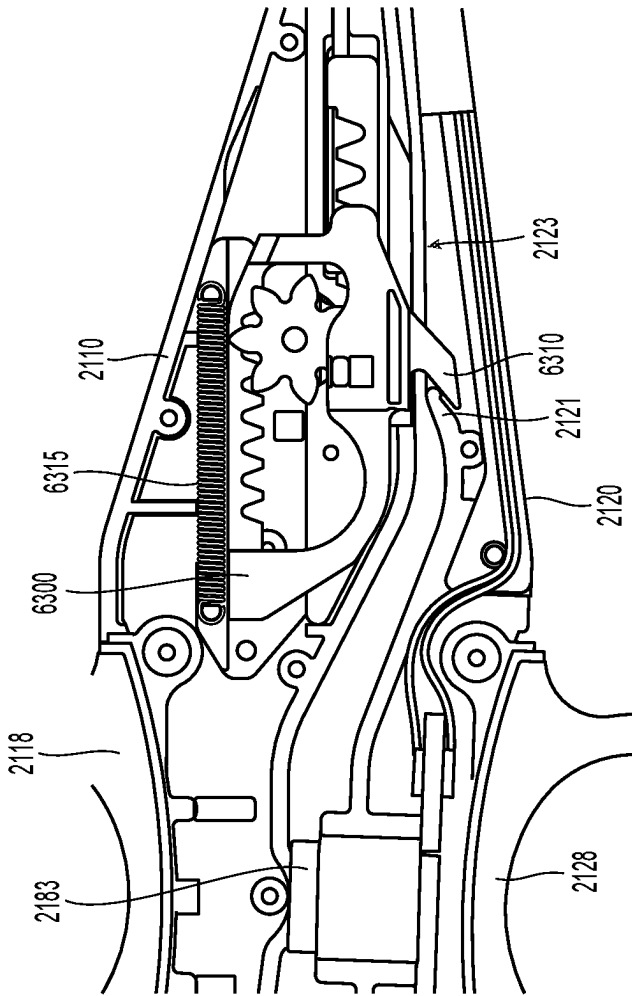


Fig. 6A

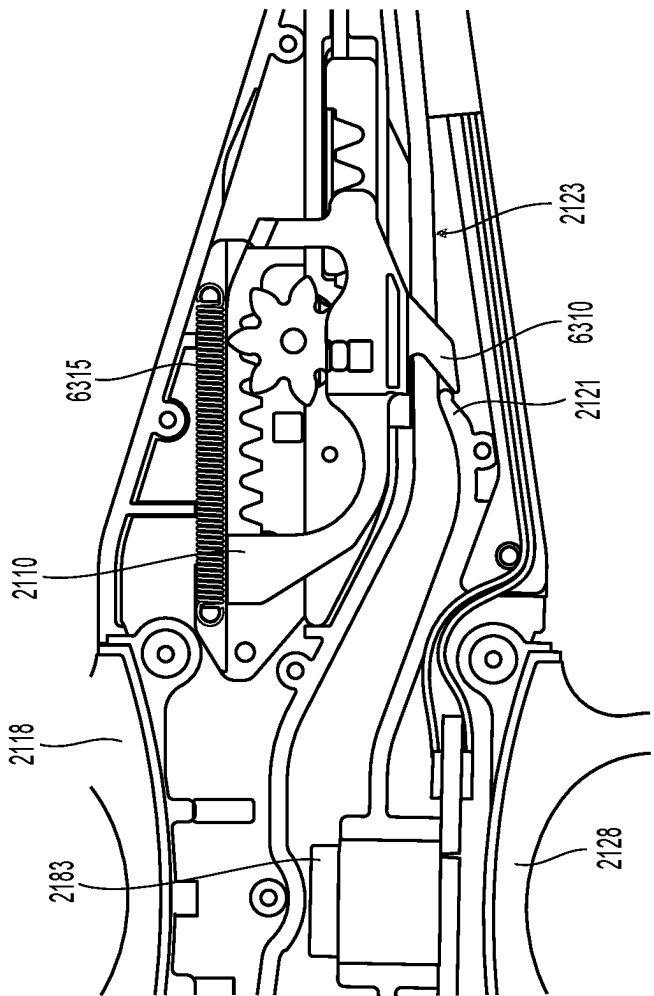


Fig. 6B

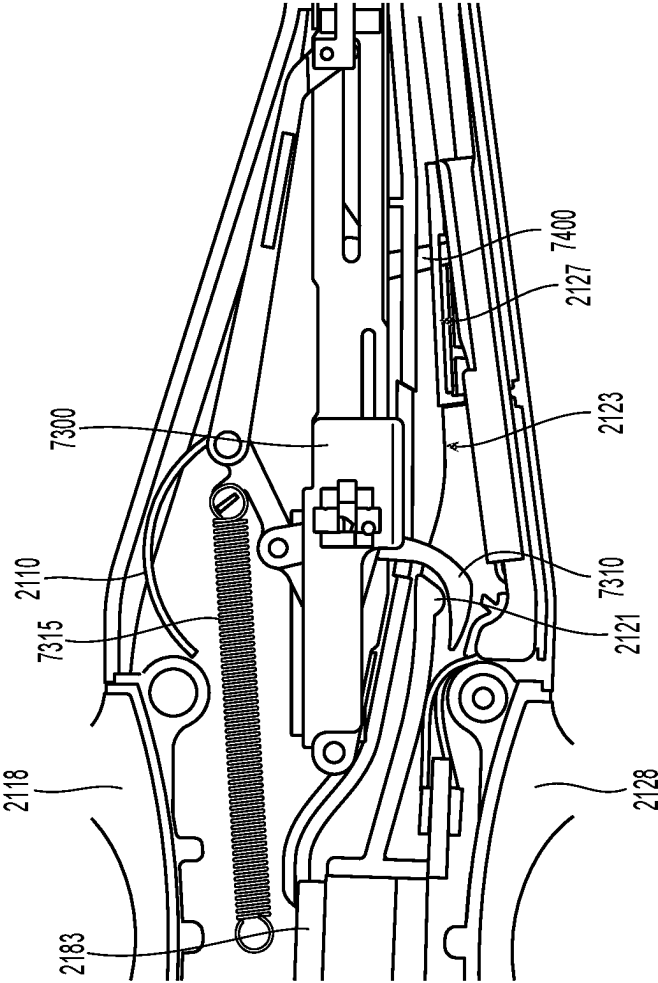


Fig. 7A

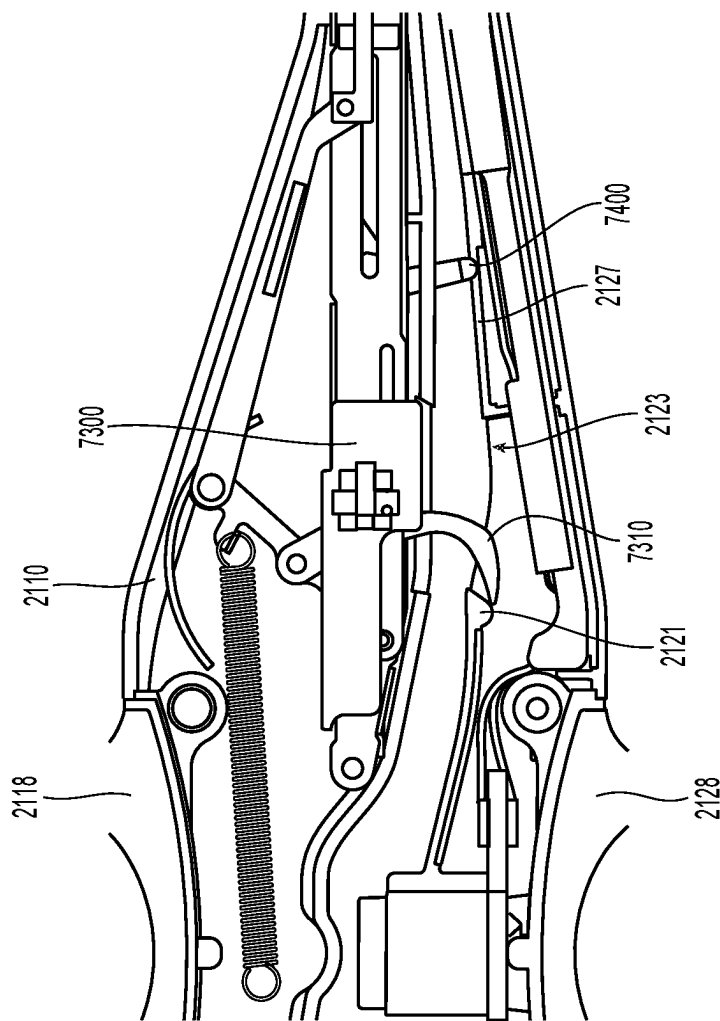


Fig. 7B

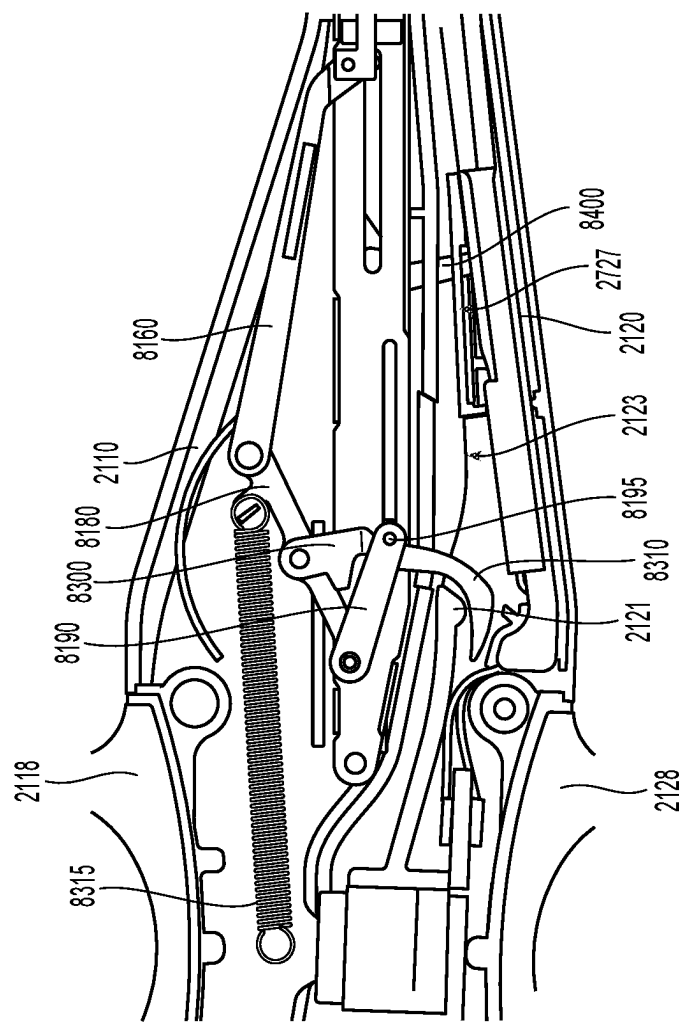


Fig. 8A

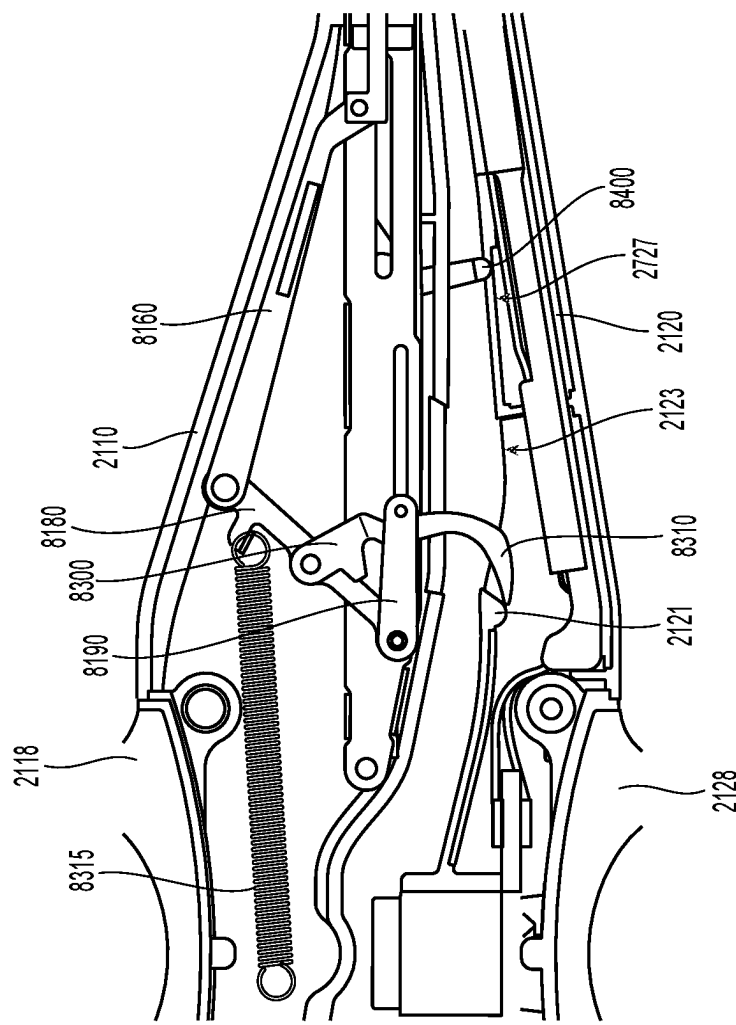


Fig. 8B

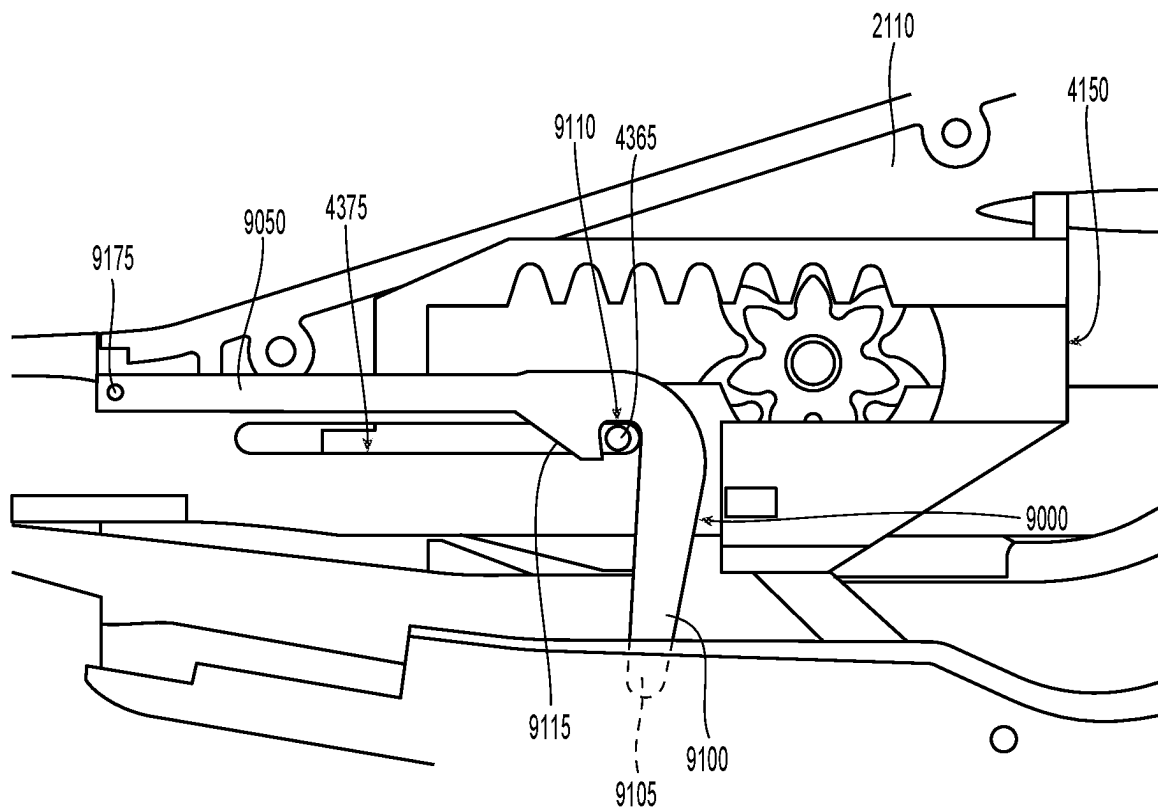


Fig. 9

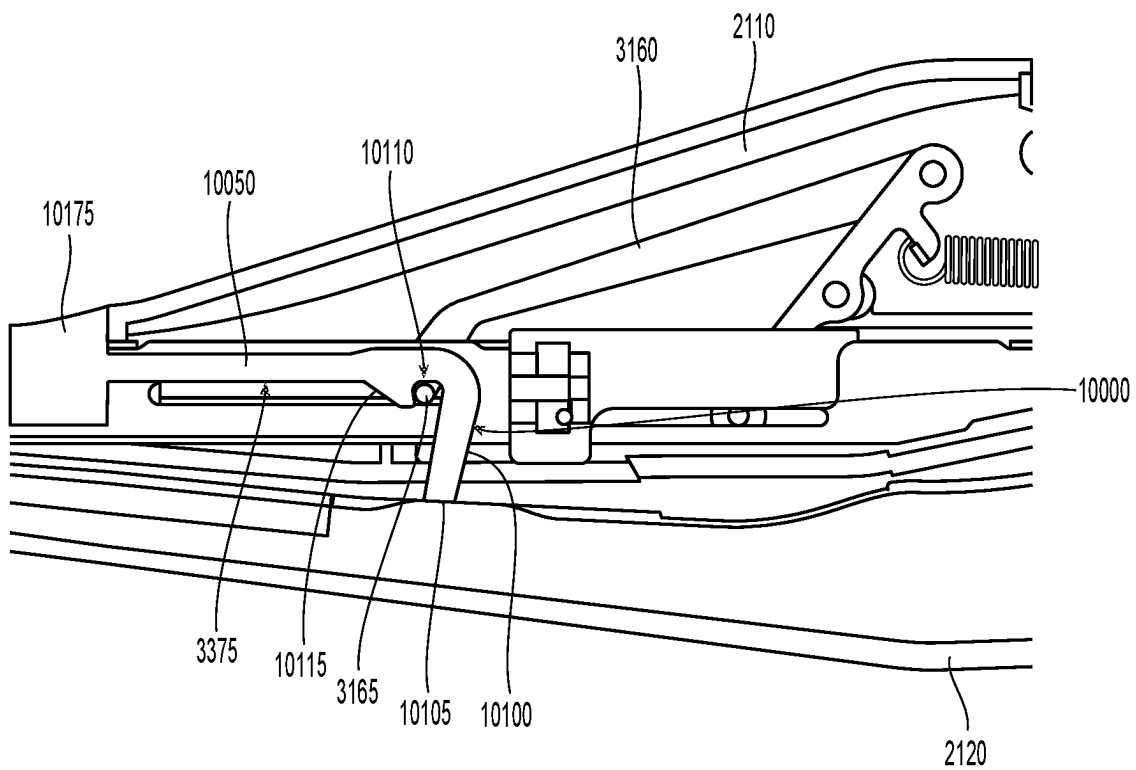


Fig. 10

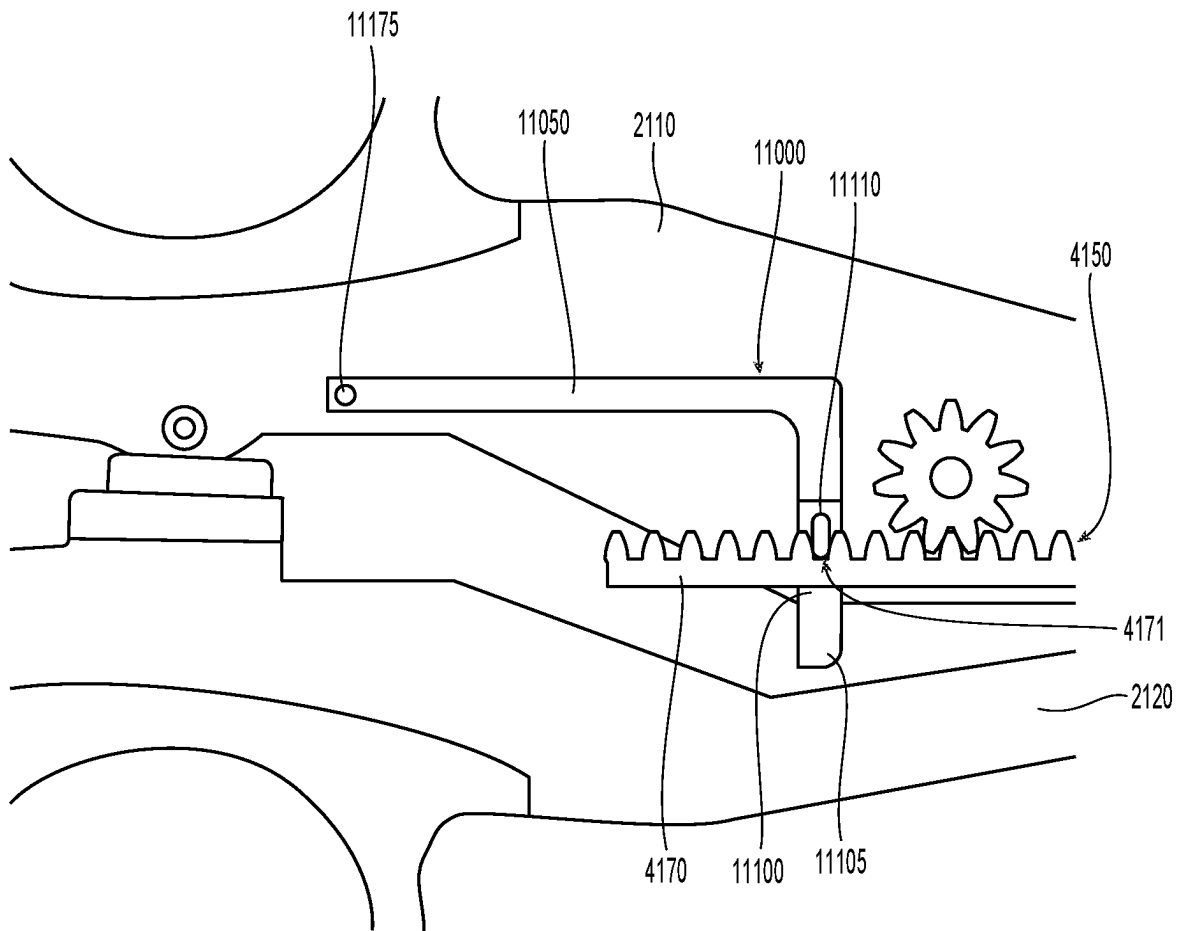


Fig. 11

1

**FORCEPS WITH LINEAR TRIGGER
MECHANISM****CROSS REFERENCE TO RELATED
APPLICATIONS**

This application claims the benefit of and priority to U.S. provisional application Ser. No. 62/990,277, filed on Mar. 16, 2020, the entire content of which is incorporated by reference herein.

BACKGROUND**Technical Field**

The present disclosure relates to electrosurgical instruments and, more particularly, to electrosurgical forceps for grasping, treating, and/or dividing tissue.

Background of Related Art

A surgical forceps is a plier-like instrument which relies on mechanical action between its jaws to grasp tissue. Electrosurgical forceps utilize both mechanical clamping action and electrical energy to treat tissue, e.g., coagulate, cauterize, and/or seal tissue.

Typically, once tissue is treated, the surgeon has to accurately sever the treated tissue. Accordingly, many electrosurgical forceps have been designed which incorporate a knife configured to effectively sever tissue after treating the tissue.

SUMMARY

As used herein, the term “distal” refers to the portion that is being described which is further from a surgeon, while the term “proximal” refers to the portion that is being described which is closer to a surgeon. Further, to the extent consistent, any of the aspects described herein may be used in conjunction with any or all of the other aspects described herein.

An electrosurgical forceps provided in accordance with aspects of the present disclosure includes first and second shaft members each having a jaw member disposed at a distal end thereof, the first and second shaft members configured to rotate about a pivot to move the jaw members between an open position and a closed position, the first and second shaft members defining a longitudinal axis therebetween. A knife deployment mechanism is disposed within the first shaft member and includes a trigger moveable along the longitudinal axis to deploy a knife (which may also be deployable along the longitudinal axis) operably coupled thereto between a retracted position relative to the jaw members and an extended position between the jaw members. The knife deployment mechanism includes first and second rack members operably coupled to one another by a gear disposed therebetween. The trigger is operably connected to the first rack member and the knife is operably coupled to the second rack member such that movement of the trigger moves the knife in an opposite direction relative thereto. A knife lockout is configured to move upon approximation of the first and second shaft members between an engaged position preventing deployment of the knife and a disengaged position allowing deployment of the knife. The knife lockout includes a flange operably connected to the first shaft member and depending therefrom in opposition to the second shaft member such that approximation of the first

2

and second shaft members forces the flange against the second shaft member to disengage the knife lockout to allow actuation of the knife.

In aspects according to the present disclosure, the first shaft member includes a trigger slot defined therein, the trigger is configured to travel between a distal-most position wherein the trigger slot is exposed and a more proximal position wherein the trigger covers the trigger slot to reduce the chances of a user's finger being pinched within the trigger slot. In other aspects according to the present disclosure, the forceps further includes a switch assembly disposed on one of the first or second shaft members which is configured to be engaged by the other of the first or second shaft members when the jaw members are approximated to move the switch assembly between a deactivated position and an activated position to control delivery of electrosurgical energy to the jaw members.

In aspects according to the present disclosure, a knife return spring is operably coupled to the knife deployment mechanism and is configured to bias the knife toward the retracted position. In other aspects according to the present disclosure, the knife return spring is operably coupled to one or both of the first or second rack members. In yet other aspects according to the present disclosure, the knife lockout includes a slot defined in the flange configured to operably engage a lock pin disposed in the knife deployment mechanism to prevent movement of the knife when engaged.

In aspects according to the present disclosure, upon approximation of the first and second shaft members, the flange is configured to dislodge the slot from engagement with the lock pin of the knife deployment mechanism to allow selective actuation of the knife. In other aspects according to the present disclosure, the flange is connected to the first shaft member by a flange pin. In yet other aspects according to the present disclosure, the flange is fixed at a distal end thereof by the flange pin and, upon approximation of the first and second shaft members, the flange is configured to cantilever or flex about the flange pin to dislodge the lock pin from the slot defined therein. In yet other aspects according to the present disclosure, upon opening of the first and second shaft members relative to one another the bias of the flange reseats the lock pin within the slot.

In aspects according to the present disclosure, the knife deployment mechanism includes an elongated slot defined therein to allow reciprocation of the lock pin therein. In other aspects according to the present disclosure, the flange includes a ramp to facilitate reseating the lock pin within the slot upon return of the knife deployment mechanism.

In yet other aspects according to the present disclosure, the knife lockout includes a boss disposed on the flange configured to operably engage one of a plurality of slots defined between a plurality of gears in the first rack to prevent movement of the knife when engaged. In still other aspects according to the present disclosure, upon approximation of the first and second shaft members, the boss on the flange is configured to dislodge from the one of a plurality of slots to allow selective actuation of the knife. In aspects according to the present disclosure, the flange is fixed at a proximal end thereof by the pivot and, upon approximation of the first and second shaft members, the flange is configured to rotate about the pivot to dislodge the boss from gear.

In aspects according to the present disclosure, a knife kickout mechanism is configured to force the knife forward upon movement of the first and second shaft members from an approximated position to a more open position. In other aspects according to the present disclosure, the knife kickout mechanism includes a flange depending from the knife

3

deployment mechanism in oppositional alignment with the second shaft member wherein, upon approximation of the first and second shaft members and actuation of the knife deployment mechanism in a first direction, the knife kickout rides within a slot defined within the second shaft member to abuttingly engage a ramp defined in the slot and wherein, upon opening of the first and second shaft members relative to one another, the ramp forces the knife kickout mechanism in an opposite direction to facilitate return of the knife deployment mechanism to an unactuated position.

An electrosurgical forceps provided in accordance with additional aspects of the present disclosure includes first and second shaft members each having a jaw member disposed at a distal end thereof, the first and second shaft members configured to rotate about a pivot to move the jaw members between an open position and a closed position, the first and second shaft members defining a longitudinal axis therebetween. A knife deployment mechanism is disposed within the first shaft member and includes a trigger moveable along the longitudinal axis to deploy a knife operably coupled thereto between a retracted position relative to the jaw members and an extended position between the jaw members, the knife deployment mechanism including first and second rack members operably coupled to one another by a gear disposed therebetween, the trigger operably connected to the first rack member and the knife operably coupled to the second rack member such that movement of the trigger moves the knife in an opposite direction relative thereto. A knife kickout mechanism is configured to force the knife forward upon movement of the first and second shaft members from an approximated position to a more open position, the knife kickout mechanism including a flange depending from the knife deployment mechanism in oppositional alignment with the second shaft member wherein, upon approximation of the first and second shaft members and actuation of the knife deployment mechanism in a first direction, the knife kickout rides within a slot defined within the second shaft member to abuttingly engage a ramp defined in the slot and wherein, upon opening of the first and second shaft members relative to one another, the ramp forces the knife kickout mechanism in an opposite direction to facilitate return of the knife deployment mechanism to an unactuated position.

In aspects according to the present disclosure, a switch assembly is disposed on one of the first or second shaft members and is configured to be engaged by the other of the first or second shaft members when the jaw members are approximated to move the switch assembly between a deactivated position and an activated position to control delivery of electrosurgical energy to the jaw members. In other aspects according to the present disclosure, a knife return spring is operably coupled to the knife deployment mechanism and configured to bias the knife toward the retracted position.

An electrosurgical forceps provided in accordance with additional aspects of the present disclosure includes first and second shaft members each having a jaw member disposed at a distal end thereof, the first and second shaft members configured to rotate about a pivot to move the jaw members between an open position and a closed position, the first and second shaft members defining a longitudinal axis therebetween. A knife deployment mechanism is disposed within the first shaft member and includes a trigger moveable along the longitudinal axis to deploy a knife operably coupled thereto between a retracted position relative to the jaw members and an extended position between the jaw members, the knife deployment mechanism including a series of

4

links operably coupled to one another and to a knife carrier configured to translate the knife. A knife lockout is configured to move upon approximation of the first and second shaft members between an engaged position preventing deployment of the knife and a disengaged position allowing deployment of the knife, the knife lockout including a flange operably connected to the first shaft member and depending therefrom in opposition to the second shaft member such that approximation of the first and second shaft members forces the flange against the second shaft member to disengage the knife lockout to allow actuation of the knife.

In aspects according to the present disclosure, the first shaft member includes a trigger slot defined therein, the trigger is configured to travel between a distal-most position wherein the trigger slot is exposed and a more proximal position wherein the trigger covers the trigger slot to reduce the chances of a user's finger being pinched within the trigger slot. In other aspects according to the present disclosure, a switch assembly is disposed on one of the first or second shaft members and is configured to be engaged by the other of the first or second shaft members when the jaw members are approximated to move the switch assembly between a deactivated position and an activated position to control delivery of electrosurgical energy to the jaw members.

In aspects according to the present disclosure, a knife return spring is operably coupled to the knife deployment mechanism and configured to bias the knife toward the retracted position. In other aspects according to the present disclosure, the knife return spring is operable coupled to at least one of the series of links.

In aspects according to the present disclosure, the knife lockout includes a slot defined in the flange configured to operably engage a lock pin disposed in the knife deployment mechanism to prevent movement of the knife when engaged. In other aspects according to the present disclosure, upon approximation of the first and second shaft members, the flange is configured to dislodge the slot from engagement with the lock pin of the knife deployment mechanism to allow selective actuation of the knife. In yet other aspects according to the present disclosure, the flange is connected to the first shaft member by a sleeve.

In aspects according to the present disclosure, the flange includes an elongated shaft fixed at a distal end thereof by the sleeve disposed within the first shaft member and, upon approximation of the first and second shaft members, the elongated shaft of the flange is configured to cantilever or flex at the sleeve to dislodge the lock pin from the slot defined therein. In other aspects according to the present disclosure, upon opening of the first and second shaft members relative to one another the bias of the elongated shaft reseats the lock pin within the slot.

In aspects according to the present disclosure, the knife deployment mechanism includes an elongated slot defined therein to allow reciprocation of the lock pin therein. In other aspects according to the present disclosure, the flange includes a ramp to facilitate reseating the lock pin within the slot of the flange upon return of the knife deployment mechanism.

In aspects according to the present disclosure, a knife kickout mechanism is configured to force the knife forward upon movement of the first and second shaft members from an approximated position to a more open position. In other aspects according to the present disclosure, the knife kickout mechanism includes a flange depending from the knife deployment mechanism in oppositional alignment with the second shaft member wherein, upon approximation of the

5

first and second shaft members and actuation of the knife deployment mechanism in a first direction, the knife kickout rides within a slot defined within the second shaft member to abuttingly engage a ramp defined in the slot and wherein, upon opening of the first and second shaft members relative to one another, the ramp forces the knife kickout mechanism in an opposite direction to facilitate return of the knife deployment mechanism to an unactuated position.

An electrosurgical forceps provided in accordance with additional aspects of the present disclosure includes first and second shaft members each having a jaw member disposed at a distal end thereof, the first and second shaft members configured to rotate about a pivot to move the jaw members between an open position and a closed position, the first and second shaft members defining a longitudinal axis therebetween. A knife deployment mechanism is disposed within the first shaft member and includes a trigger moveable along the longitudinal axis to deploy a knife operably coupled thereto between a retracted position relative to the jaw members and an extended position between the jaw members, the knife deployment mechanism including a series of links operably coupled to one another and to a knife carrier configured to translate the knife. A knife kickout mechanism is configured to force the knife forward upon movement of the first and second shaft members from an approximated position to a more open position, the knife kickout mechanism including a flange depending from the knife deployment mechanism in oppositional alignment with the second shaft member wherein, upon approximation of the first and second shaft members and actuation of the knife deployment mechanism in a first direction, the knife kickout rides within a slot defined within the second shaft member to abuttingly engage a ramp defined in the slot and wherein, upon opening of the first and second shaft members relative to one another, the ramp forces the knife kickout mechanism in an opposite direction to facilitate return of the knife deployment mechanism to an unactuated position.

In aspects according to the present disclosure, a switch assembly disposed on one of the first or second shaft members and configured to be engaged by the other of the first or second shaft members when the jaw members are approximated to move the switch assembly between a deactivated position and an activated position to control delivery of electrosurgical energy to the jaw members.

In aspects according to the present disclosure, a knife return spring operably coupled to the knife deployment mechanism and configured to bias the knife toward the retracted position

An electrosurgical forceps provided in accordance with additional aspects of the present disclosure includes first and second shaft members each having a jaw member disposed at a distal end thereof, the first and second shaft members configured to rotate about a pivot to move the jaw members between an open position and a closed position, the first and second shaft members defining a longitudinal axis therebetween. A knife deployment mechanism is disposed within the first shaft member and includes a trigger moveable along the longitudinal axis to deploy a knife operably coupled thereto between a retracted position relative to the jaw members and an extended position between the jaw members. A knife lockout is configured to move upon approximation of the first and second shaft members between an engaged position preventing deployment of the knife and a disengaged position allowing deployment of the knife, the knife lockout including a flange operably connected to the first shaft member and depending therefrom in opposition to the second shaft member such that approximation of the first

6

and second shaft members forces the flange against the second shaft member to disengage the knife lockout to allow actuation of the knife. A knife kickout mechanism is configured to force the knife forward upon movement of the first and second shaft members from an approximated position to a more open position, the knife kickout mechanism including a flange depending from the knife deployment mechanism in oppositional alignment with the second shaft member wherein, upon approximation of the first and second shaft members and actuation of the knife deployment mechanism in a first direction, the knife kickout rides within a slot defined within the second shaft member to abuttingly engage a ramp defined in the slot and wherein, upon opening of the first and second shaft members relative to one another, the ramp forces the knife kickout mechanism in an opposite direction to facilitate return of the knife deployment mechanism to an unactuated position.

In aspects according to the present disclosure, the first shaft member includes a trigger slot defined therein, the trigger is configured to travel between a distal-most position wherein the trigger slot is exposed and a more proximal position wherein the trigger covers the trigger slot to reduce the chances of a user's finger being pinched within the trigger slot.

In aspects according to the present disclosure, a switch assembly is disposed on one of the first or second shaft members and is configured to be engaged by the other of the first or second shaft members when the jaw members are approximated to move the switch assembly between a deactivated position and an activated position to control delivery of electrosurgical energy to the jaw members.

In aspects according to the present disclosure, a knife return spring is operably coupled to the knife deployment mechanism and is configured to bias the knife toward the retracted position. In other aspects according to the present disclosure, the knife lockout includes a slot defined in the flange configured to operably engage a lock pin disposed in the knife deployment mechanism to prevent movement of the knife when engaged.

In aspects according to the present disclosure, upon approximation of the first and second shaft members, the flange is configured to dislodge the slot from engagement with the lock pin of the knife deployment mechanism to allow selective actuation of the knife. In other aspects according to the present disclosure, the flange is connected to the first shaft member by a sleeve. In yet other aspects according to the present disclosure, the flange is connected to the first shaft member by a flange pin.

In aspects according to the present disclosure, the flange includes an elongated shaft fixed at a distal end thereof to the first shaft member and, upon approximation of the first and second shaft members, the elongated shaft of the flange is configured to cantilever or flex to dislodge the lock pin from the slot defined therein. In other aspects according to the present disclosure, upon opening of the first and second shaft members relative to one another the bias of the elongated shaft reseats the lock pin within the slot. In still other aspects according to the present disclosure, the knife deployment mechanism includes an elongated slot defined therein to allow reciprocation of the lock pin therein.

In aspects according to the present disclosure, the flange includes a ramp to facilitate reseating the lock pin within the slot of the flange upon return of the knife deployment mechanism.

An electrosurgical forceps provided in accordance with additional aspects of the present disclosure includes first and second shaft members each having a jaw member disposed

7

at a distal end thereof, the first and second shaft members configured to rotate about a pivot to move the jaw members between an open position and a closed position, the first and second shaft members defining a longitudinal axis therebetween. A knife deployment mechanism is disposed within the first shaft member and includes a trigger moveable along the longitudinal axis to deploy a knife operably coupled thereto between a retracted position relative to the jaw members and an extended position between the jaw members. A knife lockout is disposed within the first shaft member in oppositional alignment with the second shaft member and is configured to move upon approximation of the first and second shaft members between an engaged position preventing deployment of the knife and a disengaged position allowing deployment of the knife. A knife kickout mechanism is configured to force the knife forward upon movement of the first and second shaft members from an approximated position to a more open position, the knife kickout mechanism including a flange depending from the knife deployment mechanism in oppositional alignment with the second shaft member wherein, upon approximation of the first and second shaft members and actuation of the knife deployment mechanism in a first direction, the knife kickout rides within a slot defined within the second shaft member to abuttingly engage a ramp defined in the slot and wherein, upon opening of the first and second shaft members relative to one another, the ramp forces the knife kickout mechanism in an opposite direction to facilitate return of the knife deployment mechanism to an unactuated position.

An electrosurgical forceps provided in accordance with additional aspects of the present disclosure includes first and second shaft members each having a jaw member disposed at a distal end thereof, the first and second shaft members configured to rotate about a pivot to move the jaw members between an open position and a closed position, the first and second shaft members defining a longitudinal axis therebetween. A knife deployment mechanism is disposed within the first shaft member and includes a trigger moveable along the longitudinal axis to deploy a knife operably coupled thereto between a retracted position relative to the jaw members and an extended position between the jaw members. A knife lockout is configured to move upon approximation of the first and second shaft members between an engaged position preventing deployment of the knife and a disengaged position allowing deployment of the knife, the knife lockout including a flange operably connected to the first shaft member and depending therefrom in opposition to the second shaft member such that approximation of the first and second shaft members forces the flange against the second shaft member to disengage the knife lockout to allow actuation of the knife. A knife kickout mechanism is disposed within the first shaft member in oppositional alignment with the second shaft member and is configured to force the knife forward upon movement of the first and second shaft members from an approximated position to a more open position.

BRIEF DESCRIPTION OF THE DRAWINGS

Various aspects and features of the present electrosurgical forceps are described hereinbelow with reference to the drawings wherein like numerals designate identical or corresponding elements in each of the several views:

FIG. 1A-1F are various views of a prior art electrosurgical forceps including a knife lockout mechanism;

FIG. 2A is a side view of a first iteration of an electrosurgical forceps according to the present disclosure shown

8

superimposed upon the forceps of FIG. 1A illustrating the same rotating trigger mechanism as the trigger mechanism of FIG. 1A shown overhanging a bottom shaft of the presently disclosed forceps;

FIG. 2B is a side view of a second iteration of the electrosurgical forceps of FIG. 2A showing a linear trigger mechanism prior to actuation thereof;

FIG. 2C is a side view of the electrosurgical forceps of FIG. 2B after actuation of a trigger thereof;

FIG. 3A is a partial, front perspective view of the forceps of FIG. 2B showing the internal components of a link-driven knife deployment mechanism according to the present disclosure;

FIG. 3B is a side view of the forceps shown in FIG. 3A including a trigger carrier disposed atop the link-driven knife deployment mechanism according to the present disclosure;

FIG. 3C is a rear perspective view of another embodiment of a link-driven knife deployment mechanism according to the present disclosure;

FIG. 3D is a side view of another embodiment of a link-driven knife deployment mechanism according to the present disclosure;

FIG. 4A is a partial, front perspective view of the forceps of FIG. 2B showing the internal components of a rack and gear-driven knife deployment mechanism according to the present disclosure;

FIG. 4B is a rear perspective view of another embodiment of a gear-driven knife deployment mechanism according to the present disclosure;

FIG. 4C is a top perspective view of another embodiment of a gear-driven knife deployment mechanism according to the present disclosure;

FIG. 4D is a side view of another embodiment of a compound gear-driven knife deployment mechanism according to the present disclosure;

FIG. 5A is a side perspective view of the forceps and gear-driven knife deployment mechanisms of FIG. 4A showing a knife kickout according to the present disclosure;

FIG. 5B is a side perspective view of another embodiment of a knife kickout according to the present disclosure;

FIGS. 6A-6B are side views of the knife kickout of FIG. 5A illustrating operational movement thereof;

FIGS. 7A-7B are side views of another embodiment of a knife kickout according to the present disclosure illustrating operational movement thereof;

FIGS. 8A-8B are side views of another embodiment of a knife kickout according to the present disclosure illustrating operational movement thereof;

FIG. 9 is a side view of the knife lockout according to the present disclosure;

FIG. 10 is a side view of another embodiment of a knife lockout according to the present disclosure; and

FIG. 11 is a side view of another embodiment of a knife lockout according to the present disclosure.

DETAILED DESCRIPTION

The present disclosure describes electrosurgical forceps for grasping, treating, and/or dividing tissue. The forceps includes two shafts each having a jaw member disposed at a distal end thereof and movable between open and closed positions to grasp tissue. The electrosurgical forceps also includes a knife configured to divide grasped tissue following treatment of the tissue (e.g., a tissue seal cycle). A knife lockout works in conjunction with the shafts to prevent deployment of the knife prior to the shafts reaching a

sufficiently-approximated position corresponding to a sufficiently-closed position of jaw members as well as to prevent deployment of the knife during treatment of tissue.

Referring generally to FIGS. 1A-1F, a forceps **100** provided in accordance with the present disclosure includes first and second shafts **110**, **120** each having a proximal end portion **112a**, **122a** and a distal end portion **112b**, **122b**. An end effector assembly **200** of forceps **100** includes first and second jaw members **210**, **220** extending from distal end portions **112b**, **122b** of shafts **110**, **120**, respectively. Forceps **100** further includes a pivot member **130** pivotably coupling first and second shafts **110**, **120** with one another, a knife **140** (FIG. 1B), a knife deployment mechanism **150** for selectively deploying knife **140** relative to end effector assembly **200**, a knife lockout **170** (FIGS. 1D-1F) for preventing deployment of knife **140** prior to sufficient closure of jaw members **210**, **220**, and a switch assembly **180** including a depressible activation button **183** for enabling the selective supply of electrosurgical energy to end effector assembly **200**. An electrosurgical cable **300** electrically couples forceps **100** to a source of energy (not shown), e.g., an electrosurgical generator, to enable the supply of electrosurgical energy to jaw members **210**, **220** of end effector assembly **200** upon activation of switch assembly **180**.

The internal working components of the prior art forceps of FIGS. 1A-1F and, in particular, the inner-working components of the knife lockout **170** are disclosed in commonly-owned U.S. patent application Ser. No. 15/617,283, the entire contents of which being incorporated by reference herein.

Continuing with reference to FIGS. 1A-1F, knife deployment mechanism **150** is coupled to shaft **110** and generally includes a pair of opposed triggers **152** (FIG. 1D) extending from either side of shaft **110**, a first linkage **154**, a second linkage **156**, and a biasing spring **158**. Knife deployment mechanism **150** is disposed within outer housing **116** of shaft **110** with the exception of opposed triggers **152** which extend from either side of outer housing **116**. First linkage **154** is configured for positioning on one side of inner frame **114** (FIG. 1C) of shaft **110** and includes a pair of integral (or otherwise engaged) pivot bosses (not shown) extending from either side thereof at a first end portion of first linkage **154**. Each pivot boss enables engagement of opposed triggers **152** therewith on either side of shaft **110**, e.g., via press-fitting, adhesion, or other suitable engagement.

A proximal end portion of second linkage **156** is pivotably coupled to first linkage **154** at a second end portion of first linkage **154**. A distal end portion of second linkage **156** is pivotably coupled to knife **140** via a pivot pin **163** (FIG. 1F). Pivot pin **163** may be integrally formed with second linkage **156**, e.g., as a post extending therefrom, or may be a separate component from second linkage **156**. Pivot pin **163** extends transversely through a longitudinal slot **115e** (FIG. 1E) of inner frame **114** of shaft **110** such that pivot pin **163** is constrained to longitudinal movement within longitudinal slot **115e**. Second linkage **156** is disposed on one side of inner frame **114**, which may be the same side as first linkage **154** or the opposite side (as shown). In either configuration, pivot pin **163** extends from second linkage **156** and through longitudinal slot **115e** such that a portion of pivot pin **163** protrudes laterally from the opposite side of inner frame **114**.

Biasing spring **158** may be configured as an extension spring or other suitable biasing spring **158**. A distal end portion of biasing spring **158** is engaged to first linkage **154** and a proximal end portion of biasing spring **158** is engaged to a support plate **166** (FIG. 1C). Spring **158** may be engaged to any moveable components of the knife deployment

mechanism **150**. Support plate **166** includes handle **118** of shaft **110** integrally formed therewith or otherwise engaged thereto, and may be secured within outer housing **116** in any suitable fashion, e.g., via protrusion-aperture engagement. Support plate **166** provides increased structural support to shaft **110** to inhibit splaying of shafts **110**, **120** during use. Shaft **120** similarly includes a support plate **168** integrally formed with or otherwise engaging handle **128** of shaft **120** and secured to outer housing **126**, although support plate **168** need not extend distally as with support plate **166**.

Biasing spring **158** biases first linkage **154** towards a first orientation, corresponding to the un-actuated position of triggers **152** and the proximal-most position of second linkage **156**, thereby biasing knife **140** towards a retracted position (e.g., a proximal-most position of knife **140**). Upon rotation of either of triggers **152** relative to shaft **110**, first linkage **154** is rotated against the bias of biasing spring **158** to thereby urge second linkage **156** distally such that pivot pin **163** is driven distally through longitudinal slot **115e** (FIG. 1E) to urge knife **140** from the retracted position towards an extended position, wherein knife **140** extends through a slot defined in pivot member **130**, a channel of body plate **115**, and knife channels of jaw members **210**, **220**.

In use, a distal portion of knife **140** is configured to reciprocate through the slot of pivot member **130** to translate through knife channels of jaw members **210**, **220** in response to actuation of either trigger **152**. Knife deployment mechanism **150** is operably positioned on shaft **110** and relative to shaft **120** such that triggers **152** only slightly extend beyond the height dimension of forceps **100** in the vicinity of triggers **152**, in the furthest-approximated position of shafts **110**, **120**. As a result of this configuration, forceps **100** benefits from a low-profile design that reduces the chances of triggers **152** catching on the surgeon, patient, or on nearby objections during use and/or as forceps **100** is inserted and withdrawn from the surgical site.

Turning to FIGS. 1D-1F, knife lockout **170** works in conjunction with shafts **110**, **120** to prevent deployment of knife **140** prior to shafts **110**, **120** reaching a sufficiently-approximated position corresponding to a sufficiently-closed position of jaw members **210**, **220**. Knife lockout **170** includes a body **172** (FIGS. 1A-1C) that is disposed about a portion of the inner frame **114** of shaft **110** and forms a portion of outer housing **116** of shaft **110**. More specifically, as shown in FIG. 1A, body **172** of knife lockout **170** defines a complementarily-shaped abutting surface with the abutting surface of the adjacent other component(s) of housing **116** such that housing **116** defines a substantially continuous outer surface.

Knife lockout **170** further includes a cantilever arm **174** extending proximally from body **172**. Cantilever arm **174** and body **172** may be integrally formed, e.g., via injection molding, or may be attached in any other suitable fashion. Cantilever arm **174** extends along inner frame **114** of shaft **110** on an opposite side of inner frame **114** as compared to second linkage **156** of knife deployment mechanism **150**. Cantilever arm **174** defines a relatively narrowed configuration to permit flexing of cantilever arm **174**. A finger **176** integrally formed with cantilever arm **174** extends generally perpendicularly from a free end of cantilever arm **174** and through an opening defined in outer housing **116** of shaft **110** towards shaft **120**. A first stop **179** is defined at the junction of cantilever arm **174** and finger **176**. First stop **179** protrudes from cantilever arm **174** and defines an angled distal wall **179a** and a vertical proximal wall **179b**. The finger **176** includes a second stop **175** extending distally from a vertical

11

distal wall 173 of finger 176. The second stop 175 defines a vertical proximal wall 177 that is generally parallel to vertical distal wall 173 of finger 176. A nook 178 is defined between vertical proximal wall 177 of second stop 175 and vertical distal wall 173 of finger 176.

Referring to FIG. 1D, with shafts 110, 120 sufficiently spaced-apart from one another and jaw members 210, 220 in the open position, finger 176 of knife lockout 170 is spaced-apart from outer housing 126 of shaft 120 such that cantilever arm 174 is disposed in an at-rest position. In its at-rest position, cantilever arm 174 extends along and in a generally parallel orientation relative to longitudinal slot 115e of inner frame 114 of shaft 110. Further, vertical proximal wall 179b of first stop 179 is disposed at the proximal end portion of longitudinal slot 115e and prevents distal advancement of pivot pin 163 through longitudinal slot 115e in the at-rest position of cantilever arm 174 and, accordingly, prevents deployment of knife 140.

Referring to FIG. 1E, in order to disengage knife lockout 170 to permit deployment of knife 140, shafts 110, 120 are sufficiently approximated such that jaw members 210, 220 are moved to the closed position (e.g., to grasp tissue therebetween) and a portion of outer housing 126 of shaft 120 contacts finger 176 of knife lockout 170 to urge finger 176 further into housing 116 of shaft 110. However, as shown in the configuration of FIG. 1E, shaft 110 is sufficiently spaced from shaft 120 such that outer housing 116 of shaft 110 is spaced from or otherwise out of engagement with depressible button 183 of switch assembly 180 such that depressible button 183 is not depressed to activate switch assembly 180 for initiating the supply of energy from the energy source (not shown) to jaw members 210, 220. As finger 176 is urged further into housing 116 of shaft 110, cantilever arm 174 is flexed such that vertical proximal wall 179b of first stop 179 is removed from the distal path of pivot pin 163. Once this has been achieved, knife deployment mechanism 150 may be actuated, as detailed above, to advance pivot pin 163 distally through slot to move knife 140 from the retracted position towards the extended position.

Should shafts 110, 120 be moved apart from one another sufficiently such that shaft 120 no longer urges finger 176 to flex cantilever arm 174, cantilever arm 174 is resiliently returned to its at-rest position. If knife 140 is disposed in the retracted position at this point, vertical proximal wall 179b is returned to block the distal path of pivot pin 163. However, if knife 140 is disposed in the deployed position or a partially-deployed position, the return of cantilever arm 174 to its at-rest position does not block the distal path of pivot pin 163 via vertical proximal wall 179b. Rather, upon subsequent return of knife 140 to the retracted position, pivot pin 163 is moved proximally and into contact with angled distal wall 179a of first stop 179, camming therealong and urging cantilever arm 174 to flex from the at-rest position sufficiently so as to enable pivot pin 163 to return to the proximal end of longitudinal slot 115e.

Once pivot pin 163 reaches this position, cantilever arm 174 is returned to the at-rest position and, as a result, vertical proximal wall 179b is returned to blocking the distal path of pivot pin 163, thereby resetting knife lockout 170 to prevent movement of knife 140 from the retracted position towards the extended position until shafts 110, 120 are once again sufficiently approximated. The biasing force of biasing member 158 is sufficient to move pivot pin 163 proximally to deflect cantilever arm 174 and reset knife lockout 170 as detailed above. As such, resetting of knife lockout 170

12

occurs automatically (if shafts 110, 120 are sufficiently spaced-apart) upon return of knife 140 to the retracted position.

Referring to FIGS. 1E and 1F to activate switch assembly 180 to initiate the supply of energy from the energy source (not shown) to jaw members 210, 220 for sealing tissue grasped between jaw members 210, 220, shafts 110, 120 are further approximated from the approximated position illustrated in FIG. 1E such that finger 176 is urged further into housing 116 of shaft 110 and depressible button 183b is engaged and depressed by a portion of outer housing 116 of shaft 110 to activate switch assembly 180 (FIG. 1F).

As finger 176 is urged further into housing 116 of shaft 110, cantilever arm 174 is further flexed such that vertical proximal wall 179b of first stop 179 remains removed from the distal path of pivot pin 163 and second stop 175 is urged further into housing 116 of shaft 110 such that the portion of pivot pin 163 that extends from second linkage 156 through longitudinal slot 115e is received within nook 178 of second stop 175. Once pivot pin 163 is received within nook 178, vertical proximal wall 177 of second stop 175 prevents distal advancement of pivot pin 163 through longitudinal slot 115e and, accordingly, prevents movement of knife 140 through jaw members 210, 220 during activation of switch assembly 180. In this manner, premature cutting of tissue during delivery of energy to tissue via jaw members 210, 220 (e.g., prior to completion of a tissue sealing cycle) is prevented.

Once a tissue sealing cycle is complete, switch assembly 180 may be deactivated by returning shafts 110, 120 from an energy delivery position illustrated in FIG. 1F to the approximated position illustrated in FIG. 1E such that jaw members 210, 220 remain in the closed position and depressible button 183b is no longer depressed by outer housing 116 of shaft 110. Upon returning to the approximated position illustrated in FIG. 1E, cantilever arm 174 remains sufficiently flexed such that vertical proximal wall 179b of first stop 179 is removed from the distal path of pivot pin 163.

Accordingly, knife deployment mechanism 150 may be actuated, as detailed above, to advance pivot pin 163 distally through slot 115e to move knife 140 from the retracted position towards the extended position to cut tissue grasped between jaw members 210, 220 (e.g., subsequent to completion of sealing the grasped tissue). Following cutting of the grasped tissue, shafts 110, 120 may be moved apart from one another, as detailed above, to the spaced-apart position illustrated in FIG. 1D such that cantilever arm 174 is resiliently returned to its at-rest position to reset knife lockout 170 to prevent movement of knife 140 from the retracted position towards the extended position.

Details relating to the operation of the switch assembly 180 are disclosed in commonly-owned U.S. patent application Ser. No. 15/617,283, the entire contents of which being incorporated by reference herein.

Cantilever arm 174 in use, functions as follows: when the shaft members 110, 120 are disposed in an open position, e.g., the jaw members 210, 220 are disposed in an open position, the blade 140 is prevented from being actuated as described above with respect to FIG. 1D. Upon initial closure of the shaft members 110, 120, the blade 140 may be actuated as described above with reference to FIG. 1E. Upon full actuation of the shaft members 110, 120, the blade is once again prevented from being actuated as described above with respect to FIG. 1F.

FIG. 2A shows another embodiment of a forceps 1000 according to the present disclosure. Forceps 1000 is shown for illustrative purposes and includes opposing shafts 1110

13

and 1120 including an end effector assembly 1200 disposed at a distal end thereof. Shafts 1110 and 1120 are moveable via handles 1118, 1128 about a pivot 1130 to open and close the end effector assembly 1200. A trigger 1152 is disposed on shaft 1110 and is rotatable to deploy a knife (not shown) for cutting tissue much in the same fashion as described above with respect to forceps 100 of FIGS. 1A-1F. Forceps 1000 is shown superimposed atop the frame of forceps 100 to illustrate how a distal end 1152a of trigger 1152 projects beyond the periphery of shaft 1120 when disposed in an unactuated condition. As can be appreciated, designing a forceps in which the trigger projects from beyond the periphery of the shaft frame is not desirous.

FIGS. 2B-2C show a lower profile, linear trigger design which is configured to inhibit the trigger from catching on the surgeon, patient, or on nearby obstructions during use and/or as forceps 2000 is inserted and withdrawn from the surgical site. More particularly, FIGS. 2B-2C show forceps 2000 having trigger 2150 that is actuated linearly along longitudinal axis "A-A" defined between shafts 2110, 2120 to advance a knife (not shown, but see knife 140) through tissue disposed between jaw members 2210, 2220 of end effector assembly 2200. As such, the trigger 2150 does not extend beyond the periphery of either shaft 2110, 2120 during the range of linear motion.

It is important to note that the various previously-described components are not described with reference to the remaining figures for the purposes of brevity and only those components necessary for each figure are described, however, it is intended that the former components or variations thereof may be used interchangeably with the remaining figures.

Referring back to FIGS. 2B-2C, FIG. 2B shows the linear trigger 2150 in an un-actuated position wherein the knife (not shown, but see knife 140) is disposed in a retracted position within a knife channel (not shown) defined between the jaw members 2210, 2220. In this position, a trigger channel 2155 is exposed. FIG. 2C shows the trigger 2150 in a proximal, actuated position to deploy the knife between jaw members 2210, 2220 to cut tissue. In this position, the trigger 2150 covers the trigger channel 2155 to reduce the chances of pinching a surgical glove or finger during repeated actuation. Trigger 2150 is symmetric on both sides of shaft 2110 allowing actuation by right or left-handed surgeons.

With the reduced profile of the forceps 2000, the internal working components of the knife deployment mechanism need to be slightly modified compared to the knife deployment mechanisms described above. Various types of deployment mechanism are envisioned and can generally be classified as linkage-type deployment mechanisms as shown in FIGS. 3A-3D and gear-like deployment mechanisms as shown in FIGS. 4A-4D.

Referring initially to FIGS. 3A-3B, a linkage-type knife deployment mechanism 3150 is shown and includes a knife carrier 3170, a series of linkages 3160, 3180, 3190 and a knife return spring 3115 that cooperate to smoothly advance the knife (not shown) in a linear motion upon actuation of trigger 2150 (FIGS. 2B-2C). More particularly, trigger 2150 connects to link 3190 via pin 3195 which, in turn, operably connects to crank link 3180 via pivot 3185. Pivot 3185 is configured to slide linearly in slot 3140 defined in knife support 3114. Crank link 3180 is operably connected to link 3160 via pivot 3175 which is supported within arcuate channel 3112 defined within shaft 3110. Link 3160 is operably connected to knife carrier 3170 via pin 3165. Pin 3165 is configured to translate knife carrier 3170 within slot

14

3120 defined in a distal end of knife support 3114. Knife support 3114 is, in turn, operably connected to knife (not shown, but see knife 140).

One end 3115a of knife return spring 3115 connects to crank link 3180 proximate link 3160 and moves concurrently therewith upon actuation of trigger 2150. The other end 3115b of spring 3115 is secured to shaft 3110.

The linkage design with a linear trigger 2150 allows the forceps 2000 height to decrease, requiring less housing constraints while maintaining a similar mechanical advantage to previous designs.

In use, when trigger 2150 is actuated (pulled back proximally), pin 3195 moves link 3190 proximally which, in turn, moves pivot 3185 proximally within slot 3140. As pivot 3185 moves proximally within slot 3140, a distal end 3180a of crank link 3180 moves therewith causing pin 3183 to move proximally and rotate clockwise within slot 3130 which, in turn, forces the proximal end 3180b of crank link 3180 distally. Movement of proximal end 3180b of crank link 3180 distally rotates link 3160 distally within arcuate slot 3112 against the bias of return spring 3115. Distal movement of link 3160 forces knife carrier 3170 distally within slot 3120 to advance knife (not shown) through tissue.

Once actuated, the force of spring 3115 reverses the motion of the knife carrier 3170 and links 3160, 3180, 3190 to return the trigger 2150 distally back to an unactuated position. As explained in more detail below, if the knife (not shown) is stuck in the knife channel between jaw members 2210, 2120 or on tissue, a knife kickout may be used to force the knife proximally as the shafts 2110, 2120 are opened (See FIGS. 6A-8B).

FIG. 3B shows another embodiment of the knife deployment mechanism 3150 for use with forceps 2000 which includes a trigger carrier 3300 that operably connects to the trigger 2150. Trigger carrier 3300 includes a cam slot 3310 defined therein that resides in general perpendicular registration with slot 3140 in knife carrier 3114 and that is configured to slidably receive pivot 3185 therein. Upon actuation of the trigger 2150, trigger carrier 3300 is moved proximally and the pivot 3185 rides along the cam slot 3310 in a general perpendicular direction. Utilizing the cam slot 3310 allows for smoother and more consistent actuation of trigger 2150.

FIG. 3C shows another embodiment of the knife deployment mechanism 3150 for use with forceps 2000 which includes a guide slot 3163 defined within a proximal end of link 3160 that allows pivot 3175 to ride therein during actuation of trigger 2150. Upon actuation of the trigger 2150, link 3170 is moved proximally to pivot link crank 3180 distally which, in turn, forces link 3160 distally to advance knife (not shown). Utilizing the guide slot 3163 allows for smoother and more consistent actuation of the trigger 2150 and knife through their range of motion.

FIG. 3D shows another embodiment of the knife deployment mechanism 3150 for use with forceps 2000 which includes a knife lockout mechanism 3370 (shown in phantom) for use with the knife deployment mechanism 3150. Knife lockout mechanism 3370 is similar to knife lockout 170 of FIGS. 1D-1F and, as such, is only described in brief detail herein. Knife lockout mechanism 3370 includes a flange 3355 disposed in operative engagement with the knife carrier 3170 and depending therefrom. When the trigger 2150 is in an unactuated position, flange 3355 is configured to project downwardly relative thereto in alignment with shaft 2120 of forceps 2000. Upon closing of the handles 2118, 2128, the flange 3355 abuts against shaft 2120 and is

15

forced inwardly toward shaft 2110 to disengage the flange 3355 from the knife carrier 3170. Once disengaged, the trigger 2150 is free to actuate the knife (not shown). When the trigger 2150 is returned to an unactuated position and the handles 2118, 2128 are moved away from one another, the flange 3355 re-engages the knife carrier 3170 to prevent translation of the knife.

Referring to FIGS. 4A and 4B, a gear-type knife deployment mechanism 4150 is shown and includes a blade rack 4170, a trigger rack 4160 and a gear 4155 disposed therebetween. Gear 4155 is configured to reverse direction between the two racks 4160, 4170 and may also be utilized to amplify overall force or distance therebetween. Blade rack 4170 is operably coupled to the trigger 2150 (FIG. 2B) via a trigger carrier 4300, which, in turn, includes one or more pins 4195 or other mechanical interfaces that engage the trigger 2150 directly such that movement of the trigger 2150 correspondingly moves the blade rack 4170.

Gear 4155 is mounted about pin 4157 to shaft 4110 and between racks 4160, 4170. Movement of one rack, e.g., rack 4170 causes the other rack, e.g., rack 4160, to move in the opposite direction. Rack 4160 is operably couple to the knife carrier 4200. As such, proximal movement of the trigger 2150 is converted to distal movement of the knife (not shown).

FIG. 4B shows an alternative setup of a gear-type knife deployment mechanism 4150 showing slightly modified blade and trigger racks 4170, 4160 for actuating the knife and return spring 4115 for facilitating the return of the knife. Return spring 4115 is operably coupled to the blade rack 4170 but may be coupled to either rack 4160, 4170 depending upon a particular purpose.

FIG. 4C shows yet another embodiment of a gear-type knife deployment mechanism 4150' showing slightly modified blade and trigger racks 4170', 4160' and two gears for actuating the knife (not shown). More particularly, a single gear 4155a is operably associated with trigger rack 4160' and a compound gear 4155b is operably associated with blade rack 4170'. Compound gear 4155b allows the two gears 4155a, 4155b to align in general vertical registry while still providing the same reversing effect between the trigger 2150 and knife deployment. As can be appreciated, this may save valuable real estate within the shaft 4110 for additional components or a reduced profile.

FIG. 4D shows another embodiment of a combination gear and lever-type knife deployment mechanism 5150 having a trigger rack 5160 operably coupled to a compound gear 5155c, multiple single gears 5155a, 5155b, a knife link 5190, and a knife carrier 5200. As can be appreciated, this combination deployment mechanism 5150 can be configured to provide mechanical advantages for amplifying overall force applied to the knife or distance the knife travels with trigger 2150 actuation.

FIG. 5A shows a knife kickout mechanism 4370 for use with the knife deployment mechanism 4150 of FIG. 4A. Knife kickout mechanism 4370 includes a flange 4355 disposed in operative engagement with the knife carrier 4200 (See FIG. 4A) and depending therefrom. When the trigger 2150 is in an unactuated position, flange 4355 is configured to project downwardly relative thereto in alignment with shaft 2120 of forceps 2000. Upon closing of the handles 2118, 2128, the flange 4355 is received within a slot defined in the shaft 2110 and is forced inwardly toward a kickout ramp 2121 (See FIG. 6A). When the trigger 2150 is returned to an unactuated position and the handles 2118, 2128 are moved away from one another, the flange 4355

16

engages the kickout ramp 212 to urge the knife carrier 4200 forward facilitating knife carrier 4200 return.

FIG. 5B shows a knife lockout mechanism 6370 for use with the knife deployment mechanism similar to those shown in FIGS. 3A-3D. Knife lockout mechanism 6370 is similar to knife lockout 170 of FIGS. 1D-1F and as such, is only described in brief detail herein. Knife lockout mechanism 6370 includes a flange 6355 disposed in rotational engagement with the knife carrier 6200. When the trigger 2150 is in an unactuated position, flange 6355 is configured to project downwardly relative thereto in alignment with shaft 2120 of forceps 2000. Upon closing of the handles 2118, 2128, the flange 6355 abuts against shaft 2120 and is forced inwardly toward shaft 2110 (See FIGS. 2B and 2C) and a distal end 6356 of the flange 6355 rotates out of engagement with a proximal hook portion 6201 of the knife carrier 6200. Once disengaged, the trigger 2150 is free to actuate the knife (not shown). When the trigger 2150 is returned to an unactuated position and the handles 2118, 2128 are moved away from one another, the distal end 6356 of the flange 6355 re-engages the hook portion 6201 of the knife carrier 6200 to prevent translation of the knife.

Referring to FIGS. 6A-8B, various embodiments of a knife kickout are envisioned. The described knife kickout mechanisms are configured to work with many of the aforescribed forceps and internal components thereof, and as such, only those components necessary for an accurate understanding of the kickout are described in detail herein.

FIGS. 6A-6B show one embodiment of a knife kickout 6310 for use with trigger carrier 6300. Knife kickout 6310 is configured to depend from trigger carrier 6300 and align in vertical registration with an elongated kickout slot 2123 defined within shaft 2120. Shaft 2120 also includes a kickout ramp 2121 defined at a proximal-most portion of the kickout slot 2123. Upon approximation of handles 2118, 2128 of forceps 2000 (FIGS. 2A-2C), shafts 2110, 2120 are urged into close abutment with one another to either allow actuation of the knife (not shown) via trigger 2150 and/or activation of electrical energy via switch 2183.

As the trigger carrier 6300 is actuated (proximally), the kickout 6310 rides within slot 2123 of shaft 2120 into abutment with kickout ramp 2121. Typically, upon release of the trigger 2150, trigger carrier 6300 is supposed to automatically return to a distal-most position under the bias of knife return spring 6315. If the knife (not shown) gets caught in the knife channel disposed between jaw members 2210, 2220 or gets caught on tissue, the bias of the knife return spring 6315 may not be enough and the knife may remain in a deployed position.

In this instance, and in order to kick out the knife and get it moving proximally out of the knife channels, the user simply begins to open the forceps 2000 causing the shafts 2110, 2120 to move relative to one another and causing the kickout ramp 2121 to essentially "kick" the knife kickout 6310 forward as the handles 2118, 2128 open. Forward motion of the knife kickout 6310, in turn, forces the trigger carrier 6300 forward and, thus, forces the knife proximally.

FIGS. 7A-7B show another embodiment of a knife kickout 7310 for use with trigger carrier 7300. Knife kickout 7310 is configured to depend from trigger carrier 7300 and align in vertical registration with an elongated kickout slot 2123 defined within shaft 2120. Shaft 2120 also includes a kickout ramp 2121 defined at a proximal-most portion of the kickout slot 2123. Upon approximation of handles 2118, 2128 of forceps 2000 (FIGS. 2A-2C), shafts 2110, 2120 are urged into close abutment with one another to either allow

17

actuation of the knife (not shown) via trigger **2150** and/or activation of electrical energy via switch **2183**.

As the trigger carrier **7300** is actuated (proximally), the kickout **7310** rides within slot **2123** of shaft **2120** into abutment with kickout ramp **2121**. Typically, upon release of the trigger **2150**, trigger carrier **7300** is supposed to automatically return to a distal-most position under the bias of knife return spring **7315**. If the knife (not shown) gets caught in the knife channel disposed between jaw members **2210**, **2220** or gets caught on tissue, the bias of the knife return spring **7315** may not be enough and the knife may remain in a deployed position.

In this instance, and in order to kick out the knife and get it moving proximally out of the knife channels, the user simply begins to open the forceps **2000** causing the shafts **2110**, **2120** to move relative to one another and causing the kickout ramp **2121** to essentially “kick” the knife kickout **7310** forward as the handles **2118**, **2128** open. Forward motion of the knife kickout **7310**, in turn, forces the trigger carrier **7300** forward and, thus, forces the knife proximally.

FIGS. 8A-8B show another embodiment of a knife kickout **8310** for use with kickout link **8300**. Knife kickout **8310** is configured to depend from kickout link **8300** and align in vertical registration with an elongated kickout slot **2123** defined within shaft **2120**. Shaft **2120** also includes a kickout ramp **2121** defined at a proximal-most portion of the kickout slot **2123**. Upon approximation of handles **2118**, **2128** of forceps **2000** (FIGS. 2A-2C), shafts **2110**, **2120** are urged into close abutment with one another to either allow actuation of the knife (not shown) via trigger **2150** and/or activation of electrical energy via switch **2183**. Kickout link **8300** is rotatably engaged at one end to link **8180** and positioned proximally of pivot **8195** a distal end of link **8190** such that movement of link **8190** pulls kickout link **8300** proximally along therewith.

As mentioned above with respect to FIG. 3A, as the trigger **2150** is actuated, kickout link **8300** is actuated (proximally), the kickout **8310** rides within slot **2123** of shaft **2120** into abutment with kickout ramp **2121**. Typically, upon release of the trigger **2150**, kickout link **8300** is supposed to automatically return to a distal-most position under the bias of knife return spring **8315**. If the knife (not shown) gets caught in the knife channel disposed between jaw members **2210**, **2220** or gets caught on tissue, the bias of the knife return spring **8315** may not be enough and the knife may remain in a deployed position.

In this instance, and in order to kick out the knife and get it moving proximally out of the knife channels, the user simply begins to open the forceps **2000** causing the shafts **2110**, **2120** to move relative to one another and causing the kickout ramp **2121** to essentially “kick” the knife kickout **8310** and link **8180** forward as the handles **2118**, **2128** open. Forward motion of the knife kickout **8310**, in turn, forces the kickout link **8300** and link **8180** forward and, thus, forces the knife proximally.

Referring to FIGS. 9-11, various embodiments of a knife lockout are envisioned. The described knife lockout mechanisms are configured to work with many of the aforedescribed forceps and internal components thereof, and as such, only those components necessary for an accurate understanding of the kickout are described in detail herein.

FIG. 9 shows one embodiment of a knife lockout **9000** for use with, for example, forceps **2000** and knife deployment mechanism **4150** described in FIG. 4A. Knife lockout **9000** is L-shaped and includes an elongated shaft **9050** connected at a distal end thereof to shaft **2110** by a flange pin **9175** and terminating at an opposite end thereof with a flange **9100**

18

that depends in oppositional registry with shaft **2120**. The distal end **9105** of flange **9100** is configured to abut shaft **2120** upon approximation of shaft members **2110**, **2120** to force flange inwardly towards shaft **2110**.

Knife deployment mechanism **4150** includes a locking pin **4365** operably engaged with trigger rack **4160** (see FIG. 4B) that is configured to ride within an elongated slot **4375** defined therein upon actuation of the knife deployment mechanism **4150**. Flange **9100** includes a slot **9110** defined therein configured to seat locking pin **4365** therein to prevent actuation of the knife deployment mechanism **4150** when the shaft members **2110**, **2120** are disposed in an open position.

In use, when the shaft members **2110**, **2120** are disposed in an open position relative to one another, the locking pin **4365** is seated within slot **9110** preventing movement of the knife deployment mechanism **4150**. When the shaft members **2110**, **2120** are approximated, the distal end **9105** of flange **9100** abuts shaft **2120** forcing the flange **9100** towards shaft **2110** and causing the elongated shaft **9050** to flex about flange pin **9175**. As a result, locking pin **4365** is unseated or disengaged from slot **9110** allowing actuation of the knife deployment mechanism **4150**. Locking pin **4365** rides along elongated slot **4375** during actuation. Flange pin **9175** is anchored to shaft **2110** to bias flange **9100**. A conventional spring, e.g., torsion spring (not shown), may also be utilized for this purpose.

After actuation of the knife deployment mechanism **4150**, the knife deployment mechanism **4150** and the trigger **2150** are released and returned under the bias of the knife return spring **4115** (See FIG. 4A). As a result thereof, locking pin **4365** returns along elongated slot **4375** to its unactuated position. Upon return, the locking pin **4365** engages ramp **9115** disposed distally of slot **9110** which forces flange **9100** inwardly relative to shaft **2110** to allow the locking pin **4365** to reseat within slot **9110** re-locking the knife deployment mechanism **4150** and preventing movement thereof. Any type of conventional spring (not shown) may also be utilized for this purpose.

FIG. 10 shows another embodiment of a knife lockout **10000** for use with, for example, forceps **2000** and knife deployment mechanism **3150** described in FIG. 3A. Knife lockout **10000** is L-shaped and includes an elongated shaft **10050** connected at a distal end thereof to shaft **2110** by a sleeve **10175** and terminating at an opposite end thereof with a flange **10100** that depends in oppositional registry with shaft **2120**. The distal end **10105** of flange **10100** is configured to abut shaft **2120** upon approximation of shaft members **2110**, **2120** to force flange inwardly towards shaft **2110**.

Knife deployment mechanism **3150** includes a locking pin **3165** that operably engages link **3160** and knife carrier **3170** and that is configured to ride within an elongated slot **3375** defined in knife carrier **3170** upon actuation of the knife deployment mechanism **3150**. Flange **10100** includes a slot **10110** defined therein configured to seat locking pin **3165** therein to prevent actuation of the knife deployment mechanism **3150** when the shaft members **2110**, **2120** are disposed in an open position.

In use, when the shaft members **2110**, **2120** are disposed in an open position relative to one another, the locking pin **3165** is seated within slot **10110** preventing movement of the knife deployment mechanism **3150**. When the shaft members **2110**, **2120** are approximated, the distal end **10105** of flange **10100** abuts shaft **2120** forcing the flange **10100** towards shaft **2110** and causing the elongated shaft **10050** to flex about sleeve **10175**. As a result, locking pin **3165** is unseated or disengaged from slot **10110** allowing actuation

19

of the knife deployment mechanism **3150**. Locking pin **3165** rides along elongated slot **3375** during actuation.

After actuation of the knife deployment mechanism **3150**, the knife deployment mechanism **3150** and the trigger **2150** are released and returned under the bias of the knife return spring **3115** (See FIG. 3A). As a result thereof, locking pin **3165** returns along elongated slot **3375** to its unactuated position. Upon return, the locking pin **3165** engages ramp **10115** disposed distally of slot **10110** which forces flange **10100** inwardly relative to shaft **2110** to allow the locking pin **3165** to reseat within slot **10110** re-locking the knife deployment mechanism **3150** and preventing movement thereof.

FIG. 11 shows another embodiment of a knife lockout **11000** for use with, for example, forceps **2000** and knife deployment mechanism **4150** described in FIG. 4A. Knife lockout **11000** is L-shaped and includes an elongated shaft **11050** connected at a proximal end thereof to shaft **2110** by a flange pin **11175** and terminating at an opposite end thereof with a flange **11100** that depends in oppositional registry with shaft **2120**. The distal end **11105** of flange **11100** is configured to abut shaft **2120** upon approximation of shaft members **2110**, **2120** to force flange inwardly towards shaft **2110**.

Flange **11100** includes a boss **11110** disposed thereon therein configured to seat within a gear slot **4171** defined in gear rack **4170** to prevent actuation of the knife deployment mechanism **4150** when the shaft members **2110**, **2120** are disposed in an open position.

In use, when the shaft members **2110**, **2120** are disposed in an open position relative to one another, the boss **11110** is seated within gear slot **4171** preventing movement of the knife deployment mechanism **4150**. When the shaft members **2110**, **2120** are approximated, the distal end **11105** of flange **11100** abuts shaft **2120** forcing the flange **11100** towards shaft **2110** and causing the elongated shaft **11050** to rotate about flange pin **11175**. As a result, boss **11110** is unseated or disengaged from gear slot **4171** allowing actuation of the knife deployment mechanism **4150**. Boss **11110** remains out of the way during movement of the opposing racks **4170**, **4160** (FIG. 4A).

After actuation of the knife deployment mechanism **4150**, the knife deployment mechanism **4150** and the trigger **2150** are released and returned under the bias of the knife return spring **4115** (See FIG. 4A). As a result thereof, boss **11110** re-engages gear slot **4171** re-locking the knife deployment mechanism **4150** and preventing movement thereof.

The various embodiments disclosed herein may also be configured to work with robotic surgical systems and what is commonly referred to as "Telesurgery." Such systems employ various robotic elements to assist the surgeon and allow remote operation (or partial remote operation) of surgical instrumentation. Various robotic arms, gears, cams, pulleys, electric and mechanical motors, etc. may be employed for this purpose and may be designed with a robotic surgical system to assist the surgeon during the course of an operation or treatment. Such robotic systems may include remotely steerable systems, automatically flexible surgical systems, remotely flexible surgical systems, remotely articulating surgical systems, wireless surgical systems, modular or selectively configurable remotely operated surgical systems, etc.

The robotic surgical systems may be employed with one or more consoles that are next to the operating theater or located in a remote location. In this instance, one team of surgeons or nurses may prep the patient for surgery and configure the robotic surgical system with one or more of the

20

instruments disclosed herein while another surgeon (or group of surgeons) remotely controls the instruments via the robotic surgical system. As can be appreciated, a highly skilled surgeon may perform multiple operations in multiple locations without leaving his/her remote console which can be both economically advantageous and a benefit to the patient or a series of patients.

The robotic arms of the surgical system are typically coupled to a pair of master handles by a controller. The handles can be moved by the surgeon to produce a corresponding movement of the working ends of any type of surgical instrument (e.g., end effectors, graspers, knives, scissors, etc.) which may complement the use of one or more of the embodiments described herein. The movement of the master handles may be scaled so that the working ends have a corresponding movement that is different, smaller or larger, than the movement performed by the operating hands of the surgeon. The scale factor or gearing ratio may be adjustable so that the operator can control the resolution of the working ends of the surgical instrument(s).

The master handles may include various sensors to provide feedback to the surgeon relating to various tissue parameters or conditions, e.g., tissue resistance due to manipulation, cutting or otherwise treating, pressure by the instrument onto the tissue, tissue temperature, tissue impedance, etc. As can be appreciated, such sensors provide the surgeon with enhanced tactile feedback simulating actual operating conditions. The master handles may also include a variety of different actuators for delicate tissue manipulation or treatment further enhancing the surgeon's ability to mimic actual operating conditions.

From the foregoing and with reference to the various figure drawings, those skilled in the art will appreciate that certain modifications can also be made to the present disclosure without departing from the scope of the same. While several embodiments of the disclosure have been shown in the drawings, it is not intended that the disclosure be limited thereto, as it is intended that the disclosure be as broad in scope as the art will allow and that the specification be read likewise. Therefore, the above description should not be construed as limiting, but merely as exemplifications of particular embodiments. Those skilled in the art will envision other modifications within the scope and spirit of the claims appended hereto.

What is claimed is:

1. An electrosurgical forceps, comprising:

first and second shaft members each having a jaw member disposed at a distal end thereof, the first and second shaft members configured to rotate about a pivot to move the jaw members between an open position and a closed position, the first and second shaft members defining a longitudinal axis therebetween;

a knife deployment mechanism disposed within the first shaft member and including a trigger moveable along the longitudinal axis to deploy a knife operably coupled thereto between a retracted position relative to the jaw members and an extended position between the jaw members, the knife deployment mechanism including first and second rack members operably coupled to one another by a gear disposed therebetween, the trigger operably connected to the first rack member and the knife operably coupled to the second rack member such that movement of the trigger moves the knife in an opposite direction relative thereto; and

a knife lockout configured to move upon approximation of the first and second shaft members between an engaged position preventing deployment of the knife

21

and a disengaged position allowing deployment of the knife, the knife lockout including a flange and an elongated shaft that is pivotably connected to the first shaft member by a flange pin such that approximation of the first and second shaft members forces the second shaft member into the flange to pivot the flange and the elongated shaft relative to the first shaft member to disengage the knife lockout to allow actuation of the knife,

wherein the knife lockout includes a slot defined in the flange configured to operably capture a lock pin disposed in the knife deployment mechanism to prevent movement of the knife when engaged.

2. The electrosurgical forceps according to claim 1, wherein the first shaft member includes a trigger slot defined therein, the trigger is configured to travel between a distal-most position wherein the trigger slot is exposed and a more proximal position wherein the trigger covers the trigger slot to reduce the chances of a user's finger being pinched within the trigger slot.

3. The electrosurgical forceps according to claim 1, further comprising a switch assembly disposed on one of the first or second shaft members and configured to be engaged by the other of the first or second shaft members when the jaw members are approximated to move the switch assembly between a deactivated position and an activated position to control delivery of electrosurgical energy to the jaw members.

4. The electrosurgical forceps according to claim 1, further comprising a knife return spring operably coupled to the knife deployment mechanism and configured to bias the knife toward the retracted position.

5. The electrosurgical forceps according to claim 4, wherein the knife return spring is operably coupled to at least one of the first or second shaft members.

6. The electrosurgical forceps according to claim 1, wherein upon approximation of the first and second shaft members, the flange is configured to dislodge the lock pin

22

from within the slot of the knife deployment mechanism to allow selective actuation of the knife.

7. The electrosurgical forceps according to claim 1, wherein upon approximation of the first and second shaft members, the elongated shaft is configured to cantilever or flex to pivot about the flange pin to dislodge the lock pin from within the slot.

8. The electrosurgical forceps according to claim 1, wherein upon opening of the first and second shaft members relative to one another a bias of the flange reseats the lock pin for capture within the slot.

9. The electrosurgical forceps according to claim 1, wherein the knife deployment mechanism includes an elongated slot defined therein to allow reciprocation of the lock pin therein.

10. The electrosurgical forceps according to claim 1, wherein the flange includes a ramp to facilitate reseating the lock pin for capture within the slot upon return of the knife deployment mechanism.

11. The electrosurgical forceps according to claim 1, further comprising a knife kickout mechanism configured to force the knife forward upon movement of the first and second shaft members from an approximated position to a more open position.

12. The electrosurgical forceps according to claim 11, wherein the knife kickout mechanism includes a flange depending from the knife deployment mechanism in oppositional alignment with the second shaft member wherein, upon approximation of the first and second shaft members and actuation of the knife deployment mechanism in a first direction, the knife kickout rides within a slot defined within the second shaft member to abuttingly engage a ramp defined in the slot and wherein, upon opening of the first and second shaft members relative to one another, the ramp forces the knife kickout mechanism in an opposite direction to facilitate return of the knife deployment mechanism to an unactuated position.

* * * * *