



US012397883B2

(12) **United States Patent**
Meza et al.

(10) **Patent No.:** **US 12,397,883 B2**

(45) **Date of Patent:** **Aug. 26, 2025**

(54) **QUICK RELEASE MOTOR PUMP
ASSEMBLY FOR ELECTRIC MARINE
TOILET**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **FLOW CONTROL LLC**, Beverly, MA
(US)

953,061 A 3/1910 Ruland
2,021,241 A * 11/1935 Mall F16C 1/08
285/308

(Continued)

(72) Inventors: **Humberto V. Meza**, Trabuco Canyon,
CA (US); **Matthew Edmond**, Hitchin
(GB)

FOREIGN PATENT DOCUMENTS

(73) Assignee: **FLOW CONTROL LLC**, Beverly, MA
(US)

EP 0593937 A1 4/1994
EP 1850049 A2 10/2007

(Continued)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 727 days.

OTHER PUBLICATIONS

WO-2007124736-A2 Translation (Year: 2023).*

(Continued)

(21) Appl. No.: **17/026,584**

Primary Examiner — David P Angwin

Assistant Examiner — William R Klotz

(22) Filed: **Sep. 21, 2020**

(74) *Attorney, Agent, or Firm* — William J. Barber;
WARE FRESSOLA MAGUIRE & BARBER LLP

(65) **Prior Publication Data**

US 2022/0089255 A1 Mar. 24, 2022

(57) **ABSTRACT**

Apparatus featuring a toilet base having a wall forming a chamber for receiving waste, the wall having a toilet base coupling portion; a pump/motor assembly having a pump inlet configured to receive the waste pumped from the chamber, the pump inlet having a pump inlet coupling portion arranged inside the toilet base coupling portion when the pump/motor assembly and the toilet base are coupled together; and a quick release coupling mechanism having a clip receiving portion and a clip configured to slide within the clip receiving portion from a disengage position to an engage position to engage the pump inlet coupling portion and couple the toilet base and the pump/motor assembly together, and also configured to slide from the engage position to the disengage position to disengage the pump inlet coupling portion and decouple the pump/motor assembly from the toilet base.

Related U.S. Application Data


(60) Provisional application No. 62/902,580, filed on Sep.
19, 2019.

(51) **Int. Cl.**
B63B 29/14 (2006.01)
E03D 5/01 (2006.01)

(52) **U.S. Cl.**
CPC **B63B 29/14** (2013.01); **E03D 5/01**
(2013.01)

(58) **Field of Classification Search**
CPC B63B 29/14; E03D 5/01; E03D 5/00
(Continued)

18 Claims, 14 Drawing Sheets

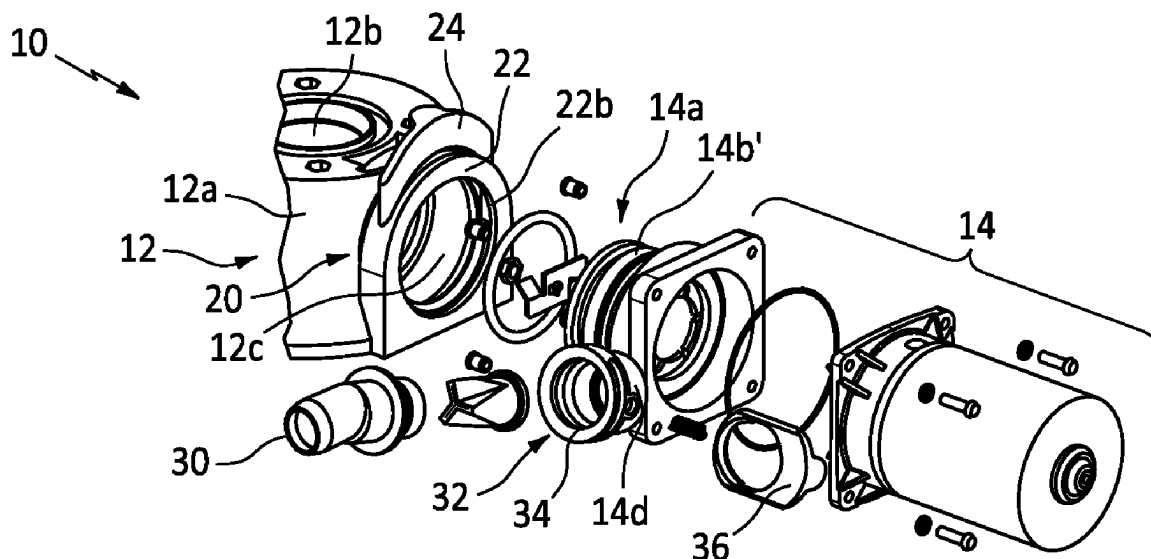

(58) **Field of Classification Search**

USPC 4/300, 431; 285/305
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,514,231 A 5/1970 Belden
3,699,592 A 10/1972 Minchak
4,244,608 A * 1/1981 Stuemky F16L 37/144
285/305
4,559,136 A 12/1985 Dockery
4,672,690 A 6/1987 Sigler
4,867,871 A 9/1989 Bowne
5,044,883 A 9/1991 Neueder
5,593,187 A * 1/1997 Okuda F28F 9/0256
285/914
5,782,508 A 7/1998 Bartholomew
5,797,627 A 8/1998 Salter et al.
5,964,483 A 10/1999 Long et al.
6,085,364 A 7/2000 Baierlein
6,161,578 A 12/2000 Braun et al.
6,908,123 B2 6/2005 Le
7,445,249 B2 11/2008 Feger et al.
7,530,605 B2 * 5/2009 Rigollet F16L 37/144
285/305
8,087,451 B2 1/2012 Gammons
8,256,743 B2 9/2012 Tiberghien et al.
8,348,582 B2 * 1/2013 Bithell F16L 37/144
24/522
8,840,150 B2 9/2014 Sierad et al.
8,944,473 B2 2/2015 Lutzke et al.
9,068,567 B2 6/2015 Hitter et al.
9,115,486 B2 8/2015 Rakoczy et al.
9,115,834 B2 8/2015 Parks et al.
9,157,560 B2 10/2015 Rehder et al.
9,371,136 B2 6/2016 Beach et al.
9,506,592 B2 11/2016 Turnau, III et al.
9,714,733 B2 7/2017 Wall

9,964,247 B2 5/2018 Rosin et al.
10,113,676 B2 10/2018 Bush et al.
10,404,013 B2 9/2019 Zhang et al.
2004/0051313 A1 3/2004 Trouyet
2004/0178629 A1 * 9/2004 Yoshida F16L 37/0885
285/305
2009/0058083 A1 * 3/2009 Dorman F16L 37/144
285/305
2013/0205489 A1 8/2013 Rakoczy
2017/0045169 A1 2/2017 Gibelin et al.
2017/0362808 A1 12/2017 Snyder et al.
2018/0112807 A1 4/2018 Erb

FOREIGN PATENT DOCUMENTS

JP H10316086 A 12/1998
WO 2006/102871 A1 10/2006
WO WO-2007124736 A2 * 11/2007 B63B 29/14
WO 2019/115591 A1 6/2019

OTHER PUBLICATIONS

“Amarine-made 12V Quick Release RV Mount Macerator Waste Water Pump 45 LPM 12GPM Boat RV Marine,” amazon.com. Feb. 20, 2019. <https://web.archive.org/web/20191002025457/https://www.amazon.com/Amarine-made-Quick-Release-Macerator-Marine/dp/B06XWVMPGH>; see images.
“APC Series, Straight-Through, Inline Coupler, For Use With APC Inserts,” grainger.com. Feb. 10, 2019. <https://web.archive.org/web/20191002020809/https://www.grainger.com/product/COLDER-APC-Series-23MG78>; see images.
Qwik Jon Ultima 203 Systems Installation Instructions Preinstallation Checklist, s3.amazonaws.com. Feb. 10, 2019. https://web.archive.org/web/20191002022947/https://s3.amazonaws.com/pumpproducts/pdf/421_2_Zoeller+202-0005+Product+Instructions.pdf; p. 3.
English translation of JPH10316086A.

* cited by examiner

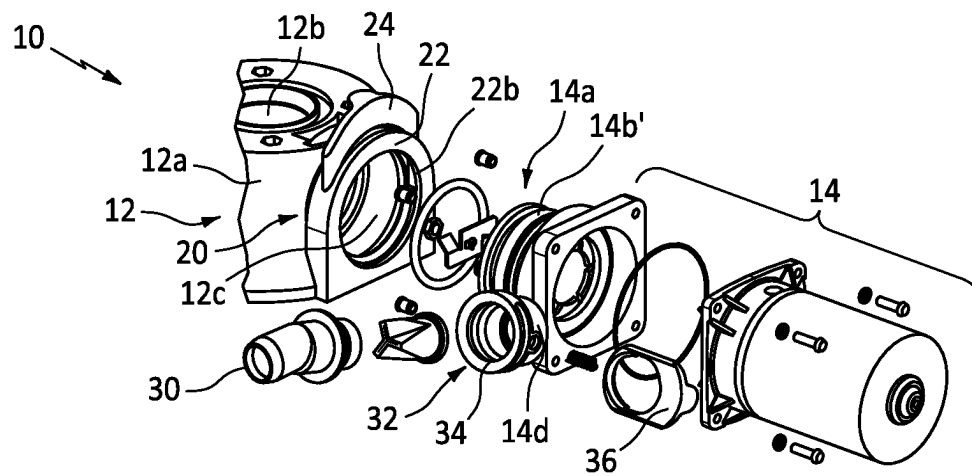


FIG. 1

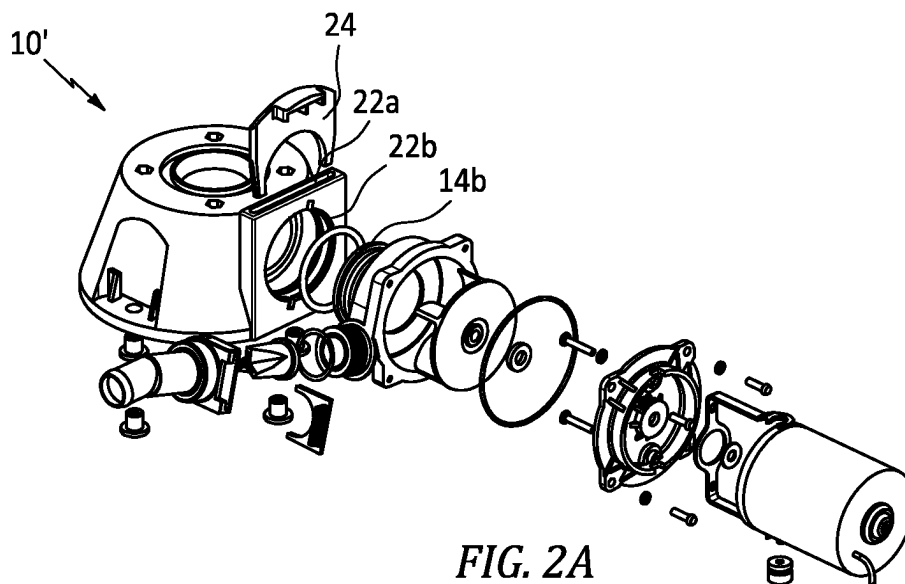


FIG. 2A

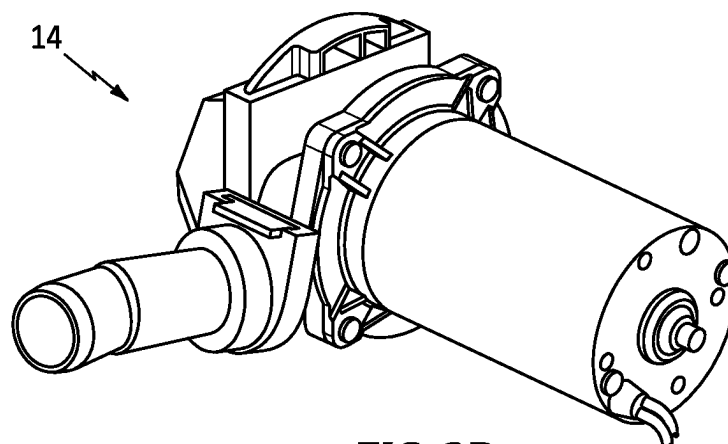


FIG. 2B



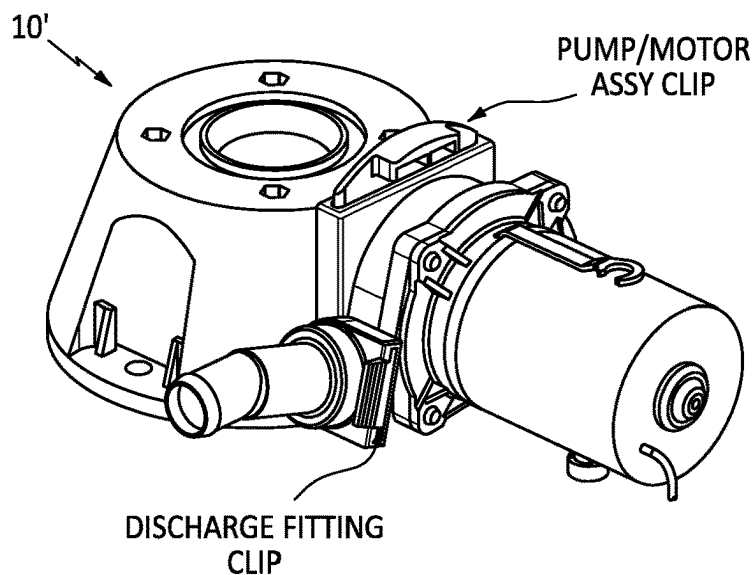


FIG. 2C1

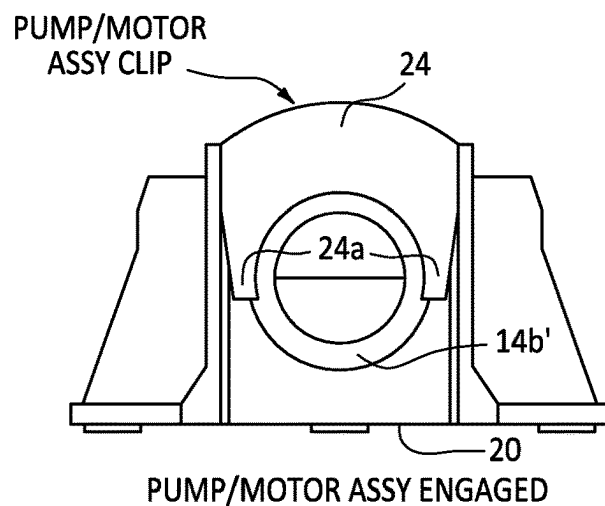

PUMP/MOTOR ASSY ENGAGED

FIG. 2C2

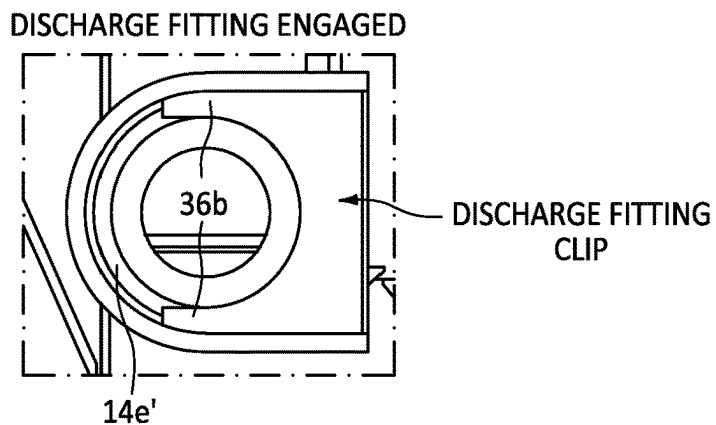

DISCHARGE FITTING ENGAGED

FIG. 2C3

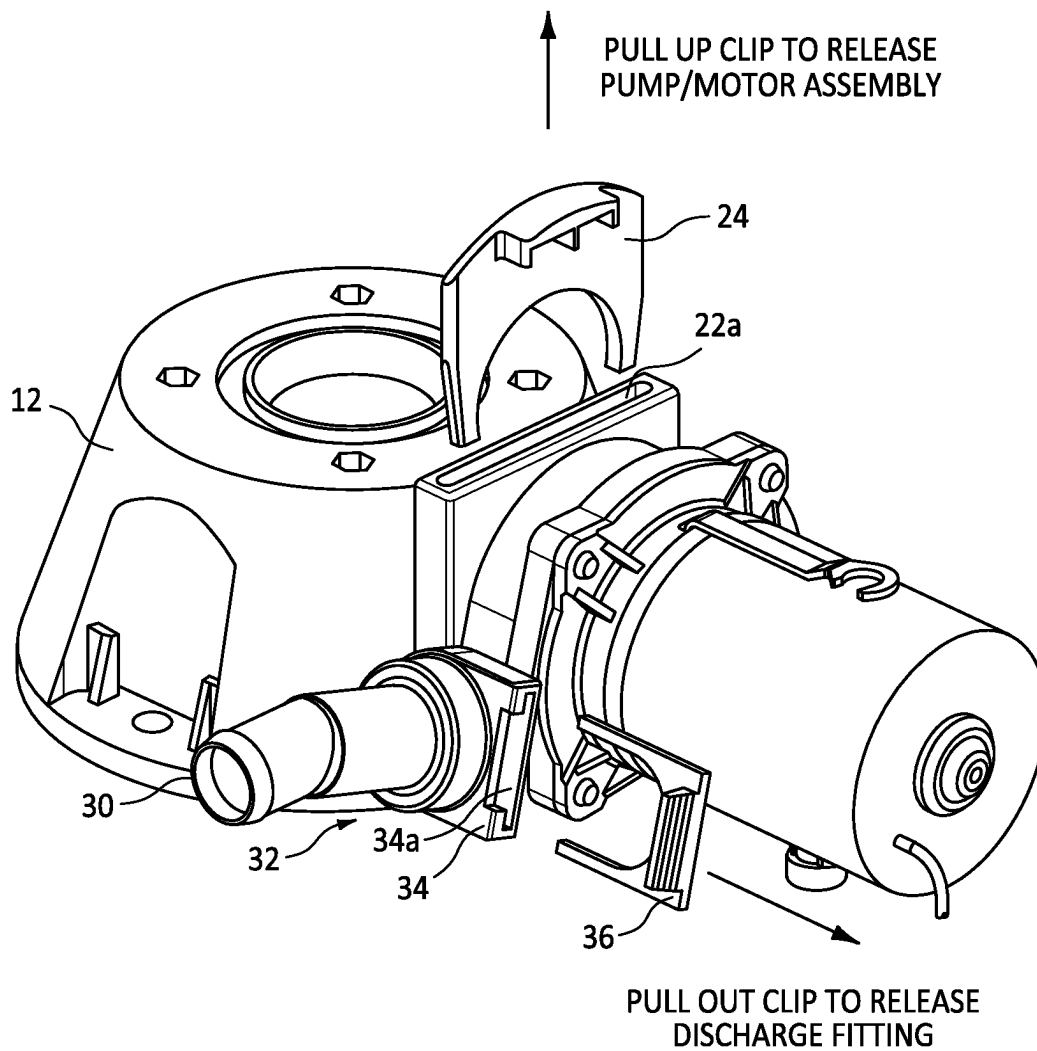


FIG. 2D1

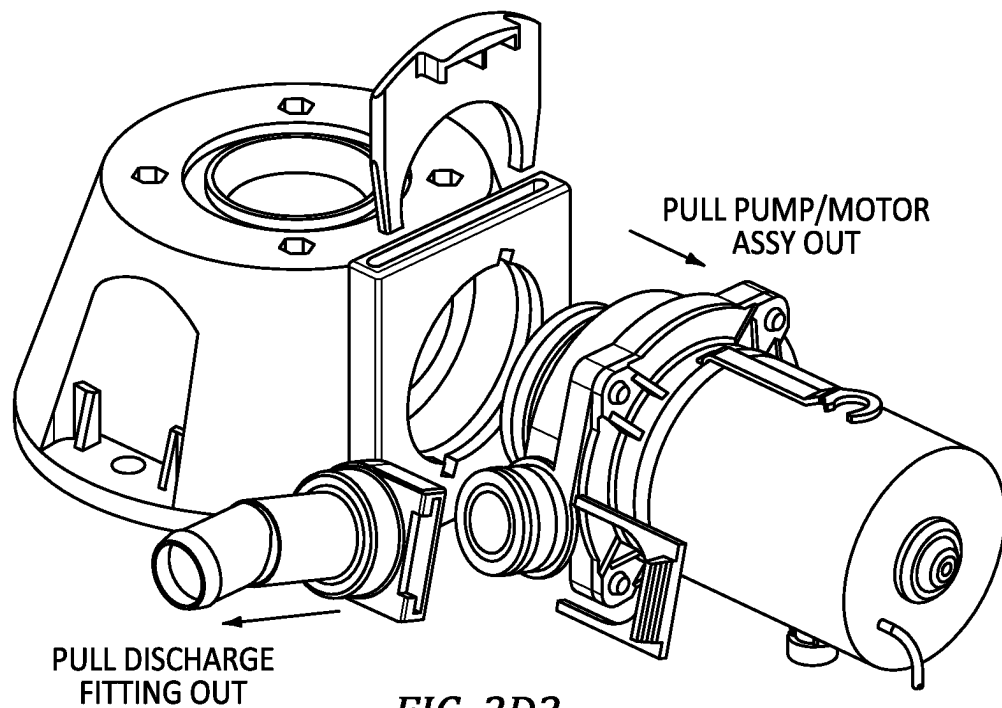


FIG. 2D2

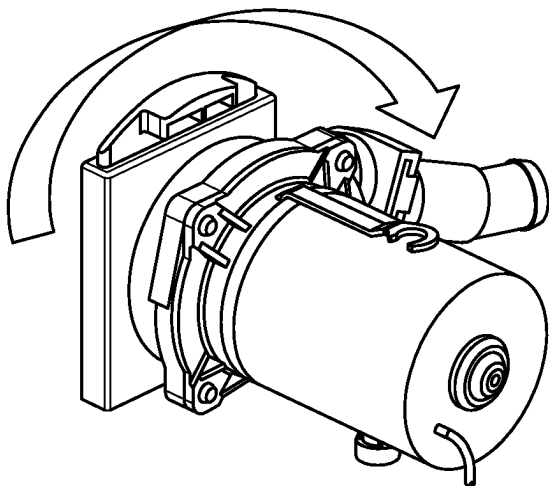


FIG. 2E1

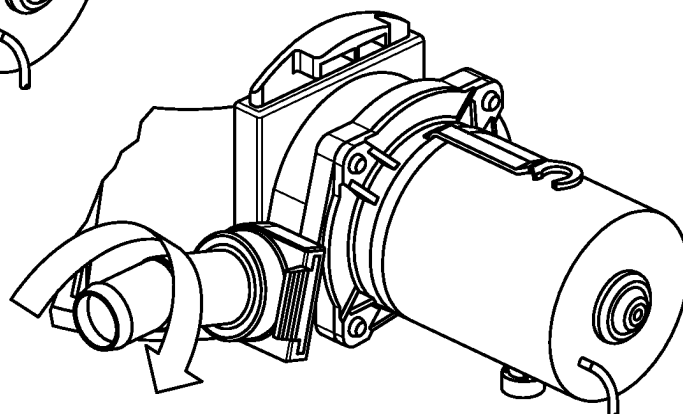


FIG. 2E2

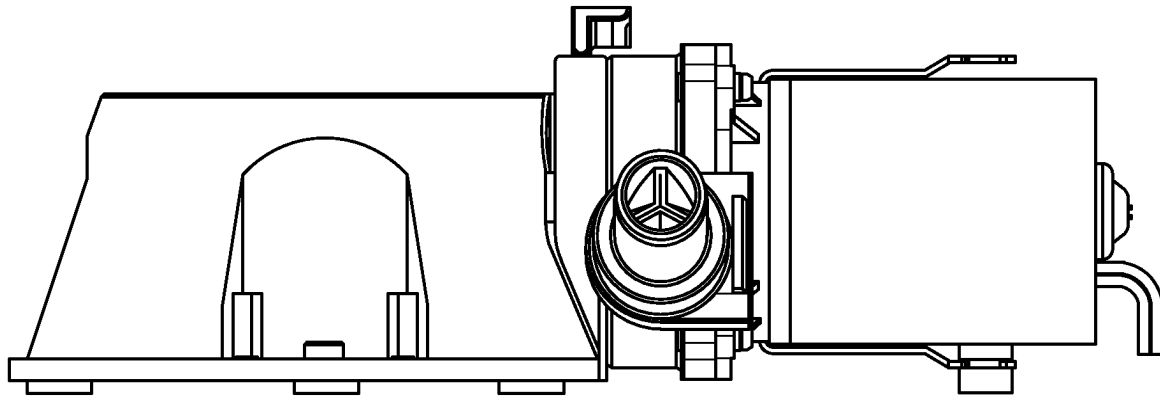


FIG. 2F

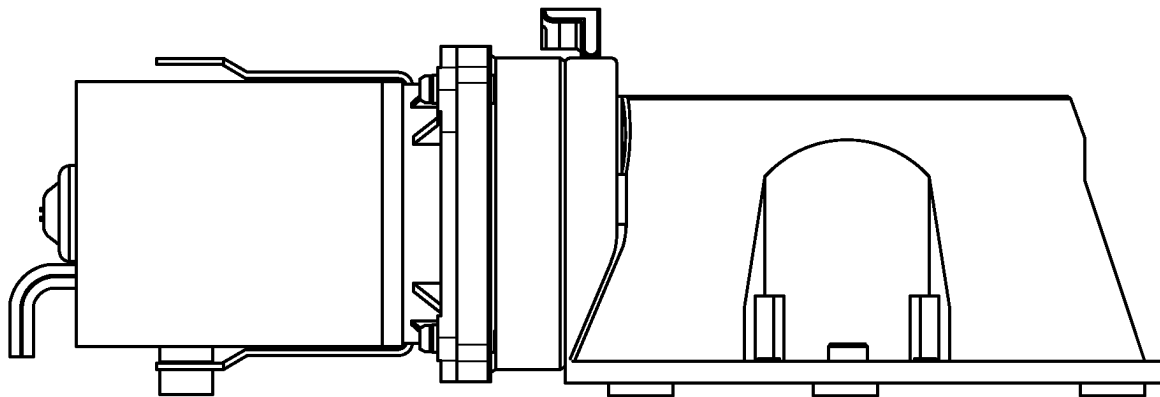


FIG. 2G

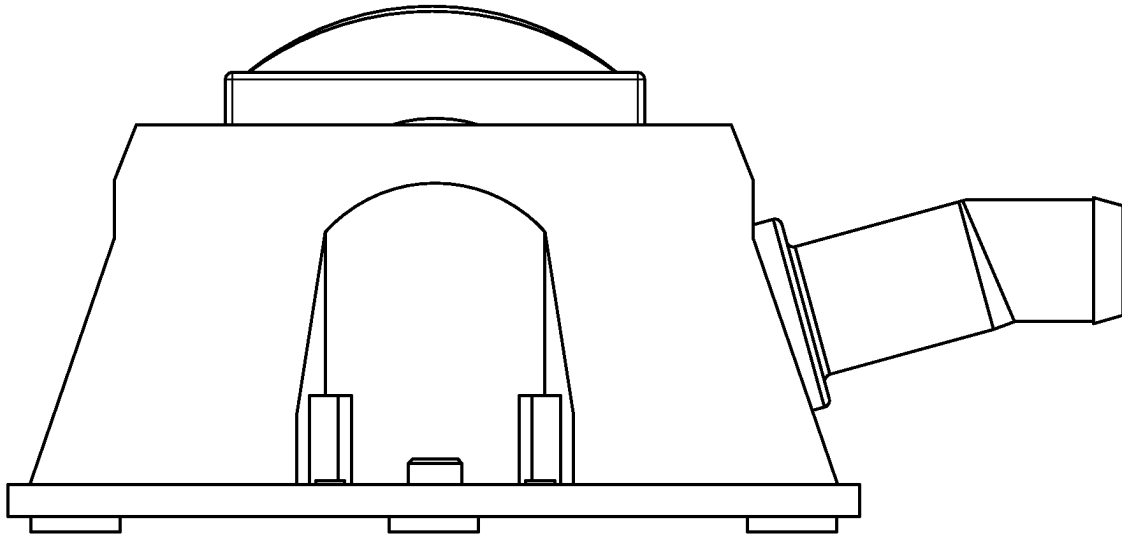


FIG. 2H

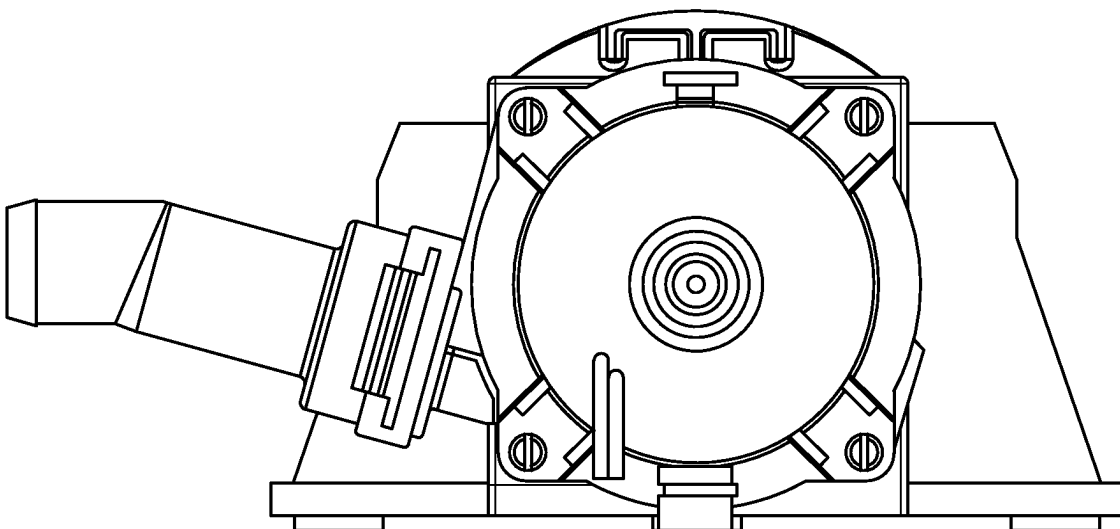


FIG. 2I

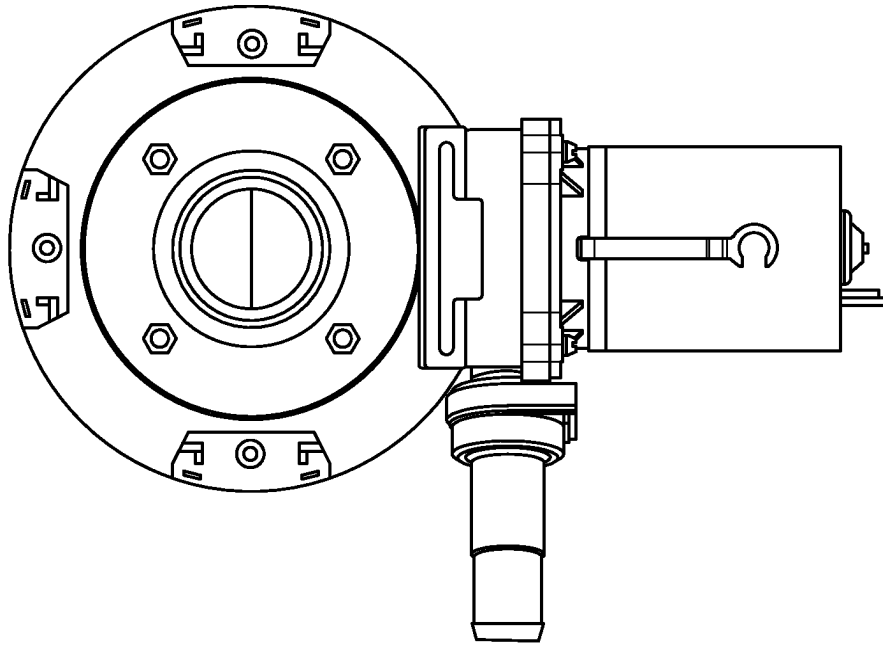


FIG. 2J

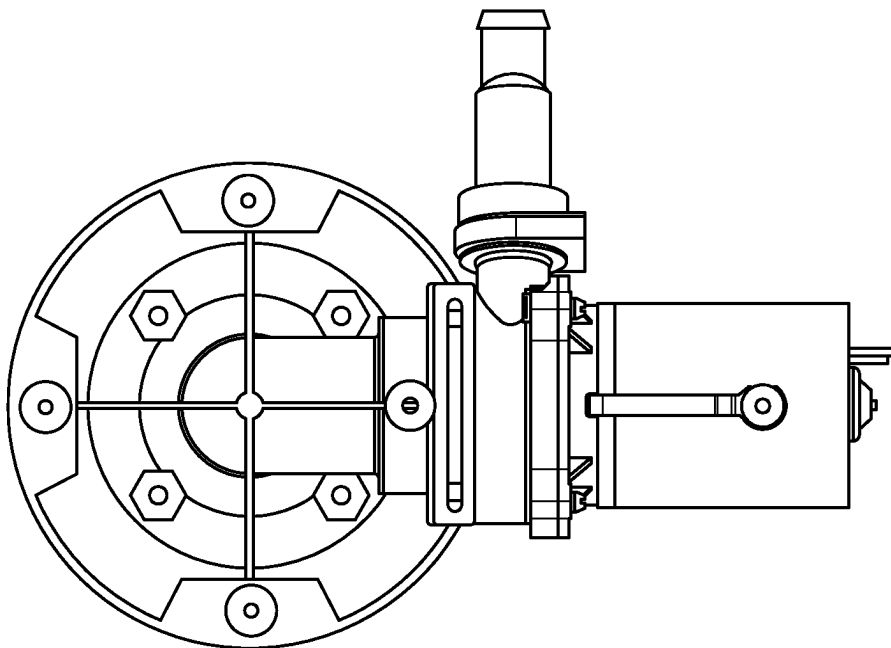


FIG. 2K

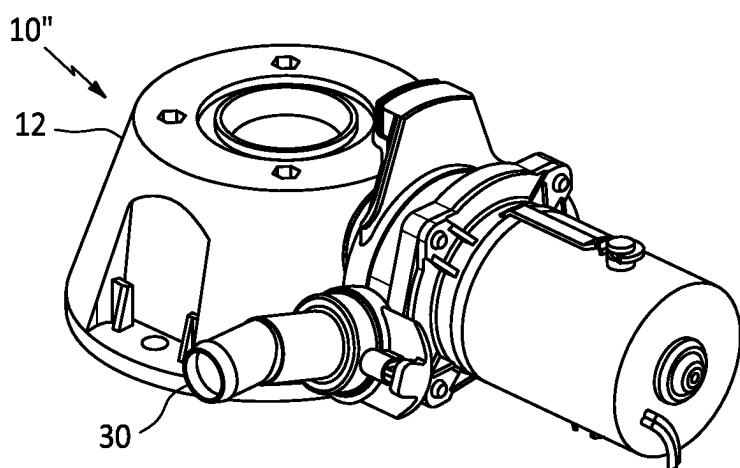


FIG. 3A

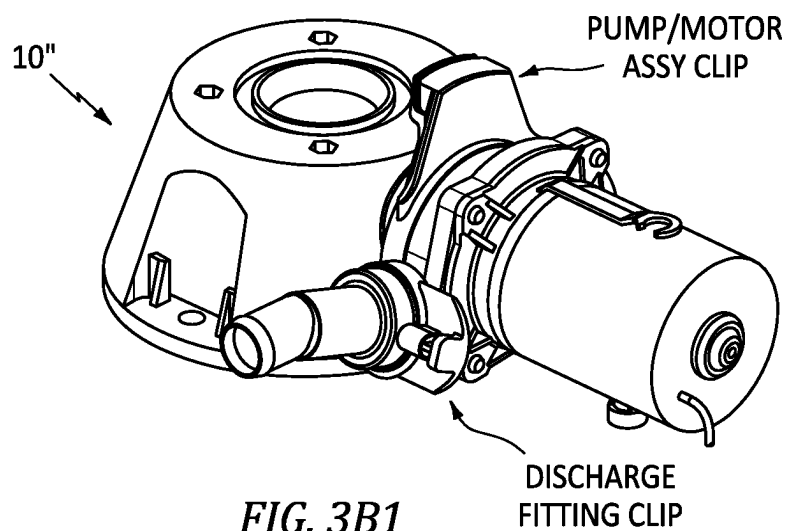


FIG. 3B1

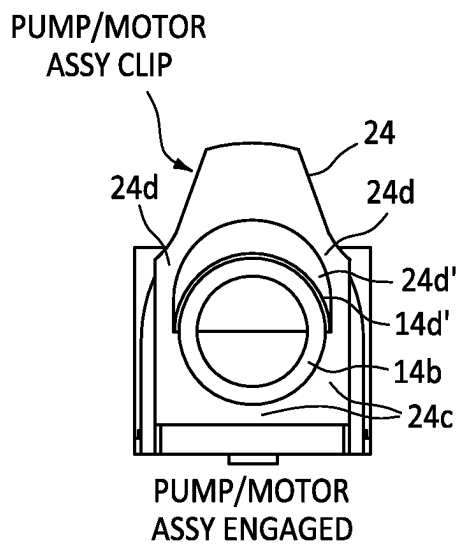


FIG. 3B2

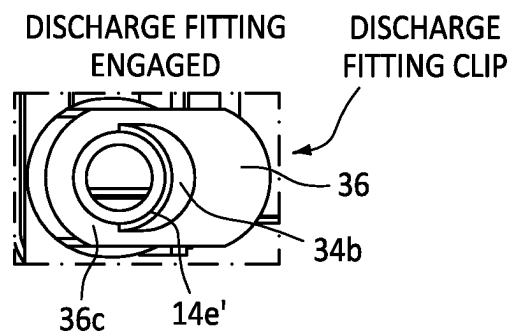


FIG. 3B3

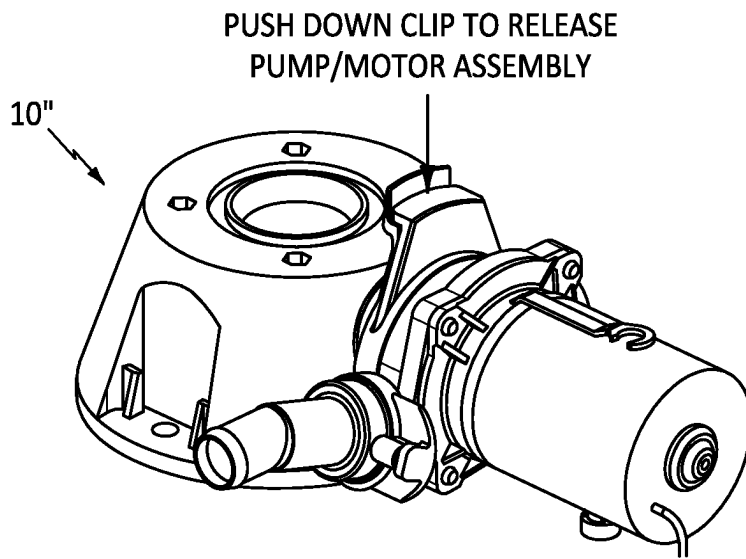


FIG. 3C1

PUSH DOWN CLIP TO RELEASE
PUMP/MOTOR ASSEMBLY

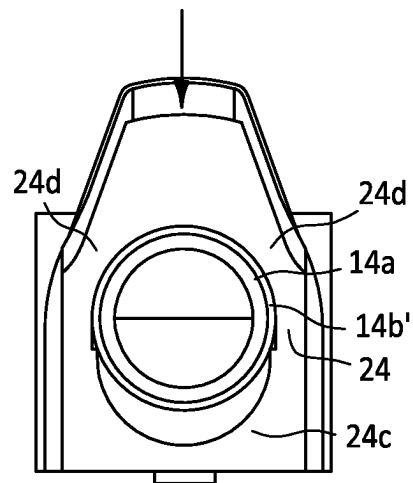


FIG. 3C2

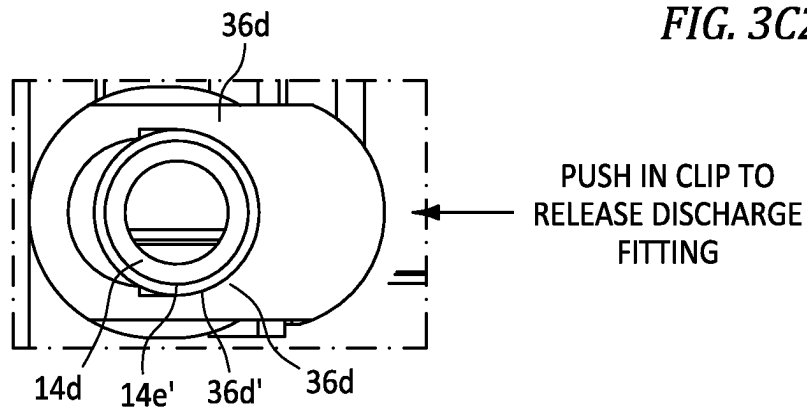


FIG. 3C3

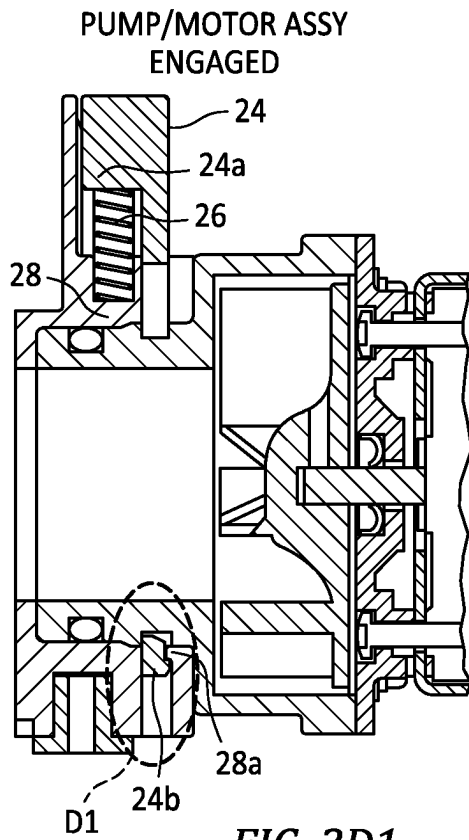


FIG. 3D1

PUSH DOWN CLIP TO
RELEASE PUMP/MOTOR
ASSEMBLY

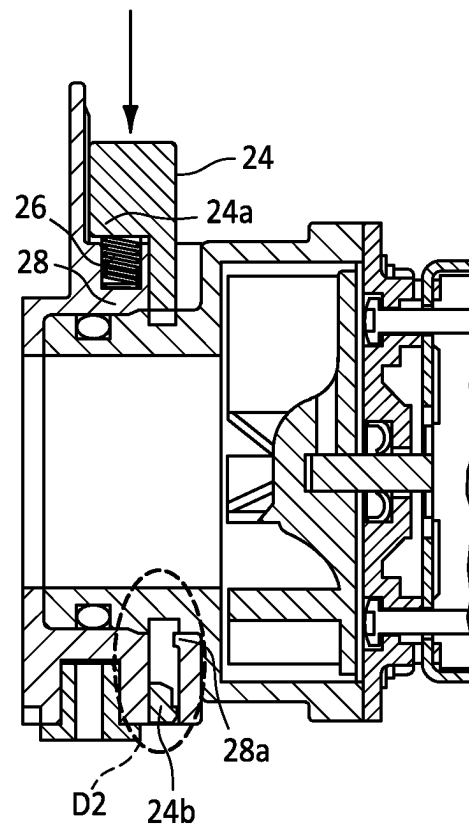


FIG. 3D2

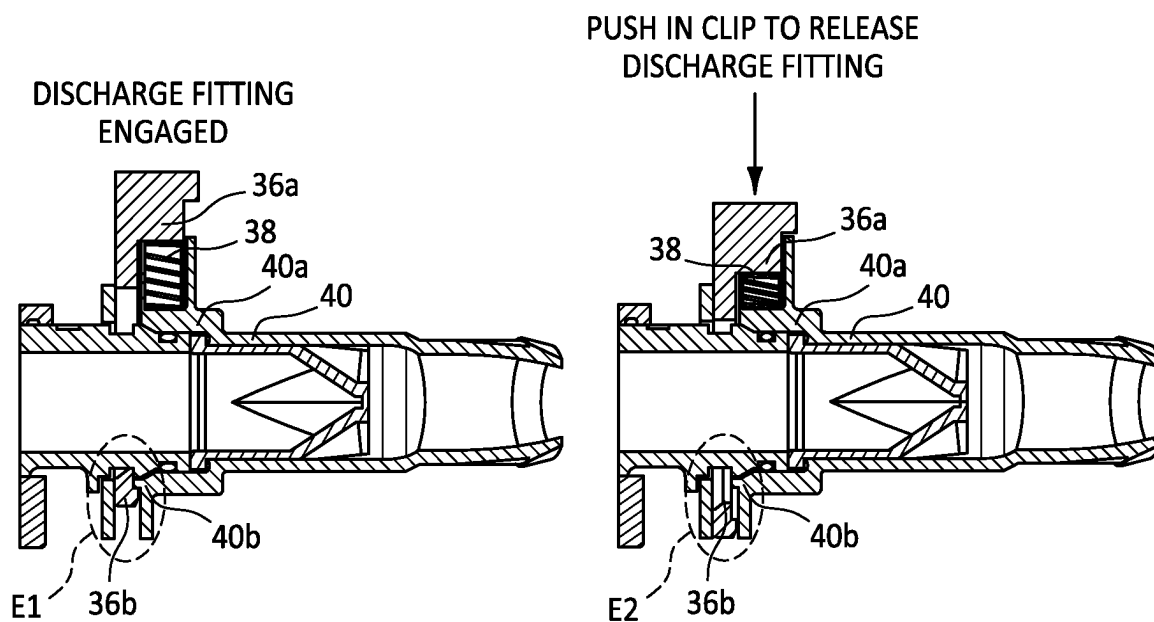


FIG. 3E1

FIG. 3E2

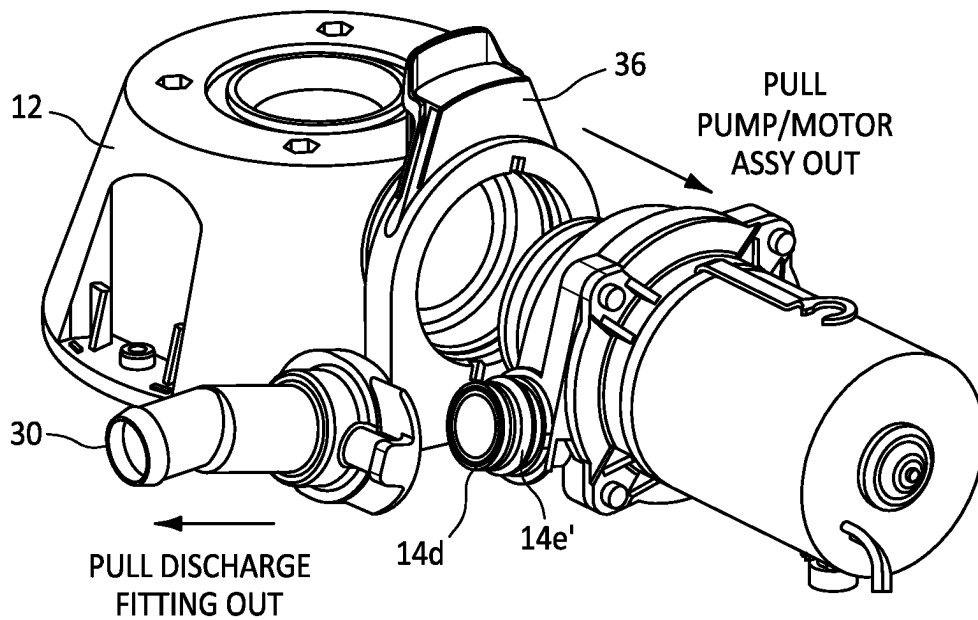


FIG. 3F

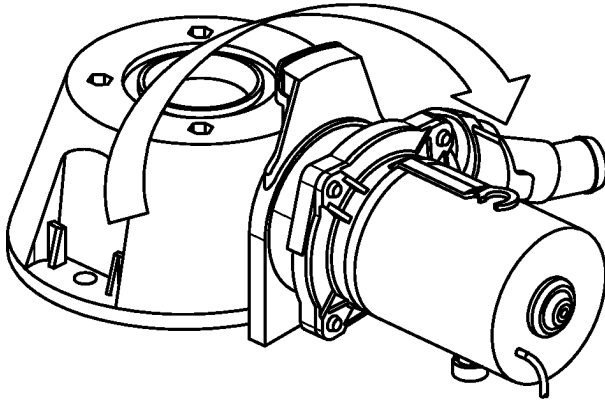


FIG. 3G1

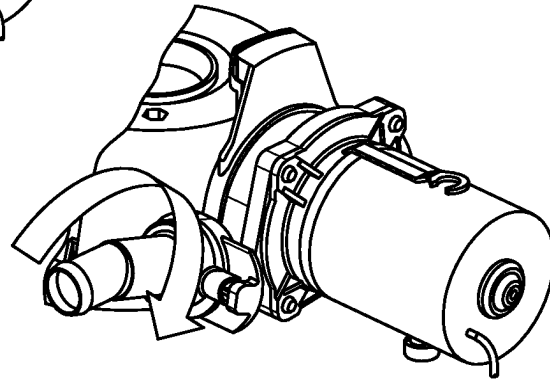


FIG. 3G2

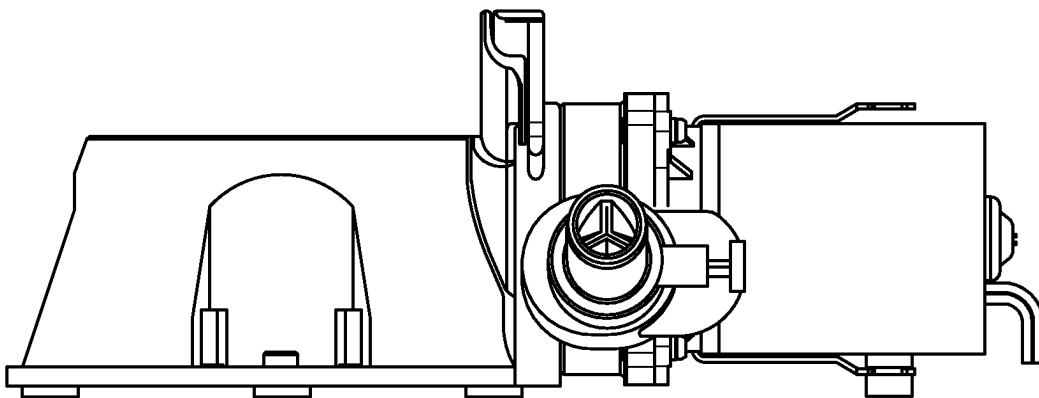


FIG. 3H

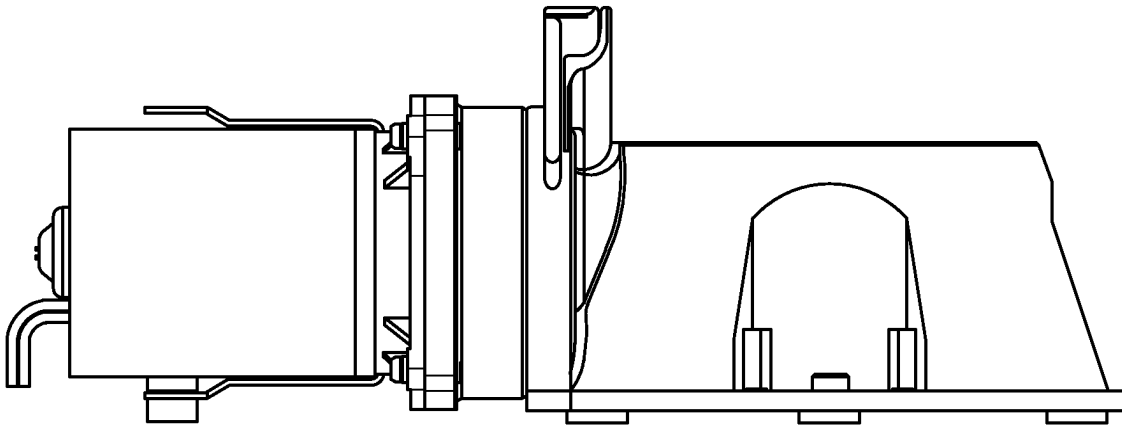


FIG. 3I

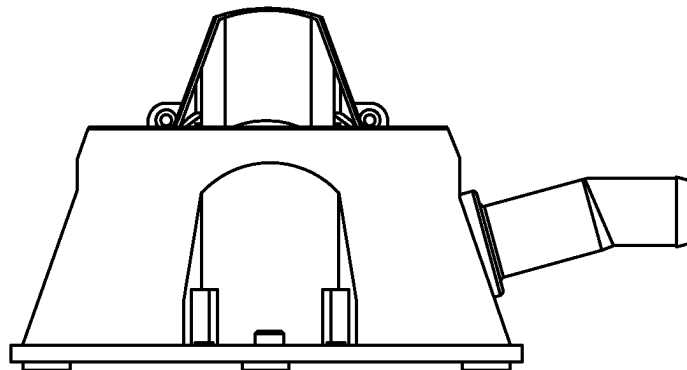


FIG. 3J

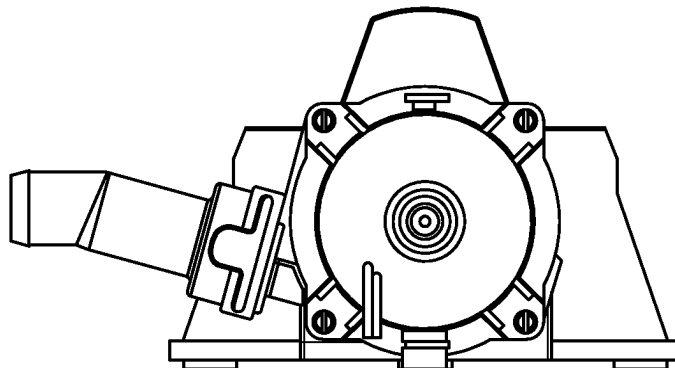


FIG. 3K

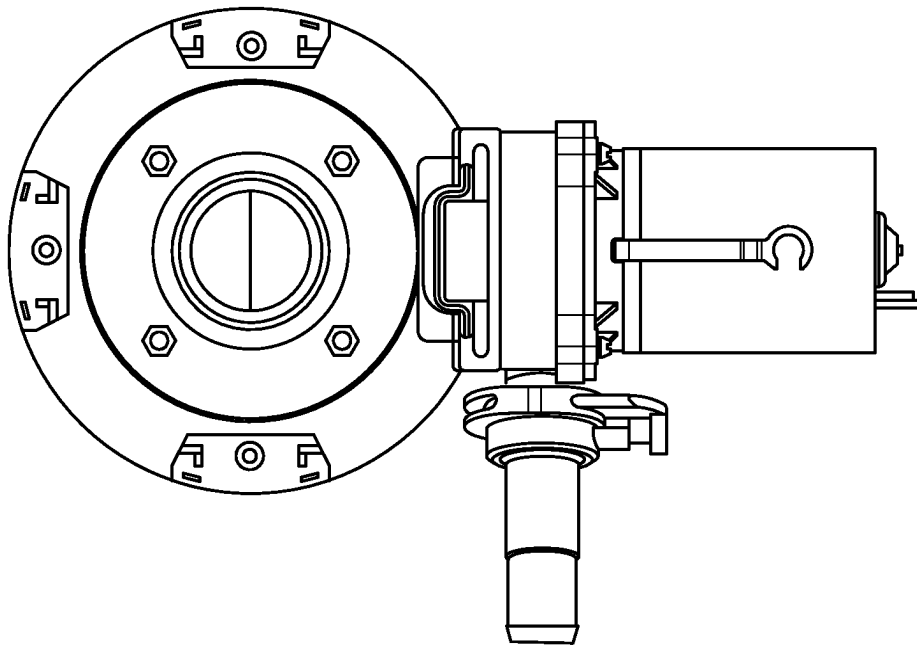


FIG. 3L

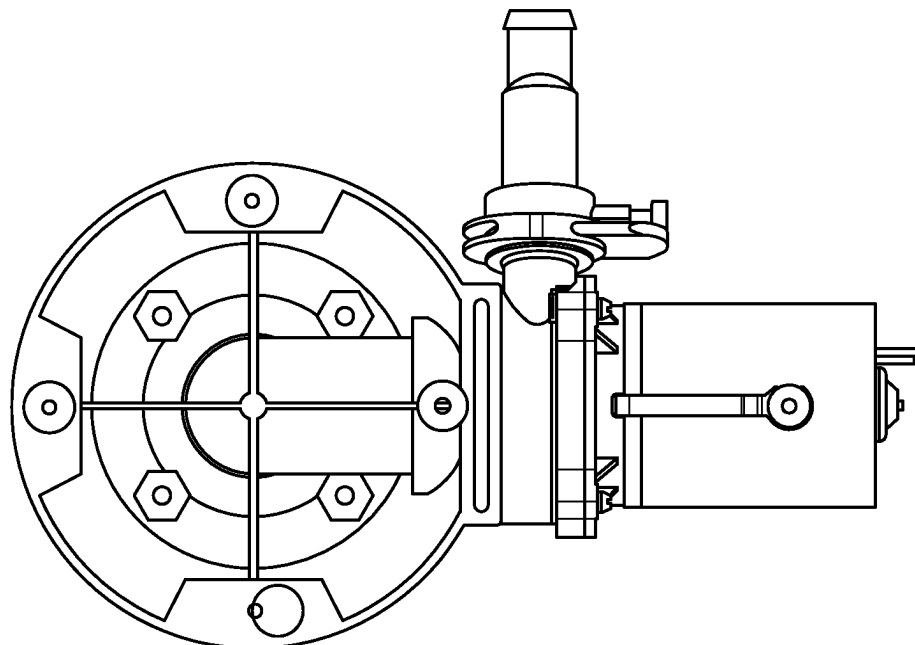


FIG. 3M

1

QUICK RELEASE MOTOR PUMP ASSEMBLY FOR ELECTRIC MARINE TOILET

CROSS-REFERENCE TO RELATED APPLICATION

This application claims benefit to provisional patent application Ser. No. 62/902,580, filed 19 Sep. 2019, which is hereby incorporated by reference in its entirety.

BACKGROUND OF THE INVENTION

1. Field of the Invention

The present invention relates to apparatus having a toilet coupled to a motor/pump assembly, including where the toilet is an electric marine toilet.

2. Brief Description of Related Art

There is no product known to the inventors that allows a user to release the pump/motor assembly from a toilet base to enable fast access to service/maintain the toilet. In view of this, there is a need in the industry for a better way to release a motor/pump assembly from a toilet to enable fast access to service/maintain the toilet.

SUMMARY OF THE PRESENT INVENTION

In summary, the present invention provides a toilet base assembly that allows a user to perform fast servicing without the use of tools. On all electric marine toilets known the inventors, a series of screws have to be removed to allow access to the pump housing and impeller to remove blockages or service the toilet. According to the present invention, the pump/motor assembly will be removed by releasing a clip mechanism that holds the pump/motor assembly in place when in operation. The clip mechanism may include a clip that is manually inserted and removed, as well as a spring loaded clip.

PARTICULAR EMBODIMENTS

By way of example, and according to some embodiments, the present invention may include, or take the form of, apparatus featuring a toilet base, a pump/motor assembly and a quick release coupling mechanism.

The toilet base has a wall forming a chamber for receiving waste, the wall having a toilet base coupling portion.

The pump/motor assembly may include a pump inlet configured to receive the waste pumped from the chamber. The pump inlet may include a pump inlet coupling portion arranged inside the toilet base coupling portion when the pump/motor assembly and the toilet base are coupled together.

The quick release coupling mechanism may include a clip receiving portion and a clip. The clip may be configured to slide within the clip receiving portion from a disengage position to an engage position to engage the pump inlet coupling portion and couple the toilet base and the pump/motor assembly together. The clip may also be configured to slide from the engage position to the disengage position to disengage the pump inlet coupling portion and to decouple the pump/motor assembly from the toilet base.

Other Features

The apparatus may include one or more of the following features:

2

The quick release coupling mechanism may be mounted on the toilet base, and/or may form part of the toilet base coupling portion. By way of further example, embodiments are envisioned, and the scope of the invention is intended to include, mounting or configuring the quick release coupling mechanism on the pump/motor assembly, e.g., and having a corresponding toilet base coupling portion arranged inside a corresponding pump inlet coupling portion.

The clip receiving portion may include a slot configured or formed therein to receive the clip; and the clip may be configured to slide within the slot of the clip receiving portion.

The clip receiving portion may include an opening configured or formed therein; the pump inlet coupling portion may include a rim configured to pass through the opening formed in the clip receiving portion and into the toilet base coupling portion of the wall of the toilet base. The clip may be configured to slide within the clip receiving portion from the disengage position to the engage position and engage the rim to couple together the toilet base and the pump/motor assembly.

The quick release coupling mechanism may include a spring configured to expand when the clip slides from the disengage position to the engage position to push and hold the clip in the engage position, and also configured to compress when the clip slides from the engage position to the disengage position to urge the spring back towards the engage position when the clip is released.

The clip may include a clip engaging portion configured to engage the rim when the clip slides from the disengage position to the engage position, and also configured to disengage the rim when the clip slides from the engage position to the disengage position.

The clip may include a clip release portion having an opening configured to allow the pump inlet coupling portion to pass thru when the clip slides into the disengage position for releasing the pump/motor assembly from the toilet base, and also for positioning the pump inlet coupling portion for engagement.

The pump/motor assembly may include a pump outlet having a pump outlet coupling portion configured or formed thereon to provide the waste from the pump/motor assembly. The apparatus may include a discharge fitting having a quick release discharge fitting coupling mechanism with a discharge fitting clip receiving portion and a discharge fitting clip. The discharge fitting clip may be configured to slide within the discharge fitting clip receiving portion from a discharge fitting disengage position to a discharge fitting engage position to engage the pump outlet coupling portion and couple the discharge fitting and the pump/motor assembly together. The discharge fitting clip may also be configured to slide from the discharge fitting engage position to the discharge fitting disengage position to disengage the pump outlet coupling portion and decouple the discharge fitting from the pump/motor assembly.

The discharge fitting clip receiving portion may include a discharge fitting slot configured or formed therein to receive the discharge fitting clip; and the discharge fitting clip may be configured to slide within the discharge fitting slot.

The discharge fitting clip receiving portion may include an opening configured or formed therein. The pump outlet coupling portion may include a pump outlet rim configured to pass through the opening formed in the discharge fitting clip receiving portion and into the discharge fitting. The discharge fitting clip may be configured to slide within the discharge fitting clip receiving portion from the discharge fitting disengage position to the discharge fitting engage

3

position to engage the pump outlet rim to couple together the pump/motor assembly and the discharge fitting.

The quick release discharge fitting coupling mechanism may include a discharge fitting spring that is configured to expand when the discharge fitting clip slides from the discharge fitting disengage position to the discharge fitting engage position to push and hold the discharge fitting clip in the discharge fitting engage position. The discharge fitting spring may also be configured to compress when the discharge fitting clip slides from the discharge fitting engage position to the discharge fitting disengage position to urge the discharge fitting spring back towards the discharge fitting engage position. The discharge fitting clip may include a discharge fitting clip engaging portion configured to engage the pump outlet rim when the discharge fitting clip slides from the discharge fitting disengage position to the discharge fitting engage position, and also configured to disengage the pump outlet rim when the discharge fitting clip slides from the discharge fitting engage position to the discharge fitting disengage position. The discharge fitting clip may include a discharge fitting release portion having an opening configured to allow the pump outlet coupling portion to pass thru when the discharge fitting clip slides into the discharge fitting disengage position for releasing the discharge fitting from the pump/motor assembly, and for also positioning the pump outlet coupling portion for engagement.

The apparatus may include an electric toilet, e.g., such as a marine electric toilet or an RV electric toilet.

BRIEF DESCRIPTION OF THE DRAWING

The drawing, which is not necessarily drawn to scale, includes the following Figures:

FIG. 1 shows an exploded view of apparatus having a quick release pump/motor assembly connected to a toilet base that may form part of an electric marine toilet, e.g., having a clip for engaging/releasing the pump/motor assembly to/from the toilet base, and having a discharge fitting clip with a spring configuration for engaging/releasing a discharge fitting to/from the pump/motor assembly, according to some embodiments of the present invention.

FIG. 2A shows an exploded view of apparatus including a quick release pump/motor assembly connected to a toilet base that may form part of an electric marine toilet, e.g., having a clip for engaging/releasing a pump/motor assembly to/from the toilet base, and having a discharge fitting clip for engaging/releasing a discharge fitting to/from the pump/motor assembly, according to some embodiments of the present invention.

FIG. 2B shows a photograph of the quick release pump/motor assembly shown in FIG. 2A as assembled for connecting to the toilet base, according to some embodiments of the present invention.

FIG. 2C1 shows a perspective view of the apparatus shown in FIG. 2A as assembled, e.g., having the clip pushed in for coupling the pump/motor assembly and the toilet base, and also having the discharge fitting clip pushed in for coupling the discharge fitting and the pump/motor assembly, according to some embodiments of the present invention.

FIG. 2C2 is a cross-sectional view of a quick release coupling mechanism showing the clip engaging part of a pump inlet of the pump/motor assembly shown in FIG. 2C1 for connecting the pump/motor assembly to the toilet base, according to some embodiments of the present invention.

FIG. 2C3 is a cross-sectional view of a quick release discharge fitting coupling mechanism showing the discharge fitting clip engaging part of a pump outlet of the pump/motor

4

assembly shown in FIG. 2C1 for connecting the pump/motor assembly and the discharge fitting, according to some embodiments of the present invention.

FIG. 2D1 shows a perspective view of the apparatus shown in FIG. 2C1, e.g., having the clip pulled out for disengaging the clip from part of the pump inlet of the pump/motor assembly and releasing the pump/motor assembly from the toilet base, and also having the discharge fitting clip pulled out for disengaging the discharge fitting clip from part of the pump outlet of the pump/motor assembly and releasing the discharge fitting from the pump/motor assembly, according to some embodiments of the present invention.

FIG. 2D2 shows an exploded view of the apparatus shown in FIG. 2D1, e.g., having the pump/motor assembly pulled out from the toilet base, and also having the discharge fitting pulled out of the pump outlet of the pump/motor assembly, according to some embodiments of the present invention.

FIG. 2E1 shows a partial perspective view of the apparatus shown in FIG. 2C1, e.g., having a discharge fitting configured to be rotated between 0°-180° in relation to, and about a longitudinal axis of, the pump inlet, to orient the discharge fitting in opposite directions as needed depending on the application, according to some embodiments of the present invention.

FIG. 2E2 shows a partial perspective view of the apparatus shown in FIG. 2C1, e.g., having the discharge fitting configured to be rotated 360° in relation to, and about a corresponding longitudinal axis of, the pump outlet, to swivel the discharge fitting as needed depending on the application, according to some embodiments of the present invention.

FIG. 2F shows a side view of the apparatus shown in FIG. 2C1, according to some embodiments of the present invention.

FIG. 2G shows a corresponding side view of the apparatus shown in FIG. 2C1 from the opposite side, according to some embodiments of the present invention.

FIG. 2H shows a back view of the apparatus shown in FIG. 2C1, according to some embodiments of the present invention.

FIG. 2I shows a front view of the apparatus shown in FIG. 2C1, according to some embodiments of the present invention.

FIG. 2J shows a top view of the apparatus shown in FIG. 2C1, according to some embodiments of the present invention.

FIG. 2K shows a bottom view of the apparatus shown in FIG. 2C1, according to some embodiments of the present invention.

FIG. 3A shows a photograph of apparatus, including a quick release pump/motor assembly connected to a toilet base that may form part of an electric marine toilet, according to some embodiments of the present invention.

FIG. 3B1 shows a perspective view of the apparatus shown in FIG. 3A, e.g., having a clip and spring configuration for engaging/releasing part of a pump inlet of a pump/motor assembly for connecting the pump/motor assembly to/from the toilet base, and also having a discharge fitting clip and spring configuration for engaging/releasing part of a pump outlet for connecting the discharge fitting to/from the pump/motor assembly, according to some embodiments of the present invention.

FIG. 3B2 is a cross-sectional view of the quick release coupling mechanism showing the clip engaging part of the pump inlet of the pump/motor assembly shown in FIG. 3B1

5

for coupling the pump/motor assembly and the toilet base, according to some embodiments of the present invention.

FIG. 3B3 is a cross-sectional view of the quick release discharge fitting coupling mechanism showing the discharge fitting clip engaging part of the pump outlet of the pump/motor assembly shown in FIG. 3B1 for coupling the discharge fitting and pump/motor assembly, according to some embodiments of the present invention.

FIG. 3C1 shows a perspective view of the apparatus shown in FIG. 3A, e.g., having the clip pushed in for compressing the spring, disengaging the clip from part of the pump inlet of the pump/motor assembly, and releasing the pump/motor assembly from the toilet base, and also having the discharge fitting clip pushed in for compressing the discharge fitting spring, disengaging the discharge fitting clip from part of the pump outlet of the pump/motor assembly, and releasing the discharge fitting from part of the pump outlet of the pump/motor assembly, according to some embodiments of the present invention.

FIG. 3C2 is a cross-sectional view of the quick release coupling mechanism showing the clip engaging part of the pump inlet of the pump/motor assembly shown in FIG. 3C1 for connecting the pump/motor assembly to the toilet base, according to some embodiments of the present invention.

FIG. 3C3 is a cross-sectional view of the quick release discharge fitting coupling mechanism showing the discharge fitting clip engaging part of the pump outlet of the pump/motor assembly shown in FIG. 3C1 for coupling the pump/motor assembly to the discharge fitting, according to some embodiments of the present invention.

FIG. 3D1 is a cross-sectional view showing part of the pump/motor assembly and the quick release coupling mechanism shown in FIG. 3C1, e.g., having the clip pushed out by the spring for engaging part of the pump inlet of the pump/motor assembly and for coupling the pump/motor assembly and the toilet base, according to some embodiments of the present invention.

FIG. 3D2 is a cross-sectional view showing part of the pump/motor assembly and the quick release coupling mechanism shown in FIG. 3C1, e.g., having the clip pushed in for compressing the spring, disengaging the clip from part of the pump inlet of the pump/motor assembly, and releasing the pump/motor assembly from the toilet base, according to some embodiments of the present invention. (In FIG. 3D2, the seven (7) "phantom" dots shown in the clip indicate where the spring extended before being compressed, and do not indicate any connection between the clip and the pump/motor assembly spring.)

FIG. 3E1 is a cross-sectional view of part of the pump/motor assembly and the quick release discharge fitting coupling mechanism shown in FIG. 3C1, e.g., having the discharge fitting clip pushed out by the discharge fitting spring for engaging part of the pump outlet of the pump/motor assembly and for coupling the discharge fitting and the pump/motor assembly, according to some embodiments of the present invention.

FIG. 3E2 is a cross-sectional view of part of the pump/motor assembly and the quick release discharge fitting coupling mechanism shown in FIG. 3C1, e.g., having the discharge fitting clip pushed in for compressing the discharge fitting spring, disengaging the discharge fitting clip from part of the pump outlet of the pump/motor assembly, and releasing the discharge fitting from the pump/motor assembly, according to some embodiments of the present invention. (In FIG. 3E2, the six (6) "phantom" dots shown in the discharge fitting clip indicate where the discharge fitting spring extended before being compressed, and do not

6

indicate any connection between the discharge fitting clip and the discharge fitting spring.)

FIG. 3F shows an exploded view of the apparatus shown in FIG. 3C1, e.g., having the pump inlet of the pump/motor assembly pulled out from the toilet base, and also having the discharge fitting pulled out of the pump outlet of the pump/motor assembly, according to some embodiments of the present invention.

FIG. 3G1 shows a partial perspective view of the apparatus shown in FIG. 3C1, e.g., having a discharge fitting portion of the quick release pump/motor assembly configured to be rotated between 0°-180° in relation to, and about a longitudinal axis of, the pump/motor assembly, to orient the discharge fitting in opposite directions as needed depending on the application, according to some embodiments of the present invention.

FIG. 3G2 shows a partial perspective view of the apparatus shown in FIG. 3C1, e.g., having the discharge fitting configured to be rotated 360° in relation to, and about a corresponding longitudinal axis of, the pump outlet, to swivel the discharge fitting as needed depending on the application, according to some embodiments of the present invention.

FIG. 3H shows a side view of the apparatus shown in FIG. 3C1, according to some embodiments of the present invention.

FIG. 3I shows a corresponding side view of the apparatus shown in FIG. 3C1 from the opposite side, according to some embodiments of the present invention.

FIG. 3J shows a back view of the apparatus shown in FIG. 3C1, according to some embodiments of the present invention.

FIG. 3K shows a front view of the apparatus shown in FIG. 3C1, according to some embodiments of the present invention.

FIG. 3L shows a top view of the apparatus shown in FIG. 3C1, according to some embodiments of the present invention.

FIG. 3M shows a bottom view of the apparatus shown in FIG. 3C1, according to some embodiments of the present invention.

Similar parts or components in Figures are labeled with similar reference numerals and labels for consistency. Every lead line and associated reference label for every element is not included in every Figure of the drawing to reduce clutter in the drawing as a whole.

DETAILED DESCRIPTION OF THE INVENTION

By way of example, FIGS. 1, 2A thru 2K and 3A thru 3M show different embodiments of the present invention, which may include, or take the form of, apparatus generally indicated as 10, 10', 10" featuring a toilet base 12, a pump/motor assembly 14 and a quick release coupling mechanism generally indicated as 20. The apparatus 10 may include an electric toilet, e.g., such as a marine electric toilet or an RV electric toilet. The upper part of the electric toilet is not shown, does not form part of the underlying invention, and may include some combination of a toilet bowl, a toilet seat, a flushing mechanism, etc.

The Basic Invention

The toilet base 12 may include a wall 12a forming a chamber 12b for receiving waste. The wall 12a may be

configured with, or may include, a toilet base coupling portion 12c, e.g., consistent with that set forth herein.

The pump/motor assembly 14 may include a pump inlet generally indicated as 14a configured to receive the waste pumped from the chamber 12b. The pump inlet 14a may include a pump inlet coupling portion 14b (e.g., see FIG. 2A) for arranging inside the toilet base coupling portion 12c when the pump/motor assembly 14 and the toilet base 12 are coupled together.

The quick release coupling mechanism 20 may include a clip receiving portion 22 and a clip 24. The clip 24 may be configured to slide within the clip receiving portion 22 from a disengage position (see FIG. 2D1, 3C2) to an engage position (see FIG. 2C2, 3B2) to engage the pump inlet coupling portion 14b and couple the toilet base 12 and the pump/motor assembly 14 together. The clip 24 may also be configured to slide from the engage position (see FIG. 2C2, 3B2) to the disengage position (see FIG. 2D1, 3C2) to disengage the pump inlet coupling portion 14b and decouple the pump/motor assembly 14 from the toilet base 12.

The quick release coupling mechanism 20 may be mounted on the toilet base 12, and/or may include, or may form part of the toilet base coupling portion 12c, e.g., consistent with that disclosed herein.

The clip receiving portion 22 may include a slot 22a (e.g., see FIG. 2A) configured or formed therein to receive the clip 24. The clip 24 may be configured to slide within the slot 22a of the clip receiving portion 22.

The clip receiving portion 22 may include an opening 22b configured or formed therein. The pump inlet coupling portion 14b may include a rim 14b' configured and dimensioned to pass through the opening 22b formed in the clip receiving portion 22 and into the toilet base coupling portion 12c of the toilet base 12. The clip 24 may be configured to slide within the clip receiving portion 22 from the disengage position (see FIG. 3C2) to the engage position (see FIG. 2C2, 3B2) to engage the rim 14b' to couple together the toilet base 12 and the pump/motor assembly 14.

The quick release coupling mechanism 20 may include a spring 26 (see 3D1, 3D2) configured to expand when the clip 24 slides from the disengage position (see FIG. 3C2) to the engage position (see FIG. 3B2) to push and hold the clip 24 in the engage position. The spring 26 (see 3D1, 3D2) may also be configured to compress when the clip 24 is pressed and slides from the engage position to the disengage position to urge the spring 26 back towards the engage position. The spring 26 may be configured between a top portion 24a of the clip 24 and an interior portion 28 of the quick release coupling mechanism 20, e.g., as shown in FIGS. 3D1, 3D2. Circled portion D1 show a lower portion of the clip 24 having a detente 24b for sliding and contacting a corresponding detent 28a of the interior portion 28 of the quick release coupling mechanism 20 for stopping and keeping the clip 24 within the slot 22a when the clip 24 is in the engage position. Circled portion D2 show the detente 24b of the clip 24 separated from the corresponding detent 28a of the interior portion 28 when the clip 24 is in the disengage position. (It is important to note that in operation the clip 24 and detente 24b are configured to slide in relation to the corresponding detent 28a of the interior portion 28, and are not connect together with the corresponding detent 28a of the interior portion 28.)

The clip 24 may include a clip engaging portion 24c (see FIG. 3B2) configured to engage the rim 14b' when the clip 24 slides from the disengage position (see FIG. 3C2) to the engage position (see FIG. 3B2), and also configured to disengage the rim 14b' when the clip 24 slides from the

engage position to the disengage position. (In FIG. 3B2, a lower part (not shown) of the rim 14b' is engaged and covered by part of the clip engaging portion 24c of the clip 24.)

The clip 24 may include a clip release portion 24d having an opening 24d' configured to allow the rim 14b' to pass thru when the clip 24 slides into the disengage position (see FIG. 3C2) for releasing the pump/motor assembly 14 from the toilet base 12, and also for positioning the pump inlet coupling portion 14b and rim 14b' for engagement. (In FIG. 3C2, the rim 14b' is not engaged by any part of the clip—release portion 24d of the clip 24.)

The pump/motor assembly 14 may include a pump outlet 14d (see FIG. 1) having a pump outlet coupling portion 14e (FIG. 3F) configured or formed thereon to provide the waste from the pump/motor assembly 14.

The apparatus 10 may also include a discharge fitting 30 having a quick release discharge fitting coupling mechanism 32 with a discharge fitting clip receiving portion 34 (FIG. 2D1) and a discharge fitting clip 36, e.g., consistent with that shown in FIGS. 2D1, 2D2. The discharge fitting clip 36 may be configured to slide within the discharge fitting clip receiving portion 34 from a discharge fitting disengage position (see FIG. 3C3) to a discharge fitting engage position (see FIG. 2C3, 3B3) to engage the pump outlet coupling portion 14e and couple the discharge fitting 30 and the pump/motor assembly 14 together. The discharge fitting clip 36 may also be configured to slide from the discharge fitting engage position (see FIG. 2C2, 3B3) to the discharge fitting disengage position (see FIG. 3C3) to disengage the pump outlet coupling portion 14e and decouple the discharge fitting 30 from the pump/motor assembly 14.

The discharge fitting clip receiving portion 34 may include a discharge fitting slot 34a (FIGS. 2D1, 2D2) configured or formed therein to receive the discharge fitting clip 36. The discharge fitting clip 36 may be configured to slide within the discharge fitting slot 34a.

The discharge fitting clip receiving portion 34 may include an opening 34b configured or formed therein. The pump outlet coupling portion 14e (see 3F) may include a pump outlet rim 14e' configured to pass through the opening 34b formed in the discharge fitting clip receiving portion 34 and into the discharge fitting 30. The discharge fitting clip 30 may be configured to slide within the discharge fitting clip receiving portion 34 from the discharge fitting disengage position (see FIG. 3C3) to the discharge fitting engage position (see FIG. 2C3, 3B3) to engage the pump outlet rim 14e' of the pump outlet 14d to couple together the pump/motor assembly 14 and the discharge fitting 30.

The quick release discharge fitting coupling mechanism 32 may include a discharge fitting spring 38 (see FIG. 3E1, 3E2) that is configured to expand when the discharge fitting clip 36 is pressed and slides from the discharge fitting disengage position (see FIG. 3C3) to the discharge fitting engage position (see FIG. 3B3) to push and hold the discharge fitting clip 36 in the discharge fitting engage position. The discharge fitting spring 38 may also be configured to compress when the discharge fitting clip 36 slides from the discharge fitting engage position to the discharge fitting disengage position to urge the discharge fitting spring 38 back towards the discharge fitting engage position. Similar to the clip 24, the spring 38 may be configured between a top portion 36a of the clip 36 and a top portion 40a of a discharge fitting housing 40, e.g., as shown in FIGS. 3E1, 3E2. Circled portion E1 shows the discharge fitting clip 36 having a detente 36b for engaging a corresponding detente 40b of the discharge fitting housing 40 for retaining the

9

discharge fitting clip 36 within the discharge fitting slot 34a. Circled portion E2 show the detente 40b separated from the corresponding detent 36b when the discharge fitting clip 36 is in the disengage position. In operation, the clip 36 and detente 36b are configured to slide in relation to the corresponding detent 40b and the discharge fitting housing 40.

The discharge fitting clip 36 may include a discharge fitting clip engaging portion 36c (FIG. 3B3) configured to engage the pump outlet rim 14e' when the discharge fitting clip 36 slides from the discharge fitting disengage position (see FIG. 3C3) to the discharge fitting engage position (see FIG. 3B3), and also configured to disengage the pump outlet rim 14e' when the discharge fitting clip 36 slides from the discharge fitting engage position to the discharge fitting disengage position.

The discharge fitting clip 36 may include a discharge fitting release portion 36d (FIG. 3C3) having an opening 36d' configured to allow the pump outlet coupling portion 14e to pass thru when the discharge fitting clip 36 slides into the discharge fitting disengage position (see FIG. 3C3) for releasing the discharge fitting 30 from the pump/motor assembly 14, and for also positioning the pump outlet coupling portion 14e for engagement.

Other Components/Parts

As one skilled in the art would appreciate, the drawing includes other components/parts that are not labeled or described to reduce clutter in the Figures, and do not form part of the underlying invention, e.g., including O-rings (FIG. 1) for sealing the pump inlet 14a in relation to the toilet base coupling portion 12c; nuts and bolts for coupling different parts of pump, motor and the pump/motor assembly together; etc.

Possible Applications

Possible applications may include marine electric toilets for vessel, or Recreational Vehicle (RV) electric toilets, etc.

The Scope of the Invention

The embodiments shown and described in detail herein are provided by way of example only; and the scope of the invention is not intended to be limited to the particular configurations, dimensionalities, and/or design details of these parts or elements included herein. In other words, one skilled in the art would appreciate that design changes to these embodiments may be made and such that the resulting embodiments would be different than the embodiments disclosed herein, but would still be within the overall spirit of the present invention.

It should be understood that, unless stated otherwise herein, any of the features, characteristics, alternatives or modifications described regarding a particular embodiment herein may also be applied, used, or incorporated with any other embodiment described herein.

Although the invention has been described and illustrated with respect to exemplary embodiments thereof, the foregoing and various other additions and omissions may be made therein and thereto without departing from the spirit and scope of the present invention.

What we claim is:

1. An electric toilet comprising:

a toilet base having a wall forming a chamber for receiving waste, the wall having a toilet base coupling portion;

10

a pump/motor assembly having a pump inlet with a longitudinal axis and configured to receive the waste pumped from the chamber, the pump inlet having a pump inlet coupling portion arranged inside the toilet base coupling portion when the pump/motor assembly and the toilet base are coupled together, the pump/motor assembly having a pump outlet configured to receive a discharge fitting and provide the waste from the pump/motor assembly;

a quick release coupling mechanism having a clip receiving portion and a clip configured to slide within the clip receiving portion from a disengage position to an engage position to engage the pump inlet coupling portion and couple the toilet base and the pump/motor assembly together, configured to slide from the engage position to the disengage position to disengage the pump inlet coupling portion and decouple the pump/motor assembly from the toilet base, the clip configured to engage the clip receiving portion and allow the pump outlet and discharge fitting to rotate between 0°-180° in relation to and about the longitudinal axis of the pump inlet to orient the discharge fitting in opposite directions as needed depending on an application.

2. The electric toilet according to claim 1, wherein the quick release coupling mechanism is mounted on the toilet base, including mounted on the wall of the toilet base or to the toilet base coupling portion of the toilet base.

3. The electric toilet according to claim 1, wherein the clip receiving portion has a slot configured or formed therein to receive the clip; and the clip is configured to slide within the slot of the clip receiving portion.

4. The electric toilet according to claim 1, wherein the clip receiving portion has an opening configured or formed therein;

the pump inlet coupling portion has a rim configured to pass through the opening formed in the clip receiving portion and into the toilet base coupling portion of the toilet base; and

the clip is configured to slide within the clip receiving portion from the disengage position to the engage position to engage the rim to couple together the toilet base and the pump/motor assembly.

5. The electric toilet according to claim 1, wherein the quick release coupling mechanism comprises a spring configured to expand when the clip slides from the disengage position to the engage position to push and hold the clip in the engage position, and also configured to compress when the clip slides from the engage position to the disengage position to urge the spring towards the engage position.

6. The electric toilet according to claim 4, wherein the clip comprises a clip engaging portion configured to engage the rim when the clip slides from the disengage position to the engage position, and also configured to disengage the rim when the clip slides from the engage position to the disengage position.

7. The electric toilet according to claim 6, wherein the clip comprises a clip release portion having an opening configured to allow the pump inlet coupling portion to pass thru when the clip slides into the disengage position for releasing the pump/motor assembly from the toilet base, and also for positioning the pump inlet coupling portion for engagement.

8. The electric toilet according to claim 1, wherein the pump outlet has a corresponding longitudinal axis and includes a pump outlet coupling portion; and

11

the discharge fitting includes a quick release discharge fitting coupling mechanism with a discharge fitting clip receiving portion and a discharge fitting clip, the discharge fitting clip configured to slide within the discharge fitting clip receiving portion from a discharge fitting disengage position to a discharge fitting engage position to engage the pump outlet coupling portion and couple the discharge fitting and the pump/motor assembly together, and also from the discharge fitting engage position to the discharge fitting disengage position to disengage the pump outlet coupling portion and decouple the discharge fitting from the pump/motor assembly, the discharge fitting clip configured to engage the discharge fitting clip receiving portion and allow the discharge fitting to rotate 360° in relation to and about the corresponding longitudinal axis of the pump outlet to swivel the discharge fitting as needed depending on the application.

9. The electric toilet according to claim 8, wherein the discharge fitting clip receiving portion has a discharge fitting slot configured or formed therein to receive the discharge fitting clip; and the discharge fitting clip is configured to slide within the discharge fitting slot.

10. The electric toilet according to claim 8, wherein the discharge fitting clip receiving portion has an opening configured or formed therein; the pump outlet coupling portion includes a pump outlet rim configured to pass through the opening formed in the discharge fitting clip receiving portion and into the discharge fitting; and the discharge fitting clip is configured to slide within the discharge fitting clip receiving portion from the discharge fitting disengage position to the discharge fitting engage position to engage the pump outlet rim to couple together the pump/motor assembly and the discharge fitting.

11. The electric toilet according to claim 8, wherein the quick release discharge fitting coupling mechanism comprises a discharge fitting spring that is configured to expand when the discharge fitting clip slides from the discharge fitting disengage position to the discharge fitting engage

12

position to push and hold the discharge fitting clip in the discharge fitting engage position, and also configured to compress when the discharge fitting clip slides from the discharge fitting engage position to the discharge fitting disengage position to urge the discharge fitting spring towards the discharge fitting engage position.

12. The electric toilet according to claim 10, wherein the discharge fitting clip comprises a discharge fitting clip engaging portion configured to engage the pump outlet rim when the discharge fitting clip slides from the discharge fitting disengage position to the discharge fitting engage position, and also configured to disengage the pump outlet rim when the discharge fitting clip slides from the discharge fitting engage position to the discharge fitting disengage position.

13. The electric toilet according to claim 8, wherein the discharge fitting clip comprises a discharge fitting release portion having an opening configured to allow the pump outlet coupling portion to pass thru when the discharge fitting clip slides into the discharge fitting disengage position for releasing the discharge fitting from the pump/motor assembly, and for also positioning the pump outlet coupling portion for engagement.

14. The electric toilet according to claim 7, wherein the electric toilet is a marine electric toilet or an RV electric toilet.

15. The electric toilet according to claim 1, wherein the electric toilet comprises one or more O-rings configured to seal the pump inlet coupling portion of the pump inlet in relation to the toilet base coupling portion of the toilet base.

16. The electric toilet according to claim 1, wherein the pump outlet has a corresponding longitudinal axis that is perpendicular to the longitudinal axis of the pump inlet.

17. The electric toilet according to claim 8, wherein the electric toilet comprises one or more O-rings configured to seal the pump outlet coupling portion and the quick release discharge fitting coupling mechanism.

18. The electric toilet according to claim 8, wherein the corresponding longitudinal axis of the pump outlet is perpendicular to the longitudinal axis of the pump inlet.

* * * * *