



US 20250277967A1

(19) **United States**

(12) **Patent Application Publication**
Gilmer

(10) **Pub. No.: US 2025/0277967 A1**

(43) **Pub. Date: Sep. 4, 2025**

(54) **DUAL VIEW FAR FIELD MAGNIFYING
BIFOCAL**

Publication Classification

(71) Applicant: **Robert L. Gilmer**, Reno, NV (US)

(72) Inventor: **Robert L. Gilmer**, Reno, NV (US)

(51) **Int. Cl.**
G02B 23/16 (2006.01)
F41G 1/38 (2006.01)
F41G 1/40 (2006.01)
(52) **U.S. Cl.**
CPC **G02B 23/16** (2013.01); **F41G 1/38**
(2013.01); **F41G 1/40** (2013.01)

(21) Appl. No.: 19/061,866


(22) Filed: **Feb. 24, 2025**

Related U.S. Application Data


(60) Provisional application No. 63/560,519, filed on Mar. 1, 2024.

(57) **ABSTRACT**


A magnifying apparatus is provided. The magnifying apparatus is comprised of a lens including: a first region providing a first level of magnification, and a second region providing a second level of magnification that is different from the first level of magnification provided by the first region. The magnifying apparatus further includes a housing that at least partially encases the lens and that is configured for attachment to a user device.

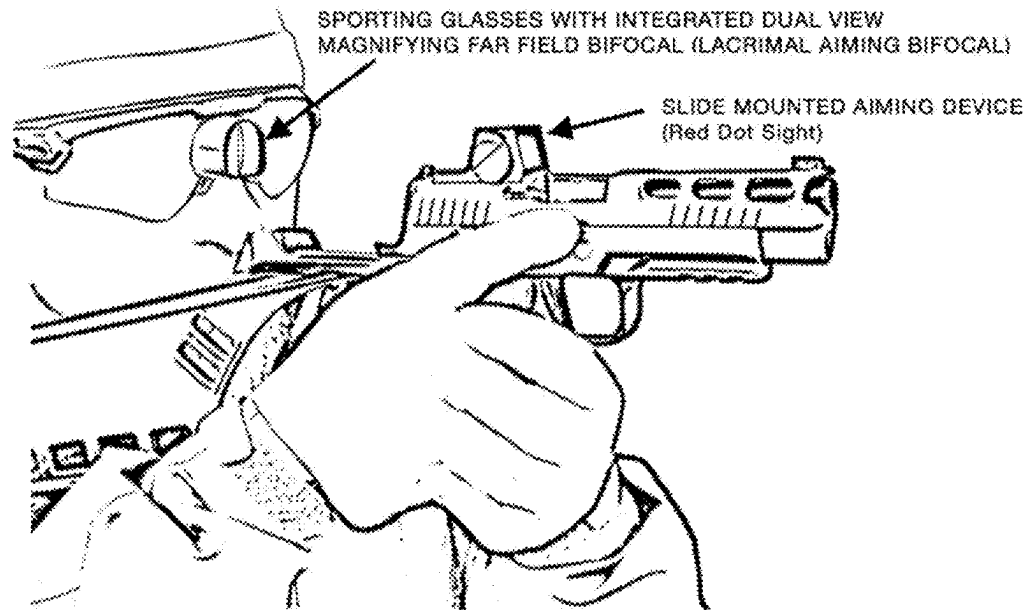

INTEGRATED DUAL VIEW
MAGNIFYING FAR FIELD BIFOCAL



LACRIMAL AIMING

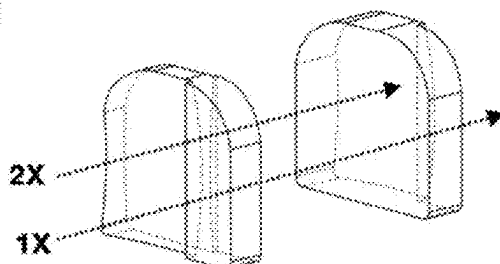

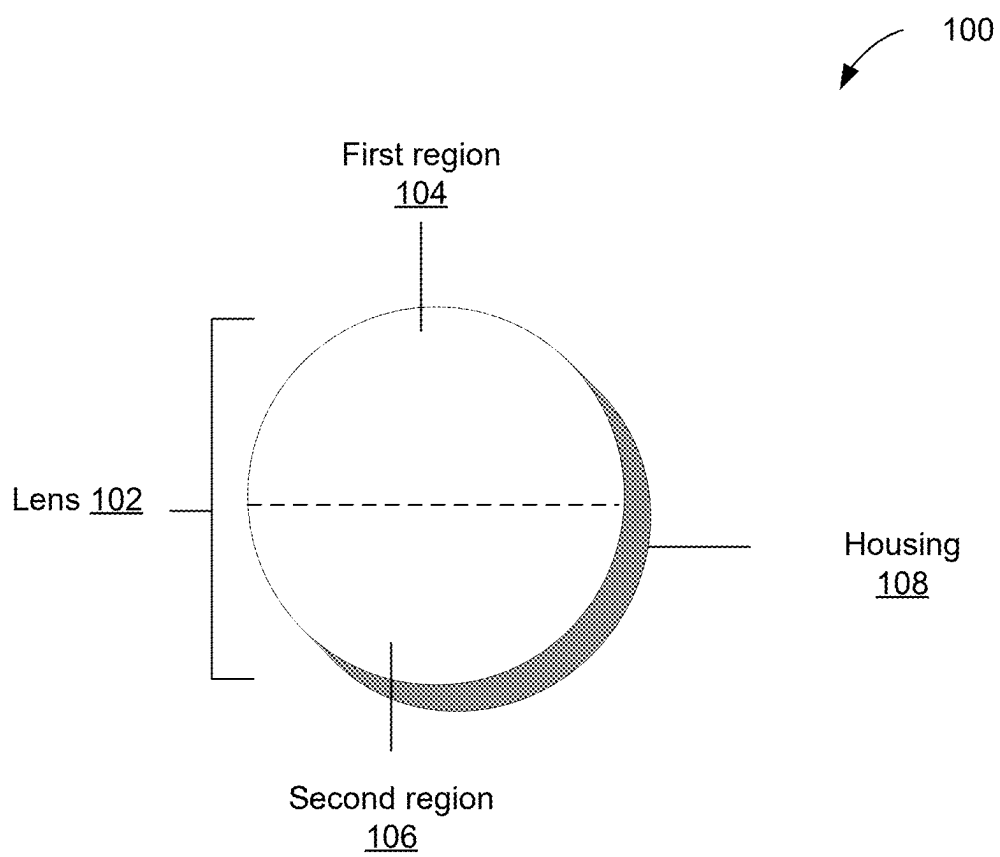


FIGURE 1A

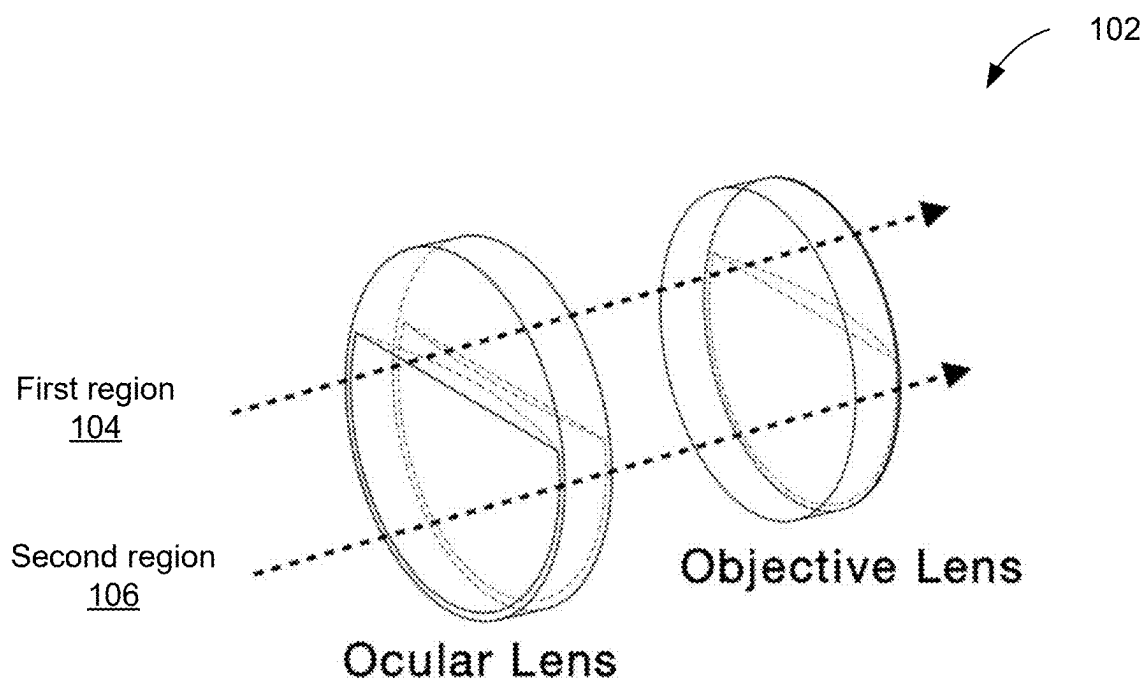


FIGURE 1B

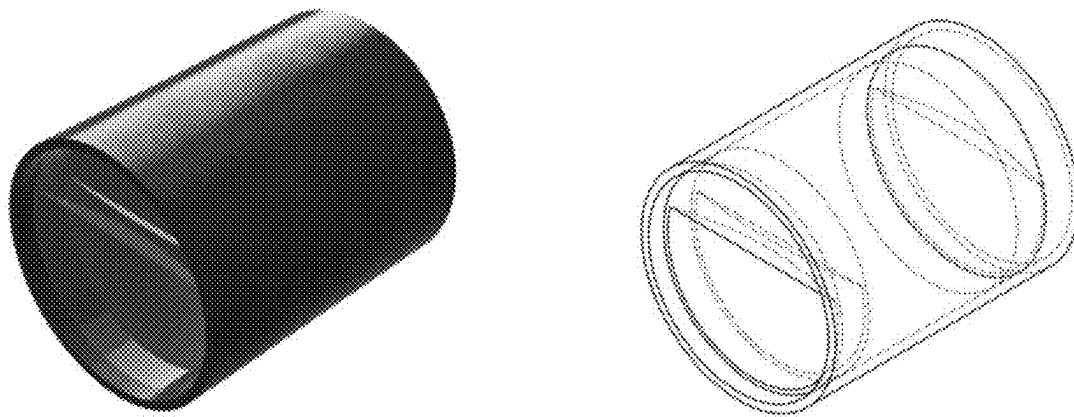


FIGURE 2A

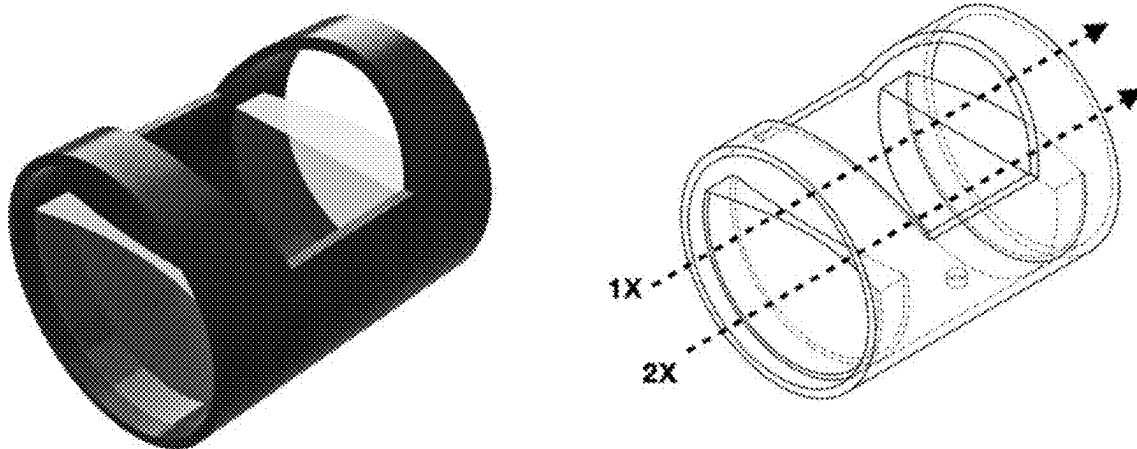


FIGURE 2B

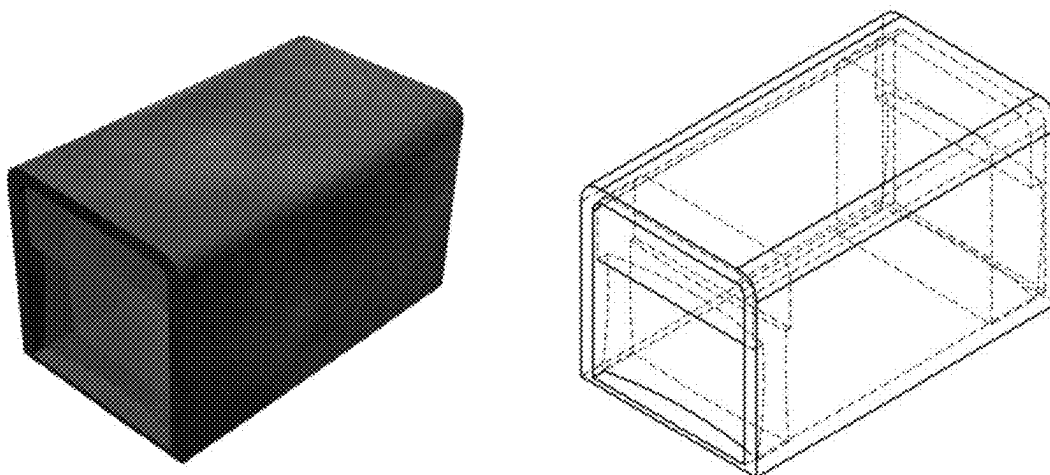


FIGURE 2C

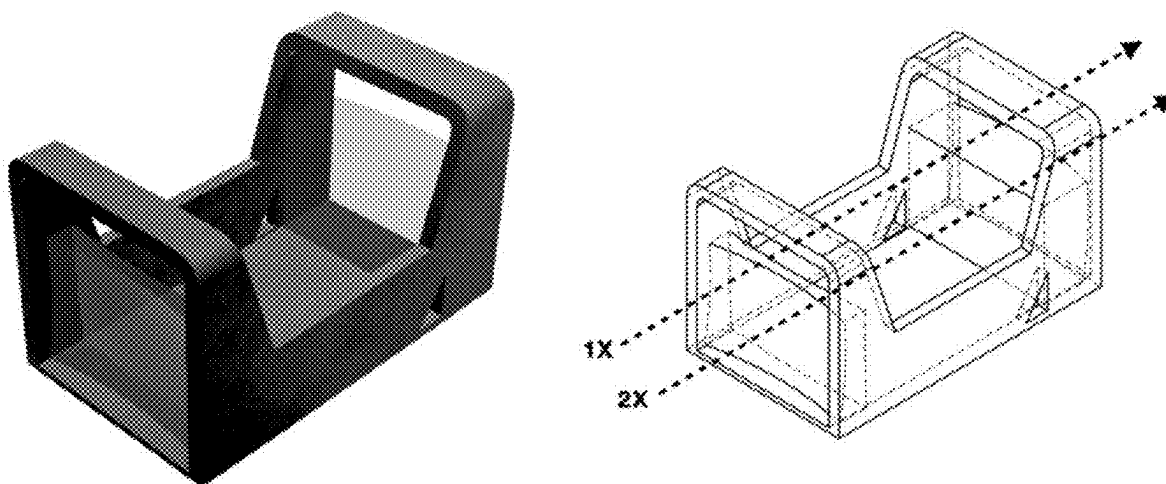


FIGURE 2D

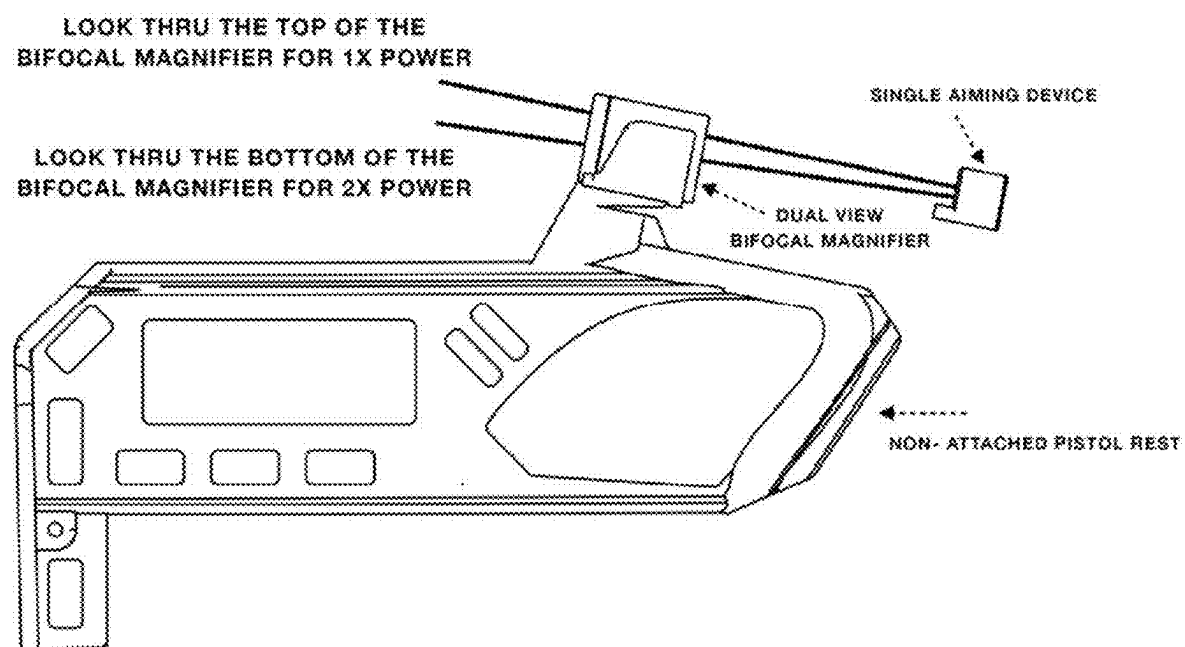
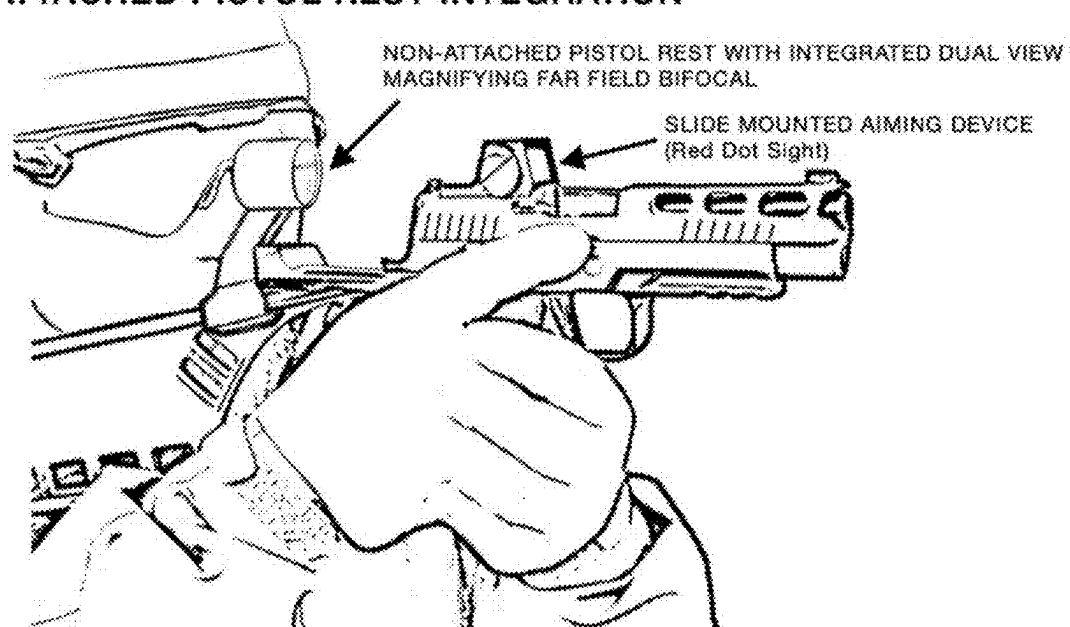


FIGURE 3A

NON-ATTACHED PISTOL REST INTEGRATION**FIGURE 3B**

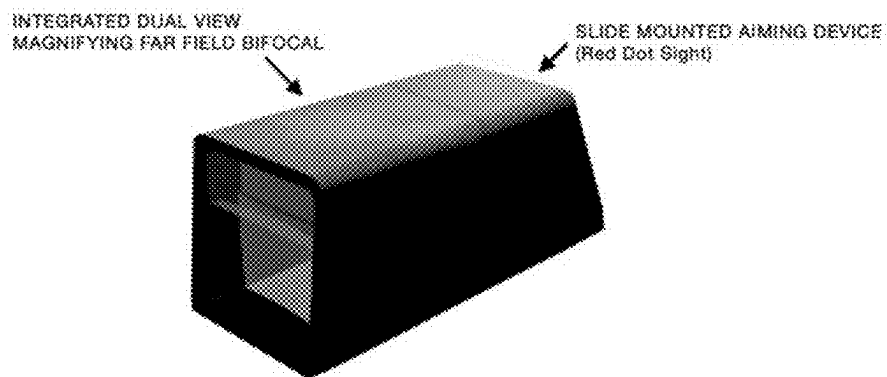
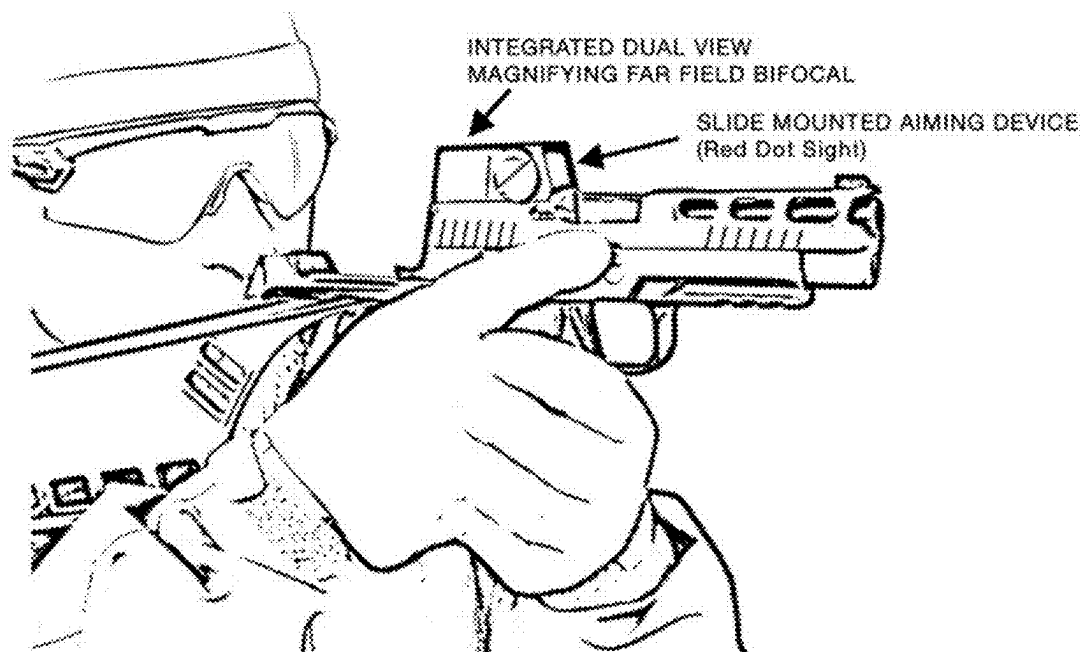


FIGURE 3C

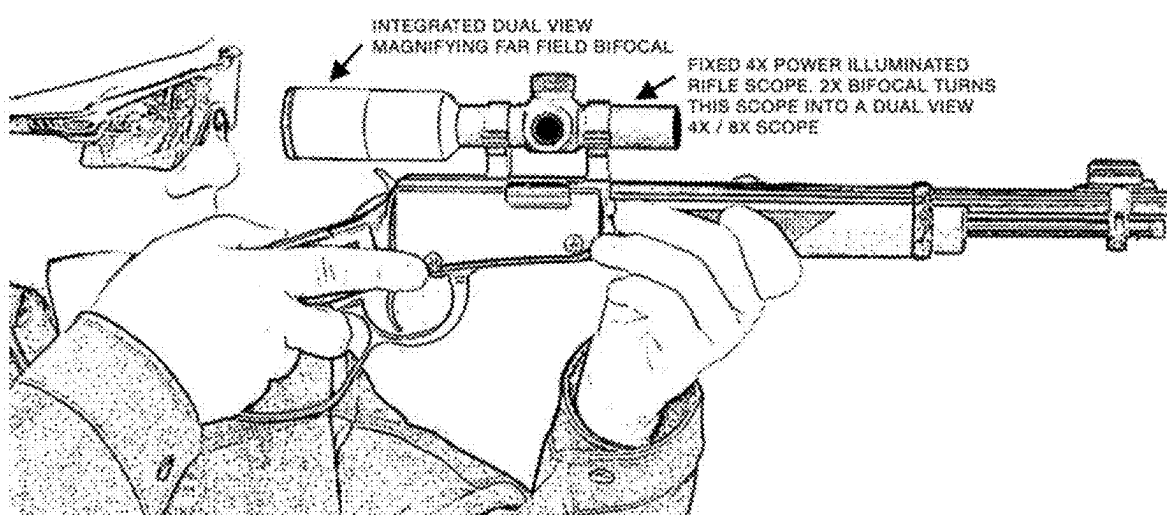


FIGURE 3D

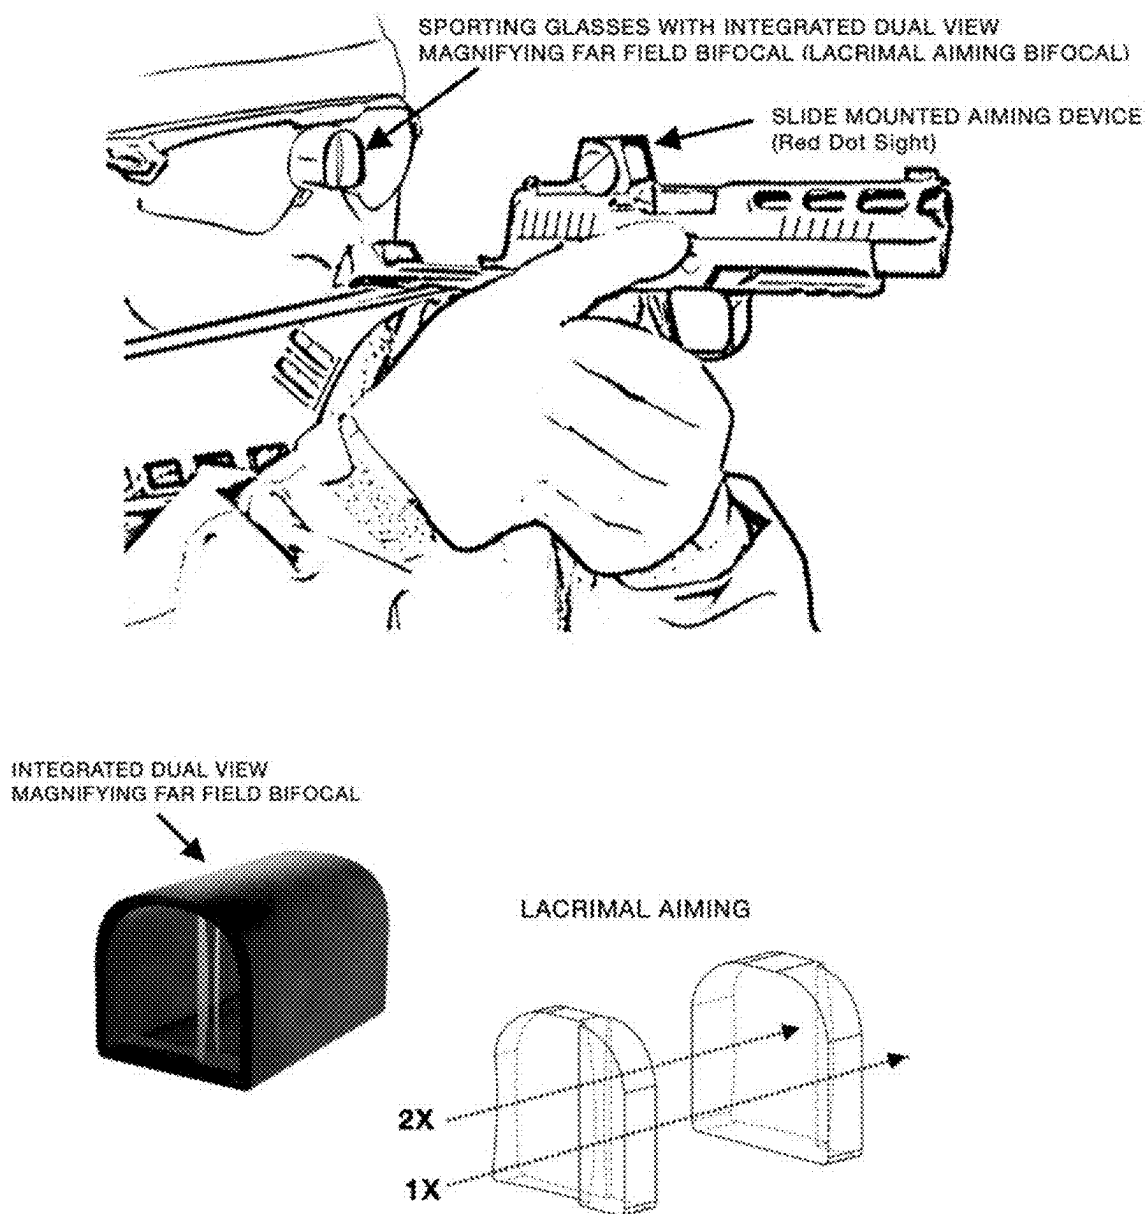


FIGURE 3E

BOTTOM MAGNIFICATION

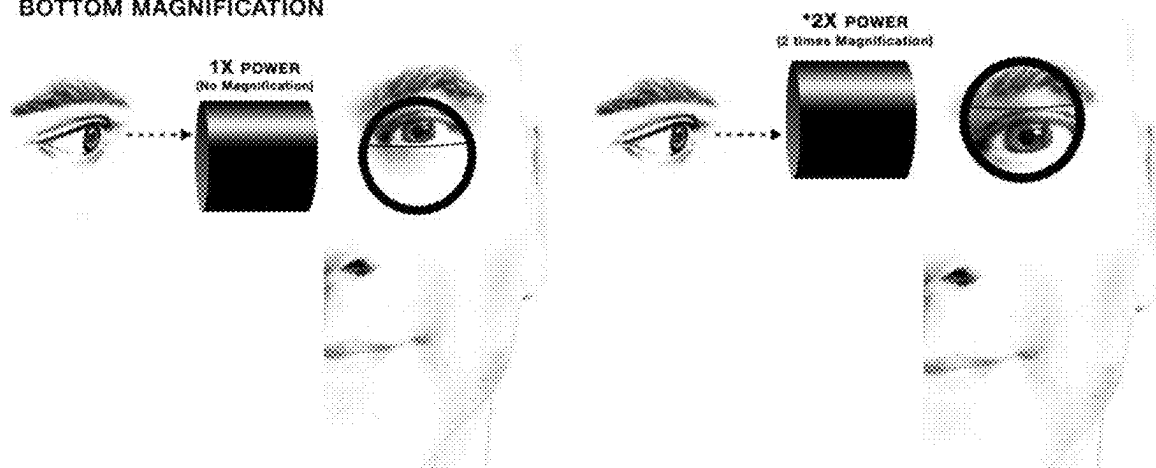


FIGURE 4A

LACRIMAL AIMING

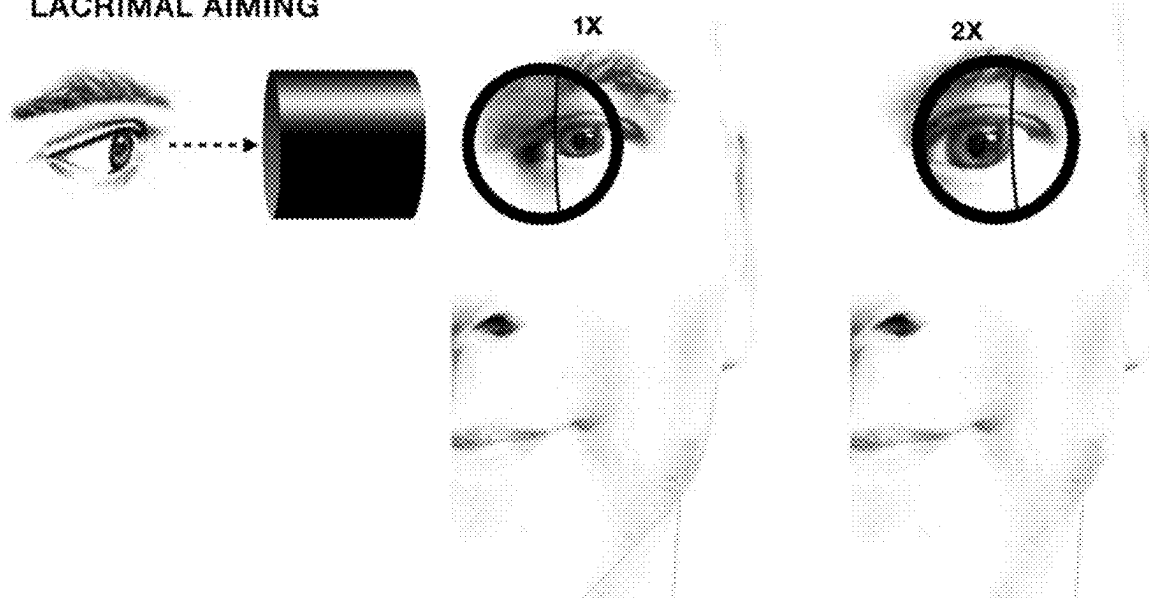
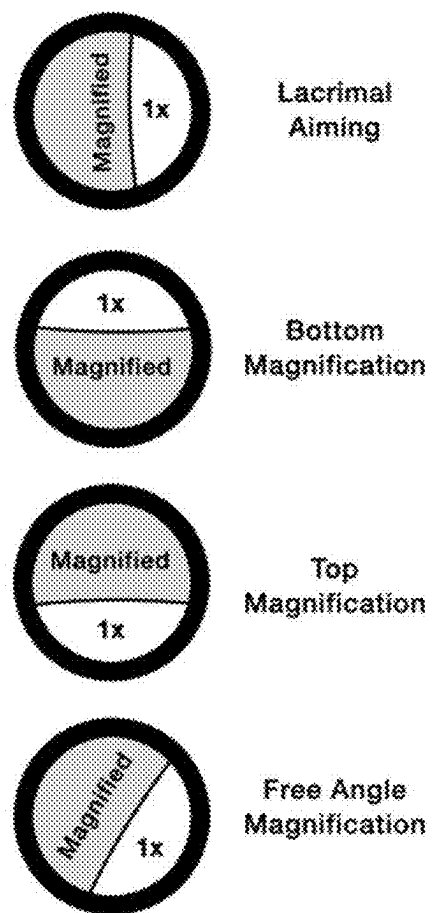


FIGURE 4B

**FIGURE 5**

DUAL VIEW FAR FIELD MAGNIFYING BIFOCAL

CLAIM FOR PRIORITY

[0001] This application claims the benefit of U.S. Provisional Application No. 63/560,519, filed Mar. 1, 2024, the entire contents of which are incorporated herein by reference.

FIELD OF THE INVENTION

[0002] The present invention relates to magnifying apparatuses.

BACKGROUND

[0003] The operation of firearms can be very dangerous. Every round fired from a firearm has the potential of causing death or serious injury. Identifying the threat and proper shot placement are both critical when trying to stop a violent life threatening attack. Misidentification or poor shot placement can cause a failure to protect life and the possible death or injury of innocent life.

[0004] Currently, some aiming devices are equipped with magnifiers. However, these magnifiers are limited to providing only a single magnified view.

[0005] There is thus a need for addressing these and/or other issues associated with the prior art. For example, there is a need for a dual view far field magnifying bifocal that can be incorporated into handgun support systems, observation systems, and aiming devices to enable more accurate threat identification and proper shot placement.

SUMMARY

[0006] A magnifying apparatus is provided. The magnifying apparatus is comprised of a lens including: a first region providing a first level of magnification, and a second region providing a second level of magnification that is different from the first level of magnification provided by the first region. The magnifying apparatus further includes a housing that at least partially encases the lens and that is configured for attachment to a user device.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] FIG. 1A illustrates a magnifying apparatus, in accordance with an embodiment.

[0008] FIG. 1B illustrates a lens of the magnifying apparatus of FIG. 1A, in accordance with an embodiment.

[0009] FIG. 2A illustrates a sealed cylindrical magnifying apparatus, in accordance with an embodiment.

[0010] FIG. 2B illustrates an open cylindrical magnifying apparatus, in accordance with an embodiment.

[0011] FIG. 2C illustrates a sealed rectangular magnifying apparatus, in accordance with an embodiment.

[0012] FIG. 2D illustrates an open rectangular magnifying apparatus, in accordance with an embodiment.

[0013] FIG. 3A illustrates a magnifying apparatus coupled to a handgun rest, in accordance with an embodiment.

[0014] FIG. 3B illustrates use of a magnifying apparatus coupled to a handgun rest, in accordance with an embodiment.

[0015] FIG. 3C illustrates a magnifying apparatus and coupled red dot sight coupled to a handgun, in accordance with an embodiment.

[0016] FIG. 3D illustrates a magnifying apparatus coupled to a rifle scope, in accordance with an embodiment.

[0017] FIG. 3E illustrates a magnifying apparatus coupled to a sporting glasses frame, in accordance with an embodiment.

[0018] FIGS. 4A-4B illustrate different orientations of a magnifying apparatus when viewed through by a user, in accordance with an embodiment.

[0019] FIG. 5 illustrates various orientations of a magnifying apparatus, in accordance with an embodiment.

DETAILED DESCRIPTION

[0020] FIG. 1A illustrates a magnifying apparatus 100, in accordance with an embodiment. The magnifying apparatus 100 may be formed with, at the very least, the features described herein with reference to FIG. 1A. Of course, additional features may also be included, such as those described below with reference to the subsequent figures.

[0021] The magnifying apparatus 100 is a physical apparatus that includes a lens 102. The lens 102 is comprised of a transparent material allowing a user to view therethrough. With respect to the present embodiment, the lens 102 includes a first region 104 providing a first level of magnification and a second region 106 providing a second level of magnification that is different from the first level of magnification provided by the first region.

[0022] In an embodiment, the lens 102 may be circular. In an embodiment, the lens 102 may be rectangular. Of course, the lens 102 may take any desired shape.

[0023] In an embodiment, the lens 102 may be comprised of an ocular lens portion and an objective lens portion. In an embodiment, the ocular lens portion may align with the objective lens portion to enable light to pass therethrough, or in other words to allow the user to view through both ocular and objective lens portions. FIG. 1B illustrates an exemplary configuration of the ocular and objective lens portions of the lens 102.

[0024] As mentioned, the lens 102 includes first 104 and second 106 regions providing different first and second levels of magnification, respectively. These levels of magnification may be 1×, 2×, 3×, 6×, etc. In an embodiment, the first 104 and second 106 regions may cover a same size area of the lens. In another embodiment, the first 104 and second 106 regions may cover different size areas of the lens, for example where the region providing a smaller level of magnification covers a smaller or larger size area than the region provider a greater level of magnification.

[0025] In an embodiment, the lens 102 may be a far field lens. For example, the lens 102 may be configured to provide focus on an object at a range between 5 feet and 5000 feet from the lens 102.

[0026] As shown, the magnifying apparatus 100 further includes a housing 108 that at least partially encases the lens 102 and that is configured for attachment to a user device. In an embodiment, the housing 108 may be of a similar or the same shape as the lens 102.

[0027] In an embodiment, the housing 108 may be sealed. In an embodiment, the housing 108 may be open, or not sealed. In an embodiment, a barrier may also be at least partially encased by the housing 108. The barrier (not shown) may be configured to reduce glare (from a light source) on the lens 102.

[0028] As mentioned, the housing 108 is configured for attachment to a user device. The user device may be a

sporting glasses frame, a handgun rest, a handgun, a rifle scope, etc. In this way, a user of the user device may view a target through the lens **102** of the magnifying apparatus **100**.

[0029] In one implementation, a user device may be comprised of the magnifying apparatus **100**, as described above, and a rigid structure coupled to the housing **108** of the lens **102** for allowing a user of the user device to view through the lens **102**. For example, the rigid structure may be a sporting glasses frame, a handgun rest that supports at least a portion of a grip of a handgun, a handgun, a rifle scope, etc. In embodiments, the magnifying apparatus **100** may be integrated with, or coupled to, an aiming device which may be a mechanical sight (iron sight), reflex sight (red dot sight), prism sight, fiber optic sight, holographic sight, pistol scope, rifle scope, thermal sight, night vision sight, etc.

[0030] In an embodiment, the housing **108** may be detachably coupled to the rigid structure. An attachment mechanism may be coupled to the housing **108** or to the rigid structure of the user device for allowing the magnifying apparatus **100** to be attached and detached from the rigid structure as desired.

[0031] In an embodiment, the housing **108** may be rotatably coupled to the rigid structure. This may allow the user to rotate the magnifying apparatus **100** and thus the lens **102** thereof. As a result, the user may configure the placement of the first **104** and second **106** regions of the lens with respect to a viewing angle of the user through the lens **102**. FIGS. **4A-B** and **5** described below illustrates the lens **102** at different orientations.

[0032] In another embodiment (not shown), a magnifying apparatus may be provided which is comprised of a lens that provides a first level of magnification that is greater than 1× magnification, and which is comprised of a housing that is configured for attachment to a user device, where the housing at least partially encases the lens and provides an open throughview. The user can view through the open throughview for viewing without magnification and can view through the lens for viewing with magnification. This embodiment may be similarly integrated into the user device as described herein.

[0033] As stated in the background above, the operation of firearms can be very dangerous. Misidentification or poor shot placement can cause a failure to protect life and the possible death or injury of innocent life. Current magnifiers for aiming devices give a single magnified view of the aiming device. The present embodiment of FIG. **1A** however provides a dual view far field magnifying bifocal which enables a simultaneous dual view (magnification) of a single aiming device.

[0034] For example, the dual view far field magnifying bifocal may enable a first responder to scan the area with a 1× reflex sight to find the threat. Once the target is acquired, the first responder simply changes their viewpoint through the lens **102** to view a 2× magnification of the target to verify the threat and take a precise shot. Both 1× and 2× views of a single reflex sight are now possible without manually adjusting the magnifying apparatus **100**. A 50 yard shot can be viewed as a 25 yard shot in a fraction of a second by simply gazing through the portion of the lens **102** with a higher level of magnification. During life threatening situations, rapid target acquisition and accurate shot placement are often the difference between who lives and who is lost.

[0035] Having a steady platform (rigid structure) for the dual view far field magnifying bifocal may be key to the operation of the user device. A nonattached handgun support with an integrated dual view far field magnifying bifocal may be one possible implementation. This combined system dramatically enhances the first responder's ability to be safe and accurate without changing the inherent operation of the handgun.

[0036] As mentioned, the dual view bifocal may be far field focusing, such that magnified objects at distance will be in focus. Further, the magnification can be made with any magnification power.

[0037] More illustrative information will now be set forth regarding various optional architectures and uses in which the foregoing method may or may not be implemented, per the desires of the user. It should be strongly noted that the following information is set forth for illustrative purposes and should not be construed as limiting in any manner. Any of the following features may be optionally incorporated with or without the exclusion of other features described.

[0038] FIG. **2A** illustrates a sealed cylindrical magnifying apparatus, in accordance with an embodiment. The magnifying apparatus may be that described above with respect to FIG. **1A**. As shown, the lens is circular and is housed by a sealed cylindrical housing. In an embodiment, the cylindrical magnifying apparatus may be sealed with inert gas. A lens barrier may also be included to reduce glare and aid with aiming.

[0039] FIG. **2B** illustrates an open cylindrical magnifying apparatus, in accordance with an embodiment. The magnifying apparatus may be that described above with respect to FIG. **1A**. As shown, the lens is circular and is housed by an open cylindrical housing. A lens barrier may also be included to reduce glare and aid with aiming.

[0040] FIG. **2C** illustrates a sealed rectangular magnifying apparatus, in accordance with an embodiment. The magnifying apparatus may be that described above with respect to FIG. **1A**. As shown, the lens is rectangular and is housed by a sealed block housing. In an embodiment, the rectangular magnifying apparatus may be sealed with inert gas. A lens barrier may also be included to reduce glare and aid with aiming.

[0041] FIG. **2D** illustrates an open rectangular magnifying apparatus, in accordance with an embodiment. The magnifying apparatus may be that described above with respect to FIG. **1A**. As shown, the lens is rectangular and is housed by an open block housing. A lens barrier may also be included to reduce glare and aid with aiming.

[0042] FIG. **3A** illustrates a magnifying apparatus coupled to a handgun rest, in accordance with an embodiment. As shown, the magnifying apparatus is coupled to a rigid structure of the handgun rest. FIG. **3B** illustrates use of a magnifying apparatus coupled to a handgun rest, in accordance with an embodiment.

[0043] FIG. **3C** illustrates a magnifying apparatus and coupled red dot sight coupled to a handgun, in accordance with an embodiment. FIG. **3D** illustrates a magnifying apparatus coupled to a rifle scope, in accordance with an embodiment. FIG. **3E** illustrates a magnifying apparatus coupled to a sporting glasses frame, in accordance with an embodiment.

[0044] FIGS. **4A-4B** illustrate different orientations of a magnifying apparatus when viewed through by a user, in

accordance with an embodiment. FIG. 5 illustrates various orientations of a magnifying apparatus, in accordance with an embodiment.

[0045] While various embodiments have been described above, it should be understood that they have been presented by way of example only, and not limitation. Thus, the breadth and scope of a preferred embodiment should not be limited by any of the above-described exemplary embodiments, but should be defined only in accordance with the following claims and their equivalents.

What is claimed is:

1. A magnifying apparatus, comprising:
a lens including:
a first region providing a first level of magnification, and
a second region providing a second level of magnification that is different from the first level of magnification provided by the first region; and
a housing that at least partially encases the lens and that is configured for attachment to a user device.
2. The magnifying apparatus of claim 1, wherein the lens is circular.
3. The magnifying apparatus of claim 1, wherein the lens is rectangular.
4. The magnifying apparatus of claim 1, wherein the lens is comprised of an ocular lens portion and an objective lens portion.
5. The magnifying apparatus of claim 4, wherein the ocular lens portion aligns with the objective lens portion to enable light to pass therethrough.
6. The magnifying apparatus of claim 1, wherein the first region and the second region cover a same size area of the lens.
7. The magnifying apparatus of claim 1, wherein the first region and the second region cover different size areas of the lens.
8. The magnifying apparatus of claim 1, wherein the lens is configured to provide focus on an object at a range between 5 feet and 5000 feet from the lens.
9. The magnifying apparatus of claim 1, wherein the housing is sealed.

10. The magnifying apparatus of claim 1, wherein the housing is open.

11. The magnifying apparatus of claim 1, further comprising:

a barrier at least partially encased by the housing that is configured to reduce glare on the lens.

12. A magnifying apparatus, comprising:

a lens providing a first level of magnification that is greater than 1× magnification; and

a housing that is configured for attachment to a user device, wherein the housing at least partially encases the lens and provides an open throughview.

13. A user device, comprising:

a magnifying apparatus comprised of:

a lens including:

a first region providing a first level of magnification, and

a second region providing a second level of magnification that is different from the first level of magnification provided by the first region, and

a housing that at least partially encases the lens; and
a rigid structure coupled to the housing of the lens for allowing a user of the user device to view through the lens.

14. The user device of claim 13, wherein the rigid structure is a sporting glasses frame.

15. The user device of claim 13, wherein the rigid structure is a handgun rest that supports at least a portion of a grip of a handgun.

16. The user device of claim 13, wherein the rigid structure is a handgun.

17. The user device of claim 13, wherein the rigid structure is a rifle scope.

18. The user device of claim 13, wherein the housing is detachably coupled to the rigid structure.

19. The user device of claim 13, wherein the housing is rotatably coupled to the rigid structure.

20. The user device of claim 13, further comprising:
a red dot sight coupled to the magnifying apparatus.

* * * * *