



US012396572B2

(12) **United States Patent**
Fan

(10) **Patent No.:** **US 12,396,572 B2**
(45) **Date of Patent:** ***Aug. 26, 2025**

(54) **BABY CARRYING HARNESS**

(71) Applicant: **WONDERLAND SWITZERLAND AG**, Steinhausen (CH)

(72) Inventor: **Meifeng Fan**, Steinhausen (CH)

(73) Assignee: **WONDERLAND SWITZERLAND AG**, Steinhausen (CH)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **18/646,400**

(22) Filed: **Apr. 25, 2024**

(65) **Prior Publication Data**

US 2024/0292962 A1 Sep. 5, 2024

Related U.S. Application Data

(63) Continuation of application No. 17/582,938, filed on Jan. 24, 2022, now Pat. No. 11,992,133.

(30) **Foreign Application Priority Data**

Jan. 26, 2021 (CN) 202110107661.4

(51) **Int. Cl.**
A47D 13/02 (2006.01)

(52) **U.S. Cl.**
CPC **A47D 13/025** (2013.01)

(58) **Field of Classification Search**
CPC A47D 13/02; A47D 13/025; A44B 11/02
USPC 224/60; D3/318
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,739,961 A	6/1973	Soukeras
D266,800 S	11/1982	Kula et al.
4,434,920 A	3/1984	Moore
4,579,264 A	4/1986	Napolitano
4,750,652 A	6/1988	Grant
5,211,321 A	5/1993	Rodriguez
5,947,552 A	9/1999	Wilkins et al.
6,152,342 A	11/2000	Suk

(Continued)

FOREIGN PATENT DOCUMENTS

CN	201691492 U	1/2011
CN	203041512 U	7/2013

(Continued)

OTHER PUBLICATIONS

Chinese Search Report issued from corresponding Chinese Application No. 202110107661.4, mailed Sep. 30, 2021, pp. 1-11.

(Continued)


Primary Examiner — Justin M Larson

(74) *Attorney, Agent, or Firm* — HAUPTMAN HAM, LLP

(57) **ABSTRACT**

A baby carrying harness includes a back carrying assembly being able to be worn on a user and a support sheet being connected to the back carrying assembly for carrying a baby. The back carrying assembly comprises a waist member and two shoulder strap members. The waist member is connected to a lower part of the support sheet. The back carrying assembly further includes a transition buckle connected to the waist member. A rear end of each of the shoulder strap members is configured to change direction by sliding through the transition buckle and then connecting to a middle of the support sheet.

19 Claims, 10 Drawing Sheets

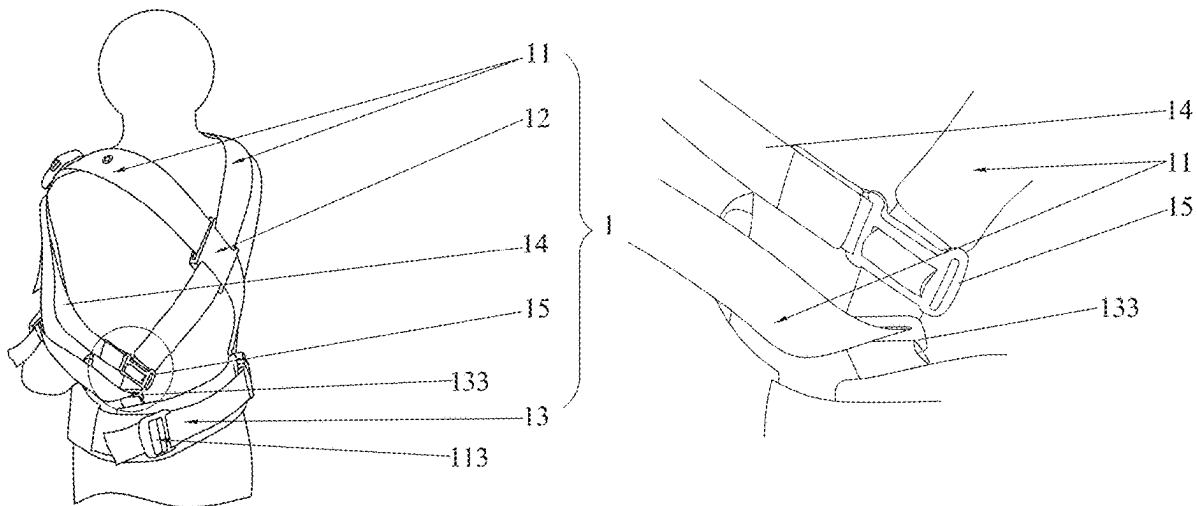

(56)

References Cited**U.S. PATENT DOCUMENTS**

D455,546	S	4/2002	Norman
6,481,606	B2	11/2002	Pickett
6,530,129	B1	3/2003	Cheng
D611,699	S	3/2010	Lundh
7,766,199	B1	8/2010	Caperon
8,418,897	B1	4/2013	Young
8,579,168	B2	11/2013	Zack et al.
9,357,852	B2	6/2016	Salazar et al.
D810,443	S	2/2018	Burgess et al.
10,245,486	B2	4/2019	Burgess et al.
10,449,429	B2	10/2019	Bruce et al.
D876,824	S	3/2020	Young
10,610,002	B2	4/2020	Pacha et al.
11,395,536	B2	7/2022	Pacha et al.
11,559,728	B2	1/2023	Martell
D984,118	S	4/2023	Fan
11,992,133	B2 *	5/2024	Fan A47D 13/025
2005/0258202	A1	11/2005	Stevens et al.
2008/0314940	A1	12/2008	Cohen Raz et al.
2009/0026235	A1	1/2009	Gray
2011/0062195	A1	3/2011	Jones et al.
2011/0203531	A1	8/2011	Spinelli
2012/0318833	A1	12/2012	Zack et al.
2014/0263491	A1	9/2014	Telford et al.
2016/0120334	A1	5/2016	Pond et al.
2016/0227940	A1	8/2016	Wikner et al.
2020/0297129	A1	9/2020	Schachtner
2023/0106051	A1	4/2023	Martell

FOREIGN PATENT DOCUMENTS

CN	104188423	A	12/2014
CN	204293323	U	4/2015
CN	108135370	A	6/2018
CN	109757929	A	5/2019

CN	109892909	A	6/2019
CN	110384365	A	10/2019
CN	211023339	U	7/2020
CN	211408344	U	9/2020
CN	111904213	A	11/2020
CN	111904214	A	11/2020
DE	202011104489	U1	11/2012
DE	102012111052	A1	5/2014
EP	3216372	A1	9/2017
JP	2010524605	A	7/2010
JP	2011167494	A	9/2011
JP	2013118900	A	6/2013
JP	2013146399	A	8/2013
JP	2019076629	A	5/2019
KR	20160002472	U	7/2016
TW	M320338	U	10/2007
TW	M501788	U	6/2015
WO	2019009744	A2	1/2019

OTHER PUBLICATIONS

Taiwanese First Office Action issued in corresponding Taiwanese Application No. 111102940, mailed Feb. 16, 2023, pp. 1-10.

Japanese Notice of Reasons for Refusal issued in corresponding Japanese Application No. 2022-008804, mailed Feb. 21, 2023, pp. 1-9.

Japanese Office Action issued from corresponding Japanese Application No. 2022-008804, mailed Aug. 8, 2023, pp. 1-10.

First Office Action in Corresponding Chinese Application No. 202110107661.4, dated Oct. 14, 2024; 23 pgs.

First Office Action in Corresponding Taiwan Application No. 113115128, dated Oct. 22, 2024; 7 pgs.

Notice of Allowance in Corresponding Korean Application No. 10-2022-0010616, dated Dec. 19, 2024; 5 pgs.

Second Office Action issued in Chinese Application No. 202110107661.4; mailed May 6, 2025; 24 pages.

* cited by examiner

100

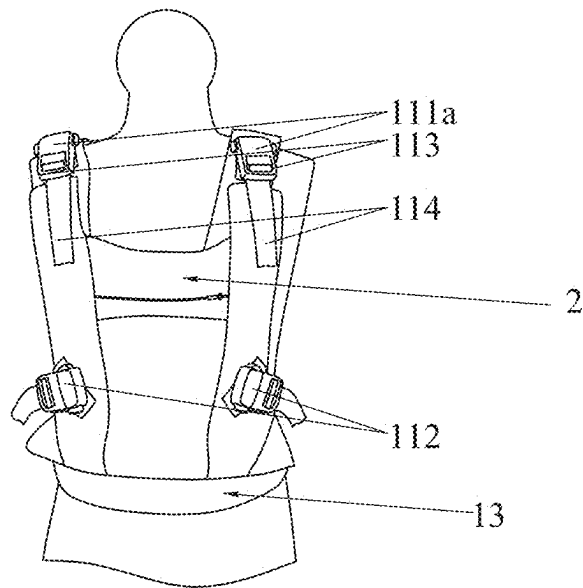


FIG.1

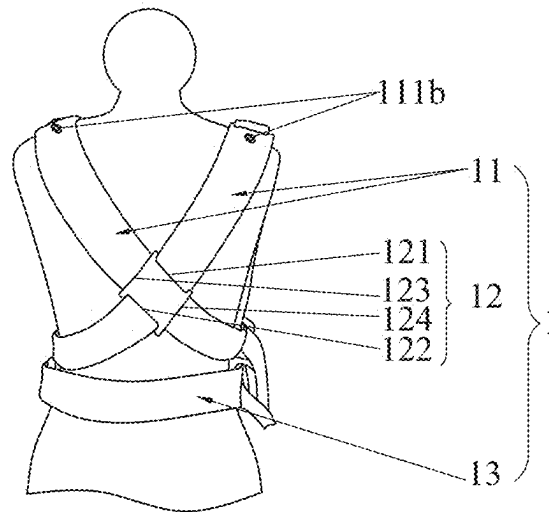


FIG.2

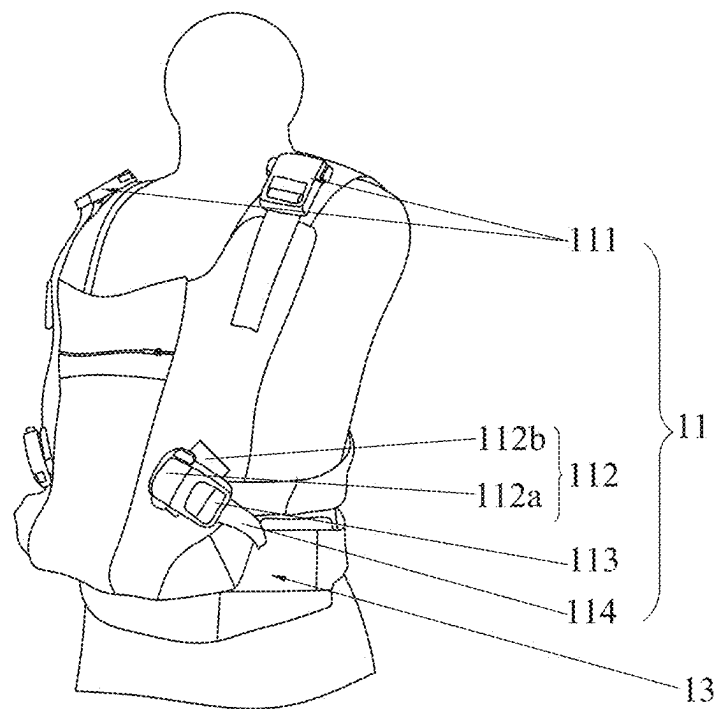


FIG.3

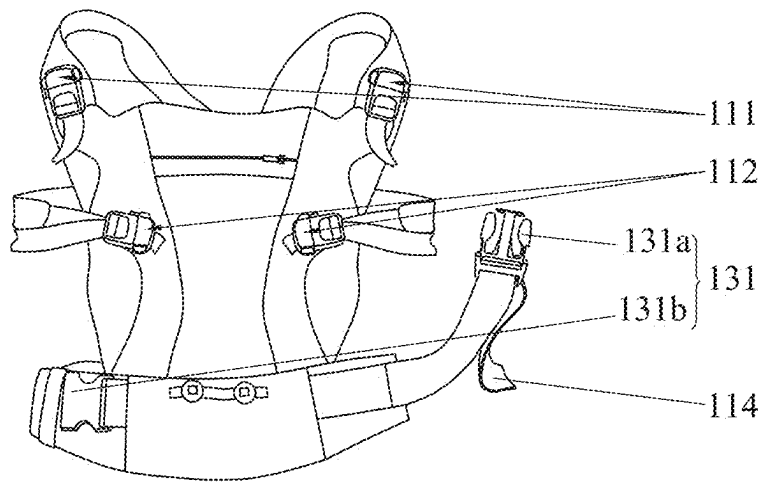


FIG.4

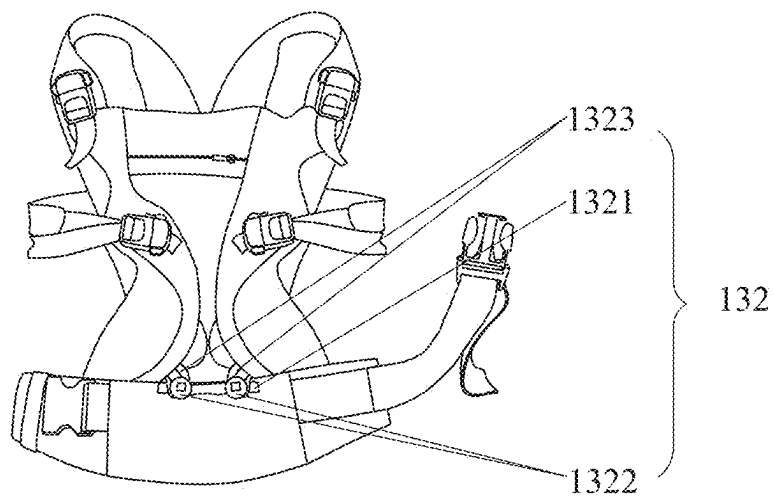


FIG.5

100

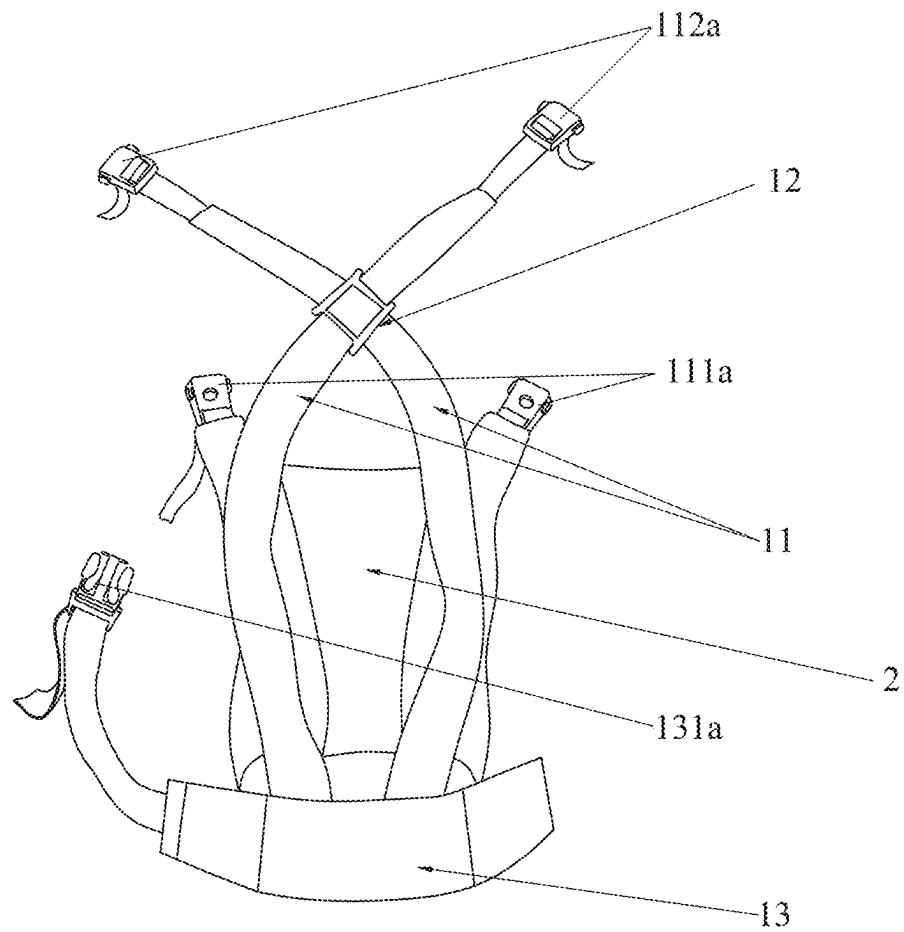


FIG.6

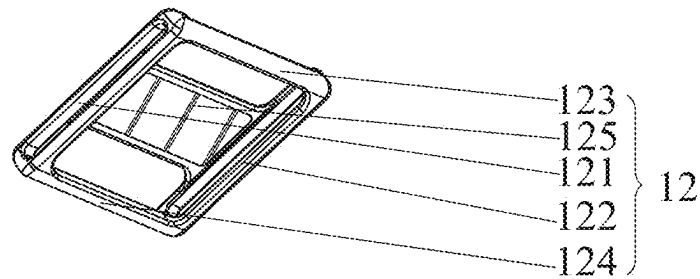


FIG. 7

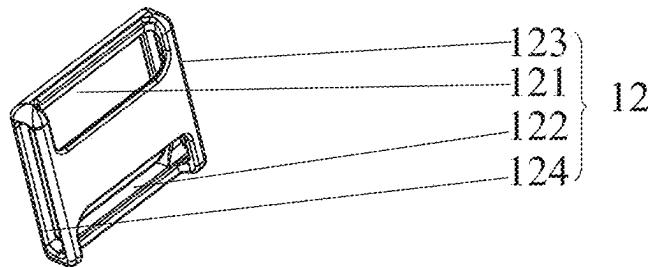


FIG. 8

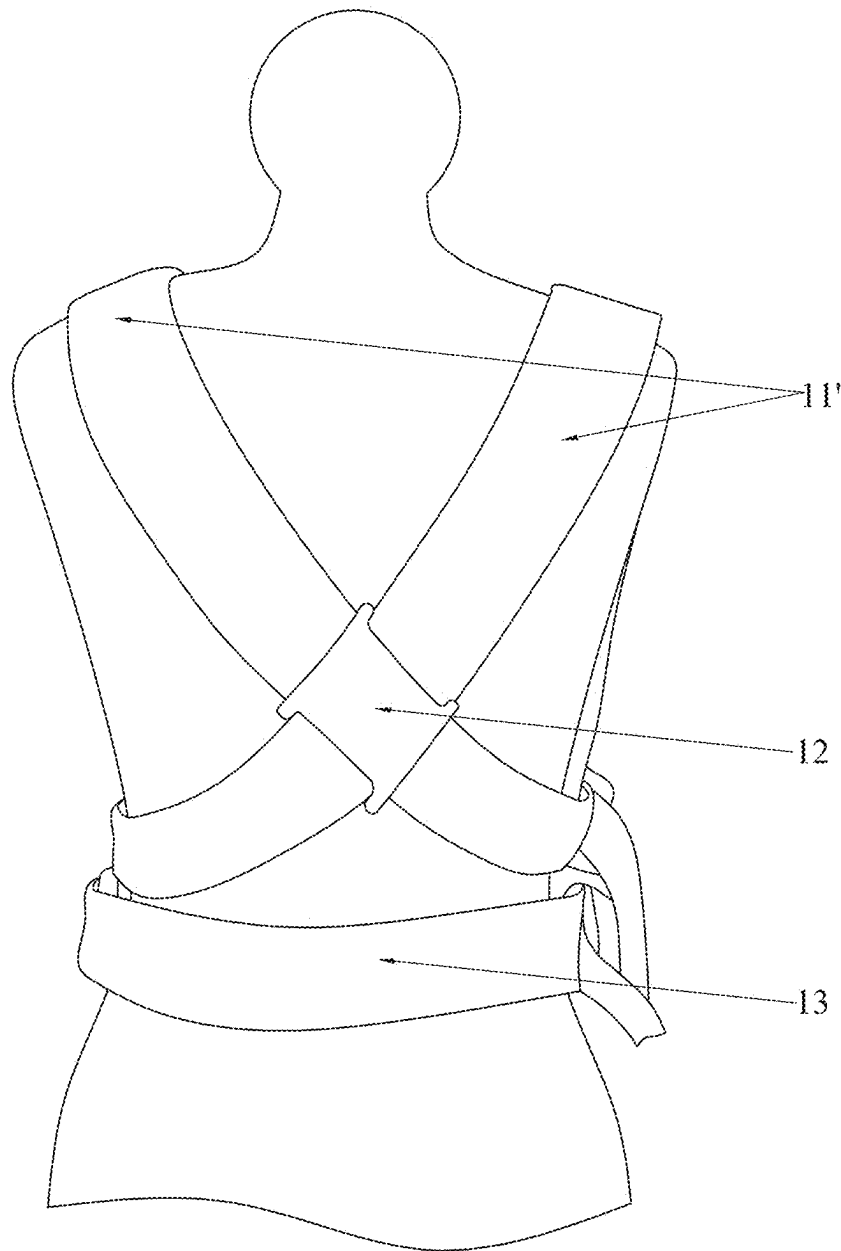


FIG. 9

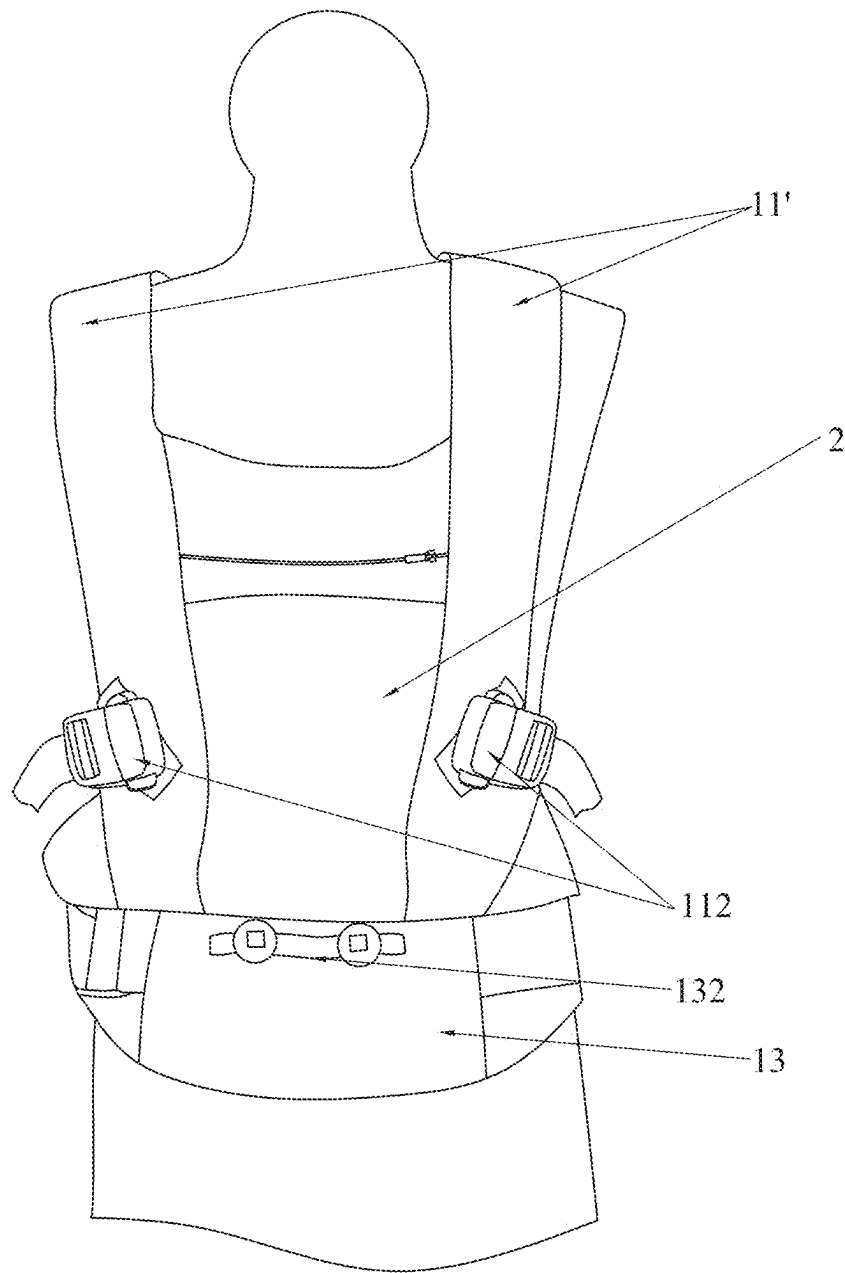


FIG.10

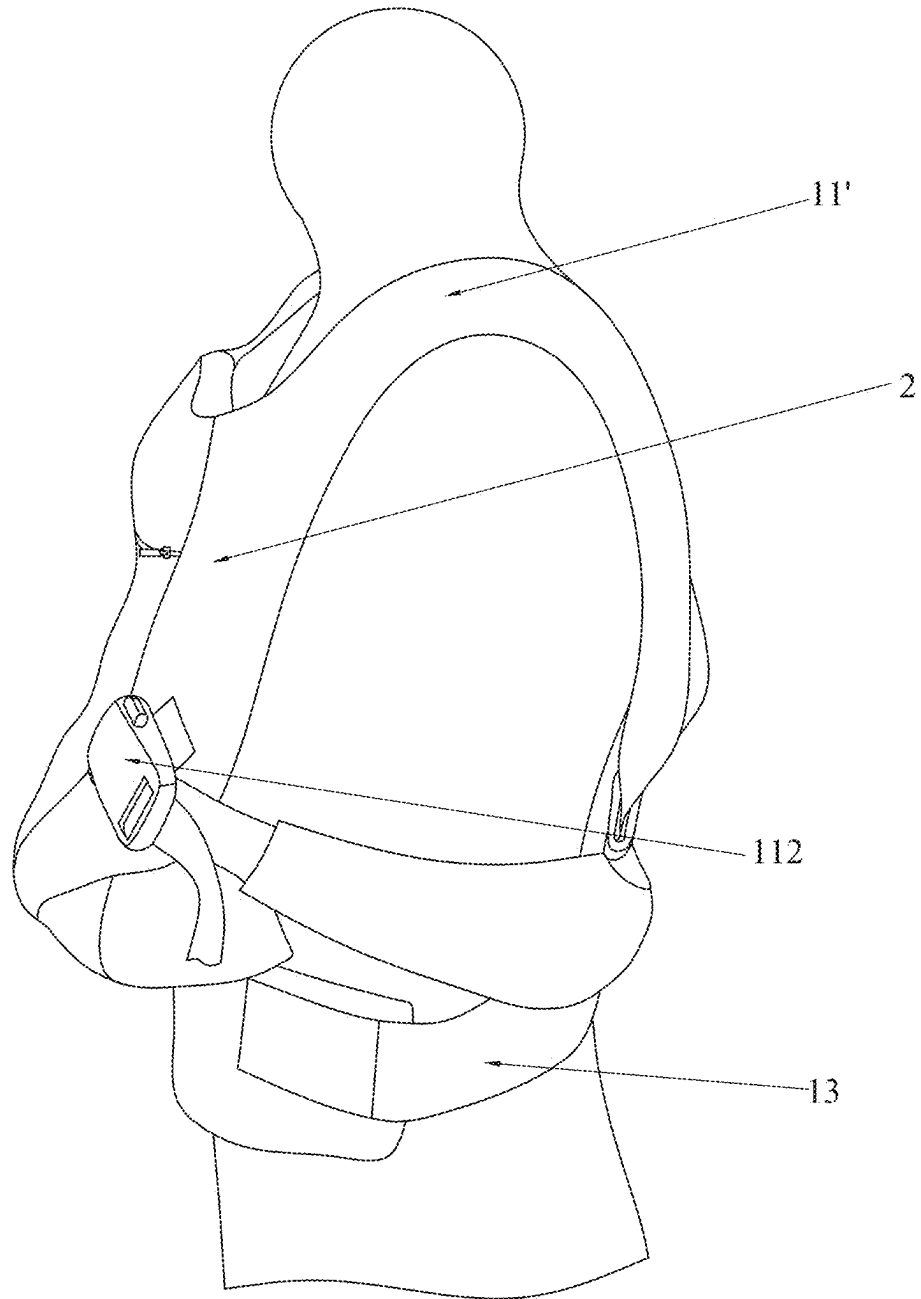


FIG.11

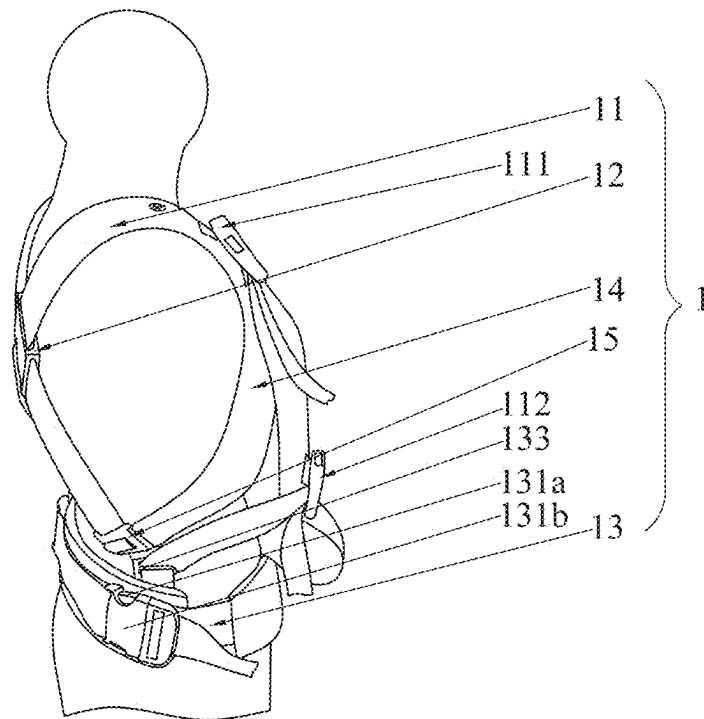


FIG.12

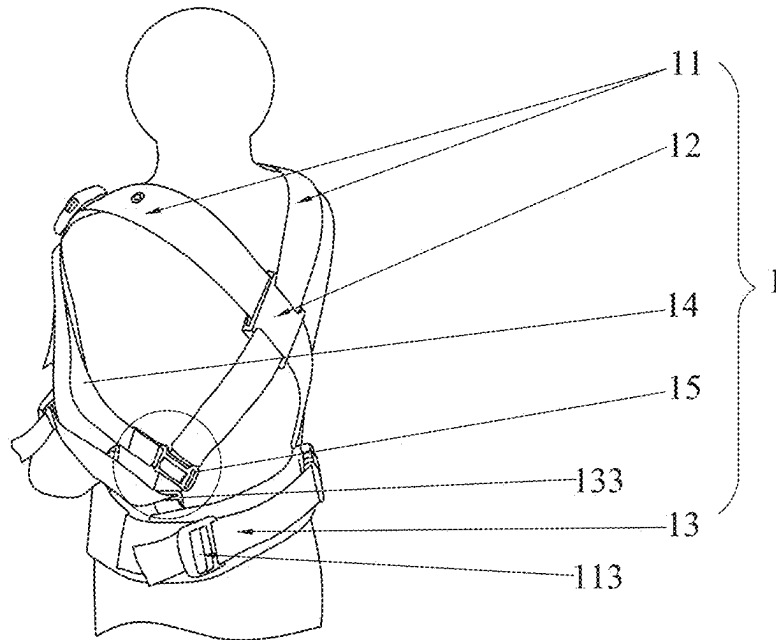


FIG.13

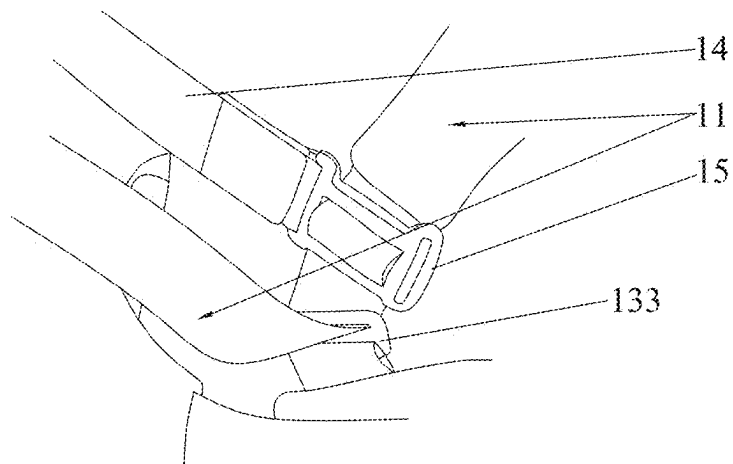


FIG.14

1

BABY CARRYING HARNESS**CROSS REFERENCE TO RELATED APPLICATIONS**

This application is a continuation application of U.S. application Ser. No. 17/582,938, filed Jan. 24, 2022, which claims priority to the Chinese Patent Application No. 202110107661.4, filed on Jan. 26, 2021, the entire content of which is incorporated herein in its entirety.

TECHNICAL FIELD

The present disclosure relates to baby products, and more particularly to an adjustable baby carrying harness.

BACKGROUND

Existing baby carrying harnesses can be divided into horizontal holding type, front carrying type, back carrying type, etc., according to different holding methods. Among them, the front carrying harness is most widely used due to its advantages facilitating operations and timely observation of babies.

In a front carrying harness, during a long time using, the user's shoulders will carry a larger load due to the baby's weight pulled forward. Moreover, in a cross-shaped formed by shoulder strap members crossed on back, the load on the user's shoulders can be partially dispersed on the back, thereby reducing the burden on the shoulders of the user and the fatigue of long-term use. Such shoulder strap members solve the problem of overloading on the user's shoulders to some extent; however, for users with different shoulder widths and different heights, in this kind of crossed shoulder strap members, because the position of the crossing point cannot be moved, positions of the shoulder strap members cannot be adjusted. Accordingly, users of different heights and shoulder widths cannot adjust or fix the crossing position to the best, so the purpose of reducing the burden on the user cannot be achieved.

For this, it is always believed in the industry, only such a baby carrying harness that is designed to distribute the burden of the baby to the user's shoulders, back and waist is the most practical and most easily promoted baby carrying harness.

Therefore, there is an urgent need for a baby carrying harness that can be adaptively adjusted according to the different body types of different users, such that the shoulders, backs and waists of the users can be uniformly stressed at the same time.

SUMMARY

An object of the disclosure to provide a baby carrying harness that can be adaptively adjusted according to the different body types of different users, such that the shoulders, backs and waists of the users can be uniformly stressed at the same time.

In order to achieve the above-mentioned object, the disclosure provides a baby carrying harness including a back carrying assembly being able to be worn on a user and a support sheet being connected to the back carrying assembly for carrying a baby. The back carrying assembly includes a waist member and two shoulder strap members, a front end of each of the shoulder strap members is connected to an upper part of the support sheet, a rear end of each of the shoulder strap members is connected to a middle of the

2

support sheet, the two shoulder strap members crosswise and slidably pass through a shoulder strap fixing member, the shoulder strap members are crossed on the user's back through the shoulder strap fixing member, a crossing position of the two shoulder strap members is adjusted by sliding of the shoulder strap fixing member, and the waist member is connected to a lower part of the support sheet.

Compared with the related art, on the one hand, the shoulder strap members of the baby carrying harness of the disclosure are crossed on the user's back through the shoulder strap fixing member, the crossed structure not only distributes the load on the user's shoulders to the user's back, but also effectively prevents the shoulder strap members from slipping off, so as to improve the stability and firmness of the front carrying harness, and ensure that the baby is kept in a more stable position, thereby ensuring the safety of the baby. On the other hand, in the baby carrying harness of the disclosure, the crossing position of the two shoulder strap members are adjusted through sliding of the shoulder strap fixing member, so users with different shoulder widths and different heights can adaptively adjust the crossing position of the two shoulder strap members according to their actual conditions, such that the crossing position of the two shoulder strap members can be adjusted and fixed a carrying position suitable for the user's own conditions, such that the shoulders, backs and waists of the users can be uniformly stressed at the same time, the burden on the user's shoulders can be reduced and the user's fatigue feeling can be delayed.

Preferably, the shoulder strap fixing member of the disclosure has two crosswise channels for the two shoulder strap members to slidably pass through accordingly, and the two shoulder strap members accordingly pass through the channels crosswise.

Preferably, the shoulder strap fixing member of the disclosure is in a hollow structure, the shoulder strap fixing member defines through holes respectively penetrating the hollow structure in two crossing directions, and two of the through holes are directly opposite to each other and are used for a same one of the shoulder strap members to pass through.

Preferably, the shoulder strap fixing member of the disclosure is in a diamond structure.

Preferably, a larger inner angle of the diamond structure of the shoulder strap fixing member of the disclosure is 95°-115°, and more preferably is 105°.

Preferably, the shoulder strap fixing member of the disclosure is made of a TPE material. In selecting the TPE material selected for the shoulder strap fixing member, both flexibility and rigidity are taken into account, so as to satisfy requirements of both the comfort of the user and the stability of the structure.

Preferably, an inner side of the shoulder strap fixing member of the disclosure is covered with an ABS material layer. Specifically, the inner side of the shoulder strap fixing member is covered with an ABS material layer adjacent to the crossing of the shoulder straps, so as to strengthen the rigidity of the shoulder strap fixing member, thereby increasing the hardness of the structure of the shoulder strap fixing member, and further improving a firmness and durability of the baby carrying harness.

Preferably, the upper part of the support sheet of the disclosure and the front ends of the two shoulder strap members are in an integrated structure. The integrated structure reduces the use of the buckle components, makes the overall structure of the baby carrying harness more concise and convenient for storage and carrying.

3

Preferably, both ends of the upper part of the support sheet of the disclosure respectively extend independently to form the two shoulder strap members.

Preferably, the upper part of the support sheet of the disclosure and the front ends of the two shoulder strap members are fixedly connected to each other by sewing to form an integrated structure.

Preferably, the upper part of the support sheet of the disclosure and the front ends of the two shoulder strap members are in a detachable structure.

Preferably, each of the shoulder strap members of the disclosure is in an adjustable length structure. Users with different shoulder widths and different heights can adjust the length of the shoulder strap members, so as to achieve a best posture.

Preferably, the front end of each of the shoulder strap members of the disclosure is detachably connected to the upper part of the support sheet by a first fixing buckle being adjustable in length and capable of being snap-fit connected. The first fixing buckle facilitates the user to disassemble and separate the upper part of the support sheet from the front ends of the two shoulder strap members, so in using, the user only need to hold the baby to the front, then use the support sheet to cover the baby, and close the first fixing buckle, so a single person can complete the entire process of carrying the baby.

Preferably, the rear end of each of the shoulder strap members of the disclosure is detachably connected to the middle of the support sheet by a second fixing buckle being adjustable in length and capable of being snap-fit connected.

Preferably, both ends of the waist member of the disclosure are detachably connected by a third fixing buckle being adjustable in length and capable of being snap-fit connected.

Preferably, an adjustable fixing buckle for adjusting a width and a height of the support sheet is disposed in a connection between the waist member and the support sheet, the adjustable fixing buckle has a buckling state and an unlocking state, and the width and height of the support sheet are smaller when the adjustable fixing buckle is in the buckling state than the width and the height of the support sheet when the adjustable fixing buckle is in the unlocking state. The adjustable fixing buckle can adaptively adjust the width and the height of the support sheet according to the changes of the baby's body shape at different ages, so as to be more suitable for the baby's body shape, and especially to provide a more stable support for the baby's buttocks and leg, thereby providing a safer and more comfortable seating experience.

Preferably, the adjustable fixing buckle of the disclosure is any one of a drawstring, a cooperative button and a fixing ring, a plug-in buckle, a snap buckle, or a magic tape.

Preferably, the back carrying assembly of the disclosure further includes a transition buckle. The transition buckle is connected to the waist member, and the rear end of each of the shoulder strap members changes direction by sliding through the transition buckle and then connects to the middle of the support sheet. The rear end of each of the shoulder strap members forms a transitional connection with the waist member through the transition buckle, such that the shoulder strap members have a larger stressed area to cover the user's back, and further reduces the burden on the user's shoulders and waist, such that the user's shoulders, back and waist are more uniformly stressed at the same time.

Preferably, the rear end of each of the shoulder strap members of the disclosure is in a weaved strap structure, and the weaved strap structure slidably passes through the waist member.

4

Preferably, the carrying assembly of the disclosure back further includes a side shoulder strap, a front end of the side shoulder strap is connected to the upper part of the support sheet, and a rear end of the side shoulder strap is slidably connected to the rear end of one of the shoulder strap members. The side shoulder strap further strengthen the connection between the support sheet and the shoulder strap members, effectively preventing the baby from sliding off the side of the baby carrying harness, thereby further ensuring the safety of the baby.

Preferably, the back carrying assembly of the disclosure further includes a side shoulder strap. The sliding buckle slidably passes through the rear end of one of the shoulder strap members, and the sliding buckle is connected to the rear end of the side shoulder strap.

Preferably, the side shoulder strap of the disclosure and the support sheet are in an integrated structure.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a schematic view of a front structure of a baby carrying harness according to a first embodiment of the disclosure.

FIG. 2 is a schematic view of a back structure of the baby carrying harness according to the first embodiment of the disclosure.

FIG. 3 is a schematic view of a side structure the baby carrying harness according to the first embodiment of the disclosure.

FIG. 4 is a schematic view of an unlocking state of an adjustable fixing buckle of the baby carrying harness of the disclosure.

FIG. 5 is a schematic view of a buckling state of the adjustable fixing buckle of the baby carrying harness of the disclosure.

FIG. 6 is a schematic view of a back unfolded state of the first embodiment of the disclosure.

FIG. 7 is a schematic view of a front structure of a shoulder strap fixing member of the disclosure.

FIG. 8 is a schematic view of a back structure of the shoulder strap fixing member of the disclosure.

FIG. 9 is a schematic view of a front structure of a second embodiment of the disclosure.

FIG. 10 is a schematic view of a back structure of the second embodiment of the disclosure.

FIG. 11 is a schematic view of a side structure of the second embodiment of the disclosure.

FIG. 12 is a schematic view of a side structure of a third embodiment of the disclosure.

FIG. 13 is a schematic view of a back structure of the third embodiment of the disclosure.

FIG. 14 is a partial enlarged schematic view of connections of a transition buckle and a sliding buckle in FIG. 13.

DETAILED DESCRIPTION

In order to explain the technical content and structural features of the disclosure, the following description will be further provided in combination with the embodiment and the accompanying drawings.

As shown in FIGS. 1-3 and 6, a baby carrying harness 100 of the disclosure includes a back carrying assembly 1 that may be worn on a user and a support sheet 2 for carrying a baby that is connected to the back carrying assembly 1. The back carrying assembly 1 includes a waist member 13 and two shoulder strap members 11. A front end of each of the shoulder strap members 11 is connected to an upper part of

5

the support sheet 2, and a rear end of each of the shoulder strap members 11 is connected to a middle of the support sheet 2. The two shoulder strap members 11 crosswise and slidably pass through a shoulder strap fixing member 12, and the shoulder strap members 11 are arranged crossed on the back of the user by the shoulder strap fixing member 12. A crossing position of the two shoulder strap members 11 is adjusted by sliding of the shoulder strap fixing member 12, and at the same time, by sliding of the shoulder strap fixing member 12, an adjustment of the distance between the two shoulder strap members 11 is realized. The waist member 13 is connected to a lower part of the support sheet 2. By arranging the shoulder strap members 11 in a crossed structure according to the disclosure, not only the loads on the shoulders of the user are well distributed on the user's back, but also the shoulder strap members 11 are effectively prevented from slipping off, so the shoulder strap members 11 are safe and reliable. At the same time, by sliding of the shoulder strap fixing member 12, the crossing position of the two shoulder strap members 11 may be adjusted in real time. Accordingly, users with different shoulder widths and different heights may adjust the crossing position of the two shoulder strap members 11, such that the crossing position of the two shoulder strap members 11 may be adjusted and fixed to a carrying position to carry load that is suitable for the user's own conditions, so the shoulders, backs and waists of the users may be uniformly stressed at the same time, and the burden on the user's shoulders may be reduced and the user's fatigue feeling may be delayed.

As shown in FIGS. 2 and 6, specifically, the shoulder strap fixing member 12 has two crosswise channels for the two shoulder strap members 11 to slidably pass through correspondingly, and the two shoulder strap members 11 accordingly sliding through the channels crosswise. Preferably, the shoulder strap fixing member 12 is in a hollow structure, and the shoulder strap fixing member 12 defines four through holes respectively penetrating the hollow structure in two crossing directions, i.e., a first through hole 121, a second through hole 122, a third through hole 123, and a fourth through hole 124. Among them, the first through hole 121 and the second through hole 122 are directly opposite, the third through hole 123 and the fourth through hole 124 are directly opposite, and the two through holes directly opposite to each other are used for the same shoulder strap member 11 to pass through.

As shown in FIGS. 7 and 8, specifically, the shoulder strap fixing member 12 of the disclosure is in a diamond structure. More specifically, a larger inner angle of the diamond structure of the shoulder strap fixing member 12 of the disclosure is 105°. When selecting a material for the shoulder strap fixing member 12, it is necessary to take both flexibility and rigidity into account, so as to satisfy requirements of both the comfort of the user and the stability of the structure. Specifically, the shoulder strap fixing member 12 needs to strengthen rigidity at a position close to the crossing point of the shoulder straps. For example, the shoulder strap fixing member 12 of the disclosure is made of a TPE material. An inner side of the shoulder strap fixing member 12 is covered with an ABS material layer 125, so as to improve a hardness of the structure of the shoulder strap fixing member 12, thereby improving a firmness and durability of the baby carrying harness 100.

As shown in FIGS. 1 and 6, specifically, each of the shoulder strap members 11 is in an adjustable length structure, and users with different shoulder widths and different heights may adaptively adjust the lengths of the shoulder strap members 11 according to their actual conditions, so as

6

to achieve a best posture. Specifically, the upper part of the support sheet 2 and the front end of each of the two shoulder strap members 11 are in a detachable structure. Specifically, the front end of each of the shoulder strap members 11 is detachably connected to the upper part of the support sheet 2 by a first fixing buckle 111 that is adjustable in length and capable of being snap-fit connected. Specifically, the first fixing buckle 111 includes a male buckle 111a and a female buckle 111b snap-fit connected to the male buckle 111a. Both ends of the upper part of the support sheet 2 are respectively connected to the male buckle 111a. A bottom of the male buckle 111a is connected to an "I" shaped buckle 113 (the "□" shaped buckle 113 is a common buckle used for adjusting the length of a weaved strap). The female buckle 111b snap-fit connected to the male buckle 111a is fixed to the front end of one of the two shoulder strap members 11. By snap-fit connection of the male buckle 111a and the female buckle 111b, a detachable connection between the upper part of the support sheet 2 and the front ends of the two shoulder strap members 11 is achieved. More specifically, the "□" shaped buckle 113 is connected to a weaved strap structure 114, and a connection length between the upper part of the support sheet 2 and the front end of one of the shoulder strap members 11 may be adjusted by sliding of the "□" shaped buckle 113 on the weaved strap structure 114. Of course, the first fixing buckle 111 may also be a convenient and practical buckle such as a plug-in buckle, a snap buckle, a magic tape, a fixing buckle and a fixing hole, and the like. The first fixing buckle 111 may facilitate the user to disassemble and separate the upper part of the support sheet 2 from the front ends of the two shoulder strap members 11. In using, the user only needs to hold the baby to the front of his/her body, then use the support sheet 2 to cover the baby, and close the first fixing buckle 111, so a single person can complete the entire process of carrying the baby.

As shown in FIGS. 3 and 4, a rear end of each of the shoulder strap member 11 and one end of the waist member 13 are in a weaved strap structure 114, the rear end of each of the shoulder strap members 11 is detachably connected to the middle of the support sheet 2 by a second fixing buckle 112 that is adjustable in length and may be snap-fit connected. Both ends of the waist member 13 are detachably connected by a third fixing buckle 131 that is adjustable in length and may be snap-fit connected. Specifically, each of the second fixing buckles 112 includes a male buckle 112a and a female buckle 112b that is snap-fit connected to the male buckle 112a. Each of the rear ends of the two shoulder strap members 11 is connected to one male buckle 112a by one "□" shaped buckle 113, respectively. A length of each of the shoulder strap members 11 is adjusted by sliding of the "□" shaped buckle 113 on the weaved strap structure 114. The female buckles 112b snap-fit connected to the male buckles 112a are fixed on both sides of the middle of the support sheet 2. By the snap-fit connections of the male buckles 112a and the female buckles 112b, the detachable connections between the rear ends of the shoulder strap members 11 and the middle of the support sheet 2 are achieved. The third fixing buckle 131 includes a male buckle 131a and a female buckle 131b that is snap-fit connected to the male buckle 131a, and one end of the waist member 13 is connected to one male buckle 131a by one "□" shaped buckle 113. By sliding of the "□" shaped buckle 113 on the weaved strap structure 114, a length of the waist member 13 is adjusted. The female buckle 131b snap-fit connected to the male buckle 131a is fixed to the other one end of the waist member 13. By the snap-fit connection of the male

7

buckle **131a** and the female buckle **131b**, detachable connections of the two ends of the waist member **13** are achieved. Of course, the second fixing buckle **112** or the third fixing buckle **131** may also be a convenient and practical buckle such as a plug-in buckle, a snap buckle, a magic tape, a fixing buckle and a fixing hole, and the like.

As shown in FIGS. 4 and 5, according to the disclosure, an adjustable fixing buckle **132** for adjusting a width and a height of the support sheet **2** is disposed in the connection between the waist member **13** and the lower part of the support sheet **2**. The adjustable fixing buckle **132** has a buckling state and an unlocking state, and the width and the height of the support sheet **2** are smaller when the adjustable fixing buckle **132** is in the buckling state than the width and the height of the support sheet **2** when the adjustable fixing buckle **132** is in the unlocking state. As shown in FIG. 4, the adjustable fixing buckle **132** is in the unlocking state, both the width and the height of the lower part of the support sheet **2** are relatively large, so a larger baby may be covered. As shown in FIG. 5, the adjustable fixing buckle **132** is in the buckling state, such that both the width and the height of the lower part of the support sheet **2** are reduced, so it may be used for a smaller baby. More specifically, the adjustable fixing buckle **132** may include a drawstring **1321**, and cooperatively a button **1322** and a fixing ring **1323**. When the button **1322** is buckled in the fixing ring **1323**, the drawstring **1321** pulls the support sheet **2** to fold to reduce its width and height. When the button **1322** is separated from the fixing ring **1323** to be unlocked, the support sheet **2** restores to its original width and height. Of course, the adjustable fixing buckle **132** may also be a convenient and practical buckle such as a plug-in buckle, a snap or a magic tape or the like. The adjustable fixing buckle **132** may adaptively adjust the width and height of the support sheet **2** according to the changes of the baby's body shape at different ages, which is more suitable for the baby's body shape, and especially supports the baby's buttocks and legs more firmly, thereby providing a safer and more comfortable seating experience.

According to the disclosure, the shoulder strap members **11** of the baby carrying harness **100** are crossed in respect to each other on the back of the user by the shoulder strap fixing member **12**, such a crossed structure not only distributes the load on the user's shoulders to the user's back, but also effectively prevents the shoulder strap members **11** from slipping off, so as to improve the stability and firmness of the front carrying harness, and ensure that the baby is kept in a more stable position, thereby ensuring the safety of the baby. On the other hand, in the baby carrying harness **100** of the disclosure, the crossing position of the two shoulder strap members **11** are adjusted through sliding of the shoulder strap fixing member **12**, so users with different shoulder widths and different heights may adaptively adjust the crossing position of the two shoulder strap members **11** according to their actual conditions, such that the crossing position of the two shoulder strap members **11** may be adjusted and fixed to a carrying position suitable for the user's own conditions, such that the shoulders, backs and waists of the users may be uniformly stressed at the same time, the burden on the user's shoulders may be reduced and the user's fatigue feeling may be delayed.

As shown in FIGS. 9-11, according to the second embodiment of disclosure, the upper part of the support sheet **2** and the front ends of the two shoulder strap members **11'** are in an integrated structure, and both ends of the upper part of the support sheet **2** respectively extend independently to form the two shoulder strap members **11'**. In using, the two

8

shoulder strap members **11'** are wound to the front and are detachably connected to the middle of the support sheet **2** by the second fixing buckle **112** whose length is adjustable and may be snap-fit connected. Of course, the upper part of the support sheet **2** and the front ends of the two shoulder strap members **11'** may also be fixedly connected to each other by sewing to form an integrated structure, however, the disclosure is not limited to the specific method for achieving the integrated structure of the upper part of the support sheet **2** and the front ends of the two shoulder strap members **11'**. The integrated structure may reduce the use of buckle components, makes the overall structure of the baby carrying harness **100** more concise and convenient for storage and carrying.

As shown in FIGS. 12-14, according to the third embodiment of the disclosure, the back carrying assembly **1** further includes a transition buckle **133**, a sliding buckle **15**, and side shoulder straps **14**. The transition buckle **133** is connected to the waist member **13**. The rear end of each of the shoulder strap members **11** changes direction by sliding through the transition buckle **133** and then connects to the middle of the support sheet **2**. The sliding buckle **15** slidably passes through the rear end of one of the shoulder strap members **11**. The sliding buckle **15** is connected to a rear end of each of the side shoulder straps **14**, and a front end of each of the side shoulder straps **14** is connected to the upper part of the support sheet **2**. Moreover, the rear end of each of the side shoulder straps **14** is slidably connected to the rear end of one of the shoulder strap members **11** by the sliding buckle **15**. Specifically, the side shoulder straps **14** and the support sheet **2** form an integrated structure. The rear end of each of the shoulder strap members **11** forms a transitional connection with the waist member **13** through the transition buckle **133**, such that the shoulder strap members **11** have a larger stressed area, and further reduces the burden on the user's shoulders and waist, such that the user's shoulders, back and waist are more uniformly stressed at the same time. The side shoulder straps **14** further strengthens the connection between the support sheet **2** and the shoulder strap members **11**, effectively preventing the baby from sliding off the side of the baby carrying harness **100**, thereby further ensuring the safety of the baby. Specifically, the rear end of each of the shoulder strap members **11** is in the weaved strap structure **114**, and the weaved strap structure **114** slidably passes through the waist member **13**.

As shown in FIGS. 1-14, in the baby carrying harness **100** of the disclosure, the shoulder strap members **11** are crossed on the user's back through the shoulder strap fixing member **12**, which may well disperse the load on the user's shoulders to the user's back, and effectively prevent the shoulder strap members **11** from slipping off, so as to improve the stability and firmness of the front carrying harness, and ensure that the baby is kept in a more stable position, thereby ensuring the safety of the baby. On the other hand, the baby carrying harness **100** of the disclosure may adjust the crossing position of the two shoulder strap members **11** by sliding of the shoulder strap fixing member **12**, so users of different shoulder widths and different heights may adaptively adjust the crossing position of the two shoulder strap members **11** according to their own actual conditions, such that the shoulders, backs and waists of the users may be uniformly stressed at the same time, the burden on the user's shoulders may be reduced and the user's fatigue feeling may be delayed. Moreover, by the snap-fit connections between the male buckles and the female buckles of the first fixing buckle **111**, the second fixing buckle **112**, and the third fixing buckle **131**, quick detached separations between various

9

components may be achieved, such that the operation to carry the baby by using the baby carrying harness **100** will be more convenient and quicker; furthermore, the adjustable fixing buckle **132** may adaptively adjust the width and height of the support sheet **2** according to changes in the body shapes of babies of different ages, so the baby carrying harness **100** is more versatile.

What disclosed above are only preferred embodiments of the disclosure, and the scope of the disclosure certainly cannot be limited by this. Therefore, any equivalent changes made according to the scope of the disclosure still belong to the disclosure.

What is claimed is:

1. A baby carrying harness comprising:
a back carrying assembly being able to be worn on a user and a support sheet being connected to the back carrying assembly for carrying a baby,
wherein
the back carrying assembly comprises a waist member and two shoulder strap members,
the waist member is connected to a lower part of the support sheet,
the back carrying assembly further comprises a transition buckle connected to the waist member, and
a rear end of at least one of the shoulder strap members is configured to change direction by sliding through the transition buckle and then connecting to a middle of the support sheet.
2. The baby carrying harness according to claim 1, wherein the two shoulder strap members crosswise and slidably pass through a shoulder strap fixing member, the shoulder strap fixing member has two crosswise channels for the two shoulder strap members to slidably pass through accordingly, and the two shoulder strap members accordingly pass through the channels crosswise.
3. The baby carrying harness according to claim 1, wherein the two shoulder strap members crosswise and slidably pass through a shoulder strap fixing member, the shoulder strap fixing member is in a hollow structure, the shoulder strap fixing member defines through holes correspondingly penetrating the hollow structure in two crossing directions, and two of the through holes are directly opposite to each other and are used for a same one of the shoulder strap members to pass through.
4. The baby carrying harness according to claim 1, wherein the two shoulder strap members crosswise and slidably pass through a shoulder strap fixing member, and the shoulder strap fixing member is in a diamond structure.
5. The baby carrying harness according to claim 4, wherein a larger inner angle of the diamond structure is 95°-115°.
6. The baby carrying harness according to claim 1, wherein the two shoulder strap members crosswise and slidably pass through a shoulder strap fixing member, and the shoulder strap fixing member is made of a TPE material.
7. The baby carrying harness according to claim 1, wherein the two shoulder strap members crosswise and

10

slidably pass through a shoulder strap fixing member, and an inner side of the shoulder strap fixing member is covered with an ABS material layer.

8. The baby carrying harness according to claim 1, wherein an upper part of the support sheet and front ends of the two shoulder strap members are in an integrated structure.

9. The baby carrying harness according to claim 8, wherein both ends of the upper part of the support sheet respectively extend independently to form the two shoulder strap members.

10. The baby carrying harness according to claim 8, wherein the upper part of the support sheet and the front ends of the two shoulder strap members are fixedly connected to each other by sewing to form an integrated structure.

11. The baby carrying harness according to claim 1, wherein an upper part of the support sheet and front ends of the two shoulder strap members are in a detachable structure.

12. The baby carrying harness according to claim 1, wherein each of the shoulder strap members is in an adjustable length structure.

13. The baby carrying harness according to claim 11, wherein the front end of each of the shoulder strap members is detachably connected to the upper part of the support sheet by a first fixing buckle being adjustable in length and capable of being snap-fit connected.

14. The baby carrying harness according to claim 1, wherein the rear end of each of the shoulder strap members is detachably connected to the middle of the support sheet by a second fixing buckle being adjustable in length and capable of being snap-fit connected.

15. The baby carrying harness according to claim 1, wherein both ends of the waist member are detachably connected by a third fixing buckle being adjustable in length and capable of being snap-fit connected.

16. The baby carrying harness according to claim 1, wherein an adjustable fixing buckle has a buckling state and an unlocking state, and a width and a height of the support sheet when the adjustable fixing buckle is in the buckling state are smaller than the width and the height of the support sheet when the adjustable fixing buckle is in the unlocking state.

17. The baby carrying harness according to claim 16, wherein the adjustable fixing buckle further includes a drawstring.

18. The baby carrying harness according to claim 1, wherein a front end of each of the shoulder strap members is connected to an upper part of the support sheet, and the rear end of each of the shoulder strap members is connected to the middle of the support sheet.

19. The baby carrying harness according to claim 1, wherein the two shoulder strap members crosswise and slidably pass through a shoulder strap fixing member, and the shoulder strap members are configured to be crossed on the user's back by the shoulder strap fixing member.

* * * * *