



US012414601B2

(12) **United States Patent**
Cheney et al.

(10) **Patent No.:** **US 12,414,601 B2**

(45) **Date of Patent:** ***Sep. 16, 2025**

(54) **RAPID-ENTRY FOOTWEAR HAVING A TRANSFORMING FOOTBED**

(71) Applicant: **FAST IP, LLC**, Lindon, UT (US)

(72) Inventors: **Craig Cheney**, Lindon, UT (US); **Seth Munger**, Springville, UT (US); **Bradley Johnson**, Draper, UT (US)

(73) Assignee: **FAST IP, LLC**, Lindon, UT (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **18/407,199**

(22) Filed: **Jan. 8, 2024**

(65) **Prior Publication Data**

US 2024/0138516 A1 May 2, 2024

Related U.S. Application Data

(63) Continuation of application No. 17/827,954, filed on May 30, 2022, now Pat. No. 11,864,620, which is a continuation of application No. PCT/US2022/016867, filed on Feb. 17, 2022.

(60) Provisional application No. 63/150,550, filed on Feb. 17, 2021.

(51) **Int. Cl.**

A43B 11/00 (2006.01)

A43B 3/26 (2006.01)

A43B 23/08 (2006.01)

(52) **U.S. Cl.**

CPC **A43B 11/00** (2013.01); **A43B 3/26** (2013.01); **A43B 23/08** (2013.01); **A43B 23/088** (2013.01)

(58) **Field of Classification Search**

CPC **A43B 11/00**; **A43B 11/02**; **A43B 17/18**; **A43B 23/08**; **A43B 23/088**; **A43B 23/28**

USPC **36/138**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

112,439 A	3/1871	Francis
287,312 A	10/1883	Packard
736,156 A	8/1903	Roberts
808,948 A	1/1906	Roberts
827,330 A	7/1906	Tillson
863,549 A	8/1907	Metz
881,153 A	3/1908	Rickert
921,461 A	5/1909	Rickert
923,860 A	6/1909	Kroell
1,081,678 A	12/1913	Meyer
1,116,462 A	11/1914	Moran
1,266,620 A	5/1918	Peabody

(Continued)

FOREIGN PATENT DOCUMENTS

CN	1403041 A	3/2003
CN	201005111 Y	1/2008

(Continued)

OTHER PUBLICATIONS

https://us.ecco.com/ecco-biom-fjuel-mens-outdoor-shoe-837594.html?dwvar_837594_color=00001 submitted herewith as of Jun. 1, 2016.


(Continued)

Primary Examiner — Marie D Bays

(57) **ABSTRACT**

A rapid-entry shoe with a sole portion and a footbed that slide, pivot or translate relative to each other to provide both an open configuration (for ease of donning or doffing by a foot) and a closed configuration (for securement of a foot).

20 Claims, 11 Drawing Sheets

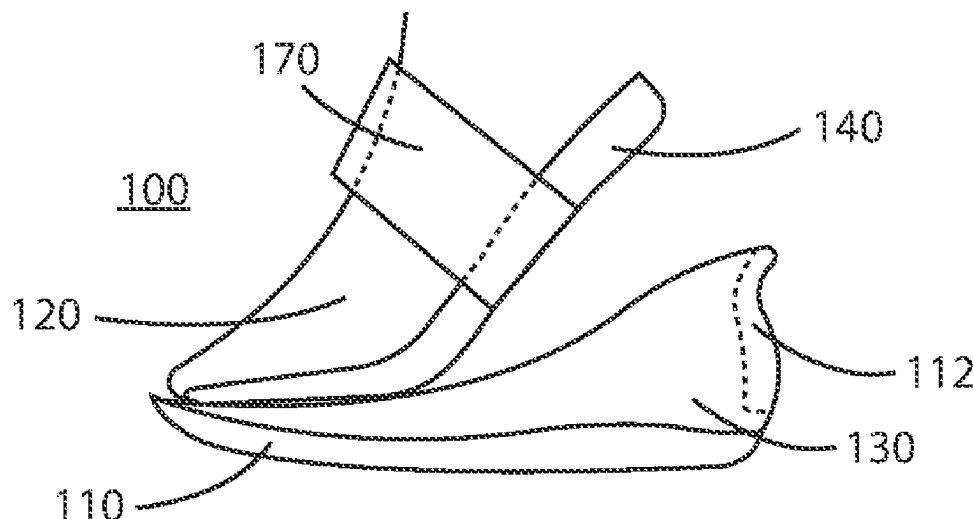

(56)

References Cited

U.S. PATENT DOCUMENTS

1,464,342	A	8/1923	Rothacher	6,922,917	B2	8/2005	Kerns et al.
1,494,236	A	5/1924	Greathouse	6,925,732	B1	8/2005	Clarke
1,686,175	A	10/1928	Read	7,059,068	B2	6/2006	Magallanes et al.
1,926,818	A	9/1933	Rateliff	7,103,994	B2	9/2006	Johnson
2,069,752	A	2/1937	Dorr	7,178,270	B2	2/2007	Hurd et al.
2,083,390	A	6/1937	Murena	7,225,563	B2	6/2007	Chen et al.
2,118,019	A	5/1938	Benjafield	7,439,837	B2	10/2008	McDonald
2,266,732	A	12/1941	Babinchak	D583,956	S	12/2008	Chang et al.
2,297,594	A	9/1942	Weinstat	7,661,205	B2	2/2010	Johnson
2,368,514	A	1/1945	Baehr	7,685,747	B1	3/2010	Gasparovic et al.
2,450,250	A	9/1948	Napton	7,757,414	B2	7/2010	Tonkel
2,452,502	A	10/1948	Tarbox	7,793,438	B1	9/2010	Busse et al.
2,693,039	A	11/1954	Balut	7,823,299	B1	11/2010	Brigham
2,736,110	A	2/1956	Hardimon	D648,512	S	11/2011	Schlageter et al.
2,763,071	A	9/1956	Napier	8,087,188	B2	1/2012	Labbe
2,829,448	A	4/1958	Minera	8,225,535	B2	7/2012	Dillenbeck
2,920,402	A	1/1960	Minera	8,302,329	B2	11/2012	Hurd et al.
3,000,116	A	9/1961	Ally	8,333,021	B2	12/2012	Johnson
3,014,288	A	12/1961	Evans et al.	8,499,474	B2	8/2013	Kaufman
3,040,454	A	6/1962	Topper et al.	8,745,901	B2	6/2014	Toraya
3,097,438	A	7/1963	Evans	9,119,441	B2	9/2015	Frappier
3,146,535	A	9/1964	Owings	9,314,067	B2	4/2016	Bock
3,192,651	A	7/1965	Smith	9,351,532	B2	5/2016	Mokos
3,373,512	A	3/1968	Jacobson	9,615,624	B2	4/2017	Kilgore et al.
3,643,350	A	2/1972	Paoletta et al.	9,629,416	B2	4/2017	Rackiewicz et al.
3,798,802	A	3/1974	Saunders	9,635,905	B2	5/2017	Dekovic
4,489,509	A	12/1984	Libit	9,717,304	B2	8/2017	Bernhard et al.
4,590,690	A	5/1986	Pfander	9,877,542	B2	1/2018	Pratt
4,596,080	A	6/1986	Benoit et al.	9,999,278	B2	6/2018	Feinstein
4,805,321	A	2/1989	Tonkel	10,271,616	B2	4/2019	Labbe
4,811,502	A	3/1989	Barret	10,327,515	B2	6/2019	Peyton et al.
4,924,605	A	5/1990	Spademan	D854,303	S	7/2019	Flanagan et al.
4,972,613	A	11/1990	Loveder	10,455,898	B1	10/2019	Orand et al.
4,979,319	A	12/1990	Hayes	10,499,707	B2	12/2019	Hobson et al.
5,054,216	A	10/1991	Lin	10,506,842	B2	12/2019	Pratt et al.
5,090,140	A	2/1992	Sessa	10,537,154	B2	1/2020	Smith et al.
5,127,170	A	7/1992	Messina	10,555,578	B2	2/2020	Pratt
5,174,050	A	12/1992	Gabrielli	10,568,382	B2	2/2020	Hatfield et al.
5,181,331	A	1/1993	Berger	10,568,385	B2	2/2020	Beers et al.
5,184,410	A	2/1993	Hamilton	10,602,802	B2	3/2020	Hopkins et al.
5,257,470	A	11/1993	Auger et al.	10,609,981	B1	4/2020	Phinney
5,259,126	A	11/1993	Rosen	10,617,174	B1	4/2020	Hopkins et al.
5,265,353	A	11/1993	Marega et al.	10,638,810	B1	5/2020	Cheney et al.
5,282,327	A	2/1994	Ogle	10,653,209	B2	5/2020	Pratt et al.
5,311,678	A	5/1994	Spademan	10,660,401	B1	5/2020	Pratt et al.
5,341,583	A	8/1994	Hallenbeck	10,743,616	B2	8/2020	Beers et al.
5,351,583	A	10/1994	Szymber et al.	10,791,796	B1	10/2020	Baker
5,353,526	A	10/1994	Foley et al.	10,813,405	B2	10/2020	Pratt
5,371,957	A	12/1994	Gaudio	10,897,956	B2	1/2021	Hopkins
5,430,961	A	7/1995	Faulconer et al.	10,905,192	B1	2/2021	Cheney
5,467,537	A	11/1995	Aveni et al.	10,912,348	B2	2/2021	Owings et al.
5,481,814	A	1/1996	Spencer	10,973,278	B2	4/2021	Raia
5,806,208	A	9/1998	French	10,973,279	B2	4/2021	Cheney et al.
5,842,292	A	12/1998	Siesel	11,000,091	B1	5/2021	Kyle
5,846,063	A	12/1998	Lakic	11,064,761	B2	7/2021	Cheney
5,983,530	A	11/1999	Chou	11,140,941	B2	10/2021	Xanthos et al.
5,997,027	A	12/1999	Jungkind	11,154,113	B2	10/2021	Hatfield et al.
6,000,148	A	12/1999	Cretinon	11,172,727	B2	11/2021	Hatfield et al.
6,014,823	A	1/2000	Lakic	11,191,321	B2	12/2021	Kilgore et al.
6,125,555	A	10/2000	Schenkel	11,213,098	B2	1/2022	Beers et al.
6,128,837	A	10/2000	Huang	11,234,482	B2	2/2022	Roser
6,170,173	B1	1/2001	Caston	D948,190	S	4/2022	Jury
6,189,239	B1	2/2001	Gasparovic et al.	D948,191	S	4/2022	Holmes
6,290,559	B1	9/2001	Scott	D949,540	S	4/2022	Jury
6,321,466	B1	11/2001	Bordin et al.	D949,544	S	4/2022	Witherow
6,360,454	B1	3/2002	Dachgruber et al.	11,344,077	B2	5/2022	Hopkins et al.
6,367,171	B1	4/2002	Burt	D955,732	S	6/2022	Kelley
6,378,230	B1	4/2002	Rotem et al.	11,490,680	B2	11/2022	Cheney et al.
6,427,361	B1	8/2002	Chou	11,607,002	B2	3/2023	Cheney
6,470,537	B1	10/2002	Schallenkamp	11,622,598	B2	4/2023	Bar
6,643,954	B2	11/2003	Voswinkel	11,633,005	B2	4/2023	Pratt et al.
6,671,980	B1	1/2004	Liu	11,633,006	B2	4/2023	Pratt et al.
6,684,533	B1	2/2004	Su	11,633,016	B2	4/2023	Orand et al.
6,839,985	B2	1/2005	Bettiol	11,659,886	B2	5/2023	Cheney et al.
6,877,252	B2	4/2005	Wilkinson	11,700,916	B2	7/2023	Kilgore et al.
				11,707,113	B2	7/2023	Hopkins et al.
				D993,601	S	8/2023	Wang et al.
				11,737,511	B2	8/2023	Cheney et al.
				11,744,319	B2	9/2023	Farina

(56)

References Cited

U.S. PATENT DOCUMENTS

11,864,620	B2 *	1/2024	Cheney	A43B 17/18	2016/0302530	A1	10/2016	Smith et al.
2001/0001350	A1	5/2001	Aguerre		2016/0374427	A1	12/2016	Zahabian
2002/0053147	A1	5/2002	Borsoi et al.		2017/0013915	A1	1/2017	Caston, Jr.
2002/0066213	A1	6/2002	Wells		2017/0035148	A1	2/2017	Marvin et al.
2002/0095823	A1	7/2002	Laio et al.		2017/0055630	A1	3/2017	Marshall
2002/0144434	A1	10/2002	Farys et al.		2017/0127755	A1	5/2017	Bunnell et al.
2002/0174568	A1	11/2002	Neiley		2017/0265562	A1	9/2017	Mullen
2003/0106244	A1	6/2003	Miller et al.		2017/0303632	A1	10/2017	Pratt et al.
2004/0003517	A1	1/2004	Marvin et al.		2017/0360141	A1	12/2017	Azoulay et al.
2004/0088890	A1	5/2004	Matis et al.		2017/0360143	A1	12/2017	Pratt et al.
2004/0111921	A1	6/2004	Lenormand		2018/0110287	A1 *	4/2018	Hopkins
2005/0022428	A1	2/2005	Anderson		2018/0199659	A1	7/2018	Lintaman
2005/0034328	A1	2/2005	Geer		2018/0235314	A1	8/2018	Farage
2005/0039348	A1	2/2005	Raluy et al.		2018/0255865	A1	9/2018	Hsu
2005/0066543	A1	3/2005	Rosen et al.		2018/0263332	A1	9/2018	Bruno
2005/0076540	A1	4/2005	Su		2018/0295942	A1	10/2018	Drake
2005/0198867	A1	9/2005	Labbe		2018/0338572	A1	11/2018	Cross et al.
2005/0241189	A1	11/2005	Elkington et al.		2018/0343968	A1	12/2018	James et al.
2006/0037215	A1	2/2006	Lee		2019/0053571	A1	2/2019	Bjornson et al.
2007/0074425	A1	4/2007	Leong		2019/0116916	A1	4/2019	Burch
2007/0180730	A1	8/2007	Greene et al.		2019/0281920	A1	9/2019	Ito et al.
2007/0209234	A1	9/2007	Chou		2019/0289960	A1	9/2019	Loveder
2007/0256329	A1	11/2007	Antonelli et al.		2019/0297999	A1	10/2019	Nakaya et al.
2007/0271822	A1	11/2007	Meschter		2019/0307208	A1	10/2019	Corcoran-Tadd et al.
2007/0277394	A1	12/2007	Hansen et al.		2019/0365029	A1	12/2019	Cross et al.
2008/0168683	A1	7/2008	Keating		2019/0366667	A1	12/2019	Cross et al.
2008/0189984	A1	8/2008	Januszewski et al.		2020/0015544	A1	1/2020	Pratt
2008/0276492	A1	11/2008	Burnett		2020/0037703	A1	2/2020	Twist
2008/0307673	A1	12/2008	Johnson		2020/0046066	A1	2/2020	Difranco
2008/0313929	A1	12/2008	Hoyt		2020/0068991	A1	3/2020	Steele et al.
2009/0090026	A1	4/2009	Mosher		2020/0085136	A1	3/2020	Pratt et al.
2009/0223084	A1	9/2009	Kaufman		2020/0113274	A1	4/2020	Butler
2010/0037483	A1	2/2010	Meschter et al.		2020/0187590	A1	6/2020	Hopkins et al.
2010/0095494	A1	4/2010	Martin		2020/0196787	A1	6/2020	Dament et al.
2010/0095554	A1	4/2010	Gillespie		2020/0205512	A1	7/2020	Blanche et al.
2010/0251572	A1	10/2010	Baudouin et al.		2020/0205516	A1	7/2020	Kilgore
2011/0016751	A1	1/2011	Somerville		2020/0205517	A1	7/2020	Happen
2011/0185592	A1	8/2011	Nishiwaki et al.		2020/0205518	A1	7/2020	Hopkins et al.
2011/0214313	A1	9/2011	James et al.		2020/0205520	A1	7/2020	Kilgore
2011/0239489	A1	10/2011	Iuchi et al.		2020/0245797	A1	8/2020	Kim
2011/0277350	A1	11/2011	Huynh		2020/0253333	A1	8/2020	Kilgore et al.
2012/0055044	A1	3/2012	Dojan et al.		2020/0305552	A1	10/2020	Cheney et al.
2012/0060395	A1	3/2012	Blevens et al.		2020/0323308	A1	10/2020	Dubuisson
2012/0151799	A1	6/2012	Weinreb		2020/0375319	A1	12/2020	Yang
2012/0167413	A1	7/2012	Marvin et al.		2020/0383424	A1	12/2020	Hughes
2012/0180338	A1	7/2012	Lin		2021/0030107	A1	2/2021	Pratt et al.
2012/0216429	A1	8/2012	Bastida et al.		2021/0059351	A1	3/2021	Piacentini
2013/0160328	A1	6/2013	Hatfield et al.		2021/0068493	A1	3/2021	Pratt et al.
2013/0185959	A1	7/2013	Coleman		2021/0068494	A1	3/2021	Zahabian
2013/0219747	A1	8/2013	Lederer		2021/0068498	A1	3/2021	Cheney et al.
2013/0312285	A1	11/2013	Sharma et al.		2021/0106094	A1	4/2021	Cheney
2014/0013624	A1	1/2014	Stockbridge et al.		2021/0112911	A1	4/2021	Pratt et al.
2014/0090274	A1	4/2014	Arquilla		2021/0112914	A1	4/2021	Cheney
2014/0101975	A1	4/2014	Ueda		2021/0112916	A1	4/2021	Schulten
2014/0123516	A1	5/2014	Cressman et al.		2021/0127788	A1	5/2021	Li
2014/0173932	A1	6/2014	Bell		2021/0145114	A1	5/2021	Kyle
2014/0189964	A1	7/2014	Wen et al.		2021/0169177	A1	6/2021	Yang
2014/0202044	A1	7/2014	Adami et al.		2021/0186146	A1	6/2021	Erwin
2014/0259781	A1	9/2014	Sakai		2021/0204642	A1	7/2021	Kyle
2014/0298687	A1	10/2014	Flinterman et al.		2021/0204643	A1	7/2021	Kyle
2014/0305005	A1	10/2014	Yeh		2021/0204644	A1	7/2021	Kyle
2014/0373396	A1	12/2014	Chang		2021/0204645	A1	7/2021	Pratt
2015/0013184	A1	1/2015	Beers		2021/0227923	A1	7/2021	Love et al.
2015/0013189	A1	1/2015	Hanak et al.		2021/0235811	A1	8/2021	Oh
2015/0020416	A1	1/2015	Wiens		2021/0282495	A1	9/2021	Davis et al.
2015/0047222	A1	2/2015	Rushbrook		2021/0321718	A1	10/2021	Chang
2015/0047223	A1	2/2015	Flinterman et al.		2021/0330033	A1	10/2021	Pratt et al.
2015/0165338	A1	6/2015	Choe		2021/0337922	A1	11/2021	Cheney
2015/0216252	A1	8/2015	Wiens		2021/0345727	A1	11/2021	Raia
2015/0305432	A1	10/2015	Wiens		2021/0378356	A1	12/2021	Cheney et al.
2015/0305442	A1	10/2015	Ravindran		2022/0053884	A1	2/2022	Kilgore et al.
2016/0007674	A1	1/2016	Labonte et al.		2022/0104582	A1	4/2022	Christensen et al.
2016/0128424	A1	5/2016	Connell et al.		2022/0132976	A1	5/2022	Bentz
2016/0128429	A1	5/2016	Hatfield et al.		2022/0142291	A1	5/2022	Cheney et al.
2016/0262492	A1	9/2016	Fujita et al.		2022/0240625	A1	8/2022	Shin
					2022/0287406	A1	9/2022	Cheney et al.
					2022/0287407	A1	9/2022	Cheney et al.
					2022/0354220	A1	11/2022	Cheney
					2022/0361627	A1	11/2022	Cheney et al.

(56)

References Cited**U.S. PATENT DOCUMENTS**

2022/0369758	A1	11/2022	Pratt
2022/0378144	A1	12/2022	Pratt et al.
2022/0400810	A1	12/2022	Cheney et al.
2023/0030016	A1	2/2023	Pratt et al.
2023/0030734	A1	2/2023	Farina
2023/0033366	A1	2/2023	Farina
2023/0035573	A1	2/2023	Bar
2023/0052916	A1	2/2023	Bar
2023/0055164	A1	2/2023	Cheney et al.
2023/0077572	A1	3/2023	Dean et al.
2023/0081272	A1	3/2023	Pratt
2023/0084256	A1	3/2023	Brilliant
2023/0218033	A1	7/2023	Cheney
2023/0225450	A1	7/2023	Cheney et al.
2023/0263270	A1	8/2023	Jones
2023/0276897	A1	9/2023	Cheney et al.
2023/0284737	A1	9/2023	Bar

FOREIGN PATENT DOCUMENTS

CN	101991227	A	3/2011
CN	107467775	A	12/2017
DE	19534249	A1	3/1997
DE	19611797	A1	10/1997
DE	29809404	U1	8/1998
DE	10247163	A1	4/2004
DE	102004005288	A1	8/2005
EP	1059044	A1	12/2000
EP	1952715	A1	8/2008
EP	3266327	A1	1/2018
FR	3066679	A1	11/2018
GB	2517399	A	2/2015
JP	01-081910	U	6/1989
JP	11-127907	A	5/1999
JP	2001-149394	A	6/2001

JP	2010-104416	A	5/2010
JP	2013-510685	A	3/2013
JP	2014-161721	A	9/2014
KR	10-2005-0095542	A	9/2005
KR	10-2009-0093548	A	9/2009
KR	10-2009-0130804	A	12/2009
KR	10-0936510	B1	1/2010
NL	2000762	C1	1/2009
WO	2007/080205	A1	7/2007
WO	2009/089572	A1	7/2009
WO	2009/154350	A1	12/2009
WO	2017/004135	A2	1/2017
WO	2018/230961	A1	12/2018
WO	2019/215359	A1	11/2019
WO	2020/006490	A1	1/2020
WO	2020/176653	A1	9/2020
WO	2021/162569	A1	8/2021
WO	2022/221339	A1	10/2022
WO	2023/064568	A1	4/2023

OTHER PUBLICATIONS

<https://www.teva.com/kids-sandals/hurricane-drift/1102483C.html>
submitted herewith as of Jun. 13, 2019.

International Preliminary Report on Patentability received for PCT Patent Application No. PCT/US22/016867, mailed on Aug. 31, 2023, 8 pages.

International Search Report and Written Opinion received for PCT Patent Application No. PCT/US22/16867, mailed on May 13, 2022, 9 pages.

Sneider, "Kizik Handsfree New York Shoe Review," <https://thegadgeteer.com/2018/06/27/kizik-handsfree-new-york-show-review/> (2018).

U.S. Provisional Application filed Jun. 29, 2015 by Zahabian., U.S. Appl. No. 62/186,148.

* cited by examiner

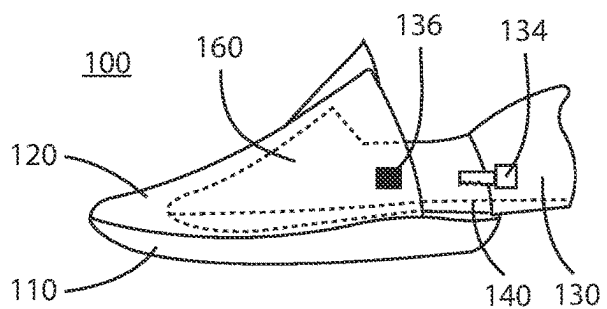


FIG. 1A

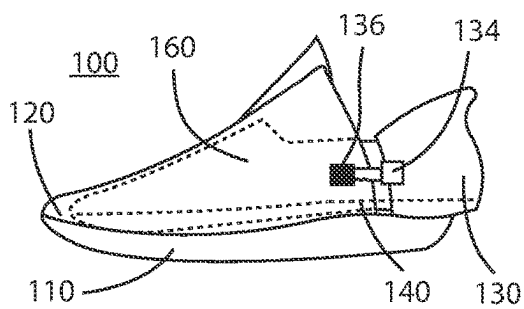


FIG. 1B

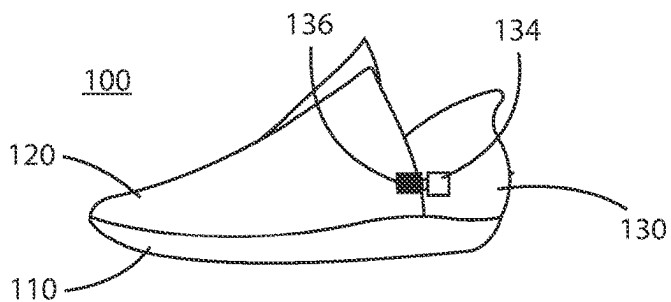


FIG. 1C

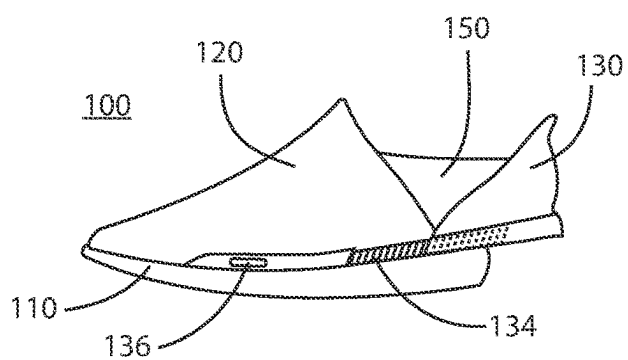


FIG. 1D

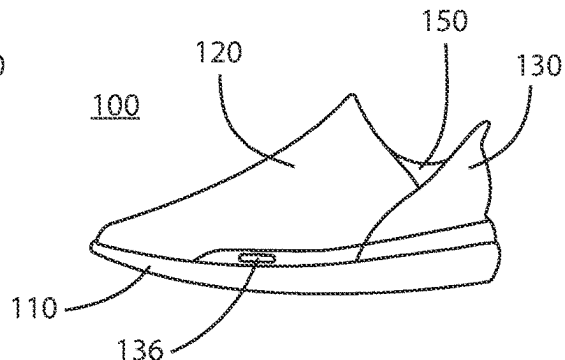


FIG. 1E

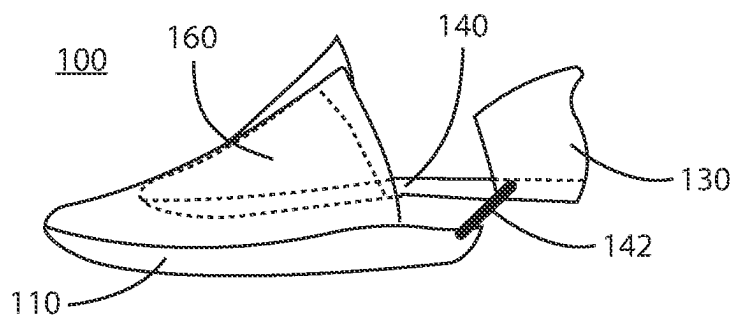


FIG. 2A

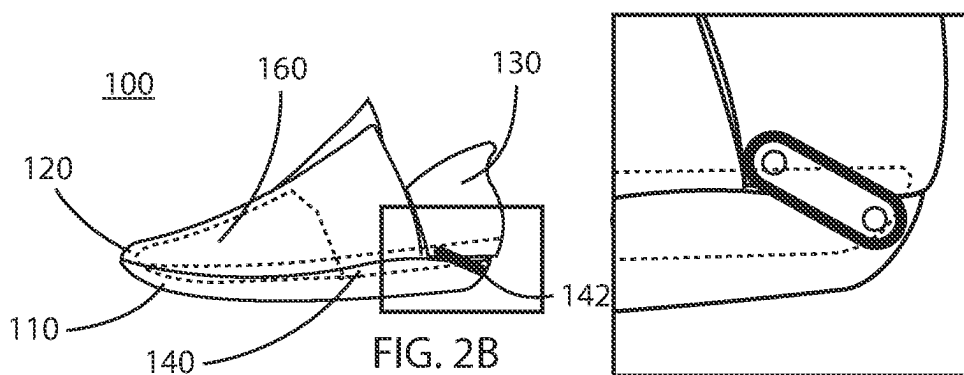


FIG. 2B

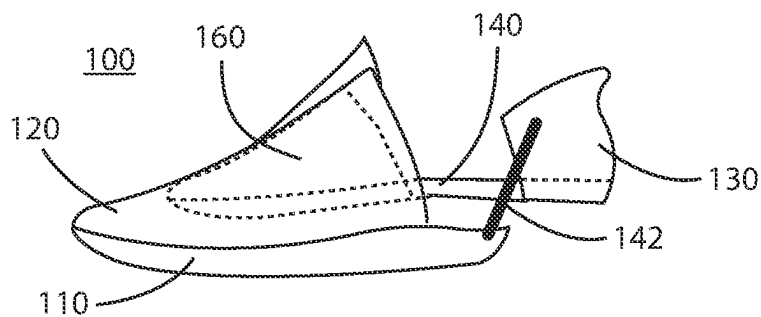


FIG. 2C

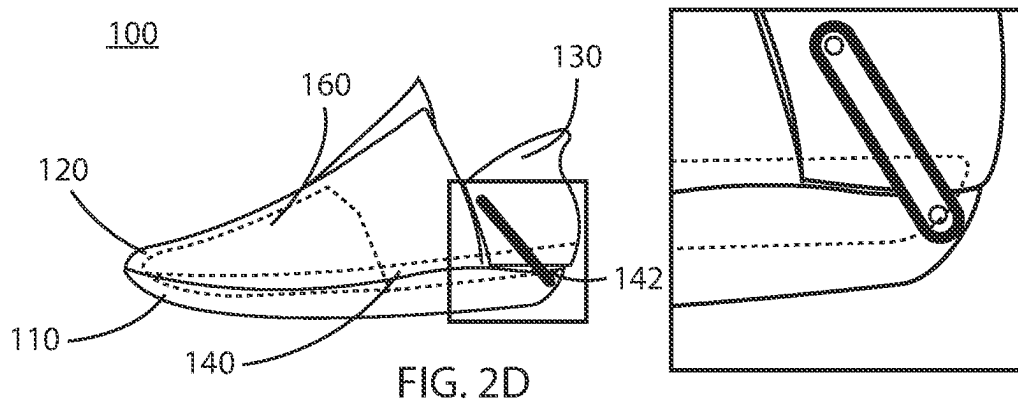


FIG. 2D

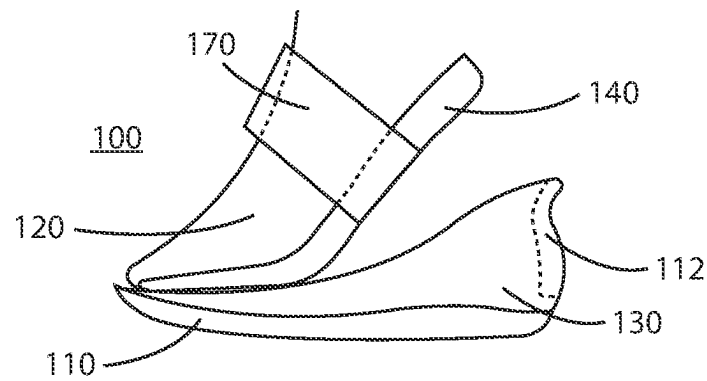


FIG. 3A

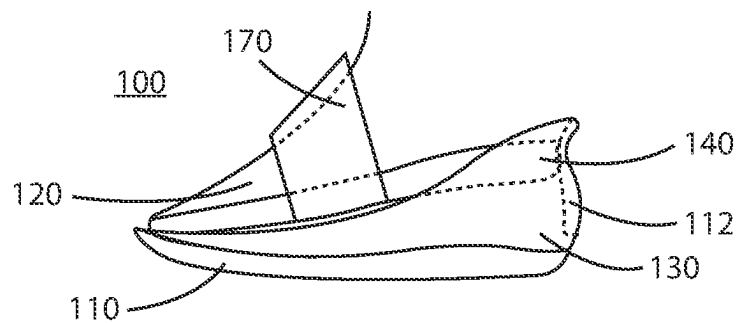


FIG. 3B

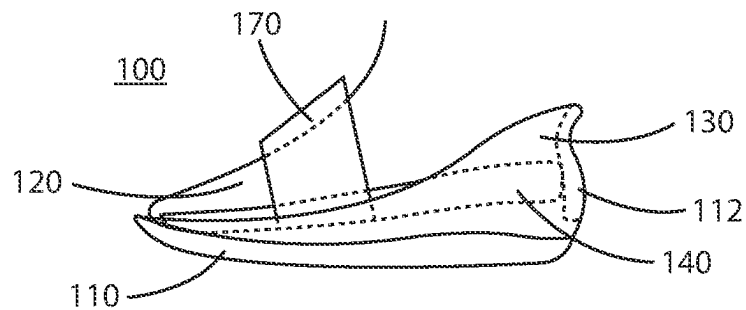


FIG. 3C

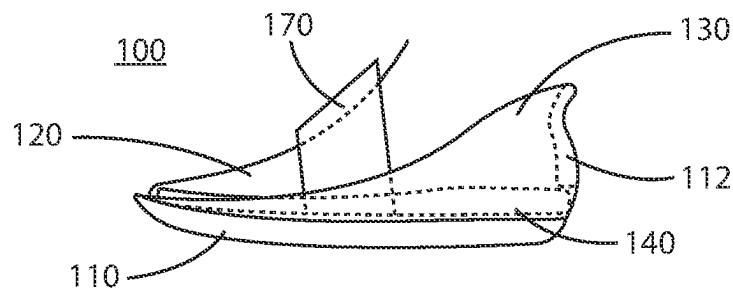
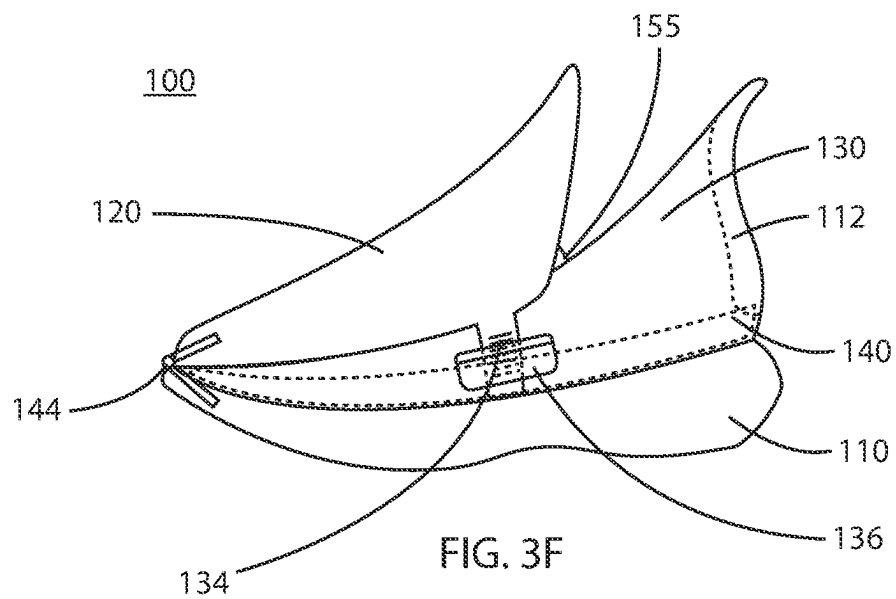
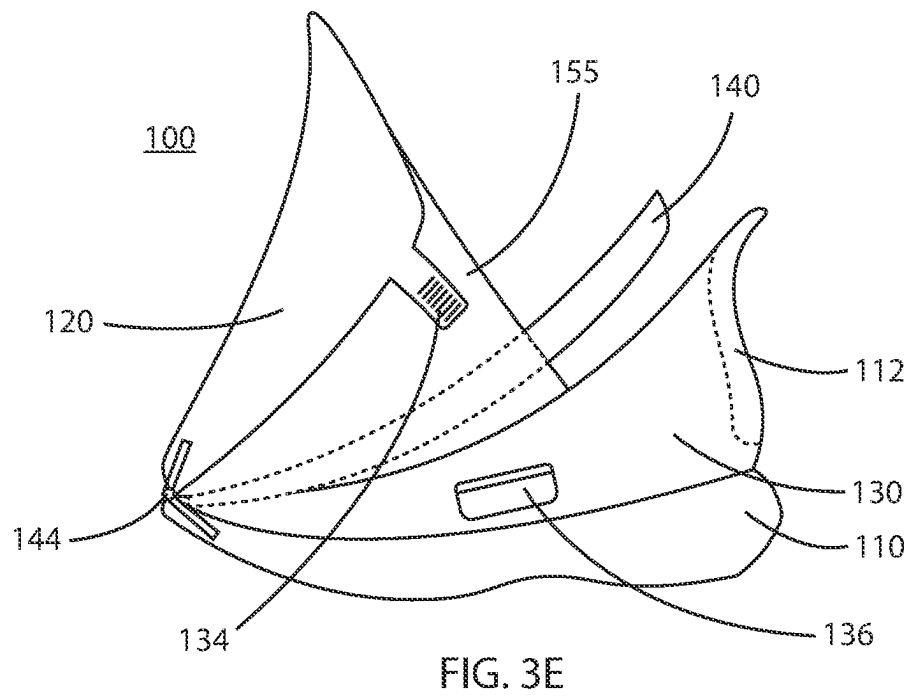


FIG. 3D



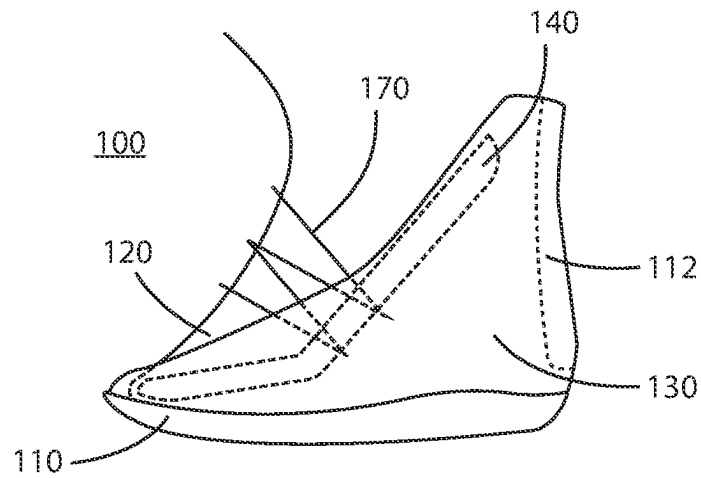


FIG. 4A

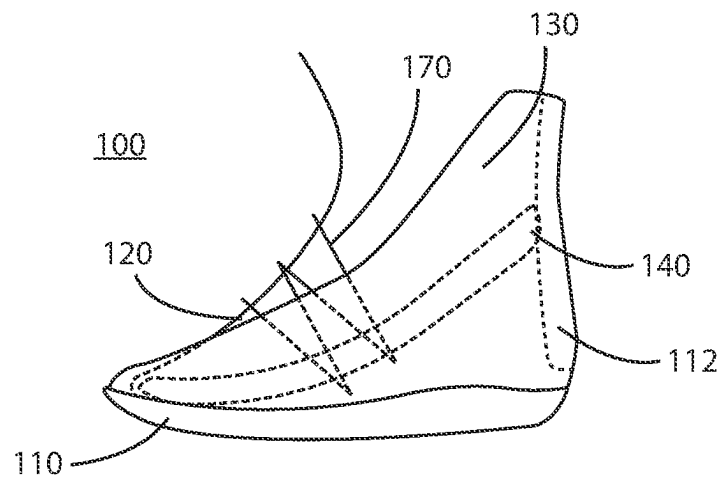


FIG. 4B

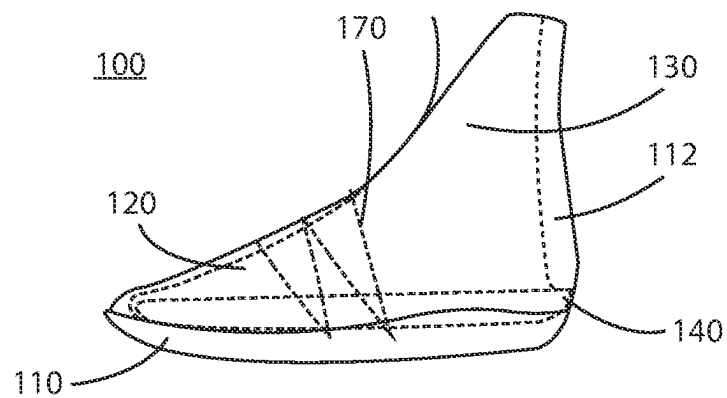


FIG. 4C

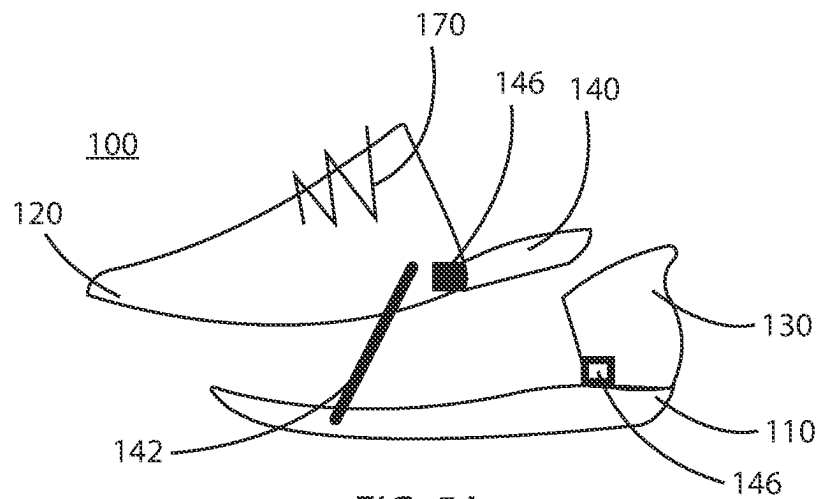


FIG. 5A

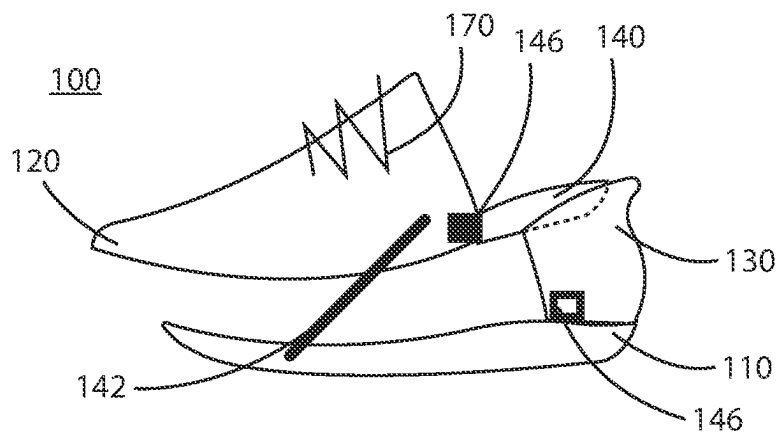


FIG. 5B

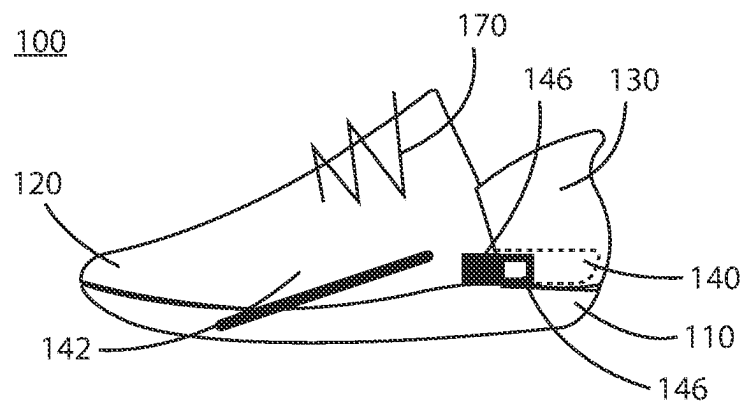


FIG. 5C

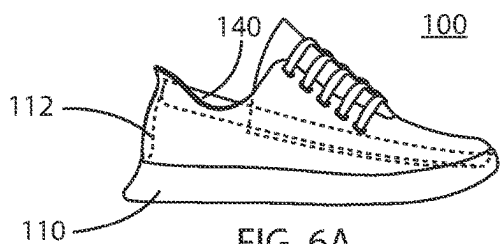


FIG. 6A

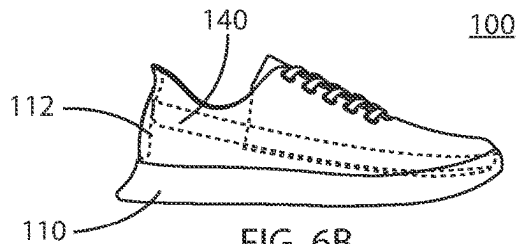


FIG. 6B

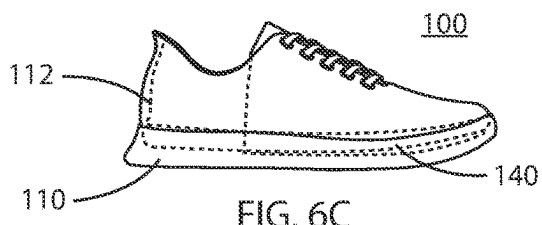


FIG. 6C

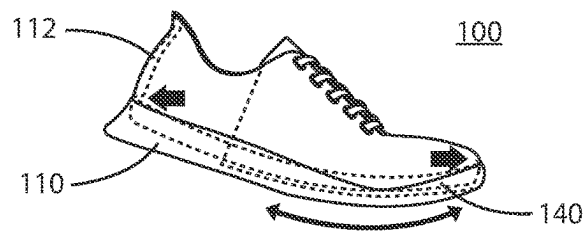


FIG. 6D

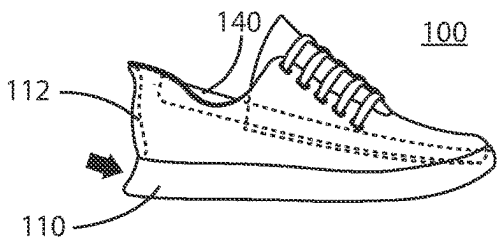


FIG. 6E

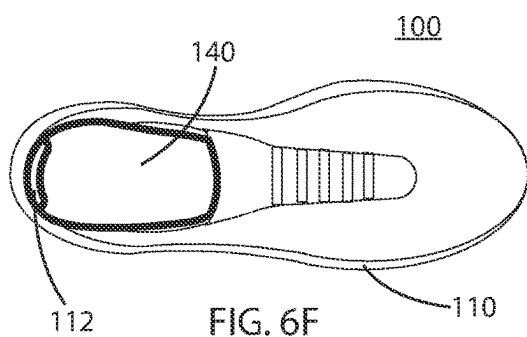


FIG. 6F

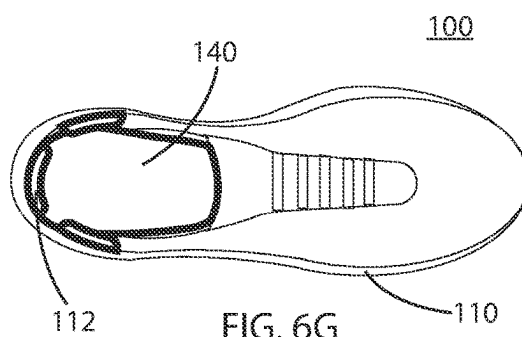


FIG. 6G

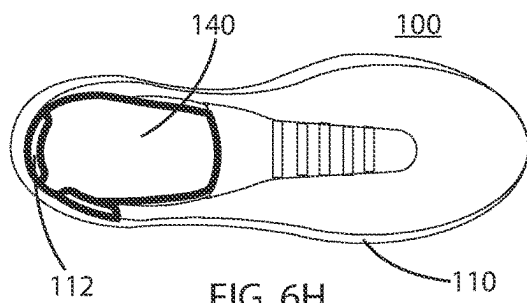


FIG. 6H

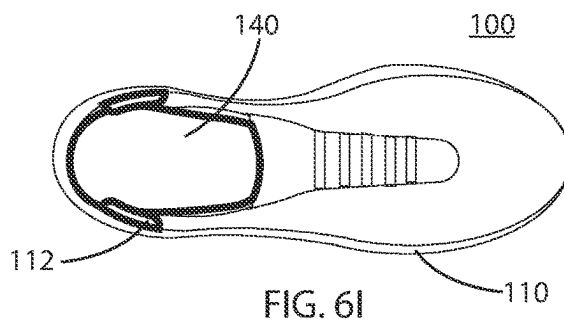
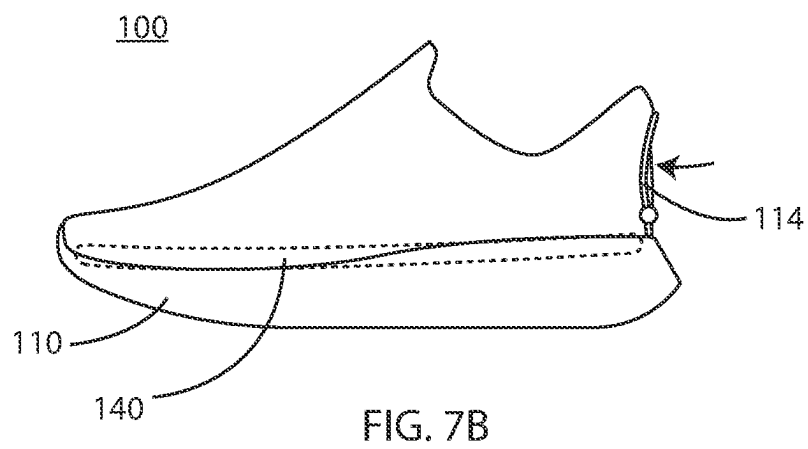
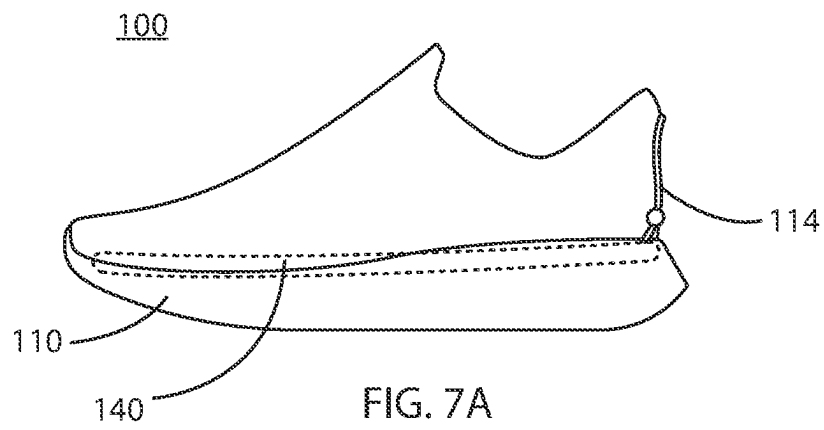
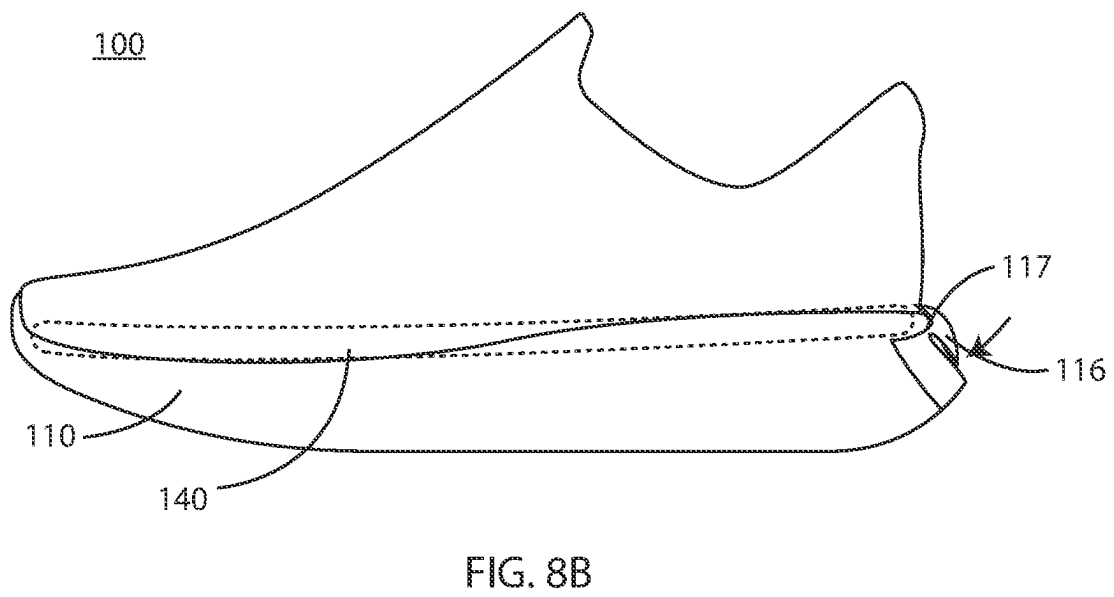
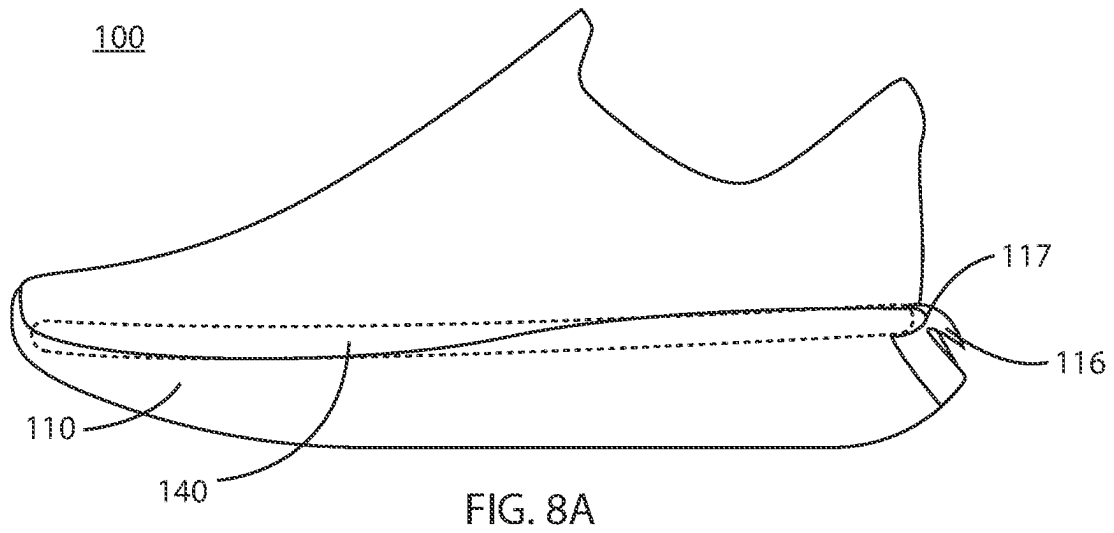


FIG. 6I





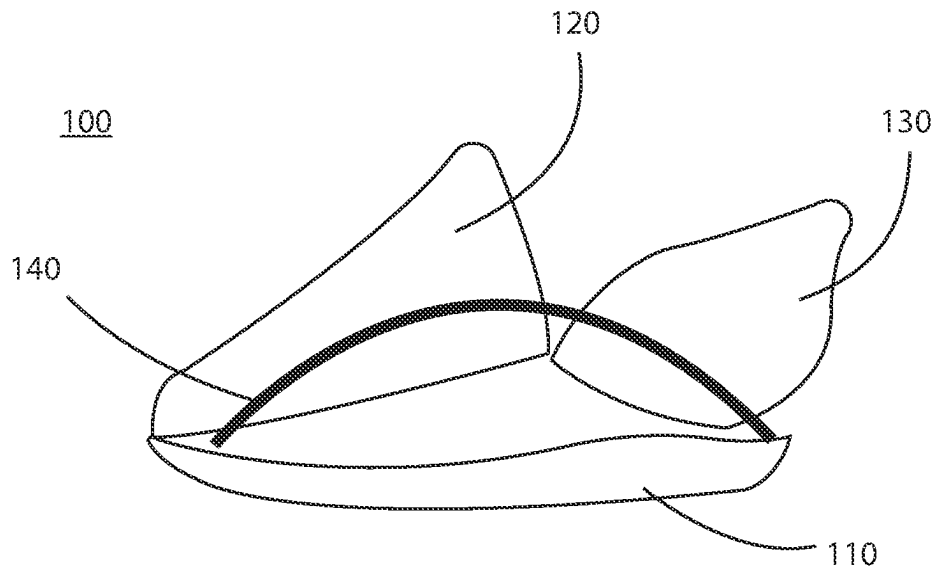


FIG. 9A

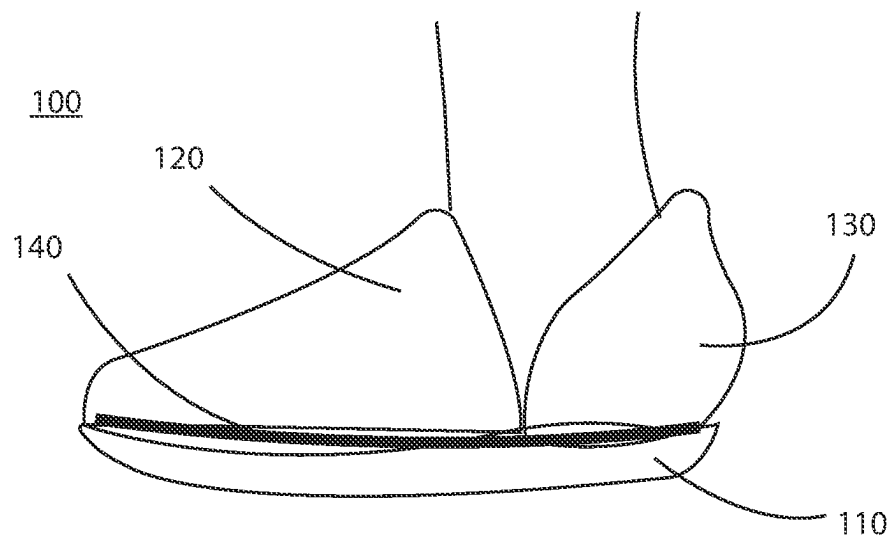


FIG. 9B

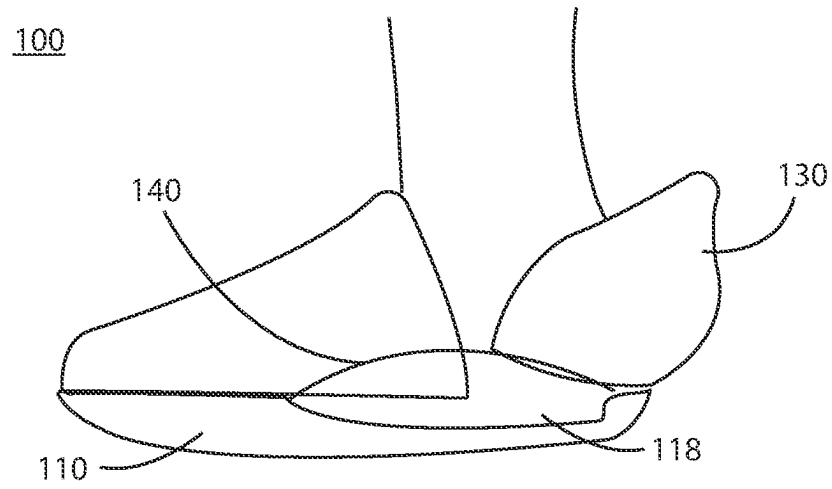


FIG. 10A

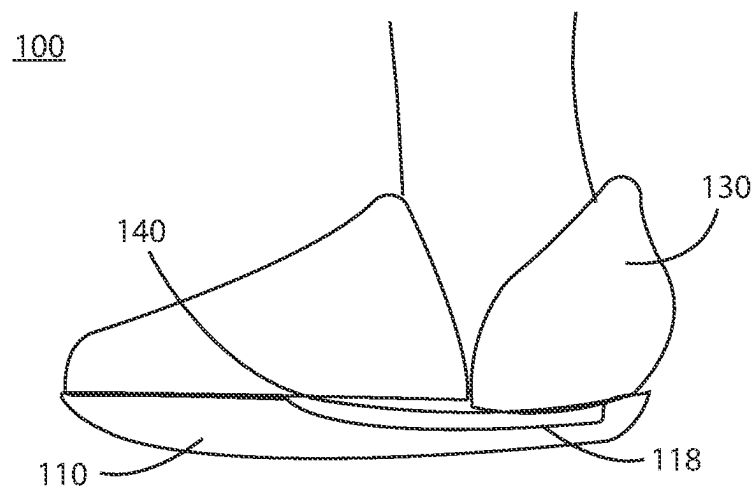


FIG. 10B

1

**RAPID-ENTRY FOOTWEAR HAVING A
TRANSFORMING FOOTBED****CROSS-REFERENCE TO RELATED
APPLICATIONS**

This application is a continuation of, claims priority to and the benefit of U.S. Ser. No. 17/827,954 filed May 30, 2022 and entitled “RAPID-ENTRY FOOTWEAR HAVING A TRANSFORMING FOOTBED.” U.S. Ser. No. 17/827, 954 is a continuation of, claims priority to and the benefit of PCT Serial No. PCT/US22/16867 filed Feb. 17, 2022 and entitled “RAPID-ENTRY FOOTWEAR HAVING A TRANSFORMING FOOTBED.” PCT Serial No. PCT/US22/16867 claims the benefit of U.S. Provisional Patent Application No. 63/150,550, filed Feb. 17, 2021 and entitled “RAPID-ENTRY FOOTWEAR HAVING A TRANSLATING FOOTBED.” All of the aforementioned applications are incorporated herein by reference in their entireties.

FIELD

The present disclosure relates to footwear, and more particularly to rapid-entry footwear having a transforming footbed.

BACKGROUND

Whether due to inconvenience or inability, donning and doffing of shoes, including tying or otherwise securing the same, may be undesirable and/or present difficulties to some individuals. The present disclosure addresses this need.

SUMMARY

In example embodiments, a rapid-entry shoe of the present disclosure comprises a sole portion, a footbed and a separable upper. In accordance with an aspect of the present disclosure, the footbed is configured to transform (e.g., slide or pivot or translate or bow) with a first portion of the separable upper relative to the sole portion and a second portion of the separable upper between an open configuration having an expanded upper opening for ease of donning or doffing by a foot and a closed configuration having an unexpanded upper opening for securement of the foot. In accordance with an aspect of the present disclosure, in the closed configuration, the footbed is secured against the sole portion.

A rapid-entry shoe in accordance with the present disclosure comprises a sole portion, a footbed, and an upper. In accordance with example embodiments, the upper comprises an upper forward portion and an upper heel portion. In accordance with example embodiments, the sole portion is coupled to the upper heel portion.

In accordance with example embodiments, the footbed is coupled to the upper forward portion. In accordance with example embodiments, the footbed is configured to pivot relative to the sole portion between an open configuration, in which the footbed is angled relative to the sole portion, and a closed position, in which the footbed and the sole portion are substantially parallel to one another.

In accordance with example embodiments, the footbed is coupled to the upper forward portion to form a bootie. In accordance with example embodiments, the bootie is configured to pivot relative to the sole portion between an open configuration, in which a rear edge of the footbed is not in contact with a rear edge of the sole portion, and a closed

2

position, in which the rear edge of the footbed is in contact with the rear edge of the sole portion.

In accordance with example embodiments, the bootie comprises a plurality of laces to secure a foot within the bootie.

In accordance with example embodiments, in the closed configuration, the rear edge of the footbed is positioned underneath at least one bumper coupled to an inner surface of the upper heel portion, the at least one bumper configured to secure the bootie in the closed position. In accordance with example embodiments, the at least one bumper is comprised of a foam material. In accordance with example embodiments, the at least one bumper comprises a dynamic bumper configured to be manually buckled such that, in the closed position, the rear edge of the footbed is no longer positioned underneath the at least one bumper, so as to no longer secure the bootie in the closed position.

In accordance with example embodiments, in the closed configuration, the rear edge of the footbed is positioned within an aperture of a dynamic hook, the aperture configured to secure the bootie in the closed position. In accordance with example embodiments, the dynamic hook comprises a living hinge configured to be manually opened such that, in the closed position, the rear edge of the footbed is no longer positioned within the aperture, so as to no longer secure the bootie in the closed position.

In accordance with example embodiments, the upper forward portion comprises a foot hold extending completely under the footbed between opposing sides of the footbed. In accordance with example embodiments, the foot hold comprises a plurality of laces.

In accordance with example embodiments, the upper forward portion is coupled to the sole portion exclusively at a forward portion of the sole portion.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings may provide a further understanding of example embodiments of the present disclosure and are incorporated in, and constitute a part of, this specification. In the accompanying drawings, only one rapid-entry shoe (either a left shoe or a right shoe) may be illustrated, however, it should be understood that in such instances, the illustrated shoe may be mirror-imaged so as to be the other shoe. The use of like reference numerals throughout the accompanying drawings is for convenience only, and should not be construed as implying that any of the illustrated embodiments are equivalent. The accompanying drawings are for purposes of illustration and not of limitation.

FIGS. 1A-1C illustrate footwear with a sliding footbed, in accordance with example embodiments of the present disclosure.

FIGS. 1D and 1E illustrate another embodiment of footwear with a sliding footbed, in accordance with the present disclosure.

FIGS. 2A-2D illustrate footwear with a translating footbed and upper heel portion, in accordance with example embodiments of the present disclosure.

FIGS. 3A-3D illustrate footwear with a pivoting footbed, in accordance with example embodiments of the present disclosure.

FIGS. 3E and 3F illustrate another embodiment of footwear with a pivoting footbed, in accordance with the present disclosure.

FIGS. 4A-4C illustrate footwear having the profile of a high-top shoe with a pivoting footbed, in accordance with example embodiments of the present disclosure.

FIGS. 5A-5C illustrate footwear with a translating footbed and upper forward portion, in accordance with example embodiments of the present disclosure.

FIGS. 6A-6E illustrate a rapid-entry shoe having a stationary bumper to secure a footbed, in accordance with example embodiments of the present disclosure.

FIGS. 6F-6I illustrate rapid-entry shoes having different configurations of stationary bumpers, in accordance with example embodiments of the present disclosure.

FIGS. 7A and 7B illustrate a rapid-entry shoe having a dynamic bumper to secure a footbed, in accordance with example embodiments of the present disclosure.

FIGS. 8A and 8B illustrate a rapid-entry shoe having a dynamic hook to secure a footbed, in accordance with example embodiments of the present disclosure.

FIGS. 9A and 9B illustrate a rapid-entry shoe having a pivoting upper heel portion and a pivoting upper forward portion, in accordance with example embodiments of the present disclosure.

FIGS. 10A and 10B illustrate, in accordance with example embodiments of the present disclosure.

DETAILED DESCRIPTION

Example embodiments of the present disclosure are described in sufficient detail in this detailed description to enable persons having ordinary skill in the relevant art to practice the present disclosure, however, it should be understood that other embodiments may be realized and that mechanical and chemical changes may be made without departing from the spirit or scope of the present disclosure. Thus, this detailed description is for purposes of illustration and not of limitation.

For example, unless the context dictates otherwise, example embodiments described herein may be combined with other embodiments described herein. Similarly, references to “example embodiment,” “example embodiments” and the like indicate that the embodiment(s) described may comprise a particular feature, structure, or characteristic, but every embodiment may not necessarily comprise the particular feature, structure, or characteristic. Moreover, such references may not necessarily refer to the same embodiment(s). Any reference to singular includes plural embodiments, and any reference to plural includes singular embodiments.

Any reference to coupled, connected, attached or the like may be temporary or permanent, removeable or not, non-integral or integral, partial or full, and may be facilitated by one or more of adhesives, stitches, hook and loop fasteners, buttons, clips, grommets, zippers and other means known in the art or hereinafter developed.

As used herein, the transitional term “comprising”, which is synonymous with “including,” “containing,” or “characterized by,” is inclusive or open-ended and does not exclude additional, unrecited elements or method steps. The transitional phrase “consisting of” excludes any element, step, or ingredient not specified in the claim. The transitional phrase “consisting essentially of” limits the scope of a claim to the specified materials or steps “and those that do not materially affect the basic and novel characteristic(s)” of the claimed invention.

No claim limitation is intended to invoke 35 U.S.C. 112(f) or pre-AIA 35 U.S.C. 112, sixth paragraph or the like unless it explicitly uses the term “means” and includes functional language.

In describing example embodiments of the rapid-entry footwear, certain directional terms may be used. By way of example, terms such as “right,” “left,” “medial,” “lateral,” “front,” “back,” “forward,” “backward,” “rearward,” “top,” “bottom,” “upper,” “lower,” “up,” “down,” and the like may be used to describe example embodiments of the rapid-entry footwear. These terms should be given meaning according to the manner in which the rapid-entry footwear is most typically designed for use, with the rapid-entry footwear on a user's foot and with the user's shod foot disposed on or ready for placement on an underlying surface. Thus, these directions may be understood relative to the rapid-entry footwear in such use. Similarly, as the rapid-entry footwear is intended primarily for use as footwear, terms such as “inner,” “inward,” “outer,” “outward,” “innermost,” “outermost,” “inside,” “outside,” and the like should be understood in reference to the rapid-entry footwear's intended use, such that inner, inward, innermost, inside, and the like signify relatively closer to the user's foot, and outer, outward, outermost, outside, and the like signify relatively farther from the user's foot when the rapid-entry footwear is being used for its intended purpose. Notwithstanding the foregoing, if the foregoing definitional guidance is contradicted by an individual use herein of any of the foregoing terms, the term should be understood and read according to the definition that gives life and meaning to the particular instance of the term.

As used herein, unless the context dictates otherwise, a “rapid-entry shoe” refers to an athleisure shoe, a casual shoe, a formal shoe, a dress shoe, a heel, a sports/athletic shoe (e.g., a tennis shoe, a golf shoe, a bowling shoe, a running shoe, a basketball shoe, a soccer shoe, a ballet shoe, etc.), a walking shoe, a sandal, a boot, or other suitable type of shoe. Additionally, a rapid-entry shoe can be sized and configured to be worn by men, women, or children.

As used herein, unless the context dictates otherwise, “footbed” can refer to an insole, sock liner, wedge or midsole, and “sole portion” can refer to a midsole or outsole.

As used herein, unless the context dictates otherwise, “upper heel portion” comprises a portion of the upper extending between medial and lateral sides, around the heel (e.g., heel counter and quarters), and “upper forward portion” can refer to comprises a portion of the upper extending between medial and lateral sides, over the forefoot (e.g., tongue, toe cap, vamp and quarters).

As used herein, unless the context dictates otherwise, “separable” refers to having at least two parts capable of relative movement, excluding a tongue in the case of a separable upper. As used herein, unless the context dictates otherwise, “slide” refers to relative 1-dimensional movement (e.g., along an axis parallel to the length of the footbed) while remaining substantially parallel. As used herein, unless the context dictates otherwise, “pivot” refers to relative movement resulting in an angle. As used herein, unless the context dictates otherwise, “translate” refers to relative 2-dimensional movement (e.g., along axes parallel and orthogonal to the length of the footbed) while remaining substantially parallel.

In example embodiments of the present disclosure, a footbed of a rapid-entry shoe is configured to move relative to a sole portion of a rapid-entry shoe, between an open configuration (for ease of donning or doffing by a foot) and a closed configuration (for securement of a foot). In example

embodiments of the present disclosure, a foot applying a force (e.g., a downward and/or shear force) to the footbed moves it relative to the sole portion from an open configuration to a closed configuration. In connection with example embodiments, a sole portion of the rapid-entry shoe can be configured to remain substantially planar or otherwise not bend during the transition of a footbed of the rapid-entry shoe between the open and closed configurations.

In some embodiments, and with reference to FIGS. 1A-2D, an upper of a rapid-entry shoe **100** is a separable upper. In this regard, the upper can comprise an upper heel portion **130** and an upper forward portion **120**. In example embodiments, an upper heel portion **130** of a rapid-entry shoe **100** is coupled to a footbed **140** and configured to slide, pivot or translate between an open configuration and a closed configuration relative to a sole portion **110** coupled to an upper forward portion **120**. In connection with the foregoing embodiments, a bootie **160** can be coupled to the footbed **140**. The bootie **160** can extend the length of the footbed (e.g., FIG. 1A) or can cover only a forward portion of the footbed and be open on the sides (e.g., FIG. 2A).

With reference now to FIGS. 1A-1E, in such embodiments, all or a portion of a footbed **140** can be configured to slide with an upper heel portion **130** rearward relative to a sole portion **110** and an upper forward portion **120**. In such embodiments, the footbed **140** and the sole portion **110** can remain parallel or substantially parallel during the sliding. In such embodiments, sliding can be facilitated by corresponding male and female track components on the footbed **140** and the sole portion **110** or the upper forward portion **120**. The upper heel portion **130** and the upper forward portion **120** can be secured to each another by a securement element (e.g., ratchet, strap) **136** comprising a securement release/tether **136**.

Paying particular attention to FIGS. 1D and 1E, an upper heel portion **130** and an upper forward portion **120** can be coupled to each other on one or both sides by a gore **150**. The gore **150** may enhance weatherproofing of the rapid-entry shoe **100**. The gore **150**, in turn, can comprise a stretch material and/or a baffle material. In this regard, the upper heel portion **130** can be spring-loaded so as to be biased with the coupled footbed in the open configuration (e.g., FIG. 1D).

With reference to FIGS. 2A-2D, in such embodiments, all or a portion of a footbed **140** can be configured to translate with an upper heel portion **130** upward and rearward relative to a sole portion **110** and an upper forward portion **120**. In such embodiments, the footbed **140** and the sole portion **110** can remain parallel or substantially parallel during the translation. In such embodiments, translation can be facilitated by a lever arm **142** extending at an angle between the sole portion **110** and a top (FIGS. 2C and 2D), middle, or bottom (FIGS. 2A and 2B) of the upper heel portion **130** (or between the sole portion **110** and the footbed **140**), the lever arm **142** being configured to rotate (e.g., a circumferential, pin or ball bearing) relative to one or both of the footbed **140** and the sole portion **110**.

A lever arm **142** can be on a single side of the rapid-entry shoe or on both sides of the rapid-entry shoe. A lever arm **142** can be coupled to the sole portion rearward relative to where the lever arm is coupled to the upper heel portion when in the closed configuration but forward relative to where the lever arm is coupled to the upper heel portion when in the open configuration. In such embodiments, the lever arm **142** can lock by going past center.

Rather than being coupled to a side of a sole portion **110** or footbed **140** as illustrated, a lever arm **142** can be coupled

to an upper surface of the sole portion **110** and a lower surface of the footbed **140** and be received with a track within the sole portion **110** and/or the footbed **140**. In such embodiments, a single lever arm **142** can be used (e.g., approximately equidistance between opposing sides of rapid entry-shoe **100**) or a plurality of lever arms **142** can be used (e.g., **2**, on opposing sides of rapid entry-shoe **100**).

In other embodiments, and with reference to FIGS. 3A-5C, an upper of a rapid-entry shoe **100** is a separable upper. In this regard, the upper can comprise an upper heel portion **130** and an upper forward portion **120**. In example embodiments, an upper forward portion **120** of a rapid-entry shoe **100** is coupled to a footbed **140** and configured to slide, pivot or translate between an open configuration and a closed configuration relative to a sole portion **110** coupled to an upper heel portion **130**. In example embodiments, the upper forward portion **120** is not merely the tongue of the rapid-entry shoe, but instead, comprises the complete upper (excluding the upper heel portion **130**). In this regard, the upper forward portion **120** can be coupled to the sole portion **110** exclusively at a forward portion of the sole portion (e.g., at or proximal to the site of the pin hinge **144** in FIGS. 3E and 3F). Stated another way, in example embodiments, the upper forward portion **120** is not coupled to the sole portion **110** at a rearward portion of the sole portion.

In example embodiments, a foot hold **170** can be coupled to the footbed **140**. The foot hold **170** can comprise one or more of a strap (e.g., FIG. 3A), one or a plurality of laces (e.g., FIGS. 4A and 5A) and a bootie (e.g., FIGS. 3A, 4A, 5A). In example embodiments, the foot hold **170** terminates at and is coupled exclusively to opposing sides of the footbed **140**, while in other embodiments, the foot hold **170** extends completely under the footbed **140** between opposing sides of the footbed **140**. In example embodiments, unlike with conventional shoes, one or a plurality of laces are coupled to the upper and have vertices that are moveable relative to the sole portion.

With reference now to FIGS. 3A-4C, in such embodiments, all or a portion of a footbed **140** can be configured to pivot with an upper forward portion **120** upward relative to a sole portion **110** and an upper heel portion **130**. In some embodiments, the sole portion **110** is configured to arc or bend during the pivoting. In other embodiments, the sole portion **110** is configured to remain substantially planar or otherwise not bend during the pivoting. In example embodiments, pivoting can be facilitated by a hinge (e.g., a living hinge or a pin hinge) between the footbed **140** and the sole portion **110**. Pivoting can also be facilitated by the footbed **140** being resiliently deformable but stable in (e.g., biased toward) a non-planar or otherwise bent shape. In example embodiments, the footbed **140** can be secured into a rapid-entry shoe **100** against the sole portion **110** with a stationary bumper **112**, discussed below.

Paying particular attention to FIGS. 3E and 3F, an upper heel portion **130** and an upper forward portion **120** can be coupled to each other on one or both sides by a gusset **155**. The gusset **155** may enhance weatherproofing of the rapid-entry shoe **100**. The gusset **155**, in turn, can comprise a stretch material and/or a baffle material. The upper heel portion **130** and the upper forward portion **120** can be secured to each another by a securement element (e.g., ratchet, strap) **136** comprising a securement release/tether **136**.

With continued attention to FIGS. 3E and 3F, an upper heel portion **130** (and a sole portion **110**) and an upper forward portion **120** (and a footbed **140**) can be configured to pivot relative to each other via a pin hinge **144** (e.g., a

spring-loaded pin hinge **144**), a first side of the pin hinge **144** coupled to the upper heel portion **130** and a second side of the pin hinge **144** coupled to the upper forward portion **120**.

Turning now to FIGS. 4A-4C, a rapid-entry shoe **100** can comprise an upper heel portion **130** and an upper forward portion **120** both having the profile of a high-top shoe (e.g., a basketball shoe or a boot). In example embodiments, an additional strap or band may be added over the top of the upper, coupled to and between opposing quarters, bluchers or upper panels, to secure the same together and/or secure the upper forward portion **120** and the footbed **140** relative to the sole portion **110** and the upper heel portion **130**.

With reference to FIGS. 5A-5C, in such embodiments, all or a portion of a footbed **140** can be configured to translate with an upper forward portion **120** upward and forward relative to a sole portion **110** and an upper heel portion **130**. In such embodiments, the footbed **140** and the sole portion **110** can remain parallel or substantially parallel during the translation. In such embodiments, translation can be facilitated by a lever arm **142** extending at an angle between the sole portion **110** and the upper forward portion **120** (or between the sole portion **110** and the footbed **140**), the lever arm **142** being configured to rotate (e.g., a circumferential, pin or ball bearing) relative to one or both of the footbed **140** and the sole portion **110**.

A lever arm **142** can be on a single side of the rapid-entry shoe or on both sides of the rapid-entry shoe. A lever arm **142** can be coupled to the sole portion forward relative to where the lever arm is coupled to the upper forward portion, when in both an open and a closed configuration.

Rather than being coupled to a side of a sole portion **110** or footbed **140** as illustrated, a lever arm **142** can be coupled to an upper surface of the sole portion **110** and a lower surface of the footbed **140** and be received with a track within the sole portion **110** and/or the footbed **140**. In such embodiments, a single lever arm **142** can be used (e.g., approximately equidistance between opposing sides of rapid entry-shoe **100**) or a plurality of lever arms **142** can be used (e.g., **2**, on opposing sides of rapid entry-shoe **100**).

In example embodiments, and with continued reference to FIGS. 5A-5C, a rapid-entry shoe **100** is secured in a closed configuration with one or more securement elements **146** comprising one or more of a hook and loop fastener, magnet, clip, tie, lever, ratchet or the like.

Alternatively, in accordance with any of the example embodiments described herein (e.g., FIGS. 3A-5C), when in the closed configuration, a footbed can be secured into a rapid-entry shoe against the sole portion with one or more of a stationary bumper, a dynamic bumper and a dynamic hook.

With reference to FIGS. 6A-6E, a rapid-entry shoe **100** can comprise a "bootie construction" that connects a tongue and a footbed **140** so they can move independently from the rest of the rapid-entry shoe **100**. In such embodiments, a footbed **140** can be secured into a rapid-entry shoe **100** against the sole portion **110** with a stationary bumper **112** having a lip at its bottom (i.e., the stationary bumper **112** does not extend completely to the sole portion **110**), the lip defining an aperture for receiving and securing an end of the footbed **140** underneath the lip. A foot applying a force (e.g., a downward and/or shear force) to the footbed **140** pushes an end of the footbed **140** past the lip and locks it under the lip, within the aperture. In this regard, an upper surface of the end of the footbed **140** be more rigid than a lower surface of the end of the footbed **140** to facilitate movement of the end of the footbed **140** past the lip and retention of it under the lip. Alternatively, a lower surface of the end of the footbed **140** can comprise a skid plate to facilitate movement of the

end of the footbed **140** past the lip. In some embodiments, the footbed **140** can be compressible along an axis parallel to the length of the footbed.

Additionally, with specific reference to FIG. 6D, articulation of the sole portion during motion results in the footbed **140** assuming an inverted arching shape that shears the footbed **140** rearward, pushing it tighter within the aperture and under the lip, locking the footbed **140** in tighter. In example embodiments, the stationary bumper **112** is configured to be manually buckled (e.g., with a toe of the other foot) such that, in the closed position, the rear edge or end of the footbed **140** is no longer positioned underneath the lip of the stationary bumper **112**, so as to no longer secure the footbed **140** in the locked or closed position.

With reference to FIGS. 6F-6I, a footbed **140** can be secured into a rapid-entry shoe **100** against the sole portion **110** with a stationary bumper **112** at a rear of the upper heel portion (FIG. 6F), at a rear and opposing sides of the upper heel portion (FIG. 6G), at a rear and a single side of the upper heel portion (FIG. 6H) or at opposing sides of the upper heel portion (FIG. 6I). A stationary bumper **112** can be comprised of foam.

With reference to FIGS. 7A and 7B, a footbed **140** can be secured into a rapid-entry shoe **100** against the sole portion **110** with a dynamic bumper **114** having a lip at its bottom (i.e., the dynamic bumper **114** does not extend completely to the sole portion **110**), the lip moveable from a position above an end of the footbed **140** (i.e., the footbed **140** locked down, FIG. 7A) to a position not above an end of the footbed **140** (i.e., the footbed **140** no longer locked down, FIG. 7B). In this regard, the dynamic bumper **114** can comprise a bistable elongated element or plate (e.g., bistable around an actuation point). In example embodiments, the dynamic bumper **114** is configured to be manually buckled (e.g., with a toe of the other foot) such that, in the closed position, the rear edge or end of the footbed **140** is no longer positioned underneath the lip of the dynamic bumper **114**, so as to no longer secure the footbed **140** in the locked or closed position.

With reference to FIGS. 8A and 8B, a footbed **140** can be secured into a rapid-entry shoe **100** against the sole portion **110** with a dynamic hook **116**, the dynamic hook **116** moveable from a position above an end of the footbed **140** (i.e., the footbed **140** locked down within an aperture **117**, FIG. 8A) to a position not above an end of the footbed **140** (i.e., the footbed **140** no longer locked down within the aperture **117**, FIG. 8B). In this regard, the dynamic hook **116** can comprise a living hinge. In example embodiments, the dynamic hook **116** is configured to be manually opened such that, in the closed position, the rear edge of the footbed **140** is no longer positioned within the aperture **117**, so as to no longer secure the footbed **140** in the locked or closed position. The dynamic hook **116** can be formed in the foam of the midsole or comprise a TPU heel clip.

With reference to FIGS. 9A and 9B, in still other embodiments, all or a portion of a footbed **140** of a rapid-entry shoe **100** can be configured to bow upward, independent from or together with an upper, away from a sole portion **110**. In such embodiments, an upper heel portion **130** and an upper forward portion **120** can pivot relative to each other, for example, along the upward bow of the footbed **140**.

With reference to FIGS. 10A and 10B, in still other embodiments, all or a portion of a footbed **140** of a rapid-entry shoe **100** can be configured to bow upward, independent from or together with an upper, away from a sole portion **110**. In such embodiments, an upper heel portion **130** can pivot relative to the sole portion **110** and the footbed **140** can be received in a recess **118** in the sole portion **110**.

9

In accordance with any of the example embodiments described herein, a footbed can be temporarily engaged relative to a sole portion in an open configuration or a closed configuration by a securement element comprising one or more of a hook and loop fastener, magnet, clip, tie, lever, ratchet or the like. In some embodiments, the securement element can be released (i.e., disengaged) by the opposite foot or rapid-entry shoe.

In accordance with any of the example embodiments described herein, a collapsible or stretchable layer can be disposed between a footbed and a sole portion such that it expands in an open configuration and collapses in a closed configuration. In this regard, there can be continuity between the footbed and the sole portion to prevent entry of dirt, debris, liquid, heat, cold or the like.

It will be apparent to those skilled in the art that various modifications and variations can be made in the present disclosure without departing from the spirit or scope of the disclosure. Thus, it is intended that the embodiments described herein cover the modifications and variations of this disclosure provided they come within the scope of the appended claims and their equivalents.

Numerous characteristics and advantages have been set forth in the preceding description, including various alternatives together with details of the structure and function of the devices and/or methods. The disclosure is intended as illustrative only and as such is not intended to be exhaustive. It will be evident to those skilled in the art that various modifications can be made, especially in matters of structure, materials, elements, components, shape, size and arrangement of parts including combinations within the principles of the invention, to the full extent indicated by the broad, general meaning of the terms in which the appended claims are expressed. To the extent that these various modifications do not depart from the spirit and scope of the appended claims, they are intended to be encompassed therein.

We claim:

1. A rapid-entry shoe comprising:
 - a sole portion;
 - a footbed; and
 - an upper, the upper comprising an upper forward portion and an upper heel portion;
 - wherein the sole portion is coupled to the upper heel portion;
 - wherein the footbed is coupled to the upper forward portion;
 - wherein the footbed is configured to pivot relative to the sole portion between an open configuration, in which a rear edge of the footbed is not in contact with an upper surface of the sole portion, and a closed position, in which the rear edge of the footbed is in contact with the upper surface of the sole portion;
 - wherein, in the closed configuration, the rear edge of the footbed is positioned underneath at least one bumper coupled to an inner surface of the upper heel portion, the at least one bumper configured to secure the footbed in the closed position; and
 - wherein the sole portion is configured to remain substantially planar or not bend during transition between the open configuration and the closed configuration.
2. The rapid-entry shoe of claim 1, wherein the at least one bumper is comprised of a foam material.
3. The rapid-entry shoe of claim 1, wherein, in the open configuration, a rear portion of the footbed is angled with respect to a forward portion of the footbed.

10

4. A rapid-entry shoe comprising:

- a sole portion;
- a footbed; and
- an upper, the upper comprising an upper forward portion and an upper heel portion;
- wherein the sole portion is coupled to the upper heel portion;
- wherein the footbed is coupled to the upper forward portion to form an upper construction;
- wherein the upper construction is configured to pivot relative to the sole portion between an open configuration in which a rear portion of the footbed is angled with respect to a rear portion of the sole portion, and a closed position in which both the rear portion of the footbed is adjacent to the sole portion;
- wherein, in the closed position, a rear edge of the footbed is positioned underneath at least one bumper coupled to an inner surface of the upper heel portion, the at least one bumper configured to secure the upper construction in the closed position; and
- wherein the sole portion remains substantially planar or does not bend during transition between the open configuration and the closed position.

5. The rapid-entry shoe of claim 4, wherein the at least one bumper is comprised of a foam material.

6. The rapid-entry shoe of claim 4, wherein, in the open configuration, the rear portion of the footbed is angled with respect to a forward portion of the footbed.

7. A rapid-entry shoe comprising:

- a sole portion;
- a footbed; and
- an upper, the upper comprising an upper forward portion and an upper heel portion;
- wherein the sole portion is coupled to the upper heel portion;
- wherein the footbed is coupled to the upper forward portion;
- wherein the footbed is configured to pivot relative to the sole portion between an open configuration, in which at least a portion of the footbed is angled relative to the sole portion and the sole portion retains a substantially flat profile, and a closed position, in which the footbed and the sole portion are substantially parallel to one another.

8. The rapid-entry shoe of claim 7, wherein the upper forward portion comprises a foot hold extending completely under the footbed between opposing sides of the footbed.

9. The rapid-entry shoe of claim 8, wherein the foot hold comprises one or more of a strap and a plurality of laces.

10. The rapid-entry shoe of claim 7, wherein, in the closed position, a rear edge of the footbed is positioned underneath at least one bumper coupled to an inner surface of the upper heel portion, the at least one bumper configured to secure the footbed in the closed position.

11. The rapid-entry shoe of claim 10, wherein the at least one bumper is comprised of a foam material.

12. The rapid-entry shoe of claim 7, wherein, in the open configuration, a rear portion of the footbed is angled with respect to a forward portion of the footbed.

13. The rapid-entry shoe of claim 10, wherein the bumper is spaced vertically above the sole portion.

14. The rapid-entry shoe of claim 10, wherein, when in the closed position, a rear portion of the foot bed is positioned sandwiched between the bumper and the sole portion.

15. The rapid-entry shoe of claim 10, wherein the bumper extends toward a collar of the upper, wherein the bumper flares rearwardly toward the collar of the upper.

11**12**

16. The rapid-entry shoe of claim **7**, further comprising a securement element configured to secure the footbed to the sole portion.

17. The rapid-entry shoe of claim **16**, wherein the securement element includes one of a ratchet and a strap. 5

18. The rapid-entry shoe of claim **17**, further comprising a securement release or securement tether.

19. The rapid-entry shoe of claim **18**, wherein the securement release or securement tether is configured to interface with the securement element to secure the footbed to the sole 10 portion.

20. The rapid-entry shoe of claim **19**, wherein the securement element is positioned on one of the footbed, the sole portion, and the upper.

* * * * *

15