



US012407117B2

(12) **United States Patent**
Sugiyama et al.

(10) **Patent No.:** **US 12,407,117 B2**
(45) **Date of Patent:** **Sep. 2, 2025**

(54) **CONNECTOR FOR SHIELDED ELECTRIC WIRE, AND WIRE HARNESS**

(71) Applicant: **Yazaki Corporation**, Tokyo (JP)

(72) Inventors: **Daisuke Sugiyama**, Makinohara (JP);
Masanobu Higashitani, Makinohara (JP); **Tomoaki Hayakawa**, Makinohara (JP); **Yasukazu Chikamatsu**, Makinohara (JP)

(73) Assignee: **YAZAKI CORPORATION**, Tokyo (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 299 days.

(21) Appl. No.: **18/446,979**

(22) Filed: **Aug. 9, 2023**

(65) **Prior Publication Data**

US 2024/0088581 A1 Mar. 14, 2024

(30) **Foreign Application Priority Data**

Sep. 14, 2022 (JP) 2022-146267

(51) **Int. Cl.**

H01R 9/05 (2006.01)

H01B 7/00 (2006.01)

(52) **U.S. Cl.**

CPC **H01R 9/0518** (2013.01); **H01B 7/0045** (2013.01); **H01R 2201/26** (2013.01)

(58) **Field of Classification Search**

CPC H01R 2201/26; H01R 13/748; H01R 13/5202; H01R 13/5205; H01R 13/6592; H01R 13/6596; H01R 13/648; H01R 11/12; H01R 13/02; H01R 13/52; H01R 13/6581

See application file for complete search history.

(56) **References Cited**

FOREIGN PATENT DOCUMENTS

CN	107887746	A	*	4/2018		H01R 13/5208
CN	106911045	B	*	6/2021		H01R 11/11
JP	2019-9010	A		1/2019		

* cited by examiner

Primary Examiner — Jean F Duverne

(74) *Attorney, Agent, or Firm* — Sughrue Mion, PLLC

(57) **ABSTRACT**

A connector for a shielded electric wire includes: a shield terminal connected to a braid on one end side thereof and grounding the braid by contact at a leaf spring on the other end side thereof; a first packing (sealing member) that seals between a housing and an object inserted into a through hole from an inner surface of the housing to an inner surface of the through hole; and a support member that is a resin ring exteriorly mounted on the shield terminal to be adjacent to the leaf spring and disposed inside the through hole in such a manner that an outer circumferential edge thereof is in contact with the inner surface of the through hole, thereby suppressing an offset of a central axis of the shield terminal with respect to a central axis of the through hole.

12 Claims, 5 Drawing Sheets

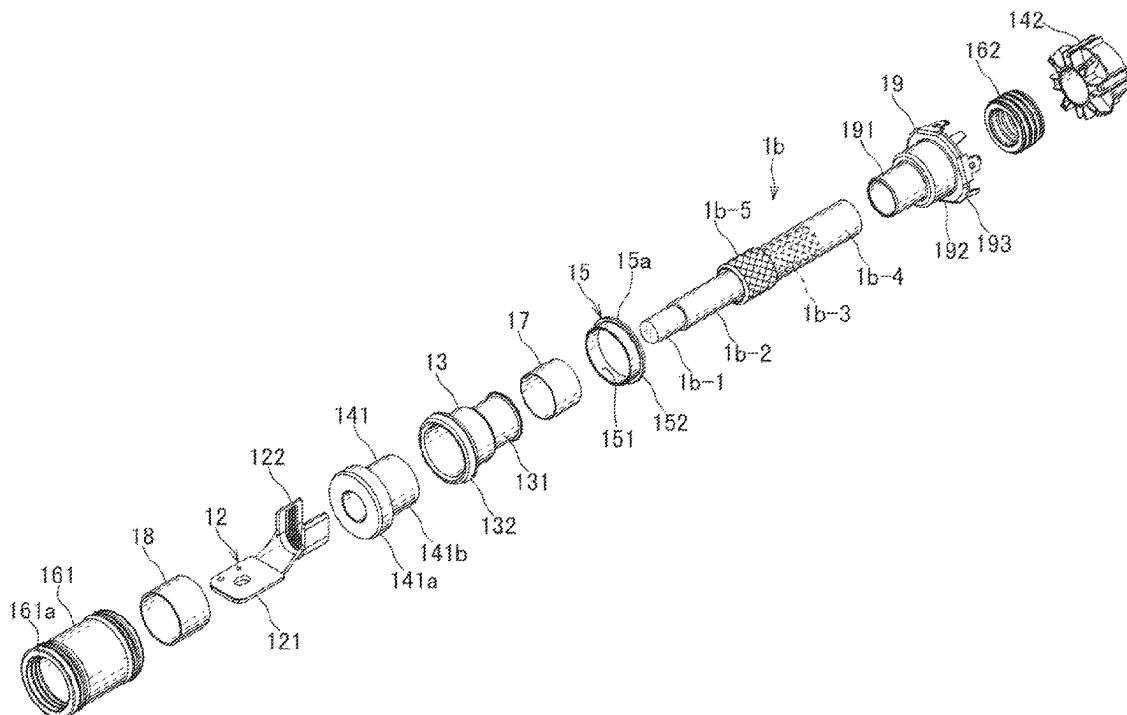


FIG. 1

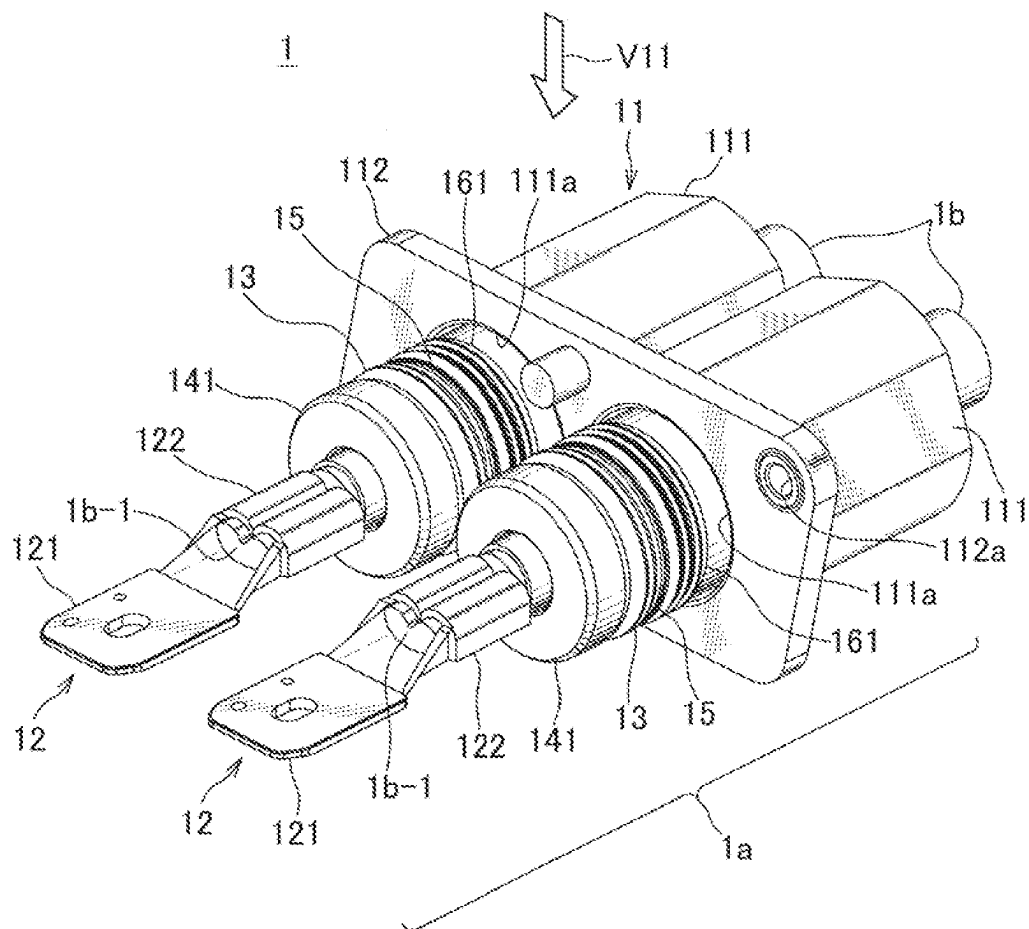


FIG. 2

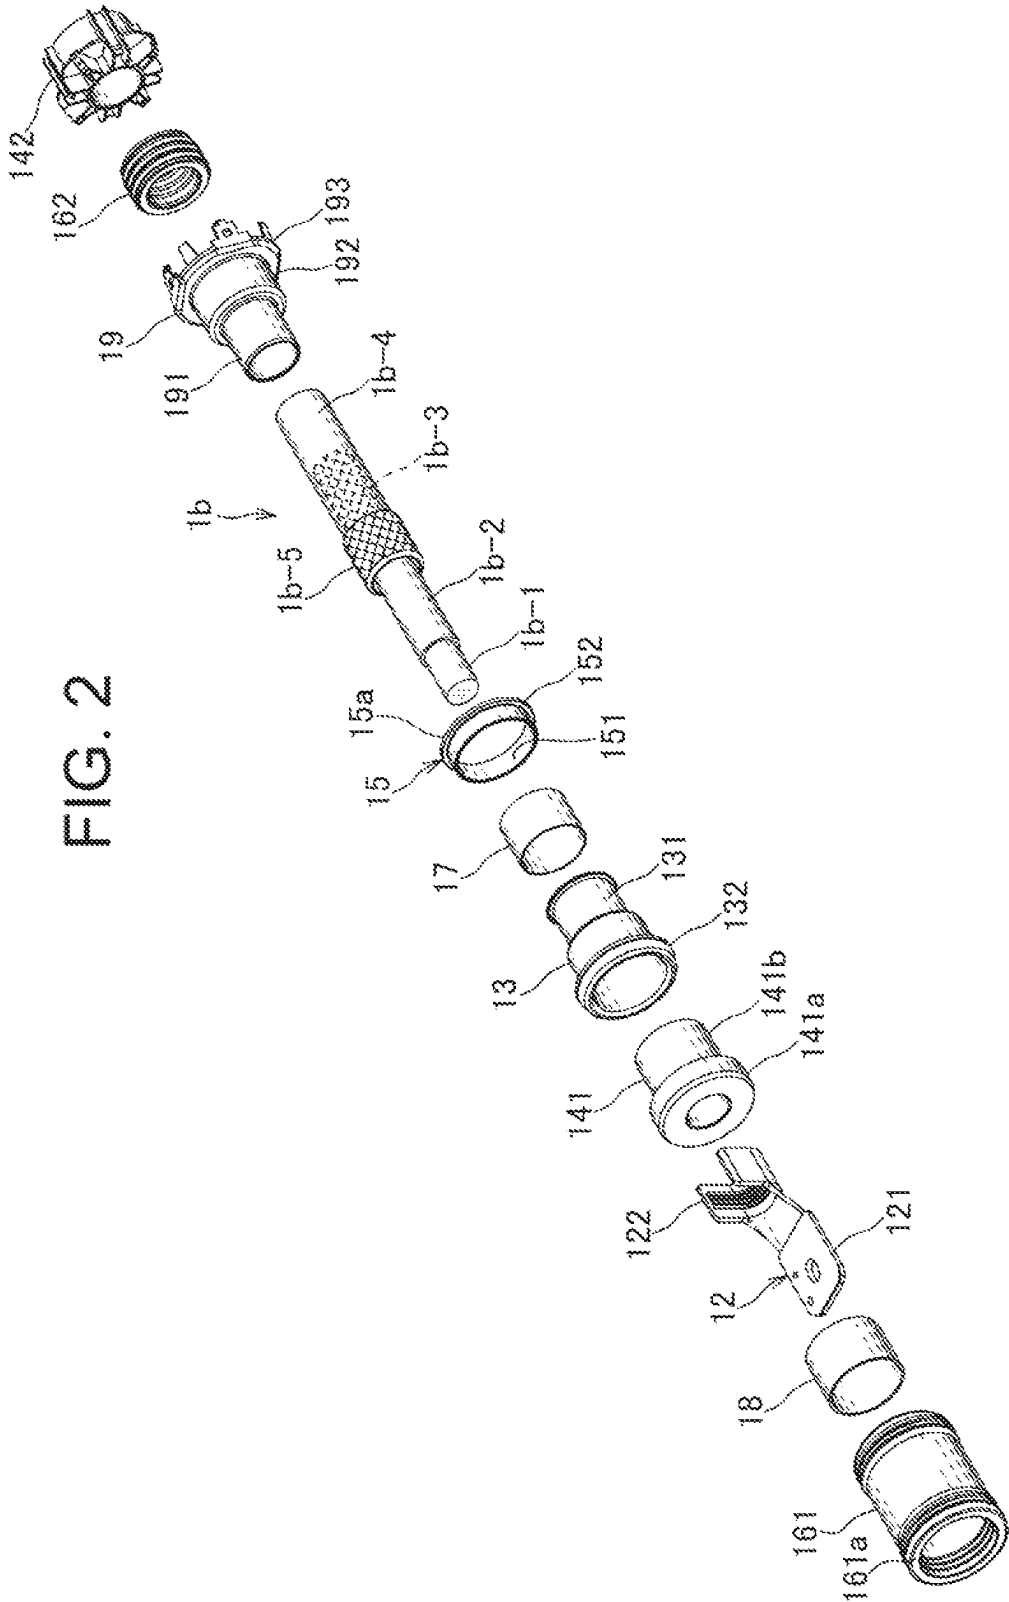


FIG. 3

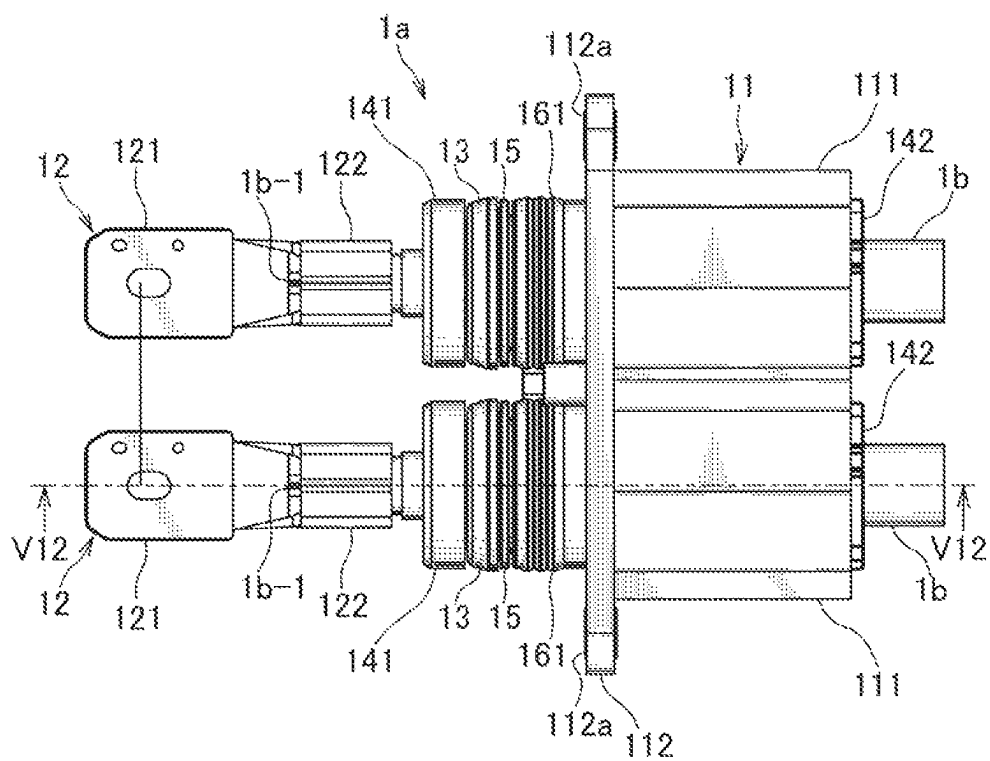


FIG. 4


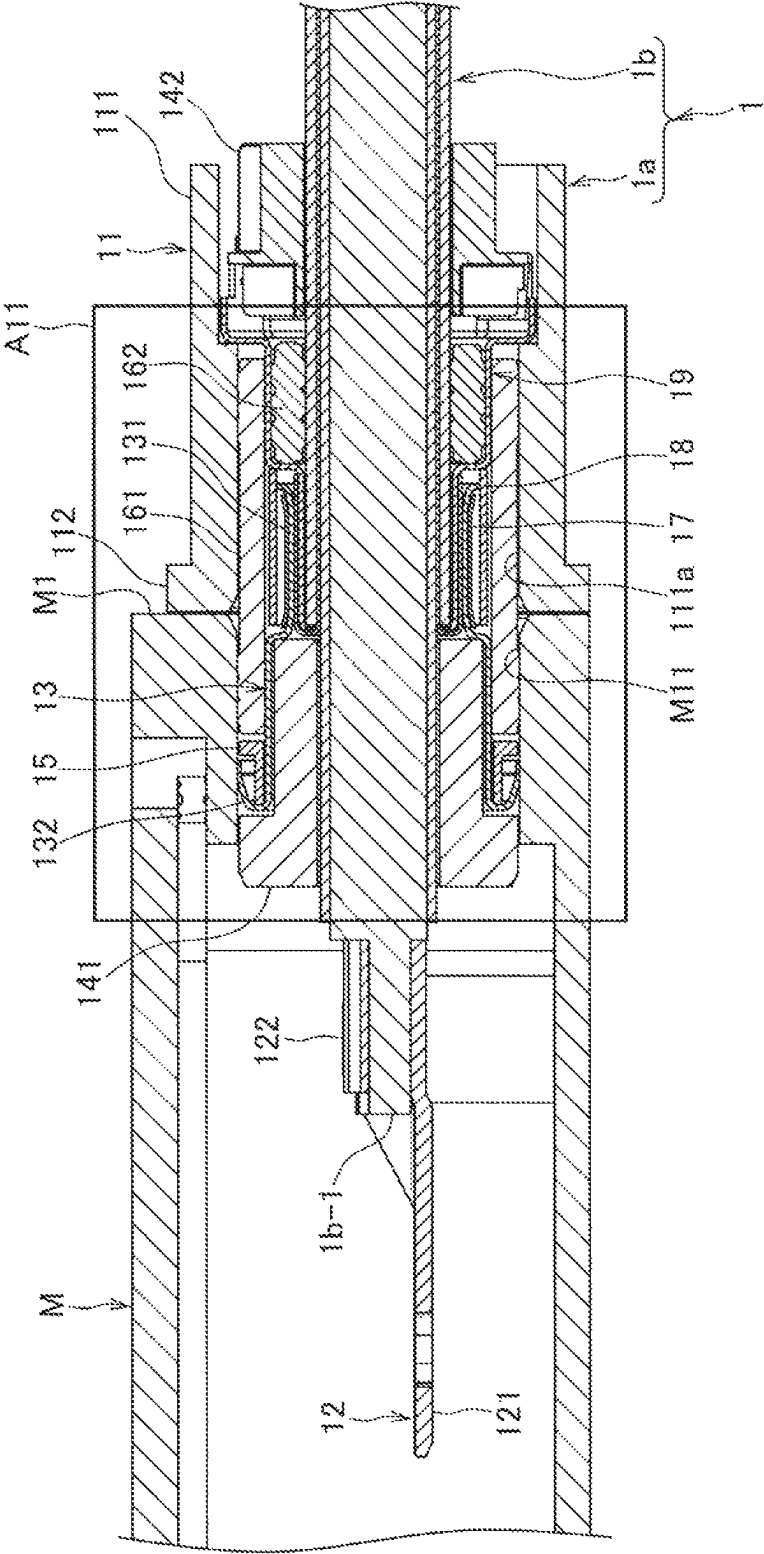


FIG. 5

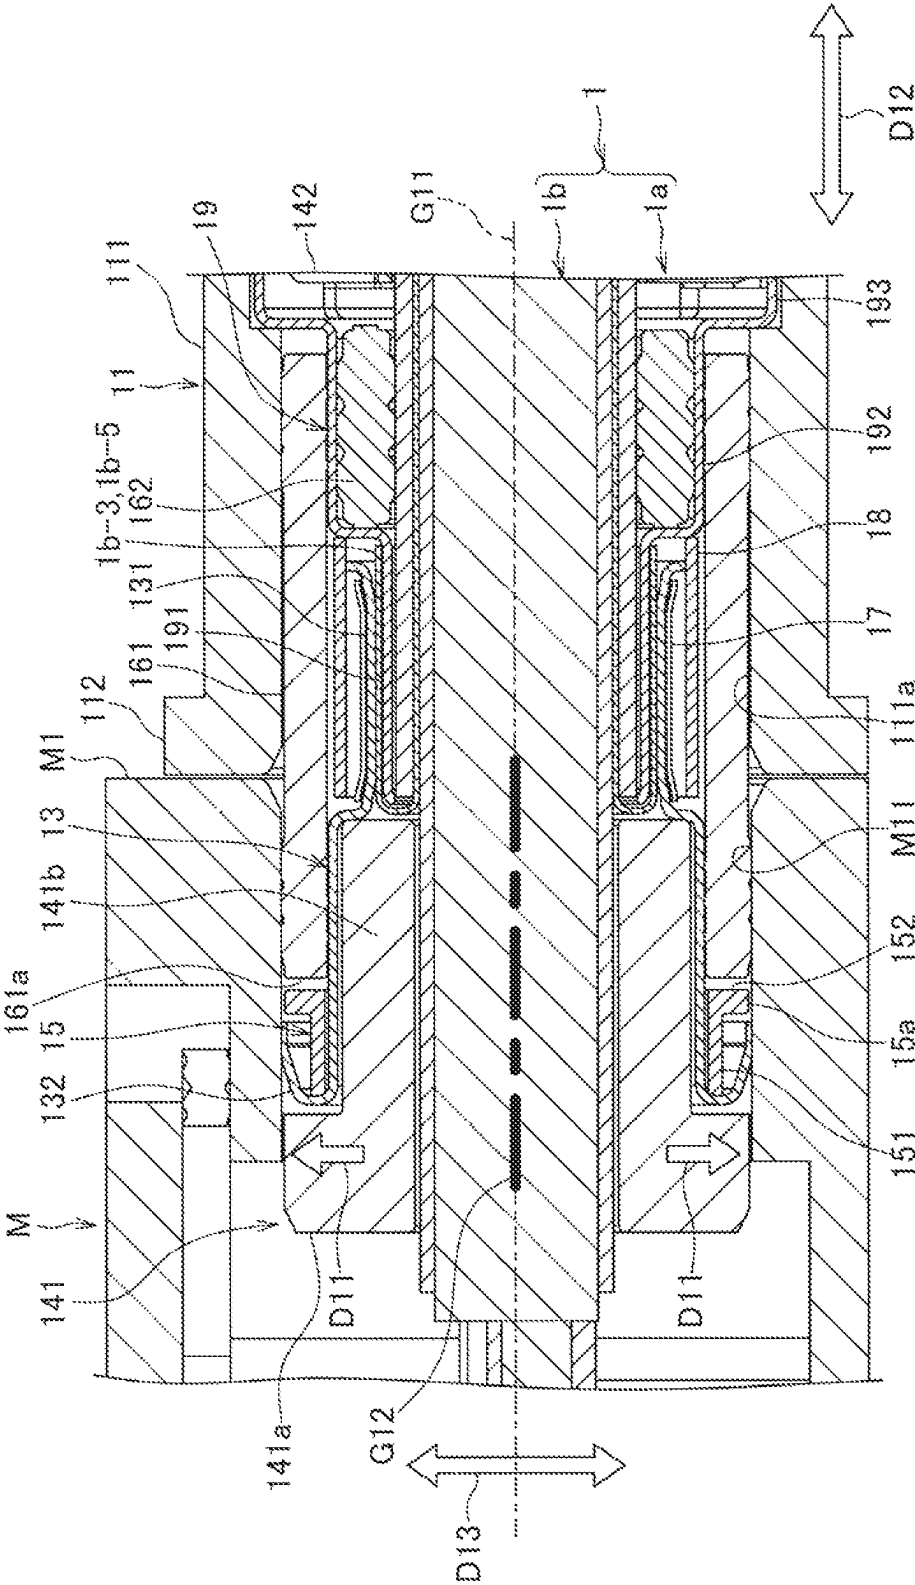

1

CONNECTOR FOR SHIELDED ELECTRIC WIRE, AND WIRE HARNESS

BACKGROUND

Technical Field

The present invention relates to a connector for a shielded electric wire for connecting a shielded electric wire there-through, and a wire harness with the connector provided at an end thereof.

Related Art

Conventionally, in many cases, a connector for a shielded electric wire for connecting a shielded electric wire there-through has a grounding structure for grounding a braid of the shielded electric wire to a metal panel constituting a connection target (for example, see JP 2019-9010 A). In the connector described in JP 2019-9010 A, a housing fixed to the metal panel of the connection target is made of metal, and the braid of the shielded electric wire is grounded to the metal panel via the metal housing.

Here, in order to make it easy to manufacture housings, many housings are made of resins, and the housings made of resins may be adopted for certain connectors. It is usual that such a type of connector includes a shield terminal that grounds a braid to a metal panel of a connection target. As the shield terminal, there has been known a shield terminal formed in a tubular shape, with an end thereof being formed in a leaf spring shape, while being connected to the braid exposed from the shielded electric wire to cover the braid. In such a shield terminal, the leaf spring portion is in spring contact with an inner surface of a through hole for inserting a wire provided in the metal panel of the connection target, thereby grounding the braid to the metal panel.

CITATION LIST

Patent Literature

Patent Document 1: JP 2019-9010 A

SUMMARY

Here, the shield terminal having the leaf spring structure described above is preferably in spring contact with the inner surface of the through hole with uniform contact pressure in a circumferential direction. To this end, it is preferable that the connector is fixed to the metal panel of the connection target in such a manner that a central axis of the tubular shield terminal does not deviate from a central axis of the through hole. However, the connector may be fixed to the metal panel of the connection target in a biased state or in an inclined state due to an influence of an error that occurs when a component is manufactured or the like. In such a case, an axis of the shield terminal may be offset with respect to the through hole, resulting in non-uniformity in contact pressure of the shield terminal in the circumferential direction with respect to the inner surface of the through hole, which may cause an increase ground resistance of the braid.

Therefore, focusing on the above-described problem, an object of the present invention is to provide a connector capable of suppressing non-uniformity in contact pressure of a shield terminal in a circumferential direction with respect to an inner surface of a through hole. Another object of the

2

present invention is to provide a wire harness with such a connector for a shielded electric wire provided at an end thereof.

In order to solve the above-described problem, a connector for a shielded electric wire includes: a housing that is a tubular resin member configured to allow a shielded electric wire electromagnetically shielded by a braid to be inserted through the resin member, and is configured to be fixed to a connection target in such a manner that one end opening thereof communicates with a through hole provided in a metal panel constituting the connection target, and one end portion of the shielded electric wire extending from the one end opening passes through the through hole;

a connector terminal provided at the one end portion of the shielded electric wire and configured to be connected to a terminal portion of the connection target;

a shield terminal that is a metal tube configured to be externally mounted on the shielded electric wire, the shield terminal having one end side configured to be connected to the braid and another end side folded outward to form a leaf spring that generates a biasing force in a radially expanding direction, the leaf spring configured to come into contact with an inner surface of the through hole of the metal panel so as to press the inner surface of the through hole and to thus ground the braid to the metal panel;

a sealing member formed of an elastic resin in a tubular shape to seal between the housing and an object inserted in the through hole from an inner surface of the housing to the inner surface of the through hole while avoiding a portion where the inner surface of the through hole and the leaf spring are in contact with each other; and

a support member that is a resin ring externally mounted on the shield terminal to be adjacent to the leaf spring on a side opposite to the connector terminal, while being sandwiched between the leaf spring and the sealing member, an outer circumferential edge of the support member configured to be disposed inside the through hole in such a manner as to be in contact with the inner surface of the through hole, thereby suppressing an offset of a central axis of the shield terminal with respect to a central axis of the through hole.

In addition, in order to solve the above-described problem, a wire harness includes: the above-described connector; and a shielded electric wire electromagnetically shielded by a braid, the shielded electric wire extending from the housing with the connector terminal being provided at an end thereof.

According to the above-described connector and wire harness, it is possible to suppress non-uniformity in contact pressure of the shield terminal in the circumferential direction with respect to the inner surface of the through hole.

BRIEF DESCRIPTION OF DRAWINGS

FIG. 1 is a perspective view illustrating a connector for a shielded electric wire and a wire harness according to an embodiment;

FIG. 2 is an exploded perspective view illustrating a configuration related to one wire in the connector and the wire harness illustrated in FIG. 1;

FIG. 3 is a plan view of the connector illustrated in FIG. 1 as viewed from a direction of arrow V11 of FIG. 1;

FIG. 4 is a cross-sectional view illustrating a cross section taken along line V12-V12 of FIG. 3 in the connector illustrated in FIG. 3; and

3

FIG. 5 is an enlarged view of area A11 of FIG. 4 in the cross section illustrated in FIG. 4.

DETAILED DESCRIPTION

Hereinafter, a connector for a shielded electric wire, and a wire harness will be described.

FIG. 1 is a perspective view illustrating a connector for a shielded electric wire, and a wire harness according to an embodiment. FIG. 2 is an exploded perspective view illustrating a configuration related to one wire in the connector and the wire harness illustrated in FIG. 1.

The wire harness 1 illustrated in FIG. 1 is routed in an automobile or the like, and a connector 1a for a shielded electric wire is provided therein at end portions of two shielded electric wires 1b.

The connector 1a is a two-terminal straight connector, and has a structure in which the two shielded electric wires 1b are inserted into a housing 11 formed of a resin in a double-tube type, and a connector terminal 12 is connected to an end of each shielded electric wire 1b. Here, the shielded electric wire 1b extending from the connector 1a and constituting the wire harness 1 is a wire electromagnetically shielded by a braid 1b-3 as illustrated in FIG. 2. The shielded electric wire 1b is formed in such a manner that a core wire 1b-1 is covered with a first sheath 1b-2, the first sheath 1b-2 is covered with a shielding braid 1b-3, and the braid 1b-3 is covered with a second sheath 1b-4. At the end of each shielded electric wire 1b, the connector terminal 12 is connected in a crimped manner to the core wire 1b-1 exposed after passing through the housing 11. In addition, the braid 1b-3 is exposed and folded outward at a position slightly away from the connector terminal 12 toward the housing 11. Then, the folded portion 1b-5 is connected to a shield terminal 13 for grounding the braid 1b-3 to a metal panel which is the ground on the connection target side.

In addition to the housing 11, the connector terminal 12, and the shield terminal 13 described above in outline, the connector 1a includes the following members. That is, the connector 1a includes a front holder 141, a rear holder 142, a support member 15, a first packing 161 (sealing member), a second packing 162, a shield ring 17, a protective material 18, and a shield sleeve 19. Hereinafter, these members will be described with reference to FIGS. 3 to 5.

FIG. 3 is a plan view of the connector illustrated in FIG. 1 as viewed from a direction of arrow V11 of FIG. 1, and FIG. 4 is a cross-sectional view illustrating a cross section taken along line V12-V12 of FIG. 3 in the connector illustrated in FIG. 3. FIG. 5 is an enlarged view of area A11 of FIG. 4 in the cross section illustrated in FIG. 4. FIGS. 4 and 5 illustrate cross sections of a connection target M of the connector 1a of the present embodiment and a metal panel M1 to which the connector 1a is fixed while constituting the connection target M.

As described above, the housing 11 is a double-tube resin member into which the shielded electric wires 1b are inserted. The housing 11 is fixed to the connection target M in such a manner that one end opening 111a thereof communicates with a through hole M11 provided in the metal panel M1 of the connection target M, and one end portion of the shielded electric wire 1b extending from the one end opening 111a passes through the through hole M11. In addition, the housing 11 includes a pair of tubular main body portions 111 and a flange 112 having a substantially rectangular shape as viewed in front thereof, the flange 112 being formed over the ends of the main body portions 111 on the side where the connector terminals 12 are installed and

4

spreading outward from the ends of the main body portions 111. In addition, each of the shielded electric wires 1b is inserted in each of the main body portions 111. That is, the two shielded electric wires 1b are inserted in the housing 11.

The flange 112 is a portion that is fixed to the metal panel M1 of the connection target M in a surface-pressed manner. The one end openings 111a of the pair of main body portions 111 are disposed at the flange 112, and the connector terminal 12 is fixed to the end of the shielded electric wire 1b extending from each of the one end openings 111a. In addition, the flange 112 has a pair of attachment holes 112a formed to penetrate therethrough in a plate thickness direction at diagonal positions as viewed in front thereof. Bolts (not illustrated) are inserted into the attachment holes 112a, and the flange 112 is fixed to the metal panel M1 by the bolts, and thereby, the connector 1a is connected to the connection target M.

The connector terminal 12 is a terminal metal fitting connected to a terminal portion inside the connection target M, and includes a connecting portion 121 having a flat plate shape and a crimped portion 122 provided at an end of the connecting portion 121 on the housing 11 side. The connecting portion 121 is a portion connected to the terminal portion by bolt fastening. The crimped portion 122 is a portion crimped while having the core wire 1b-1 in the exposed state.

The shield terminal 13 is a metal tube externally mounted on the shielded electric wire 1b, and a braid-connected portion 131 provided on one end side thereof is sheathed on and connected in a caulked manner to the folded portion 1b-5 of the braid 1b-3, as will be described later. Then, a leaf spring 132 that generates a biasing force in a radially expanding direction D11 is formed by folding the shield terminal 13 outward on the other end side thereof, and the leaf spring 132 is in contact with an inner surface of the through hole M11 of the metal panel M1 so as to press the inner surface of the through hole M11 and to thus ground the braid 1b-3 to the metal panel M1.

The front holder 141 is a tubular member made of a resin. When the side on which the shielded electric wire 1b is connected to the connector terminal 12 is defined as a front side and the side opposite to the front side is defined as a rear side, the front holder 141 closes a space between the through hole M11 of the metal panel M1 and the shielded electric wire 1b on the front side of the housing 11. The front holder 141 includes a large-diameter portion 141a that closes an outlet of the connection target M on an inner side thereof in the through hole M11, and a small-diameter portion 141b that is inserted between the inner side of the leaf spring 132 of the shield terminal 13 and the shielded electric wire 1b. The small-diameter portion 141b supports pressure of the leaf spring 132 against the inner surface of the through hole M11 from a central axis G11 side of the through hole M11.

The rear holder 142 is a tubular member made of a resin, and is a member that closes a space between a rear-side opening of the main body portion 111 of the housing 11 and the shielded electric wire 1b.

The support member 15 is a resin ring externally mounted on the shield terminal 13 to be adjacent to the leaf spring 132 on the side opposite to the connector terminal 12. The support member 15 is disposed in such a manner that the leaf spring 132 is sandwiched between the support member 15 and the large-diameter portion 141a of the front holder 141 in an axial direction D12, and the support member 15 is sandwiched between the leaf spring 132 and a first packing 161 to be described later. In addition, the support member 15 is disposed in such a manner that the shield terminal 13 is

5

sandwiched between the support member **15** and the small-diameter portion **141b** of the front holder **141** in a radial direction **D13**. Also, the support member **15** is disposed inside the through hole **M11** in such a manner that an outer circumferential edge **15a** thereof is in contact with the inner surface of the through hole **M11**, thereby suppressing an offset of the central axis **G12** of the shield terminal **13** with respect to a central axis **G11** of the through hole **M11** of the metal panel **M1**.

In the present embodiment, the support member **15** includes a tubular portion **151** inserted into a folded side of the leaf spring **132** of the shield terminal **13**, and a flange portion **152** protruding from an opening edge of the tubular portion **151** on the side opposite to the leaf spring **132**. By having these portions, the support member **15** has an L-shaped cross section in the axial direction **D12**, and is in contact with the inner surface of the through hole **M11** at the outer circumferential edge **15a** of the flange portion **152**. The support member **15** is disposed in such a manner that the flange portion **152** faces an end **161a** of the first packing **161** facing the leaf spring **132**.

In the present embodiment, the large-diameter portion **141a** of the front holder **141** is disposed in such a manner that the leaf spring **132** of the shield terminal **13** is sandwiched between the large-diameter portion **141a** and the support member **15**. Together with the outer circumferential edge **15a** of the support member **15**, an outer circumferential surface of the large-diameter portion **141a** of the front holder **141** is in contact with the inner surface of the through hole **M11**, thereby contributing to suppressing an offset of the central axis **G12** of the shield terminal **13** with respect to the central axis **G11** of the through hole **M11** of the metal panel **M1**.

The first packing **161** is a sealing member formed of an elastic resin in a tubular shape to seal between the main body portion **111** and the object inserted in the through hole **M11** from an inner surface of the main body portion **111** of the housing **11** to the inner surface of the through hole **M11**. At this time, the first packing **161** performs sealing while avoiding a portion where the inner surface of the through hole **M11** and the leaf spring **132** are in contact with each other.

The second packing **162** is a sealing member formed of an elastic resin in a tubular shape on the rear side of the main body portion **111** of the housing **11** to seal between the inner surface of the main body portion **111** and the shielded electric wire **1b** together with the first packing **161**. The second packing **162** performs sealing in a state where a shield sleeve **19** to be described later is sandwiched between the first packing **161** and the second packing **162**. On the rear side, the first packing **161** seals between the inner surface of the main body portion **111** and the shield sleeve **19**, and the second packing **162** seals between an inner surface of the shield sleeve **19** and the shielded electric wire **1b**.

The shield ring **17** is a metal tubular member for connecting the braid-connected portion **131**, which is a tubular portion of the shield terminal **13** other than the leaf spring **132**, to the folded portion **1b-5** of the braid **1b-3** in a caulked manner. Here, a braid-connected portion **191** of the shield sleeve **19** is inserted into a portion caulked by the shield ring **17** between the folded portion **1b-5** of the braid **1b-3** and the second sheath **1b-4**. The shield ring **17** is externally mounted on a portion where the braid-connected portion **191** of the shield sleeve **19**, the folded portion **1b-5** of the braid **1b-3**, and the braid-connected portion **131** of the shield terminal **13** are stacked to caulk that portion by reducing its diameter.

6

The protective material **18** is a tube member formed of a resin in a tubular shape and interposed between the first packing **161** and the portion caulked by the shield ring **17** to protect the first packing **161** from the caulked portion that is a metal stack.

The shield sleeve **19** is a metal tubular member to be inserted into the rear side of the main body portion **111**. As described above, the shield sleeve **19** includes the braid-connected portion **191** which is connected to the folded portion **1b-5** of the braid **1b-3** in a caulked manner, together with the braid-connected portion **131** of the shield terminal **13**, by the shield ring **17**. The shield sleeve **19** includes a packing holding portion **192** having a larger diameter than the braid-connected portion **191** for the second packing **162** to be fitted thereto, and a holder holding portion **193** having a larger diameter than the packing holding portion **192** to hold the rear holder **142**.

According to the connector **1a** and the wire harness **1** described above, the support member **15** made of a resin ring is externally mounted on the shield terminal **13** adjacent to the leaf spring **132**. Also, the outer circumferential edge **15a** of the support member **15** is in contact with the inner surface of the through hole **M11** for inserting a wire in the metal panel **M1** of the connection target **M**, thereby suppressing an offset of the central axis **G12** of the shield terminal **13** with respect to the central axis **G11** of the through hole **M11**. According to the connector **1a** described above, by suppressing such an offset, it is possible to suppress non-uniformity of contact pressure of the shield terminal **13** in a circumferential direction with respect to the inner surface of the through hole **M11**.

Here, in the present embodiment, the support member **15** is a member having an L-shaped cross section in the axial direction **D12**, with a tubular portion **151** inserted into the folded side of the leaf spring **132** and a flange portion **152**. In addition, the support member **15** is in contact with the inner surface of the through hole **M11** at the outer circumferential edge **15a** of the flange portion **152**. According to this configuration, since the support member **15** is in contact with the inner surface of the through hole **M11** at the outer circumferential edge **15a** of the flange portion **152**, a contact area between the support member **15** and the inner surface of the through hole **M11** can be suppressed, thereby easily a clearance between the inner surface of the through hole **M** and the support member **15**.

In the present embodiment, the support member **15** is disposed in such a manner that the flange portion **152** of the support member **15** faces the end **161a** of the first packing **161**. According to this configuration, since the contact between the end **161a** of the first packing **161** and the support member **15** in the axial direction **D12** is surface contact through the flange portion **152**, it is possible to easily restrict a movement of the support member **15** in the axial direction **D12**.

In the present embodiment, the braid-connected portion **131** of the shield terminal **13** is connected to the folded portion **1b-5** of the braid **1b-3** in a caulked manner through the shield ring **17**. According to this configuration, the shield terminal **13** can be firmly connected in the caulked manner to the braid **1b-3** of the shielded electric wire **1b** electrically and mechanically.

In addition, in the present embodiment, the protective material **18** formed of a resin in a tubular shape is interposed between the first packing **161** and the portion caulked by the shield ring **17** to protect the first packing **161** from the caulked portion. According to this configuration, since the

first packing **161** is effectively protected from the caulked portion by the protective material **18**, the lifespan of the component can be extended.

In the present embodiment, while the leaf spring **132** of the shield terminal **13** is sandwiched between the large-diameter portion **141a** of the front holder **141** and the support member **15**, the outer circumferential surface of the large-diameter portion **141a** is in contact with the inner surface of the through hole **M11** together with the outer circumferential edge **15a** of the support member **15**, thereby contributing to suppressing an offset of the axis. According to this configuration, the front holder **141** further suppresses the offset of the central axis **G12** of the shield terminal **13** with respect to the central axis **G11** of the through hole **M11**, making it possible to further suppress the non-uniformity of contact pressure of the shield terminal **13** in the circumferential direction with respect to the inner surface of the through hole **M11**.

Note that the above-described embodiment merely shows typical forms of the connector and the wire harness. The connector and the wire harness are not limited the above-described embodiment, and various modifications can be made thereto.

For example, the wire harness **1** routed in an automobile or the like is exemplified as an example of a wire harness in the above-described embodiment, but the wire harness is not limited thereto, and the specific location where the wire harness is routed is not limited.

In the above-described embodiment, as an example of a connector, the connector **1a** that is a two-terminal straight connector is exemplified. However, the connector is not limited thereto, and the specific number of terminals and the like are not limited.

In the above-described embodiment, as an example of a support member, the support member **15** contacting the inner surface of the through hole **M11** at the outer circumferential edge **15a** of the flange portion **152** is exemplified. However, the support member is not limited thereto, and the specific shape, the form of the contact with the inner surface of the through hole and the like are not limited as long as the support member can suppress an offset of the axis by contacting the inner surface of the through hole. According to the support member **15** contacting the inner surface of the through hole **M11** at the outer circumferential edge **15a** of the flange portion **152**, a clearance between the inner surface of the through hole **M11** and the support member **15** can be easily reduced as described above.

In the present embodiment, as an example of a support member, the support member **15** disposed in such a manner that the flange portion **152** faces the end **161a** of the first packing **161** is exemplified. However, the support member is not limited thereto, and the relative positional relationship of the support member with the sealing member around the wire and the like can be appropriately set. According to the support member **15** of which the flange portion **152** faces the end **161a** of the first packing **161**, a movement of the support member **15** in the axial direction **D12** can be easily restricted as described above.

In addition, in the present embodiment, as an example of a shield terminal, the shield terminal **13** connected in a caulked manner to the folded portion **1b-5** of the braid **1b-3** through the shield ring **17** is exemplified. However, the shield terminal is not limited thereto, and any form can be adopted as a specific form of connection with the braid. According to the shield terminal **13** connected in a caulked manner to the folded portion **1b-5** of the braid **1b-3** through

the shield ring **17**, the shield terminal **13** can be firmly connected to the braid **1b-3** as described above.

In addition, in the present embodiment, as an example of a connector, the connector **1a** in which the protective material **18** is interposed between the first packing **161** and the caulked portion to protect the first packing **161** from the caulked portion is exemplified. However, the connector is not limited thereto, and no protective material may be provided between the caulked portion and the sealing member. As described above, by providing the protective material **18** between the caulked portion and the first packing **161**, the lifespan of the component can be extended.

In the present embodiment, as an example of a connector, the connector **1a** in which a partial portion of the front holder **141** adjacent to the leaf spring **132** of the shield terminal **13** contributes to suppressing an offset of the axis is exemplified. However, the connector is not limited thereto, and the front holder may be away from the inner surface of the through hole in the metal panel, not contributing to suppressing an axial deviation. As described above, since the partial portion of the front holder **141** contributes to suppressing the offset of the axis, it is possible to further suppress the non-uniformity of contact pressure of the shield terminal **13** in the circumferential direction with respect to the inner surface of the through hole **M11**.

REFERENCE SIGNS LIST

1	Wire harness
1a	Connector for a shielded electric wire
1b	Shielded electric wire
1b-1	Core wire
1b-2	First sheath
1b-3	Braid
1b-4	Second sheath
1b-5	Folded portion
11	Housing
12	Connector terminal
13	Shield terminal
15	Support member
15a	Outer circumferential edge
17	Shield ring
18	Protective material
19	Shield sleeve
111	Main body portion
111a	One end opening
121	Connecting portion
122	Crimped portion
131, 191	Braid-connected portion
132	Leaf spring
141	Front holder
141a	Large-diameter portion
141b	Small-diameter portion
142	Rear holder
151	Cylindrical portion
152	Flange portion
161	First packing (sealing member)
161a	End
162	Second packing
192	Packing holding portion
193	Holder holding portion
D11	Radially expanding direction
D12	Axial direction
D13	Radial direction
G11, G12	Central axis

M Connection target
 M1 Metal panel
 M11 Through hole

What is claimed is:

1. A connector for a shielded electric wire comprising:
 - a housing that is a tubular resin member configured to allow a shielded electric wire electromagnetically shielded by a braid to be inserted through the resin member, and is configured to be fixed to a connection target in such a manner that one end opening thereof communicates with a through hole provided in a metal panel constituting the connection target, and one end portion of the shielded electric wire extending from the one end opening passes through the through hole;
 - a connector terminal provided at the one end portion of the shielded electric wire and configured to be connected to a terminal portion of the connection target;
 - a shield terminal that is a metal tube configured to be externally mounted on the shielded electric wire, the shield terminal having one end side configured to be connected to the braid and another end side folded outward to form a leaf spring that generates a biasing force in a radially expanding direction, the leaf spring configured to come into contact with an inner surface of the through hole of the metal panel so as to press the inner surface of the through hole and to thus ground the braid to the metal panel;
 - a sealing member formed of an elastic resin in a tubular shape to seal between the housing and an object inserted in the through hole from an inner surface of the housing to the inner surface of the through hole while avoiding a portion where the inner surface of the through hole and the leaf spring are in contact with each other; and
 - a support member that is a resin ring externally mounted on the shield terminal to be adjacent to the leaf spring on a side opposite to the connector terminal, while being sandwiched between the leaf spring and the sealing member, an outer circumferential edge of the support member configured to be disposed inside the through hole in such a manner as to be in contact with the inner surface of the through hole, thereby suppressing an offset of a central axis of the shield terminal with respect to a central axis of the through hole.
2. The connector according to claim 1, wherein the support member is a member having an L-shaped cross section in an axial direction, with a tubular portion inserted into a folded side of the leaf spring on the another end side of the shield terminal and a flange portion protruding from an opening edge of the tubular portion on a side opposite to the leaf spring, and is configured to come into contact with the inner surface of the through hole at an outer circumferential edge of the flange portion.
3. The connector according to claim 2, wherein the support member is disposed in such a manner that the flange portion faces an end of the sealing member facing the leaf spring.
4. The connector according to claim 1, wherein the braid of the shielded electric wire is folded outward on a connection end side of the connector terminal, and
 - a tubular portion other than the leaf spring of the shield terminal is connected in a caulked manner to the folded portion of the braid through a metal shield ring.

5. The connector according to claim 4, wherein the sealing member is externally mounted to the caulked portion of the shield terminal with the braid to cover the caulked portion, and

5 a protective material formed of a resin in a tubular shape is interposed between the sealing member and the caulked portion to protect the sealing member from the caulked portion.

6. The connector according to claim 1, further comprising:

10 a front holder that is configured to close a space between the through hole and the shielded electric wire on a front side of the housing, the front side being a side on which the shielded electric wire is connected to the connector terminal while a side opposite to the front side is defined as a rear side; and

15 a rear holder that is configured to close a space between an opening on the rear side of the housing and the shielded electric wire,

wherein the front holder is disposed in such a manner that the leaf spring of the shield terminal is sandwiched between a partial portion of the front holder and the support member, and an outer circumferential surface of the partial portion of the front holder is in contact with the inner surface of the through hole together with the outer circumferential edge of the support member, thereby suppressing the offset.

7. A wire harness comprising:

the connector according to claim 1; and

30 a shielded electric wire electromagnetically shielded by a braid, the shielded electric wire extending from the housing with the connector terminal being provided at an end thereof.

8. A wire harness comprising:

the connector according to claim 2; and

35 a shielded electric wire electromagnetically shielded by a braid, the shielded electric wire extending from the housing with the connector terminal being provided at an end thereof.

9. A wire harness comprising:

the connector according to claim 3; and

40 a shielded electric wire electromagnetically shielded by a braid, the shielded electric wire extending from the housing with the connector terminal being provided at an end thereof.

10. A wire harness comprising:

the connector according to claim 4; and

45 a shielded electric wire electromagnetically shielded by a braid, the shielded electric wire extending from the housing with the connector terminal being provided at an end thereof.

11. A wire harness comprising:

the connector according to claim 5; and

50 a shielded electric wire electromagnetically shielded by a braid, the shielded electric wire extending from the housing with the connector terminal being provided at an end thereof.

12. A wire harness comprising:

the connector according to claim 6; and

60 a shielded electric wire electromagnetically shielded by a braid, the shielded electric wire extending from the housing with the connector terminal being provided at an end thereof.