



US012409474B2

(12) **United States Patent**
Gyde et al.

(10) **Patent No.:** **US 12,409,474 B2**

(45) **Date of Patent:** **Sep. 9, 2025**

(54) **DEVICES FOR ANALYSIS OF A FLUID**

(71) Applicant: **S.C.R. (ENGINEERS) LIMITED**,
Netanya (IL)

(72) Inventors: **Dwayne Mark Gyde**, Hamilton (NZ);
Paul David Harris, Hamilton (NZ);
Robert Graham Orchard, Hamilton
(NZ); **Samuel James Whetnall**,
Hamilton (NZ)

(73) Assignee: **S.C.R. (ENGINEERS) LIMITED**,
Netanya (IL)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 866 days.

(21) Appl. No.: **17/638,828**

(22) PCT Filed: **Aug. 28, 2020**

(86) PCT No.: **PCT/NZ2020/050095**

§ 371 (c)(1),

(2) Date: **Feb. 27, 2022**

(87) PCT Pub. No.: **WO2021/040540**

PCT Pub. Date: **Mar. 4, 2021**

(65) **Prior Publication Data**

US 2022/0323995 A1 Oct. 13, 2022

(30) **Foreign Application Priority Data**

Aug. 28, 2019 (NZ) 756776

(51) **Int. Cl.**

B06B 1/06 (2006.01)

G01N 29/028 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **B06B 1/0677** (2013.01); **B06B 1/067**
(2013.01); **G01N 29/028** (2013.01);
(Continued)

(58) **Field of Classification Search**

CPC B06B 1/0677; B06B 1/067; B06B 1/0215;
B06B 1/0644; B06B 2201/70; B06B 3/02;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

85,575 A 1/1869 Drake
377,588 A 2/1888 Walsh, Jr.
(Continued)

FOREIGN PATENT DOCUMENTS

AU 199534570 10/1994
AU 2003239832 5/2002
(Continued)

OTHER PUBLICATIONS

Christian Pahl, Eberhard Hartung, Anne Grothmann, Katrin Mahlkow-Nerge, Angelika Haeussermann, Rumination activity of dairy cows in the 24 hours before and after calving, Journal of Dairy Science, vol. 97, Issue 11, 2014, pp. 6935-6941.

(Continued)


Primary Examiner — Emily P Pham

(74) *Attorney, Agent, or Firm* — Keith O'Doherty

(57) **ABSTRACT**

An ultrasonic transducer is described, including a piezoelectric element, a fluid medium contact layer, a matching layer between the piezoelectric element and the fluid medium contact layer, and a backing layer. Ultrasound sensor devices utilising the ultrasonic transducer are also described, for use in systems for analysing a fluid such as milk.

26 Claims, 6 Drawing Sheets

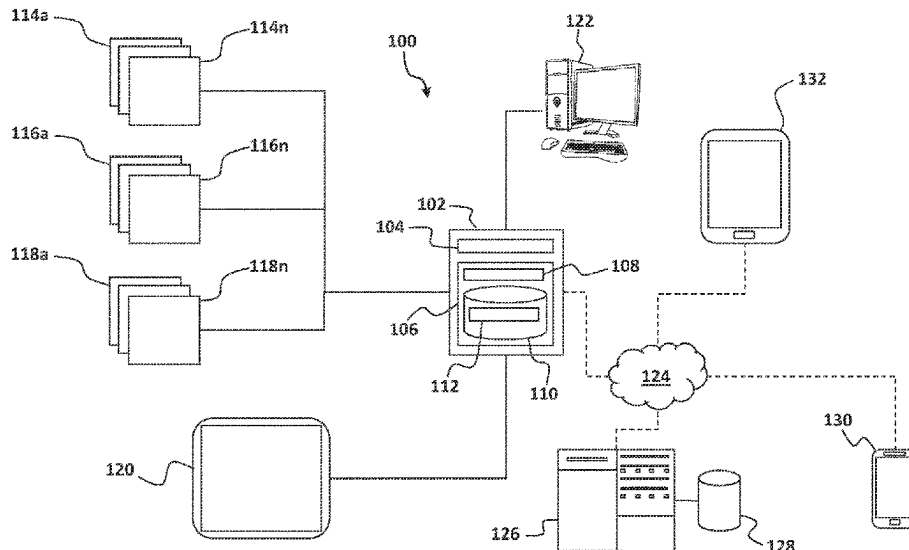

(51)	Int. Cl. G01N 29/036 G01N 29/22 G01N 29/24	(2006.01) (2006.01) (2006.01)	6,232,880 B1	5/2001	Anderson et al.	
			6,235,036 B1	5/2001	Gardner et al.	
			6,271,757 B1	8/2001	Touchton et al.	
			6,297,739 B1	10/2001	Small	
(52)	U.S. Cl. CPC	G01N 29/036 (2013.01); G01N 29/222 (2013.01); G01N 29/245 (2013.01)	6,310,553 B1	10/2001	Dance	
			6,402,692 B1	6/2002	Morford	
			6,476,541 B1 *	11/2002	Smith	G01N 29/348
						310/334
(58)	Field of Classification Search CPC .. G01N 29/028; G01N 29/036; G01N 29/222; G01N 29/245; G01N 29/2437; G01N 29/4436; G01N 29/348; G01N 2291/102; G01N 2291/0228; G01N 2291/02466; G01N 2291/02818; G01N 33/04; G01H 3/00; G01H 11/08 See application file for complete search history.		6,497,197 B1	12/2002	Huisma	
			6,502,060 B1	12/2002	Christian	
			6,510,630 B1	1/2003	Gardner	
			6,535,131 B1	3/2003	Bar-Shalom et al.	
			6,569,092 B1	5/2003	Guichon et al.	
			6,659,039 B1	12/2003	Larsen	
			6,868,804 B1	3/2005	Huisma et al.	
			7,016,730 B2	3/2006	Ternes	
			7,046,152 B1	5/2006	Peinetti et al.	
			7,137,359 B1	11/2006	Braden	
			7,296,539 B2	11/2007	Iljas	
			7,380,518 B2	6/2008	Kates	
			7,705,736 B1	4/2010	Kedziora	
			7,772,979 B2	8/2010	Nehls	
			7,843,350 B2	11/2010	Geissler et al.	
(56)	References Cited U.S. PATENT DOCUMENTS		7,937,861 B1	5/2011	Zacher	
			8,005,624 B1	8/2011	Starr	
			8,266,990 B1	9/2012	Janson	
			8,305,220 B2	11/2012	Gibson	
			8,478,389 B1	7/2013	Brockway et al.	
			8,622,929 B2	1/2014	Wilson et al.	
			8,763,557 B2	7/2014	Lipscomb et al.	
			8,955,462 B1	2/2015	Golden et al.	
			9,215,862 B2	12/2015	Bladen et al.	
			9,392,767 B2	7/2016	Talt et al.	
			9,392,946 B1	7/2016	Sarantos et al.	
			9,449,487 B1	9/2016	Spitalny	
			9,648,849 B1	5/2017	Vivathana	
			9,654,925 B1	5/2017	Solinsky et al.	
			9,693,536 B1	7/2017	Dana	
			9,717,216 B1	8/2017	Schlachta et al.	
			9,743,643 B1	8/2017	Kaplan et al.	
			9,848,577 B1	12/2017	Brandao et al.	
			9,861,080 B1	1/2018	Hathway et al.	
			10,021,857 B2	7/2018	Bailey et al.	
			10,039,263 B2	8/2018	Teychene et al.	
			10,045,511 B1	8/2018	Yarden et al.	
			10,064,391 B1	9/2018	Riley	
			10,091,972 B1	10/2018	Jensen et al.	
			10,231,442 B1	3/2019	Chang et al.	
			10,242,547 B1	3/2019	Struhsaker et al.	
			10,264,762 B1	4/2019	Lamb	
			10,352,759 B1	7/2019	Jensen	
			10,446,006 B1	10/2019	Johnson, Jr. et al.	
			10,512,430 B1	12/2019	Hladio	
			10,588,295 B1	3/2020	Riley	
			10,628,756 B1	4/2020	Kuper et al.	
			10,638,726 B1	5/2020	Makarychev et al.	
			10,691,674 B2	6/2020	Leong et al.	
			2001/0027751 A1	10/2001	van den Berg	
			2002/0009015 A1 *	1/2002	Laugharn, Jr.	B01J 19/10
						366/108
			2002/0010390 A1	1/2002	Guice et al.	
			2002/0021219 A1	2/2002	Edwards	
			2002/0091326 A1	7/2002	Hashimoto et al.	
			2002/0095828 A1	7/2002	Koopman et al.	
			2002/0154015 A1	10/2002	Hixson	
			2002/0158765 A1	10/2002	Pape et al.	
			2003/0004652 A1	1/2003	Brunner et al.	
			2003/0023517 A1	1/2003	Marsh et al.	
			2003/0024317 A1 *	2/2003	Miller	G10K 11/002
						73/626
			2003/0062001 A1	4/2003	Hakan	
			2003/0066491 A1	4/2003	Stampe	
			2003/0144926 A1	7/2003	Bodin et al.	
			2003/0146284 A1	8/2003	Schmit et al.	
			2003/0149526 A1	8/2003	Zhou et al.	
			2003/0177025 A1	9/2003	Curkendall et al.	
			2003/0201931 A1	10/2003	Durst et al.	
			2003/0208157 A1	11/2003	Eidson et al.	
			2003/0221343 A1	12/2003	Volk et al.	

(56)

References Cited

U.S. PATENT DOCUMENTS

2003/0229452	A1	12/2003	Lewis	2008/0228105	A1	9/2008	Howell et al.
2004/0066298	A1	4/2004	Schmitt et al.	2008/0262326	A1	10/2008	Hete et al.
2004/0078390	A1	4/2004	Saunders	2008/0272908	A1	11/2008	Boyd
2004/0118920	A1	6/2004	He	2008/0312511	A1	12/2008	Osler et al.
2004/0123810	A1	7/2004	Lorton et al.	2009/0009388	A1	1/2009	Wangrud
2004/0177011	A1	9/2004	Ramsay et al.	2009/0020613	A1	1/2009	Chang et al.
2004/0201454	A1	10/2004	Waterhouse et al.	2009/0025651	A1	1/2009	Lalor
2005/0000279	A1	1/2005	Yogeswaren	2009/0058730	A1	3/2009	Geissler et al.
2005/0010333	A1	1/2005	Lorton et al.	2009/0094869	A1	4/2009	Geissler et al.
2005/0026181	A1	2/2005	Davis et al.	2009/0102668	A1	4/2009	Thompson et al.
2005/0097997	A1	5/2005	Hile	2009/0139462	A1	6/2009	So
2005/0108912	A1	5/2005	Bekker	2009/0149727	A1	6/2009	Truitt et al.
2005/0115508	A1	6/2005	Little	2009/0187392	A1	7/2009	Riskey et al.
2005/0128086	A1	6/2005	Brown et al.	2009/0255484	A1	10/2009	Muelken
2005/0139168	A1	6/2005	Light et al.	2009/0312667	A1	12/2009	Utsunomiya et al.
2005/0145187	A1	7/2005	Gray	2010/0018363	A1	1/2010	Chervenak et al.
2005/0273117	A1	12/2005	Teychene	2010/0030036	A1	2/2010	Mottram et al.
2005/0279287	A1	12/2005	Kroeker	2010/0045468	A1	2/2010	Geissler
2005/0284381	A1	12/2005	Bell et al.	2010/0113902	A1	5/2010	Hete et al.
2006/0011145	A1	1/2006	Kates	2010/0139575	A1	6/2010	Duncan et al.
2006/0052986	A1	3/2006	Rogers et al.	2010/0160809	A1	6/2010	Laurence et al.
2006/0064325	A1	3/2006	Suzuken	2010/0175625	A1	7/2010	Klenotiz
2006/0087440	A1	4/2006	Klein	2010/0217102	A1	8/2010	LeBoeuf et al.
2006/0106289	A1	5/2006	Elser	2010/0250198	A1	9/2010	Lorton et al.
2006/0117619	A1	6/2006	Costantini	2010/0289639	A1	11/2010	Gibson et al.
2006/0155172	A1	7/2006	Rugg	2010/0315241	A1	12/2010	Jow
2006/0170561	A1	8/2006	Eyal	2010/0317972	A1	12/2010	Baumgartner et al.
2006/0173367	A1	8/2006	Stuart et al.	2010/0321182	A1	12/2010	Wangrud
2006/0185605	A1	8/2006	Renz et al.	2010/0321189	A1	12/2010	Gibson et al.
2006/0201436	A1	9/2006	Kates	2010/0331739	A1	12/2010	Afikim et al.
2006/0207515	A1	9/2006	Palett	2011/0018717	A1	1/2011	Takahashi et al.
2006/0241521	A1	10/2006	Cohen	2011/0041367	A1	2/2011	Bladen et al.
2006/0282274	A1	12/2006	Bennett	2011/0061605	A1	3/2011	Hardi et al.
2006/0290514	A1	12/2006	Sakama et al.	2011/0095089	A1	4/2011	Kolton et al.
2007/0006494	A1	1/2007	Hayes et al.	2011/0121356	A1	5/2011	Krawinkel et al.
2007/0008155	A1	1/2007	Trost et al.	2011/0137185	A1	6/2011	Hete et al.
2007/0021660	A1	1/2007	Delonzor et al.	2011/0152876	A1	6/2011	Vandeputte
2007/0027375	A1	2/2007	Melker et al.	2011/0178423	A1	7/2011	Hatch
2007/0027377	A1	2/2007	Delonzor et al.	2011/0203144	A1	8/2011	Junek et al.
2007/0027379	A1	2/2007	Delonzor et al.	2011/0258130	A1	10/2011	Grabiner et al.
2007/0029381	A1	2/2007	Braiman	2011/0272470	A1	11/2011	Baba et al.
2007/0044317	A1	3/2007	Critelli	2011/0313264	A1	12/2011	Hete
2007/0044732	A1	3/2007	Araki et al.	2012/0009943	A1	1/2012	Greenberg et al.
2007/0062457	A1	3/2007	Bates et al.	2012/0068848	A1	3/2012	Campbell et al.
2007/0069899	A1	3/2007	Shih et al.	2012/0089152	A1	4/2012	Lynd et al.
2007/0103296	A1	5/2007	Paessel et al.	2012/0092132	A1	4/2012	Holme et al.
2007/0149871	A1	6/2007	Sarussi et al.	2012/0111286	A1	5/2012	Lee et al.
2007/0152825	A1	7/2007	August et al.	2012/0112917	A1	5/2012	Menachem et al.
2007/0222624	A1	9/2007	Eicken et al.	2012/0160181	A1	6/2012	So et al.
2007/0255124	A1	11/2007	Pologe et al.	2012/0175412	A1	7/2012	Grabiner et al.
2007/0258625	A1	11/2007	Mirtsching	2012/0204811	A1	8/2012	Ryan
2007/0283791	A1	12/2007	Engvall et al.	2012/0236690	A1	9/2012	Rader et al.
2007/0298421	A1	12/2007	Jiang et al.	2012/0291715	A1	11/2012	Jiang et al.
2008/0001815	A1	1/2008	Wang et al.	2012/0299731	A1	11/2012	Triener
2008/0004798	A1	1/2008	Troxler et al.	2012/0320710	A1	12/2012	Sato et al.
2008/0017126	A1	1/2008	Adams et al.	2012/0326862	A1	12/2012	Kwak et al.
2008/0018481	A1	1/2008	Zehavi	2012/0326874	A1	12/2012	Kwak et al.
2008/0021352	A1	1/2008	Keegan et al.	2013/0006065	A1	1/2013	Yanai et al.
2008/0036610	A1	2/2008	Hokuf et al.	2013/0014706	A1	1/2013	Menkes
2008/0047177	A1	2/2008	Hilpert	2013/0046170	A1	2/2013	Haynes
2008/0055155	A1	3/2008	Hensley et al.	2013/0113622	A1	5/2013	Pratt et al.
2008/0059263	A1	3/2008	Stroman et al.	2013/0119142	A1	5/2013	McCoy et al.
2008/0061990	A1	3/2008	Mines et al.	2013/0175347	A1	7/2013	Decaluwe et al.
2008/0076988	A1	3/2008	Sarussi et al.	2013/0192526	A1	8/2013	Mainini
2008/0076992	A1	3/2008	Hete et al.	2013/0211773	A1	8/2013	Loeschinger et al.
2008/0085522	A1	4/2008	Meghen et al.	2013/0222141	A1	8/2013	Rhee et al.
2008/0097726	A1	4/2008	Lorton et al.	2013/0237778	A1	9/2013	Rouquette et al.
2008/0110406	A1	5/2008	Anderson et al.	2013/0239904	A1	9/2013	Kim et al.
2008/0125658	A1	5/2008	Lee et al.	2013/0239907	A1	9/2013	Laurence et al.
2008/0146890	A1	6/2008	LeBoeuf et al.	2013/0241356	A1	9/2013	Kim et al.
2008/0173255	A1	7/2008	Mainini et al.	2013/0265165	A1	10/2013	So et al.
2008/0190202	A1	8/2008	Kulach et al.	2013/0285815	A1	10/2013	Jones, II
2008/0190379	A1	8/2008	Mainini et al.	2014/0062259	A1	3/2014	Lautzenhiser et al.
2008/0215484	A1	9/2008	Oldham	2014/0073486	A1	3/2014	Ahmed et al.
2008/0227662	A1	9/2008	Stromberg et al.	2014/0122488	A1	5/2014	Jung et al.
				2014/0123912	A1	5/2014	Menkes et al.
				2014/0135596	A1	5/2014	LeBoeuf et al.
				2014/0135631	A1	5/2014	Brumback et al.
				2014/0171762	A1	6/2014	LeBoeuf et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2014/0174376	A1	6/2014	Touchton et al.	2017/0258039	A1	9/2017	Lauterbach
2014/0196673	A1	7/2014	Menkes et al.	2017/0272842	A1	9/2017	Touma
2014/0230755	A1	8/2014	Trenkle et al.	2017/0280675	A1	10/2017	MacNeil et al.
2014/0232541	A1	8/2014	Trenkle et al.	2017/0280688	A1	10/2017	Deliou et al.
2014/0253709	A1	9/2014	Bresch et al.	2017/0318781	A1	11/2017	Rollins et al.
2014/0254325	A1	9/2014	Korbler et al.	2017/0360004	A1	12/2017	Carver
2014/0261235	A1	9/2014	Rich et al.	2017/0372583	A1	12/2017	Lamkin et al.
2014/0267299	A1	9/2014	Couse	2018/0000045	A1	1/2018	Bianchi et al.
2014/0275824	A1	9/2014	Couse	2018/0007863	A1	1/2018	Bailey et al.
2014/0276089	A1	9/2014	Kirenko et al.	2018/0014512	A1	1/2018	Arabani et al.
2014/0290013	A1	10/2014	Eidelman et al.	2018/0055016	A1	3/2018	Hsieh et al.
2014/0302783	A1	10/2014	Aiuto et al.	2018/0064068	A1	3/2018	McKee et al.
2014/0331942	A1	11/2014	Sarazyn	2018/0070559	A1	3/2018	So
2014/0333439	A1	11/2014	Downing et al.	2018/0098522	A1	4/2018	Steinfert
2014/0347184	A1	11/2014	Triener	2018/0110205	A1	4/2018	Czarnecky et al.
2014/0352632	A1	12/2014	McLaughlin	2018/0131074	A1	5/2018	Wilkinson et al.
2014/0368338	A1	12/2014	Rettedal et al.	2018/0132455	A1	5/2018	Pradeep et al.
2015/0025394	A1	1/2015	Hong et al.	2018/0206455	A1	7/2018	Thiex et al.
2015/0039239	A1	2/2015	Shuler et al.	2018/0242860	A1	8/2018	LeBoeuf et al.
2015/0057963	A1	2/2015	Zakharov et al.	2018/0249683	A1	9/2018	Borchersen et al.
2015/0097668	A1	4/2015	Toth	2018/0260976	A1	9/2018	Watanabe et al.
2015/0099472	A1	4/2015	Ickovic	2018/0271058	A1	9/2018	Valdez
2015/0100245	A1	4/2015	Huang et al.	2018/0279582	A1	10/2018	Yajima et al.
2015/0107519	A1	4/2015	Rajkondawar et al.	2018/0288968	A1	10/2018	Cisco
2015/0107522	A1	4/2015	Lamb	2018/0295809	A1	10/2018	Yajima et al.
2015/0122893	A1	5/2015	Warther	2018/0303425	A1	10/2018	Wordham et al.
2015/0128873	A1	5/2015	Prescott et al.	2018/0310526	A1	11/2018	Birch et al.
2015/0130617	A1	5/2015	Triener	2018/0325382	A1	11/2018	Brandao et al.
2015/0148811	A1	5/2015	Swope et al.	2018/0332989	A1	11/2018	Chiu et al.
2015/0157435	A1	6/2015	Chasins et al.	2018/0333244	A1	11/2018	Hanks et al.
2015/0182322	A1	7/2015	Couse et al.	2019/0008118	A1	1/2019	Keegan
2015/0245592	A1	9/2015	Sibbald et al.	2019/0008124	A1	1/2019	Komatsu et al.
2015/0282457	A1	10/2015	Yarden	2019/0029226	A1	1/2019	Triener
2015/0334994	A1	11/2015	Prasad	2019/0053469	A1	2/2019	Mardirossian
2015/0342143	A1	12/2015	Stewart	2019/0053470	A1	2/2019	Singh et al.
2015/0351885	A1	12/2015	Kool et al.	2019/0059335	A1	2/2019	Crider, Jr. et al.
2015/0366166	A1	12/2015	Mueller	2019/0059337	A1	2/2019	Robbins
2016/0000045	A1	1/2016	Funaya et al.	2019/0059741	A1	2/2019	Crider, Jr. et al.
2016/0021506	A1	1/2016	Bonge, Jr.	2019/0069512	A1	3/2019	Eriksson et al.
2016/0058379	A1	3/2016	Menkes et al.	2019/0075945	A1	3/2019	Strassburger et al.
2016/0066546	A1	3/2016	Borchersen et al.	2019/0082654	A1	3/2019	Robbins
2016/0100802	A1	4/2016	Newman	2019/0090754	A1	3/2019	Brandao et al.
2016/0106064	A1	4/2016	Bladen et al.	2019/0110433	A1	4/2019	Myers
2016/0113524	A1	4/2016	Gross et al.	2019/0110436	A1	4/2019	Gardner et al.
2016/0120154	A1	5/2016	Hill et al.	2019/0125509	A1	5/2019	Hotchkin
2016/0128637	A1	5/2016	LeBoeuf et al.	2019/0130728	A1	5/2019	Struhsaker et al.
2016/0135431	A1	5/2016	Siegel	2019/0133086	A1	5/2019	Katz et al.
2016/0148086	A1	5/2016	Clarke et al.	2019/0159428	A1	5/2019	Bolen
2016/0150362	A1	5/2016	Shaprio et al.	2019/0166802	A1	6/2019	Seltzer et al.
2016/0151013	A1	6/2016	Atallah et al.	2019/0183091	A1	6/2019	Betts-LaCroix et al.
2016/0165851	A1	6/2016	Harty et al.	2019/0183092	A1	6/2019	Couse et al.
2016/0165852	A1	6/2016	Goldfain	2019/0208358	A1	7/2019	de Barros Chapiewski et al.
2016/0166761	A1	6/2016	Piehl et al.	2019/0213860	A1	7/2019	Shaprio et al.
2016/0198957	A1	7/2016	Arditi et al.	2019/0254599	A1	8/2019	Young et al.
2016/0210841	A1	7/2016	Huang	2019/0287429	A1	9/2019	Dawson et al.
2016/0213317	A1	7/2016	Richardson et al.	2019/0290133	A1	9/2019	Crider et al.
2016/0278712	A1	9/2016	Sagara et al.	2019/0290847	A1	9/2019	Veyrent et al.
2016/0286757	A1	10/2016	Armstrong	2019/0298226	A1	10/2019	Filipowicz
2016/0287108	A1	10/2016	Wei et al.	2019/0298924	A1	10/2019	Gibson et al.
2016/0317049	A1	11/2016	LeBoeuf et al.	2019/0302063	A1*	10/2019	Hadimioglu G01N 29/28
2016/0345881	A1	12/2016	Sarantos et al.	2019/0327939	A1	10/2019	Sharpe et al.
2016/0360733	A1	12/2016	Triener	2019/0335715	A1	11/2019	Hicks et al.
2016/0367495	A1	12/2016	Miller et al.	2019/0350168	A1	11/2019	Shi
2017/0000090	A1	1/2017	Hall	2019/0365324	A1	12/2019	Chang
2017/0006836	A1	1/2017	Torres	2019/0373857	A1	12/2019	Leigh-Lancaster et al.
2017/0042119	A1	2/2017	Garrity	2019/0380311	A1	12/2019	Crouthamel et al.
2017/0067770	A1	3/2017	Sun	2019/0385037	A1	12/2019	Robadey et al.
2017/0079247	A1	3/2017	Womble et al.	2019/0385332	A1	12/2019	Yajima et al.
2017/0095206	A1	4/2017	Leib et al.	2020/0015740	A1	1/2020	Alnofeli et al.
2017/0156288	A1	6/2017	Singh	2020/0037886	A1	2/2020	Greer et al.
2017/0164905	A1	6/2017	Gumiero	2020/0068853	A1	3/2020	Radovic
2017/0193208	A1	7/2017	Ashley et al.	2020/0085019	A1	3/2020	Gilbert et al.
2017/0196203	A1	7/2017	Huisma et al.	2020/0100463	A1	4/2020	Rooda et al.
2017/0202185	A1	7/2017	Trumbull et al.	2020/0107522	A1	4/2020	Kersey et al.
2017/0245797	A1	8/2017	Quinn	2020/0110946	A1	4/2020	Kline et al.
				2020/0113728	A1	4/2020	Spector et al.
				2020/0170222	A1	6/2020	Gotts
				2020/0178505	A1	6/2020	Womble et al.
				2020/0178800	A1	6/2020	Geissler et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2020/0205381 A1 7/2020 Wernimont et al.
 2020/0229391 A1 7/2020 De Groot
 2020/0229707 A1 7/2020 Donnelly
 2020/0242551 A1 7/2020 Lau et al.

FOREIGN PATENT DOCUMENTS

AU 2003238759 1/2004
 AU 2004263067 2/2005
 AU 2004305403 7/2005
 AU 2011210083 8/2011
 AU 2016266101 12/2016
 AU 2017100469 5/2017
 AU 2018220079 9/2018
 BR 11201201890 9 1/2011
 CA 2267812 10/2000
 CA 2493331 1/2005
 CA 2788153 8/2011
 CA 2880138 2/2013
 CA 2858905 10/2013
 CA 2875637 1/2014
 CA 2875578 12/2014
 CA 2915843 12/2014
 CA 2990620 12/2016
 CA 2916286 6/2017
 CA 3007296 6/2017
 CN 1989895 7/2007
 CN 201171316 12/2008
 CN 101578516 11/2009
 CN 101816290 9/2010
 CN 101875975 11/2010
 CN 101875976 11/2010
 CN 102781225 1/2011
 CN 102142116 8/2011
 CN 102485892 6/2012
 CN 102682322 9/2012
 CN 103300893 A 9/2013
 CN 203313865 12/2013
 CN 203689049 2/2014
 CN 203523519 4/2014
 CN 204047531 8/2014
 CN 204305813 5/2015
 CN 204331349 5/2015
 CN 105080822 A 11/2015
 CN 105191817 12/2015
 CN 106125648 11/2016
 CN 106172068 12/2016
 CN 106197675 12/2016
 CN 106719037 2/2017
 CN 205919898 2/2017
 CN 106472347 3/2017
 CN 106845598 6/2017
 CN 206431665 8/2017
 CN 107201409 9/2017
 CN 207201674 9/2017
 CN 107251851 10/2017
 CN 107667898 2/2018
 CN 108353810 2/2018
 CN 207100094 3/2018
 CN 207249710 4/2018
 CN 108651301 5/2018
 CN 108656996 5/2018
 CN 108684549 5/2018
 CN 108118096 6/2018
 CN 108308055 7/2018
 CN 109006541 8/2018
 CN 109008529 8/2018
 CN 108617533 10/2018
 CN 108717668 10/2018
 CN 108766586 11/2018
 CN 109006550 12/2018
 CN 208273869 12/2018
 CN 109355402 2/2019
 CN 109937904 3/2019
 CN 109937905 3/2019

CN 109823691 5/2019
 CN 110073995 5/2019
 CN 110059781 7/2019
 CN 110106261 8/2019
 CN 110106262 8/2019
 CN 110506656 11/2019
 CN 210076292 2/2020
 DE 633742 8/1936
 DE 2850438 5/1980
 DE 19629166 2/1997
 DE 19826348 6/1998
 DE 29906146 6/1999
 DE 19911766 9/2000
 DE 20018364 1/2001
 DE 10001176 5/2001
 DE 102004027978 12/2005
 DE 202010008325 2/2012
 DE 202016101289 4/2016
 DK 140001 11/1979
 EP 55127 6/1982
 EP 125915 11/1984
 EP 0499428 8/1992
 EP 513525 11/1992
 EP 743043 11/1996
 EP 938841 2/1998
 EP 898449 3/1999
 EP 1076485 2/2001
 EP 1445723 8/2004
 EP 1479338 11/2004
 EP 1521208 4/2005
 EP 1907816 4/2008
 EP 1961294 8/2008
 EP 2028931 3/2009
 EP 2172878 4/2010
 EP 2453733 5/2012
 EP 2465344 6/2012
 EP 2488237 8/2012
 EP 2528431 12/2012
 EP 2534945 12/2012
 EP 2657889 10/2013
 EP 2664234 11/2013
 EP 2728995 5/2014
 EP 2879615 6/2015
 EP 2955998 12/2015
 EP 3153098 4/2017
 EP 3164855 5/2017
 EP 3210531 8/2017
 EP 3217566 9/2017
 EP 3218865 9/2017
 EP 3225106 10/2017
 EP 3316680 5/2018
 EP 3346422 7/2018
 EP 3385886 10/2018
 EP 3593634 1/2020
 EP 3627856 3/2020
 EP 3660855 6/2020
 ES 2046912 2/1994
 ES 2206009 5/2004
 ES 2215152 10/2004
 ES 2239500 A1 9/2005
 ES 1072416 7/2010
 ES 2391341 11/2012
 ES 1194609 10/2017
 FI 20165318 6/2017
 FR 2106705 5/1972
 FR 2297565 8/1976
 FR 2342024 1/1983
 FR 2601848 1/1988
 FR 2779153 12/1999
 FR 2834521 7/2003
 FR 2964777 3/2012
 FR 3046332 1/2016
 FR 3024653 2/2016
 FR 3085249 9/2018
 GB 588870 6/1947
 GB 641394 8/1950
 GB 865164 4/1961
 GB 1072971 6/1967
 GB 1267830 3/1972

(56)	References Cited		WO	2004015655	2/2004
	FOREIGN PATENT DOCUMENTS		WO	2005104775	4/2004
			WO	2006078943	1/2005
			WO	2005104930	4/2005
GB	1415650	11/1975	WO	2005073408	8/2005
GB	2067121	7/1981	WO	2005082132	9/2005
GB	2055670	7/1983	WO	2006021855	3/2006
GB	2114045	8/1983	WO	2006134197	12/2006
GB	2125343	3/1984	WO	2006135265	12/2006
GB	2142812	1/1985	WO	2007034211	3/2007
GB	2392138	2/2004	WO	2007095684	8/2007
GB	2469326	10/2010	WO	2007122375	11/2007
GB	2554636	9/2016	WO	2008033042	3/2008
GB	2570340	7/2019	WO	2008041839	4/2008
GB	2571404	8/2019	WO	2008052298	5/2008
IN	201103443	12/2011	WO	2008075974	6/2008
IN	200802272	6/2016	WO	2010091686	12/2008
JP	57173562	11/1982	WO	2009034497	3/2009
JP	7177832	7/1995	WO	2009062249	5/2009
JP	2001178692	7/2001	WO	2009076325	6/2009
JP	2004292151	10/2004	WO	2009089215	7/2009
JP	2005102959	4/2005	WO	2009117764	10/2009
JP	5659243	1/2011	WO	2009153779	12/2009
JP	2011067178	4/2011	WO	2010008620	1/2010
JP	2011087657	5/2011	WO	2010048753	5/2010
JP	2013247941	6/2012	WO	2010053811	5/2010
JP	2016225891	12/2016	WO	2010068713	6/2010
JP	2017112857	6/2017	WO	2010140900	12/2010
JP	2017002170	4/2018	WO	2012075480	12/2010
KR	2003061157	7/2003	WO	2011039112	4/2011
KR	2005046330	5/2005	WO	2011076886	6/2011
KR	780449	11/2007	WO	2011154949	12/2011
KR	101747418	1/2011	WO	2012071670	6/2012
KR	20130019970	2/2013	WO	2013008115	1/2013
KR	20130057683	6/2013	WO	2013038326	3/2013
KR	2013138899	12/2013	WO	2013082227	6/2013
KR	2019061805	11/2017	WO	2015001537	7/2013
KR	101827311	2/2018	WO	2013118121	8/2013
KR	20180035537	4/2018	WO	2015024050	8/2013
KR	2018109451	10/2018	WO	2013179020	12/2013
KR	20190081598	7/2019	WO	2013190423	12/2013
KR	2019091708	8/2019	WO	2014020463	2/2014
MX	9600754	2/1997	WO	2014095759	6/2014
MX	356331	1/2011	WO	2014107766	7/2014
NL	2017104	1/2018	WO	2014118788	8/2014
NL	2019186	1/2019	WO	2014125250	8/2014
NL	2020275	7/2019	WO	2016027271	8/2014
NZ	198486	5/1986	WO	2014140148	9/2014
NZ	199494	7/1986	WO	2014141084	9/2014
NZ	203924	10/1986	WO	2014194383	12/2014
NZ	335702	3/2001	WO	2014197631	12/2014
NZ	507129	8/2002	WO	2014199363	12/2014
NZ	582984	1/2011	WO	2015009167	1/2015
RU	2178711	1/2002	WO	2015030832	3/2015
RU	2265324	12/2005	WO	2015055709	4/2015
SE	4567	3/1893	WO	2015086338	6/2015
SE	5549	4/1894	WO	2016207844	6/2015
SE	123213	11/1948	WO	2015107354	7/2015
SE	188102	3/1964	WO	2017001717	7/2015
SU	1766336	10/1992	WO	2017031532	8/2015
WO	1984000468	2/1984	WO	2015140486	9/2015
WO	1991011956	8/1991	WO	2015142764	9/2015
WO	199302549	2/1993	WO	2015158787	10/2015
WO	199822028	5/1998	WO	2015175686	11/2015
WO	1998039475	9/1998	WO	2015176027	11/2015
WO	1999017658	4/1999	WO	2015197385	12/2015
WO	2000062263	4/1999	WO	2016037190	3/2016
WO	9945761	9/1999	WO	2017149049	3/2016
WO	2000013393	3/2000	WO	2016053104	4/2016
WO	2000061802	10/2000	WO	2016108187	7/2016
WO	2001004969	1/2001	WO	2016166748	10/2016
WO	2001033950	5/2001	WO	2017001538	1/2017
WO	2001087054	11/2001	WO	2017027551	2/2017
WO	2002031629	4/2002	WO	2017037479	3/2017
WO	2002085106	10/2002	WO	2017066813	4/2017
WO	2003001180	1/2003	WO	2017089289	6/2017
WO	2004092920	3/2003	WO	2017096256	6/2017
WO	2003087765	10/2003	WO	2017121834	7/2017
WO	2003094605	11/2003	WO	2018006965	1/2018

(56)

References Cited

FOREIGN PATENT DOCUMENTS

WO	2018011736	1/2018
WO	2018019742	2/2018
WO	2020022543	7/2018
WO	2018172976	9/2018
WO	2020060248	9/2018
WO	2018203203	11/2018
WO	2019009717	1/2019
WO	2019025138	2/2019
WO	2019046216	3/2019
WO	2019048521 A1	3/2019
WO	2019058752	3/2019
WO	2019071222	4/2019
WO	2019132803	7/2019
WO	2019207561	10/2019
WO	2019235942	12/2019
WO	2019245978	12/2019
WO	2020003310	1/2020
WO	2020096528	5/2020
WO	2020140013	7/2020

OTHER PUBLICATIONS

Steensels, Machteld; Maltz, Ephraim; Bahr, Claudia; Berckmans, Daniel; Antler, Aharon; et al., Towards practical application of sensors for monitoring animal health: The effect of post-calving health problems on rumination duration, activity and milk yield, *The Journal of Dairy Research*; Cambridge vol. 84, Iss. 2, (May 2017): 132-138.

Clark, C., Lyons, N., Millapan, L., Talukder, S., Cronin, G., Kerrisk, K., Garcia, S. (2015), Rumination and activity levels as predictors of calving for dairy cows, *Animal*, 9(4), 691-695.

Koyama, T. Koyama, M. Sugimoto, N. Kusakari, R. Miura, K. Yoshioka, M. Hirako, Prediction of calving time in Holstein dairy

cows by monitoring the ventral tail base surface temperature, *The Veterinary Journal*, vol. 240, 2018, pp. 1-5, ISSN 1090-0233.

L. Calamari, N. Soriani, G. Panella, F. Petrer, A. Minuti, E. Trevisi, Rumination time around calving: An early signal to detect cows at greater risk of disease, *Journal of Dairy Science*, vol. 97, Issue 6, 2014, pp. 3635-3647, ISSN 0022-0302.

S. Benaissa, F.A.M. Tuytens, D. Plets, J. Trogh, L. Martens, L. Vandaele, W. Joseph, B. Sonck, Calving and estrus detection in dairy cattle using a combination of indoor localization and accelerometer sensors, *Computers and Electronics in Agriculture*, vol. 168, 2020, 105153, ISSN 0168-1699.

N. Soriani, E. Trevisi, L. Calamari, Relationships between rumination time, metabolic conditions, and health status in dairy Cows during the transition period, *Journal of Animal Science*, vol. 90, Issue 12, Dec. 2012, pp. 4544-4554.

The role of sensors, big data and machine learning in modern animal farming; Suresh Neethirajan; Accepted Jul. 3, 2020 *Sensing and Bio-Sensing Research* 29 (2020) 100367 2214-1804/ © 2020 the Author. Published by Elsevier B.V.

A Review on Determination of Computer Aid Diagnosis and/or Risk Factors Using Data Mining Methods in Veterinary Field Pinar Cihan, Erhan Gökçe, Oya Kalipsiz; Tekirdağ Namik Kemal University, Çorlu Faculty of Engineering, Department of Computer Engineering, Tekirdağ, Turkey. 2019.

Big Data Analytics and Precision Animal Agriculture Symposium: Data to decisions B. J. White, D. E. Amrine, and R. L. Larson Beef Cattle Institute, Kansas State University, Manhattan, KS; © the Author(s) 2018. Published by Oxford University Press on behalf of American Society of Animal Science.

Gasteiner, J.; Boswerger, B.; Guggenberger, T., Practical use of a novel ruminal sensor on dairy farms, *Praktische Tierarzt* 2012 vol. 93 No. 8 pp. 730 . . . 739 ref.45.

Drying up Cows and the Effect of Different Methods Upon Milk Production; Ralph Wayne, C. H. Eckles, and W. E. Peterson; Division of Dairy Husbandry, University of Minnesota, St. Paul; *Research-Article* vol. 16, Issue 1, p. 69-78, Jan. 1, 1933.

* cited by examiner

FIG. 1

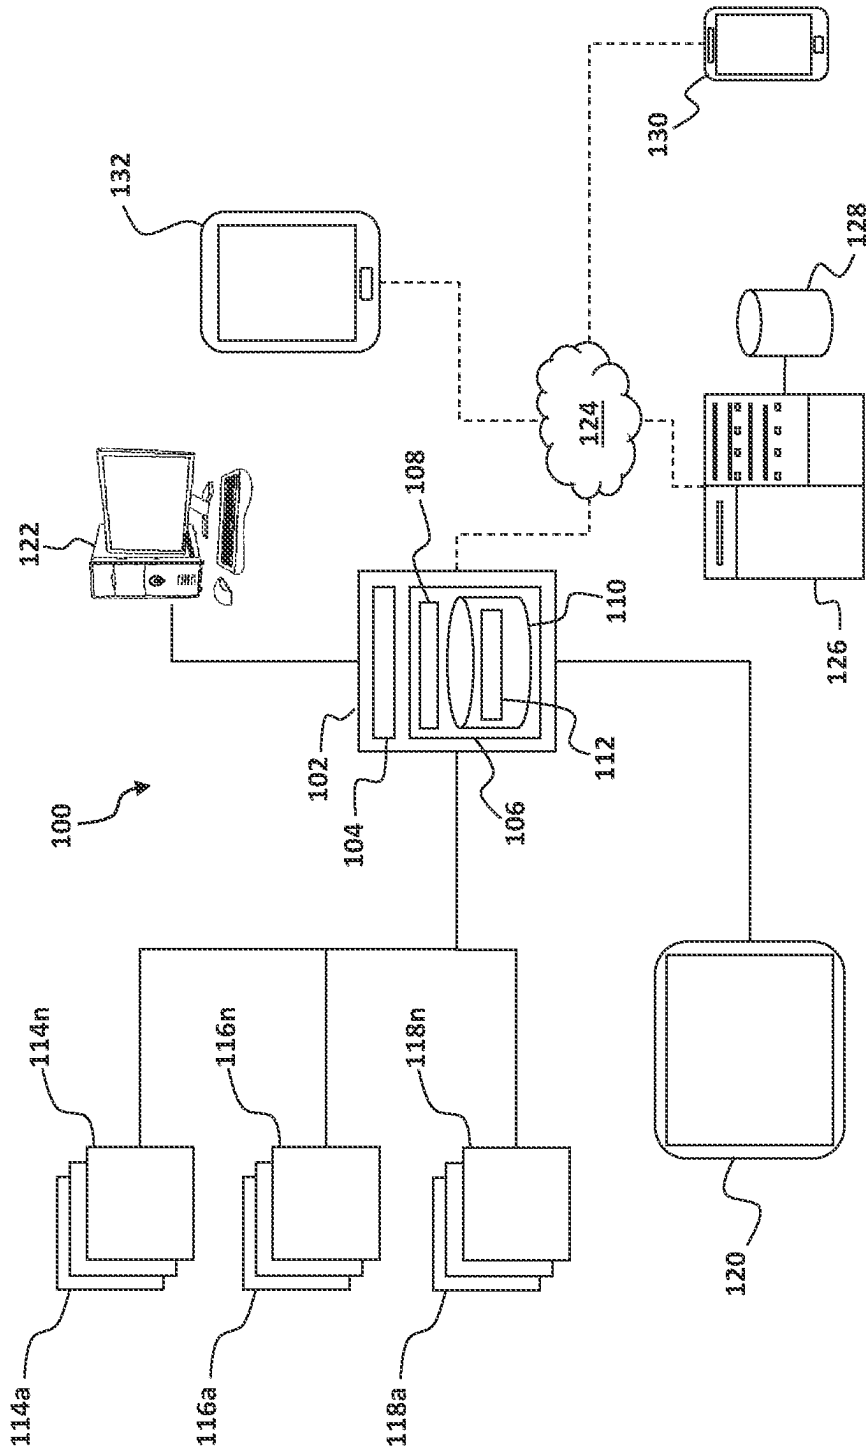


FIG. 2

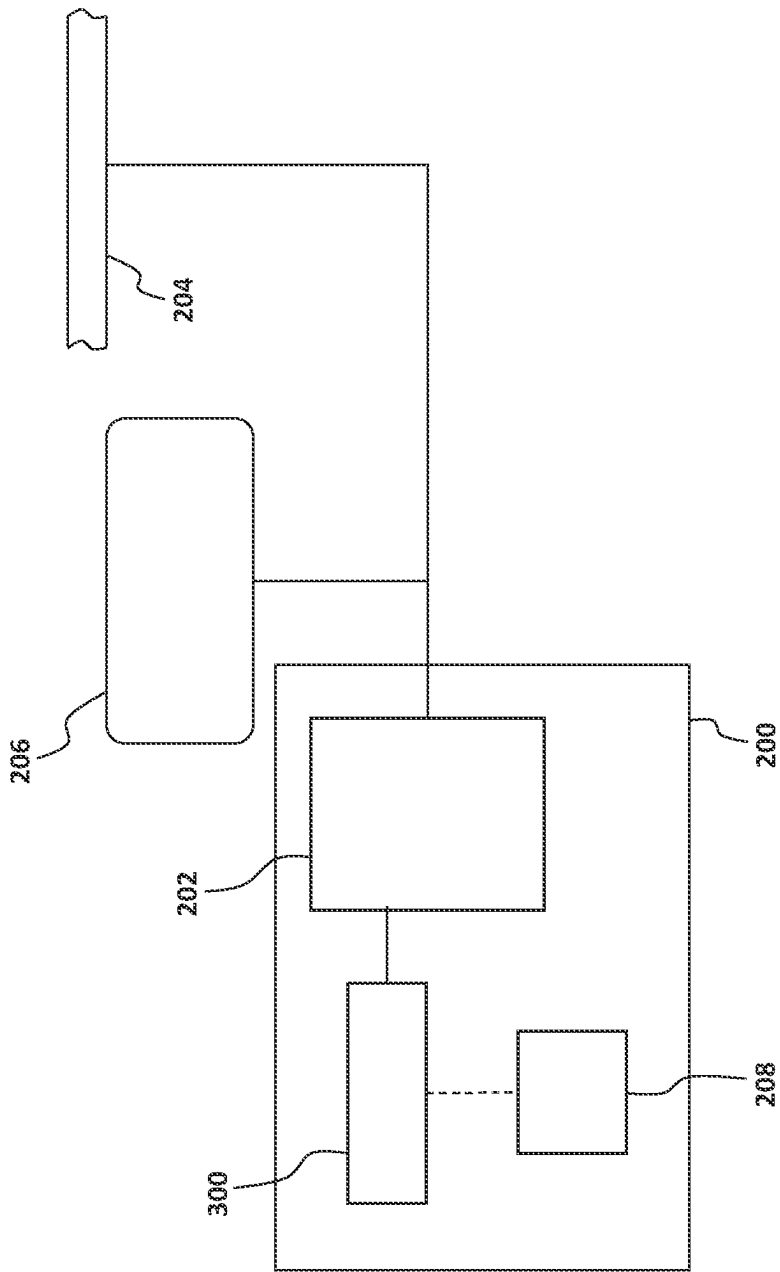


FIG. 3A

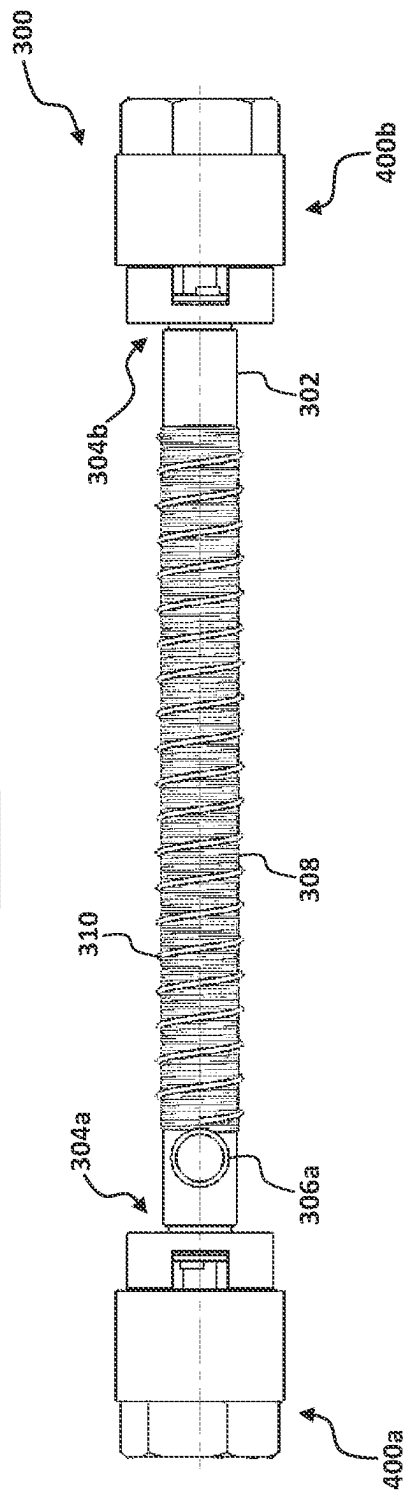


FIG. 3B

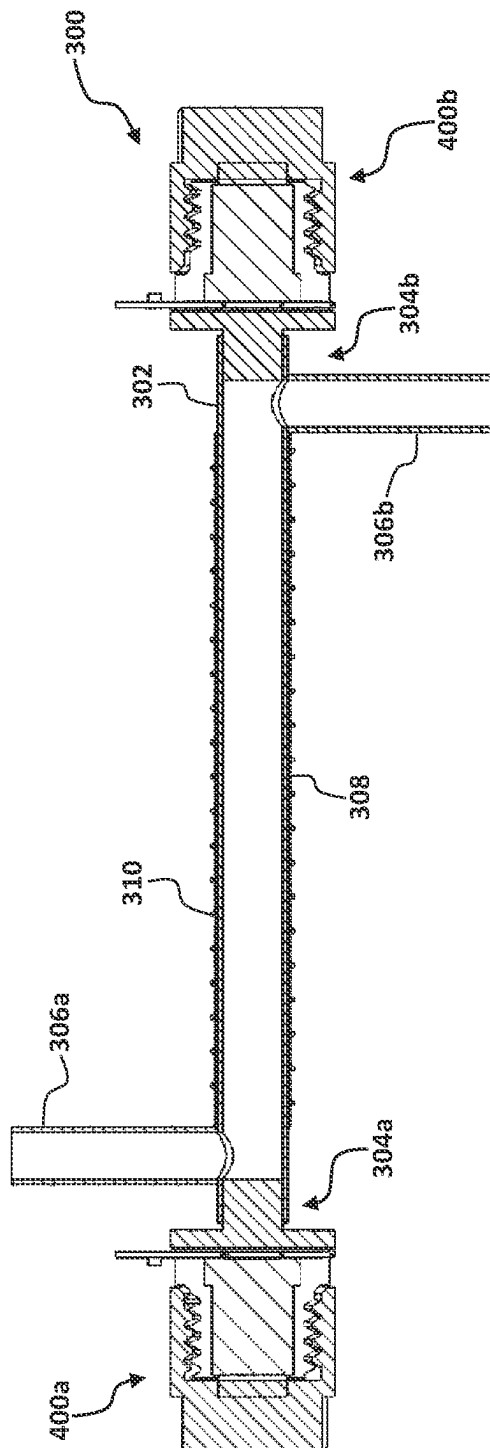


FIG. 4A

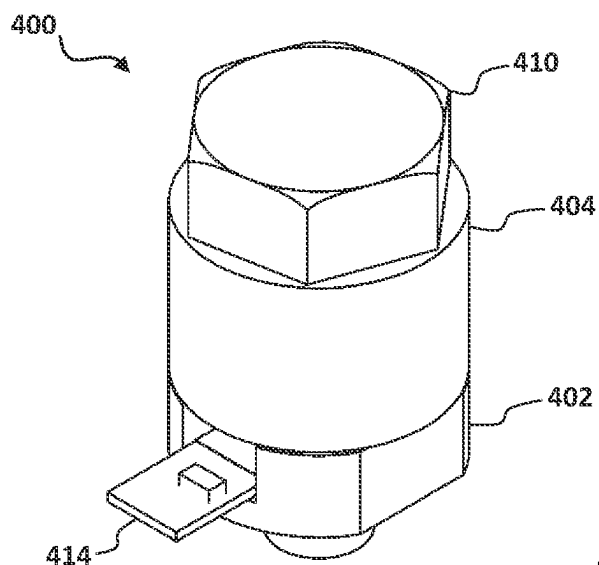


FIG. 4B

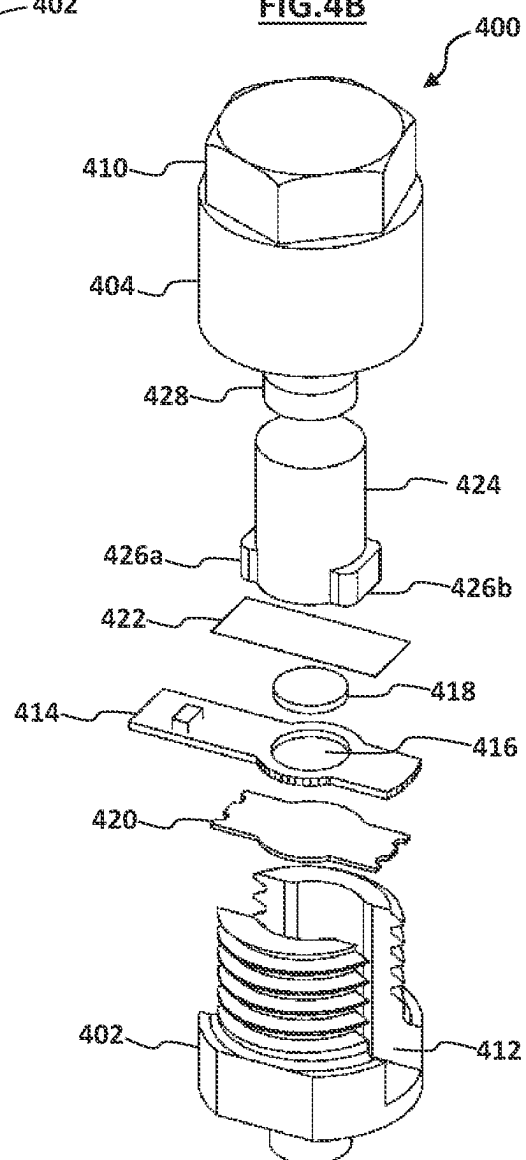


FIG. 4C

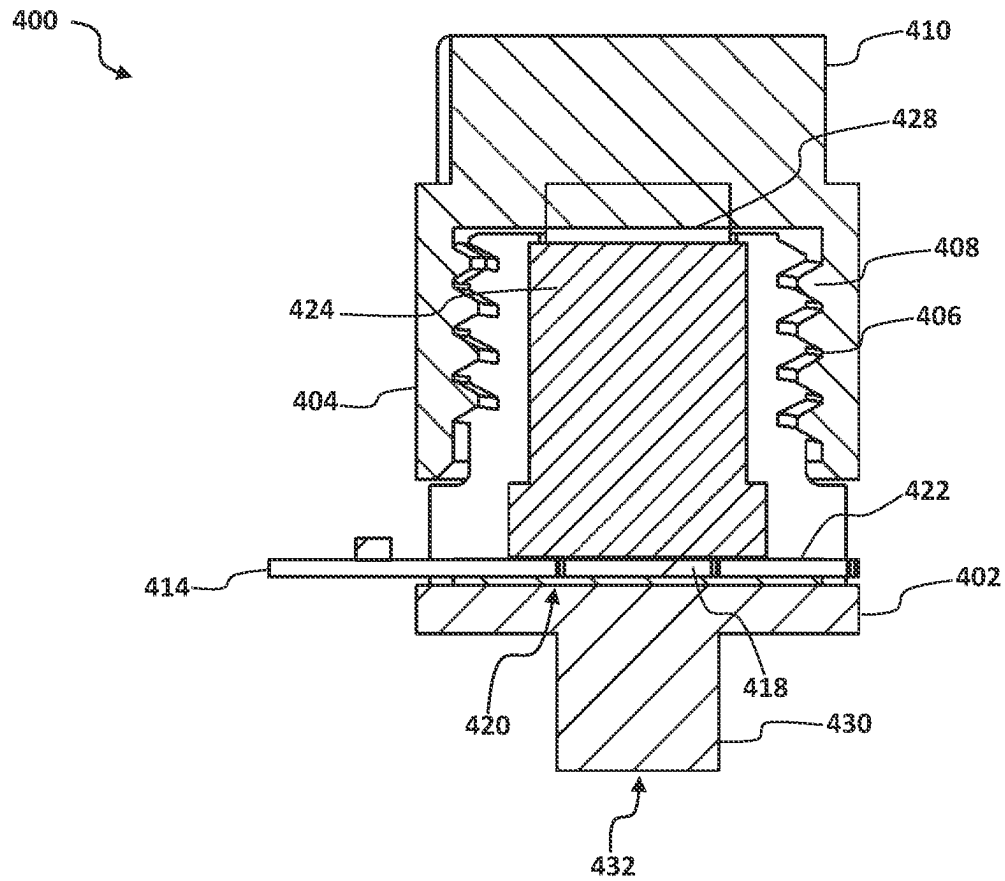


FIG. 5


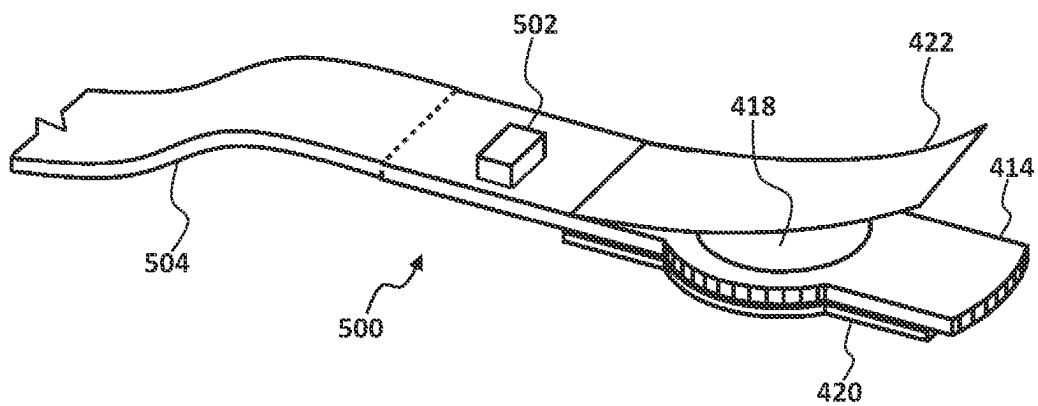


FIG. 6

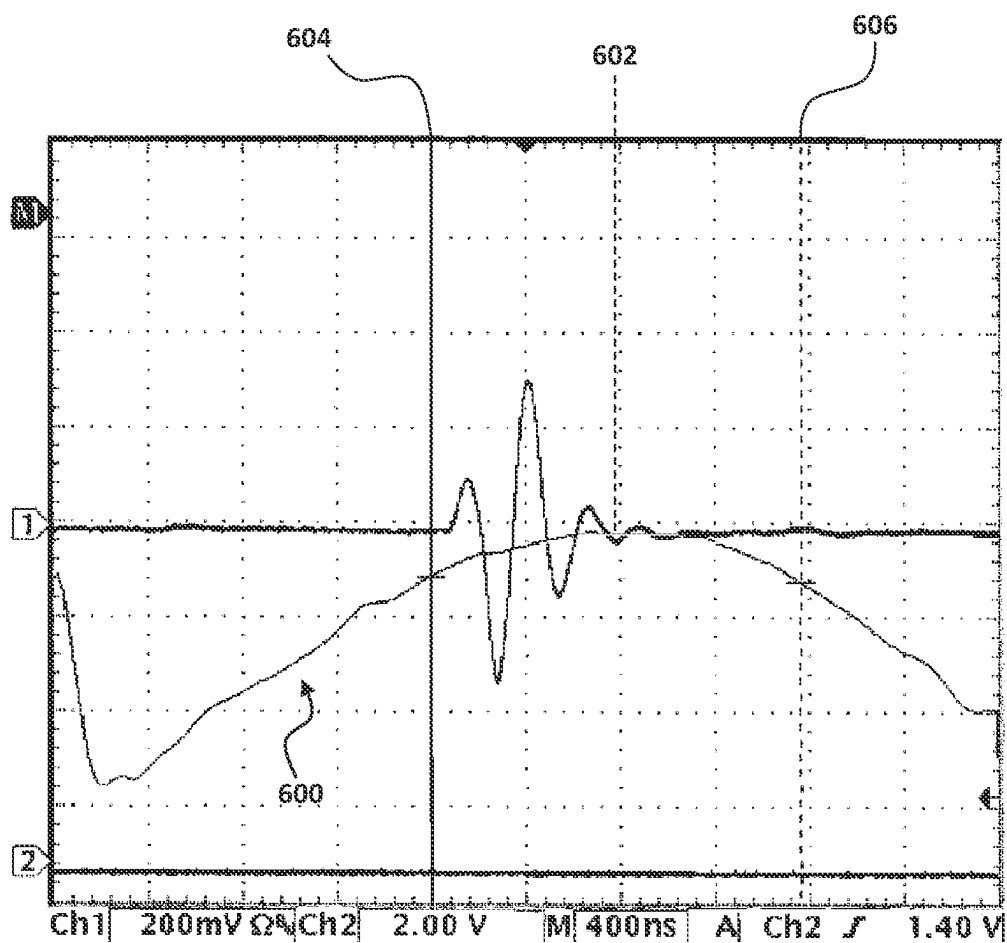

1

DEVICES FOR ANALYSIS OF A FLUID**STATEMENT OF CORRESPONDING APPLICATIONS**

This application is based on the provisional specification filed in relation to New Zealand Patent Application No. 756776, the entire contents of which are incorporated herein by reference.

TECHNICAL FIELD

The present disclosure relates to analysis of a fluid—more particularly ultrasound transducers for use in analysis of milk.

BACKGROUND

The use of sensors to obtain information relating to milk collected from dairy animals is well known. Such information is used in decision making regarding such matters as processing of the milk, culling, breeding, medical treatment, animal specific feed rations as well as measurement of milk production efficiency.

Numerous portable off-line analysers are known in the art for analysing a sample of milk to determine parameters such as fat, protein, lactose and total solids. Examples of such analysers using ultrasound analysis include the Lacti-Check™ milk analyser by Page & Pedersen International, Ltd (www.pagepedersen.com); the Master milk analyser by Milkotester Ltd (www.milkotester.com); and the LAC-TOSCAN™ milk analyser by Milkotronic Ltd (www.lac-toscan.com).

Such off-line analysers are generally capable of relatively high precision measurements in comparison with commercially available in-line sensors. However, they have practical limitations associated with the collection of samples for analysis — requiring an operator to collect and deliver samples to the sensor.

Sensors of other types are known for use in milking systems whereby samples are automatically extracted from the system for analysis. However, known ultrasound-based analysers are not well suited to this application, i.e. being fluidly connected to the milking system. For example, sensor having a measuring cell and one or more transducers needs to be suitable for exposure to milk as well as chemicals commonly used in cleaning milking systems. However, material selection for such an interface needs to be weighed against costs, and the ultrasonic transmission and acoustic impedance characteristics of the material.

It is an object of the present invention to address the foregoing problems or at least to provide the public with a useful choice.

Further aspects and advantages of the present invention will become apparent from the ensuing description which is given by way of example only.

SUMMARY

The present disclosure provides ultrasound transducers, ultrasound sensor devices utilising said transducers, and systems for analysing a fluid sample.

According to one aspect of the present disclosure, there is provided an ultrasonic transducer including a piezoelectric element, a fluid medium contact layer, a matching layer between the piezoelectric element and the fluid medium contact layer, and a backing layer.

2

Arrangements and material properties of the elements of the transducer are provided for obtaining desired performance characteristics. Generally, it is envisaged that such arrangements may be used to reduce reflections of acoustic signals at material boundaries, or combinations of boundaries, with the objective of attaining a transducer performance for transmitting signals into, and receiving signals from, the sample with a near ideal damped characteristic as viewed in the time and frequency domains.

More particularly, it is envisaged that the exemplary embodiments of the present disclosure may be used in sensing a characteristic of milk and/or water, where the nominal acoustic impedance of milk is 1.56 MRayl, while the nominal acoustic impedance of water is 1.49 MRayl. However, it should be appreciated that exemplary embodiments of the present disclosure may be used in the sensing of other fluids, particularly food or medical products. In examples, the fluid may be non-gaseous. In examples, the fluid may be a liquid. In examples the fluid may be a solution comprising solids suspended in a liquid, such as a slurry.

It is envisaged that as the impedance of the fluid increases towards that of the fluid medium contact layer, the energy transmitted at that boundary may increase. The inverse is also to be expected for lower impedance fluids, but while less transmitted energy and relatively more reflected energy can be expected, it is envisaged that a useful measurement may still be obtained. By way of example, ethanol (nominal acoustic impedance of 0.95 MRays) and honey (nominal acoustic impedance of 2.89 MRayls) are envisaged as being plausible measurement mediums for use with the transducer.

In an exemplary embodiment the piezoelectric element may be one or more of:

- a lead metaniobate piezoelectric element;
- a piezoelectric element having an acoustic impedance of between 15 to 22 MRayls.

Lead metaniobate is a commercially available piezoceramic material that has a relatively low acoustic impedance in comparison with other piezoceramic materials such as lead zirconate titanates (PZT). It is envisaged that this relatively low impedance may assist with reducing the impedance gap between the piezoelectric element, and the fluid medium contact layer. Further, this may assist with provision of a backing layer having a comparable acoustic impedance. Other piezoelectric materials are available (e.g. piezocomposites) that have relatively low impedance values and may be used in exemplary embodiments of the present disclosure, but it is envisaged that lead metaniobate may have particular application to embodiments in which limiting cost is a high priority consideration. In an exemplary embodiment, the lead metaniobate may be APC 3285 (available from APC International).

In an exemplary embodiment the fluid medium contact layer may be one or more of:

- a polymer layer;
- a fluid medium contact layer having an acoustic impedance of between 2.5 to 3.5 MRayls.

In an exemplary embodiment in which the fluid medium contact layer is a polymer layer, the polymer may be polysulfone. Polysulfone is generally characterised by properties well suited to the milking system environment such as chemical inertness, toughness, and thermal stability. Polysulfone has an acoustic impedance in the order of 2.78 MRayl, being relatively close to that of the fluid medium (e.g. milk or water) in comparison with other materials and thereby reducing reflections at the boundary between the contact layer and the fluid medium. Polysulfone also has suitable acoustic transmission properties in addition to the

aforementioned properties, reducing attenuation in comparison with other materials. Polysulfone is also considered to be suitable for use in exemplary embodiments of the present disclosure in terms of price point, and ability to be machined or molded.

It should be appreciated that reference to the polymer layer consisting of polysulfone is not intended to be limiting to all embodiments of the present disclosure. By way of example, it is envisaged that the polymer may be an amorphous polyamide (such as the Grilamid TR 90 product available from EMS Group)—particularly where intended for use in or with milking systems. It should also be appreciated that in exemplary embodiments the polymer layer may be a composite material, or a polymer with a non-polymer filler.

In an exemplary embodiment, the thickness of the fluid medium contact layer may be configured to delay reflections of an acoustic signal from an interface between the fluid and the fluid medium contact layer by a predetermined number of wavelengths, or part wavelengths, of the acoustic signal. Reference to the thickness of the fluid medium contact layer should be understood to mean the dimension in the direction between the piezoelectric element and the fluid and contact layer interface. It is envisaged that there may be some mismatch of acoustic impedance at this interface as the result of other design constraints, resulting in reflections that may have an effect on signal detection and analysis. Delaying the reflections is expected to reduce their influence—i.e. received by the piezoelectric element after the majority of ringing from a pulse signal has died down.

In an exemplary embodiment the number of wavelengths for the delay may be at least four. As such, the thickness of the fluid medium contact layer may be at least two wavelengths (such that the total path length is four wavelengths) of the acoustic signal—more particularly two wavelengths at a low frequency cut-off of the design bandwidth.

In another exemplary embodiment the thickness of the fluid medium contact layer may be about one quarter wavelength in length (e.g. between 0.2 to 0.3 wavelength) in order to provide a quarter wave matching effect as described below in relation to the matching layer.

In an exemplary embodiment the matching layer may be one or more of:

- a hydrocarbon ceramic laminate layer;
- a matching layer having an acoustic impedance of between 4 to 10 MRayls;
- a circuit board layer having an acoustic impedance of between 4 to 10 MRayls.

It should be appreciated that reference to a matching layer in the context of an ultrasound transducer is intended to mean an intermediate layer provided for reducing energy reflected between two materials in the acoustic path—more particularly, the piezoelectric element and the fluid medium contact layer.

For this geometry with a harmonic plane wave at normal incidence, standard formulations exist for the transmission coefficient of acoustic energy from the piezoelectric element and the fluid contact layer (and vice-versa). These formulations show that when the thickness of the matching layer equates to $\frac{1}{4}$ wavelength within that material and $Z_0 = \sqrt{Z_1 Z_2}$, where Z_0 is the acoustic impedance of the matching layer with Z_1 and Z_2 being the acoustic impedances of the piezoelectric element and fluid contact layer, the transmission coefficient will be maximised and the frequency response approach that of an ideal damped transducer.

It is envisaged that a matching layer impedance of between 4 to 10 MRayls may be suitable in exemplary

embodiments of the present disclosure. In an exemplary embodiment the matching layer may have an acoustic impedance of between 5 to 8 MRayls.

In exemplary embodiments in which the matching layer is a circuit board layer, it is envisaged that the matching layer may provide electrical connections to the piezoelectric element—i.e. in addition to its function in matching acoustic impedance between the piezoelectric element and the fluid medium contact layer.

In an exemplary embodiment in which the matching layer is a hydrocarbon ceramic laminate, the hydrocarbon ceramic laminate may be a laminate such as the RO4000 series (available from Rogers Corporation), and more particularly RO4003C or an equivalent thereof.

In addition to having a suitable acoustic impedance for use in exemplary embodiments of the present disclosure, being in the order of 6 MRayls, this material is fabricated with a copper layer (by way of electrodeposited copper foil) for PCB applications and has a construction more suitable to use in the present disclosure than other circuit board materials. A typical PCB fibreglass construction would tend to scatter the ultrasound signal, with associated losses. In contrast, the RO4000 material has a smaller grain size and thinner fibreglass reinforcing, with scattering being reduced as a result.

In an exemplary embodiment, the thickness of the matching layer may provide quarter wave matching with the ultrasound signal. More particularly, the thickness of the matching layer may be between 20 to 30% of the signal wavelength at the centre frequency of the transducer (i.e. between 0.2 to 0.3 wavelengths of the acoustic signal). It should be appreciated that it may be generally desirable for the thickness of the matching material to have low variability in order to achieve this design parameter. In addition to the other properties described herein, the RO4000 material is considered to have a highly controlled thickness. For example, the RO4003 material used in exemplary embodiments of the present disclosure is available in a standard thickness of 0.203 mm, which approximates a quarter wavelength at a centre frequency of about 3.75 MHz.

It should be appreciated that while the matching layer may be a single layer of material, in exemplary embodiments the matching layer may include two or more layers. However, control of the thickness of each of the layers becomes particularly important, and consequently the cost for implementing more than one matching layer can be unnecessarily high.

It should be appreciated that alternative materials may be used for the matching layer in exemplary embodiments—for example, an alumina composite.

In an exemplary embodiment the backing layer may be one or more of:

- a backing layer having an acoustic impedance substantially that of the piezoelectric element;
- a backing layer having an acoustic impedance of between 15 to 20 MRayls; and
- a tungsten composite layer.

The backing layer forms part of the acoustic path for ultrasound energy directed backwards from the piezoelectric element. It is considered desirable that the acoustic signal that propagates into the backing layer be rapidly absorbed—i.e. any acoustic signal propagating through the piezoelectric element, including that resulting from transmission excitation, does not reverberate for an extended period. More particularly, the ultrasound energy directed backwards from the piezoelectric element should essentially not return, being

diminished in magnitude to substantially less than the forward going acoustic energy at that time (for example, by an order of magnitude).

In an exemplary embodiment in which the backing layer is a tungsten composite layer, the tungsten composite may include tungsten particles of a first size, and tungsten particles of a second size. It is envisaged that this may assist with improving the ability of the backing layer to absorb the acoustic signal over a broader range of frequencies in comparison with a single particle size. Further, the relatively high density of tungsten is considered to aid in achieving a suitable acoustic impedance.

In an exemplary embodiment, the larger particle may be a granulated tungsten powder—such as that made by crushing of sintered tungsten metal (for example GW-100270 available from Buffalo Tungsten Inc). In an exemplary embodiment, the smaller particle may be a fine tungsten powder (for example C20-491 available from Buffalo Tungsten Inc). It should be appreciated that the ratio of the two particle sizes may be adjusted according to the desired acoustic properties of the backing layer; in an exemplary embodiment the ratio may be in the order of 56:7 of the granulated powder to fine powder. It should be appreciated that the backing layer may include a suspension medium for the tungsten particles—for example, an epoxy resin.

In an exemplary embodiment the backing layer may be manufactured using a centrifuge, such that there is a graduation in the density in the suspended particles due to the forces imparted by the centrifuge. It is believed that this graduation of density, and so a graduation in impedance, along the length of the backing layer may aid attenuation.

According to one aspect of the present technology, an ultrasound transducer constructed in accordance with exemplary embodiments of the present disclosure may have one or more of: a centre frequency of between 1 to 10 MHz; a centre frequency of between 3 to 5 MHz; a centre frequency of between 3.5 to 4 MHz; and a centre frequency of about 3.75 MHz.

Attenuation of ultrasound signals in a medium such as milk increases with frequency. As such, it is considered generally desirable to avoid a higher centre operating frequency, as this would require more energy to achieve a received signal of sufficient strength. It is also believed that higher frequency signals may also complicate the electronics design of associated circuitry of sensors utilizing the transducer(s), with associated issues in terms of cost and reliability. Higher frequencies may also require the design of the piezoelectric element and matching layer to be thinner, where complications in manufacture begin to arise due to the accuracy required, as well as becoming unsuitably fragile for assembly. Additionally, where adhesive is applied between layers, it is considered desirable for the thickness of the adhesive to be much less than a wavelength—at higher frequencies tighter tolerances are required for the surface finish of each of the mating surfaces to reduce discontinuities resulting from adhesive filling voids in the surfaces.

Conversely, at lower design frequencies, the axial dimensions of key acoustic components will increase in large part in relation to the wavelength. Additionally, the attenuation of the acoustic signal propagating in the backing layer is significantly sensitive to frequency, as it is in part related to wave scattering. As a result, it is harder to attain backing performance at lower frequency. Generally speaking, a lower centre frequency will result in a lower resolution in time, and it is desirable to balance this effect against those associated with higher frequencies.

For completeness, it should be appreciated that the centre frequency of the transducer is the cumulative result of the characteristics of the various layers (e.g. the piezoelectric element, fluid contact layer, matching layer and backing layer), and that the centre frequency may be adjusted accordingly by modification of these characteristics.

According to one aspect of the present technology, an ultrasound transducer constructed in accordance with exemplary embodiments of the present disclosure may have one or more of:

- a -6 dB percentage bandwidth greater than 60%;
- a -6 dB percentage bandwidth of between 60% to 100%;
- a -6 dB bandwidth between 2 to 3 MHz.

Bandwidth may be measured using a standard by which a narrow width pulsatile voltage is applied to the transducer to launch an ultrasonic wave. Either a second transducer may be used to detect this wave, or the transducer configured so the launched wave reflects and is detected by the same transducer. In both instances the received voltage is recorded and used to characterise the transducer performance.

The ultrasound transducer requires sufficient bandwidth to achieve a desired resolution, more particularly temporal resolution of the acoustic signal propagation time through the fluid sample.

Ultrasound transducers with a relatively narrow frequency response will produce a pulse containing several cycles, reducing the resolution. Conversely, a relatively wide frequency response provides a higher degree of damping which produces a shorter pulse in the time domain, resulting in higher resolution. However, performance in terms of resolution needs to be weighed against practical constraints such as costs and availability of piezoelectric elements having such characteristics. Manufacturing of such components requires more sophisticated processing techniques, with associated costs which are a significant barrier to their adoption in applications such as sensors for on-farm milk analysis. The technology of the present disclosure seeks to strike a balance between a desired level of performance in terms of resolution, and costs which might otherwise prohibit adoption of the technology.

In an exemplary embodiment, the ultrasound transducer may include a housing. In an exemplary embodiment the housing may include a main body. In an exemplary embodiment, a portion of the main body may provide the fluid medium contact layer.

In an exemplary embodiment the main body may include a projection through which the acoustic pathway of the transducer passes. It is envisaged that the projection may take the form of a solid cylindrical shaft, with a free end of the shaft providing a flat surface intended to face the fluid to be sensed in use.

In exemplary embodiments the acoustic velocity in the material of the body, and therefore fluid medium contact layer, may be temperature dependent. It is contemplated that the temperature of the material may vary between measurements, and also vary more significantly that the fluid being sensed. The effect of this will depend on a number of factors, for example shaping of components of the transducer, insulation, temperature range experienced, and signal power input. However, it is envisaged that the shaft length, from the matching layer to the flat surface, may alter the extent to which ambient temperature effects sound speed measurements of the fluid. The fluid medium contact layer is exposed to ambient conditions, and also receives varying heat inputs from the piezoelectric element and other heating sources. This means that the temperature of the fluid medium contact layer may take longer to stabilise than the fluid, and may

stabilise at different temperatures depending on the ambient conditions. Rather than control the temperature of the fluid medium contact layer, it is envisaged that this influence may be contained by reducing the length of the fluid medium contact layer as a percentage of the overall acoustic path length. In an exemplary embodiment in which two opposing transducers are used in an ultrasound sensor device, the length of the fluid medium contact layer may be less than 15% of the overall path length. Increasing the separation between transducer, or decreasing the length of the fluid medium contact layer, can further reduce the percentage if greater accuracy or wider ambient temperature ranges are required.

In an exemplary embodiment the housing may include a cap, configured to be secured to the main body. It is envisaged that the cap and main body may include complementary threads—but it should be appreciated that this is not intended to be limiting. For example, the cap and main body may be secured using one or more of: an interference fit, clips, fasteners, or any other suitable means known in the art.

In an exemplary embodiment the ultrasound transducer may have a piezoelectric assembly including the piezoelectric element and the matching layer.

In an exemplary embodiment the piezoelectric assembly may include an element holder. The element holder may include an aperture in which the piezoelectric element is located. In an exemplary embodiment the element holder may be made of a circuit board material.

In an exemplary embodiment the matching layer may span the aperture of the element holder. In exemplary embodiments the matching layer may provide an electrical contact to the piezoelectric element—for example, where the matching layer is a circuit board.

In an exemplary embodiment the piezoelectric assembly may include an electrical contact on the other side of the piezoelectric element from the matching layer. In an exemplary embodiment, the electrical contact may include a foil strip—for example a copper foil in the order of 35 μm or less in thickness. In an exemplary embodiment the foil may be arranged to span the aperture of the element holder and contact an entire face of the piezoelectric element. It is envisaged that the foil strip may be soldered to the element holder. It is envisaged that the foil thickness may be selected to provide a degree of robustness during assembly, but not be so thick so as to significantly influence the acoustic path to the backing layer.

In an exemplary embodiment one or more electronic components may be provided on the element holder.

In an exemplary embodiment, the housing body and/or piezoelectric assembly may be configured so as to locate the piezoelectric assembly in a desired position and orientation during assembly of the transducer. For example, the housing body may include a receiving portion configured to receive the piezoelectric assembly and shaped to restrict movement—particularly rotation or lateral movement.

According to one aspect of the present disclosure there is provided an ultrasound sensor device, including: a hollow body configured to receive a fluid to be analysed, a first ultrasound transducer, and a second ultrasound transducer.

In an exemplary embodiment the hollow body may be elongate. For example, it is envisaged that the hollow body may be a tube.

In an exemplary embodiment the first and second ultrasound transducers may be arranged to face each other through the hollow body. In exemplary embodiments in which the hollow body is elongate the transducers may be disposed at distal ends of the hollow body.

In an exemplary embodiment, the hollow body may be made of a metal. In an exemplary embodiment the hollow body may be made of a stainless steel.

In ultrasound-based measuring cells used in off-line sensing of milk, the body is typically made of brass, which has a high heat transfer coefficient and can be constructed with a very thin wall, allowing it to quickly and precisely control milk temperature. However, brass is not resistant to the acidic chemicals commonly used in cleaning milking systems. The use of stainless steel may assist with providing resistance to such chemicals, enabling cleaning of the device using chemicals already in use within the wider system. This has further implications for assembly, as brass material allows the prior art ultrasonic transducer assemblies to be secured together, and to the measuring cell, in a relatively simple and robust way using solder. However, a solder-based assembly method is incompatible with materials such as stainless steel and polysulfone. As such, features of the present disclosure are intended to facilitate assembly of the transducer, and the ultrasound sensor device using the transducer, with one or more of the following considerations in mind: repeatability, secure and robust construction, achieving electrical connection to the piezoelectric element with insignificant impact on the acoustic performance, and doing so with the general constraints of cost containment and material suitability for milk contact.

According to one aspect of the present disclosure there is provided an ultrasound sensor device, including: a hollow body having an acoustically reflective surface and being configured to receive a fluid to be analysed, and a first ultrasound transducer facing the acoustically reflective surface.

In exemplary embodiments the path length between piezoelectric elements of respective ultrasound transducers, or the total return path length between the piezoelectric element of an ultrasound transducer and the acoustically reflective surface, may be one of: greater than about 25 mm; between 25 mm to 100 mm; between 50 mm to 80 mm; greater than about 50 mm; between 60 mm to 75 mm; and about 70 mm. It is envisaged that such embodiments may be particularly applicable to embodiments in which the hollow body is tubular, and for use cases in which the fluid is milk.

According to one aspect of the present disclosure there is provided a system for analysing a fluid, including: a ultrasound sensor device; a sample delivery device configured to deliver a sample of fluid from a fluid carrying and/or storing system to the ultrasound sensor device; and at least one processor configured to determine a characteristic of the sample of fluid based at least in part on a signal output from the ultrasound sensor device.

In exemplary embodiments, the fluid may be milk extracted from a milking animal. It is envisaged that the present disclosure may have particular application to the analysis of milk during the transfer of milk from the point of extraction to a storage vessel. Milking systems typically include individual milk transport conduits from the points of extraction (for example, using a milking cluster including teat cups), joining to a common transport line for delivery to the storage vessel.

In exemplary embodiments, the system may be embodied in a single unit—which may be referred to herein as a sensor. Various configurations of sensors, in terms of how the sensor is exposed to the fluid to be analysed, are known in the art. Terms such as “in-line”, “on-line”, “at-line”, “near-line” and “off-line” are used in the art to distinguish between these configurations—however there is a degree of inconsistency in their usage. For clarity, reference to an on-line sensor

should be understood to mean a sensor which automatically extracts a sample of fluid from a fluid source (for example, a milk line or jar in the context of milking systems), and analyses the sample of fluid to determine at least one characteristic of the sample. As used herein, the term “on-line” may encompass embodiments in which the sample is returned to the source, or discarded. The terms “at-line” and “off-line” may be used in the art to distinguish between the environment in which the sensor is configured to operate. Both at-line and off-line sensors are configured to analyse a discrete sample of the fluid delivered to the sensor by an operator. At-line sensors (which may be referred to as “near-line” sensors) are generally intended to be located within the vicinity of the fluid source—for example, within a milking facility—while off-line sensors are primarily intended for use in a more environmentally controlled environment—for example, in a laboratory. In practice, particularly for milking operations, analysis of a sample by an off-line sensor may necessitate transport of the sample from the sample source to a remote facility. As used herein, the term “off-line” should be understood to refer to a sensor configuration in which a sample is collected from the fluid, and delivered to the sensor by an operator rather than an automated system. On-line and off-line sensors, as defined herein, may be distinguished from in-line sensors by the act of analysing a sample extracted from the fluid rather than analysing the flow itself. As such, on-line and off-line sensors may be referred to in the collective as “sample” sensors.

BRIEF DESCRIPTION OF DRAWINGS

Further aspects of the present invention will become apparent from the following description which is given by way of example only and with reference to the accompanying drawings in which:

FIG. 1 is a schematic diagram of an exemplary livestock management system in which an aspect of the present disclosure may be implemented;

FIG. 2 is a schematic diagram of an exemplary on-line sensor according to one aspect of the present disclosure;

FIG. 3A is a top view of an exemplary ultrasound sensor device according to one aspect of the present disclosure;

FIG. 3B is a side cross-section view of the ultrasound sensor device;

FIG. 4A is a perspective assembled view of an exemplary ultrasound transducer according to one aspect of the present disclosure;

FIG. 4B is a perspective exploded view of the ultrasound transducer;

FIG. 4C is a side cross-sectional view of the ultrasound transducer;

FIG. 5 is a perspective view of an exemplary piezoelectric assembly of the ultrasound transducer according to one aspect of the present disclosure, and

FIG. 6 is a graph of the frequency response of an exemplary ultrasound transducer according to one aspect of the present disclosure.

DETAILED DESCRIPTION

Exemplary embodiments are discussed herein in the context of analysis of milk. However, it should be appreciated that principles of the disclosure discussed herein may be applied to the analysis of other fluids.

FIG. 1 illustrates a livestock management system 100, within which a local hardware platform 102 manages the

collection and transmission of data relating to operation of a milking facility. The hardware platform 102 has a processor 104, memory 106, and other components typically present in such computing devices. In the exemplary embodiment illustrated the memory 106 stores information accessible by processor 104, the information including instructions 108 that may be executed by the processor 104 and data 110 that may be retrieved, manipulated or stored by the processor 104. The memory 106 may be of any suitable means known in the art, capable of storing information in a manner accessible by the processor 104, including a computer-readable medium, or other medium that stores data that may be read with the aid of an electronic device. The processor 104 may be any suitable device known to a person skilled in the art. Although the processor 104 and memory 106 are illustrated as being within a single unit, it should be appreciated that this is not intended to be limiting, and that the functionality of each as herein described may be performed by multiple processors and memories, that may or may not be remote from each other. The instructions 108 may include any set of instructions suitable for execution by the processor 104. For example, the instructions 108 may be stored as computer code on the computer-readable medium. The instructions may be stored in any suitable computer language or format. Data 110 may be retrieved, stored or modified by processor 104 in accordance with the instructions 108. The data 110 may also be formatted in any suitable computer readable format. Again, while the data is illustrated as being contained at a single location, it should be appreciated that this is not intended to be limiting—the data may be stored in multiple memories or locations. The data 110 may also include a record 112 of control routines for aspects of the system 100.

The hardware platform 102 may communicate with various devices associated with the milking facility, for example: in-line sensors 114a to 114n associated with individual milking clusters within the milking facility, and sample sensors in the form of on-line sensors 116a to 116n associated with the individual milking clusters or milk jars collecting milk from same.

Animal identification devices 118a to 118n are provided for determining an animal identification (“animal ID”) of individual animals entering, or within, the milking facility. More particularly, the animal identification devices 118a to 118n may be used to associated an animal ID with each of the milking clusters associated with the in-line sensors 114a to 114n and on-line sensors 116a to 116n, such that the sensor data may be attributed to the individual animals. A variety of methodologies are known for the determination of an animal ID—for example a radio frequency identification (“RFID”) reader configured to read a RFID tag carried by the animal. In an alternative embodiment, or in conjunction with the animal identification devices 118a to 118n, a user may manually enter (or correct) animal IDs via a user device—examples of which are discussed below.

The hardware platform 102 may also communicate with user devices, such as touchscreen 120 located within the milking facility for monitoring operation of the system, and a local workstation 122. The hardware platform 102 may also communicate over a network 124 with one or more server devices 126 having associated memory 128 for the storage and processing of data collected by the local hardware platform 102. It should be appreciated that the server 126 and memory 128 may take any suitable form known in the art—for example a “cloud-based” distributed server architecture. The network 124 potentially comprises various configurations and protocols including the Internet,

11

intranets, virtual private networks, wide area networks, local networks, private networks using communication protocols proprietary to one or more companies—whether wired or wireless, or a combination thereof. It should be appreciated that the network 124 illustrated may include distinct networks and/or connections: for example a local network over which the user interface may be accessed within the vicinity of the milking facility, and an internet connection via which the cloud server is accessed. Information regarding operation of the system 100 may be communicated to user devices such as a smart phone 130 or a tablet computer 132 over the network 124.

Referring to FIG. 2, an exemplary sensor 200 is illustrated, which may be used (for example) as one or more of the on-line sensors 116a to 116n. In this exemplary embodiment, the on-line sensor 200 includes an ultrasound sensor device 300, configured to perform ultrasound-based measurements of milk contained therein.

The sensor 200 includes sample delivery device 202 configured to be connected to a source of the fluid to be sampled—for example milk tube 204 or milk jar 206—and deliver a sample of the fluid to the ultrasound sensor device 300.

A controller 208 is provided to control the operation of the various components described, receive data obtained by the ultrasound sensor device 300, and communicate over a network such as the network 124.

FIG. 3A and FIG. 3B illustrate an exemplary embodiment of the ultrasound sensor device 300. The sensor device 300 includes a hollow body in the form of a stainless steel main tube 302, having a first end 304a and a second end 304b. A first port tube 306a is provided proximate the first end 304a, while a second port tube 306b is provided proximate the second end 304b. In this exemplary embodiment, the port tubes 306 extend radially from the main tube 302 in opposing directions. In use, the port tubes 306 function as an inlet/outlet to and from the main tube 302.

Between the port tubes 306, the exterior of the main tube 302 may be wrapped in coiled heating wires, for example an enamelled fine copper winding 308 around the main tube 302, and a larger nichrome wire winding 310 coiled over the copper winding 308. While not illustrated, it is envisaged that at least the copper windings 308 may also be provided on the port tubes 306. The respective windings 308 and 310 may be connected in series, and current supplied to control temperature of the sensor device 300 and/or fluid being sensed. Further, the resistance of the windings 308 and/or 310 may be used to determine temperature. While not illustrated, it is also envisaged that insulating material may be provided over at least the main tube 302 in order to reduce the influence of ambient temperature and/or to increase efficiency when heating the fluid to measurement temperatures. It is envisaged that the insulating material may not cover the ends of the sensor device 300 to allow for heat dissipation from a first ultrasound transducer 400a at the first end 304a of the main tube 302, and a second ultrasound transducer 400b at the second end 304b.

The first ultrasound transducer 400a and the second transducer 400b are arranged to face each other along the longitudinal axis of the main tube 302. In use, one of the transducers 400 is configured as a transmitter, while the other is configured as a receiver.

FIG. 4A to 4C illustrate an exemplary embodiment of the ultrasound transducer 400. The transducer 400 includes a housing having a main body 402 and a cap 404 configured to be secured to the main body 402. Referring to FIG. 4C, the main body 402 includes a first set of threads 406, while

12

the cap 404 includes a second set of threads 408 configured to engage the first set of threads 406. The cap 404 includes a tool engaging portion, for example hexagonal head 410. In this exemplary embodiment, the housing is made of polysulfone, as will be discussed further below.

Referring to FIG. 4A, the main body 402 includes a slotted portion 412 configured to receive components of the transducer 400. In the exemplary embodiment illustrated, a piezoelectric element holder (referred to herein as piezo holder 414) is provided, having an aperture 416 configured to receive a piezoelectric element 418. In this embodiment, the piezoelectric element 418 is a disk-shaped lead metaniobate piezoelectric element. The acoustic impedance of the piezoelectric element 418 is between 15 to 22 MRayls, more particularly in the order of 16 MRayls. In an exemplary embodiment the piezoelectric element is constructed of 0.5 mm thick APC3285. When heavily damped in the exemplary transducer design the resulting transducer has a centre frequency around 3.75 MHz.

In this embodiment, the piezo holder 414 is made of a circuit board material for ease of forming electrical connections. The piezo holder 414 includes a rigid portion for locating the piezoelectric element 418 and an elongate flex portion 504 to act as an electrical connection. A piezoelectric contact member (referred to herein as piezo contact 420) is provided beneath the piezo holder 414 to contact the piezoelectric element 418. In this embodiment, the piezo contact 420 is made of RO4003C with a 35 µm electrodeposited copper foil layer, available from Rogers Corporation. In this exemplary embodiment, an electrical contact is provided on the opposing side of the piezo holder 414 (to the piezo contact 420) in the form of a foil strip 422—for example, a copper foil in the order of 33 µm in thickness.

Above the foil strip 422, a backing element 424 is provided. The backing element 424 is generally cylindrical in shape, having locating wings 426a and 426b on opposing sides. The locating wings 426 align with the slotted portion 412 of the main body 402, to assist with maintaining the position of the backing element 424 during assembly. A PTFE gasket 428 is provided between the backing element 424 and the cap 404.

Referring to FIG. 4C, below the piezo contact 420 the main body 402 includes a cylindrical shaft 430. The distal end of the shaft 430 has a flat surface 432, which in use is presented to the interior of the main tube 302 (as shown in FIG. 3B). The thickness of the main body 402 from the flat surface 432 to the piezo contact 420 is influenced by several factors. Firstly, the temperature of polysulfone has an effect on acoustic performance (more particularly sound speed), and the main body 402 is subject to heat inputs from the piezoelectric element 418 and windings 308 and 310, as well as fluctuations in the ambient temperature. Secondly, reflections of the acoustic signal will occur at the boundary between the flat surface 432 and the fluid, which if not accounted for will interfere with signal analysis. As such, there is a balance to be struck between reducing the thickness of the polysulfone as a percentage of the overall signal transmission path, and achieving a sufficient thickness so as to delay the reflections.

Further, there are practical considerations for assembly of the transducer 400—for example, the shaft 430 being of a sufficient length for fitting to the main tube 302 of the sensor device 300. It should also be appreciated that the diameter of the shaft 430 may be sized relative to the internal diameter of the main tube 302 to produce a seal, as well as mechanically securing the transducer 400 to the main tube 320.

In the exemplary embodiment illustrated in FIG. 3A and 3B, the respective piezoelectric elements of the transducers **400a** and **400b** are spaced apart at 69 mm (comprising a 59 mm gap between end surfaces, and a polysulfone thickness of about 5 mm). The thickness of the polysulfone of each transducer **400** is about 5 mm, which in combination represents just under 15% of the total path length. It is also considered desirable for reflections to be delayed by at least four wavelengths—i.e. requiring the thickness of the polysulfone to be at least two wavelengths. In a design having a 2.5 MHz low frequency cut-off, and 2240 m/s nominal sound speed in polysulfone, the wavelength of the signal through the main body **402** is 0.896 mm. A 5 mm thickness provides a total path length of eleven wavelengths, which satisfies this design criteria.

With the acoustic impedance of the piezoelectric element being in the order of 16 MRayls, it is desirable for the acoustic impedance of the backing element **424** to be substantially the same. In the exemplary embodiment described herein, the backing element **424** is made of a tungsten composite, including tungsten particles of a relatively large size (more particularly granulated tungsten powder—such as GW-100270 available from Buffalo Tungsten Inc), and tungsten particles of a relatively small size (more particularly fine tungsten powder—such as C20-491 available from Buffalo Tungsten Inc). It is envisaged that this may assist with improving the ability of the backing element to absorb the acoustic signal over a broader range of frequencies in comparison with a single particle size. Further, the relatively high density of tungsten is considered to aid in achieving a suitable acoustic impedance. In this exemplary embodiment, the tungsten particles are suspended in an epoxy resin, for example EpoTek 301 available from Epoxy Technology Inc. In an exemplary embodiment, the ratio of GW-100270:C20-491:EpoTek 301A may be in the order of 56:7:3.5 (with the second part of the epoxy EpoTek 301B later added at 0.875). It is envisaged that the unset mixture may be spun in a centrifuge so as to promote settling of the tungsten particles towards an end of the backing element **424** which is proximate the piezoelectric element **418** in use.

The polysulfone of the main body **402** may be Sustason PSU rod stock produced from non UV-stabilised polysulfone resin (available from Rochling Sustaplast SE & Co. KG), which has a nominal acoustic impedance in the order of 2.78 MRayl. Due to the differential in acoustic impedance between the polysulfone and the piezoelectric material it is desirable to include an impedance matching layer. The piezo contact **420** is configured for this purpose. An ideal matching layer should have an acoustic impedance (Z_0) that is the square root of the product of the acoustic impedance of the adjacent materials (i.e. Z_1 and Z_2)—i.e. $Z_0 = \sqrt{(Z_1 \cdot Z_2)}$. For the lead metaniobate piezoelectric material and polysulfone interface of the present example, the ideal acoustic impedance of the piezo contact **420** would be 6.67 MRayls. While it is generally preferable for the acoustic impedance of the matching layer to be as close as possible to the ideal value, in practice the impedance may be within a wider range and still produce a useful result—particularly where other design constraints are present.

The thickness of the piezo contact **420** is also designed to provide quarter wave matching with the ultrasound signal. More particularly, the thickness of the piezo contact **420** may be between 20 to 30% of the signal wavelength at the centre operating frequency of the transducer **400** (i.e. 3.75 MHz). As such, with a nominal acoustic impedance of about 6 MRayls and thickness of about 0.203 mm, the RO4003C

piezo contact **420** is considered suitable for impedance matching. Further, the RO4003C material can be supplied with an electrodeposited copper foil, which is used in the exemplary embodiment to provide electrical contact between the piezo holder **414** and the bottom face of the piezoelectric element **418**. In the exemplary embodiment the electrodeposited foil is 35 μ m thick.

FIG. 5 illustrates a piezoelectric assembly **500**, including the piezo holder **414**, piezoelectric element **418**, piezo contact **420**, and foil strip **422** as previously described. In an exemplary embodiment, prior to assembly of the transducer **400**, the piezo contact **420** may be soldered to the piezo holder **414**, and one end of the foil strip **422** soldered to the piezo holder **414**. One or more electronic components **502** may also be soldered to the piezo holder **414**. It may be seen that the piezo holder **414** also includes a flex portion **504**—which may be used to provide electric connections to associated circuitry. The resulting sub-assembly is used to assist in assembly of the transducer **400**.

During assembly, the piezoelectric element **418** is inserted into the aperture **416** of the piezo holder **414**, beneath the foil strip **422**. The thickness of the piezo holder **414** is such that the piezoelectric element **418** projects above it, to ensure contact with the foil **422** (and therefore backing element **424**). The piezoelectric assembly **500** is then inserted into the slotted portion **412** of the main body **402**. The slotted portion **412** and piezoelectric assembly **500** are shaped such that the piezoelectric element **418** is centred over the shaft **430** of the main body **402**.

During assembly, an epoxy adhesive (for example, Scotch-Weld™ Epoxy Adhesive EC-2216 B/A available from 3M Company) is used between the piezoelectric element **418**, the piezo contact **420** and the foil strip **422** for good acoustic contact, and between the piezo contact **420** and the main body **402**, and between the foil strip **422** and the backing element **424**.

The backing element **424** is inserted into the slotted portion **412**, contacting the top of the foil strip **422**. The cap **404** is then screwed on to the main body **402** until a specified torque is achieved, to squeeze the epoxy from between the various layers and provide a desired pressure as the epoxy sets. It is envisaged that the residual epoxy may be sufficiently thin so as to have a negligible effect on acoustic transmission properties or electrical contact. During assembly a fillet of epoxy is also applied to cover the electronic component **502** and portions of the piezo holder **414** adjacent the housing, to seal and encapsulate the transducer components.

FIG. 6 illustrates the frequency response **600** of an exemplary ultrasound transducer **400** constructed in accordance with the description above. The ultrasound transducer **600** has a centre frequency **602** of about 3.75 MHz, with a lower -6 dB frequency limit **604** of about 2.5 MHz and an upper -6 dB frequency limit **606** of about 4.9 MHz. This provides a -6 dB bandwidth of about 2.4 MHz, which may be expressed as a -6 dB percentage bandwidth of about 64%. For completeness, it will be appreciated that variation in the tested bandwidth may be expected between different batches of the transducer, and between individual examples of the transducer design.

All references, including any patents or patent applications cited in this specification are hereby incorporated by reference. No admission is made that any reference constitutes prior art. The discussion of the references states what their authors assert, and the applicants reserve the right to challenge the accuracy and pertinency of the cited documents. Reference to any prior publications in this specifi-

15

cation is not, and should not be taken as, an acknowledgement or any form of suggestion that that prior art forms part of the common general knowledge in the field of endeavour in any country in the world.

Unless the context clearly requires otherwise, throughout the description and the claims, the words “comprise”, “comprising”, and the like, are to be construed in an inclusive sense as opposed to an exclusive or exhaustive sense, that is to say, in the sense of “including, but not limited to”. The entire disclosures of all applications, patents and publications cited above and below, if any, are herein incorporated by reference.

The invention may also be said broadly to consist in the parts, elements and features referred to or indicated in the specification of the application, individually or collectively, in any or all combinations of two or more of said parts, elements or features.

Where in the foregoing description reference has been made to integers or components having known equivalents thereof, those integers are herein incorporated as if individually set forth.

It should be noted that various changes and modifications to the presently preferred embodiments described herein will be apparent to those skilled in the art. Such changes and modifications may be made without departing from the spirit and scope of the invention and without diminishing its attendant advantages. It is therefore intended that such changes and modifications be included within the present invention.

Aspects of the present invention have been described by way of example only and it should be appreciated that modifications and additions may be made thereto without departing from the scope thereof.

The invention claimed is:

1. An ultrasonic transducer including:
 - a piezoelectric element, wherein the piezoelectric element has an acoustic impedance of between 15 to 22 MRayls;
 - a fluid medium contact layer, wherein the fluid medium contact layer is a polymer layer;
 - a matching layer between the piezoelectric element and the fluid medium contact layer, wherein the matching layer has an acoustic impedance of between 4 to 10 MRayls; and
 - a backing layer, wherein the backing layer has an acoustic impedance of between 15 to 20 MRayls.
2. The ultrasonic transducer of claim 1, wherein the piezoelectric element is a lead metaniobate piezoelectric element.
3. The ultrasonic transducer of claim 1, wherein the polymer layer is polysulfone.
4. The ultrasonic transducer of claim 1, wherein the thickness of the fluid medium contact layer is configured to delay reflections of an acoustic signal from an interface between the fluid medium contact layer and a fluid in contact with the fluid medium contact layer by a predetermined number of wavelengths, or part wavelengths, of the acoustic signal.
5. The ultrasonic transducer of claim 4, wherein the thickness of the fluid medium contact layer is greater than two wavelengths of the acoustic signal.
6. The ultrasonic transducer of claim 1, wherein the matching layer is a hydrocarbon ceramic laminate layer.
7. The ultrasonic transducer of claim 1, wherein the matching layer has an acoustic impedance of between 5 to 8 MRayls.

16

8. The ultrasonic transducer of claim 1, wherein the thickness of the matching layer is configured to provide quarter wave matching with the acoustic signal.

9. The ultrasonic transducer of claim 8, wherein the thickness of the matching layer is between 0.2 to 0.3 wavelengths of the acoustic signal at the centre frequency of the ultrasonic transducer.

10. The ultrasonic transducer of claim 1, wherein the matching layer is a circuit board layer.

11. The ultrasonic transducer of claim 10, wherein the circuit board layer provides electrical connections to the piezoelectric element.

12. The ultrasonic transducer of claim 1, wherein the backing layer has an acoustic impedance substantially that of the piezoelectric element.

13. The ultrasonic transducer of claim 1, wherein at least one of the following is true:

- the backing layer is a tungsten composite layer;
- the tungsten composite of the tungsten composite layer includes first tungsten particles of a first size, and second tungsten particles of a second size;
- the first tungsten particles are a granulated tungsten powder, and the second tungsten particles are a fine tungsten powder;
- a ratio of granulated tungsten powder to fine tungsten powder in the tungsten composite is about 56:7;
- the backing layer comprises a graduation in density of the first tungsten particles and the second tungsten particles; and
- any combination thereof.

14. The ultrasonic transducer of claim 1, wherein the ultrasonic transducer has a centre frequency of one of: between 1 to 10 MHz, between 3 to 5 MHz, 3.5 to 4 MHz, and about 3.75 MHz.

15. The ultrasonic transducer of claim 1, wherein the ultrasonic transducer has a -6 dB percentage bandwidth greater than 60%.

16. The ultrasonic transducer of claim 1, wherein the -6 dB bandwidth is between 2 to 3 MHz.

17. The ultrasonic transducer of claim 1, wherein at least one of the following is true:

- the ultrasonic transducer further includes a housing having a main body, wherein a portion of the main body provides the fluid medium contact layer;
- the main body includes a projection through which an acoustic pathway of the ultrasonic transducer passes;
- the ultrasonic transducer further includes a piezoelectric assembly, the piezoelectric assembly including the piezoelectric element and the matching layer;
- the piezoelectric assembly includes an element holder having an aperture in which the piezoelectric element is located;
- wherein the element holder is made of a circuit board material;
- the matching layer spans the aperture of the element holder;
- the piezoelectric assembly includes an electrical contact on an opposing side of the piezoelectric element from the matching layer;
- the main body includes a slotted portion configured to receive the piezoelectric assembly, wherein the ultrasonic transducer further includes a cap configured to be secured to the main body to hold the piezoelectric assembly in place within the slotted portion; and
- any combination thereof.

17

18. A system for analysing a fluid, including:
 a ultrasound sensor device comprising an ultrasonic transducer as claimed in claim 1,
 a sample delivery device configured to deliver a sample of fluid from a fluid carrying and/or storing system to the ultrasound sensor device; and
 at least one processor configured to determine a characteristic of the sample of fluid based at least in part on a signal output from the ultrasound sensor device.
19. The system of claim 18, wherein the fluid is one of: a liquid, a solution including a liquid, and milk.
20. An ultrasound sensor device, including:
 an elongate hollow body configured to receive a fluid to be analysed;
 a first ultrasound transducer, provided at a first end of the hollow body, wherein the first ultrasound transducer includes:
 a piezoelectric element, wherein the piezoelectric element has an acoustic impedance of between 15 to 22 MRayls;
 a fluid medium contact layer, wherein the fluid medium contact layer is a polymer layer;
 a matching layer between the piezoelectric element and the fluid medium contact layer,
 wherein the matching layer has an acoustic impedance of between 4 to 10 MRayls; and
 a backing layer, wherein the backing layer has an acoustic impedance of between 15 to 20 MRayls.

18

21. The ultrasound sensor device of claim 20, further including a second ultrasound transducer of the same configuration as the first ultrasound transducer, wherein the second ultrasound transducer is provided at a second end of the hollow body and facing the first ultrasound transducer.
22. The ultrasound sensor device of claim 21, wherein a length of the respective fluid medium contact layers of the first ultrasound transducer and the second ultrasound transducer is less than 15% of the overall path length.
23. The ultrasound sensor device of claim 21, wherein a path length between the respective piezoelectric elements of the first ultrasound transducer and the second ultrasound transducer is one of: greater than about 25 mm, between 25 mm to 100 mm, and about 70 mm.
24. The ultrasound sensor device of claim 20, wherein the hollow body is made of a metal.
25. The ultrasound sensor device of claim 20, wherein the hollow body comprises an acoustically reflective surface, wherein the first ultrasound transducer faces the acoustically reflective surface.
26. The ultrasound sensor device of claim 25, wherein a total return path length between the piezoelectric element of the first ultrasound transducer and the acoustically reflective surface is one of: greater than about 25 mm, between 25 mm to 100 mm, and about 70 mm.

* * * * *