




US 20250274115A1

(19) **United States**(12) **Patent Application Publication**
SANTILLAN et al.(10) **Pub. No.: US 2025/0274115 A1**(43) **Pub. Date: Aug. 28, 2025**(54) **SOLID STATE SWITCH AND A CIRCUIT**(71) Applicant: **Analog Devices International
Unlimited Company**, Co. Limerick
(IE)(72) Inventors: **Jofrey SANTILLAN**, Co. Limerick
(IE); **David AHERNE**, Co. Limerick
(IE); **Declan McDONAGH**, Co.
Limerick (IE)(73) Assignee: **Analog Devices International
Unlimited Company**, Co. Limerick
(IE)(21) Appl. No.: **18/586,378**(22) Filed: **Feb. 23, 2024****Publication Classification**(51) **Int. Cl.**
H03K 17/082 (2006.01)
H01L 27/02 (2006.01)
H01L 27/06 (2006.01)(52) **U.S. Cl.**CPC **H03K 17/0822** (2013.01); **H10D 84/40**
(2025.01); **H10D 89/601** (2025.01)

(57)

ABSTRACT

A solid state switch, comprising a first metal-oxide-semiconductor field-effect transistor (MOSFET). The first MOSFET has a first terminal, a second terminal, a bulk terminal and a gate terminal, and is configured to be switched between an on-state and an off-state. The solid state switch also comprises a second MOSFET in series with the first MOSFET. The second MOSFET has a first terminal, a second terminal, a bulk terminal, and a gate terminal. The second terminal of the first MOSFET is connected to the second terminal of the second MOSFET. The solid state switch comprises a first buffer comprises an output terminal coupled to the bulk terminal of the first MOSFET, and an input terminal coupled to the first terminal of the first MOSFET.

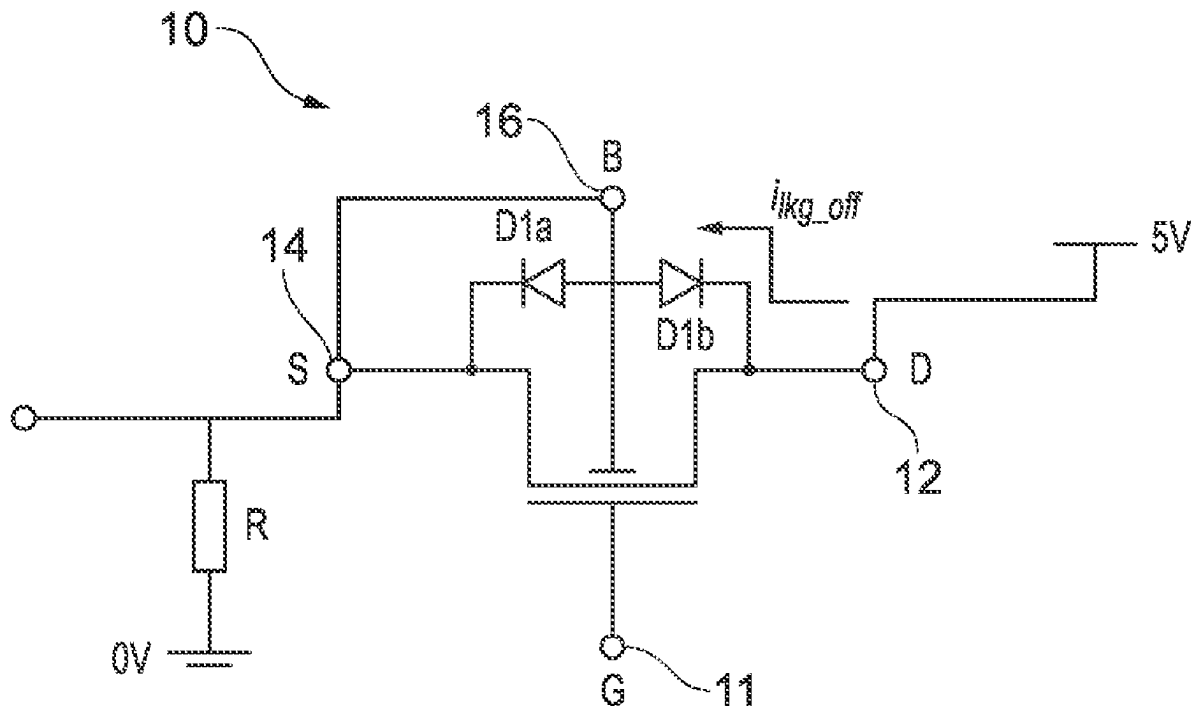

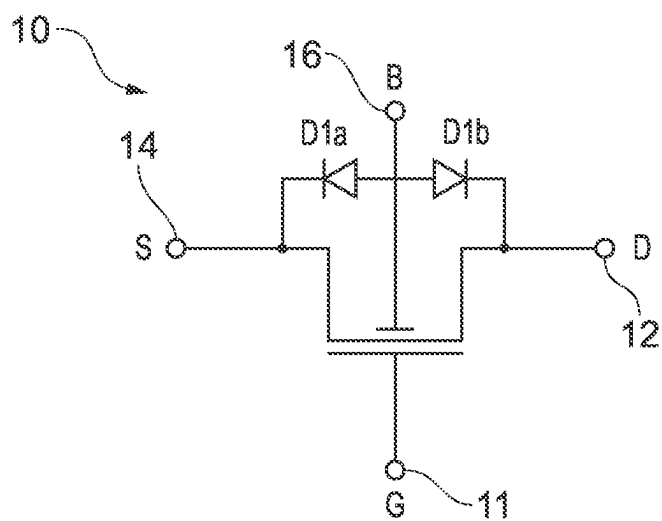


FIG. 1a


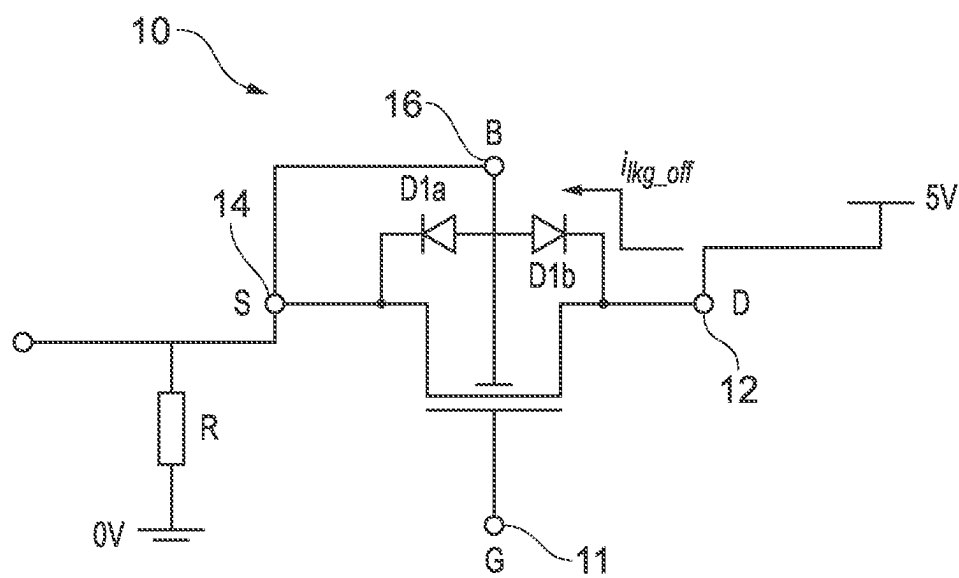


FIG. 1b

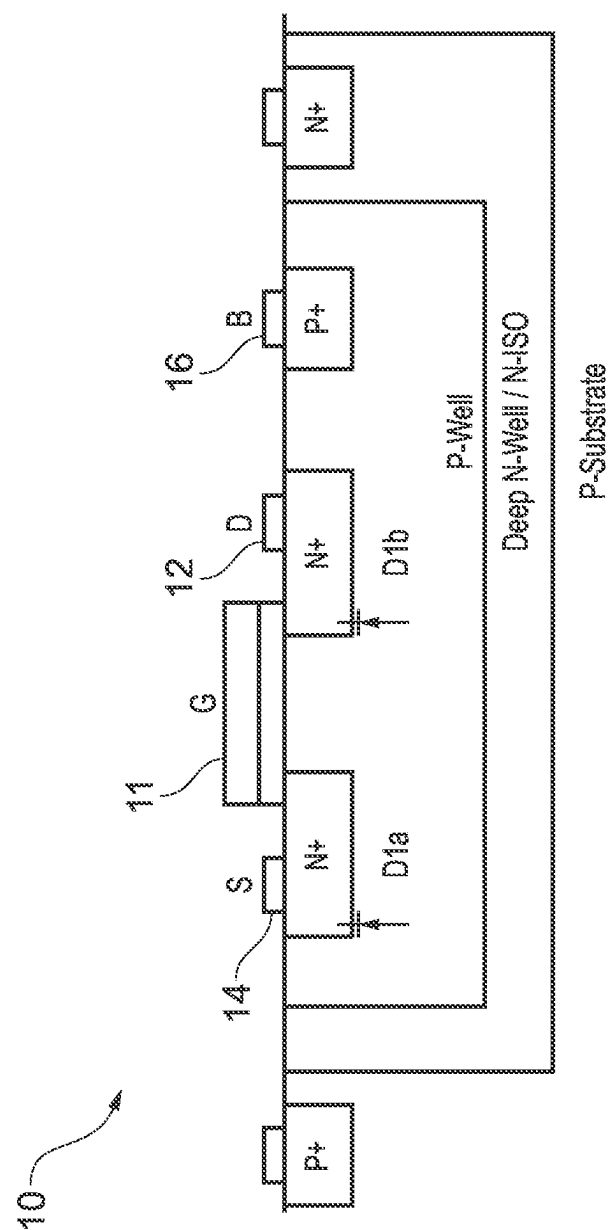

2000

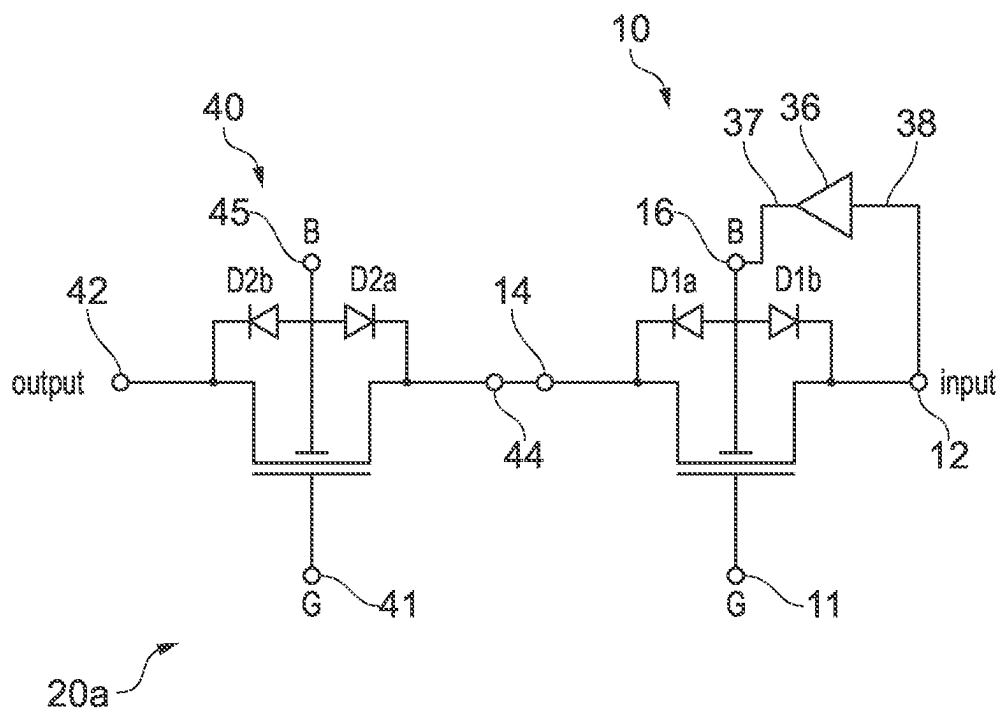


FIG. 3

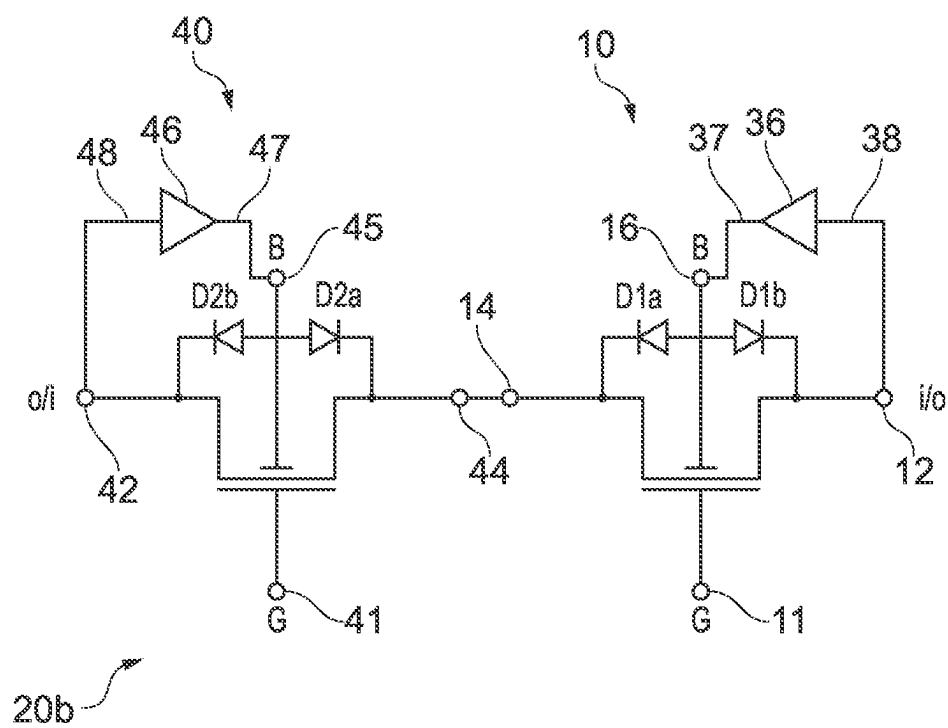


FIG. 4a

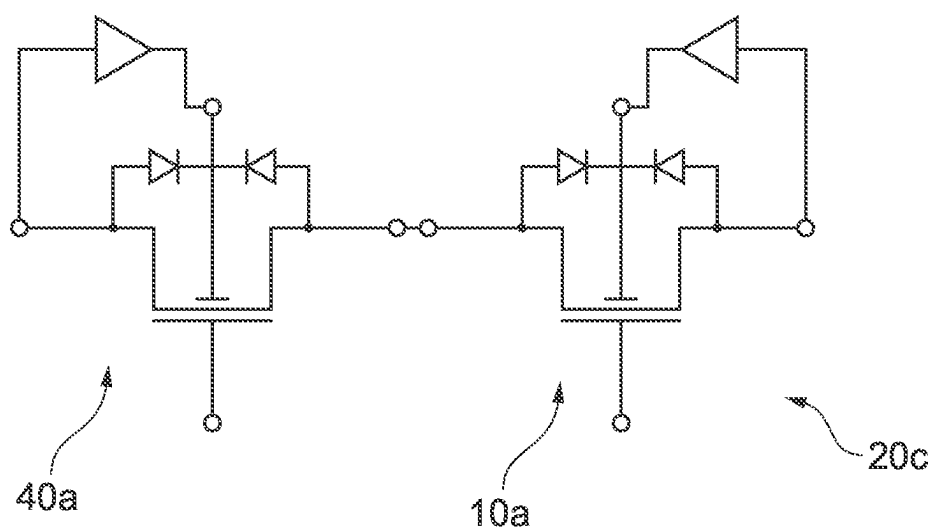


FIG. 4b

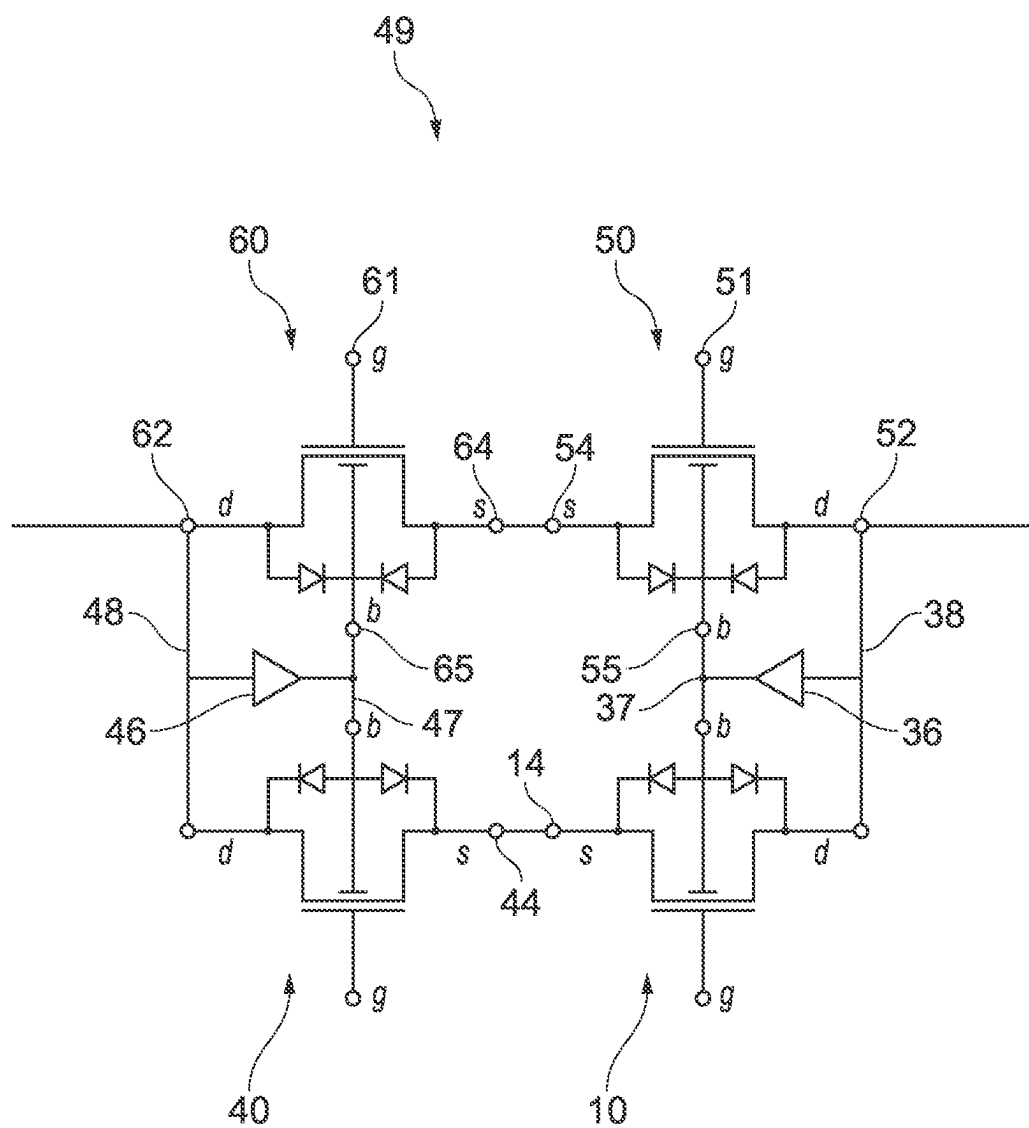


FIG. 5a

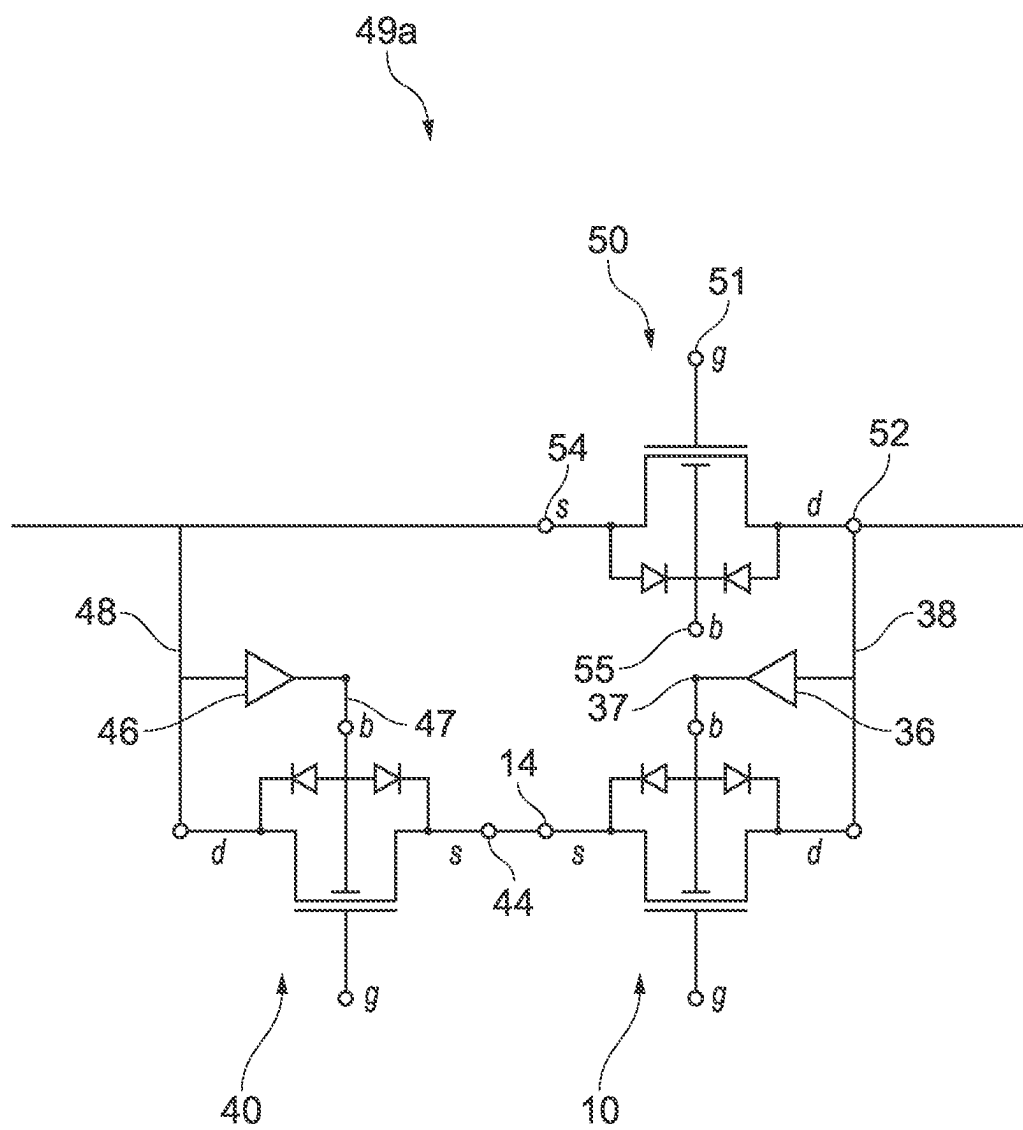


FIG. 5b

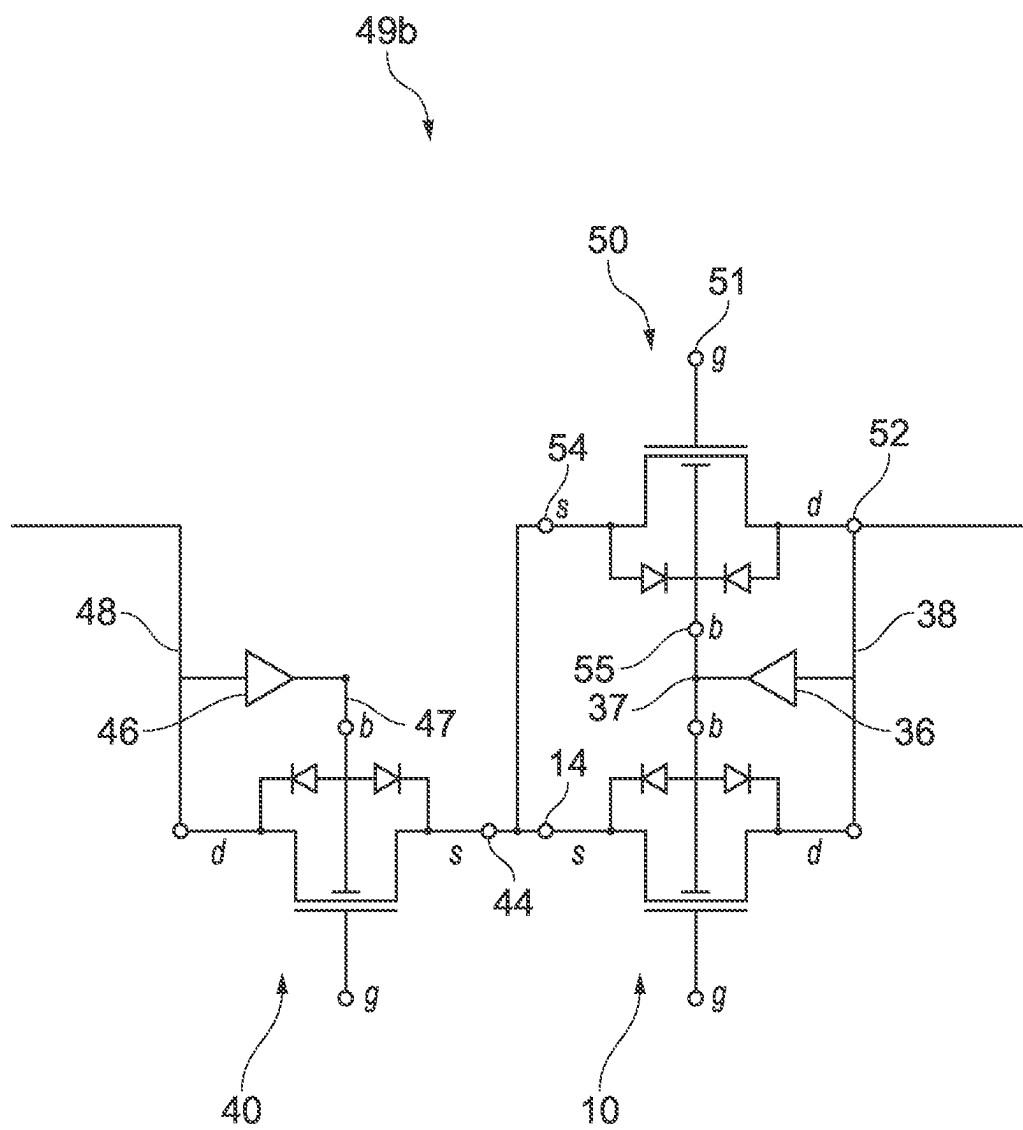


FIG. 5c

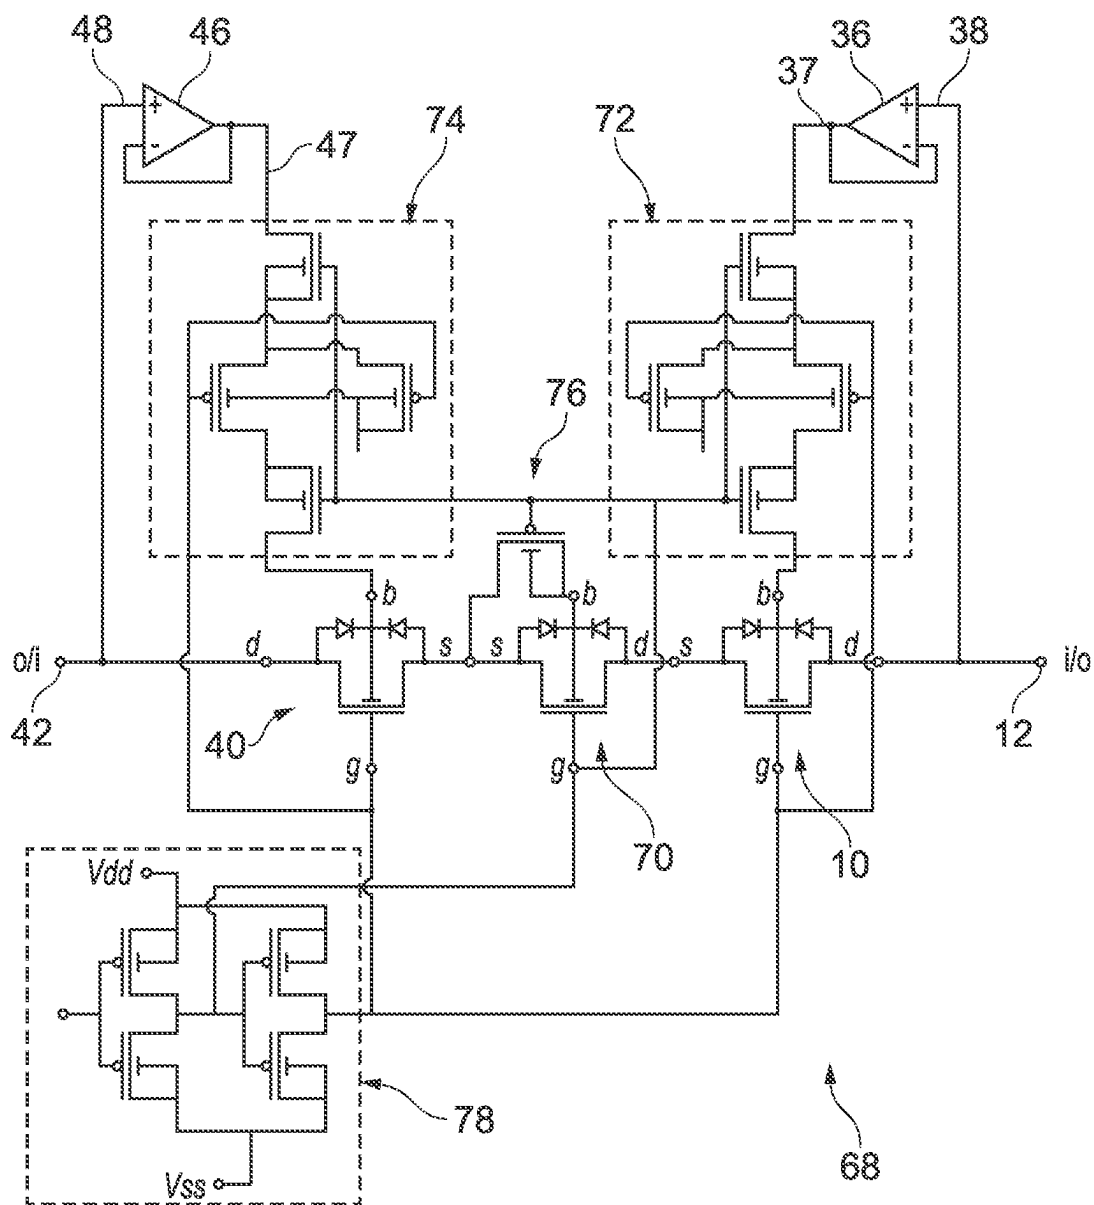


FIG. 6a

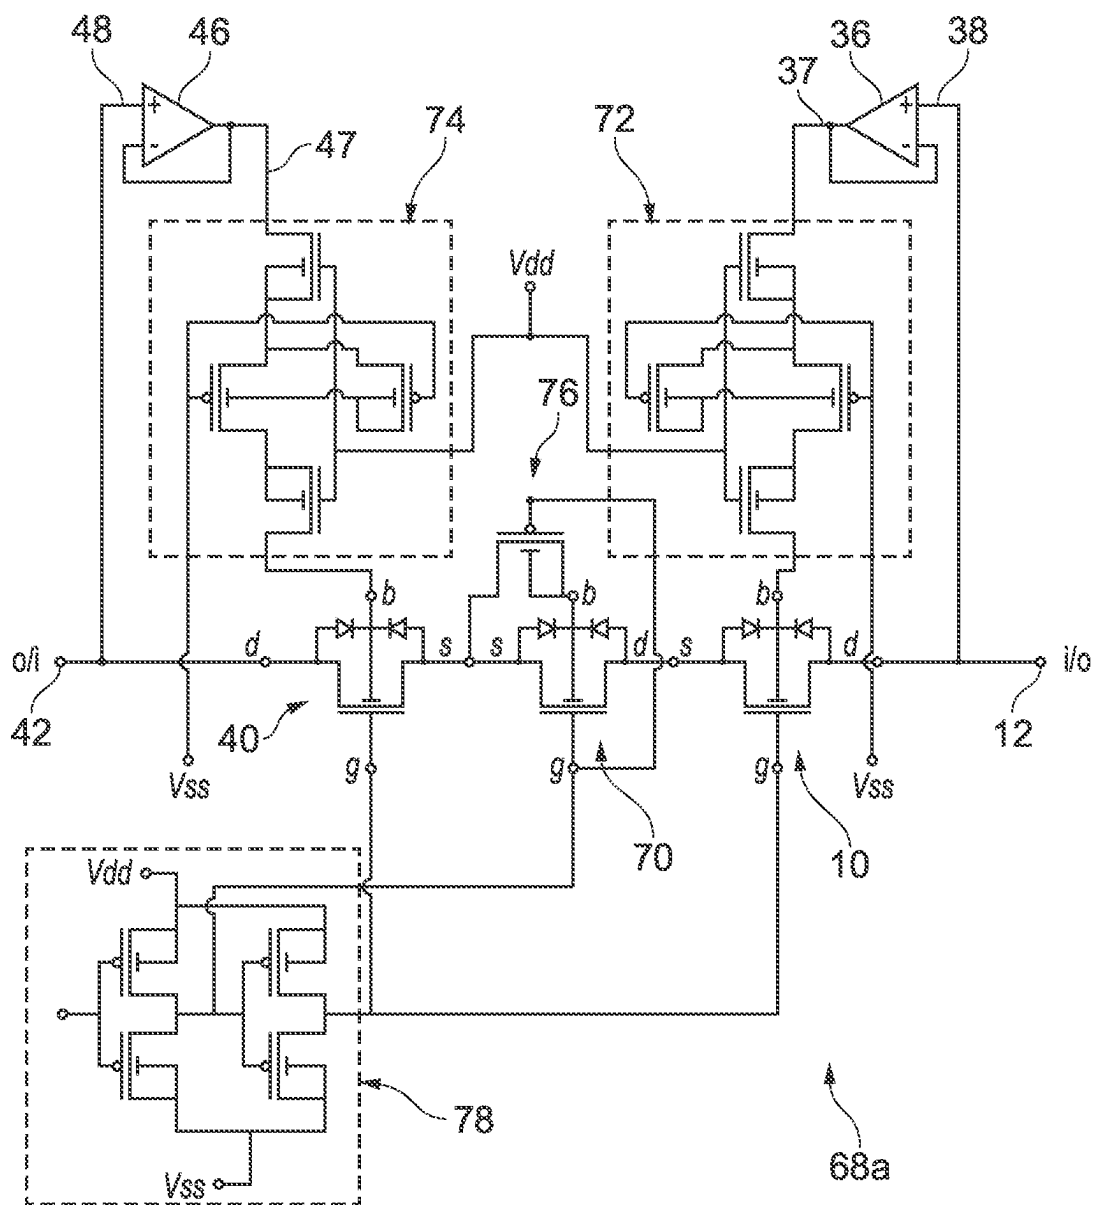


FIG. 6b

SOLID STATE SWITCH AND A CIRCUIT**TECHNICAL FIELD**

[0001] This application relates to compensating for leakage in a semiconductor switch (i.e. a solid state switch). Specifically, a metal-oxide-semiconductor field-effect-transistor (MOSFET or MOS), e.g., a low voltage MOS, such as a MOS with an accessible bulk (also called ‘body’, or ‘back-gate’) terminal.

BACKGROUND

[0002] Solid state switches may be used with components such as, a precision measurement apparatus, and automated test equipment. A solid state switch can have an associated leakage which affects the results at a precision measurement apparatus. For example, a large leakage current can reduce power efficiency and reduces the accuracy of component measurements connected via a solid state switch. Leakage reduction herein refers to reducing the current leakage at an input and/or output terminal of a solid state switch.

SUMMARY OF THE DISCLOSURE

[0003] The present disclosure provides a solid state switch device which compensates for current leakage. In particular, the examples herein provide leakage compensation techniques which are suitable with non-isolated and fully isolated (e.g., a silicon-on-insulator (SOI), or buried oxide isolated device) switches. In addition, the examples herein also provide an area efficient implementation. Such solid state switch devices are suitable for use with AC and/or DC voltage precision measurement apparatuses and AC and/or DC automated test equipment.

[0004] According to a first aspect there is provided a solid state switch, comprising:

[0005] a first metal-oxide-semiconductor field-effect transistor, MOSFET, comprising: a first terminal, a second terminal, a bulk terminal and a gate terminal, and configured to be switched between an on-state and an off-state;

[0006] a second MOSFET in series with the first MOSFET, wherein the second MOSFET comprises a first terminal, a second terminal, a bulk terminal, and a gate terminal, and wherein the second terminal of the first MOSFET is connected to the second terminal of the second MOSFET; and,

[0007] a first buffer comprising an output terminal coupled to the bulk terminal of the first MOSFET, and an input terminal coupled to the first terminal of the first MOSFET.

[0008] Optionally, the first terminal is a drain terminal. Optionally, the second terminal is a source terminal. Optionally, the first buffer is arranged to provide a current source to the bulk terminal of the first MOSFET.

[0009] Optionally, the first buffer is: a unity gain buffer, UGB; a voltage follower; or a cascade complementary source follower.

[0010] Optionally, the first aspect further comprises a second buffer comprising an output terminal coupled to the bulk terminal of the second MOSFET, and an input terminal coupled to the first terminal of the second MOSFET. Optionally, the second buffer is arranged to provide a current source to the bulk terminal of the second MOSFET.

[0011] Optionally, the second buffer is: a unity gain buffer, UGB; a voltage follower; or a cascade complementary source follower.

[0012] Optionally, the first buffer is a UGB so as to reduce leakage at the first terminal of the first MOSFET.

[0013] Optionally, the first MOSFET is a low voltage MOSFET, and optionally the second MOSFET is a low voltage MOSFET. Optionally, a low voltage MOSFET is a MOSFET arranged to be used with voltage differences of less than or equal to 5V, i.e., voltage rated at 5V.

[0014] Optionally, the first MOSFET is an isolated MOSFET, and the second MOSFET is an isolated MOSFET.

[0015] Optionally, the first terminal of the first MOSFET is a drain terminal. Optionally, the first terminal of the second MOSFET is a drain terminal. Optionally, the second terminal of the first MOSFET is a source terminal. Optionally, the second terminal of the second MOSFET is a source terminal.

[0016] Optionally, the first and second MOSFET are both a first-type MOSFET. Optionally, the first-type is n-type or p-type.

[0017] Optionally, the first aspect further comprises an electrical component for overvoltage protection. Optionally, the electrical component is arranged in series between the first and second MOSFETs.

[0018] Optionally, the electrical component is a third MOSFET. Optionally, the third MOSFET is a second-type MOSFET. Optionally, the second-type is p-type or n-type. Optionally, the first-type is different to the second-type. Optionally, the first, second, and third MOSFETs have the same voltage rating.

[0019] Optionally, the electrical component protects the solid state switch in applications where overvoltage conditions can cause damage to a device to which the switch is connected.

[0020] Optionally, the solid state switch of the first aspect is a transmission-gate switch comprising the first MOSFET in parallel with a third MOSFET. Optionally, the third MOSFET, comprises: a first terminal; a second terminal; a bulk terminal; and, a gate terminal, and the third MOSFET is configured to be switched between an on-state and an off-state. Optionally, the third MOSFET is a first-type MOSFET. Optionally, the first MOSFET is a second-type MOSFET. Optionally, the first-type is n-type or p-type. Optionally, the second-type is p-type or n-type. Optionally, the first-type is different to the second-type.

[0021] Optionally, the first terminal of the third MOSFET is coupled to the first terminal of the first MOSFET, and the second terminal of the third MOSFET is coupled to the first terminal of the second MOSFET.

[0022] Optionally, the first terminal of the third MOSFET is coupled to the first terminal of the first MOSFET, and the second terminal of the third MOSFET is coupled to the second terminal of the first MOSFET.

[0023] Optionally, the solid state switch of the first aspect further comprises a fourth MOSFET in parallel with the second MOSFET. Optionally, the fourth MOSFET comprises: a first terminal; a second terminal; a bulk terminal; and, a gate terminal, and the fourth MOSFET is configured to be switched between an on-state and an off-state. Optionally, the fourth MOSFET is a third-type MOSFET. Optionally, the second MOSFET is a fourth-type MOSFET.

Optionally, the third-type is n-type or p-type. Optionally, the fourth-type is p-type or n-type. Optionally, the third-type is different to the fourth-type.

[0024] Optionally, the fourth MOSFET is in series with the third MOSFET. Optionally, the second terminal of the third MOSFET is connected to the second terminal of the fourth MOSFET.

[0025] Optionally, the output terminal of the first buffer is coupled to the bulk terminal of the third MOSFET, and the input terminal of the first buffer is coupled to the first terminal of the third MOSFET.

[0026] Optionally, the output terminal of the second buffer is coupled to the bulk terminal of the fourth MOSFET, and the input terminal of the second buffer is coupled to the first terminal of the fourth MOSFET.

[0027] Optionally, the first terminal of the third MOSFET is a drain terminal. Optionally, the first terminal of the fourth MOSFET is a drain terminal. Optionally, the second terminal of the third MOSFET is a source terminal. Optionally, the second terminal of the fourth MOSFET is a source terminal.

[0028] Optionally, the third MOSFET is a low voltage MOSFET, and optionally the fourth MOSFET is a low voltage MOSFET.

[0029] Optionally, the third MOSFET is an isolated MOSFET, and optionally the fourth MOSFET is an isolated MOSFET.

[0030] According to a second aspect there is provided a solid state switch, comprising:

[0031] a first metal-oxide-semiconductor field-effect transistor, MOSFET, comprising: a first terminal, a second terminal, a bulk terminal, and a gate terminal, and configured to be switched between an on-state and an off-state;

[0032] a second MOSFET in series with the first MOSFET, wherein the second comprises: a first terminal, a second terminal, a bulk terminal, and a gate terminal, and wherein the second terminal of the first MOSFET is coupled to the second terminal of the second MOSFET;

[0033] means for providing a current source to the bulk terminal of the first MOSFET based on the voltage at the first terminal of the first MOSFET; and

[0034] means for providing a current source to the bulk terminal of the second MOSFET based on the voltage at the first terminal of the second MOSFET.

[0035] Optionally, the means for providing a current source to the bulk terminal of the first MOSFET based on the voltage at the first terminal of the first MOSFET is one or more first electronic components.

[0036] Optionally, means for providing a current source to the bulk terminal of the second MOSFET based on the voltage at the first terminal of the second MOSFET is one or more second electronic components.

[0037] Optional features of the first aspect may be applied to the second aspect.

BRIEF DESCRIPTION OF DRAWINGS

[0038] FIG. 1a illustrates a design of an n-type MOSFET switch with its parasitic diodes D1a and D1b.

[0039] FIG. 1b illustrates a source of dominant current leakage through the MOSFET switch of FIG. 1a.

[0040] FIG. 2 illustrates an example of a semiconductor structure of an isolated MOSFET switch, with its parasitic diodes D1a and D1b.

[0041] FIG. 3 illustrates a bi-directional solid state switch with unidirectional leakage reduction comprising a first n-type MOSFET coupled in series to a second n-type MOSFET, the first MOSFET being coupled to a buffer to generate a bulk voltage substantially equal to its drain voltage.

[0042] FIG. 4a illustrates a bidirectional solid state switch comprising a first n-type MOSFET coupled in series to a second n-type MOSFET, each MOSFET being coupled to a buffer to generate a bulk voltage substantially equal to its drain voltage.

[0043] FIG. 4b illustrates a bidirectional solid state switch comprising a first p-type MOSFET coupled in series to a second p-type MOSFET, each MOSFET being coupled to a buffer to generate a bulk voltage substantially equal to its drain voltage.

[0044] FIG. 5a illustrates a bi-directional solid state T-gate switch with bidirectional leakage reduction.

[0045] FIG. 5b illustrates a bi-directional solid state T-gate switch with unidirectional leakage reduction.

[0046] FIG. 5c illustrates a bi-directional solid state T-gate switch with partial leakage reduction.

[0047] FIG. 6a illustrates a bi-directional solid state switch with bidirectional leakage reduction with overvoltage protection circuitry.

[0048] FIG. 6b illustrates a bi-directional solid state switch with bidirectional leakage reduction with overvoltage protection circuitry.

DETAILED DESCRIPTION

[0049] A metal-oxide-semiconductor field-effect-transistor (MOSFET or MOS) device when configured to function as a switch is susceptible to parasitic capacitance and current leakage which can negatively impact measurement performance of equipment connected via said MOS device. To overcome the impact of parasitic capacitance and current leakage, additional circuitry can be coupled to the MOS device configured to function as a switch. Most types of field-effect-transistor devices with a designer accessible bulk terminal can benefit from the additional circuitry. For example, the devices described below are MOSFET devices configured to function as switches. A MOS device may imply a low-voltage device. For example, low voltage may be defined as: less than or equal to 5V, or, less than or equal to 10V. A low voltage MOS may be configured to operate with a V_{ds} which is less than or equal to 5V, or, less than or equal to 10V.

[0050] As a brief non-limiting overview of the invention, a new MOS based switch for use in/with precision instruments is provided. The switch can enable leakage compensation. That is reduced current leakage at the input and/or output of the switch. The new MOS based switch can comprise a MOS device coupled to another MOS device in series and a respective buffer coupled to a bulk terminal of each MOS device for providing a current source to the bulk terminal of each MOS device, such that the new MOS based switch appears not to leak current from the perspective of the input and/or output terminal of the new MOS based switch. The buffer may comprise a unity gain buffer (UGB); a voltage follower; or a cascade complementary source follower.

[0051] FIG. 1a shows an n-type MOS 10 (i.e., NMOS 10) with its parasitic diodes D1a and D1b. The parasitic diodes D1a and D1b of the NMOS 10 result from the fabrication process and are present in the majority of types of MOS switches. The parasitic diodes D1a and D1b are formed between P-type and N-type material of the NMOS 10. The parasitic diode D1a of the NMOS 10 is formed between the p-well and a source n-type layer. The parasitic diode D1b of the NMOS 10 is formed between the drain n-type and the p-well layer. If the NMOS device was a non-isolated MOS device, then the p-well layer may be the P-type substrate layer.

[0052] NMOS 10 comprises a gate terminal 11, a drain terminal 12, a source terminal 14, and a bulk terminal 16. The bulk terminal 16 is accessible to a circuit designer. In prior-art applications, the bulk terminal is directly electrically coupled (and therefore, biased) to the source terminal to avoid body effect.

[0053] A P-type MOS (PMOS) (or other p-type FET switch) could be described similarly.

[0054] FIG. 1b shows the NMOS 10 of FIG. 1a with a leakage current shown. When the NMOS 10 is in the on-state (i.e., switched ‘ON’) the drain/source voltage can be any value usually between the power supplies (e.g., Vdd and Vss). If the NMOS 10 is switched ‘ON’, the voltage difference between the source terminal 14 and the drain terminal 12 is approximately 0V (assuming a negligible/low ON-resistance). Typically, the bulk terminal 16 is coupled to the source terminal 14, thus, parasitic diode D1a may be ignored.

[0055] If the NMOS 10 is switched ‘OFF’ and the voltage at the drain 12 (e.g., 5V, or the most positive supply, e.g., Vdd) is greater than the voltage at the source 14 (e.g., 0V/gnd, or the most negative supply, e.g., Vss), then there is a large voltage differential across the parasitic diode D1b. The large voltage differential across the parasitic diode D1b causes a leakage current i_{lkg_off} through the reverse biased parasitic diode D1b. The leakage current i_{lkg_off} reduces power efficiency and reduces the accuracy of component measurements connected via the NMOS 10. The leakage current may be defined by the Shockley diode equation:

$$i_{lkg_off} = i_s \left(e^{\frac{V_d}{nV_t}} - 1 \right)$$

[0056] where i_s is the reverse-bias saturation current (or scale current), V_d is the voltage across the parasitic diode D1b, V_t is the thermal voltage, and n is the ideality factor (also known as the quality factor or emission coefficient) and depends on the fabrication process and semiconductor material. Therefore, if the voltage across the parasitic diode D1b is non-zero, then the leakage current i_{lkg_off} is large.

[0057] FIG. 2 shows an example of a semiconductor structure of an NMOS transistor, specifically an isolated NMOS 10. The parasitic diodes D1a and D1b are shown in FIG. 2. Note that the P-well is accessible to the circuit designer via the bulk terminal 16.

[0058] As shown in FIGS. 1a, 1b, and 2, the NMOS 10 is susceptible to leakage currents which reduce the accuracy of component measurements connected via the NMOS 10. Leakage current can also reduce the power efficiency of the NMOS 10 or components connected via the NMOS 10.

[0059] FIG. 3 shows a bi-directional solid state switch 20a with unidirectional leakage reduction solid state switch 20a comprising the first NMOS 10 coupled to a first buffer 36. The first NMOS 10 being configured to be switched between an on-state (i.e., switched ‘ON’) and an off-state (i.e., switched ‘OFF’). The first buffer 36 includes an output terminal 37; and an input terminal 38 coupled to the drain terminal 12 of the first NMOS 10. The first buffer 36 is arranged to provide a voltage to the bulk terminal 16 substantially equal to the voltage at the drain terminal 12 of the first NMOS 10. This reduces the leakage current i_{lkg_off} through parasitic diode D1b as per equation (1). The first buffer 13 connected to the first NMOS 10 may also be arranged to provide a current source to the bulk terminal 16 of the first NMOS 10 based on the voltage at the drain terminal 12 of the first NMOS 10. Thus, the addition of the first buffer 36 reduces leakage via the parasitic diode D1b when compared to an arrangement of the first NMOS 10 where the bulk terminal 16 is directly electrically coupled to the source terminal 14 (e.g., without the first buffer 36 present), or a negative voltage supply terminal (e.g., gnd, Vss). Therefore, the first buffer 36 may reduce (or eliminate) current leakage at the drain terminal 12 of the first NMOS 10 when the voltage at the drain terminal 12 of the first NMOS 10 is greater than the voltage at the source terminal 14 of the first NMOS 10 (e.g., by providing a 0V across the parasitic diodes D1b). However, the first buffer 36 may act as a current source and provide a large leakage current over parasitic diode D1a to the source terminal 14 of the first NMOS 10, if the voltage at the bulk terminal 16 of the first NMOS 10 is greater than the voltage at the source terminal 14 of the first NMOS 10.

[0060] To prevent the large leakage current over parasitic diode D1a to the source terminal 14 of the first NMOS 10 leaking through the solid state switch when it is in an off-state 10, a mirrored arrangement of the first NMOS 10 is provided by a second NMOS 40. The first NMOS 10 may be substantially similar to the second NMOS 40. Thus, when the voltage at the drain terminal 12 of the first NMOS 10 is greater than the voltage at the drain terminal 42 of the second NMOS 40, current leakage through the solid state switch 20a when it is in an off-state may be reduced (or eliminated). The solid state switch 20a is constructed by coupling the source terminals 14, 44 of each first NMOS 10 and second NMOS 40 together (either directly or optionally, via an electrical component for overvoltage protection). This arrangement ensures that the parasitic diode D2a (between a source terminal 44 and a bulk terminal 45 of the second NMOS 40) may be reverse biased and reduces the leakage current sourced from the first buffer 36 over the forward biased parasitic diode D1a. There may be a small current leakage via the reverse biased parasitic diode D2a (i.e., sourced from the first buffer 36), however, advantageously, this is not ‘seen’ at (i.e., does not interact with) the drain terminal of the first NMOS 10. Thus, from the perspective of the input terminal 12 of the solid state switch 20a, current leakage may be eliminated.

[0061] Specifically, FIG. 3 shows the solid state switch 20a comprises the second NMOS 40. The second NMOS 40 being configured to be switched between an on-state and an off-state. FIG. 3 shows the second NMOS 40 with parasitic diodes D2a and D2b. The second NMOS 40 comprises a

gate terminal **41**, a drain terminal **42**, a source terminal **44**, and a bulk terminal **45**. The bulk terminal **45** is accessible to a circuit designer.

[0062] An input of the solid state switch **20a** may be the drain terminal **12** of the first NMOS **10**. An output of the solid state switch **20a** may be the drain terminal **42** of the second NMOS **40**.

[0063] A switching signal coupled to the gate **41** of the second NMOS **40** may also be coupled to the gate **11** of the first NMOS **10**, such that the first and second NMOSs **10**, **40** are configured to be in the same switching state, either 'ON' or 'OFF'. Thus, during an off-state of the solid state switch **20**, the first and second MOSs **10** and **40** can be switched 'OFF' simultaneously. Similarly, during an on-state of the solid state switch **20**, the first and second MOSs **10** and **40** can be switched 'ON' simultaneously.

[0064] In an off-state, the bulk terminal **45** of second NMOS **40** may be coupled to the most negative supply of the switch (e.g., 0V, gnd, or Vss). In an on-state, the bulk terminal **45** of second NMOS **40** may also be coupled to the most negative supply of the switch (e.g., 0V, gnd, or Vss). Alternatively, in an on-state, the bulk terminal **45** of second NMOS **40** may be back gate switched. In back gate switching, the bulk terminal (e.g., **45**) is tied to the signal passing through the switch (e.g., second NMOS **40**) to reduce the body effect and improve performance.

[0065] The solid state switch **20a** of FIG. 3 may be particularly advantageous when used in a multiplexed system.

[0066] FIG. 4a shows a bi-directional solid state switch **20b** with bi-directional leakage reduction comprising the solid state switch **20a** of FIG. 3, and a second buffer **46**. That is, the arrangement of the second NMOS **40** and the second buffer **46a** is a mirrored arrangement of the first NMOS **10** and the first buffer **36**. The first buffer **36** may be substantially similar to the second buffer **46**. The second buffer **46** may include an output terminal **47**, and an input terminal **48** coupled to the drain terminal **42** of the second NMOS **40**.

[0067] Considering a scenario whereby the solid state switch **20b** is arranged such that the voltage at the drain terminal **42** of the second NMOS **40** is greater than the voltage at the drain terminal **12** of the first NMOS **10**. The second buffer **46** which is connected to the second NMOS **40** may be arranged to provide a voltage to the bulk terminal **45** substantially equal to the voltage at the drain terminal **42** of the second NMOS **40**. This reduces the leakage current $i_{(lkg_off)}$ through parasitic diode **D2b** as per equation (1). The second buffer **46** connected to the second NMOS **40** may also be arranged to provide a current source to the bulk terminal **45** of the second NMOS **40** based on the voltage at the drain terminal **42** of the second NMOS **40**. Thus, the addition of the second buffer **46** reduces leakage via the parasitic diode **D2b** when compared to an arrangement of the solid state switch **20** where the bulk terminal **45** is directly electrically coupled to the source terminal **44** (e.g., without the second buffer **46** present). Therefore, the second buffer **46** may reduce (or eliminate) leakage at the drain terminal **42** of the second NMOS **40** when the voltage at the drain terminal **42** of the second NMOS **10** is greater than the voltage at the source terminal **44** of the second NMOS **40** (e.g., by providing a 0V across the parasitic diodes **D2b**).

[0068] Advantageously, the buffers **36**, **46** of bi-directional solid state switch **20b** may reduce (or eliminate)

leakage if there is any voltage differential between the drain terminal **42** of the second NMOS **40** and the drain terminal **12** of the first NMOS **10**.

[0069] In addition, the parasitic diode **D1a** (between a source terminal **14** and a bulk terminal **16** of the first NMOS **10**) may be reverse biased and reduces the leakage current sourced from the second buffer **46** over the forward biased parasitic diode **D2a**. Thus, from the perspective of the input/output terminals of the solid state switch **20b**, leakage may be eliminated, and the accuracy of component measurements connected via the solid state switch **20b** can be improved.

[0070] Optionally, the first and/or second buffer **36**, **46** is a unitary gain buffer (UGB) (e.g., an operational amplifier-based buffer circuit with unitary gain). The first and second UGB **36**, **46** provides a low impedance output and therefore can source or sink current at the output terminal **37**, **47** of the first and second UGB **36**, **46**, respectively. Therefore, current leakage from parasitic diodes **D1b** and **D2b** can (in theory) be eliminated, or at least greatly reduced. Therefore, an advantage of a UGB **36**, **46** is that leakage may be reduced at the drain terminal of the first and second NMOS **10**, **40**. A reduced leakage can result in improved power efficiency and accuracy of component measurements connected via the solid state switch (e.g., solid state switch **20a**, **20b**, etc.). In addition, one or more UGBs **36**, **46** can beneficially provide a particularly low voltage difference between the input terminal **38**, **48** voltage and output terminal **37**, **47**. Therefore, the UGB **36**, **46** can achieve improved accuracy of component current measurements due to low current leakage at the input and/or output of the solid state switch **20a**, **20b**. Additionally, if one or more buffers (such as first and second buffers **36**, **46**, and optionally, gate drive circuitry configured to operate the gates of the first NMOS **10** and the second NMOS **40** each) comprise an operational amplifier, then improved THD can be achieved.

[0071] FIG. 4b shows a solid state switch **20c** which may operate substantially similarly to the solid state switch **20b** of FIG. 4a. The solid state switch **20c** comprises PMOS devices **10a**, **40a** in place of the NMOS devices **10**, **40**. Specifically, a first terminal (e.g., a source terminal) of a first PMOS **10a** is coupled to a first terminal (e.g., a source terminal) of a second PMOS **40a**.

[0072] FIG. 5a shows a bi-directional solid state switch **49** whereby the arrangement of the first and second MOSFETs **10**, **40**, and the first and second buffers **36**, **46** corresponds with the arrangement as shown in FIG. 4a. Advantageously, FIG. 5a provides bidirectional leakage reduction. In addition, FIG. 5a comprises a third and a fourth MOSFETs **50**, **60**. The third MOSFET **50** is in series with the fourth MOSFET **60**. The third MOSFET **50** comprises: a gate terminal **51**, a drain terminal **52**, a source terminal **54** and a bulk terminal **65**. The fourth MOSFET **60** comprises: a gate terminal **61**, a drain terminal **62**, a source terminal **64** and a bulk terminal **65**. The output terminal **37** of the first buffer **36** is coupled to the bulk terminal **55** of the third MOSFET **50**, and the input terminal **38** of the first buffer **36** is coupled to the drain terminal **52** of the third MOSFET **50**. The output terminal **47** of the second buffer **46** is coupled to the bulk terminal **65** of the fourth MOSFET **60**, and the input terminal **48** of the second buffer **46** is coupled to the drain terminal **62** of the fourth MOSFET **60**. The third MOSFET may be a first PMOS **50** and the fourth MOSFET **60** may be a second PMOS **60**.

[0073] The solid state switch 49 of FIG. 5a is a bi-directional solid state transmission-gate (i.e., T-gate) switch 49. The bi-directional solid state T-gate switch 49 comprises an n-type bi-directional solid state switch comprising first and second NMOS 10, 40 in parallel with a p-type bi-directional solid state switch comprising first and second PMOS 50, 60. Advantageously, the bi-directional solid state T-gate switch 49 provides full rail-to-rail signal pass.

[0074] Alternatively, the solid state T-gate switch 49 may be arranged to only reduce (or eliminate) leakage from only one of the two input/output terminals of the solid state switch 49, (similar to the solid state switch 20a of FIG. 3) by removing the second buffer 46 (or by removing the first buffer 36) from the solid state T-gate switch 49 shown at FIG. 5a.

[0075] Alternatively, a solid state switch may be substantially similar to the bi-directional solid state T-gate switch 49 of FIG. 5a but may only comprise one of either the first or second PMOS 50, 60 and therefore, not provide leakage compensation to the remaining PMOS, for example, see FIG. 5b. Alternatively or in addition, a solid state switch may be substantially similar to the bi-directional solid state T-gate switch 49 of FIG. 5a but may only comprise one of either the first or second NMOS 10, 40. For a first example, the bi-directional solid state T-gate switch 49 of FIG. 5a may be modified such that any one of the MOSFETs 10, 40, 50, or 60 of the bi-directional solid state T-gate switch 49 are absent. If one of the MOSFETs 10, 40, 50, 60 are absent then the resulting open-circuited source terminal (e.g., either 14, 44, 54, 64) may be coupled to:

[0076] a) one or more of the remaining source terminals of the remaining MOSFETs (i.e., any three of MOSFETs 10, 40, 50, 60), as shown by FIG. 5c; or

[0077] b) coupled to the input or output terminal 52, 62 of the solid state switch (e.g., such that the all remaining three MOSFETs pass current between the input and the output terminals 52, 62 of the solid state switch when the solid state switch is turned “ON”), as shown by FIG. 5b.

[0078] In example a), shown by FIG. 5c, the gate drive signal of the second MOSFET 40 is greater than the gate drive signal of the remaining MOSFETs 10, 50. For example, the gate drive signal of the second MOSFET 40 may be V_{th} (i.e., “ON” threshold voltage) above the gate drive signals of the remaining MOSFETs 10, 50.

[0079] For a second example, the bi-directional solid state T-gate switch 49 of FIG. 5a may be modified such that any two of the MOSFETs 10, 40, 50, or 60 are absent. In the second example, it is preferable (in order to maintain bi-directional functionality) that either: first PMOS 50 and second PMOS 60 are absent (i.e., corresponding to solid state switch 20 of FIG. 4a); first NMOS 10 and second NMOS 40 are absent (i.e., corresponding to solid state switch 20a of FIG. 4b); first NMOS 10 and second PMOS 60 are absent (and the source terminal 54 of the first PMOS 50 is coupled to the source terminal 44 of the second NMOS 40); or, first PMOS 50 and second NMOS 40 are absent (and the source terminal 14 of the first NMOS 10 is coupled to the source terminal 64 of the second PMOS 60).

[0080] The T-gate arrangement described with reference to FIG. 5a comprises two buffers 36, 46. Alternatively, the bi-directional solid state T-gate switch 49 with may be reconfigured to use a buffer associated with the bulk terminal of each MOSFET.

[0081] Alternatively, the MOSFETs of FIGS. 5a-6b may be any type of MOSFETs respectively.

[0082] In an example, the solid state switches as shown in FIG. 3, 4a, 4b, 5a, 5b, or 5c may further comprise an electrical component for overvoltage protection. The electrical component may be arranged in series between the first and second MOSFETs (e.g., NMOSs 10 and 40 of FIGS. 3, 4a, 4b, 5a, 5b, and 5c). The electrical component may protect the solid state switch in applications where overvoltage conditions can cause damage to a device to which the switch is connected. That is, the solid state switch may have overvoltage protection characteristics.

[0083] FIG. 6a shows a bi-directional solid state switch 68 with an overvoltage MOSFET 70 (for overvoltage protection) arranged in series between the first and second MOSFETs 10, 40. Although, in practice all three MOSFETs (i.e., first and second MOSFETs 10, 40, and overvoltage MOSFET 70) provide overvoltage protection, specifically, NMOS devices provide overvoltage protection for positive voltages and PMOS devices provide overvoltage protection for negative voltages. Advantageously, FIG. 6a provides bidirectional leakage reduction, due to the presence of two buffers 36, 46. The overvoltage MOSFET is of a different type to the first and second MOSFETs 10, 40. The bi-directional solid state switch 68 includes three series-connected MOS transistors:

[0084] first NMOS 10, a PMOS 70 and second NMOS 40. The first and third MOSFETs 10, 40 are shown as N-type MOSFETs and the middle MOSFET 70 is shown as a P-type MOSFET in FIG. 6a. Alternatively, the first and third MOSFETs 10, 40 may be P-type MOSFETs and the middle MOSFET 70 may be a N-type MOSFET. Alternatively, all three MOSFETs may be of the same type, for example, this may be advantageous in examples if the expected input/output overvoltages were different. For the architecture of FIG. 6a, it is the voltage rating of the MOSFETs that set the overvoltage protection level.

[0085] The bi-directional solid state switch 68 of FIG. 6a may provide positive and negative overvoltage protection (e.g., +55V, and -45V) when the bi-directional solid state switch 68 is powered via V_{dd} and V_{ss} , and when the solid state switch is unpowered (i.e., the power supplies $V_{dd} = -V_{ss} = \text{gnd}$).

[0086] The switch input/output terminal 12 of the bi-directional solid state switch 68 is the drain terminal 12 of the first NMOS transistor 10. The bulk terminal of the first NMOS 10 is coupled to the output terminal 37 of the first buffer 36 via a first protection circuit 72. The drain terminal of the PMOS 70 is coupled to the source electrode of the first NMOS 10. The source terminal of the PMOS 70 is coupled to the source electrode of the second NMOS 40. The switch input/output terminal 42 of the solid state switch is the drain terminal of the second NMOS transistor 40. The bulk terminal of the second NMOS 40 is coupled to the output terminal 47 of the second buffer 46 via a second protection circuit 74. The bulk terminal of the PMOS 70 may be configured to float when the solid state switch is turned “OFF”. Specifically, a bulk-source PMOS 76 with a gate terminal coupled to the gate terminal of the PMOS 70 may be arranged to cause the bulk terminal of the PMOS 70 to float when it is in an off-state. When the bi-directional solid state switch 68 is in an off-state, the bulk terminals of the first NMOS 10 and second NMOS 40 are coupled to output

terminals **37**, **47** of the first and second buffers **36**, **46** respectively. Thus, reducing (or eliminating) current leakage at the inputs/outputs **12**, **42** of the bi-directional solid state switch **68**. Alternatively, the bulk-source PMOS **76** of FIG. **6a** may be replaced with a bulk-drain PMOS **76** (i.e., between the bulk terminal and the drain terminal of the PMOS **70**).

[0087] The bulk terminal of the PMOS **70** may be configured to be coupled to the source terminal of the PMOS **70** when the bi-directional solid state switch **68** is turned 'ON', such that the PMOS **70** does not impede the signal through the bi-directional solid state switch **68**. Specifically, the bulk-source PMOS **76** with a gate terminal coupled to the gate terminal of the PMOS **70** may be arranged to cause the bulk terminal of the PMOS **70** to be coupled to the source terminal of the PMOS **70** when it is in an on-state. When the bi-directional solid state switch **68** is in an on-state, the bulk terminals of the first NMOS **10** and second NMOS **40** may be configured to float, for example, due to the first and second protection circuits **72**, **74**.

[0088] The gate terminals of the NMOSs **10**, **40** are coupled together and to a first output of a control circuit **78**. The gate terminal of the PMOS **70** is coupled to a second output of the control circuit **78**, such that the PMOS **70**, first NMOS **10**, and second NMOS **40** may be in the on-state (or off-state) at the same time (e.g., switched simultaneously).

[0089] In the example described, control signals output from the first output and second output of the control circuit **78** respectively are either +15 volts or -15 volts (alternatively, these may +5V or -5V), derived from the supply voltages. The control signals are complementary, such that when one is +15 volts, the other is -15 volts. When the first control signal is +15 volts, the first and second NMOSs **10**, **40** are turned on. The second control signal will at that time be -15 volts, and this voltage on the gate terminal **32** of the PMOS **70** (and bulk-source PMOS **76**) will turn PMOS **70** on. Thus, all three in-series MOSFETs (i.e., first NMOS **10**, PMOS **70**, and second NMOS **40**) are turned 'ON', and the switch is "closed", meaning that an input signal can be transmitted from the input to the output of the bi-directional solid state switch **68**.

[0090] When the second control signal is +15 volts and the first control signal is -15 volts, all three MOSFETs (i.e., first NMOS **10**, PMOS **70**, and second NMOS **40**) will be turned 'OFF', and bi-directional solid state switch **68** will open, that is, its resistance from the input terminal **12** to the output terminal **42** will be extremely high (typically megohms), effectively preventing signal transmission through the bi-directional solid state switch **68**.

[0091] FIG. **6b**, shows an alternative bi-directional solid state switch **68a** with an overvoltage MOSFET **70** (for overvoltage protection) arranged in series between the first and second MOSFETs **10**, **40**. The bi-directional solid state switch **68a** shows all of the components of the bi-directional solid state switch **68** of FIG. **6a**. The same reference numerals are used to denote the same/corresponding features in relation to FIG. **6a** and will not be described in detail again below. Specifically, in contrast to the bi-directional solid state switch **68** of FIG. **6a**, the first and second protection circuits **72**, **74** may be configured to be always 'ON' by tying the gates of NMOS devices to V_{dd} and the gates of PMOS devices to V_{ss}, as shown in FIG. **6b**. This will always drive the bulk terminals of all three MOSFETs (i.e., first NMOS **10**, PMOS **70**, and second NMOS **40**) with

the buffer **36**, **46** except in an overvoltage event when the bulk terminals will be automatically floated. Advantageously, this provides better performance in the 'ON' state of the bi-directional solid state switch **68a**.

[0092] Each MOSFET of the solid state switch **20a**, **20b**, **20c**, **49**, **68** may be a low voltage MOSFET. Low voltage may be defined as: less than or equal to 5V, or, less than or equal to 10V. A low voltage MOS may be configured operate with a V_d which is less than or equal to 5V, or, less than or equal to 10V. Low voltage components and MOSFET devices may advantageously provide reduced area and power consumption in comparison to higher voltage components.

[0093] The values of any components herein may be changed depending on the application and/or designer choice.

[0094] For all of the above designs and circuits, it is possible to add additional components while still achieving the technical effects associated with each embodiment.

[0095] Alternatively, the MOS devices herein may comprise an isolation terminal or may not comprise an isolation terminal (e.g. Silicon on Insulator (SOI) devices). The output terminal of the first buffer **36** may only be coupled to the bulk terminal of the first MOSFET **10** when the first MOSFET **10** is in the off-state. The output terminal of the second buffer **46** may only be coupled to the bulk terminal of the second MOSFET **40** when the second MOSFET **40** is in the off-state.

[0096] The first and second MOSFET devices **10**, **40** of FIGS. **3-6b** are shown as n-type devices, however, the teachings can be readily applied to p-type devices by a person skilled in the art, and vice versa.

[0097] The output terminals **37** of the first and second buffers **36**, **46** are shown to be coupled to the bulk terminals of both the first MOSFET **10** and the second MOSFET **40** in FIGS. **3-6b**. Alternatively, any means for providing a current source to the bulk terminal of the first MOSFET **10** based on the voltage at the drain terminal **12** of the first MOSFET **10** may be used in order to achieve reduced leakage, and/or any means for providing a current source to the bulk terminal of the second MOSFET **40** based on the voltage at the drain terminal **42** of the second MOSFET **40** may be used in order to achieve reduced leakage. For example, if the second MOSFET **40** has different leakage characteristics to the first MOSFET **10**. The above applies equally to the other MOSFETs in a similar arrangement, e.g., the third and Fourth MOSFETs **50**, **60** of FIGS. **5a-5c**, and/or PMOS **70** of FIGS. **6a**, **6b**.

[0098] The MOSFETs herein (e.g., **10**, **40**, **50**, **60**, **70**) may be any type of MOSFET design.

[0099] When reference is made to a drain, source, gate, bulk, buried layer, isolation layer or other input/output of a component, this may include a drain terminal, source terminal, gate terminal, bulk terminal, buried layer terminal, isolation terminal or other input/output terminal of a component, respectively (and vice versa).

[0100] Throughout the described embodiments, where a MOSFET has a 'drain terminal', this may be referred to as a 'first terminal', and where a MOSFET has a 'source terminal', this may be referred to as a 'second terminal'. This is due to the symmetrical nature of certain MOSFETs as a result of their fabrication method. Additionally, it will be understood that due to the symmetrical nature of MOSFETs, in any embodiment described herein, the orientation

of the first and second terminals of each MOSFET may be arbitrary. For example, FIG. 4a may show the first terminal of the first MOSFET 10 coupled in series to the second terminal of the second MOSFET 40, and the input terminals of the first and second buffers 36, 46 may be coupled to the second terminal of the first MOSFET 10 and the first terminal of the second MOSFET 40 respectively.

[0101] The first and/or second buffer 36, 46 may each be a unity gain buffer in FIGS. 3 to 6b. The unity gain buffer may comprise an operational amplifier to reduce leakage and capacitance at the drain of the connected MOS (e.g., the first MOSFET 10 in FIGS. 3 to 6b). The operational amplifier may be one of: a continuous time auto-zero operational amplifier; or a continuous time ping-pong auto zero operational amplifier, to achieve a low voltage difference across the input terminal 38, 48 and the output terminal 37, 47 of the first and/or second buffer 36, 46.

[0102] Alternatively, the first and/or second buffer 36, 46 may each be a voltage follower circuit. The voltage follower circuit can reduce capacitance at the drain of the connected MOSFET (e.g., the first MOSFET 10 in FIGS. 3 to 6b). The voltage follower circuit is simpler to implement and reduces circuit complexity. The voltage follower circuit is usually an open loop or feedforward type circuit.

[0103] Alternatively, the first and/or second buffer 36, 46 may each be a cascade complementary source follower (CCSF). The CCSF can reduce capacitance at the drain of the connected MOSFET (e.g., the first MOSFET 10 in FIGS. 3 to 6b). The CCSF is simpler to implement and reduces circuit complexity. The CCSF can achieve near zero voltage drop across the CCSF, although, this may vary with temperature and silicon processes. Alternatively, the first and/or second buffer 36, 46 may each be any other implementation of a source follower type circuit or buffer.

[0104] The first and/or second buffer 36, 46 may each be any means for providing a current source to the bulk terminal of a MOSFET (e.g., MOSFET 10, and/or MOSFET 40 respectively) based on the voltage at the first terminal (e.g., the drain terminal) of the MOSFET.

[0105] In an example, the NMOS devices 10, 40, 50, 60 and/or the PMOS devices 10a, 20a, 70 may be a non-isolated MOS devices. Alternatively, the NMOS devices 10, 10a, 40, 40a, 50, 60, 70 may be an isolated MOS devices.

General

[0106] Unless the context clearly requires otherwise, throughout the description and the claims, the words “comprise,” “comprising,” “include,” “including,” and the like are to be construed in an inclusive sense, as opposed to an exclusive or exhaustive sense; that is to say, in the sense of “including, but not limited to.”

[0107] The words “coupled” or “connected”, as generally used herein, refer to two or more elements that may be either directly connected, or connected by way of one or more intermediate elements. Additionally, the words “herein,” “above,” “below,” and words of similar import, when used in this application, shall refer to this application as a whole and not to any particular portions of this application. Where the context permits, words in the Detailed Description using the singular or plural number may also include the plural or singular number, respectively. The words “or” in reference to a list of two or more items, is intended to cover all of the

following interpretations of the word: any of the items in the list, all of the items in the list, and any combination of the items in the list.

[0108] It is to be understood that one or more features from one or more of the above-described embodiments may be combined with one or more features of one or more other ones of the above-described embodiments, so as to form further embodiments which are within the scope of the appended claims.

Numbered Clauses

[0109] Numbered clause 1. A solid state switch, comprising:

[0110] a first metal-oxide-semiconductor field-effect transistor, MOSFET, comprising: a first terminal, a second terminal, a bulk terminal and a gate terminal, and configured to be switched between an on-state and an off-state;

[0111] a second MOSFET in series with the first MOSFET, wherein the second MOSFET comprises a first terminal, a second terminal, a bulk terminal, and a gate terminal, and wherein the second terminal of the first MOSFET is connected to the second terminal of the second MOSFET; and,

[0112] a first buffer comprising an output terminal coupled to the bulk terminal of the first MOSFET, and an input terminal coupled to the first terminal of the first MOSFET.

[0113] Numbered clause 2. The solid state switch of numbered clause 1, wherein the first buffer is: a unity gain buffer, UGB; a voltage follower; or a cascade complementary source follower.

[0114] Numbered clause 3. The solid state switch of numbered clause 1 or 2, further comprising a second buffer comprising an output terminal coupled to the bulk terminal of the second MOSFET, and an input terminal coupled to the first terminal of the second MOSFET.

[0115] Numbered clause 4. The solid state switch of numbered clause 3, wherein the second buffer is: a unity gain buffer, UGB; a voltage follower; or a cascade complementary source follower.

[0116] Numbered clause 5. The solid state switch of any previous numbered clause, wherein the first buffer is a UGB so as to reduce leakage at the first terminal of the first MOSFET.

[0117] Numbered clause 6. The solid state switch of any previous numbered clause, wherein the first MOSFET is a low voltage MOSFET, and the second MOSFET is a low voltage MOSFET.

[0118] Numbered clause 7. The solid state switch of any previous numbered clause, wherein the first MOSFET is an isolated MOSFET, and the second MOSFET is an isolated MOSFET.

[0119] Numbered clause 8. The solid states switch of any previous numbered clause, wherein the first terminal of the first MOSFET is a drain terminal, wherein the first terminal of the second MOSFET is a drain terminal, wherein the second terminal of the first MOSFET is a source terminal, wherein the second terminal of the second MOSFET is a source terminal.

[0120] Numbered clause 9. The solid state switch of any preceding numbered clause, wherein the first and second MOSFET are both a first-type MOSFET, wherein the first-type is n-type or p-type.

[0121] Numbered clause 10. The solid state switch of numbered clause 9, further comprising an electrical component for overvoltage protection, wherein the electrical component is arranged in series between the first and second MOSFETs.

[0122] Numbered clause 11. The solid state switch of numbered clause 10, wherein the electrical component is a third MOSFET, wherein the third MOSFET is a second-type MOSFET, wherein the second-type is p-type or n-type, wherein the first-type is different to the second-type.

[0123] Numbered clause 12. The solid state switch of numbered clauses 10 or 11, wherein the electrical component protects the solid state switch in applications where overvoltage conditions can cause damage to a device to which the switch is connected.

[0124] Numbered clause 13. The solid state switch of any of numbered clauses 1 to 9, wherein the solid state switch is a transmission-gate switch comprising the first MOSFET in parallel with a third MOSFET, wherein the third MOSFET, comprises: a first terminal; a second terminal; a bulk terminal; and, a gate terminal, and the third MOSFET is configured to be switched between an on-state and an off-state, wherein the third MOSFET is a first-type MOSFET, wherein the first MOSFET is a second-type MOSFET, wherein the first-type is n-type or p-type, wherein the second-type is p-type or n-type, wherein the first-type is different to the second-type.

[0125] Numbered clause 14. The solid state switch of numbered clause 13, wherein the solid state switch further comprises a fourth MOSFET in parallel with the second MOSFET, wherein the fourth MOSFET comprises: a first terminal; a second terminal; a bulk terminal; and, a gate terminal, and the fourth MOSFET is configured to be switched between an on-state and an off-state, wherein the fourth MOSFET is a third-type MOSFET, wherein the second MOSFET is a fourth-type MOSFET, wherein the third-type is n-type or p-type, wherein the fourth-type is p-type or n-type, wherein the third-type is different to the fourth-type.

[0126] Numbered clause 15. The solid state switch of numbered clause 14, wherein the fourth MOSFET is in series with the third MOSFET, and wherein the second terminal of the third MOSFET is connected to the second terminal of the fourth MOSFET.

[0127] Numbered clause 16. The solid state switch of numbered clause 15, wherein the output terminal of the first buffer is coupled to the bulk terminal of the third MOSFET, and the input terminal of the first buffer is coupled to the first terminal of the third MOSFET; and/or when dependent on numbered clause 3, wherein the output terminal of the second buffer is coupled to the bulk terminal of the fourth MOSFET, and the input terminal of the second buffer is coupled to the first terminal of the fourth MOSFET.

[0128] Numbered clause 17. The solid states switch of numbered clause 16, wherein the first terminal of the third MOSFET is a drain terminal, wherein the first terminal of the fourth MOSFET is a drain terminal, wherein the second terminal of the third MOSFET is a source terminal, wherein the second terminal of the fourth MOSFET is a source terminal.

[0129] Numbered clause 18. The solid state switch of any of numbered clauses 13 to 17, wherein the third MOSFET is a low voltage MOSFET, and the fourth MOSFET is a low voltage MOSFET.

[0130] Numbered clause 19. The solid state switch of any of numbered clauses 13 to 18, wherein the third MOSFET is an isolated MOSFET, and the fourth MOSFET is an isolated MOSFET.

[0131] Numbered clause 20. A solid state switch, comprising:

[0132] a first metal-oxide-semiconductor field-effect transistor, MOSFET, comprising: a first terminal, a second terminal, a bulk terminal, and a gate terminal, and configured to be switched between an on-state and an off-state;

[0133] a second MOSFET in series with the first MOSFET, wherein the second comprises: a first terminal, a second terminal, a bulk terminal, and a gate terminal, and wherein the second terminal of the first MOSFET is coupled to the second terminal of the second MOSFET;

[0134] means for providing a current source to the bulk terminal of the first MOSFET based on the voltage at the first terminal of the first MOSFET; and means for providing a current source to the bulk terminal of the second MOSFET based on the voltage at the first terminal of the second MOSFET.

1. A solid state switch, comprising:

a first metal-oxide-semiconductor field-effect transistor, MOSFET,

comprising: a first terminal, a second terminal, a bulk terminal and a gate terminal, and configured to be switched between an on-state and an off-state;

a second MOSFET in series with the first MOSFET, wherein the second MOSFET comprises a first terminal, a second terminal, a bulk terminal, and a gate terminal, and wherein the second terminal of the first MOSFET is connected to the second terminal of the second MOSFET; and,

a first buffer comprising an output terminal coupled to the bulk terminal of the first MOSFET, and an input terminal coupled to the first terminal of the first MOSFET.

2. The solid state switch of claim 1, wherein the first buffer is: a unity gain buffer, UGB; a voltage follower; or a cascade complementary source follower.

3. The solid state switch of claim 1, further comprising a second buffer comprising an output terminal coupled to the bulk terminal of the second MOSFET, and an input terminal coupled to the first terminal of the second MOSFET.

4. The solid state switch of claim 3, wherein the second buffer is: a unity gain buffer, UGB; a voltage follower; or a cascade complementary source follower.

5. The solid state switch of claim 1, wherein the first buffer is a UGB so as to reduce leakage at the first terminal of the first MOSFET.

6. The solid state switch of claim 1, wherein the first MOSFET is a low voltage MOSFET, and the second MOSFET is a low voltage MOSFET.

7. The solid state switch of claim 1, wherein the first MOSFET is an isolated MOSFET, and the second MOSFET is an isolated MOSFET.

8. The solid states switch of claim 1, wherein the first terminal of the first MOSFET is a drain terminal, wherein the first terminal of the second MOSFET is a drain terminal, wherein the second terminal of the first MOSFET is a source terminal, wherein the second terminal of the second MOSFET is a source terminal.

9. The solid state switch of claim 1, wherein the first and second MOSFET are both a first-type MOSFET, wherein the first-type is n-type or p-type.

10. The amplifier circuit according to claim 1, wherein the first and second feedback passive circuit components are first and second feedback resistors.

11. The solid state switch of claim 10, wherein the electrical component is a third MOSFET, wherein the third MOSFET is a second-type MOSFET, wherein the second-type is p-type or n-type, wherein the first-type is different to the second-type.

12. The solid state switch of claim 10, wherein the electrical component protects the solid state switch in applications where overvoltage conditions can cause damage to a device to which the switch is connected.

13. The solid state switch of any of claim 1, wherein the solid state switch is a transmission-gate switch comprising the first MOSFET in parallel with a third MOSFET, wherein the third MOSFET, comprises: a first terminal; a second terminal; a bulk terminal; and, a gate terminal, and the third MOSFET is configured to be switched between an on-state and an off-state, wherein the third MOSFET is a first-type MOSFET, wherein the first MOSFET is a second-type MOSFET, wherein the first-type is n-type or p-type, wherein the second-type is p-type or n-type, wherein the first-type is different to the second-type.

14. The solid state switch of claim 13, wherein the solid state switch further comprises a fourth MOSFET in parallel with the second MOSFET, wherein the fourth MOSFET comprises: a first terminal; a second terminal; a bulk terminal; and, a gate terminal, and the fourth MOSFET is configured to be switched between an on-state and an off-state, wherein the fourth MOSFET is a third-type MOSFET, wherein the second MOSFET is a fourth-type MOSFET, wherein the third-type is n-type or p-type, wherein the fourth-type is p-type or n-type, wherein the third-type is different to the fourth-type.

15. The solid state switch of claim 14,

wherein the fourth MOSFET is in series with the third MOSFET, and wherein the second terminal of the third MOSFET is connected to the second terminal of the fourth MOSFET.

16. The solid state switch of claim 15, wherein the output terminal of the first buffer is coupled to the bulk terminal of the third MOSFET, and the input terminal of the first buffer is coupled to the first terminal of the third MOSFET.

17. The solid states switch of claim 16, wherein the first terminal of the third MOSFET is a drain terminal, wherein the first terminal of the fourth MOSFET is a drain terminal, wherein the second terminal of the third MOSFET is a source terminal, wherein the second terminal of the fourth MOSFET is a source terminal.

18. The solid state switch of any of claim 13, wherein the third MOSFET is a low voltage MOSFET, and the fourth MOSFET is a low voltage MOSFET.

19. The solid state switch of any of claim 13, wherein the third MOSFET is an isolated MOSFET, and the fourth MOSFET is an isolated MOSFET.

20. A solid state switch, comprising:

a first metal-oxide-semiconductor field-effect transistor, MOSFET, comprising: a first terminal, a second terminal, a bulk terminal, and a gate terminal, and configured to be switched between an on-state and an off-state;

a second MOSFET in series with the first MOSFET, wherein the second comprises: a first terminal, a second terminal, a bulk terminal, and a gate terminal, and wherein the second terminal of the first MOSFET is coupled to the second terminal of the second MOSFET; means for providing a current source to the bulk terminal of the first MOSFET based on the voltage at the first terminal of the first MOSFET; and

means for providing a current source to the bulk terminal of the second MOSFET based on the voltage at the first terminal of the second MOSFET.

* * * * *