



US012405513B2

(12) **United States Patent**
Zhuang et al.

(10) **Patent No.:** **US 12,405,513 B2**
(45) **Date of Patent:** **Sep. 2, 2025**

(54) **OPTICAL SYSTEM**

(71) Applicant: **TDK TAIWAN CORP.**, Taoyuan (TW)

(72) Inventors: **Po-Xiang Zhuang**, Taoyuan (TW);
Wei-Jhe Shen, Taoyuan (TW); **Ko-Lun**
Chao, Taoyuan (TW)

(73) Assignee: **TDK TAIWAN CORP.**, Taoyuan (TW)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 181 days.

(21) Appl. No.: **18/318,243**

(22) Filed: **May 16, 2023**

(65) **Prior Publication Data**

US 2023/0367179 A1 Nov. 16, 2023

Related U.S. Application Data

(60) Provisional application No. 63/342,285, filed on May
16, 2022.

(51) **Int. Cl.**
G03B 9/42 (2021.01)
G03B 30/00 (2021.01)

(52) **U.S. Cl.**
CPC **G03B 9/42** (2013.01); **G03B 30/00**
(2021.01); **G03B 2205/0069** (2013.01)

(58) **Field of Classification Search**

CPC G03B 35/00; G03B 35/08; G03B 19/22;
H04N 13/239; H04N 13/243; H04N
23/698

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2022/0121086 A1* 4/2022 Wang G03B 11/043
2023/0027221 A1* 1/2023 Ushio G06F 1/1616

* cited by examiner


Primary Examiner — Noam Reisner

(74) *Attorney, Agent, or Firm* — Muncy, Geissler, Olds &
Lowe, P.C.

(57) **ABSTRACT**

An optical system includes a first optical mechanism, a
second optical mechanism and a third optical mechanism.
The first optical mechanism includes a movable part, a fixed
assembly, and a driving assembly. The movable part is
movable relative to the fixed assembly. The driving assem-
bly is configured to drive the movable part to move relative
to the fixed assembly. When viewed along a first axis, a base
of the fixed assembly is disposed between the second optical
mechanism and the third optical mechanism.

20 Claims, 8 Drawing Sheets

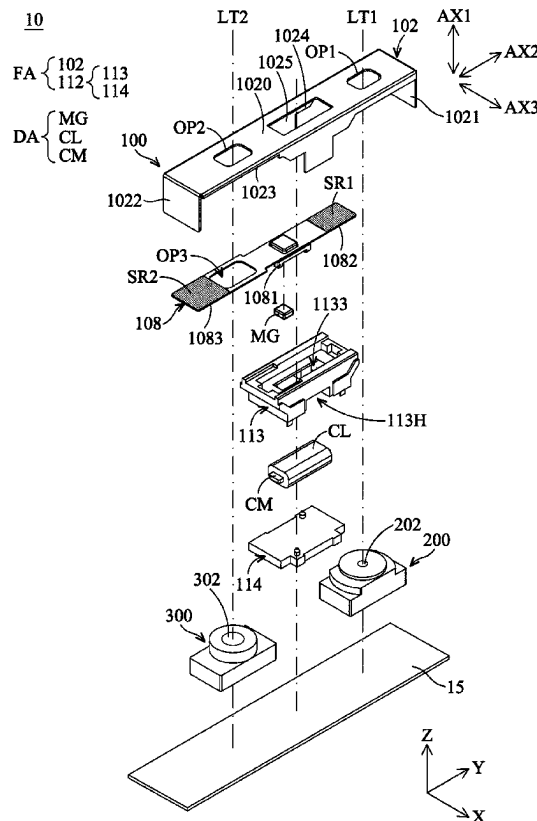

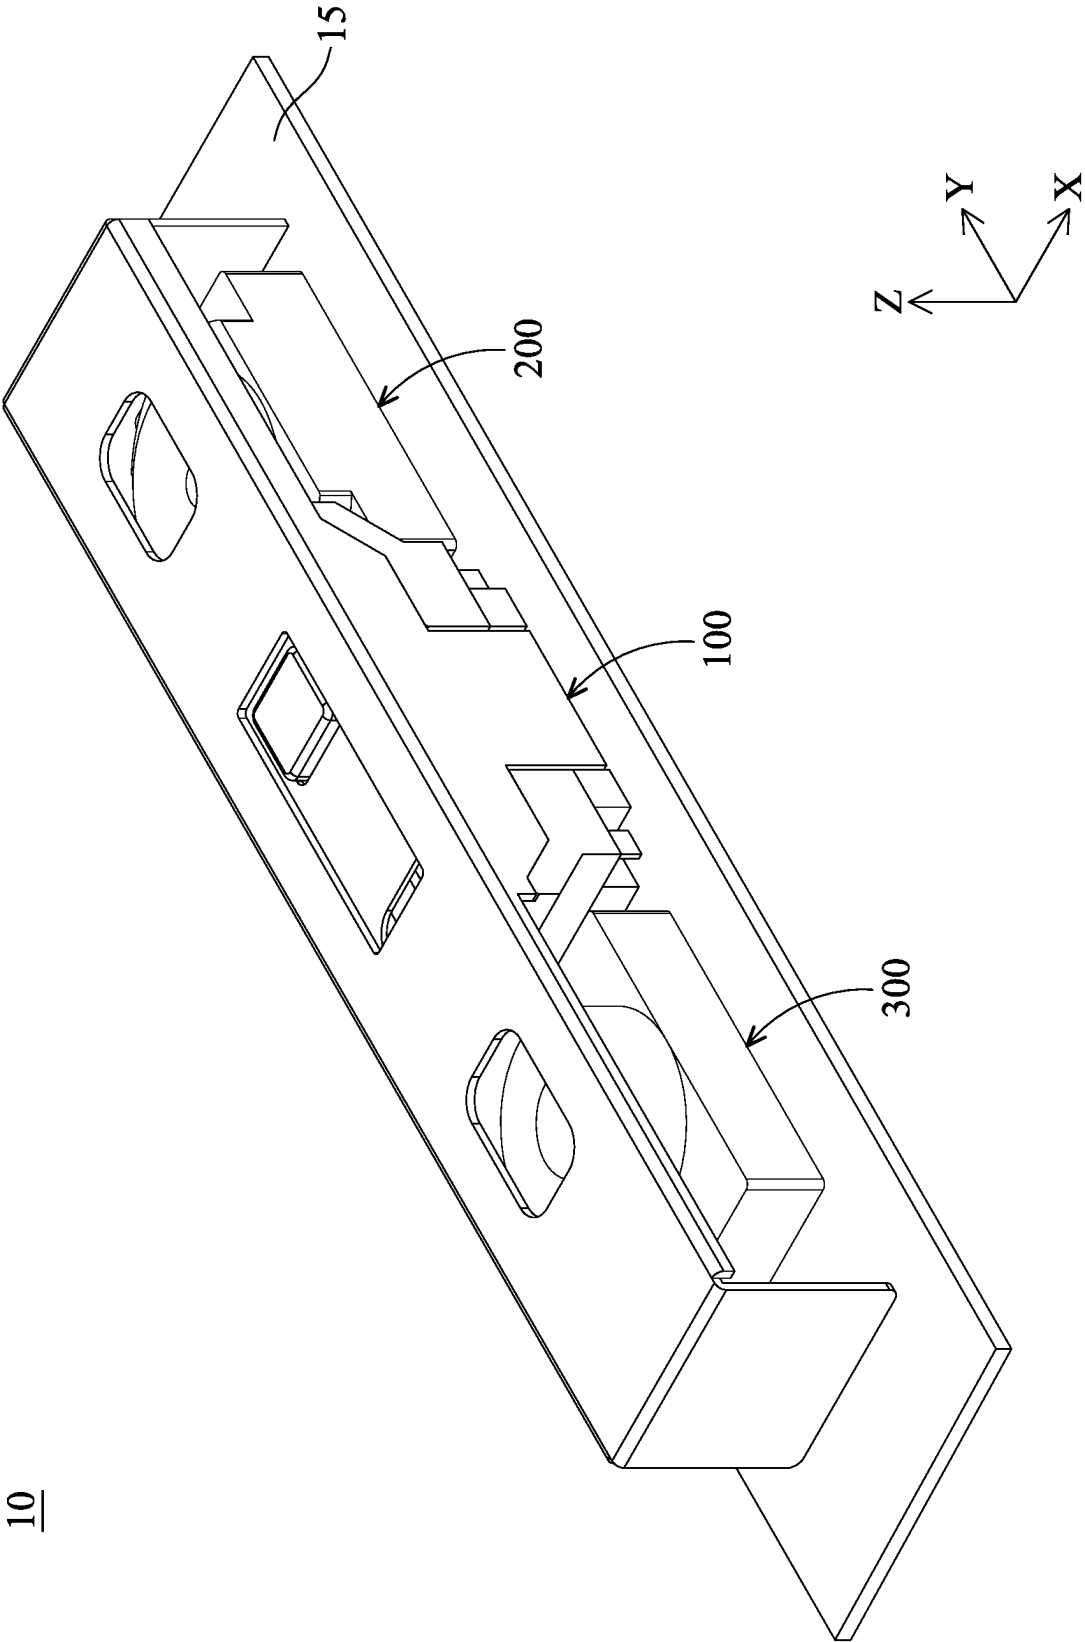


FIG. 1

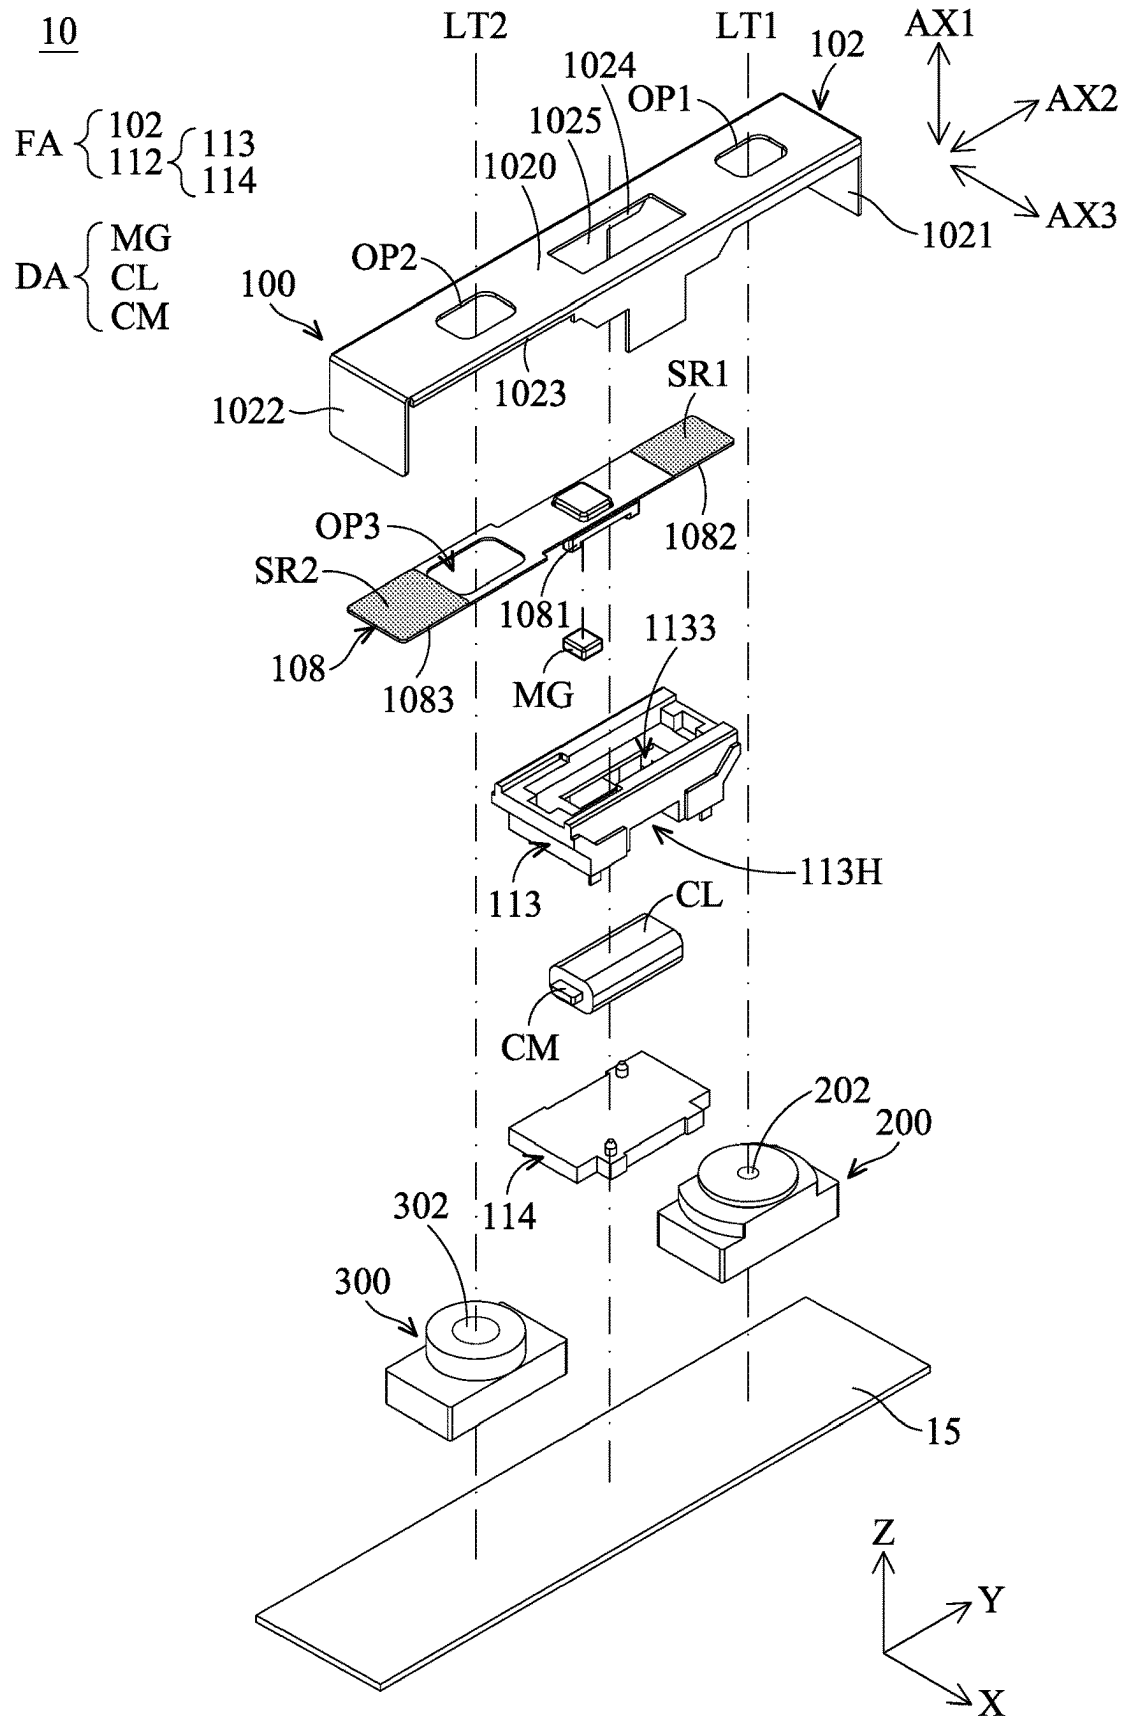


FIG. 2

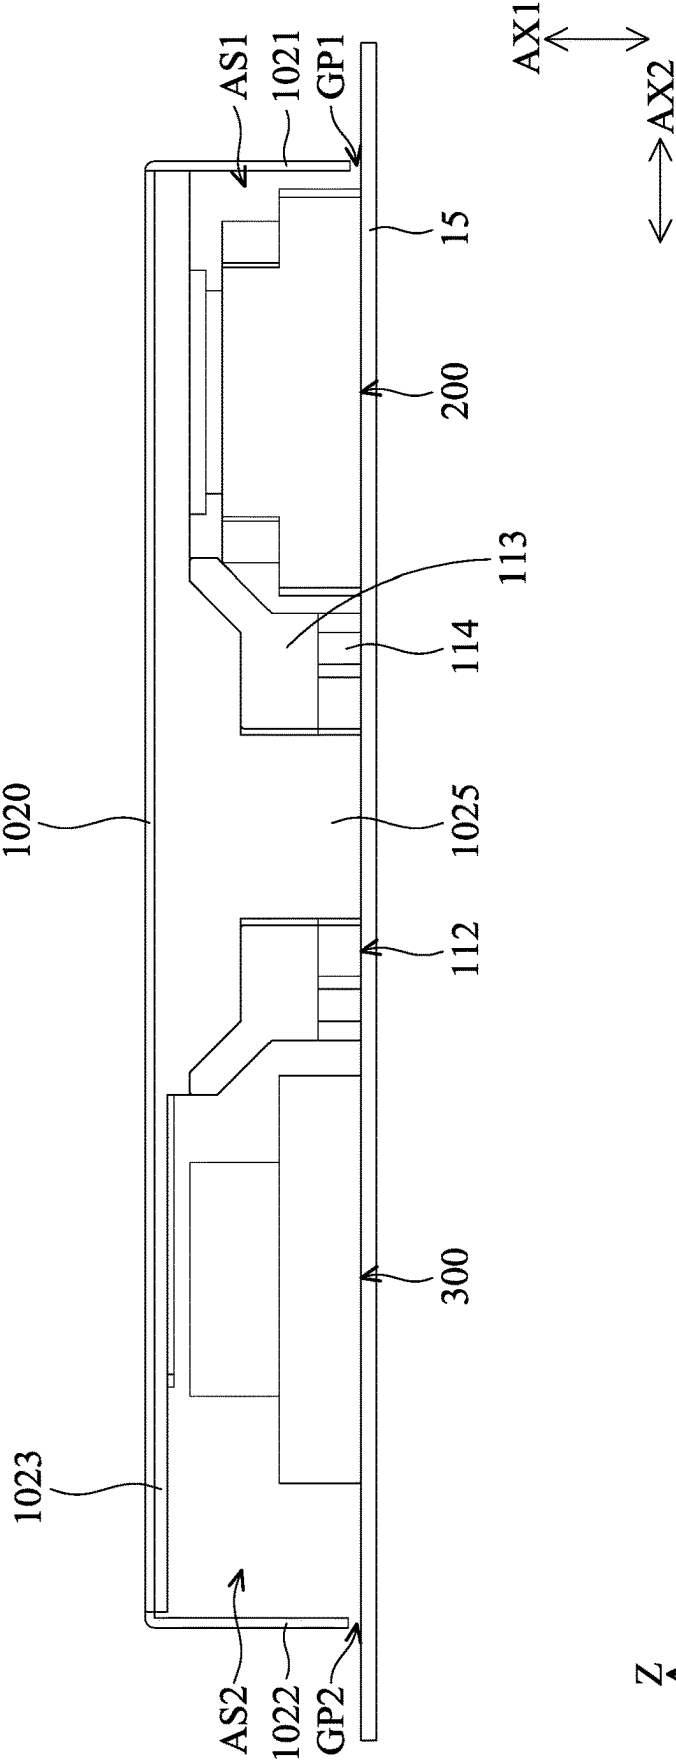


FIG. 3

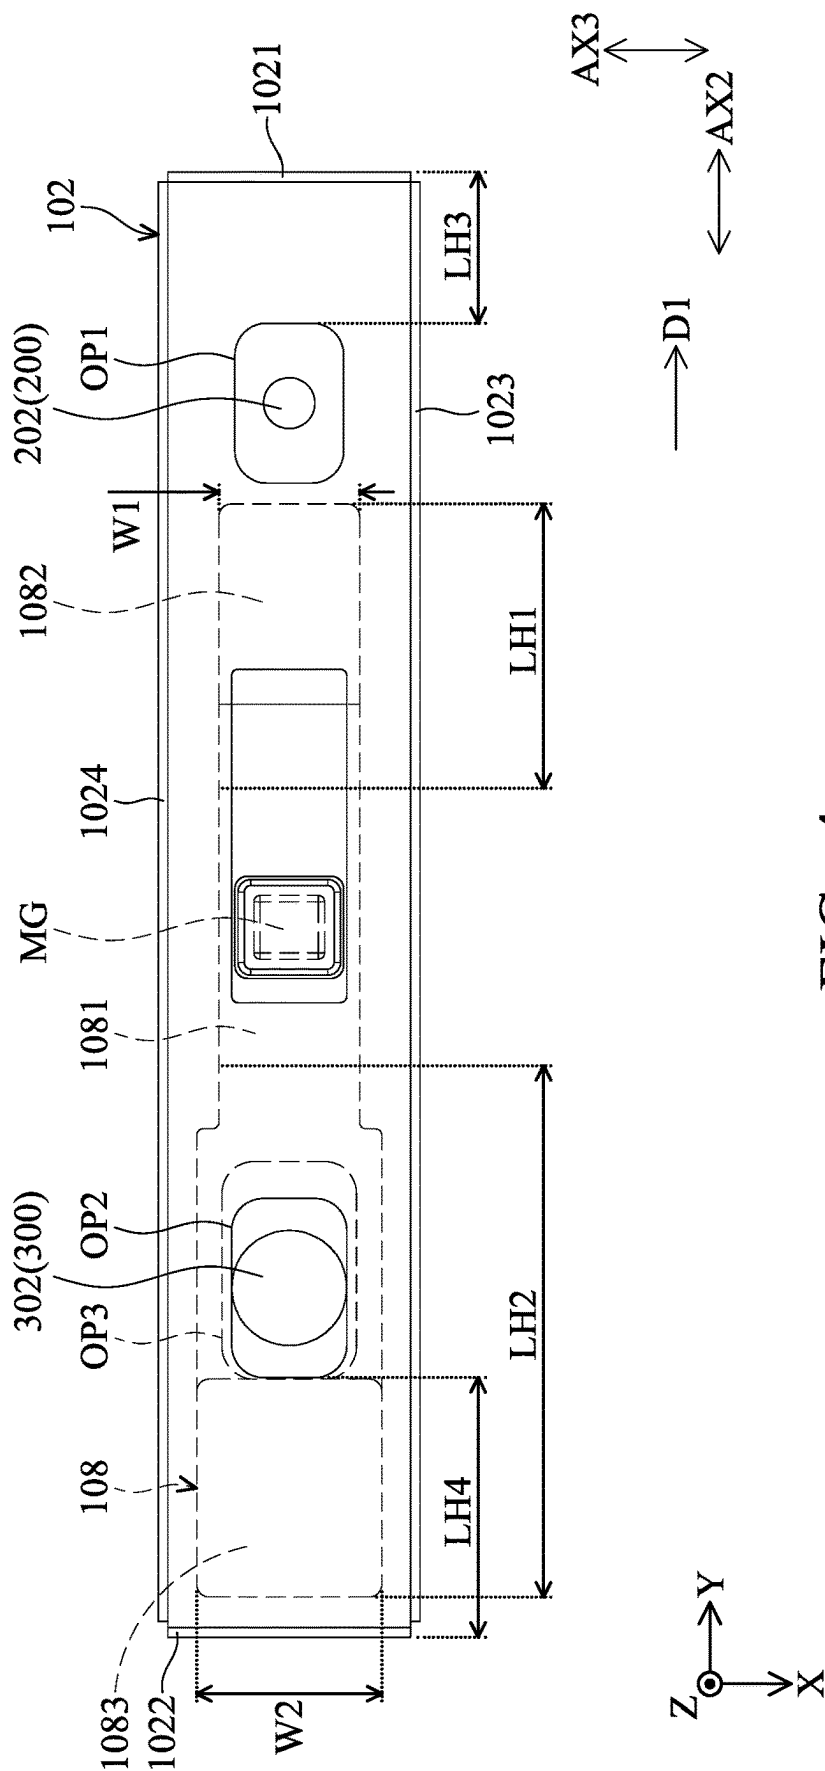


FIG. 4

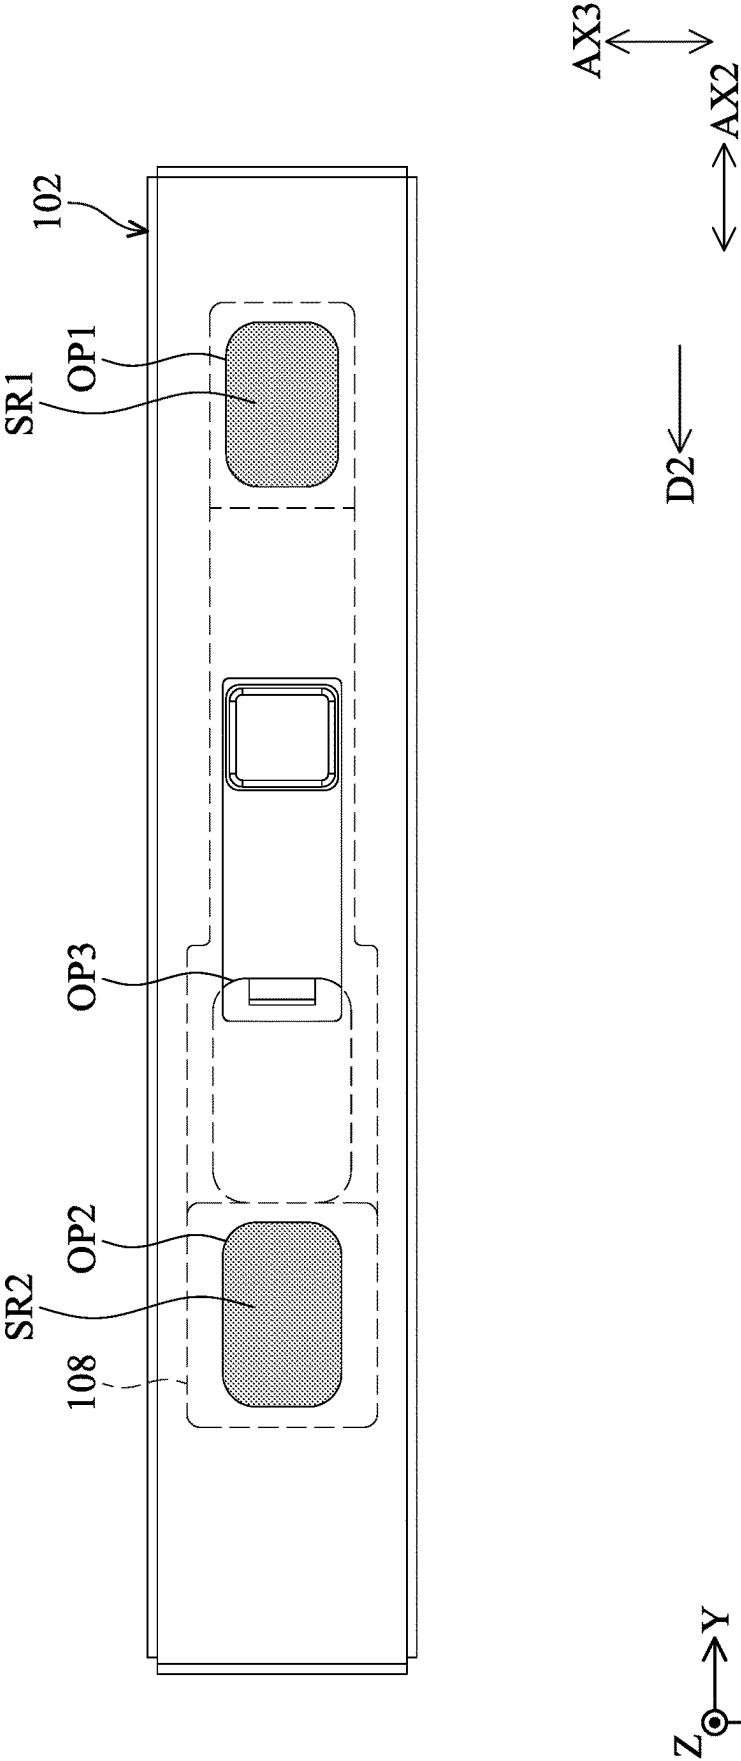
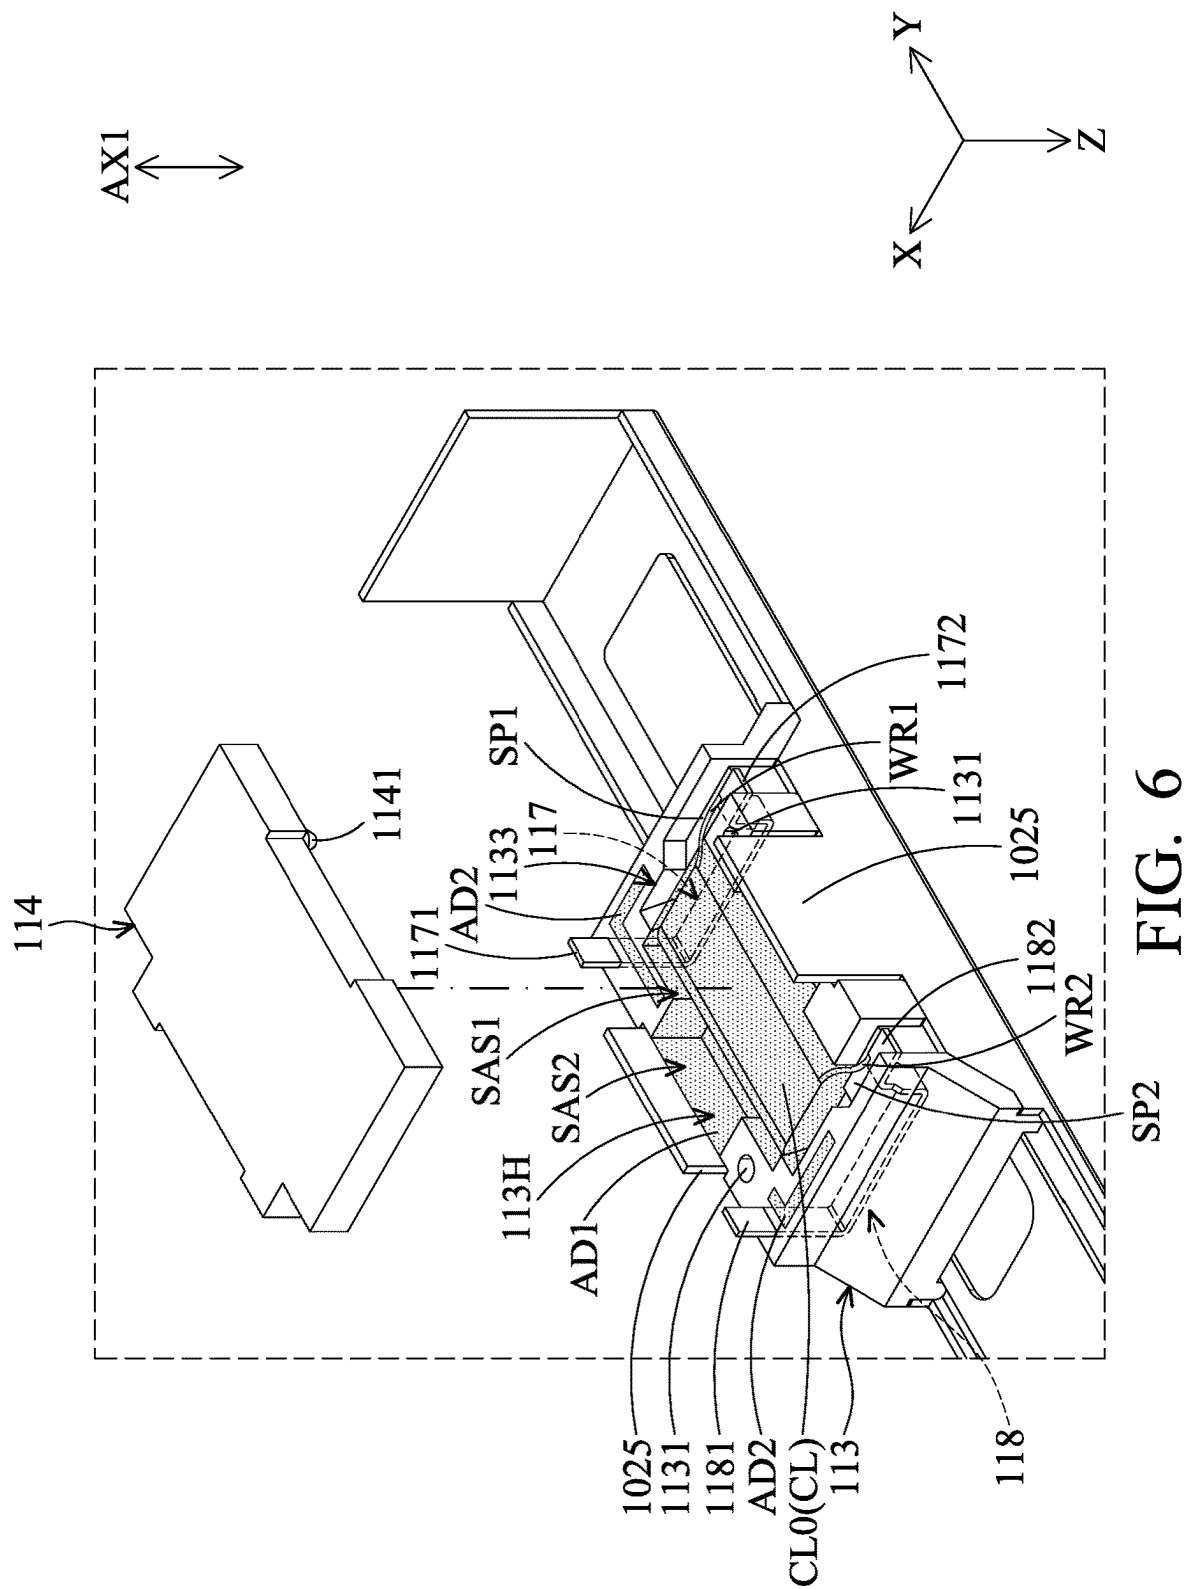


FIG. 5



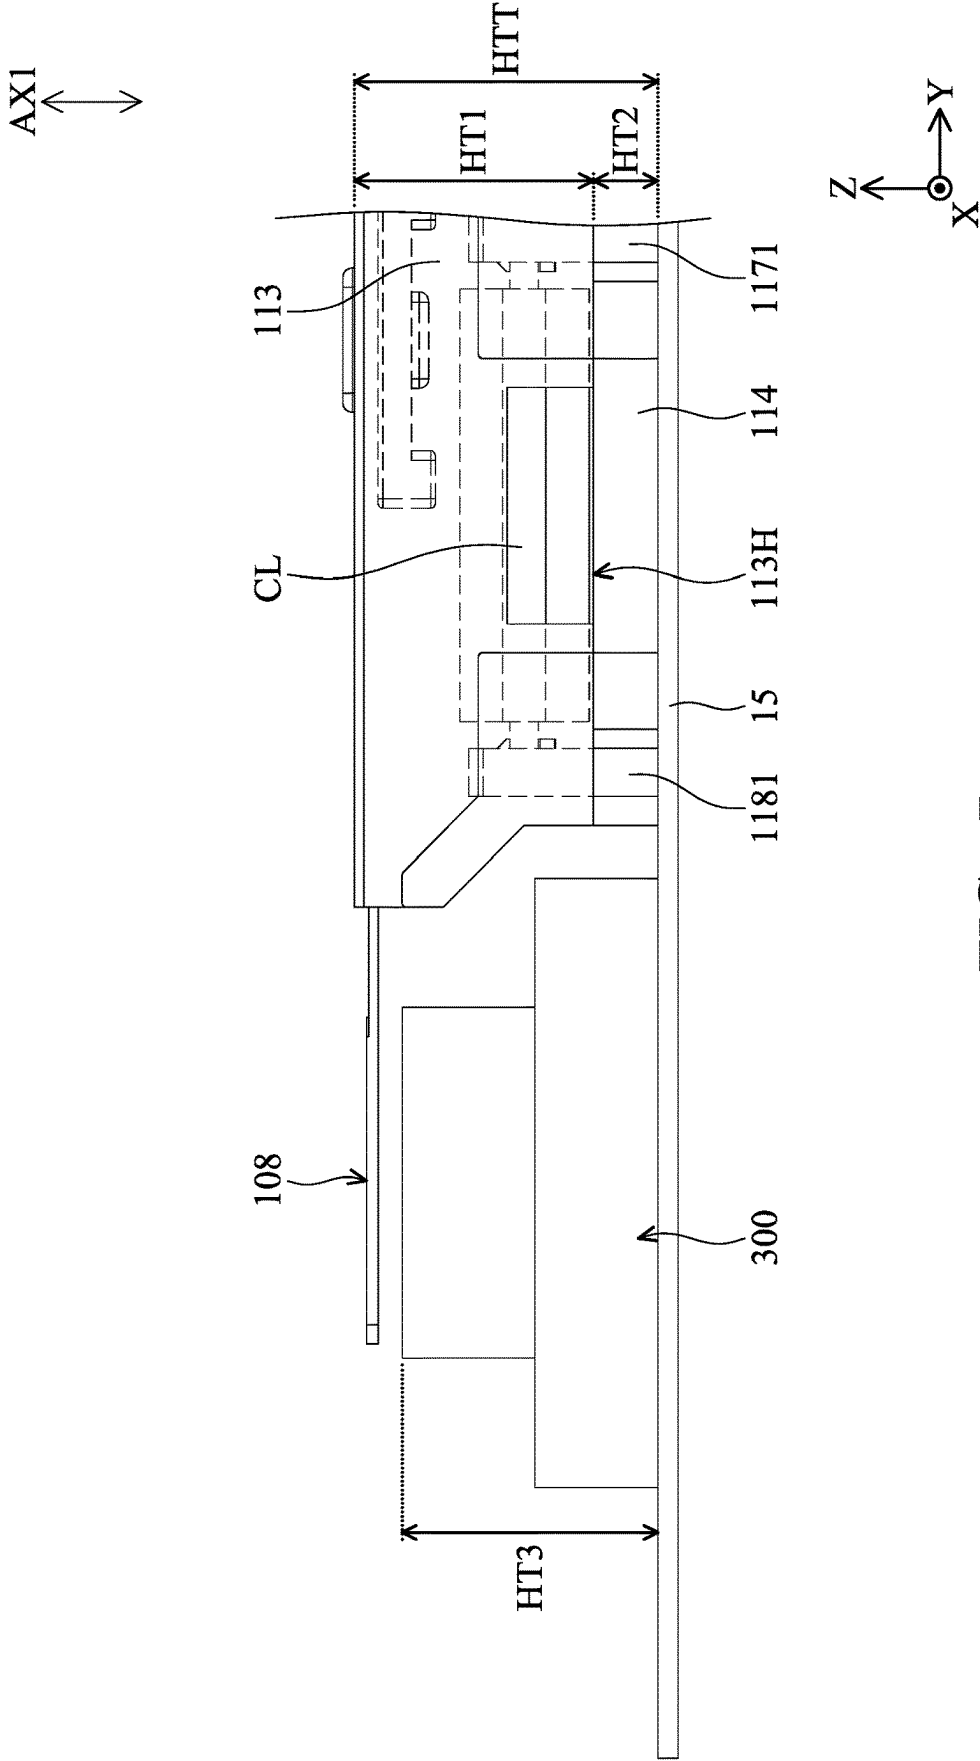


FIG. 7

AX1

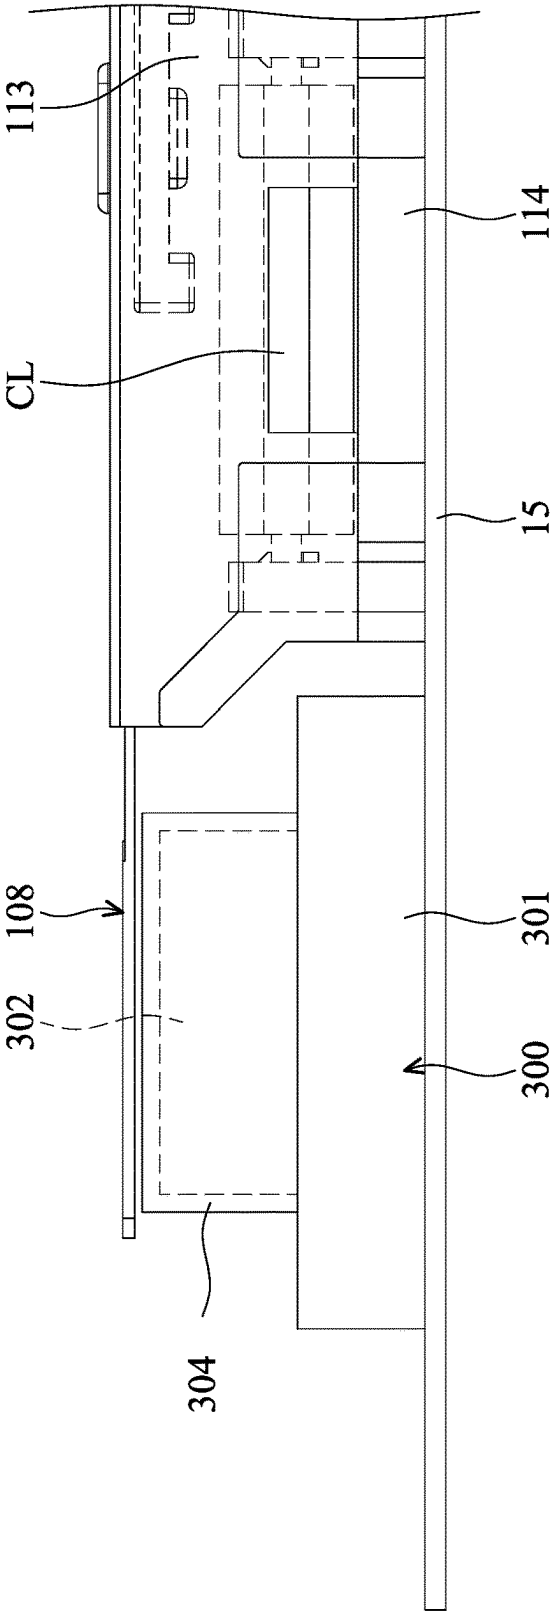


FIG. 8

1

OPTICAL SYSTEM**CROSS REFERENCE TO RELATED APPLICATIONS**

This application claims the benefit of U.S. Provisional Application No. 63/342,285, filed May 16, 2022, the entirety of which is incorporated by reference herein.

BACKGROUND OF THE INVENTION**Field of the Disclosure**

The present disclosure relates to an optical system, and in particular it relates to an optical system with a shutter structure.

Description of the Related Art

As technology has developed, many of today's electronic devices (such as smartphones) have a camera, and offer video functionality. Using the camera modules disposed on electronic devices, users can operate their electronic devices to capture photographs and record videos.

Today's design of electronic devices continues to follow the trend of miniaturization, meaning that the various components of the camera module or its structure must also be continuously reduced, so as to achieve miniaturization. In general, a driving mechanism in the camera module has a camera lens and a shutter mechanism. However, although the existing driving mechanism can achieve the aforementioned functions of photographing or video recording, they still cannot meet all the needs of the users.

Therefore, how to design a camera module capable of capturing images and capable of achieving miniaturization are topics nowadays that need to be discussed and solved.

BRIEF SUMMARY OF THE INVENTION

Accordingly, one objective of the present disclosure is to provide an optical system to solve the above problems.

According to some embodiments of the disclosure, an optical system is provided and includes a first optical mechanism, a second optical mechanism and a third optical mechanism. The first optical mechanism includes a movable part, a fixed assembly, and a driving assembly. The movable part is movable relative to the fixed assembly. The driving assembly is configured to drive the movable part to move relative to the fixed assembly. When viewed along the first axis, the base of the fixed assembly is disposed between the second optical mechanism and the third optical mechanism.

According to some embodiments, the fixed assembly includes a first opening and a second opening. The first opening is configured to allow a first light beam to pass through to enter the second optical mechanism. The second opening is configured to allow a second light beam to pass through to enter the third optical mechanism. The first light beam is parallel to the second light beam. The second optical mechanism includes a camera module configured to capture an image. The third optical mechanism includes a depth-sensing module configured to measure distance. When viewed along the first axis, the first opening and the second opening are arranged along a second axis. The first axis is parallel to the first light beam. The second axis is perpendicular to the first axis.

According to some embodiments, when viewed along the first axis, the driving assembly is located between the second

2

optical mechanism and the third optical mechanism. The optical system further includes a base plate, and the base of the first optical mechanism, the second optical mechanism and the third optical mechanism are fixedly disposed on the base plate and located on the same plane. When viewed along the first axis, the third optical mechanism, the base and the second optical mechanism are arranged along the second axis in sequence. When viewed along the first axis, the fixed assembly has a long strip-shaped structure extending along the second axis.

According to some embodiments, the fixed assembly further includes an outer frame fixedly connected to the base. When viewed along the first axis, the outer frame has a long strip-shaped structure extending along the second axis. The outer frame has a base portion, a first bending portion and a second bending portion. The base portion extends along the second axis. The first bending portion and the second bending portion are formed on opposite ends along the second axis of the base portion. The first bending portion and the second bending portion extend along the first axis.

According to some embodiments, when viewed along a third axis, there is a gap between the first bending portion and the base plate. The third axis is perpendicular to the first axis and the second axis. When viewed along a third axis, there is another gap between the second bending portion and the base plate. The outer frame further has a first side portion and a second side portion. The first side portion and the second side portion are formed on opposite sides along the third axis of the base portion. The first side portion and the second side portion extend along the second axis and are configured to strengthen the structural strength of the outer frame.

According to some embodiments, the first bending portion and the base form a first accommodation space. At least part of the second optical mechanism is located in the first accommodation space. The second bending portion and the base form a second accommodation space. At least a part of the third optical mechanism is located in the second accommodation space.

According to some embodiments, the base includes a first base body and a second base body. The first base body is connected to the second base body in a detachable manner. The first base body forms a first coupling structure. The second base body forms a second coupling structure corresponding to the first coupling structure. The first coupling structure is configured to be coupled to the second coupling structure so that the first base body is fixedly connected to the second base body. The first coupling structure includes one of a positioning column and a positioning hole. The second coupling structure includes the other one of the positioning column and the positioning hole.

According to some embodiments, when viewed along the third axis, the total height of the first base body and the second base body relative to the base plate is greater than the height of the third optical mechanism relative to the base plate. The driving assembly includes a coil, a magnetic element and a magnetically conductive element. The magnetic element corresponds to the coil. The magnetically conductive element corresponds to the coil and has a magnetically conductive material. The coil surrounds the magnetically conductive element. The magnetically conductive element has a plate-shaped structure and is parallel to the second axis. The first base body further has an accommodating groove configured to accommodate the magnetically conductive element and the coil. When viewed along the third axis, the second base body does not overlap the coil.

3

According to some embodiments, the first optical mechanism further includes a first circuit member and a second circuit member which are disposed at the first base body. The first circuit member has a first electrical connection portion and a first welding portion. The first electrical connection portion and the first welding portion are exposed from the first base body. The second circuit member has a second electrical connection portion and a second welding portion. The second electrical connection portion and the second welding portion are exposed from the first base body. When viewed along the first axis, the first electrical connection portion and the first welding portion are located on both sides of the first base body. When viewed along the first axis, the second electrical connection portion and the second welding portion are located on both sides of the first base body.

According to some embodiments, the first leading end of the coil is configured to connect to the first welding portion. A first heat-insulation portion is disposed between the first welding portion and the main body of the coil. The second leading end of the coil is configured to connect to the second welding portion. A second heat-insulation portion is disposed between the second welding portion and the main body of the coil. The first heat-insulation portion, the second heat-insulation portion and the first base body are integrally formed as one piece.

According to some embodiments, when the coil is disposed in the accommodating groove, a first accommodating subspace is formed between the main body and the first base body. The first optical mechanism further includes a first adhesive element filled in the first accommodating subspace configured to affix the main body to the first base body. When viewed along the first axis, the first adhesive element completely overlaps the main body of the coil.

According to some embodiments, the first optical mechanism further includes a second adhesive element disposed between the first base body and the second base body. The second adhesive element is configured to affix the first base body to the second base body. The thermal conductivity coefficient of the first adhesive element is different from the thermal conductivity coefficient of the second adhesive element.

According to some embodiments, the first base body further has two exposing portions connected to the accommodating groove. When viewed along the third axis, the coil overlaps the two exposing portions. The outer frame further has two connection structures extending along the first axis. After the outer frame covers the first base body, the two connection structures cover the two exposing portions.

According to some embodiments, after the outer frame covers the first base body, a second accommodating subspace is formed between the two connection structures and the main body and is connected to the first accommodating subspace. The first adhesive element is disposed in the second accommodating subspace and contacts the two connection structures.

According to some embodiments, when the movable part is located at a first preset position relative to the fixed assembly and when viewed along the first axis, the movable part does not overlap with the first opening. When the movable part is located at the first preset position and when viewed along the first axis, the movable part does not overlap the second opening. The movable part includes a holding portion, a first side end portion and a second side end portion. The holding portion is configured to hold the magnetic element. When viewed along the first axis, the holding portion is connected between the first side end

4

portion and the second side end portion. When viewed along the first axis, the driving assembly is located between the first opening and the second opening.

According to some embodiments, when viewed along the first axis, the length of the second side end portion along the second axis is different from the length of the first side end portion along the second axis. When viewed along the first axis, the length of the second side end portion along the second axis is greater than the length of the first side end portion along the second axis. When viewed along the first axis, the width of the second side end portion along the third axis is different from the width of the first side end portion along the third axis. When viewed along the first axis, the width of the second side end portion along the third axis is greater than the width of the first side end portion along the third axis.

According to some embodiments, a third opening is formed on the second side end portion. When the movable part is located at the first preset position and when viewed along the first axis, the second opening overlaps the third opening. The size of the first opening is the same as the size of the second opening. The size of the third opening is larger than the size of the second opening. The second optical mechanism has a second camera lens corresponding to the first opening. The third optical mechanism has a third camera lens corresponding to the second opening.

According to some embodiments, when viewed along the first axis, the distance between the first opening and the first bending portion along the second axis is different from the distance between the second opening and the second bending portion along the second axis. When viewed along the first axis, the distance between the first opening and the first bending portion along the second axis is smaller than the distance between the second opening and the second bending portion along the second axis.

According to some embodiments, when the movable part is located at a second preset position relative to the fixed assembly and when viewed along the first axis, the movable part overlaps the first opening. When the first movable part is located at the second preset position and when viewed along the first axis, the movable part overlaps the second opening. The movable part further includes a first shading element and a second shading element respectively disposed on the first side end portion and the second side end portion. The first shading element and the second shading element are made of light-absorbing material. The second shading element is adjacent to the third opening. When the first movable part is located at the second preset position and viewed along the first axis, the first shading element and the second shading element respectively cover the first opening and the second opening.

According to some embodiments, the third optical mechanism further includes a third camera lens and a third base. The third camera lens is disposed on the third base and is located between the movable part and the third base. The third optical mechanism further includes a supporting member disposed on the third base and configured to support the movable part. The supporting member sheathes the third camera lens. The supporting member has a ring structure. The supporting member is made of a light-absorbing material.

The present disclosure provides an optical system, including a first optical mechanism, a second optical mechanism and a third optical mechanism, and the outer frame of the first optical mechanism has a first opening and a second opening respectively corresponding to the second optical mechanism and third optical mechanism. In some embodi-

ments, the driving assembly of the first optical mechanism can drive the movable part to move to selectively shield or not shield the first opening and the second opening at the same time.

In some embodiments, the base of the first optical mechanism can include a first base body and a second base body. The second base body can increase the height of the first base body relative to the base plate, so that the first optical mechanism is suitable for a higher camera lens module (such as the third optical mechanism).

In addition, the first base body has two exposing portions. When the outer frame is covered on the first base body, the first adhesive element can be connected to the two connection structures of the outer frame through the two exposing portions. Based on this design, the heat generated by the coil can be conducted to the outer frame made of metal through the first adhesive element, so as to achieve the advantage of rapid heat dissipation.

Additional features and advantages of the disclosure will be set forth in the description which follows, and, in part, will be obvious from the description, or can be learned by practice of the principles disclosed herein. The features and advantages of the disclosure can be realized and obtained by means of the instruments and combinations pointed out in the appended claims. These and other features of the disclosure will become more fully apparent from the following description and appended claims, or can be learned by the practice of the principles set forth herein.

BRIEF DESCRIPTION OF THE DRAWINGS

Aspects of the present disclosure are best understood from the following detailed description when read with the accompanying figures. It is noted that, in accordance with the standard practice in the industry, various features are not drawn to scale. In fact, the dimensions of the various features may be arbitrarily increased or reduced for clarity of discussion.

FIG. 1 is a perspective view of an optical system 10 according to an embodiment of the present disclosure.

FIG. 2 is an exploded diagram of the optical system 10 according to an embodiment of the present disclosure.

FIG. 3 is a side view of the optical system 10 according to an embodiment of the present disclosure.

FIG. 4 is a top view of the movable part 108 located in a first preset position according to an embodiment of the present disclosure.

FIG. 5 is a top view of the movable part 108 located in a second preset position according to an embodiment of the present disclosure.

FIG. 6 is a three-dimensional exploded view of the first optical mechanism 100 in another view according to an embodiment of the present disclosure.

FIG. 7 is a side view of a partial structure of the first optical mechanism 100 according to an embodiment of the present disclosure.

FIG. 8 is a side view of a partial structure of the first optical mechanism 100 according to another embodiment of the present disclosure.

DETAILED DESCRIPTION OF THE INVENTION

The following disclosure provides many different embodiments, or examples, for implementing different features of the provided subject matter. Specific examples of components and arrangements are described below to sim-

plify the present disclosure. These are, of course, merely examples and are not intended to be limiting. For example, the formation of a first feature over or on a second feature in the description that follows may include embodiments in which the first and second features are in direct contact, and may also include embodiments in which additional features may be disposed between the first and second features, such that the first and second features may not be in direct contact.

In addition, the present disclosure may repeat reference numerals and/or letters in the various examples. This repetition is for the purpose of simplicity and clarity and does not in itself dictate a relationship between the various embodiments and/or configurations discussed. Moreover, the formation of a feature on, connected to, and/or coupled to another feature in the present disclosure that follows may include embodiments in which the features are in direct contact, and may also include embodiments in which additional features may be disposed interposing the features, such that the features may not be in direct contact. In addition, spatially relative terms, for example, "vertical," "above," "over," "below," "bottom," etc. as well as derivatives thereof (e.g., "downwardly," "upwardly," etc.) are used in the present disclosure for ease of description of one feature's relationship to another feature. The spatially relative terms are intended to cover different orientations of the device, including the features.

Unless defined otherwise, all technical and scientific terms used herein have the same meaning as commonly understood by one of ordinary skill in the art to which this disclosure belongs. It should be appreciated that each term, which is defined in a commonly used dictionary, should be interpreted as having a meaning conforming to the relative skills and the background or the context of the present disclosure, and should not be interpreted in an idealized or overly formal manner unless defined otherwise.

Use of ordinal terms such as "first," "second", etc., in the claims to modify a claim element does not by itself connote any priority, precedence, or order of one claim element over another or the temporal order in which acts of a method are performed, but are used merely as labels to distinguish one claim element having a certain name from another element having the same name (but for use of the ordinal term) to distinguish the claim elements.

In addition, in some embodiments of the present disclosure, terms concerning attachments, coupling and the like, such as "connected" and "interconnected", refer to a relationship wherein structures are secured or attached to one another either directly or indirectly through intervening structures, as well as both movable or rigid attachments or relationships, unless expressly described otherwise.

Please refer to FIG. 1 to FIG. 3. FIG. 1 is a perspective view of an optical system 10 according to an embodiment of the present disclosure, FIG. 2 is an exploded diagram of the optical system 10 according to an embodiment of the present disclosure, and FIG. 3 is a side view of the optical system 10 according to an embodiment of the present disclosure. The optical system 10 may be an optical camera module configured to hold and drive at least one optical element. The optical system 10 can be installed in various electronic devices or portable electronic devices, such as a smart phone or notebook computer, for users to perform image capturing functions.

In this embodiment, the optical system 10 may include a base plate 15, a first optical mechanism 100, a second optical mechanism 200, and a third optical mechanism 300. The base plate 15 is, for example, a main circuit board of a portable electronic device, but it is not limited thereto. The

first optical mechanism **100**, the second optical mechanism **200**, and the third optical mechanism **300** are disposed on the base plate **15** and located on the same plane. It should be noted that the size of the base plate **15** is not limited to the size illustrated in the figures.

The first optical mechanism **100** may include a fixed assembly **FA**, a movable part **108** and a driving assembly **DA**. In this embodiment, as shown in FIG. 2, the fixed assembly **FA** includes an outer frame **102** and a base **112**, and the movable part **108** can serve as a light-shielding plate or a shutter, but it is not limited thereto. In other embodiments, the movable part **108** can also serve as a filter or an aperture.

The outer frame **102** is fixedly disposed on and connected to the base **112**, and the outer frame **102** and the base **112** can be combined with each other to accommodate the movable part **108** and the driving assembly **DA**. The movable part **108** is movable relative to the fixed assembly **FA**, and the driving assembly **DA** is configured to drive the movable part **108** to move relative to the fixed assembly **FA**.

The outer frame **102** of the fixed assembly **FA** may include a first opening **OP1** and a second opening **OP2**. The first opening **OP1** is configured to allow a first light beam **LT1** to pass through to enter the second optical mechanism **200**, and the second opening **OP2** is configured to allow a second light beam **LT2** to pass through to enter the third optical mechanism **300**. The first light beam **LT1** is parallel to the second light beam **LT2**, and the first light beam **LT1** is, for example, parallel to the Z-axis.

In this embodiment, the second optical mechanism **200** may be a camera module configured to receive the first light beam **LT1** to capture an image. The third optical mechanism **300** may be a depth-sensing module configured to receive the second light beam **LT2** to measure the distance between an object and the optical system **10**. When viewed along a first axis **AX1**, the base **112** is disposed between the second optical mechanism **200** and the third optical mechanism **300**.

Next, please refer to FIG. 1 to FIG. 5. FIG. 4 is a top view of the movable part **108** located in a first preset position according to an embodiment of the present disclosure, and FIG. 5 is a top view of the movable part **108** located in a second preset position according to an embodiment of the present disclosure. When viewed along the first axis **AX1** (the Z-axis), the first opening **OP1** and the second opening **OP2** are arranged along a second axis **AX2**. The first axis **AX1** is parallel to the first light beam **LT1**, and the second axis **AX2** is perpendicular to the first axis **AX1**.

As shown in FIG. 4, when viewed along the first axis **AX1**, the driving assembly **DA** is located between the second optical mechanism **200** and the third optical mechanism **300**. In addition, as shown in FIG. 3, when viewed along a third axis **AX3**, the third optical mechanism **300**, the base **112** and the second optical mechanism **200** are arranged along the second axis **AX2** in sequence. The third axis **AX3** is perpendicular to the first axis **AX1** and the second axis **AX2**.

As shown in FIG. 4, when viewed along the first axis **AX1**, the fixed assembly **FA** has a long strip-shaped structure extending along the second axis **AX2**. Specifically, when viewed along the first axis **AX1**, the outer frame **102** has a long strip-shaped structure extending along the second axis **AX2**.

In this embodiment, the driving assembly **DA** includes a coil **CL**, a magnetic element **MG** and a magnetically conductive element **CM**. The magnetic element **MG** corre-

sponds to the coil **CL**, and the magnetically conductive element **CM** corresponds to the coil **CL** and has a magnetically conductive material.

The coil **CL** surrounds the magnetically conductive element **CM**, and the magnetically conductive element **CM** has a plate-shaped structure and is perpendicular to the third axis **AX3**. Specifically, the magnetically conductive element **CM** with a long strip-shaped structure extends along the second axis **AX2**. Furthermore, the first base body **113** of the base **112** has an accommodating groove **1133** configured to accommodate the magnetically conductive element **CM** and the coil **CL**. In contrast, the magnetic element **MG** is accommodated in the movable part **108**.

In this embodiment, the optical system **10** can selectively shield or not shield the first opening **OP1** and the second opening **OP2**. For example, when the movable part **108** is located at the first preset position in FIG. 4 relative to the fixed assembly **FA**, and when viewed along the first axis **AX1**, the movable part **108** does not overlap the first opening **OP1**. When the movable part **108** is located at the first preset position, and when viewed along the first axis **AX1**, the movable part **108** does not overlap the second opening **OP2**.

On the other hand, when the first opening **OP1** and the second opening **OP2** are to be closed together, the coil **CL** can receive a current to act with the magnetic element **MG** to generate an electromagnetic driving force to drive the movable part **108** to move along a first direction **D1** from the first preset position in FIG. 4 to the second preset position in FIG. 5.

When the movable part **108** is located at the second preset position in FIG. 5 relative to the fixed assembly **FA**, and when viewed along the first axis **AX1**, the movable part **108** overlaps the first opening **OP1**. When the movable part **108** is located at the second preset position, and when viewed along the first axis **AX1**, the movable part **108** does not overlap the second opening **OP2**. Based on the configuration, the function of the aperture switch can be achieved.

When the first opening **OP1** and the second opening **OP2** are to be opened again, the driving assembly **DA** can generate an electromagnetic driving force in the opposite direction to drive the movable part **108** to move along a second direction **D2** from the second preset position in FIG. 5 to the first preset position in FIG. 4. The first direction **D1** is opposite to the second direction **D2**.

Next, the specific structure of each element are described below. As shown in FIG. 3, in this embodiment, the outer frame **102** has a base portion **1020**, a first bending portion **1021** and a second bending portion **1022**. The base portion **1020** extends along the second axis **AX2**, the first bending portion **1021** and the second bending portion **1022** are formed on opposite ends along the second axis **AX2** of the base portion **1020**, and the first bending portion **1021** and the second bending portion **1022** extend along the first axis **AX1**.

As shown in FIG. 3, when viewed along the third axis **AX3**, there is a gap **GP1** between the first bending portion **1021** and the base plate **15**. When viewed along the third axis **AX3**, there is a gap **GP2** between the second bending portion **1022** and the base plate **15**. The size of the gap **GP1** is substantially equal to the size of the gap **GP2**, but it is not limited thereto.

Furthermore, as shown in FIG. 2, the outer frame **102** further has a first side portion **1023** and a second side portion **1024**. The first side portion **1023** and the second side portion **1024** are formed on opposite sides along the third axis **AX3** of the base portion **1020**, and the first side portion **1023** and

the second side portion **1024** extend along the first axis **AX1** and the second axis **AX2** and are configured to strengthen the structural strength of the outer frame **102**.

As shown in FIG. 3, the first bending portion **1021** and the base **112** form a first accommodation space **AS1**, and at least a part of the second optical mechanism **200** is located in the first accommodation space **AS1**. Similarly, the second bending portion **1022** and the base **112** form a second accommodation space **AS2**, and at least a part of the third optical mechanism **300** is located in the second accommodation space **AS2**.

Furthermore, the movable part **108** may include a holding portion **1081**, a first side end portion **1082** and a second side end portion **1083**. The holding portion **1081** is configured to hold the magnetic element **MG**. When viewed along the first axis **AX1**, the holding portion **1081** is connected between the first side end portion **1082** and the second side end portion **1083**.

Because the magnetic element **MG** is accommodated in the bottom of the holding portion **1081**, when viewed along the first axis **AX1**, the magnetic element **MG** of the driving assembly **DA** is located between the first opening **OP1** and the second opening **OP2**.

As shown in FIG. 4, when viewed along the first axis **AX1**, a length **LH2** of the second side end portion **1083** along the second axis **AX2** is different from a length **LH1** of the first side end portion **1082** along the second axis **AX2**. When viewed along the first axis **AX1**, the length **LH2** of the second side end portion **1083** along the second axis **AX2** is greater than the length **LH1** of the first side end portion **1082** along the second axis **AX2**.

When viewed along the first axis **AX1**, a width **W2** of the second side end portion **1083** along the third axis **AX3** is different from a width **W1** of the first side end portion **1082** along the third axis **AX3**. When viewed along the first axis **AX1**, the width **W2** of the second side end portion **1083** along the third axis **AX3** is greater than the width **W1** of the first side end portion **1082** along the third axis **AX3**.

As shown in FIG. 2 and FIG. 4, a third opening **OP3** is formed on the second side end portion **1083**. When the movable part **108** is located at the first preset position and when viewed along the first axis **AX1**, the second opening **OP2** overlaps the third opening **OP3**. In this embodiment, the size of the first opening **OP1** is the same as the size of the second opening **OP2**, and the size of the third opening **OP3** is larger than the size of the second opening **OP2**.

In this embodiment, as shown in FIG. 4, the second optical mechanism **200** has a second camera lens **202** corresponding to the first opening **OP1**, and the third optical mechanism **300** has a third camera lens **302** corresponding to the second opening **OP2**. When the movable part **108** is located at the first preset position and viewed along the first axis **AX1**, the second camera lens **202** and the third camera lens **302** are respectively exposed from the first opening **OP1** and the second opening **OP2**.

When viewed along the first axis **AX1**, a distance **LH3** between the first opening **OP1** and the first bending portion **1021** along the second axis **AX2** is different from a distance **LH4** between the second opening **OP2** and the second bending portion **1022** along the second axis **AX2**.

For example, when viewed along the first axis **AX1**, the distance **LH3** between the first opening **OP1** and the first bending portion **1021** along the second axis **AX2** is smaller than the distance **LH4** between the second opening **OP2** and the second bending portion **1022** along the second axis **AX2**.

Furthermore, the movable part **108** may further include a first shading element **SR1** and a second shading element

SR2, which are respectively disposed on the first side end portion **1082** and the second side end portion **1083**. The first shading element **SR1** and the second shading element **SR2** are made of light-absorbing material, such as black material.

As shown in FIG. 2, the second shading element **SR2** is adjacent to the third opening **OP3**. As shown in FIG. 5, when the first movable part **108** is located at the second preset position and viewed along the first axis **AX1**, the first shading element **SR1** and the second shading element **SR2** respectively shade the first opening **OP1** and the second opening **OP2**.

Then please refer to FIG. 2, FIG. 6 and FIG. 7. FIG. 6 is a three-dimensional exploded view of the optical mechanism **100** in another view according to an embodiment of the present disclosure, and FIG. 7 is a side view of a partial structure of the optical mechanism **100** according to an embodiment of the present disclosure. As shown in FIG. 2 and FIG. 6, the base **112** includes the aforementioned first base body **113** and a second base body **114**, and the first base body **113** is connected to the second base body **114** in a detachable manner.

Specifically, the first base body **113** forms a first coupling structure. The second base body **114** forms a second coupling structure corresponding to the first coupling structure. The first coupling structure is configured to be coupled to the second coupling structure so that the first base body **113** is fixedly connected to the second base body **114**.

For example, the first coupling structure can be a positioning hole **1131**, and the second coupling structure can be a positioning column **1141**, but they are not limited thereto, and the two can be interchanged. The positioning column **1141** is configured to be inserted into the positioning hole **1131** so that the first base body **113** is combined with the second base body **114**.

As shown in FIG. 7, when viewed along the third axis **AX3**, a total height **HTT** of the first base body **113** and the second base body **114** relative to the base plate **15** is greater than a height **HT3** of the third optical mechanism **300** relative to the base plate **15**. A height **HT1** of the first base body **113** is smaller than the height **HT3**, and a height **HT2** of the second base body **114** is smaller than the height **HT3**.

It is worth noting that the second base body **114** is a plate body and does not form any accommodating space for accommodating the coil **CL**. That is, when viewed along the third axis **AX3**, as shown in FIG. 7, the second base body **114** does not overlap the coil **CL**.

Moreover, as shown in FIG. 6, the first optical mechanism **100** further includes a first circuit member **117** and a second circuit member **118**, which are disposed at the first base body **113**. For example, the first circuit member **117** and the second circuit member **118** are formed at the first base body **113** by insert molding technology.

The first circuit member **117** may have a first electrical connection portion **1171** and a first welding portion **1172**, and the first electrical connection portion **1171** and the first welding portion **1172** are exposed from the first base body **113**. Similarly, the second circuit member **118** has a second electrical connection portion **1181** and a second welding portion **1182**, and the second electrical connection portion **1181** and the second welding portion **1182** are exposed from the first base body **113**.

When viewed along the first axis **AX1**, the first electrical connection portion **1171** and the first welding portion **1172** are located on both sides of the first base body **113**. Similarly, when viewed along the first axis **AX1**, the second

11

electrical connection portion **1181** and the second welding portion **1182** are located on both sides of the first base body **113**.

As shown in FIG. 7, a first leading end **WR1** of the coil **CL** is configured to be connected to the first welding portion **1172** by welding, and a first heat-insulation portion **SP1** is disposed between the first welding portion **1172** and a main body **CLO** of the coil **CL**. The first base body **113** is, for example, made of plastic material, and the first heat-insulation portion **SP1** is a part of the first base body **113**, separating the first welding portion **1172** from the main body **CLO** of the coil **CL**.

Similarly, a second leading end **WR2** of the coil **CL** is connected to the second welding portion **1182** by welding, and a second heat-insulation portion **SP2** is disposed between the second welding portion **1182** and the main body **CLO** of the coil **CL**. The second heat-insulation portion **SP2** is also a part of the first base body **113**, separating the second welding portion **1182** from the main body **CLO** of the coil **CL**.

The first heat-insulation portion **SP1**, the second heat-insulation portion **SP2** and the first base body **113** are integrally formed as one piece and can be made of plastic material. Based on the structural configuration, it can avoid the problem of heat energy being directly transmitted from the first welding portion **1172** and the second welding portion **1182** to the main body **CLO** during welding and causing damage.

In addition, when the coil **CL** is disposed in the accommodating groove **1133**, a first accommodating subspace **SAS1** is formed between the main body **CLO** and the first base body **113**, and the first optical mechanism **100** further includes a first adhesive element **AD1** which is filled in the first accommodating subspace **SAS1** and is configured to affix the main body **CLO** to the first base body **113**. When viewed along the first axis **AX1**, the first adhesive element **AD1** completely overlaps the main body **CLO** of the coil **CL**. That is, the first adhesive element **AD1** completely covers the main body **CLO**.

The first optical mechanism **100** may further include a second adhesive element **AD2** disposed between the first base body **113** and the second base body **114**. The second adhesive element **AD2** is configured to affix the first base body **113** to the second base body **114**.

The thermal conductivity coefficient of the first adhesive element **AD1** is different from the thermal conductivity coefficient of the second adhesive element **AD2**. For example, the first adhesive element **AD1** is thermally conductive adhesive, and the second adhesive element **AD2** is thermoset adhesive, but they are not limited thereto.

It is worth noting that the first base body **113** has two exposing portions **113H** connected to the accommodating groove **1133**. As shown in FIG. 7, when viewed along the third axis **AX3**, the coil **CL** overlaps the two exposing portions **113H**. Furthermore, the outer frame **102** further has two connection structures **1025** extending along the first axis **AX1**. After the outer frame **102** covers the first base body **113**, as shown in FIG. 6, the two connection structures **1025** cover the two exposing portions **113H**.

After the outer frame **102** covers the first base body **113**, a second accommodating subspace **SAS2** is formed between the two connection structures **1025** and the main body **CLO** and is connected to the first accommodating subspace **SAS1**. The first adhesive element **AD1** is also disposed in the second accommodating subspace **SAS2** and contacts the two connection structures **1025**.

12

Based on the design, the heat generated by the coil **CL** can be conducted to the two connection structures **1025** of the outer frame **102** through the first adhesive element **AD1**, and because the outer frame **102** can be made of a metal material, the heat can be quickly dissipated to the surrounding environment to avoid the overheating problems.

Please refer to FIG. 8, which is a side view of a partial structure of the first optical mechanism **100** according to another embodiment of the present disclosure. In this embodiment, the third optical mechanism **300** may include a third base **301**, and the third camera lens **302** is disposed on the third base **301** and located between the movable part **108** and the third base **301**.

Furthermore, in this embodiment, the third optical mechanism **300** further includes a supporting member **304** disposed on the third base **301** and configured to support the movable part **108**. The supporting member **304** may have a ring structure and is sheathed on the third camera lens **302**, and the supporting member **304** is made of a light-absorbing material.

Based on the configuration of the supporting member **304**, the problem that the length of the movable part **108** is too long and sags to collide with the third camera lens **302** can be avoided. It should be noted that the height of the supporting member **304** is greater than the height of the third camera lens **302**, but there is a gap between the supporting member **304** and the movable part **108**. In addition, the supporting member **304** can be made of a smooth material, so as to avoid the problem that the movable part **108** is affected by too much friction when the movable part **108** contacts the supporting member **304** and affects the movement of the movable part **108**.

The present disclosure provides an optical system, including a first optical mechanism **100**, a second optical mechanism **200** and a third optical mechanism **300**, and the outer frame **102** of the first optical mechanism has a first opening **OP1** and a second opening **OP2** respectively corresponding to the second optical mechanism **200** and third optical mechanism **300**. In some embodiments, the driving assembly **DA** of the first optical mechanism **100** can drive the movable part **108** to move to selectively shield or not shield the first opening **OP1** and the second opening **OP2** at the same time.

In some embodiments, the base **112** of the first optical mechanism **100** can include a first base body **113** and a second base body **114**. The second base body **114** can increase the height of the first base body **113** relative to the base plate **15**, so that the first optical mechanism **100** is suitable for a higher camera lens module (such as the third optical mechanism **300**).

In addition, the first base body **113** has two exposing portions **113H**. When the outer frame **102** is covered on the first base body **113**, the first adhesive element **AD1** can be connected to the two connection structures **1025** of the outer frame **102** through the two exposing portions **113H**. Based on this design, the heat generated by the coil **CL** can be conducted to the outer frame **102** made of metal through the first adhesive element **AD1**, so as to achieve the advantage of rapid heat dissipation.

Although the embodiments and their advantages have been described in detail, it should be understood that various changes, substitutions, and alterations can be made herein without departing from the spirit and scope of the embodiments as defined by the appended claims. Moreover, the scope of the present application is not intended to be limited to the particular embodiments of the process, machine, manufacture, composition of matter, means, methods, and

13

steps described in the specification. As one of ordinary skill in the art will readily appreciate from the disclosure, processes, machines, manufacture, compositions of matter, means, methods, or steps, presently existing or later to be developed, that perform substantially the same function or achieve substantially the same result as the corresponding embodiments described herein can be utilized according to the disclosure. Accordingly, the appended claims are intended to include within their scope such processes, machines, manufacture, compositions of matter, means, methods, or steps. In addition, each claim constitutes a separate embodiment, and the combination of various claims and embodiments are within the scope of the disclosure.

What is claimed is:

1. An optical system, comprising:
 - a first optical mechanism, comprising:
 - a movable part;
 - a fixed assembly, wherein the movable part is movable relative to the fixed assembly; and
 - a driving assembly, configured to drive the movable part to move relative to the fixed assembly;
 - a second optical mechanism; and
 - a third optical mechanism;

wherein when viewed along a first axis, a base of the fixed assembly is disposed between the second optical mechanism and the third optical mechanism;

the optical system further comprises a base plate, and the base of the first optical mechanism, the second optical mechanism and the third optical mechanism are fixedly disposed on the base plate and located on a same plane;

the fixed assembly further comprises an outer frame fixedly connected to the base;

when viewed along the first axis, the outer frame has a long strip-shaped structure extending along a second axis;

the outer frame has a base portion, a first bending portion and a second bending portion;

when viewed along a third axis, there is a gap between the first bending portion and the base plate;

the third axis is perpendicular to the first axis and the second axis; and

when viewed along the third axis, there is another gap between the second bending portion and the base plate.

2. The optical system as claimed in claim 1, wherein the fixed assembly comprises:
 - a first opening, configured to allow a first light beam to pass through to enter the second optical mechanism; and
 - a second opening, configured to allow a second light beam to pass through to enter the third optical mechanism;

wherein the first light beam is parallel to the second light beam;

the second optical mechanism comprises a camera module configured to capture an image;

the third optical mechanism comprises a depth-sensing module configured to measure distance;

when viewed along the first axis, the first opening and the second opening are arranged along the second axis;

the first axis is parallel to the first light beam; and

the second axis is perpendicular to the first axis.

3. The optical system as claimed in claim 2, wherein when viewed along the first axis, the driving assembly is located between the second optical mechanism and the third optical mechanism;

when viewed along the first axis, the third optical mechanism, the base and the second optical mechanism are arranged along the second axis in sequence; and

14

when viewed along the first axis, the fixed assembly has a long strip-shaped structure extending along the second axis.

4. The optical system as claimed in claim 3, wherein the base portion extends along the second axis;

the first bending portion and the second bending portion are formed on opposite ends along the second axis of the base portion; and

the first bending portion and the second bending portion extend along the first axis.

5. The optical system as claimed in claim 3, wherein the third optical mechanism further comprises a third camera lens and a third base;

the third camera lens is disposed on the third base and is located between the movable part and the third base;

the third optical mechanism further includes a supporting member disposed on the third base and configured to support the movable part;

the supporting member sheathes the third camera lens;

the supporting member has a ring structure; and

the supporting member is made of a light-absorbing material.

6. The optical system as claimed in claim 4, wherein the outer frame further has a first side portion and a second side portion;

the first side portion and the second side portion are formed on opposite sides along the third axis of the base portion; and

the first side portion and the second side portion extend along the second axis and are configured to strengthen a structural strength of the outer frame.

7. The optical system as claimed in claim 6, wherein the first bending portion and the base form a first accommodation space;

at least part of the second optical mechanism is located in the first accommodation space;

the second bending portion and the base form a second accommodation space; and

at least a part of the third optical mechanism is located in the second accommodation space.

8. The optical system as claimed in claim 7, wherein the base comprises a first base body and a second base body;

the first base body is connected to the second base body in a detachable manner;

the first base body forms a first coupling structure;

the second base body forms a second coupling structure corresponding to the first coupling structure;

the first coupling structure is configured to be coupled to the second coupling structure so that the first base body is fixedly connected to the second base body;

the first coupling structure comprises one of a positioning column and a positioning hole; and

the second coupling structure comprises the other one of the positioning column and the positioning hole.

9. The optical system as claimed in claim 8, wherein when viewed along the third axis, a total height of the first base body and the second base body relative to the base plate is greater than a height of the third optical mechanism relative to the base plate;

the driving assembly comprises:

a coil;

a magnetic element, corresponding to the coil; and

a magnetically conductive element corresponding to the coil and having a magnetically conductive material;

wherein the coil surrounds the magnetically conductive element;

15

the magnetically conductive element has a plate-shaped structure and is parallel to the second axis;
the first base body further has an accommodating groove configured to accommodate the magnetically conductive element and the coil; and

when viewed along the third axis, the second base body does not overlap the coil.

10. The optical system as claimed in claim 9, wherein the first optical mechanism further comprises a first circuit member and a second circuit member which are disposed at the first base body;

the first circuit member has a first electrical connection portion and a first welding portion;

the first electrical connection portion and the first welding portion are exposed from the first base body;

the second circuit member has a second electrical connection portion and a second welding portion;

the second electrical connection portion and the second welding portion are exposed from the first base body;

when viewed along the first axis, the first electrical connection portion and the first welding portion are located on both sides of the first base body; and

when viewed along the first axis, the second electrical connection portion and the second welding portion are located on both sides of the first base body.

11. The optical system as claimed in claim 9, wherein when the movable part is located at a first preset position relative to the fixed assembly and when viewed along the first axis, the movable part does not overlap with the first opening;

when the movable part is located at the first preset position and when viewed along the first axis, the movable part does not overlap the second opening;

the movable part includes a holding portion, a first side end portion and a second side end portion;

the holding portion is configured to hold the magnetic element;

when viewed along the first axis, the holding portion is connected between the first side end portion and the second side end portion; and

when viewed along the first axis, the driving assembly is located between the first opening and the second opening.

12. The optical system as claimed in claim 11, wherein when viewed along the first axis, a length of the second side end portion along the second axis is different from a length of the first side end portion along the second axis;

when viewed along the first axis, the length of the second side end portion along the second axis is greater than the length of the first side end portion along the second axis;

when viewed along the first axis, a width of the second side end portion along the third axis is different from a width of the first side end portion along the third axis; and

when viewed along the first axis, the width of the second side end portion along the third axis is greater than the width of the first side end portion along the third axis.

13. The optical system as claimed in claim 12, wherein a third opening is formed on the second side end portion; when the movable part is located at the first preset position and when viewed along the first axis, the second opening overlaps the third opening;

a size of the first opening is the same as a size of the second opening;

16

a size of the third opening is larger than the size of the second opening;

the second optical mechanism has a second camera lens corresponding to the first opening; and

the third optical mechanism has a third camera lens corresponding to the second opening.

14. The optical system as claimed in claim 13, wherein when viewed along the first axis, a distance between the first opening and the first bending portion along the second axis is different from a distance between the second opening and the second bending portion along the second axis; and

when viewed along the first axis, the distance between the first opening and the first bending portion along the second axis is smaller than the distance between the second opening and the second bending portion along the second axis.

15. The optical system as claimed in claim 14, wherein when the movable part is located at a second preset position relative to the fixed assembly and when viewed along the first axis, the movable part overlaps the first opening;

when the first movable part is located at the second preset position and when viewed along the first axis, the movable part overlaps the second opening;

the movable part further includes a first shading element and a second shading element respectively disposed on the first side end portion and the second side end portion;

the first shading element and the second shading element are made of light-absorbing material;

the second shading element is adjacent to the third opening; and

when the first movable part is located at the second preset position and viewed along the first axis, the first shading element and the second shading element respectively cover the first opening and the second opening.

16. The optical system as claimed in claim 10, wherein a first leading end of the coil is configured to connect to the first welding portion;

a first heat-insulation portion is disposed between the first welding portion and a main body of the coil;

a second leading end of the coil is configured to connect to the second welding portion;

a second heat-insulation portion is disposed between the second welding portion and the main body of the coil; and

the first heat-insulation portion, the second heat-insulation portion and the first base body are integrally formed as one piece.

17. The optical system as claimed in claim 16, wherein when the coil is disposed in the accommodating groove, a first accommodating subspace is formed between the main body and the first base body;

the first optical mechanism further comprises a first adhesive element filled in the first accommodating subspace configured to affix the main body to the first base body; and

when viewed along the first axis, the first adhesive element completely overlaps the main body of the coil.

18. The optical system as claimed in claim 17, wherein the first optical mechanism further comprises a second adhesive element disposed between the first base body and the second base body;

the second adhesive element is configured to affix the first base body to the second base body; and

17

a thermal conductivity coefficient of the first adhesive element is different from a thermal conductivity coefficient of the second adhesive element.

19. The optical system as claimed in claim **18**, wherein the first base body further has two exposing portions 5 connected to the accommodating groove; when viewed along the third axis, the coil overlaps the two exposing portions; the outer frame further has two connection structures extending along the first axis; and 10 after the outer frame covers the first base body, the two connection structures cover the two exposing portions.

20. The optical system as claimed in claim **19**, wherein after the outer frame covers the first base body, a second accommodating subspace is formed between the two 15 connection structures and the main body and is connected to the first accommodating subspace; and the first adhesive element is disposed in the second accommodating subspace and contacts the two connection structures. 20

* * * * *

18