



US012385449B2

(12) **United States Patent**
Kupratis et al.

(10) **Patent No.:** **US 12,385,449 B2**

(45) **Date of Patent:** **Aug. 12, 2025**

(54) **SPLITTER AND GUIDE VANE
ARRANGEMENT FOR GAS TURBINE
ENGINES**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **RTX CORPORATION**, Farmington,
CT (US)

2,258,792 A 10/1941 New
2,936,655 A 5/1960 Peterson et al.
(Continued)

(72) Inventors: **Daniel Bernard Kupratis**, Wallingford,
CT (US); **Paul R. Hanrahan**,
Farmington, CT (US)

FOREIGN PATENT DOCUMENTS

(73) Assignee: **RTX CORPORATION**, Farmington,
CT (US)

EP 0791383 A1 8/1997
EP 1142850 A1 10/2001
(Continued)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 167 days.

OTHER PUBLICATIONS

McCune, M.E. (1993). Initial test results of 40,000 horsepower fan
drive gear system for advanced ducted propulsion systems. AIAA
29th Joint Conference and Exhibit. Jun. 28-30, 1993. pp. 1-10.

(Continued)

(21) Appl. No.: **18/461,709**

(22) Filed: **Sep. 6, 2023**

(65) **Prior Publication Data**

US 2023/0407817 A1 Dec. 21, 2023

Primary Examiner — Stephanie Sebasco Cheng

(74) *Attorney, Agent, or Firm* — Carlson, Gaskey & Olds,
P.C.

Related U.S. Application Data

(63) Continuation of application No. 16/891,492, filed on
Jun. 3, 2020, now Pat. No. 11,781,506.

(51) **Int. Cl.**
F02K 3/077 (2006.01)
F01D 5/14 (2006.01)
(Continued)


(52) **U.S. Cl.**
CPC **F02K 3/077** (2013.01); **F02K 3/075**
(2013.01); **F01D 5/145** (2013.01); **F02K 1/72**
(2013.01);
(Continued)

(58) **Field of Classification Search**
CPC F02C 7/18-185; F02C 7/052; F02C 6/08;
F02C 9/18; F02C 7/04-057; F02K 1/72;
(Continued)

(57) **ABSTRACT**

A section for a gas turbine engine according to an example
of the present disclosure includes, among other things, a
rotor including a row of blades extending in a radial direc-
tion outwardly from a hub. The row of blades deliver flow
to a bypass flow path, an intermediate flow path, and a core
flow path. A first case surrounds the row of blades to
establish the bypass flow path. A first flow splitter divides
flow between the bypass flow path and a second duct. An
aftmost row of guide vanes extends in the radial direction
across the bypass flow path. A second flow splitter radially
inboard of the first flow splitter divides flow from the second
duct between the intermediate flow path and the core flow
path. A bypass port interconnects the intermediate and
bypass flow paths.

19 Claims, 15 Drawing Sheets

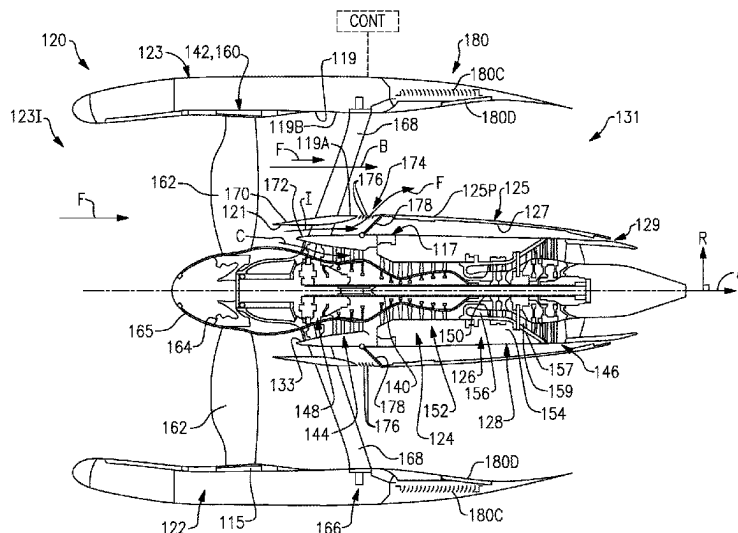

(51)	Int. Cl.		5,915,917 A	6/1999	Eveker et al.
	F02K 1/72	(2006.01)	5,975,841 A	11/1999	Lindemuth et al.
	F02K 3/06	(2006.01)	5,985,470 A	11/1999	Spitsberg et al.
	F02K 3/075	(2006.01)	6,134,880 A	10/2000	Yoshinaka
	F04D 29/54	(2006.01)	6,223,616 B1	5/2001	Sheridan
(52)	U.S. Cl.		6,315,815 B1	11/2001	Spadaccini et al.
	F04D 29/66	(2006.01)	6,318,070 B1	11/2001	Rey et al.
	CPC	<i>F02K 3/06</i> (2013.01); <i>F04D 29/542</i>	6,387,456 B1	5/2002	Eaton, Jr. et al.
		(2013.01); <i>F04D 29/661</i> (2013.01)	6,517,341 B1	2/2003	Brun et al.
			6,607,165 B1	8/2003	Manteiga et al.
(58)	Field of Classification Search		6,619,030 B1	9/2003	Seda et al.
	CPC	<i>F02K 1/68</i> ; <i>F02K 1/54</i> –766; <i>F02K 3/077</i> ;	6,709,492 B1	3/2004	Spadaccini et al.
		<i>F02K 3/075</i> ; <i>F02K 3/115</i> ; <i>F02K 3/04</i> –06;	6,732,502 B2	5/2004	Seda et al.
		<i>F02K 3/068</i> ; <i>F02K 3/045</i> ; <i>F02K 3/044</i> ;	6,814,541 B2	11/2004	Evans et al.
		<i>F02K 3/00</i> –77; <i>F05D 2240/12</i> –125; <i>F05D</i>	6,883,303 B1	4/2005	Seda
		<i>2260/231</i> ; <i>F05D 2270/101</i> –1024; <i>F01D</i>	7,021,042 B2	4/2006	Law
		<i>5/146</i> ; <i>F01D 9/00</i> –048; <i>F04D 29/464</i> ;	7,195,456 B2	3/2007	Aggarwala et al.
		<i>F04D 29/542</i> –545; <i>F04D 29/681</i>	7,219,490 B2	5/2007	Dev
	See application file for complete search history.		7,328,580 B2	2/2008	Lee et al.
			7,374,403 B2	5/2008	Decker et al.
			7,437,877 B2	10/2008	Kawamoto et al.
			7,484,356 B1	2/2009	Lair
			7,591,754 B2	9/2009	Duong et al.
			7,632,064 B2	12/2009	Somanath et al.
			7,662,059 B2	2/2010	McCune
(56)	References Cited		7,762,086 B2	7/2010	Schwark
	U.S. PATENT DOCUMENTS		7,785,066 B2	8/2010	Bil et al.
	3,021,731 A	2/1962 Stoeckicht	7,806,651 B2	10/2010	Kennepohl et al.
	3,194,487 A	7/1965 Tyler et al.	7,824,305 B2	11/2010	Duong et al.
	3,287,906 A	11/1966 McCormick	7,828,682 B2	11/2010	Smook
	3,352,178 A	11/1967 Lindgren et al.	7,926,260 B2	4/2011	Sheridan et al.
	3,412,560 A	11/1968 Gaubatz	7,955,046 B2	6/2011	McCune et al.
	3,664,612 A	5/1972 Skidmore et al.	7,997,868 B1	8/2011	Liang
	3,747,343 A	7/1973 Rosen	8,075,261 B2	12/2011	Merry et al.
	3,754,484 A	8/1973 Roberts	8,128,021 B2	3/2012	Suciu et al.
	3,765,623 A	10/1973 Donelson et al.	8,205,432 B2	6/2012	Sheridan
	3,820,719 A	6/1974 Clark et al.	8,277,174 B2	10/2012	Hasel et al.
	3,843,277 A	10/1974 Ehrich	9,121,412 B2	9/2015	Gallagher et al.
	3,892,358 A	7/1975 Gisslen	9,140,188 B2	9/2015	Kupratis
	3,932,058 A	1/1976 Harner et al.	9,623,976 B2 *	4/2017	James B64D 33/04
	3,935,558 A	1/1976 Miller et al.	9,964,037 B2	5/2018	Snyder et al.
	3,988,889 A	11/1976 Chamay et al.	10,030,606 B2 *	7/2018	Moon F02K 1/46
	4,055,042 A *	10/1977 Colley F02K 3/06 415/77	10,161,316 B2	12/2018	Kupratis et al.
			10,184,426 B2	1/2019	Schrell
	4,080,785 A	3/1978 Koff et al.	10,364,750 B2 *	7/2019	Rambo F02K 3/115
	4,130,872 A	12/1978 Haloff	10,670,040 B2	6/2020	Nolcheff et al.
	4,220,171 A	9/1980 Ruehr et al.	10,774,788 B2 *	9/2020	Feulner F02C 3/045
	4,240,250 A	12/1980 Harris	10,927,761 B2	2/2021	Rambo
	4,284,174 A	8/1981 Salvana et al.	11,448,131 B2 *	9/2022	Rambo F02K 3/075
	4,289,360 A	9/1981 Zirin	11,994,089 B2 *	5/2024	Sidelkovskiy F04D 29/323
	4,478,551 A	10/1984 Honeycutt, Jr. et al.	2001/0035004 A1	11/2001	Balzer
	4,559,784 A	12/1985 Jenny et al.	2002/0069637 A1	6/2002	Becquerelle et al.
	4,649,114 A	3/1987 Miltenburger et al.	2006/0228206 A1	10/2006	Decker et al.
	4,696,156 A	9/1987 Burr et al.	2007/0245739 A1	10/2007	Stretton et al.
	4,722,357 A	2/1988 Wynosky	2008/0003096 A1	1/2008	Kohli et al.
	4,896,499 A	1/1990 Rice	2008/0092548 A1	4/2008	Morford et al.
	4,916,894 A	4/1990 Adamson et al.	2008/0116009 A1	5/2008	Sheridan et al.
	4,979,362 A	12/1990 Vershure, Jr.	2008/0149445 A1	6/2008	Kern et al.
	5,003,773 A	4/1991 Beckwith	2008/0190095 A1	8/2008	Baran
	5,058,379 A	10/1991 Lardellier	2008/0219849 A1	9/2008	Decker et al.
	5,058,617 A	10/1991 Stockman et al.	2008/0224018 A1	9/2008	Lafont et al.
	5,102,379 A	4/1992 Pagluica et al.	2008/0317588 A1	12/2008	Grabowski et al.
	5,141,400 A	8/1992 Murphy et al.	2009/0056343 A1	3/2009	Suciu et al.
	5,169,288 A	12/1992 Gliebe et al.	2009/0081035 A1	3/2009	Merry et al.
	5,174,525 A	12/1992 Schilling	2009/0293445 A1	12/2009	Ress, Jr.
	5,261,227 A	11/1993 Giffin, III	2009/0304518 A1	12/2009	Kodama et al.
	5,317,877 A	6/1994 Stuart	2009/0314881 A1	12/2009	Suciu et al.
	5,361,580 A	11/1994 Ciokajlo et al.	2010/0105516 A1	4/2010	Sheridan et al.
	5,433,674 A	7/1995 Sheridan et al.	2010/0146933 A1	6/2010	Caruel
	5,447,411 A	9/1995 Curley et al.	2010/0148396 A1	6/2010	Xie et al.
	5,466,198 A	11/1995 McKibbin et al.	2010/0212281 A1	8/2010	Sheridan
	5,524,847 A	6/1996 Brodell et al.	2010/0218483 A1	9/2010	Smith
	5,634,767 A	6/1997 Dawson	2010/0219779 A1	9/2010	Bradbrook
	5,677,060 A	10/1997 Terentieva et al.	2010/0331139 A1	12/2010	McCune
	5,694,768 A	12/1997 Johnson et al.	2011/0056208 A1	3/2011	Norris et al.
	5,746,391 A	5/1998 Rodgers et al.	2011/0159797 A1	6/2011	Beltman et al.
	5,778,659 A	7/1998 Duesler et al.	2011/0293423 A1	12/2011	Bunker et al.
	5,794,432 A	8/1998 Dunbar et al.	2012/0099963 A1	4/2012	Suciu et al.
	5,857,836 A	1/1999 Stickler et al.	2012/0124964 A1	5/2012	Hasel et al.

(56)

References Cited**U.S. PATENT DOCUMENTS**

2012/0247571	A1	10/2012	Vauchel et al.
2012/0291449	A1	11/2012	Adams et al.
2013/0008144	A1	1/2013	Gallagher et al.
2013/0008170	A1	1/2013	Gallagher et al.
2013/0149112	A1	6/2013	Kohlenberg et al.
2013/0149113	A1	6/2013	Kohlenberg et al.
2013/0192196	A1	8/2013	Suciu et al.
2013/0192200	A1	8/2013	Kupratis et al.
2013/0202415	A1	8/2013	Karl et al.
2013/0216364	A1	8/2013	Evans
2014/0157754	A1	6/2014	Hasel et al.
2014/0165534	A1	6/2014	Hasel et al.
2014/0271163	A1	9/2014	Hue et al.
2014/0318149	A1	10/2014	Guillon et al.
2014/0363276	A1	12/2014	Vetters et al.
2015/0233250	A1	8/2015	Gallagher et al.
2016/0040605	A1	2/2016	Howarth
2016/0069275	A1	3/2016	Lecordix et al.
2016/0131084	A1	5/2016	Kupratis et al.
2016/0298550	A1*	10/2016	Kupratis F02C 9/18
2017/0089299	A1*	3/2017	Kupratis F02C 3/145
2017/0096945	A1	4/2017	Mueller et al.
2017/0191500	A1	7/2017	Lobocki et al.
2017/0314471	A1	11/2017	Sennoun
2017/0314562	A1	11/2017	Rose
2018/0030926	A1	2/2018	Eckett et al.
2019/0017446	A1	1/2019	Adams et al.
2019/0048826	A1	2/2019	Pointon et al.
2019/0063370	A1	2/2019	Phelps et al.

FOREIGN PATENT DOCUMENTS

EP	1340903	A2	9/2003
EP	1712738	A2	10/2006
EP	1976758	B1	7/2010
EP	2374995	A2	10/2011
EP	2383434	A2	11/2011
EP	2428644	A1	3/2012
EP	2480779	A1	8/2012
EP	2610460	A2	7/2013
EP	3070266	A2	9/2016
EP	3489461	A2	5/2019
FR	2991670	B1	6/2014
FR	3002785	A1	9/2014
GB	1516041	A	6/1978
GB	2041090	A	9/1980
GB	2165892	A	4/1986
GB	2426792	A	12/2006
WO	2007038674	A1	4/2007
WO	2009148655	A2	12/2009
WO	2010042215	A1	4/2010
WO	2013064762	A1	5/2013
WO	2013186475	A1	12/2013
WO	2014091110	A1	6/2014
WO	2014147343	A1	9/2014
WO	2014176427	A1	10/2014
WO	2015006005	A1	1/2015

OTHER PUBLICATIONS

McMillian, A. (2008) Material development for fan blade containment casing. Abstract. p. 1. Conference on Engineering and Physics: Synergy for Success 2006. Journal of Physics: Conference Series vol. 105. London, UK. Oct. 5, 2006.

Meier N. (2005) Civil Turbojet/Turbofan Specifications. Retrieved from <http://jet-engine.net/civtfspec.html>.

Merriam-Webster's collegiate dictionary, 10th Ed. (2001). p. 1125-1126.

Merriam-Webster's collegiate dictionary, 11th Ed. (2009). p. 824.

Meyer, A.G. (1988). Transmission development of TEXTRON Lycoming's geared fan engine. Technical Paper. Oct. 1988. pp. 1-12.

Middleton, P. (1971). 614: VFW's jet feederliner. Flight International, Nov. 4, 1971. p. 725, 729-732.

Misel, O.W. (1977). QCSEE main reduction gears test program. NASA CR-134669. Mar. 1, 1977. pp. 1-222.

Moxon, J. How to save fuel in tomorrow's engines. Flight International. Jul. 30, 1983. 3873(124). pp. 272-273.

Muhlstein, C.L., Stach, E.A., and Ritchie, R.O. (2002). A reaction-layer mechanism for the delayed failure of micron-scale polycrystalline silicon structural films subjected to high-cycle fatigue loading. Acta Materialia vol. 50. 2002. pp. 3579-3595.

Munt, R. (1981). Aircraft technology assessment: Progress in low emissions engine. Technical Report. May 1981. pp. 1-171.

Nanocor Technical Data for Epoxy Nanocomposites using Nanomer 1.30E Nanoclay. Nnacor, Inc. Oct. 2004.

NASA Conference Publication. (1978). CTOL transport technology. NASA-CP-2036-PT-1. Jun. 1, 1978. pp. 1-531.

NASA Conference Publication. Quiet, powered-lift propulsion. Cleveland, Ohio. Nov. 14-15, 1978. pp. 1-420.

Neitzel, R., Lee, R., and Chamay, A.J. (1973). Engine and installation preliminary design. Jun. 1, 1973. pp. 1-333.

Neitzel, R.E., Hirschkron, R. and Johnston, R.P. (1976). Study of unconventional aircraft engines designed for low energy consumption. NASA-CR-135136. Dec. 1, 1976. pp. 1-153.

Newton, F.C., Liebeck, R.H., Mitchell, G.H., Mooiweer, M.A., Platte, M.M., Toogood, T.L., and Wright, R.A. (1986). Multiple Application Propfan Study (MAPS): Advanced tactical transport. NASA CR-175003. Mar. 1, 1986. pp. 1-101.

Nexcelle Press Release. Nexcelle highlights its key role for CFM International's LEAP-1C integrated propulsion system on the COMAC C919. Retrieved Dec. 17, 2014, from <http://www.nexcelle.com/news-press-release/2008-2014/11-10-2014.asp>.

Norris, G. (2009). Aeronautics/propulsion laureate; Pratt Whitney's geared turbofan development team. Aviation Week Space Technology. Mar. 16, 2016. Republished in Pratt & Whitney Digital Press Kit. p. 10.

Norton, M. and Karczub, D. (2003). Fundamentals of noise and vibration analysis for engineers. Press Syndicate of the University of Cambridge. New York: New York. p. 524.

Notice of Opposition of European Patent No. 3239459 mailed Oct. 2, 2019 by Safran Aircraft Engines.

Oates, G.C. (Ed). (1989). Aircraft propulsion systems and technology and design. Washington, D.C.: American Institute of Aeronautics, Inc. pp. 341-344.

Parametric study of STOL short-haul transport engine cycles and operational techniques to minimize community noise impact. NASA-CR-114759. Jun. 1, 1974. pp. 1-397.

Parker, R.G. and Lin, J. (2001). Modeling, modal properties, and mesh stiffness variation instabilities of planetary gears. Prepared for NASA. NASA/CR-2001-210939. May 2001. pp. 1-111.

Patent Owner's Response in U.S. Pat. No. 9, 121,412, *General Electric Company*, Petitioner, V. *United Technologies Corporation*, Patent Owner: IPR2016-00952 filed Jan. 27, 2017, pp. 1-75.

Patentee's Request to Notice of Opposition to U.S. Pat. No. 2,776,677B, *United Technologies Corporation* opposed by SNECMA dated Sep. 12, 2016.

Petition for Inter Partes Review of U.S. Pat. No. 9,121,412. *General Electric Company*, Petitioner, v. *United Technologies Corporation*, Patent Owner. IPR2017-00431. Filed Apr. 25, 2016.

Petition for Inter Parties Review of U.S. Pat. No. 8,277,174, *General Electric Company*, Petitioner v. *United Technologies Corporation*, Patent Owner: IPR2017-00999, filed Mar. 1, 2017, 71 pages.

Petition for Inter Parties Review of U.S. Pat. No. 8,337,149, *General Electric Company*, Petitioner v. *United Technologies Corporation*, Patent Owner: IPR2016-00855, filed Apr. 8, 2016, 72 pages.

Petrovic, J.J., Castro, R.G., Vaidya, R.U., Peters, M.I., Mendoza, D., Hoover, R.C., and Gallegos, D.E. (2001). Molybdenum disilicide materials for glass melting sensor sheaths. Ceramic Engineering and Science Proceedings. vol. 22(3). 2001. pp. 59-64.

(56)

References Cited**OTHER PUBLICATIONS**

- Pratt & Whitney (2014). Evaluation of ARA catalytic hydrothermolysis (CH) fuel: Continuous lower energy, emissions and noise (CLEEN) program. FR-27652-2 Rev. 1. Apr. 30, 2014. pp. 1-17.
- Press release. The GE90 engine. Retrieved from: <https://www.geaviation.com/commercial/engines/ge90-engine>; <https://www.geaviation.com/press-release/ge90-engine-family/ge90-115b-fan-completing-blade-testing-schedule-first-engine-test>; and <https://www.geaviation.com/press-release/ge90-engine-family/ge90-composite-fan-blade-revolution-turns-20-years-old>.
- Product Brochure. Garrett TFE731. Allied Signal. Copyright 1987. pp. 1-24.
- Pyrograf-III Carbon Nanofiber. Product guide. Retrieved Dec. 1, 2015 from: http://pyrografproducts.com/Merchant5/merchant.mvc?Screen=cp_nanofiber.
- QCSEE ball spline pitch-change mechanism whirligig test report. (1978). NASA-CR-135354. Sep. 1, 1978. pp. 1-57.
- QCSEE hamilton standard cam/harmonic drive variable pitch fan actuation system derail design report. (1976). NASA-CR-134852. Mar. 1, 1976. pp. 1-172.
- QCSEE main reduction gears bearing development program final report. (1975). NASA-CR-134890. Dec. 1, 1975. pp. 1-41.
- QCSEE over-the-wing final design report. (1977). NASA-CR-134848. Jun. 1, 1977. pp. 1-460.
- QCSEE over-the-wing propulsion system test report vol. III—mechanical performance. (1978). NASA-CR-135325. Feb. 1, 1978. pp. 1-112.
- QCSEE Preliminary analyses and design report. vol. I. (1974). NASA-CR-134838. Oct. 1, 1974. pp. 1-337.
- QCSEE preliminary analyses and design report. vol. II. (1974). NASA-CR-134839. Oct. 1, 1974. pp. 340-630.
- QCSEE the aerodynamic and mechanical design of the QCSEE under-the-wing fan. (1977). NASA-CR-135009. Mar. 1, 1977. pp. 1-137.
- QCSEE the aerodynamic and preliminary mechanical design of the QCSEE OTW fan. (1975). NASA-CR-134841. Feb. 1, 1975. pp. 1-74.
- QCSEE under-the-wing engine composite fan blade design. (1975). NASA-CR-134840. May 1, 1975. pp. 1-51.
- QCSEE under-the-wing engine composite fan blade final design test report. (1977). NASA-CR-135046. Feb. 1, 1977. pp. 1-55.
- QCSEE under-the-wing engine composite fan blade preliminary design test report. (1975). NASA-CR-134846. Sep. 1, 1975. pp. 1-56.
- QCSEE under-the-wing engine digital control system design report. (1978). NASA-CR-134920. Jan. 1, 1978. pp. 1-309.
- Quiet clean general aviation turboprop (QCGAT) technology study final report vol. I. (1975). NASA-CR-164222. Dec. 1, 1975. pp. 1-186.
- Ramsden, J.M. (Ed). (1978). The new European airliner. Flight International, 113(3590). Jan. 7, 1978. pp. 39-43.
- Ratna, D. (2009). Handbook of thermoset resins. Shawbury, UK: iSmithers. pp. 187-216.
- Rauch, D. (1972). Design study of an air pump and integral lift engine ALF-504 using the Lycoming 502 core. Prepared for NASA. Jul. 1972. pp. 1-182.
- Read, B. (2014). Powerplant revolution. AeroSpace. May 2014. pp. 28-31.
- Reshotko, M., Karchmer, A., Penko, P.F. and McArdle, J.G. (1977). Core noise measurements on a YF-102 turbofan engine. NASA TM X-73587. Prepared for Aerospace Sciences Meeting sponsored by the American Institute of Aeronautics and Astronautics. Jan. 24-26, 1977.
- Response to the Summons of Oral Proceedings for European Patent No. EP2949882 by Rolls-Royce, dated Oct. 9, 2019.
- Response to the Summons of Oral Proceedings for European Patent No. EP2949882 by Safran, dated Oct. 9, 2019.
- Response to the Summons of Oral Proceedings for European Patent No. EP3051078 by Rolls-Royce, dated Oct. 17, 2019.
- Reynolds, C.N. (1985). Advanced prop-fan engine technology (APET) single- and counter-rotation gearbox/pitch change mechanism. Prepared for NASA. NASA CR-168114 (vol. I). Jul. 1985. pp. 1-295.
- Riegler, C., and Bichlmaier, C. (2007). The geared turbofan technology—Opportunities, challenges and readiness status. Proceedings CEAS. Sep. 10-13, 2007. Berlin, Germany. pp. 1-12.
- Rolls-Royce M45H. Jane's Aero-engines, Aero-engines—Turbofan. Feb. 24, 2010.
- Rossikhin, A. A., Pankov, S.V., Khaletskiy, Y.D., and Mileschin, V.I. (2014). Computational study on acoustic features of fan model with leaned stators. Proceedings of ASME Turbo Expo 2014: Turbine Technical Conference and Exposition. Jun. 16-20, 2014. pp. 1-10.
- Rossikhin, A., Pankov S., Brailko, I., and Mileschin, V. (2014). Numerical investigation of high bypass ratio fan tine noise. Proceedings of ASME Turbo Expo 2014: Turbine Technical Conference and Exposition. Jun. 16-20, 2014. pp. 1-10.
- Rotordynamic instability problems in high-performance turbomachinery. (1986). NASA conference publication 2443. Jun. 2-4, 1986.
- Roux, E. (2007). Turbofan and turbojet engines database handbook. Editions Elodie Roux. Blagnac: France, pp. 1-595.
- Salemme, C.T. and Murphy, G.C. (1979). Metal spar/superhybrid shell composite fan blades. Prepared for NASA. NASA-CR-159594. Aug. 1979. pp. 1-127.
- Sargisson, D.F. (1985). Advanced propfan engine technology (APET) and single-rotation gearbox/pitch change mechanism. NASA Contractor Report-168113. R83AEB592. Jun. 1, 1985. pp. 1-476.
- Savelle, S.A. and Garrard, G.D. (1996). Application of transient and dynamic simulations to the U.S. Army T55-L-712 helicopter engine. The American Society of Mechanical Engineers. Presented Jun. 10-13, 1996. pp. 1-8.
- Schaefer, J.W., Sagerser, D.R., and Stakolich, E.G. (1977). Dynamics of high-bypass-engine thrust reversal using a variable-pitch fan. Technical Report prepared for NASA. NASA-TM-X-3524. May 1, 1977. pp. 1-33.
- Seader, J.D. and Henley, E.J. (1998). Separation process principles. New York, NY: John Wiley & Sons, Inc. pp. 722-726 and 764-771.
- Shah, D.M. (1992). MoSi₂ and other silicides as high temperature structural materials. Superalloys 1992. The Minerals, Metals, Materials Society. pp. 409-422.
- Shorter Oxford English Dictionary, 6th Edition. (2007), vol. 2, N-Z, pp. 1888.
- Silverstein, C.C., Gottschlich, J.M., and Meininger, M. The feasibility of heat pipe turbine vane cooling. Presented at the International Gas Turbine and Aeroengine Congress and Exposition, The Hague, Netherlands. Jun. 13-16, 1994. pp. 1-7.
- Singh, A. (2005). Application of a system level model to study the planetary load sharing behavior. Journal of Mechanical Design. vol. 127. May 2005. pp. 469-476.
- Singh, B. (1986). Small engine component technology (SECT) study. NASA CR-175079. Mar. 1, 1986. pp. 1-102.
- Singh, R. and Houser, D.R. (1990). Non-linear dynamic analysis of geared systems. NASA-CR-180495. Feb. 1, 1990. pp. 1-263.
- Smith, C.E., Hirschkrone, R., and Warren, R.E. (1981). Propulsion system study for small transport aircraft technology (STAT). Final report. NASA-CR-165330. May 1, 1981. pp. 1-216.
- Smith, L.H. Jr. (1993). NASA/GE fan and compressor research accomplishments. May 24-27, 1993. pp. 1-20.
- Smith-Boyd, L. and Pike, J. (1986). Expansion of epicyclic gear dynamic analysis program. Prepared for NASA. NASA CR-179563. Aug. 1986. pp. 1-98.
- Sowers, H.D. and Coward, W.E. (1978). QCSEE over-the-wing (OTW) engine acoustic design. NASA-CR-135268. Jun. 1, 1978. pp. 1-52.
- Spadaccini, L.J., and Huang, H. (2002). On-line fuel deoxygenation for coke suppression. ASME, Jun. 2002. pp. 1-7.
- Spadaccini, L.J., Sobel, D.R., and Huang, H. (2001). Deposit formation and mitigation in aircraft fuels. Journal of Eng. for Gas Turbine and Power, vol. 123. Oct. 2001. pp. 741-746.
- Summons to Attend Oral Proceedings for European Patent Application No. EP13777804.9 dated Dec. 10, 2019.
- Summons to Attend Oral Proceedings for European Patent Application No. EP13778330.4 (EP2809922) dated Dec. 2, 2019.

(56)

References Cited

OTHER PUBLICATIONS

- Summons to Attend Oral Proceedings for European Patent Application No. EP13822569.3 (EP2841718), dated Oct. 23, 2019, 13 pages.
- Sundaram, S.K., Hsu, J.-Y., Speyer, R.F. (1994). Molten glass corrosion resistance of immersed combustion-heating tube materials in soda-lime-silicate glass. *J. Am. Ceram. Soc.* 77(6). pp. 1613-1623.
- Sundaram, S.K., Hsu, J.-Y., Speyer, R.F. (1995). Molten glass corrosion resistance of immersed combustion-heating tube materials in e-glass. *J. Am. Ceram. Soc.* 78(7). pp. 1940-1946.
- Sutliff, D. (2005). Rotating rake turbofan duct mode measurement system. NASA TM-2005-213828. Oct. 1, 2005. pp. 1-34.
- Suzuki, Y., Morgan, P.E.D., and Niihara, K. (1998). Improvement in mechanical properties of powder-processed MoSi₂ by the addition of Sc₂O₃ and Y₂O₃. *J. Am. Ceram. Soc.* 81(12). pp. 3141-3149.
- Sweetman, B. and Sutton, O. (1998). Pratt Whitney's surprise leap. *Interavia Business & Technology*, 53.621, p. 25.
- Taylor, W.F. (1974). Deposit formation from deoxygenated hydrocarbons. I. General features. *Ind. Eng. Chem., Prod. Res. Develop.*, vol. 13(2). 1974. pp. 133-138.
- Taylor, W.F. (1974). Deposit formation from deoxygenated hydrocarbons. II. Effect of trace sulfur compounds. *Ind. Eng. Chem., Prod. Res. Dev.*, vol. 15(1). 1974. pp. 64-68.
- Taylor, W.F. and Frankenfeld, J.W. (1978). Deposit formation from deoxygenated hydrocarbons. 3. Effects of trace nitrogen and oxygen compounds. *Ind. Eng. Chem., Prod. Res. Dev.*, vol. 17(1). 1978. pp. 86-90.
- Technical Data. Teflon. WS Hampshire Inc. Retrieved from: http://catalog.ws-hampshire.com/Asset/psg_teflon_ptfe.pdf.
- Technical Report. (1975). Quiet Clean Short-haul Experimental Engine (Qcsee) Utw fan preliminary design. NASA-CR-134842. Feb. 1, 1975. pp. 1-98.
- Technical Report. (1977). Quiet Clean Short-haul Experimental Engine (QCSEE) Under-the-Wing (UTW) final design report. NASA-CR-134847. Jun. 1, 1977. pp. 1-697.
- Third Party Observations for EP Application No. EP13777804.9 (EP2809940), by Rolls-Royce, dated Nov. 21, 2019, 3 pages.
- Third Party Observations for EP Application No. EP18191325.2 (EP3608515) by Rolls Royce dated Mar. 10, 2020.
- Third Party Observations for EP Application No. EP18191325.2 (EP3608515) by Rolls Royce dated Mar. 6, 2020.
- Third Party Observations for EP Application No. EP18191333.6 (EP3467273) by Rolls Royce dated Mar. 9, 2020.
- Thompson L. Gamechanger: How Pratt & Whitney transformed itself to lead a revolution in jet propulsion. *Forbes*. Retrieved Apr. 28, 2016 from: <http://www.forbes.com/sites/lorenthompson/2016/01/21/gamechanger-how-pratt-whitney-transformed-itself-to-lead-a-revolution-in-jet-propulsion/print/>.
- Thulin, R.D., Howe, D.C., and Singer, I.D. (1982). Energy efficient engine: High pressure turbine detailed design report. Prepared for NASA. NASA CR-165608. Received Aug. 9, 1984. pp. 1-178.
- Gliebe, P.R., Ho, P.Y., and Mani, R. (1995). UHB engine fan and broadband noise reduction study. NASA CR-198357. Jun. 1995. pp. 1-48.
- Grace, S.M., Sondak, D.L., Dorney, D.J., and Longue, M. (2007). CFD computation of fan interaction noise. *Proceedings of IMECE2007 2007 ASME International Mechanical Engineering Congress and Exposition*. Nov. 11-14, 2007. pp. 1-11.
- Grady, J.E., Weir, D.S., Lamoureux, M.C., and Martinez, M.M. (2007). Engine noise research in NASA's quiet aircraft technology project. *Papers from the International Symposium on Air Breathing Engines (ISABE)*. 2007.
- Gray, D.E. (1978). Energy efficient engine preliminary design and integration studies. NASA-CP-2036-PT-1. Nov. 1978. pp. 89-110.
- Gray, D.E. (1978). Energy efficient engine preliminary design and integration studies. Prepared for NASA. NASA CR-135396. Nov. 1978. pp. 1-366.
- Gray, D.E. and Gardner, W.B. (1983). Energy efficient engine program technology benefit/cost study—vol. 2. NASA CR-174766. Oct. 1983. pp. 1-118.
- Greitzer, E.M., Bonnefoy, P.A., Delaroseblanco, E., Dorbian, C.S., Drela, M., Hall, D.K., Hansman, R.J., Hileman, J.I., Liebeck, R.H., Levegren, J. (2010). N+3 aircraft concept designs and trade studies, final report. vol. 1. Dec. 1, 2010. NASA/CR-2010-216794/vol. 1. pp. 1-187.
- Griffiths, B. (2005). Composite fan blade containment case. *Modern Machine Shop*. Retrieved from: <http://www.mmsonline.com/articles/composite-fan-blade-containment-case> pp. 1-4.
- Grose T.K. (2013). Reshaping flight for fuel efficiency: Five technologies on the runway. *National Geographic*. Mar. 16, 2016. Retrieved Apr. 23, 2013 from: <http://news.nationalgeographic.com/news/energy/2013/04/130423-reshaping-flight-for-fuel-efficiency.html>.
- Growneneweg, J.F. (1994). Fan noise research at NASA. NASA-TM-106512. Prepared for the 1994 National Conference on Noise Control Engineering. Fort Lauderdale, FL. May 1-4, 1994. pp. 1-10.
- Growneneweg, J.F. (1994). Fan noise research at NASA. Noise-CON 94. Fort Lauderdale, FL. May 1-4, 1994. pp. 1-10.
- Gunston, B. (Ed.) (2000). *Jane's aero-engines*, Issue seven. Coulsdon, Surrey, UK: Jane's Information Group Limited. pp. 510-512.
- Guynn, M. D., Berton, J.J., Fisher, K. L., Haller, W.J., Tong, M. T., and Thurman, D.R. (2009). Analysis of turbofan design options for an advanced single-aisle transport aircraft. *American Institute of Aeronautics and Astronautics*. pp. 1-13.
- Guynn, M. D., Berton, J.J., Fisher, K. L., Haller, W.J., Tong, M. T., and Thurman, D.R. (2011). Refined exploration of turbofan design options for an advanced single-aisle transport. NASA/TM-2011-216883. pp. 1-27.
- Guynn, M.D., Berton, J.J. & Haller, W.J. (2013). Advanced single-aisle transport propulsion design options revisited. *AIAA* 2013-4330. Aug. 12-14, 2013. p. 1-17.
- Guynn, M.D., Berton, J.J., Fisher, K.L., Haller, W.J., Tong, M.T., and Thurman, D.R. (2009). Engine concept study for an advanced single-aisle transport. NASA/TM-2009-215784. pp. 1-97.
- Haldenbrand, R. and Norgren, W.M. (1979). *Airesearch QCGAT program [quiet clean general aviation turbofan engines]*. NASA-CR-159758. pp. 1-199.
- Hall, C.A. and Crichton, D. (2007). Engine design studies for a silent aircraft. *Journal of Turbomachinery*, 129, 479-487.
- Han, J., Dutta, S., and Ekkad, S.V. (2000). *Gas turbine heat transfer and cooling technology*. New York, NY: Taylor Francis. pp. 1-25, 129-157, and 160-249.
- Haque, A. and Shamsuzzoha, M., Hussain, F., and Dean, D. (2003). S20-glass/epoxy polymer nanocomposites: Manufacturing, structures, thermal and mechanical properties. *Journal of Composite Materials*, 37 (20), 1821-1837.
- Hazlett, R.N. (1991). Thermal oxidation stability of aviation turbine fuels. Philadelphia, PA: ASTM. pp. 1-163.
- Heidelberg, L.J., and Hall, D.G. (1992). Acoustic mode measurements in the inlet of a model turbofan using a continuously rotating rake. *AIAA-93-0598*. 31st Aerospace Sciences Meeting. Reno, NV. Jan. 11-14, 1993. pp. 1-30.
- Heidelberg, L.J., and Hall, D.G. (1992). Acoustic mode measurements in the inlet of a model turbofan using a continuously rotating rake. NASA-TM-105989. Prepared for the 31st Aerospace Sciences Meeting. Reno, NV. Jan. 11-14, 1993. pp. 1-30.
- Heingartner, P., Mba, D., Brown, D. (2003). Determining power losses in the helical gear mesh; Case Study. *ASME 2003 Design Engineering Technical Conferences*. Chicago, IL. Sep. 2-6, 2003. pp. 1-7.
- Hemighaus, G., Boval, T., Bacha, J., Barnes, F., Franklin, M., Gibbs, L., . . . Morris, J. (2007). *Aviation fuels: Technical review*. Chevron Products Company. pp. 1-94. Retrieved from: https://www.cgabusinessdesk.com/document/aviation_tech_review.pdf.
- Hendricks, E.S. and Tong, M.T. (2012). Performance and weight estimates for an advanced open rotor engine. NASA/TM-2012-217710. pp. 1-13.
- Hess, C. (1998). Pratt & Whitney develops geared turbofan. *Flug Revue* 43(7). Oct. 1998.

(56)

References Cited**OTHER PUBLICATIONS**

- Hill, P.G. & Peterson, C.R. (2010). *Mechanics and thermodynamics of propulsion*, 2nd Edition. New Delhi, India: Dorling Kindersley. p. 225-6.
- Hill, P.G., Peterson, C.R. (1965). *Mechanics and thermodynamics of propulsion*. Addison-Wesley Publishing Company, Inc. pp. 307-308.
- Hill, P.G., Peterson, C.R. (1992). *Mechanics and thermodynamics of propulsion*, 2nd Edition. Addison-Wesley Publishing Company, Inc. pp. 400-406.
- Holcombe, V. (2003). Aero-Propulsion Technology (APT) task V low noise ADP engine definition study. NASA CR-2003-212521. Oct. 1, 2003. pp. 1-73.
- Honeywell Learjet 31 and 35/36 TFE731-2 to 2C Engine Upgrade Program. Sep. 2005. pp. 1-4.
- Honeywell LF502. Jane's Aero-engines, Aero-engines—Turbofan. Feb. 9, 2012.
- Honeywell LF502. Jane's Aero-engines, Aero-engines—Turbofan. Aug. 17, 2016.
- Honeywell LF507. Jane's Aero-engines, Aero-engines—Turbofan. Feb. 9, 2012.
- Honeywell Sabreliner 65 TFE731-3 to -3D Engine Upgrade Program. Oct. 2005. pp. 1-4.
- Honeywell TFE731. Jane's Aero-engines, Aero-engines—Turbofan. Jul. 18, 2012.
- Honeywell TFE731 Pilot Tips. pp. 1-143.
- Honeywell TFE731-5AR to -5BR Engine Conversion Program. Sep. 2005. pp. 1-4.
- Horikoshi, S. and Serpone, N. (2013). *Introduction to nanoparticles. Microwaves in nanoparticle synthesis*. Wiley-VCH Verlag GmbH Co. KGaA. pp. 1-24.
- Horlock, J.H. (1958). *Axial flow compressors: Fluid mechanics and thermodynamics*. London: Butterworths Scientific Publications. pp. 29, 70.
- Howard, D.F. (1976). QCSEE preliminary under the wing flight propulsion system analysis report. NASA CR-134868. Feb. 1, 1976. pp. 1-260.
- Howe, D.C. and Wynosky, T.A. (1985). Energy efficient engine program advanced turbofan nacelle definition study. NASA CR-174942. May 1, 1985. pp. 174.
- Howe, D.C., and Wynosky, T.A. (1985). Energy efficient engine program advanced turbofan nacelle definition study. NASA-CR-174942. May 1985. University of Washington dated Dec. 13, 1990. pp. 1-14.
- Howe, D.C., and Wynosky, T.A. (1985). Energy efficient engine program advanced turbofan nacelle definition study. NASA-CR-174942. May 1985. pp. 1-60.
- Huang, H., Sobel, D.R., and Spadaccini, L.J. (2002). Endothermic heat-sink of hydrocarbon fuels for scramjet cooling. AIAA/ASME/SAE/ASEE, Jul. 2002. pp. 1-7.
- Hughes, C. (2002). Aerodynamic performance of scale-model turbofan outlet guide vanes designed for low noise. Prepared for the 40th Aerospace Sciences Meeting and Exhibit. Reno, NV. NASA/TM-2001-211352. Jan. 14-17, 2002. pp. 1-38.
- Hughes, C. (2010). Geared turbofan technology. NASA Environmentally Responsible Aviation Project. Green Aviation Summit. NASA Ames Research Center. Sep. 8-9, 2010. pp. 1-8.
- Hughes, C., Jeracki, R.J., Woodward, R.P., and Miller, C.J. (2005). Fan noise source diagnostic test—Rotor alone aerodynamic performance results. NASA/TM-2005-211681. pp. 1-28.
- Hughes, C.E., Podboy, G.G., Woodward, R.P., and Jeracki, R.J. (2005). The effect of bypass nozzle exit area on fan aerodynamic performance and noise in a model turbofan simulator. Proceedings of GT2005 ASME Turbo Expo 2005 Power for Land, Sea, and Air. Jun. 6-9, 2005. pp. 1-24.
- 2003 NASA seal/secondary air system workshop. (2003). NASA/CP-2004-212963/vol. 1. Sep. 1, 2004. pp. 1-408.
- K2012). *Gas Power Cycle—Jet Propulsion Technology*, A case study. Machine Design Magazine. Nov. 5, 1998. Retrieved from: <http://machinedesign.com/content/pw8000-0820>.
- About Gas Turb. Retrieved Jun. 26, 2018 from: <http://gasturb.de/about-gasturb.html>.
- Adamson, A.P. (1975). Quiet Clean Short-Haul Experimental Engine (QCSEE) design rationale. Society of Automotive Engineers. Air Transportation Meeting. Hartford, CT. May 6-8, 1975. pp. 1-9.
- Aeronautical Engineering: A cumulative index to the 1977 issues. National Aeronautics and Space Administration. NASA SP-7037. Washington, D.C. Jan. 1978.
- Aerospace Information Report. (2008). Advanced ducted propulsor in-flight thrust determination. SAE International AIR5450. Aug. 2008. p. 1-392.
- Agarwal, B.D and Broutman, L.J. (1990). *Analysis and performance of fiber composites*, 2nd Edition. John Wiley Sons, Inc. New York: New York. pp. 1-11, 13-23, 26-33, 50-51, 56-58, 60-61, 64-71, 87-89, 324-329, 436-437.
- AGMA Standard (1997). Design and selection of components for enclosed gear drives. Alexandria, VA: American Gear Manufacturers Association. pp. 1-48.
- AGMA Standard (1999) Flexible couplings—Mass elastic properties and other characteristics. Alexandria, VA: American Gear Manufacturers Association. pp. 1-46.
- AGMA Standard (2006). Design manual for enclosed epicyclic gear drives. Alexandria, VA: American Gear Manufacturers Association. pp. 1-104.
- Ahmad, F. and Mizramoghadam, A.V. (1999). Single v. two stage high pressure turbine design of modern aero engines. ASME. Prestand at the International Gast Turbine Aeroengine Congress & Exhibition. Indianapolis, Indiana. Jun. 7-10, 1999. pp. 1-9.
- Amezket, M., Iriarte, X., Ros, J., and Pintor, J. (2009). Dynamic model of a helical gear pair with backlash and angle-varying mesh stiffness. Multibody Dynamics 2009, ECCOMAS Thematic Conference. 2009. pp. 1-36.
- Anderson, N.E., Loewenthal, S.H., and Black, J.D. (1984). An analytical method to predict efficiency of aircraft gearboxes. NASA Technical Memorandum prepared for the Twentieth Joint Propulsion Conference. Cincinnati, OH. Jun. 11-13, 1984. pp. 1-25.
- Anderson, R.D. (1985). Advanced Propfan Engine Technology (APET) definition study, single and counter-rotation gearbox/pitch change mechanism design. NASA CR-168115. Jul. 1, 1985. pp. 1-289.
- Annexe Mesures—Methodologie de mesure et de calcul. STF495M-4 and STF495M-5. Cited in: Documents cited by Rolls-Royce in anticipation of Oral Proceedings for Opposition of European Patent No. 2809932 dated Jan. 20, 2020.
- Avco Lycoming Division. ALF 502L Maintenance Manual. Apr. 1981. pp. 1-118.
- Aviadvigatel D-110. Jane's Aero-engines, Aero-engines—Turbofan. Jun. 1, 2010.
- Awker, R.W. (1986). Evaluation of propfan propulsion applied to general aviation. NASA CR-175020. Mar. 1, 1986. pp. 1-140.
- Baker, R.W. (2000). *Membrane technology and applications*. New York, NY: McGraw-Hill. pp. 87-153.
- Benzakein, M.J. (2001). Propulsion strategy for the 21st century—A vision into the future. pp. 1-9.
- Berton, J.J. and Guynn, M.D. (2012). Multi-objective optimization of a turbofan for an advanced, single-aisle transport. NASA/TM-2012-217428. pp. 1-26.
- Bessarabov, D.G., Jacobs, E.P., Sanderson, R.D., and Beckman, I.N. (1996). Use of nonporous polymeric flat-sheet gas-separation membranes in a membrane-liquid contactor: experimental studies. Journal of Membrane Sciences, vol. 113. 1996. pp. 275-284.
- Bloomer, H.E. and Loeffler, I.J. (1982). QCSEE over-the-wing engine acoustic data. NASA-TM-82708. May 1, 1982. pp. 1-558.
- Bloomer, H.E. and Samanich, N.E. (1982). QCSEE under-the-wing engine acoustic data. NASA-TM-82691. May 1, 1982. pp. 1-28.
- Bloomer, H.E. and Samanich, N.E. (1982). QCSEE under-the-wing engine-wing-flap aerodynamic profile characteristics. NASA-TM-82890. Sep. 1, 1982. pp. 1-48.
- Bloomer, H.E., Loeffler, I.J., Kreim, W.J., and Coats, J.W. (1981). Comparison of NASA and contractor results from aeroacoustic tests of QCSEE OTW engine. NASA Technical Memorandum 81761. Apr. 1, 1981. pp. 1-30.

(56)

References Cited

OTHER PUBLICATIONS

- Bornstein, N. (1993). Oxidation of advanced intermetallic compounds. *Journal de Physique IV*, 1993, 03 (C9), pp. C9-367-C9-373.
- Brennan, P.J. and Krolczek, E.J. (1979). Heat pipe design handbook. Prepared for National Aeronautics and Space Administration by B & K Engineering, Inc. Jun. 1979. pp. 1-348.
- Brief Communication from Opponent after Oral Proceedings for European Patent Application No. 13743283.7 (2809932), by Safran Aircraft Engines, dated Dec. 2, 2019.
- Brines, G.L. (1990). The turbofan of tomorrow. *Mechanical Engineering: The Journal of the American Society of Mechanical Engineers*, 108(8), 65-67.
- Bucknell, R.L. (1973). Influence of fuels and lubricants on turbine engine design and performance, fuel and lubricant analyses. Final Technical Report, Mar. 1971-Mar. 1973. pp. 1-252.
- Bunker, R.S. (2005). A review of shaped hole turbine film-cooling technology. *Journal of Heat Transfer* vol. 127. Apr. 2005. pp. 441-453.
- Carney, K., Pereira, M. Revilock, and Matheny, P. (2003). Jet engine fan blade containment using two alternate geometries. 4th European LS-DYNA Users Conference. pp. 1-10.
- CFM International LEAP. (n.d.) In Wikipedia. Retrieved Dec. 17, 2014 from http://en.wikipedia.org/wiki/CFM_International_LEAP.
- Chapman J.W., et al., "Control Design for an Advanced Geared Turbofan Engine", AIAA Joint Propulsion Conference 2017, Jul. 10, 2017-Jul. 12, 2017, Atlanta, GA, pp. 1-12.
- Cheryan, M. (1998). Ultrafiltration and microfiltration handbook. Lancaster, PA: Technomic Publishing Company, Inc. pp. 171-236.
- Ciepluch, C. (1977). Quiet clean short-haul experimental engine (QCSEE) under-the-wing (UTW) final design report. Prepared for NASA. NASA-CP-134847. Retrieved from: <https://ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/19800075257.pdf>.
- Clarke, D.R. and Levi, C.G. (2003). Materials design for the next generation thermal barrier coatings. *Annual. Rev. Mater. Res.* vol. 33. 2003. pp. 383-417.
- Cramoisi, G. Ed. (2012). Death in the Potomac: The crash of Air Florida Flight 90. Air Crash Investigations. Accident Report NTSB/AAR-82-8. p. 45-47.
- Crichton, D., and Hall, T. (2007). Fan design and operation for ultra low noise. University of Cambridge Department of Engineering. Apr. 2007. pp. 1-241.
- Croft, J. (2009). Integrated propulsion systems: The engine connection. Retrieved Dec. 17, 2014 from <http://www.flightglobal.com/news/articles/integrated-propulsion-systems-the-engine-connection-333001/>.
- Cusick, M. (1981). Avco Lycoming's ALF 502 high bypass fan engine. Society of Automotive Engineers, Inc. Business Aircraft Meeting Exposition. Wichita, Kansas. Apr. 7-10, 1981. pp. 1-9.
- Daggett, D.L., Brown, S.T., and Kawai, R.T. (2003). Ultra-efficient engine diameter study. NASA/CR-2003-212309. May 2003. pp. 1-52.
- Dalton, III., W.N. (2003). Ultra high bypass ratio low noise engine study. NASA/CR-2003-212523. Nov. 2003. pp. 1-187.
- Daly, M. Ed. (2008). Jane's Aero-Engine. Issue Twenty-three. Mar. 2008. p. 707-12.
- Daly, M. Ed. (2010). Jane's Aero-Engine. Issue Twenty-seven. Mar. 2010. p. 633-636.
- Damerau, J. (2014) What is the mesh stiffness of gears Screen shot of query submitted by Vahid Dabbagh, answered by Dr. Jochan Damerau, Research General Managerat Bosch Corp., Japan. Retrieved from: https://www.researchgate.net/post/What_is_the_mesh_stiffness_of_gears.
- Darrah, S. (1987). Jet fuel deoxygenation. Interim Report for Period Mar. 1987-Jul. 1988. pp. 1-22.
- Dassault Falcon 900EX Easy Systems Summary. Retrieved from: <http://www.smartcockpit.com/docs/F900EX-Engines.pdf> pp. 1-31.
- Datasheet. CF6-80C2 high-bypass turbofan engines. Retrieved from <https://geaviation.com/sites/default/files/datasheet-CF6-80C2.pdf>.
- Datasheet. CFM56-5B for the Airbus A320ceo family and CFM56-7B for the Boeing 737 family. <https://www.cfmaeroengines.com/>.
- Datasheet. Genx™ high bypass turbofan engines. Retrieved from: <https://www.geaviation.com/sites/default/files/datasheet-genx.pdf>.
- Davies, D. and Miller, D.C. (1971). A variable pitch fan for an ultra quiet demonstrator engine. 1976 Spring Convention: Seeds for Success in Civil Aircraft Design in the Next Two Decades. pp. 1-18.
- Davis, D.G.M. (1973). Variable-pitch fans: Progress in Britain. *Flight International*. Apr. 19, 1973. pp. 615-617.
- Decision Denying Institution of Inter Partes Review, *General Electric Company*, Petitioner v. *United Technologies Corporation*, Patent Owner, IPR 2016-00855, Entered Sep. 29, 2016.
- Decision for Inter Partes Review of U.S. Pat. No. 9,121,412. Claims 1, 2, 4, 5, 7, 8, and 11. *General Electric Company*, Petitioner v. *United Technologies Corporation*, Patent Owner. Entered date of Oct. 27, 2016.
- Decision Institution of Inter Parties Review, *General Electric Company*, Petitioner v. *United Technologies Corporation*, Patent Owner, IPR2017-00999, U.S. Pat. No. 8,277,174, Entered Jul. 6, 2017, pp. 1-4.
- Decision of the Opposition Division for European Patent No. 2811120 (14155460.0), dated Jan. 15, 2020.
- Decker, S. and Clough, R. (2016). GE wins shot at voiding pratt patent in jet-engine clash. Bloomberg Technology. Retrieved from: <https://www.bloomberg.com/news/articles/2016-06-30/ge-wins-shot-to-invalidate-pratt-airplane-engine-patent-in-u-s>.
- Declaration of Dr. Magdy Attia, In re U.S. Pat. No. 8,313,280, Executed Oct. 21, 2016, pp. 1-88.
- Declaration of Dr. Magdy Attia, In re U.S. Pat. No. 8,517,668, Executed Dec. 8, 2016, pp. 1-81.
- Declaration of John Eaton, Ph.D. In re U.S. Pat. No. 8,689,568, Executed Mar. 28, 2016, pp. 1-87.
- Declaration of Reza Abhari, In re U.S. Pat. No. 8,227,174, IPR2017-00999, Executed Feb. 7, 2017, pp. 1-85.
- Declaration of Reza Abhari, In re U.S. Pat. No. 8,448,895, Executed Nov. 28, 2016, pp. 1-81.
- Declaration of Reza Abhari. In re U.S. Pat. No. 8,695,920, claims 1-4, 7-14, 17 and 19, Executed Nov. 29, 2016, pp. 1-102.
- Declaration of Reza Abhari. In re U.S. Pat. No. 8,695,920. Executed Nov. 30, 2016, pp. 1-67.
- Declaration of Reza Abhari, Ph.D. In re U.S. Pat. No. 8,337,149, Executed Apr. 5, 2016, pp. 1-77.
- Declaration of Reza Abhari, Ph.D. In re U.S. Pat. No. 8,844,265, Executed Jun. 28, 2016, pp. 1-91.
- Declaration of Reza Abhari, Ph.D. In re U.S. Pat. No. 9,121,412, Executed Apr. 23, 2016, pp. 1-71.
- Defeo, A. and Kulina, M. (1977). Quiet clean short-haul experimental engine (QCSEE) main reduction gears detailed design final report. Prepared for Nasa. NASA-CR-134872. Jul. 1977. pp. 1-157.
- Dickey, T.A. and Dobak, E.R. (1972). The evolution and development status of ALF 502 turbofan engine. National Aerospace Engineering and Manufacturing Meeting. San Diego, California. Oct. 2-5, 1972. pp. 1-12.
- Digital Press Kit. Pratt Whitney PurePower Engine: This changes everything. pp. 4-6.
- Dixon, S.L. (1998). Fluid mechanics, thermodynamics of turbomachinery. Oxford: Elsevier Butterworth-Heinemann. pp. 94-144.
- Drago, R.J. (1974). Heavy-lift helicopter brings up drive ideas. *Power Transmission Design*. Mar. 1987. pp. 1-15.
- Drago, R.J. and Margasahayam, R.N. (1987). Stress analysis of planet gears with integral bearings; 3D finite-element model development and test validation. 1987 MSC NASTRAN World Users Conference. Los Angeles, CA. Mar. 1987. pp. 1-14.
- Dudley, D.W., Ed. (1954). Handbook of practical gear design. Lancaster, PA: Technomic Publishing Company, Inc. pp. 3.96-102 and 8.12-18.
- Dudley, D.W., Ed. (1962). Gear handbook. New York, NY: McGraw-Hill. pp. 14-17 (TOC, Preface, and Index).
- Dudley, D.W., Ed. (1962). Gear handbook. New York, NY: McGraw-Hill. pp. 3.14-18 and 12.7-12.21.
- Dudley, D.W., Ed. (1994). Practical gear design. New York, NY: McGraw-Hill. pp. 119-124.
- Edkins, D.P., Hirschkrone, R., and Lee, R. (1972). TF34 turbofan quiet engine study. Final Report prepared for NASA. NASA-CR-120914. Jan. 1, 1972. pp. 1-99.

(56)

References Cited**OTHER PUBLICATIONS**

- Edwards, T. and Zabarnick, S. (1993). Supercritical fuel deposition mechanisms. *Ind. Eng. Chem. Res.* vol. 32. 1993. pp. 3117-3122.
- El-Sayad, A.F. (2008). Aircraft propulsion and gas turbine engines. Boca Raton, FL: CRC Press. pp. 215-219 and 855-860.
- Enoki, T. Kodama, H., Kusuda, S. (2013). Investigation of fan rotor interaction with pressure disturbance produced by downstream pylon. *Proceedings of ASME Turbo Expo 2013: Turbine Technical Conference and Exposition* Jun. 3-7, 2013. pp. 1-14.
- Epstein, A.H. (2014). Aeropropulsion for commercial aviation in the twenty-first century and research directions needed. *AiAA Journal* 52(5). May 2014. pp. 901-911.
- European Search Report for Application No. EP12861657 dated Sep. 3, 2014.
- European Search Report for Application No. EP15166722.7 dated Sep. 2, 2015.
- European Search Report for Application No. EP16154639, dated Jun. 16, 2016, 7 pages.
- European Search Report for European Patent Application No. 19166650.2 completed Jul. 18, 2019.
- European Search Report for European Patent Application No. 21177641.4 completed Oct. 15, 2021.
- Faghri, A. (1995). Heat pipe and science technology. Washington, D.C.: Taylor Francis. pp. 1-60.
- Falchetti, F., Quiniou, H., and Verdier, L. (1994). Aerodynamic design and 3D Navier-Stokes analysis of a high specific flow fan. ASME. Presented at the International Gas Turbine and Aeroengine Congress and Exposition. The Hague, Netherlands. Jun. 13-16, 1994. pp. 1-10.
- File History for U.S. Appl. No. 12/131,876.
- Fisher, K., Berton, J., Guynn, M., Haller B., Thurman, D., and Tong, M. (2012). NASA's turbofan engine concept study for a next-generation single-aisle transport. Presentation to ICAO's noise technology independent expert panel. Jan. 25, 2012. pp. 1-23.
- Flack, R. (2005). Fundamentals of jet propulsion with applications. New York: Cambridge University Press. p. 281.
- Fledderjohn, K.R. (1983). The TFE731-5: Evolution of a decade of business jet service. SAE Technical Paper Series. Business Aircraft Meeting Exposition. Wichita, Kansas. Apr. 12-15, 1983. pp. 1-12.
- Frankenfeld, J.W. and Taylor, W.F. (1980). Deposit formation from deoxygenated hydrocarbons. 4. Studies in pure compound systems. *Ind. Eng. Chem., Prod. Res. Dev.*, vol. 19(1). 1978. pp. 65-70.
- Garret TFE731 Turbofan Engine (Cat C). Chapter 79: Lubrication System. TTFE731 Issue 2. 2010. pp. 1-24.
- Gates, D. Bombardier flies at higher market. *Seattle Times*. Jul. 13, 2008. pp. C6.
- Gibala, R., Ghosh, A.K., Van Aken, D.C., Srolovitz, D.J., Basu, A., Chang, H., . . . Yang, W. (1992). Mechanical behavior and interface design of MoSi₂-based alloys and composites. *Materials Science and Engineering*, A155, 1992. pp. 147-158.
- Gliebe, P.R. and Janardan, B.A. (2003). Ultra-high bypass engine aeroacoustic study. NASA/CR-2003-21252. GE Aircraft Engines, Cincinnati, Ohio. Oct. 2003. pp. 1-103.
- Ivchenko-Progress AI-727M. Jane's Aero-engines, Aero-engines—Turbofan. Nov. 27, 2011.
- Ivchenko-Progress D-436. Jane's Aero-engines, Aero-engines—Turbofan. Feb. 8, 2012.
- Ivchenko-Progress D-727. Jane's Aero-engines, Aero-engines—Turbofan. Feb. 7, 2007.
- Jacobson, N.S. (1993). Corrosion of silicon-based ceramics in combustion environments. *J. Am. Ceram. Soc.* 76 (1). pp. 3-28.
- Jeng, Y.-L., Lavernia, E.J. (1994). Processing of molybdenum disilicide. *J. of Mat. Sci.* vol. 29. 1994. pp. 2557-2571.
- Johnson, I.A. and Bullock, R.O. Ed. (1965). Aerodynamic design of axial-flow compressors. pp. 1-505.
- Johnston, R.P. and Hemsworth, M.C. (1978). Energy efficient engine preliminary design and integration studies. Jun. 1, 1978. pp. 1-28.
- Johnston, R.P., Hirschkron, R., Koch, C.C., Neitzel, R.E., and Vinson, P.W. (1978). Energy efficient engine: Preliminary design and integration study- final report. NASA CR-135444. Sep. 1978. pp. 1-401.
- Jorgensen, P.J., Wadsworth, M.E., and Cutler, I.B. (1961). Effects of water vapor on oxidation of silicon carbide. *J. Am. Ceram. Soc.* 44(6). pp. 248-261.
- Judgement and Final Written Decision. U.S. Pat. No. 8,448,895, *General Electric Company*, Petitioner, v. *United Technologies Corporation*, Patent Owner, IPR2017-00425, Entered Jul. 2, 2018, 52 pages.
- Kahn, H., Tayebi, N., Ballarini, R., Mullen, R.L., Heuer, A.H. (2000). Fracture toughness of polysilicon MEMS devices. *Sensors and Actuators* vol. 82. 2000. pp. 274-280.
- Kandebo, S.W. (1998). Geared-Turbofan engine design targets cost, complexity. *Aviation Week Space Technology*, 148(8). p. 34-5.
- Kandebo, S.W. (1998). Pratt & Whitney launches geared turbofan engine. *Aviation Week Space Technology*, 148(8). p. 32-4.
- Kaplan, B., Nicke, E., Voss, C. (2006). Design of a highly efficient low-noise fan for ultra-high bypass engines. *Proceedings of GT2006 for ASME Turbo Expo 2006: Power for Land, Sea and Air*. Barcelona, SP. May 8-11, 2006. pp. 1-10.
- Kasuba, R. and August, R. (1984). Gear mesh stiffness and load sharing in planetary gearing. *American Society of Mechanical Engineers, Design Engineering Technical Conference*, Cambridge, MA. Oct. 7-10, 1984. pp. 1-6.
- Kerrebrock, J.L. (1977). Aircraft engines and gas turbines. Cambridge, MA: The MIT Press, p. 11.
- Kestner, B.K., Schutte, U.S., Gladin, J.C., and Mavris, D.N. (2011). Ultra high bypass ratio engine sizing and cycle selection study for a subsonic commercial aircraft in the N+2 timeframe. *Proceedings of ASME Turbo Expo 2011*. Jun. 6-10, 2011. pp. 1-11.
- Kjelgaard, C. (2010). Gear up for the GTF. *Aircraft Technology*, 105. Apr.-May 2010. pp. 86, 88, 90, 92-95.
- Knip, Jr., G. (1987). Analysis of an advanced technology subsonic turbofan incorporating revolutionary materials. NASA Technical Memorandum. May 1987. pp. 1-23.
- Kollar, L.P. and Springer, G.S. (2003). Mechanics of composite structures. Cambridge, UK: Cambridge University Press, p. 465.
- Kovich, G. and Steinke, R.J. (1976). Performance of low-pressure-ratio low-tip-speed fan stage with blade tip solidity of 0.65. NASA TM X-3341. Feb. 1976. pp. 1-95.
- Krantz, T.L. (1990). Experimental and analytical evaluation of efficiency of helicopter planetary stage. NASA Technical Paper. Nov. 1990. pp. 1-19.
- Krauskopf, L. & Shumaker, L. (2014). GE exec says avoided geared design in jet engine battle with Pratt. *Reuters*. Sep. 15, 2014. <http://www.reuters.com/article/us-general-electric-united-tech-engine-idUSKBN0HA2H620140915>.
- Kurzke, J. (2001). GasTurb 9: A program to calculate design and off-design performance of gas turbines. Retrieved from: <https://www.scribd.com/document/92384867/GasTurb9Manual>.
- Kurzke, J. (2008). Preliminary Design, Aero-engine design: From state of the art turbofans towards innovative architectures. pp. 1-72.
- Kurzke, J. (2009). Fundamental differences between conventional and geared turbofans. *Proceedings of ASME Turbo Expo: Power for Land, Sea, and Air 2009*, Orlando, Florida. pp. 145-153.
- Kurzke, J. (2012). GasTurb 12: Design and off-design performance of gas turbines. Retrieved from: <https://www.scribd.com/document/153900429/GasTurb-12>.
- Larsson L., Gronstedt, T., and Kyprianidis, K.G. (2011). Conceptual design and mission analysis for a geared turbofan and an open rotor configuration. *Proceedings of ASME turbo expo 2011*. Jun. 6-10, 2011. pp. 1-12.
- Leckie, F.A. and Dal Bello, D.J. (2009). Strength and stiffness of engineering systems. *Mechanical Engineering Series*. Springer. pp. 1-10, 48-51.
- Lee, K.N. (2000). Current status of environmental barrier coatings for Si-Based ceramics. *Surface and Coatings Technology* 133-134, 2000. pp. 1-7.
- Levintan, R.M. (1975). Q-Fan demonstrator engine. *Journal of Aircraft*. vol. 12(8). Aug. 1975. pp. 658-663.

(56)

References Cited

OTHER PUBLICATIONS

- Lewicki, D.G., Black, J.D., Savage, M., and Coy, J.J. (1985). Fatigue life analysis of a turboprop reduction gearbox. NASA Technical Memorandum. Prepared for the Design Technical Conference (ASME). Sep. 11-13, 1985. pp. 1-26.
- Liebeck, R.H., Andrastek, D.A., Chau, J., Girvin, R., Lyon, R., Rawdon, B.K., Scott, P.W. et al. (1995). Advanced subsonic airplane design economics studies. NASA CR-195443. Apr. 1995. pp. 1-187.
- Litt, J.S. (2018). Sixth NASA Glenn Research Center propulsion control and diagnostics (PCD) workshop. NASA/CP-2018-219891. Apr. 1, 2018. pp. 1-400.
- Lord, W.K., MacMartin, D.G., and Tillman, T.G. (2000). Flow control opportunities in gas turbine engines. American Institute of Aeronautics and Astronautics. pp. 1-15.
- Lynwander, P. (1983). Gear drive systems: Design and application. New York, New York: Marcel Dekker, Inc. pp. 145, 355-358.
- Macisaac, B. and Langston, R. (2011). Gas turbine propulsion systems. Chichester, West Sussex: John Wiley Sons, Ltd. pp. 260-265.
- Mancuso, J.R. and Corcoran, J.P. (2003). What are the differences in high performance flexible couplings for turbomachinery Proceedings of the Thirty-Second Turbomachinery Symposium. 2003. pp. 189-207.
- Matsumoto, T., Toshiro, U., Kishida, A., Tsutomu, F., Maruyama, I., and Akashi, M. (1996). Novel functional polymers: Poly (dimethylsiloxane)-polyamide multiblock copolymer. VII. Oxygen permeability of aramid-silicone membranes in a gas-membrane-liquid system. Journal of Applied Polymer Science, vol. 64(6). May 9, 1997. pp. 1153-1159.
- Mattingly, J.D. (1996). Elements of gas turbine propulsion. New York, New York: McGraw-Hill, Inc. pp. 1-18, 60-62, 223-234, 462-479, 517-520, 757-767, and 862-864.
- Mattingly, J.D. (1996). Elements of gas turbine propulsion. New York, New York: McGraw-Hill, Inc. pp. 1-18, 60-62, 85-87, 95-104, 121-123, 223-234, 242-245, 278-285, 303-309, 323-326, 462-479, 517-520, 563-565, 630-632, 668-670, 673-675, 682-685, 697-705, 726-727, 731-732, 802-805, 828-830 and appendices.
- Mattingly, J.D. (1996). Elements of gas turbine propulsion. New York, New York: McGraw-Hill, Inc. pp. 1-18, 60-62, 85-87, 95-104, 121-123, 223-234, 242-245, 278-285, 303-309, 323-326, 462-479, 517-520, 563-565, 630-632, 673-675, 682-685, 697-699, 703-705, 802-805, 862-864, and 923-925.
- Mattingly, J.D. (1996). Elements of gas turbine propulsion. New York, New York: McGraw-Hill, Inc. pp. 299-305.
- Mattingly, J.D. (1996). Elements of gas turbine propulsion. New York, New York: McGraw-Hill, Inc. pp. 8-15.
- Mattingly, J.D. (2006). Elements of propulsion gas turbines and rockets. New York, New York: AIAA Education Series. p. 419.
- Mattingly, J.D., Heiser, W.H., and Pratt, D.T. (2002). Aircraft engine design. Second Ed. Education Series. Reston, VA. pp. 1-687.
- Mavris, D.N., Schutte, U.S. (2016). Application of deterministic and probabilistic system design methods and enhancements of conceptual design tools for ERA project final report. NASA/CR-2016-219201. May 1, 2016. pp. 1-240.
- McArdle, J.G. and Moore, A.S. (1979). Static test-stand performance of the YF-102 turbofan engine with several exhaust configurations for the Quiet Short-Haul Research Aircraft (QSRA). Prepared for NASA. NASA-TP-1556. Nov. 1979. pp. 1-68.
- McCracken, R.C. (1979). Quiet short-haul research aircraft familiarization document. NASA-TM-81149. Nov. 1, 1979. pp. 1-76.
- Tong, M.T., Jones, S.M., Haller, W.J., and Handschuh, R.F. (2009). Engine conceptual design studies for a hybrid wing body aircraft. NASA/TM-2009-215680. Nov. 1, 2009. pp. 1-15.
- Translation of European Opposition against European Patent Application No. EP2776677 held by United Technologies Corporation. Mailed Mar. 23, 2016.
- Trembley, Jr., H.F. (1977). Determination of effects of ambient conditions on aircraft engine emissions. ALF 502 combustor rig testing and engine verification test. Prepared for Environmental Protection Agency. Sep. 1977. pp. 1-256.
- Tsang D. (2011). Special report: The engine battle heats up (Update 1) Aspire Aviation. Retrieved Apr. 3, 2016 from: <http://www.aspireaviation.com/2011/05/10/pw-purepower-engine-vs-cfm-leap-x/>.
- Tsirlin, M., Pronin, Y.E., Florina, E.K., Mukhametov, S. Kh., Khatsernov, M.A., Yun, H.M., . . . Kroke, E. (2001). Experimental investigation of multifunctional interphase coatings on SiC fibers for non-oxide high temperature resistant CMCs. High Temperature Ceramic Matrix Composites. 4th Int'l Conf. on High Temp. Ceramic Matrix Composites. Oct. 1-3, 2001. pp. 149-156.
- Tsuchiya, N., Nakamura, Y., Goto, S., and Kodama, H. (2004). Low noise FEGV designed by numerical method based on CFD. Proceedings of ASME Turbo Expo 2004 Power for Land, Sea, and Air. Jun. 14-17, 2004. pp. 1-8.
- Tummers, B. (2006). DataThief III. Retrieved from: <https://datathief.org/DataThiefManual.pdf> pp. 1-52.
- Turbomeca Aubisque. Jane's Aero-engines, Aero-engines—Turbofan. Nov. 2, 2009.
- Turner, M. G., Norris, A., and Veres, J.P. (2004). High-fidelity three-dimensional simulation of the GE90. Nasa/TM-2004-212981. pp. 1-18.
- Type Certificate Data Sheet No. E6NE. Department of Transportation Federal Aviation Administration. Jun. 7, 2002. pp. 1-10.
- U.S. Department of Transportation: Federal Aviation Administration Advisory Circular, Runway overrun prevention, dated: Nov. 6, 2007, p. 1-8 and Appendix 1 pp. 1-15, Appendix 2 pp. 1-6, Appendix 3 pp. 1-3, and Appendix 4 pp. 1-5.
- U.S. Department of Transportation: Federal Aviation Administration Advisory Circular. Standard operating procedures for flight deck crewmembers, Dated: Feb. 27, 2003, p. 1-6 and Appendices.
- U.S. Department of Transportation: Federal Aviation Administration Type Certificate Data Sheet No. E6WE. Dated: May 9, 2000. p. 1-9.
- Vasudevan, A.K. and Petrovic, J.J. (1992). A comparative overview of molybdenum disilicide composites. Materials Science and Engineering, A155, 1992. pp. 1-17.
- Warwick, G. (2007). Civil engines: Pratt & Whitney gears up for the future with GTF. Flight International, Nov. 2007. Retrieved Jun. 14, 2016 from: <https://www.flightglobal.com/news/articles/civil-engines-pratt-amp-whitney-gears-up-for-the-future-with-219989/>.
- Waters, M.H. and Schairer, E.T. (1977). Analysis of turbofan propulsion system weight and dimensions. NASA Technical Memorandum. Jan. 1977. pp. 1-65.
- Webster, J.D., Westwood, M.E., Hayes, F.H., Day, R.J., Taylor, R., Duran, A., . . . Vogel, W.D. (1998). Oxidation protection coatings for C/SiC based on yttrium silicate. Journal of European Ceramic Society vol. 18. 1998. pp. 2345-2350.
- Wendus, B.E., Stark, D.F., Holler, R.P., and Funkhouse, M.E. (2003). Follow-on technology requirement study for advanced subsonic transport. Technical Report prepared for Nasa. NASA/CR-2003-212467. Aug. 1, 2003. pp. 1-47.
- Whitaker, R. (1982). ALF 502: plugging the turbofan gap. Flight International, p. 237-241, Jan. 30, 1982.
- Wie, Y.S., Collier, F.S., Wagner, R.D., Viken, J.K., and Pfenniger, W. (1992). Design of a hybrid laminar flow control engine nacelle. AIAA-92-0400. 30th Aerospace Sciences Meeting & Exhibit. Jan. 6-9, 1992. pp. 1-14.
- Wikipedia. Stiffness. Retrieved Jun. 28, 2018 from: <https://en.wikipedia.org/wiki/Stiffness>.
- Wikipedia. Torsion spring. Retrieved Jun. 29, 2018 from: https://en.wikipedia.org/wiki/Torsion_spring.
- Wilfert, G. (2008). Geared fan. Aero-Engine Design: From State of the Art Turbofans Towards Innovative Architectures, von Karman Institute for Fluid Dynamics, Belgium, Mar. 3-7, 2008. pp. 1-26.
- Willis, W.S. (1979). Quiet clean short-haul experimental engine (QCSEE) final report. NASA/CR-159473 pp. 1-289.
- Winn, A. (Ed). (1990). Wide Chord Fan Club. Flight International, 4217(137). May 23-29, 1990. pp. 34-38.
- Woodward, R.P., Bock, L.A., Heidelberg, L., and Hall, D.G. (1992). Far-field noise and internal modes from a ducted propeller at simulated aircraft takeoff conditions. NASA TM 105369. Jan. 6-9, 1992. pp. 1-15.

(56)

References Cited

OTHER PUBLICATIONS

- Wright, G.H. and Russell, J.G. (1990). The M.45SD-02 variable pitch geared fan engine demonstrator test and evaluation experience. *Aeronautical Journal.*, vol. 84(836). Sep. 1980. pp. 268-277.
- Xie, M. (2008). Intelligent engine systems: Smart case system. NASA/CR-2008-215233. pp. 1-31.
- Xu, L. & Gronstedt, T. (2010). Design analysis of an intercooled turbofan engine. *Journal of Engineering for Gas Turbine Engines and Power* vol. 132. Nov. 2010. pp. 114503-1-114503-4.
- Xu, Y., Cheng, L., Zhang, L., Ying, H., and Zhou, W. (1999). Oxidation behavior and mechanical properties of C/SiC composites with Si—MoSi₂ oxidation protection coating. *J. of Mat. Sci.* vol. 34. 1999. pp. 6009-6014.
- Zalud, T. (1998). Gears put a new spin on turbofan performance. *Machine Design*, 70(20), p. 104.
- Zamboni, G. and Xu, L. (2009). Fan root aerodynamics for large bypass gas turbine engines: Influence on the engine performance and 3D design. *Proceedings of ASME Turbo Expo 2009: Power for Land, Sea and Air*. Jun. 8-12, 2009, Orlando, Florida, USA. pp. 1-12.
- Zhao, J.C. and Westbrook, J.H. (2003). Ultrahigh-temperature materials for jet engines. *MRS Bulletin*. vol. 28(9). Sep. 2003. pp. 622-630.

* cited by examiner

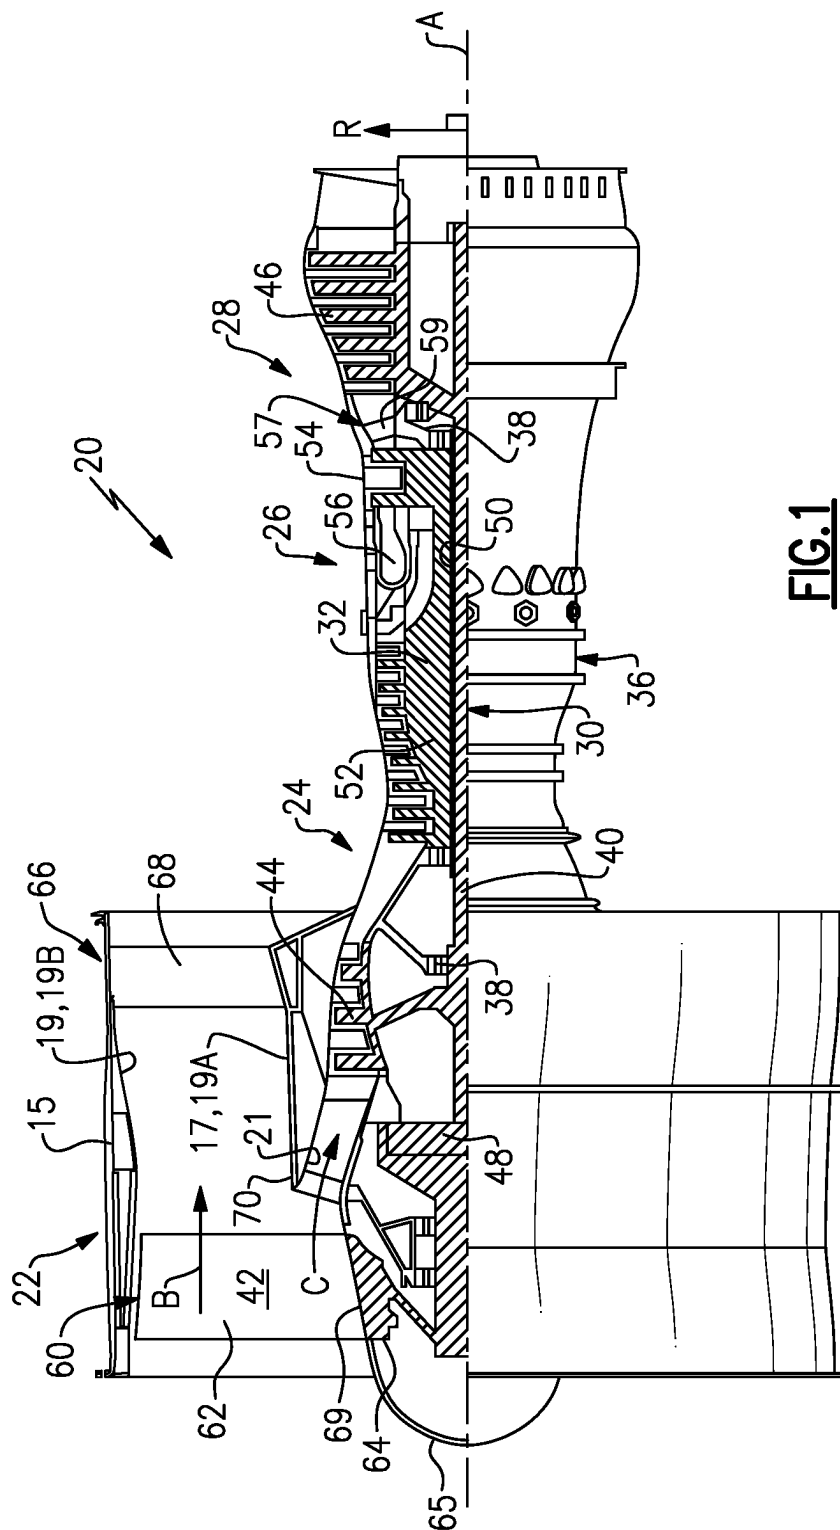


FIG. 1

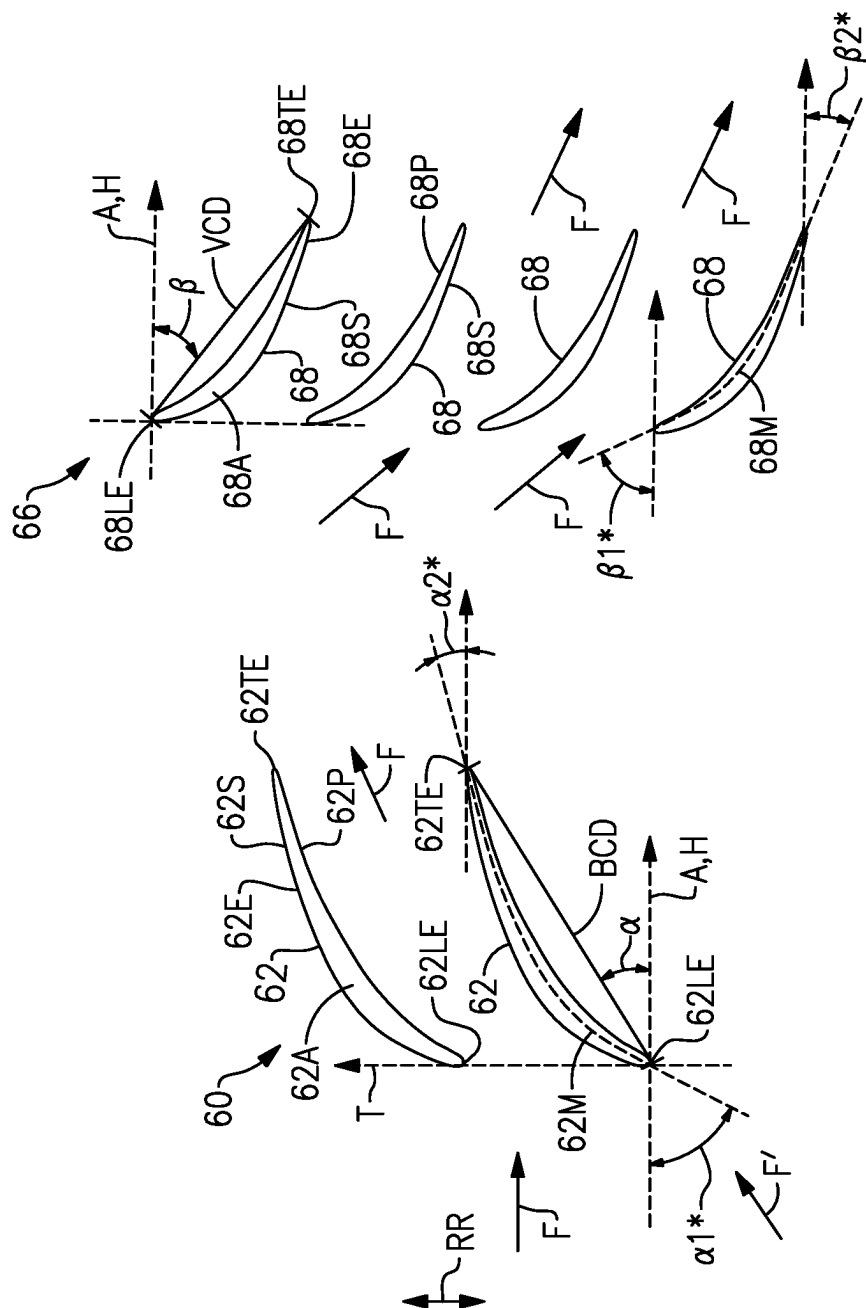


FIG. 2A

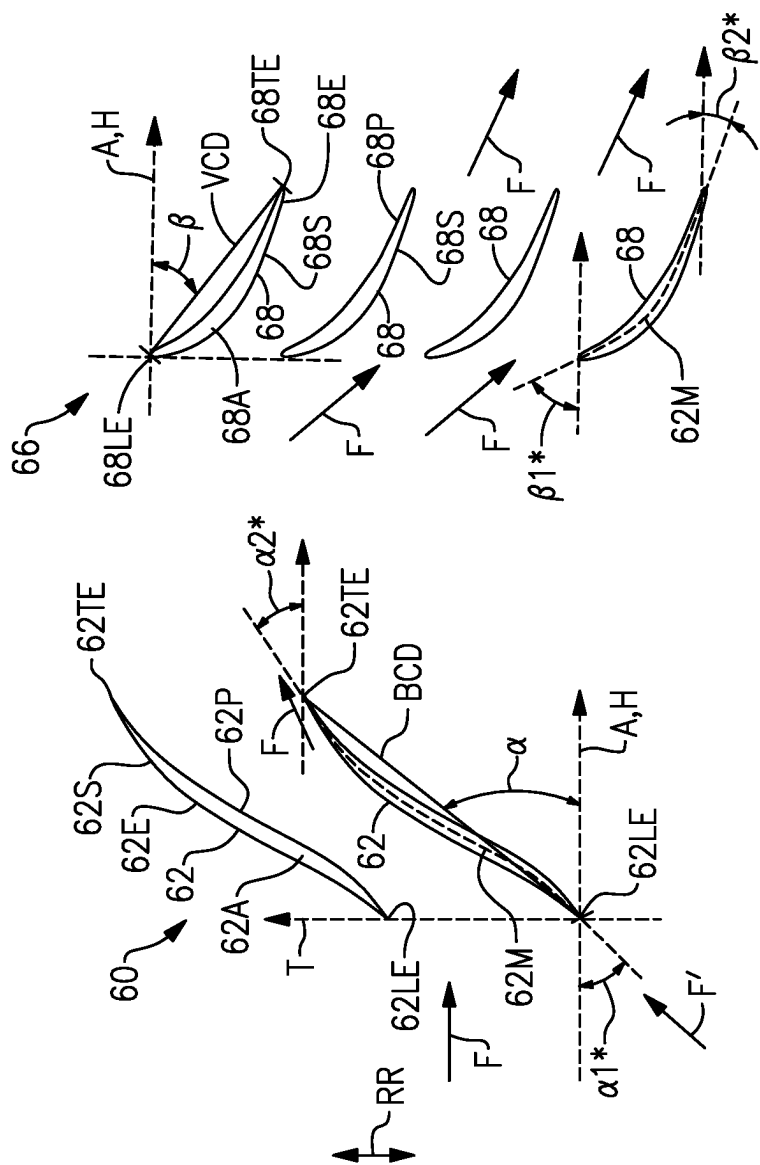


FIG. 2B

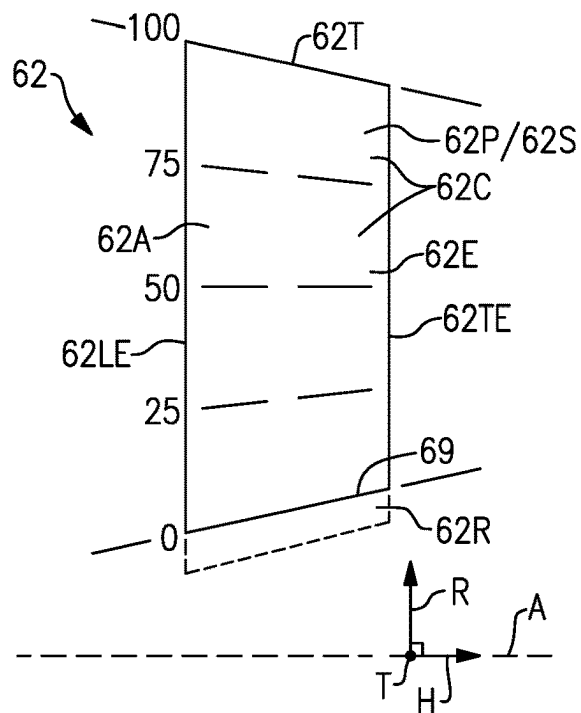


FIG. 3

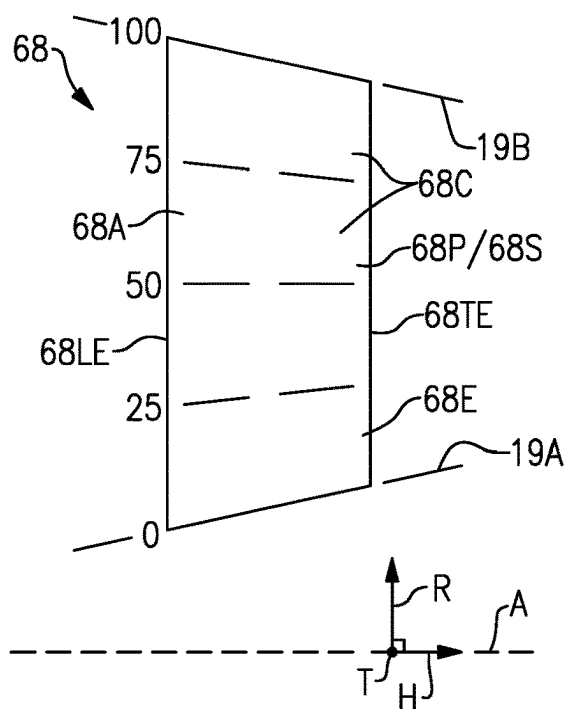
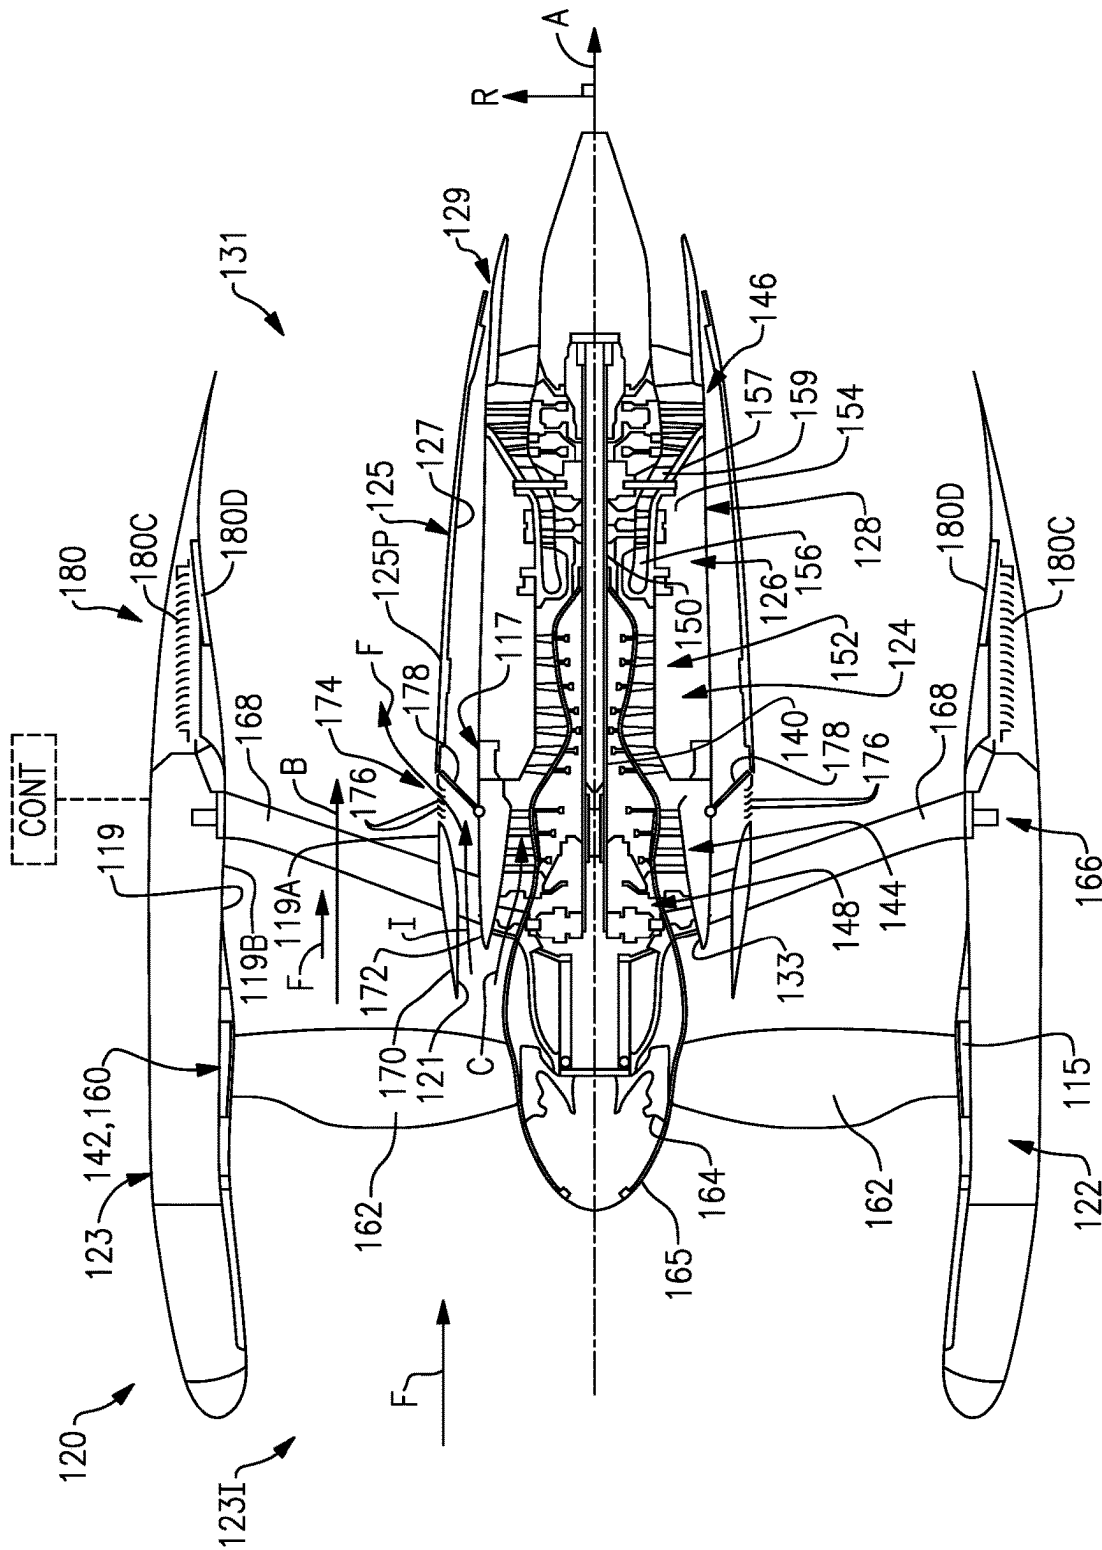


FIG. 4



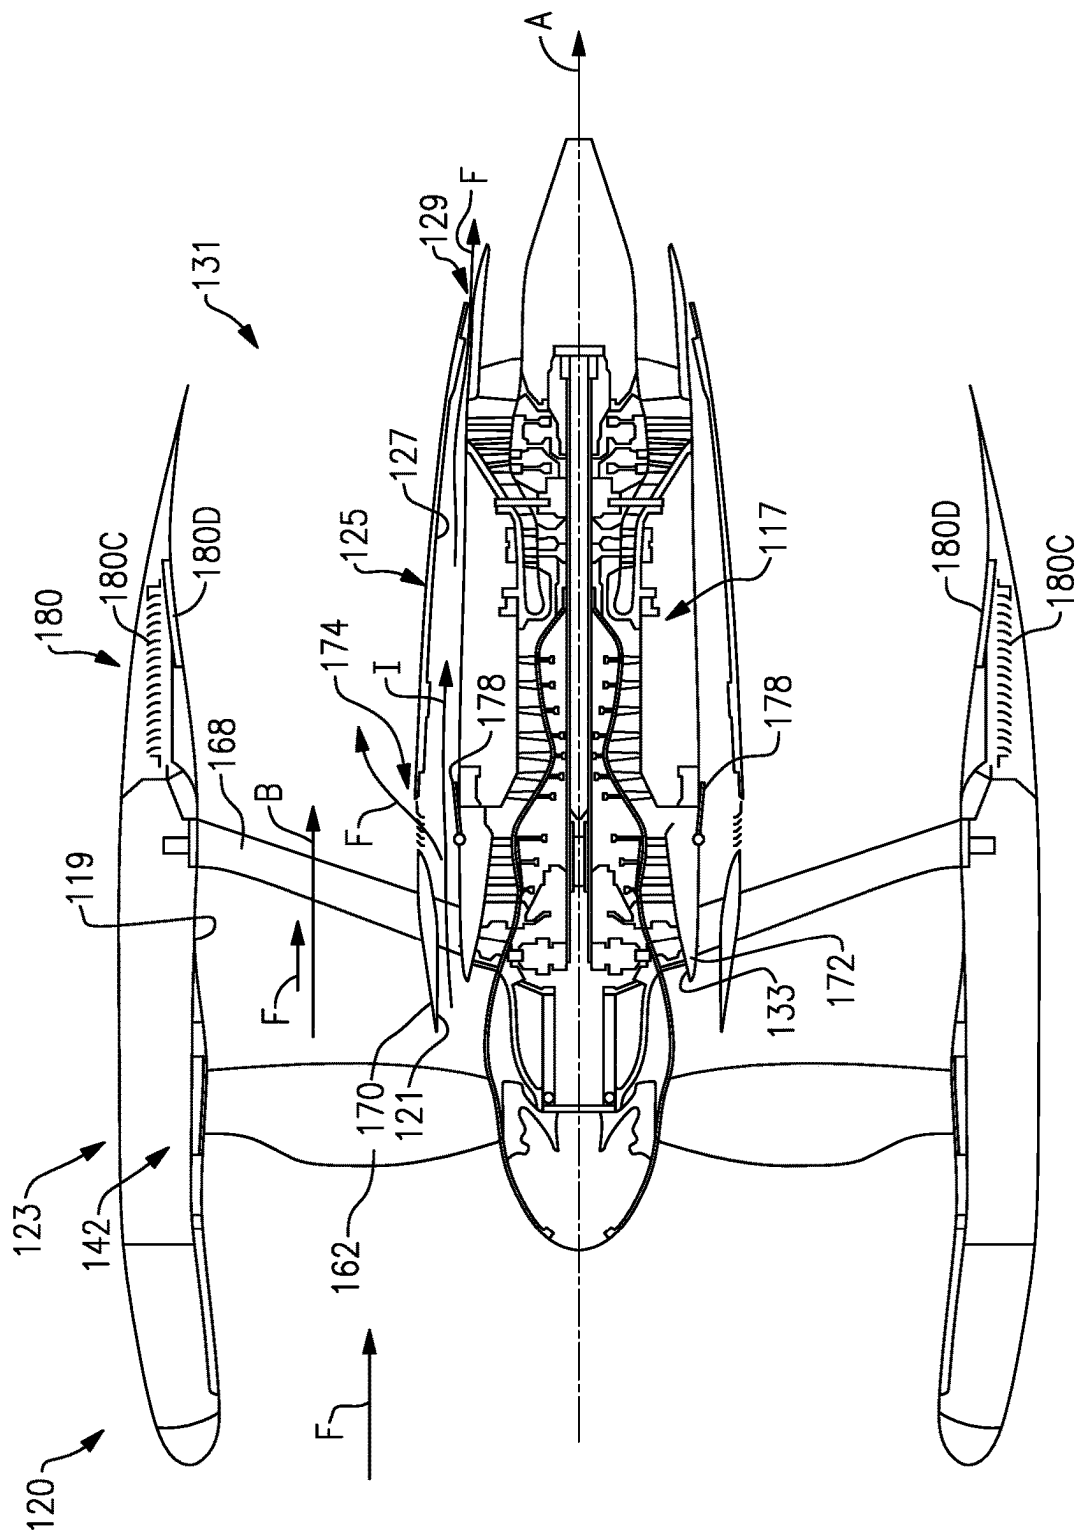


FIG. 6

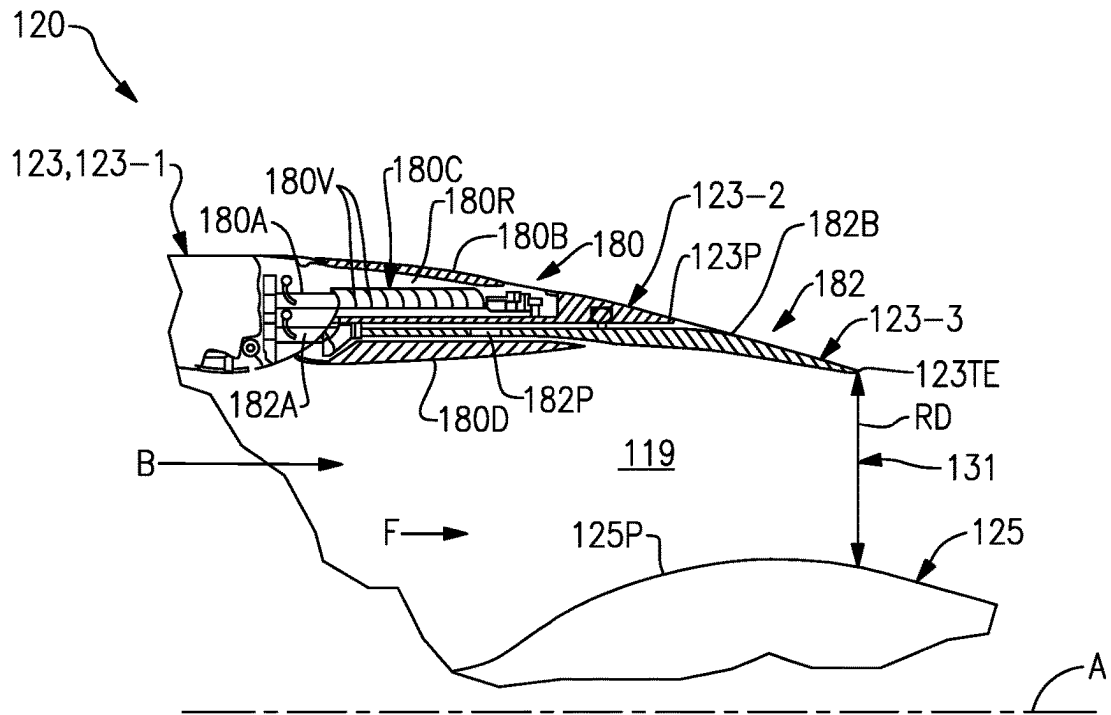


FIG. 7A

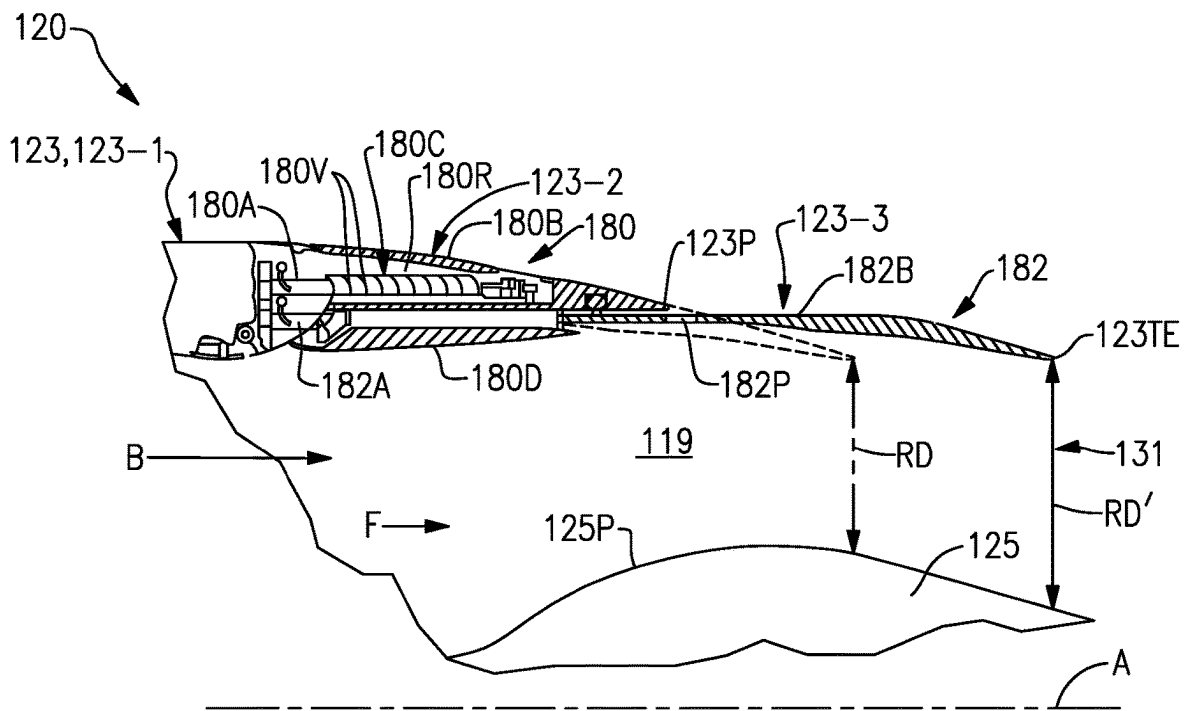


FIG. 7B

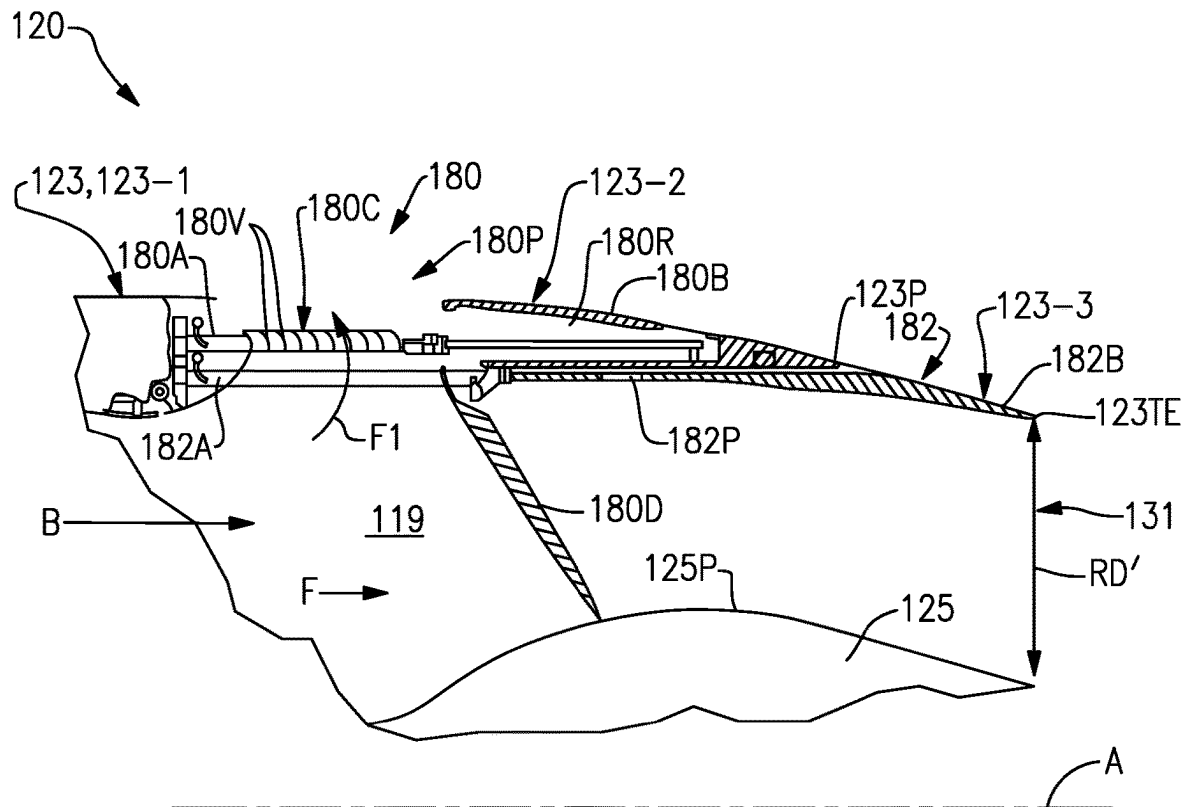
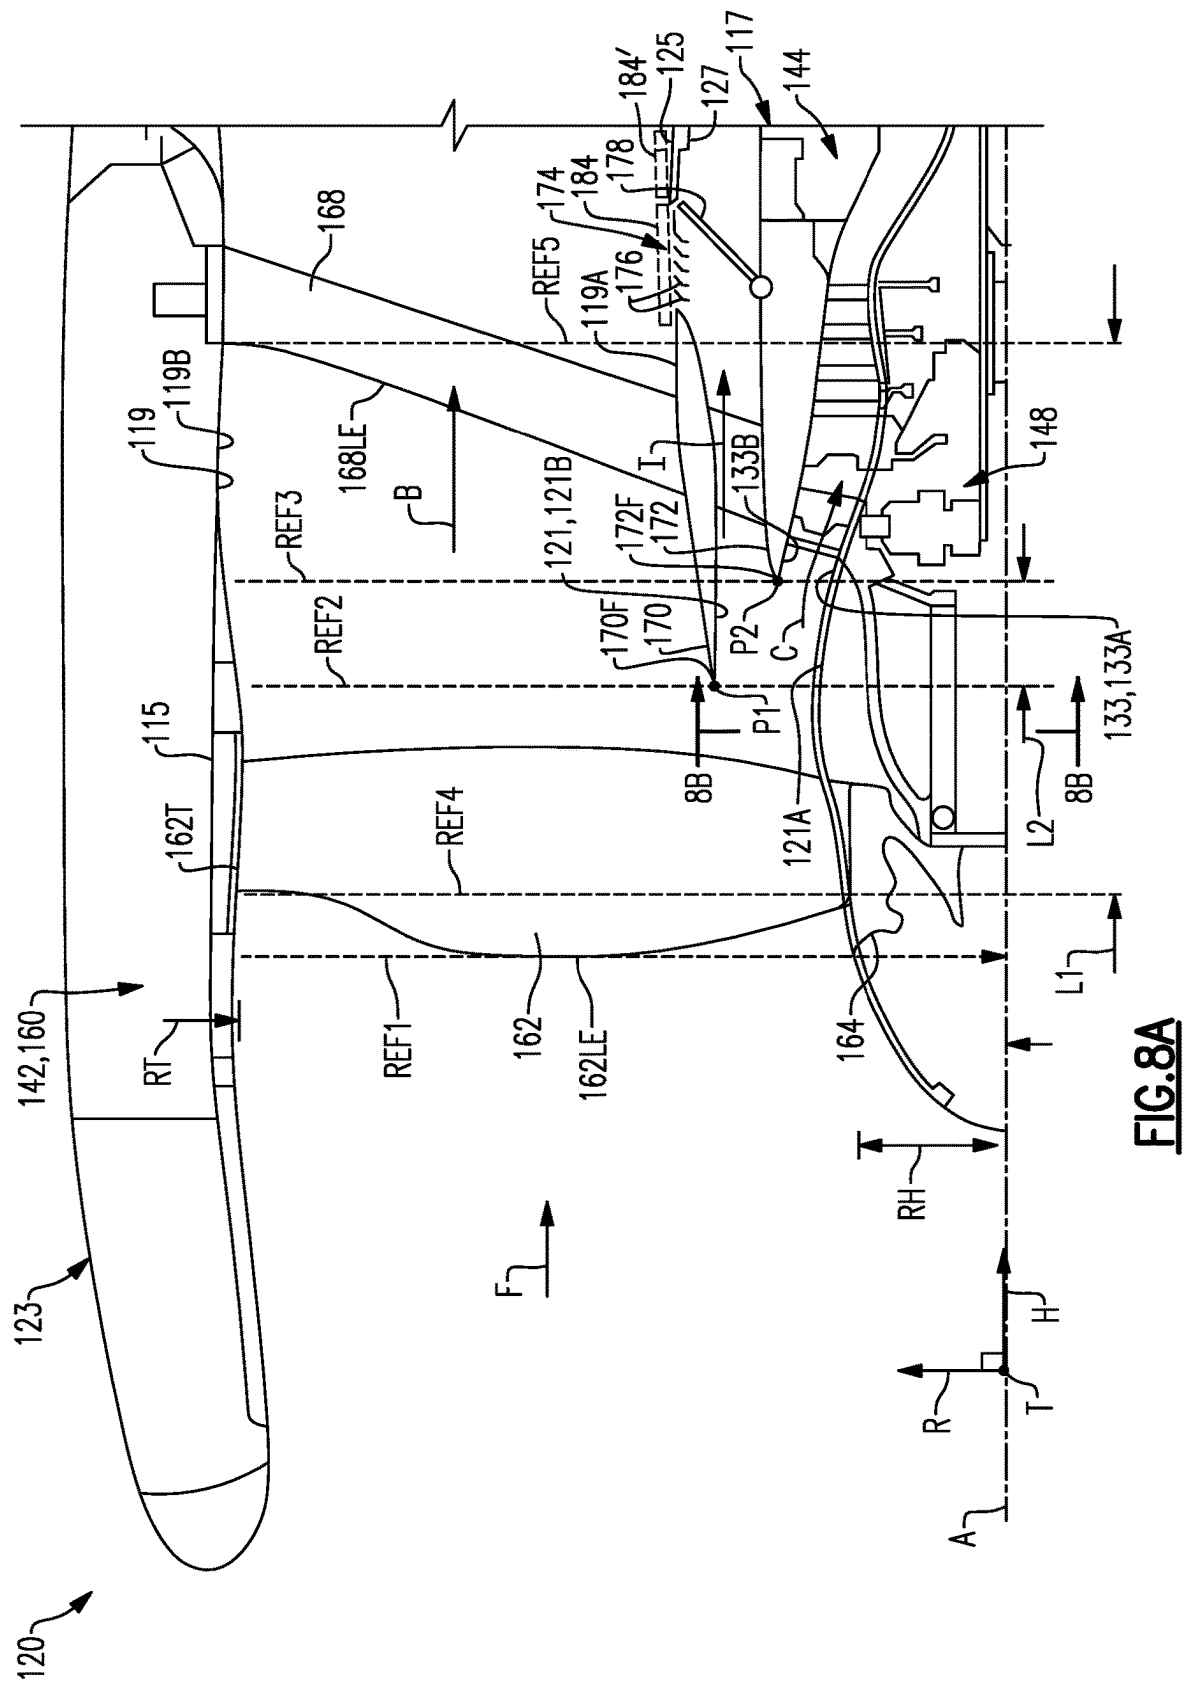


FIG.7C



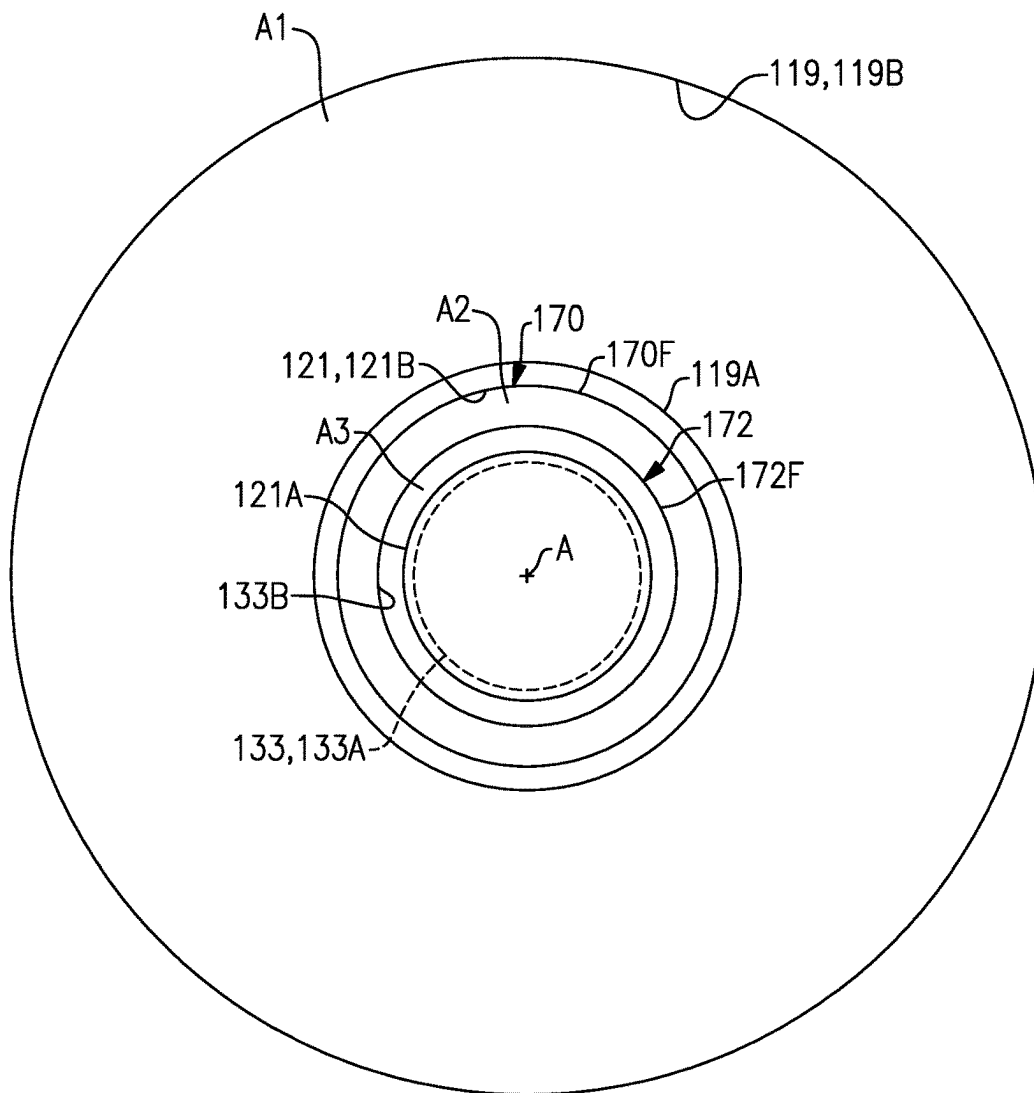


FIG. 8B

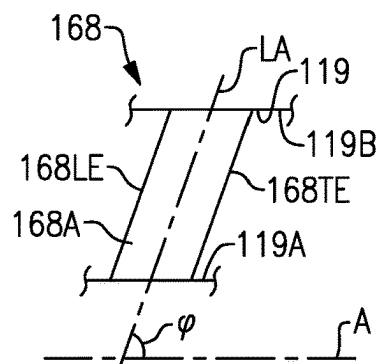
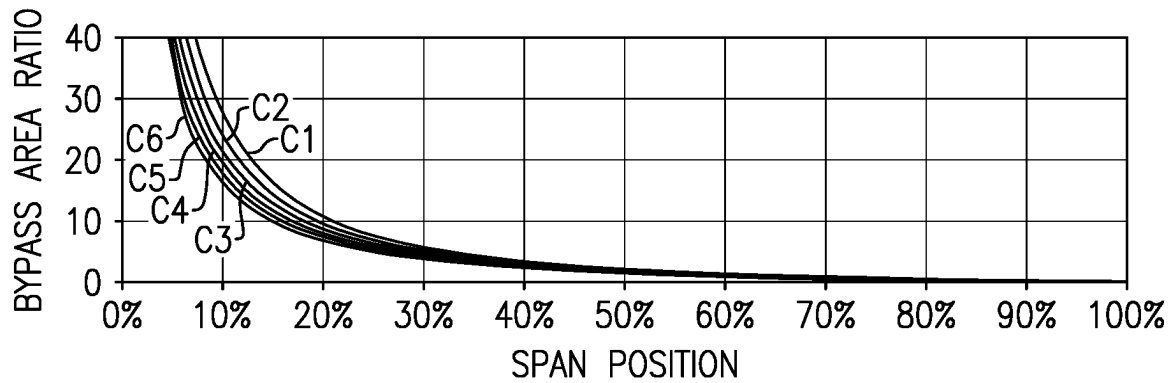
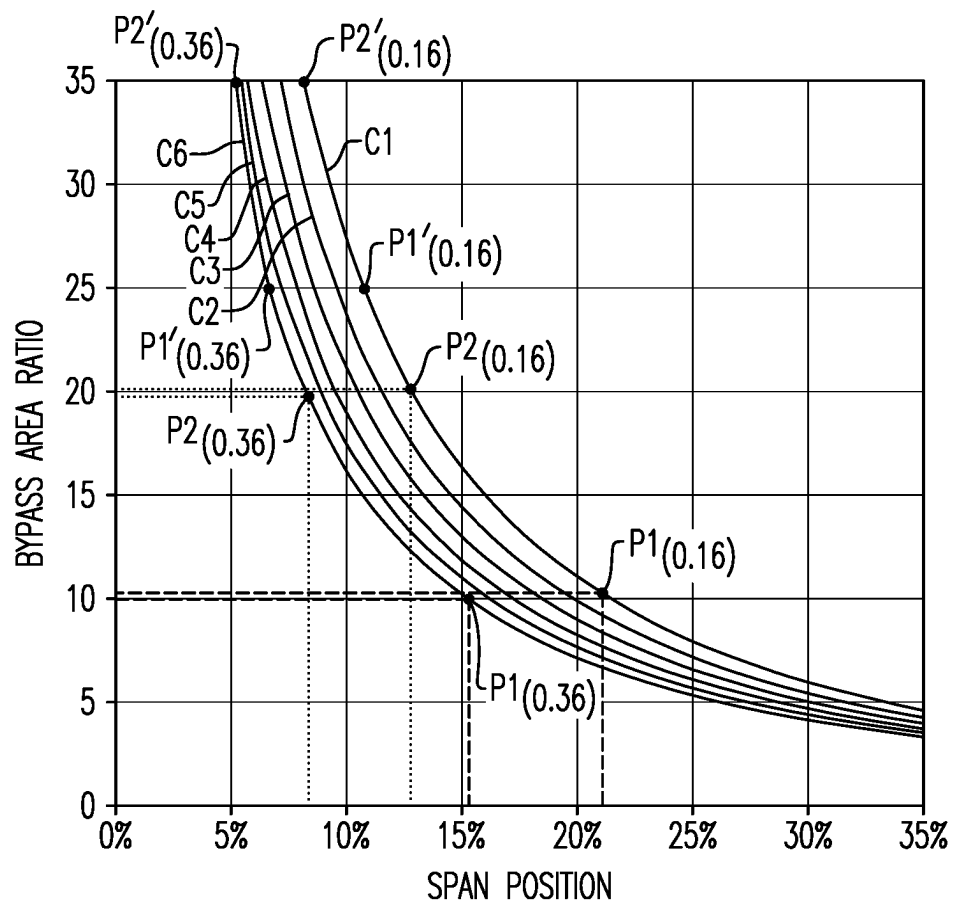


FIG. 8C

**FIG. 9A****FIG. 9B**

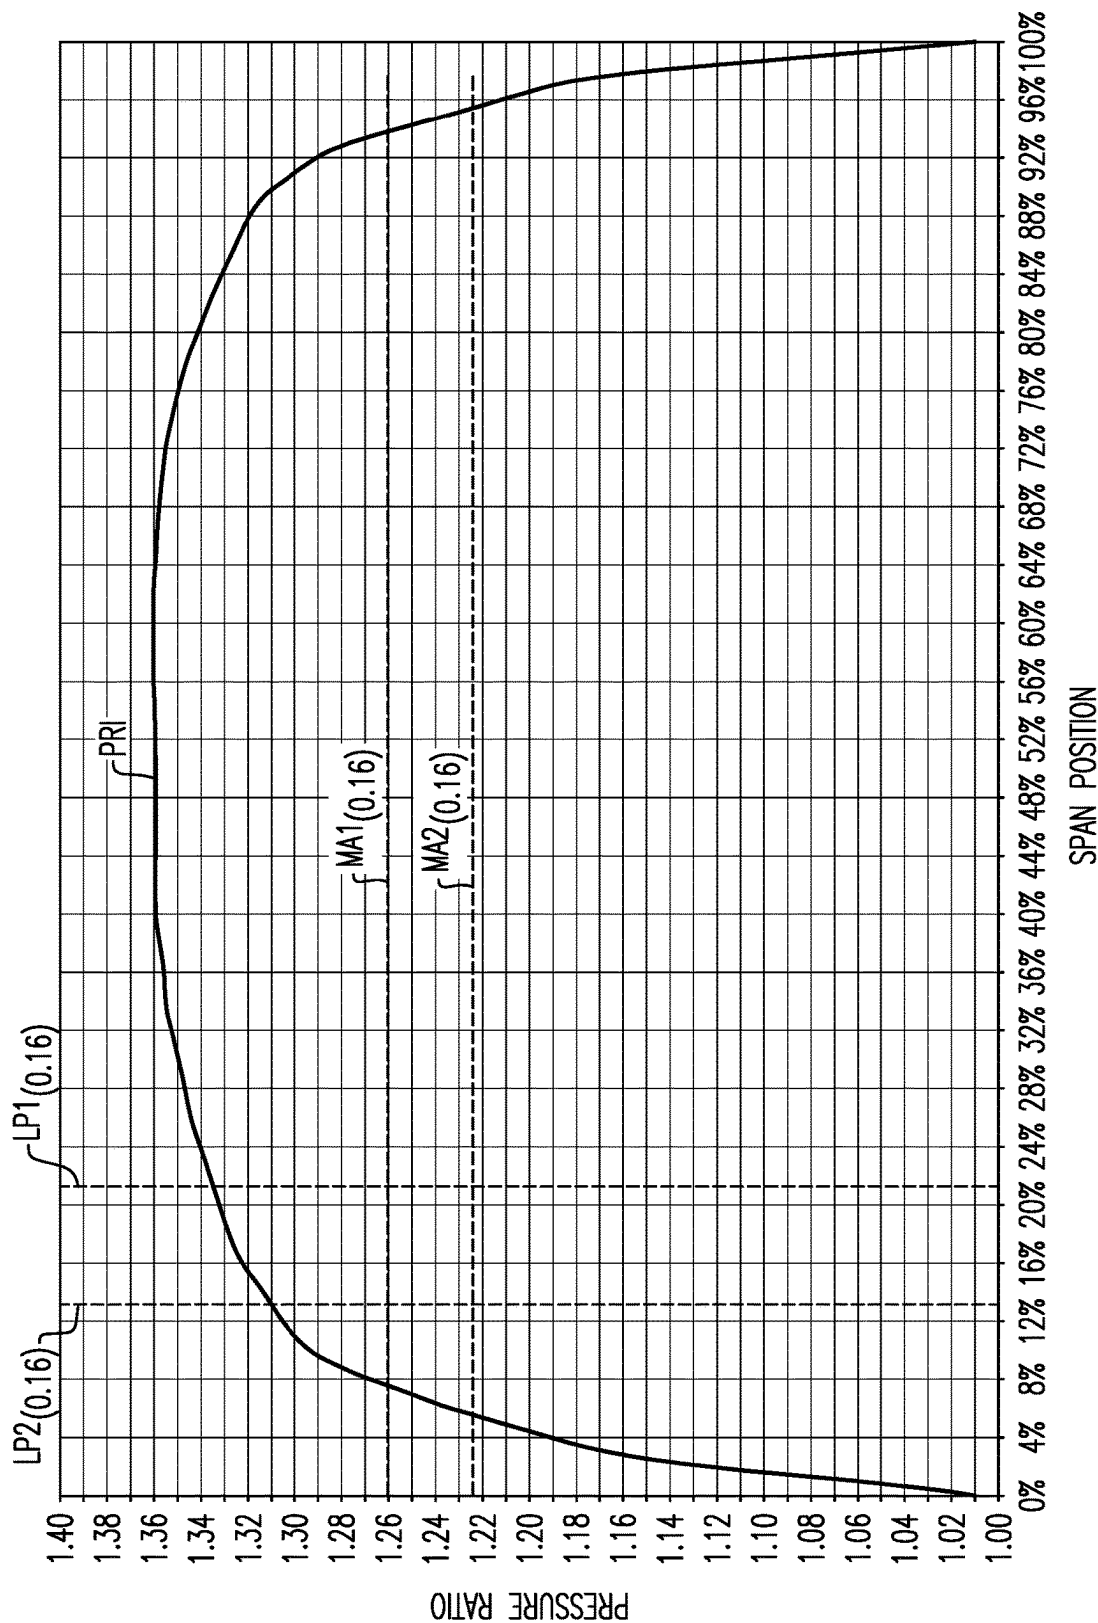


FIG.10A

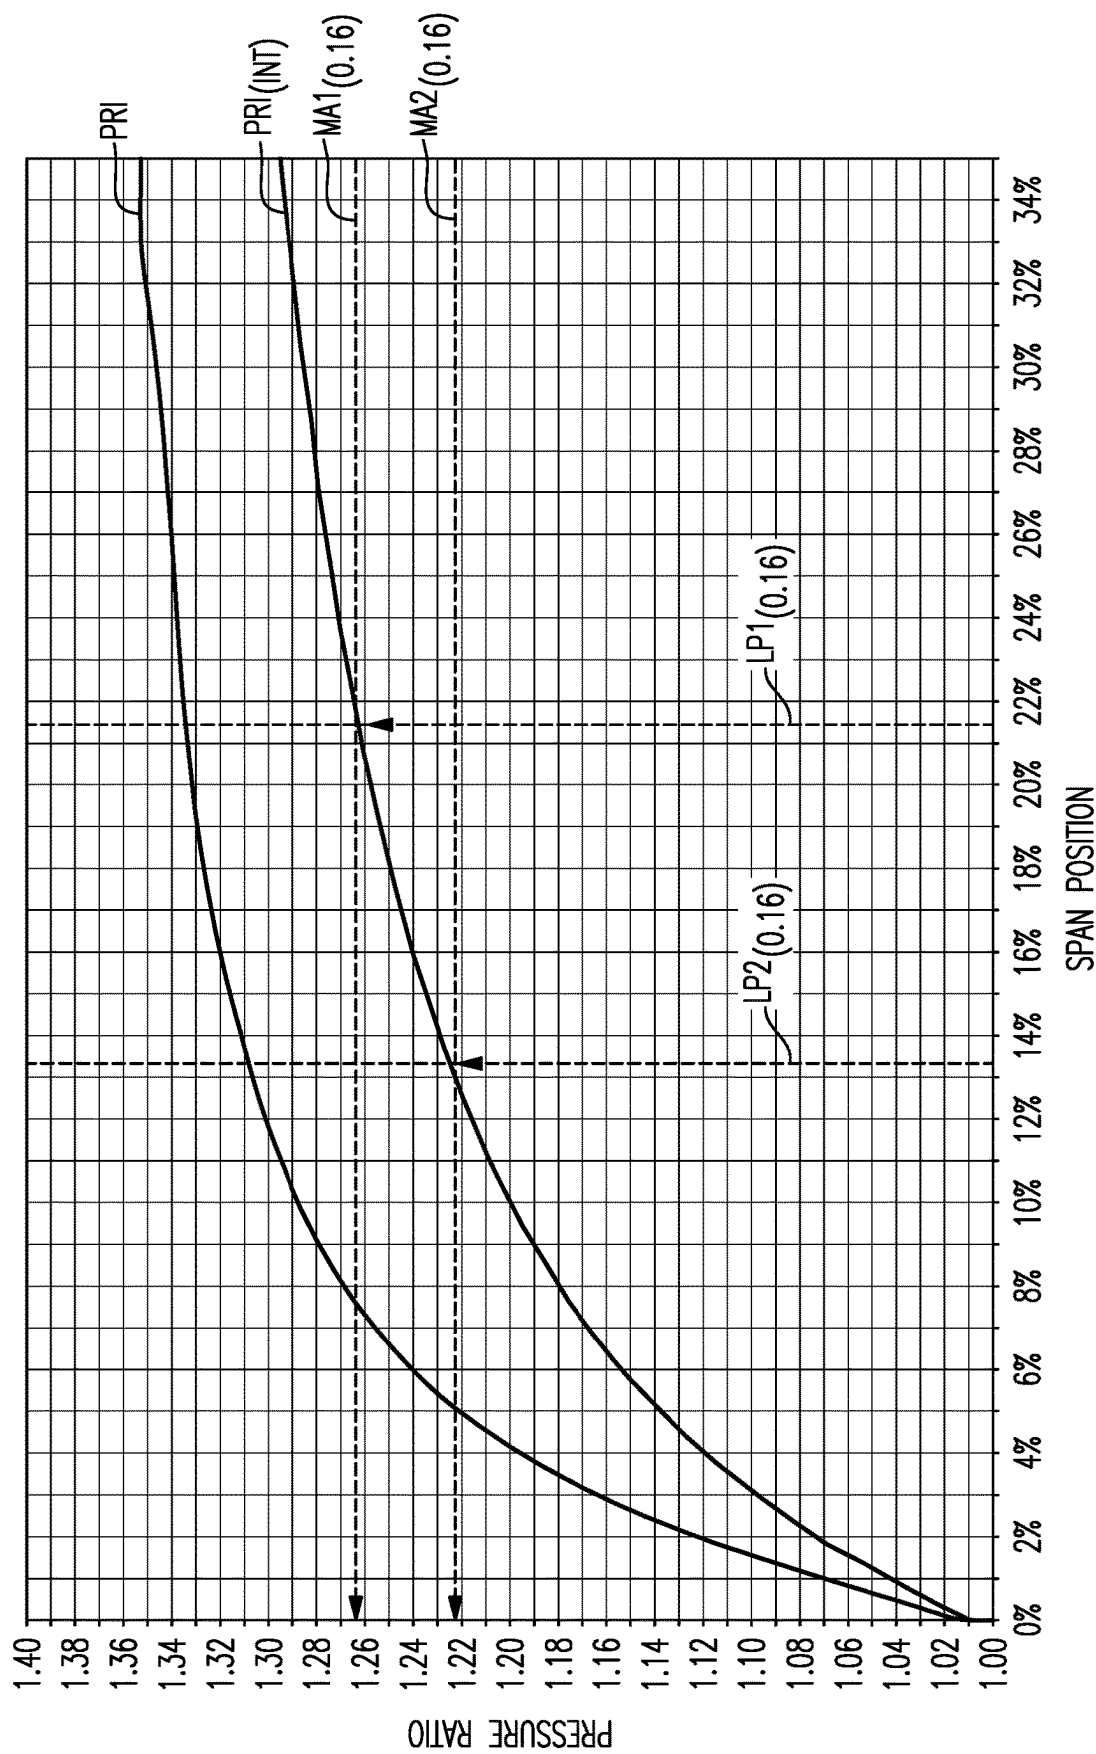


FIG. 10B

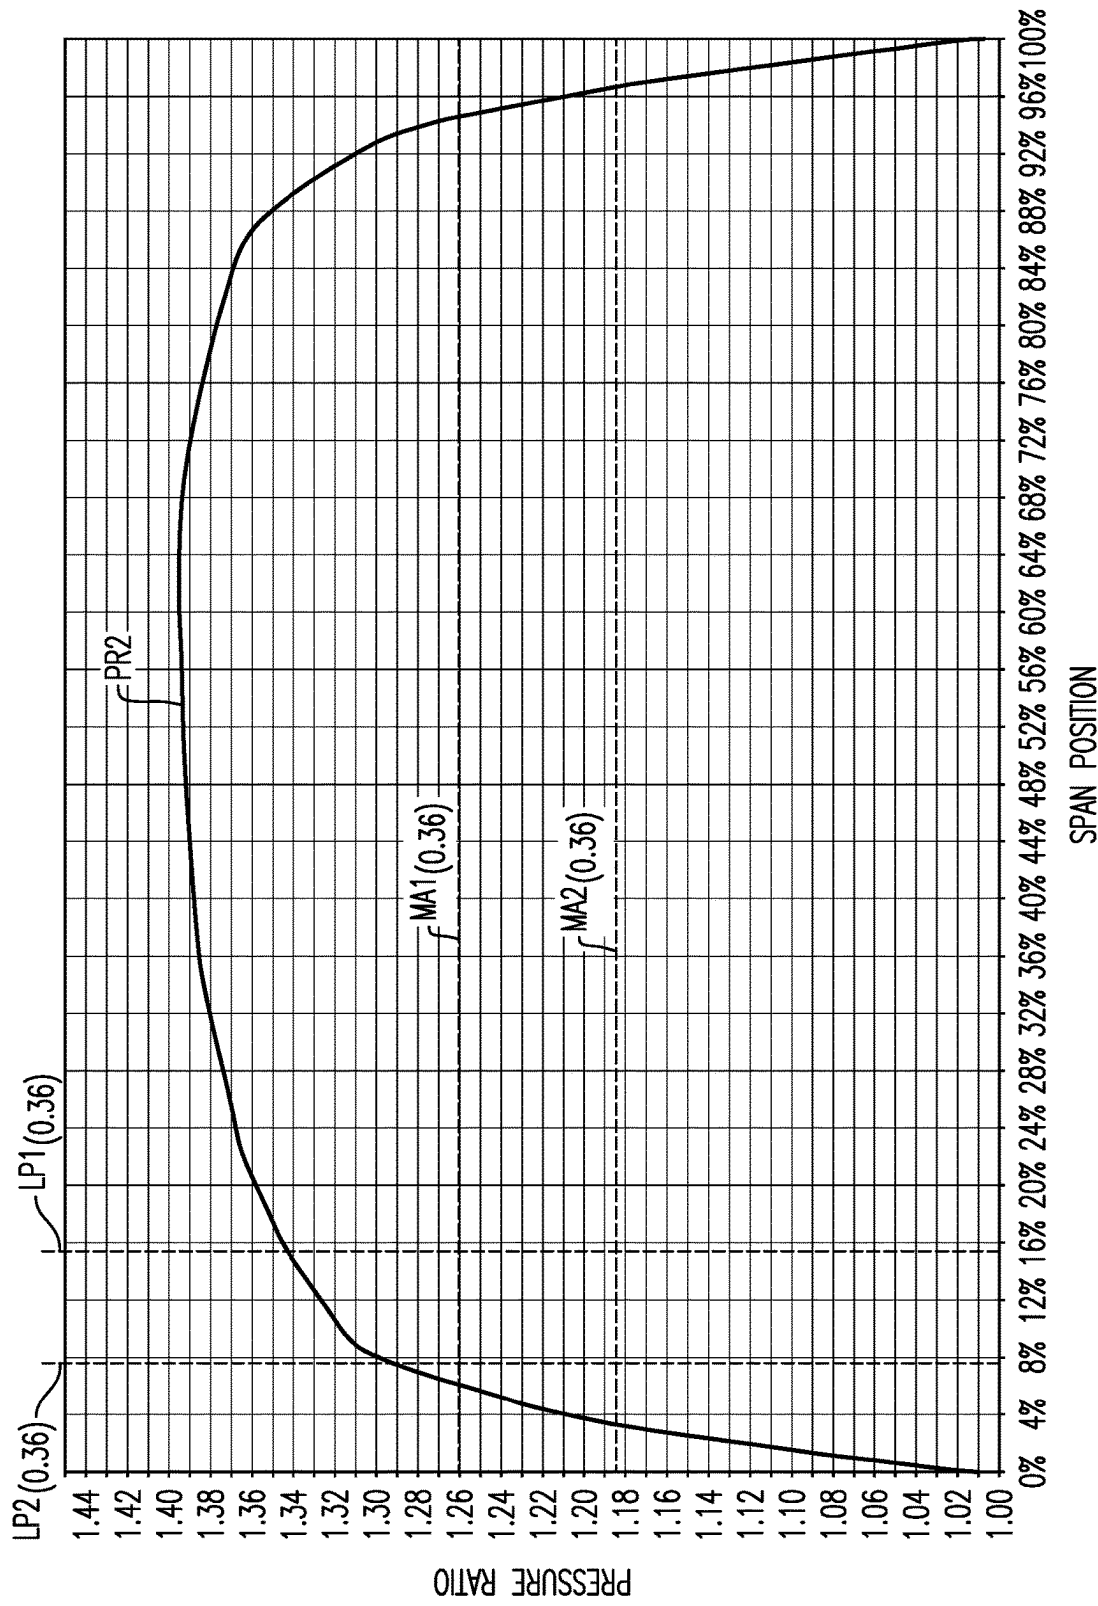


FIG.11

		BLOCKER DOOR POSITION	
		OPEN	CLOSE
BYPASS PORT	OPEN	M1	M2
	CLOSE	M3	M4

FIG.12

1

SPLITTER AND GUIDE VANE ARRANGEMENT FOR GAS TURBINE ENGINES

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 16/891,492, filed Jun. 3, 2020, the disclosure of which is incorporated by reference in its entirety herein.

BACKGROUND

This disclosure relates generally to flow distribution for gas turbine engines, and more particularly to arranging guide vanes relative to one or more flow splitters.

Gas turbine engines can include a fan section, a compressor section, a combustor section and a turbine section. The fan section includes a fan having fan blades for compressing a portion of incoming air to produce thrust and also for delivering a portion of air to the compressor section. Air entering the compressor section is compressed and delivered into the combustor section where it is mixed with fuel and ignited to generate a high-speed exhaust gas flow. The high-speed exhaust gas flow expands through the turbine section to drive the compressor section and the fan.

Some fan sections may include guide vanes positioned in a bypass flow path downstream of the fan blades and a flow splitter. The guide vanes may direct the bypass airflow from the fan blades before being ejected from the bypass flow path.

SUMMARY

A section for a gas turbine engine according to an example of the present disclosure includes a rotor including a row of blades extending in a radial direction outwardly from a hub. The hub is rotatable about a longitudinal axis such that the row of blades deliver flow to a bypass flow path, an intermediate flow path, and a core flow path. A first case surrounds the row of blades to establish the bypass flow path. A first flow splitter divides flow between the bypass flow path and a second duct. A row of guide vanes extends in the radial direction across the bypass flow path. A second flow splitter radially inboard of the first flow splitter divides flow from the second duct between the intermediate flow path and the core flow path. A forwardmost edge of the second flow splitter is axially aft of a forwardmost edge of the first flow splitter with respect to the longitudinal axis, and the forwardmost edges of the first and second flow splitters are axially forward of the row of guide vanes with respect to the longitudinal axis. A bypass port interconnects the intermediate and bypass flow paths at a position axially aft of a position of the row of guide vanes relative to the longitudinal axis.

In a further embodiment of any of the foregoing embodiments, the hub is driven by a turbine through a geared architecture.

In a further embodiment of any of the foregoing embodiments, each of the blades extends in the radial direction between a 0% span position at the hub and a 100% span position at a tip to establish a hub-to-tip ratio, and the hub-to-tip ratio is less than or equal to 0.4 measured relative to a forwardmost portion of a leading edge of the blades.

In a further embodiment of any of the foregoing embodiments, a pressure ratio across the blades alone is less than 1.45 at cruise at 0.8 Mach and 35,000 feet.

2

A further embodiment of any of the foregoing embodiments includes a first duct and a second duct. The first duct establishes the bypass flow path. The second duct branches between the intermediate and core flow paths at the second flow splitter. A first annulus area is established by the first duct at the forwardmost edge of the first flow splitter. A second annulus area is established by the second duct at the forwardmost edge of the first flow splitter. A bypass area ratio is defined as the first annulus area divided by the second annulus area, and the bypass area ratio is greater than or equal to 10.

In a further embodiment of any of the foregoing embodiments, each of the blades extends in the radial direction between a 0% span position at the hub and a 100% span position at a tip. The forwardmost edge of the first flow splitter is situated in the radial direction at a first splitter position. The first splitter position is radially aligned with or radially inward of a 25% span position of the blades. The forwardmost edge of the second flow splitter is situated in the radial direction at a second splitter position, and the second splitter position is radially aligned with or radially outward of a 5% span position of the blades.

In a further embodiment of any of the foregoing embodiments, each of the blades extends in the radial direction between the 0% span position and the 100% span position to establish a hub-to-tip ratio, and the hub-to-tip ratio is between 0.16-0.36. The hub-to-tip ratio measured relative to a forwardmost portion of a leading edge of the blades.

In a further embodiment of any of the foregoing embodiments, the leading edges of the blades at the 100% span position is established along a first reference plane, and leading edges of the guide vanes at a 100% span position are established along a second reference plane. The first and second reference planes are perpendicular to the longitudinal axis. A first axial length is established between the first and second reference planes. A tip radius of the blades is established between the tip and the longitudinal axis, and a ratio of the first axial length divided by the tip radius is greater than or equal to 0.5.

In a further embodiment of any of the foregoing embodiments, the row of blades establishes a blade quantity (BQ), the blade quantity (BQ) is at least 12 but not more than 20 blades, the row of guide vanes establishes a vane quantity (VQ), and the vane quantity (VQ) is at least 20 but not more than 40 guide vanes.

In a further embodiment of any of the foregoing embodiments, the ratio of VQ/BQ is between 2.0 and 2.6.

In a further embodiment of any of the foregoing embodiments, the first splitter position radially is aligned with or radially outward of a 10% span position of the blades, and the second splitter position is radially aligned with or radially inward of a 15% span position of the blades. A second axial length is established between the first and second splitter positions relative to the longitudinal axis, and a ratio of the second axial length divided by the first axial length is between 0.1 and 0.3.

A gas turbine engine according to an example of the present disclosure includes a fan section including a fan having a row of blades extending in a radial direction between a 0% span position at a hub and a 100% span position at a tip. The hub is rotatable about an engine longitudinal axis such that the row of blades deliver flow to a bypass flow path, an intermediate flow path and a core flow path. A compressor section establishes the core flow path. A turbine section drives the fan section and the compressor section. A fan case includes a bypass duct surrounding the row of blades to establish the bypass flow path. A housing

includes a first flow splitter that divides flow between the bypass flow path and a second duct. A row of guide vanes in the bypass duct extend in the radial direction across the bypass flow path. An engine case includes a second flow splitter radially inboard of the first flow splitter and divides flow from the second duct between the intermediate flow path and the core flow path. A bypass port interconnects the intermediate and bypass flow paths at a position downstream of the row of guide vanes. Each of the blades extends in the radial direction between the 0% span position and 100% span position to establish a hub-to-tip ratio, and the hub-to-tip ratio is less than or equal to measured relative to a forwardmost portion of a leading edge of the blades.

In a further embodiment of any of the foregoing embodiments, the turbine section includes a fan drive turbine, and a geared architecture drives the fan at a different speed than a speed of the fan drive turbine.

In a further embodiment of any of the foregoing embodiments, a pressure ratio across the blades alone is less than 1.45 at cruise at 0.8 Mach and 35,000 feet.

In a further embodiment of any of the foregoing embodiments, a forwardmost edge of the second flow splitter is axially aft of a forwardmost edge of the first flow splitter with respect to the engine longitudinal axis, and the forwardmost edges of the first and second flow splitters are axially forward of the row of guide vanes with respect to the engine longitudinal axis.

A further embodiment of any of the foregoing embodiments includes one or more blocker doors situated in the intermediate flow path downstream of the bypass port. The one or more blocker doors are moveable to selectively communicate flow in the intermediate flow path to a vent port.

A further embodiment of any of the foregoing embodiments includes a thrust reverser including a cascade that selectively communicates airflow from the bypass duct. The cascade extends axially aft of both the row of guide vanes and the bypass port with respect to the engine longitudinal axis.

A method of operation for a gas turbine engine according to an example of the present disclosure includes driving a rotor having a hub and a row of blades to deliver airflow to a bypass flow path, and an intermediate flow path and a core flow path. A first duct surrounds the row of blades to establish the bypass flow path. A first flow splitter divides airflow between the bypass flow path and the intermediate flow path. A row of guide vanes extend across the bypass flow path. A second flow splitter divides airflow between the intermediate flow path and the core flow path. The method includes communicating the airflow through a bypass port that interconnects the intermediate flow path to the bypass flow path at a position downstream of the row of guide vanes. Each of the blades extends in a radial direction between a 0% span position at the hub and a 100% span position at a tip to establish a hub-to-tip ratio, and the hub-to-tip ratio is less than or equal to 0.4 measured relative to a forwardmost portion of a leading edge of the blades.

In a further embodiment of any of the foregoing embodiments, the method includes selectively moving one or more blocker doors to communicate airflow in the intermediate flow path to a vent port, the vent port established downstream of the bypass port.

In a further embodiment of any of the foregoing embodiments, the driving step including driving the rotor through a geared architecture at a different speed than a turbine, the hub-to-tip ratio is between 0.16-0.36, a pressure ratio across the blades alone is less than 1.45 at cruise at 0.8 Mach and

35,000 feet, and a first annulus area is established at the forwardmost edge of the first flow splitter. A second annulus area is established at the forwardmost edge of the first flow splitter. A bypass area ratio is defined as the first annulus area divided by the second annulus area, and the bypass area ratio is greater than or equal to 10.

The various features and advantages of this disclosure will become apparent to those skilled in the art from the following detailed description. The drawings that accompany the detailed description can be briefly described as follows.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a gas turbine engine.

FIG. 2A illustrates an example arrangement of blades and guide vanes at a span position.

FIG. 2B illustrates an example arrangement of blades and guide vanes at another span position.

FIG. 3 is a schematic view of airfoil span positions for a blade.

FIG. 4 is a schematic view of airfoil span positions for a guide vane.

FIG. 5 illustrates a gas turbine engine according to another example including blocker doors in a closed position.

FIG. 6 illustrates the blocker doors of FIG. 5 in an opened position.

FIG. 7A is a partial cross section view of a thrust reverser and a variable area nozzle in stowed positions.

FIG. 7B is a partial cross section view of the thrust reverser of FIG. 7A in the stowed position and the variable area nozzle of FIG. 7A in a deployed position.

FIG. 7C is a partial cross section view of the thrust reverser and the variable area nozzle of FIG. 7A in deployed positions.

FIG. 8A illustrates a section of the engine of FIG. 5.

FIG. 8B illustrates a sectional view taken along line 8B-8B of FIG. 8A.

FIG. 8C illustrates an exemplary guide vane.

FIG. 9A illustrates an example plot of bypass area ratio with respect to span position.

FIG. 9B illustrates selected portions of the plot of FIG. 9A.

FIG. 10A illustrates an example plot of fan pressure ratio with respect to span position.

FIG. 10B illustrates selected portions of the plot of FIG. 10A.

FIG. 11 illustrates another example plot of fan pressure ratio with respect to span position.

FIG. 12 illustrates exemplary engine modes.

Like reference numbers and designations in the various drawings indicate like elements.

DETAILED DESCRIPTION

FIG. 1 schematically illustrates a gas turbine engine 20. The gas turbine engine 20 is disclosed herein as a two-spool turbofan that generally incorporates a fan section 22, a compressor section 24, a combustor section 26 and a turbine section 28. The fan section 22 drives air along a bypass flow path B in a bypass duct defined within a housing 15 such as a fan case or nacelle, and also drives air along a core flow path C for compression and communication into the combustor section 26 then expansion through the turbine section 28. Although depicted as a two-spool turbofan gas turbine engine in the disclosed non-limiting embodiment, it should

be understood that the concepts described herein are not limited to use with two-spool turbfans as the teachings may be applied to other types of turbine engines including three-spool architectures.

The exemplary engine 20 generally includes a low speed spool 30 and a high speed spool 32 mounted for rotation about an engine central longitudinal axis A relative to an engine static structure 36 via several bearing systems 38. It should be understood that various bearing systems 38 at various locations may alternatively or additionally be provided, and the location of bearing systems 38 may be varied as appropriate to the application.

The low speed spool 30 generally includes an inner shaft 40 that interconnects, a first (or low) pressure compressor 44 and a first (or low) pressure turbine 46. The inner shaft 40 is connected to the fan 42 through a speed change mechanism, which in exemplary gas turbine engine 20 is illustrated as a geared architecture 48 to drive a fan 42 at a lower speed than the low speed spool 30. The high speed spool 32 includes an outer shaft 50 that interconnects a second (or high) pressure compressor 52 and a second (or high) pressure turbine 54. A combustor 56 is arranged in exemplary gas turbine 20 between the high pressure compressor 52 and the high pressure turbine 54. A mid-turbine frame 57 of the engine static structure 36 may be arranged generally between the high pressure turbine 54 and the low pressure turbine 46. The mid-turbine frame 57 further supports bearing systems 38 in the turbine section 28. The inner shaft 40 and the outer shaft 50 are concentric and rotate via bearing systems 38 about the engine central longitudinal axis A which is collinear with their longitudinal axes.

The core airflow is compressed by the low pressure compressor 44 then the high pressure compressor 52, mixed and burned with fuel in the combustor 56, then expanded through the high pressure turbine 54 and low pressure turbine 46. The mid-turbine frame 57 includes airfoils 59 which are in the core airflow path C. The turbines 46, 54 rotationally drive the respective low speed spool 30 and high speed spool 32 in response to the expansion. It will be appreciated that each of the positions of the fan section 22, compressor section 24, combustor section 26, turbine section 28, and fan drive gear system 48 may be varied. For example, gear system 48 may be located aft of the low pressure compressor, or aft of the combustor section 26 or even aft of turbine section 28, and fan 42 may be positioned forward or aft of the location of gear system 48.

The engine 20 in one example is a high-bypass geared aircraft engine. In a further example, the engine 20 bypass ratio is greater than about six (6), with an example embodiment being greater than about ten (10), the geared architecture 48 is an epicyclic gear train, such as a planetary gear system or other gear system, with a gear reduction ratio of greater than about 2.3 and the low pressure turbine 46 has a pressure ratio that is greater than about five. In one disclosed embodiment, the engine 20 bypass ratio is greater than about ten (10:1), the fan diameter is significantly larger than that of the low pressure compressor 44, and the low pressure turbine 46 has a pressure ratio that is greater than about five 5:1. Low pressure turbine 46 pressure ratio is pressure measured prior to inlet of low pressure turbine 46 as related to the pressure at the outlet of the low pressure turbine 46 prior to an exhaust nozzle. The geared architecture 48 may be an epicycle gear train, such as a planetary gear system or other gear system, with a gear reduction ratio of greater than about 2.3:1 and less than about 5:1. It should be understood, however, that the above parameters are only exemplary of one embodiment of a geared architecture engine and that the

present invention is applicable to other gas turbine engines including direct drive turbfans.

A significant amount of thrust is provided by the bypass flow B due to the high bypass ratio. The fan section 22 of the engine 20 is designed for a particular flight condition—typically cruise at about 0.8 Mach and about 35,000 feet (10,668 meters). The flight condition of 0.8 Mach and 35,000 ft (10,668 meters), with the engine at its best fuel consumption —also known as “bucket cruise Thrust Specific Fuel Consumption (“TSFC”)”—is the industry standard parameter of lbf of fuel being burned divided by lbf of thrust the engine produces at that minimum point. “Low fan pressure ratio” is the pressure ratio across the fan blade alone, without a Fan Exit Guide Vane (“FEGV”) system. The low fan pressure ratio as disclosed herein according to one non-limiting embodiment is less than about 1.45. “Low corrected fan tip speed” is the actual fan tip speed in ft/sec divided by an industry standard temperature correction of $[(T_{\text{fan}} - T_{\text{ref}})/(518.7 - T_{\text{ref}})]^{0.5}$. The “Low corrected fan tip speed” as disclosed herein according to one non-limiting embodiment is less than about 1150 ft/second (350.5 meters/second).

The fan 42 includes at least one row 60 of airfoils or blades 62 that are circumferentially distributed about, and are supported by, a rotatable hub 64. The row 60 of blades 62 can extend in a generally spanwise or radial direction R outwardly from the hub 64. The radial direction R can be perpendicular to the engine axis A. The hub 64 is rotatable in a clockwise or counter-clockwise direction RR (FIG. 4) about the engine axis A such that the blades 62 deliver airflow to the bypass flow path B and core flow path C in operation. In the illustrative example of FIG. 1, the hub 64 is driven by the low pressure (or fan drive) turbine 46 through the geared architecture 48. A spinner or nosecone 65 is supported relative to the hub 64 to provide an aerodynamic inner flow path into the fan section 22.

The fan section 22 includes at least one row 66 of turning or fan exit guide vanes 68. The guide vanes 68 are positioned in the bypass flow path B axially aft of the row 60 of blades 62 relative to the engine axis A. The row 66 of guide vanes 68 extend in the radial direction R across the bypass flow path B between the fan (e.g., first) case 15 and a core engine (e.g., second case) 17. The fan case 15 includes a bypass (e.g., first) duct 19 surrounding the row 60 of blades 62 and the row 66 of guide vanes 68 to establish the bypass flow path B. The engine case 17 is dimensioned to extend about and along the engine axis A to at least partially surround and house the compressors 44, 52, combustor 56 and turbines 46, 54. The fan case 15 and engine case 17 establish a portion of the engine static structure 36.

The engine case 17 includes a flow splitter 70 situated downstream and axially aft of the row 60 of blades 62 relative to the engine axis A. The flow splitter 70 can have a generally V-shaped cross sectional geometry and is arranged to divide airflow communicated from the row 60 of blades 62 between the bypass flow path B and a second duct 21 establishing the core flow path C. The second duct 21 can serve as an entrance or inlet to the compressor section 24 and is bounded by the flow splitter 70.

Referring to FIGS. 2-3, with continuing reference to FIG. 1, each of the blades 62 includes an airfoil body 62A that extends in the radial direction R from the hub 64 (FIG. 1) between a root 62R coupled to the hub 64 and a tip 62T. Each airfoil body 62A extends axially in an axial or chordwise direction H between a leading edge 62LE and a trailing edge 62TE, and extends circumferentially in a thickness or circumferential direction T between a pressure side 62P and

a suction side **62S**. The directions R, H, T are perpendicular to each other. The chordwise direction H can be substantially parallel or transverse to the engine axis A. The radial direction R can have a major component that extends generally from or toward an axis of rotation of the blades **62**, which in the illustrated example coincides with the engine axis A. It should be understood that the radial direction R can include a minor component in the axial and/or circumferential directions H, T such that the blades **62** have a predefined amount of sweep and/or lean, for example.

The airfoil body **62A** has an exterior airfoil surface **62E** providing a contour that extends in the chordwise direction H between the leading and trailing edges **62LE**, **62TE**. The exterior airfoil surface **62E** generates lift based upon its geometry and directs flow along the core flow path C and bypass flow path B. Each blade **62** can be constructed from a composite material, a metallic material such as steel, an aluminum or titanium alloy, or a combination of one or more of these. Abrasion-resistant coatings or other protective coatings may be applied to the blade **62**.

Referring to FIGS. 2 and 4, with continuing reference to FIGS. 1 and 3, each of the guide vanes **68** includes an airfoil body **68A** that extends in the radial direction R between inner and outer surfaces **19A**, **19B** of the duct **19**, axially in the chordwise direction H between a leading edge **68LE** and a trailing edge **68TE**, and circumferentially in the thickness direction T between a pressure side **68P** and a suction side **68S**. The inner surfaces **19A** of the first duct **19** can be provided by the engine case **17** at a location downstream of the flow splitter as illustrated in FIG. 1.

The airfoil body **68A** has an exterior airfoil surface **68E** providing a contour that extends in the chordwise direction H between the leading and trailing edges **68LE**, **68TE**. The exterior airfoil surface **68E** can be contoured to direct airflow F (FIGS. 2A, 2B) compressed by the blades **62** through a gas path such as the bypass flow path B. The guide vanes **68** can be constructed from a composite material, a metallic material such as steel, an aluminum or titanium alloy, or a combination of one or more of these. The guide vanes **68** can serve as a structural component to transfer loads between the fan case **15** and the engine case **17** or another portion of the engine static structure **36**. The fan section **22** of FIG. 1 includes a single stage fan **42** having only one row **60** of blades **62** and only one row **66** of guide vanes **68**. In other examples, the fan section **22** has more than one row of blades **62** and/or guide vanes **68** configured with respect to any of the quantities disclosed herein.

FIGS. 3-4 schematically illustrate span positions of a blade **62** and guide vane **68**, respectively. Span positions are schematically illustrated from 0% to 100% in 25% increments, for example, to define a plurality of sections **62C** of the blade **62** and a plurality of sections **68C** of the guide vane **68**. Each section **62C**, **68C** at a given span position is provided by a conical cut that corresponds to the shape of segments of the respective gas path, such as the bypass flowpath B or core flow path C, as shown by the large dashed lines.

In the case of a blade **62** with an integral platform, the 0% span position (or zero span) corresponds to the generally radially innermost location where airfoil body **62A** meets the fillet joining the airfoil body **62A** to an adjacent platform **69** (see also FIG. 1). In the case of a blade **62** without an integral platform, the 0% span position corresponds to the generally radially innermost location where the discrete platform **69** meets the exterior blade surface **62E** of the airfoil body **62A**. A 100% span position (or full span) corresponds to a section **62C** of the blade **62** at the tip **62T**.

The 50% position (or midspan) corresponds to a generally radial position halfway between the 0% and 100% span positions.

The 0% span position of the vane **68** can correspond to the generally radially innermost location where the exterior surface **68E** of the airfoil body **68A** meets the inner surfaces **19A** of the duct **19**. The 100% span position can correspond to the generally radially outermost location where the exterior surface **68E** of the airfoil body **68A** meets the outer surfaces **19B** of the duct **19**. The 50% span position (or midspan) corresponds to a generally radial position halfway between the 0% and 100% span positions. As illustrated in FIGS. 2A and 2B, each blade **62** is sectioned at a first generally radial position between the root **62R** and the tip **62T**, and each vane **68** is sectioned at a second generally radial position between the inner and outer surfaces **19A**, **19B** of the duct **19**. The first and second radial positions can be the same (e.g., both at 25%, 50% or 100% span) or can differ (e.g., one at 50% and the other at 100% span).

Airfoil geometric shapes, stacking offsets, chord profiles, stagger angles, axial sweep and dihedral angles, tangential lean angles, bow, and/or other three-dimensional geometries, among other associated features, can be incorporated individually or collectively into the blades **62** and/or guide vanes **68** to improve various characteristics such as aerodynamic efficiency, structural integrity, and vibration mitigation.

Referring to FIG. 2A, the blades **62** and guide vanes **68** can be arranged at various orientations relative to the engine axis A. Each blade **62** establishes a chord dimension BCD. Each vane **68** establishes a chord dimension VCD. The chord dimension BCD/VCD is a length between the respective leading and trailing edges **62LE/68LE**, **62TE/68TE**. The chord dimension BCD/VCD may vary along the span of the airfoil body **62A/68A**. The chord BCD/VCD forms a respective stagger angle α/β relative to the chordwise direction H or a plane parallel to the engine axis A.

The stagger angles α , β can vary along the airfoil span to define a twist. For example, the blades **62** and guide vanes **68** in FIG. 2A may be at a first span position, such as at 0% span, and the blades **62** and guide vanes **68** in FIG. 2B may be at a second, different span position, such as at 100% span. Referring to FIG. 2B, the stagger angle α of the blades **62** is larger at 100% span than the stagger angle α of the blades **62** corresponding to the span position of FIG. 2A. In examples, the stagger angle α of the blade **62** is greater than or equal to about 5 degrees at 0% span, or more narrowly less than or equal to about 40 degrees, such as between about 10 and 30 degrees at 0% span. In examples, the stagger angle α is less than or equal to about 70 degrees at 100% span, or more narrowly less than or equal to about 60 degrees, such as between about 30 and 50 degrees at 100% span.

The stagger angle β of the vane **68** can be substantially the same from 0% span to 100% span or can differ. In examples, the stagger angle β is greater than or equal about 10 degrees at 0% span, or more narrowly less than or equal to about 60 degrees, such as between about 20 and 40 degrees at 0% span. In examples, the stagger angle β is less than or equal about degrees at 100% span, or more narrowly less than or equal to about 60 degrees, such as between about 30 and 50 degrees at 100% span.

Each of the blades **62** can be cambered. A mean camber line **62M** bisects the airfoil body **62A** between the leading and trailing edges **62LE**, **62TE** of the blade **62**. A leading edge metal angle $\alpha 1^*$ at the leading edge **62LE** and a trailing edge metal angle $\alpha 2^*$ at the trailing edge **62TE** are established with respect to the mean camber line **62M** and the

chordwise direction H. The tip 62T of the blade 62 can rotate at a relatively faster speed, and the stagger of the blade 62 can be aligned with a relative flow direction F' to achieve an optimum incidence of the flow F relative to the leading edge metal angle $\alpha 1^*$ of the blade 62. A camber $\kappa 1$ of the blade 62 is equal to a difference between the leading edge metal angle $\alpha 1^*$ and the trailing edge metal angle $\alpha 2^*$. In the illustrative example of FIGS. 2A-2B, the camber $\kappa 1$ of the blade 62 can be substantially less at 100% span (FIG. 2B) than the camber $\kappa 1$ of the blade 62 at less than 100% span (FIG. 2A). The camber $\kappa 1$ of the airfoil body 62A contour that extends in the chordwise direction H between the leading and trailing edges 62LE, 62TE of the blade 62 can be less than or equal to about 80 degrees at 0% span, or more narrowly less than or equal to about 70 degrees, such as between about 40 and 60 degrees at 0% span. The camber $\kappa 1$ can be greater than or equal to about 5 degrees at 100% span, or more narrowly less than or equal to about 50 degrees, such as between about 10 and 40 degrees at 100% span.

Each of the vanes 68 can be cambered. A mean camber line 68M bisects the airfoil body 68A between the leading and trailing edges 68LE, 68TE of the vane 68. A leading edge metal angle $\beta 1^*$ at the leading edge 68LE and a trailing edge metal angle $\beta 2^*$ at the trailing edge 68TE are established with respect to the mean camber line 68M and the chordwise direction H. A camber $\kappa 2$ of the vane 68 is equal to a difference between the leading edge metal angle $\beta 1^*$ and the trailing edge metal angle $\beta 2^*$. The camber $\kappa 2$ of the airfoil body 68A contour that extends in the chordwise direction H between the leading and trailing edges 68LE, 68TE of the vane 68 can be greater than or equal to about 5 degrees at 0% span, or more narrowly less than or equal to about 50 degrees, such as between about 10 and 40 degrees at 0% span. The camber $\kappa 2$ can be less than or equal to about 80 degrees at 100% span, or more narrowly less than or equal to about 70 degrees, such as between about 40 and 60 degrees at 100% span. For the purposes of this disclosure, the terms "about" and "approximately" mean $\pm 3\%$ of the stated value unless otherwise indicated.

FIG. 5 illustrates a gas turbine engine 120 according to another example. In this disclosure, like reference numerals designate like elements where appropriate and reference numerals with the addition of one-hundred or multiples thereof designate modified elements that are understood to incorporate the same features and benefits of the corresponding original elements. The engine 120 includes a fan section 122 including a fan (or rotor) 142, a compressor section 124, a combustor section 126 and a turbine section 128. The compressor, combustor and turbine sections 124, 126, 128 establish respective portions of the core flow path C. The turbine section 128 drives the fan section 122 and the compressor section 124. The compressor section 124 includes a low pressure compressor 144 and a high pressure compressor 152. The turbine section 128 includes a low pressure (or fan drive) turbine 146 and a high pressure turbine 154.

The fan 142 includes at least one row 160 of blades 162 carried by and mounted to a rotatable hub 164. In examples, the blades 162 are incorporated into a fixed-pitch arrangement in which the blades 162 have a fixed stagger angle α . In other examples, the blades 162 are incorporated into a variable-pitch arrangement in which the stagger angle α varies in response to rotation of the blades 162 about a respective blade axis that extends between the blade root 162R and tip 162T.

The engine 120 can include a geared architecture 148 that drives the fan 142 at a different speed than a speed of the fan

drive turbine 146 in operation. In examples, the geared architecture 148 is an epicyclic gear system such as a planetary gear system having a fixed ring gear and a rotatable carrier, or such as a star gear system having a fixed carrier and a rotatable ring gear. The geared architecture 48 can establish a gear reduction ratio of greater than about 2.3 or 2.6, or more narrowly less than about 4.0 or 5.0, for example. In other examples, the geared architecture 148 is omitted such that the fan drive turbine 146 directly drives the fan 142 at a common speed and in a common direction.

The fan section 122 includes a fan (e.g., first) case 115 including a bypass (e.g., first) duct 119 surrounding the row 160 of blades 162 to establish a bypass (e.g., first) flow path B. The engine 120 includes an engine (e.g., second) case 117 that establishes a core (e.g., second) flow path C.

The engine 120 can include a nacelle 123 and core cowling (or housing) 125. The nacelle 123 is mechanically attached or otherwise secured to the fan case 115 and establishes an engine inlet 1231. The engine inlet 1231 conveys airflow F to the fan 142 in operation. The core cowling 125 is mechanically attached or otherwise secured to the engine case 117. The core cowling 125 at least partially surrounds the engine case 117. The bypass flow path B terminates at a bypass exit (or nozzle) 131 established by a trailing edge of the nacelle 123.

At least one row 166 of turning or fan exit guide vanes 168 are situated in the bypass duct 119. The guide vanes 168 extend in a radial direction R across the bypass flow path B. Each guide vane 168 extends in the radial direction R between a 0% span position along an inner surface 119A and a 100% span position along an outer surface 119B of the bypass duct 119.

An airfoil body 168A of the guide vane 168 extends along a longitudinal axis LA, as illustrated in FIG. 8C. A projection of the longitudinal axis LA intersects the engine axis A to establish a vane angle φ . The vane angle φ can be approximately 90 degrees such that the guide vane is substantially perpendicular to the engine axis A, as illustrated by the guide vane 68 of FIG. 1. In examples, the vane angle φ is less 90 degrees such that the guide vane has a component that extends aftwards in the axial direction from 0% to 100% span with respect to the engine axis A, as illustrated by the guide vane 168 of FIG. 8A. The vane angle φ can be greater than or equal to 15 degrees, or more narrowly between 30 and 60 degrees, for example.

Various quantities of blades 162 and guide vanes 168 can be incorporated into the engine 120. The row 160 of blades 162 establishes a blade quantity (BQ). The row 166 of guide vanes 168 establishes a vane quantity (VQ), which can be the same or can differ from the blade quantity (BQ). The blade quantity (BQ) can be less than 24 or 26 blades, or more narrowly at least 12 but not more than 20 blades, such as 14 or 16 blades, for example. The vane quantity (VQ) can be no more than 40 guide vanes, or more narrowly at least 20 guide vanes, for example. In examples, the ratio of VQ/BQ is between 2.0 and 2.6, or more narrowly between 2.2 and 2.5, which may reduce noise due to flow interaction between the blades 162 and guide vanes 168. For the purposes of this disclosure, the term "between" is inclusive of the stated value(s) unless otherwise stated.

Various stage counts can be incorporated in the compressors 144, 152 and turbines 146, 154. For example, the low pressure compressor 144 can include at least 3 but no more than 5 compressor stages, such as 3 compressor stages as illustrated by FIGS. 1 and 5. In examples, the low pressure turbine 146 includes at least 3 but no more than 6 turbine stages, such as 3 turbine stages as illustrated by FIG. 5, 4

11

turbine stages, or 5 turbine stages as illustrated by FIG. 1. The high pressure turbine **154** can include a single stage, or can include two stages as illustrated by FIGS. 1 and 5, for example. A ratio between the blade quantity (BQ) and a quantity of the stages of the low pressure turbine **146** can be between about 3.3 and about 8.6, or more narrowly less than or equal to about 4.0, such as about 3.5. The example low pressure turbine **146** provides the driving power to rotate the fan **142** and therefore the relationship between the number of turbine stages of the low pressure turbine **146** and the blade quantity (BQ) disclose an example gas turbine engine **120** with increased power transfer efficiency.

The engine **120** includes a core bypass (or third) duct **127** established between the engine case **117** and core cowling **125**. The core bypass duct **127** establishes an intermediate (or third) flow path I. The core bypass duct **127** can be a separate and distinct structure or can be established by a volume of the core engine bay between the engine core and core cowling **125**. The core bypass duct **127** can be coupled to an annular core vent port (or nozzle) **129** established along an outer periphery of the core cowling **125**. In the illustrated example of FIG. 5, the guide vanes **168** are an axially aftmost row of fan exit guide vanes in the bypass flow path B between the row **160** of blades **162** and the bypass exit **131** relative to the engine axis A. In other examples, one or more rows of vanes are arranged in the bypass flow path B axially forward and/or aft of the row **166** of guide vanes **168**. The hub **164** is rotatable about the engine axis A such that the row **160** of blades **162** deliver or convey airflow to the bypass, intermediate and core flow paths B, I, C in operation.

The engine **120** includes a first flow splitter **170** and a second flow splitter **172** arranged in a cascade. The flow splitters **170**, **172** are situated downstream and axially aft of the row **160** of blades **162** relative to the engine axis A. The first flow splitter **170** can be incorporated into or mechanically attached to the core cowling **125**. The second flow splitter **172** can be incorporated into or mechanically attached to the engine case **117**. The first flow splitter **170** establishes a portion of the bypass duct **119** and a portion of the second duct **121**. The second flow splitter **172** establishes a portion of the second duct **121** and a portion of an entrance (e.g., fourth) duct **133**. The entrance duct **133** can establish an entrance or inlet to the compressor section **124**.

The first flow splitter **170** is arranged to divide airflow conveyed by the row **160** of blades **162** between the bypass flow path B and the second duct **121**. The second flow splitter **172** is radially inboard of the first flow splitter **170** relative to the engine axis A. The second duct **121** branches between the core flow path C and the intermediate flow path I at the second flow splitter **172**. The second flow splitter **172** is arranged to divide airflow conveyed to the second duct **121** between the intermediate flow path I and the core flow path C along the entrance duct **133**. The flow splitters **170**, **172** can have a generally V-shaped cross sectional geometry dimensioned to divide the airflow.

A bypass port **174** is established along an outer periphery **125P** of the core cowling **125**. The bypass port **174** interconnects the intermediate flow path I and bypass flow path B at a position downstream of the row **166** of guide vanes **168** relative to a general direction of airflow through the bypass flow path B such that airflow conveyed by the intermediate flow path I through the bypass port **174** bypasses or otherwise is not communicated across the guide vanes **168** in operation. The bypass port **174** can interconnect the intermediate flow path I and bypass flow path B at a position axially aft of the 0% span position of the row **166**

12

of guide vanes **168** relative to the engine axis A. In the illustrated example of FIG. 5, the vent port **129** is established downstream and axially aft of both the bypass port **174** and the bypass exit **131** relative to the engine axis A. In other examples, the vent port **129** is established upstream and axially forward of the bypass exit **131** such that airflow in the bypass flow path B mixes in the bypass duct **119** with airflow conveyed by the vent port **129** prior to exiting the bypass exit **131**.

One or more louvers **176** can be situated in the bypass port **174**. The louvers **176** can have a generally airfoil-shaped cross sectional geometry and are arranged to direct airflow from the intermediate flow path I into the bypass flow path B in a direction generally downstream of the guide vanes **168** and toward the bypass exit **131**.

The engine **120** can establish an adaptive fan flow arrangement in which a relative distribution of airflow conveyed by the fan **142** to the flow paths B, I and/or C varies during one or more modes. One or more blocker doors **184** can be moved between opened and closed positions to selectively communicate airflow through the bypass port **174** (open and closed positions indicated in dashed lines at **184**, **184'** of FIG. 8A for illustrative purposes).

In the illustrative example of FIG. 6, the engine **120** includes one or more blocker doors **178** situated in the core bypass duct **127** to modulate airflow through the intermediate flow path I. The blocker doors **178** are situated in the intermediate flow path I downstream of the bypass port **174**. The blocker doors **178** are moveable between a closed position (FIG. 5) and an open position (FIG. 6) to selectively communicate airflow in the intermediate flow path I downstream to the vent port **129**. The blocker doors **178** at least partially or substantially block airflow through the intermediate flow path I in the closed position. In the illustrative example of FIGS. 5-6, the blocker doors **178** are pivotable flaps having a pivot point established along the core bypass duct **127**. It should be understood that other arrangements can be utilized to selectively communicate airflow downstream to the vent port **129**.

Referring to FIGS. 7A-7C, with continuing reference to FIGS. 5-6, the nacelle **123** can include at least one thrust reverser **180** and/or a variable area fan nozzle (VAFN) **182** for adjusting various characteristics of the bypass flow. FIG. 7A illustrates the thrust reverser **180** and the variable area fan nozzle **182** in stowed positions. FIG. 7B illustrates the thrust reverser **180** in the stowed position and the variable area fan nozzle **182** in a deployed position. FIG. 7C illustrates the thrust reverser **180** in a deployed position and the variable area fan nozzle **182** in the stowed position. The nacelle **123** includes a stationary portion **123-1** mounted to the fan case **115**, a first moveable portion **123-2** and a second moveable portion **123-3**. The moveable portions **123-2**, **123-3** are moveable relative to the stationary portion **123-1** and relative to each other.

The thrust reverser **180** is operable to convey airflow in the bypass flow path B for producing reverse thrust such as during approach and/or landing conditions of an aircraft associated with the engine **120**. The thrust reverser **180** includes a thrust reverser body **180B**, which is configured with the first moveable portion **123-2** of the nacelle **123**. The thrust reverser body **180B** may have a generally tubular geometry. The thrust reverser **180** can include one or more blocker doors **180D**, one or more actuators **180A**, and/or one or more cascades **180C** of turning vanes **180V** arranged circumferentially about the engine axis A.

The thrust reverser body **180B** can include at least one recess **180R** that houses the cascades **180C** and the actuators

13

180A when the thrust reverser **180** is in the stowed position. The cascades **180C** are dimensioned to span across a reversal port **180P** when the thrust reverser **180** is in the deployed position, as illustrated by FIG. 7C. The cascade **180C** selectively communicates airflow from the bypass duct **119** outwardly through the reversal port **180P** in the deployed position. The cascade **180C** can extend axially aft of both the row **166** of guide vanes **168** and the bypass port **174** with respect to the engine axis A, and the row **168** of guide vanes **168** can be situated axially forward of the blocker doors **180D** relative to the engine axis A, as illustrated by FIGS. 5-6.

Each blocker door **180D** is pivotally connected to the thrust reverser body **180B**. The bypass port **174** can be established axially forward of the blocker doors **180D** with respect to the engine axis A, as illustrated in FIGS. 5-6. The actuators **180A** are operable to axially translate the thrust reverser body **180B** between the stowed and deployed positions. As the thrust reverser body **180B** translates aftwards, the blocker doors **180B** pivot radially inward into the bypass duct **119** and divert at least some or substantially all of the bypass airflow F as flow F1 through the cascades **180C** to provide the reverse engine thrust, as illustrated in FIG. 7C. In other examples, the cascades **180C** are configured to translate axially with a respective thrust reverser body **180B**. The thrust reverser body **180B** and/or cascades **180C** can include one or more circumferential segments that synchronously or independently translate or otherwise move between deployed and stowed positions.

The variable area fan nozzle **182** includes a nozzle body **182B** and one or more actuators **182A**. The nozzle body **182B** is configured with the second movable portion **123-3** of the nacelle **123**, and is arranged radially within and may nest with the thrust reverser body **180B**. The nozzle body **182B** may have a generally tubular geometry that extends about an axially contoured outer periphery **125P** of the core cowling **125**. The actuators **182A** are operable to axially translate the nozzle body **182B** between the stowed position of FIG. 7A and the deployed position of FIG. 7B. As the nozzle body **182B** translates aftwards, a radial distance RD of the bypass exit **131** between a trailing edge or aft end **123TE** of the nacelle **123** and the outer periphery **125P** of the core cowling **125** established at the stowed position may change (e.g., increase) to a radial distance RD' and thereby change (e.g., increase) a flow area of the bypass exit **131**. In this manner, the variable area fan nozzle **182** may adjust a pressure drop or ratio across the bypass flowpath B defined by the bypass duct **119** by changing the flow area of the bypass exit **131**.

The variable area fan nozzle **182** can define or otherwise include at least one auxiliary port **182P** to vary the bypass flow. The auxiliary port **182P** can be established in the nozzle body **182B**, as illustrated by FIGS. 7A-7C. The auxiliary port **182P** is moveable relative to a trailing edge portion **123P** of the first moveable portion **123-1** of the nacelle **123** to selectively block and open the auxiliary port **182P**. The auxiliary port **182P** is opened as the nozzle body **182B** translates axially aftwards relative to the engine axis A. A flow area through the auxiliary port **182P** augments the flow area of the bypass exit **131**, thereby increasing an effective flow area of the variable area fan nozzle **182**. The variable area fan nozzle **182** therefore may adjust a pressure drop or ratio across the bypass flowpath B defined by the bypass duct **119** while translating the nozzle body **182B** over a relatively smaller axial distance. In the illustrative example of FIGS. 5-6, the variable area fan nozzle **182** is omitted.

14

Referring to FIG. 8A, with continuing reference to FIG. 5, the blades **162** can be dimensioned to provide a relatively radially compact engine arrangement. Each of the blades **162** extends in the radial direction R between a 0% span position at the hub **164** and a 100% span position at a tip **162T**. A tip radius RT of the blades **162** is established between a radially outermost portion of the tip **162T** and the engine axis A. A forwardmost portion of a leading edge **162LE** of each of the blades **162** is arranged along a first reference plane REF1. The first reference plane REF1 is perpendicular to the engine axis A. A hub radius RH is established along the first reference plane REF1 between an outer periphery of the hub **164** and the engine axis A. The tip radius RT can be between 35 and 60 inches, or more narrowly between 40 and 55 inches, for example.

Each of the blades **162** extends in the radial direction R between the 0% span position and the 100% span position to establish a geometric hub-to-tip ratio (RH:RT). The hub-to-tip ratio (RH:RT) can be less than or equal to about 0.4, or more narrowly greater than or equal to about 0.1, measured relative to the forwardmost portion of the leading edge **162LE** of the blades **162**. In examples, the hub-to-tip ratio (RH:RT) is between 0.16-0.36, or more narrowly between 0.2-0.3. In examples, the hub-to-tip ratio (RH:RT) is established such that a maximum value of the fan pressure ratio across the blade **162** alone is less than or about equal to about 1.45 measured at cruise at 0.8 Mach and 35,000 feet. In further examples, a maximum value of the fan pressure ratio is greater than or equal to about 1.1, or more narrowly less than or equal to about 1.35. The fan pressure ratios and hub-to-tip ratios disclosed herein can be utilized alone or in combination to establish relatively high bypass turbo fan engine arrangements.

The flow splitters **170**, **172** are arranged at respective positions relative to each other and the row **160** of blades **162** to establish a predetermined distribution of airflow through the bypass, intermediate and core flow paths B, I, C in operation. A forwardmost edge **170F** of the first flow splitter **170** is situated in the radial and axial directions R, H at a first splitter position P1 relative to the engine axis A. The first splitter position P1 is established along a second reference plane REF2. A forwardmost edge **172F** of the second flow splitter **172** is situated in the radial and axial directions R, H at a second splitter position P2 relative to the engine axis A. The second splitter position P2 is established along a third reference plane REF3. The reference planes REF2, REF3 are perpendicular to the engine axis A.

The reference planes REF2, REF3 can be established at the same position, or at different positions relative to the engine axis A to establish a cascade arrangement. For example, the forwardmost edge **172F** of the second flow splitter **172** can be axially aft of the forwardmost edge **170F** of the first flow splitter **170** with respect to the engine axis A. The forwardmost edges **170F**, **172F** of the flow splitters **170**, **172** are axially forward of the leading edges **168LE** of the row **166** of guide vanes **168** at the 0% span position with respect to the engine axis A. The forwardmost edges **170F**, **172F** can be dimensioned to extend axially forward of the geared architecture **148** relative to the engine axis A, as illustrated by FIG. 8A, which can establish a relatively compact core engine arrangement.

Referring to FIG. 8B, with continuing reference to FIG. 8A, a first annulus area A1 is established by, and between, inner and outer diameter surfaces **119A**, **119B** of the bypass duct **119** at the forwardmost edge **170F** of the first flow splitter **170**. A second annulus area A2 is established by, and between, inner and outer diameter surfaces **121A**, **121B** of

15

the second duct **121** at the forwardmost edge **170F** of the first flow splitter **170**. A third annulus area **A3** is established by, and between, inner and outer diameter surfaces **133A**, **133B** of the entrance duct **133** at the second flow splitter **172**. The annulus areas **A1**, **A2**, **A3** extend about the engine axis **A** to establish a portion of the respective flow paths **B**, **I**, **C**.

The annulus areas **A1**, **A2**, **A3** can be dimensioned to establish a predetermined distribution of airflow to the flow paths **B**, **I**, **C** in operation. A first geometric bypass area ratio (**A1:A2**) associated with the first flow splitter **170** is defined as the first annulus area **A1** divided by the second annulus area **A2**. A second geometric bypass area ratio (**A1:A3**) associated with the second flow splitter **172** is defined as the first annulus area **A1** divided by the third annulus area **A3**. The annulus areas **A1**, **A2**, **A3** can be dimensioned to establish a predetermined value of the first bypass area ratio (**A1:A2**) and a predetermined value of the second bypass area ratio (**A1:A3**). In examples, the first bypass area ratio (**A1:A2**) is greater than or equal to about 10 to establish a relatively high bypass turbo fan arrangement. In examples, the first bypass area ratio (**A1:A2**) is less than or equal to about 35, or more narrowly less than or equal to about 20. The second bypass area ratio (**A1:A3**) is greater than the first bypass area ratio (**A1:A2**). For example, a value of the second bypass area ratio (**A1:A3**) can be between about 150-250% of the first bypass area ratio (**A1:A2**), such as approximately twice or 200% of the first bypass area ratio (**A1:A2**). In examples, the second bypass area ratio (**A1:A3**) is greater than or equal to about 15, or more narrowly greater than or equal to about 20.

Referring back to FIG. **8A**, the forwardmost edges **170F**, **172F** of the flow splitters **170**, **172** can be dimensioned relative to a span of the blades **162** to establish the predetermined distribution of airflow through the bypass, intermediate and core flow paths **B**, **I**, **C** in operation. In examples, the first splitter position **P1** can be radially aligned with or radially inward of a 25% span position of the blades **162**, or more narrowly can be radially aligned with or radially outward of a 10% span position of the blades **162** relative to the radial direction **R**, such as between about 16-22% span. The second splitter position **P2** can be radially aligned with or radially outward of a 5% span position of the blades **162**, or more narrowly can be radially aligned with or radially inward of a 15% span position of the blades **162** relative to the radial direction **R**, such as between about 8-13% span. The splitter positions **P1**, **P2** can be established at a radial distance of at least 5% span apart from each other relative to the blades **162** such that a relatively larger amount of airflow is communicated to the intermediate flow path **I** and bypasses the guide vanes **168**. In examples, the radial distance between the splitter positions **P1**, **P2** is between about 6-12% span, relative to the blades **162**. The blades **162** can have any of the stagger angles α and/or camber κ values disclosed herein at the respective spanwise positions of the first splitter position **P1** and/or second splitter position **P2** to convey airflow in a predetermined direction towards the splitters **170**, **172**, which can improve efficiency.

The guide vanes **168** and flow splitters **170**, **172** can be arranged relative to the fan blades **162** to establish a relatively axially compact envelope. The leading edges **162LE** of the blades **162** at the 100% span position are established along a fourth reference plane **REF4**. The leading edges **168LE** of the guide vanes **168** at the 100% span position are established along a fifth reference plane **REF5**. The reference planes **REF4**, **REF5** are perpendicular to the engine axis **A**. A first axial length **L1** is established between the

16

reference planes **REF4**, **REF5**. In examples, a ratio (**L1:RT**) of the first axial length **L1** divided by the tip radius **RT** is greater than or equal to about 0.5, which can reduce fan noise propagation through the bypass flow path **B**. The ratio (**L1:RT**) can be less than or equal to about 0.75, which can establish a relatively axially compact fan section. A second axial length **L2** is established between the first and second splitter positions **P1**, **P2** along the reference planes **REF2**, **REF3** relative to the engine axis **A**. In examples, a ratio (**L2:L1**) of the second axial length **L2** divided by the first axial length **L1** is less than or equal to about 0.5, or more narrowly between about 0.1 and about 0.3, which can further establish a relatively axially compact engine.

FIG. **9A** illustrates a plot of bypass area ratio relative to airfoil span position, such as span positions of the blades **162**. FIG. **9B** illustrates selected portions of FIG. **9A**. Example profiles or curves **C1-C6** are shown. The curves **C1-C6** correspond to fan or rotor arrangements having hub-to-tip ratios (**RH:RT**) of 0.16, 0.20, 0.24, 0.28, 0.32, 0.36, respectively. The fan **142** can be dimensioned to establish any of the hub-to-tip ratios (**RH:RT**) and corresponding values along the curves **C1-C6**.

Each curve **C1-C6** can be established as function of annulus area associated with respective bypass area ratios. Splitter position values for each % span position along the respective curve **C1-C6** can be defined in one of the following ways:

$$\% \text{ span position} = [(MR - RH) / (RT - RH)] * 100 \quad \text{Equation 1}$$

$$\% \text{ span position} = [(MR / RT - \lambda) / (1 - \lambda)] * 100 \quad \text{Equation 2}$$

where (**MR**) is the radial splitter position of the respective splitter **170**, **172**, (**RH**) is the hub radius and (**RT**) is the tip radius as previously defined, and (λ) is the hub-to-tip ratio (**RH:RT**). Since the annulus areas established by the splitters are non-linear, the corresponding curves **C1-C6** are also non-linear.

The plot of curves **C1-C6** can serve as a nomograph utilized to select radial locations of the first and second positions **P1**, **P2** of the flow splitters **170**, **172** with respect to hub-to-tip (**RH:RT**) ratio and/or bypass area ratio (**A1:A2**), (**A1:A3**), or vice versa. For example, referring to FIG. **9B**, the fan **142** can establish a hub-to-tip (**RH:RT**) ratio of 0.16 corresponding to the curve **C1**. The radial location of the first and second splitter positions **P1**, **P2** of the flow splitters **170**, **172** correspond to points $P1_{(0.16)}$, $P2_{(0.16)}$ selected along the curve **C1**. The points $P1_{(0.16)}$, $P2_{(0.16)}$ can be selected with respect to a predetermined bypass area ratio. For example, point $P1_{(0.16)}$ of the first flow splitter **170** can be established in the radial direction **R** at about a 21.5% span position of the blades **162**. Point $P1_{(0.16)}$ corresponds to a first bypass area ratio (**A1:A2**) of about 10 and a mass average fan pressure ratio of about 1.260. The radial location of the second flow splitter **172** can be determined by assuming analytically that the second flow splitter **172** is the first flow splitter **170** (e.g., a single flow splitter arrangement). The point $P2_{(0.16)}$ of the second flow splitter **172** can be established in the radial direction **R** at about a 13.1% span position of the blades **162**. Point $P2_{(0.16)}$ corresponds to a second bypass area ratio (**A1:A3**) of about 20 and a mass average fan pressure ratio of about 1.225. For the purposes of this disclosure, mass average fan pressure ratio is defined as an average pressure ratio across the blades **162** alone measured at cruise at 0.8 Mach and 35,000 feet between the 0% span position and the corresponding span position of the respective splitter **170**, **172**. The mass across the blades **162** associated with the mass average fan pressure ratio is

approximately equal to the amount of the mass captured by the respective splitter **170**, **172**.

As another example, the fan **142** can establish a hub-to-tip (RH:RT) ratio of 0.36 corresponding to the curve C6. The radial location of the first and second splitter positions **P1**, **P2** of the flow splitters **170**, **172** correspond to points $P1_{(0.36)}$, $P2_{(0.36)}$ selected along the curve C6. Point $P1_{(0.36)}$ of the first flow splitter **170** can be established in the radial direction R at about a 15.5% span position of the blades **162**. Point $P1_{(0.36)}$ corresponds to a first bypass area ratio (A1:A2) of about 10 and a mass average fan pressure ratio of about 1.260. Point $P2_{(0.36)}$ of the second flow splitter **172** can be established in the radial direction R at about a 7.6% span position of the blades **162**. Point $P2_{(0.36)}$ corresponds to a second bypass area ratio (A1:A3) of about 20 and a mass average fan pressure ratio of about 1.185.

The flow splitters **170**, **172** and other portions of the fan section **122** can be dimensioned with respect to any other values along the curves C1-C6. For example, points $P1'_{(0.16)}$, $P2'_{(0.16)}$ can be established along the curve C1 at about 11.0% and about 7.6% span corresponding to first and second bypass area ratios (A1:A2), (A1:A3) of about 25 and 35, respectively. As another example, points $P1'_{(0.36)}$, $P2'_{(0.36)}$ can be established along the curve C6 at about 7.0% and about 5.5% span corresponding to first and second bypass area ratios (A1:A2), (A1:A3) of about 20 and 35, respectively.

As illustrated by the curves C1-C6 of FIGS. 9B, for the same bypass area ratio, a lower hub-to-tip ratio (RH:RT) can result in the splitter positions **P1**, **P2** of the splitters **170**, **172** being relatively further away from the 0% span position of the blades **162**. The splitters **170**, **172** can be dimensioned with respect to relatively lower % span positions to establish relatively larger bypass area ratios, as illustrated by the curves C1-C6 of FIG. 9B.

FIG. 10A illustrates a plot of fan pressure ratio relative to airfoil span position, such as span positions of the blades **162**. FIG. 10B illustrates selected portions of the plot of FIG. 10A. Curve PR1 corresponds to discrete fan pressure ratios at each span position. Lines $LP1_{(0.16)}$, $LP2_{(0.16)}$ correspond to the splitter positions $P1_{(0.16)}$, $P2_{(0.16)}$ of the splitters **170**, **172** associated with a hub-to-tip ratio (RH:RT) equal to 0.16. Lines $MA1_{(0.16)}$, $MA2_{(0.16)}$ are the mass averaged fan pressure ratios corresponding to the respective splitter positions $P1_{(0.16)}$, $P2_{(0.16)}$. FIG. 10B depicts a curve PR1(NT) representing a spanwise integration of the discrete fan pressure ratios of curve PR1. An intersection of the lines $LP1_{(0.16)}$, $LP2_{(0.16)}$ corresponding to the points $P1_{(0.16)}$, $P2_{(0.16)}$ and the curve PR1(INT) establish a position of the respective lines $MA1_{(0.16)}$, $MA2_{(0.16)}$ relative to the y-axis. In the illustrative example of FIGS. 10A-10B, lines $MA1_{(0.16)}$, $MA2_{(0.16)}$ correspond to mass average fan pressure ratios of 1.260 and 1.225, respectively, which correspond to values previously discussed with respect to the points $P1_{(0.16)}$, $P2_{(0.16)}$ along the curve C1 of FIG. 9B.

FIG. 11 illustrates another plot of fan pressure ratio relative to airfoil span position, such as span positions of the blades **162**. Curve PR2 corresponds to discrete fan pressure ratios at each span position of the blade **162**. Lines $LP1_{(0.36)}$, $LP2_{(0.36)}$ correspond to splitter positions $P1_{(0.36)}$, $P2_{(0.36)}$ of the splitters **170**, **172** associated with a hub-to-tip ratio (RH:RT) equal to 0.36. In the illustrative example of FIG. 11, lines $MA1_{(0.36)}$, $MA2_{(0.36)}$ correspond to mass average fan pressure ratios of 1.260 and 1.185, respectively, which correspond to values previously discussed with respect to the points $P1_{(0.36)}$, $P2_{(0.36)}$ along the curve C6 of FIG. 9B.

The engine **120** can include a controller CONT (shown in dashed lines in FIG. 5 for illustrative purposes). The controller CONT is operable to cause the blocker doors **178**, **184**, thrust reverser **180** and variable area fan nozzle **182** to move between the various disclosed positions or modes. The controller CONT can include one or more computing devices, each having one or more of a computer processor, memory, storage means, network device and input and/or output devices and/or interfaces according to some example. The memory may, for example, include UVROM, EEPROM, FLASH, RAM, ROM, DVD, CD, a hard drive, or other computer readable medium which may store data and/or the algorithms corresponding to the various functions of this disclosure. In other examples, the controller CONT is an analog or electromechanical device configured to provide the disclosed functions of this disclosure. The controller CONT can be a portion of a full-authority digital electronic control FADEC or an electronic engine control (EEC), another system, or a stand-alone system located within the aircraft remote from the engine **120**.

FIG. 12 illustrates a plurality of discrete modes M1-M4 established by the position of the blocker door(s) **178** and position of the blocker door(s) **184** across the bypass port **174**. The controller CONT can be programmed with logic or otherwise configured to cause the engine **120** to execute each of the modes M1-M4. During modes M1 and M3, the blocker doors **178** are stowed to establish an open position to at least partially communicate airflow through vent port **129**. During modes M2 and M4, the blocker doors **178** are deployed to establish a closed position to at least partially block airflow from being communicated to the vent port **129**. During modes M1 and M2, the bypass port **174** is open or uncovered to at least partially communicate airflow from the intermediate flow path I to the bypass flow path B. During modes M3 and M4, the bypass port **174** is closed or covered to at least partially block airflow being communicated from the intermediate flow path I to the bypass flow path B. The engine **120** can be operated in the first mode M1 during takeoff, for example, which may be associated with relatively lower engine inlet airflow such that the fan **142** communicates relatively more airflow which may improve fan stability.

The engine **120** can be operated in the first mode M1 and/or the second mode M2 during cruise, for example. The engine **120** can be operated in the second mode M2 during a beginning of climb condition to increase fan pressure ratio and generate relatively greater thrust. The thrust reverser **180** can be deployed during the second mode M2, for example, to increase an amount of airflow being communicated to the bypass flow path to the thrust reverser **180** for generating reverse thrust. The engine **120** can be operated in the third mode M3 during a middle of climb condition (i.e., between beginning climb and top of climb). The engine **120** can be operated in the fourth mode M4 during a top of climb condition to increase airflow to the core flow path C and bypass flow path B to maximize or otherwise increase thrust. The modes M1-M4 are exemplary and it should be appreciated the blocker door(s) **178** and bypass port **174** can be configured to establish fewer or more than four modes.

The controller CONT can be coupled to one or more sensors to determine any of the conditions disclosed herein, such as temperature, pressure and/or speed sensors operable to measure various conditions or states of the engine **120**. Temperature and/or pressure sensors can be situated along the bypass, intermediate and/or core flow paths B, I, C, for example. Speed sensors can be situated adjacent to the rotors to determine a speed of the fan rotor, low spool, and/or high

19

spool, for example. The controller CONT can utilize other data and information to determine any of the conditions disclosed herein, including aircraft velocity, altitude and throttle position. One would understand how to situate the sensors and program or otherwise configure the controller CONT with logic to obtain data and other information from the sensors and other systems in view of the teachings disclosed herein.

The engine 120 can be operated as follows. Referring to FIG. 5, the fan 142 is driven by the fan drive turbine 146 such that the blades 162 deliver airflow to the bypass, intermediate and core flow paths B, I, C. Driving the fan 142 can include driving the hub 164 of the fan 142 through the geared architecture 148 at a different speed than a speed of the fan drive turbine 146. The engine 120 can be operated in any of the modes disclosed herein, including the modes M1-M4 of FIG. 12. Airflow in the intermediate flow path I can be ejected from the bypass port 174 into the bypass flow path B to bypass the guide vanes 168. One or more blocker doors 178 can be selectively moved between open and closed positions to at least partially block airflow from the intermediate flow path I being communicated downstream to the core bypass duct 127 and vent port 129. One or more of the blocker doors 184 can be moved between open and closed positions to selectively communicate airflow through the bypass port 174 (184 shown in dashed lines in FIG. 8A for illustrative purposes).

Referring to FIG. 6, an operating line of the fan 142 at an operating condition such as takeoff can be shifted relatively further away from the stall line by upflowing the fan 142 in response to selectively communicating airflow to the vent port 129. One or more of the blocker doors 178 can be selectively moved to the open position to communicate airflow in the intermediate flow path I downstream to the vent port 129. Airflow communicated to the core bypass duct 127 can be ejected from the vent port 129 downstream of the bypass port 174 and/or bypass exit 131.

The disclosed splitter arrangements can improve aerodynamic loading and efficiency of the guide vanes, including lowering inlet Mach number to the guide vanes and improving aerodynamic diffusion in the guide vanes. The disclosed splitter arrangements can improve blade and guide vane performance near 0% span, which can be utilized to achieve a relatively more efficient spanwise pressure ratio across the entire span of the blade and the entire span of the guide vane. Engines made with the disclosed architecture, and including arrangements as set forth in this application, and with modifications coming from the scope of the claims in this application, thus provide very high efficient operation, relatively high stall margins, and are compact and lightweight relative to their thrust capability. Two-spool and three-spool direct drive engine architectures can also benefit from the teachings herein.

It should be understood that relative positional terms such as “forward,” “aft,” “upper,” “lower,” “above,” “below,” and the like are with reference to the normal operational attitude of the vehicle and should not be considered otherwise limiting.

Although the different examples have the specific components shown in the illustrations, embodiments of this disclosure are not limited to those particular combinations. It is possible to use some of the components or features from one of the examples in combination with features or components from another one of the examples.

Although particular step sequences are shown, described, and claimed, it should be understood that steps may be

20

performed in any order, separated or combined unless otherwise indicated and will still benefit from the present disclosure.

The foregoing description is exemplary rather than defined by the limitations within. Various non-limiting embodiments are disclosed herein, however, one of ordinary skill in the art would recognize that various modifications and variations in light of the above teachings will fall within the scope of the appended claims. It is therefore to be understood that within the scope of the appended claims, the disclosure may be practiced other than as specifically described. For that reason the appended claims should be studied to determine true scope and content.

What is claimed is:

1. A section for a gas turbine engine comprising:

- a rotor including a row of blades extending in a radial direction outwardly from a hub, wherein the hub is rotatable about a longitudinal axis such that the row of blades deliver flow to a bypass flow path, an intermediate flow path and a core flow path;
- a first case surrounding the row of blades to establish the bypass flow path through a first duct;
- a first flow splitter that divides flow between the bypass flow path and a second duct;
- an aftmost row of guide vanes extending in the radial direction across the bypass flow path;
- a second case including a second flow splitter radially inboard of the first flow splitter, wherein the second flow splitter is axially forward of an axially forwardmost compressor blade row of the gas turbine engine relative to the longitudinal axis that is surrounded by the second case, the second flow splitter divides flow from the second duct between the intermediate flow path and the core flow path, a forwardmost edge of the second flow splitter is axially aft of a forwardmost edge of the first flow splitter with respect to the longitudinal axis, and the forwardmost edges of the first and second flow splitters are axially forward of the aftmost row of guide vanes with respect to the longitudinal axis;
- a bypass port that interconnects the intermediate and bypass flow paths at a position axially aft of a position of the aftmost row of guide vanes relative to the longitudinal axis, and the bypass port configured to direct flow from the intermediate flow path to the bypass flow path;

wherein each of the blades extends in the radial direction between a 0% span position at the hub and a 100% span position at a tip, leading edges of the blades at the 100% span position are established along a first reference plane, leading edges of the guide vanes at a 100% span position of the respective guide vanes are established along a second reference plane, the first and second reference planes are perpendicular to the longitudinal axis, a first axial length is established between the first and second reference planes, a tip radius is established between the tip of one of the respective blades and the longitudinal axis, and a ratio of the first axial length divided by the tip radius is greater than or equal to 0.5; and

wherein the forwardmost edge of the first flow splitter is situated in the radial direction at a first splitter position, the forwardmost edge of the second flow splitter is situated in the radial direction at a second splitter position, the first splitter position is radially aligned with or radially inward of a 25% span position of the

21

blades, and the second splitter position being radially aligned with or radially outward of a 5% span position of the blades.

2. The section as recited in claim 1, wherein the hub is driven by a turbine through a geared architecture.

3. The section as recited in claim 1, wherein each of the blades extends in the radial direction between the 0% span position at the hub and the 100% span position at the tip to establish a hub-to-tip ratio, and the hub-to-tip ratio of each one of the blades is less than or equal to 0.4, the hub-to-tip ratio of each one of the blades measured relative to the forwardmost portion of the leading edge of the respective blade.

4. The section as recited in claim 1, wherein the first duct establishes the bypass flow path, the second duct branches between the intermediate and core flow paths at the second flow splitter, a first annulus area is established by the first duct at the forwardmost edge of the first flow splitter, a second annulus area is established by the second duct at the forwardmost edge of the first flow splitter, a bypass area ratio is defined as the first annulus area divided by the second annulus area, and the bypass area ratio is greater than or equal to 10, and less than or equal to 35.

5. The section as recited in claim 4, wherein a maximum value of a pressure ratio across the blades alone is less than 1.45 at cruise at 0.8 Mach and 35,000 feet.

6. The section as recited in claim 4, wherein only one row of guide vanes extends in the radial direction across the bypass flow path and the row of guide vanes comprises the aftmost row of guide vanes.

7. The section as recited in claim 4, wherein each of the blades extends in the radial direction between the 0% span position at the hub and the 100% span position at the tip to establish a hub-to-tip ratio, and the hub-to-tip ratio of each one of the respective blades is between 0.16-0.36 measured relative to the forwardmost portion of the leading edge of the respective blade.

8. The section as recited in claim 7, wherein the row of blades establishes a blade quantity (BQ), the blade quantity (BQ) is at least 12 but not more than 20 blades, the aftmost row of guide vanes establishes a vane quantity (VQ), and the vane quantity (VQ) is at least 20 but not more than 40 guide vanes.

9. The section as set forth in claim 8, wherein a ratio of VQ/BQ is between 2.0 and 2.6.

10. The section as recited in claim 1, further comprising: one or more blocker doors situated in the intermediate flow path downstream of the bypass port, and wherein the one or more blocker doors are moveable to direct flow from the intermediate flow path to the bypass port.

11. The section as set forth in claim 10, wherein: the one or more blocker doors are configured to pivot from the second case towards the bypass flow path to direct flow from the intermediate flow path to the bypass port; and

louvers are situated in the bypass port, the louvers have an airfoil-shaped geometry and are arranged to direct flow from the intermediate flow path to the bypass flow path.

12. A gas turbine engine comprising:

a fan section including a fan having a row of blades, each extending in a radial direction between a 0% span position at a hub and a 100% span position at a respective tip, wherein the hub is rotatable about an engine longitudinal axis such that the row of blades deliver flow to a bypass flow path, an intermediate flow path and a core flow path;

a compressor section establishing the core flow path;

22

a turbine section that drives the fan section and the compressor section;

a fan case including a bypass duct surrounding the row of blades to establish the bypass flow path;

a housing including a first flow splitter that divides flow between the bypass flow path and a second duct;

an aftmost row of guide vanes in the bypass duct that extend in the radial direction across the bypass flow path;

an engine case including a second flow splitter radially inboard of the first flow splitter and that divides flow from the second duct between the intermediate flow path and the core flow path, wherein the second flow splitter is axially forward of an axially forwardmost compressor blade row of the compressor section that is surrounded by the engine case relative to the engine longitudinal axis, a forwardmost edge of the second flow splitter is axially aft of a forwardmost edge of the first flow splitter with respect to the engine longitudinal axis, and the forwardmost edges of the first and second flow splitters are axially forward of the row of aftmost guide vanes with respect to the engine longitudinal axis;

a bypass port that interconnects the intermediate and bypass flow paths at a position downstream of the aftmost row of guide vanes, and the bypass port configured to direct flow from the intermediate flow path to the bypass flow path;

wherein each of the blades extends in the radial direction between the 0% span position and 100% span position to establish a hub-to-tip ratio, and the hub-to-tip ratio of each one of the blades is less than or equal to 0.4 measured relative to a forwardmost portion of a leading edge of the respective blade;

the leading edges of the blades at the 100% span position are established along a first reference plane, leading edges of the guide vanes at a 100% span position of the respective guide vanes are established along a second reference plane, the first and second reference planes are perpendicular to the engine longitudinal axis, a first axial length is established between the first and second reference planes, a tip radius is established between the tip of one of the respective blades and the longitudinal axis, and a ratio of the first axial length divided by the tip radius is greater than or equal to 0.5; and

wherein the forwardmost edge of the first flow splitter is situated in the radial direction at a first splitter position, the forwardmost edge of the second flow splitter is situated in the radial direction at a second splitter position, the first splitter position is radially aligned with or radially inward of a 25% span position of the blades relative to the engine longitudinal axis, and the second splitter position is radially aligned with or radially outward of a 5% span position of the blades relative to the engine longitudinal axis.

13. The gas turbine engine as recited in claim 12, further comprising a geared architecture, wherein the turbine section includes a fan drive turbine, and the geared architecture drives the fan at a different speed than a speed of the fan drive turbine.

14. The gas turbine engine as recited in claim 12, further comprising one or more blocker doors situated in the intermediate flow path downstream of the bypass port, wherein the one or more blocker doors are moveable between a first position and a second position, wherein the one or more blocker doors are configured to communicate flow in the intermediate flow path to a vent port in the first position but

are configured to block flow in the intermediate flow path to the vent port in the second position.

15. The gas turbine engine as recited in claim 14, wherein the vent port is axially aft of an exit of the bypass flow path with respect to the engine longitudinal axis.

5

16. The gas turbine engine as recited in claim 14, further comprising a thrust reverser including a cascade that selectively communicates airflow from the bypass duct, wherein the cascade extends axially aft of both the aftmost row of guide vanes and the bypass port with respect to the engine longitudinal axis.

10

17. The gas turbine engine as recited in claim 12, wherein: the compressor section includes a first compressor and a second compressor, the first compressor comprises the axially forwardmost compressor blade row of the compressor section, and both the second flow splitter and an entrance of the intermediate flow path are axially forward of the compressor section relative to the engine longitudinal axis.

15

18. The gas turbine engine as recited in claim 17, wherein the first compressor includes three compressor blade rows.

20

19. The gas turbine engine as recited in claim 17, wherein the aftmost row of guide vanes extend in the radial direction across the intermediate flow path relative to the engine longitudinal axis.

25

* * * * *