



US012384599B2

(12) **United States Patent**
Nathan et al.

(10) **Patent No.:** **US 12,384,599 B2**
(45) **Date of Patent:** **Aug. 12, 2025**

(54) **BAKEWARE STORAGE SYSTEM**

(71) Applicant: **Caraway Home, Inc.**, New York, NY (US)

(72) Inventors: **Jordan Nathan**, New York, NY (US); **Bret Recor**, San Francisco, CA (US); **Benjamin Gross**, San Francisco, CA (US); **Kenneth Young**, San Francisco, CA (US); **Christoph Andrejciec**, San Francisco, CA (US)

(73) Assignee: **Caraway Home, Inc.**, New York, NY (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **17/847,106**

(22) Filed: **Jun. 22, 2022**

(65) **Prior Publication Data**

US 2022/0402653 A1 Dec. 22, 2022

Related U.S. Application Data

(60) Provisional application No. 63/213,315, filed on Jun. 22, 2021.

(51) **Int. Cl.**

B65D 25/04 (2006.01)

A47B 77/18 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **B65D 25/04** (2013.01); **A47B 77/18** (2013.01); **A47J 47/16** (2013.01); **B65D 25/2808** (2013.01)

(58) **Field of Classification Search**

CPC **B65D 25/04**; **B65D 25/22**; **B65D 25/2808**; **A47J 47/00**; **A47J 47/16**; **A47J 47/18**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

887,712 A 5/1908 Frank
2,672,232 A * 3/1954 Kessell, Jr. A45C 11/20
220/521

(Continued)

FOREIGN PATENT DOCUMENTS

EP 2532596 A1 12/2012

OTHER PUBLICATIONS

Extended European Search Report of the European Patent Office in related European Patent Appl. No. 22829270.2, dated Mar. 26, 2025, 20 pages.


Primary Examiner — Andrew T Kirsch

(74) *Attorney, Agent, or Firm* — Bochner PLLC; Andrew D Bochner; Eric R Kleinertz

(57) **ABSTRACT**

Disclosed is a system for storing various bakeware items in an organized and efficient manner. The bakeware caddy may include a short divider orthogonal to a left wall, a right wall, and a bottom surface; and a long divider orthogonal to the short divider and the bottom surface. Accordingly, the caddy may comprise one or more pockets, for example a rear pocket, a left pocket, and a right pocket, formed by disposition of the one or more walls and dividers. A strap may be disposed on the outer circumference of the caddy, the strap comprising one or more ends magnetically engaged. Thus, reversible magnet adherence of the strap ends may enable withdrawal and placement of bakeware items within the caddy. The caddy and the components thereof may be composed of various materials to enable rigidity and support and may be further covered in fabric to prevent damage to the bakeware items.

20 Claims, 10 Drawing Sheets

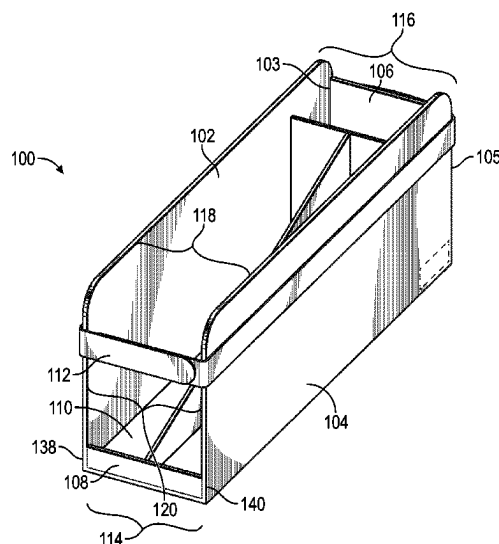

(51) **Int. Cl.**

A47J 47/16 (2006.01)

B65D 25/28 (2006.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,182,872	A *	5/1965	Brosseau	A01K 97/06
				206/315.11
D659,632	S *	5/2012	Jordan	D12/414.1
2001/0039807	A1	11/2001	Mogil	
2009/0114690	A1	5/2009	Landay	
2009/0159598	A1 *	6/2009	Kuehneman	B65D 25/04
				220/553
2010/0147861	A1	6/2010	Andochick	
2016/0121642	A1 *	5/2016	Herbst	B42F 13/26
				220/4.23

* cited by examiner

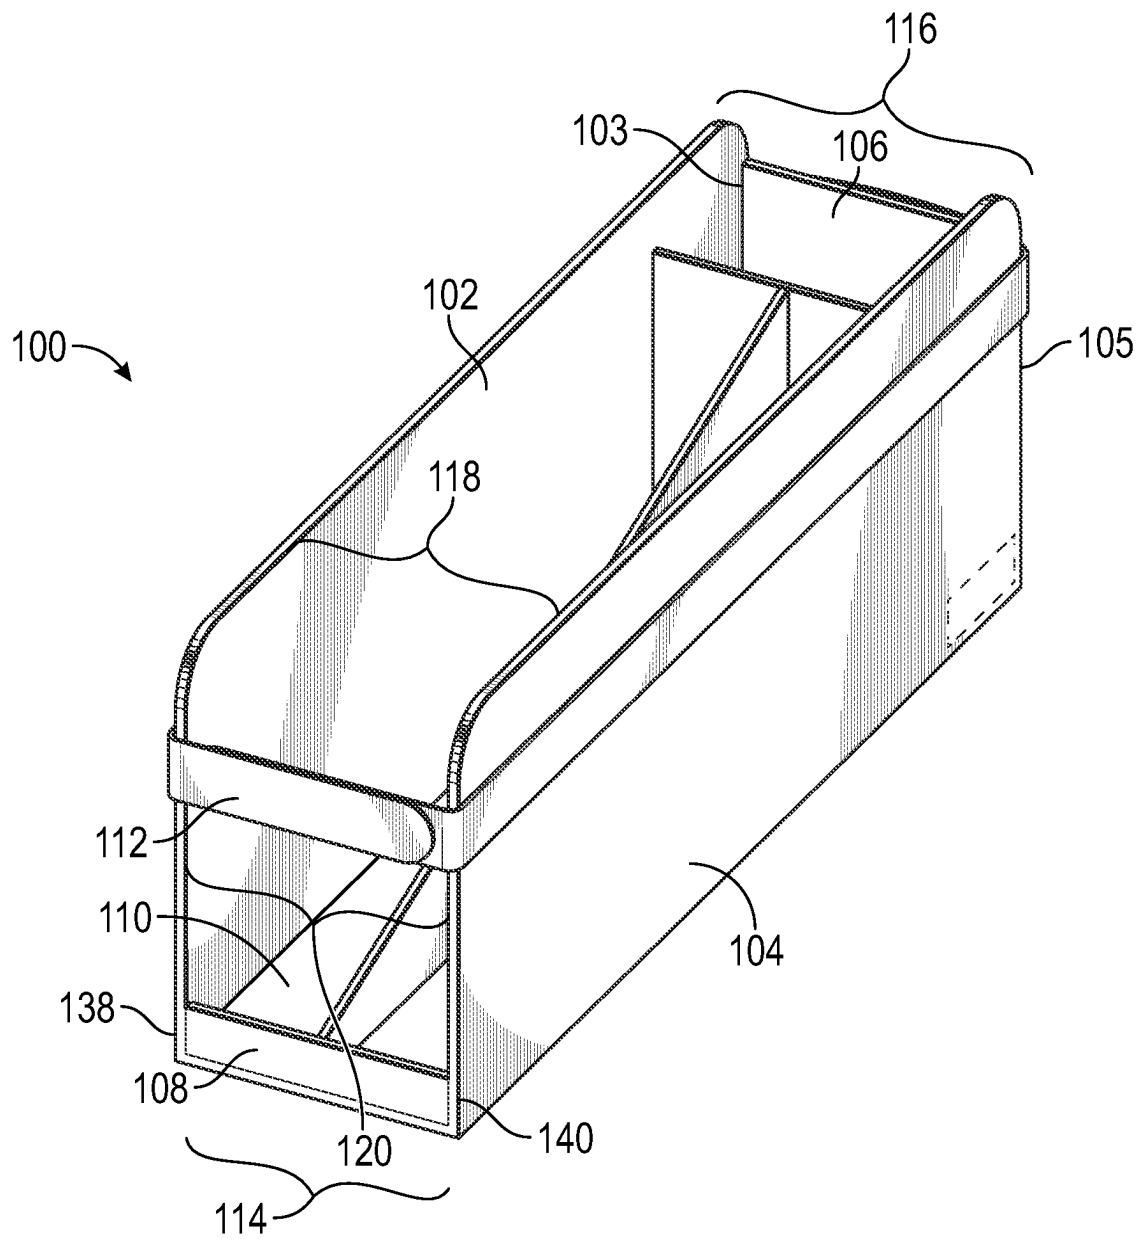


FIG. 1

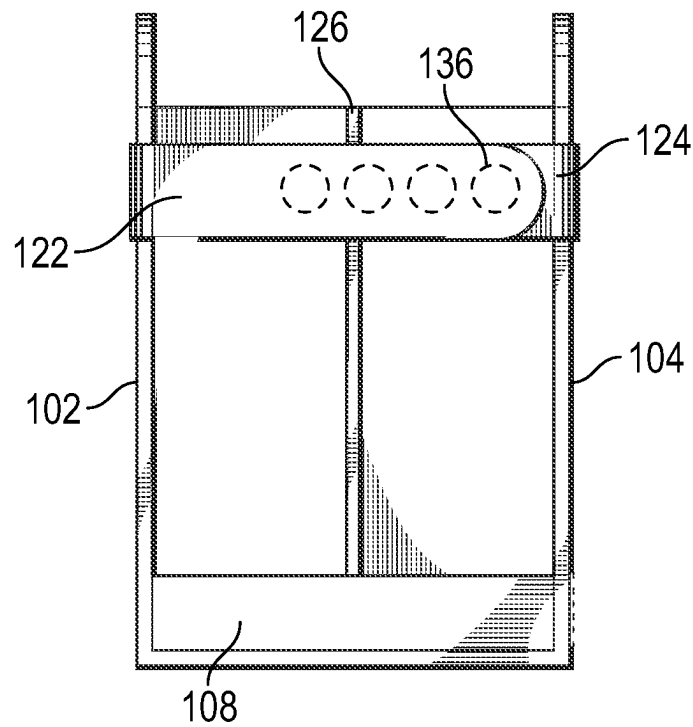


FIG. 2

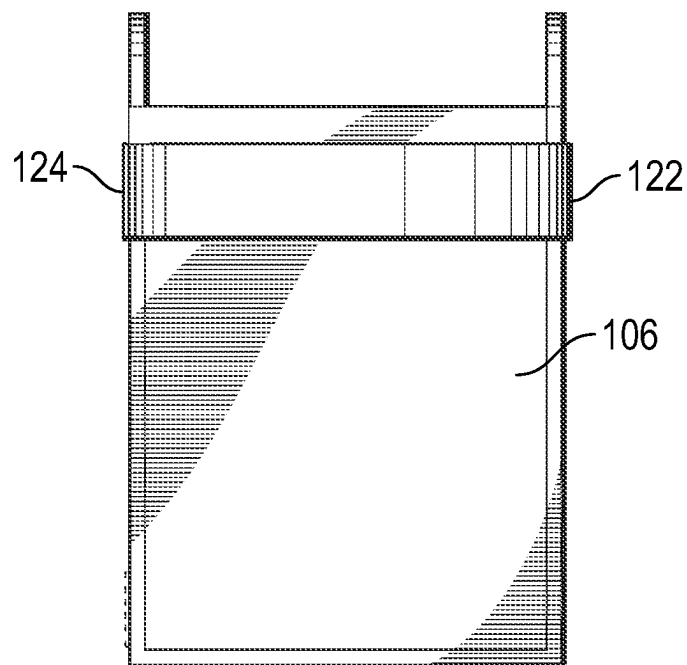
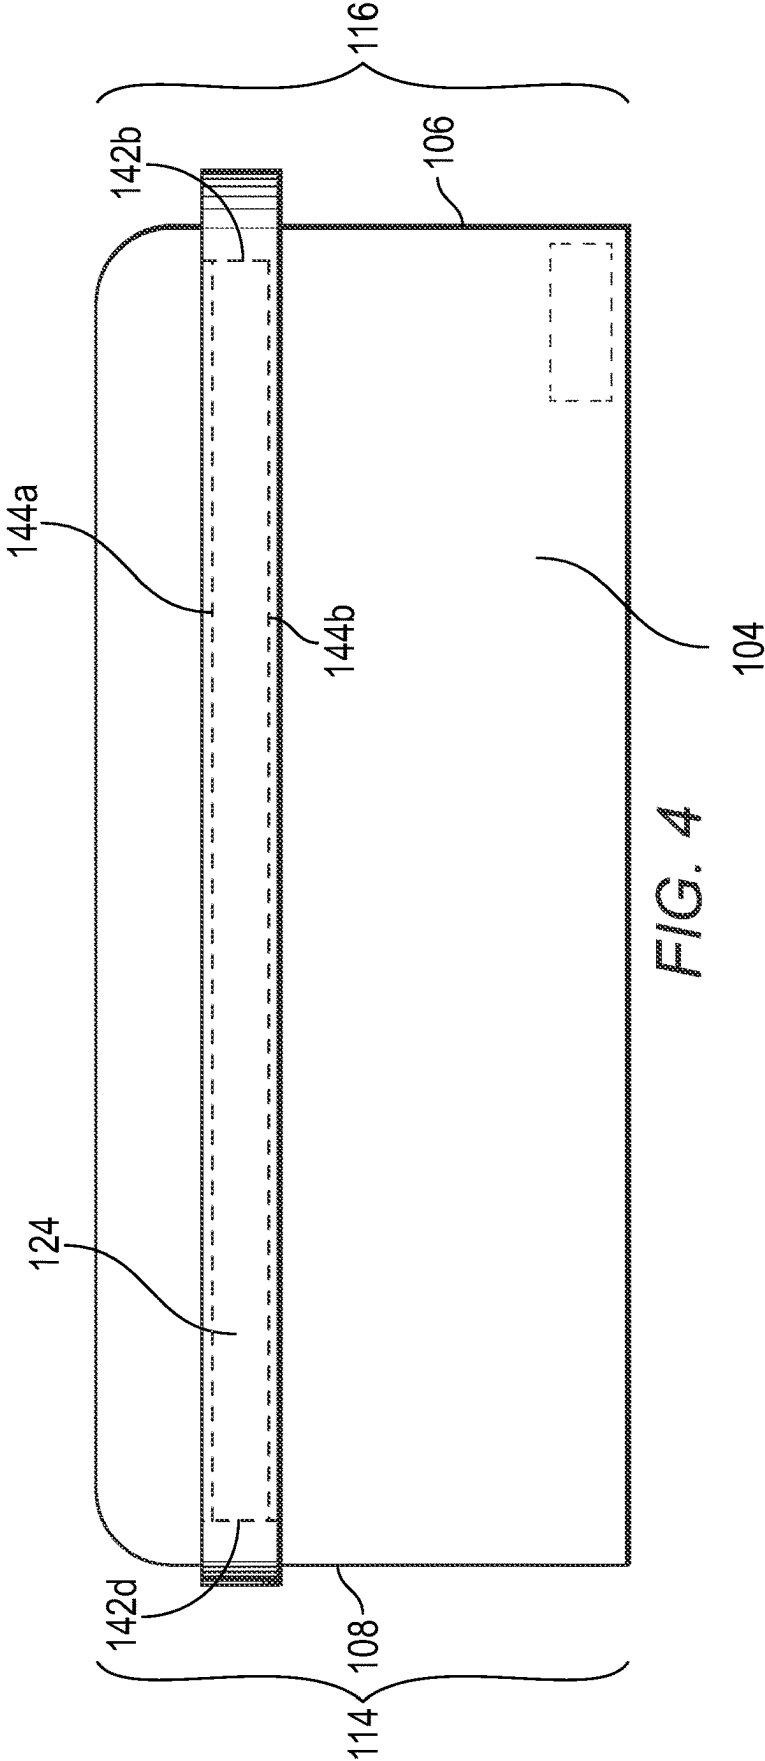


FIG. 3



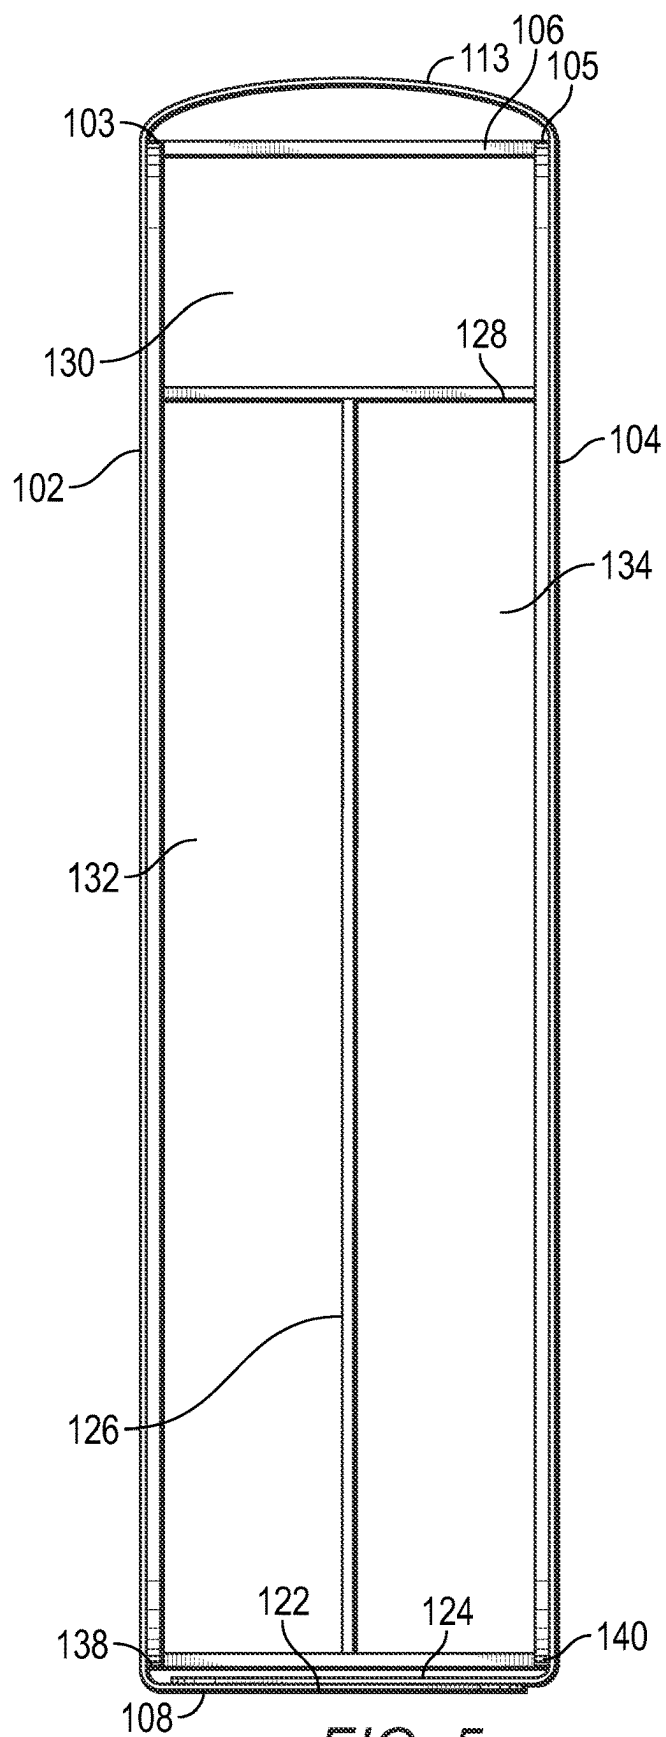


FIG. 5

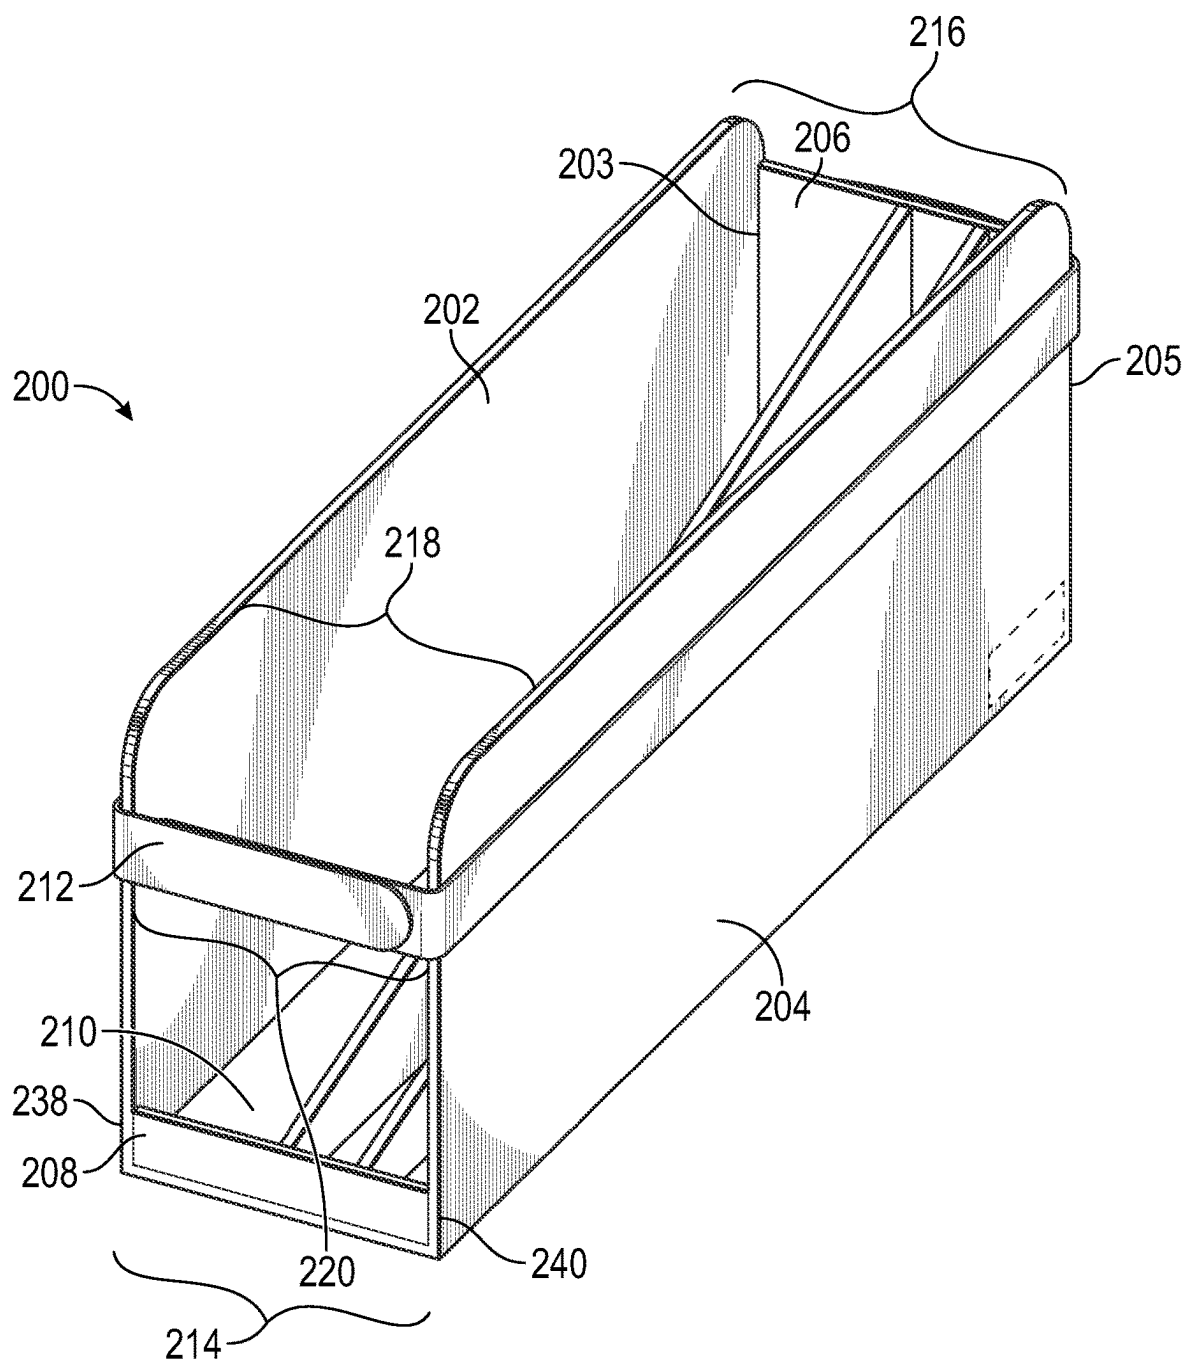


FIG. 6

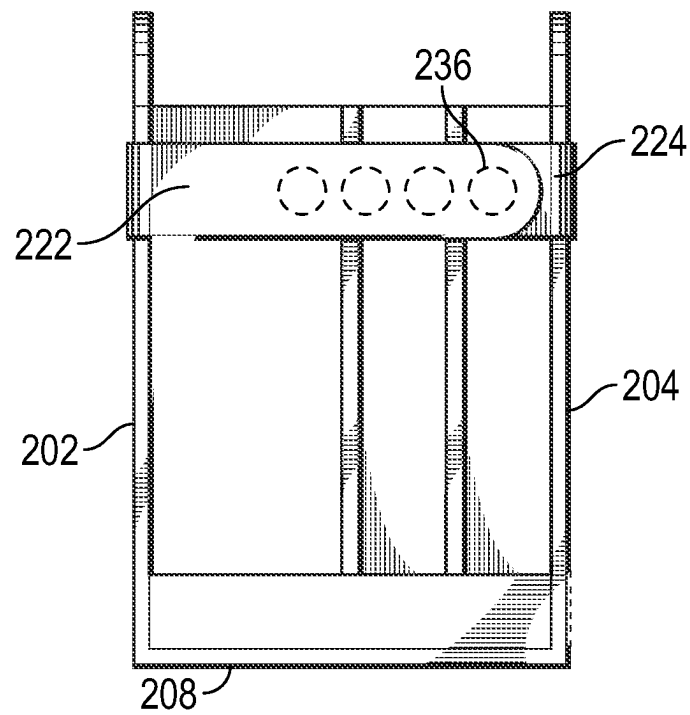


FIG. 7

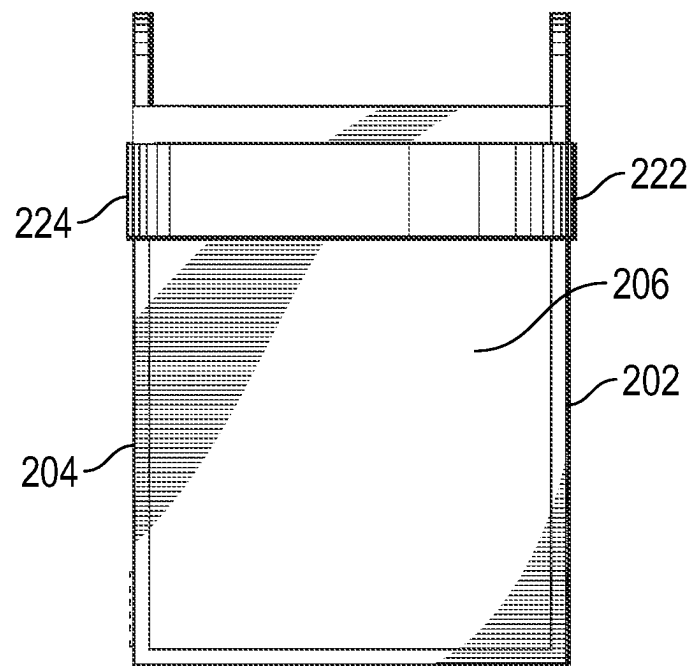


FIG. 8

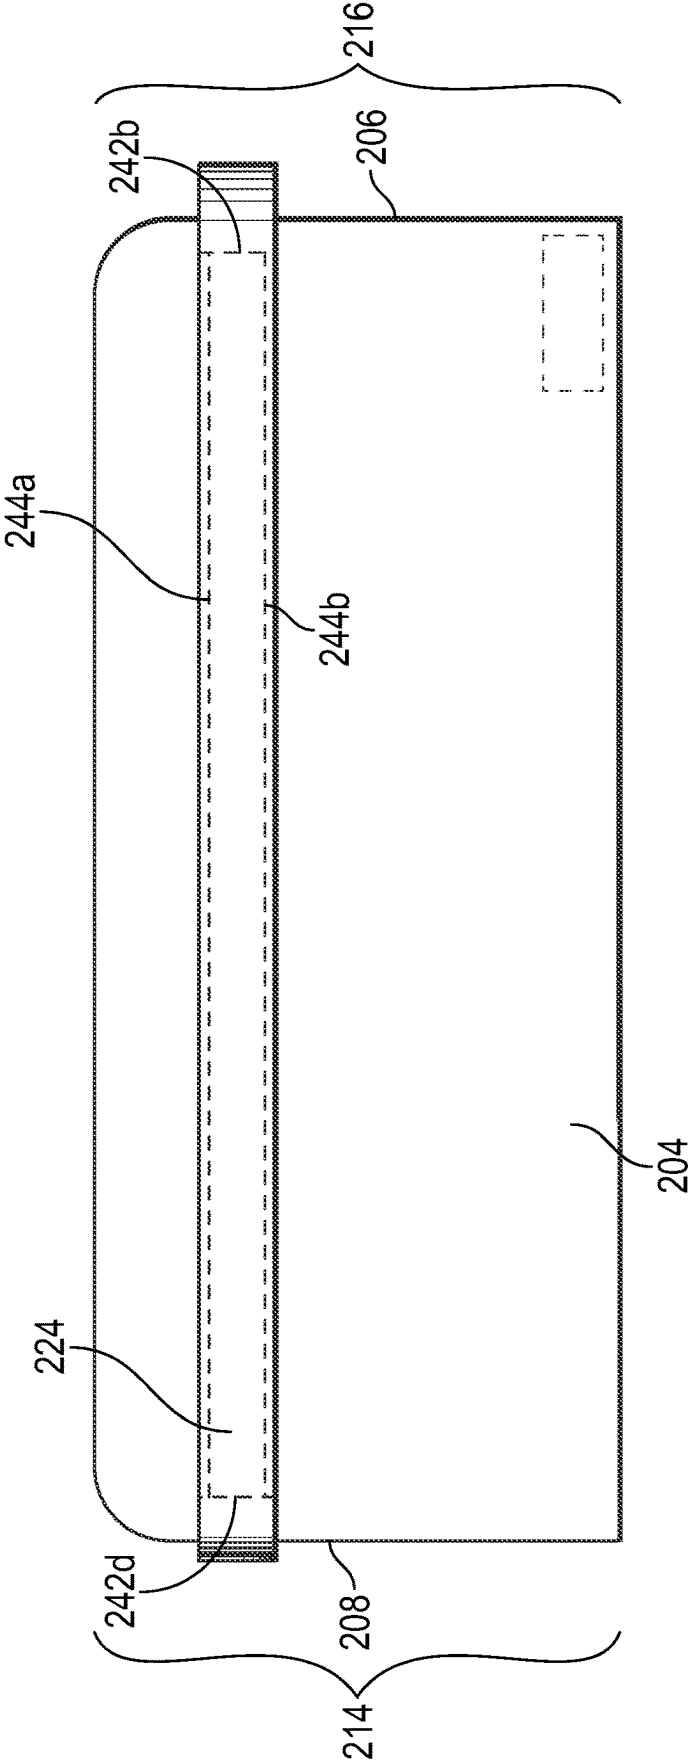


FIG. 9

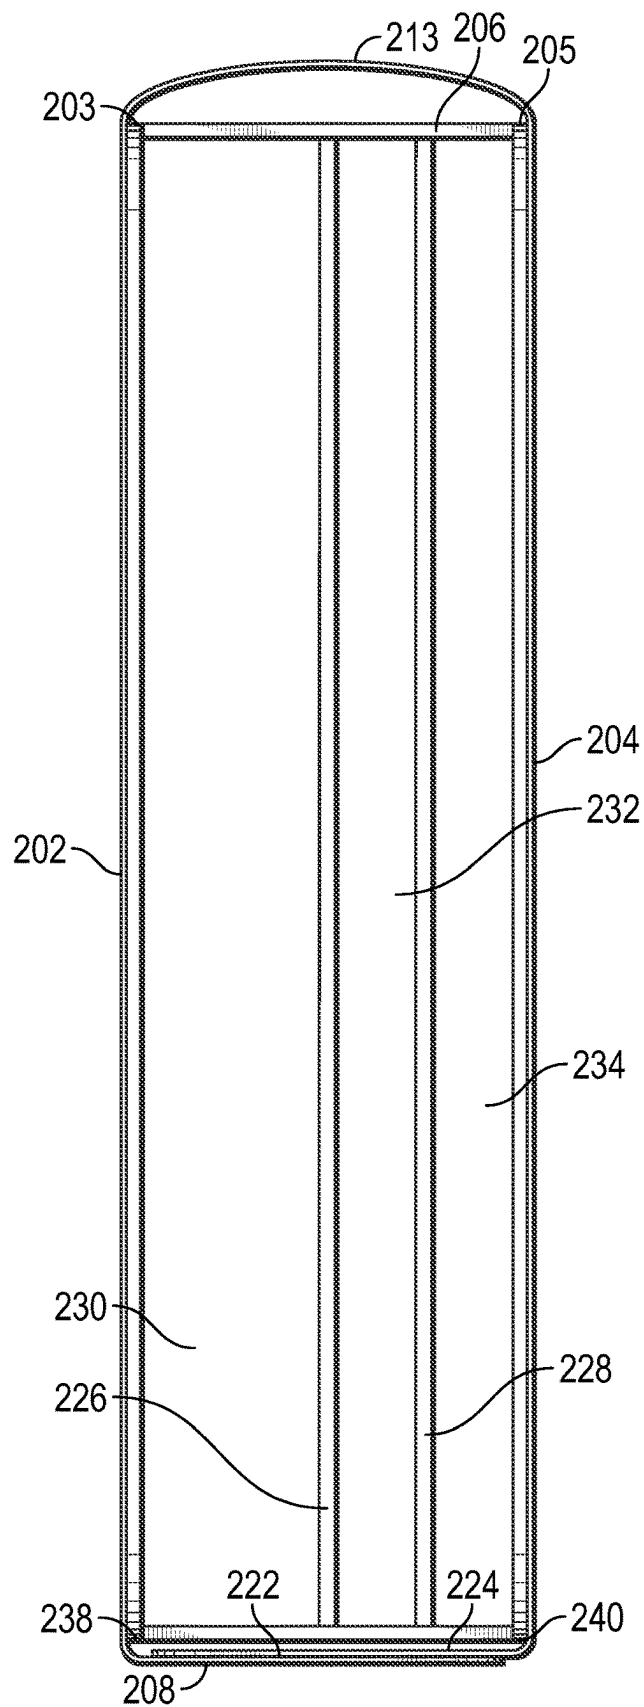


FIG. 10

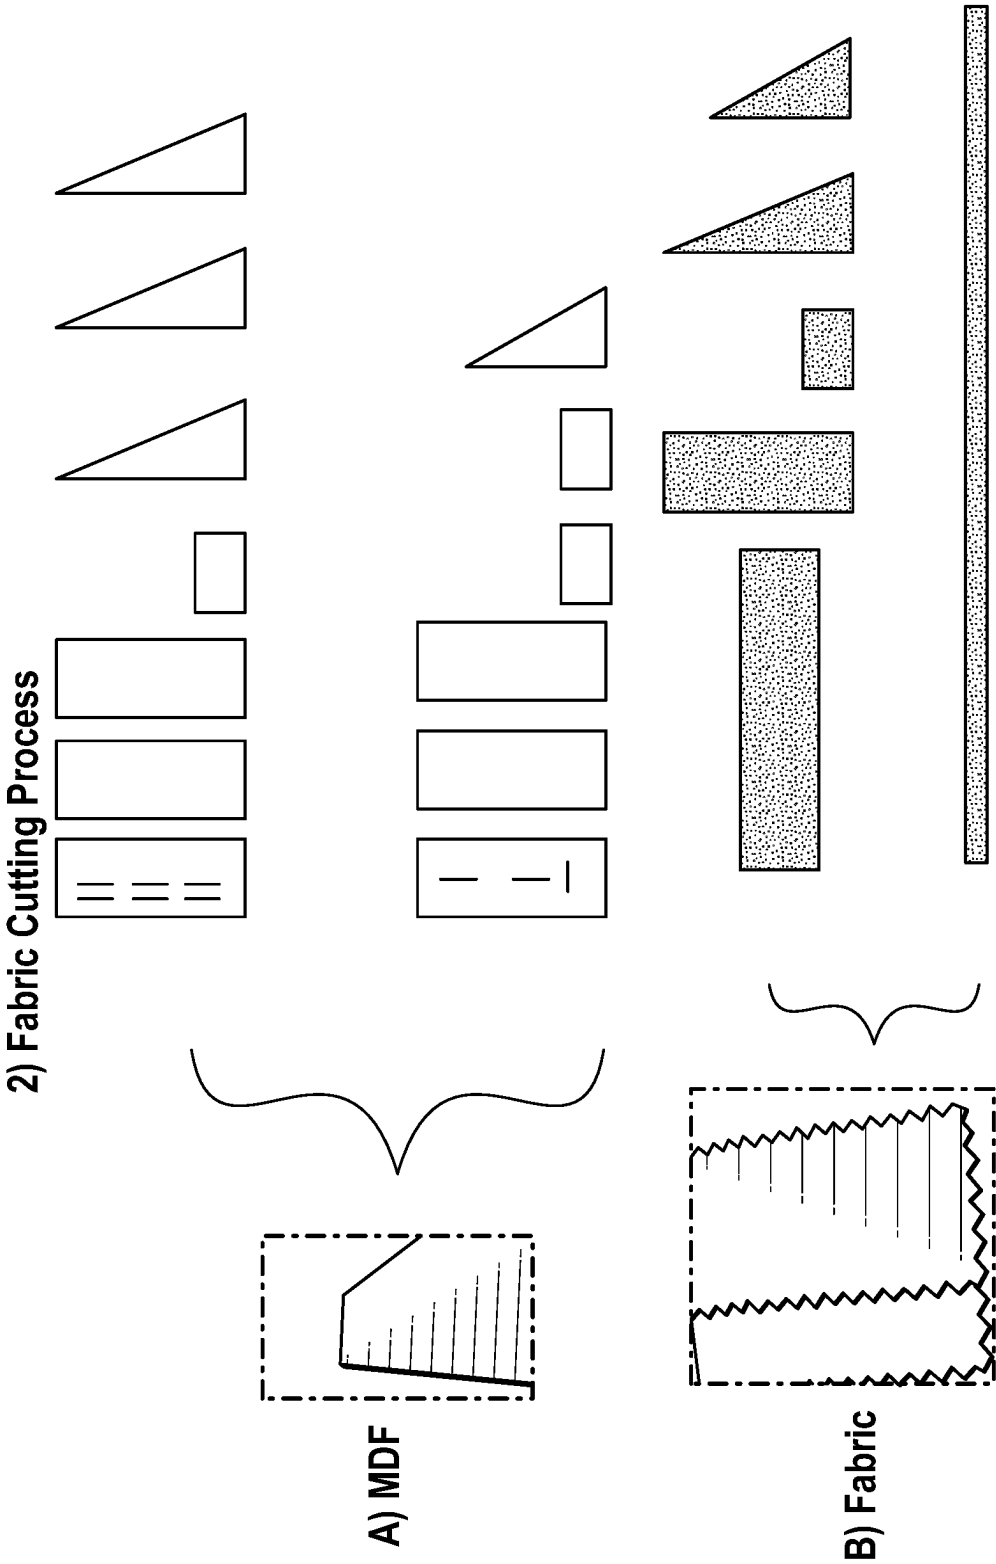


FIG. 11

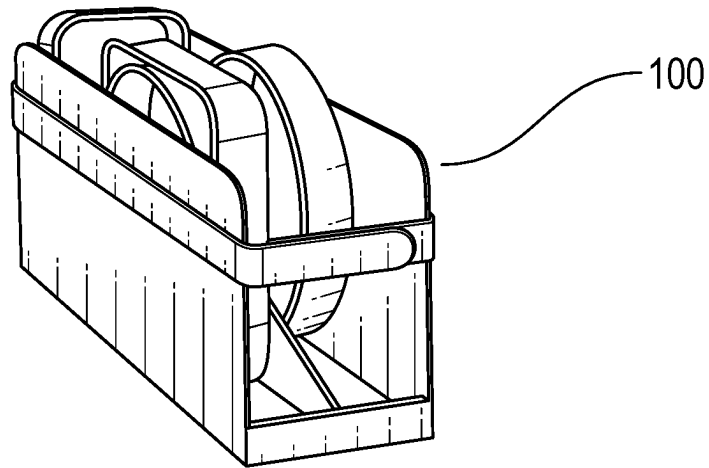


FIG. 12A

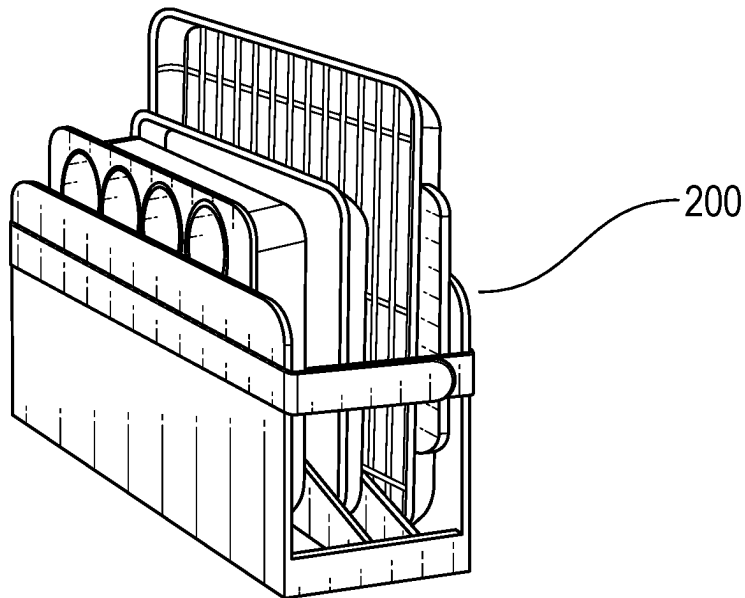


FIG. 12B

BAKEWARE STORAGE SYSTEM**CLAIM OF PRIORITY**

This application claims priority from U.S. Provisional Patent Application No. 63/213,315, filed on Jun. 22, 2021, the contents of which are incorporated herein by reference.

FIELD OF INVENTION

The invention is in the field of kitchen storage organizers, specifically systems for organizing various bakeware sets of different sizes, allowing for space saving and easy access.

INTRODUCTION

Modern day kitchens often include numerous items ("bakeware") used for both preparation and serving of baked goods. Due to varied baking needs, many kitchens include pots, pans, tins, and trays of various shapes and sizes, resulting in a need to store such bakeware.

Due to the constant use of bakeware, the varied layouts of kitchens in different homes, and the need for accessible and convenient bakeware, a multitude of bakeware storage systems have been attempted.

Conventional bakeware storage systems attempt to store bakeware to reduce the footprint and space needed. This is particularly beneficial in scenarios where kitchens are small, such as apartments in urban settings. However, even with reduced footprints, conventional bakeware storage systems are seldom efficient. Specifically, most traditional bakeware pieces are manufactured in a multitude of shapes and sizes. For example, baking sheets are generally flat and rectangular, cake pans may be circular, and muffin pans may have flat tops and multiple cylindrical protrusions. Essentially, there is great difficulty in organizing bakeware pieces, as these pieces are incongruent and fail to nest easily. Moreover, considering many of these bakeware pieces are sized for recipes utilizing standardized volumes and shapes, simply reshaping the pieces to be more stackable would be impractical.

Additionally, durability and reliability, in addition to efficiency and ease-of-use, have proven to be a long-standing issue in bakeware storage. Conventional wire storage racks suffer from warping, stretching and bending, and are unable to hold significant amounts of weight. Moreover, conventional wire storage racks often scratch the bakeware, causing degradation and removal of any coating, while also damaging the aesthetic of the product. Additionally, wire storage systems still do not resolve the problem of storage efficiency, instead merely stacking bakeware on the units as shelves.

Often, stacking bakeware does not actually solve storage for users, it causes bigger problems. For example, in an eight-piece bakeware stack, if a user wants the piece second from the bottom, the user needs to pull all the bakeware pieces out of the cabinet, then remove many pieces to get to the desired piece. Since bakeware shapes have very particular sizes that are standardized by most popular recipes and baking mixes, the sizes for each type of shape in the market creates a situation where the standard baking set cannot accommodate a perfect nest amongst pieces due to the rigid dimensions of said bakeware pieces. Thus, storing bakeware becomes an even larger challenge since no set can fully nest. Moreover, this makes pieces at the top likely to fall or forces the user to use more cabinet space to fit all pieces. This leads the user to opt for space-wasting options or else sacrifice

ease of access to readily obtain the intended bakeware item. Additionally, bakeware pieces are large and long, and have many shapes including squares, rectangles, and circles. These varying shapes make such items both hard to nest and store together. This may result in an inability to utilize cabinet space efficiently.

Thus, it would be desirable to provide systems and devices for providing efficient storage for bakeware and encourage easy access of bakeware. It would be further desirable to provide systems and devices for efficient storage in a reduced footprint.

Systems and devices for storage of bakeware that are modular, customizable, reliable and durable, in order to fit any kitchen cabinet size or structure, or to orient in any way a user may see fit may prove preferable to the user of bakeware items.

Therefore, systems and devices incorporating such advantageous features are hereby provided.

SUMMARY

The invention may be a bakeware storage caddy, where the caddy comprises a left wall and a right wall, where the left wall and the right wall are parallel to each other, and where the right wall and left wall are joined by a front wall and rear wall. The front wall may be lesser in height than the rear wall. A first juncture may be formed by the left wall and rear wall and a second juncture may be formed by the right wall and rear wall. A third juncture may be formed by the left wall and front wall and a fourth juncture may be formed by the right wall and front wall. The rear wall and front wall may sit perpendicular to the left and right walls. Further, a short divider may sit orthogonal to the left wall, the right wall, and the bottom surface, closer to the distal end of the caddy. In an embodiment, a long divider sits orthogonal to the short divider and the bottom surface, where the short divider has a lesser length than the long divider. In a further embodiment, the long divider may taper from the short divider to the front wall. A rear pocket may be formed from the joining of the left wall, the right wall, the bottom surface, the rear wall, and the short divider. Further, the rear pocket may form a rectangular cuboid shape, complete with six sides, where one side is open to the atmosphere. A strap may traverse the front opening, one or more magnets may enable the opening and closing of the strap. The strap may have vertical stitches and horizontal stitches along the portion of the strap traversing the right and left walls to secure the strap to the caddy and enable engagement and disengagement of the strap ends (for example, permitting access to the caddy).

In a further embodiment, the left pocket comprises a left pocket volume and the right pocket comprises a right pocket volume, and the left pocket volume and the right pocket volume are equal. The short divider may be disposed in proximity to a distal end of the caddy, wherein the rear pocket may comprise a rear pocket volume, and wherein the rear pocket volume may comprise no less than 20% of a caddy volume. The left wall and the right wall may comprise a thickness greater than that of the short divider. In an embodiment, the caddy further comprises a rear loop formed by the strap and the rear wall. The strap may be secured to the caddy with a number of vertical stitches and a number of horizontal stitches along the portion of the strap traversing the right and left walls. In one embodiment, the right pocket and the left pocket are greater than eight inches in length, and the rear pocket is greater than three inches in length and five inches in width.

3

In a further embodiment, the caddy may comprise a left wall and a right wall, where the left wall and the right wall are parallel to each other, and where the right wall and left wall are joined by a front wall and rear wall. The front wall may be lesser in height than the rear wall. A first juncture may be formed by the left wall and rear wall and a second juncture may be formed by the right wall and rear wall. The rear wall and front wall may sit perpendicular to the left and right walls. Further, two long dividers may sit perpendicular to the front wall and rear wall, within the left wall and right wall. The first long divider may sit at the vertical bisection of the rear wall and front wall and a second divider may sit equidistant from the first long divider and the right wall. The first long divider and second long divider may form three pockets. The left pocket may be formed by the left wall, first long divider, rear wall, and front wall. The center pocket may be formed by the first long divider, second long divider, rear wall, and front wall. The right pocket may be formed by the second long divider, right wall, rear wall, and front wall.

In an embodiment, the left wall and the right wall comprise a greater thickness than that of the first long divider and the second long divider. The strap may be secured to the caddy with a number of vertical stitches and a number of horizontal stitches along the portion of the strap traversing the right and left walls.

In an embodiment, the left pocket, the center pocket, and the right pocket comprise a left pocket volume, a center pocket volume, and a right pocket volume, respectively, and the left pocket volume is greater than the center pocket volume and the right pocket volume. Further, the center pocket volume and the right pocket volume may be equal.

Additional aspects related to this disclosure are set forth, in part, in the description which follows, and, in part, will be obvious from the description, or may be learned by practice of this disclosure.

It is to be understood that both the foregoing and the following descriptions are exemplary and explanatory only and are not intended to limit the claimed disclosure or application thereof in any manner whatsoever.

BRIEF DESCRIPTION OF THE FIGURES

Objects, aspects, features, and advantages of embodiments disclosed herein will become more fully apparent from the following detailed description, the appended claims, and the accompanying drawing figures in which like reference numerals identify similar or identical elements. Reference numerals that are introduced in the specification in association with a drawing figure may be repeated in one or more subsequent figures without additional description in the specification in order to provide context for other features, and not every element may be labeled in every figure. The drawing figures are not necessarily to scale, emphasis instead being placed upon illustrating embodiments, principles and concepts. The drawings are not intended to limit the scope of the claims included herewith.

FIG. 1 is a top, front, right elevated side perspective view of a first embodiment of a bakeware storage caddy.

FIG. 2 is a front view of a first embodiment of a bakeware storage caddy.

FIG. 3 is a rear view of a first embodiment of a bakeware storage caddy.

FIG. 4 is a right-side view of a first embodiment of a bakeware storage caddy.

FIG. 5 is a top, elevated view of a first embodiment of a bakeware storage caddy.

4

FIG. 6 is a top, front, right elevated side perspective view of a second embodiment of a bakeware storage caddy.

FIG. 7 is a front view of a second embodiment of a bakeware storage caddy.

FIG. 8 is a rear view of a second embodiment of a bakeware storage caddy.

FIG. 9 is a right-side view of a second embodiment of a bakeware storage caddy.

FIG. 10 is a top, elevated view of a first embodiment of a bakeware storage caddy.

FIG. 11 is an illustration of the material cutting process and components thereof composing an embodiment of the bakeware storage caddy.

FIGS. 12A-12B illustrate a first embodiment of the caddy in use and a second embodiment of the caddy in use, respectively.

DETAILED DESCRIPTION

In the following detailed description, reference will be made to the accompanying drawing(s), in which identical functional elements are designated with like numerals. The aforementioned accompanying drawings show by way of illustration, and not by way of limitation, specific aspects, and implementations consistent with principles of this disclosure. These implementations are described in sufficient detail to enable those skilled in the art to practice the disclosure and it is to be understood that other implementations may be utilized and that structural changes and/or substitutions of various elements may be made without departing from the scope and spirit of this disclosure. The following detailed description is, therefore, not to be construed in a limited sense.

It is noted that description herein is not intended as an extensive overview, and as such, concepts may be simplified in the interests of clarity and brevity.

All documents mentioned in this application are hereby incorporated by reference in their entirety. Any process described in this application may be performed in any order and may omit any of the steps in the process. Processes may also be combined with other processes or steps of other processes.

Disclosed herein are systems and devices for bakeware storage (the "system"). In an embodiment, the system provides a space-saving benefit. Further disclosed is a novel system and device that avoids the need for stackable solutions, which are inefficient, time consuming, and lead to frustration. Additionally, such a system may increase the lifespan of bakeware products and prevent damage to the products' aesthetic appearance.

In an embodiment, the invention of the present disclosure is a bakeware system. The bakeware system may be configured to store a user's bakeware without the need for stacking. In another embodiment, the bakeware system may function as a drying rack. In an embodiment, the bakeware system is comprised of caddies configured to store each bakeware piece in an upright position (for example, to minimize the footprint of the bakeware system in a cabinet). In such an embodiment, the upright arrangement of bakeware may more efficiently utilize vertical space in a cabinet, while imposing a smaller horizontal footprint. The bakeware system may be sized for utilization in standard cabinets (for example, cabinets that are 24 inches deep). However, the storage system may be sized for a variety of cabinets, counter tops, and pantries.

Referring to FIGS. 1-5, the caddy 100 may include a left wall 102, a right wall 104, a rear wall 106, a front wall 108,

5

and a bottom surface 110. In another embodiment, the caddy 100 also includes a strap 112. In an embodiment, the caddy 100 has a proximal end 114 and a distal end 116. As a non-limiting example, the rear wall 106 may be disposed on the distal end 116 of the caddy 100. Accordingly, the distal end of the right wall 104 and the distal end of the left wall 102 may be joined by the rear wall 106. The right wall 104 and the left wall 102 may include rounded edges or corners. For example, the distal and proximal top edges of the left wall 102 and the right wall 104 may be rounded to enable unobstructed placement and withdrawal of bakeware items within the caddy 100. Accordingly, said rounded edges may be less jagged and, thus, less likely to cause snags (as opposed to a sharp ninety-degree corner) when depositing bakeware items within the caddy 100. In an embodiment, the left wall 102 and the rear wall 106 meet perpendicularly to form a first juncture 103. In a further embodiment, the right wall 104 and the rear wall 106 meet perpendicularly to form a second juncture 105. The first juncture 103 and second juncture 105 may fasten the rear wall 106 to the left wall 102 and right wall 104. In a further embodiment, the left wall 102 and the front wall 108 may meet perpendicularly to form a third juncture 138. The right wall 104 and the front wall 108 may meet perpendicularly to further form a fourth juncture 140. The third juncture 138 and the fourth juncture 140 may meet perpendicularly to fasten the front wall 108 to the left wall 102 and the right wall 104. The junctures, as formed by orthogonal walls, may provide rigid support to the caddy 100.

In an embodiment, a front wall 108 is disposed on the proximal end 114 of the caddy 100 and may join the proximal ends of the left wall 102 and the right wall 104. The front wall 108 may be substantially shorter than the rear wall 106, the left wall 102, and/or the right wall 104. As a non-limiting example, the front wall 108 may be roughly 10% the height of the rear wall 106, the left wall 102, and/or the right wall 104. Alternatively, the caddy 100 may not include a front wall 108. The front wall 108 may be sized and adapted to retain bakeware items within the caddy (for example, to prevent such items from sliding out of the caddy 100), yet may be unobtrusive enough as to enable withdrawal and deposit of bakeware items within the caddy.

A top gap 118 may be formed between the top portion of the left wall 102 and the top portion of the right wall 104. A front gap 120 may be formed between the proximal ends of the left wall 102 and the right wall 104. In an embodiment, the top gap 118 and the front gap 120 are uniform along the length of the caddy 100 (for example, from the proximal end 114 to the distal end 116). Alternatively, the top gap 118 and the front gap 120 may not be uniform along the caddy 100 (for example, wherein the left wall 102, the right wall 104, the rear wall 106, and/or the front wall 108 may be non-planar and/or disposed non-orthogonally).

The left wall 102 may have a left wall height and a left wall depth. The right wall 104 may have a right wall height and a right wall depth. In one embodiment, the left wall height may be greater than the depth, in another embodiment, the left wall depth may be greater than the height. In a further embodiment, the right wall height may be greater than the depth, in another embodiment, the right wall depth may be greater than the height. As a non-limiting example, as shown in FIG. 1, the left wall depth and right wall depth may be greater than the left wall height and the right wall height, respectively, as to accommodate horizontal storage of lengthy bakeware items. The left wall 102 and right wall 104 may be greater in thickness than the long divider 126 and/or short divider 128. Wall thickness may be provided to

6

enable support, rigidity, and structural integrity such that said walls can support the weight of the bakeware items. As a non-limiting example, the left wall 102, the right wall 104, the rear wall 106, and/or the front wall 108 may have a thickness greater than one or more of the dividers to increase the rigidity of the entire caddy 100. In such a non-limiting example, the thickness of the dividers may be lesser than that of the walls 102-106 as to increase the available volume or floor space within the caddy 100. The walls may further form a rectangular cuboid with sharp edges or rounded edges. The rear wall 106 may have a rear wall height and a rear wall width. The front wall 108 may have a front wall height and a front wall width. In an embodiment, the walls may be covered in fabric. Further, one or more of the walls may be embossed with a logo.

In an embodiment, a strap 112 traverses the front gap 120. In such an embodiment, the strap 112 may be detachably connected to the left wall 102 and/or the right wall 104. In an embodiment, the strap 112 includes a left end 122 and a right end 124. The strap 112 may form a rear loop 113. Further, the strap 112 may be both detachably connected to a wall and/or permanently affixed to a wall. As a non-limiting example, the left end 122 of the strap 112 may be permanently attached to the left wall 102 and the right end 124 of the strap 112 may be detachably connected to the right wall 104. In an embodiment, both ends 122/124 of the strap 112 are permanently attached to the caddy 100. The strap 112 may be sewn to the caddy 100 so that it is located along the perimeter of the caddy 100, in closer proximity to the top gap 118, one fourth the distance of the caddy 100 from the top gap 118. However, the strap 112 may be located anywhere along the perimeter of the caddy 100. In a further embodiment, the rear loop 113 forms a handle to permit the user to accessibly grasp the caddy 100 when lifting it out of its resting place. The strap 112 and rear loop 113 may work in tandem to give the user the option to slide out the caddy 100 from its resting place using the strap 112 to access its contents and/or grasp the rear loop 113 to lift the caddy 100 out of its resting place to be taken to another surface (for example, when accessing more than one item from the caddy 100). As a non-limiting example, the strap 112 may be composed of leather, nylon, cotton, polypropylene, or other suitable materials. The strap 112 may be composed of multiple materials, for example, having a flexible core wrapped by a fabric.

In an embodiment, the strap 112 includes one or more magnets 136. The magnets 136 may be embedded in the strap 112, such that the strap 112 adheres to one of the walls. As shown in FIG. 2, the magnets 136 may also be embedded within the strap 112; such that one segment of the strap 112 adheres to another segment of the strap 112. Accordingly, such an embodiment may allow for utilization of a unibody strap (for example, reducing steps in manufacturing and/or producing a strap less inclined to tear). A single magnet 136 may be used, however additional magnets may be used to strengthen the ability of the strap 112 to hold in place the bakeware items. The magnet 136 may be circular in shape to allow for seamlessness within the strap 112, however the magnet may be any shape. In an embodiment, the magnet 136 may be a neodymium magnet (for example, a N52 neodymium magnet), however the magnet 136 may have any strength suitable for storing bakeware items. To enable magnetic coupling, each end 122/124 of the strap 112 may include one or more magnets 136 positioned such that the north poles of magnets disposed in the first end interface with the south poles of magnets disposed in the second end and vice versa. For example, as shown in FIG. 2, the one or

more magnets **136** may be embedded in the strap left end **122** and/or the strap right end **124**. In one embodiment, the strap left end **122** may include the one or more magnets **136** and the strap right end **124** may include a metallic element and/or magnetic element, such that the strap left end **122** magnetically adheres to the strap right end **124**. Alternatively, the strap right end **124** may include the one or more magnets **136** and the strap left end **122** may include a metallic element and/or magnetic element. In an embodiment, the strap end **122/124** containing the one or more magnets **136** may be the end **122/124** disposed most proximal, such that the one or more magnets **136** are further distanced from potentially metallic bakeware items within the caddy **100**. Such an embodiment may be configured to reduce unintentional magnetic adherence of a strap end **122/124** to a bakeware item.

The strap **112** may be configured to hold the bakeware pans in the caddies and provide users a handle to pull the bakeware storage caddy **100** out of their cabinet. In an embodiment, the strap **112** may be fastened to the caddy **100** and/or the strap **112** may be fastened to itself via a hook-and-loop fastener, an adhesive, a button(s), a latch, a locking hinge, or other fastener.

Referring to FIG. 4, the strap **112** may include a plurality of right stitches **144** traversing horizontally along the strap **112**. The strap **112** may include a top right stitch **144a** and a bottom right stitch **144b** where the strap **112** meets the right wall **104**. The right stitches **144** may bind the strap **112** to the caddy **100**. The top right stitch **144a** and the bottom right stitch **144b** may be disposed in parallel. In an alternate embodiment, the strap **112** may be adhered to the right wall **104** with an adhesive. In one embodiment, the stitches **144a/144b** couple the strap **112** to the right wall **104** and/or the fabric (or other suitable material) surrounding the right wall **104**.

The strap **112** may include a plurality of left stitches **146** (not shown) traversing horizontally along the strap **112**. The strap **112** may include a top left stitch **146a** (not shown) and a bottom left stitch **146b** (not shown) where the strap **112** meets the left wall **102**. The left stitches **146** may bind the strap **112** to the caddy **100**. The top left stitch **146a** and the bottom left stitch **146b** may be disposed in parallel. In an alternate embodiment, the strap **112** may be adhered to the left wall **102** with an adhesive. In one embodiment, the stitches **146a/146b** couple the strap **112** to the left wall **102** and/or the fabric (or other suitable material) surrounding the left wall **102**.

The strap **112** may have a plurality of vertical stitches **142** comprising a first stitch **142a** (not shown), a second stitch **142b**, a third stitch **142c** (not shown), and a fourth stitch **142d**. The first stitch **142a** (not shown) may be located a distance from the first juncture **103** along the portion of the strap **112** traversing the left wall **102**. As a non-limiting example, the distance may be 2 mm from the first juncture **103**. However, the first stitch **142a** (not shown) may be any suitable distance from the first juncture **103**, for example, 15 mm. The distance between the vertical stitch **142** and the respective juncture may be the same for all four vertical stitches **142**. In a further embodiment, a second stitch **142b**, a third stitch **142c** (not shown), and a fourth stitch **142d** may be disposed a distance from the second juncture **105**, third juncture **138**, and fourth juncture **140**, respectively. In an alternate embodiment, a vertical segment of glue may be disposed in place or in conjunction with the vertical stitch **142**. Each of the vertical stitches **142** may be parallel to the corresponding juncture.

In an embodiment, the vertical stitches **142** act as anchors to the right wall **104** and/or left wall **102** such that when pressure and/or force is applied to the rear loop **113** or the strap **112**, the strap **112** tightens around the most proximal and/or most distal edge of the right wall **104** and/or left wall **102** and is anchored by the vertical stitch such that the rear loop **113** or strap **112** have a solid hold on the caddy **100**. Such an embodiment may decrease the likelihood of force application from disengaging the stitching of the strap **112** to the caddy **100**. Accordingly, the vertical stitches **142** are positioned such as to distribute tension between the vertical stitch **142** and the respective junctures.

The caddy **100** may include one or more dividers. The dividers may be long dividers **126** or short dividers **128**. Long dividers **126** may be dividers that extend from the proximal end **114** to the distal end **116** of the caddy **100**. Short dividers **128** may be dividers that extend from the left wall **102** to the right wall **104**. The long divider **126** may taper from the distal end **116** of the caddy **100** to the proximal end **114** of the caddy **100**. The short divider **128** may be orthogonal to the left wall **102** and/or the right wall **104**. The long divider **126** may be orthogonal to the front wall **108**, the short divider **128**, and/or the bottom surface **110**. In a further embodiment, the bottom surface **110** of the caddy **100** may have grooves where the long divider **126** or short divider **128** are positioned in the caddy to allow for structural integrity. In an embodiment, the front wall **108**, left wall **102**, and/or right wall **104** may have vertical grooves to enable the long divider **126** and/or the short divider **128** to lock into place within the caddy **100**. The short divider **128** may further contain a groove to enable the long divider **126** to lock into place on the distal end **116**. The long divider **126** and the short divider **128** may be removable by the user to accommodate the user's fluctuating baking storage needs. For example, applying a withdrawing force upon the long divider **126** and/or short divider **128** may separate the tabs of the long divider **126** and/or tabs of the short divider **128** from the grooves of the walls and/or the grooves of the bottom surface **110**.

In one embodiment, the caddy **100** includes two dividers. As a non-limiting example, the caddy **100** may include one long divider **126** and one short divider **128**. The short divider **128** may be disposed between the left wall **102** and the right wall **104** a distance closer to the distal end **116** of the caddy **100**. In such an embodiment, a rear pocket **130** may be formed. The rear pocket **130** may be a space contained by the rear wall **106**, the left wall **102**, the right wall **104**, the short divider **128**, and the bottom surface **110**. In such an embodiment, a long divider **126** may extend from the short divider **128** to the front wall **108** and/or proximal end **114** of the caddy **100**. For example, the long divider **126** may begin at the distal end **116** (for example, the position of the short divider **128**) with a height equal to that of the short divider **128** and end at the proximal end **114** with a height equal to that of the front wall **108**. However, the long divider **126** may also taper completely to the bottom surface **110**.

A left pocket **132** may be formed between the left wall **102** and the long divider **126** and a right pocket **134** may be formed between the long divider **126** and the right wall **104**. Volumetrically, if the long divider **126** is disposed at the midpoint of the short divider **128**, the left pocket **132** and the right pocket **134** may comprise the same volumes. However, the volumes of the left pocket **132**, the right pocket **134**, and/or the rear pocket **130** may be adjusted as a function of the position of the short divider **128** and/or the long divider **126**. The caddy **100** may have a total volume comprising at least the left pocket volume, the right pocket volume, and the

rear pocket volume. In one embodiment, the rear pocket volume is less than 20% of the total volume. In another embodiment, the rear pocket volume is less than 40% of the total volume. However, the rear pocket volume may be any suitable fraction of the total volume such that the left pocket **132**, the right pocket **134**, and the rear pocket **130** may sufficiently house one or more bakeware pieces.

The long divider **126** may be disposed orthogonally to the short divider **128** and the bottom surface **110**. The long divider **126** may be formed so that the distal portion of the long divider **126** is the same height as the short divider **128**. Alternatively, the height of the distal end of the long divider **126** may be up to 50% shorter than the short divider **128**. The long divider **126** may be a right triangle in shape. The long divider **126** may be formed so that the proximal end of the long divider **126** is the same height as the front wall **108**. As a non-limiting example, the long divider **126** and the short divider **128** may be sized 3 mm in thickness or more. The dividers **126/128** may be less thick than the walls of the caddy **100**. Divider thickness may be sized to provide for structural integrity and further organization within the caddy **100** of bakeware items. In a further embodiment, the long divider **126** may be a greater width than the short divider **128** or the short divider **128** may be a greater width than the long divider **126**. In an alternate embodiment, the long divider **126** may be rectangular in shape such that the proximal end of the long divider **126** is the same height as the right wall **104** and left wall **102** and the distal end is the same height as the rear wall **106**. The short divider **128** may be rectangular in shape. In an embodiment, the short divider **128** is the same height where the short divider **128** meets the left wall **102** and where the short divider **128** meets the right wall **104**. The short divider **128** may be formed such that the height is the same as the left wall **102** and the right wall **104** or may be formed such that the height is up to 50% less than the left wall **102** and right wall **104**.

In an embodiment, the long divider **126** and short divider **128** may be transparent. In an alternate embodiment, the long divider **126** and short divider **128** may be opaque. Moreover, the dividers may be covered in fabric to prevent damage to the bakeware items.

The left wall **102** may have a left wall height and a left wall depth. The right wall **104** may have a right wall height and a right wall depth. In one embodiment, the left wall height may be greater than the depth, in another embodiment, the left wall depth may be greater than the height. In a further embodiment, the right wall height may be greater than the depth, in another embodiment, the right wall depth may be greater than the height. The left wall **102** and right wall **104** may be greater in thickness than the long divider **126** and short divider **128**. Wall thickness may be provided to enable support, rigidity, and structural integrity such that it can support the weight of the bakeware items. The walls may further form a rectangular cuboid with sharp edges or rounded edges. The rear wall **106** may have a rear wall height and a rear wall depth. The front wall **108** may have a front wall height and a front wall depth. The rear wall height may be greater than the front wall height. The front wall height may be 10% or more the length of the rear wall height.

Referring to FIG. 6, in a second embodiment, the caddy **200** may include a left wall **202**, a right wall **204**, a rear wall **206**, a front wall **208**, and a bottom surface **210**. In another embodiment, the caddy **200** also includes a strap **212**. In an embodiment, the caddy **200** has a proximal end **214** and a distal end **216**. As a non-limiting example, the rear wall **206** may be disposed on the distal end **216** of the caddy **200**. In

an embodiment, the distal end of the right wall **204** and the distal end of the left wall **202** are joined by the rear wall **206**. The right wall **204** and the left wall **202** may include rounded edges or corners. In an embodiment, a first juncture **203** is formed between the left wall **202** and the rear wall **206**. In a further embodiment, a second juncture **205** is formed between the right wall **204** and the rear wall **206**. The first juncture **203** and second juncture **205** connect the rear wall **206** to the left wall **202** and right wall **204**. In a further embodiment, the left wall **202** and the front wall **208** may meet perpendicularly to form a third juncture **238**. The right wall **104** and the front wall **208** may meet perpendicularly to further form a fourth juncture **240**. The third juncture **238** and the fourth juncture **240** may meet perpendicularly to fasten the front wall **208** to the left wall **202** and the right wall **204**, respectively. The junctures may provide adequate support to the caddy **100** so as to enable rigorous support.

In an embodiment, a front wall **208** is disposed on the proximal end **214** of the caddy **200** and may join the proximal ends of the left wall **202** and the right wall **204**. The front wall **208** may be substantially shorter than the rear wall **206**, the left wall **202**, or the right wall **204**. As a non-limiting example, the front wall **208** may be roughly 10% the height of the rear wall **206**, the left wall **202**, and/or the right wall **204**. In an embodiment, the caddy **200** does not include a front wall **208**.

In an embodiment, a top gap **218** is formed between the top portion of the left wall **202** and the top portion of the right wall **204**. A front gap **220** may be formed between the proximal ends **214** of the left wall **202** and the right wall **204**.

In an embodiment, a strap **212** traverses the front gap. In such an embodiment, the strap **212** may be detachably connected to the left wall **202** and/or the right wall **204**. In an embodiment, the strap **212** includes a strap left end **222** and a strap right end **224**. In an embodiment, the strap **212** may form a rear loop **213**. Further, the strap **212** may be both detachably connected to a wall and/or permanently affixed to a wall. As a non-limiting example, the left end **222** of the strap **212** may be permanently attached to the left wall **202** and the right end **224** of the strap **212** may be detachably connected to the right wall **204**. In an embodiment, both ends of the strap **212** are permanently attached to the caddy **200**. The strap **212** may be sewn to the caddy **200** so that it is located along the perimeter of the caddy **200**, closer to the top gap **218**, one fourth the distance of the caddy **200** from the top gap **218**. However, the strap **212** may be located anywhere along the perimeter of the caddy **200**. In a further embodiment, the rear loop **213** comprises a handle to permit the user to accessibly grasp the caddy **200** when lifting it out of its resting place. The strap **212** and rear loop **213** may work in tandem to give the user the option to slide out the caddy **200** from its resting place using the strap **212** to access its contents and/or grasp the rear loop **213** to lift the caddy **200** out of its resting place to be taken to another surface (for example, when accessing more than one item from the caddy **200**). As a non-limiting example, the strap **212** may be composed of leather, nylon, cotton, polypropylene, or other suitable materials.

In an embodiment, the strap **212** includes one or more magnets **236**. The magnets **236** may be embedded in the strap **212**, such that the strap **212** adheres to one of the walls. The magnets **136** may also be embedded in the strap **112**; such that one segment of the strap **112** adheres to another segment of the strap **112**. A single magnet **236** may be used, however additional magnets may be used to strengthen the ability of the strap **112** to hold in place the bakeware items. The magnet **236** may be circular in shape to allow for

11

seamlessness within the strap **112**, however the magnet may be any shape. The magnets **236** may also be embedded in the strap **212**; such that one segment of the strap **212** adheres to another segment of the strap **212**.

The strap **212** may be configured to hold the bakeware pans in the caddy **200** and provide users a handle to pull the bakeware storage caddy **200** out of their cabinet. In an embodiment, the strap **212** may be fastened to the caddy **200** and/or the strap **212** may be fastened to itself via a hook-and-loop fastener, an adhesive, a button(s), a latch, a locking hinge, or other fastener.

For the purposes of this disclosure, features recited in the first embodiment of the caddy **100** may be imported to caddy **200**, and features recited in the second embodiment of caddy **200** may be imported to caddy **100**. Thus, features as recited in relation to either embodiment should not be read as to limit inclusion of such features to the embodiment of initial recitation.

Referring to FIG. 9, the strap **212** may include a plurality of right stitches **244** traversing horizontally along the strap **212**. The strap **212** may include a top right stitch **244a** and a bottom right stitch **244b** where the strap **212** meets the right wall **204**. The right stitches **244** may bind the strap **212** to the caddy **200**.

The strap **212** may include a plurality of left stitches **246** (not shown) traversing horizontally along the strap **212**. The strap **212** may include a top left stitch **246a** and a bottom left stitch **246b** where the strap **212** meets the left wall. The left stitches **246** may bind the strap **212** to the caddy **200**. The left stitches **246** may be disposed in a manner identical to that of the right stitches **244** as depicted in FIG. 9, yet disposed on the left wall **202**.

The strap **212** may have a plurality of vertical stitches **242** comprising a first stitch **242a** (not shown), a second stitch **242b**, a third stitch **242c** (not shown), and a fourth stitch **242d**. The first stitch **242a** may be located a distance from the first juncture **203** along the portion of the strap **212** traversing the left wall. The distance may be 2 mm from the first juncture **203** or more. In a further embodiment, a second stitch **242b**, a third stitch **242c** (not shown), and a fourth stitch **242d** may be stitched vertically a distance from the second juncture **205**, third juncture **238**, and fourth juncture **240**, respectively. The distance between the vertical stitch **242** and the respective juncture may be the same for all four vertical stitches **242**. In an alternate embodiment, the vertical stitches **242** may be replaced or supplemented with vertical segments of adhesive to secure the strap **212** to the caddy **200**. The first juncture **203** and the second juncture **205** may be parallel to the most distal edge of the left wall **202** and right wall **204**, respectively. The third juncture **238** and fourth juncture **240** may be parallel to the most proximal edge of the left wall **202** and right wall **204**, respectively.

In an embodiment, the vertical stitch acts as an anchor to the right and/or left wall such that when pressure and/or force is applied to the rear loop **213** or the strap **212**, the strap **212** tightens around the proximal and/or most distal edge of a respective wall and is anchored by the vertical stitch such that the rear loop **213** or strap **212** includes a solid hold on the caddy **200**. Accordingly, such an embodiment may decrease the likelihood of force application disengaging the stitching of the strap **212** from the caddy **200**.

The caddy **200** may include two dividers. As a non-limiting example, the caddy **200** may include two long dividers. The two long dividers may be disposed parallel to the left wall **202** and the right wall **204**. The two long dividers may be positioned orthogonal to the rear wall **106**, front wall **108**, and bottom surface **210**. The two long

12

dividers may taper from the distal end **216** to the proximal end **214**. In an embodiment a first long divider **226** is disposed equidistant from the left wall **202** and the right wall **204**. The second long divider **228** may be disposed equidistant from the first long divider **226** and the right wall **204**. In such an embodiment, the space between the left wall **202** and the first long divider **226** may form a left pocket **230**; the space between the first long divider **226** and the second long divider **228** may form a center pocket **232**; and the space between the second long divider **228** and right wall **204** may form a right pocket **234**. The center pocket **232** and right pocket **234** may be 50% the volume of the left pocket **230**. However, the volumes comprising the pockets may be adjusted to accommodate the user's baking needs. In a further embodiment, the bottom surface **210** of the caddy **200** may have grooves where the two long dividers are positioned in the caddy **200** to allow for structural integrity. In an alternate embodiment, the rear wall **206** and front wall **208** may have vertical grooves to enable the two long dividers to lock into place within the caddy **200**. The two long dividers may be removable by the user to accommodate the user's fluctuating baking storage needs.

The first long divider **226** and second long divider **228** may form a right angle orthogonal to the bottom surface **210** and rear wall **206**. The first long divider **226** and second long divider **228** may be formed such that the distal portion is the same height as the rear wall or may be up to 50% shorter than the rear wall **206**. The first long divider **226** and second long divider **228** may be a right triangle in shape. The first long divider **226** and second long divider **228** may be formed such that the proximal end of the long divider is the same height as the front wall **208**. As a non-limiting example, the first long divider **226** and second long divider **228** may be sized 3 mm in thickness or more. The first long divider **226** and second long dividers **228** may present the same thickness. The first long divider **226** and second long divider **228** may be less thick than the walls of the caddy **200**. Divider thickness may be enabled to provide for structural integrity and further organization of bakeware items within the caddy **200**. In a further embodiment, the first long divider **226** may be a greater width than the second long divider **228** or the second long divider **228** may be a greater width than the first long divider **226**. In an alternate embodiment, the first long divider **226** and the second long divider **228** may be rectangular in shape so that the proximal end of the long divider is the same height as the right wall **204** and left wall **202** and the distal end is the same height as the rear wall **206**. In an embodiment, the first long divider **226** and second long divider **228** may be transparent. In an alternate embodiment, the first long divider **226** and second long divider **228** may be opaque. In an alternate embodiment, the dividers may be covered in fabric to prevent damage to the bakeware items. In a further embodiment, the first long divider **226** and second long divider **228** may have curved edges or sharp edges.

In an alternate embodiment, the caddy may include any number of dividers. Further, the dividers may be positioned in any fashion. The caddy may enable these dividers with corresponding grooves on the walls of the caddy. As a non-limiting example, a caddy may include four long dividers and one short divider. As another non-limiting example, a caddy may include one long divider and two short dividers, where the two short dividers are positioned at the proximal end of the caddy. In alternate embodiments, any number of the dividers may be positioned orthogonal to the left and right wall, parallel to the left and right wall, or angled towards or away the left or right wall. The dividers may be

13

of any height and/or dimensions. The dividers may be any thickness. The dividers may be covered in fabric. The dividers may be transparent or opaque. The dividers may have curved or sharp edges. For example, in one embodiment, a caddy may have a first long divider that is as tall as the left and right walls, a second long divider that is shorter in height than the first divider, and a third long divider that is shorter in height than the second divider. Furthermore, the caddy may include dividers encompassing various angles, heights, slopes, and/or widths.

In one embodiment, the caddy includes two dividers. As a non-limiting example, the caddy may include a long divider and a short divider. The short divider may be perpendicular to the left wall and the right wall. The long divider may run from the short divider to the front wall and/or proximal end of the caddy. In such an embodiment, the long divider may taper from the distal end to the proximal end. The distal end of the long divider may begin on the short divider equidistant to the left wall and the right wall. The proximal end of the long divider may end at the junction of the right wall and the front wall or the proximal end of the right wall. In such an embodiment, the space between the left wall, the right wall, the short divider, the rear wall, and the bottom surface forms a rear pocket; the space between the left wall, the short divider, the long divider, and the bottom surface forms a left pocket; and the long divider, the short divider, the right wall, and the bottom surface form a right pocket. The right pocket may be closed on all but one side.

In one embodiment, the caddy includes two dividers. As a non-limiting example, the caddy includes two long dividers. The first long divider may begin at the rear wall equidistant from the left wall and the right wall. The first long divider may end at the proximal end of the caddy (for example, equidistant from the left wall and the right wall). The second long divider may begin at the rear wall equidistant from the first long divider and the right wall. The second long divider may end at the proximal end of the caddy (for example, at the junction of the front wall and the right wall).

In an embodiment, the caddy may be comprised of plastic, wood, cardboard, or Medium-Density Fibreboard ("MDF"). In an embodiment, the caddy or components of the caddy may include fabric. Fabric may be utilized to prevent bakeware from slipping and/or scratching against adjacent bakeware pieces. MDF may be used to construct the caddy, enabling a rigid structure capable of accepting textile or fabric seamlessly.

Referring to FIG. 11, the invention of the present disclosure may include a method for manufacturing the bakeware system. The first step may include preparing the raw materials (for example, the fabric, MDF, and magnets).

In an embodiment, one step includes a cutting process. The MDF (or other suitable material) may be cut into a plurality of pieces of MDF (for example, the left wall, the right wall, the first divider, etc.). The fabric may be cut into a corresponding plurality of fabric pieces. In such an embodiment, each of the plurality of fabric pieces may be sized to cover at least one of the plurality of pieces of MDF. One piece of fabric may be sized to cover multiple pieces of MDF. In an embodiment, one or more MDF pieces may include tabs or cut-outs (for example, configured to allow easy connection of components).

In an embodiment, a logo may be printed on the strap. In an embodiment, the strap and/or handle may be cut as a fabric strip and glue may be applied. One or more magnets may be positioned on the strap and/or on the sides of the

14

caddy. For example, the magnets may be captured between the strap material and the fabric surrounding the strap material. The fabric may then be pasted onto the body of the caddy.

A computer may auto-stitch the handles. In an embodiment, the plurality of pieces may be assembled. The plurality of pieces may be fastened via an adhesive, for example, glue applied to the tabs and/or grooves.

The fabric may be joined to the MDF and the dividers may be inserted into the caddy. An adhesive/glue may be placed on the back of the fabric material and then interfaced with the MDF. Such an embodiment may require precise shape-cutting and accuracy when applying in production.

The external material may be leather or various blends of polyester and cotton. In an embodiment, the material is waterproof (for example, to promote integrity of the caddy when wet bakeware items are deposited within or adjacent to the caddy). The material may be textured (for example, to promote friction such the bakeware pieces do not move excessively within the caddy). The material may be 720D Catonic Yarn Dyed Fabrics (for example, 1 mm water proof material of 200-210 GSM) and may accommodate a weave pattern for texture. However, in various embodiments, the material may be any suitable material.

The internal dividers may be various thicknesses from 1-5 mm MDF. In an embodiment, the dividers are 3 mm thick (for example, providing rigidity but also allowing for the material to be attached).

For each divider in the bakeware storage, there may be three layers of fabric. There may be a base material with a layer of fabric on each side sandwiching the base layer. This provides an additional layer of strength and rigidity to the divider walls to keep the bakeware pieces standing straight and preventing the walls from bending or collapsing. In alternate embodiments, each divider may include any number of fabric layers (for example, a single layer, two layers, three layers, four layers, etc.).

In an embodiment, the strap allows users to pull out the caddies from their cabinets to access their bakeware, and opens to allow users to access bakeware without pulling caddies directly out. In an embodiment, to achieve this, buttons, snaps, or hook-and-loop fasteners may be used. However, alternatively, a number of magnets (for example, four magnets) may be disposed on the strap. Such a magnet arrangement may provide enough magnetic adherence to enable pulling of the caddy, but still enables the straps to easily connect and disconnect. The strap may have four magnet hole cutouts on the back of the front of the strap. The circular magnets may be added into their respective position and another section or piece of fabric may be glued over said magnets. This may enable the magnets to be embedded in the strap such that the magnets are not visible.

In an embodiment, the slots and/or pockets of the caddies are designed to nest and fit each bakeware piece with some overlapping in the caddies. In an embodiment, fasteners are disposed on the caddies, enabling multiple caddies to be detachably linked to one another.

The caddy may include a back handle. The back handle may be parallel to the front handle such that users can easily pick up the caddies, gripping both handles. In an alternate embodiment, handles are disposed on the two exterior left and right sidewalls (for example, in addition to the front and back handles). The back handle may be sewn at the edges of the distal end of the caddy. In another alternate embodiment, the back handle is also magnetic.

The bakeware storage caddies may be configured in multiple sizes to accommodate small and large bundles of

15

bakeware. A Small Bakeware Bundle may fit 1× Large Baking Sheet (with handles), 1× Medium Baking Sheet, 1× Brownie Pan (with handles), and 1× Muffin Pan. A Large Bakeware Bundle may fit 1× Large Baking Sheet (with handles), 1× Medium Baking Sheet, 1× Brownie Pan (with handles), 1× Muffin Pan, and 1× Cooling Rack. A Large Bakeware Bundle may fit 1× Loaf Pan, 2× Circle Pan, and 1× Square Pan.

The bakeware system may include a 3MM MDF base covered with 720D Catonic Yarn Dyed Fabrics (for example, 1 mm waterproof material of 200-210 GSM); dividers with 3 layers of fabric; six pockets across two storage caddies may fit various bakeware pieces tightly; four (4) N38 magnets on the front strap. The caddy may be 527 mm×146 mm×216 mm. The back handle may be 25 mm distance from body. The caddy may be beige color on the inside and outside with a gray strap and white logo. The logo on side of caddy may be white on a gray stitched square. However, in various embodiments, the color, shape, size, and dimensions of the caddy may differ. The caddy may include any kind of fabric, any number of pockets, and position of pockets, any number of magnets, any number and position of front or back handles, and any stitching or pattern.

Referring to FIGS. 12A, the caddy 100 may be utilized such that bakeware is disposed within the rear pocket 130, the left pocket 132, and the right pocket 134. For example, the bakeware disposed within the rear pocket 130 may be perpendicular to those pieces disposed within the left pocket 132 and/or the right pocket 134. Referring to FIG. 12B the caddy 200 may be utilized such that bakeware is disposed within the left pocket 230, the center pocket 232, and the right pocket 234. Accordingly, bakeware pieces disposed in the three pockets 230-234 may each be disposed in parallel.

While this invention has been described in conjunction with the embodiments outlined above, many alternatives, modifications and variations will be apparent to those skilled in the art upon reading the foregoing disclosure. Accordingly, the embodiments of the invention, as set forth above, are intended to be illustrative, not limiting. Various changes may be made without departing from the spirit and scope of the invention.

What is claimed is:

1. A bakeware storage system comprising:

a caddy comprising:

a left wall, a right wall, a rear wall, a bottom surface, and a front wall, the rear wall forming a first juncture with the left wall and a second juncture with the right wall, both the first juncture connecting the rear wall to the left wall and the second juncture connecting the rear wall to the right wall at an angle between 85 and 95 degrees so that the rear wall is substantially orthogonal to the left and right walls, the front wall forming a third juncture with the left wall and a fourth juncture with the right wall, both the third juncture connecting the front wall to the left wall and the fourth juncture connecting the front wall to the right wall at an angle between 85 and 95 degrees so that the front wall is substantially orthogonal to the left and right walls, the left wall, the right wall, the rear wall, the bottom surface, and the front wall covered in a fabric covering;

a top gap defined by a first space between a top portion of the left wall and a top portion of the right wall;

a front gap defined by a second space between a proximal end of the left wall and a proximal end of the right wall,

16

the top gap and the front gap being uniform along a length of the caddy;

a short divider covered in the fabric covering, having a short divider length, the short divider orthogonal to the left wall, the right wall, and the bottom surface, wherein the short divider length is defined by a first distance between the right wall and the left wall;

a long divider covered in the fabric covering, having a long divider length, the long divider orthogonal to the short divider, the front wall, and the bottom surface,

wherein the long divider length is defined by a second distance between the short divider and the front wall,

wherein the short divider length is less than the long divider length, and

wherein the long divider tapers from the short divider to the front wall;

a left pocket formed by the left wall, long divider, front wall, short divider, and bottom surface, the left pocket being a rectangular cuboid in shape, having five sides, being open to the atmosphere on the remaining side;

a right pocket formed by the right wall, long divider, front wall, short divider, and bottom surface, the right pocket being a rectangular cuboid in shape, having five sides, being open to the atmosphere on the remaining side;

a rear pocket formed by the left wall, the right wall, the bottom surface, the rear wall, and the short divider, the rear pocket being a rectangular cuboid in shape, having five sides, being open to the atmosphere on the remaining side; and

a strap covered in the fabric covering traversing the front gap, the strap comprising:

a first segment,

a first magnet embedded within the first segment,

a second segment,

a second magnet embedded in the second segment, wherein the first magnet is configured to reversibly adhere to the second magnet across the front gap to enable opening and closing of the strap.

2. The bakeware storage system of claim 1, wherein the long divider interfaces with a vertical bisection of the short divider, wherein the left pocket comprises a left pocket volume and the right pocket comprises a right pocket volume, and wherein the left pocket volume and the right pocket volume are equal.

3. The bakeware storage system of claim 1, wherein the short divider is disposed in proximity to a distal end of the caddy, wherein the rear pocket comprises a rear pocket volume, and wherein the rear pocket volume comprises no less than 20% of a caddy volume.

4. The bakeware storage system of claim 1, wherein the left wall and the right wall comprise a thickness greater than that of the short divider.

5. The bakeware storage system of claim 1, further comprising a rear loop formed by the strap and the rear wall.

6. The bakeware storage system of claim 1, wherein the strap is secured, via a plurality of vertical stitches and a plurality of horizontal stitches, to the right wall and the left wall.

7. The bakeware storage system of claim 1, wherein the right pocket and the left pocket are greater than 8 inches in length, wherein the rear pocket is greater than 3 inches in length and 5 inches in width.

17

8. The bakeware storage system of claim 1, wherein at least one of the long divider and the short divider are removable.

9. The bakeware storage system of claim 1, wherein the strap further comprises a plurality of vertical stitches, disposed a distance from the third juncture and the fourth juncture, to anchor the strap to the right wall and the left wall.

10. The bakeware storage system of claim 1, wherein the fabric covering is waterproof.

11. A bakeware storage system comprising:

a caddy comprising:

a left wall, a right wall, a rear wall, a bottom surface, and a front wall, the rear wall forming a first juncture with the left wall and a second juncture with the right wall, both the first juncture connecting the rear wall to the left wall and the second juncture connecting the rear wall to the right wall at an angle between 85 and 95 degrees so that the rear wall is substantially orthogonal to the left and right walls, the front wall forming a third juncture with the left wall and a fourth juncture with the right wall, both the third juncture connecting the front wall to the left wall and the fourth juncture connecting the front wall to the right wall at an angle between 85 and 95 degrees so that the front wall is substantially orthogonal to the left and right walls,

the left wall, the right wall, the rear wall, bottom surface, and the front wall covered in a fabric covering;

a top gap defined by a first space between a top portion of the left wall and a top portion of the right wall;

a front gap defined by a second space between a proximal end of the left wall and a proximal end of the right wall,

the top gap and the front gap being uniform along a length of the caddy;

a first long divider covered in the fabric covering, having a first long divider length;

a second long divider covered in the fabric covering, having a second long divider length, wherein the first long divider and the second long divider taper from the rear wall to the front wall, and

wherein the first long divider and the second long divider are orthogonal to the front wall, the rear wall, and the bottom surface,

18

wherein the first long divider length and the second long divider length are defined by a distance between the front wall and the rear wall;

a left pocket formed by the left wall, the first long divider, the front wall, and the rear wall;

a center pocket formed by the first long divider, the second long divider, front wall, and the rear wall;

a right pocket formed by the second long divider, the right wall, the rear wall, and the front wall; and

a strap covered in the fabric covering traversing the front gap, the strap comprising,

a first segment,

a first magnet embedded within the first segment,

a second segment,

a second magnet embedded in the second segment,

wherein the first magnet is configured to reversibly adhere to the second magnet across the front gap to enable opening and closing of the strap.

12. The bakeware storage system of claim 11, wherein the first long divider interfaces with a vertical bisection of the rear wall; wherein the second long divider is disposed equidistant between the first long divider and the right wall.

13. The bakeware storage system of claim 11, wherein the left wall and the right wall comprise a greater thickness than that of the first long divider and the second long divider.

14. The bakeware storage system of claim 11, wherein the strap is secured via, a plurality of vertical stitches and a plurality of horizontal stitches, to the right wall and left wall.

15. The bakeware storage system of claim 11, further comprising a rear loop formed by the strap and the rear wall.

16. The bakeware storage system of claim 11, wherein the left pocket, the center pocket, and the right pocket comprise a left pocket volume, a center pocket volume, and a right pocket volume, respectively, and wherein the left pocket volume is greater than the center pocket volume and the right pocket volume.

17. The bakeware storage system of claim 16, wherein the center pocket volume and the right pocket volume are equal.

18. The bakeware storage system of claim 11, wherein at least one of the first long divider and the second long divider are removable.

19. The bakeware storage system of claim 11, wherein the strap further comprises a plurality of vertical stitches, disposed a distance from the third juncture and the fourth juncture, to anchor the strap to the right wall and the left wall.

20. The bakeware storage system of claim 11, wherein the fabric covering is waterproof.

* * * * *