



US012397193B1

(12) **United States Patent**
Rosenow et al.

(10) **Patent No.:** **US 12,397,193 B1**

(45) **Date of Patent:** **Aug. 26, 2025**

(54) **WALL HANGING BRACKET SET FOR SUPPORTING A WEIGHT TRAINING SLED IN AN ELEVATED VERTICAL STOWAGE POSITION**

(71) Applicant: **TORQUE FITNESS, LLC**, Coon Rapids, MN (US)

(72) Inventors: **Charles J. Rosenow**, Ramsey, MN (US); **Thomas K. Baumler**, Ramsey, MN (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **18/608,212**

(22) Filed: **Mar. 18, 2024**

Related U.S. Application Data

(62) Division of application No. 17/449,113, filed on Sep. 28, 2021, now Pat. No. 11,957,958.

(60) Provisional application No. 63/089,228, filed on Oct. 8, 2020.

(51) **Int. Cl.**

A63B 23/04 (2006.01)

A63B 21/00 (2006.01)

A63B 21/06 (2006.01)

F16M 13/02 (2006.01)

(52) **U.S. Cl.**

CPC **A63B 23/047** (2013.01); **A63B 21/0004** (2013.01); **A63B 21/0618** (2013.01); **F16M 13/02** (2013.01); **A63B 21/00192** (2013.01); **A63B 2210/54** (2013.01)

(58) **Field of Classification Search**

CPC **A63B 23/047**; **A63B 21/0004**; **A63B 21/0618**; **A63B 21/00192**; **A63B 2210/54**; **F16M 13/02**

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,973,203	A	2/1961	Taylor
3,007,699	A	11/1961	Taylor
3,062,548	A	11/1962	Foster et al.
3,326,553	A	6/1967	Forrest
3,684,283	A	8/1972	Forrest
3,950,817	A	4/1976	McKaig
4,302,023	A	11/1981	Kiesz
4,451,037	A	5/1984	O'Hare
4,867,439	A	9/1989	Salyer
5,228,716	A	7/1993	Dahl
5,454,577	A	10/1995	Bell
5,810,697	A	9/1998	Joiner
5,927,732	A	7/1999	Snyder
6,086,517	A	7/2000	Schapmire
6,190,293	B1	2/2001	Schuyler et al.

(Continued)

FOREIGN PATENT DOCUMENTS

CN	101557978	A	10/2009
CN	203473173	U	3/2014

(Continued)


Primary Examiner — Andrew S Lo

(74) *Attorney, Agent, or Firm* — Sherrill Law Offices, PLLC

(57) **ABSTRACT**

A wall hanging bracket set for supporting a weight training sled in an elevated vertical stowage position. The wall hanging bracket set includes an upper bracket for attachment to a vertical surface and supportively contacting a second longitudinal end of the sled at two laterally spaced contact points, and a lower bracket for attachment to the vertical surface and supportively contact a first longitudinal end of the sled at a single contact point.

8 Claims, 15 Drawing Sheets

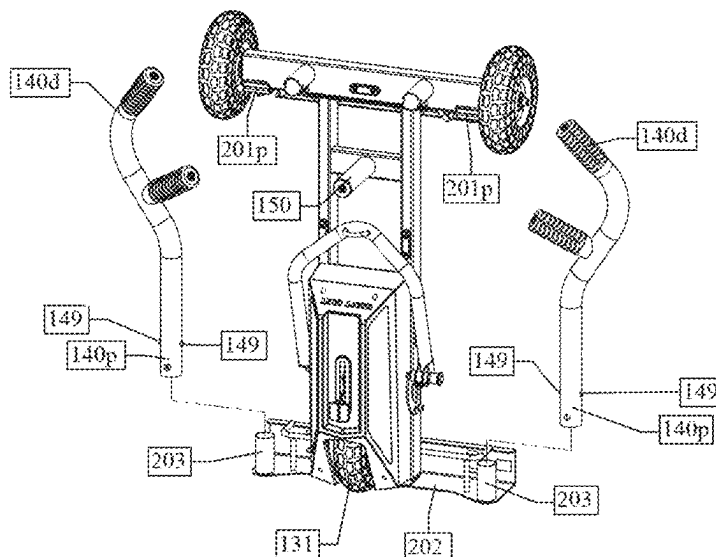

US 12,397,193 B1

Page 2

(56)

References Cited

U.S. PATENT DOCUMENTS


6,276,700	B1	8/2001	Way et al.	
6,287,240	B1	9/2001	Trabbic	
6,299,001	B1 *	10/2001	Frolov	A47F 5/08 248/220.21
6,302,421	B1	10/2001	Lee	
6,761,650	B1	7/2004	Dettmann	
6,877,764	B2	4/2005	Sagol	
6,935,518	B2 *	8/2005	Winig	A47B 96/067 211/106.01
6,942,585	B1	9/2005	Krause	
7,152,748	B2 *	12/2006	Vosbikian	A47F 5/01 211/87.01
7,562,729	B2	7/2009	Hammerle	
7,678,026	B2	3/2010	Lewis	
7,972,224	B2	7/2011	Gilman	
7,985,166	B2	7/2011	Farnsworth et al.	
8,272,610	B2 *	9/2012	Ernst	A47L 13/16 248/302
8,328,664	B2	12/2012	Krause	
8,469,861	B1	6/2013	McFee et al.	
8,617,007	B2	12/2013	Gilman	
8,858,405	B2	10/2014	Agate	
8,905,901	B2	12/2014	Stewart et al.	
9,017,223	B2	4/2015	Eschenbach	
9,126,611	B2	9/2015	Liu	
9,144,708	B2	9/2015	Selek	
9,192,803	B2	11/2015	Cayo	
9,289,668	B2	3/2016	Gilman	
9,604,086	B2	3/2017	Meredith et al.	
9,610,989	B2	4/2017	Marchetti	
9,643,040	B1	5/2017	Guerrero Diaz	
10,220,233	B2	3/2019	Schmidt et al.	
10,246,115	B2	4/2019	Ryan	
10,398,926	B2	9/2019	Baumler et al.	
10,398,927	B2	9/2019	Baumler et al.	

10,500,432	B2	12/2019	Bentley	
10,576,322	B2	3/2020	Schlegel	
10,799,750	B2	10/2020	Baumler et al.	
11,179,591	B1	11/2021	Bazargan et al.	
2002/0109399	A1	8/2002	Papac	
2004/0002413	A1	1/2004	Wimber	
2005/0164850	A1	7/2005	Leibowitz	
2005/0272572	A1	12/2005	Lewis	
2007/0090067	A1 *	4/2007	Holztrager	A47F 5/083 211/59.1
2007/0249472	A1	10/2007	Frei	
2008/0081741	A1	4/2008	Sargen et al.	
2010/0048368	A1	2/2010	Donofrio	
2010/0203986	A1	8/2010	Gilman	
2010/0240499	A1	9/2010	Lewis	
2013/0143719	A1	6/2013	Selek	
2013/0172159	A1	7/2013	Stewart et al.	
2014/0073491	A1	3/2014	Gilson	
2014/0206508	A1	7/2014	Hall	
2014/0221131	A1	8/2014	Gilman	
2017/0189799	A1	7/2017	Bentley	
2017/0313334	A1	11/2017	Ryan	
2017/0326402	A1	11/2017	Sorin et al.	
2018/0243597	A1	8/2018	Schlegel	
2018/0311522	A1	11/2018	Schmidt et al.	
2018/0326248	A1	11/2018	Baumler et al.	
2021/0121727	A1	4/2021	Baumler et al.	

FOREIGN PATENT DOCUMENTS

DE	19748215	C1	2/1999
KR	102077546	B1	2/2020
WO	2009129564	A1	10/2009
WO	2011150519	A2	12/2011
WO	2014039059	A1	3/2014
WO	2017136560	A1	8/2017
WO	2019090121	A1	5/2019

* cited by examiner

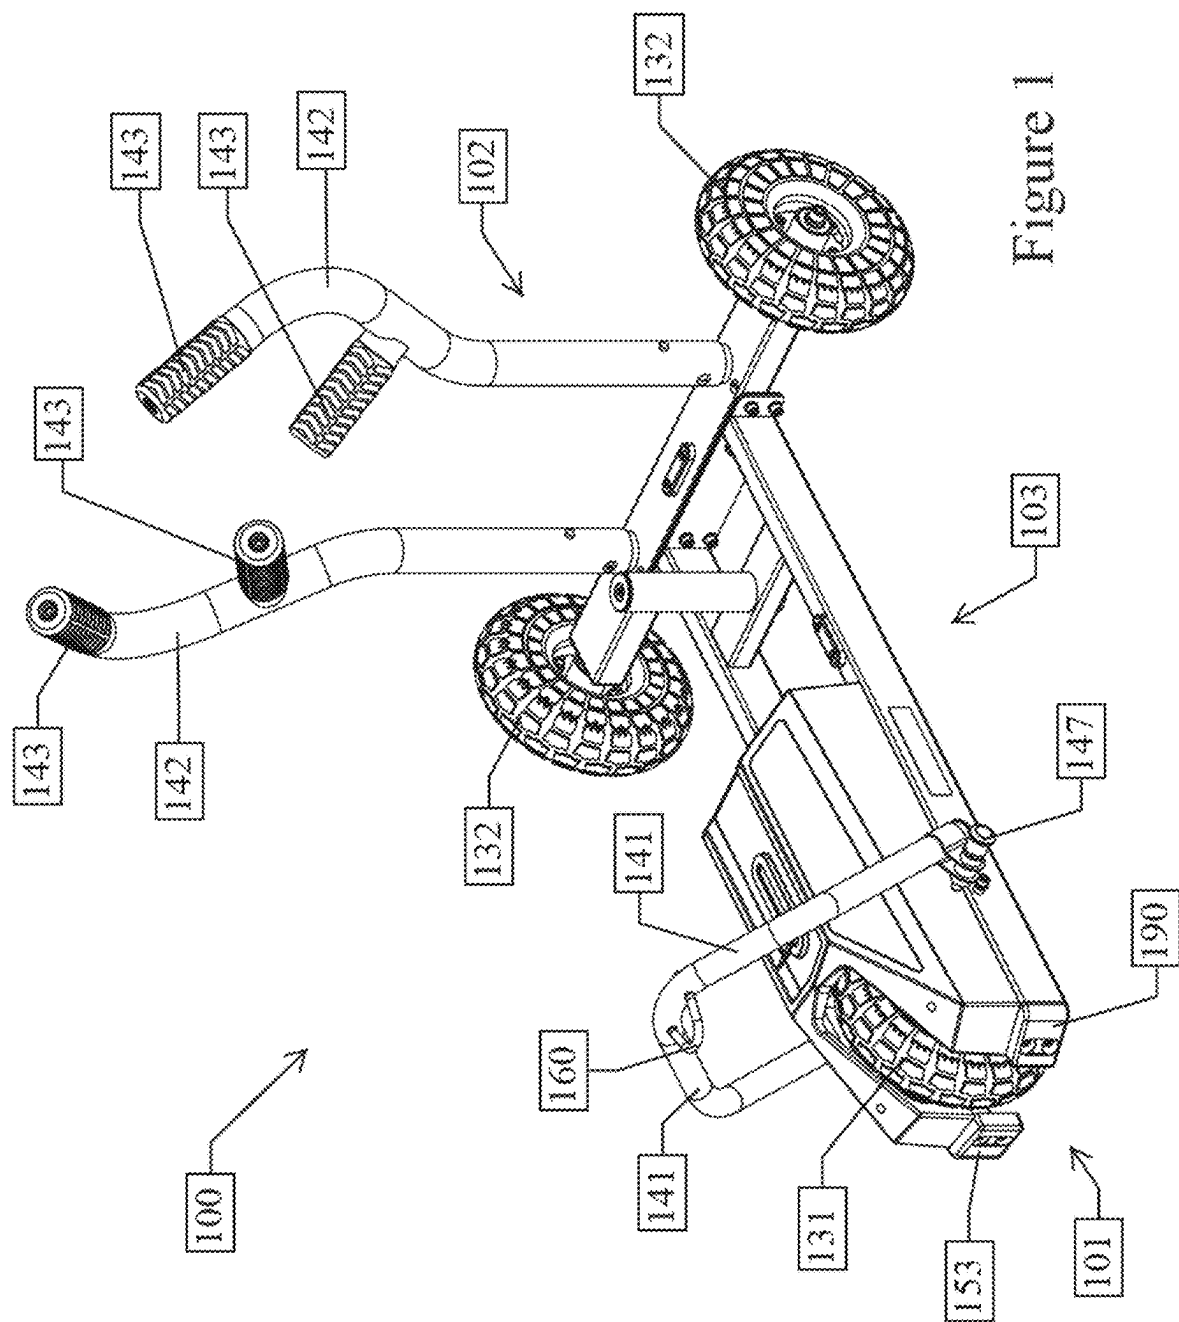

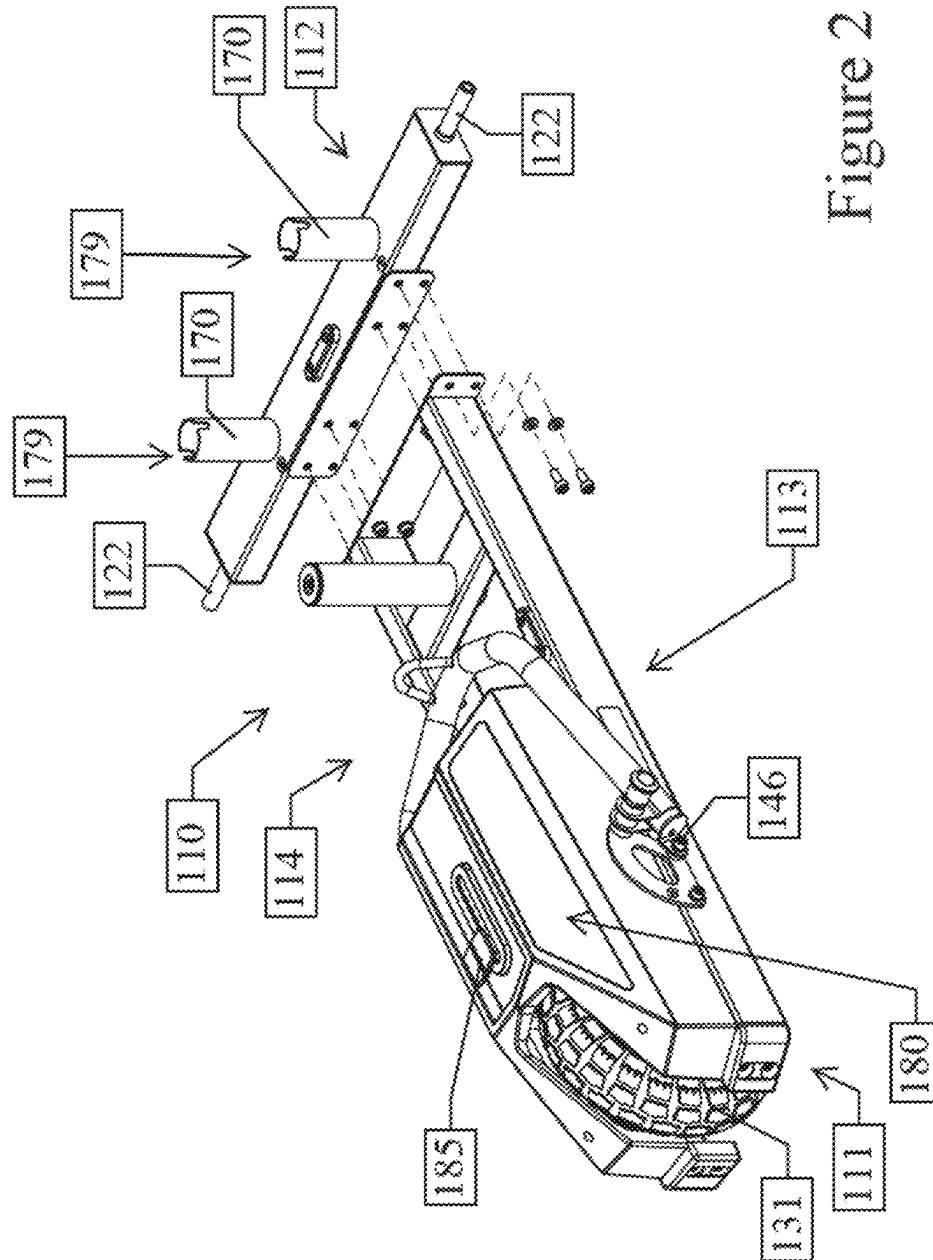


Figure 2

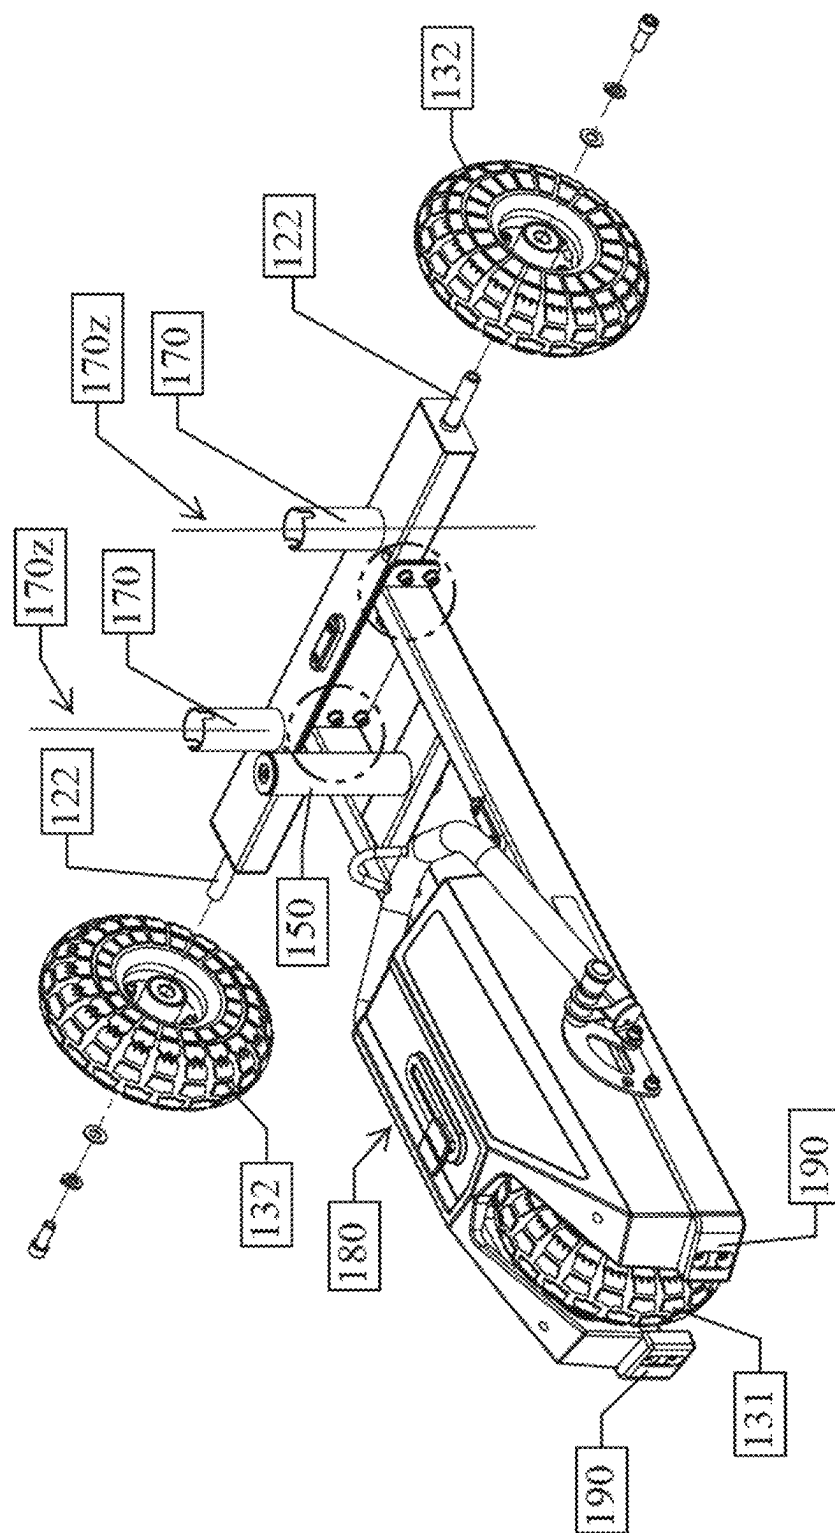
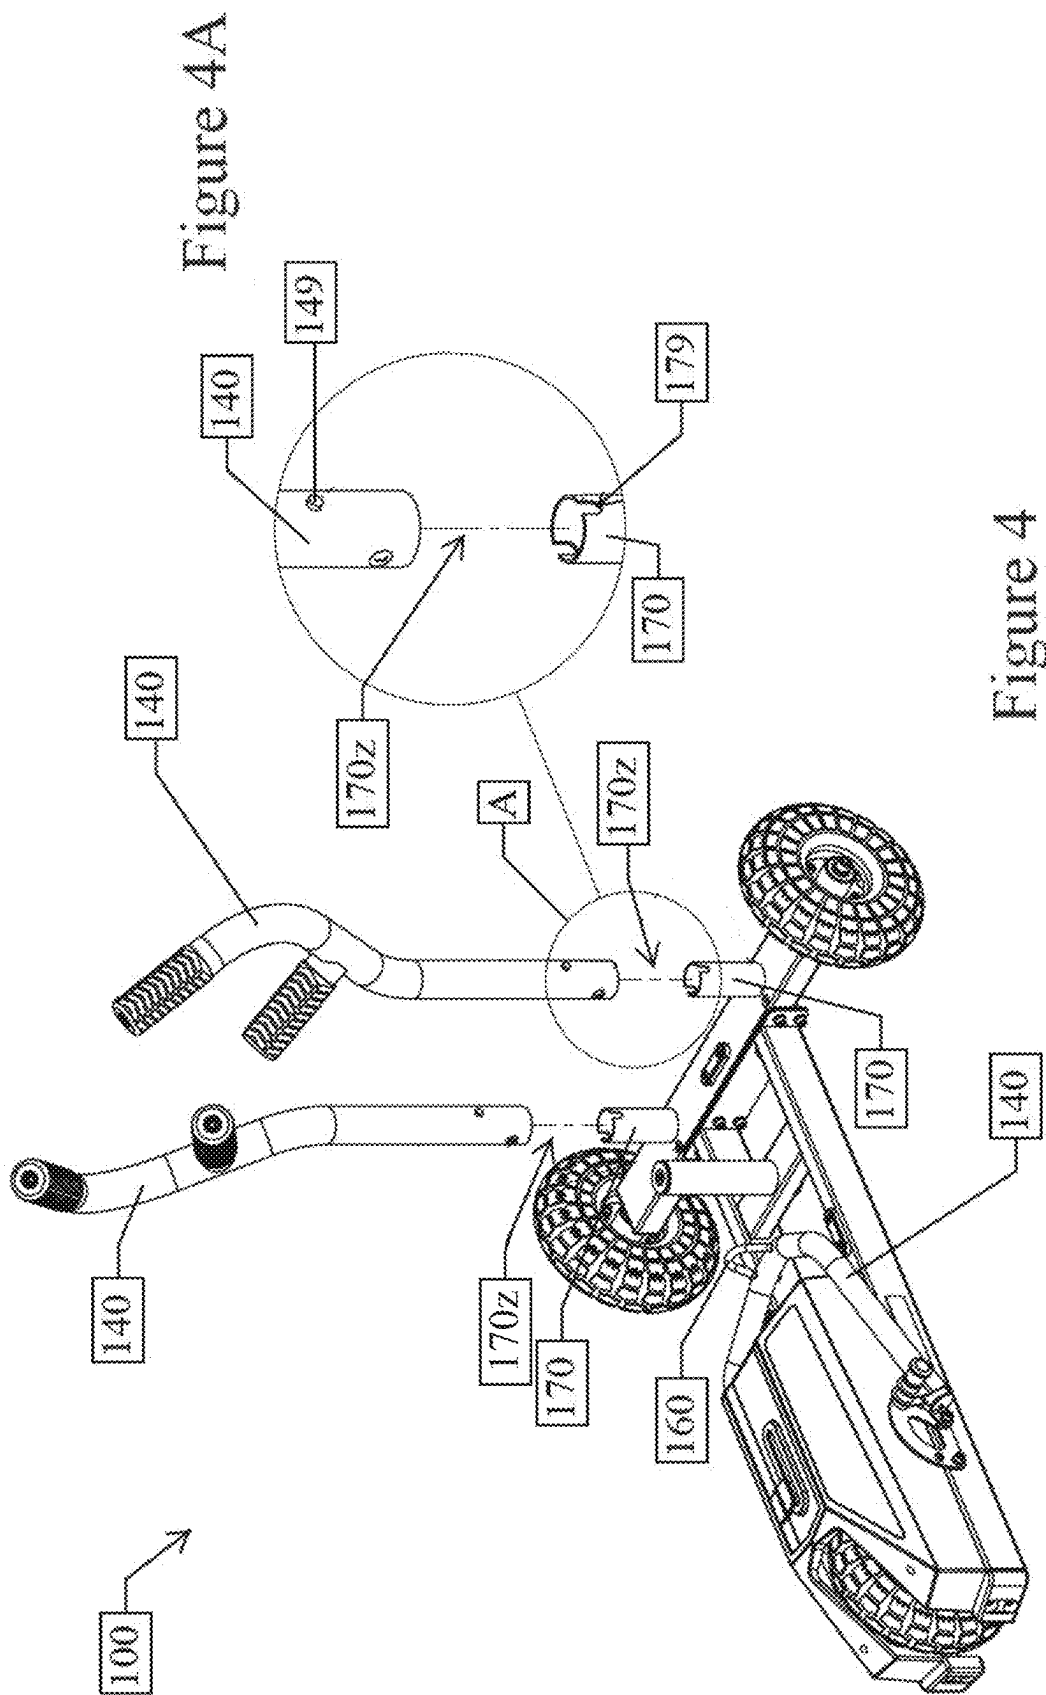


Figure 3



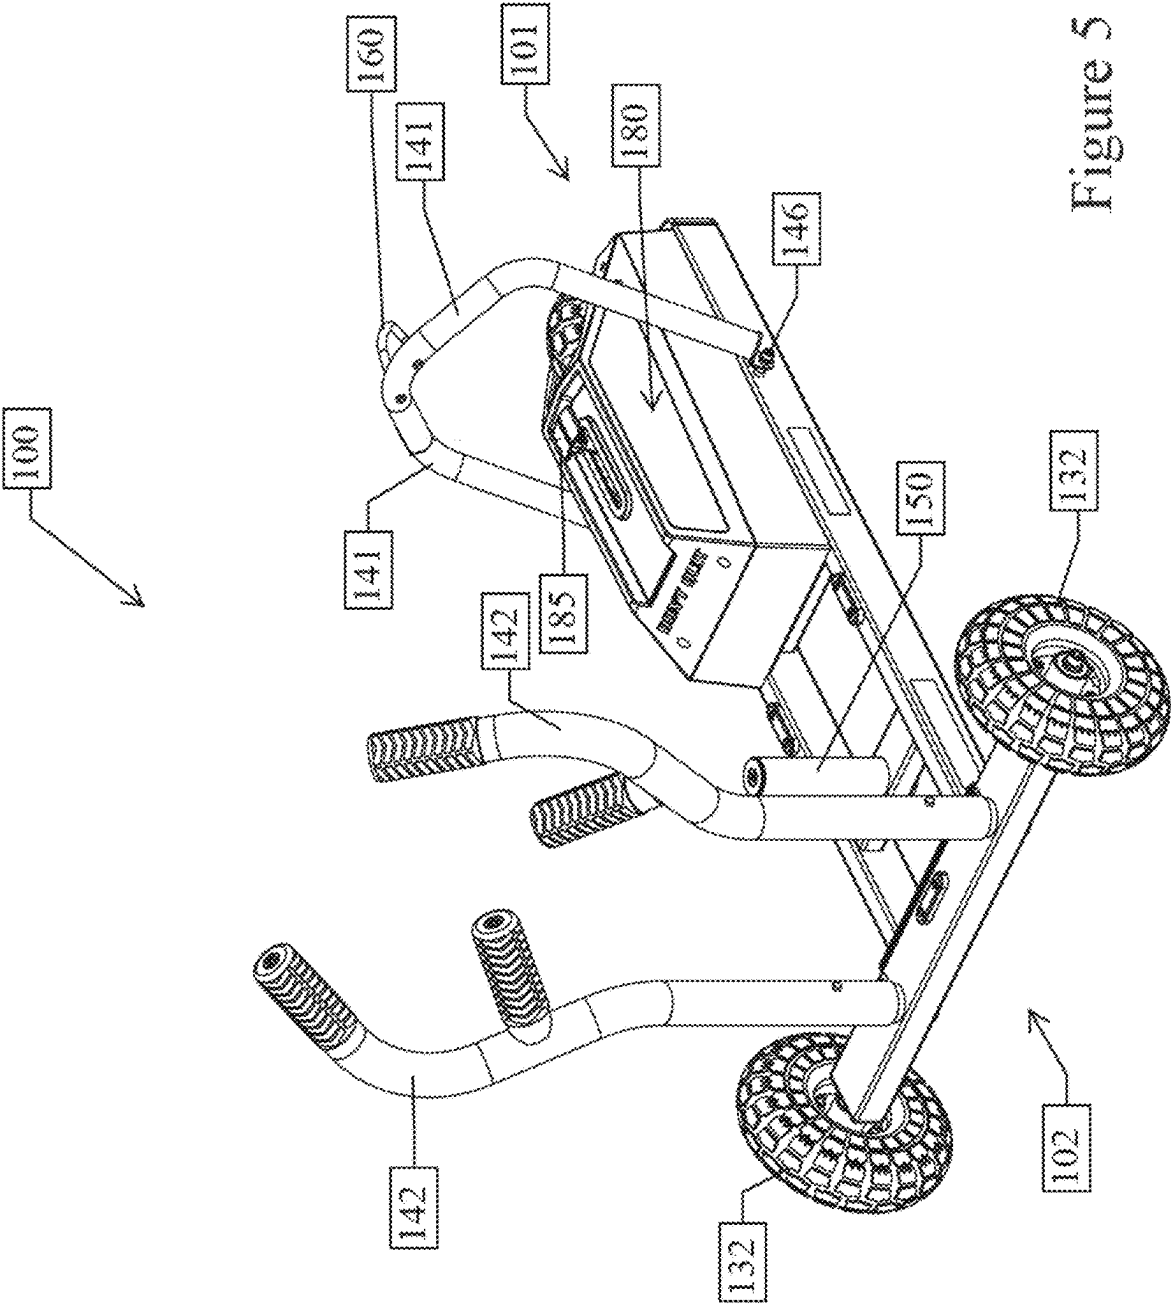


Figure 5

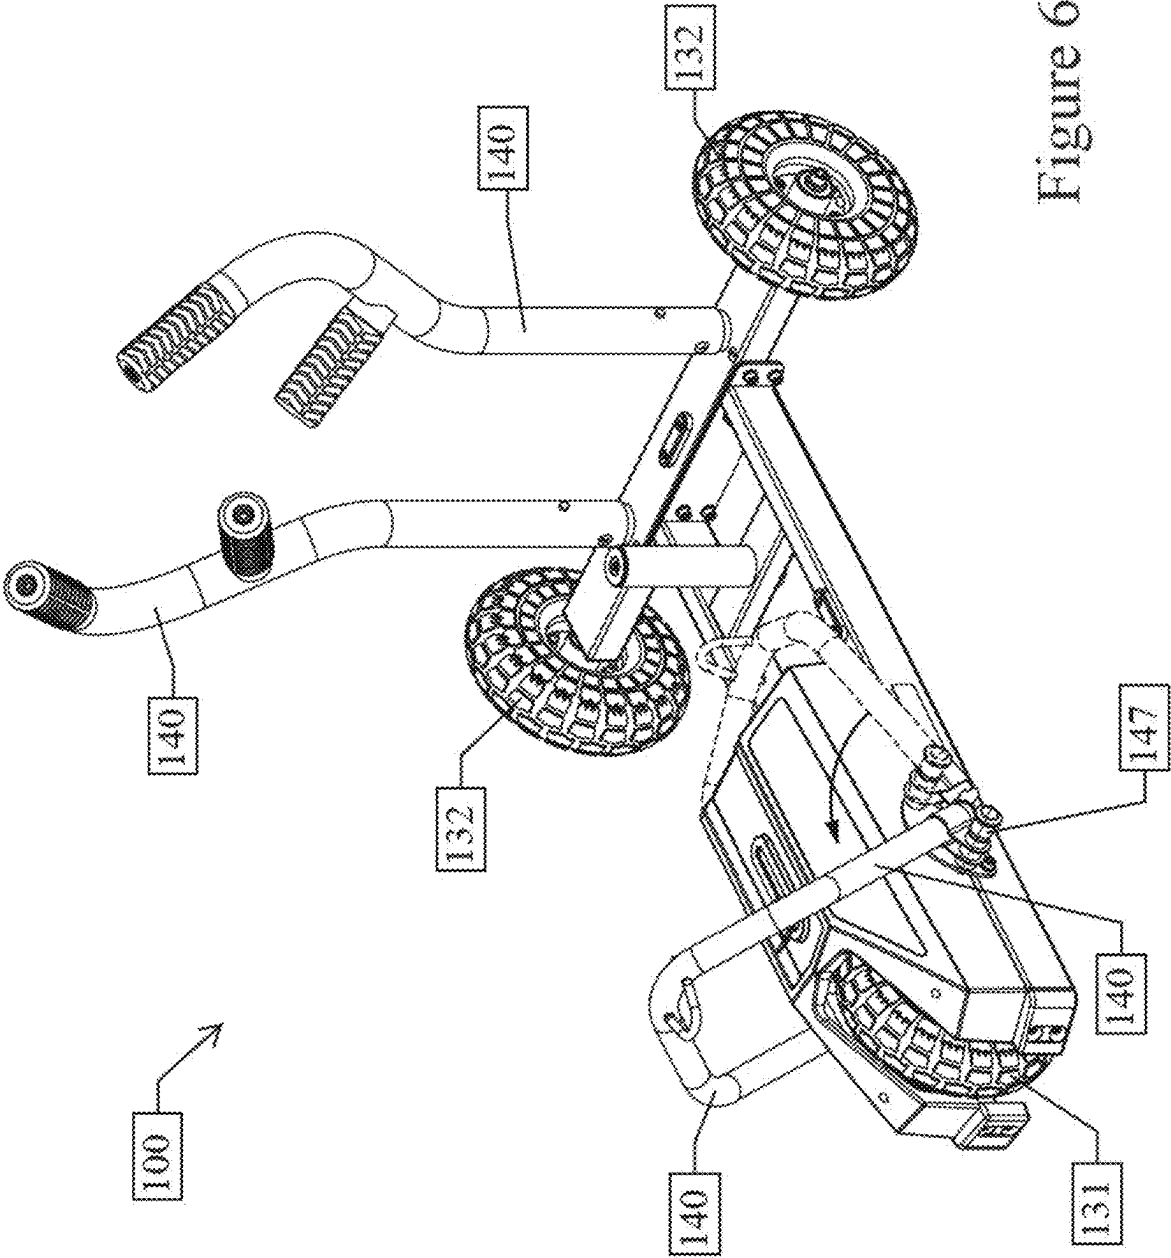


Figure 6

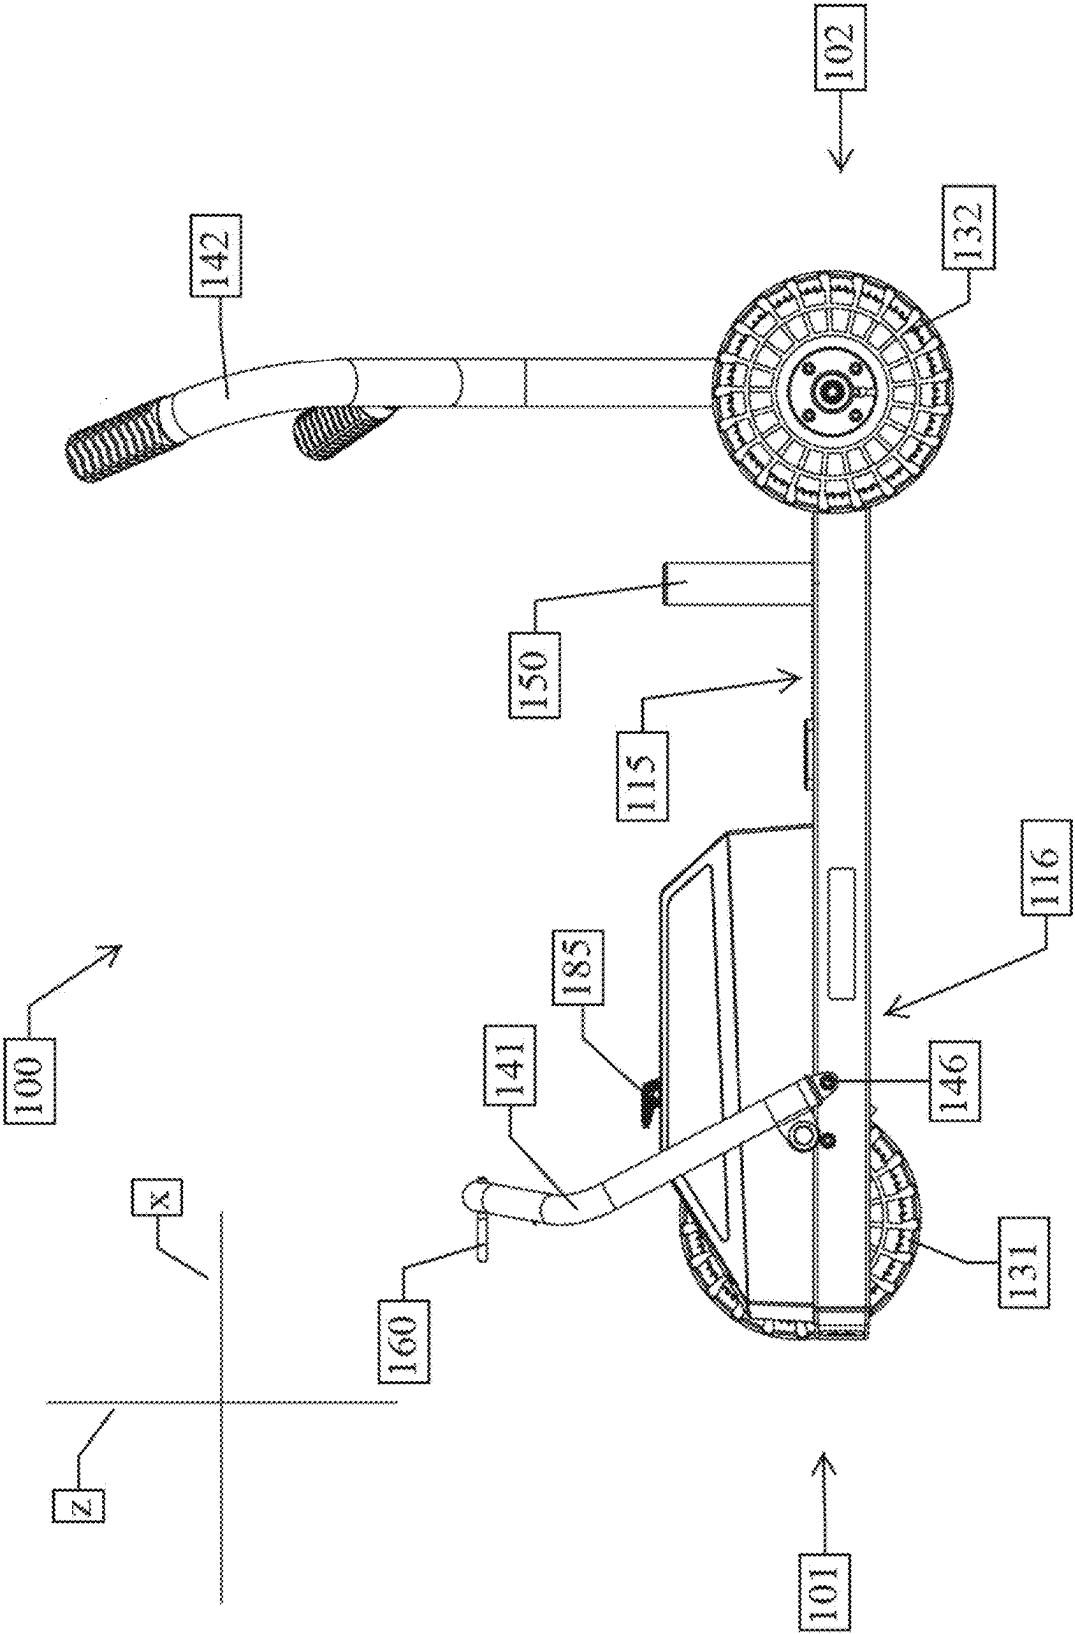


Figure 7

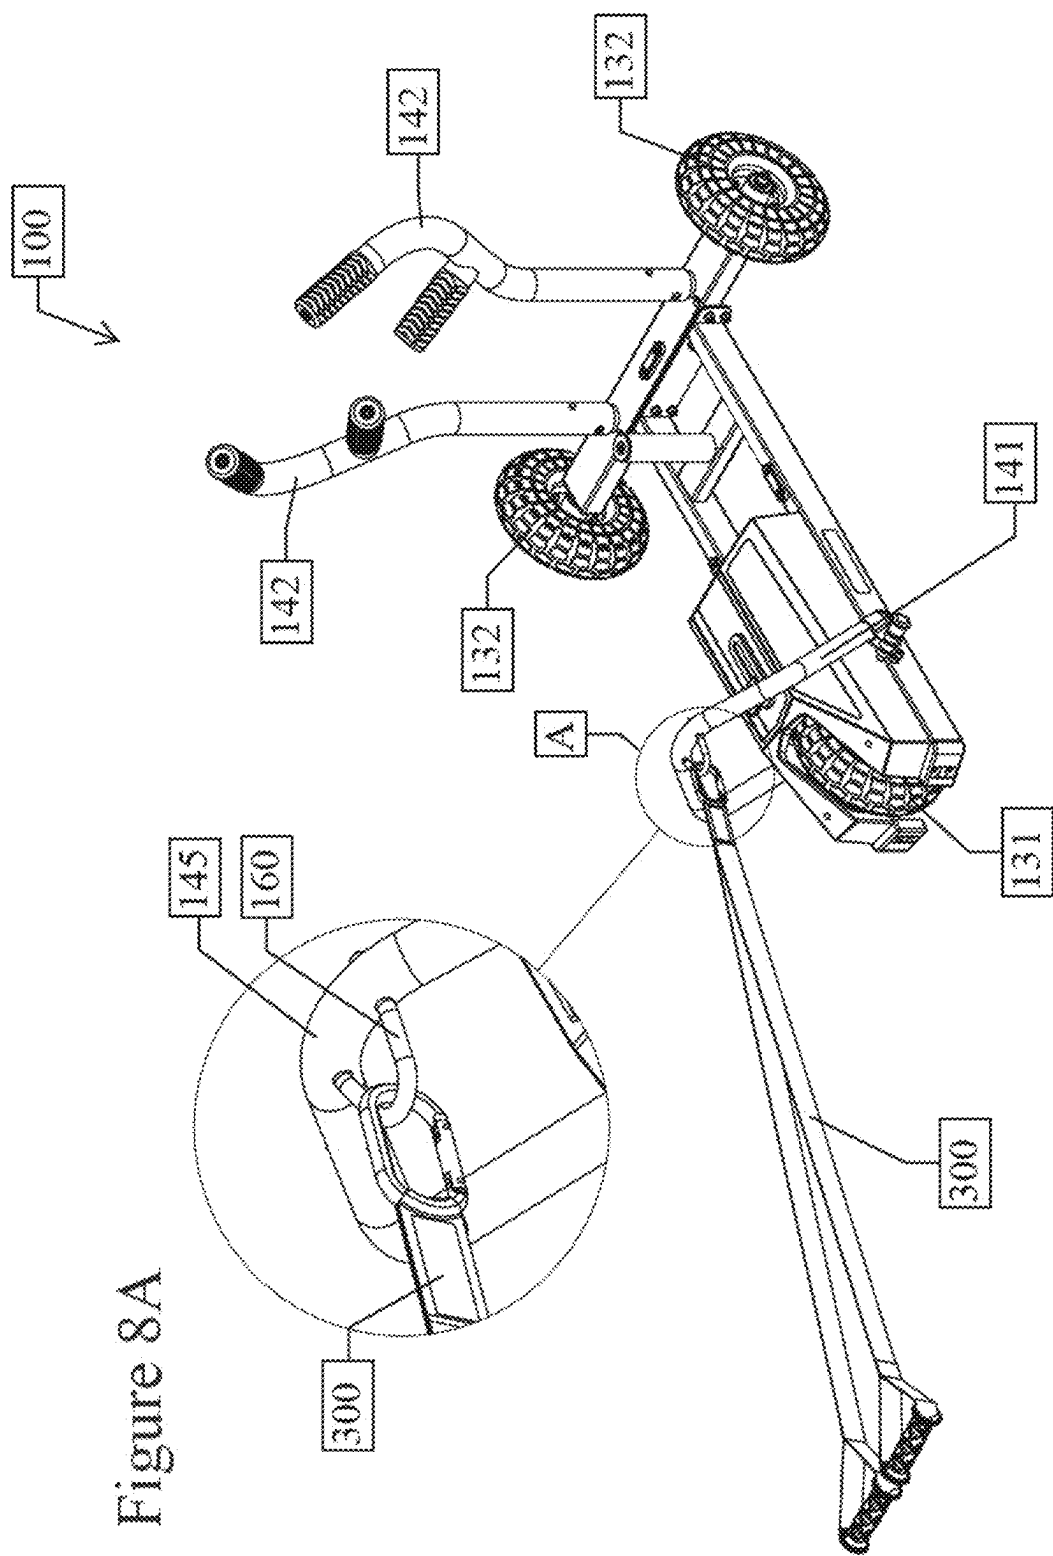


Figure 8

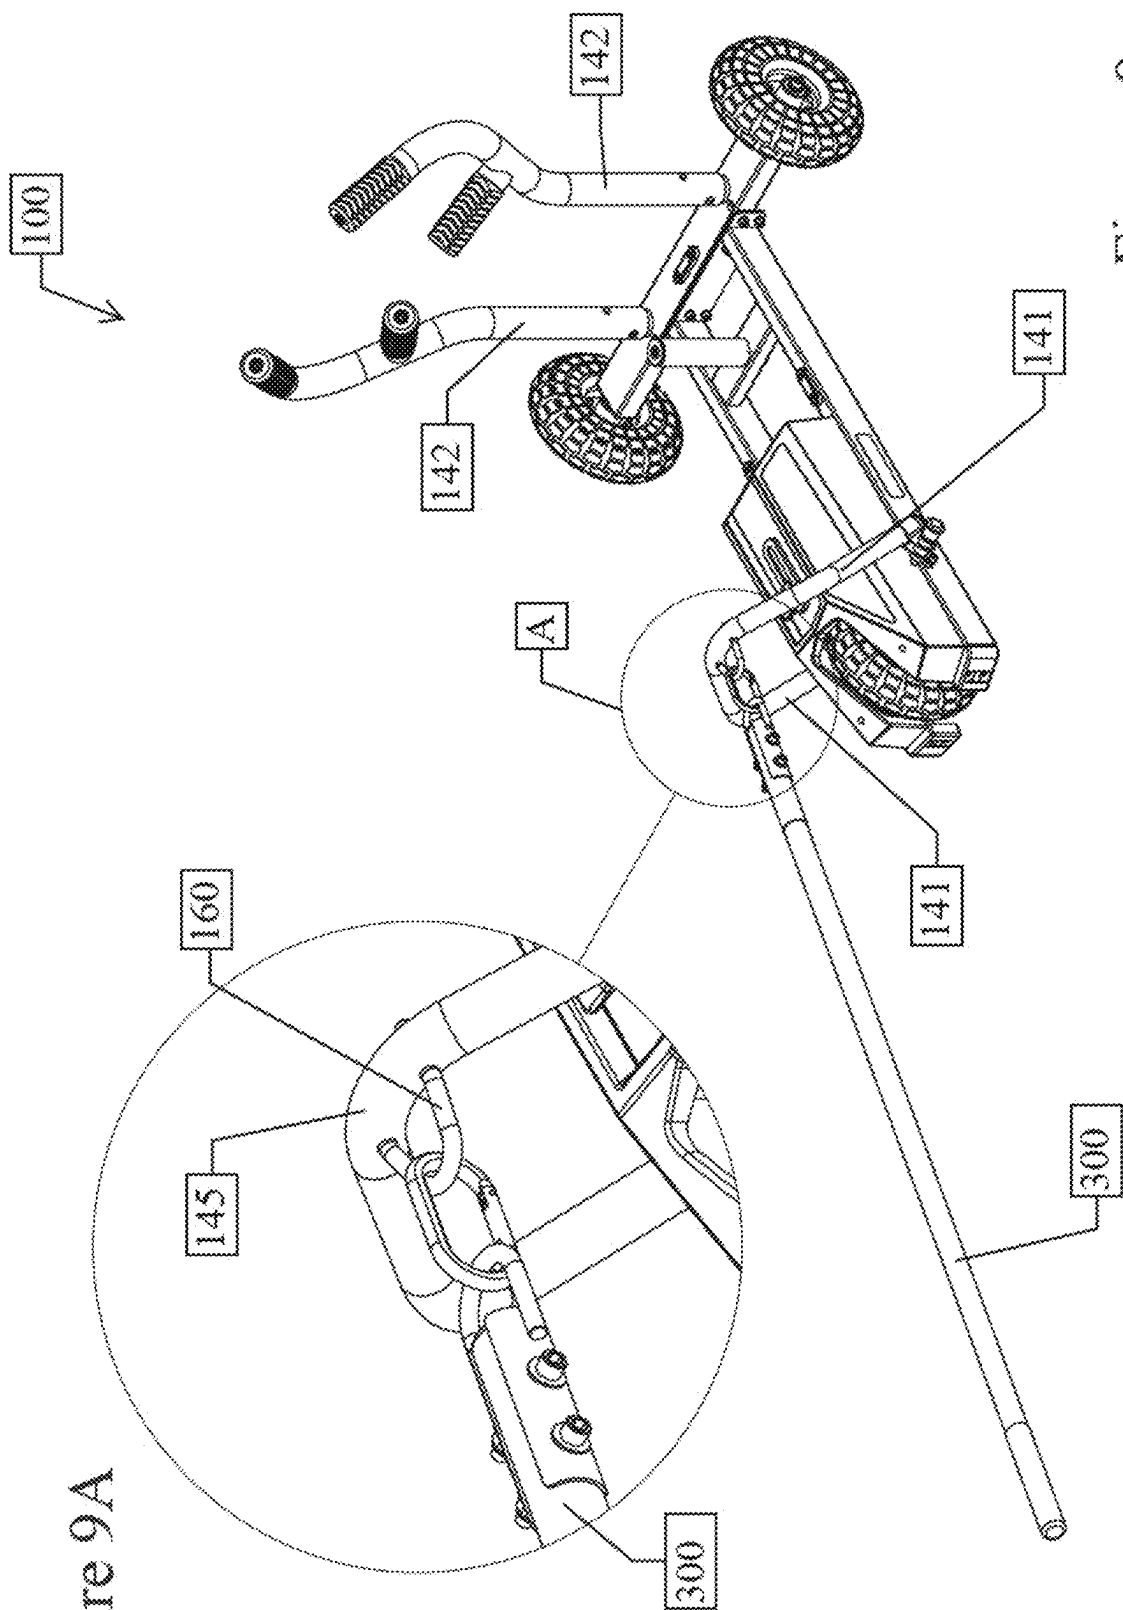


Figure 9

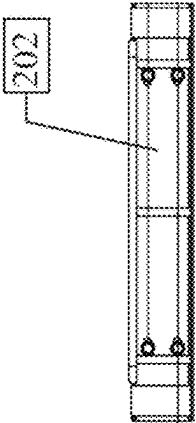
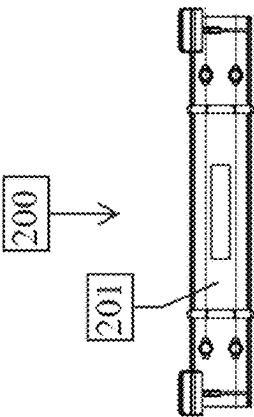


Figure 11

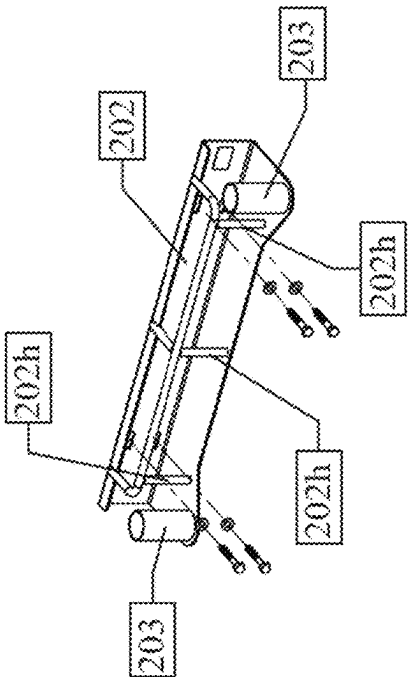
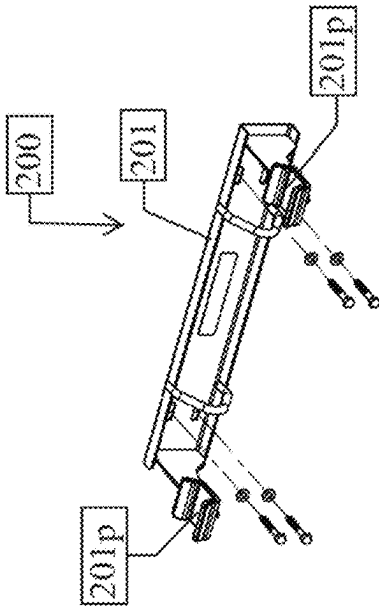


Figure 10

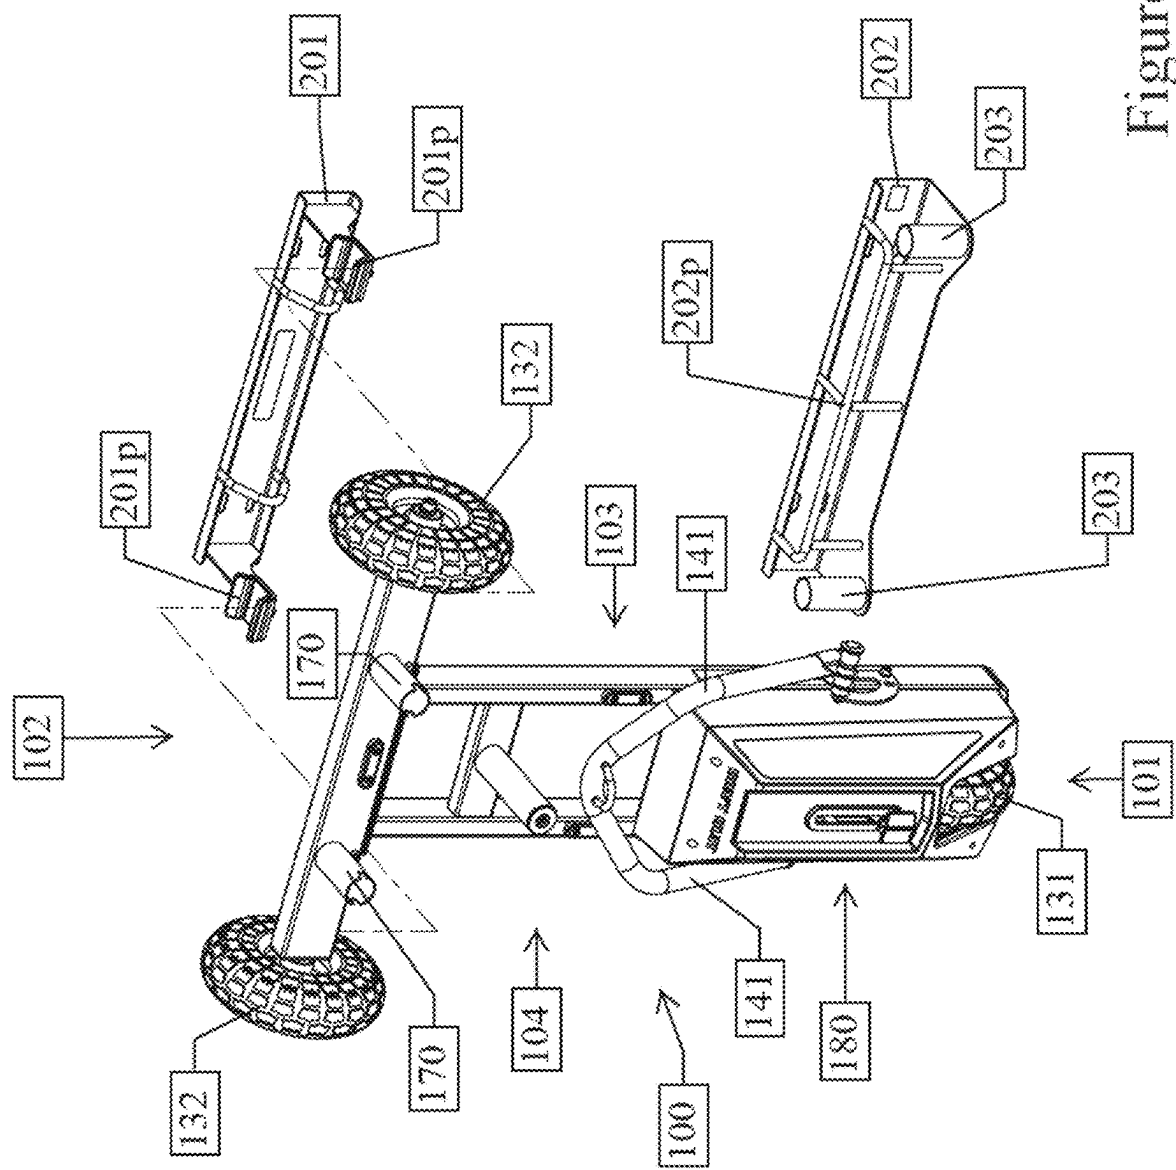


Figure 12

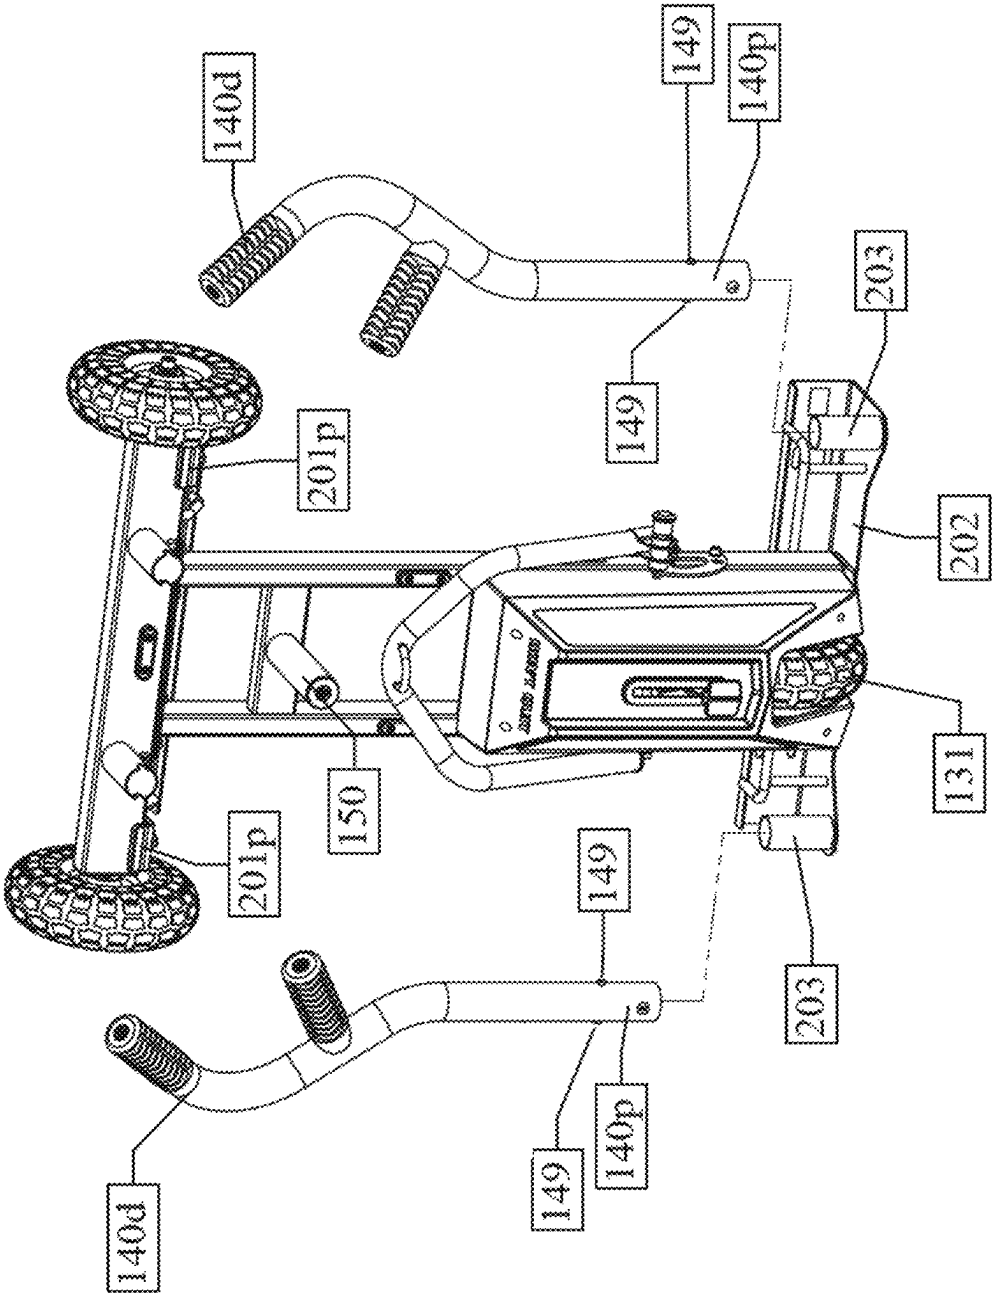


Figure 13

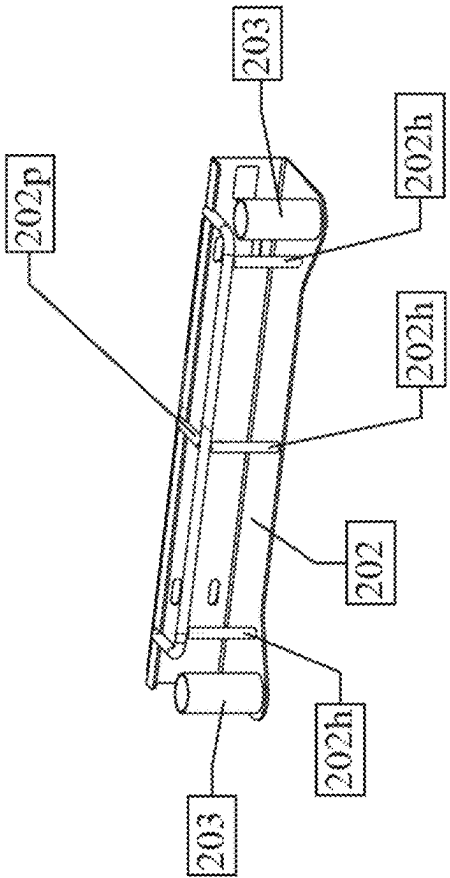
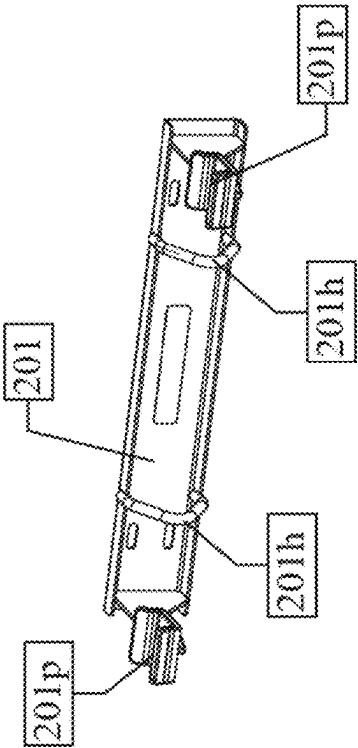


Figure 14

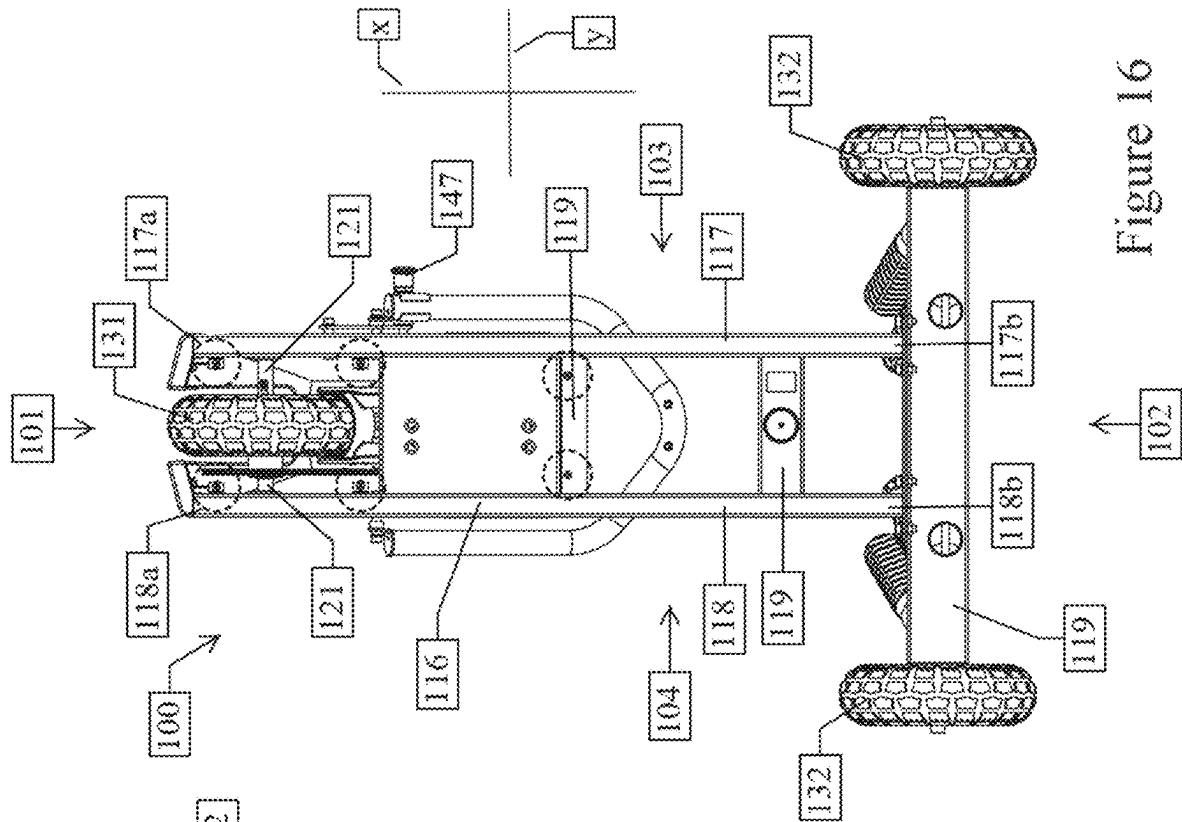


Figure 16


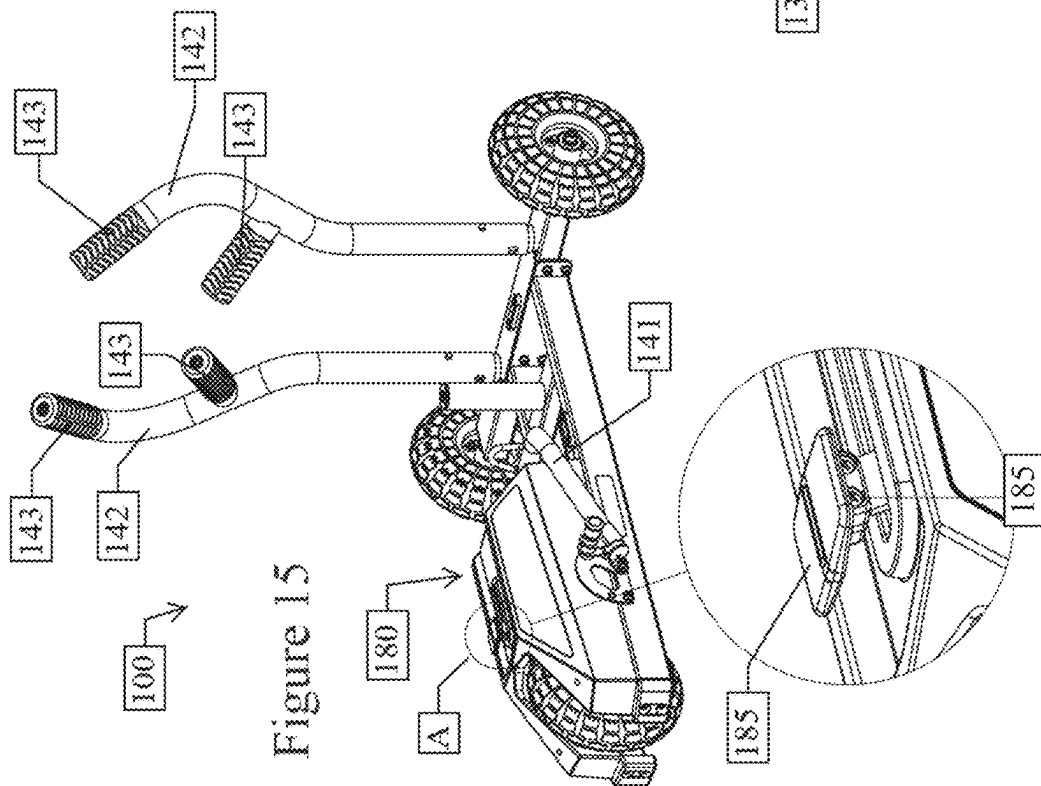


Figure 15A

Figure 17

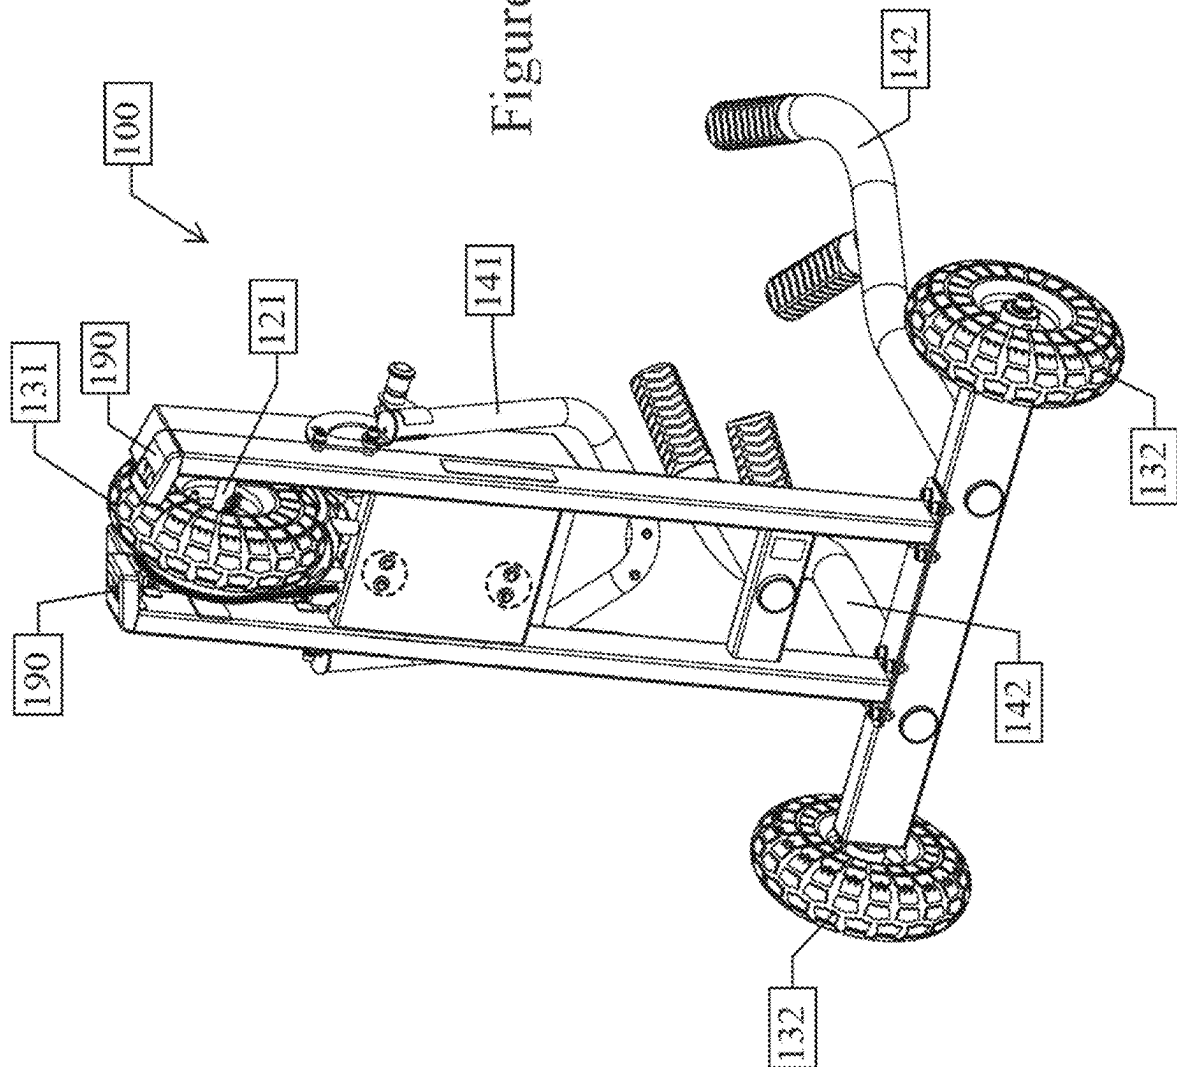

1

WALL HANGING BRACKET SET FOR SUPPORTING A WEIGHT TRAINING SLED IN AN ELEVATED VERTICAL STOWAGE POSITION

BACKGROUND

Weight sleds have become an increasingly popular exercise device in indoor health and fitness clubs, many of which have limited open space. Weight sleds, also known as blocking sleds, typically support weights upon one or more skids which exert frictional resistance against movement of the sled. An exemplary traditional weight sled is depicted in US Patent Application Publication 2014/0073492. Weight sleds were originally designed for outdoor use where space and the damage caused by the frictional sliding of the skids against the ground were of little concern. The transition from outdoor to indoor use has come with certain challenges, including the need for substantial open space and installation of flooring that can withstand the abrasive effects of repetitive frictional sliding of the skids over the flooring.

Wheeled version of blocking sleds are depicted in U.S. Pat. No. 3,326,553 (a three wheeled skid-steer version) and U.S. Pat. No. 6,942,585 (a single wheel version) whereby frictional skidding is substantially eliminated, but at the expense of a loss in stability when pushing the sled—resulting in the need for an onboard operator to steer the sled of U.S. Pat. No. 3,326,553, or the need for additional space to accommodate the uncontrolled instability of the sled of U.S. Pat. No. 6,942,585.

Stable wheeled weight training sleds are disclosed in U.S. Pat. Nos. 10,398,926, 10,398,927 and 10,799,750. While these weight training sleds constitute a significant advance over prior weight training sleds, a need still exists for a compact, lighter weight wheeled weight training sled.

SUMMARY OF THE INVENTION

The invention is directed to a weight training sled and wall hanging bracket set for supporting the weight training sled in an elevated vertical stowage position.

The weight training sled is a wheeled weight training sled that includes (a) a chassis having longitudinally spaced first and second ends and laterally spaced first and second sides, (b) at least two longitudinally spaced rotatable wheels for supporting the chassis a vertical distance above a support surface, (c) a brake for applying resistance to rotation of at least one of the wheels, (d) a first pair of laterally spaced push handles extending upward from proximate a first longitudinal end of the chassis, and (e) a second pair of laterally spaced push handles extending from proximate a second longitudinal end of the chassis wherein the first pair of push handles are pivotable as a unit about a laterally extending pivot axis as between an upward use position and a lowered stowage position extending towards the second longitudinal end of the chassis.

The wall hanging bracket set, comprising (a) an upper laterally elongated bracket configured and arranged for attachment to a vertical surface and supportively contact a second longitudinal end of the sled at two laterally spaced contact points when attached to the vertical surface, and (b) a lower laterally elongated bracket configured and arranged for attachment to the vertical surface and supportively contact a first longitudinal end of the sled at a single contact point when attached to the vertical surface at a defined distance away from and vertically below the attached upper bracket.

2

In a preferred embodiment, the wall hanging bracket set includes at least one hook or loop available for use in attaching one end of a battle rope or resistance band while a weight training sled is supported upon the hanging bracket set. The at least one hook or loop can be provided on either the upper or lower bracket, with a preference for providing at least one hook or loop on each of the upper and lower brackets.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a front perspective view of one embodiment of a weight training sled in accordance with the invention, with the first pair of push handles pivoted into the use position.

FIG. 2 is a partially exploded perspective view of the invention depicted in FIG. 1 sans rear wheels and the second pair of push handles, with the first pair of push handles pivoted into the stowage position.

FIG. 3 is a partially exploded perspective view of the invention depicted in FIG. 1 sans second pair of push handles, with the first pair of push handles pivoted into the stowage position.

FIG. 4 is a perspective view of the invention depicted in FIG. 1 with detached second pair of push handles, with the first pair of push handles pivoted into the stowage position.

FIG. 4A is an enlarged view of a portion of the invention depicted in FIG. 4 encircled by A.

FIG. 5 is a rear perspective view of the invention depicted in FIG. 1 with the first pair of push handles pivoted into the use position.

FIG. 6 is a front perspective view of the invention depicted in FIG. 1 depicting the use and stowage pivot positions of the first pair of push handles.

FIG. 7 is a side view of the invention depicted in FIG. 1.

FIG. 8 is a perspective view of the invention depicted in FIG. 1 with a pull strap attached to the tow hook.

FIG. 8A is an enlarged view of a portion of the invention depicted in FIG. 8 encircled by A.

FIG. 9 is a perspective view of the invention depicted in FIG. 1 with a pull rope attached to the tow hook.

FIG. 9A is an enlarged view of a portion of the invention depicted in FIG. 9 encircled by A.

FIG. 10 is a front perspective view of one embodiment of a wall hanging bracket set in accordance with the invention.

FIG. 11 is a front view of the invention depicted in FIG. 10.

FIG. 12 is a front perspective view of the weight training sled depicted in FIG. 3 and the wall hanging bracket set depicted in FIG. 10 in hanging spatial relationship to one another.

FIG. 13 is a front perspective view of the weight training sled depicted in FIG. 3 hanging from the wall hanging bracket set depicted in FIG. 10 and detached second push handles shown in mounted spatial relationship to the wall hanging bracket set.

FIG. 14 is an enlarged front perspective view of the invention depicted in FIG. 10.

FIG. 15 is a perspective view of the invention depicted in FIG. 1 with the first pair of push handles pivoted into the stowage position.

FIG. 15A is an enlarged view of a portion of the invention depicted in FIG. 15 encircled by A.

FIG. 16 is a bottom view of the invention depicted in FIG. 1 with the first pair of push handles pivoted into the stowage position.

FIG. 17 is a bottom perspective view of the invention depicted in FIG. 16.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

Definitions

As utilized herein, including the claims, the term “neutral resistance” means resistance at or near zero, whereby the wheeled exercise sled of the present invention is rendered suitable for use as a wheeled transport wagon when the braking mechanism is set to neutral.

Nomenclature Table	
REF. NO.	NAME
100	Wheeled Weight Training Sled
101	First End of Weight Training Sled
102	Second End of Weight Training Sled
103	First Side of Weight Training Sled
104	Second Side of Weight Training Sled
110	Chassis
111	First End of Chassis
112	Second End of Chassis
113	First Side of Chassis
114	Second Side of Chassis
115	Top of Chassis
116	Bottom of Chassis
117	First Side Rail of Chassis
117a	First End of First Side Rail
117b	Second End of First Side Rail
118	Second Side Rail of Chassis
118a	First End of Second Side Rail
118b	Second End of Second Side Rail
119	Cross Beams Interconnecting Side Rails
120	Axles
121	First Axle
122	Second Axle
130	Wheels
131	Front Wheel(s)
132	Rear Wheel(s)
140	Push Handles
140d	Distal End of Push Handles
140p	Proximal End of Push Handles
141	First Pair of Push Handles
142	Second Pair of Push Handles
143	Grips on Each Push Handle
145	Interconnecting Member
146	Pivot Axis for First Pair of Push Handles
147	Locking Pin for First Pair of Push Handles
149	Locking Pin on Each Second Push Handle
150	Weight Plate Horn
160	Tow Hook
170	Posts or Sleeves for Second Push Handles
170z	Central Axis of Post or Sleeve
179	Locking Slot in Each Post or Sleeve
180	Braking Mechanism
185	Braking Level Adjustment Lever
190	Rubber Bumpers
200	Wall Hanging Bracket Set
201	Upper Bracket
201h	Upper Bracket Hook or Loop
201p	Upper Bracket Contact Support Points
202	Lower Bracket
202h	Lower Bracket Hook or Loop
202p	Lower Bracket Contact Support Point
203	Posts or Sleeves for Second Push Handles
300	Elongate Flexible Exercise Pull (e.g. pull strap, battle rope, elastic band, etc.)
x	Longitudinal Direction
y	Lateral Direction
z	Transverse Direction

Construction

With reference to the illustrative drawings, the invention is directed to a wheeled weight training sled **100** (hereinafter

“sled”) and a wall hanging bracket set **200** for supporting a weight training sled such as sled **100** in an elevated vertical stowage position.

Wheeled Sled

Referring to FIGS. 1-9 and 15-17, the wheeled sled **100** includes a chassis **110**, at least two wheels **130**, two pair of push handles **140** with a pair proximate each longitudinal end **101** and **102** of the sled **100**, and at least one braking mechanism **180**. The wheeled sled **100** preferably includes at least one of (i) three fixed-directional wheels **130** comprised of a single front wheel **131** mounted upon a first axle **121** proximate the first longitudinal end **101** of the sled **100** and a pair of rear wheels **132** mounted upon a second axle **122** proximate the second longitudinal end **102** of the sled **100**, (ii) a push handle pivot feature wherein a first pair of the push handles **141** proximate the front or first longitudinal end **101** of the sled **100** is pivotable as a unit about a laterally y extending pivot axis **146** as between an upward use position and a lowered stowage position extending towards the rear or second longitudinal end **102** of the sled **100**, (iii) a tow hook **160** mounted between and pivotable with the first pair of push handles **141**, and (iv) a push handle conformation adjustment feature wherein the second pair of push handles **142** are curvilinear and releasably engageable with a post or sleeve **170** extending upward from the chassis **110**, and rotatable up to 180° about a central axis **170z** of each post or sleeve **170** as between a first axially rotated locked position and a second axially rotated locked position.

The wheeled sled **100** has longitudinally x spaced first and second ends **101** and **102**, and laterally y spaced first and second sides **103** and **104**.

Referring to FIGS. 2, 3 and 16, a preferred chassis **110** is a metal structure having first and second longitudinally x elongated and laterally y spaced side rails **117** and **118** rigidly interconnected by cross-beams **119**, defining a chassis **110** with first and second longitudinal ends **111** and **112**, first and second lateral sides **113** and **114**, and a transversely z spaced top **115** and bottom **116**.

Referring to FIGS. 1, 3-9 and 15-17, the wheels **130** are rotatably mounted to the chassis **110** for supporting the bottom **116** of the chassis **110** a distance above a surface (hereinafter referenced as “clearance”). The wheels **130** can be fixed-directional wheels **130** so as to constrain the chassis **110** to reciprocating travel upon a surface along a substantially linear longitudinal x path.

When two wheels **130** are employed they are preferably longitudinally x aligned in the midsagittal plane of the sled **100**. When three wheels **130** are employed they are preferably spaced at the corners of an isosceles triangle with two of the wheels **130** laterally y aligned proximate one end **102** of the sled **100** and the third centrally positioned proximate the other end **101** of the sled **100**. When four wheels **130** are employed the wheels **130** are mounted in laterally y spaced pairs upon each of two laterally y extending axles **121** and **122** mounted proximate each longitudinal end **101** and **102** of the sled **100** with the wheels **130** in each pair of wheels mounted proximate opposite sides **103** and **104** of the sled **100**. Alternatively, the four wheel embodiment may employ a pair of longitudinally x aligned and laterally y centered wheels **130** proximate the longitudinal ends **101** and **102** of the sled **100**, with a vertically z raised or vertically z aligned outrigger wheel **130** extending from each side **103** and **104** of the sled **100**.

The wheels **130** are preferably pneumatic wheels **130** with good traction in order to limit undesired sliding of the wheels **130** across the floor during exercise as opposed to desired rotation of the wheels **130**.

5

Referring to FIGS. 1, 4-9 and 15-17, the sled 100 includes two pair of push handles 141 and 142, with a first pair of push handles 141 secured to the first end 101 of the sled 100, preferably secured to the first ends 117a and 118a of the chassis side rails 117 and 118, and a second pair of push handles 142 secured to the second end 102 of the sled 100, preferably secured to the second ends 117b and 118b of the chassis side rails 117 and 118. This allows a user to exercise by pushing the sled in either direction along the longitudinal x path of travel.

Referring to FIG. 6, the first pair of the push handles 141 can be configured and arranged to pivot as a unit about a laterally y extending pivot axis 146 as between an upward use position and a lowered stowage position extending towards the rear or second longitudinal end 102 of the sled 100. The first pair of push handles 141 can be releasably locked in the upward use position and a lowered stowage position by a spring biased locking pin 147 attached to the first pair of push handles 141 for pivoting with the first pair of push handles 141, which can be selectively inserted into at least two radially spaced orifices (not numbered) attached to the chassis 110.

Referring to FIGS. 4 and 4A, the second pair of push handles 142 can be configured and arranged to allow conformational adjustment of the push handles 142 on the sled 100 by releasably engaging each of the push handles 142 to the sled 100 via a post or sleeve 170 extending upward from the chassis 110, and configuring the push handles 142 and the posts or sleeves 170 with cross-sectional shapes that allows each push handle 142 to be engaged with a post or sleeve 170 at different rotated angles of up to 180° about a central axis 170z of each post or sleeve 170 thereby allowing mounting of the push handles 142 as between a first axially rotated locked position and a second axially rotated locked position. The second pair of push handles 142 can be releasably locked in each axially rotated position by a locking pin 149 at the proximal end 140p of each handle 142 that engages locking slots 179 in the distal end (unnumbered) of each post or sleeve 170.

Referring to FIGS. 1, 4-9 and 15-17, the second pair of push handles 142 are preferably curvilinear, with grips 143 proximate the distal ends 140d of the push handles 142 that angle inward towards one another and downward towards the chassis 110 when in one of the axially rotated locked positions.

Inward angling of the grips 143 provides a more natural ergonomic rotational gripping position, while downward angling of the grips 143 redirects at least some of the vertical force vector created when a user is pushing the sled 100 from an upwardly directed force vector to a downwardly directed force vector, thereby preventing or at least limiting lifting of the work end of the sled 100 off the ground.

Referring to FIGS. 8, 8A, 9 and 9A, a tow hook 160 can be mounted between and pivotable with the first pair of push handles 141. The distal end 140d of the first pair of push handles 141 can be interconnected by an interconnecting member 145. This interconnecting member 145 provides both stabilization of the paired push handles 141 and an elevated position for attachment of an elongate flexible exercise pull 300 such as a pull strap, battle rope, elastic band, etc. to the sled 100. A tow hook 160 preferably extends longitudinally x outward from the lateral y center of this interconnecting member 145 to facilitate temporary attachment of an elongate flexible exercise pull 300. The interconnecting member 145 can also be gripped by a user pushing the sled 100 as an alternative gripping position.

6

Referring to FIGS. 8, 8A, 9 and 9A, the interconnecting member 145, and thereby the tow hook 160, is preferably located so as to provide a clearance of at least 30 cm between the tow hook 160 and ground when the first pair of push handles 141 are pivoted into the use position. Such elevated positioning of the tow hook 160 serves to limit the amount of upward force vector created when a user pulls upon a elongate flexible exercise pull 300 attached to the sled 100 at the tow hook 160, thereby limiting and potentially eliminating lifting of the first or front end 101 of the sled 100 off the ground.

Referring to FIGS. 1-9 and 15, one or more weight plate horns 150 can be provided on the chassis 110 for mounting weight plates (not shown) onto the top 115 of the chassis 110 in order to increase exercise resistance offered by the sled 100 and, more importantly, counteract any upward lifting force vector exerted by a user that would tend to lift an end of the sled 100 and thereby lift the wheel(s) 130 closest to the user off the floor. The preferred embodiment has a weight plate horn 150 positioned along the midsagittal plane of the sled 100 secured to a cross beam 119. Rubber pads (not shown) can be provided atop the chassis 115 proximate the horn 150 for cushioning and protecting the chassis 110 when weight plates are added to or removed from the horn 150.

Referring to FIGS. 1-9 and 15-17, a braking mechanism 180 is attached to the chassis 110 and in communication with at least one of the wheels 130, preferably in communication with the first or front wheel 131, for exerting a bidirectional controlled variable resistive force against rotation of the wheel(s) 130 along the longitudinal x path of travel. Separate braking mechanisms 201 and 202 can be provided for each wheel 130 or each axle 120. Many types of resistance devices are known such as braking motors, generators, brushless generators, eddy current systems, magnetic systems, alternators, tightenable belts, friction rollers, fluid brakes, etc., any of which could be effectively utilized in the present invention. A braking mechanism capable of providing progressive resistance based upon acceleration or speed of travel is generally preferred.

In further detail, a preferred braking mechanism 180 is an eddy current brake mounted to a side rail 117 or 118 of the chassis 110 for exerting resistance to rotation of the first axle 121. An eddy current brake generally includes (i) a mounting plate which would be rigidly attached to the chassis 110, (ii) a drive sprocket rotatably with and secured to a portion of the first axle 121 extending through an orifice in the mounting plate, (iii) a pulley assembly with a pulley and driven sprocket rotatably mounted via an internal hub and a sprocket mount onto a first mounting post projecting from the mounting plate in rotatable driven communication with the drive sprocket via a drive chain, (iv) an eddy disk assembly comprised of an eddy disk rotatably mounted via a disk mount having a shaft and mounting plate onto a second mounting post projecting from the mounting plate in rotatable driven communication with the pulley assembly via a drive belt, (v) a drive belt tensioning assembly secured within an adjustment slot in the mounting plate for adjustably tensioning the drive belt, and (vi) a magnetic stator assembly secured to the mounting plate for manual (as shown) or automatic (not shown) repositioning of the magnets relative to the eddy disk of the eddy disk assembly via an adjustment slot in the mounting plate or a multi-stop lever 185 as depicted in FIGS. 15 and 15A, to increase or decrease resistance as desired.

Referring to FIGS. 15 and 15A, in a preferred embodiment the braking mechanism 180 is adjustable into a neutral resistance setting, whereby the sled 100 is effectively con-

verted from an exercise sled to a transport wagon. The neutral setting facilitates movement of the sled **100** from one location to another, such as transport back and forth between a storage location and a use location. The neutral setting preferably applies some modest resistance to rotation of the wheels which does not appreciably interfere with transport of the sled **100** but is effective for preventing or at least slowing down gravity induced movement of the sled **100**.

A protective shroud (unnumbered) may be provided over the components of the braking mechanism **180**.

Rubber bumpers **190** can be provided on the front end **101** of the sled **100** to minimize any structural damage should a user strike an object while pushing the sled **100**.

Various acceptable, preferred and most preferred dimensions having some significance to the value and/or performance of the sled **100** are provided below.

Dimension	Acceptable (cm)	Preferred (cm)	Most Preferred (cm)
Chassis			
Longitudinal Length of Chassis	60-150	>100	100-140
Maximum Lateral Width of Chassis	30-100	40-80	50-60
Maximum Transverse Height of Chassis	3-30	5-20	10-20
Clearance Wheels	>2	5-20	10-15
Wheelbase	60-100	>80	80-100
Track	40-100	60-100	80-100
Second Push Handles			
Height relative to Floor	40-120	50-100	60-100
Lateral Spacing at Top End	70-120% of Track	80-100% of Track	80-90% of Track

Wall Hanging Bracket Set

Referring to FIGS. **10-14**, the wall hanging bracket set **200** includes an upper laterally y elongated bracket **201** and a lower laterally y elongated bracket **202**. The upper bracket **201** is configured and arranged for attachment to a vertical surface and for supportively contacting the second longitudinal end **102** of the sled **100** at two laterally y spaced contact points **201p** when attached to the vertical surface. The contact points **201p** on the upper bracket **201** preferably engage the chassis **110** of the sled **100**. The lower bracket **202** is configured and arranged for attachment to the same vertical surface and, when attached to the vertical surface at a defined distance away from and vertically below the attached upper bracket **201**, can supportively contact a first longitudinal end **101** of the sled **100** at a single contact point **202p**. The contact point **202p** on the lower bracket **202** preferably engages the front wheel **131** of the sled **100**.

Referring to FIGS. **10-14**, the lower bracket **202** preferably includes upward projecting sleeves or posts **203** upon which the second pair of push handles **142** can be secured for storage when detached from the chassis **110**.

Referring to FIGS. **10** and **12-14**, the wall hanging bracket set **200** preferably has a low mounted horizontal projecting profile, with each of the upper **201** and lower **202** brackets extending less than 6 inches away from a vertical surface upon which the brackets **201** and **202** are attached.

In a preferred embodiment, the wall hanging bracket set **200** includes at least one hook or loop **201h** and/or **202h** available for use in attaching one end of an elongate flexible exercise pull **300** while a weight training sled **100** is sup-

ported upon the hanging bracket set **200**. The at least one hook or loop **201h** and/or **202h** can be provided on either the upper **201** or lower **202** bracket, with a preference for providing at least one hook or loop **201h** and **202h** on each of the upper **201** and lower **202** brackets respectively.

Use

The sled **100** can be conveniently and safely used in a confined space as small as 1.2 meters wide and 5 meters long, by (i) setting the braking mechanism(s) **180** to the desired resistance, (ii) standing at the second end **102** of the sled **100**, (iii) leaning forward and gripping the second pair of push handles **142**, (iv) pushing the sled **100** in a first longitudinal x direction along a longitudinal path, (v) walking around the sled **100** to the first end **101** of the sled **100**, (vi) leaning forward and gripping the first pair of push handles **141**, (vii) pushing the sled **100** in a second longitudinal x direction back along the longitudinal path, (viii) walking back around the sled **100** to the second end **102** of the sled **100**, and (ix) repeating steps (iii)-(viii) for as many reps as desired.

Alternatively, the sled **100** can be conveniently and safely used in a confined space as small as 1.2 meters wide and 5 meters long, by (i) setting the braking mechanism(s) **180** to the desired resistance, (ii) standing at the second end **102** of the sled **100**, (iii) leaning forward and gripping the second pair of push handles **142**, (iv) pushing the sled **100** in a first longitudinal x direction along a longitudinal path, (v) tilting the first end **101** of the sled **100** up until the front wheel **131** loses contact with ground, (vi) rotating the sled **101** 180° with only the rear wheels **132** in contact with ground, (vii) pushing the sled **100** in a second longitudinal x direction back along the longitudinal path, and (viii) repeating steps (v)-(vii) for as many reps as desired.

We claim:

1. A wall hanging bracket set for supporting a weight training sled having a chassis and a pair of push handles detachable from the chassis in an elevated vertical stowage position, comprising (a) an upper laterally elongated bracket configured and arranged for attachment to a vertical surface and supportively contact a second longitudinal end of the sled at two laterally spaced contact points when attached to the vertical surface, and (b) a lower laterally elongated bracket configured and arranged for attachment to the vertical surface and supportively contact a first longitudinal end of the sled at a single contact point when attached to the vertical surface at a defined distance away from and vertically below the attached upper bracket, the lower laterally elongated bracket further including a pair of laterally spaced and upward projecting sleeves or posts operable for securing the pair of push handles when detached from the chassis in an upwardly projecting storage orientation.

2. The wall hanging bracket set of claim 1 wherein the upper bracket further comprises at least one hook or loop operable for use in attaching one end of a battle rope or resistance band.

3. The wall hanging bracket set of claim 2 wherein the at least one hook or loop is available for use in attaching one end of a battle rope or resistance band with a weight training sled supported upon the upper bracket.

4. The wall hanging bracket set of claim 1 wherein the lower bracket further comprises at least one hook or loop operable for use in attaching one end of a battle rope or resistance band.

5. The wall hanging bracket set of claim 4 wherein the at least one hook or loop is available for use in attaching one end of a battle rope or resistance band with a weight training sled supported upon the lower bracket.

9

6. The wall hanging bracket set of claim 1 wherein each of the upper and lower brackets extend less than 6 inches away from a vertical surface upon which the bracket is attached.

7. The wall hanging bracket set of claim 1 wherein the upper laterally elongated bracket is configured and arranged to supportively contact a chassis of the sled.

8. The wall hanging bracket set of claim 7 wherein the lower laterally elongated bracket is configured and arranged to supportively contact a wheel on the sled.

10

* * * * *

10