

(45) **Date of Patent:** Sep. 2, 2025

(2013.01); *H01L 21/02164* (2013.01); *H01L 21/0217* (2013.01); *H01L 21/02236* (2013.01); *H01L 21/02255* (2013.01); *H01L 21/02271* (2013.01); *H01L 21/02274* (2013.01); *H01L 21/0332* (2013.01); *H01L 21/0337* (2013.01);

(Continued)

(58) **Field of Classification Search**

CPC H01L 29/4991; H01L 29/6656; H10D
64/679

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

6,001,695 A * 12/1999 Wu H10D 64/679
438/307

8,962,400 B2 2/2015 Tsai et al.

(Continued)

Primary Examiner — Evren Seven

(22) Filed: **Feb. 5, 2024**

(74) *Attorney, Agent, or Firm* — Birch, Stewart, Kolasch
& Birch, LLP

(65) **Prior Publication Data**

US 2024/0178300 A1 May 30, 2024

Related U.S. Application Data

(60) Continuation of application No. 17/129,253, filed on Dec. 21, 2020, now Pat. No. 11,929,419, which is a
(Continued)

(51) **Int. Cl.**
H10D 64/66 (2025.01)
H01L 21/28 (2025.01)

(Continued)


(52) **U.S. Cl.**
CPC ***H10D 64/679*** (2025.01); ***H01L 21/28088***
(2013.01); ***H10D 30/024*** (2025.01); ***H10D***
64/015 (2025.01); ***H10D 64/017*** (2025.01);
H10D 64/021 (2025.01); ***H01L 21/0206***

(57) **ABSTRACT**

A device includes a semiconductor fin semiconductor fin extending from a substrate, a gate structure extending across the semiconductor fin, and a multilayer gate spacer on a sidewall of the gate structure. The multilayer gate spacer includes an inner spacer layer, an outer spacer layer, and a dielectric structure. The inner spacer layer has a vertical portion extending along the sidewall of the gate structure, and a lateral portion laterally extending from the vertical portion in a direction away from the gate structure. The outer spacer layer is spaced apart from the vertical portion of the inner spacer layer by an air gap. The dielectric structure spaces apart a bottom end of the outer spacer layer from the lateral portion of the inner spacer layer.

20 Claims, 18 Drawing Sheets

1700

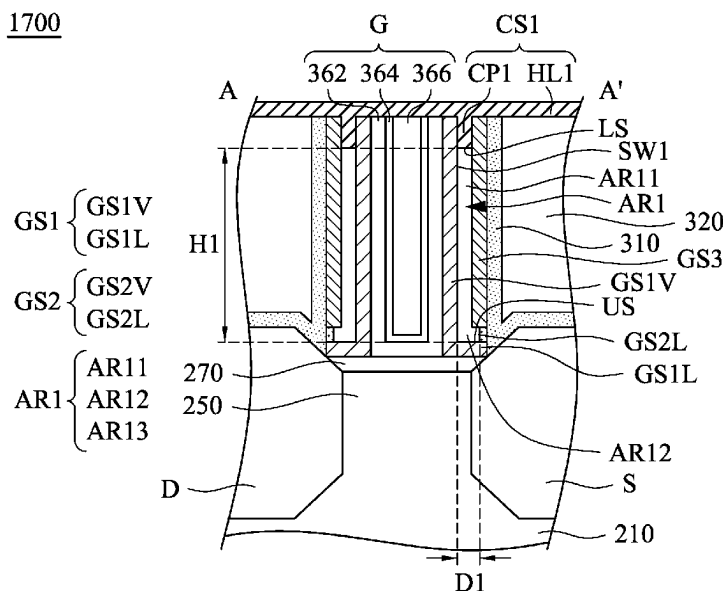

Related U.S. Application Data

continuation of application No. 16/914,940, filed on Jun. 29, 2020, now Pat. No. 10,872,965, which is a division of application No. 16/047,038, filed on Jul. 27, 2018, now Pat. No. 10,700,180.

(51) **Int. Cl.**

H10D 30/01 (2025.01)
H10D 64/01 (2025.01)
H01L 21/02 (2006.01)
H01L 21/027 (2006.01)
H01L 21/033 (2006.01)
H01L 21/3105 (2006.01)
H01L 21/311 (2006.01)
H01L 21/321 (2006.01)
H01L 21/762 (2006.01)

(52) **U.S. Cl.**

CPC ... *H01L 21/31053* (2013.01); *H01L 21/31111* (2013.01); *H01L 21/3212* (2013.01); *H01L 21/76224* (2013.01); *H10D 64/667* (2025.01)

(56)

References Cited

U.S. PATENT DOCUMENTS

9,093,514 B2 7/2015 Tsai et al.
 9,236,267 B2 1/2016 De et al.
 9,245,805 B2 1/2016 Yeh et al.
 9,418,897 B1 8/2016 Ching et al.
 9,520,482 B1 12/2016 Chang et al.
 9,576,814 B2 2/2017 Wu et al.
 9,608,065 B1 3/2017 Bergendahl et al.

9,608,116 B2 3/2017 Ching et al.
 9,666,533 B1 5/2017 Basker et al.
 9,812,363 B1 11/2017 Liao et al.
 9,859,380 B2 1/2018 Lee et al.
 10,026,824 B1 7/2018 Chanemougame et al.
 10,367,076 B1 7/2019 Cheng et al.
 2005/0189660 A1* 9/2005 Bu H10D 30/0227 257/900
 2010/0213554 A1* 8/2010 Wang H01L 29/6656 257/E21.214
 2014/0110798 A1 4/2014 Cai et al.
 2016/0163816 A1 6/2016 Yu et al.
 2016/0181143 A1 6/2016 Kwon et al.
 2016/0284806 A1 9/2016 Park et al.
 2016/0365426 A1 12/2016 Ching et al.
 2017/0162650 A1 6/2017 Cheng et al.
 2017/0194423 A1 7/2017 Lin
 2018/0138280 A1 5/2018 Li et al.
 2018/0182845 A1 6/2018 Seong et al.
 2018/0233398 A1* 8/2018 Van Cleemput H01L 21/67259
 2018/0269301 A1 9/2018 Cheng et al.
 2018/0323276 A1 11/2018 Kang et al.
 2018/0374927 A1 12/2018 Liu et al.
 2019/0043959 A1 2/2019 Lee et al.
 2019/0148501 A1 5/2019 Chen et al.
 2019/0157414 A1 5/2019 Ando et al.
 2019/0165121 A1 5/2019 Park
 2019/0296123 A1 9/2019 Lee et al.
 2019/0334008 A1 10/2019 Chen et al.
 2019/0393335 A1 12/2019 Economikos et al.
 2020/0027959 A1 1/2020 Cheng et al.
 2020/0127109 A1 4/2020 Wang et al.
 2020/0219989 A1 7/2020 Cheng

* cited by examiner

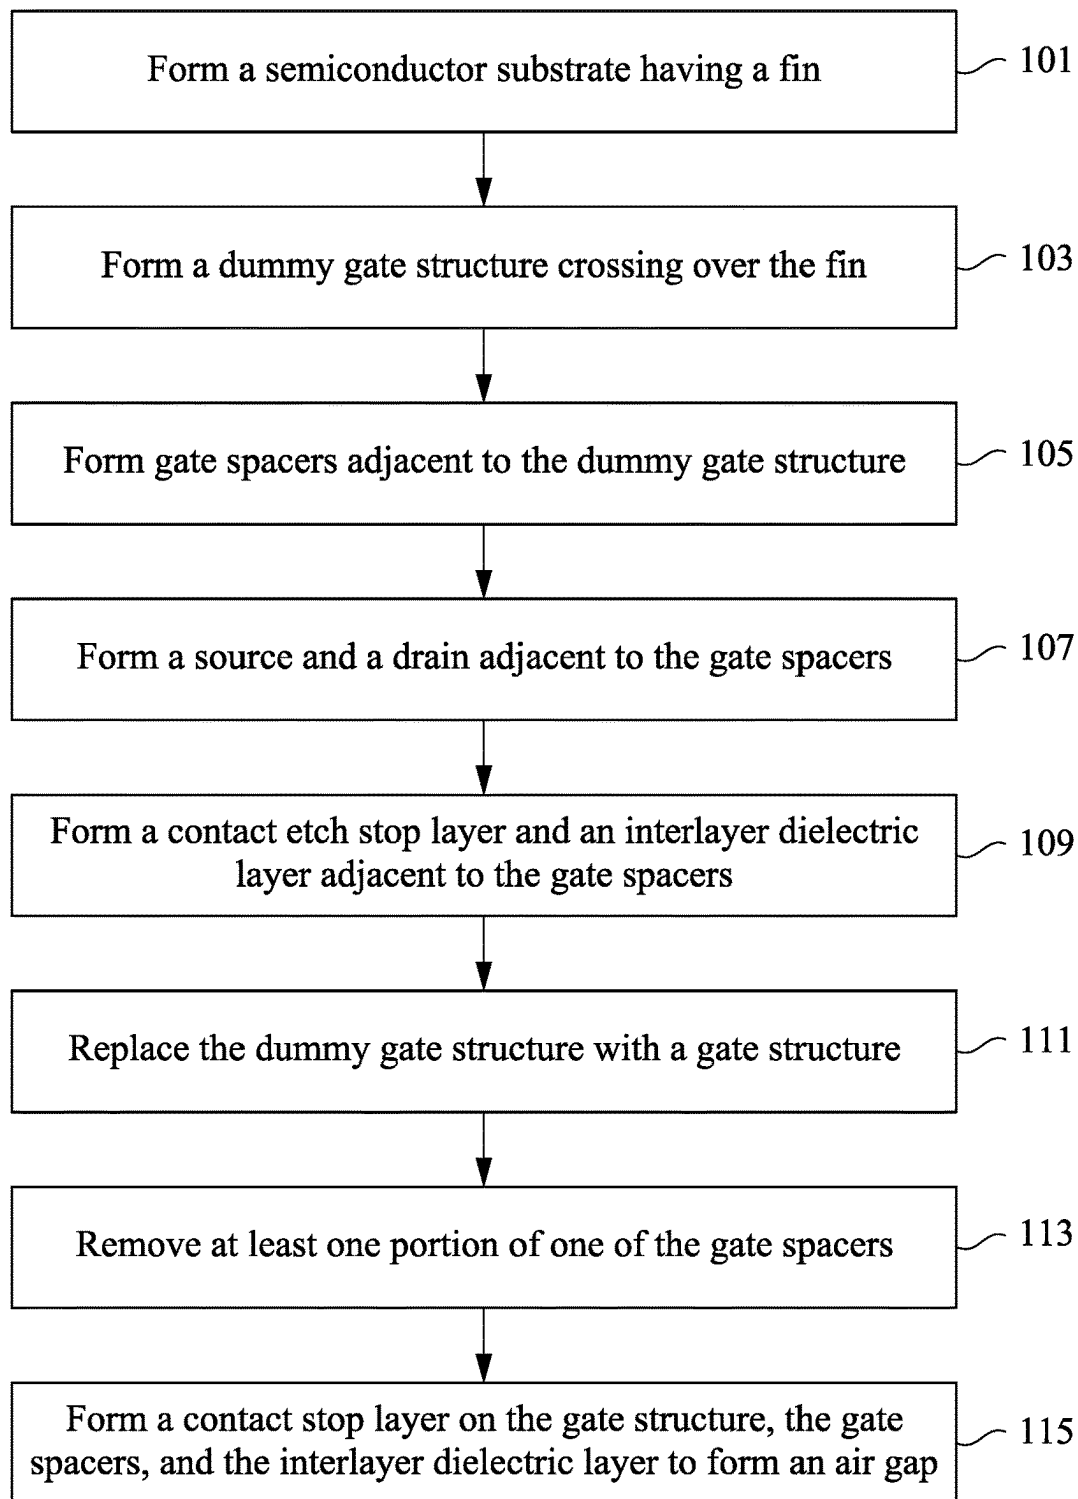
100

Fig. 1

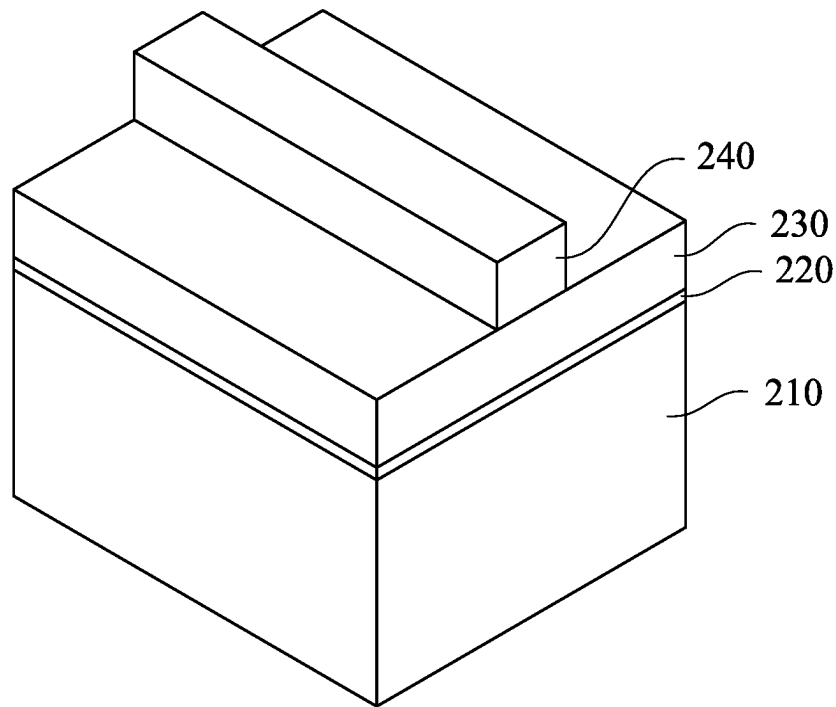


Fig. 2

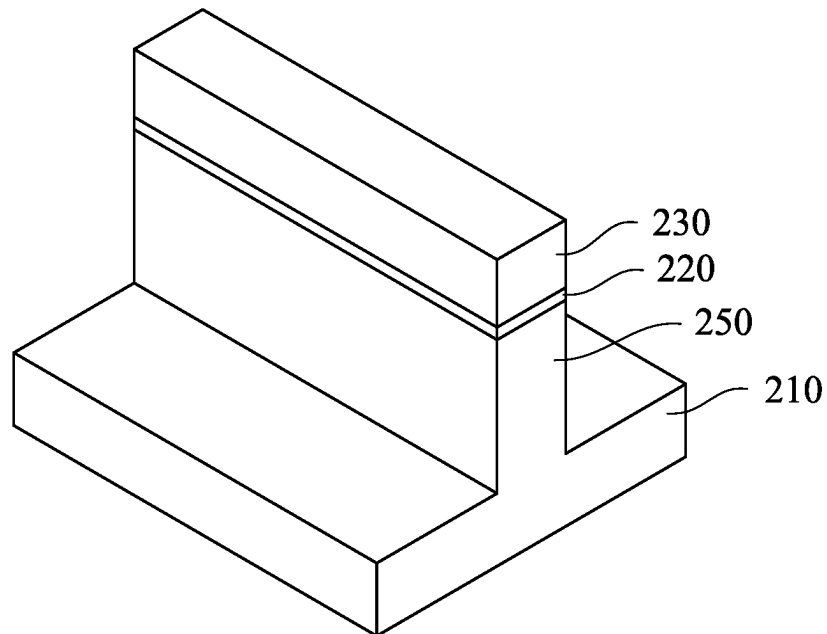


Fig. 3

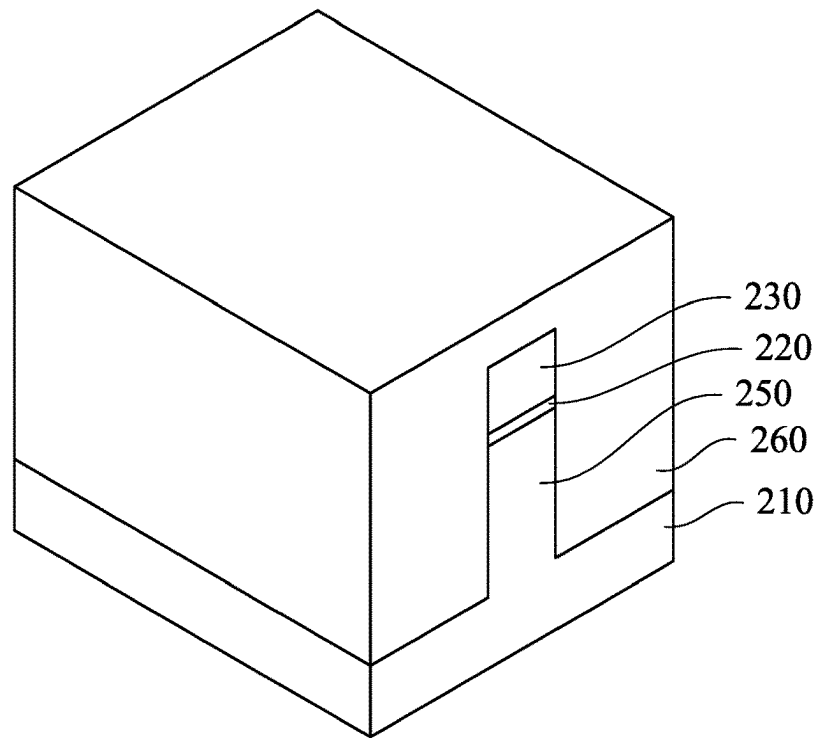


Fig. 4

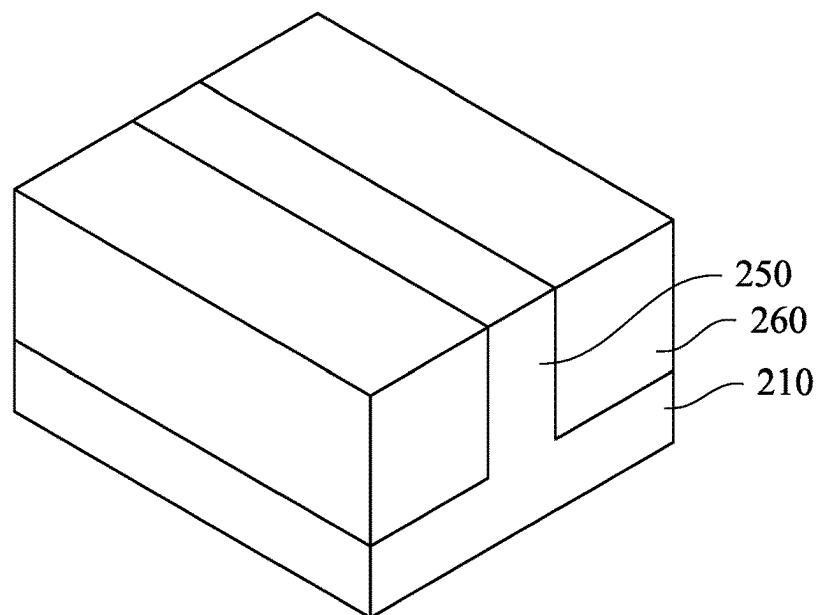


Fig. 5

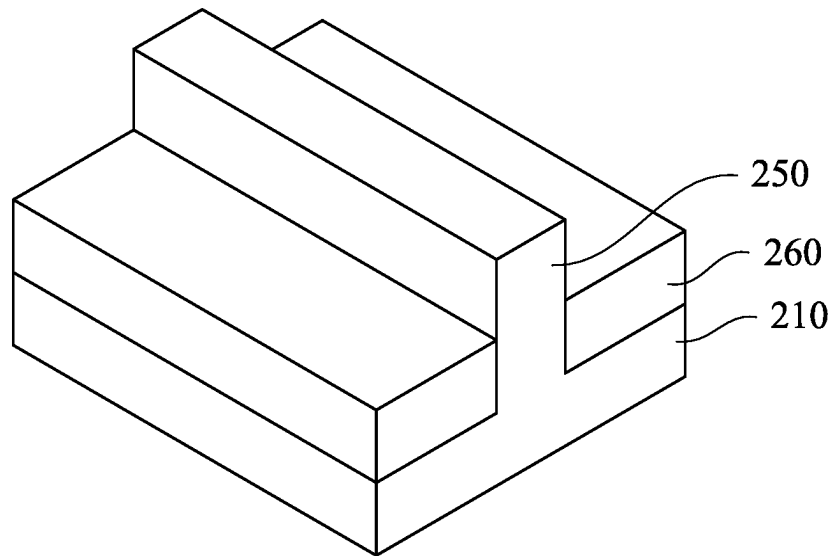


Fig. 6

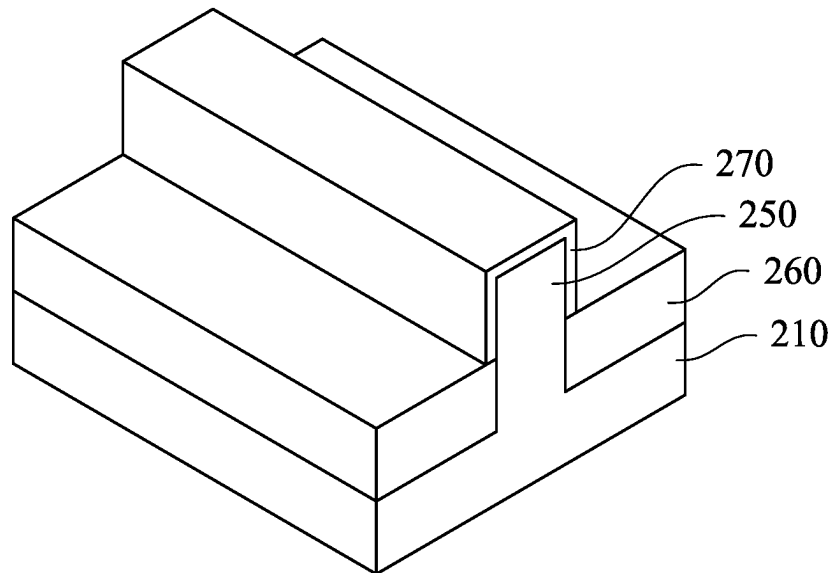


Fig. 7

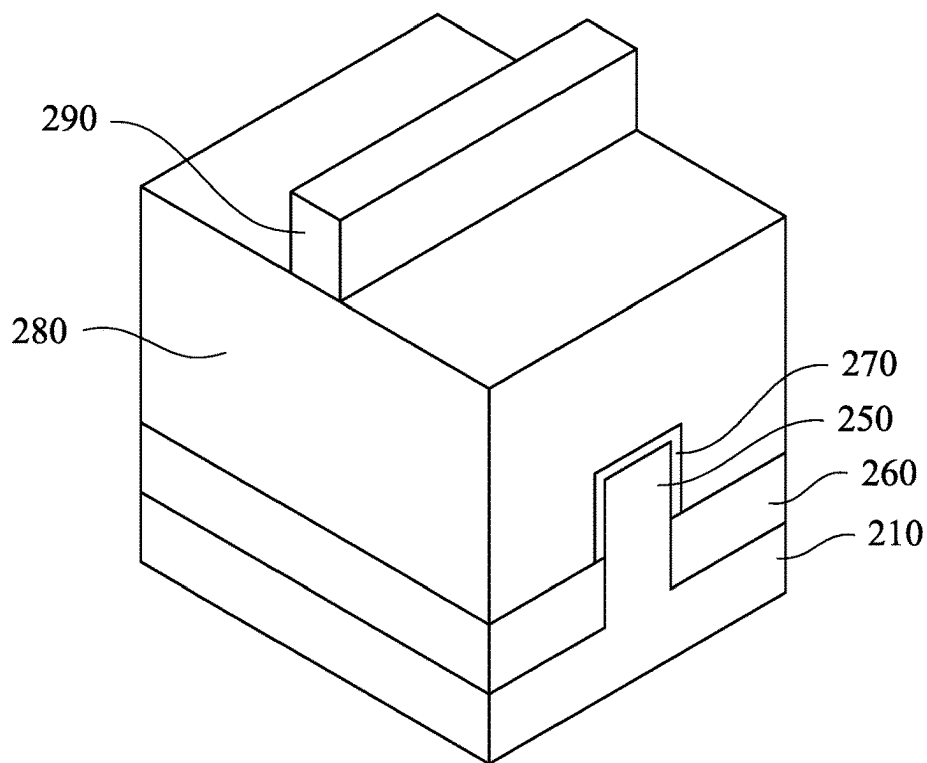


Fig. 8

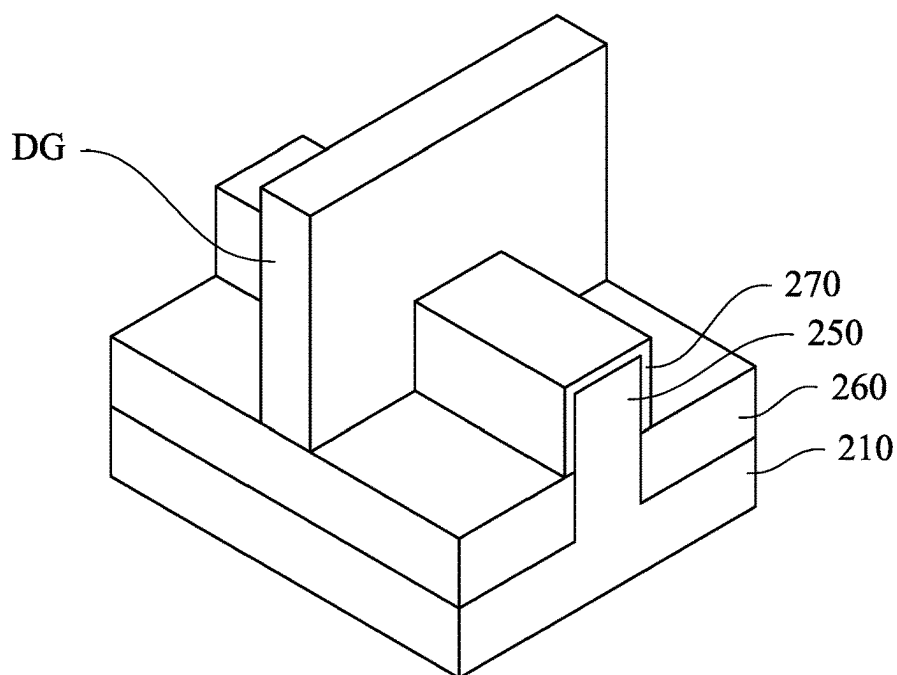


Fig. 9

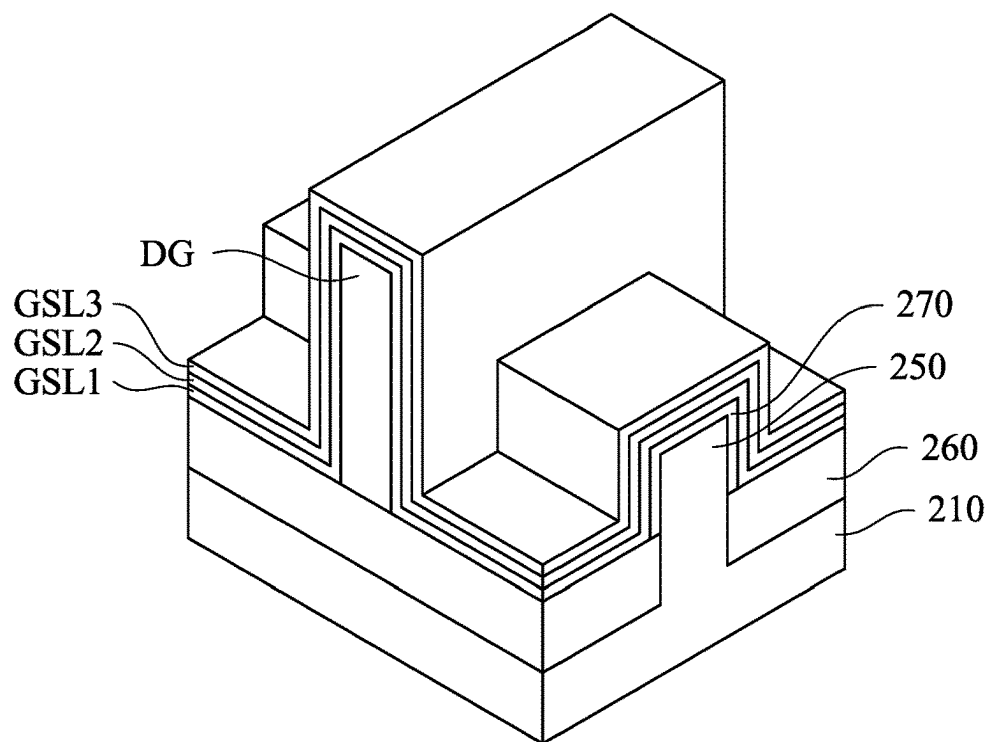


Fig. 10

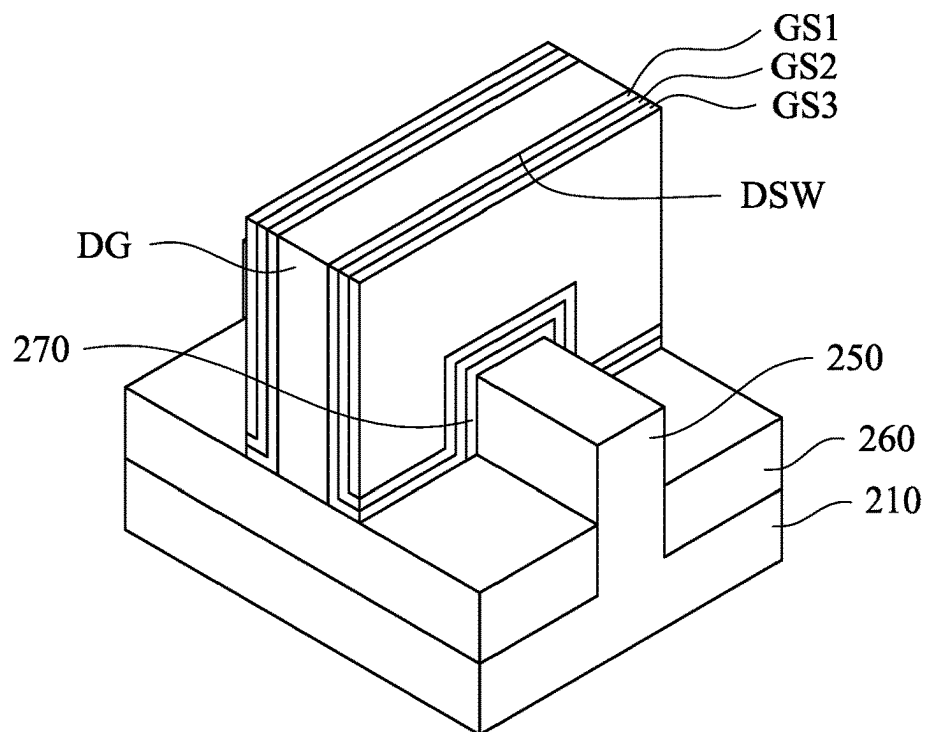


Fig. 11

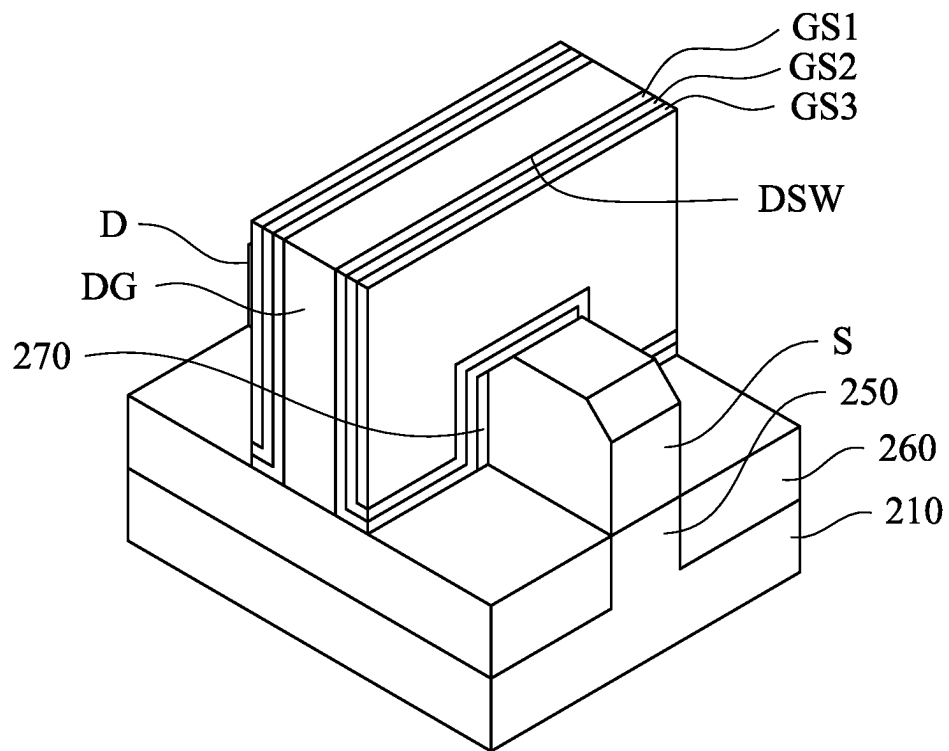


Fig. 12

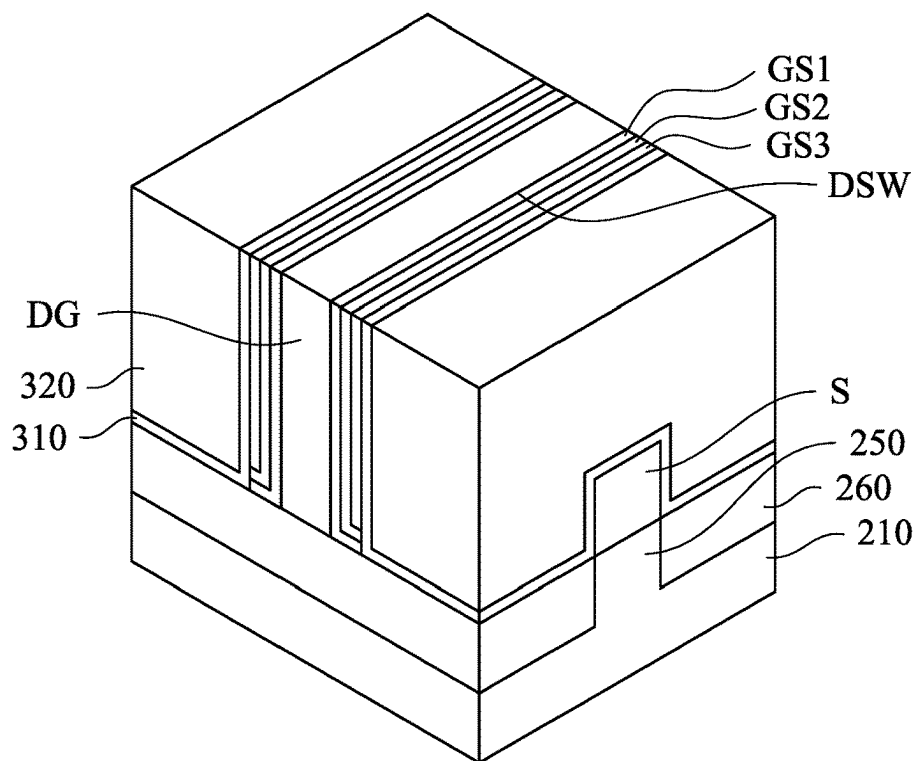


Fig. 13

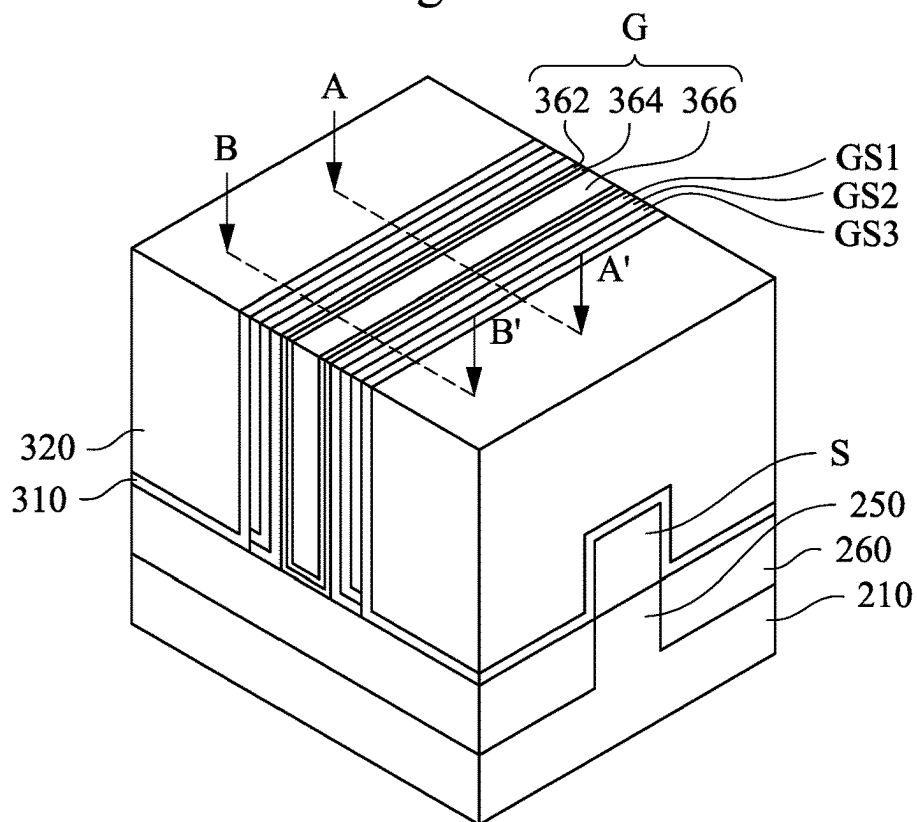


Fig. 14

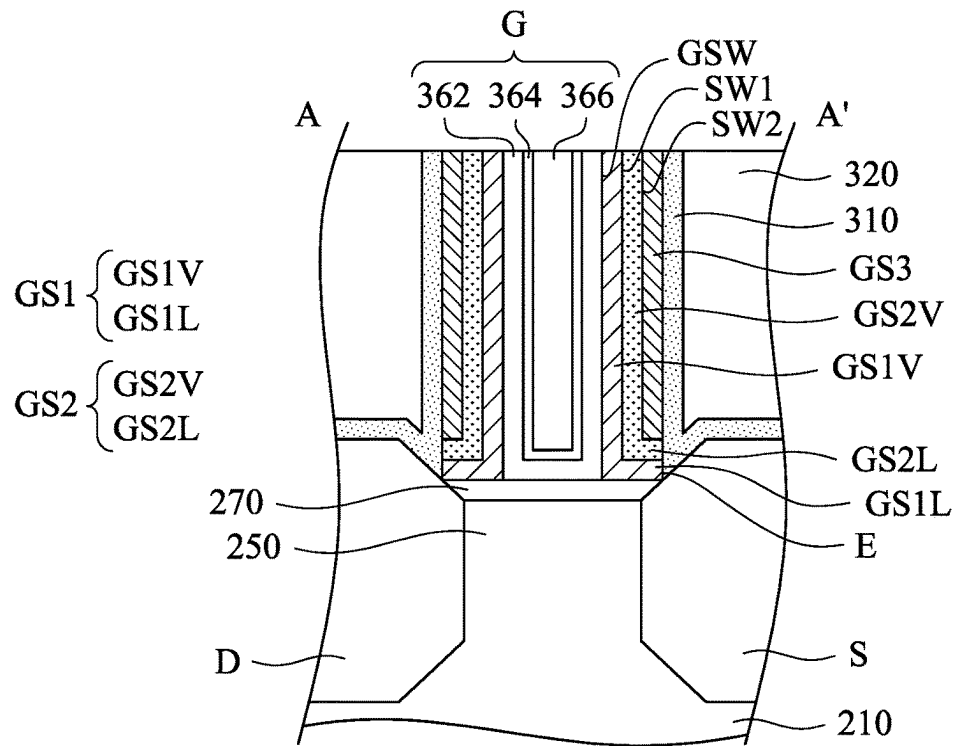


Fig. 15A

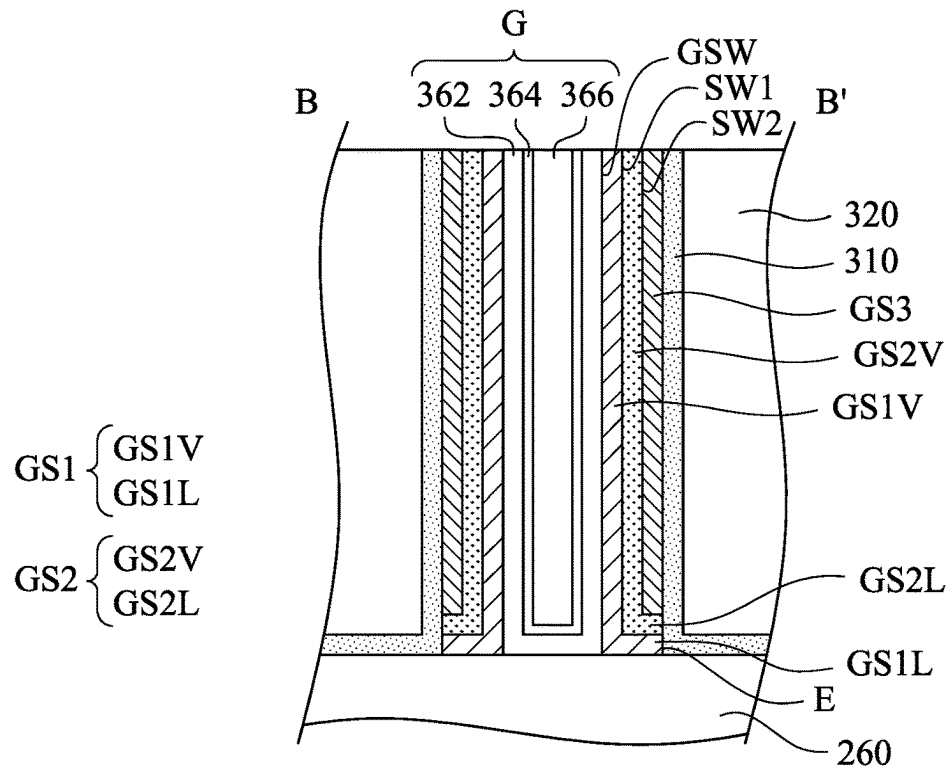


Fig. 15B

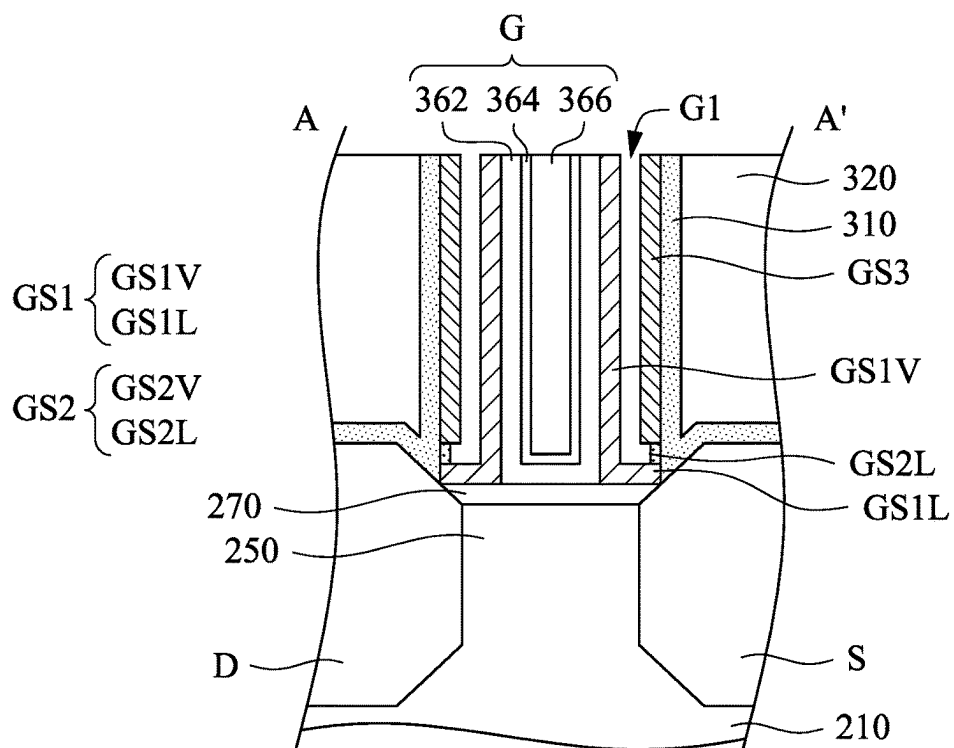


Fig. 16A

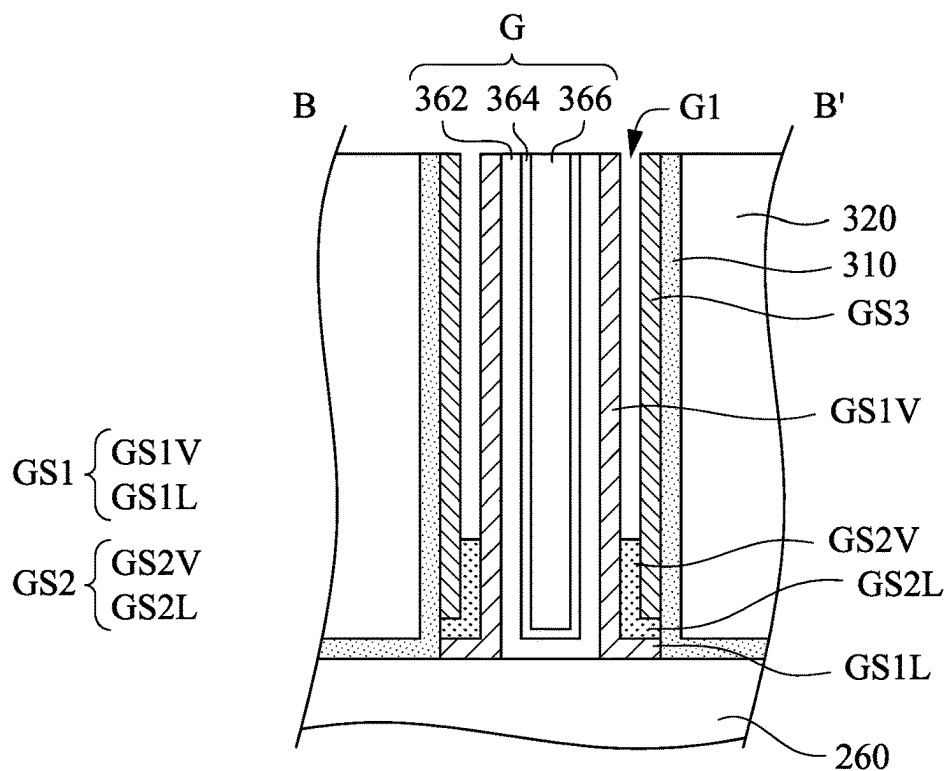


Fig. 16B

1700

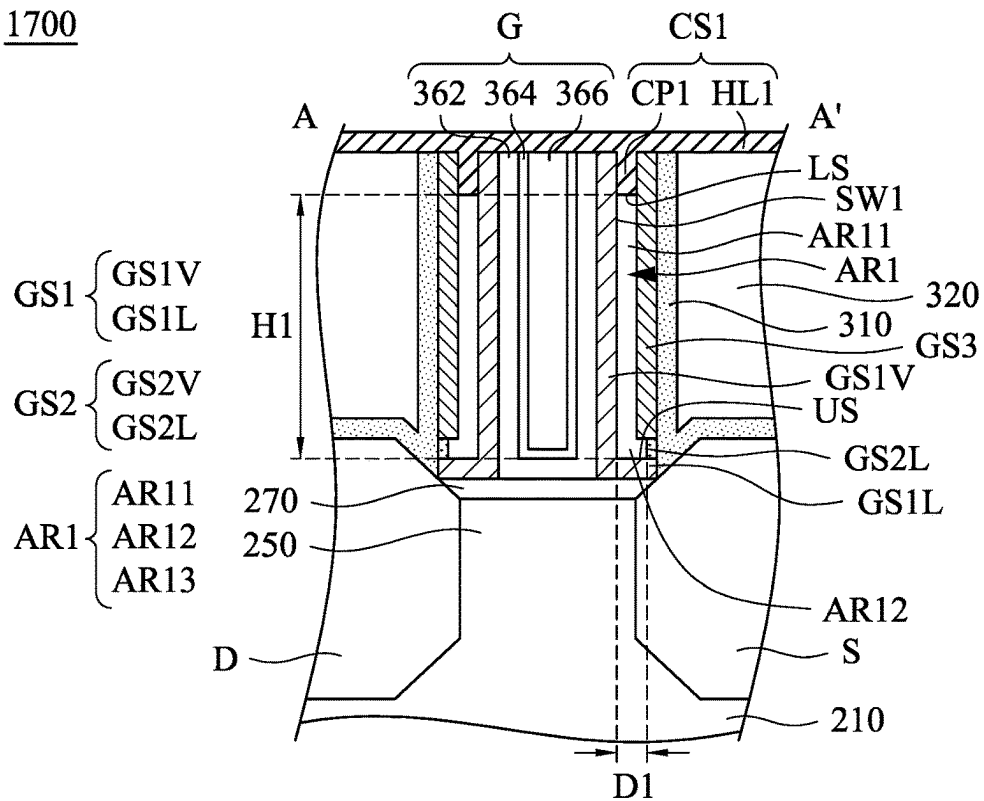


Fig. 17A

1700

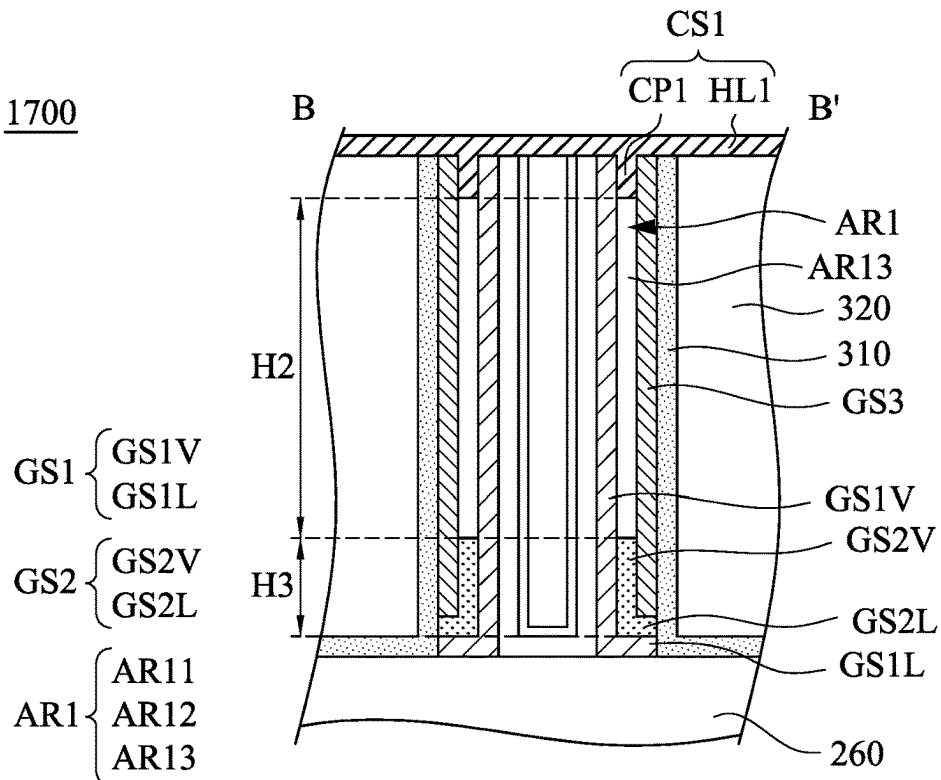


Fig. 17B

1800

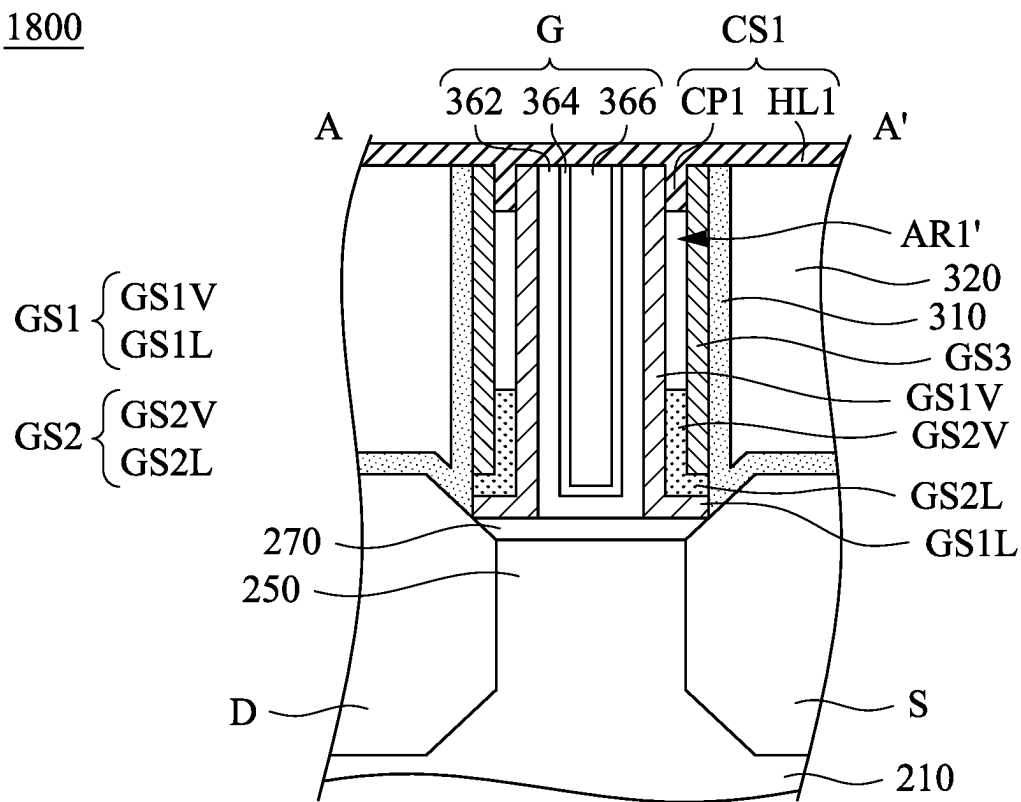


Fig. 18

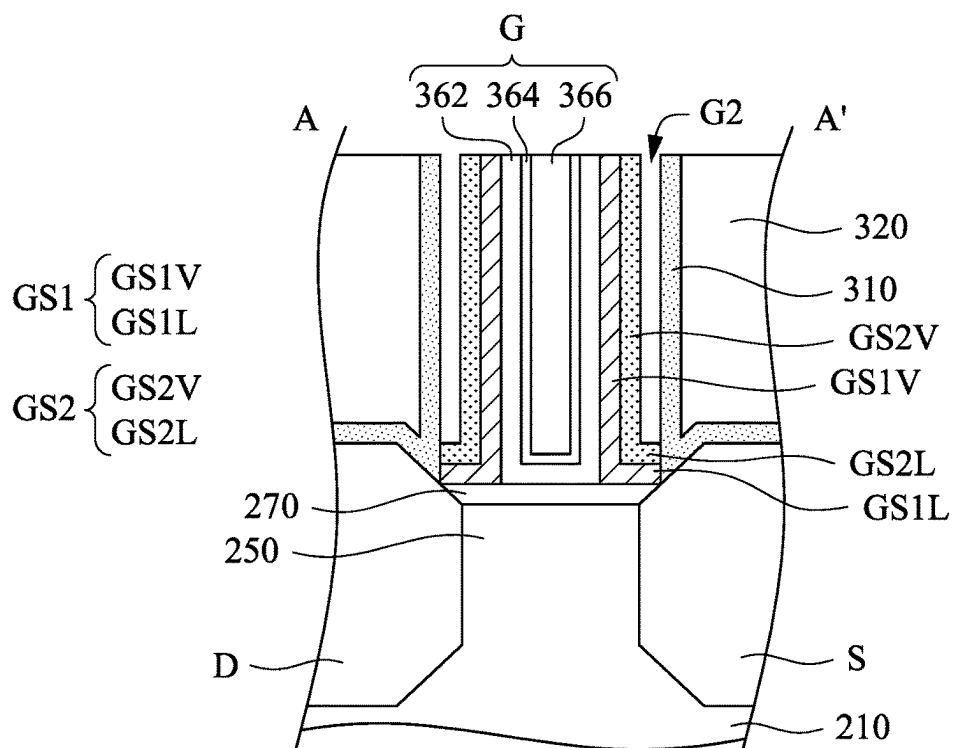


Fig. 19A

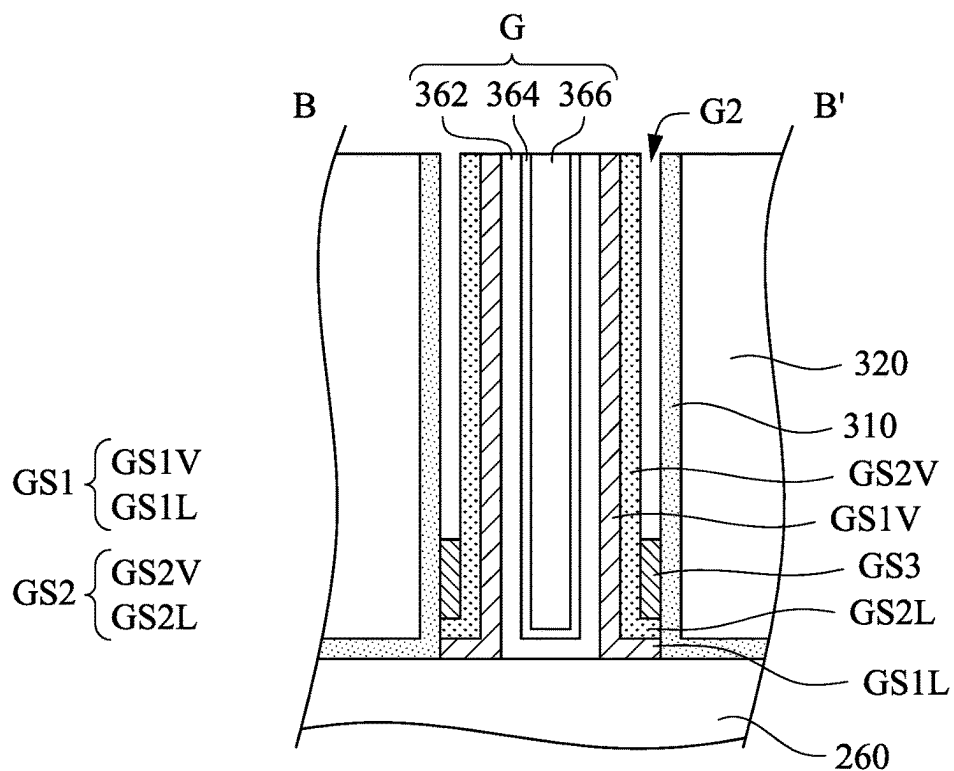


Fig. 19B

2000

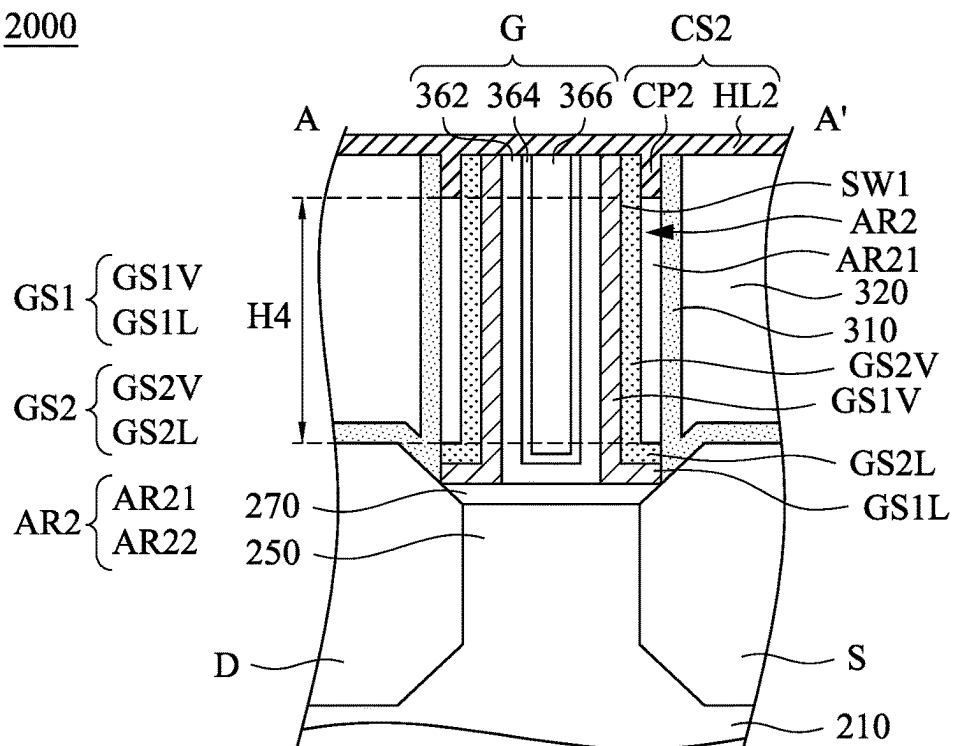


Fig. 20A

2000

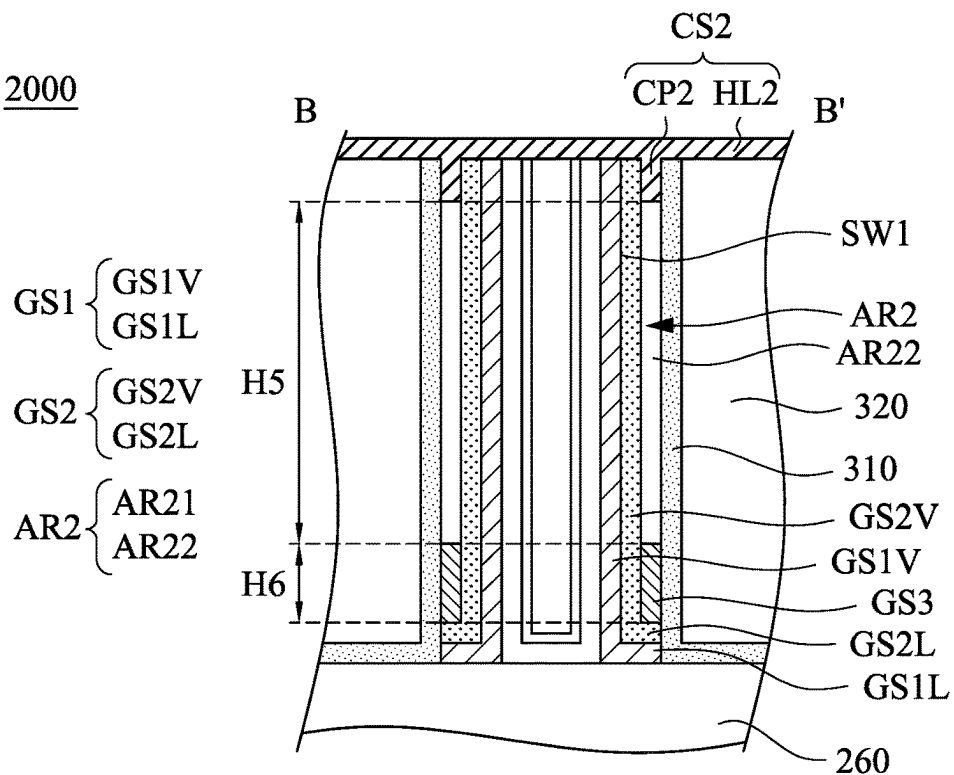


Fig. 20B

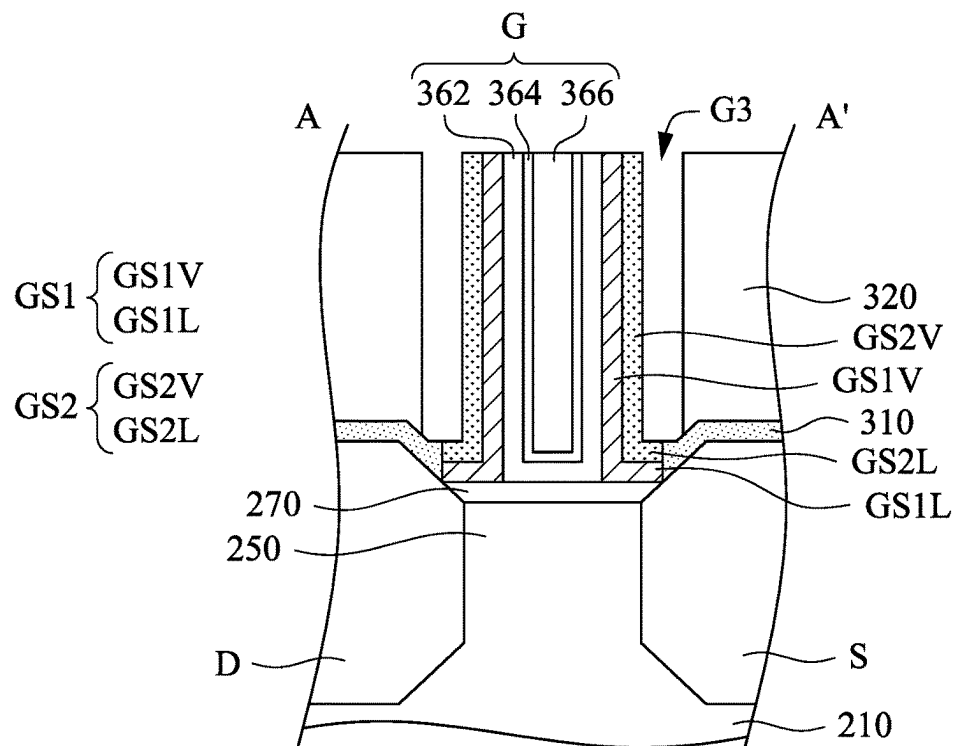


Fig. 22A

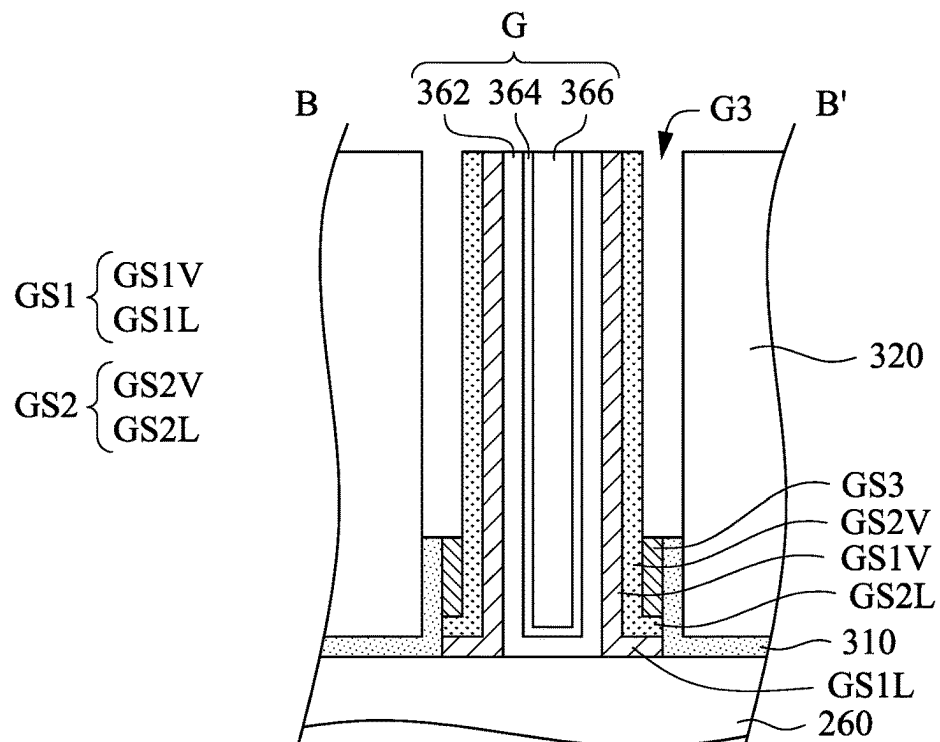


Fig. 22B

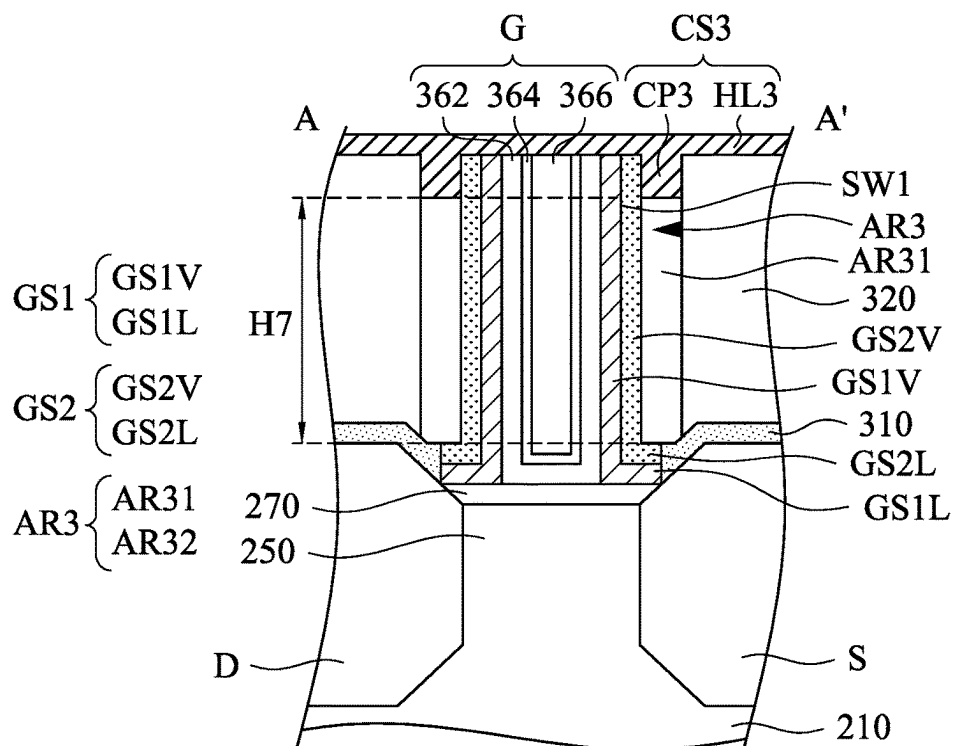


Fig. 23A

2300

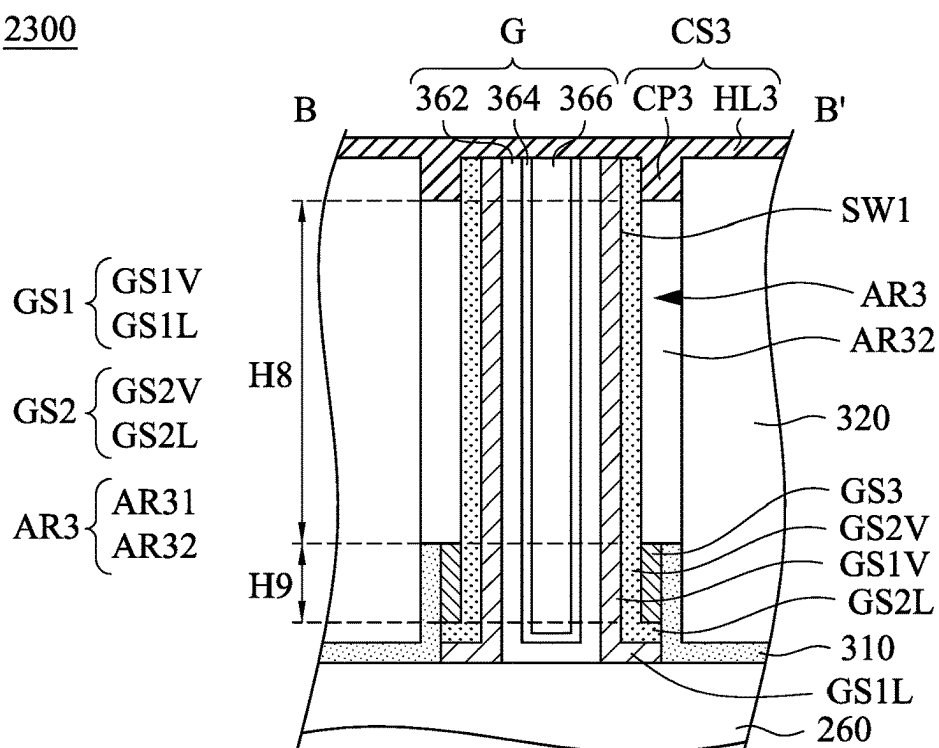


Fig. 23B

2400

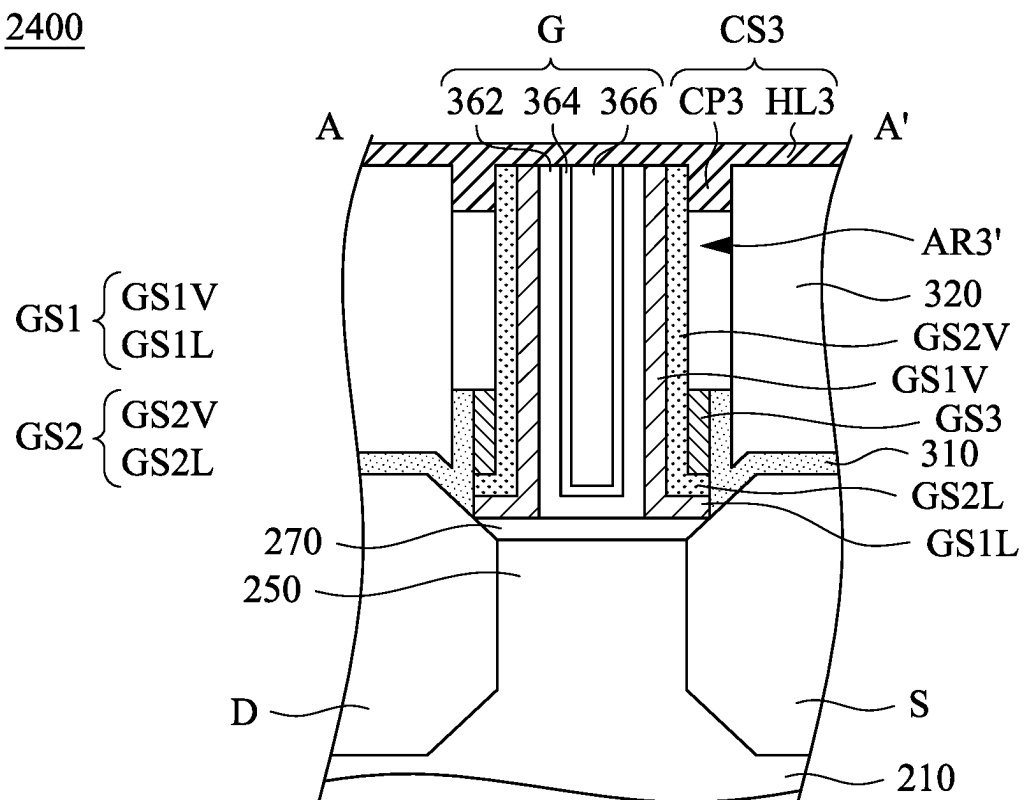


Fig. 24

1

SEMICONDUCTOR DEVICE

CROSS-REFERENCE TO RELATED APPLICATION

This application is continuation of U.S. application Ser. No. 17/129,253, filed Dec. 21, 2020, which is continuation of U.S. application Ser. No. 16/914,940, filed Jun. 29, 2020, now U.S. Pat. No. 10,872,965, issued Dec. 22, 2020, which is a divisional of U.S. application Ser. No. 16/047,038, filed Jul. 27, 2018, now U.S. Pat. No. 10,700,180, issued Jun. 30, 2020, all of which are incorporated herein by reference in their entirety.

BACKGROUND

As the semiconductor industry has strived for higher performance, higher device density, and lower costs, problems involving both fabrication and design have been encountered. One solution to these problems has been the development of a fin-like field effect transistor (FinFET). A FinFET includes a thin vertical 'fin' formed in a free standing manner over a major surface of a substrate. The source, drain, and channel regions are defined within this fin. The gate in the transistor crosses over the channel region of the fin. This configuration allows the gate to induce current flow in the channel from three sides. Thus, FinFET devices have the advantage of higher current flow and reduced short-channel effects.

The dimensions of FinFETs and other metal oxide semiconductor field effect transistors (MOSFETs) have been reduced as technological advances have been made in integrated circuit materials. For example, high-k metal gate (HKMG) processes have been applied to FinFETs.

BRIEF DESCRIPTION OF THE DRAWINGS

Aspects of the present disclosure are best understood from the following detailed description when read with the accompanying figures. It is noted that, in accordance with the standard practice in the industry, various features are not drawn to scale. In fact, the dimensions of the various features may be arbitrarily increased or reduced for clarity of discussion.

FIG. 1 is a flowchart of a method for manufacturing a semiconductor structure, in accordance with some embodiments of the instant disclosure.

FIGS. 2-14 are perspective views illustrating intermediate stages in the manufacturing of a semiconductor structure, in accordance with some embodiments of the instant disclosure.

FIG. 15A is a cross-sectional view along a line A-A' in FIG. 14.

FIG. 15B is a cross-sectional view along a line B-B' in FIG. 14.

FIGS. 16A, 16B, 17A, 17B, 18, 19A, 19B, 20A, 20B, 21, 22A, 22B, 23A, 23B, and 24 are cross-sectional views illustrating intermediate stages in the manufacturing of a semiconductor structure, in accordance with some embodiments of the instant disclosure.

DETAILED DESCRIPTION

The following disclosure provides many different embodiments, or examples, for implementing different features of the provided subject matter. Specific examples of components and arrangements are described below to sim-

2

plify the present disclosure. These are, of course, merely examples and are not intended to be limiting. For example, the formation of a first feature over or on a second feature in the description that follows may include embodiments in which the first and second features are formed in direct contact, and may also include embodiments in which additional features may be formed between the first and second features, such that the first and second features may not be in direct contact. In addition, the present disclosure may repeat reference numerals and/or letters in the various examples. This repetition is for the purpose of simplicity and clarity and does not in itself dictate a relationship between the various embodiments and/or configurations discussed.

Further, spatially relative terms, such as "beneath," "below," "lower," "above," "upper" and the like, may be used herein for ease of description to describe one element or feature's relationship to another element(s) or feature(s) as illustrated in the figures. The spatially relative terms are intended to encompass different orientations of the device in use or operation in addition to the orientation depicted in the figures. The apparatus may be otherwise oriented (rotated 90 degrees or at other orientations) and the spatially relative descriptors used herein may likewise be interpreted accordingly.

The fins may be patterned by any suitable method. For example, the fins may be patterned using one or more photolithography processes, including double-patterning or multi-patterning processes. Generally, double-patterning or multi-patterning processes combine photolithography and self-aligned processes, allowing patterns to be created that have, for example, pitches smaller than what is otherwise obtainable using a single, direct photolithography process. For example, in one embodiment, a sacrificial layer is formed over a substrate and patterned using a photolithography process. Spacers are formed alongside the patterned sacrificial layer using a self-aligned process. The sacrificial layer is then removed, and the remaining spacers may then be used to pattern the fins.

The instant disclosure provides a method for manufacturing a semiconductor structure. FIG. 1 is a flowchart of a method 100 for manufacturing a semiconductor structure, in accordance with some embodiments of the instant disclosure. Operation 101 of the method is forming a semiconductor substrate having a fin. The method continues with operation 103 in which a dummy gate structure is formed to cross over the fin. Operation 105, gate spacers are formed adjacent to the dummy gate structure. The method continues with operation 107 in which a source and a drain are formed adjacent to the gate spacers. The method continues with operation 109 in which a contact etch stop layer and an interlayer dielectric layer are formed adjacent to the gate spacers. The method continues with operation 111 in which the dummy gate structure is replaced with a gate structure. Operation 113, at least one portion of one of the gate spacers is removed. The method continues with operation 115 in which a contact stop layer is formed on the gate structure, the gate spacers, and the interlayer dielectric layer to form an air gap. It is understood that FIG. 1 has been simplified for a good understanding of the concepts of the instant disclosure. Accordingly, it should be noted that additional processes may be provided before, during, and after the methods of FIG. 1, and that some other processes may only be briefly described herein.

FIGS. 2-14 are perspective views illustrating intermediate stages in the manufacturing of a semiconductor structure, in accordance with some embodiments of the instant disclosure.

3

In the operation **101** of FIG. **1**, a semiconductor substrate having a fin is formed. Please refer to FIGS. **2-6**. As shown in FIG. **2**, a semiconductor substrate **210** is illustrated. In some embodiments, the semiconductor substrate **210** is a bulk semiconductor, a semiconductor-on-insulator (SOI) substrate, or the like. For example, the substrate **210** may be a wafer, such as a silicon wafer. Generally, an SOI substrate includes an insulator layer and a layer of a semiconductor material thereon. For example, the insulator layer may be a buried oxide (BOX) layer, a silicon oxide layer, or the like. The insulator layer is provided on a substrate, a silicon, or a glass substrate. Other substrates, such as a multi-layered or gradient substrate may also be used. In some embodiments, the semiconductor material of the semiconductor substrate **210** may include silicon; germanium; a compound semiconductor including silicon carbide, gallium arsenic, gallium phosphide, indium phosphide, indium arsenide, and/or indium antimonide; an alloy semiconductor including SiGe, GaAsP, AlInAs, AlGaAs, GaInAs, GaInP, and/or GaInAsP; or combinations thereof.

Still referring to FIG. **2**, a pad layer **220** is formed on the semiconductor substrate **210**, a mask layer **230** is formed on the substrate **210**, and a photo-sensitive layer **240** is formed on the mask layer **230**. The pad layer **220** may act as an adhesion layer between the substrate **210** and mask layer **230**, and may also act as an etch stop layer for etching the mask layer **230**. The mask layer **230** may be used as a hard mask during photolithography processes. In some embodiments, the pad layer **220** is formed using thermal oxidation process. For example, the pad layer **220** is a thin film including silicon oxide formed by a thermal oxidation process. In some embodiments, the mask layer **230** is formed using low-pressure chemical vapor deposition (LPCVD) or plasma enhanced chemical vapor deposition (PECVD). For example, the mask layer **230** includes silicon nitride.

As shown in FIG. **3**, portions of the mask layer **230** and the pad layer **220** not covered and protected by the photo-sensitive layer **240** are etched to expose the semiconductor substrate **210**, and the semiconductor substrate **210** is then etched to form a fin **250** of the semiconductor substrate **210**. Next, the photo-sensitive layer **240** may be removed. A cleaning step may be optionally performed to remove a native oxide of the semiconductor substrate **210**. The cleaning may be performed using diluted hydrofluoric (HF) acid, for example.

Please refer to FIG. **4**. An isolation dielectric layer **260** is formed to cover the mask layer **230**, the pad layer **220**, and the fin **250**. In some embodiments, the isolation dielectric layer **260** is formed using a high-density-plasma (HDP) chemical vapor deposition (CVD) process, a sub-atmospheric CVD (SACVD) process, a high aspect-ratio process (HARP), or spin-on-dielectric (SOD) process. For example, the isolation dielectric layer **260** includes silicon oxide, silicon nitride, silicon oxynitride, fluoride-doped silicate glass (FSG), or other low-K dielectric materials. Other processes and materials may be used.

As shown in FIG. **5**, a planarization process is performed to remove a portion of the isolation dielectric layer **260**, the mask layer **230**, and the pad layer **220** to expose the fin **250**. For example, the planarization process is a chemical mechanical polish (CMP) process. In embodiments, the planarization process is performed to remove a portion of the isolation dielectric layer **260** to expose the mask layer **230**, which may act as the CMP stop layer. Subsequently, the mask layer **230**, if formed of silicon nitride, may be removed by a wet process using hot H_3PO_4 , and the pad layer **220**, if

4

formed of silicon oxide, may be removed using diluted HF, according to some examples of the present disclosure.

Please refer to FIG. **6**. The isolation dielectric layer **260** is recessed, for example, through an etching operation, wherein diluted HF, SiCoNi (including HF and NH_3), or the like, may be used as the etchant. In some embodiments, the isolation dielectric layer **260** is referred to as shallow trench isolation (STI) structure. After recessing the isolation dielectric layer **260**, a top surface of the fin **250** is higher than a top surface of the isolation dielectric layer **260**. Therefore, an upper portion of the fin **250** protrudes above the isolation dielectric layer **260**, and a lower portion of the fin **250** is embedded in the isolation dielectric layer **260**.

In the operation **103** of FIG. **1**, a dummy gate structure is formed to cross over the fin. Reference is made to FIGS. **7-9**. As shown in FIG. **7**, a gate oxide layer **270** is formed to wrap the fin **250**, and portions of the isolation dielectric layer **260** are not covered by the gate oxide layer **270**. In some embodiments, the gate oxide layer **270** is formed using a deposition processes, such as chemical vapor deposition (CVD), physical vapor deposition (PVD), atomic layer deposition (ALD), plasma enhanced CVD (PECVD) or other suitable techniques. In some embodiments, the gate oxide layer **270** is made of high-k dielectric materials, such as metal oxides, transition metal-oxides, or the like. Examples of the high-k dielectric material include, but are not limited to, hafnium oxide (HfO_2), hafnium silicon oxide (HfSiO), hafnium tantalum oxide (HfTaO), hafnium titanium oxide (HfTiO), hafnium zirconium oxide (HfZrO), zirconium oxide (ZrO_2), zirconium silicon oxide (ZrSiO_4), lanthanum oxide (La_2O_3), titanium oxide (TiO_2), tantalum pentoxide (Ta_2O_5), strontium titanium oxide (SrTiO_3), aluminum oxide (Al_2O_3), hafnium dioxide-alumina ($\text{HfO}_2\text{—Al}_2\text{O}_3$) alloy, scandium oxide (Sc_2O_3), barium strontium titanium oxide ($\text{BaO}_6\text{SrTi}_2$), yttrium oxide (Y_2O_3), a combination thereof, or other suitable dielectric materials. The gate oxide layer **270** may include various dielectric materials, either individually or in combination.

Please refer to FIG. **8**. After the gate oxide layer **270** is formed, a dummy gate electrode layer **280** is subsequently formed over the gate oxide layer **270**, and a mask layer **290** is formed on the dummy gate electrode layer **280**. In some embodiments, the dummy gate electrode layer **280** is deposited by CVD, PVD, sputter deposition, or other techniques suitable for depositing conductive materials. In some embodiments, the dummy gate electrode layer **280** includes polycrystalline-silicon (poly-Si), polycrystalline silicon-germanium (poly-SiGe), metallic nitrides, metallic silicides, metallic oxides, or metals. In some embodiments, the dummy gate electrode layer **280** includes a metal-containing material such as TiN, TaN, TaC, Co, Ru, Al, combinations thereof, or multi-layers thereof. The mask layer **290** may be hard masks for protecting the underlying dummy gate electrode layer **280** against subsequent etching process. The mask layer **290** may be formed by a series of operations including deposition, photolithography patterning, and etching processes. The photolithography patterning processes may include photoresist coating (e.g., spin-on coating), soft baking, mask aligning, exposure, post-exposure baking, developing the photoresist, rinsing, drying (e.g., hard baking), and/or other applicable processes. The etching processes may include dry etching, wet etching, and/or other etching methods (e.g., reactive ion etching).

The dummy gate electrode layer **280** is then etched, using the mask layer **290** as an etching mask, to form a dummy gate structure DG crossing over the fin **250** of the semiconductor substrate **210**, as shown in FIG. **9**. More specifically,

a portion of the fin **250** is wrapped by the dummy gate structure DG. The gate oxide layer **270** is disposed between the fin **250** and the dummy gate structure DG. In some embodiments, the dummy gate structure DG has a longitudinal axis substantially perpendicular to a longitudinal axis of the fin **250**. In some embodiments, the dummy gate structure DG may be later replaced with a replacement gate structure using a “gate-last” or replacement-gate process.

In the operation **105** of FIG. **1**, gate spacers are formed adjacent to the dummy gate structure. Attention is now invited to FIGS. **10-11**. In embodiments, as shown in FIG. **10**, a gate spacer layer GSL1 is blanket formed over the dummy gate structure DG, the fin **250**, and the isolation dielectric layer **260**, a gate spacer layer GSL2 is formed on the gate spacer GSL1, and a gate spacer layer GSL3 is formed on the gate spacer layer GSL2. In some embodiments, the gate spacer layer GSL1 is conformally formed on the dummy gate structure DG, the fin **250**, and the isolation dielectric layer **260**. The gate spacer layer GSL2 is conformally formed on the gate spacer layer GSL1. The gate spacer layer GSL3 is conformally formed on the gate spacer layer GSL2. For example, the gate spacer layer GSL1, the gate spacer layer GSL2, and the gate spacer layer GSL3 independently include silicon oxide, silicon nitride, silicon oxynitride, silicon carbide, silicon carbonitride, silicon oxycarbonitride, silicon oxycarbide, porous dielectric materials, hydrogen doped silicon oxycarbide (SiOC:H), low-k dielectric materials, or other suitable dielectric material. In some embodiments, the gate spacer layer GSL2 includes a material different from that of the gate spacer layer GSL1 and/or the gate spacer layer GSL3. In some embodiments, the gate spacer layer GSL2 has an etch resistance different from that of the gate spacer layer GSL1 and/or the gate spacer layer GSL3, with respect to an identical etchant. In some embodiments, the gate spacer layer GSL2 has an etch resistance lower than that of the gate spacer layer GSL1 and/or the gate spacer layer GSL3, with respect to an identical etchant. In some embodiments, the gate spacer layer GSL1, the gate spacer layer GSL2, and the gate spacer layer GSL3 respectively have a thickness ranged from about 5 Å to about 1000 Å.

Please refer to FIG. **11**. In some embodiments, the gate spacer layer GSL1, the gate spacer layer GSL2, the gate spacer layer GSL3, the gate oxide layer **270** are etched to expose a portion of the fin **250** and the isolation dielectric layer **260**, thereby forming a gate spacer GS1 adjacent to the dummy gate structure DG, a gate spacer GS2 adjacent to the gate spacer GS1, and a gate spacer GS3 adjacent to the gate spacer GS2. As such, the gate spacer GS1 is formed to cover a sidewall DSW of the dummy gate structure DG. The gate spacer GS2 is formed on the gate spacer GS1. The gate spacer GS3 is formed on the gate spacer GS2. In examples, the gate spacer GS1, the gate spacer GS2, and the gate spacer GS3 independently include silicon oxide, silicon nitride, silicon oxynitride, silicon carbide, silicon carbonitride, silicon oxycarbonitride, silicon oxycarbide, porous dielectric materials, hydrogen doped silicon oxycarbide (SiOC:H), low-k dielectric materials, or other suitable dielectric material. In some embodiments, the gate spacer GS2 includes a material different from that of the gate spacer GS1 and/or the gate spacer GS3. In yet some embodiments, the gate spacer GS2 has an etch resistance different from that of the gate spacer GS1 or the gate spacer GS3. In some embodiments, the gate spacer GS2 has an etch resistance lower than that of the gate spacer GS1 or the gate spacer GS3. In some embodiments, the gate spacer GS1, the gate

spacer GS2, and the gate spacer GS3 respectively have a thickness of from about 5 Å to about 1000 Å.

In the operation **107** of FIG. **1**, a source and a drain is formed adjacent to the gate spacers. Referring to FIG. **12**, a source S and a drain D are formed adjacent to the gate spacers GS1, GS2, GS3. In some embodiments, the source S and the drain D are formed by the steps described below. The exposed portions of the fin **250** are partially removed (or partially recessed) to form recesses. Subsequently, one or more epitaxy or epitaxial (epi) processes are performed to form the source S and the drain D. In examples, the source S and the drain D may include Si features, SiGe features, silicon phosphate (SiP) features, silicon carbide (SiC) features and/or other suitable features with a crystalline. For example, the source S and the drain D may include GaAs, GaP, GaN, InP, InAs, InSb, GaAsP, AlGaAs, AlInAs, AlGaAs, GaInAs, GaInP, GaInAsP, or a combination thereof.

In the operation **109** of FIG. **1**, a contact etch stop layer and an interlayer dielectric layer are formed adjacent to the gate spacers. Turning now to FIG. **13**, in some embodiments, a contact etch stop layer (CESL) **310** is formed adjacent to the gate spacer GS3. The interlayer dielectric layer (ILD) **320** is formed adjacent to the CESL **310**. More specifically, the CESL **310** is interposed between the gate spacer GS3 and the interlayer dielectric layer (ILD) **320**. In some embodiments, the CESL **310** and the ILD layer **320** are formed by the steps described below. A CESL material layer is blanket deposited covering the structure shown in FIG. **12**, and then an ILD material layer is blanket deposited covering the CESL. Afterwards, a CMP process may be performed to remove excessive portions of the ILD material layer and the CESL material layer to expose the dummy gate structure DG. In some embodiments, the CMP process may planarize the top surface of the ILD layer **320** with the top surfaces of the dummy gate structure DG. In example, the CESL **310** may include a dielectric material, such as SiN, SiON, SiCON, SiC, SiOC, SiC_xN_y, SiO_x, or a combination thereof.

In some embodiments, the CESL material layer may be deposited using plasma enhanced chemical vapor deposition (PECVD), sub atmospheric chemical vapor deposition (SACVD), low pressure chemical vapor deposition (LPCVD), atomic layer deposition (ALD), high-density plasma (HDP), plasma enhanced atomic layer deposition (PEALD), molecular layer deposition (MLD), or plasma impulse chemical vapor deposition (PICVD). In some embodiments, the CESL **310** has a thickness of from about 5 Å to about 500 Å.

In some embodiments, the ILD material layer may be formed by CVD, ALD, spin-on-glass (SOG) or other suitable techniques. In some embodiments, the ILD layer **320** includes a material different from that of the CESL **310**. For example, the ILD layer **320** may include silicon oxide, silicon nitride, silicon oxynitride, tetraethoxysilane (TEOS), phosphosilicate glass (PSG), borophosphosilicate glass (BPSG), low-k dielectric material, and/or other suitable dielectric materials. Examples of low-k dielectric materials include, but are not limited to, fluorinated silica glass (FSG), carbon doped silicon oxide, amorphous fluorinated carbon, parylene, bis-benzocyclobutenes (BCB), or polyimide.

In the operation **111** of FIG. **1**, the dummy gate structure is replaced with a gate structure. Attention is now invited to FIG. **14**. The dummy gate structure DG is replaced with a gate structure G crossing over the fin **250** of the semiconductor substrate **210**. The gate structure G includes a gate dielectric layer **362**, a barrier layer **364**, and a work function

conductor layer **366**. In some embodiments, the gate structure **G** is a high-k metal gate (HKMG), in which the gate dielectric layer **362** is made of a high-k dielectric material.

In some embodiments, the gate structure **G** may be formed by the steps described below. The dummy gate structure **DG** is removed to form a trench exposing the first gate spacer **GS1**. A layer of gate dielectric is conformally formed to cover the inner surface of the trench. In some embodiments, the layer of gate dielectric is formed using a deposition processes, such as CVD, PVD, ALD, plasma enhanced CVD (PECVD) or other suitable techniques. For example, the layer of gate dielectric is made of high-k dielectric materials, such as metal oxides, transition metal-oxides, or the like. Examples of the high-k dielectric material include, but are not limited to, hafnium oxide (HfO_2), hafnium silicon oxide (HfSiO), hafnium tantalum oxide (HfTaO), hafnium titanium oxide (HfTiO), hafnium zirconium oxide (HfZrO), zirconium oxide (ZrO_2), zirconium silicon oxide (ZrSiO_4), lanthanum oxide (La_2O_3), titanium oxide (TiO_2), tantalum pentoxide (Ta_2O_5), strontium titanium oxide (SrTiO_3), aluminum oxide (Al_2O_3), hafnium dioxide-alumina ($\text{HfO}_2\text{—Al}_2\text{O}_3$) alloy, scandium oxide (Sc_2O_3), barium strontium titanium oxide ($\text{BaO}_6\text{SrTi}_2$), yttrium oxide (Y_2O_3), a combination thereof, or other suitable dielectric materials. The layer of gate dielectric may include various dielectric materials, either individually or in combination.

Thereafter, in some embodiments, a layer of barrier material is conformally formed on the layer of gate dielectric. In some embodiments, the layer of barrier material is formed using ALD, CVD, LPCVD or MLD. For example, the barrier material may include TiN, TaN, AlN, SiN, TiC, TaC, AlC, SiC or a combination thereof. In some embodiments, the layer of barrier material may be omitted.

Thereafter, in some embodiments, a layer of work function conductor material is conformally formed on the barrier layer **364**. In some embodiments, the layer of work function conductor material includes W, Al, Cu, AlCu, Ti, TiAlN, TaC, TaCN, TaSiN, Mn, Zr, TiN, Ta, TaN, Co, Ni, or a combination thereof. In some embodiments, the layer of work function conductor material has a thickness of about 5 Å to about 500 Å. In some embodiments, the layer of work function conductor material includes a material different from that of the barrier layer **364**.

Thereafter, a CMP is carried out to polish the deposited layers of work function conductor material, barrier material, and the gate dielectric to obtain the structure depicted in FIG. **14**.

Attention is now invited to FIGS. **14**, **15A**, and **15B**. FIG. **15A** is a cross-sectional view along a line A-A' in FIG. **14**. FIG. **15B** is a cross-sectional view along a line B-B' in FIG. **14**. The gate structure **G** is disposed on the semiconductor substrate **210**. More specifically, the gate structure **G** has a part disposed on the fin **250** of the semiconductor substrate **210** as shown in FIG. **15A**, and a part disposed on the isolation dielectric layer **260** as shown in FIG. **15B**. The gate oxide layer **270** may be disposed between the gate structure **G** and the fin **250** as shown in FIG. **15A**. Referring to FIGS. **15A** and **15B** simultaneously, the gate spacer **GS1** abuts the sidewall **GSW** of the gate structure **G**. More specifically, the gate spacer **GS1** has a vertical portion **GS1V** on the sidewall **GSW** of the gate structure **G** and a lateral portion **GS1L** that extends from a bottom of the vertical portion **GS1V** away from the gate structure **G**. In some embodiments, the gate spacer **GS1** has an L-shape cross-section. The gate spacer **GS2** is in contact with the gate spacer **GS1**, and has a vertical portion **GS2V** on a sidewall **SW1** of the gate spacer **GS1** and

a lateral portion **GS2L** that extends from a bottom of the vertical portion **GS2V** away from the gate spacer **GS1**. In some embodiments, the gate spacer **GS2** has an L-shape cross-section. The gate spacer **GS3** is in contact with the gate spacer **GS2**. The gate spacer **GS3** abuts a sidewall **SW2** of the gate spacer **GS2** and is disposed on the lateral portion **GS2L** of the gate spacer **GS2**. In some embodiments, the lateral portion **GS1L** of the gate spacer **GS1** has an edge **E** aligned with the lateral portion **GS2L** of the gate spacer **GS2** and the gate spacer **GS3**. The interlayer dielectric layer **320** is neighboring to the gate spacer **GS1**, the gate spacer **GS2**, and the gate spacer **GS3**. The CESL **310** is disposed between the interlayer dielectric layer **320** and the gate spacers **GS1**, **GS2**, **GS3**. More specifically, the CESL **310** is disposed between the interlayer dielectric layer **320** and each of the lateral portion **GS1L** of the gate spacer **GS1**, and the lateral portion **GS2L** of the gate spacer **GS2**.

In operation **113** of FIG. **1**, at least one portion of one of the gate spacers is removed. Reference is made to FIGS. **16A-16B**. A portion of the gate spacer **GS2** is removed to form a gap **G1** between the gate spacer **GS1** and the gate spacer **GS3**. In other words, the gate spacer **GS2** is partially removed to form the gap **G1**. The gate spacer **GS2** may act as a sacrificial gate spacer. As shown in FIG. **16A**, a portion of the lateral portion **GS2L** of the gate spacer **GS2** remains under the gate spacer **GS3** and over the lateral portion **GS1L** of the gate spacer **GS1**. The remained lateral portion **GS2L** is under the gate spacer **GS3** and over the lateral portion **GS1L** of the gate spacer **GS1**. As shown in FIG. **16B**, a portion of the vertical portion **GS2V** of the gate spacer **GS2** over the isolation dielectric layer **260** remains between the gate spacer **GS1** and the gate spacer **GS3**. In some embodiments, the gate spacer **GS2** is removed by an etching process, such as dry etching. In the removing process, only the gate spacer **GS2** is removed. In some embodiments, the gate spacer **GS2** includes or consists of a material different from that of the gate spacer **GS1** and/or the gate spacer **GS3**. In some embodiments, the gate spacer **GS2** has an etch resistance different from that of the gate spacer **GS1** and/or the gate spacer **GS3**. In some embodiments, the gate spacer **GS2** has an etch resistance lower than that of the gate spacer **GS1** and/or the gate spacer **GS3**. In some other embodiments, the gate spacer **GS2** may be entirely removed (not shown in FIGS. **16A-16B**).

In the operation **115** of FIG. **1**, a contact stop layer is formed over the gate structure, the gate spacers, and the interlayer dielectric layer to form an air gap. Attention is now invited to FIGS. **17A-17B**. A contact stop layer **CS1** is formed over the gate structure **G**, the gate spacers **GS1**, **GS2**, **GS3**, the CESL **310**, and the interlayer dielectric layer **320** to form an air gap **AR1** present between the gate spacer **GS1**, the contact stop layer **CS1**, and the interlayer dielectric layer **320**. As such, a semiconductor structure **1700** is formed. The gate spacer **GS3** is disposed between the air gap **AR1** and the interlayer dielectric layer **320**. The CESL **310** is disposed between the gate spacer **GS3** and the interlayer dielectric layer **320**. The contact stop layer **CS1** includes a capping portion **CP1** that seals a top of the air gap **AR1**. The capping portion **CP1** extends toward the top of the air gap **AR1**. The air gap **AR1** contacts the gate spacers **GS1**, **GS3** and the capping portion **CP1** of the contact stop layer **CS1**, and optionally the remained gate spacer **GS2**. The gate spacers **GS1**, **GS3** (and optionally the remained gate spacer **GS2**) and the capping portion **CP1** of the contact stop layer **CS1** respectively constitute a portion of a boundary of the air gap **AR1**. In some embodiments, the contact stop layer **CS1** further includes a horizontal layer **HL1**, and the capping

portion CPI extends downwards from the horizontal layer HL1 and to a position between the gate spacer GS1 and the gate spacer GS3 (or between the gate spacer GS1 and the interlayer dielectric layer 320).

Referring to FIGS. 17A-17B simultaneously, the air gap AR1 has a first air gap portion AR11 and a second air gap portion AR12 communicated with the first air gap portion AR11 over the gate oxide layer 270 as shown in FIG. 17A. The air gap AR1 further has a third air gap portion AR13 over the isolation dielectric layer 260, as shown in FIG. 17B, communicated with the first air gap portion AR11 and the second air gap portion AR12. The first air gap portion AR11 is present between the vertical portion GS1V of the gate spacer GS1 and the gate spacer GS3. The second air gap portion AR12 is sandwiched between the gate spacer GS3 and the lateral portion GS1L of the gate spacer GS1. In some embodiments, a height H1 between a lower surface LS of the capping portion CP1 and an upper surface US of the lateral portion GS1V of the gate spacer GS1 ranges from about 10 Å to about 1000 Å. In some embodiments, a distance D1 between the remained lateral portion GS2L and the sidewall SW1 of the gate spacer GS1 ranges from about 2 Å to about 200 Å. In some embodiments, the third air gap portion AR13 has a height H2 ranges from about 10 Å to about 800 Å. In some embodiments, the remained vertical portion GS2V of the gate spacer GS2 shown in FIG. 17B has a height H3 ranged from about 2 Å to about 200 Å.

FIG. 18 is a cross-sectional view illustrating a semiconductor structure 1800, in accordance with yet some embodiments of the instant disclosure. The difference between the semiconductor structure 1800 shown in FIG. 18 and the semiconductor structure 1700 shown in FIG. 17A is that, after the operation 113, a portion of the vertical portion GS2V of the gate spacer GS2 of FIG. 18 remains between the gate spacer GS1 and the gate spacer GS3. Further, a portion of the lateral portion GS2L remains under the gate spacer GS3 and over the lateral portion GS1L of the gate spacer GS1. However, the gate spacer GS2 of FIG. 17A does not have the remained vertical portion GS2V between the gate spacer GS1 and the gate spacer GS3. As shown in FIG. 18, an air gap AR1' is disposed between the gate spacers GS1 and GS3 and between the gate spacer GS2 and the capping portion CP1 of the contact stop layer CS1, and contacts the gate spacers GS1, GS2, GS3 and the capping portion CP1 of the contact stop layer CS1.

Reference is made to FIGS. 19A-19B, which are cross-sectional views illustrating the structure after the operation 113 of FIG. 1 is performed, according to yet some embodiments. A portion of the gate spacer GS3 is removed to form a gap G2 between the gate spacer GS2 and the CESL 310. The gate spacer GS3 may act as a sacrificial gate spacer. As shown in FIG. 19A, the portion of the gate spacer GS3 over the gate oxide layer 270 is entirely removed. As shown in FIG. 19B, however, the portion of the gate spacer GS3 over the isolation dielectric layer 260 remains between the gate spacer GS2 and the CESL 310. In yet some other embodiments, the portion of the gate spacer GS3 over the isolation dielectric layer 260 may be entirely removed (not shown in FIG. 19B). In some embodiments, the gate spacer GS3 is removed by an etching process, such as dry etching. In the removing operation shown in FIGS. 19A and 19B, only the gate spacer GS3 is removed. In some embodiments, the gate spacer GS3 includes or consists of a material different from that of the gate spacer GS2 and/or the CESL 310. In some

embodiments, the gate spacer GS3 has an etch resistance lower than that of the gate spacer GS2 and/or the CESL 310.

Attention is now invited to FIGS. 20A-20B, that are cross-sectional views illustrating the structure after the operation 115 of FIG. 1 is performed, according to yet some embodiments. A contact stop layer CS2 is formed over the gate structure G, the gate spacers GS1, GS2, the remained gate spacer GS3, the CESL 310, and the interlayer dielectric layer 320 to form an air gap AR2 present between the gate spacer GS1, the contact stop layer CS2, and the interlayer dielectric layer 320. As such, a semiconductor structure 2000 is formed. The gate spacer GS2 is disposed between the gate spacer GS1 and the air gap AR2. The CESL 310 is disposed between the gate spacers GS1, GS2 and the interlayer dielectric layer 320. The contact stop layer CS2 includes a capping portion CP2 that seals a top of the air gap AR2. The capping portion CP2 extends toward the top of the air gap AR2. The air gap AR2 contacts the gate spacer GS2, the remained spacer GS3, the capping portion CP2 of the contact stop layer CS2, and the CESL 310. The gate spacer GS2, the remained spacer GS3, the capping portion CP2 of the contact stop layer CS2, and the CESL 310 respectively constitute a portion of a boundary of the air gap AR2. In some embodiments, the contact stop layer CS2 further includes a horizontal layer HL2, and the capping portion CP2 extends downwards from the horizontal layer HL2 and to a position between the gate spacer GS2 and the CESL 310 (or between the gate spacer GS1 and the interlayer dielectric layer 320).

Referring to FIGS. 20A-20B simultaneously, the air gap AR2 has a first air gap portion AR21 on the gate oxide layer 270 as shown in FIG. 20A and a second air gap portion AR22 communicated with the first air gap portion AR21 on the isolation dielectric layer 260 as shown in FIG. 20B. The first air gap portion AR21 is present between the vertical portion GS2V of the gate spacer GS2 and the CESL 310, and directly over the lateral portion GS2L of the gate spacer GS2. The lateral portion GS2L of the gate spacer GS2 is under the first air gap portion AR21 of the air gap AR2. In some embodiments, the first air gap portion AR21 has a height H4 ranges from about 10 Å to about 800 Å. As shown in FIG. 20B, remained portion of the gate spacer GS3 is under the second air gap portion AR22. In some embodiments, the second air gap portion AR22 has a height H5 ranged from about 10 Å to about 600 Å. In some embodiments, the remained gate spacer GS3 shown in FIG. 20B has a height H6 of from about 2 Å to about 150 Å.

FIG. 21 is a cross-sectional view illustrating a semiconductor structure 2100, in accordance with yet some embodiments of the instant disclosure. The difference between the semiconductor structure 2100 shown in FIG. 21 and the semiconductor structure 2000 shown in FIG. 20A is that, after the operation 113, a portion of the gate spacer GS3 of FIG. 21 over the gate oxide layer 270 remains between the gate spacer GS2 and the CESL 310 and over the lateral portion GS2L of the gate spacer GS2. However, FIG. 20A shows the portion of gate spacer GS3 over the gate oxide layer 270 is entirely removed. As shown in FIG. 21, the remained portion of the gate spacer GS3 is under an air gap AR2'. The air gap AR2' is located between the gate spacer GS2 and the CESL 310, and between the remained gate spacer GS3 and the capping portion CP1 of the contact stop layer CS1. The air gap AR2' contacts the gate spacer GS2, the remained gate spacer GS3, the CESL 310 and the capping portion CP2 of the contact stop layer CS2.

11

In yet some other embodiments, the method 100 may further include removing at least one portion of the contact etch stop layer. For example, the removal of the at least one portion of the contact etch stop layer may be performed before or after the operation 113. Alternatively, the removing the at least one portion of the contact etch stop layer and the operation 113 are performed concurrently. Reference is made to FIGS. 22A-22B. A portion of the gate spacer GS3 and a portion of the CESL 310 are removed to form a gap G3 between the gate spacer GS2 and the ILD layer 320. As shown in FIG. 22A, the gate spacer GS3 over the gate oxide layer 270 is entirely removed, and the CESL 310 is partially removed. As shown in FIG. 22B, the gate spacer GS3 and the CESL 310 on the isolation dielectric layer 260 are partially removed. A portion of the gate spacer GS3 remains over the lateral portion GS2L of the gate spacer GS2 and a portion of the CESL 310 remains next to the remained portion of the gate spacer GS3. In some embodiments, the gate spacer GS3 and the CESL 310 are removed by etching processes, such as dry etching processes. In some embodiments, the gate spacer GS3 includes or consists of a material different from that of the gate spacer GS2 and/or the CESL 310. In some embodiments, the gate spacer GS3 has an etch resistance different from that of the gate spacer GS2 and/or the CESL 310. In some embodiments, the gate spacer GS3 has an etch resistance lower than that of the gate spacer GS2 and/or the CESL 310. In some embodiments, the CESL 310 includes or consists of a material different from that of the interlayer dielectric layer 320. In some embodiments, the CESL 310 has an etch resistance different from that of the interlayer dielectric layer 320. In some embodiments, the CESL 310 has an etch resistance lower than that of the interlayer dielectric layer 320.

FIGS. 23A-23B are cross-sectional views illustrating the structure after the operation 115 of FIG. 1 is performed, according to yet some embodiments. A contact stop layer CS3 is formed over the gate structure G, the gate spacers GS1, GS2, the remained gate spacer GS3, the remained CESL 310, and the interlayer dielectric layer 320 to form an air gap AR3 present between the gate spacer GS1, the contact stop layer CS3, and the interlayer dielectric layer 320. As such, a semiconductor structure 2300 is formed. The gate spacer GS2 is disposed between the gate spacer GS1 and the air gap AR3. The remained CESL 310 is disposed between the gate spacers GS1, GS2 and the interlayer dielectric layer 320. The contact stop layer CS3 includes a capping portion CP3 that seals a top of the air gap AR3. The capping portion CP3 extends toward the top of the air gap AR3. The air gap AR3 contacts the gate spacer GS2, the remained gate spacer GS3, the capping portion CP3 of the contact stop layer CS3, the remained CESL 310, and the interlayer dielectric layer 320. The gate spacer GS2 and the remained gate spacer GS3, the capping portion CP3 of the contact stop layer CS3, the remained CESL 310, and the interlayer dielectric layer 320 respectively constitute a portion of a boundary of the air gap AR3. In some embodiments, the contact stop layer CS3 further includes a horizontal layer HL3, and the capping portion CP3 extends downwards from the horizontal layer HL3 and to a position between the gate spacer GS2 and the interlayer dielectric layer 320 (or between the gate spacer GS1 and the interlayer dielectric layer 320).

Please referring to FIGS. 23A-23B simultaneously, the air gap AR3 has a first air gap portion AR31 over the gate oxide layer 270 as shown in FIG. 23A and a second air gap portion AR32 over the isolation dielectric layer 260 that communicates with the first air gap portion AR31, as shown in FIG.

12

23B. The first air gap portion AR31 is present between the vertical portion GS2V of the gate spacer GS2 and the interlayer dielectric layer 320, and over the lateral portion GS2L of the gate spacer GS2 and the CESL 310. The lateral portion GS2L is under the air gap AR3. In some embodiments, the first air gap portion AR31 has a height H7 of from about 10 Å to about 600 Å. As shown in FIG. 23B, portions of the gate spacer GS3 and the CESL 310 are disposed under the second air gap portion AR32. In some embodiments, the second air gap portion AR32 has a height H8 of from about 10 Å to about 600 Å. In some embodiments, the remaining gate spacer GS3 shown in FIG. 23B has a height H9 of from about 2 Å to about 150 Å.

FIG. 24 is a cross-sectional view illustrating a semiconductor structure 2400, in accordance with some embodiments of the instant disclosure. The difference between the semiconductor structure 2400 shown in FIG. 24 and the semiconductor structure 2300 shown in FIG. 23A is that, after removing a portion of the gate spacer GS3 and a portion of the CESL 310, a portion of the gate spacer GS3 in FIG. 24 over the gate oxide layer 270 remains between the gate spacer GS2 and the CESL 310, and a portion of the CESL 310 in FIG. 24 over the gate oxide layer 270 remains between the gate spacer GS3 and the ILD layer 320. As shown in FIG. 24, the remained portion of the gate spacer GS3 and the remained portion of the CESL 310 are under an air gap AR3'. The air gap AR3' is disposed between the gate spacer GS2 and the ILD layer 320, and between the gate spacer GS3, the CESL 310, and the capping portion CP1 of the contact stop layer CS1. The air gap AR3' contacts the gate spacer GS2, remained gate spacer GS3, the remained CESL 310, the capping portion CP2 of the contact stop layer CS2, and the ILD layer 320.

For a semiconductor structure, such as fin effect transistor (FinFET), lowering the parasitic capacitance between the gates and the drains or between the gates and the sources is good for reducing the gate pitches. The instant disclosure provides the air gaps adjacent to the gate structures in various embodiments to lower the parasitic capacitance and to mitigate current leakage. Accordingly, the performance of the semiconductor structure is promoted.

According to some embodiments, a device includes a semiconductive fin having source and drain regions and a channel region between the source and drain regions, a gate feature over the channel region of the semiconductive fin, a first spacer around the gate feature, source and drain features respectively in the source and drain regions of the semiconductive fin, an interlayer dielectric layer around the first spacer, and a void between the first spacer and the interlayer dielectric layer and spaced apart from the gate feature and the source and drain features.

According to some embodiments, a device includes a semiconductive fin having source and drain regions and a channel region between the source and drain regions, a gate feature over the channel region of the semiconductive fin, a first spacer around the gate feature, a second spacer around the first spacer, a void between the first spacer and the second spacer, and source and drain features respectively in the source and drain regions of the semiconductive fin.

According to some embodiments, a device includes a semiconductive fin having source and drain regions and a channel region between the source and drain regions, a gate feature over the channel region of the semiconductive fin, a first spacer around the gate feature, source and drain features respectively in the source and drain regions of the semiconductive fin, an interlayer dielectric layer around the first spacer, a void between the first spacer and the interlayer

13

dielectric layer, and a contact stop layer. The contact stop layer has a first portion directly over the gate feature, a second portion directly over the first spacer, and a third portion directly over the void, in which a bottom surface of the third portion of the contact stop layer is lower than a top surface of the first spacer.

The foregoing outlines features of several embodiments so that those skilled in the art may better understand the aspects of the present disclosure. Those skilled in the art should appreciate that they may readily use the present disclosure as a basis for designing or modifying other processes and structures for carrying out the same purposes and/or achieving the same advantages of the embodiments introduced herein. Those skilled in the art should also realize that such equivalent constructions do not depart from the spirit and scope of the present disclosure, and that they may make various changes, substitutions, and alterations herein without departing from the spirit and scope of the present disclosure.

What is claimed is:

1. A device, comprising:

a transistor channel region;

a transistor gate over the transistor channel region; and

a multilayer gate spacer covering a sidewall of the transistor gate, the multilayer gate spacer comprising:

a first spacer layer on the sidewall of the transistor gate;

a second spacer layer on an outermost sidewall of the first spacer layer;

a third spacer layer on an outermost sidewall of the second spacer layer, wherein when viewed in a cross-sectional

view taken along a direction perpendicular to a longitudinal axis of the transistor gate, the third spacer layer

has a cross-sectional pattern having a different shape than cross-sectional patterns of the first and second

spacer layers, and the cross-sectional pattern of the

third spacer layer has a top lower than tops of the

cross-sectional patterns of the first and second spacer

layers, wherein a bottom of the cross-sectional pattern

of the third spacer layer has a horizontal dimension less than a vertical dimension of an outermost side of the

cross-sectional pattern of the third spacer layer;

an air-filled region atop the third spacer layer;

a source/drain region adjacent to the transistor channel

region; and

a contact etch stop layer over the source/drain region,

wherein the contact etch stop layer defines a vertical

boundary of the air-filled region, and the contact etch

stop layer has a top end level with or higher than a top

end of the first spacer layer.

2. The device of claim 1, wherein the cross-sectional

pattern of the third spacer layer is linear-shaped.

3. The device of claim 1, wherein one or more of the

cross-sectional patterns of the first and second spacer layers are L-shaped.

4. The device of claim 1, wherein the top of the cross-sectional pattern of the third spacer layer is a bottom boundary of an air gap.

5. A device, comprising:

a semiconductor pedestal over a substrate;

a gate structure across the semiconductor pedestal;

a multilayer spacer alongside the gate structure, the multilayer spacer comprising:

a first spacer layer;

a second spacer layer on an outermost sidewall of the second spacer layer; and

a third spacer layer on an outermost sidewall of the second spacer layer;

14

a capping layer over the multilayer spacer, the capping layer and the third spacer layer defining an air gap between a top of the third spacer layer and a bottom of the capping layer, wherein the bottom of the capping layer in the air gap vertically overlaps with the third spacer layer;

a source/drain region over the semiconductor pedestal; and

a contact etch stop layer over the source/drain region, wherein the contact etch stop layer defines a vertical boundary of the air gap, and the contact etch stop layer has a top end level with or higher than a top end of the first spacer layer.

6. The device of claim 5, wherein the air gap has a top boundary lower than a top end of first spacer layer.

7. The device of claim 5, wherein the air gap has a top boundary lower than a top end of the second spacer layer.

8. The device of claim 5, wherein the air gap has a height greater than a height of the third spacer layer.

9. The device of claim 5, wherein the top of the third spacer layer is lower than a top of the second spacer layer.

10. The device of claim 5, wherein the top of the third spacer layer is lower than a top of the first spacer layer.

11. A device, comprising:

a semiconductor fin extending from a substrate;

a gate structure extending across the semiconductor fin; and

a multilayer gate spacer abutting a sidewall of the gate structure, the multilayer gate spacer comprising:

a first spacer layer in contact with the sidewall of the gate structure;

a second spacer layer in contact with a sidewall of the first spacer layer oriented away from the gate structure;

a third spacer layer in contact with a sidewall of the second spacer layer oriented away from the second

spacer layer; and

an air-filled region atop the third spacer layer;

a source/drain region over the semiconductor fin; and

a contact etch stop layer over the source/drain region, wherein the contact etch stop layer defines a vertical

boundary of the air-filled region, and the contact etch

stop layer has a top end not lower than a top end of the first spacer layer.

12. The device of claim 11, further comprising:

a dielectric layer defining a top boundary of the air-filled region.

13. The device of claim 11, wherein the air-filled region has a top boundary lower than a top of the second spacer layer.

14. The device of claim 11, wherein the air-filled region has a top boundary lower than a top of the first spacer layer.

15. The device of claim 11, wherein the second spacer layer defines another vertical boundary of the air-filled region.

16. The device of claim 11, wherein the third spacer layer has a linear pattern in a cross-sectional view.

17. The device of claim 11, wherein the first spacer layer has an L-shaped pattern in a cross-sectional view.

18. The device of claim 11, wherein the second spacer layer has an L-shaped region in a cross-sectional view.

19. The device of claim 11, wherein the third spacer layer includes a material different from a material of the second

spacer layer and a material of the first spacer layer.

20. The device of claim 1, wherein the horizontal dimension of the bottom of the cross-sectional pattern of the third

15

spacer layer is the same as a horizontal dimension of the top of the cross-sectional pattern of the third spacer layer.

* * * * *

16