

(12) **United States Patent**
Zhao et al.

(10) **Patent No.:** **US 12,398,580 B2**
(45) **Date of Patent:** **Aug. 26, 2025**

(54) **MOUNTING ASSEMBLY FOR DOOR LOCK**

(71) Applicant: **SimpliSafe, Inc.**, Boston, MA (US)

(72) Inventors: **Yong Zhao**, Medford, MA (US); **Heath Allen Marvin**, Woburn, MA (US); **Chaim Carmiel Futran**, Cambridge, MA (US)

(73) Assignee: **SimpliSafe, Inc.**, Boston, MA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **18/401,884**

(22) Filed: **Jan. 2, 2024**

(65) **Prior Publication Data**

US 2024/0151064 A1 May 9, 2024

Related U.S. Application Data

(63) Continuation of application No. 16/539,214, filed on Aug. 13, 2019, now Pat. No. 11,933,092.

(51) **Int. Cl.**
E05B 9/08 (2006.01)

(52) **U.S. Cl.**
CPC **E05B 9/08** (2013.01); **E05Y 2900/132** (2013.01)

(58) **Field of Classification Search**

CPC ... H04L 5/0055; H04L 5/0053; H04L 5/0057; H04L 5/001; H04L 5/003; H04L 5/0091; H04L 5/0048; H04L 1/1812; H04L 1/08; H04L 1/1671; H04L 1/1861; H04L 1/20; H04W 72/044; H04W 72/20; H04W 72/23; H04W 72/0453; H04W 72/046; H04W 72/262; H04W 72/0626; H04W

72/0632; H04W 72/0639; H04W 72/06952; H04W 72/088; H04W 72/0457; H04W 72/21; H04W 72/231

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

3,397,905 A	8/1968	Banse
4,156,541 A	5/1979	Babb, Jr. et al.
4,845,490 A	7/1989	Ward et al.
5,369,913 A	12/1994	Brickner

(Continued)

FOREIGN PATENT DOCUMENTS

AU	2011224106 A1	4/2012
CN	104213759 A	12/2014

(Continued)

OTHER PUBLICATIONS

International Search Report and Written Opinion for International Application No. PCT/US2020/045880, mailed Dec. 8, 2020.

(Continued)

Primary Examiner — Kristina R Fulton


Assistant Examiner — Thomas L Neubauer

(74) *Attorney, Agent, or Firm* — Wolf, Greenfield & Sacks, P.C.

(57) **ABSTRACT**

A door lock that includes a latch adapted to be moved manually relative to a mounting bracket and lock body to attach the body to the mounting bracket. The latch may be movably mounted to the body, and arranged to capture a portion of the mounting bracket between the latch and the body. A detent may be used to hold the latch in the closed position relative to the body, and a spring may be adapted to bias the latch away from the body.

20 Claims, 15 Drawing Sheets

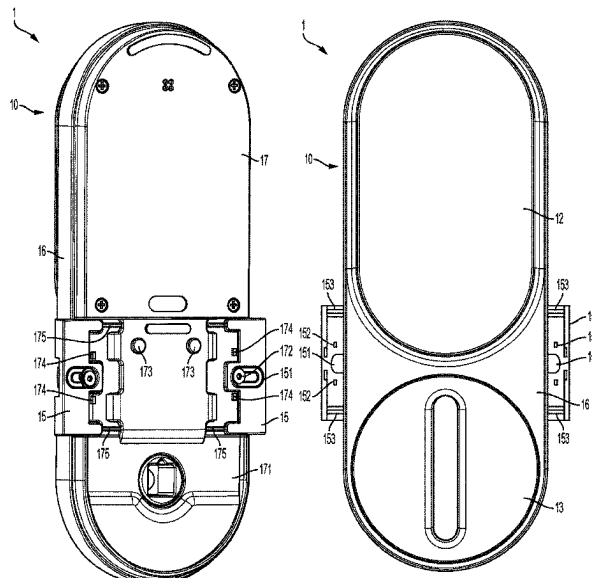

(56)	References Cited			2016/0186463 A1 *	6/2016	Roatis	E05C 3/12 70/266
	U.S. PATENT DOCUMENTS			2016/0253855 A1	9/2016	Lowder	
				2016/0340930 A1 *	11/2016	Schaeffer	E05B 15/02
	5,421,178 A	6/1995	Hamel et al.	2017/0191287 A1	7/2017	Mittleman et al.	
	5,460,863 A	10/1995	Kessel et al.	2017/0204637 A1	7/2017	Matyko	
	5,473,236 A	12/1995	Frolov	2017/0342742 A1	11/2017	Snodgrass	
	5,474,348 A	12/1995	Palmer et al.	2017/0342750 A1	11/2017	Hiramine	
	5,628,216 A	5/1997	Qureshi et al.	2018/0061163 A1	3/2018	Ku	
	5,646,605 A	7/1997	Leonaggeo et al.	2018/0108228 A1	4/2018	Lovejoy	
	5,712,626 A	1/1998	Andreou et al.	2018/0320412 A1	11/2018	Matosian	
	5,782,118 A	7/1998	Chamberlain et al.	2018/0320413 A1	11/2018	Wong	
	5,857,365 A	1/1999	Armstrong	2018/0340352 A1	11/2018	Compton	
	5,931,430 A	8/1999	Palmer	2019/0019365 A1	1/2019	Lee	
	6,076,870 A	6/2000	Frolov	2019/0211581 A1	7/2019	Roup et al.	
	6,330,817 B1	12/2001	Frolov	2019/0257116 A1	8/2019	Coster et al.	
	6,354,121 B1	3/2002	Frolov	2019/0309539 A1	10/2019	Mukundala et al.	
	6,442,986 B1	9/2002	Russell et al.	2019/0383057 A1	12/2019	Larson	
	D552,964 S	10/2007	Bogdanov et al.	2020/0002973 A1	1/2020	Hill	
	7,497,103 B1 *	3/2009	Misner	2020/0011088 A1	1/2020	Harris	E05B 63/14 70/120
	9,685,017 B2	6/2017	Johnson	2020/0011090 A1	1/2020	Ku et al.	
	11,933,092 B2	3/2024	Zhao et al.	2020/0032551 A1	1/2020	Holmes et al.	
	2001/0025517 A1	10/2001	Bates et al.	2020/0071955 A1	3/2020	Binek et al.	
	2002/0095958 A1	7/2002	Bates et al.	2020/0123808 A1	4/2020	Lovejoy et al.	
	2003/0179074 A1	9/2003	Palomaki et al.	2020/0149317 A1	5/2020	Seacat et al.	
	2004/0177663 A1	9/2004	Walsh, III et al.	2020/0149320 A1	5/2020	Pfunder	
	2005/0050928 A1	3/2005	Frolov et al.	2020/0157851 A1	5/2020	Fodstad et al.	
	2005/0167995 A1	8/2005	Wallis et al.	2020/0248484 A1	8/2020	Arlinghaus et al.	
	2005/0179267 A1	8/2005	Cote et al.	2020/0263449 A1	8/2020	Rai et al.	
	2006/0101878 A1	5/2006	Dickhans et al.	2020/0291678 A1	9/2020	Eickhoff et al.	
	2007/0157684 A1	7/2007	Bogdanov et al.	2021/0040775 A1	2/2021	Kusanale et al.	
	2007/0204663 A1	9/2007	Lee	2021/0047861 A1	2/2021	Zhao et al.	
	2007/0209413 A1	9/2007	Dobbs	2021/0054657 A1	2/2021	Luebeck et al.	
	2008/0142593 A1	6/2008	Walsh et al.	2021/0079691 A1	3/2021	Sundkvist et al.	
	2008/0169655 A1	7/2008	Gomez Gonzalez	2021/0148136 A1	5/2021	Kim et al.	
	2008/0236213 A1	10/2008	Blanch	2021/0174620 A1	6/2021	Kusanale et al.	
	2009/0027197 A1	1/2009	Frolov	2021/0214970 A1	7/2021	Yang et al.	
	2009/0277232 A1	11/2009	Walsh, III	2021/0348422 A1	11/2021	Kumar et al.	
	2009/0282877 A1	11/2009	Laverty et al.				
	2010/0089109 A1	4/2010	Bliding et al.	FOREIGN PATENT DOCUMENTS			
	2010/0257906 A1	10/2010	Sorensen et al.	CN	105545092 A	5/2016	
	2010/0294008 A1	11/2010	Bogdanov et al.	CN	105840003 A	8/2016	
	2011/0036131 A1	2/2011	Chiou et al.	CN	206110869 U	4/2017	
	2011/0067464 A1	3/2011	Chiou et al.	CN	206903396 U	1/2018	
	2011/0203331 A1	8/2011	Picard et al.	CN	107795195 A	3/2018	
	2012/0061974 A1	3/2012	Laverty et al.	CN	207620532 U	7/2018	
	2012/0212001 A1	8/2012	Benitez et al.	CN	108643715 A	10/2018	
	2012/0324967 A1	12/2012	Goren et al.	CN	207988685 U	10/2018	
	2013/0031940 A1	2/2013	Romero	CN	110242112 A	9/2019	
	2013/0039715 A1	2/2013	Daykin et al.	CN	110388138 A	10/2019	
	2013/0061644 A1	3/2013	Trent et al.	CN	112343426 A	2/2021	
	2013/0192316 A1	8/2013	McKibben et al.	CN	112396732 A	2/2021	
	2013/0318519 A1	11/2013	Coolidge	CN	213774876 U	7/2021	
	2013/0335222 A1	12/2013	Comerford et al.	CN	113250536 A	8/2021	
	2014/0109633 A1	4/2014	Romero	DE	41 02 892 A1	8/1992	
	2014/0109634 A1	4/2014	Almomani et al.	DE	10 2006 001 478 A1	7/2007	
	2014/0113563 A1	4/2014	Almomani et al.	DE	10 2011 081 789 A1	4/2012	
	2014/0118107 A1	5/2014	Almomani	DE	20 2013 103 126 U1	7/2013	
	2014/0157842 A1	6/2014	Almomani et al.	EP	0 505 887 A1	9/1992	
	2014/0159392 A1	6/2014	Tsai et al.	EP	2 136 019 A2	12/2009	
	2014/0165673 A1	6/2014	Tyner et al.	EP	2 208 840 A2	7/2010	
	2014/0250956 A1	9/2014	Chong	EP	2 746 497 A2	6/2014	
	2014/0260448 A1	9/2014	Beck et al.	EP	3 599 329 A1	1/2020	
	2014/0260449 A1	9/2014	Uyeda et al.	GB	2 568 730 A	5/2019	
	2014/0260451 A1	9/2014	Quach et al.	JP	2010-112002 A	5/2010	
	2014/0265359 A1	9/2014	Cheng et al.	JP	2011-017242 A	1/2011	
	2014/0292001 A1	10/2014	Nunez et al.	JP	2015-202767 A	11/2015	
	2015/0184425 A1	7/2015	Ellis et al.	KR	10-2005-0074820 A	7/2005	
	2015/0240528 A1	8/2015	Mani et al.	KR	10-2006-0039712 A	5/2006	
	2015/0240529 A1	8/2015	Dore Vasudevan et al.	KR	20-0468708 Y1	8/2013	
	2015/0257345 A1	9/2015	Carpenter et al.	KR	20-0484625 Y1	10/2017	
	2015/0281228 A1	10/2015	Rettig et al.	KR	10-2018-0083157 A	7/2018	
	2015/0361704 A1	12/2015	Larsen et al.	KR	20-0486963 Y1	7/2018	
	2016/0040452 A1	2/2016	Ku	KR	20-2020-0001831 U	8/2020	
	2016/0060904 A1	3/2016	Dore Vasudevan et al.	WO	WO 01/12931 A1	2/2001	
	2016/0115720 A1	4/2016	Wong et al.	WO	WO 2004/088069 A1	10/2004	
	2016/0145898 A1	5/2016	Ohl et al.	WO	WO 2007/020623 A2	2/2007	
	2016/0168888 A1	6/2016	Farias et al.	WO	WO 2007/065200 A1	6/2007	

(56)

References Cited

FOREIGN PATENT DOCUMENTS

WO	WO 2007/104499	A2	9/2007	
WO	WO 2012/015135	A1	2/2012	
WO	WO 2012/116037	A1	8/2012	
WO	WO-2017142472	A1 *	8/2017	 E05B 47/02
WO	WO 2019/018897	A1	1/2019	
WO	WO 2019/044962	A1	3/2019	
WO	WO 2019/071306	A1	4/2019	
WO	WO 2020/123573	A1	6/2020	
WO	WO 2020/123575	A1	6/2020	
WO	WO 2021/053435	A1	3/2021	
WO	WO 2021/092660	A1	5/2021	

OTHER PUBLICATIONS

International Preliminary Report on Patentability for International Application No. PCT/US2020/045880, mailed Feb. 24, 2022.
PCT/US2020/045880, Dec. 8, 2020, International Search Report and Written Opinion.
PCT/US2020/045880, Feb. 24, 2022, International Preliminary Report on Patentability.

* cited by examiner

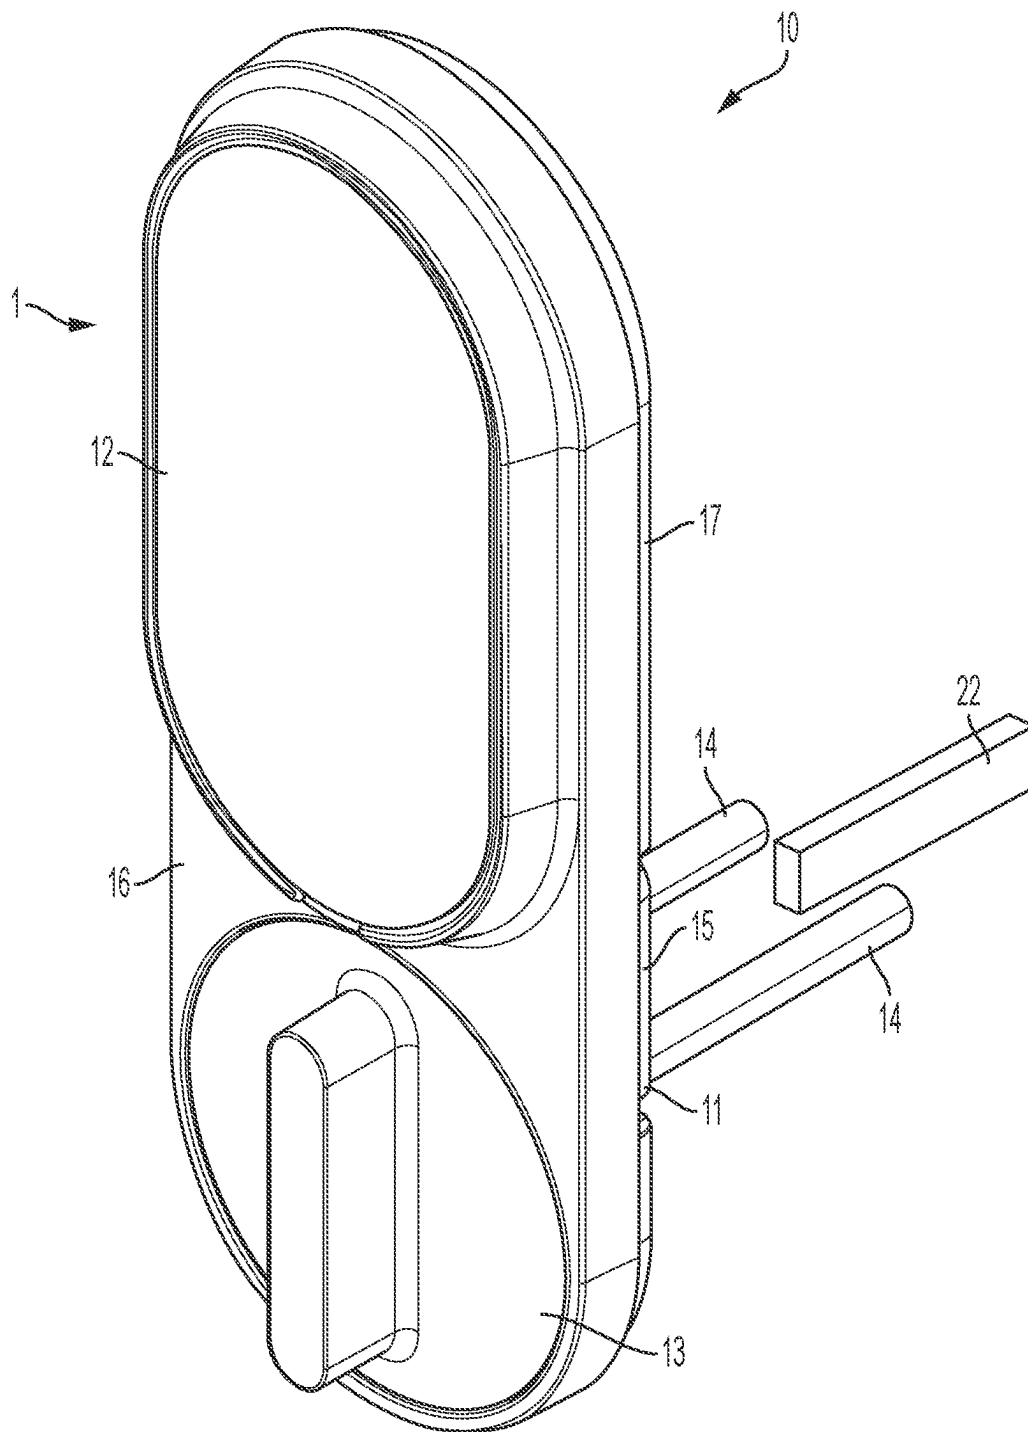


FIG. 1

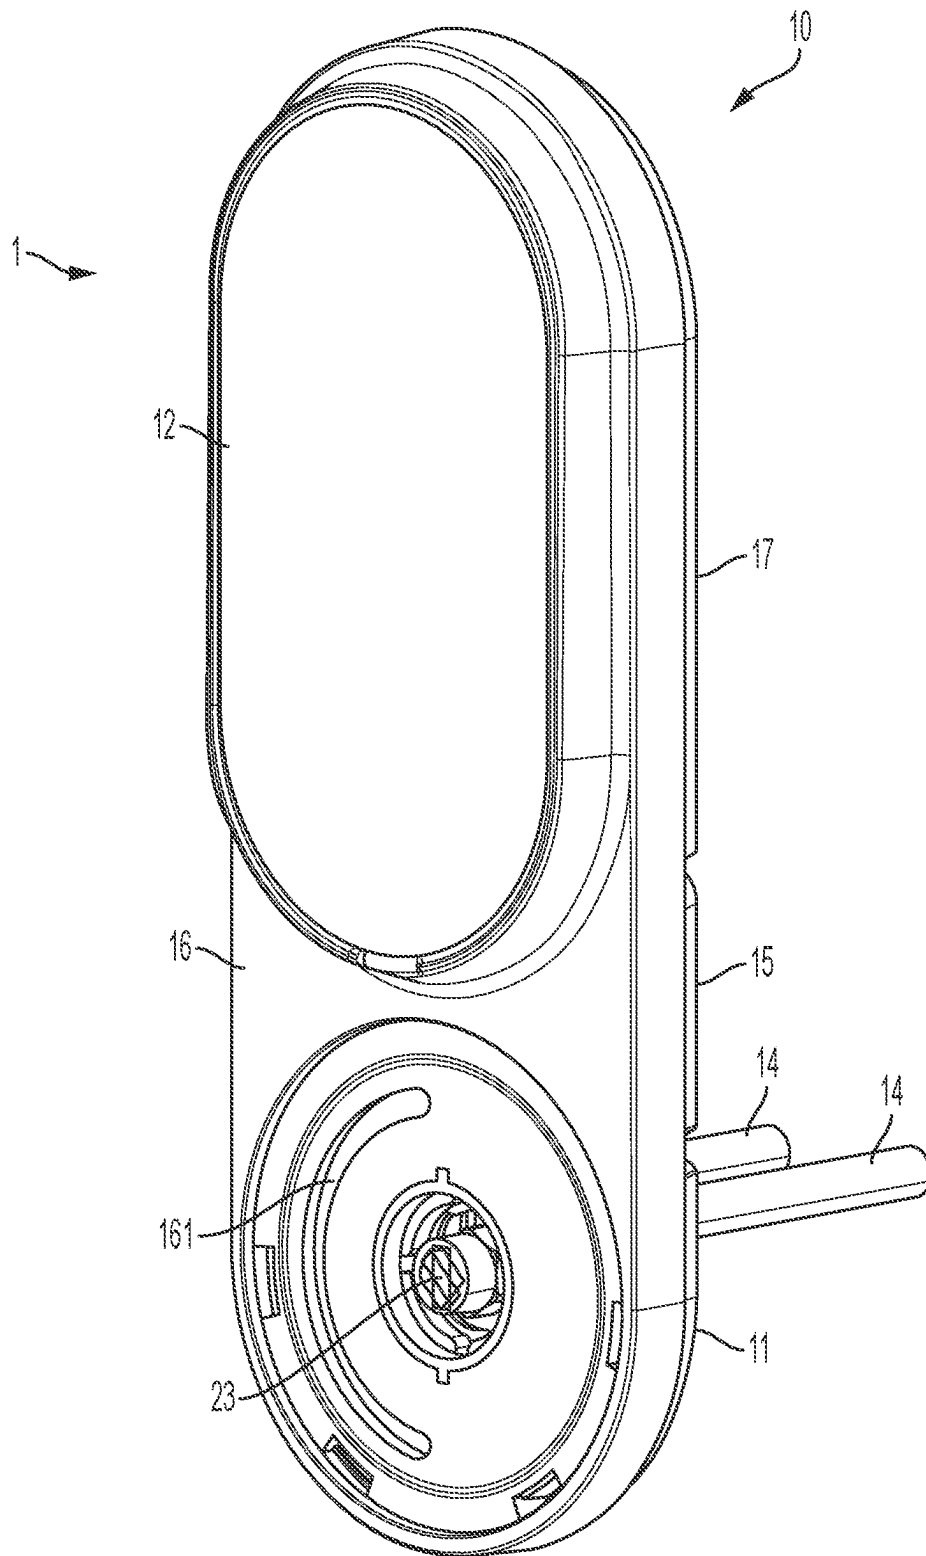


FIG. 2

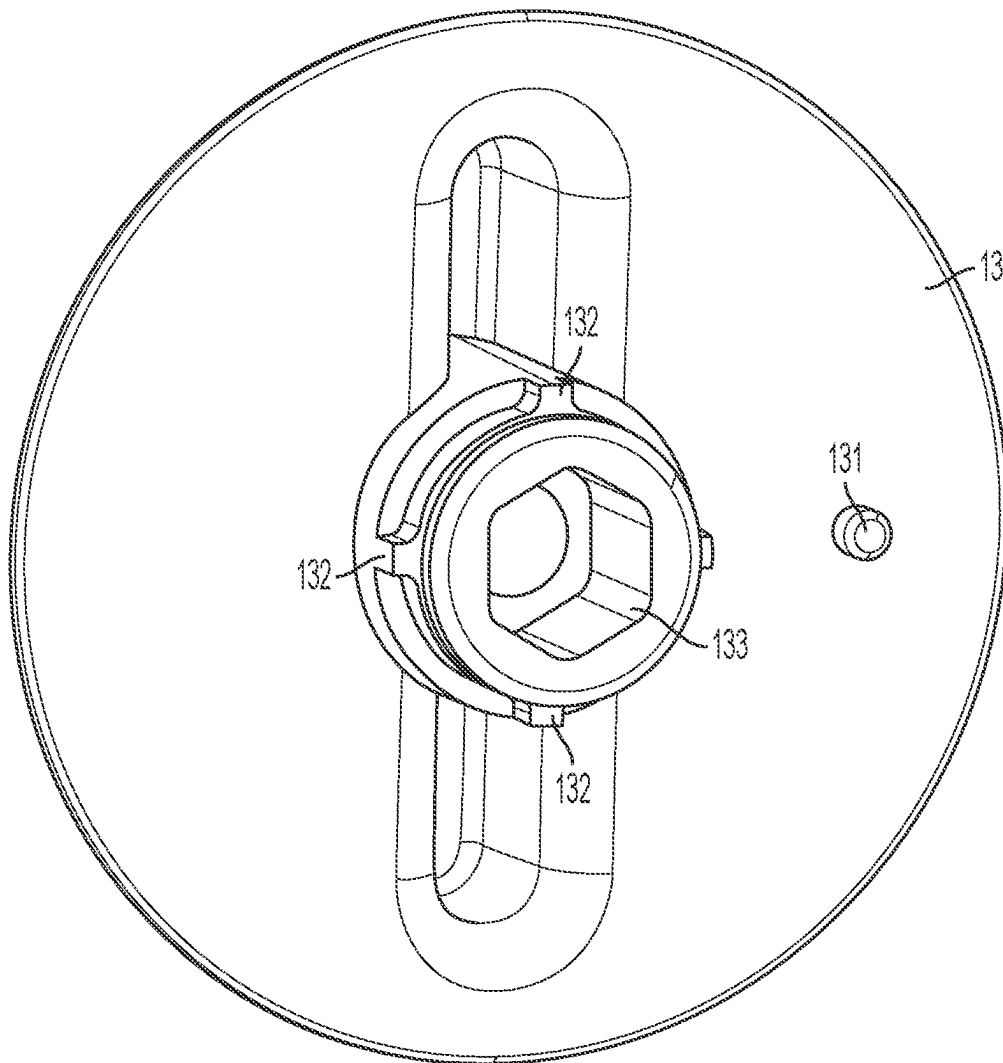


FIG. 3

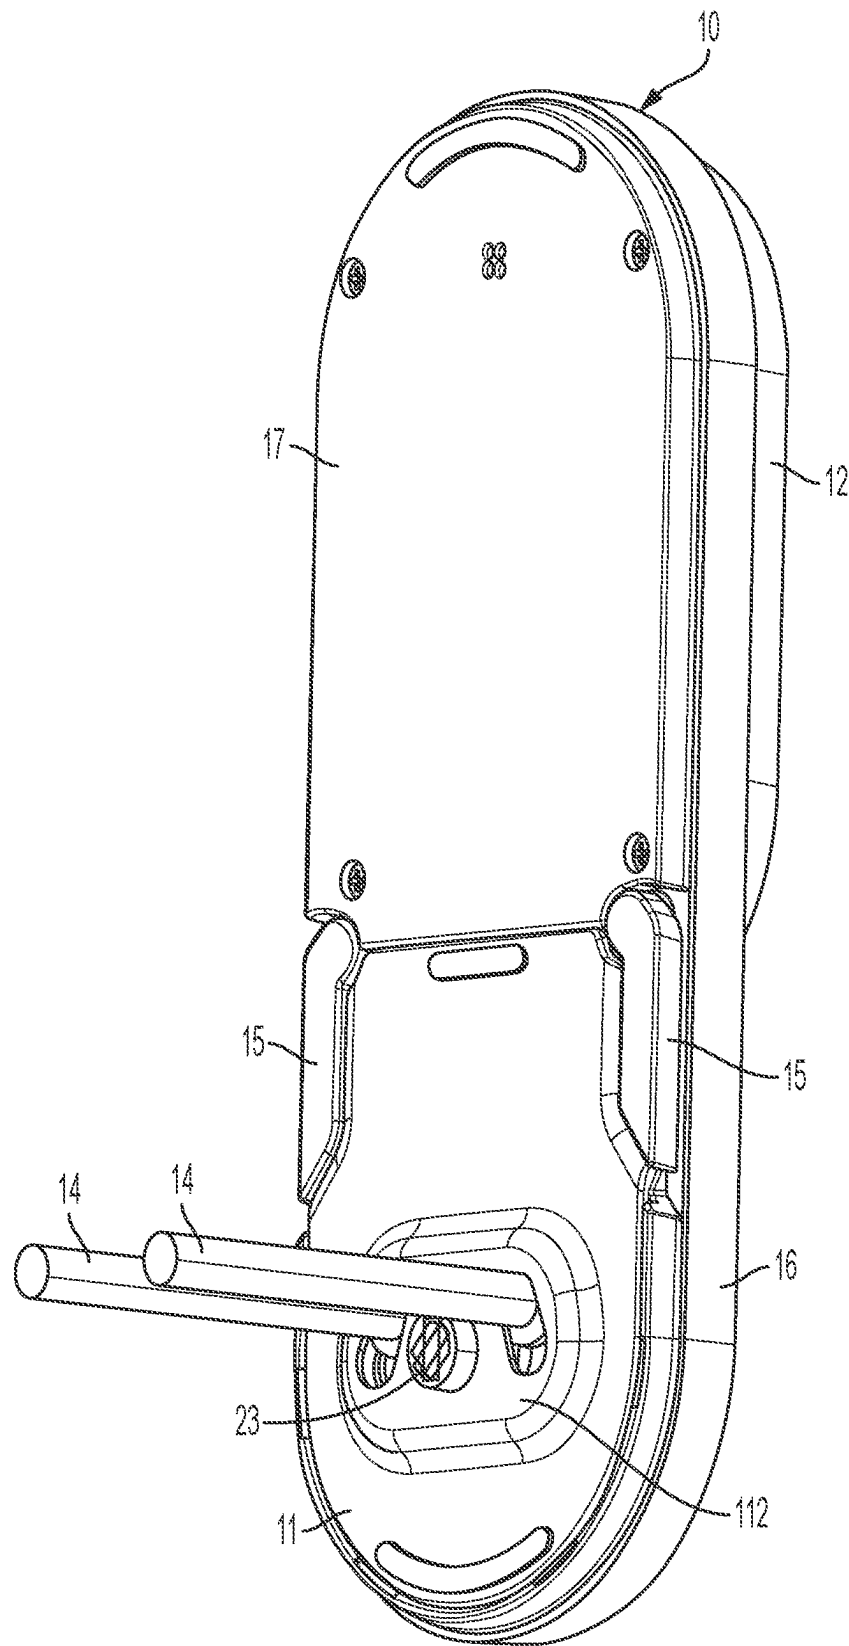


FIG. 4

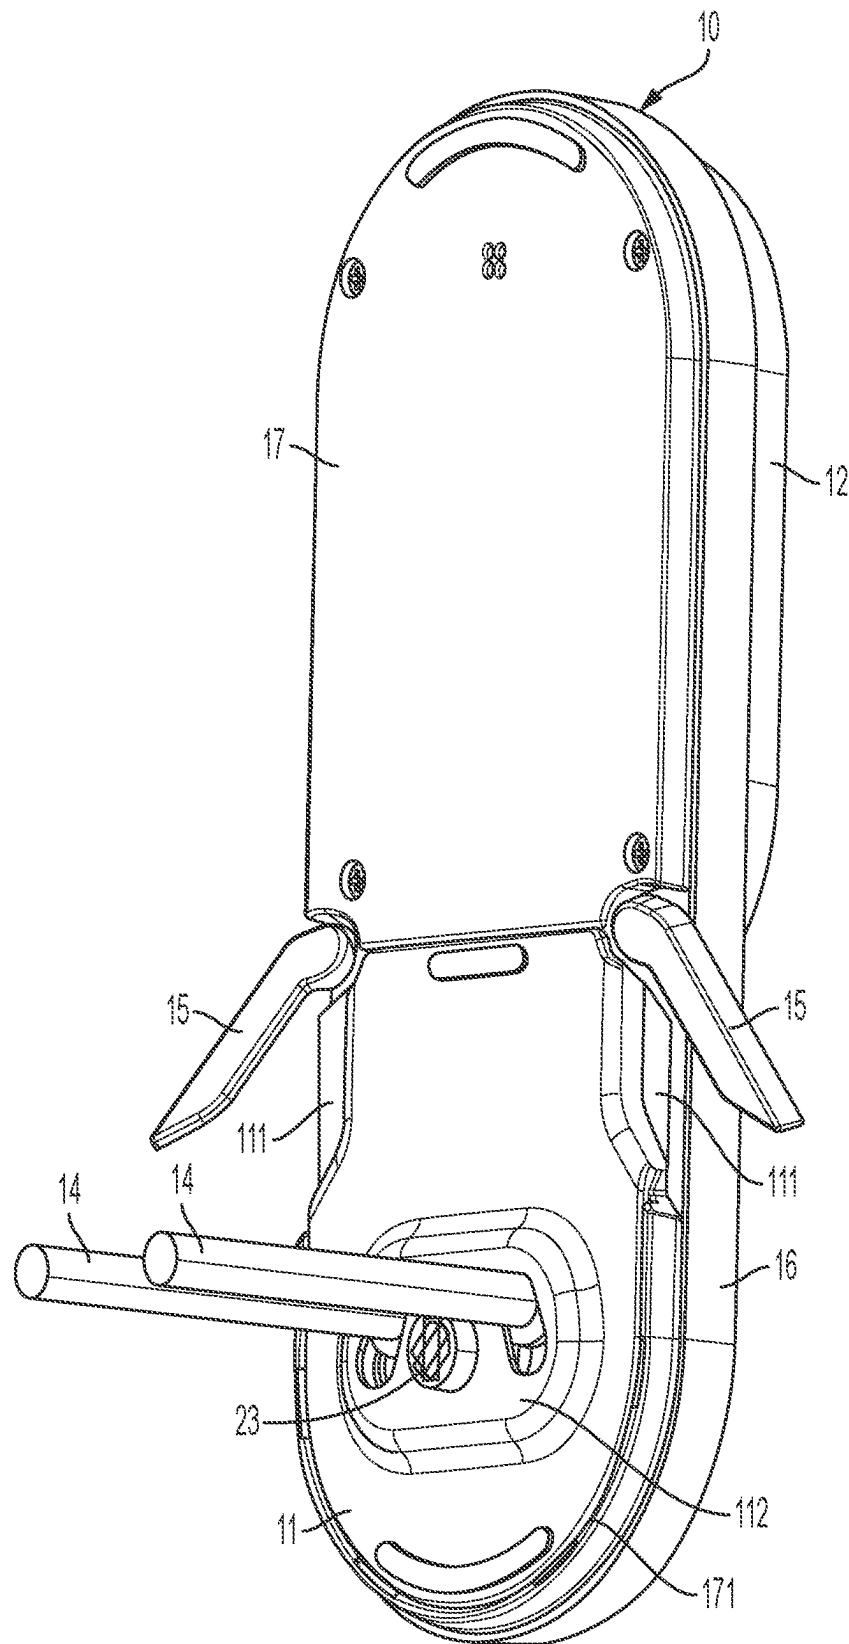


FIG. 5

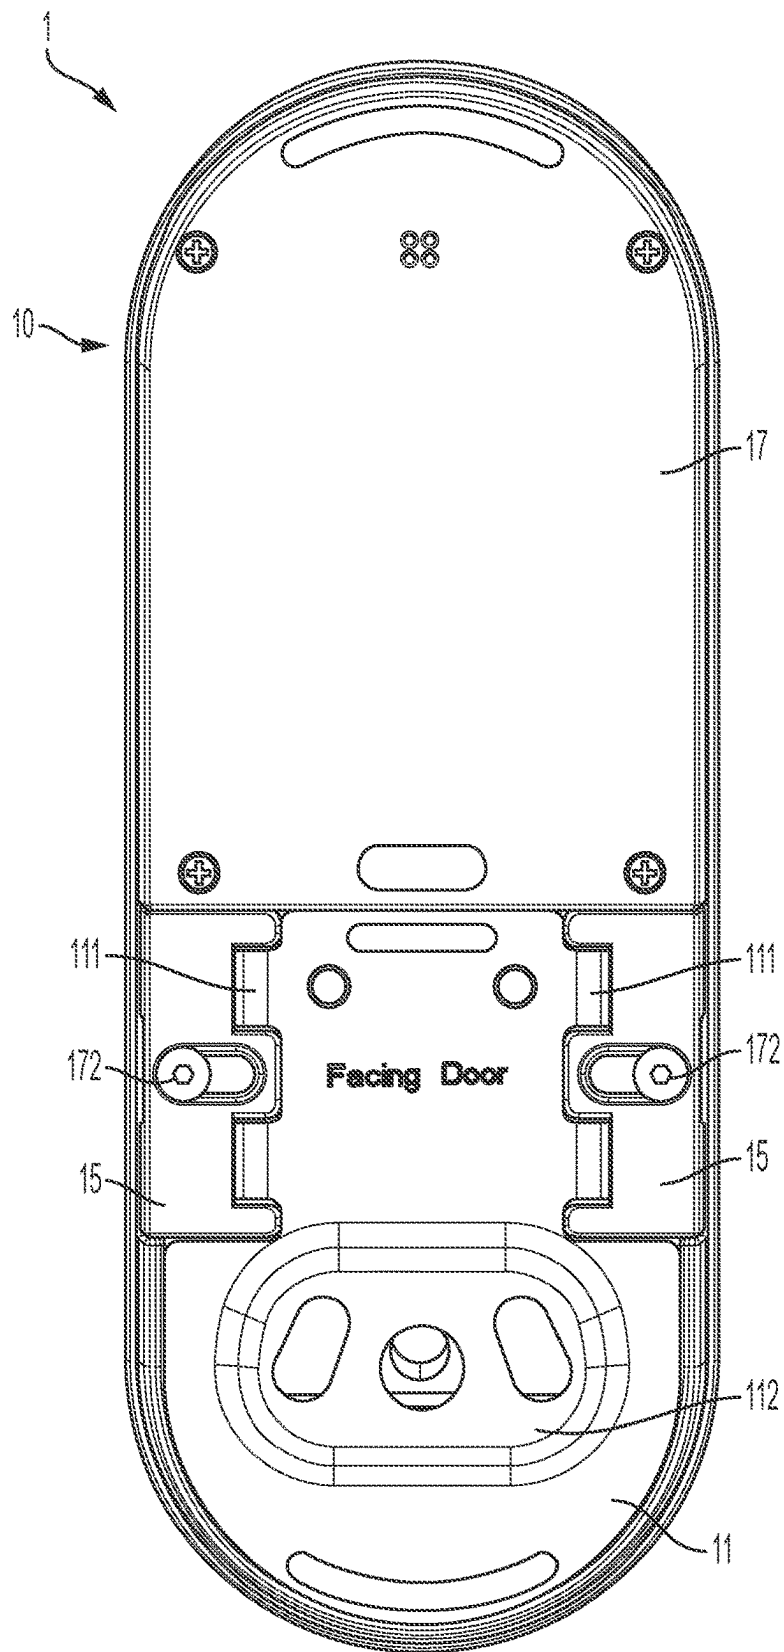


FIG. 6.

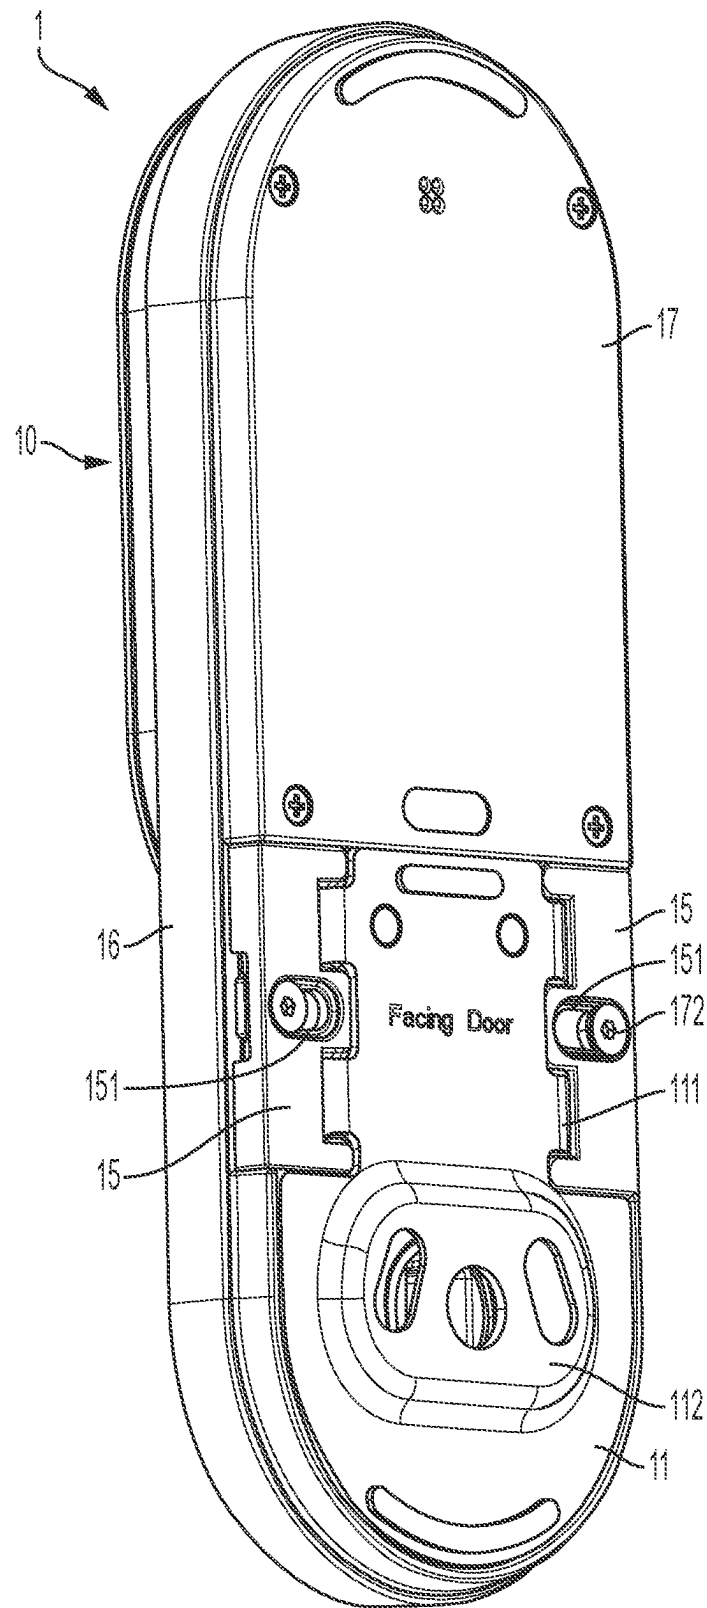


FIG. 7

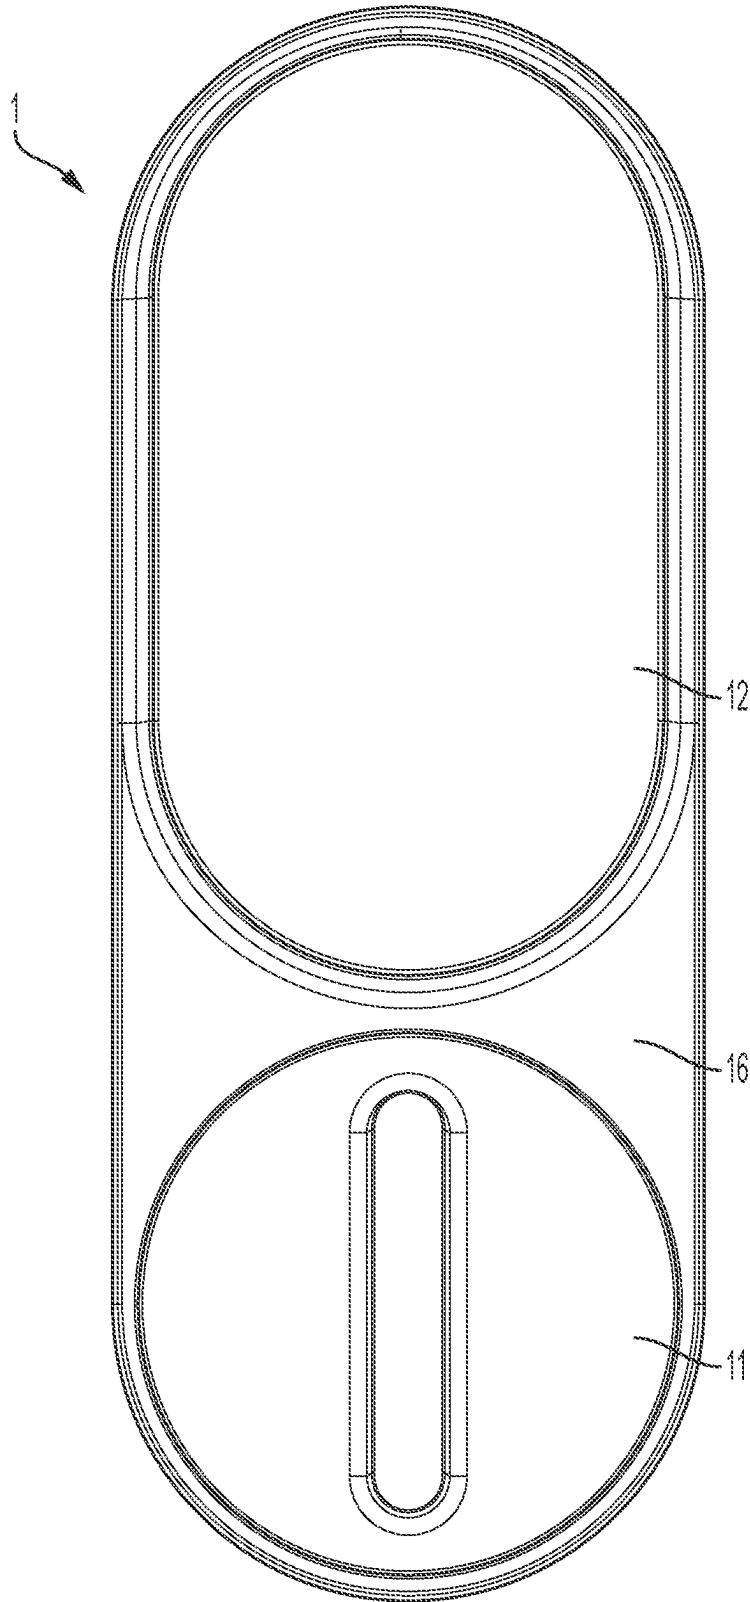


FIG. 8

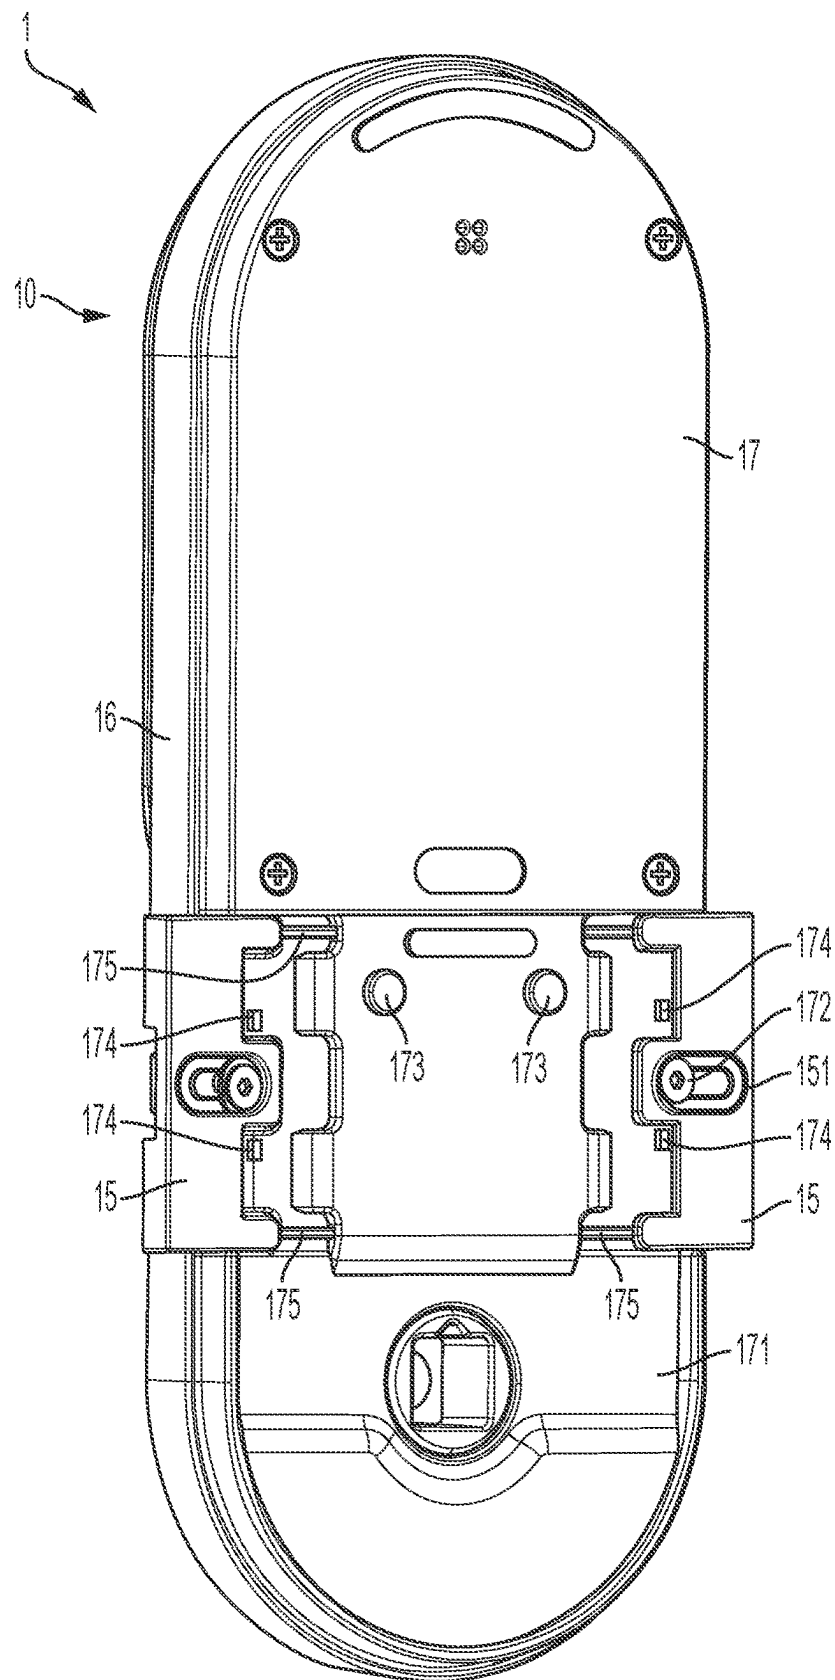


FIG. 9

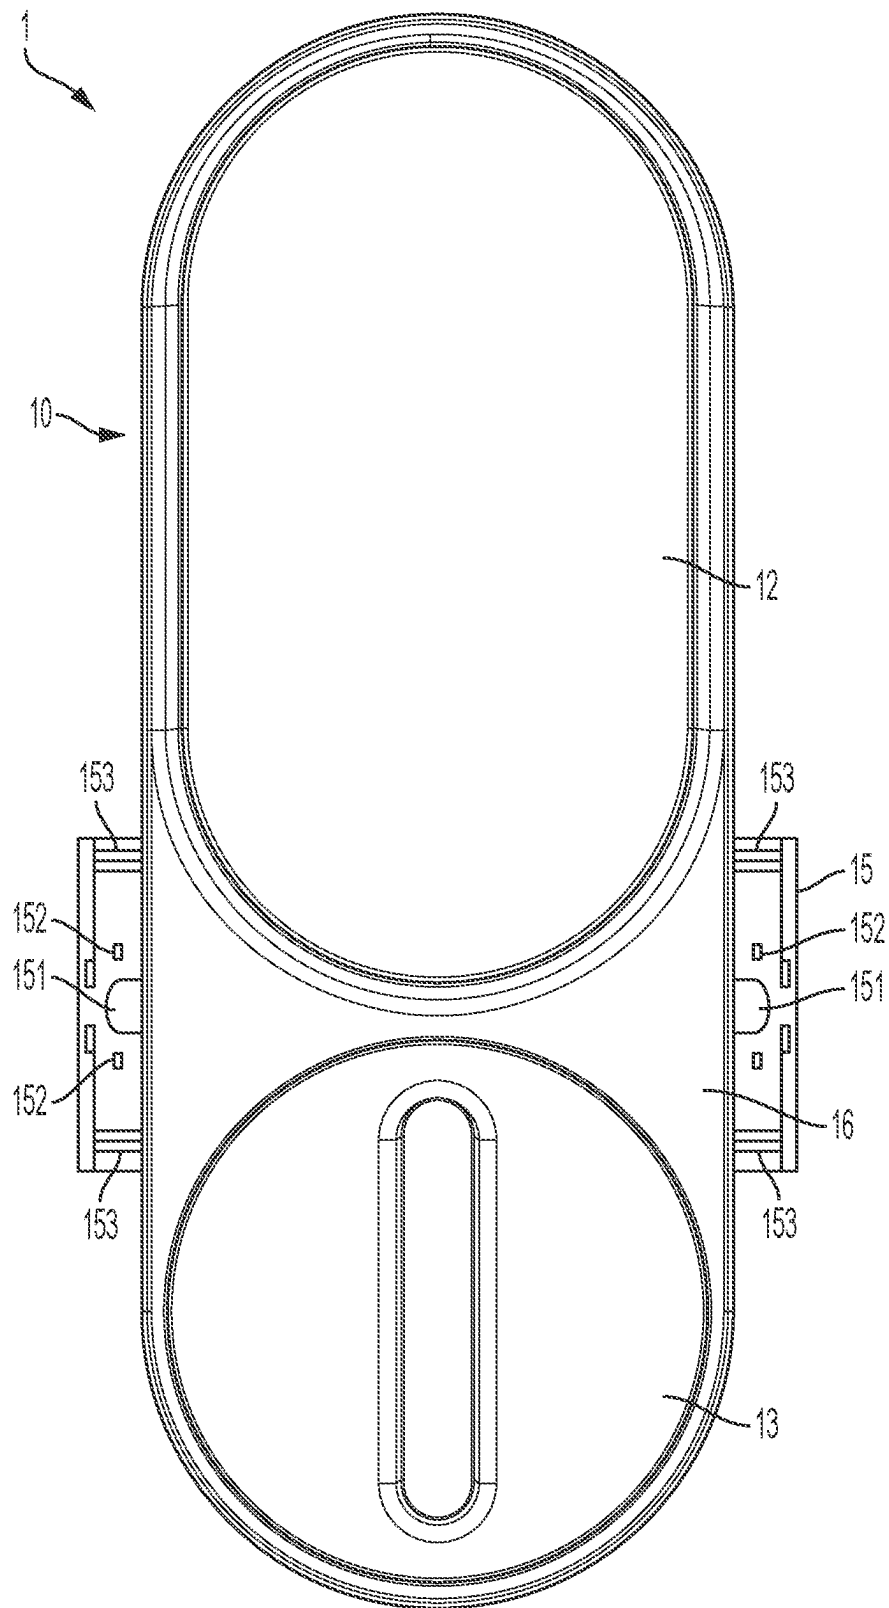


FIG. 10

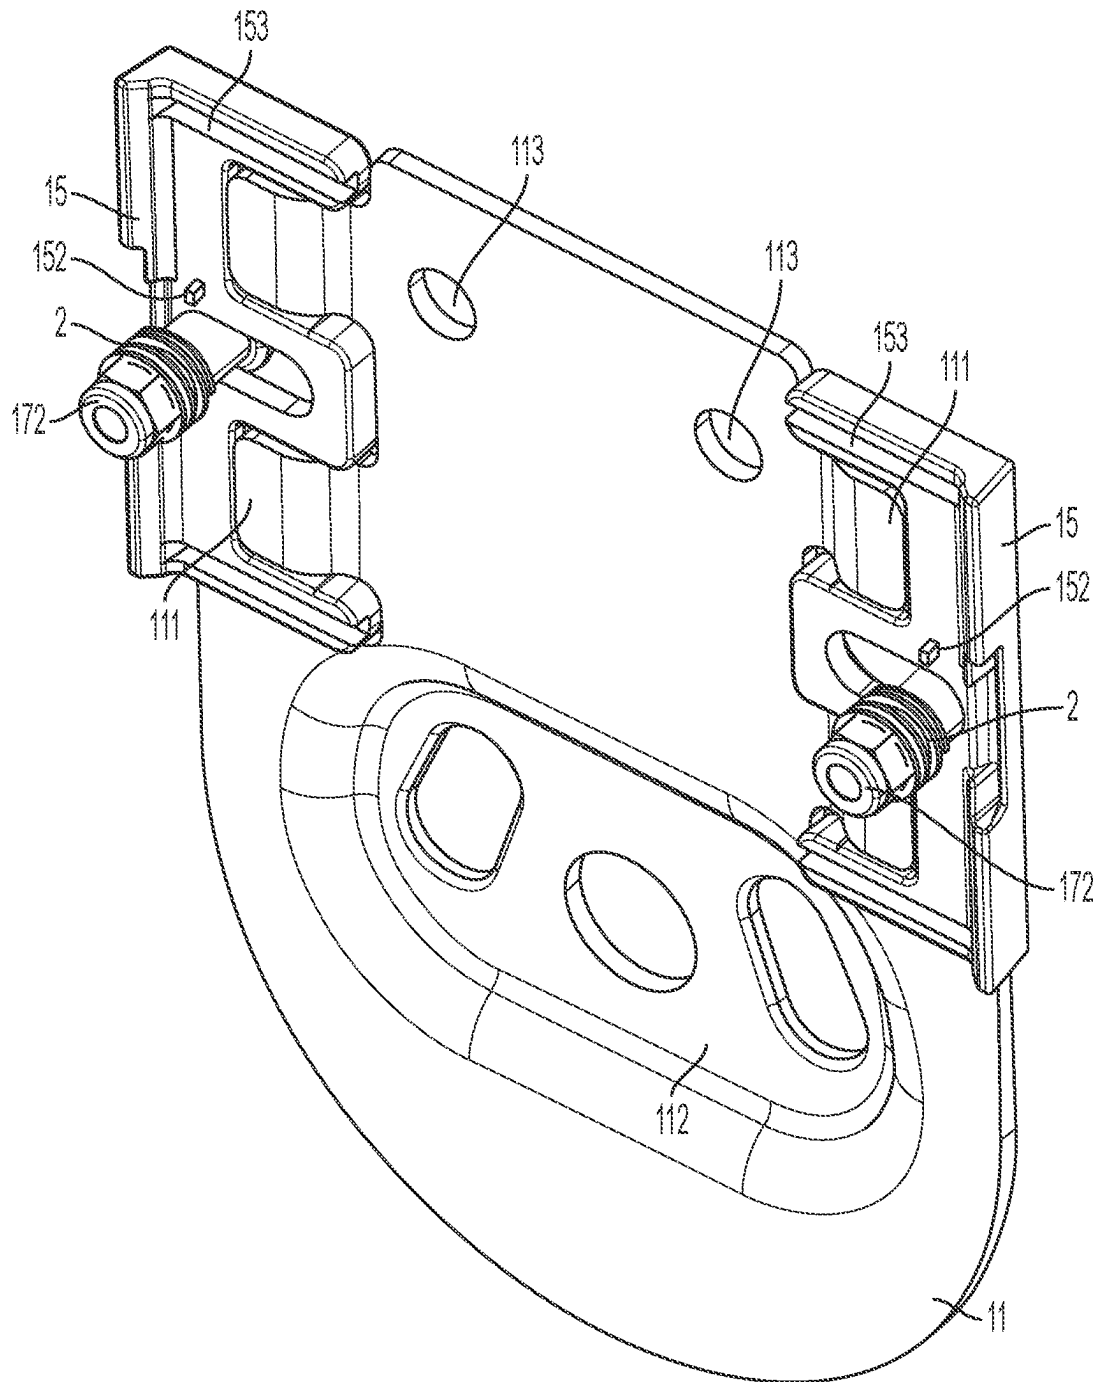


FIG. 11

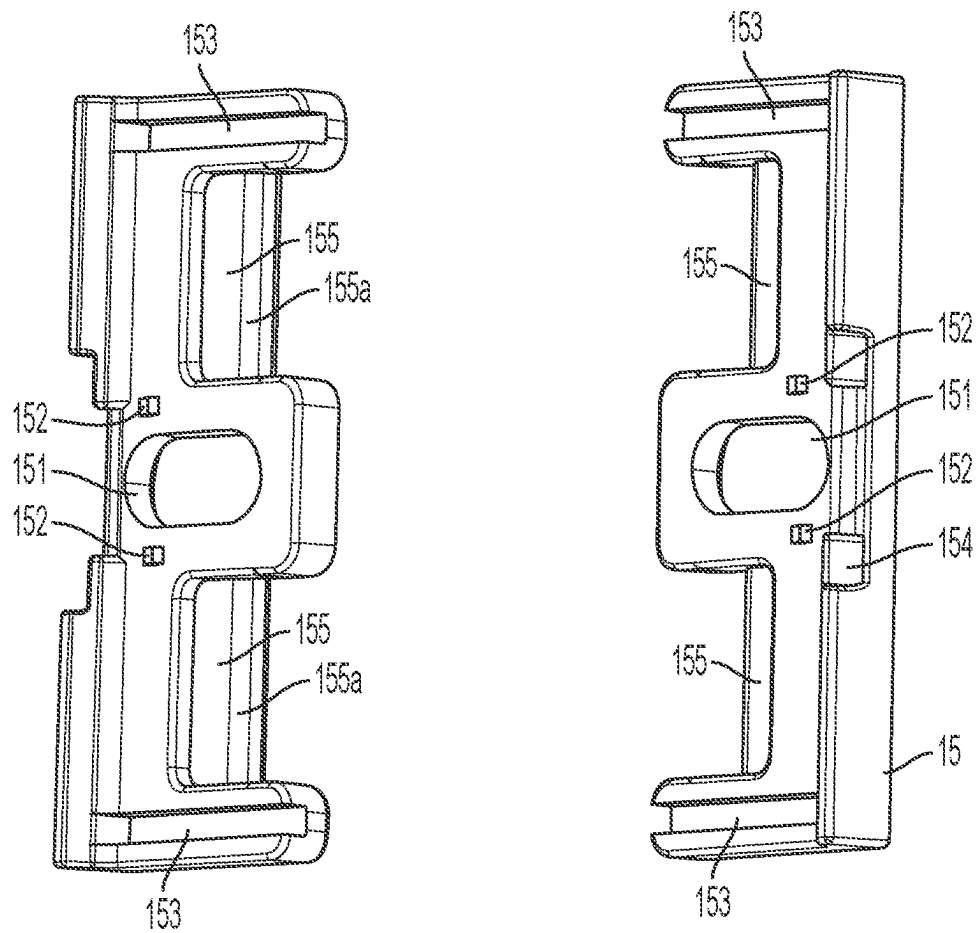


FIG. 12

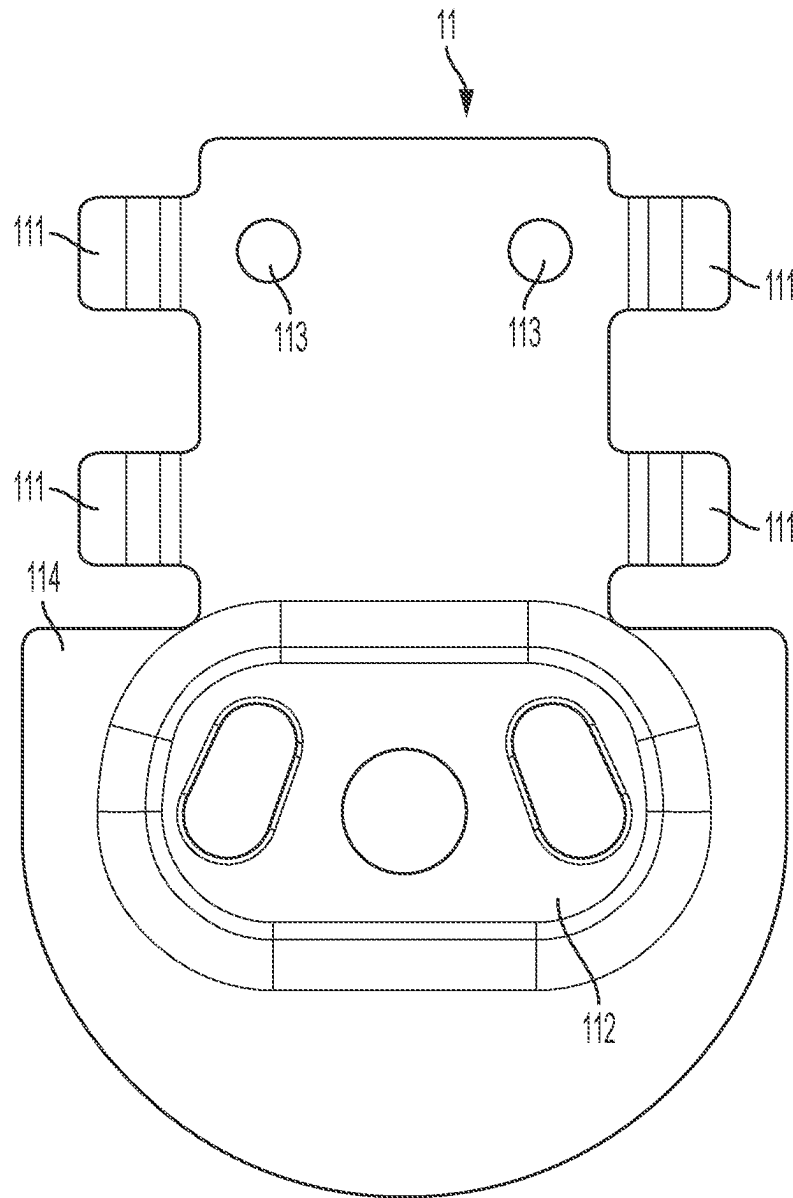


FIG. 13

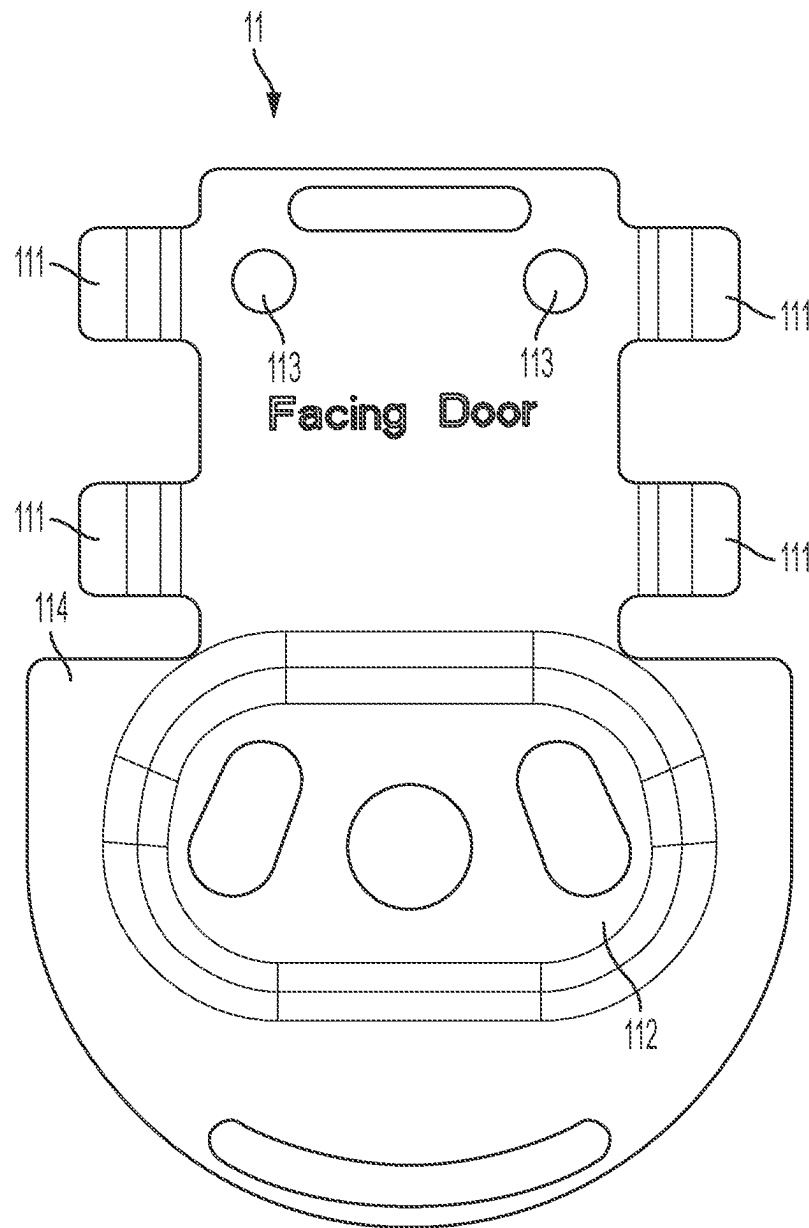


FIG. 14

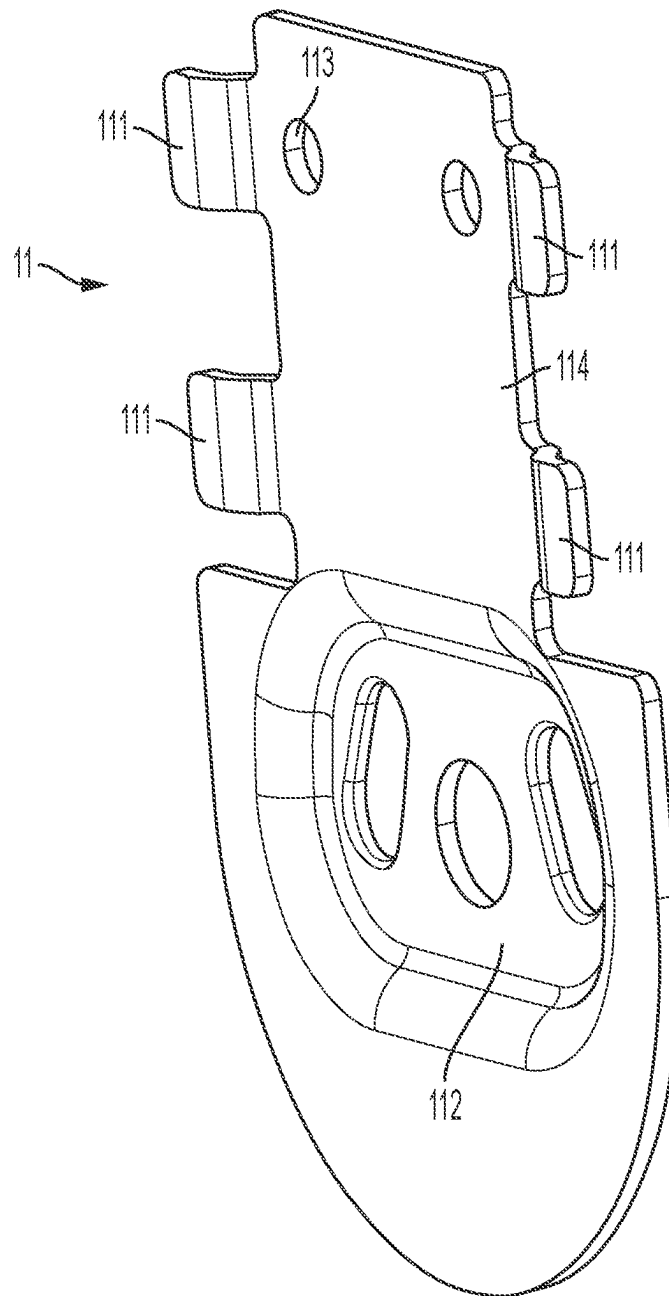


FIG. 15

1

MOUNTING ASSEMBLY FOR DOOR LOCK**RELATED APPLICATIONS**

This Application is a Continuation of U.S. application Ser. No. 16/539,214, filed Aug. 13, 2019, entitled "MOUNTING ASSEMBLY FOR DOOR LOCK".

BACKGROUND**1. Field of Invention**

This invention relates to a door lock or other lock control mechanism that is operable to lock and unlock a door or similar structure.

2. Related Art

Electronic door lock actuators, including so-called smart locks that are used to actuate existing door lock mechanisms, are known, e.g., as described in US Patent Application Publication US20170037937. Such door lock arrangements can allow a user to both operate the door lock manually, e.g., by operating a thumb turn, and electronically, e.g., by interacting with the door lock via an electronic device such as a smartphone.

SUMMARY OF INVENTION

In one aspect of the invention, a door lock includes a body adapted to be mounted to a door or other structure that has a component which can be opened and closed, such as a window. Typically, the body is mounted to a movable part of the door, but may be mountable to a door jamb or other stationary element of the door. The body may be mounted to a door or other structure by a mounting bracket adapted to be mounted to the door. For example, the mounting bracket may be screwed or otherwise attached to a door, and the body then attached to the mounting bracket. A latch adapted to be moved manually relative to the mounting bracket and the body to attach the body to the mounting bracket, e.g., allowing a user to attach the body to (and/or remove it from) the mounting bracket by hand and without tools. The rear side of the body may be adapted for positioning adjacent a surface (e.g., in contact with) of a door to which the door lock is mounted. A lock drive may be movably mounted to the body and adapted to move a lock mechanism between locked and unlocked positions. The lock mechanism may include a slidable lock bolt, movable latch or other lock element that, when in a locked position, can prevent or otherwise resist movement of the door from a closed position to an open position. The lock drive may be coupled to the lock mechanism to actuate the lock mechanism based on movement of the lock drive. For example, the lock drive may be coupled to the lock mechanism by a tailpiece or other coupling element so that rotation of the lock drive moves the tailpiece and thus the lock mechanism between lock and unlock positions. A thumb turn may be movably mounted to the body and adapted for manual movement between at least two positions, such as open and closed positions. The thumb turn may be coupled to the lock drive such that movement of the thumb turn moves the lock drive, e.g., so that a user can move the thumb turn to move the lock mechanism between lock and unlock positions. While the lock drive can be moved manually via the thumb turn, the lock drive can be moved by a motorized or other automated drive train arrangement.

2

In some embodiments, the latch use to attach the body to the mounting bracket may be movably mounted to the body, e.g., the latch may be movable relative to the body in a plane of a door surface to which the mounting bracket is mounted. The latch may be movable relative to the body between open and closed positions, wherein in the open position a portion of the latch is extended laterally from an outer periphery of the body, and in the closed position the latch is positioned within the outer periphery of the body. In some cases, the latch is movable relative to the body to capture a portion of the mounting bracket between the latch and the body. As an example, the mounting bracket may include a plate arranged in a first plane, and a tab attached to the plate and positioned above the first plane. The latch may have a catch to engage the tab to attach the body to the mounting bracket, e.g., by capturing the tab between the latch and the body. The mounting bracket may include a lock mechanism engaging portion that is positioned below the first plane and adapted to secure the mounting bracket to a door to which the door lock is mounted, e.g., by using threaded fasteners that secure the lock mechanism engaging portion to a lock mechanism mounted to a door.

In some embodiments, first and second latches may be provided that are movable toward each other to attach the body to the mounting bracket. For example, the first and second latches may be mounted on opposite sides of the body. The first and second latches may be arranged to be movable toward each other using a thumb and finger of one hand, e.g., by a user squeezing the two latches toward each other to engage the latches with the mounting bracket. In the open position, a portion of the first and second latches may be extended laterally from an outer periphery of the body, e.g., so a user can grip the latches. In the closed position, the first and second latches may be positioned within the outer periphery of the body, e.g., the user may press the latches into a cavity of the body to the outer portions of the latches are flush with or recessed into the body.

A detent may be provided to hold the latch in the closed position (and/or the open position) relative to the body. For example, the detent may include a pin on the latch and a groove on the body, and be arranged such that the pin and groove can engage each other with the latch in the closed position. The latch may be slidably movable relative to the body, and a spring may be adapted to bias the latch away from the body, e.g., the latch may be mounted to a rear side of the body and the spring may bias the latch away from the rear side of the body. This may help position the latch away from a portion of the body so that a tab or other part of the mounting bracket can be received between the latch and body. The latch may be guided in its movement relative to the body, e.g., the body may have a rail or groove to guide movement of the latch relative to the body, and that latch may have a groove or rail to cooperate with the rail or groove of the body. The latch may have an elongated slot to receive a fastener to attach the latch to the body with the elongated slot extending in a same direction as the groove.

Other advantages and novel features of the invention will become apparent from the following detailed description of various non-limiting embodiments when considered in conjunction with the accompanying figures and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

Aspects of the invention are described with reference to the following drawings in which numerals reference like elements, and wherein:

3

FIG. 1 is a front perspective view of a door lock in an illustrative embodiment;

FIG. 2 is a front perspective view of the FIG. 1 door lock with the thumb turn removed;

FIG. 3 is a rear perspective view of the thumb turn of the FIG. 1 embodiment;

FIG. 4 is a rear perspective view of the FIG. 1 embodiment;

FIG. 5 is a rear perspective view of the FIG. 1 embodiment with latches disengaged from a mounting bracket;

FIG. 6 is a rear view of another door lock embodiment having slidably movable latches;

FIG. 7 is a rear perspective view of the FIG. 6 embodiment;

FIG. 8 is front view of the FIG. 6 embodiment;

FIG. 9 is a rear perspective view of the FIG. 6 embodiment with latches in an open position;

FIG. 10 is a front view of the FIG. 6 embodiment with latches in an open position;

FIG. 11 shows a front right perspective view of the latches and mounting bracket of the FIG. 6 embodiment;

FIG. 12 shows a front right perspective view of the latches of the FIG. 6 embodiment;

FIG. 13 is a front view of the mounting bracket of the FIG. 6 embodiment;

FIG. 14 is a rear view of the mounting bracket of the FIG. 6 embodiment; and

FIG. 15 is a front perspective view of the mounting bracket of the FIG. 6 embodiment.

DETAILED DESCRIPTION

Aspects of the invention are described below by way of one or more illustrative embodiments. It should be understood that the illustrative embodiments described are not intended to limit the aspects of the invention, but rather to help show how one or more aspects of the invention may be implemented in a particular example. Also, aspects of the invention may be implemented alone and/or in combination with other aspects of the invention.

FIG. 1 shows a perspective view of an illustrative door lock 1 that incorporates one or more aspects of the invention and can be used to move an existing door lock mechanism, such as a sliding bolt or latch, between lock and unlock positions. Embodiments below are described in connection with a door lock mechanism that includes a dead bolt-type lock mechanism in which a bolt element is extended from/retracted into a door structure to lock/unlock the door. However, the door lock 1 may be used with other types of lock mechanisms. In this embodiment, the door lock 1 has a body 10 including a base 17 and a cover plate 16. As discussed in more detail below, the body 10 is mounted to a door, window or other surface to which the door lock 1 is to be attached via a mounting bracket 11. The mounting bracket 11 is initially attached to a door or other surface, and thereafter the body 10 may be attached to the mounting bracket 11 to assemble the door lock 1 on the door. For example, the mounting bracket 11 may have one or more mounting pins 14 that are extended into an opening in a door from an inner side of the door and are secured to a lock cylinder assembly (not shown) on an outer side of the door by screws that engage with the mounting pins 14. Such lock cylinder assemblies are well known in the art and allow a user, for example, to operate the door lock mechanism using a key at the outer side of the door. In other arrangements, the mounting bracket 11 may be mounted over an existing thumb turn of a lock installed on a door. As an example,

4

screws that secure the existing thumb turn of the installed lock may be used to secure the mounting bracket 11 to the door. With the mounting bracket 11 secured to the door or other structure, the base 17 and cover plate 16 of the body 10 may be positioned over and attached to the mounting bracket 11. In this embodiment, the base 17 includes latches 15 that are pivotally mounted to the base 17 and have levers that can be swung outwardly away from the base 17 to allow the base 17 to be positioned over the mounting bracket 11. Thereafter, the latches 15 may be pivoted inwardly so that the latches 15 engage corresponding portions of the mounting bracket 11, thereby attaching the base 17 to the mounting bracket 11. This arrangement can allow for relatively easy and tool-free engagement of the base 17 with the mounting bracket 11.

As is common with many fully manual door locks, the door lock 1 includes a thumb turn 13 that allows a user to manually rotate or otherwise actuate the lock mechanism to move a bolt, latch or other lock element between lock and unlock positions. In this embodiment, the thumb turn 13 may be coupled with a lock tailpiece 22 (either pre-existing or provided with the door lock 1) so that the thumb turn 13 can rotate the tailpiece 22, and thereby move the lock mechanism between lock and unlock positions. Use of a lock tailpiece 22 with the door lock 1 will typically be done when a thumb turn of an existing lock is removed and the door lock 1 is mounted in its place. Where the door lock 1 is mounted over an existing lock thumb turn, the thumb turn 13 of the door lock 1 may be coupled with the existing lock thumb turn, e.g., by providing the door lock 1 with a coupling device that fits over and has a recess to receive the existing thumb turn, as discussed more below.

FIG. 2 shows a view of the door lock 1 with the thumb turn 13 removed. Normally, the thumb turn 13 is mounted to the cover plate 16, but the thumb turn 13 is shown removed in FIG. 2 to illustrate that the range of motion of the thumb turn 13 may be limited. For example, the cover plate 16 may have a recess in which the thumb turn 13 is received when engaged to the cover plate 16. An arcuate slot 161 may be included in the recess and engage with a portion of the thumb turn 13 so that the thumb turn 13 can only be rotated relative to the cover plate 16 to an extent permitted by the slot 161. For example, FIG. 3 shows a rear perspective view of the thumb turn 13 and illustrates a pin 131 that is received in the slot 161. When the thumb turn 13 is mounted to the cover plate 16, the pin 131 moves in the slot 161 as the thumb turn 13 is rotated to actuate the lock mechanism between lock and unlock positions. However, the pin 131 and slot 161 limit the range of motion of the thumb turn 13 relative to the cover plate 16, e.g., in this case to about 180 degrees rotation. Such limitation is not required, however, and the thumb turn 13 need not be limited in its movement relative to the body 10. Alternately, the thumb turn 13 may be limited to a range of motion that is less than 180 degrees, e.g., 90 degrees or less.

FIG. 4 shows a rear perspective view of the door lock 1, and illustrates a tailpiece receiver 23 that is coupled to the thumb turn 13 and may receive the tailpiece 22 shown in FIG. 1. In this embodiment, the tailpiece receiver 23 engages with a tailpiece coupling 133 at the rear of the thumb turn 13, as can be seen in FIG. 3. This couples the thumb turn 13 and the tailpiece receiver 23 so that rotation of the thumb turn 13 rotates the tailpiece receiver 23. In this embodiment, the tailpiece coupling 133 includes a hexagonal opening that receives a hexagonal portion of the tailpiece receiver 23 to rotationally fix the tailpiece receiver 23 with respect to the thumb turn 13. Of course other arrangements are possible.

5

For example, the tailpiece receiver **23** may be made integrally with or otherwise attached to the thumb turn **13** and need not necessarily be made separable from the thumb turn **13**. As will be understood, the tailpiece receiver **23** may be arranged to accept differently sized and/or shaped tailpieces **22** so that the door lock **1** can be used with different lock mechanisms. The tailpiece receiver **23** may be made replaceable and/or adaptable to allow for a desired range of different tailpiece or other lock mechanism engagement parts. Also, where the door lock **1** is mounted over an existing lock thumb turn, the tailpiece receiver **23** may be arranged to couple with the existing thumb turn. For example, the tailpiece receiver **23** may be arranged with a suitably sized and shaped recess to fit over the existing thumb turn and rotate the existing thumb turn based on rotation of the thumb turn **13**.

While the door lock **1** in this embodiment allows a user to manually move a lock mechanism between lock and unlock positions using the thumb turn **13**, the door lock **1** may include a drive train with a motor drive function that allows the lock mechanism to be moved automatically between lock and unlock positions, e.g., in response to wireless signals from a user device such as a smartphone. For example, a lock drive may be provided to drive rotation of the tailpiece **22**, an existing thumb turn, or other lock mechanism engagement part. The lock drive may include the tail piece receiver **23** and the drive train may be arranged to move the tail piece receiver **23**. As an example, a drive wheel may be coupled to the tailpiece receiver **23** via the thumb turn **13**, e.g., the drive wheel may be fixed to the thumb turn **13**, and the motor may be arranged to rotate the drive wheel, and thus a coupled tailpiece **22** and lock mechanism, between lock and unlock positions. In some cases, the drive train may include a motor and transmission (e.g., one or more gears driven by the motor and engaged with the drive wheel) to move the lock drive. Control of the drive train may be performed by any suitable control circuitry, which may include a programmed general purpose computer and/or other data processing device along with suitable software or other operating instructions, one or more memories (including non-transient storage media that may store software and/or other operating instructions), a power supply **12** for the control circuitry and/or other system components, position and other sensors, wireless communication devices to allow the control circuitry to receive and send signals with respect to user devices such as a smartphone or wireless router, input/output interfaces (e.g., such as the user interface to display information to a user and/or receive input from a user), communication buses or other links between components of the door lock **1**, a display, switches, relays, triacs, motors, mechanical linkages and/or actuators, or other components necessary to perform desired input/output or other functions.

In accordance with an aspect of the invention, the door lock may include a latch that is manually movable, e.g., without tools, to attach the door lock body to the mounting bracket. For example, FIG. 4 shows a rear perspective view of the door lock **1**, and illustrates a pair of latches that are pivotally mounted to opposite sides of the body **10** and adapted to selectively engage with the mounting bracket **11**. In FIG. 4, the latches **15** are pivoted inwardly to a closed position so that catches on each of the latches **15** engage a respective tab of the mounting bracket **11** to secure the base **17** and cover plate **16** to the mounting bracket **11**. As can be seen generally in FIGS. 1 and 4, when the latches **15** are in a closed position, the latches **15** are positioned within an outer periphery of the body **10**, e.g., when the door lock **1** is

6

viewed from the front, the latches do not protrude outwardly from the side portions of the body **10**. When the latches **15** are pivoted outwardly to an open position as shown in FIG. 5, the latches **15** are extended laterally from the outer periphery of the body **10** so the latches **15** disengage tabs **111** of the mounting bracket **11**, thus disengaging the body **10** from the mounting bracket **11**. To mount the door lock **1** to a door or other surface, the mounting bracket **11** may first be separated from the body **10** and attached to the door. The mounting bracket **11** may be attached to the door in a variety of different ways, such as by adhesive, fasteners, magnets, etc. In this embodiment, the mounting bracket **11** includes a lock mechanism engaging portion **112** that has a pair of openings and pins **14** used to engage a lock mechanism. The pins **14** may include a male or female threaded portion that threadedly engages with a corresponding fastener to secure the mounting bracket **11** to a lock cylinder, cover plate or other lock mechanism structure. With the mounting bracket **11** attached to the door, the latches **15** may be pivoted to the open position and the body **10** may be positioned over the mounting bracket **11** so that mounting bracket **11** is received into a corresponding recess **171** in the base **17** and the latches **15** are appropriately positioned relative to tabs **111** of the mounting bracket **11**. The latches **15** may then be pivoted inwardly to the closed position as in FIG. 4 to attach the body **10** to the mounting bracket **11**, and thus to the door. Engaging of the latches **15** with the tabs **111** captures the tabs **111** and potentially other portions of the mounting bracket **11** between the latch **15** and the body **10**. In some embodiments, the latches **15** may be moved to the closed position by a user with a thumb and fingers of one hand, which may provide a particularly easy way to attach the body **10** to a door.

While FIGS. 1-4 show an embodiment in which latches **15** are pivotally mounted to the body **10**, other arrangements for latches **15** are possible. For example, a latch may be moved linearly or along other paths than moved pivotally between open and closed positions, a latch may be mounted to a mounting bracket rather than the door lock body, and/or a latch may not be mounted to either a mounting bracket or body and instead may be separate from both elements. In one illustrative embodiment, one or more latches may be slidable or movable along a linear path to engage and disengage a lock body and mounting bracket. For example, FIG. 6 shows a rear view and FIG. 7 shows a rear perspective view of a door lock **1** in which latches **15** are movable laterally, e.g., in a plane of a door or other surface to which the lock **1** is mounted, between open and closed positions. FIGS. 6 and 7 show the latches **15** in a closed position in which tabs **111** of the mounting bracket **11** are engaged by catches of the latches **15**, e.g., the tabs **111** are captured between the latches **15** and the body **10** to engage the body **10** with the mounting bracket **11**. As can be seen in the front view of the door lock **1** in FIG. 8, with the latches **15** in the closed position, the latches **15** are positioned within an outer periphery of the body **10**. The latches **15** are mounted to the body **10** by fasteners **172** that are fixed relative to the body **10**. The fasteners **172** are received in respective elongated slots **151** of the latches **15** so that the latches **15** are slidably movable in a lateral direction relative to the body **10**, e.g., in a plane of the surface to which the lock **1** is mounted. FIG. 9 shows a rear perspective view and FIG. 10 shows a front view of the door lock **1** with the latches **15** in an open position in which tabs **111** of the mounting bracket **11** are disengaged and the body **10** is removable from the mounting bracket **11**. In fact, FIG. 9 shows the mounting bracket **11** removed from the recess **171** of the body **17** into which the

7

mounting bracket 11 is receivable. In this embodiment, the base 17 includes posts 173 that are received into corresponding openings of the mounting bracket 11 when the mounting bracket 11 is received into the recess 171 of the base 17. Engagement of the posts 173 with the mounting bracket openings may help suitably position the mounting bracket 11 relative to the base 17 and/or help prevent unwanted movement of the body 10 relative to the mounting bracket 11. FIG. 10 illustrates how the latches 15 are extended laterally from the outer periphery of the body 10 on opposite sides of the body 10 when the latches 15 are in the open position. In this embodiment, the latches 15 may be moved toward each other to move from the open position to the closed position, and this movement may be effected by a user with thumb and fingers of one hand, e.g., squeezing the latches 15 toward each other to attach the body 10 to the mounting bracket 11.

In this embodiment, a detent is provided to hold the latches 15 in the closed position relative to the body. However, such a detent is not required, and/or a detent may be provided to hold the latches 15 in the open position in addition, or alternately, to the closed position. In this embodiment, the detent includes a pin 152 on the latches 15 (see FIG. 10) which engages with a corresponding groove 174 (see FIG. 9) on the body 10. The pins 152 may be made suitably flexible to releasably engage the grooves 174, e.g., so the latches 15 are held in the closed position until a suitably large force is exerted on the latches 15 to move them toward the open position, at which point the pins 152 disengage from the grooves 174. Other detent arrangements are possible, such as a spring-loaded ball and groove, a pawl and ratchet, etc.

In some embodiments, a latch may be guided in movement relative to the body and/or mounting bracket between open and closed positions. For example, FIGS. 9 and 10 show that the latches 15 include grooves 153 (see FIG. 10) that receive rails 175 (see FIG. 9) of the base 17 so that the latches 15 are guided in motion relative to the body 10. The elongated slots 151 extend in a same direction as the grooves 153 to allow for desired movement, and the slots 151 may limit the extent of travel of the latches 15 relative to the body 10. That is, the length of the slots 151 and engagement of the slots 151 with the fasteners 172 may limit the extent to which the latches 15 are moveable relative to the body 10. Other arrangements are possible for guiding movement of a latch, such as reversing the relative positions of the rail and groove, providing a pocket in the base 17 into which a latch 15 moves, etc.

FIG. 11 shows a front right perspective view of the latches 15 and mounting bracket 11 of the FIGS. 6-10 embodiment with the body 10 removed for clarity. The fasteners 172 are normally fixed to the base 17 and so attach the latches 15 to the base 17. In this embodiment, springs 2 are provided at each fastener 172 to bias the latches 15 rearwardly and away from the body 10. That is, the latches 15 are mounted to the rear side of the body 10, and the springs 2 bias the latches 15 away from the rear side of the body 10. This spring bias may help properly position the latches 15 so that tabs 111 of the mounting bracket 11 may be caught by catches on the latches 15 so the tabs 111 are positioned between the latches 15 and the body 10. FIG. 11 also shows openings 113 of the mounting bracket 11 that may engage with posts 173 of the base 17 when the mounting bracket 11 is engaged with the body 10.

FIG. 12 shows a front right perspective view of the latches 15 and illustrates the catches 155 used to engage corresponding tabs 111 of the mounting bracket 11. In this

8

embodiment, the catches 155 include a recess formed in the latch 15 that includes a ramp or sloped leading edge 155a to aid in engagement of a corresponding tab 111. For example, the ramp 155a may help guide a tab 111 into the catch 155 if the latch 15 and tab 111 are not precisely aligned. FIG. 12 also shows tabs 154 provided on a lateral side of the latches 15 that may be engaged by a tool to move the latches 15 from the closed position to the open position. Use of a tool to move the latches 15 from the closed position may be helpful, e.g., because the latches 15 may be recessed or flush with respect to the base 17 and cover 16 in the closed position, making gripping of a latch 15 by hand difficult. In addition, or alternately, a detent used to hold the latch in the closed position may provide resistance to movement of the latch from the closed position, and may require use of a tool to move the latch. The tabs 154 may be accessible at a side of the door lock 1, e.g., a screwdriver blade may be inserted behind a tab 154 and used to pry the latch 15 outwardly from the closed position.

FIGS. 13-15 show front, rear and front perspective views of the mounting bracket 11 of the FIG. 6 embodiment. These figures illustrate that the mounting bracket 11 includes a plate 114 arranged in a first plane, and having a surface, e.g., the rear side of the plate 114, that is adapted to be positioned against or otherwise adjacent to a door surface to which the lock 1 is mounted. The tabs 111 may be arranged above the first plane of the plate 114, e.g., extending forwardly relative to the plate 114 so the tabs 111 can be caught between the latches 15 and the body 10. The lock mechanism engagement portion 112 may be positioned below the first plane of the plate 114, e.g., rearwardly of the plate 114 so the engagement portion 112 may be at least partially received into an opening of a door where a lock mechanism is located. The engagement portion 112 in this embodiment includes openings for the mounting pins 14 and to allow the tailpiece 22 to pass through the mounting bracket 11, but other arrangements are possible, e.g., depending on how the lock mechanism is arranged and/or how the mounting bracket 11 is secured to a door. While in this embodiment the mounting bracket 11 includes four tabs 111, any suitable number of tabs 111 may be used, e.g., one on each lateral side of the bracket 11. Also, this embodiment employs two latches 15, but a single latch 15 may be used, and in such a case, a single tab 11 may be used. In a single latch embodiment, the mounting bracket 11 may include a hook or other feature on one lateral side that engages with an opening or other feature of the body 10. A tab may be provided on a side opposite the hook (or opening or other feature) and engaged by the single latch.

While aspects of the invention have been described with reference to various illustrative embodiments, such aspects are not limited to the embodiments described. Thus, it is evident that many alternatives, modifications, and variations of the embodiments described will be apparent to those skilled in the art. Accordingly, embodiments as set forth herein are intended to be illustrative, not limiting. Various changes may be made without departing from the spirit of aspects of the invention.

The invention claimed is:

1. A door lock comprising:

- a mounting bracket adapted to be mounted to a first side of a door; and
- a body adapted to be mounted to the mounting bracket, the body including latches movable along a linear path relative to the body to (i) an open position beyond an outer periphery of the body that permits positioning of the body adjacent to the mounting bracket and (ii) a

9

closed position within the outer periphery of the body so that the latches engage the mounting bracket to secure the body onto the mounting bracket.

2. The door lock of claim 1, wherein the latches are movable relative to the body in a plane of a door surface to which the mounting bracket is mounted.

3. The door lock of claim 2, wherein the latches are movable relative to the body to capture a portion of the mounting bracket between the latch and the body.

4. The door lock of claim 1, further comprising a detent to hold the latches in the closed position relative to the body.

5. The door lock of claim 1, wherein the mounting bracket includes a plate arranged in a first plane, and a tab attached to the plate and positioned above the first plane, each of the latches having a catch to engage the tab to attach the body to the mounting bracket.

6. The door lock of claim 5, wherein the mounting bracket includes a lock mechanism engaging portion that is positioned below the first plane and adapted to secure the mounting bracket to a door to which the door lock is mounted.

7. The door lock of claim 1, wherein the latches are slidably mounted to the body, and the body has a rail or groove to guide movement of the latches relative to the body.

8. The door lock of claim 7, wherein the body has a rail to guide movement of the latches, and each of the latches has a groove to receive and engage with the rail.

9. The door lock of claim 8, wherein each of the latches has an elongated slot to receive a fastener to attach the latch to the body, the elongated slot extending in a same direction as the groove.

10. A device comprising:

a mounting bracket adapted to be mounted to a first side of a door; and

a body adapted to be mounted to the mounting bracket, the body including latches movable along a linear path relative to the body to (i) an open position beyond an outer periphery of the body that permits positioning of the body adjacent to the mounting bracket and (ii) a closed position within the outer periphery of the body so that the latches engage the mounting bracket to secure the body onto the mounting bracket.

10

11. The device of claim 10, wherein the latches are movable relative to the body in a plane of a door surface to which the mounting bracket is mounted.

12. The device of claim 11, wherein the latches are movable relative to the body to capture a portion of the mounting bracket between the latch and the body.

13. The device of claim 10, further comprising a detent to hold the latches in the closed position relative to the body.

14. The device of claim 10, wherein the mounting bracket includes a plate arranged in a first plane, and a tab attached to the plate and positioned above the first plane, each of the latches having a catch to engage the tab to attach the body to the mounting bracket.

15. The device of claim 10, wherein the latches are slidably mounted to the body, and the body has a rail or groove to guide movement of the latches relative to the body.

16. A device comprising:

a bracket adapted to be mounting to a first side of a door; and

a body adapted to be mounted to the bracket, the body including a means for latching the body to the bracket, the means being movable along a linear path relative to the body to (i) an open position beyond an outer periphery of the body to permit positioning of the body adjacent to the bracket and (ii) a closed position within the outer periphery of the body to secure the body to the bracket.

17. The device of claim 16, wherein the means for latching are movable relative to the body in a plane of a door surface to which the bracket is mounted.

18. The device of claim 17, wherein the means for latching are movable relative to the body to capture a portion of the bracket between the means for latching and the body.

19. The device of claim 16, further comprising a detent to hold the means for latching in the closed position relative to the body.

20. The device of claim 16, wherein the bracket includes a plate arranged in a first plane, and a tab attached to the plate and positioned above the first plane, the means for latching having a catch to engage the tab to attach the body to the bracket.

* * * * *