



US 20250281004A1

(19) **United States**

(12) **Patent Application Publication**
Szabo

(10) **Pub. No.: US 2025/0281004 A1**

(43) **Pub. Date: Sep. 11, 2025**

(54) **TOWEL WITH SECURED OPENINGS**

(52) **U.S. Cl.**

CPC **A47K 10/02** (2013.01)

(71) Applicant: **Aaron Szabo**, Swanton, OH (US)

(72) Inventor: **Aaron Szabo**, Swanton, OH (US)

(57)

ABSTRACT

(21) Appl. No.: **18/599,182**

(22) Filed: **Mar. 7, 2024**


A towel having openings with securing fixtures that can fit over a common headrest of an automobile or chair. The towel may be formed from cloth and use the securing features to keep the openings closed when the towel is not installed over a headrest of and automobile or chair corners, or the securing features can be used to attached the towel to chair corners.

Publication Classification

(51) **Int. Cl.**

A47K 10/02

(2006.01)

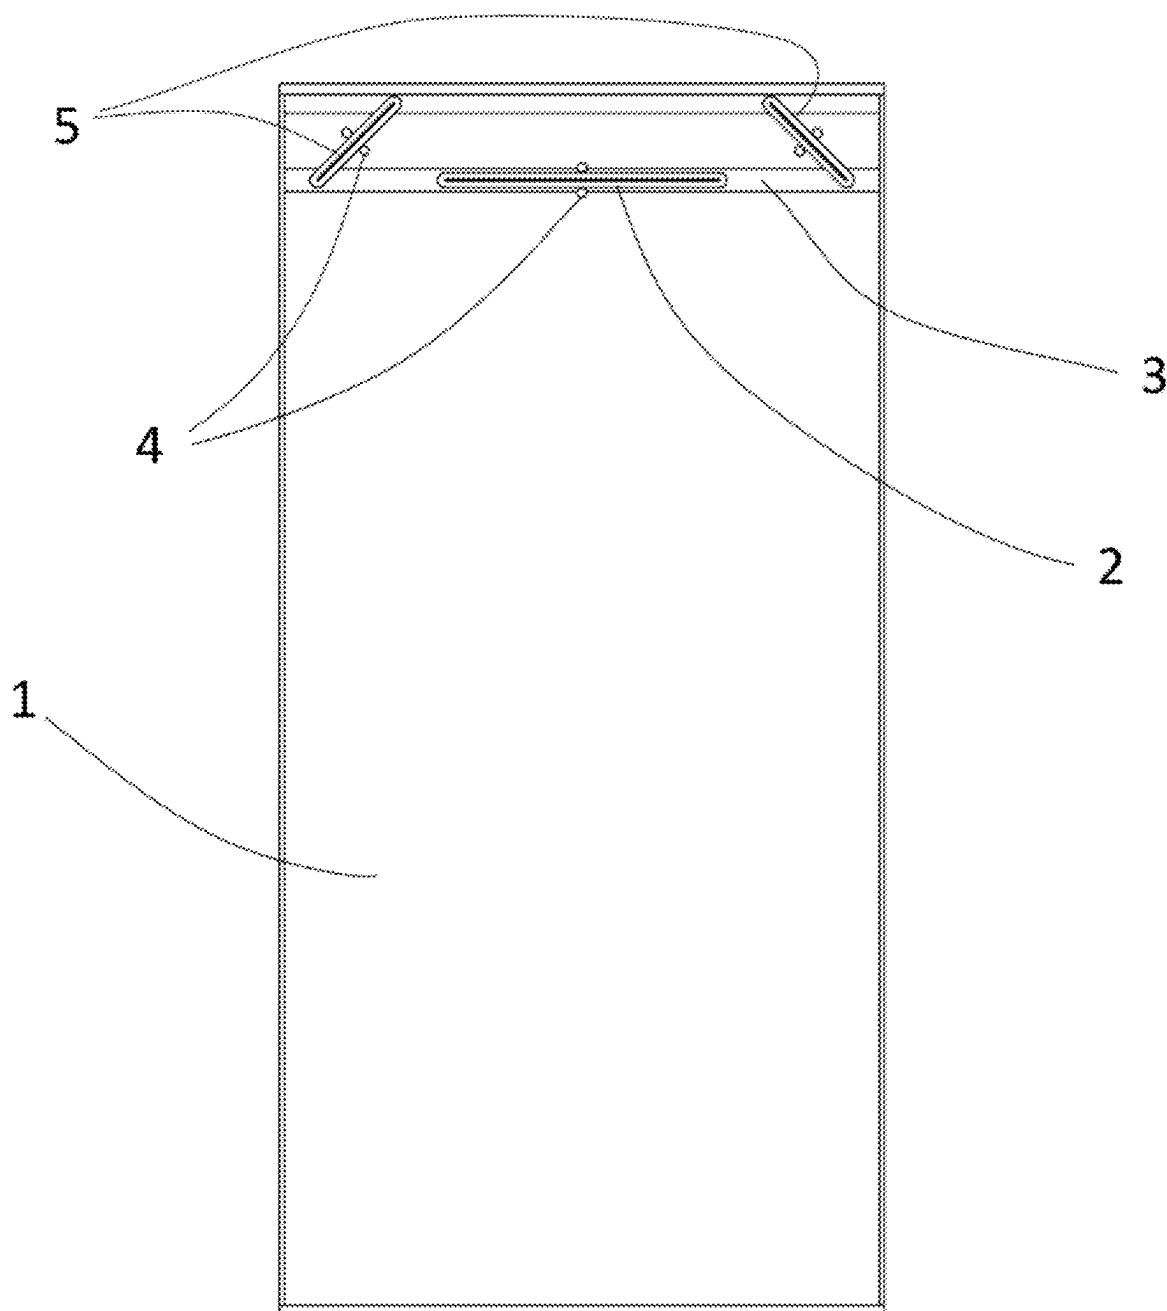

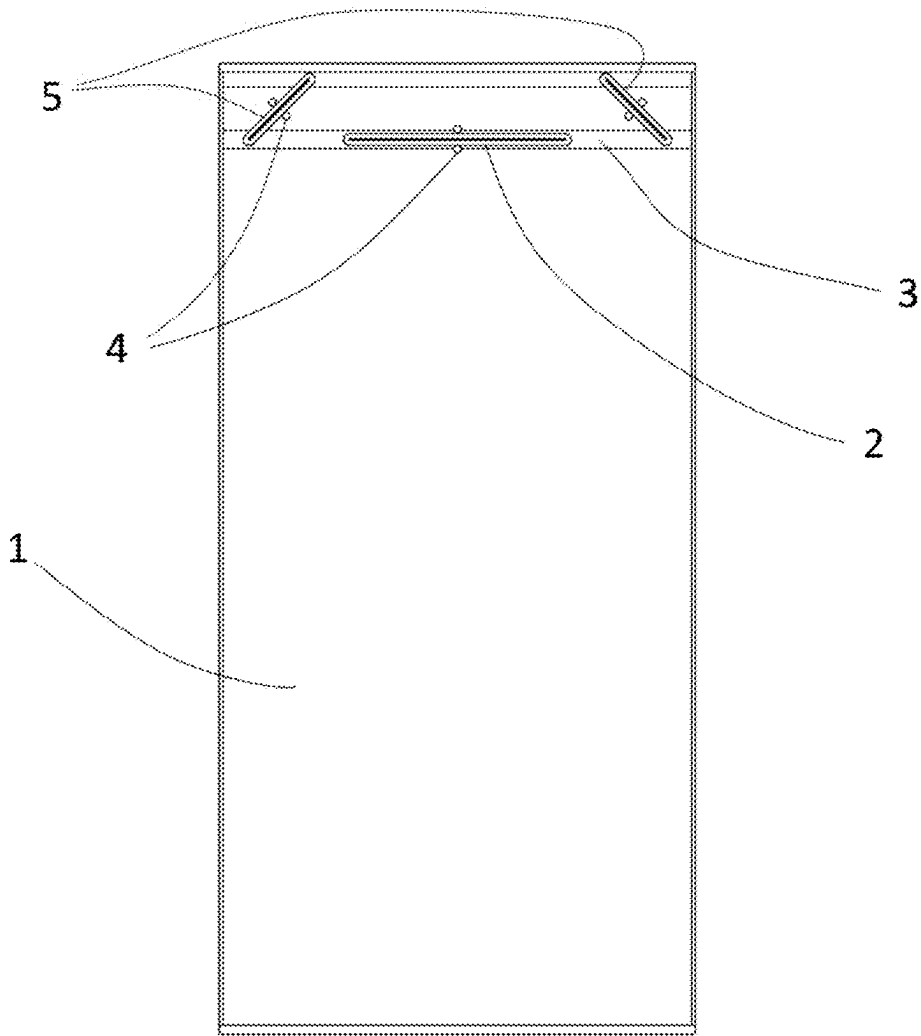


Figure 1

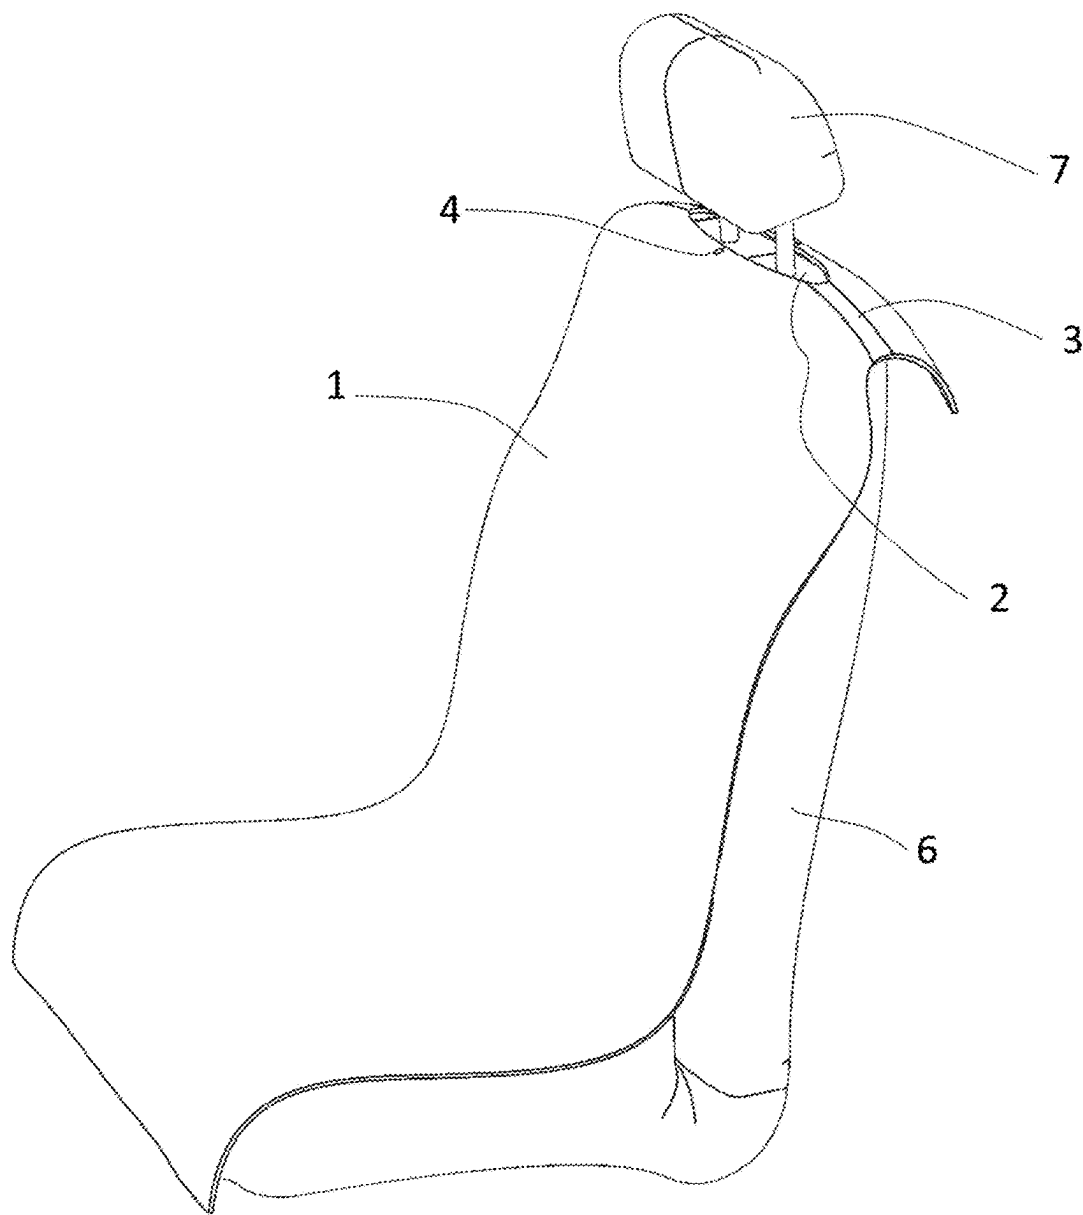


Figure 2

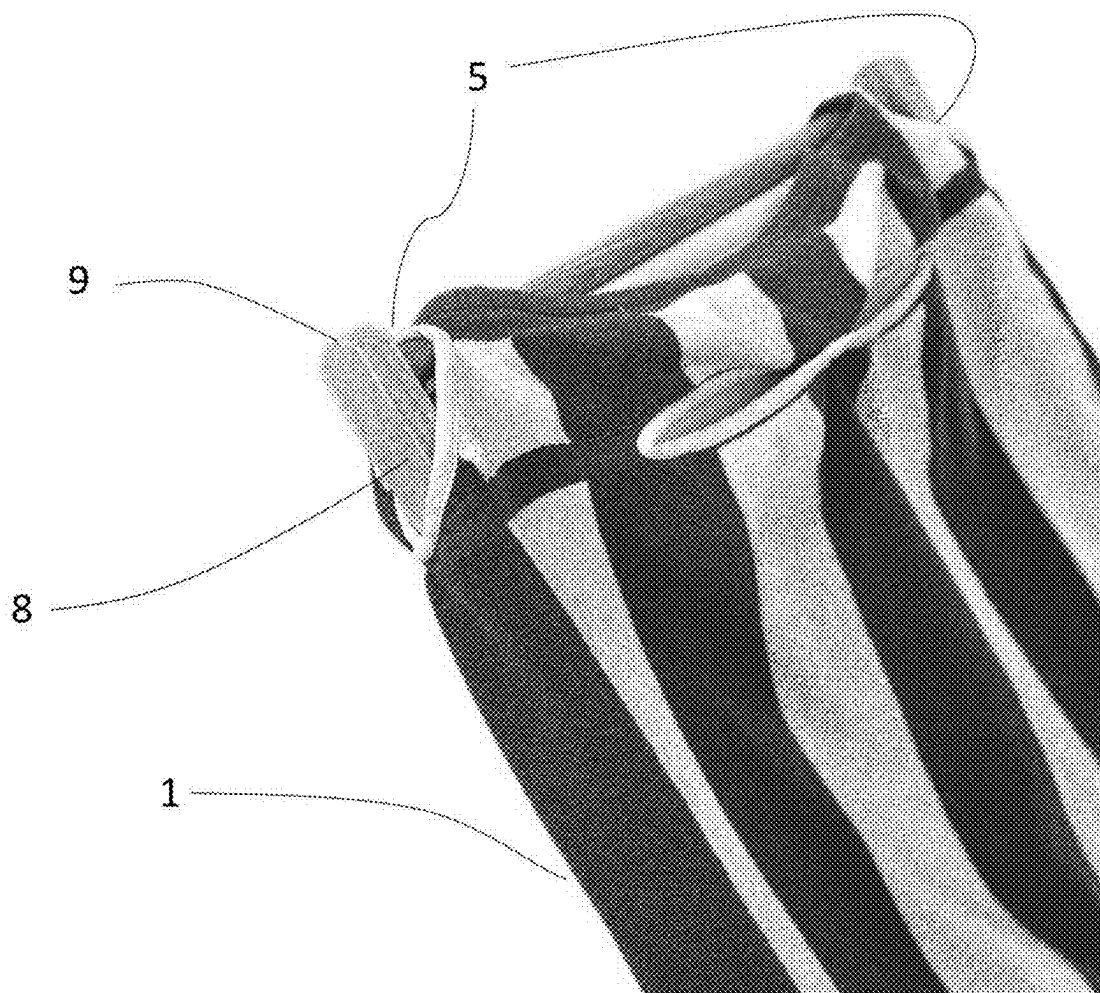


Figure 3

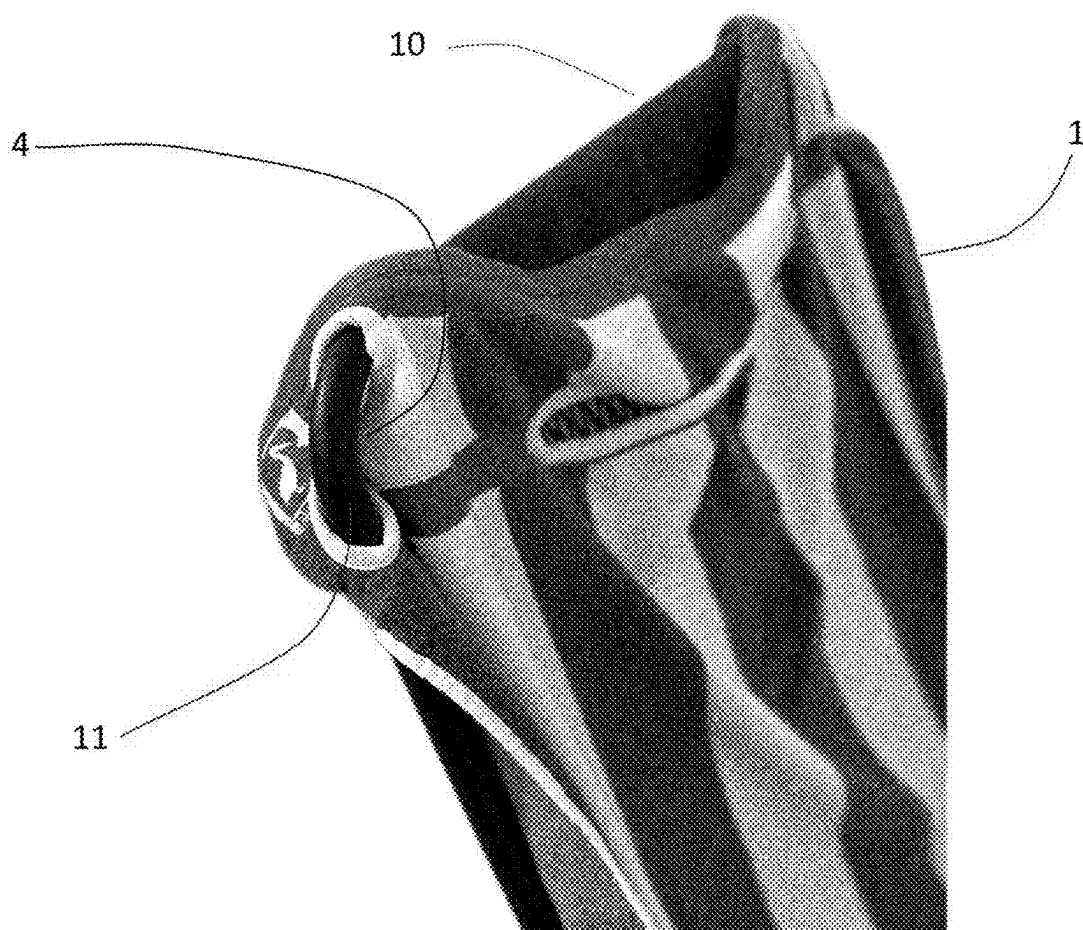


Figure 4

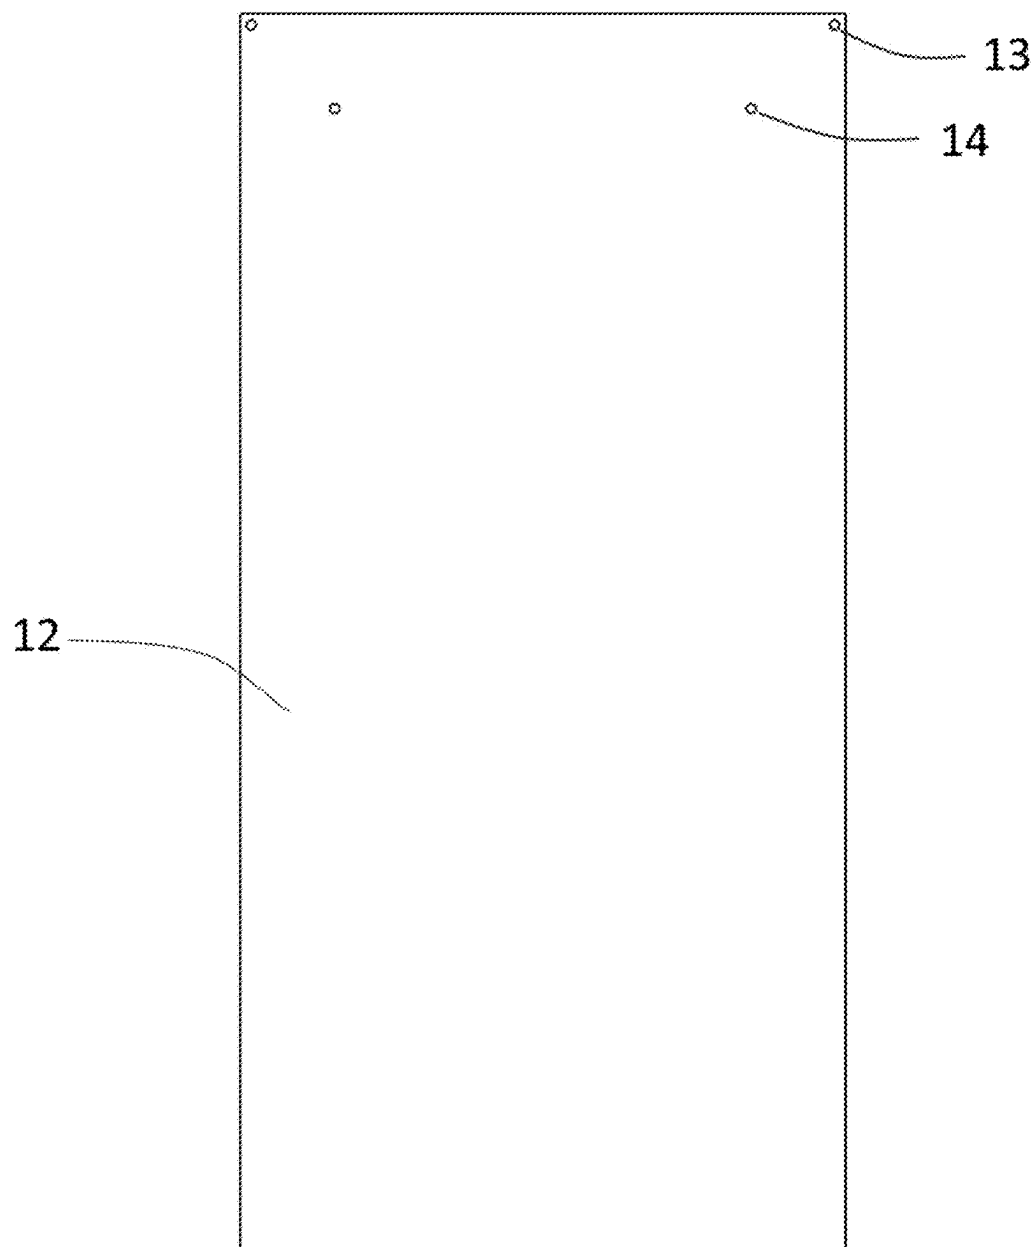


Figure 5

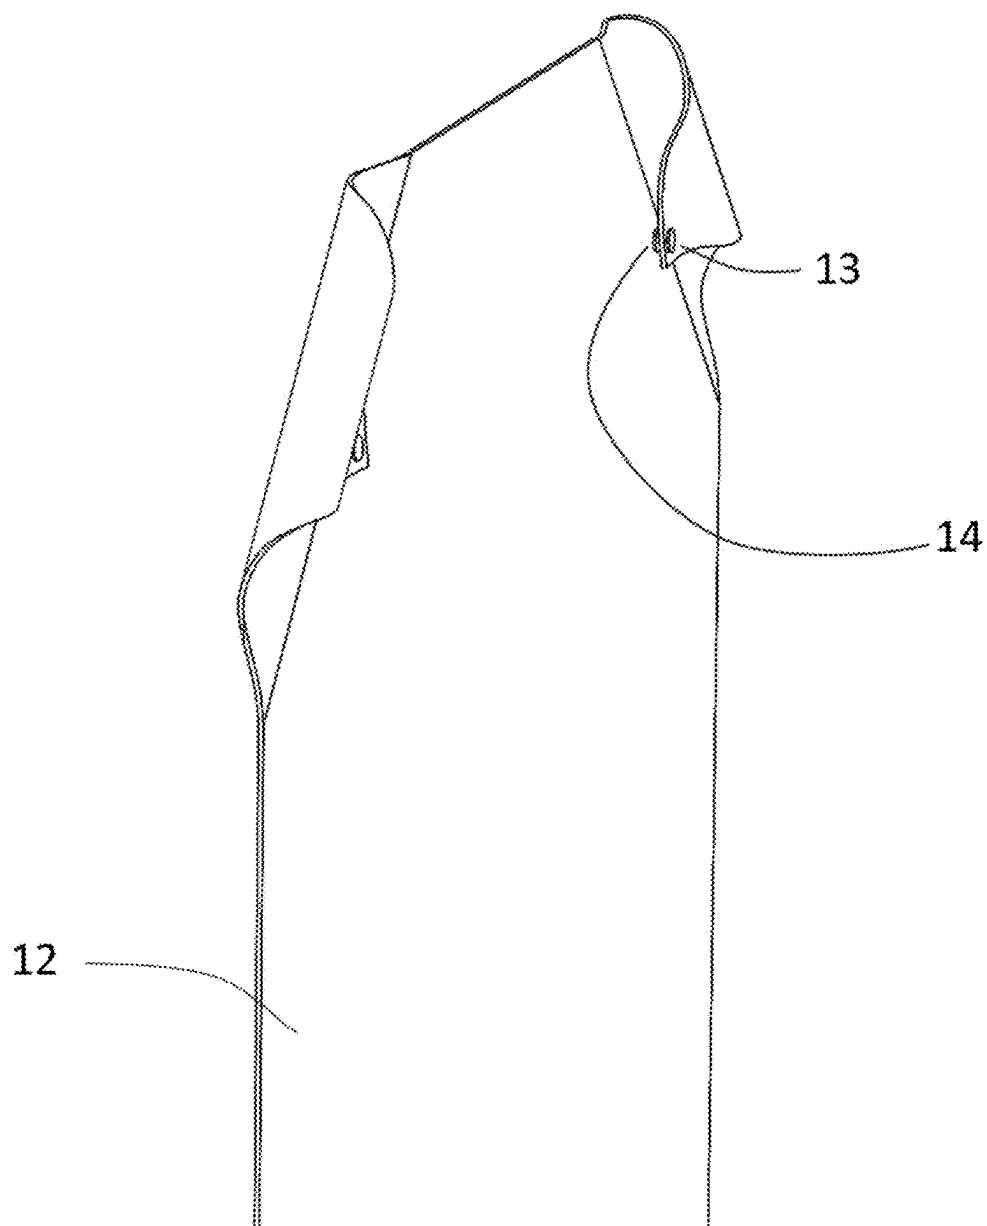


Figure 6

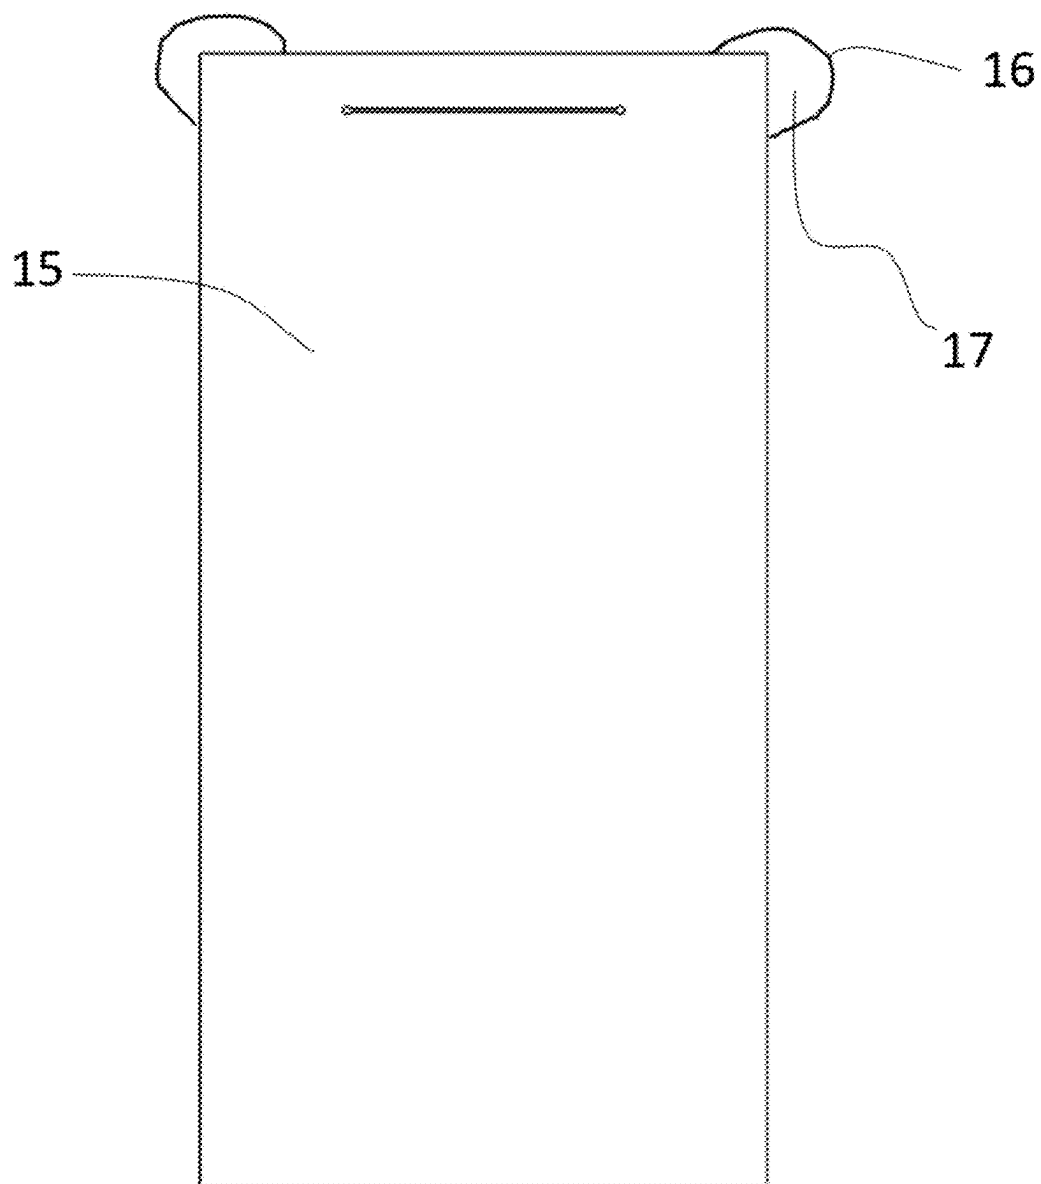


Figure 7

TOWEL WITH SECURED OPENINGS

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims priority to U.S. Provisional Application No. 63/489,741, filed on Mar. 8, 2023, and U.S. Provisional Application No. 66/205,208.

BACKGROUND

Field of the Invention

[0002] The present invention relates to a towel or similar drying element that contains features allowing it to be hooked around the headrest of an automobile seat or upper corners of a chair such that the towel or similar drying element stays secured so that the towel is unable to slide down the back of the seat or chair and thus provide a barrier between a person and the seat or chair both on the bottom and the back of the seat.

Description of the Related Art

[0003] A beach towel is a common item found upon those that are around water or beaches during warmer temperature days. Although the primary use of most towels is to absorb moisture, Beach towels in particular, often get used for not only for staying dry, but also for sitting or lying on in different scenarios. This can include such scenarios as covering a spot in the sand to sit or lay down on, covering a chair to sit on, covering a boat seat to sit on, covering a vehicle seat to sit on, covering a lounge chair to lay on, and many more scenarios that are both common and uncommon. Depending on the intent of the user, these towels under these scenarios usually can be summarized into two different intents.

[0004] One, the user is protecting or limiting exposure to the surface from which they are sitting or lying on from their body and the contents that which the surface of their body contains. One such example of this is that a user may lay the towel against a seat if they are trying to block or absorb any moisture, sand, or other contents in effort to prevent these contents from getting onto or absorbing into the seat they are sitting on.

[0005] Two, the user is protecting or limiting exposure to their body from the surface they are sitting or lying on from the contents, temperature, texture, or other unwanted sensation that they don't want exposed to their body. One such example of this is that a user may lay the towel against a seat if the seat has been exposed to the sun and is at a high temperature and the user wants to create a barrier between them and the seat to limit the discomfort of sitting directly on the high temperature seat.

BRIEF SUMMARY OF THE INVENTION

[0006] According to the embodiment of the present invention, a towel includes a device that has an absorbent cloth that contains a reinforced opening within the device such that the device can be secured around a vehicle headrest or other fixed structure so that the device is held up in position.

[0007] Another embodiment of the present invention, a towel includes a device that has an absorbent cloth that contains a reinforced opening within the device and a securing element that allows the opening to close fully or partially.

[0008] Another embodiment of the present invention, a towel includes a device that is an absorbent cloth that contains multiple openings within the device that are located near the end of the device such that the device can be secured around the corners of a chair or other similar fixed structure so that the device can be held up in position without falling from the force of gravity.

[0009] Another embodiment of the present invention, a towel includes a device that is an absorbent cloth that contains multiple openings within the device that are located near the end of the device. Snap buttons or other securing features are coupled to the towel near opposing edges of said openings such that the snap button or securing feature can secure the device in such a manner that it fixes to a chair or other similar fixed structure so that the device can be held up in position without falling from the force of gravity.

[0010] Another embodiment of the present invention, a towel includes a device that is an absorbent cloth that contains snap buttons or other securing features that are coupled to the towel near the corners of the device and also has second set up snap buttons or other securing features that are coupled to the towel positioned a distance away from the first set whose distance is sufficient to that if the snap buttons or other securing features were connected, they could secure around the top or corners of a chair or other similar fixed structure so that the device can be held up in position without falling from the force of gravity.

BRIEF DESCRIPTION OF THE DRAWINGS

[0011] FIG. 1 is a schematic of a towel to one embodiment of the present invention.

[0012] FIG. 2 is a perspective view of a towel attached to a head rest and in use on a vehicle seat according to one embodiment of the present invention.

[0013] FIG. 3 is a perspective view of a towel attached to a squared corner chair according to one embodiment of the present invention.

[0014] FIG. 3 is a perspective view of a towel attached to a round corner chair according to one embodiment of the present invention.

[0015] FIG. 3 is a schematic of a towel to one embodiment of the present invention.

[0016] FIG. 4 is a perspective view of a towel according to one embodiment of the present invention.

DETAILED DESCRIPTION

[0017] Referring to FIG. 1 and FIG. 2, a towel 1 typically made of cotton, microfiber, or other material(s) that are absorbent, contains an opening 2 near the end of the device. To prevent tearing, the opening 2 is surrounded by a reinforced region 3. Reinforced region 3 is made by manufacturing a different weave into the device that acts to increase the strength and reduce the chance of tearing when tensional force, whether intentional or unintentional, is applied to the towel 1 when the opening 2 is hooked around a relatively fixed object such as the automobile headrest 5 shown in FIG. 2.

[0018] The towel 1 has an opening 2 that is large enough to fit over a common automobile headrest 5 as shown in FIG. 2. This allows the towel 1 to be held secure and prevent falling or sliding down the back of a vehicle seat 6 as illustrated in FIG. 2. The towel 1 has a width and length that may fully or partially cover the seat 6.

[0019] The towel **1** contains a securing element **4**, which could consist of a button, zipper, hook and loop, or other fixing method, on opposing sides of the opening **2** such that the opening **2** can be partially or fully closed while the opening **2** is not looped around any object such as an automobile headrest **5** so that the towel **1** does not contain a large opening which makes it better for use on a beach or other towel prone environment, or can be secured partially while the opening **2** is looped around an automobile headrest **5** or other relatively fixed object such that the opening **2** does not sag or get pulled down the seat **6** and thus rendering its protective characteristics not as effective as it no longer covers as much of the seat **6**.

[0020] Referring to FIG. 1, FIG. 3 and FIG. 4, a towel **1** typically made of cotton, microfiber, or other material(s) that are absorbent, contains two openings **5** near the end corners. The opening **5** has reinforced stitching at both ends of the two openings **5** to increase the ability to resist tearing when tensional force, whether intentional or unintentional, is applied to the towel **1** when the two openings **5** are hooked around a relatively fixed object such as a chair corner **9** shown in FIG. 3.

[0021] The towel **1** has openings **5** that are large enough to fit over a common chair corner **9** as shown in FIG. 2. This allows the towel **1** to be held secured and prevent falling or sliding down the back of the chair **8** as illustrated in FIG. 2. The towel **1** has a width and length that may fully or partially cover the seat **8**.

[0022] The towel **1** has a securing element **4** on opposing sides of the two openings **5** that can be secured together around a tubular or rounded chair corner **11** that are often found on beach chairs **10**. This allows the towel **1** to be held secured and prevents falling or sliding down the back of the chair **10** as illustrated in FIG. 4. The towel **1** has a width and length that may fully or partially cover the seat **10**.

[0023] Referring to FIG. 5 and FIG. 6, a towel **12** typically made of cotton, microfiber, or other material(s) that are absorbent, contains an outer snap button or other securing element **13** and an inner snap button or other securing element **14** that are positioned a set distance away from each other such that when the corner or edge of the towel **1** is looped, the snap button or other securing element **13** and the snap button or other securing element **14** can be secured together in such a manner that towel **12** can be affixed to a chair or other fixed sitting structure.

[0024] Referring to FIG. 7, a towel **15** typically made of cotton, microfiber, or other material(s) that are absorbent, contains two securing elements that consist of securing straps **16** for fitting around chair corner. The securing straps **16** are attached to the towel **15** at either end of the securing straps **16** and whose end is defined by the point in which securing strap **16** is first fixed to the towel **15** and is fixed to towel **15** at or near the corners of the towel **15** and may be fixed across any width of towel **15** such that the gap **17** created by the space between securing strap **16** and the towel **15** is sufficient enough to fit around a common chair corner.

What is claimed is:

1. A towel, comprising:
 - a sheet formed from a first material that is absorbent to form a front surface and a back surface;
 - at least one opening extending through the sheet from the front surface to the back surface; and
 - a securing feature to hold the at least one opening fully or partially closed.
2. A towel of claim 1, wherein the at least one opening is dimensioned to fit over a headrest of an automobile.
3. A towel of claim 1, wherein the at least one opening is dimensioned to fit over a chair corner.
4. The towel of claim 2, wherein the first material is cloth.
5. A towel, comprising:
 - a sheet formed from a first material that is absorbent to form a front surface and a back surface;
 - at least two openings extending through the sheet from the front surface to the back surface.
6. A towel of claim 5, wherein the at least two openings are dimensioned to fit around a chair corner.
7. The towel of claim 5, wherein the first material is cloth.
8. A towel, comprising:
 - a sheet formed from a first material that is absorbent to form a front surface, a back surface, and at least two corners;
 - at least two securing features, each of which is located near one of the at least two corners.
9. A towel of claim 8, wherein the at least two securing features form loops that can fit around a corner of a chair.
10. The towel of claim 8, wherein the first material is cloth.

* * * * *