



US0D1087832S

(12) **United States Design Patent** (10) **Patent No.:** **US D1,087,832 S**
Hiller et al. (45) **Date of Patent:** **** Aug. 12, 2025**

(54) **BUCKLE PART**

(71) Applicant: **Fidlock GmbH**, Hannover (DE)

(72) Inventors: **Lasse Hiller**, Ronnenberg (DE); **Esther Endrigkeit**, Hannover (DE)

(73) Assignee: **FIDLOCK GMBH**, Hannover (DE)

(**) Term: **15 Years**

(21) Appl. No.: **29/867,510**

(22) Filed: **Oct. 27, 2022**

(30) **Foreign Application Priority Data**

Jun. 2, 2022 (DE) 402022100460.5

(51) **LOC (15) Cl.** **02-07**

(52) **U.S. Cl.**
USPC **D11/216**

(58) **Field of Classification Search**

USPC D11/200, 202, 206, 210, 212, 216, 218,
D11/201, 214, 217, 220, 226, 237;
D30/151–153

CPC A44B 11/00; A44B 11/02; A44B 11/04;
A44B 11/18; A44B 11/2557; A44B
13/0017; A44B 13/0023; A44B 13/0058;
A44B 11/2519; A44B 11/005; A44B
11/006; A44B 11/06; A44B 11/10; A44B
11/12; A44B 11/24; A44B 11/25; A44B
11/2511; A44B 11/2523; A44B 11/2526;
A44B 11/253; A44B 11/2538; A44B
11/2549; A44B 11/266; A44B 11/2573;
A44B 11/2592; A44B 17/0005; A44B
17/0011; A44B 17/0023; A44B 17/0035;
A44B 17/0052; A44B 18/00; A44B
18/0034; A44B 19/00; A44B 19/303;
A44B 19/403

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

D340,678 S * 10/1993 Wakabayashi D11/218
D421,578 S * 3/2000 Anscher D11/218

D446,473 S * 8/2001 Chung D11/218
D496,605 S * 9/2004 Anscher D11/218
D507,509 S * 7/2005 Hou D11/218
D535,914 S * 1/2007 Yang D11/216
D823,717 S * 7/2018 Ho D11/218
(Continued)

FOREIGN PATENT DOCUMENTS

DE 402022100460.5 * 6/2022

OTHER PUBLICATIONS

Instagram posted entitled “Our Pinclip M are the ideal solution for products that require durable, virtually clearance-free fastening.” 1 page, posted Mar. 8, 2024 by user “@fidlock.components”. Retrieved from internet: https://www.instagram.com/p/C4P1I_vMTJf/ (Year: 2024).*

Primary Examiner — Joseph Kukella

Assistant Examiner — Heather Wencil

(74) *Attorney, Agent, or Firm* — WCF IP

(57) **CLAIM**

The ornamental design for a buckle part as shown and described.

DESCRIPTION

FIG. 1 is a top, front, right side perspective view of a buckle part, showing the new design;

FIG. 2 is a top, rear, left side perspective view thereof;

FIG. 3 is a top plan view in an opened status thereof;

FIG. 4 is a bottom plan view thereof;

FIG. 5 is a left side view thereof;


FIG. 6 is a right side view thereof;

FIG. 7 is a front view thereof; and,

FIG. 8 is a rear view thereof.

Broken lines depict portions of the buckle part which form no part of the claimed design.

1 Claim, 8 Drawing Sheets

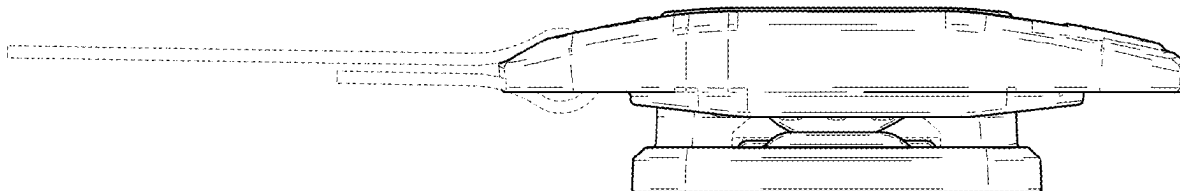

(56)

References Cited

U.S. PATENT DOCUMENTS

D840,870	S *	2/2019	Koreishi	D11/218
D858,349	S *	9/2019	Ishii	D11/218
D877,656	S *	3/2020	Chan	D11/218
D890,022	S *	7/2020	Alcantra	D11/218
11,758,988	B2 *	9/2023	Cheng	A44B 11/2511 24/303
2018/0317611	A1 *	11/2018	Rittenhouse	A44B 11/04

* cited by examiner

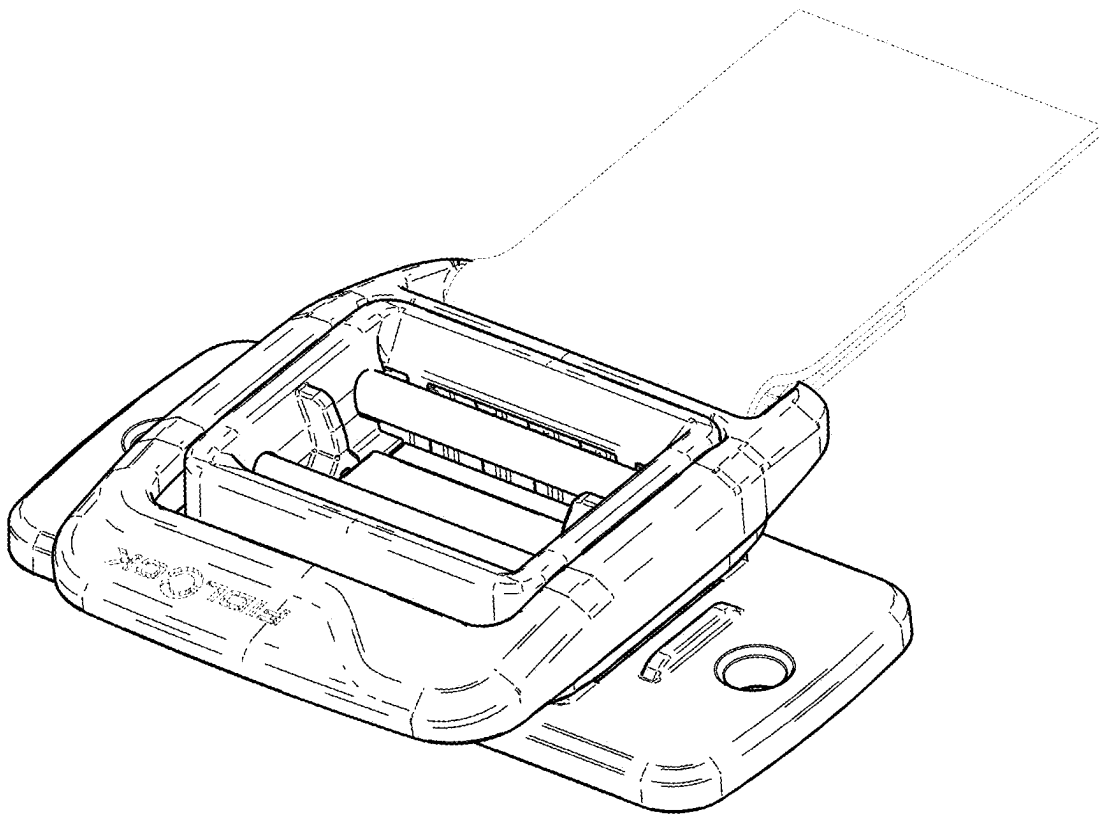


FIG. 1

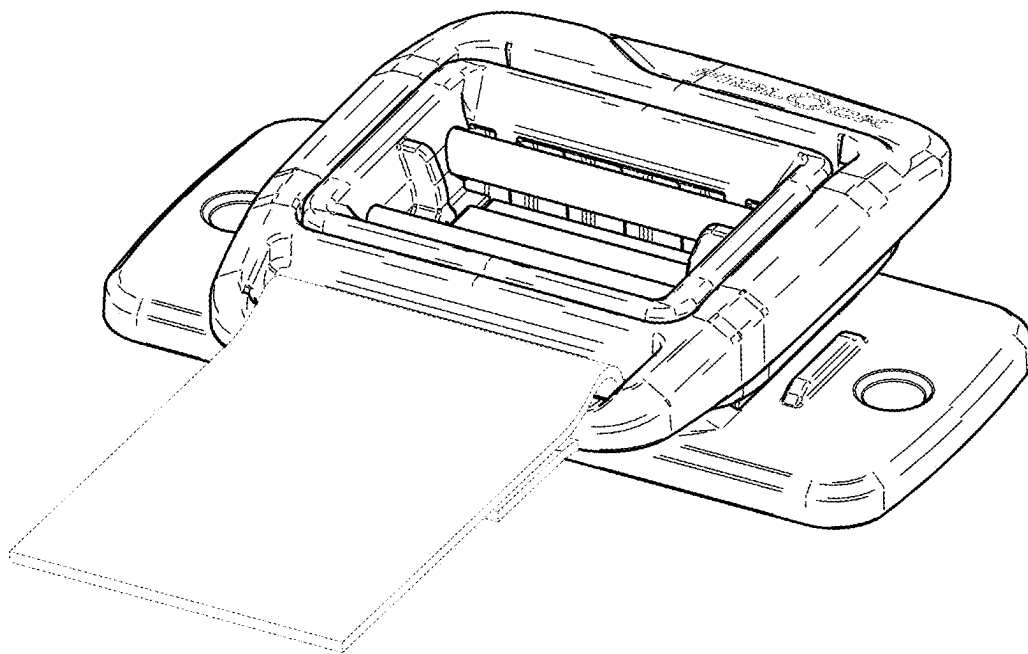


FIG. 2

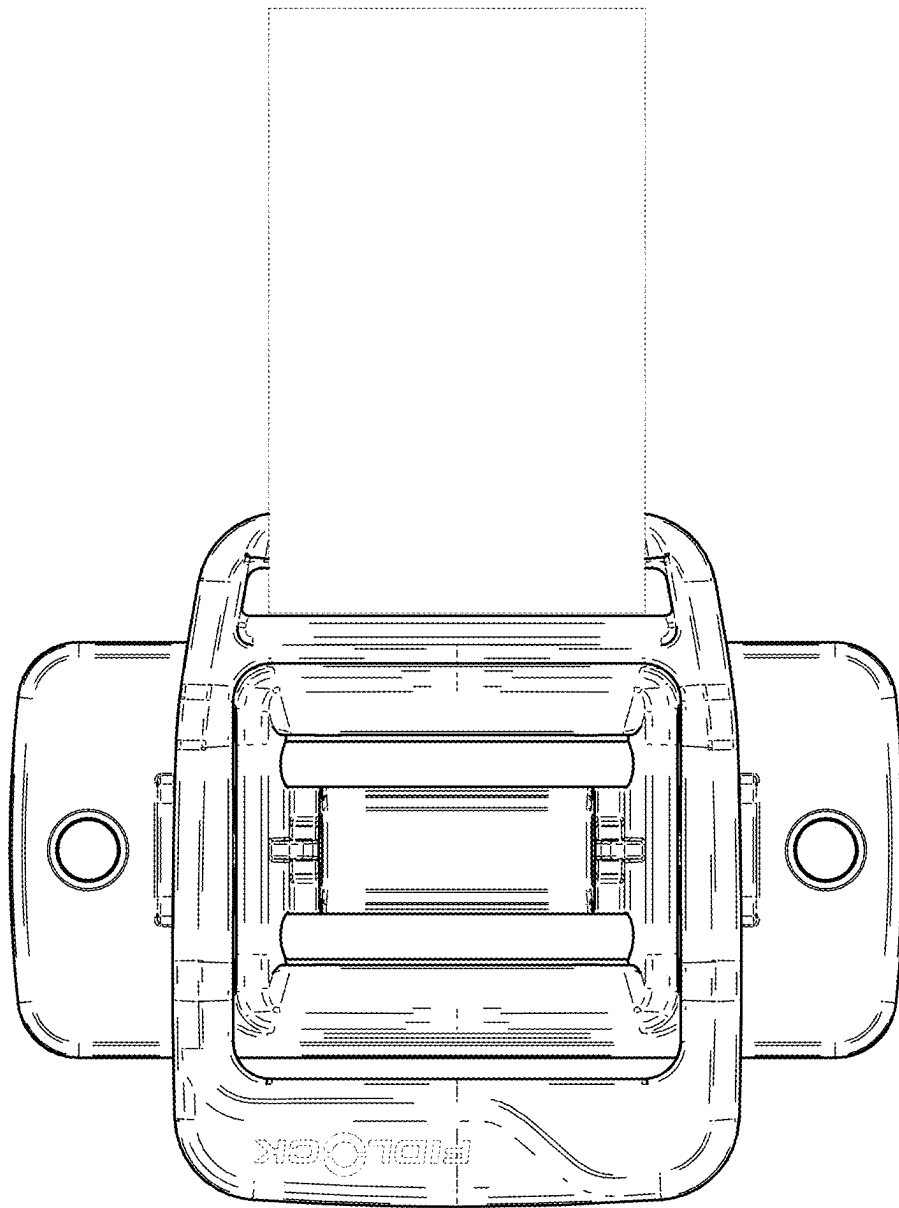


FIG. 3

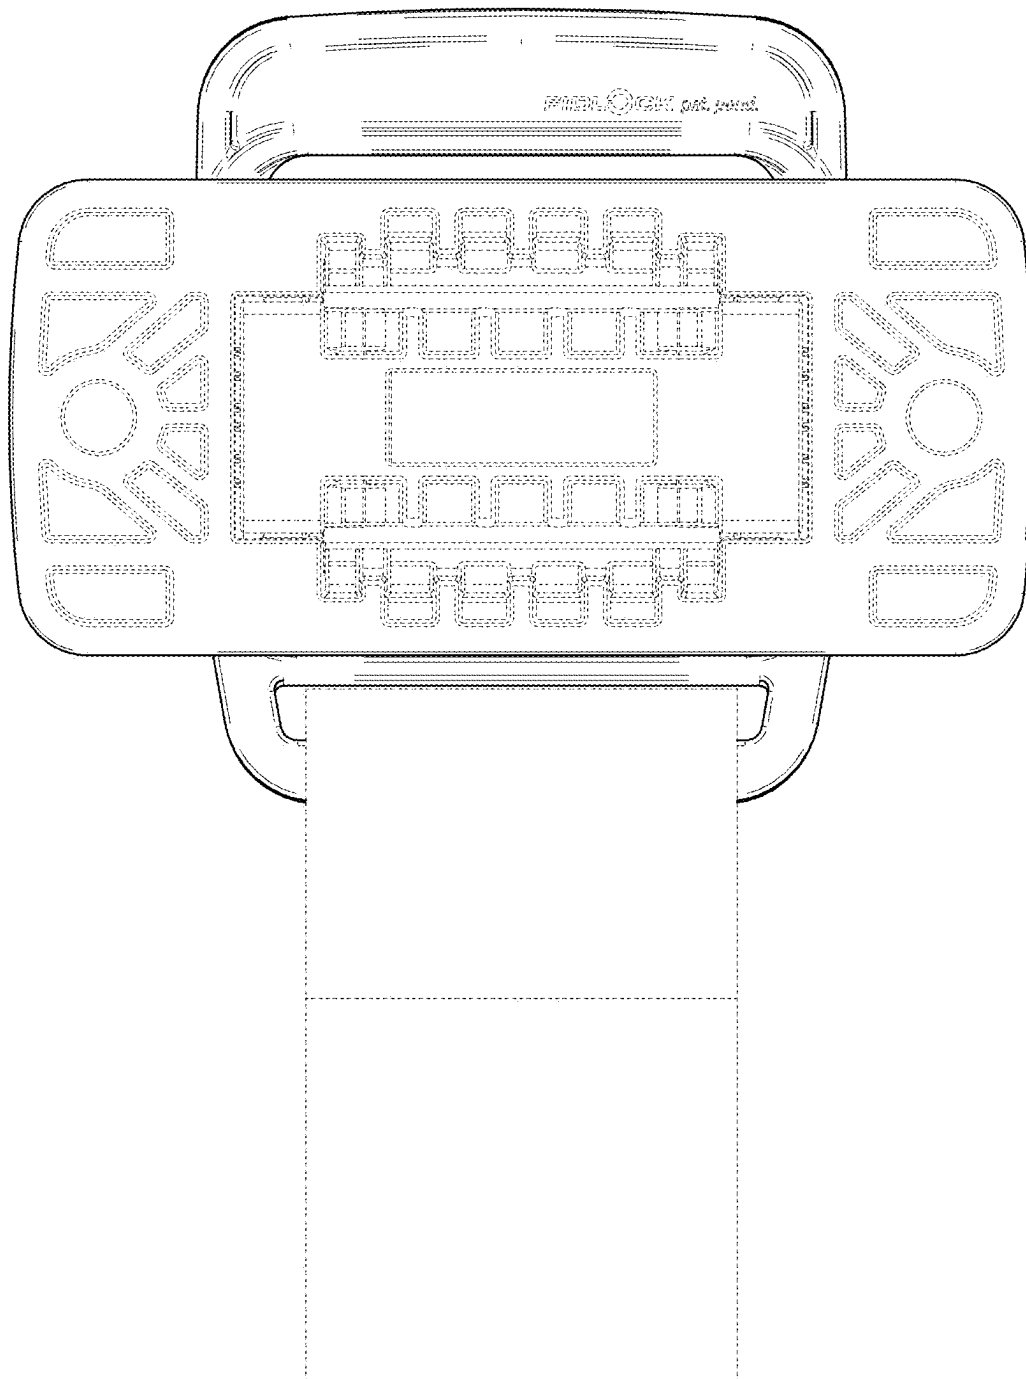


FIG. 4

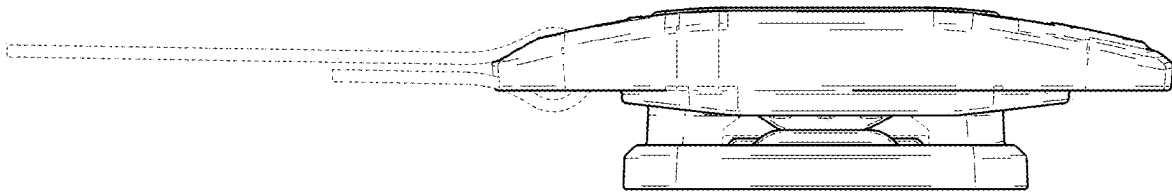


FIG. 5

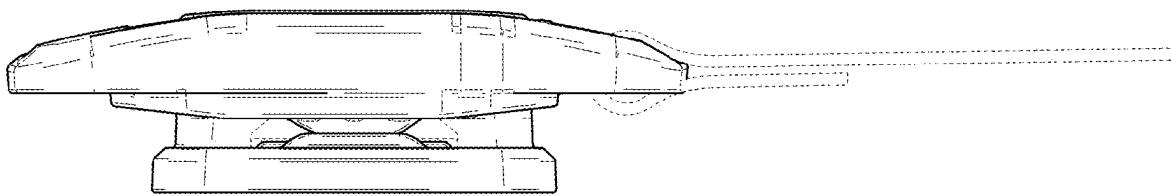


FIG. 6

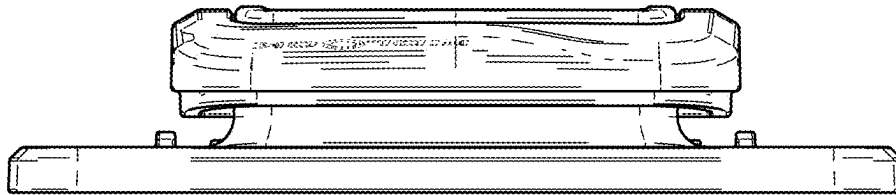


FIG. 7

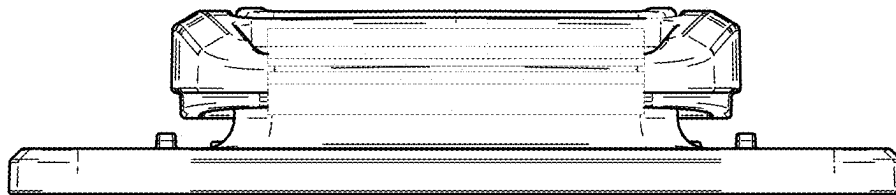


FIG. 8