




US 20250281783A1

(19) **United States**(12) **Patent Application Publication**
Saarikoski et al.(10) **Pub. No.: US 2025/0281783 A1**(43) **Pub. Date: Sep. 11, 2025**(54) **UPRIGHT SPRINKLER AND A SPRINKLER SYSTEM**(52) **U.S. Cl.**CPC *A62C 31/02* (2013.01); *A62C 35/68* (2013.01); *A62C 37/14* (2013.01)(71) Applicants: **Tuomas Saarikoski**, Helsinki (FI);
Samuli Jarvinen, Espoo (FI)(72) Inventors: **Tuomas Saarikoski**, Helsinki (FI);
Samuli Jarvinen, Espoo (FI)(21) Appl. No.: **18/598,211**(22) Filed: **Mar. 7, 2024****Publication Classification**(51) **Int. Cl.***A62C 31/02* (2006.01)
A62C 35/68 (2006.01)
A62C 37/14 (2006.01)

(57)

ABSTRACT

An upright sprinkler is disclosed. The sprinkler comprises a housing having a conduit extending therethrough, a heat-sensitive valve assembly configured above the conduit, and a nozzle arrangement configured below the conduit. The nozzle arrangement is fluidically connected to the conduit via the valve assembly, such that actuation of the valve assembly enables the flow of a fluid from the conduit to the nozzle arrangement via the valve assembly and further sprays the fluid at different downward-facing angles through the nozzle arrangement.

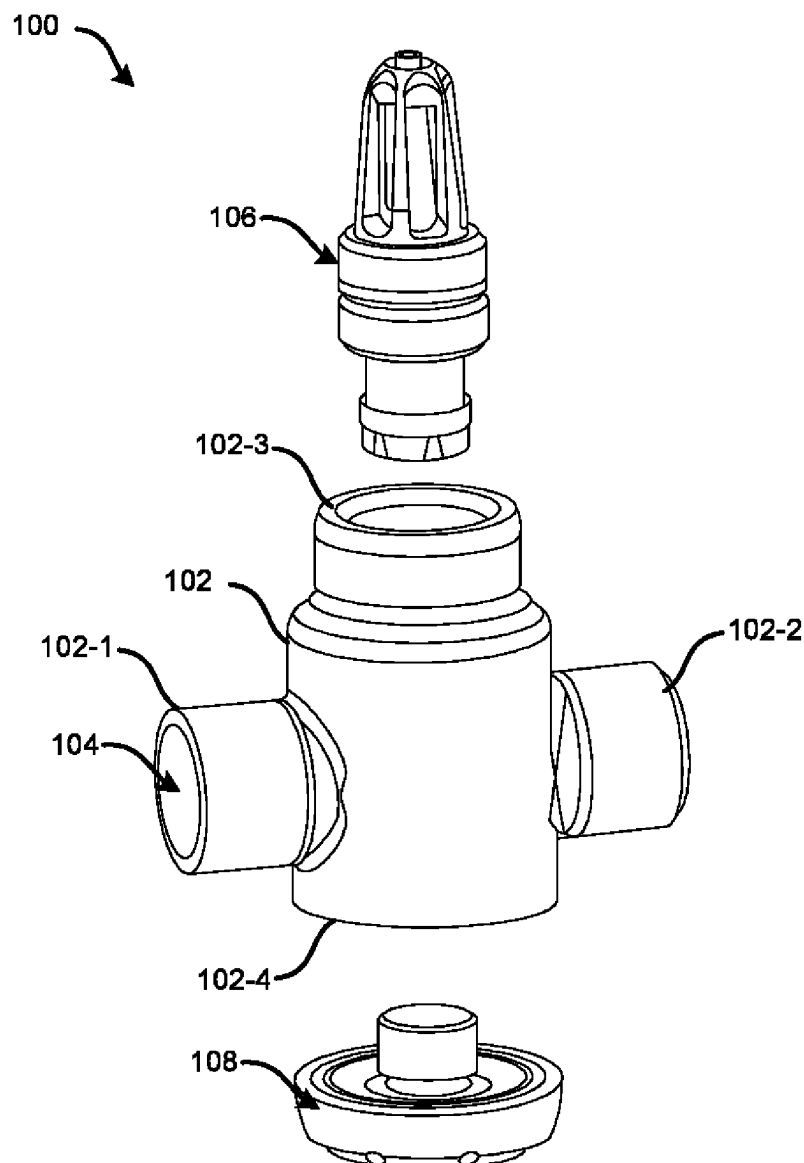

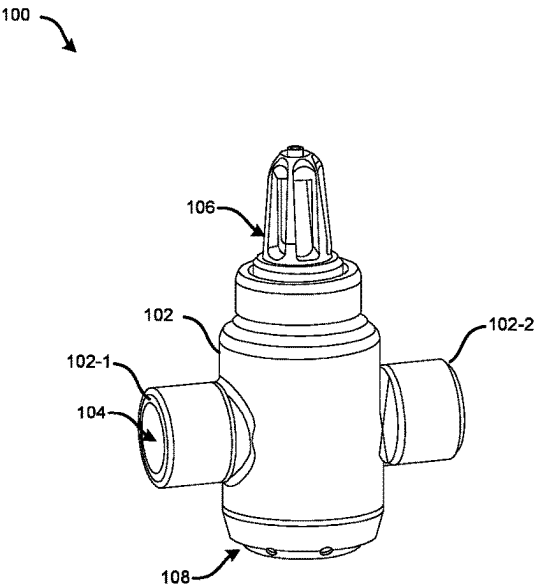


FIG. 1A

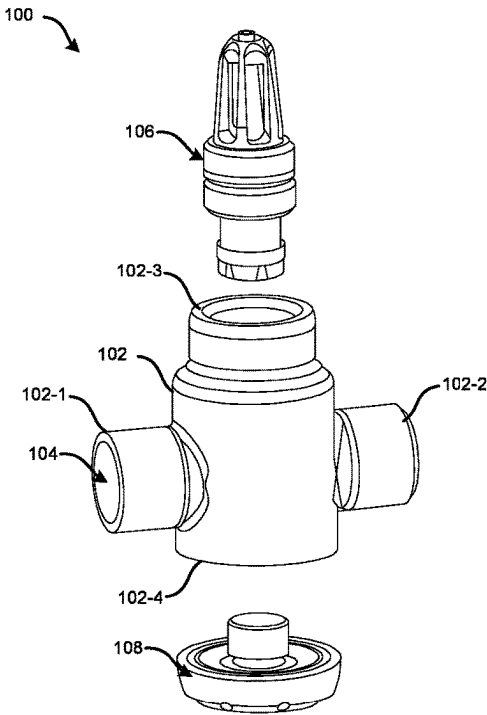


FIG. 1B

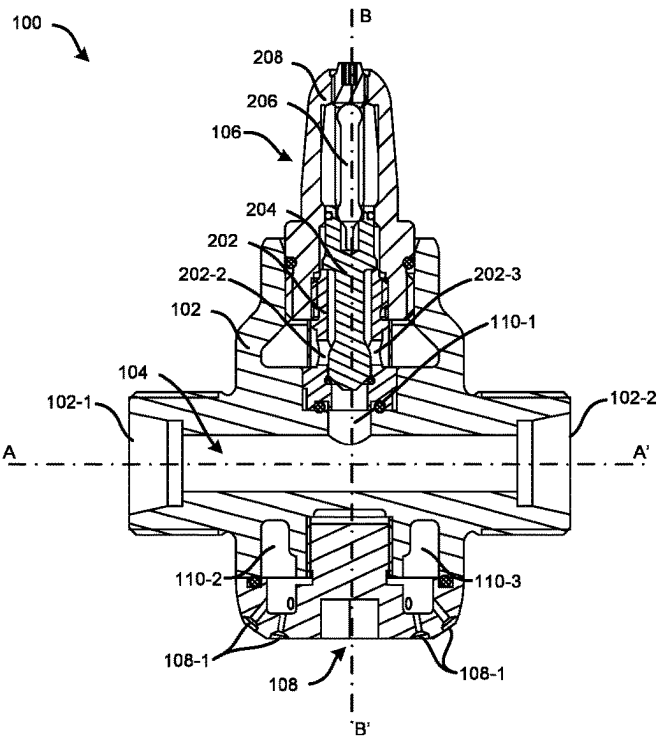


FIG. 2A

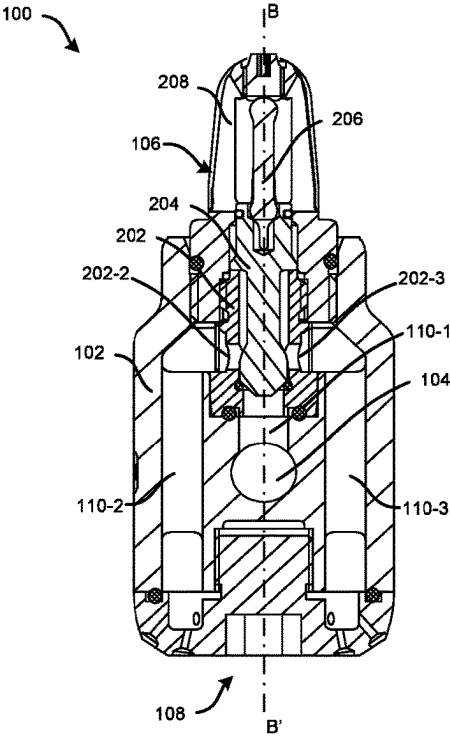


FIG. 2B

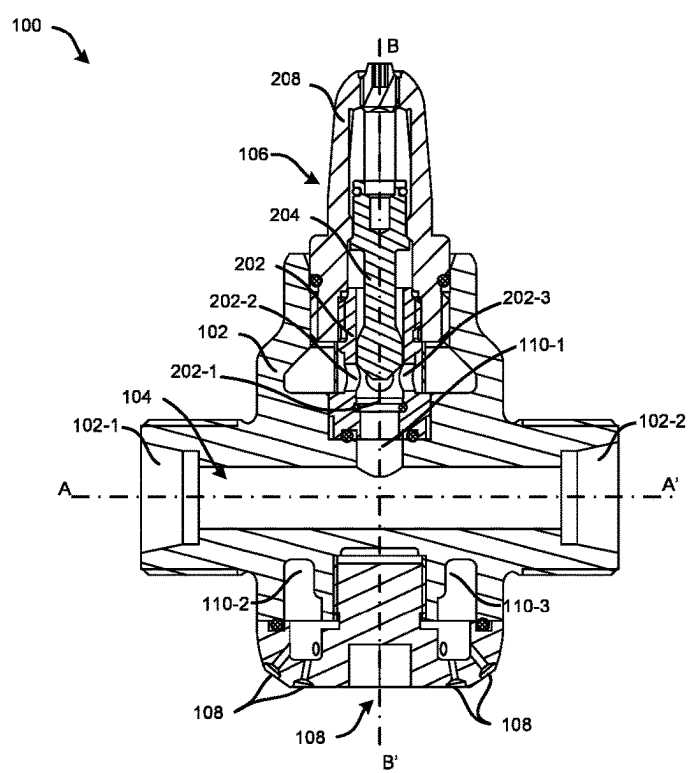


FIG. 2C

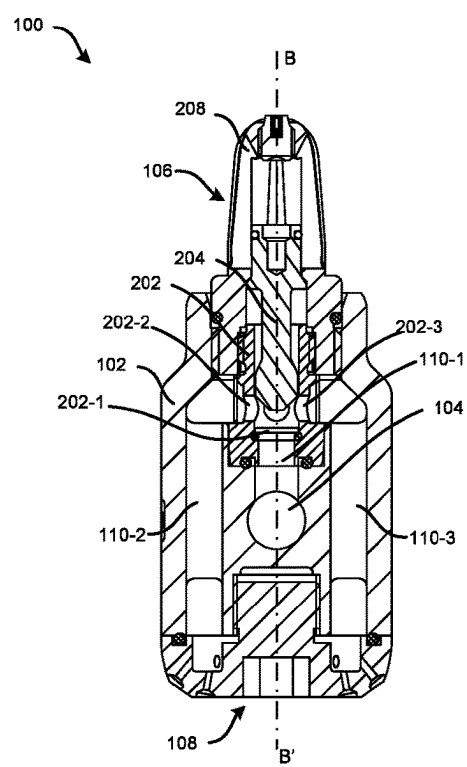


FIG. 2D

UPRIGHT SPRINKLER AND A SPRINKLER SYSTEM

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This patent application claims the benefit of U.S. Provisional Patent Application No. 63/489,443, filed on Mar. 10, 2023, which is incorporated by reference herein in its entirety.

BACKGROUND

[0002] This invention relates to the field of sprinklers, and more particularly, a simple, improved, and efficient upright sprinkler and sprinkler system

[0003] Conventional upright sprinkler designs position a heat-sensitive activation member and a nozzle arrangement above a water distribution pipe. As a result, the pipe may cause significant shadowing to the spray pattern especially if the pipe is close to the ceiling. In addition, direct downward spraying or spraying underneath the sprinkler may be difficult to achieve in conventional upright sprinklers. Moreover, the nozzle arrangement and the heat-sensitive member are built into the sprinkler body of conventional upright sprinklers, which may also lead to the requirement of different sprinkler variations for separate sprinkler versions and different spray patterns.

SUMMARY

[0004] Described herein is a sprinkler. The sprinkler comprises a housing comprising a conduit extending there-through, a heat-sensitive valve assembly configured above the conduit, and a nozzle arrangement comprising one or more orifices configured below the conduit, wherein the nozzle arrangement is fluidically connected to the conduit via the valve assembly, such that actuation of the valve assembly enables flow of a fluid from the conduit to the nozzle arrangement via the valve assembly and further sprays the fluid through the nozzle arrangement.

[0005] In one or more embodiments, the housing comprises one or more channels extending between the conduit and the nozzle arrangement within the housing, to fluidically connect the nozzle arrangement to the conduit.

[0006] In one or more embodiments, the one or more channels comprise a first fluidic path that extends upward from the conduit and at least one second fluidic path that diverges downward from the first fluidic path into the nozzle arrangement.

[0007] In one or more embodiments, the valve assembly comprises a filter plug comprising one or more openings, the filter plug is adapted to be disposed of within at least a portion of the one or more channels such that the nozzle arrangement remains fluidically connected to the conduit via the one or more openings of the filter plug, and a spindle coaxially disposed of within the filter plug, wherein the spindle is configured to move between a deactivated position where the spindle blocks the one or more openings of the filter plug to fluidically disconnect the nozzle arrangement from the conduit, and an activated position where the spindle moves away from the deactivated position to unblock the one or more openings of the filter plug and fluidically connect the conduit with the nozzle arrangement.

[0008] In one or more embodiments, the valve assembly comprises a heat-sensitive element connected to the spindle

and configured to retain the spindle in the deactivated position, and wherein when a temperature of the heat-sensitive element exceeds a predefined value, the heat-sensitive element is adapted to deform or break, thereby enabling automated movement of the spindle to the activated position.

[0009] In one or more embodiments, the valve assembly comprises a frame accommodating the heat sensitive element, the filter plug, and the spindle, wherein the frame facilitates coupling of the valve assembly to a top end of the housing.

[0010] In one or more embodiments, the heat-sensitive element is configured between a first end of the spindle and a top inner side of the frame, wherein a second end of the spindle is movably disposed of within the filter plug using a biasing element such that upon the deforming or breaking of the heat sensitive element, the biasing element and/or a pressurized fluid present in the conduit enables automated movement of the spindle to the activated position.

[0011] In one or more embodiments, the heat-sensitive element is a bulb filled with a heat-sensitive material that is adapted to explode or expand to break the glass when the temperature of the heat-sensitive material exceeds the predefined value.

[0012] In one or more embodiments, the heat-sensitive element is a fusible material that is adapted to deform or break when the temperature of the fusible material exceeds the predefined value.

[0013] In one or more embodiments, the valve assembly comprises a filter mesh configured at the one or more openings of the filter plug.

[0014] In one or more embodiments, the valve assembly is adapted to be removably coupled to a top end of the housing such that the conduit remains fluidically connected to the one or more channels and the nozzle arrangement via the valve assembly.

[0015] In one or more embodiments, the nozzle arrangement is adapted to be removably coupled to a bottom end of the housing such that the nozzle arrangement remains fluidically connected to the one or more channels.

[0016] In one or more embodiments, the nozzle arrangement is removably coupled to a bottom end of the housing such that actuation of the valve assembly enables spraying of the fluid, through the nozzle arrangement, at predefined angles in a downward direction.

[0017] In one or more embodiments, the conduit comprises an inlet and an outlet that are adapted to be fluidically coupled to a fluid source.

[0018] In one or more embodiments, the sprinkler is fluidically connected to the fluid source by a dry conduit system comprising an isolation valve, wherein the conduit of the sprinkler and the dry conduit system is filled with a pressurized gas that facilitates actuation of the isolation valve to a closed position to restrict the flow of the fluid between the fluid source and the sprinkler when the temperature of the heat-sensitive element associated with the sprinkler is below the predefined value.

[0019] In one or more embodiments, when the temperature of the heat-sensitive element associated with the sprinkler exceeds the predefined value, the sprinkler is configured to release the pressurized gas via the nozzle arrangement which facilitates actuation of the isolation valve to an open position to allow the flow of the fluid from the fluid source to the nozzle arrangement through the conduit system.

[0020] Also described herein is a sprinkler system. The sprinkler system comprises one or more sprinklers fluidically connected to each other and a fluid source, wherein each of the sprinklers comprises a housing comprising a conduit extending therethrough, a heat-sensitive valve assembly configured above the conduit, and a nozzle arrangement comprising one or more orifices configured below the conduit, wherein the nozzle arrangement is fluidically connected to the conduit via the valve assembly, such that actuation of the valve assembly enables flow of a fluid from the conduit to the nozzle arrangement via the valve assembly and further sprays the fluid through the nozzle arrangement.

[0021] In one or more embodiments, the conduit of each of the sprinklers comprises an inlet and an outlet that facilitates fluidic coupling of the one or more sprinklers with each other and the fluid source.

[0022] In one or more embodiments, the one or more sprinklers are fluidically connected to the fluid source by a dry conduit system comprising an isolation valve, wherein the conduit of each of the sprinklers and the dry conduit system is filled with a pressurized gas that facilitates actuation of the isolation valve to a closed position to restrict the flow of the fluid between the fluid source and the one or more sprinklers when the temperature of the heat-sensitive element associated with the corresponding sprinkler is below the predefined value, and wherein when the temperature of the heat-sensitive element associated with any of the one or more sprinklers exceeds the predefined value, the corresponding sprinklers are configured to release the pressurized gas via the nozzle arrangement which facilitates actuation of the isolation valve to an open position to allow the flow of the fluid from the fluid source to the nozzle arrangement through the conduit system.

[0023] In one or more embodiments, the housing of each of the sprinklers comprises one or more channels extending between the conduit and the nozzle arrangement within the housing, to fluidically connect the nozzle arrangement to the conduit, wherein the one or more channels comprise a first fluidic path that extends upward from the conduit and at least one second fluidic path that diverges downward from the first fluidic path into the nozzle arrangement.

[0024] The foregoing summary is illustrative only and is not intended to be in any way limiting. In addition to the illustrative aspects, embodiments, and features described above, further aspects, embodiments, features, and techniques of the invention will become more apparent from the following description taken in conjunction with the drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0025] The accompanying drawings are included to provide a further understanding of the subject disclosure of this invention and are incorporated in and constitute a part of this specification. The drawings illustrate exemplary embodiments of the subject disclosure and, together with the description, serve to explain the principles of the subject disclosure.

[0026] In the drawings, similar components and/or features may have the same reference label. Further, various components of the same type may be distinguished by following the reference label with a second label that distinguishes among the similar components. If only the first reference label is used in the specification, the description is

applicable to any one of the similar components having the same first reference label irrespective of the second reference label.

[0027] FIG. 1A illustrates an exemplary isometric view of the sprinkler, in accordance with one or more embodiments of the disclosure.

[0028] FIG. 1B illustrates an exemplary exploded view of the sprinkler of FIG. 1A.

[0029] FIGS. 2A and 2B illustrate exemplary cross-sectional views of the sprinkler of FIG. 1A in a deactivated state, respectively, in accordance with one or more embodiments of the disclosure.

[0030] FIGS. 2C and 2D illustrate exemplary cross-sectional views of the sprinkler of FIG. 1A in an activated state, respectively, in accordance with one or more embodiments of the disclosure.

DETAILED DESCRIPTION

[0031] The following is a detailed description of embodiments of the disclosure depicted in the accompanying drawings. The embodiments are in such detail as to clearly communicate the disclosure. However, the amount of detail offered is not intended to limit the anticipated variations of embodiments; on the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the subject disclosure as defined by the appended claims.

[0032] Various terms are used herein. To the extent a term used in a claim is not defined below, it should be given the broadest definition persons in the pertinent art have given that term as reflected in printed publications and issued patents at the time of filing.

[0033] In the specification, reference may be made to the spatial relationships between various components and to the spatial orientation of various aspects of components as the devices are depicted in the attached drawings. However, as will be recognized by those skilled in the art after a complete reading of the subject disclosure, the components of this invention, described herein may be positioned in any desired orientation. Thus, the use of terms such as “above,” “below,” “upper,” “lower,” “first,” “second” or other like terms to describe a spatial relationship between various components or to describe the spatial orientation of aspects of such components should be understood to describe a relative relationship between the components or spatial orientation of aspects of such components, respectively, housing, nozzle arrangement, heat-sensitive valve assembly, and corresponding components, described herein may be oriented in any desired direction.

[0034] Sprinklers are devices that may be used to spray or distribute water over a designated area for fire suppression or irrigation. Sprinklers typically consist of a pipe system that is connected to a water source and equipped with valves, nozzle arrangements, and other components that may regulate the flow and distribution of water. Sprinklers may be generally classified as pendant sprinklers and upright sprinklers. As the pendant sprinklers generally point downward so they may not be used in freezing areas, even with dry pipes as the sprinkler points downwards, water may remain collected inside the pipe and may not work at all in freezing temperatures. To overcome the water accumulation issue, upright sprinklers are generally employed, especially in cold areas.

[0035] Existing upright sprinkler designs position a heat-sensitive activation member and a nozzle arrangement above a water distribution pipe. As a result, the pipe may cause significant shadowing to the spray pattern especially if the pipe is close to the ceiling. In addition, downward spraying may be difficult to achieve in existing upright sprinklers. Moreover, the nozzle arrangement and the heat-sensitive member are built into the sprinkler body of conventional upright sprinklers, which may also lead to the employment of different sprinkler variations for separate sprinkler versions and different spray patterns. Further, the existing sprinkler designs may restrict the replacement or removal of the nozzle arrangement from the sprinkler body when the sprinkler is connected to a dry or wet conduit system in an operating state. Thus, there is a need to restrict spray pattern shadowing and achieve downward spraying in upright sprinklers. Further, there is a need to provide a simple, efficient, and easily operable upright sprinkler design that allows easier replacement of heat-sensitive members and nozzle arrangements from the sprinkler body for different sprinkler variations and different spray patterns, without completely replacing the overall sprinkler.

[0036] This invention provides a simple, reliable, efficient, and cost-effective upright sprinkler that enables downward spraying at all angles and has no spray pattern shadowing or obstruction issues. In addition, the upright sprinkler allows easier replacement of the heat-sensitive member and the nozzle arrangement from the sprinkler body for different sprinkler variations and different spray patterns, without completely replacing the overall sprinkler. The sprinkler may include a housing (sprinkler body) comprising a conduit extending therethrough. Further, the heat-sensitive valve assembly (heat-sensitive member) may be configured above the conduit, and the nozzle arrangement may be configured below the conduit. The nozzle arrangement may be fluidically connected to the conduit via the valve assembly, such that actuation of the valve assembly enables the flow of fluid (water) from the conduit to the nozzle arrangement via the valve assembly and further sprays the fluid, through the nozzle arrangement, in all downward facing angles. In addition, as the nozzle arrangement is at the bottom, the spray pattern from the nozzle arrangement remains unobstructed, thereby overcoming the spray pattern shadowing issues. Moreover, the heat-sensitive valve assembly and the nozzle arrangement may be adapted to be removably coupled to the housing, which may allow easier replacement of the heat-sensitive valve assembly and the nozzle arrangement for different sprinkler variations and different spray patterns, without completely replacing the overall sprinkler. The sprinkler also allows the replacement of the nozzle arrangement from the housing when the sprinkler is in a pressurized state or when installed.

[0037] Referring to FIGS. 1A to 2D, the upright sprinkler **100** “sprinkler **100**” is disclosed. The sprinkler **100** can include a housing **102** (also referred to as sprinkler body, herein) that may include a conduit **104** extending therethrough. The conduit **104** may extend horizontally along a horizontal axis A-A', such that an inlet **102-1** and outlet **102-2** of the conduit **104** remain on two opposite sides of the housing **102**. The sprinkler **100** may further include a heat-sensitive valve assembly **106** configured above the conduit **104**, and a nozzle arrangement **108** having multiple orifices/holes **108-1** configured below the conduit **104**. The nozzle arrangement **108** may be fluidically connected to the

conduit **104** via the valve assembly **106** within the housing **102**, such that actuation of the valve assembly **106** may enable the flow of a fluid from the conduit **104** to the nozzle arrangement **108** via a portion of the valve assembly **106** and further sprays the fluid through the nozzle arrangement **108**. In one or more embodiments, the fluid may be water, air, and fire-retardant liquid or gas, but not limited to the like.

[0038] In one or more embodiments, the sprinkler **100** may further include a first opening at the top end **102-3** and a second opening at the bottom end **102-4** of the housing **102**. Further, the valve assembly **106** may be adapted to be removably coupled to the first opening at the top end **102-3** of the housing **102** and the nozzle arrangement **108** may be adapted to be removably coupled to the second opening at the bottom end **102-4** of the housing **102**. However, in other embodiments, the valve assembly **106** and the nozzle arrangement **108** may also be an integral part of the housing **102** or may be built into the housing **102**.

[0039] The housing **102** may include one or more channels **110** extending between the conduit **104** and the nozzle arrangement **108** within the housing **102**, to fluidically connect the nozzle arrangement **108** to the conduit **104** via a portion of the valve assembly **106**. In one or more embodiments, the channel(s) may include a first fluidic path **110-1** that may extend perpendicularly upward from the conduit **104** along a vertical axis B-B' and at least one second fluidic paths **110-2**, and/or **110-3** that may diverge downward from the first fluidic path **110-1**, each extending around the conduit **104**, into the nozzle arrangement **108**. However, the channels **110** may also extend in a different arrangement between the conduit **104** and the nozzle arrangement **108** via the valve assembly **106**.

[0040] The heat-sensitive valve assembly “valve assembly” **106** may include a filter plug **202** comprising one or more openings **202-1** to **202-3**, which may be adapted to be disposed of within a portion of the one or more channels **110** within the housing **102** such that the nozzle arrangement **108** remains fluidically connected to the conduit **104** via the one or more openings **202-1** to **202-3** of the filter plug **202**. In one or more embodiments, the filter plug **202** may have an annular body comprising a channel, one plug opening **202-1** at the bottom of the filter plug **202**, and two plug openings **202-2**, **202-3** on two opposite lateral sides of the filter plug **202**. The filter plug **202** may be coaxially disposed of within the housing **102**, along the vertical axis B-B', from the top end of the housing **102**, such that the bottom plug opening **202-1** of the filter plug **202** may be fluidically connected to the first fluidic path **110-1** of the housing **102** and each of the two lateral plug openings **202-2**, **202-3** of the filter plug **202** may be fluidically connected to the second fluidic paths **110-2**, **110-3** respectively of the housing **102**, thereby fluidically connecting the first fluidic path **110-1** to the second fluidic paths **110-2**, **110-3** or fluidically connecting the conduit **104** to the nozzle arrangement **108**. The valve assembly **106** may further include a filter mesh configured at each opening **202-1** to **202-3** of the filter plug **202**.

[0041] The heat-sensitive valve assembly **106** may further include a spindle **204** that may be coaxially disposed of within the annular channel of the filter plug **202**, along the vertical axis B-B'. The spindle **204** may be configured to move between a deactivated position and an activated position to switch the sprinkler **100** between a deactivated state and an activated state, respectively. Referring to FIGS. 2A and 2B, the deactivated position may correspond to a

position where the spindle **204** remains completely disposed within the channel of the filter plug **202** to block the openings **202-1** to **202-3** of the filter plug **202** and fluidically disconnect the first fluidic path **110-1** and the second fluidic paths **110-2**, **110-3** of the channels, thereby fluidically disconnecting the nozzle arrangement **108** from the conduit **104**. Further, referring to FIGS. 2C and 2D, the activated position may correspond to a position where the spindle **204** moves away (upward) from the deactivated position to unblock the openings **202-1** to **202-3** of the filter plug **202** and fluidically connect the first fluidic path **110-1** to the second fluidic paths **110-2**, **110-3** via the openings **202-1** to **202-3** of the plug **202**, thereby fluidically connecting the conduit **104** with the nozzle arrangement **108**.

[0042] The heat-sensitive valve assembly **106** may include a heat-sensitive element **206** connected to the spindle **204** and configured to retain the spindle **204** in the deactivated position when the sprinkler **100** is in the deactivated state as shown in FIGS. 2A and 2B. Further, when the temperature of the heat-sensitive element **206** or the ambient temperature of the sprinkler **100** exceeds a predefined value, the sprinkler **100** may switch to the activated state where the heat-sensitive element **206** may break deform or break to enable automated movement of the spindle **204** to the activated position. The valve assembly **106** may include a frame “cage” **208** accommodating the heat-sensitive element **206**, the filter plug **202**, and the spindle **204**. The frame **208** may facilitate coupling of the valve assembly **106** to the top end **102-3** of the housing **102** such that the heat-sensitive element **206** may extend between a first end (top end) of the spindle **204** and a top inner side of the frame **208** and a second end of the spindle **204** may remain movably disposed of within the channels **110** of the filter plug **202** using a biasing element (spring) (not shown) such that upon the deforming or breaking of the heat sensitive element **206**, the biasing element (spring) and/or a pressurized fluid (gas or water) present in the conduit **104** may enable automated movement of the spindle **204** to the activated position.

[0043] In one or more embodiments, the heat-sensitive element **206** may be a bulb filled with a heat-sensitive material that may be adapted to explode or expand to break the glass when the temperature of the heat-sensitive material exceeds the predefined value. In other embodiments, (not shown) the heat-sensitive element may also be a fusible material that may be adapted to deform or break when the temperature of the fusible material exceeds the predefined value. As a result, upon the deforming or breaking of the heat-sensitive element **206**, a force created by the biasing element (spring) and/or the pressurized fluid may enable automated movement of the spindle **204** to the activated position, thereby switching the sprinkler **100** to the activated state. In the activated state, the sprinkler **100** may allow the fluid to flow from the conduit **104** into the nozzle arrangement **108** via the channels **110** of the housing **102** and the unblocked openings of the filter plug **202**, thereby spraying the fluid in predefined downward-facing angles through the orifices of the nozzle arrangement **108** and without any obstruction or shadowing.

[0044] In one or more embodiments, the sprinkler **100** may be fluidically connected to a fluid source by a dry conduit system comprising an isolation valve (not shown). The inlet **102-1** and outlet **102-2** of the conduit **104** of the sprinkler **100** may facilitate the fluidic connection of the sprinkler **100** (or multiple sprinklers) to the fluid source by

the dry conduit system, where the conduit **104** and the conduit system may be filled with a pressurized gas (pressurized water in case of a wet conduit system) that may signal and facilitate actuation of the isolation valve to a closed position to restrict the flow of the fluid between the fluid source and the sprinkler **100** when the temperature of the heat-sensitive element **206** associated with the sprinkler **100** is below the predefined value. Further, when the temperature of the heat-sensitive element **206** associated with the sprinkler **100** exceeds the predefined value, the sprinkler **100** may switch to the activated state where the sprinkler **100** releases the pressurized gas via the nozzle arrangement **108** which may signal and facilitate actuation of the isolation valve to an open position to allow the flow of the fluid from the fluid source into the sprinkler **100** through the conduit system and further spray the fluid through the nozzle arrangement **108**.

[0045] Initially, when the temperature of the heat-sensitive element **206** associated with the sprinkler **100** exceeds the predefined value, the sprinkler **100** in the activated state may allow the pressurized gas of the conduit system to flow from the conduit **104** into the nozzle arrangement **108** via the channels of the housing **102** and the unblocked openings of the filter plug **202**, thereby releasing the pressurized gas through the orifices/holes **108-1** of the nozzle arrangement **108**. This drop in pressure of the gas may signal and trigger the isolation valve to open and allow an automated flow of the fluid from the fluid source into the sprinkler **100** through the conduit system and further enable the spraying of the fluid in predefined downward-facing angles through the orifices/holes **108-1** of the nozzle arrangement **108** and without any obstruction or shadowing.

[0046] In addition, the sprinkler **100** may also allow the replacement or removal of the nozzle arrangement **108** from the housing **102** of the sprinkler **100** without any leakage of the fluid when the sprinkler **100** is connected to the pressurized conduit system in the deactivated state, as the spindle **204** and filter plug **202** of the valve assembly **106** keep the nozzle arrangement **108** fluidically disconnected from the conduit **104** during the deactivated state.

[0047] In one or more embodiments, the housing/sprinkler body **102** may be made of stainless steel or brass, but not limited to the like. Further, the nozzle arrangement **108** and components of the valve assembly **106** (except the heat-sensitive element **206**) may be made of nickel-coated brass, but not limited to the like. The material for the heat-sensitive element **206** may be selected based on activation temperature or the predefined temperature selected for the sprinkler **100**. In addition, the sprinkler **100** may include one or more rubber seals or O-rings configured between the filter plug **202** and the housing **102**, the nozzle arrangement **108** and the housing **102**, the frame **208** of the valve assembly **106** and the housing **102**, and the spindle **204** and the housing **102**, to restrict leakage of fluid. Further, the size and orientation of the orifices/holes **108-1** associated with the nozzle arrangement **108** may be selected based on downward-facing spraying angles and different spray patterns to be achieved.

[0048] In one or more embodiments, (not shown) a sprinkler system including multiple sprinklers **100** being installed at an area of interest (AOI) is also disclosed herein. The sprinkler system may include multiple sprinklers of FIG. 1A, which may be fluidically connected to each other and a fluid source by a conduit system. The sprinkler may be

positioned at predefined locations at the AOI such that sprinklers may spray the fluid across the entire AOI. In one or more embodiments, the sprinklers may be fluidically connected to the fluid source by a dry conduit system comprising one or more isolation valve, where the conduit of each of the sprinklers and the conduit system may be filled with pressurized gas that may trigger the isolation valve(s) to restrict the flow of the fluid between the fluid source and the sprinklers when the temperature of the heat-sensitive element associated with the corresponding sprinkler is below a predefined value. Further, when the temperature of the heat-sensitive element associated with any of the one or more sprinklers exceeds the predefined value, the corresponding sprinklers may switch to the activated position to release the pressurized gas via the nozzle arrangement which may trigger the isolation valve(s) to allow the flow of the fluid from the fluid source to the nozzle arrangement through the conduit system and further allow spraying of the fluid from the activated sprinklers. In other embodiments, the sprinklers may be fluidically connected to the fluid source by a wet conduit system, where the conduit of each of the sprinklers and the conduit system may be filled with a pressurized water.

[0049] Thus, the invention provides a simple, reliable, efficient, and cost-effective upright sprinkler that enables downward spraying at all angles and has no spray pattern shadowing or obstruction issues. In addition, the upright sprinkler also allows easier replacement of the heat-sensitive member and the nozzle arrangement from the sprinkler body for different sprinkler variations and different spray patterns, without completely replacing the overall sprinkler. Moreover, the sprinkler also allows the replacement of the nozzle arrangement from the housing when the sprinkler is in a pressurized or installed state

[0050] While the invention has been described with reference to exemplary embodiments, it will be understood by those skilled in the art that various changes may be made and equivalents may be substituted for elements thereof without departing from the scope of the invention as defined by the appended claims. Modifications may be made to adopt a particular situation or material to the teachings of the invention without departing from the scope thereof. Therefore, it is intended that the invention not be limited to the particular embodiment disclosed, but that the invention includes all embodiments falling within the scope of the invention as defined by the appended claims.

[0051] In interpreting the specification, all terms should be interpreted in the broadest possible manner consistent with the context. In particular, the terms “comprises” and “comprising” should be interpreted as referring to elements, components, or steps in a non-exclusive manner, indicating that the referenced elements, components, or steps may be present, or utilized, or combined with other elements, components, or steps that are not expressly referenced. Where the specification claims refer to at least one of something selected from the group consisting of A, B, C . . . and N, the text should be interpreted as requiring only one element from the group, not A plus N, or B plus N, etc.

1. A sprinkler comprising:
 - a housing comprising a conduit extending therethrough;
 - a heat-sensitive valve assembly configured above the conduit; and
 - a nozzle arrangement comprising one or more orifices, configured below the conduit;

wherein the nozzle arrangement is fluidically connected to the conduit via the valve assembly, such that actuation of the valve assembly enables flow of a fluid from the conduit to the nozzle arrangement via the valve assembly and further sprays the fluid through the nozzle arrangement.

2. The sprinkler of claim 1, wherein the housing comprises one or more channels extending between the conduit and the nozzle arrangement within the housing, to fluidically connect the nozzle arrangement to the conduit.

3. The sprinkler of claim 2, wherein the one or more channels comprise a first fluidic path that extends upward from the conduit and at least one second fluidic path that diverges downward from the first fluidic path into the nozzle arrangement.

4. The sprinkler of claim 1, wherein the valve assembly comprises:

- a filter plug comprising one or more openings, the filter plug is adapted to be disposed of within at least a portion of the one or more channels such that the nozzle arrangement remains fluidically connected to the conduit via the one or more openings of the filter plug; and
- a spindle coaxially disposed of within the filter plug,

wherein the spindle is configured to move between a deactivated position where the spindle blocks the one or more openings of the filter plug to fluidically disconnect the nozzle arrangement from the conduit, and an activated position where the spindle moves away from the deactivated position to unblock the one or more openings of the filter plug and fluidically connect the conduit with the nozzle arrangement.

5. The sprinkler of claim 1, wherein the valve assembly comprises a heat-sensitive element connected to the spindle and configured to retain the spindle in the deactivated position, and wherein when a temperature of the heat-sensitive element exceeds a predefined value, the heat-sensitive element is adapted to deform or break, thereby enabling automated movement of the spindle to the activated position.

6. The sprinkler of claim 1, wherein the valve assembly comprises a frame accommodating the heat sensitive element, the filter plug, and the spindle, wherein the frame facilitates coupling of the valve assembly to a top end of the housing.

7. The sprinkler of claim 1, wherein the heat-sensitive element is configured between a first end of the spindle and a top inner side of the frame, wherein a second end of the spindle is movably disposed of within the filter plug using a biasing element such that upon the deforming or breaking of the heat sensitive element, the biasing element and/or a pressurized fluid present in the conduit enables automated movement of the spindle to the activated position.

8. The sprinkler of claim 1, wherein the heat-sensitive element is a bulb filled with a heat-sensitive material that is adapted to explode or expand to break the glass when the temperature of the heat-sensitive material exceeds the predefined value.

9. The sprinkler of claim 1, wherein the heat-sensitive element is a fusible material that is adapted to deform or break when the temperature of the fusible material exceeds the predefined value.

10. The sprinkler of claim 1, wherein the valve assembly comprises a filter mesh configured at the one or more openings of the filter plug.

11. The sprinkler of claim 1, wherein the valve assembly is adapted to be removably coupled to a top end of the housing such that the conduit remains fluidically connected to the one or more channels and the nozzle arrangement via the valve assembly.

12. The sprinkler of claim 1, wherein the nozzle arrangement is adapted to be removably coupled to a bottom end of the housing such that the nozzle arrangement remains fluidically connected to the one or more channels.

13. The sprinkler of claim 12, wherein the nozzle arrangement is removably coupled to a bottom end of the housing such that actuation of the valve assembly enables spraying of the fluid, through the nozzle arrangement, at predefined angles in a downward direction.

14. The sprinkler of claim 1, wherein the conduit comprises an inlet and an outlet that are adapted to be fluidically coupled to a fluid source.

15. The sprinkler of claim 14, wherein the sprinkler is fluidically connected to the fluid source by a dry conduit system comprising an isolation valve, wherein the conduit and the conduit system is filled with a pressurized gas that facilitates actuation of the isolation valve to a closed position to restrict the flow of the fluid between the fluid source and the sprinkler when the temperature of the heat-sensitive element associated with the sprinkler is below the predefined value.

16. The sprinkler of claim 15, wherein when the temperature of the heat-sensitive element associated with the sprinkler exceeds the predefined value, the sprinkler is configured to release the pressurized gas via the nozzle arrangement which facilitates actuation of the isolation valve to an open position to allow the flow of the fluid from the fluid source to the nozzle arrangement through the conduit system.

17. A sprinkler system comprising:

- one or more sprinklers fluidically connected to each other and a fluid source, wherein each of the sprinklers comprises:
 - a housing comprising a conduit extending there-through;
 - a heat-sensitive valve assembly configured above the conduit; and

- a nozzle arrangement comprising one or more orifices configured below the conduit;

- wherein the nozzle arrangement is fluidically connected to the conduit via the valve assembly, such that actuation of the valve assembly enables flow of a fluid from the conduit to the nozzle arrangement via the valve assembly and further sprays the fluid through the nozzle arrangement.

18. The sprinkler system of claim 17, wherein the conduit of each of the sprinklers comprises an inlet and an outlet that facilitates fluidic coupling of the one or more sprinklers with each other and the fluid source.

19. The sprinkler system of claim 17, wherein the one or more sprinklers are fluidically connected to the fluid source by a dry conduit system comprising one or more isolation valve, wherein the conduit of each of the sprinklers and the dry conduit system is filled with a pressurized gas that facilitates actuation of the one or more isolation valve to a closed position to restrict the flow of the fluid between the fluid source and the one or more sprinklers when the temperature of the heat-sensitive element associated with the corresponding sprinkler is below the predefined value, and

- wherein when the temperature of the heat-sensitive element associated with any of the one or more sprinklers exceeds the predefined value, the corresponding sprinklers are configured to release the pressurized gas via the nozzle arrangement which facilitates actuation of the one or more isolation valve to an open position to allow the flow of the fluid from the fluid source to the nozzle arrangement through the conduit system.

20. The sprinkler system of claim 17, wherein the housing of each of the sprinklers comprises one or more channels extending between the conduit and the nozzle arrangement within the housing, to fluidically connect the nozzle arrangement to the conduit, wherein the one or more channels comprise a first fluidic path that extends upward from the conduit and at least one second fluidic path that diverges downward from the first fluidic path into the nozzle arrangement.

* * * * *