



US 20250285181A1

(19) **United States**

(12) **Patent Application Publication**
Simpson

(10) **Pub. No.: US 2025/0285181 A1**

(43) **Pub. Date: Sep. 11, 2025**

(54) **VIRTUAL REALITY, AUGMENTED
REALITY, MIXED REALITY DATA
EXCHANGE SOCIAL NETWORK WITH
MULTI DIMENSIONAL MAP TILE PORTING**

now abandoned, which is a continuation-in-part of application No. 16/242,981, filed on Jan. 8, 2019, now abandoned, which is a continuation-in-part of application No. 16/242,967, filed on Jan. 8, 2019, now Pat. No. 12,001,999, which is a continuation-in-part of application No. 16/239,485,
(Continued)

(71) Applicant: **Circlessx LLC**, Houston, TX (US)

(72) Inventor: **Erik Mowery Simpson**, Houston, TX (US)

Publication Classification

(21) Appl. No.: **19/088,953**

(22) Filed: **Mar. 24, 2025**

(51) **Int. Cl.**

G06Q 40/04 (2012.01)
G06N 3/04 (2023.01)
G06N 20/00 (2019.01)
G06Q 20/32 (2012.01)
G06Q 50/00 (2024.01)
G06Q 50/14 (2012.01)
G06T 19/00 (2011.01)
H04W 4/029 (2018.01)

(52) **U.S. Cl.**


CPC **G06Q 40/04** (2013.01); **G06Q 50/14** (2013.01); **G06T 19/006** (2013.01); **H04W 4/029** (2018.02); **G06N 3/04** (2013.01); **G06N 20/00** (2019.01); **G06Q 20/321** (2020.05); **G06Q 50/01** (2013.01)

Related U.S. Application Data

(63) Continuation of application No. 17/349,829, filed on Jun. 16, 2021, now Pat. No. 12,260,456, which is a continuation-in-part of application No. 17/324,051, filed on May 18, 2021, now Pat. No. 12,354,033, said application No. 17/349,829 is a continuation-in-part of application No. 17/082,254, filed on Oct. 28, 2020, now Pat. No. 12,361,486, said application No. 17/349,829 is a continuation-in-part of application No. 17/069,597, filed on Oct. 13, 2020, now Pat. No. 12,346,987, said application No. 17/349,829 is a continuation-in-part of application No. 16/589,229, filed on Oct. 1, 2019, now abandoned, which is a continuation-in-part of application No. 16/556,838, filed on Aug. 30, 2019, now Pat. No. 11,555,709, which is a continuation-in-part of application No. 16/397,685, filed on Apr. 29, 2019, now Pat. No. 12,154,183, which is a continuation-in-part of application No. 16/359,841, filed on Mar. 20, 2019, now Pat. No. 12,141,885, which is a continuation-in-part of application No. 16/357,241, filed on Mar. 18, 2019, now Pat. No. 12,165,223, which is a continuation-in-part of application No. 16/274,490, filed on Feb. 13, 2019, now Pat. No. 11,215,466, which is a continuation-in-part of application No. 16/258,658, filed on Jan. 27, 2019, now Pat. No. 11,035,682, said application No. 17/349,829 is a continuation-in-part of application No. 16/257,032, filed on Jan. 24, 2019,

ABSTRACT

Various implementations directed to price time priority queue routing for a multi-dimension map tile data exchange linked database are provided. In one implementation, a method may include receiving origin location data and destination location data. The method may also include generating routes based on the origin location data and the destination location data. The method may further include determining virtual hubs along the routes, where the virtual hubs include a first virtual hub based on the origin location data and a second virtual hub based on the destination location data. In addition, the method may include receiving market depth data for a geolocation exchange for the geolocation exchange units based on the routes. The method may also include selecting an optimized route of the routes for the geolocation exchange units based on an objective function.

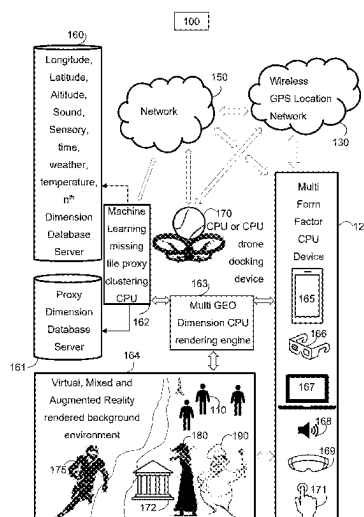

Related U.S. Application Data

filed on Jan. 3, 2019, which is a continuation-in-part of application No. 16/183,647, filed on Nov. 7, 2018, now Pat. No. 11,861,527, which is a continuation-in-part of application No. 16/167,525, filed on Oct. 22, 2018, now Pat. No. 11,810,023, which is a continuation-in-part of application No. 15/877,393, filed on Jan. 23, 2018, now Pat. No. 12,124,976, which is a continuation-in-part of application No. 15/266,326, filed on Sep. 15, 2016, now Pat. No. 11,138,827.

- (60) Provisional application No. 62/914,427, filed on Oct. 12, 2019, provisional application No. 62/927,081, filed on Oct. 28, 2019, provisional application No. 63/027,344, filed on May 19, 2020, provisional application No. 63/039,918, filed on Jun. 16, 2020, provisional application No. 63/044,997, filed on Jun. 26, 2020, provisional application No. 63/051,373, filed on Jul. 13, 2020, provisional application No. 63/052,159, filed on Jul. 15, 2020.

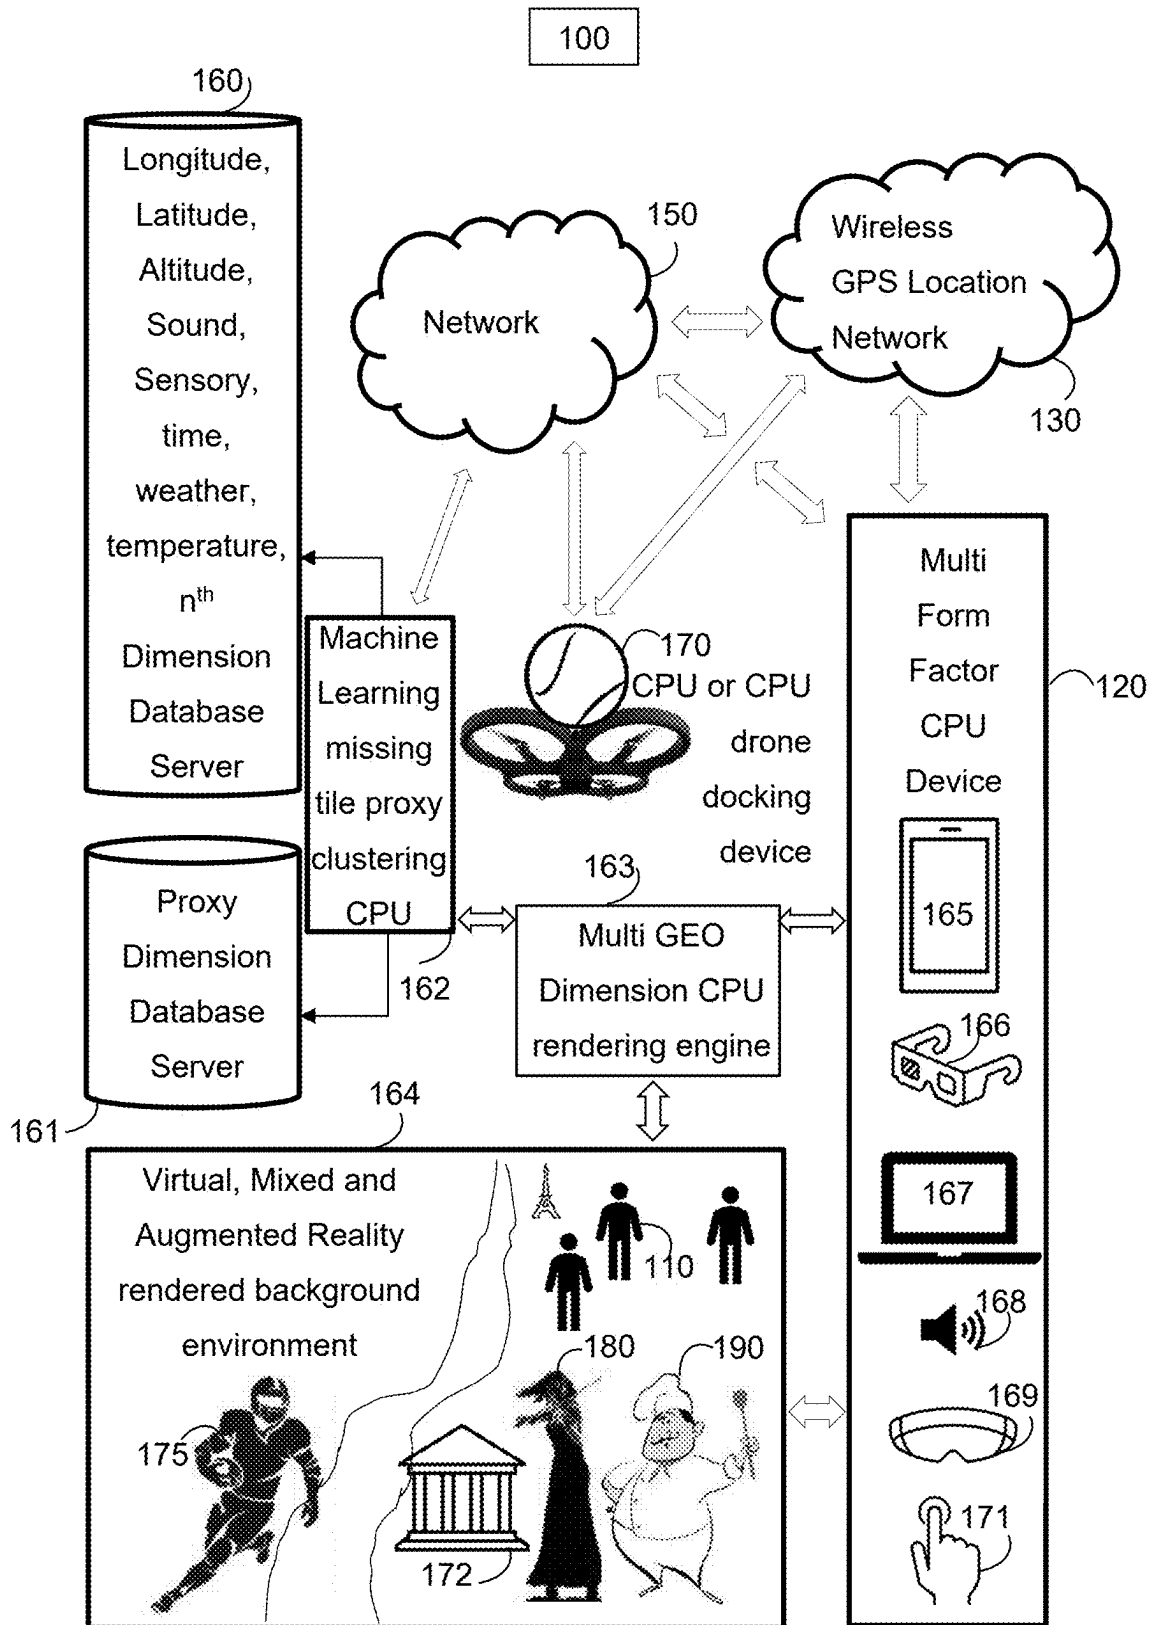


FIG. 1

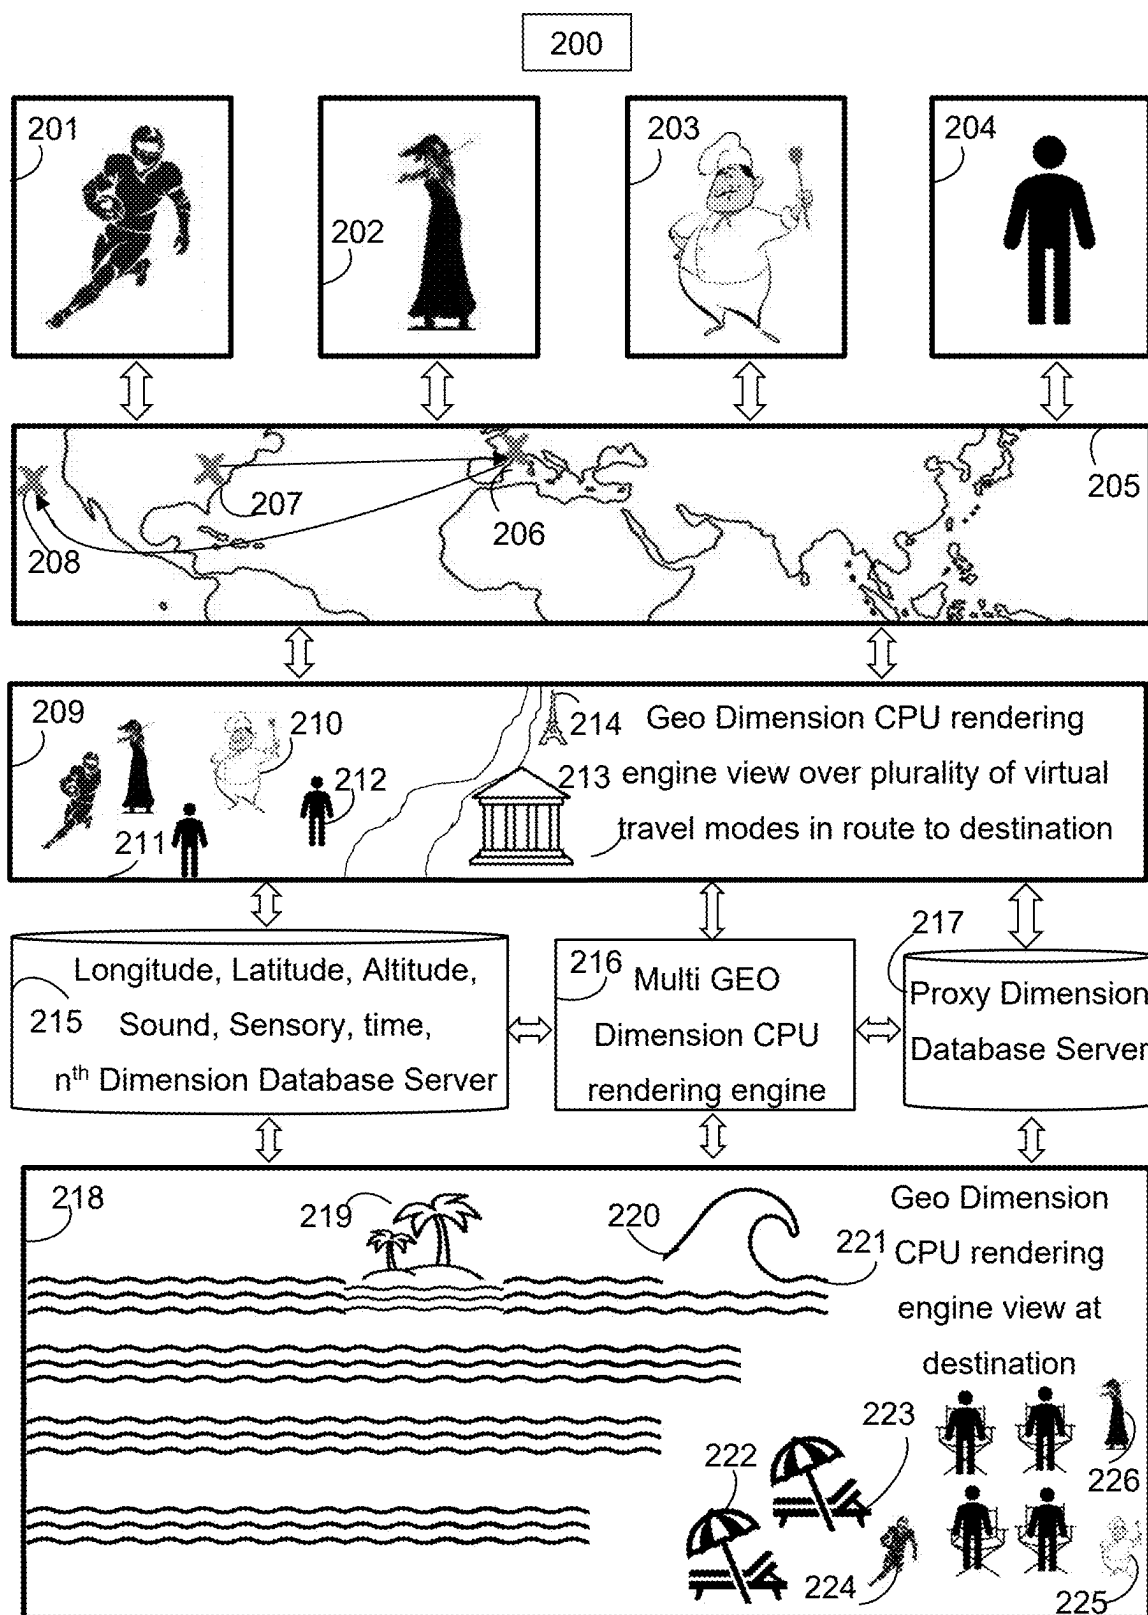


FIG. 2

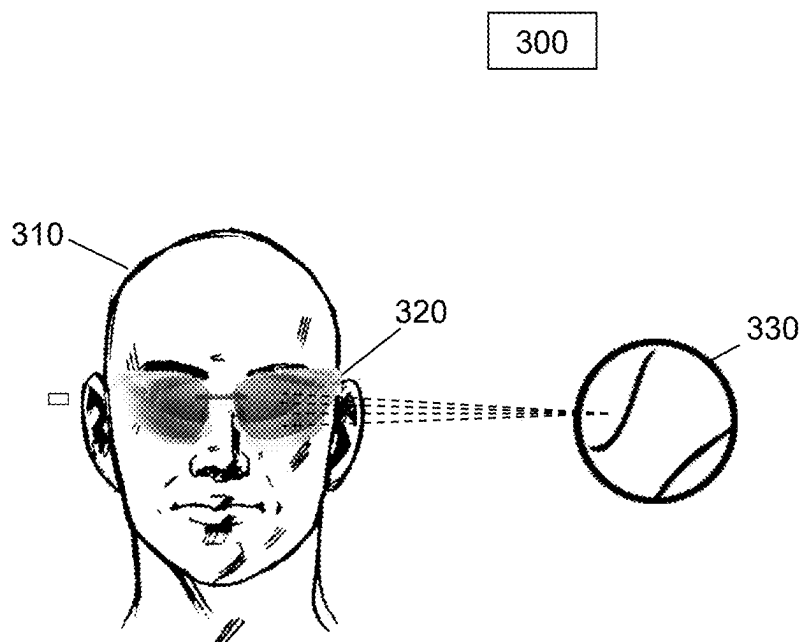


FIG. 3A

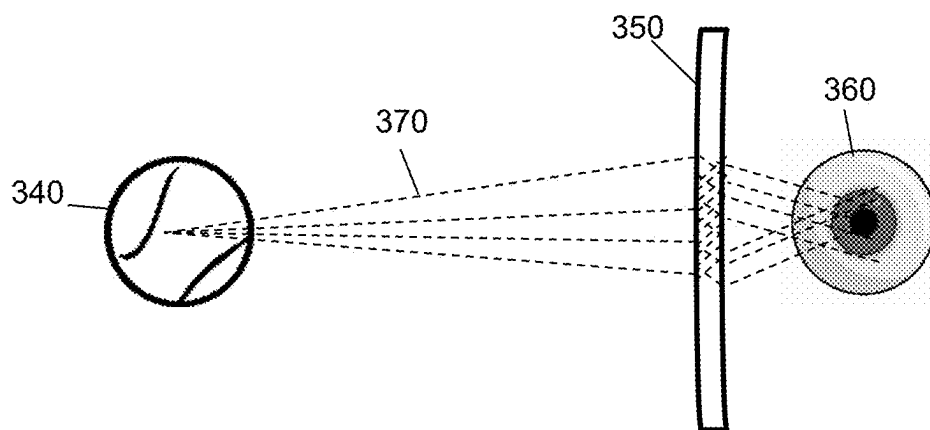


FIG. 3B

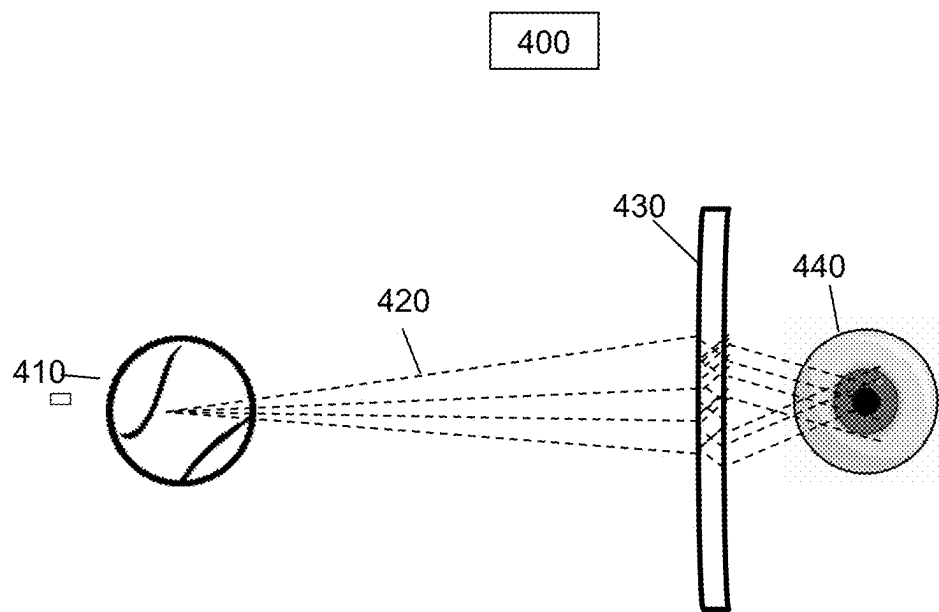


FIG. 4A

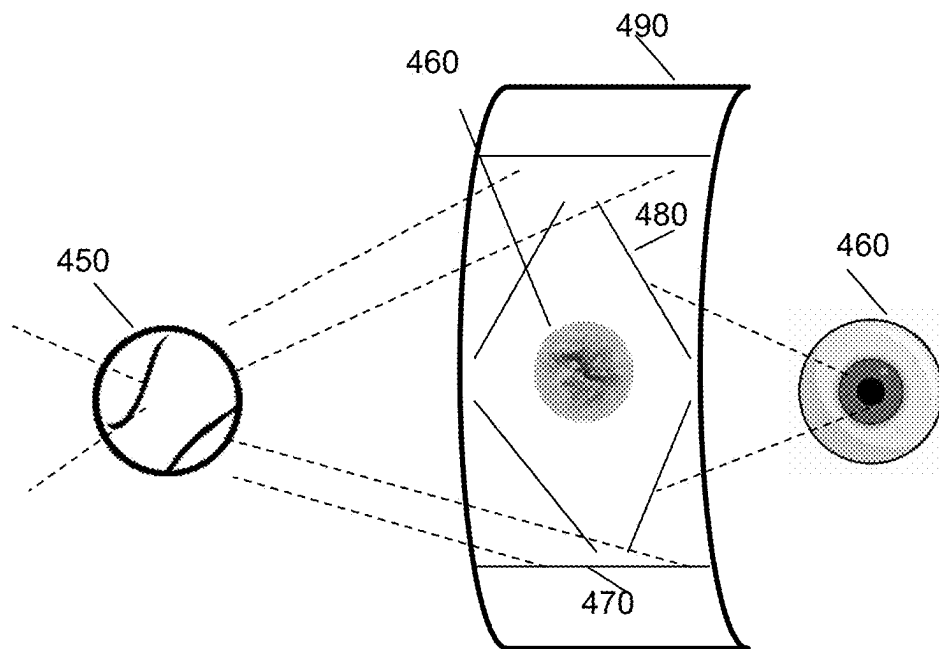


FIG. 4B

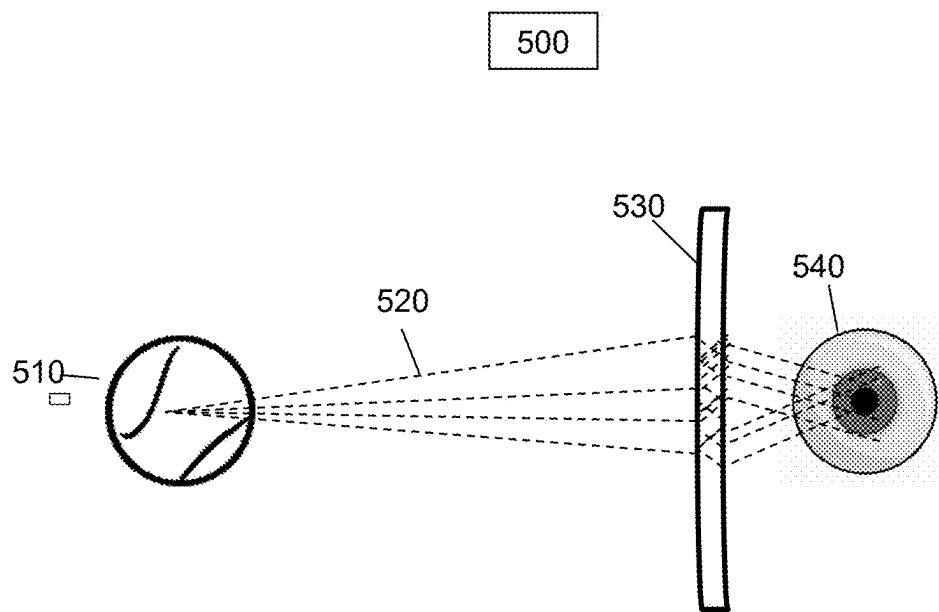


FIG. 5A

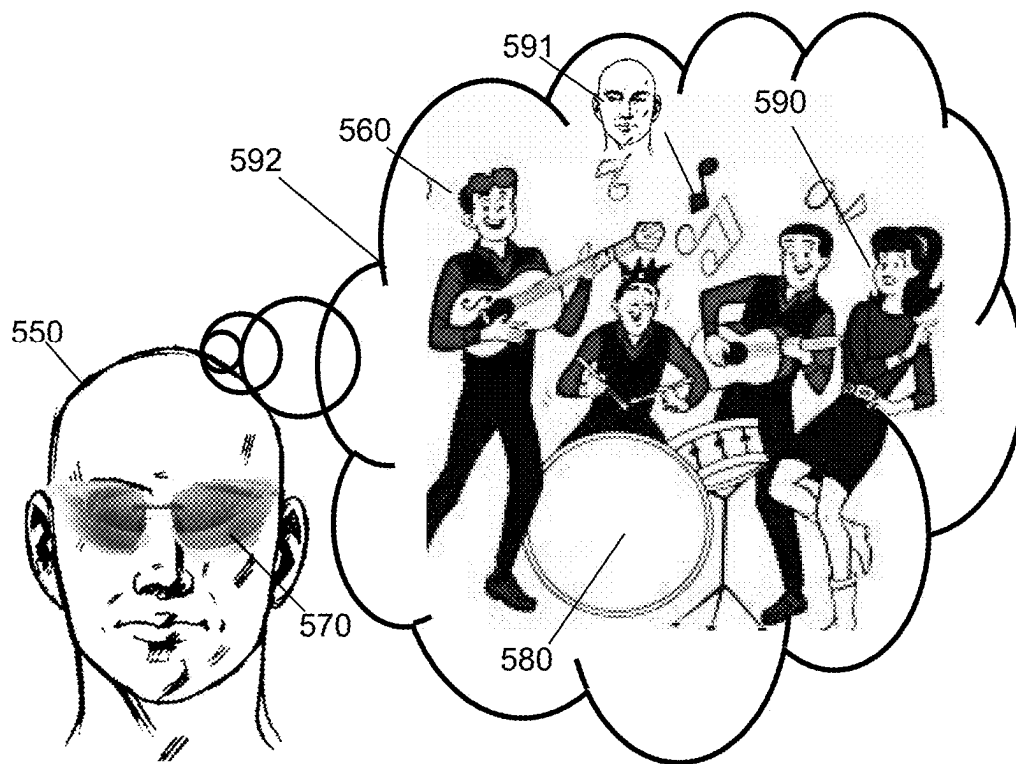


FIG. 5B

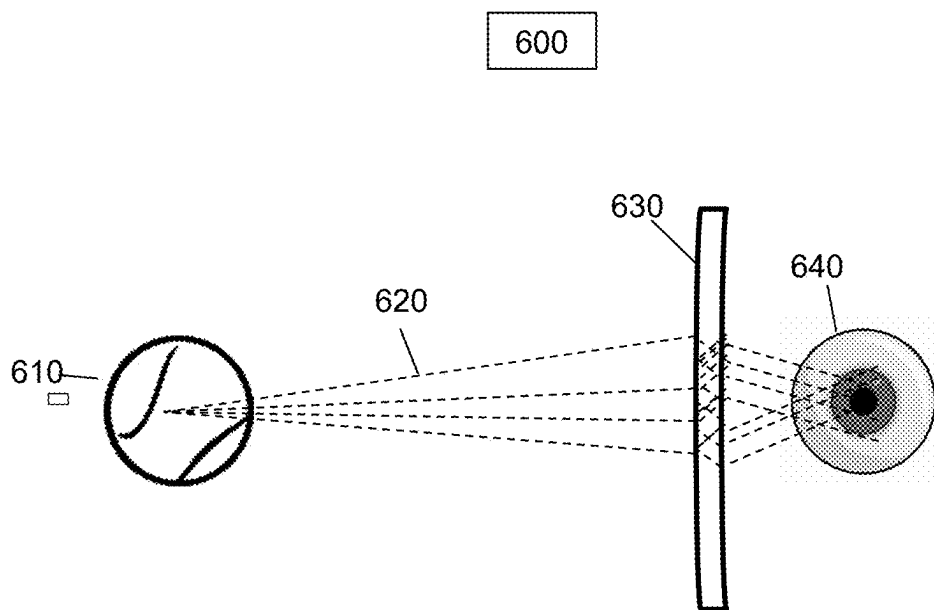


FIG. 6A

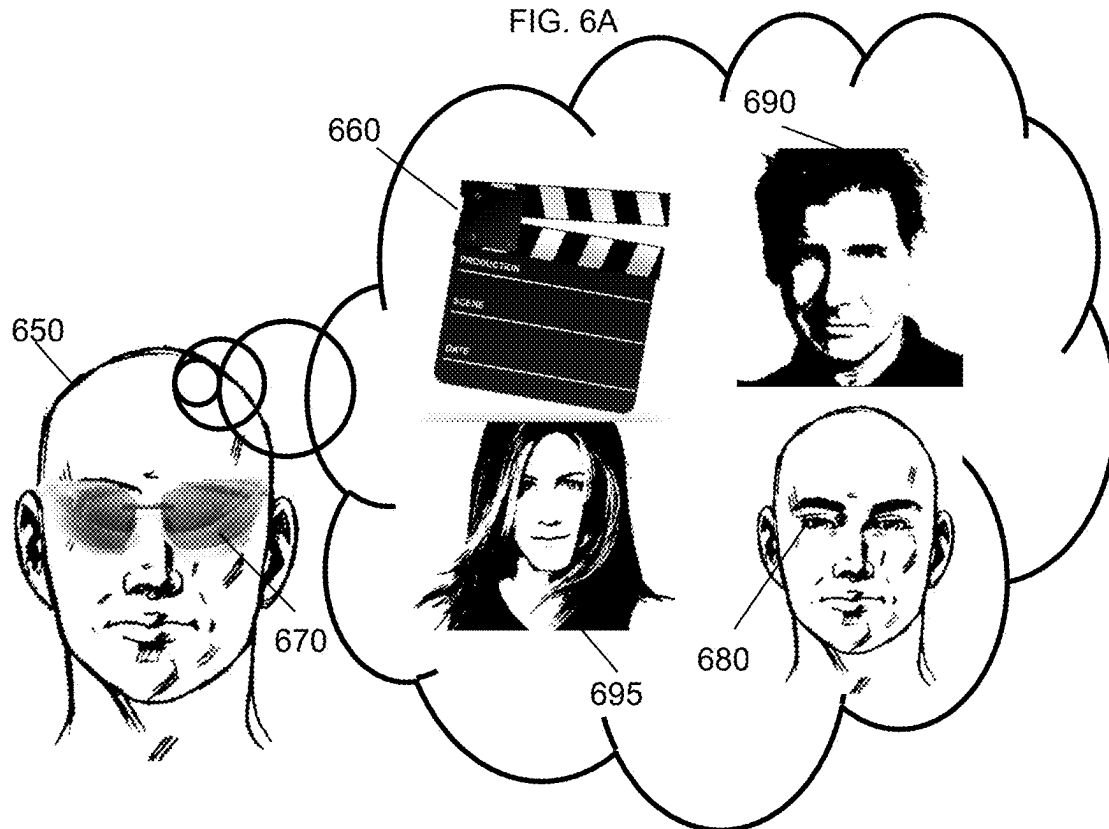


FIG. 6B

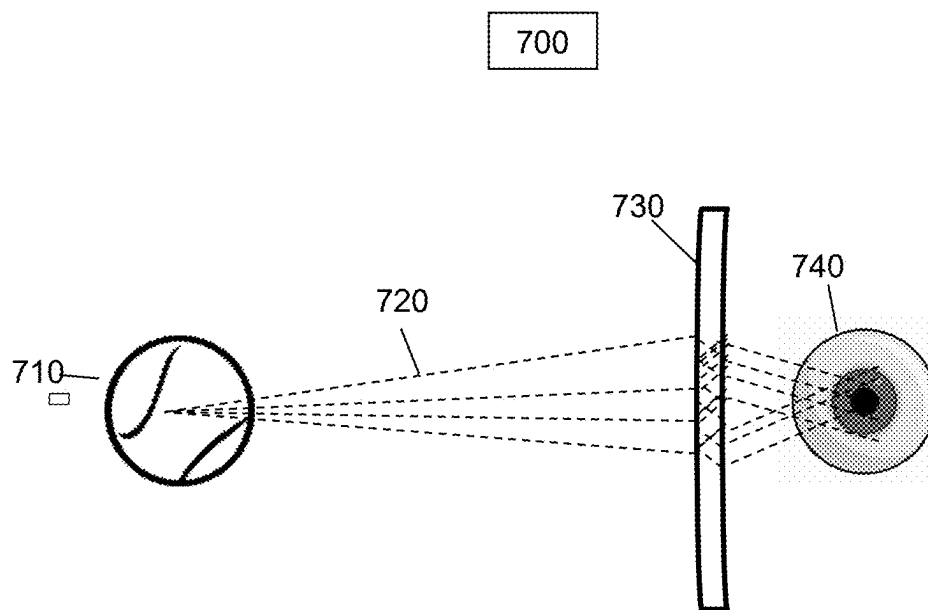


FIG. 7A

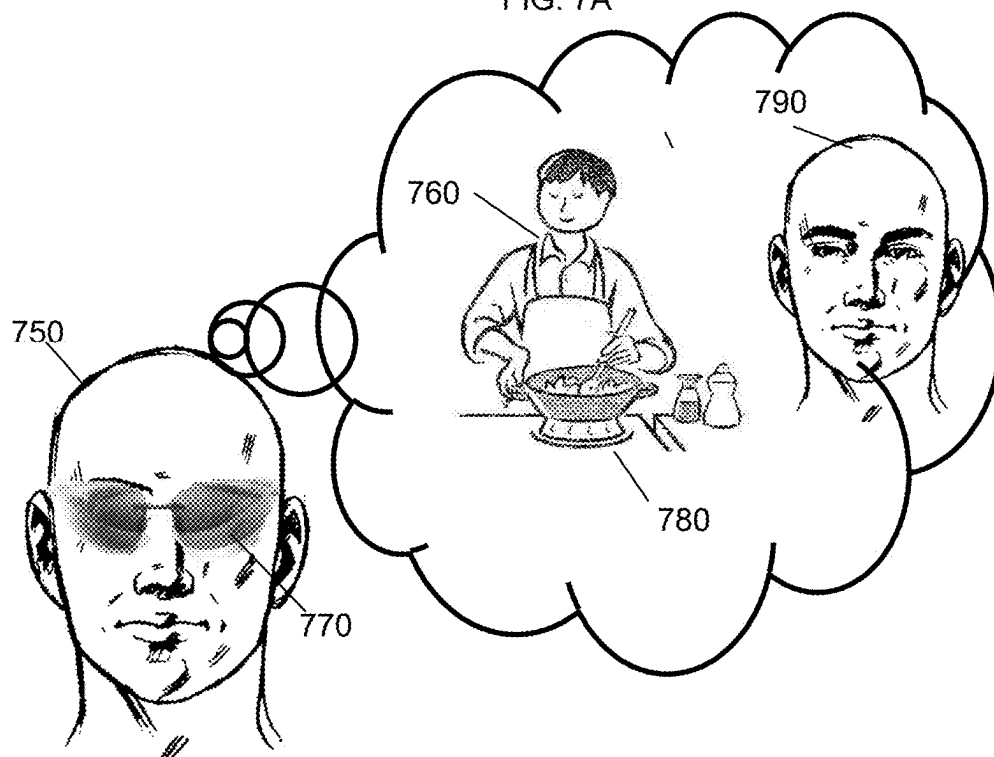


FIG. 7B

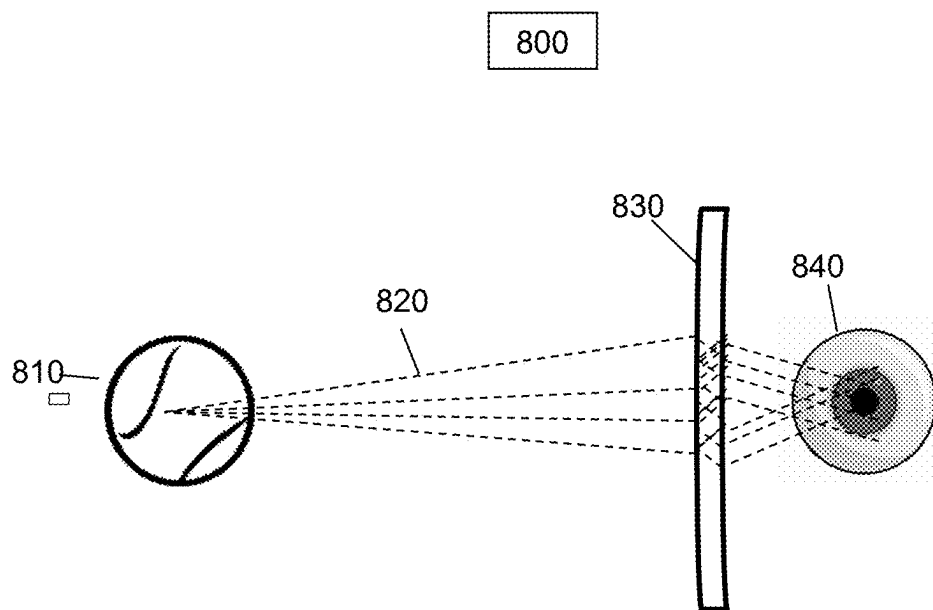


FIG. 8A

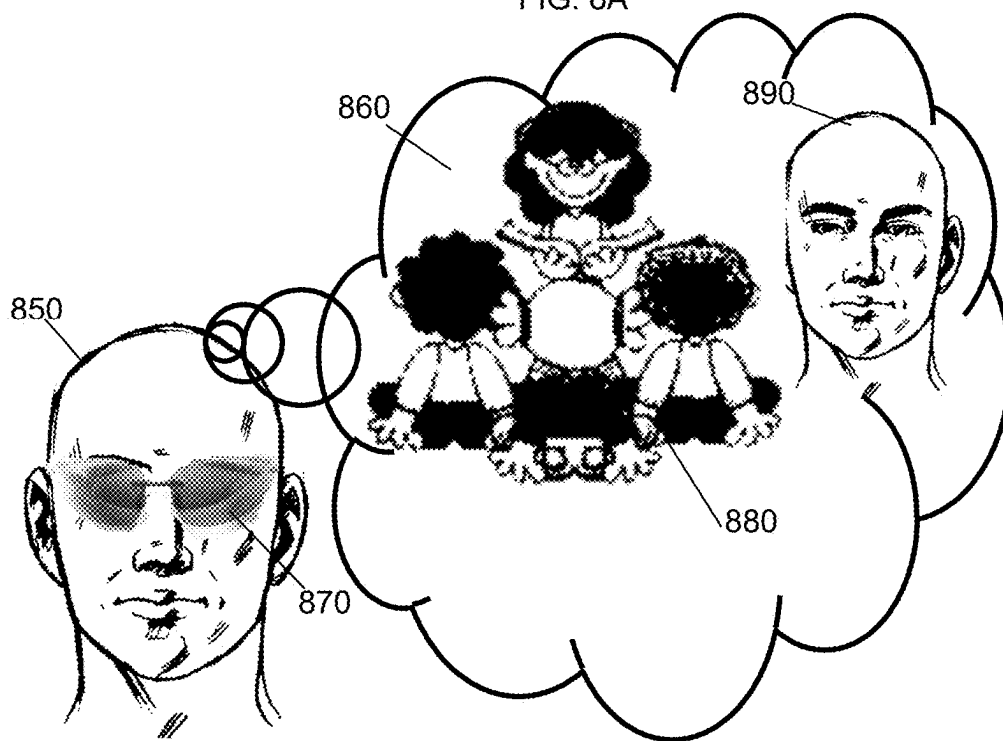


FIG. 8B

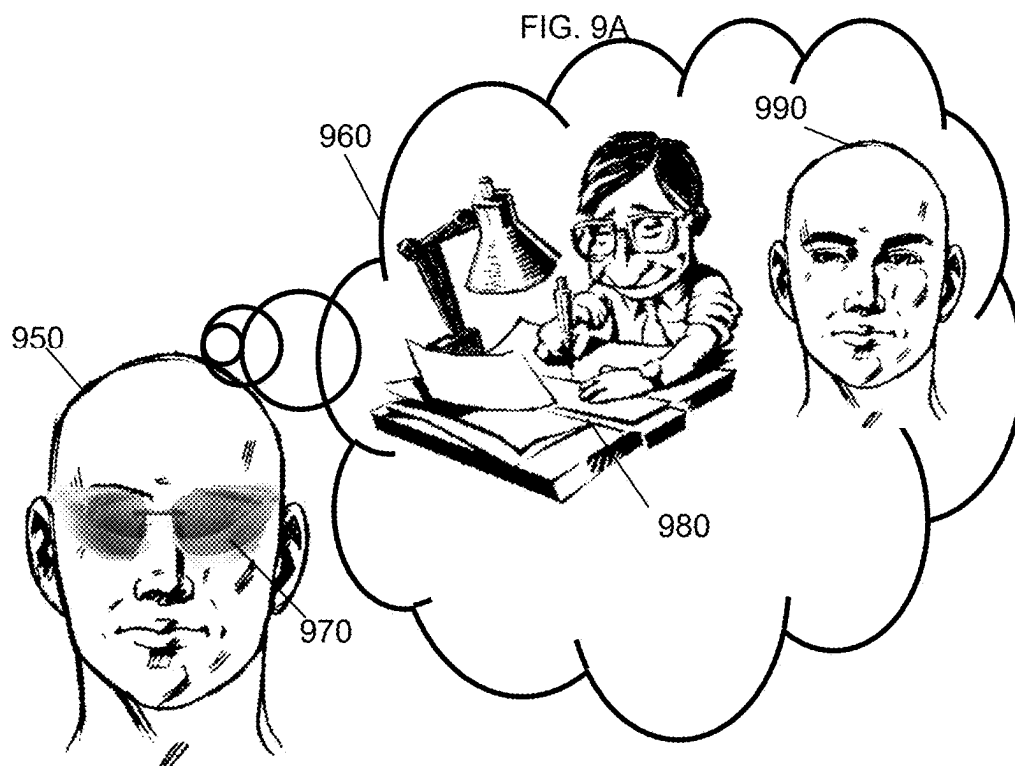
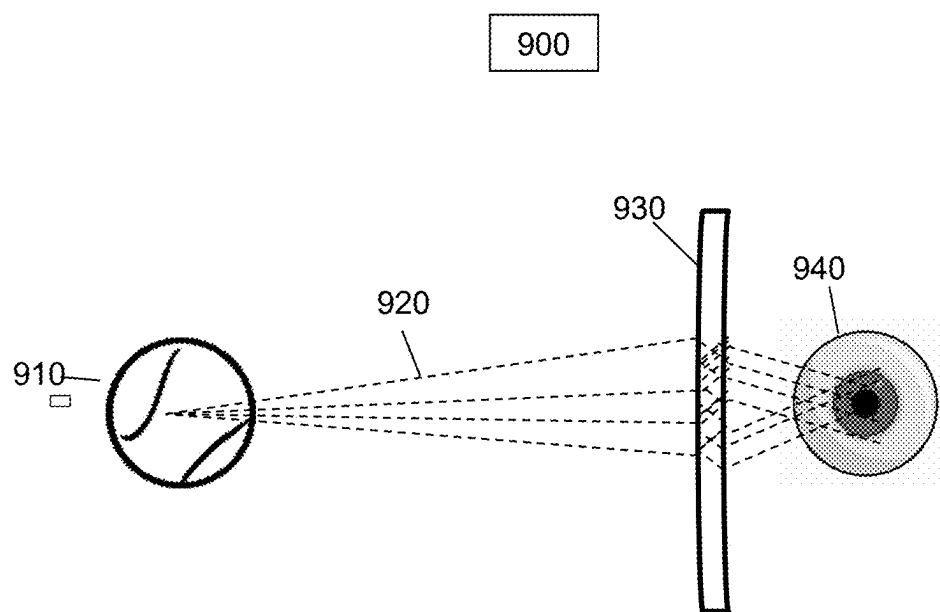
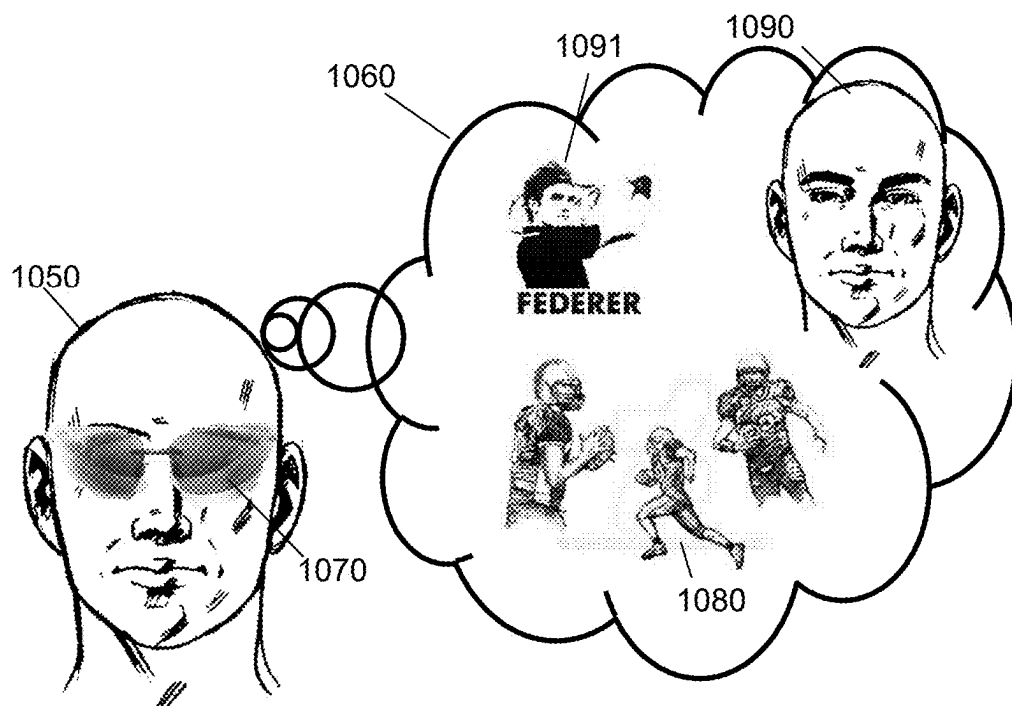
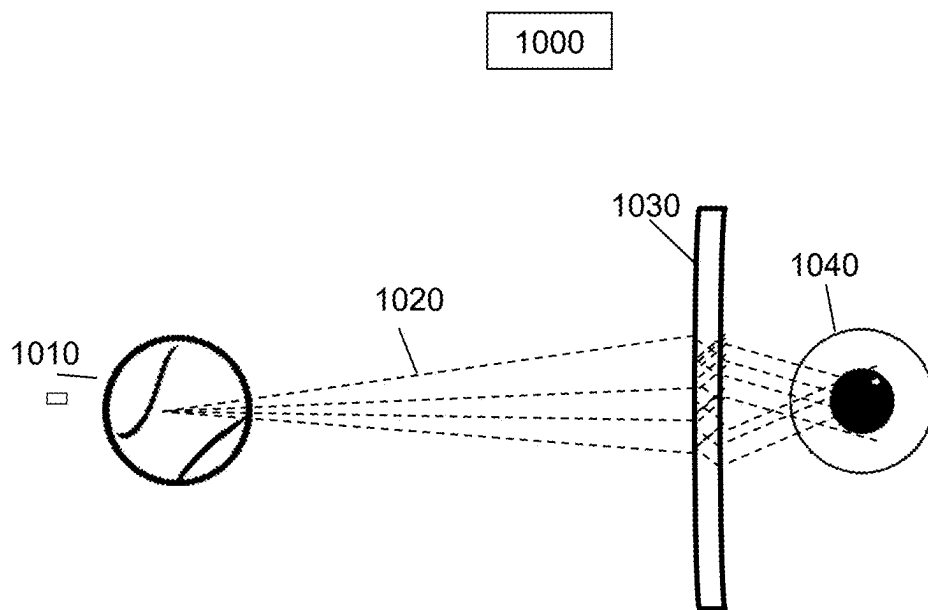


FIG. 9B



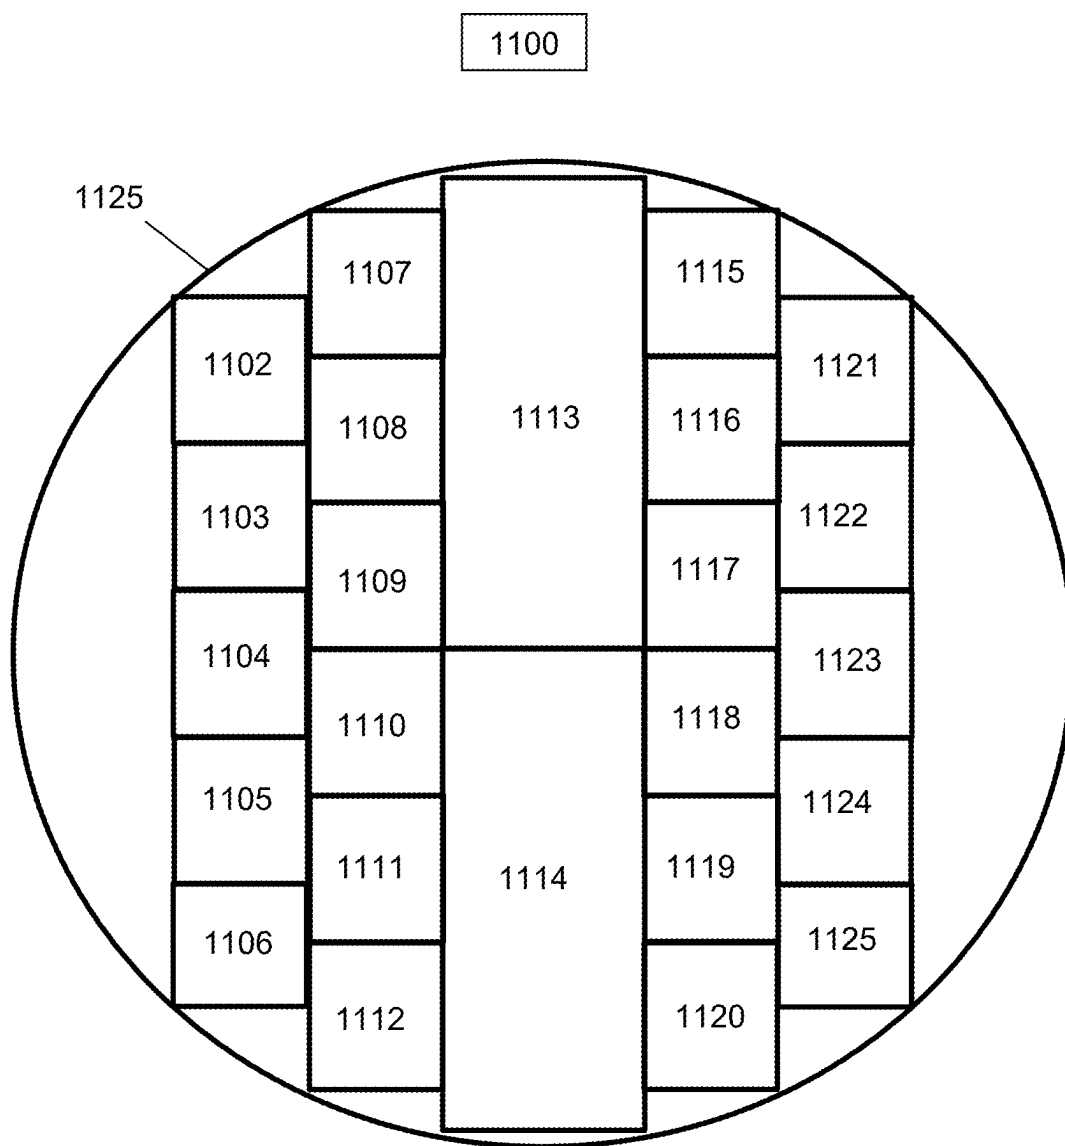


FIG. 11

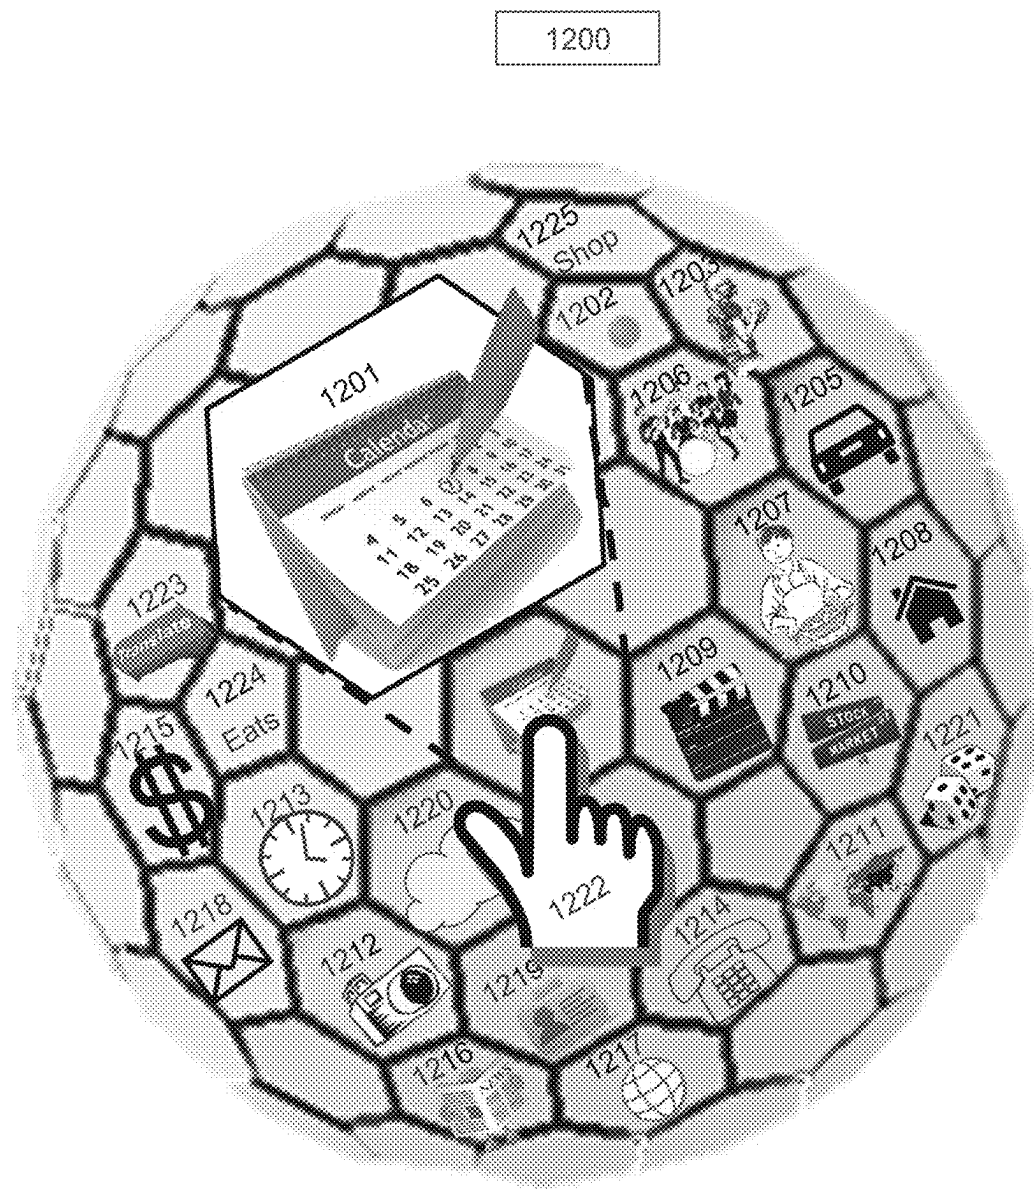


FIG. 12

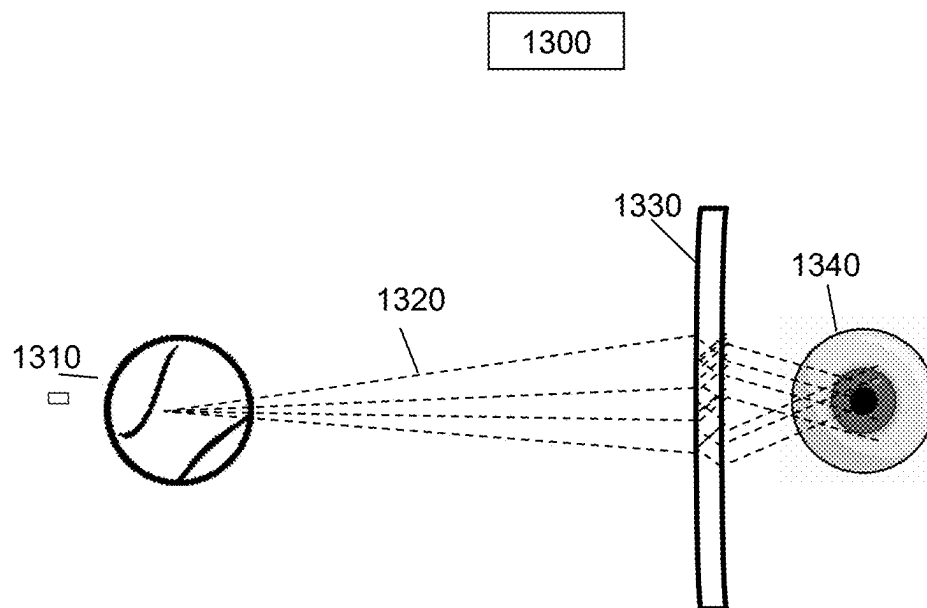


FIG. 13A

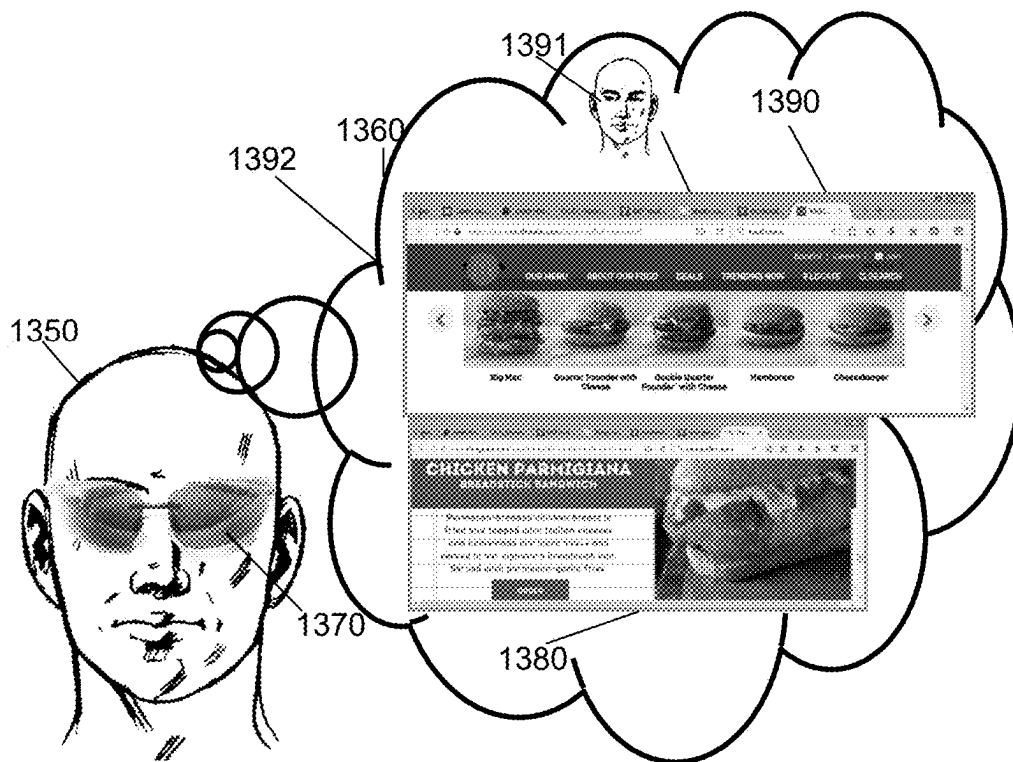


FIG. 13B

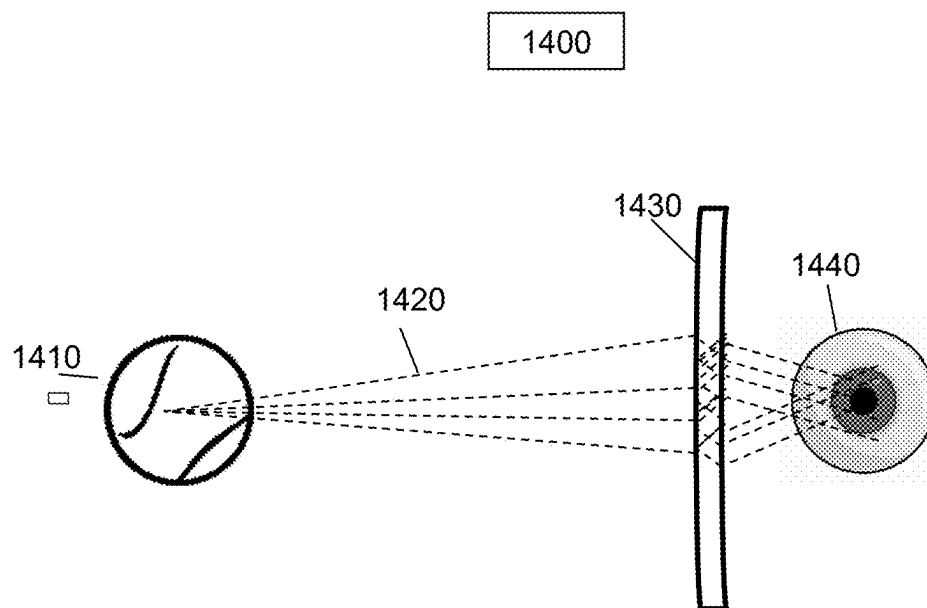


FIG. 14A

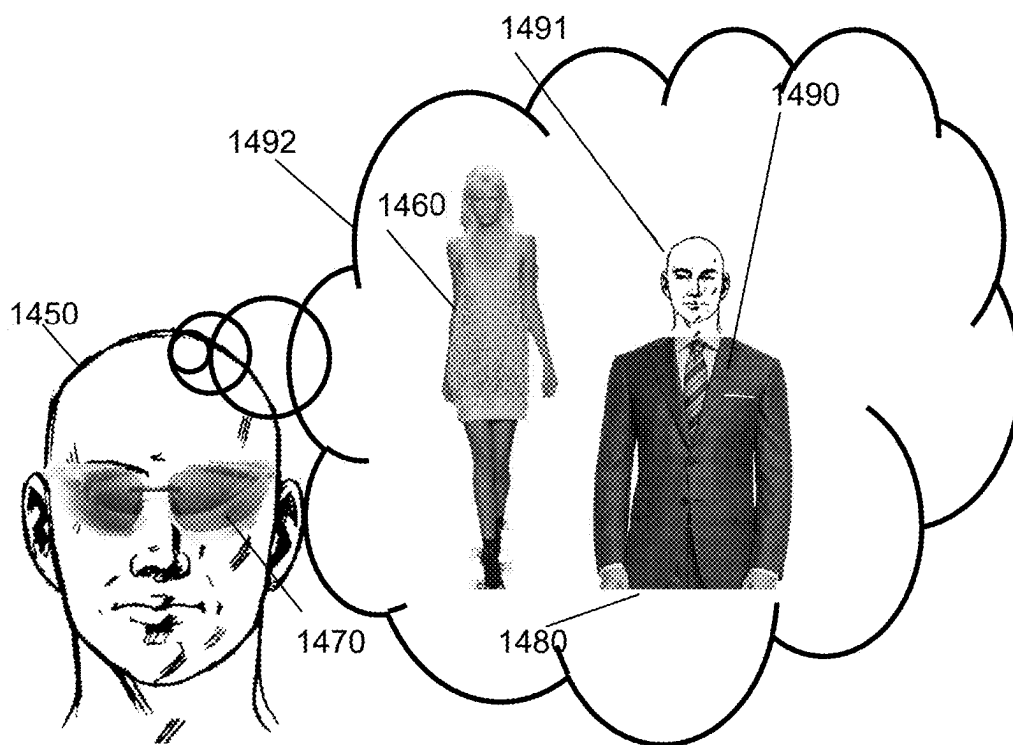


FIG. 14B

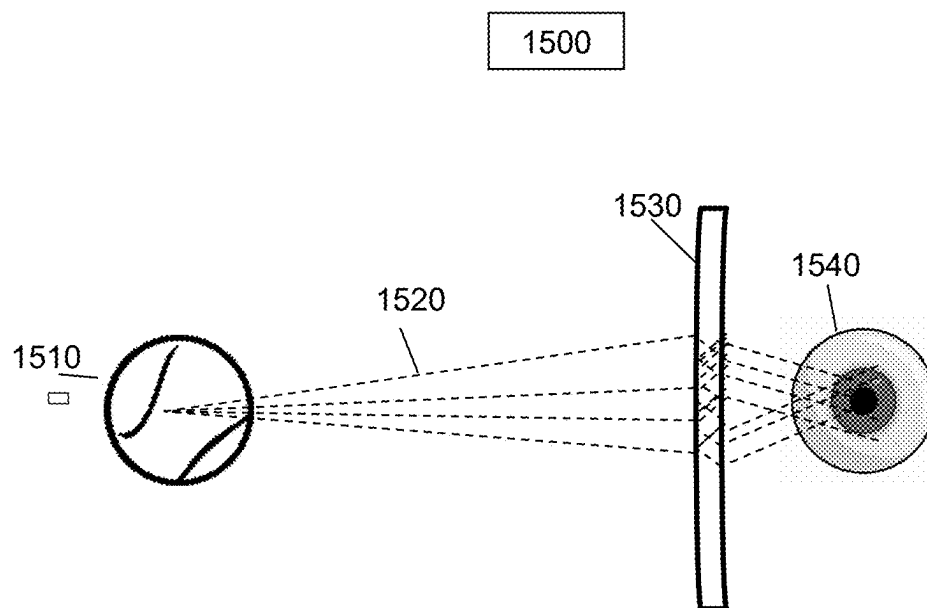


FIG. 15A

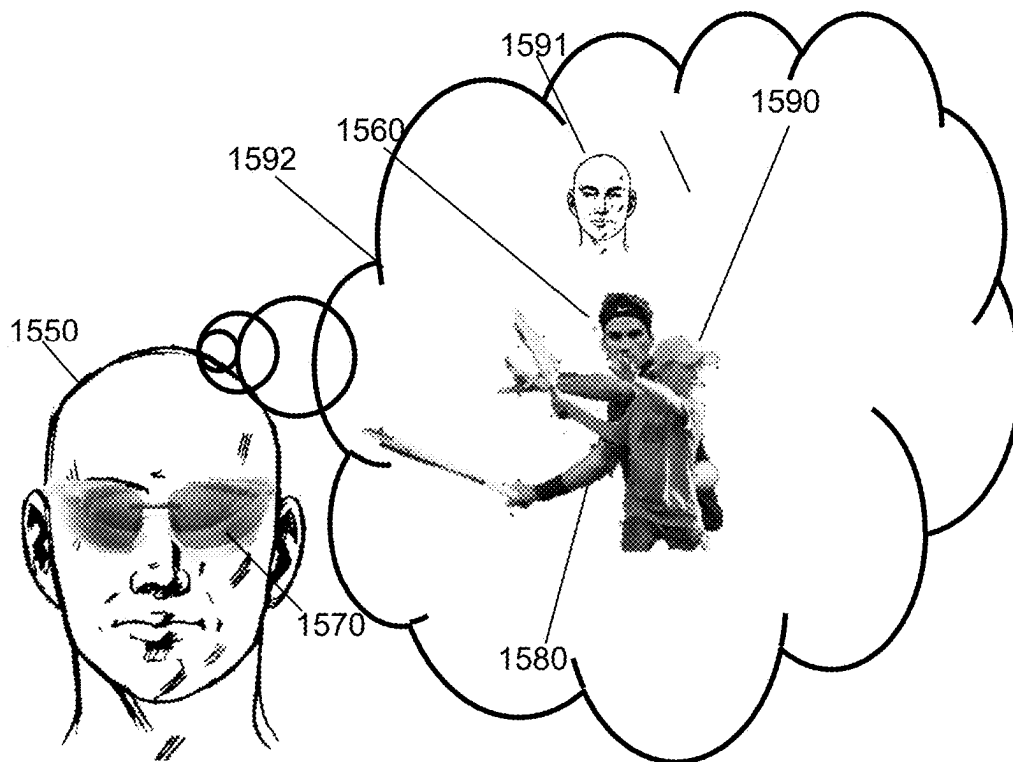


FIG. 15B

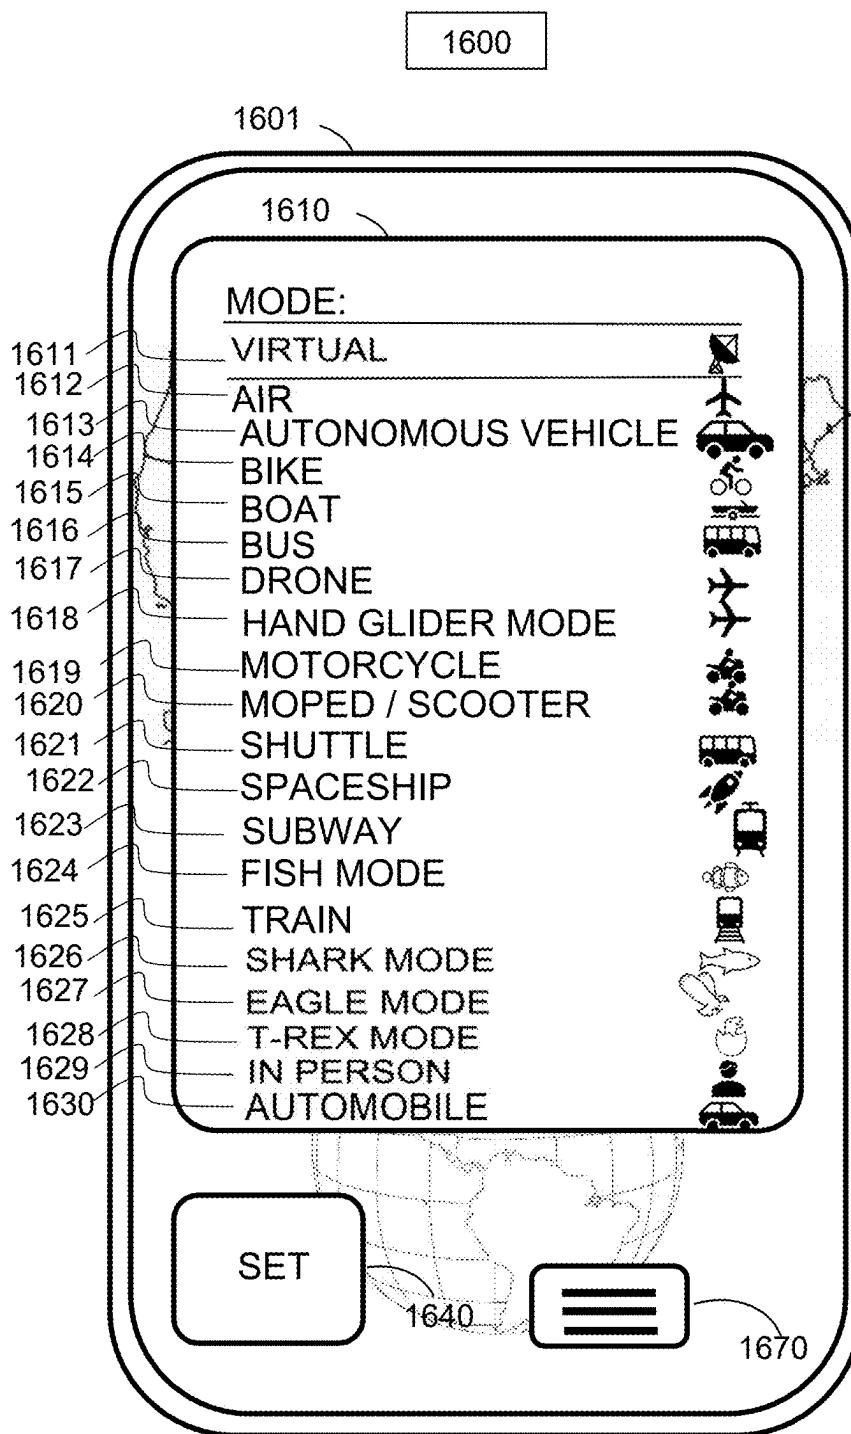


FIG. 16

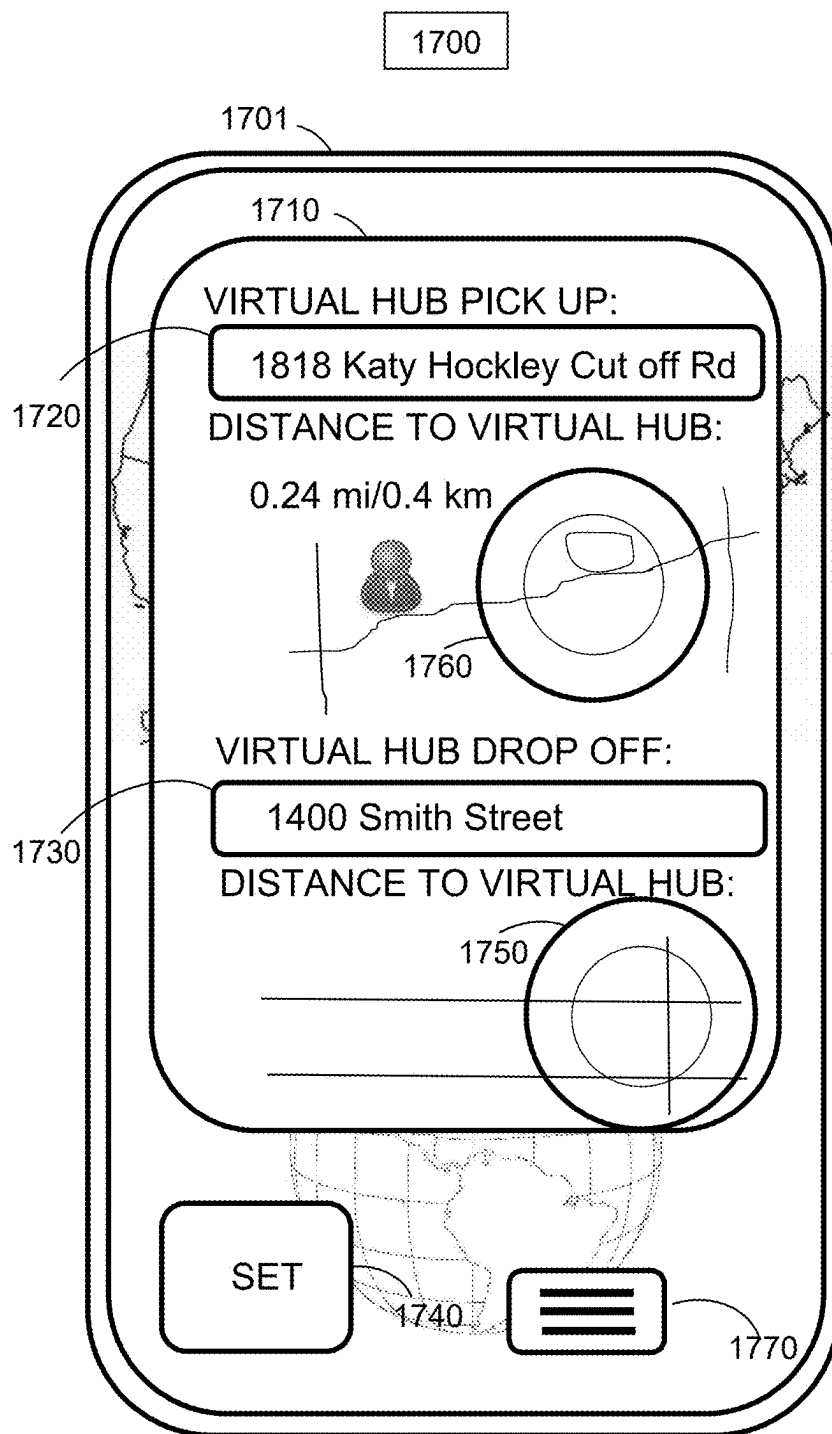


FIG. 17

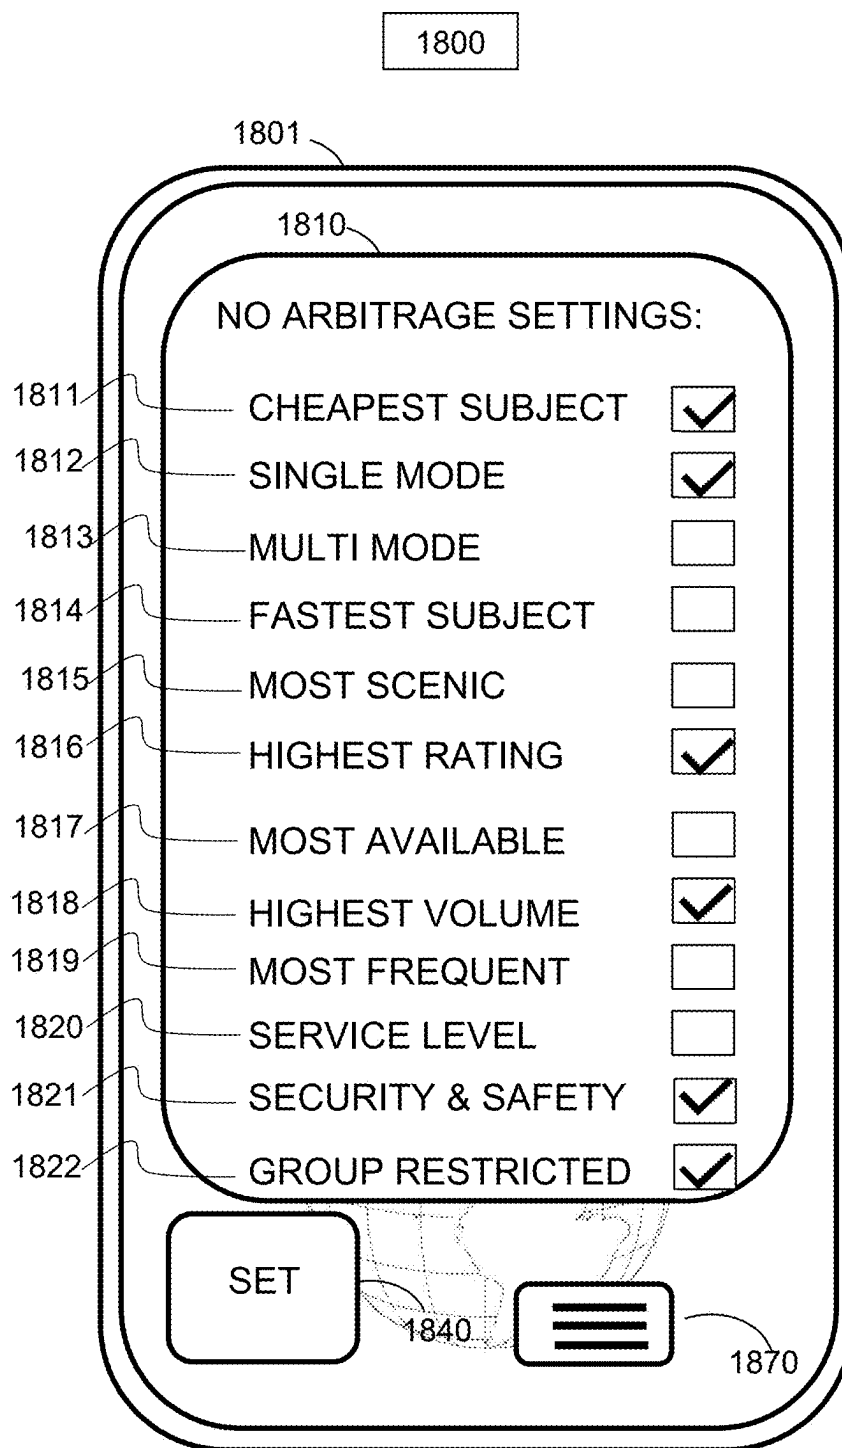


FIG. 18

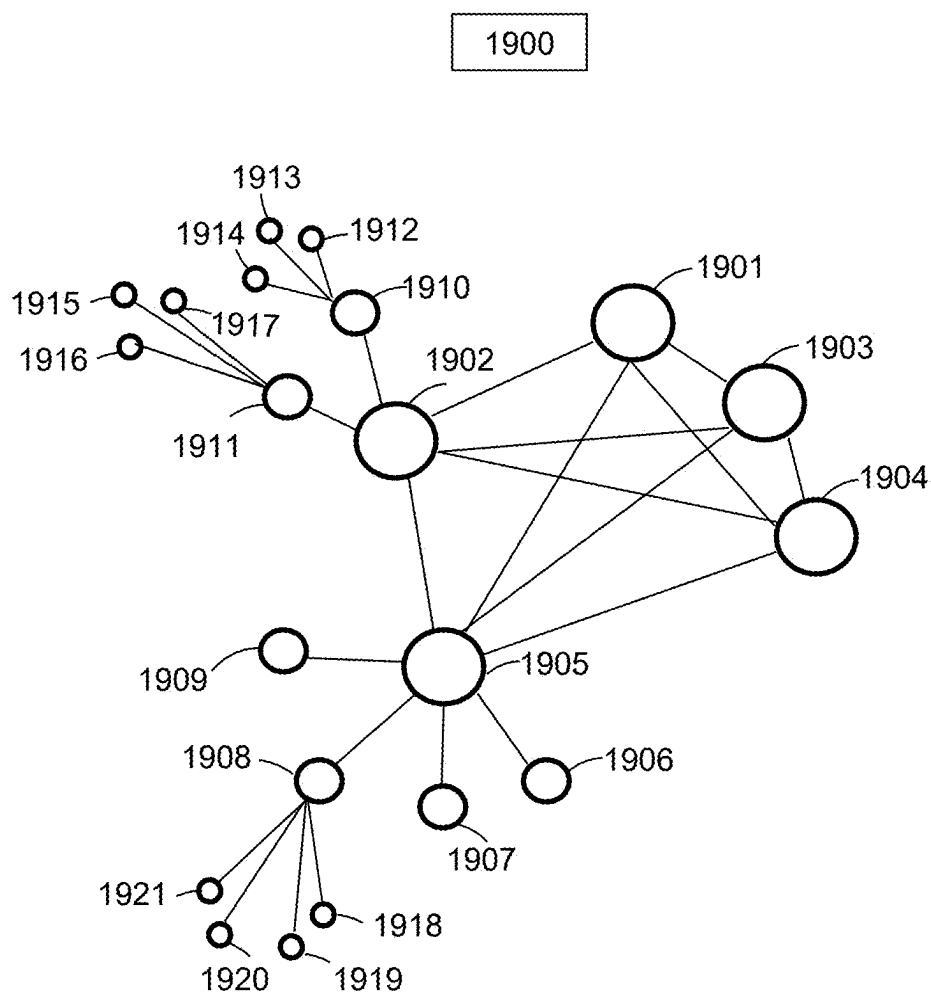


FIG. 19

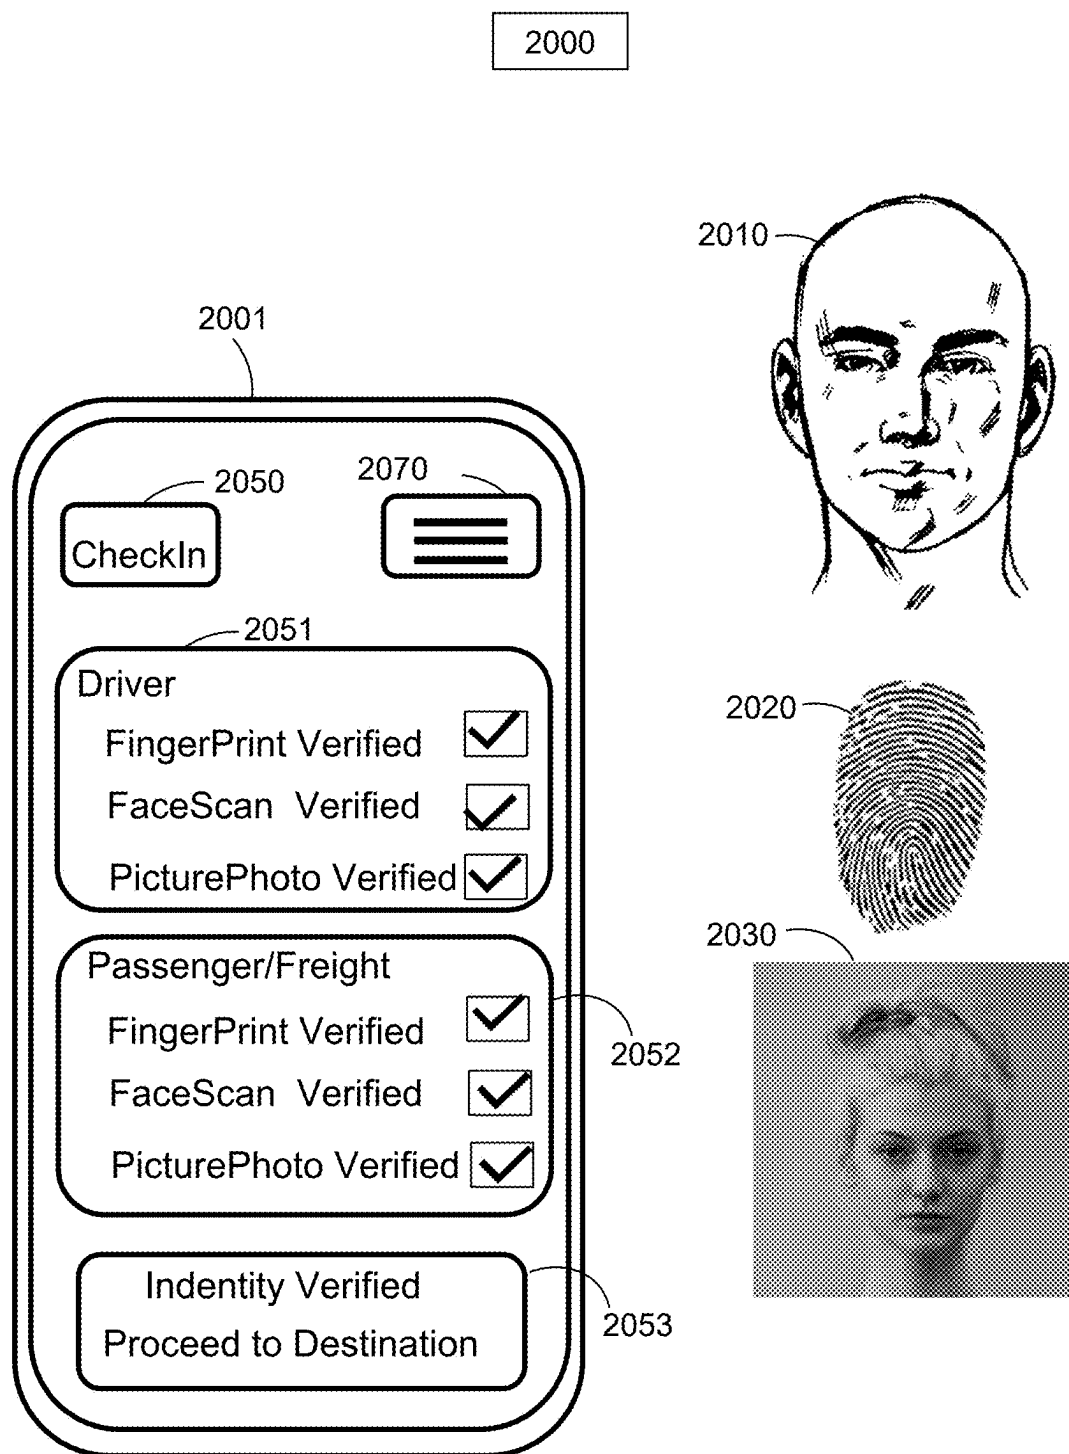


FIG. 20

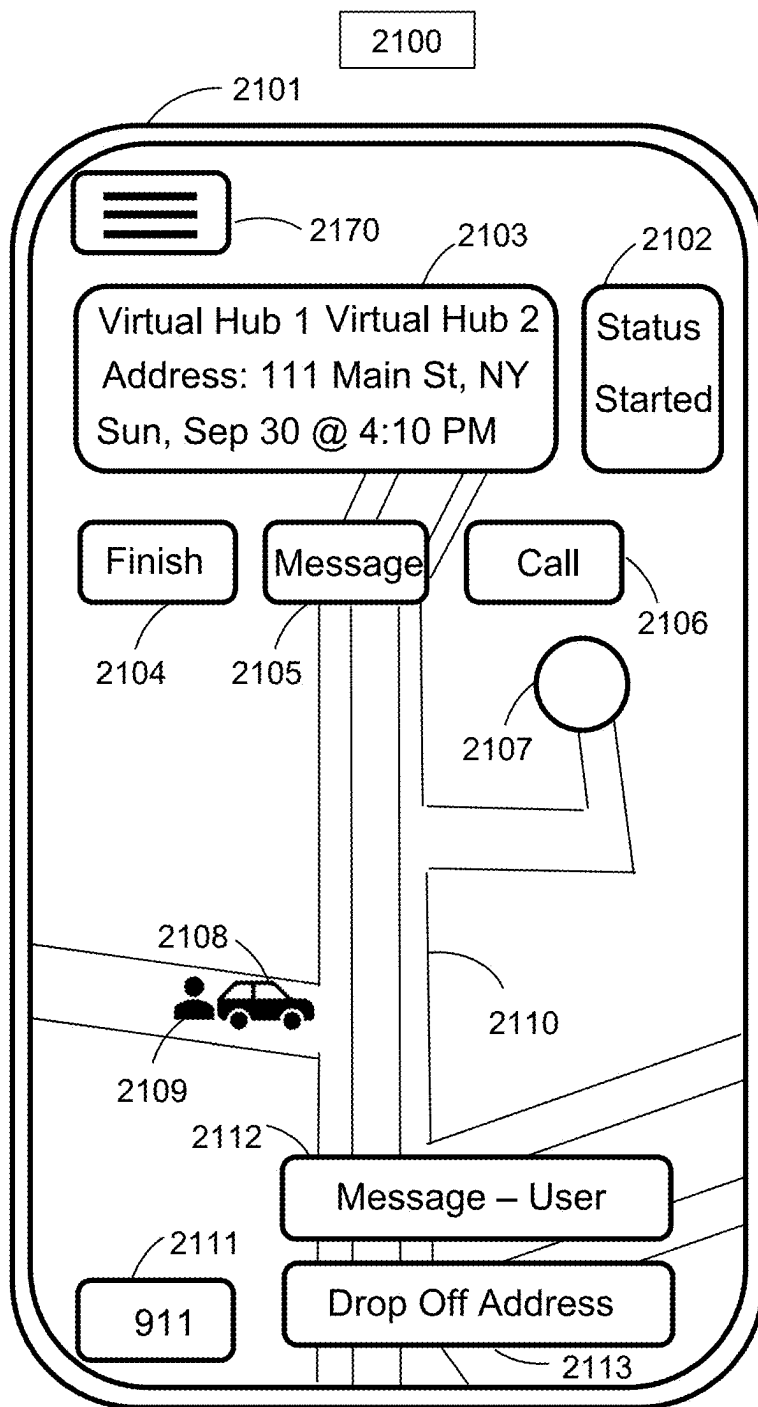


FIG. 21

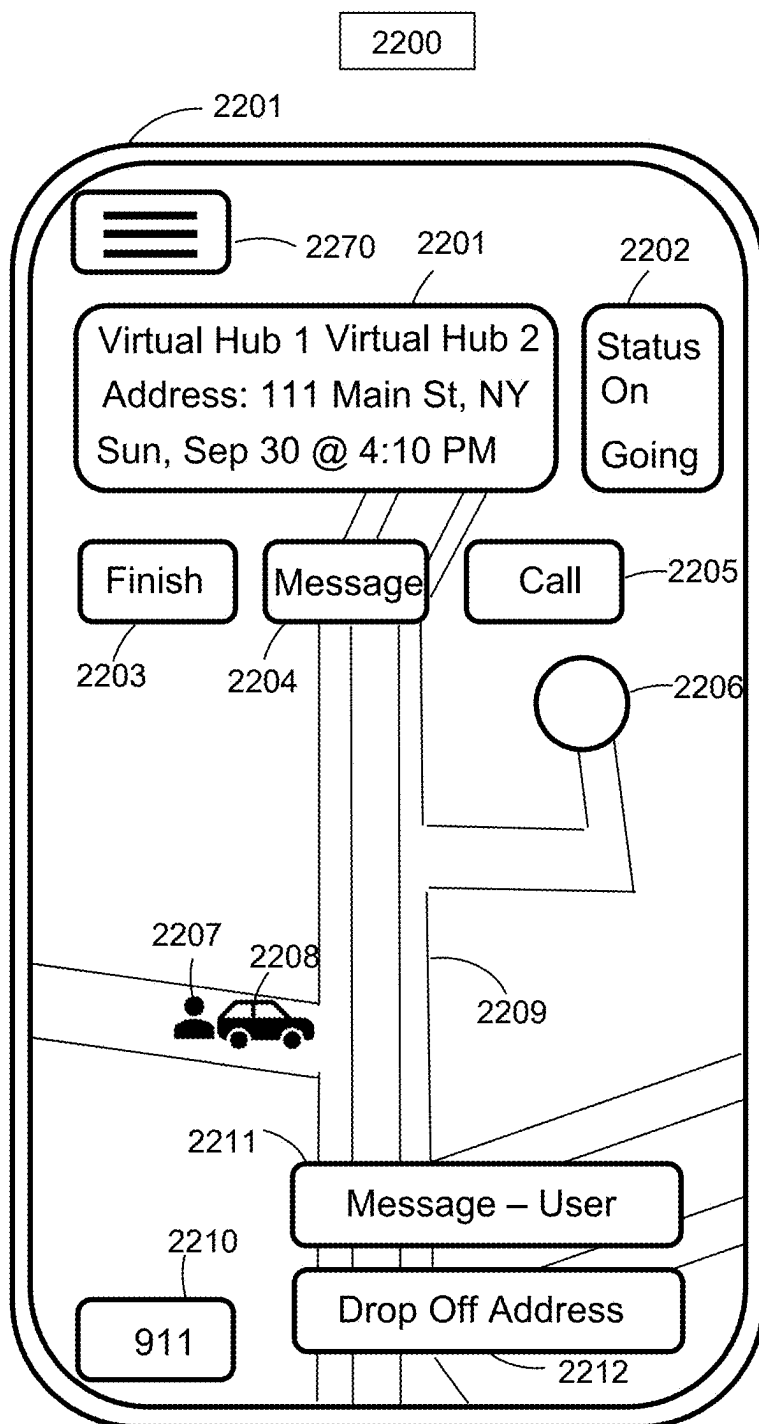


FIG. 22

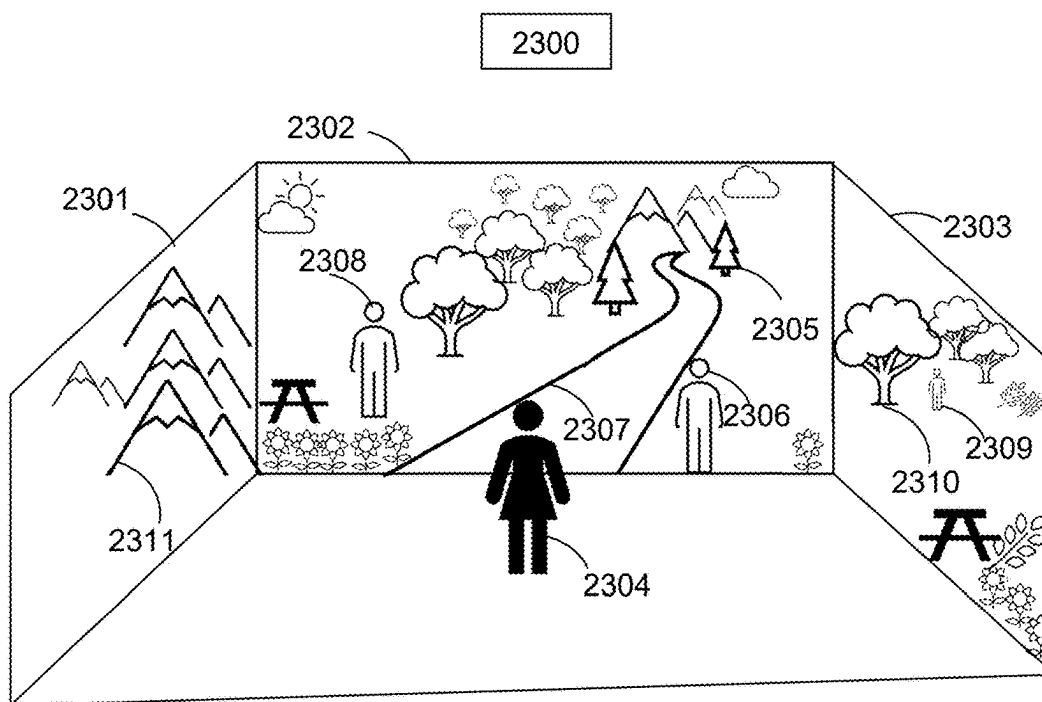


FIG. 23A

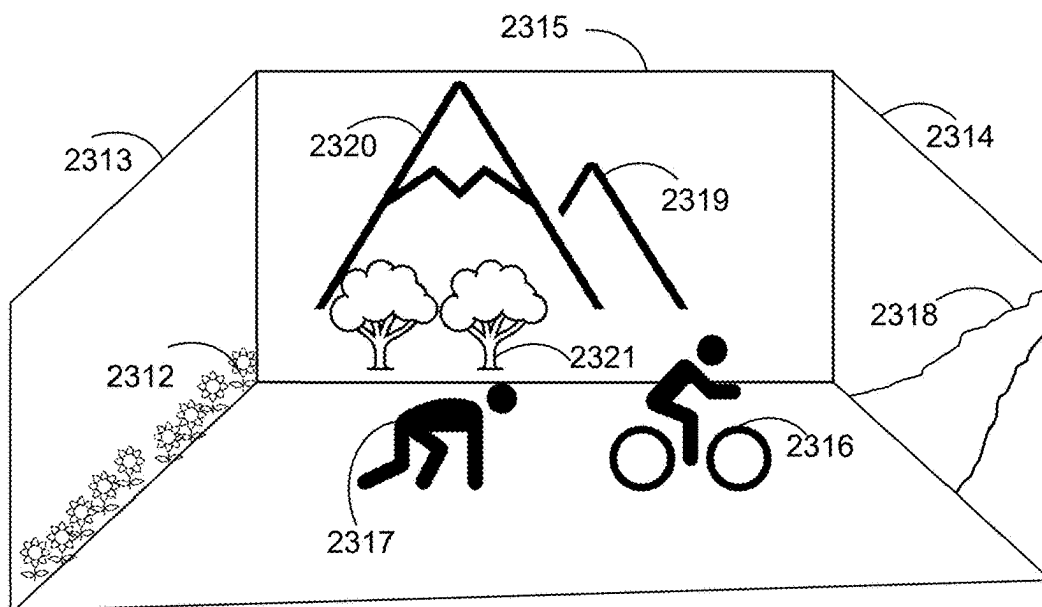


FIG. 23B

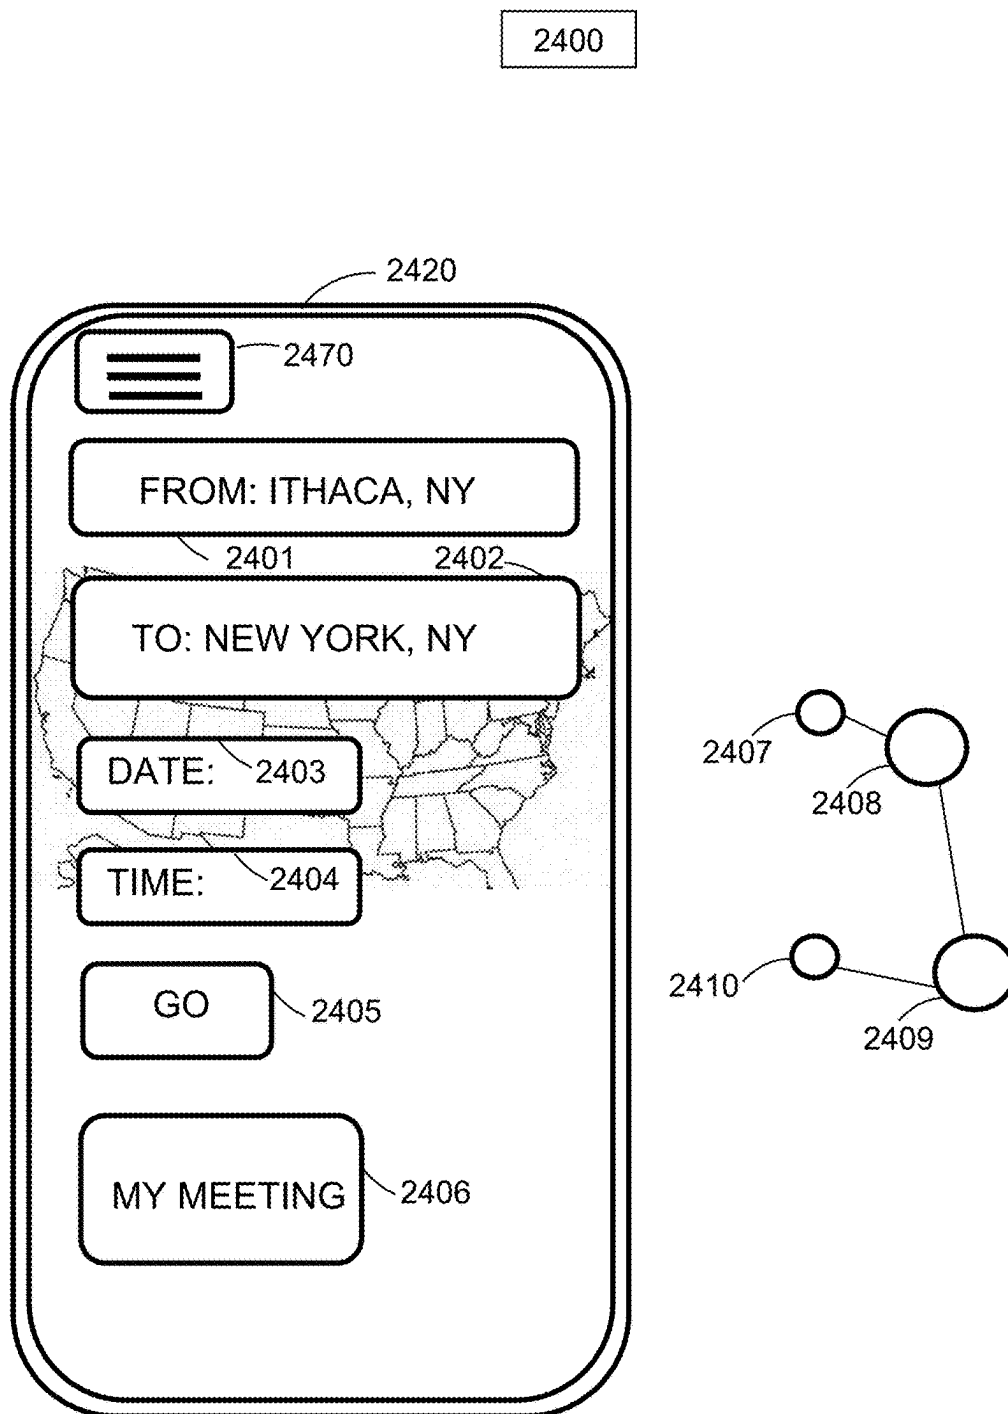


FIG. 24

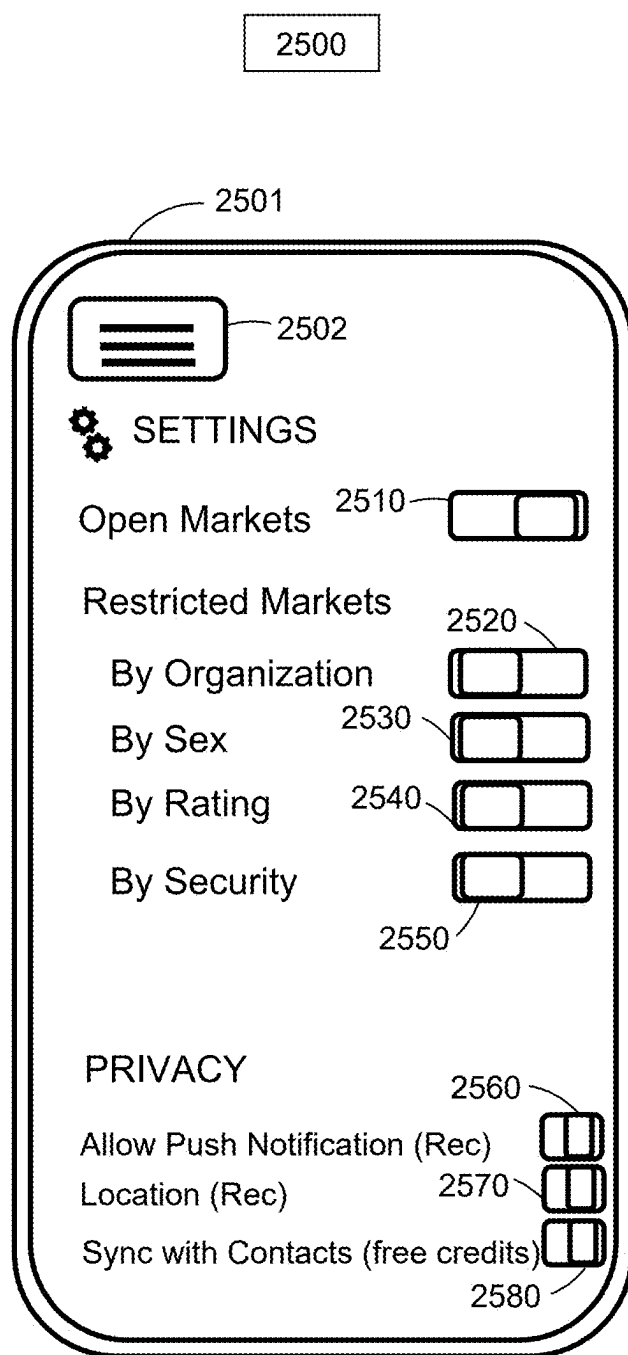


FIG. 25

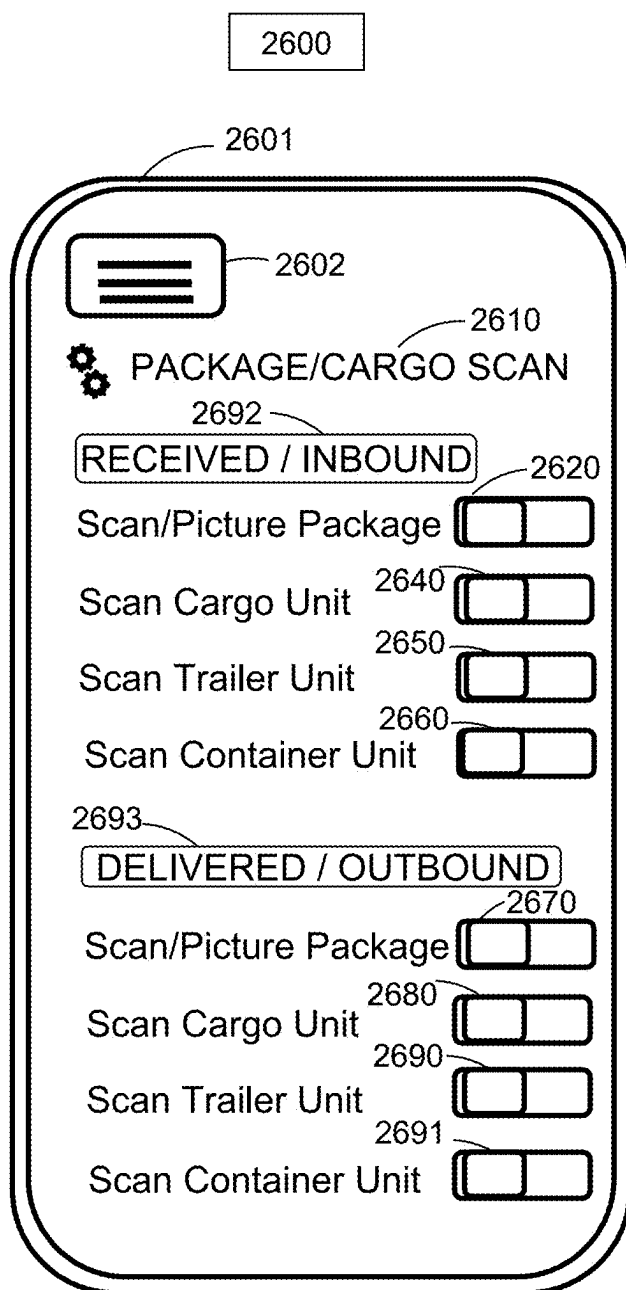


FIG. 26

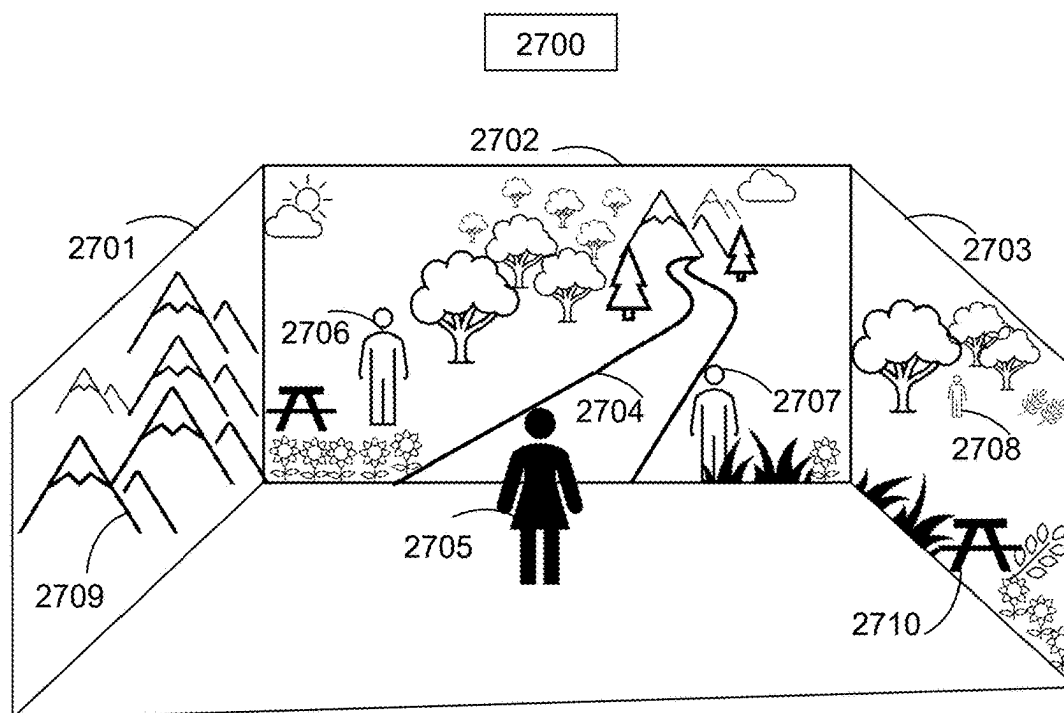


FIG. 27A

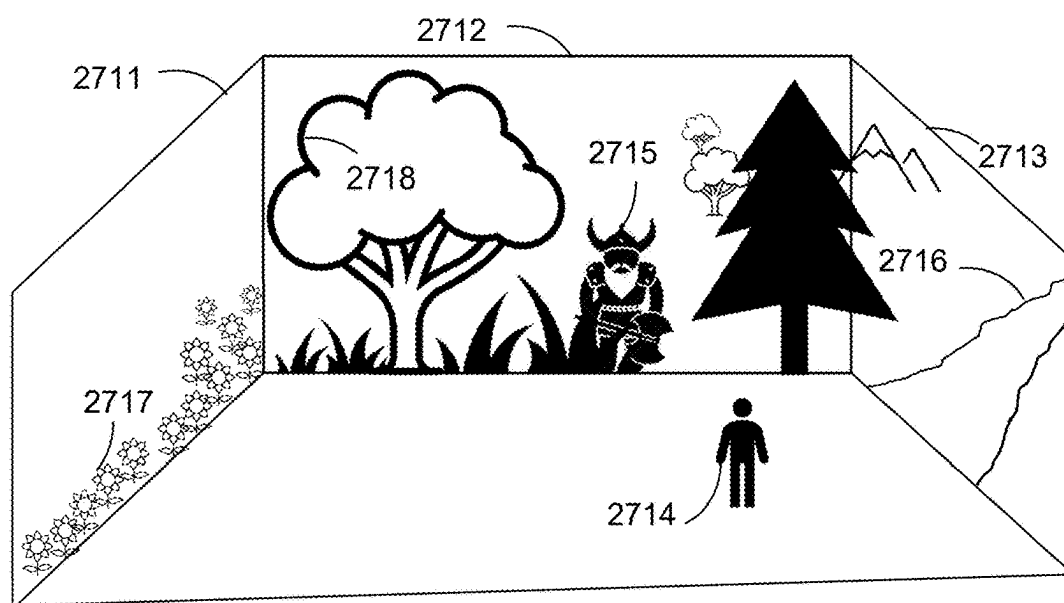


FIG. 27B

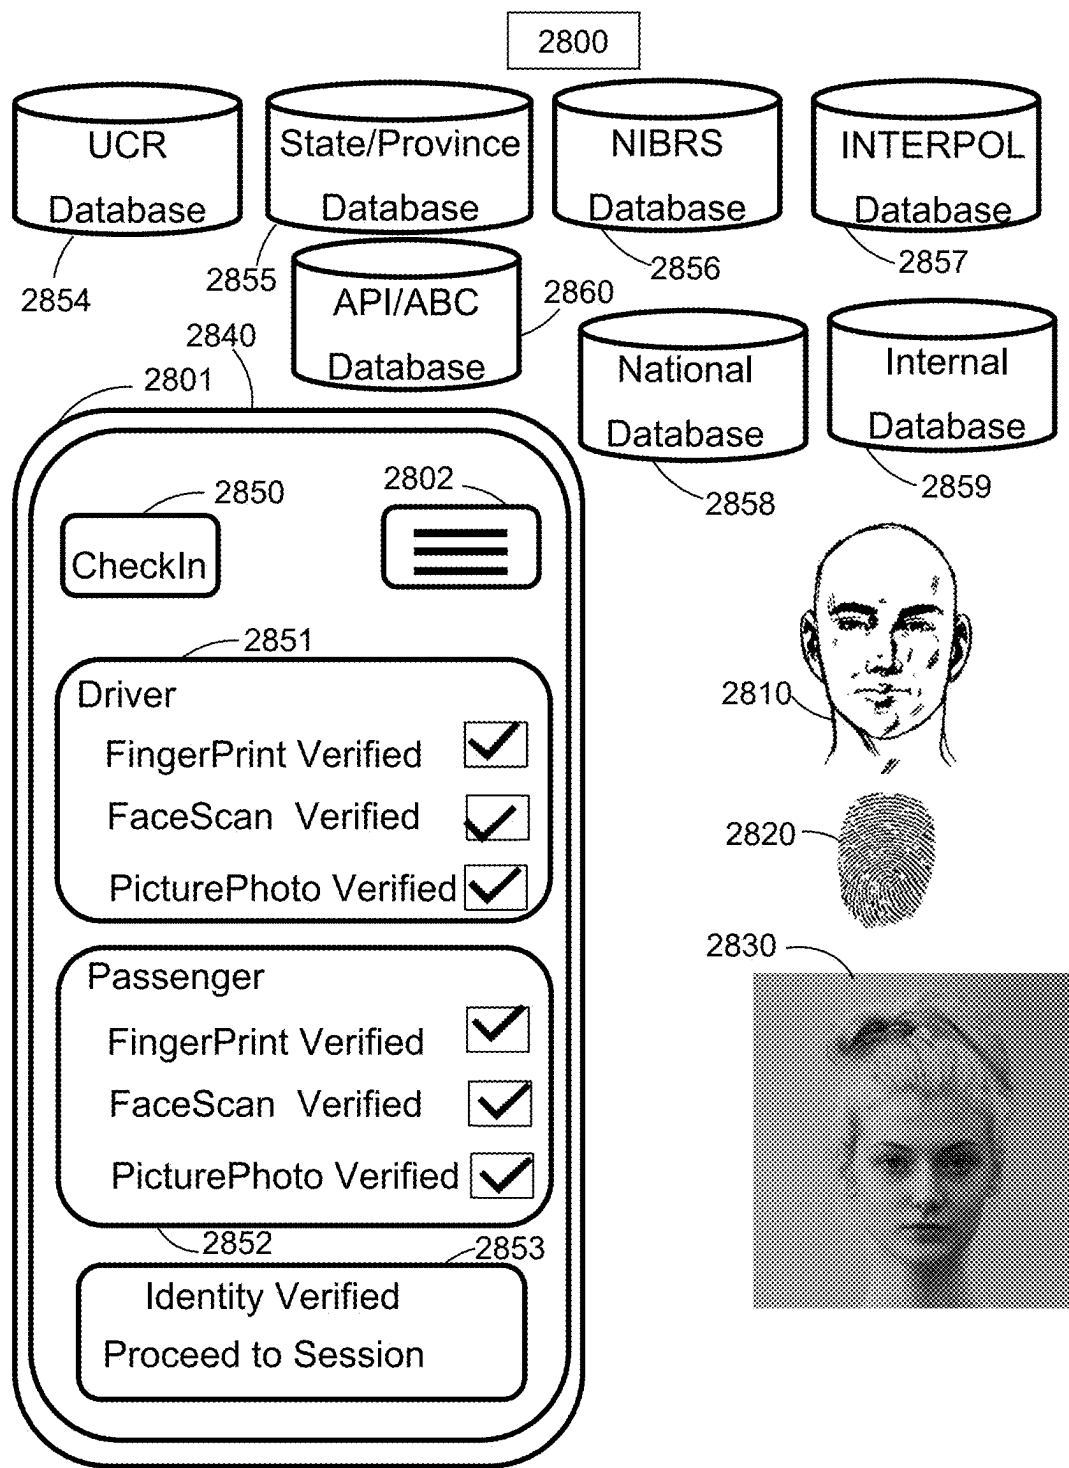


FIG. 28

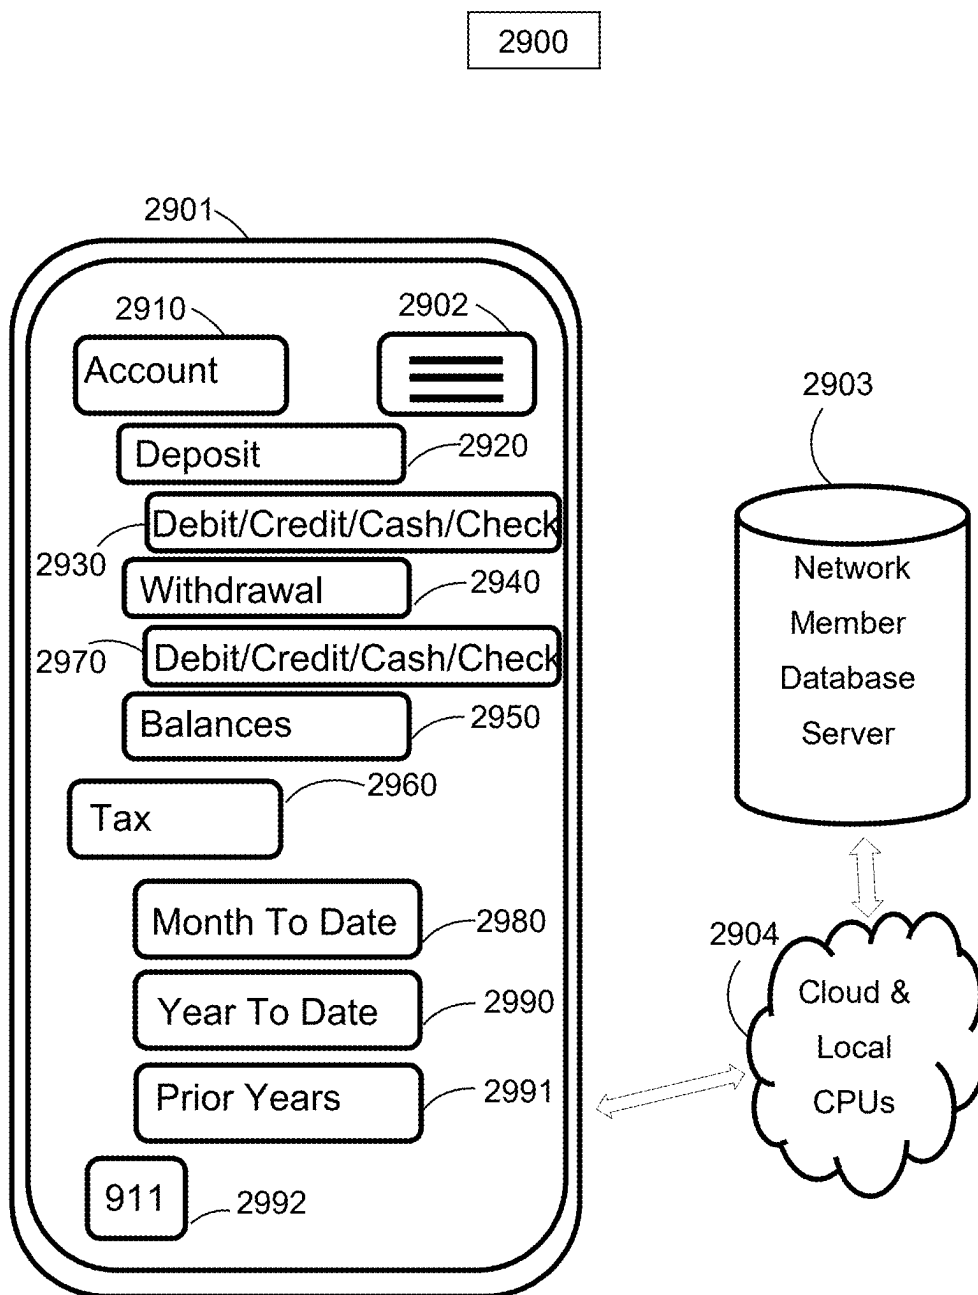


FIG. 29

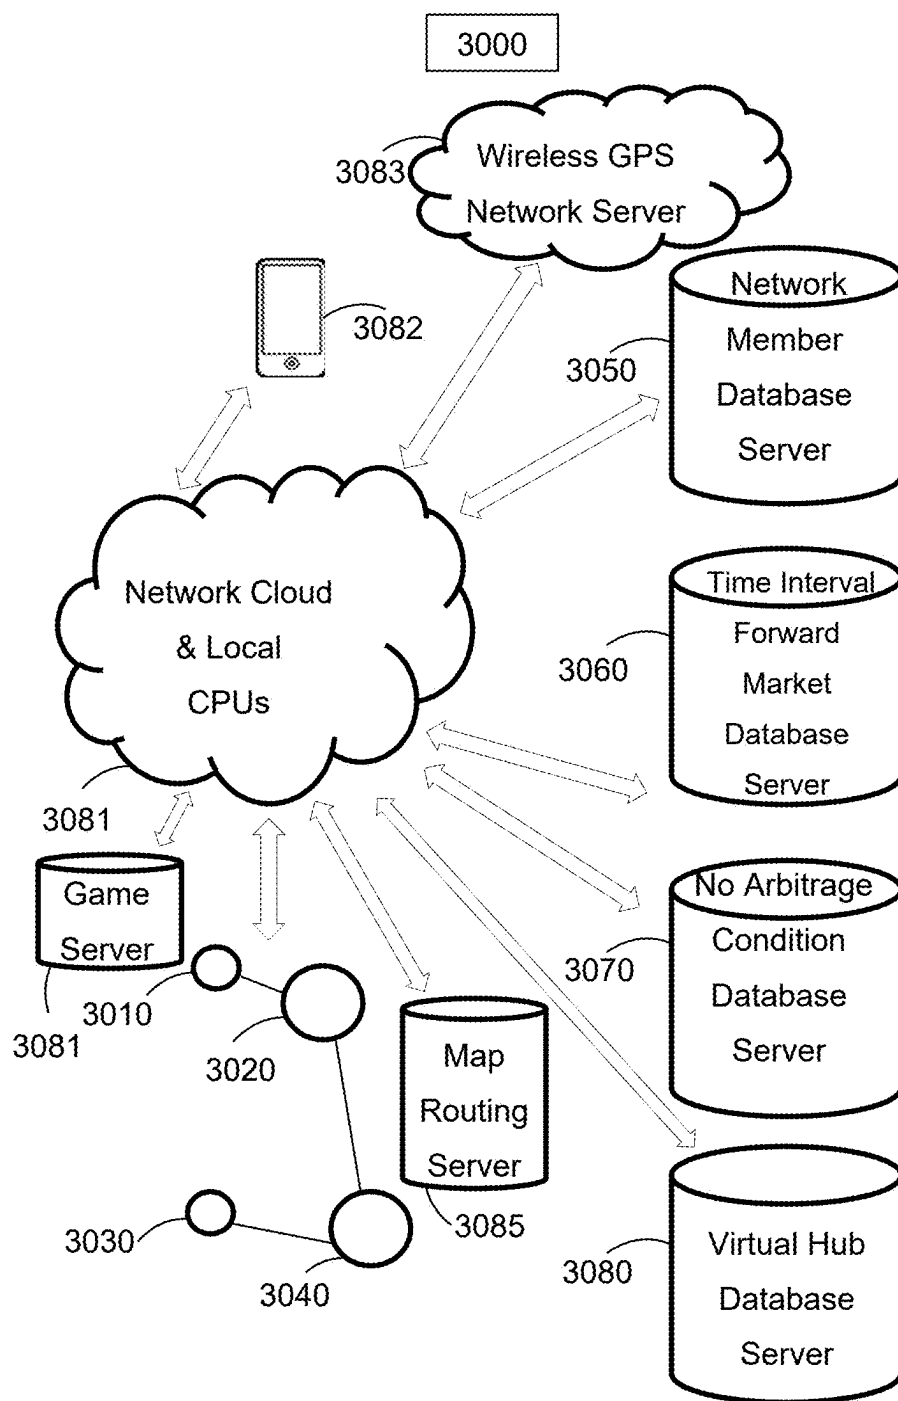


FIG. 30

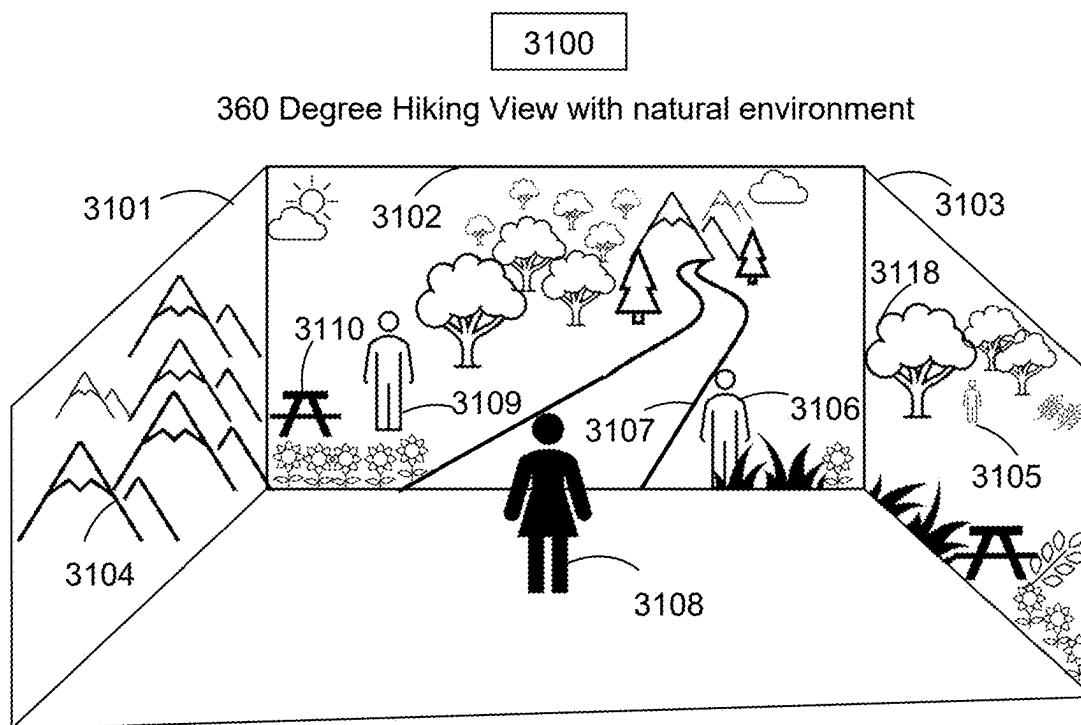


FIG. 31A

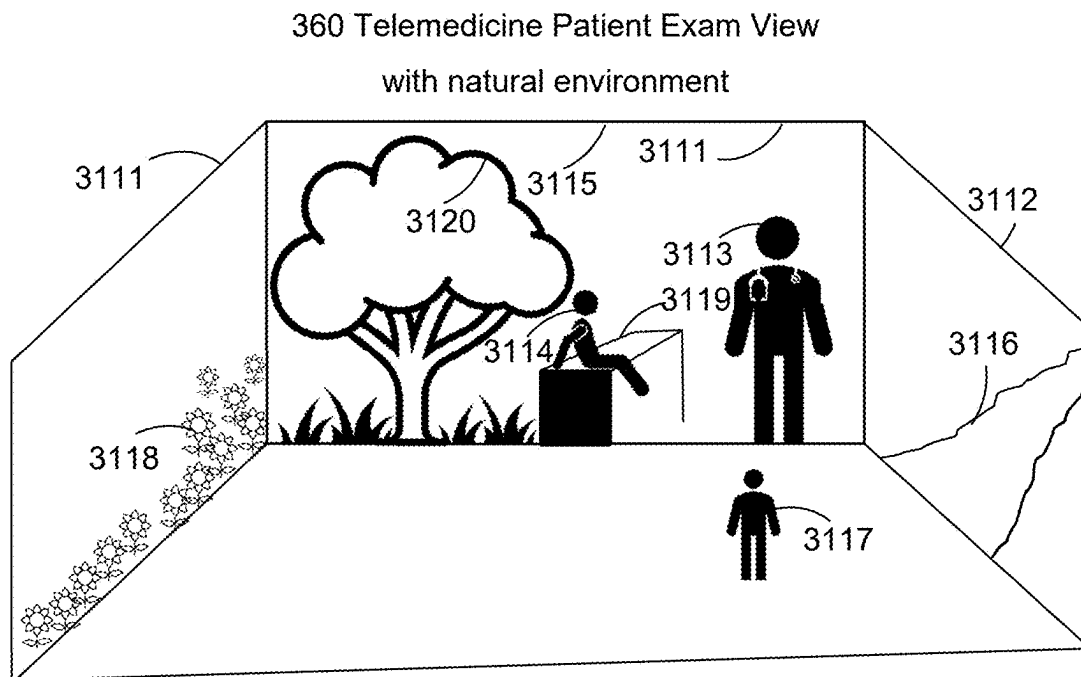


FIG. 31B

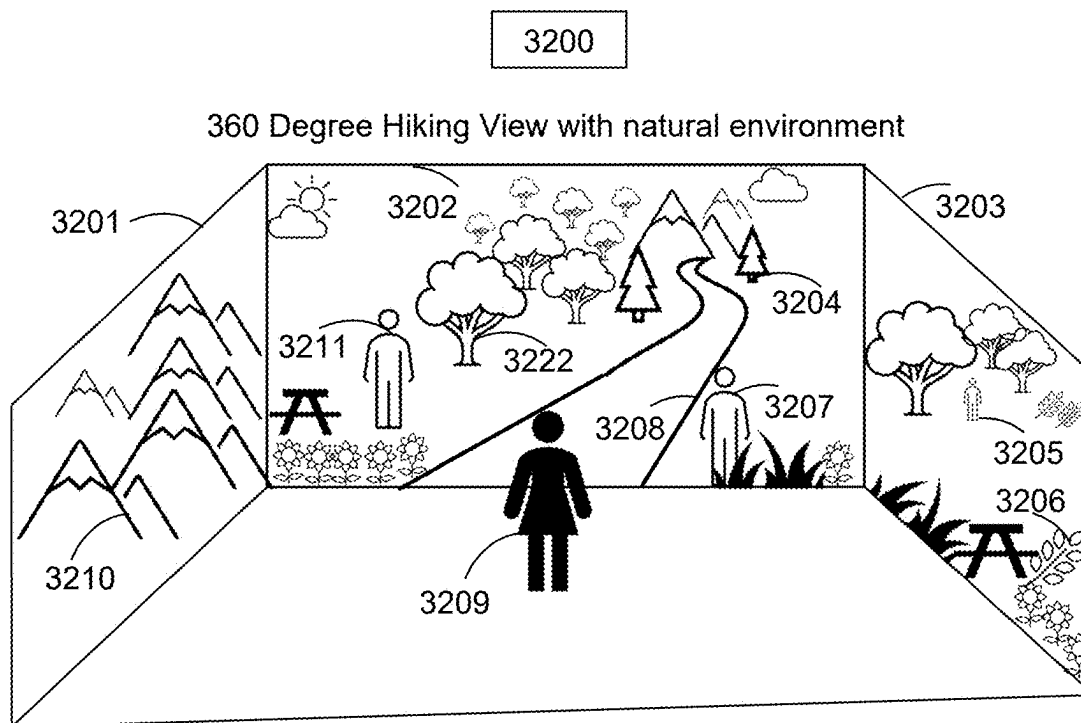


FIG. 32A

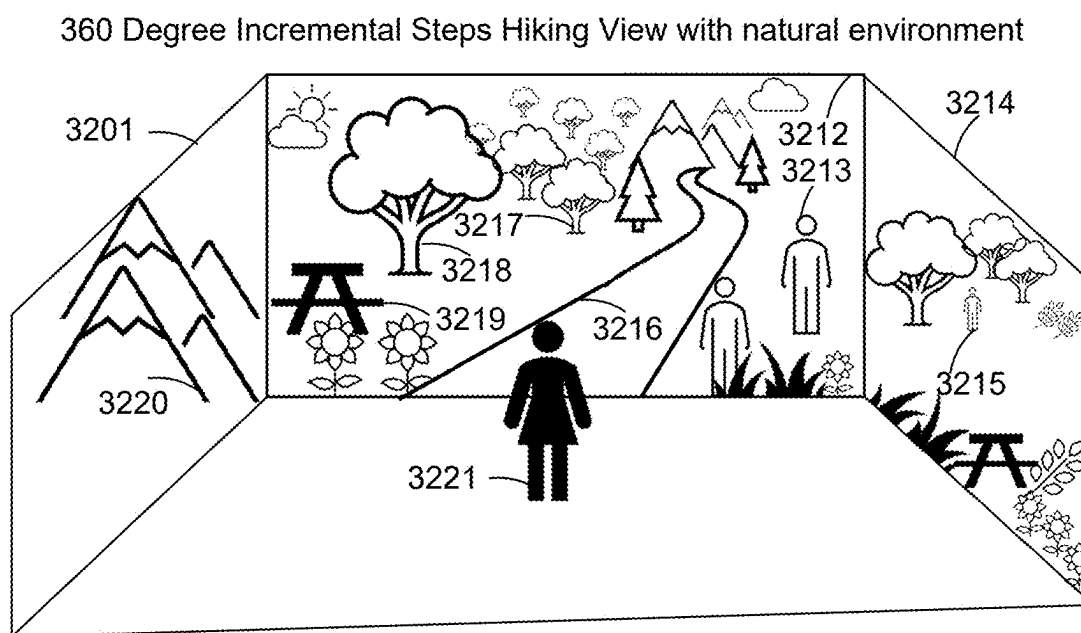


FIG. 32B

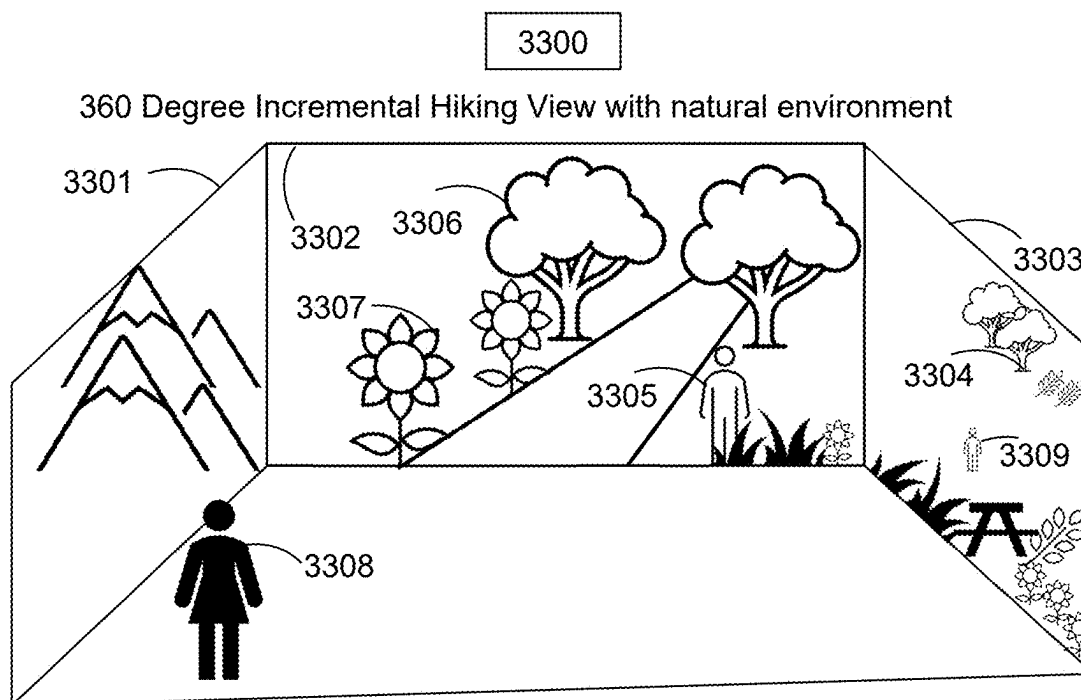


FIG. 33A

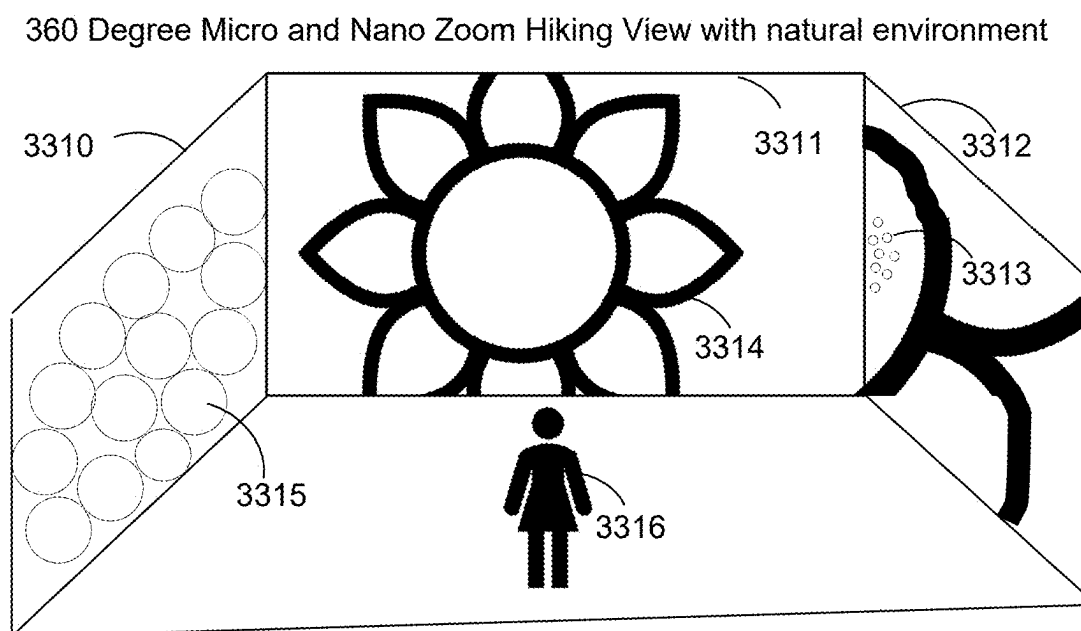


FIG. 33B

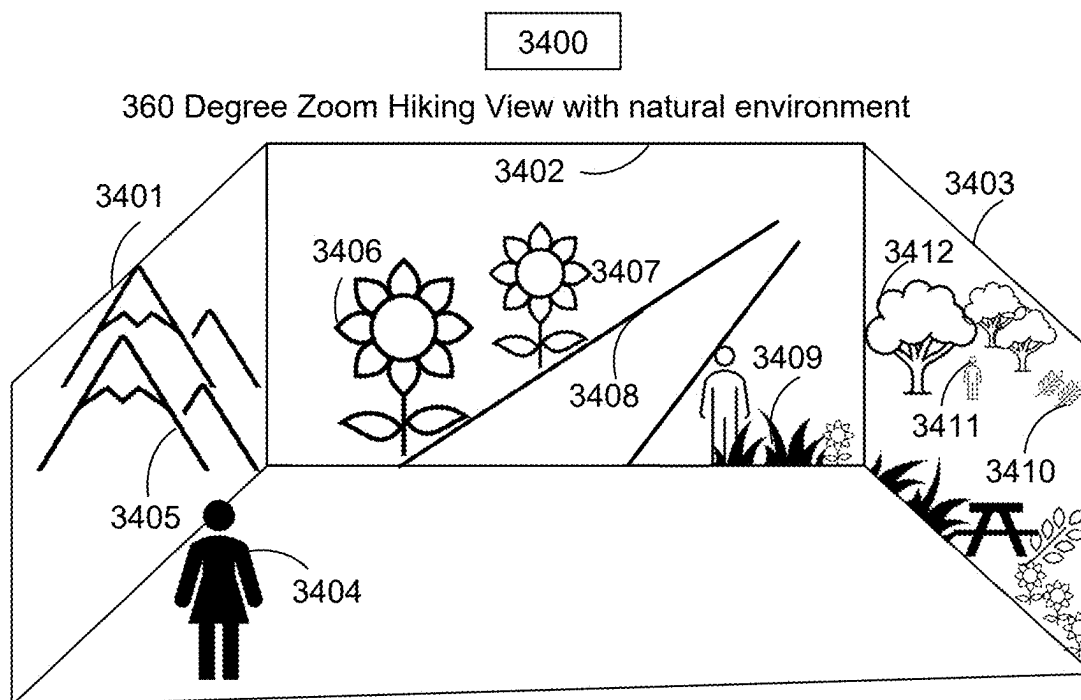


FIG. 34A

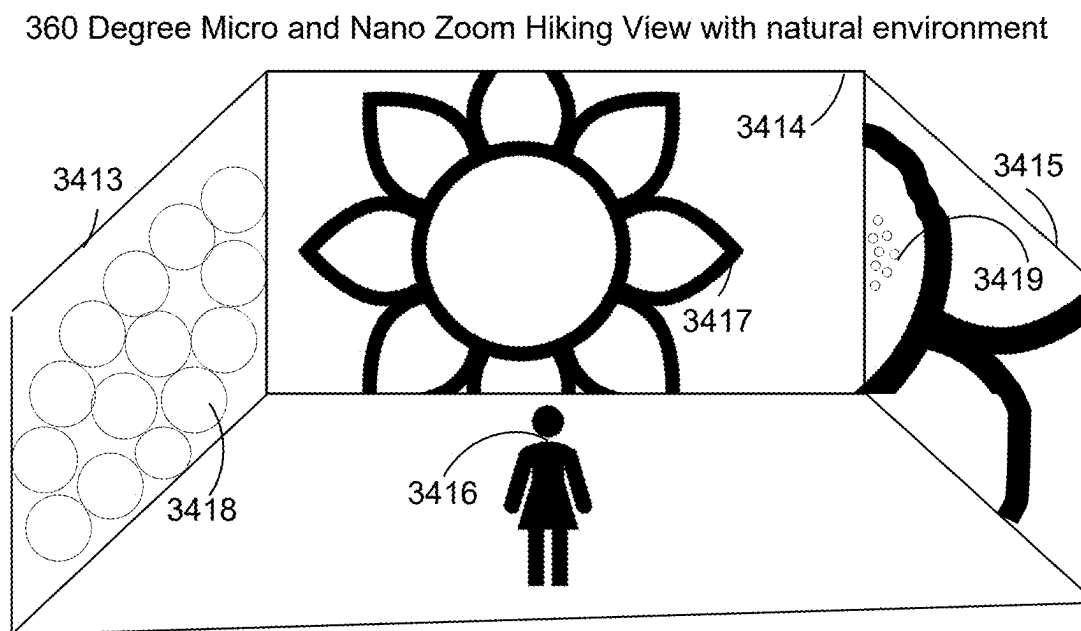


FIG. 34B

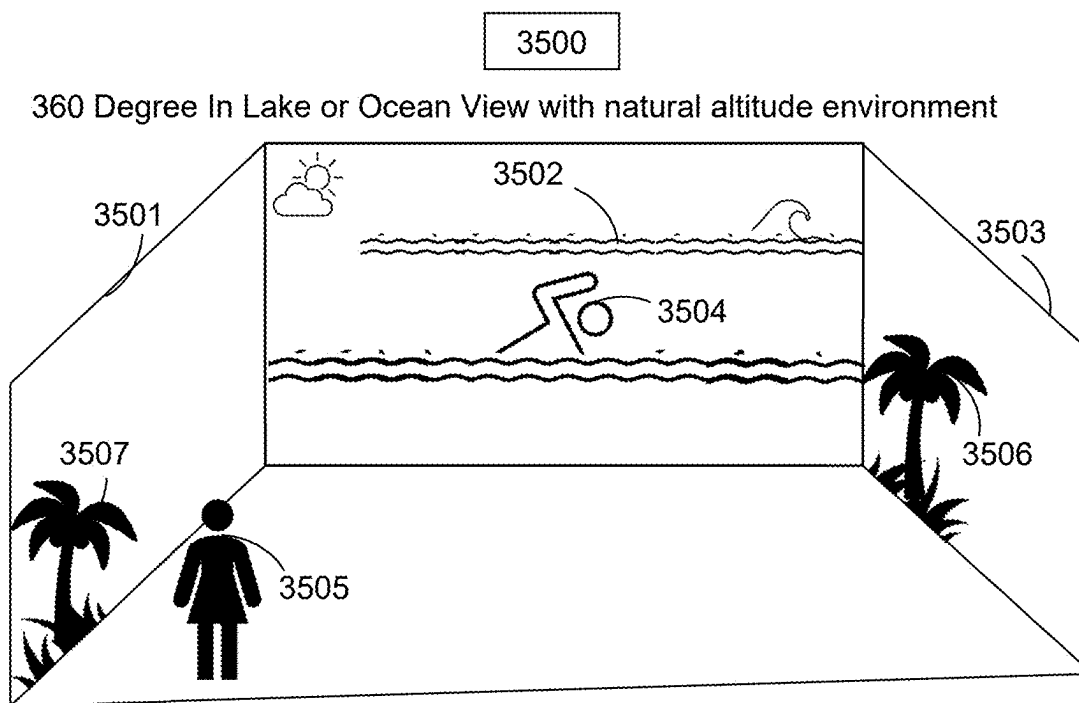


FIG. 35A

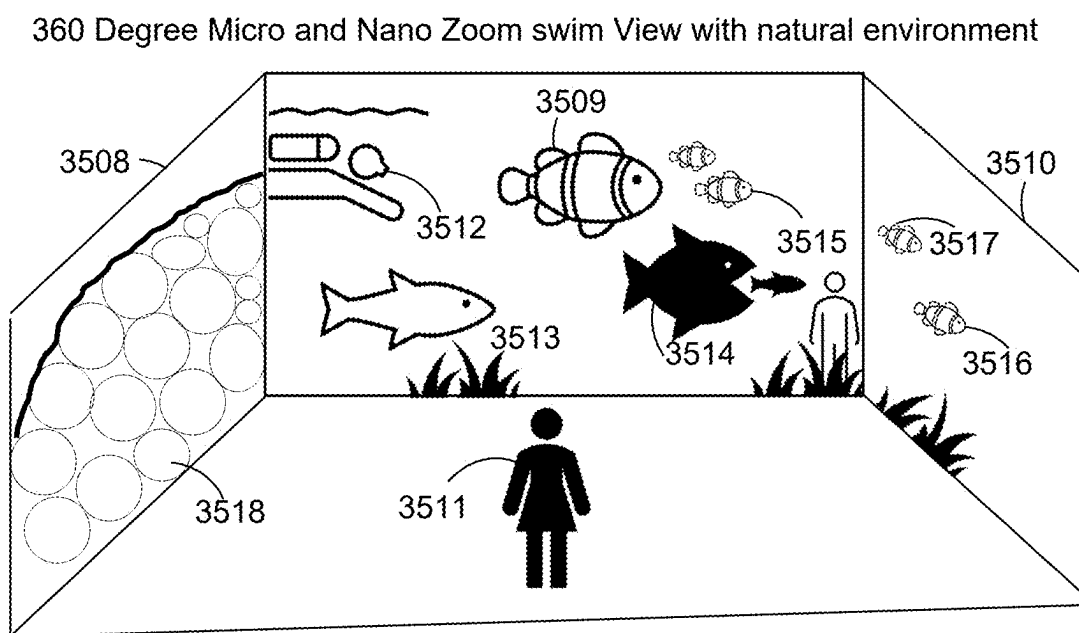


FIG. 35B

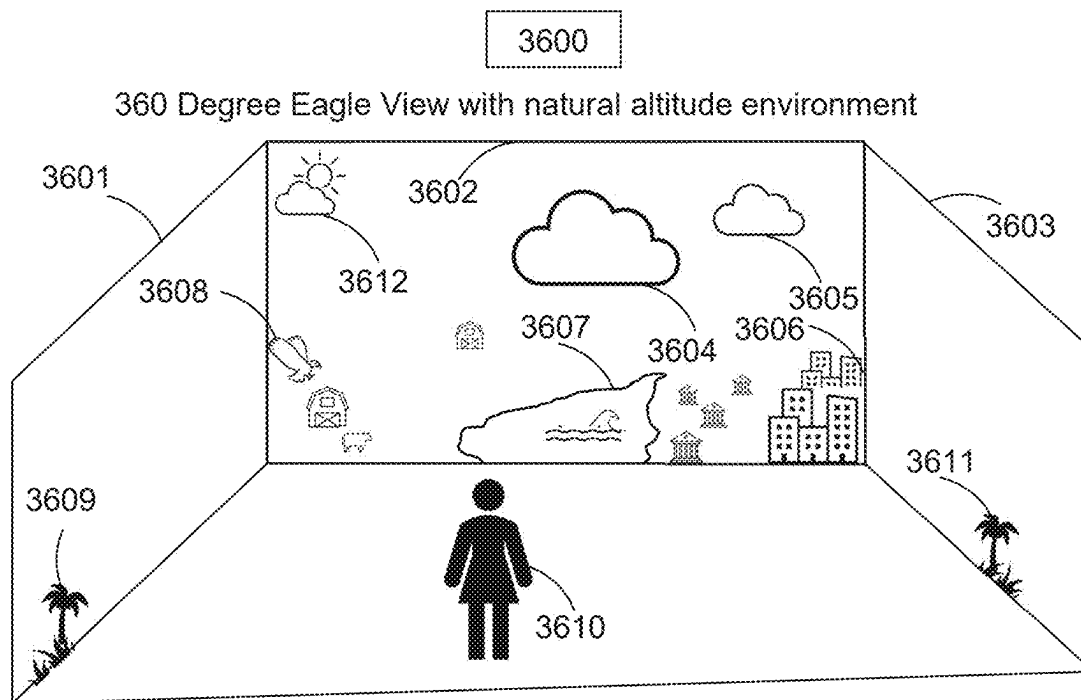


FIG. 36A

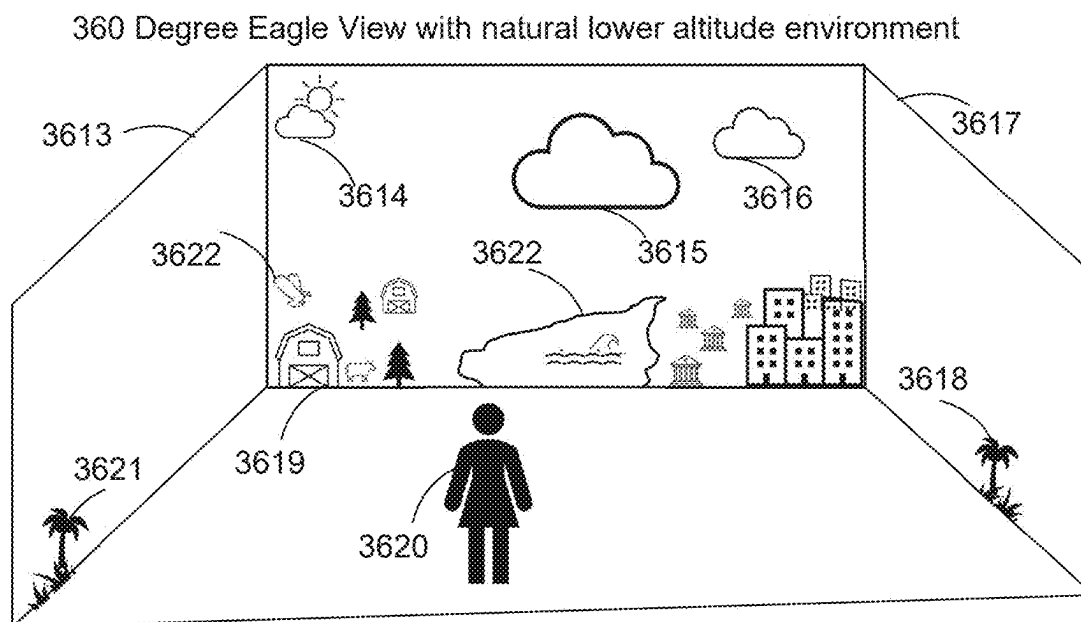


FIG. 36B

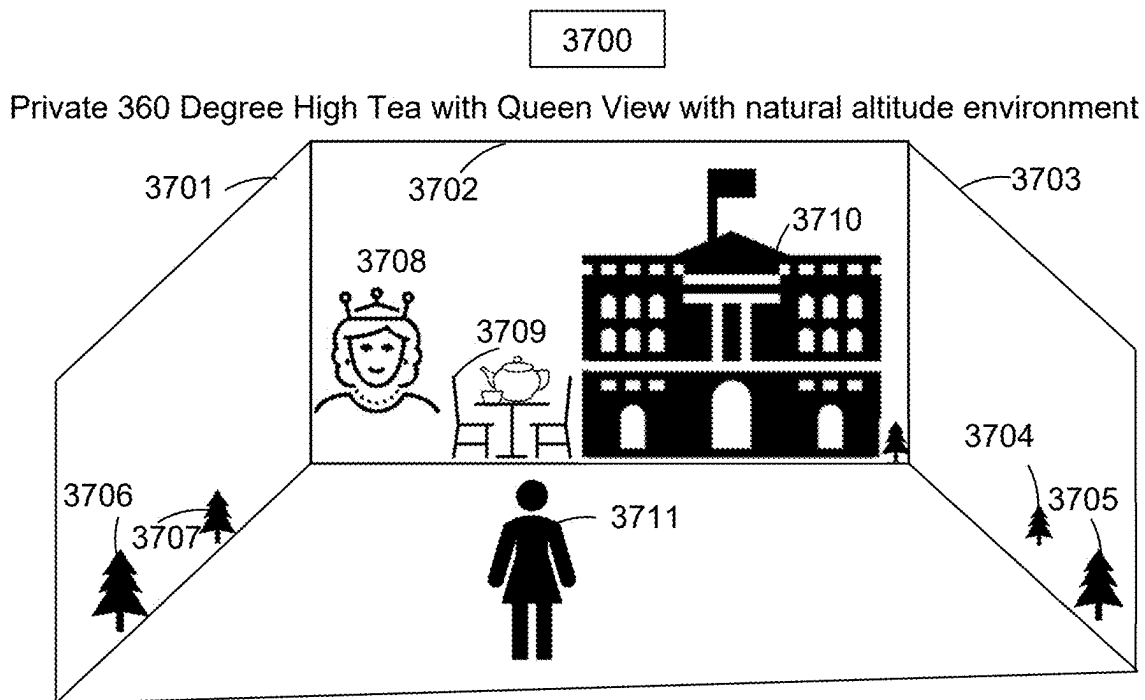


FIG. 37A

Public 360 Degree High Tea with Queen View with natural altitude environment

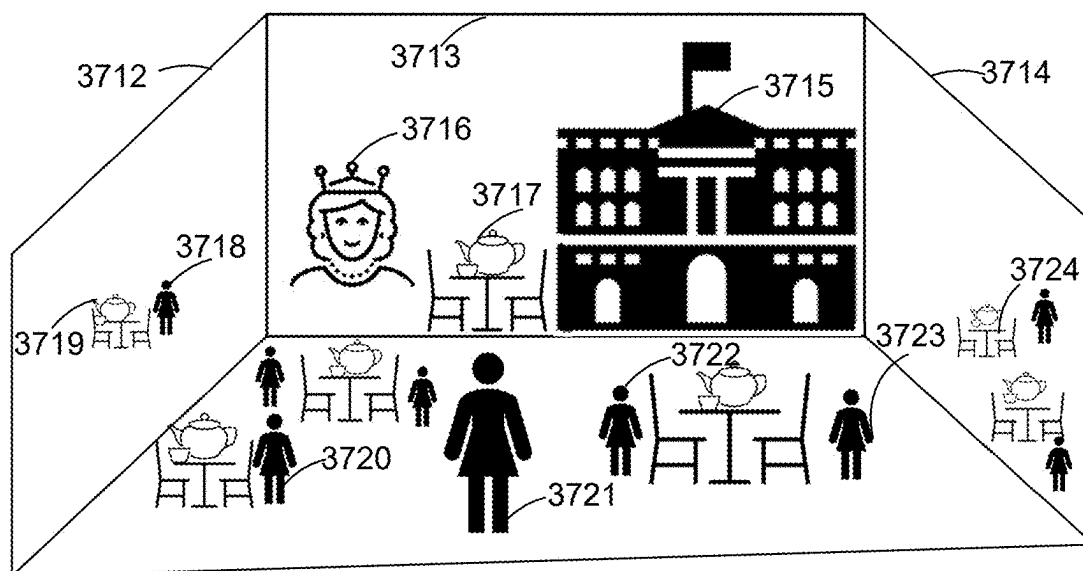


FIG. 37B

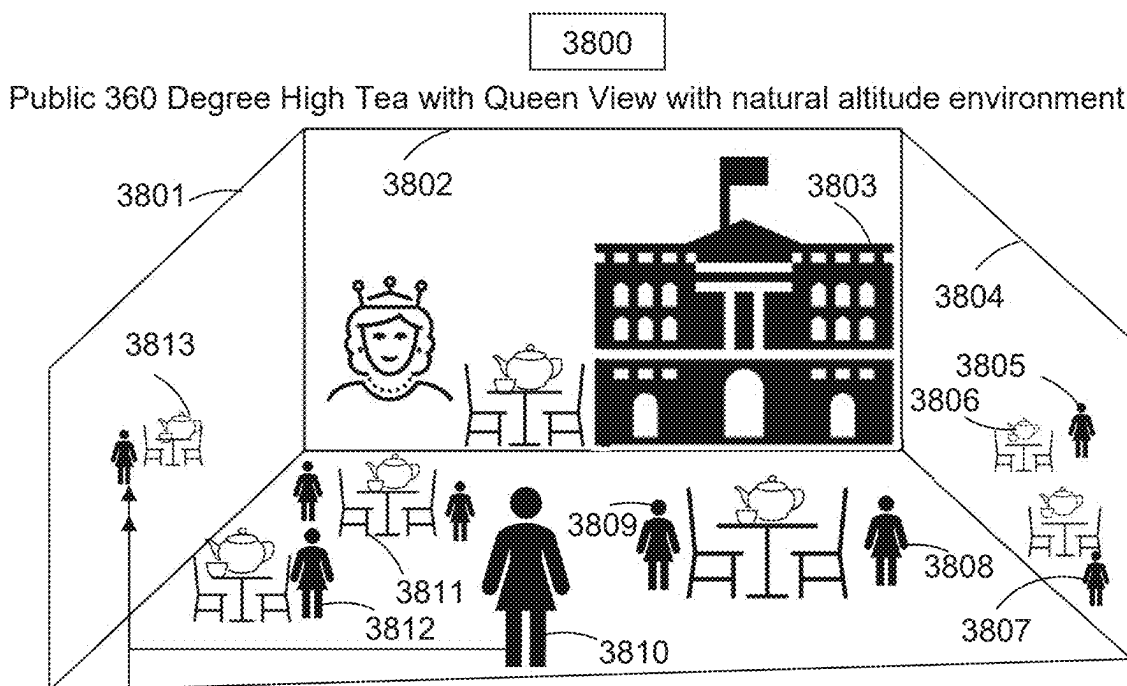


FIG. 38A

Request Conversation with Virtual People in the Public Room

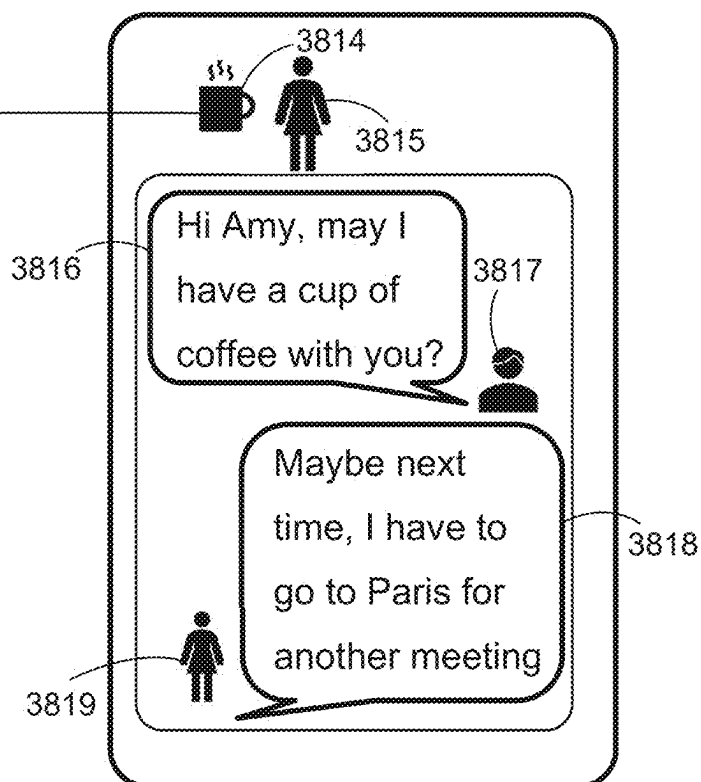


FIG. 38B

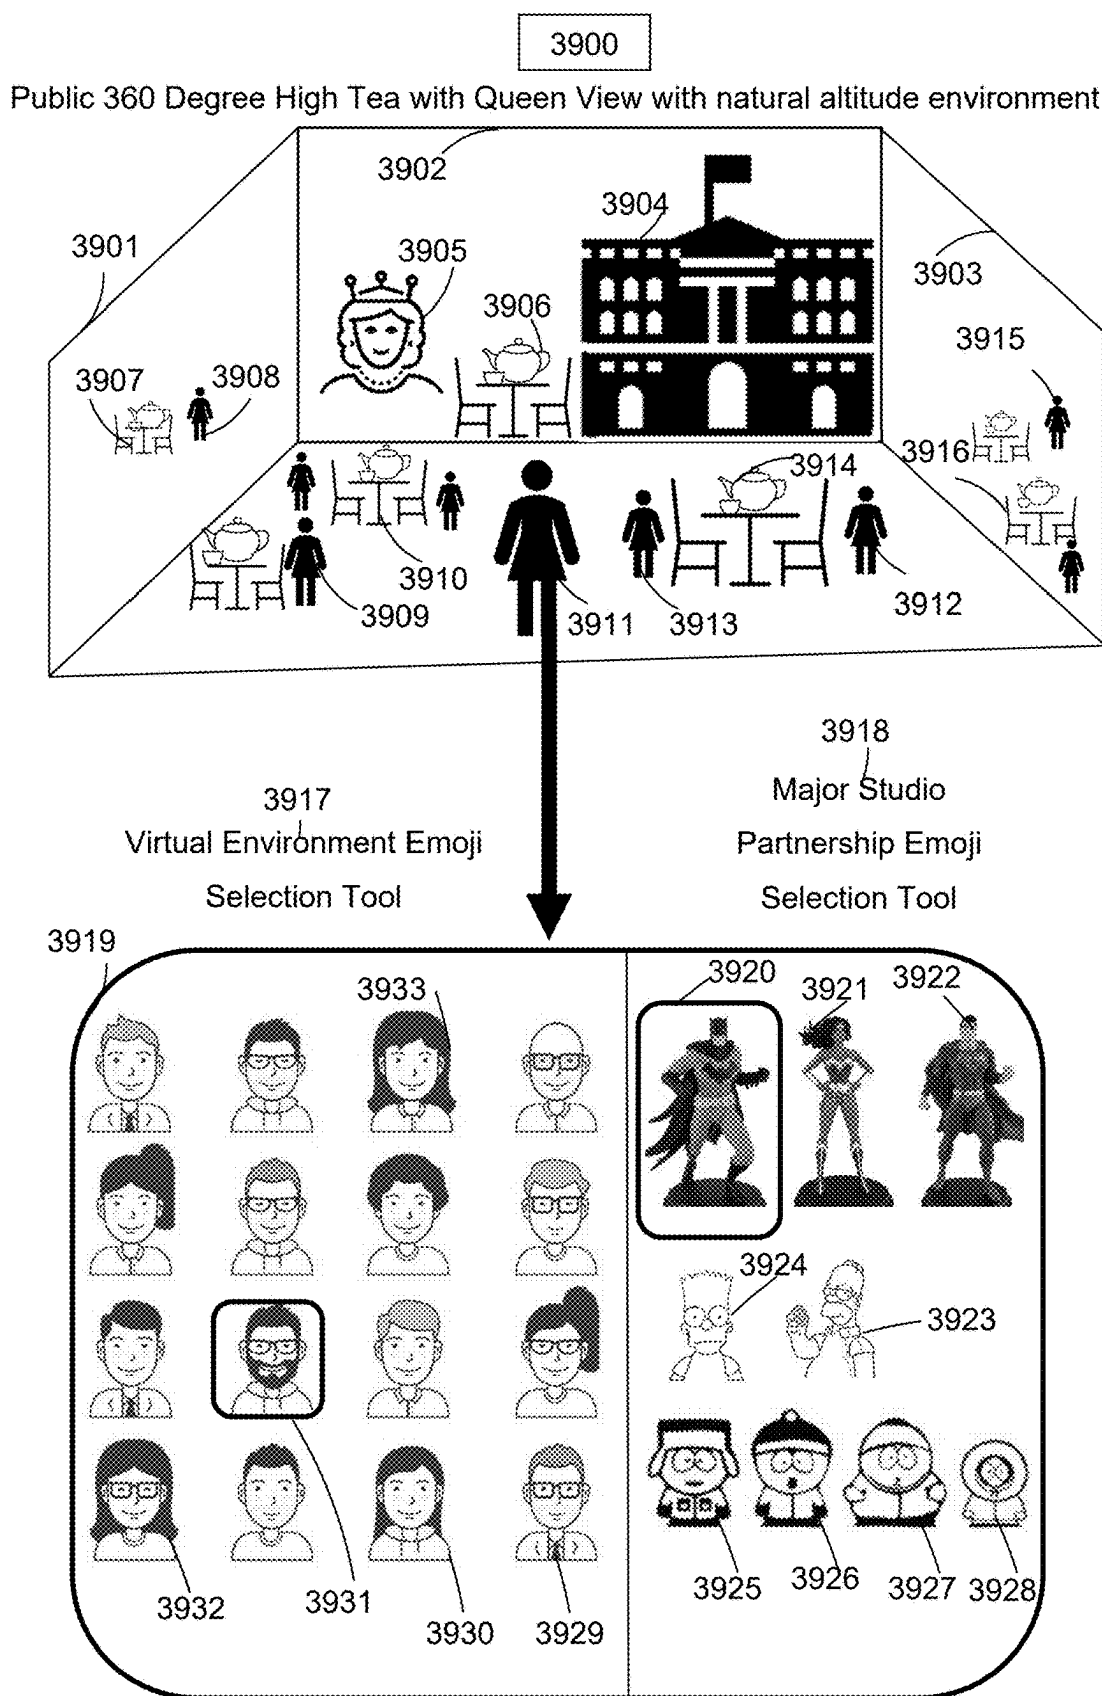


FIG. 39

4000

Private 360 Degree Weight Lifting Venice Beach View with natural altitude environment

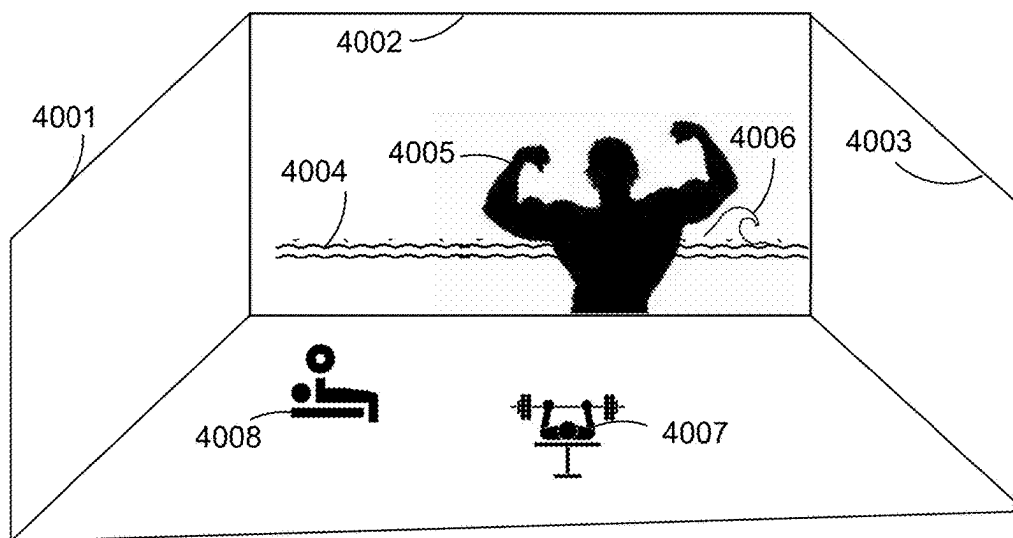


FIG. 40A

Public 360 Degree Weight Lifting Venice Beach View with natural altitude environment

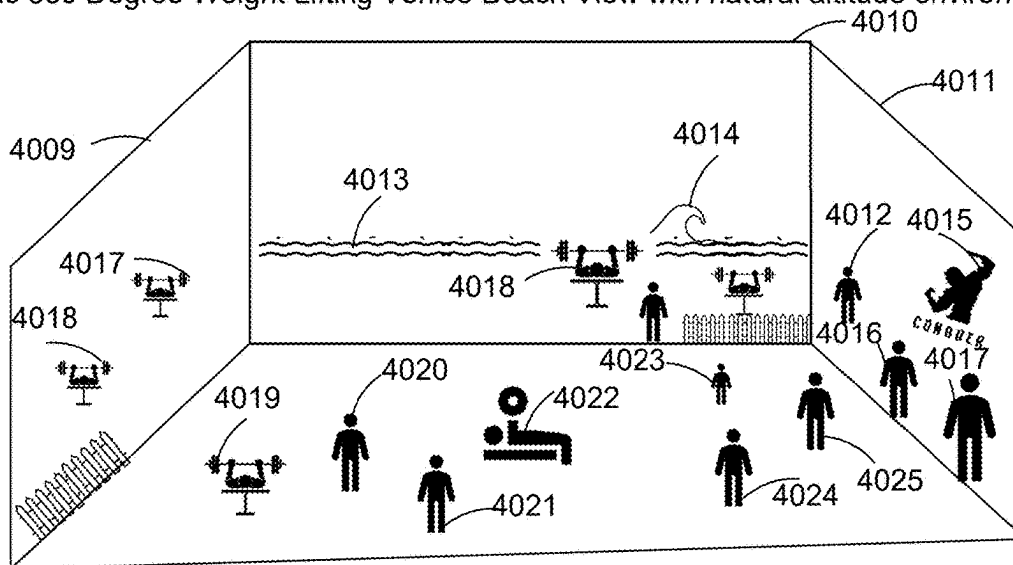


FIG. 40B

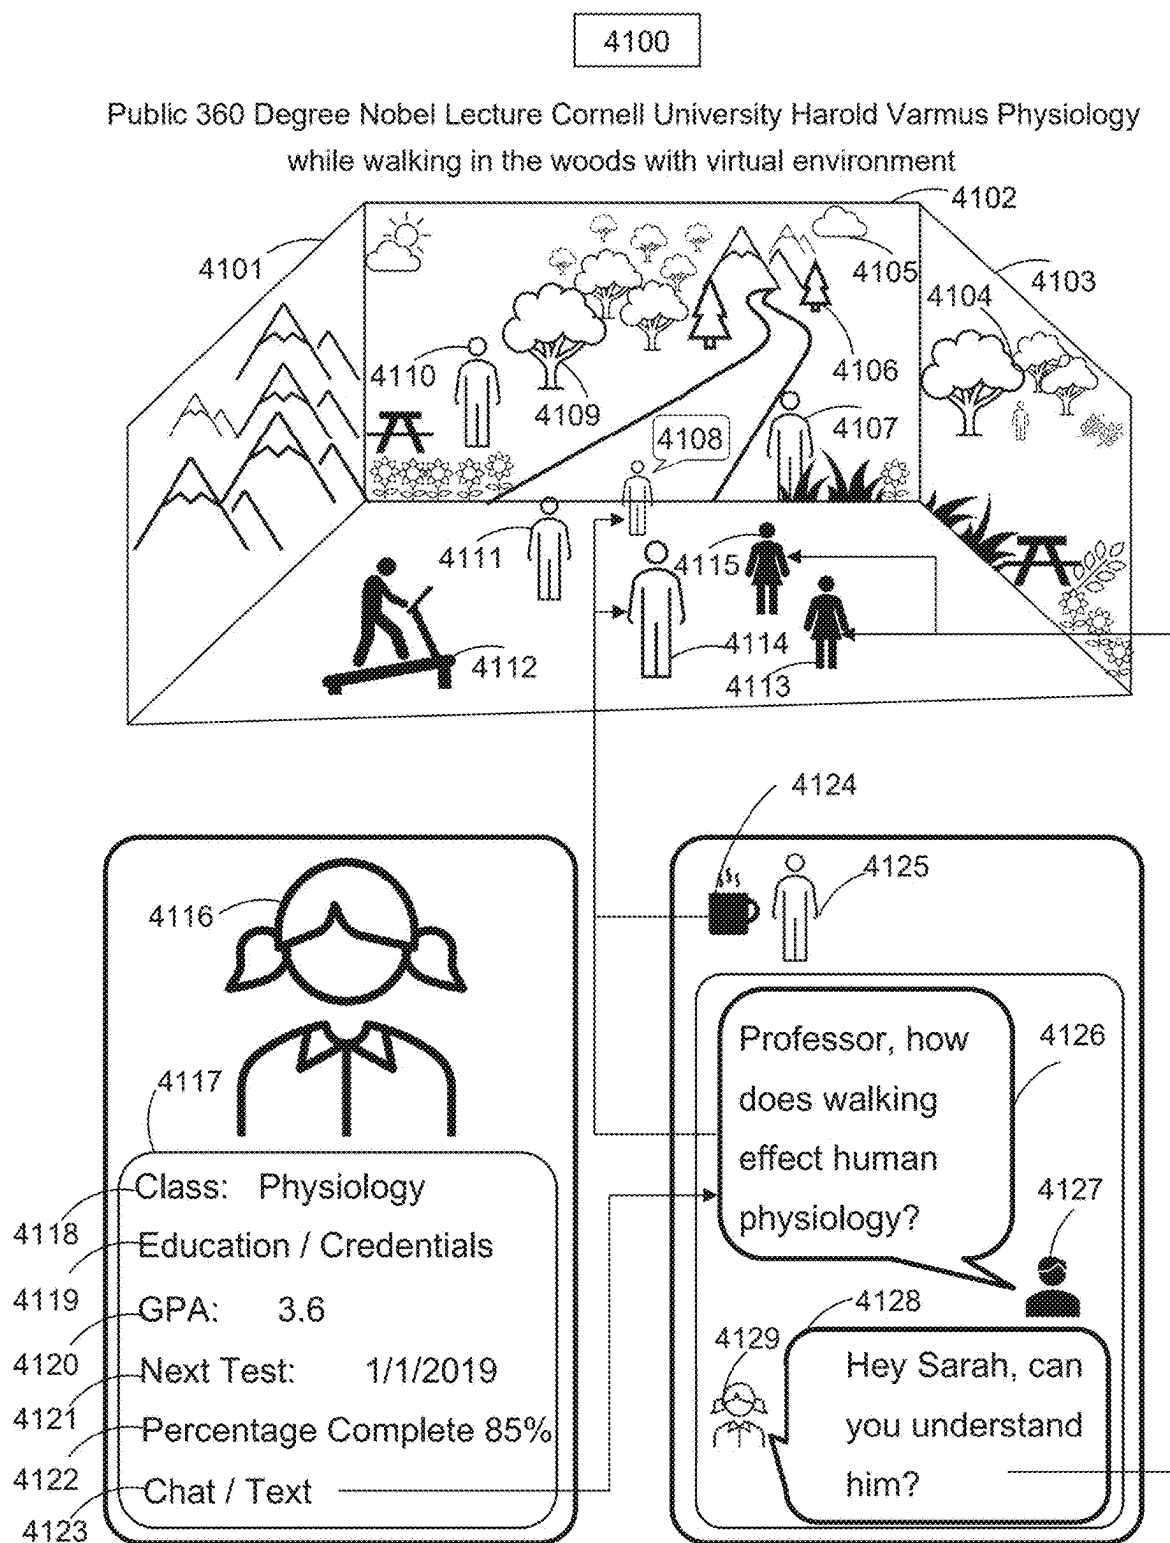


FIG. 41

4200

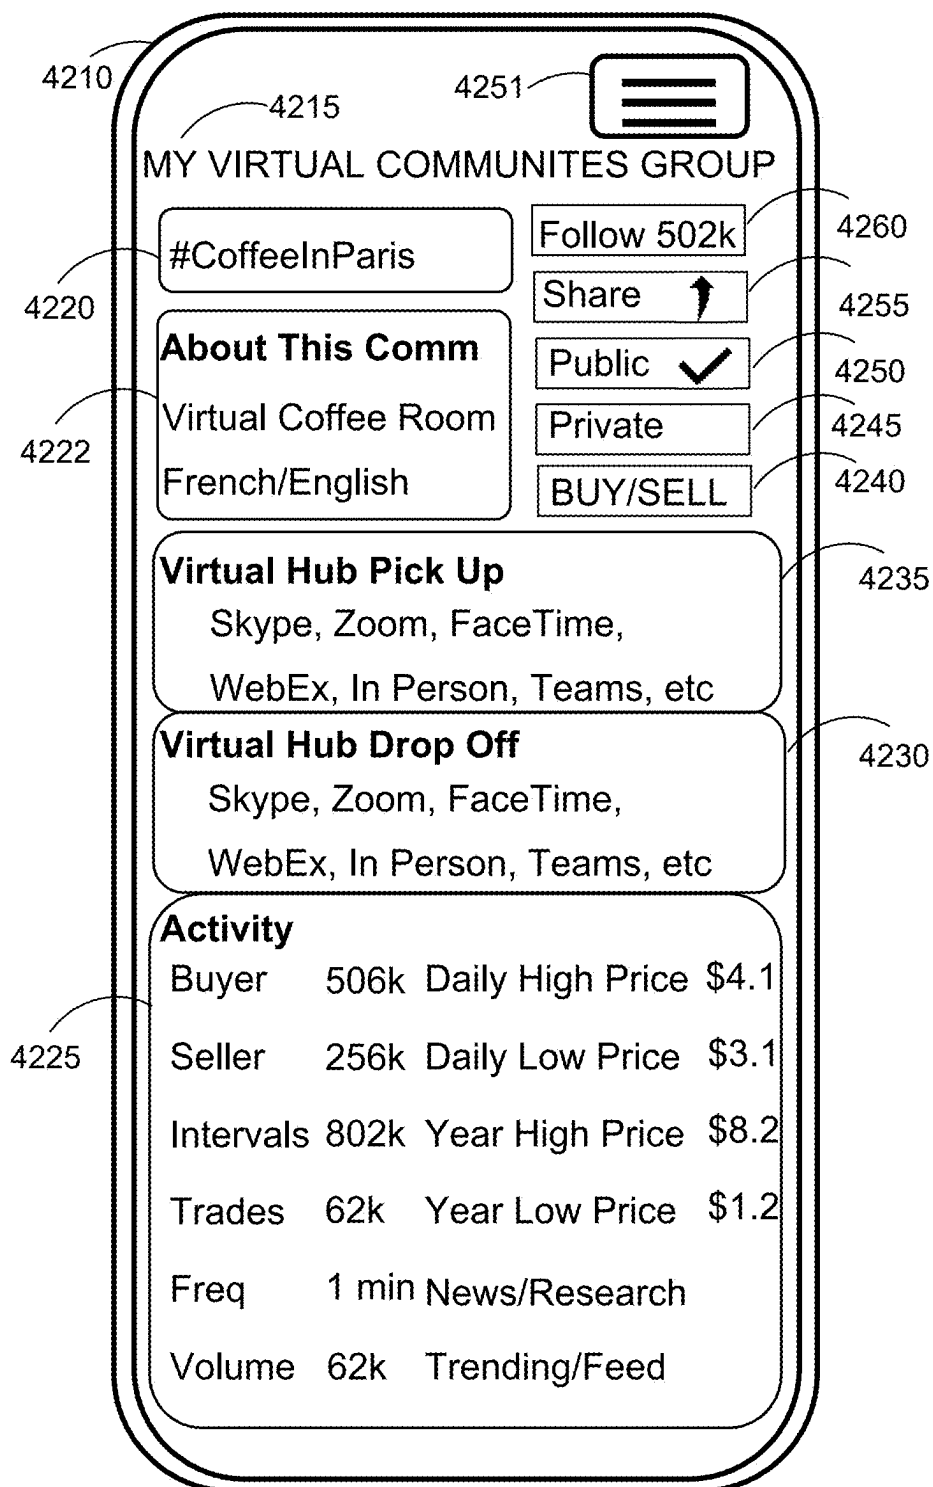


FIG. 42

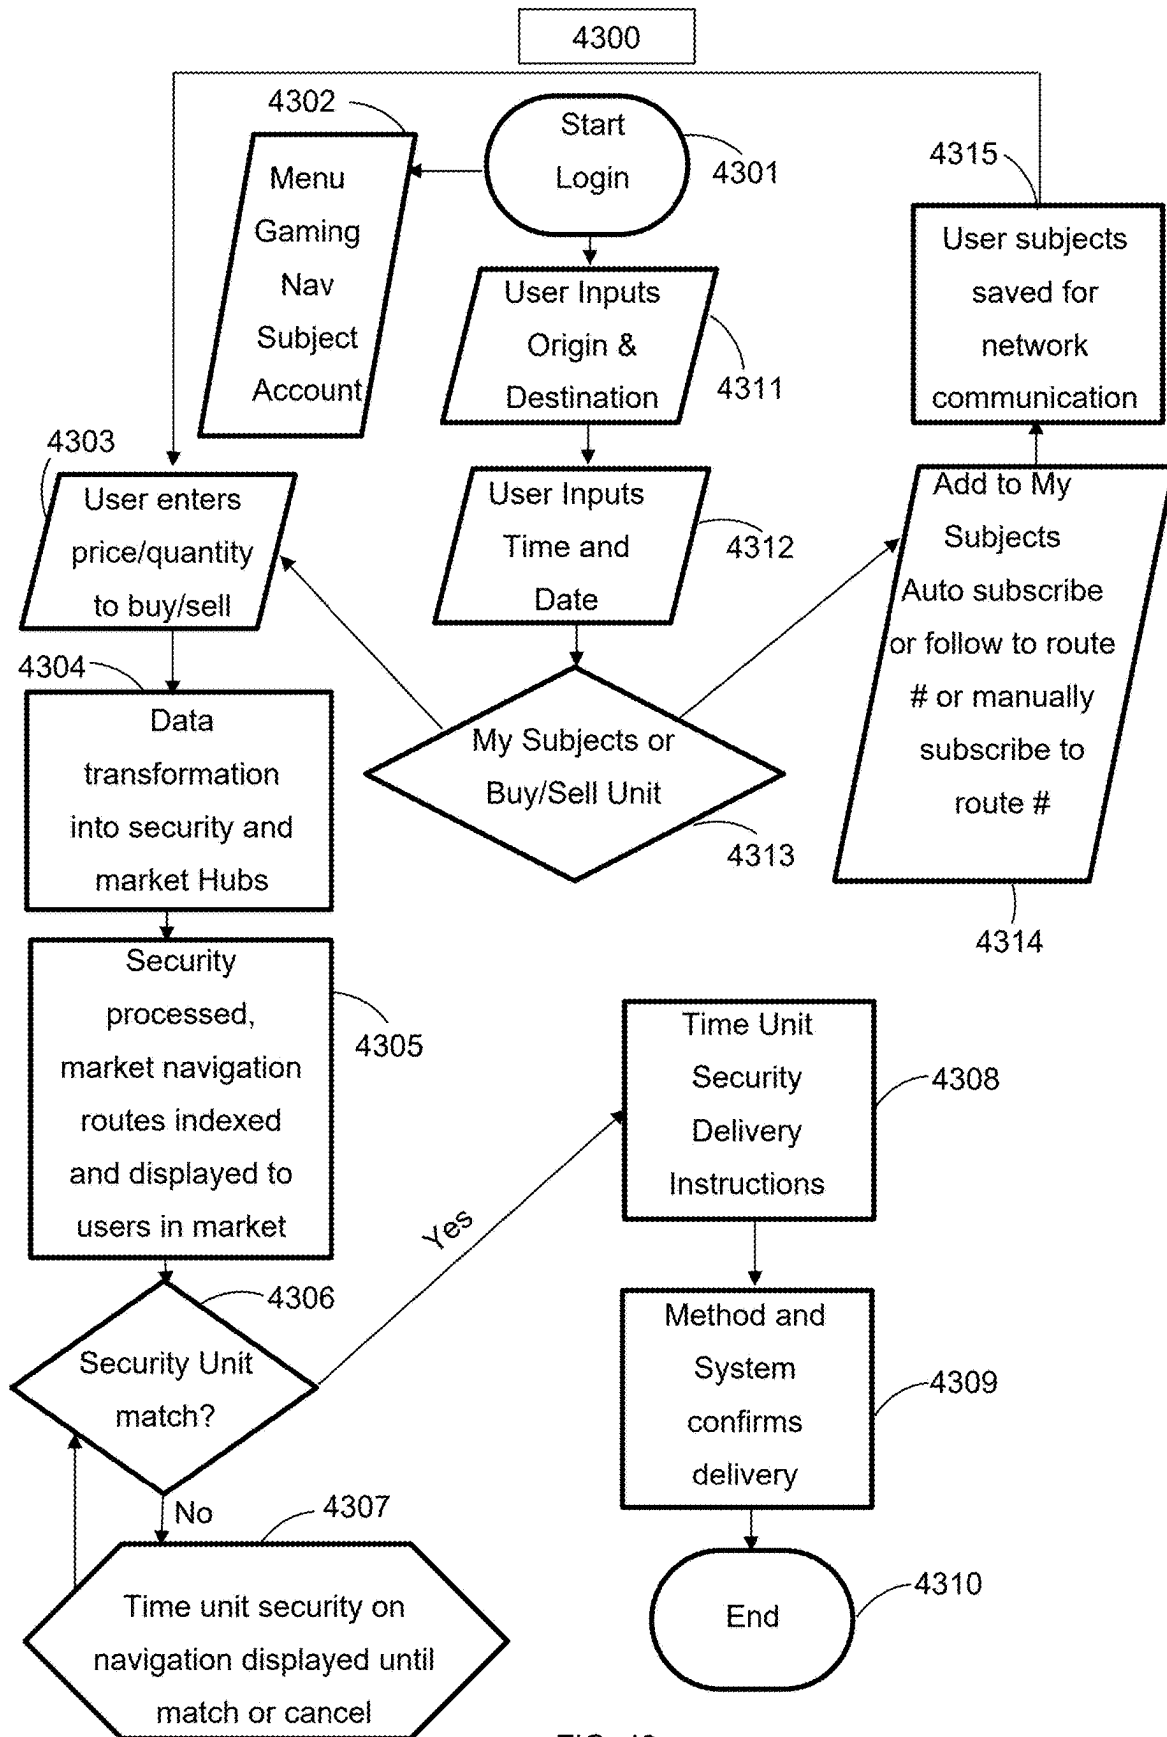


FIG. 43

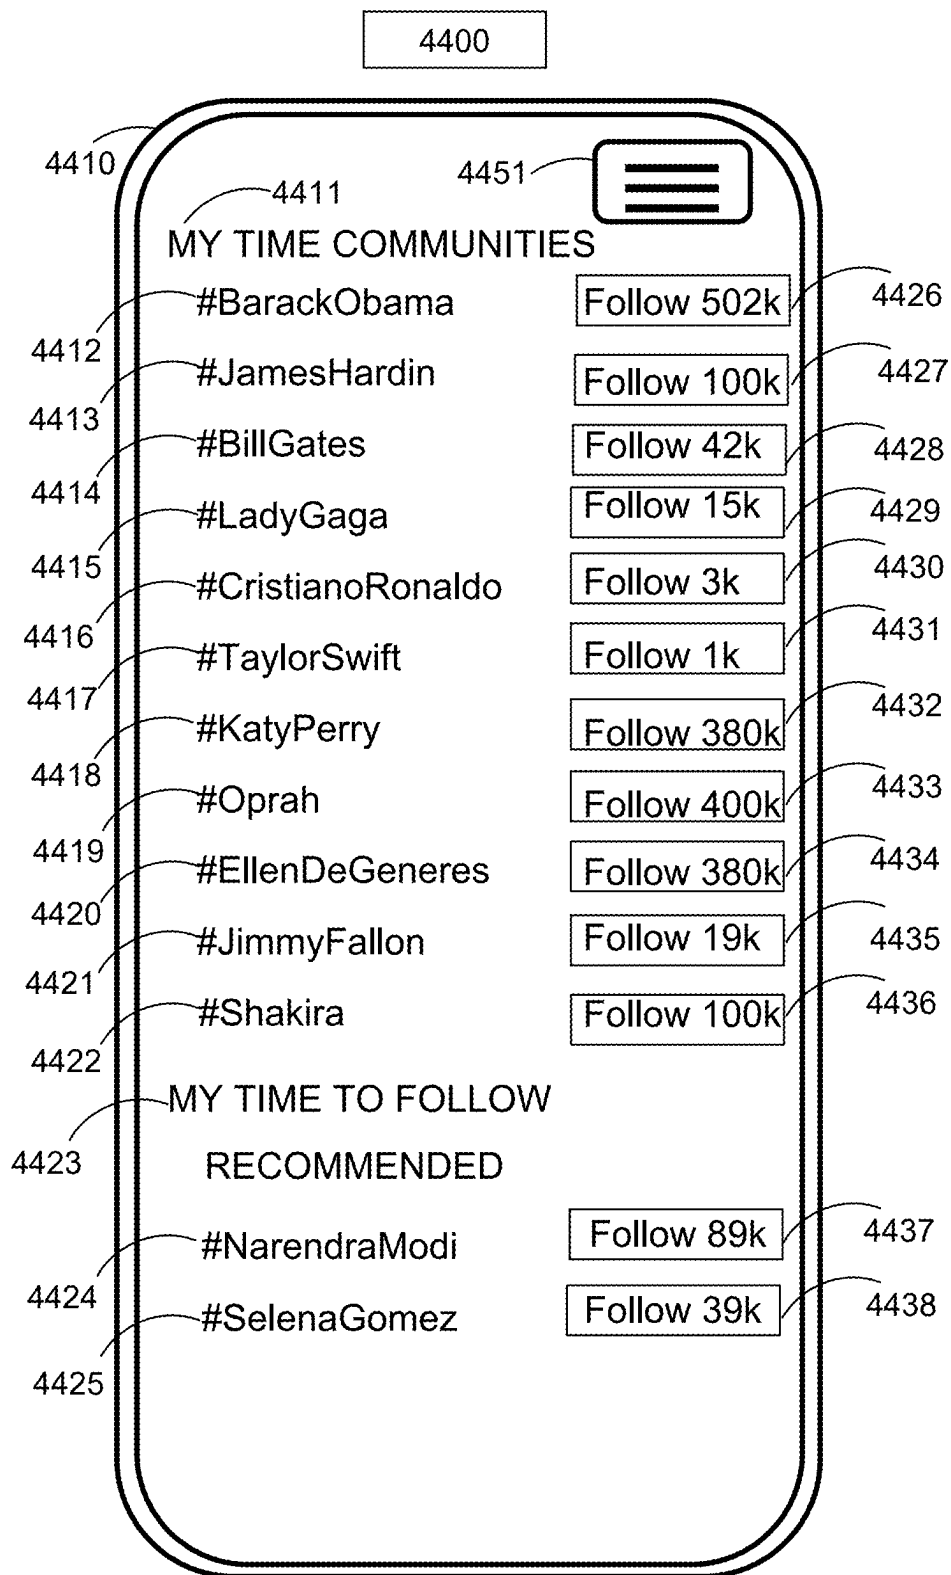


FIG. 44

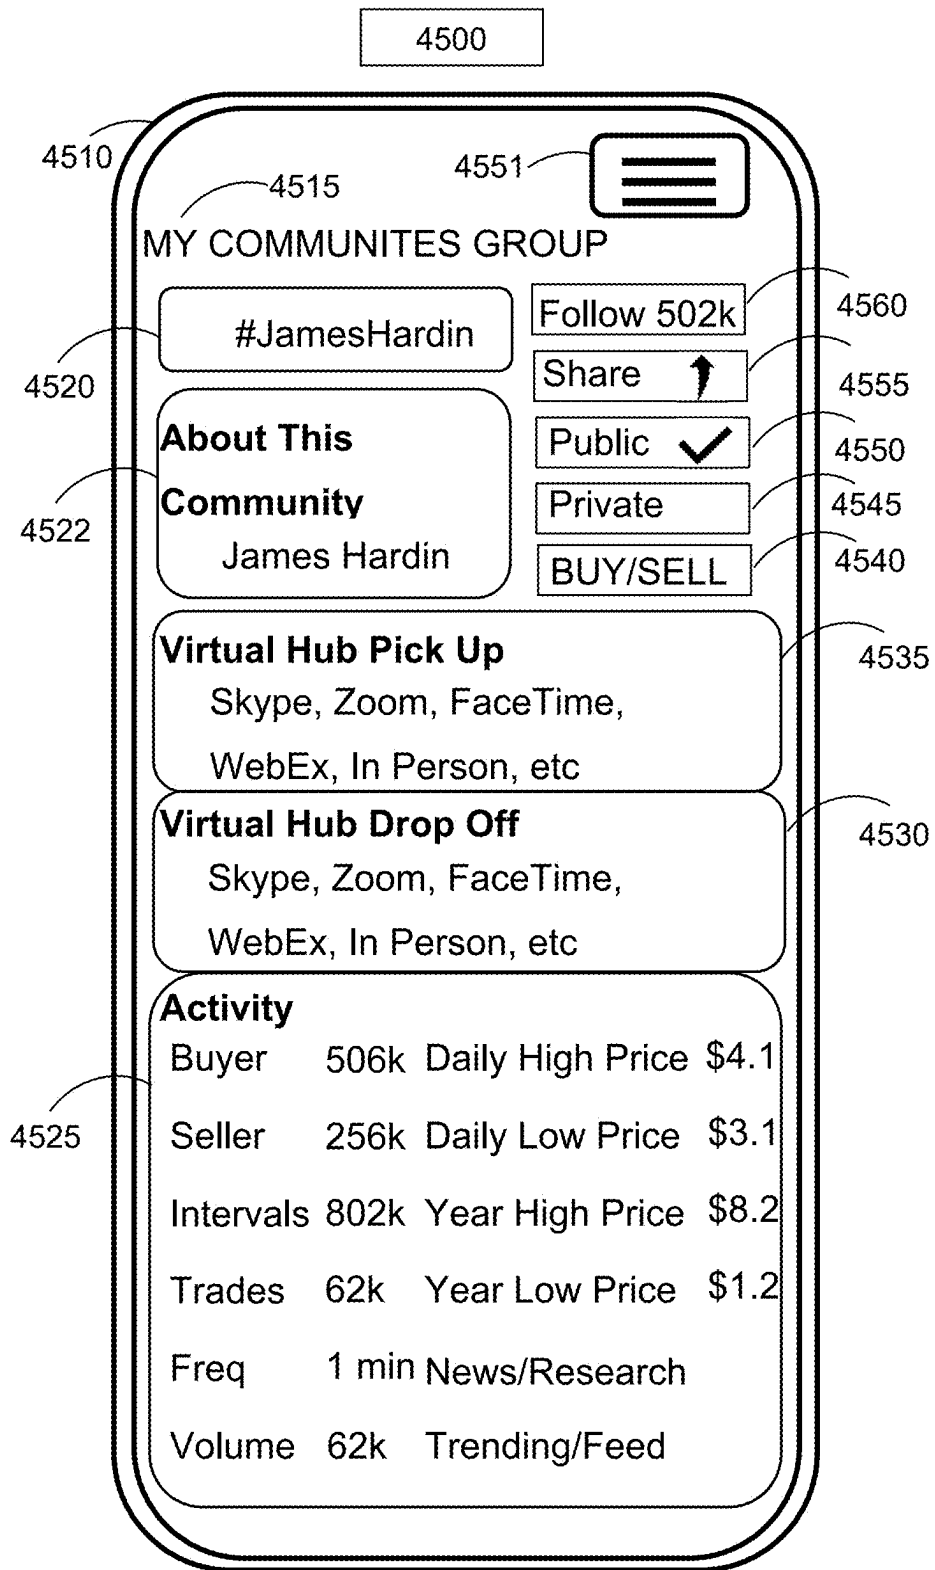


FIG. 45

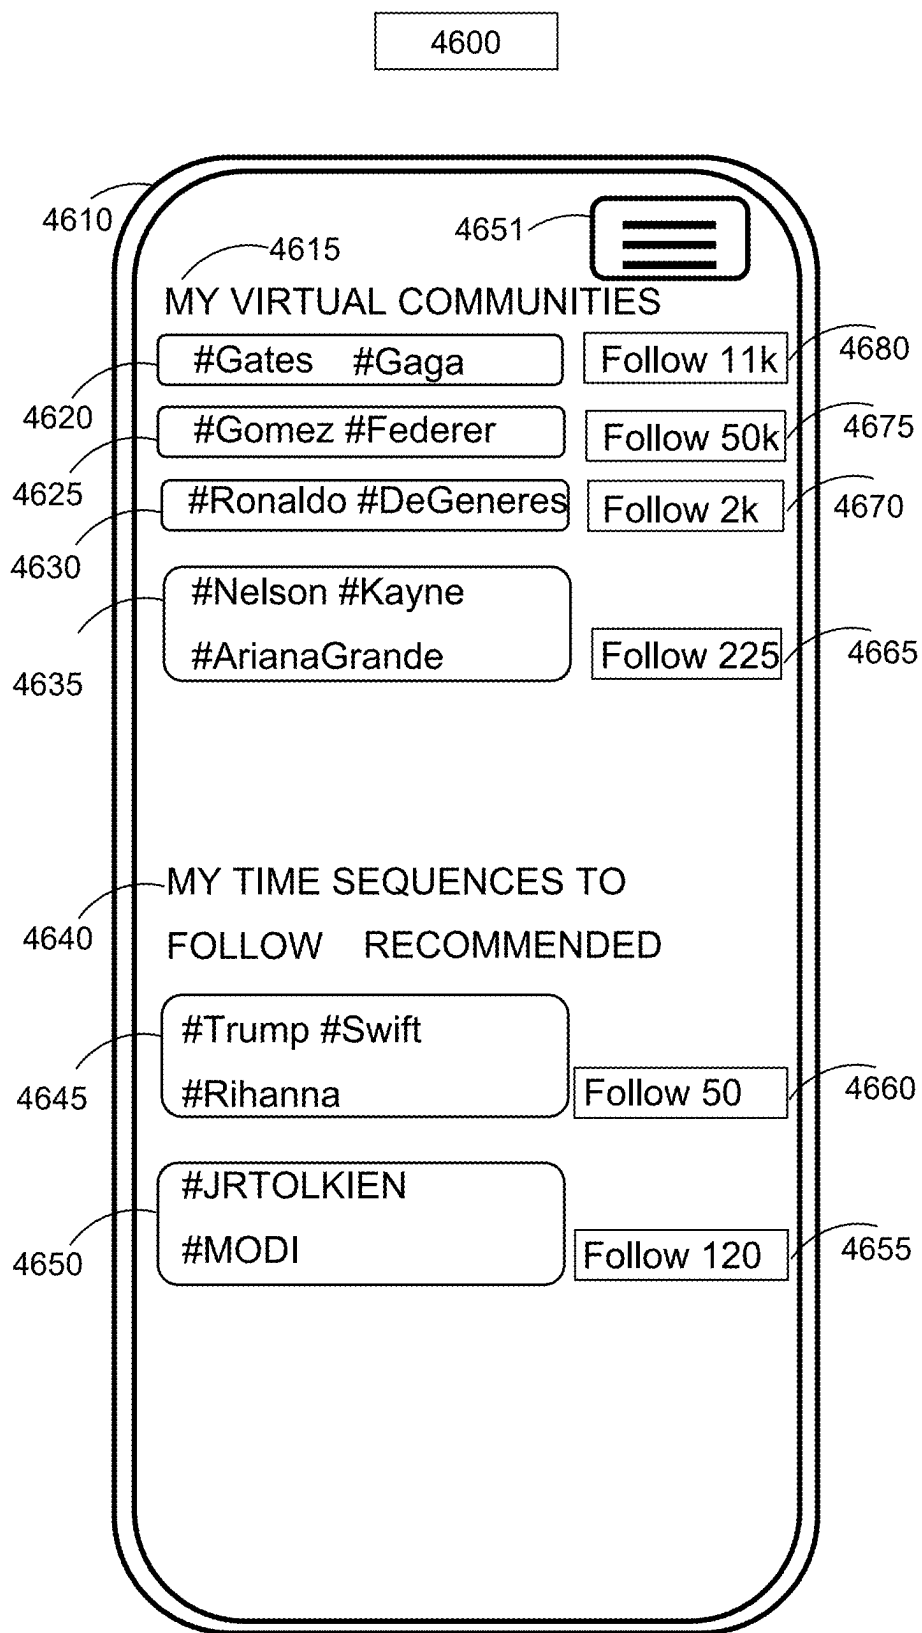


FIG. 46

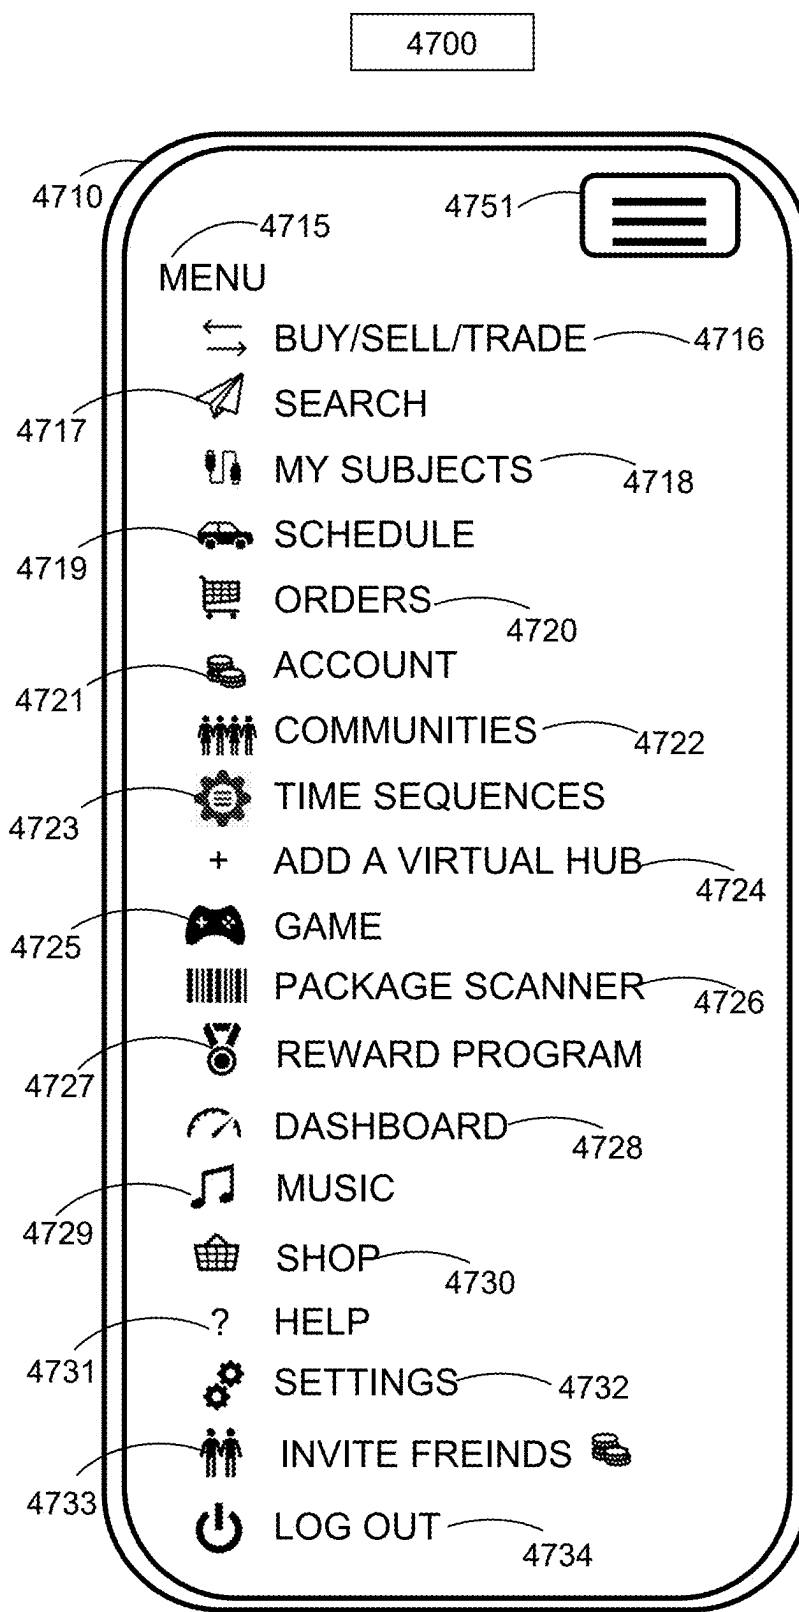


FIG. 47

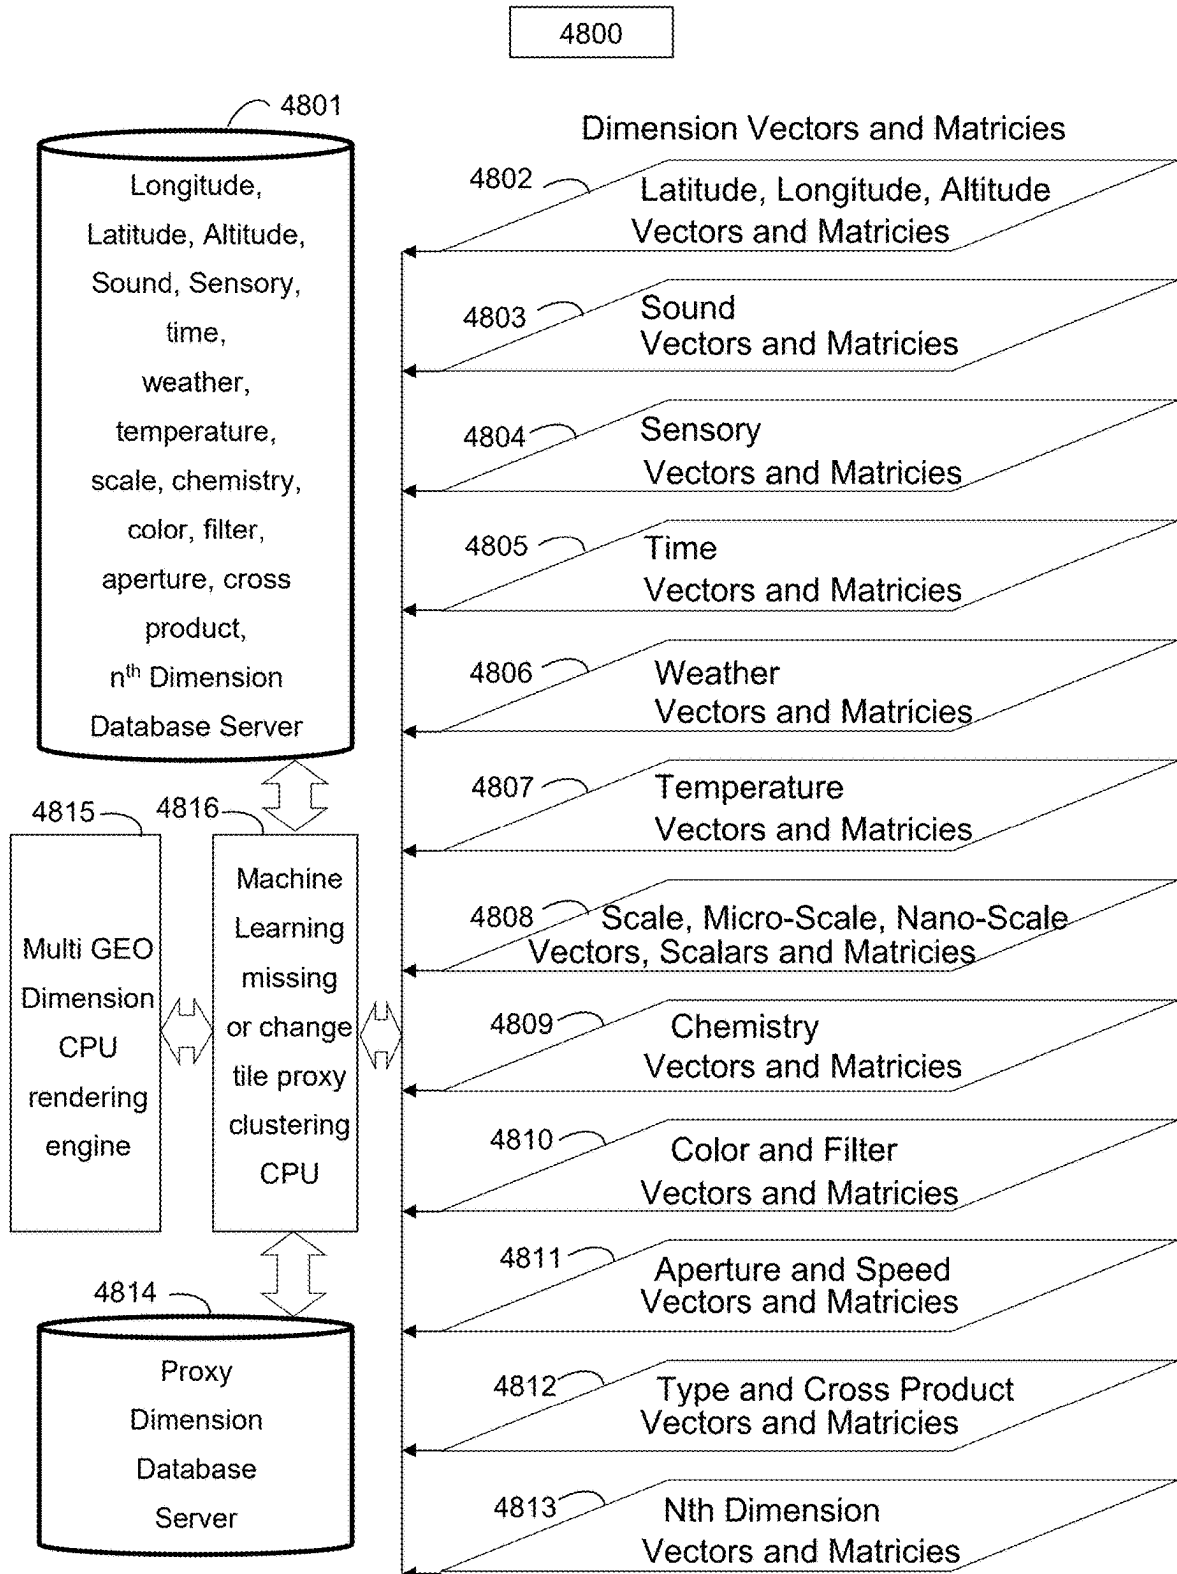


FIG. 48

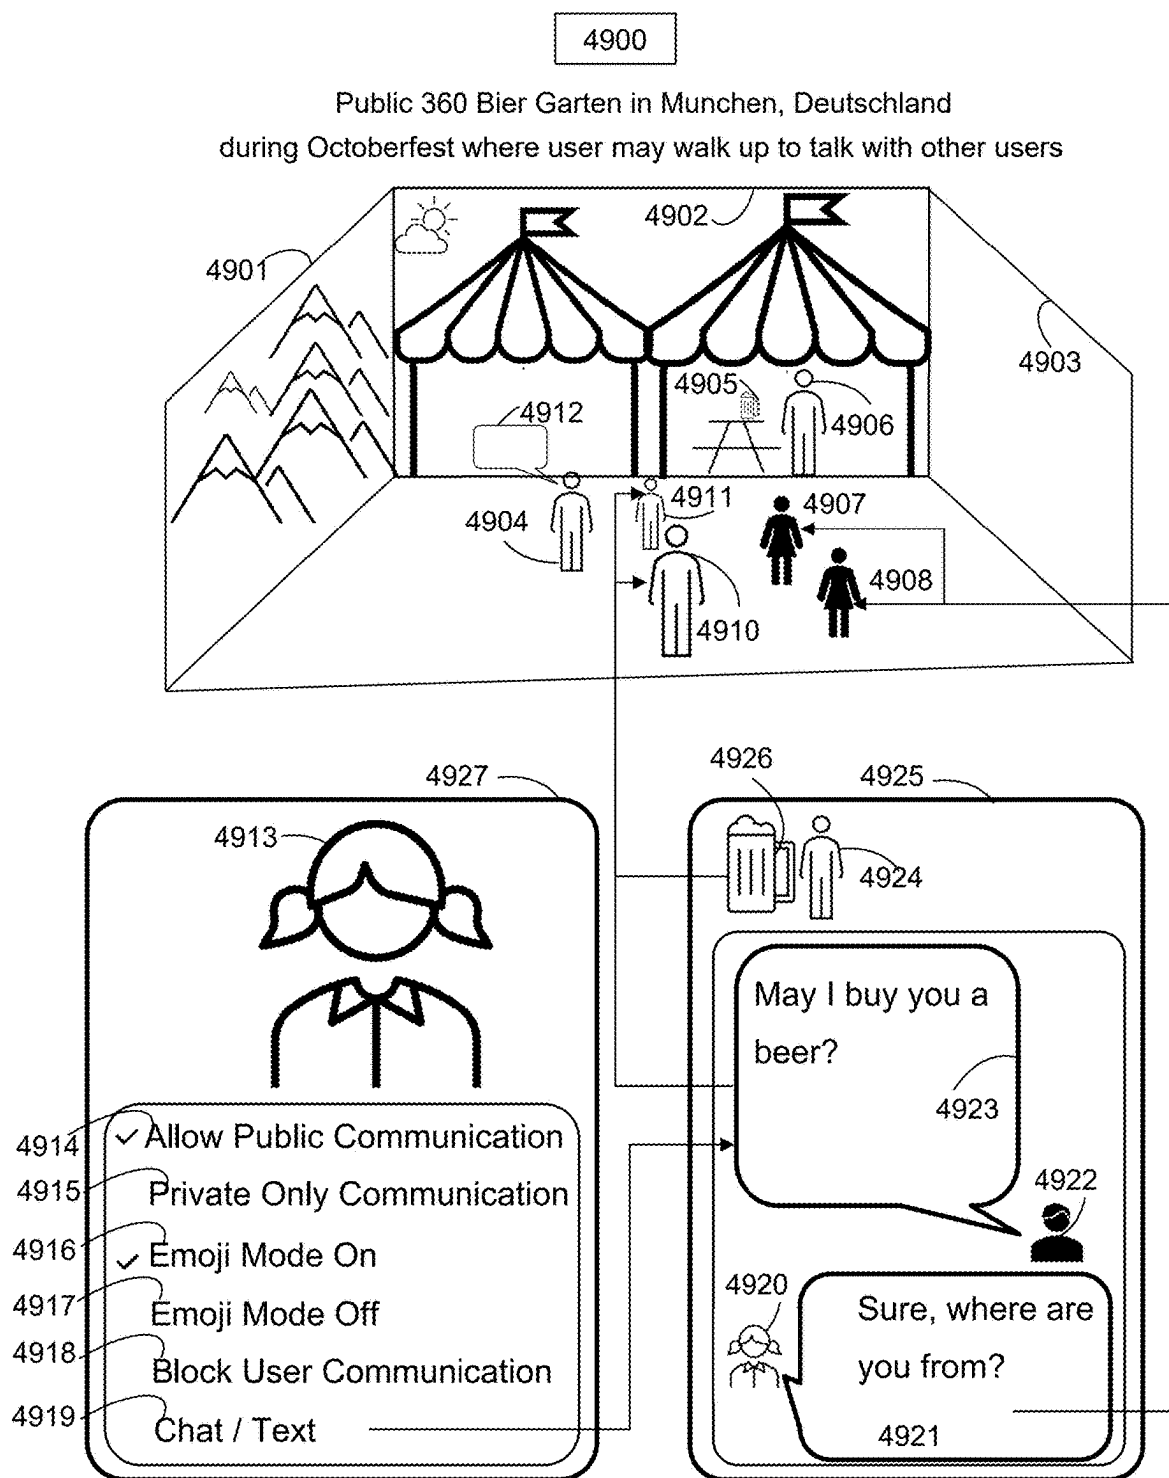


FIG. 49

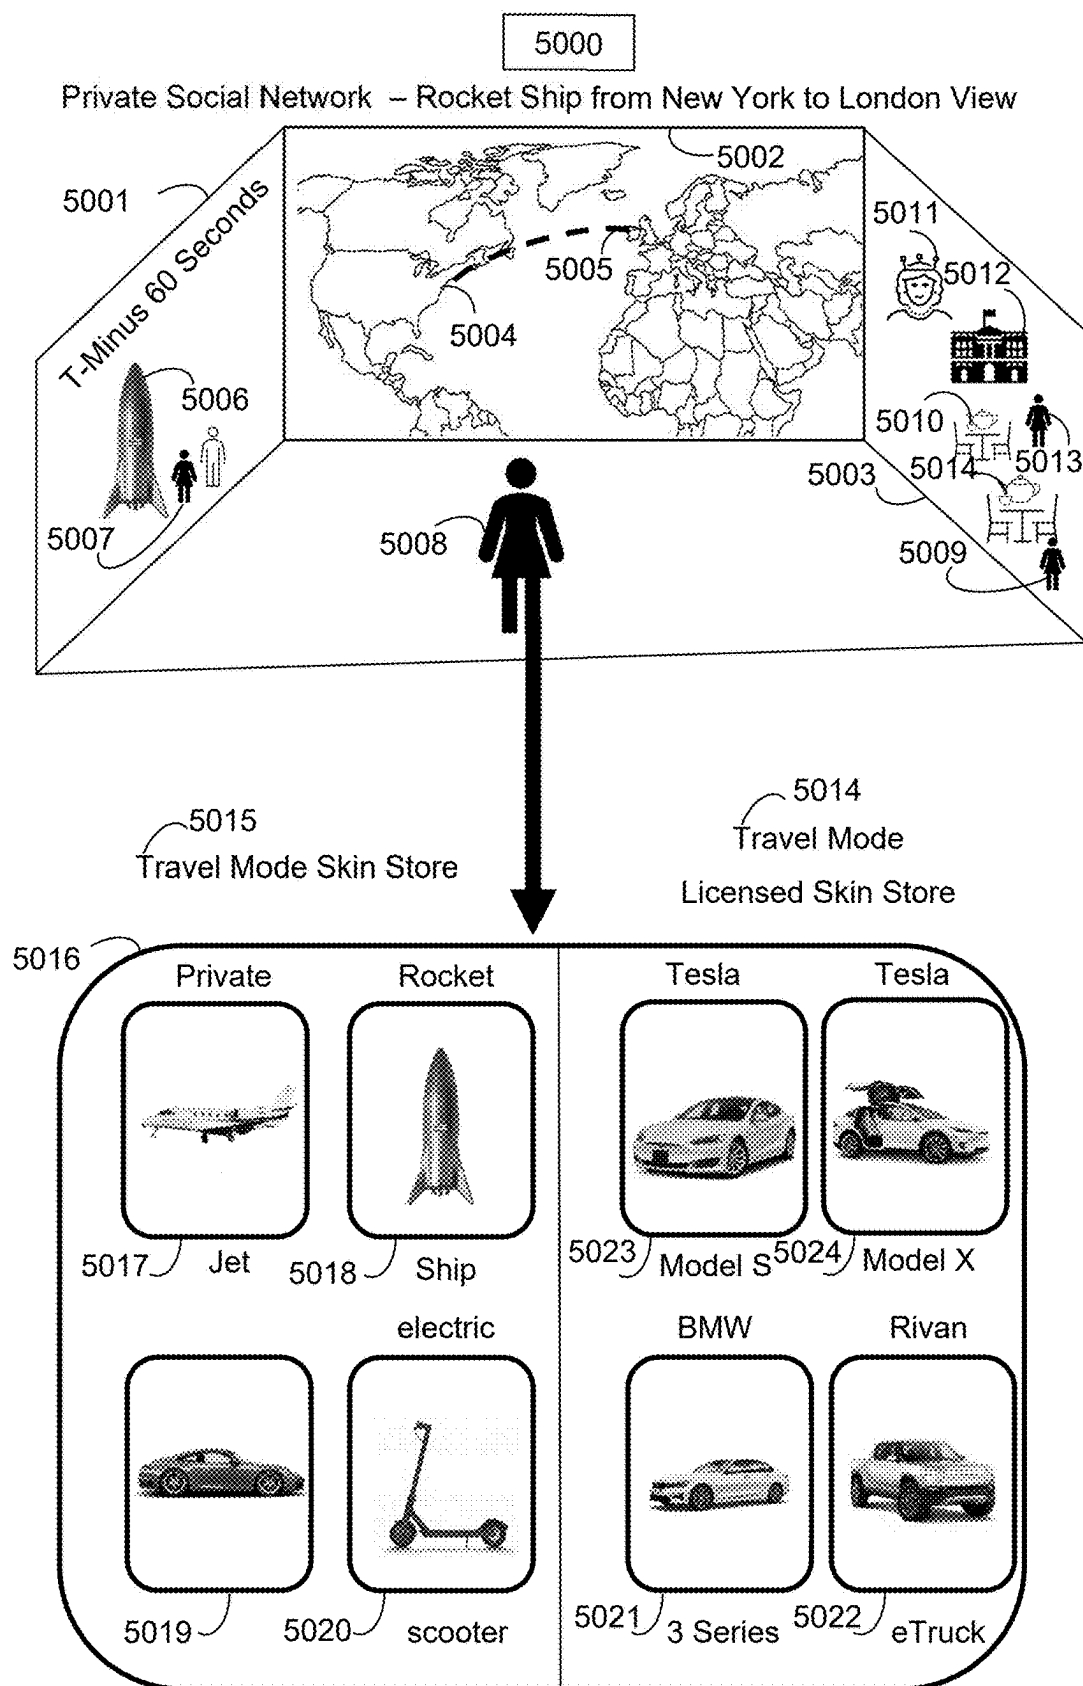


FIG. 50

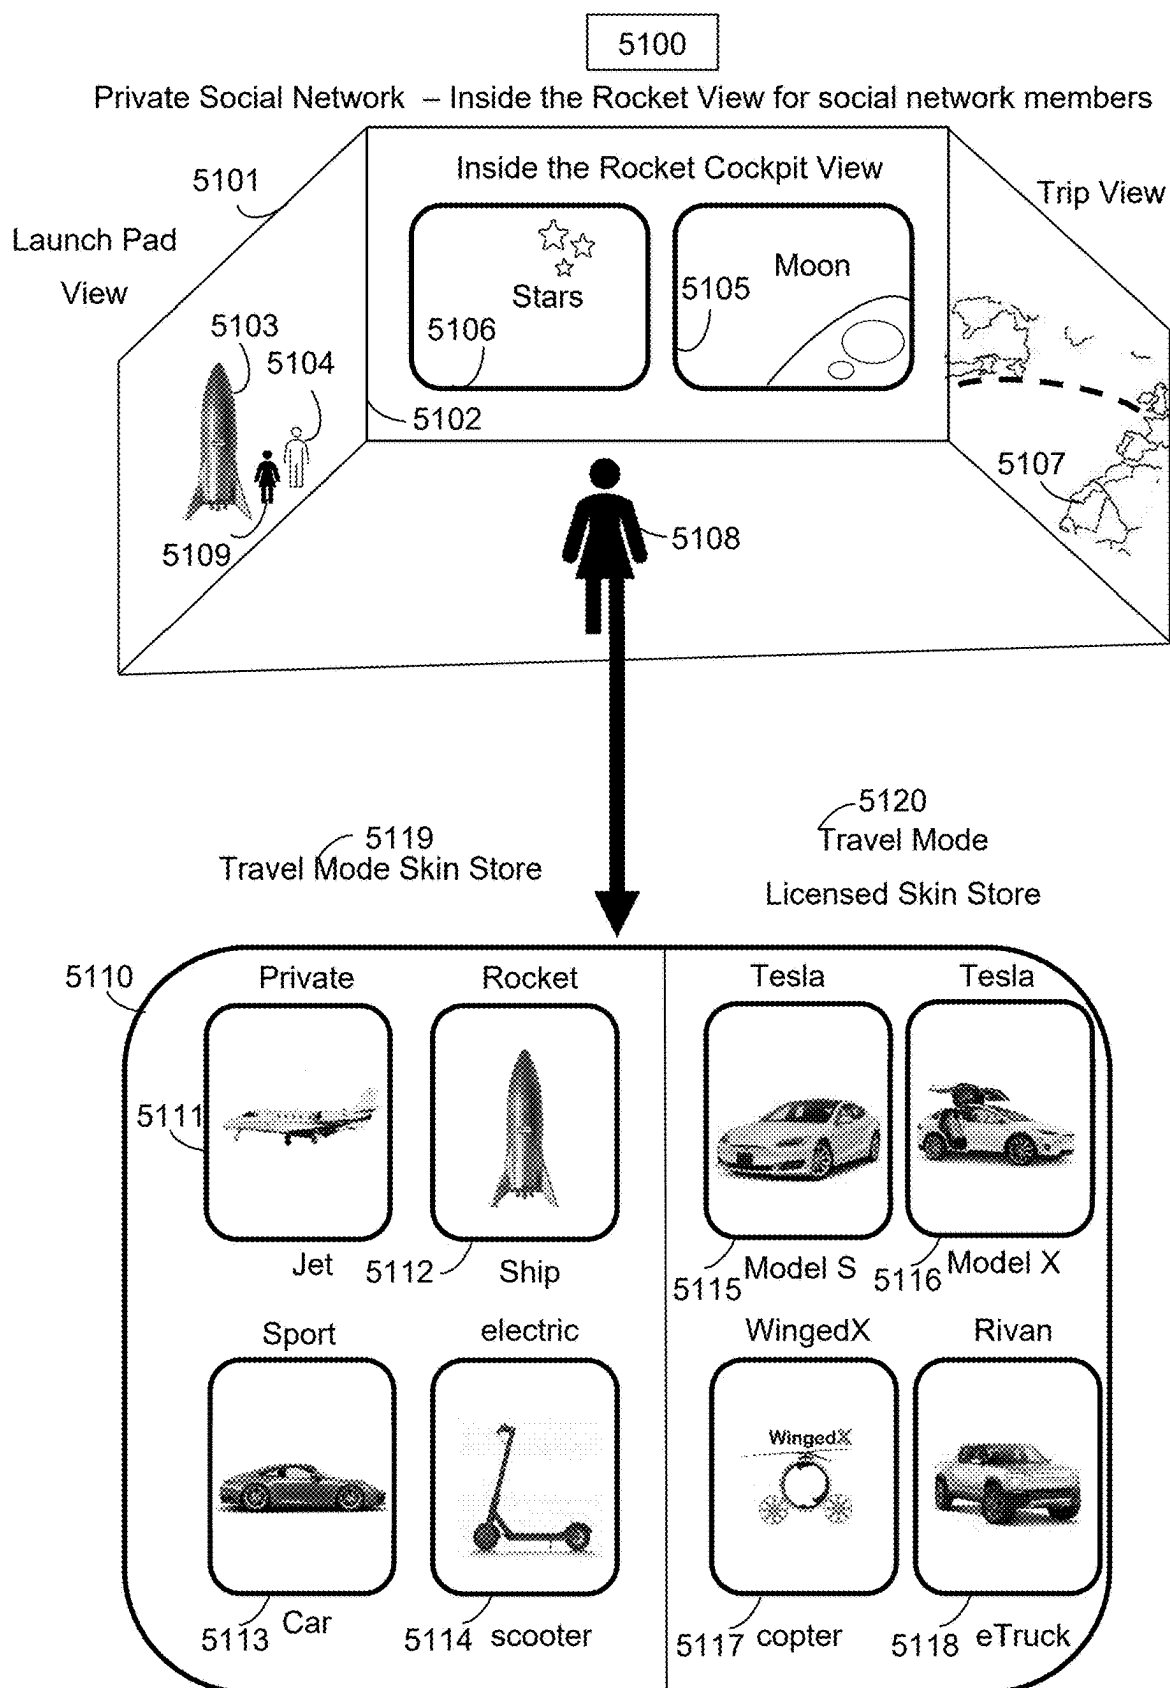


FIG. 51

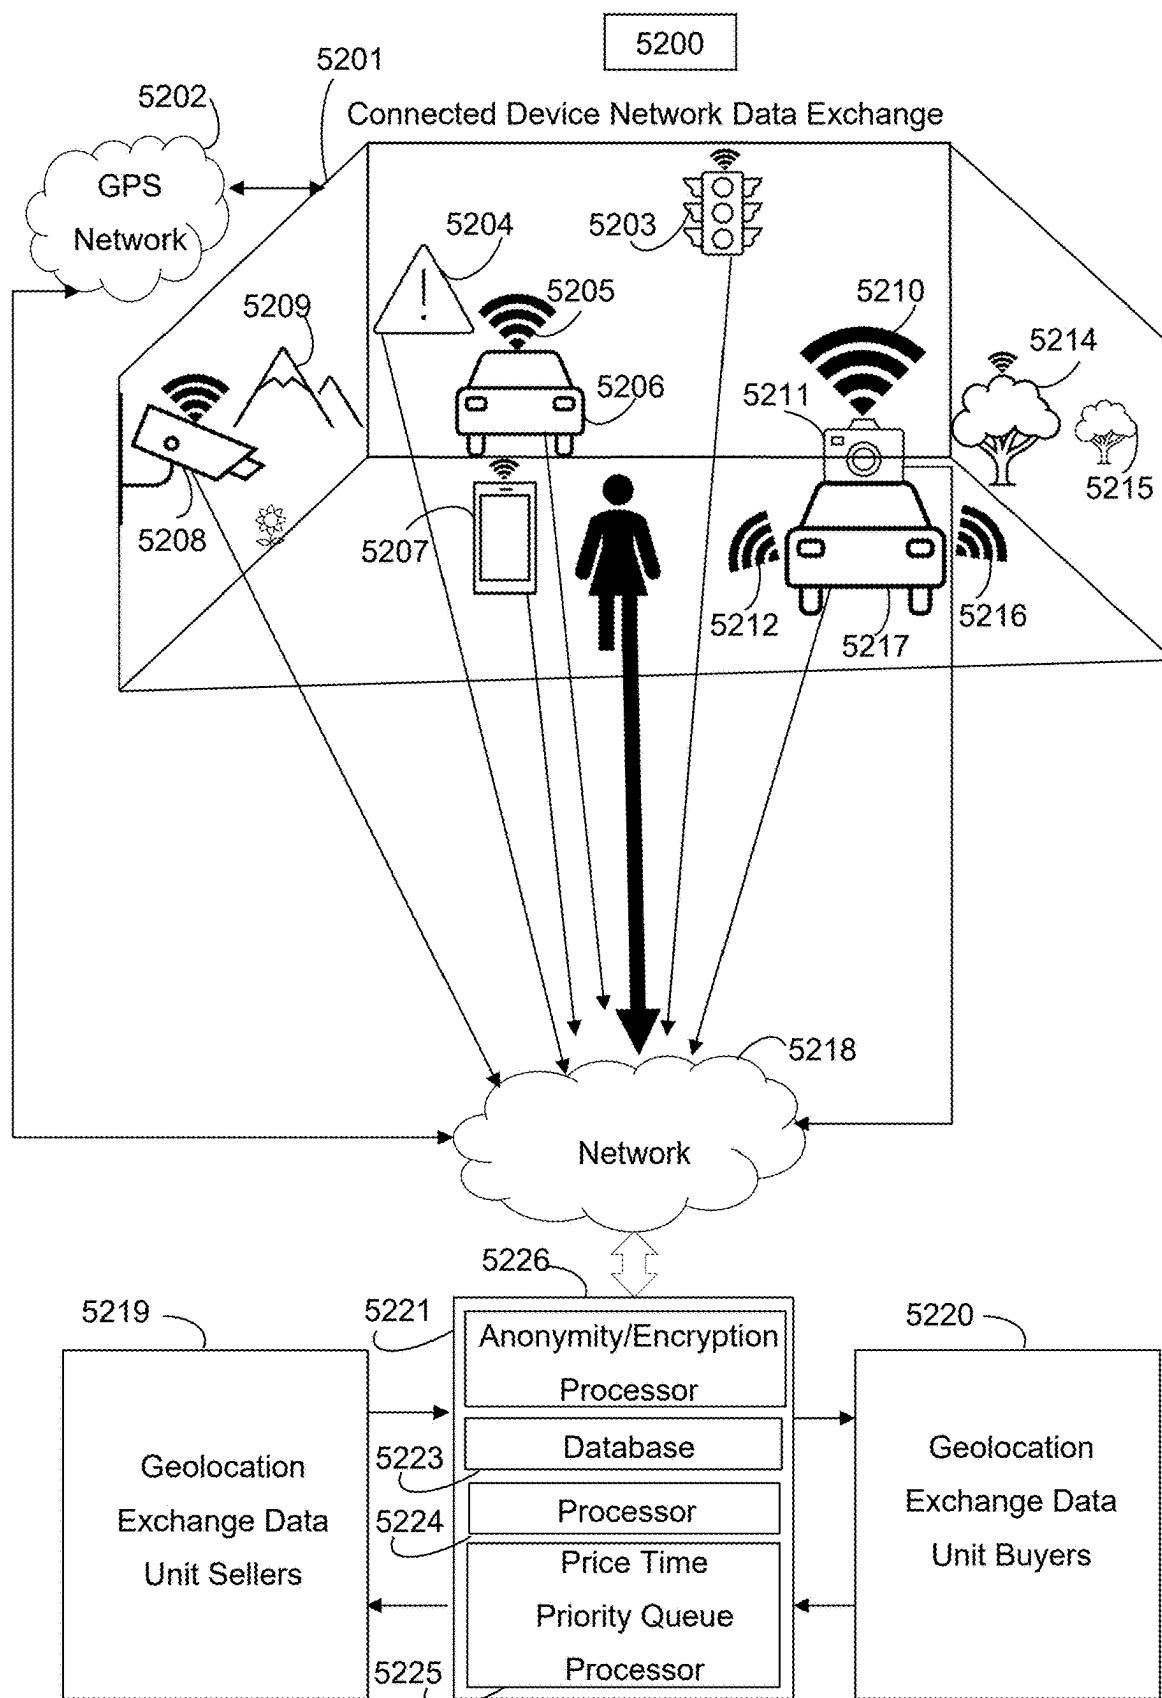


FIG. 52

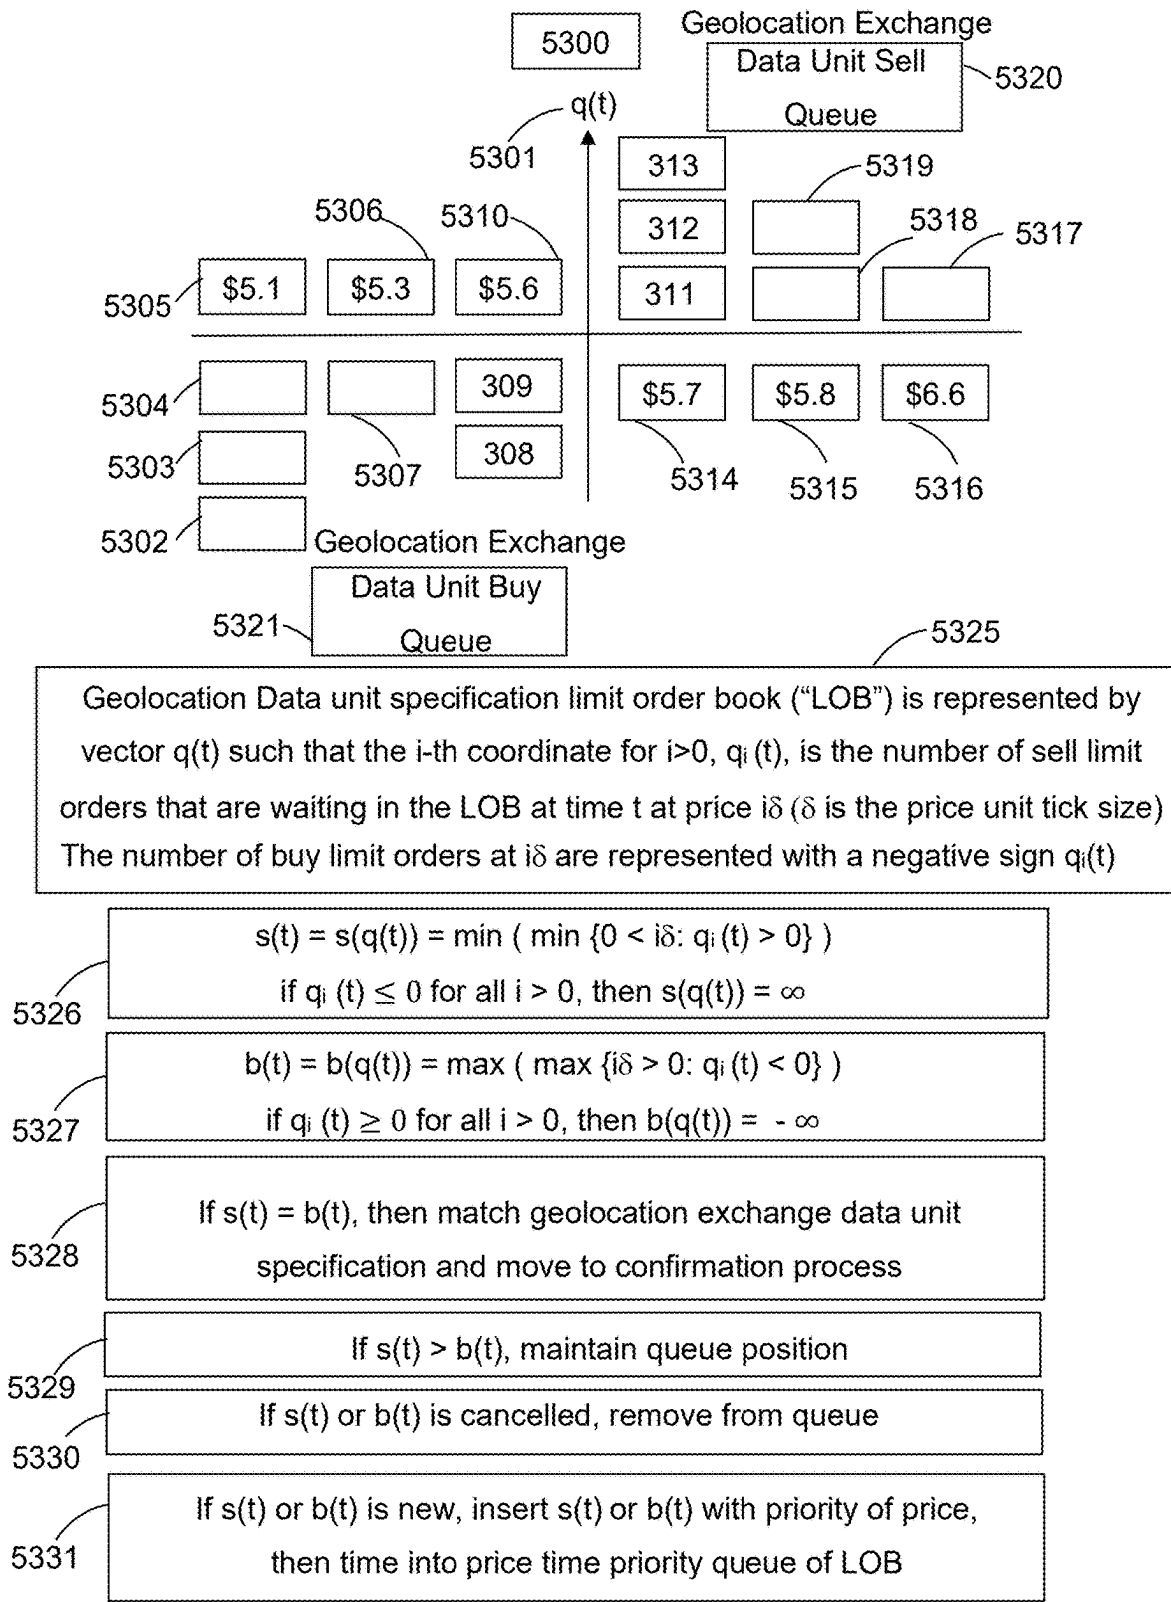


FIG. 53

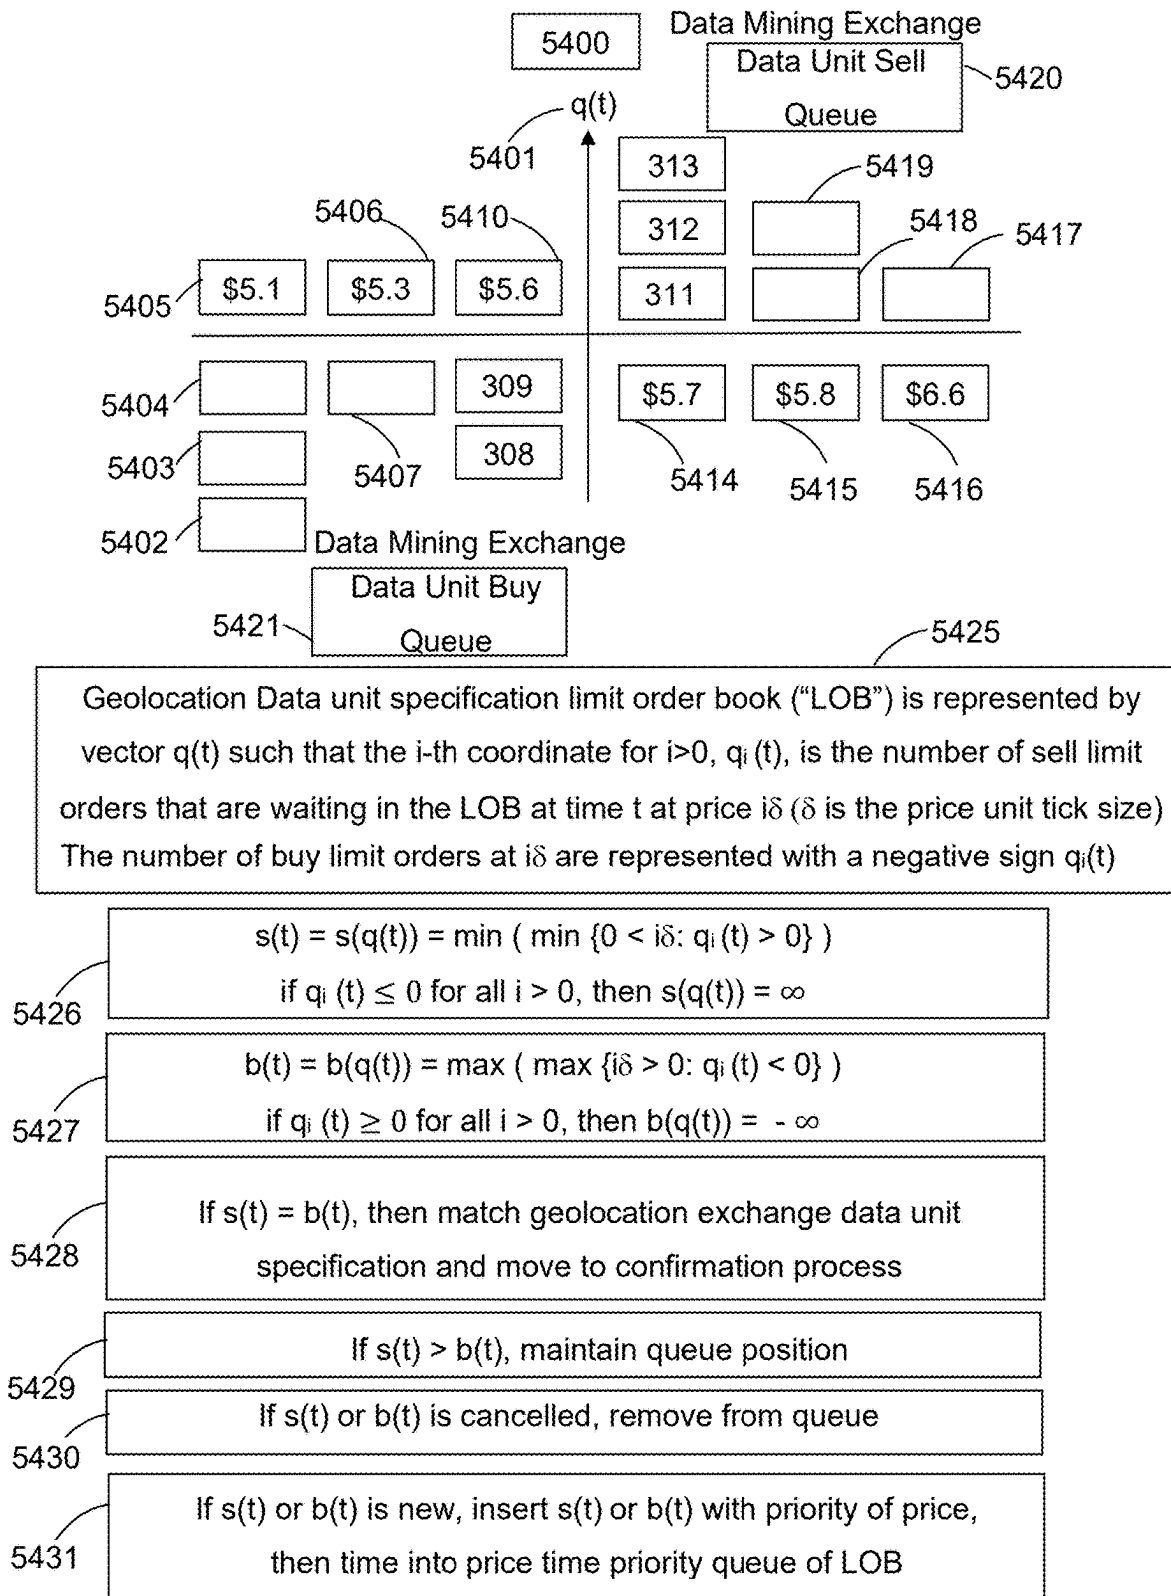


FIG. 54

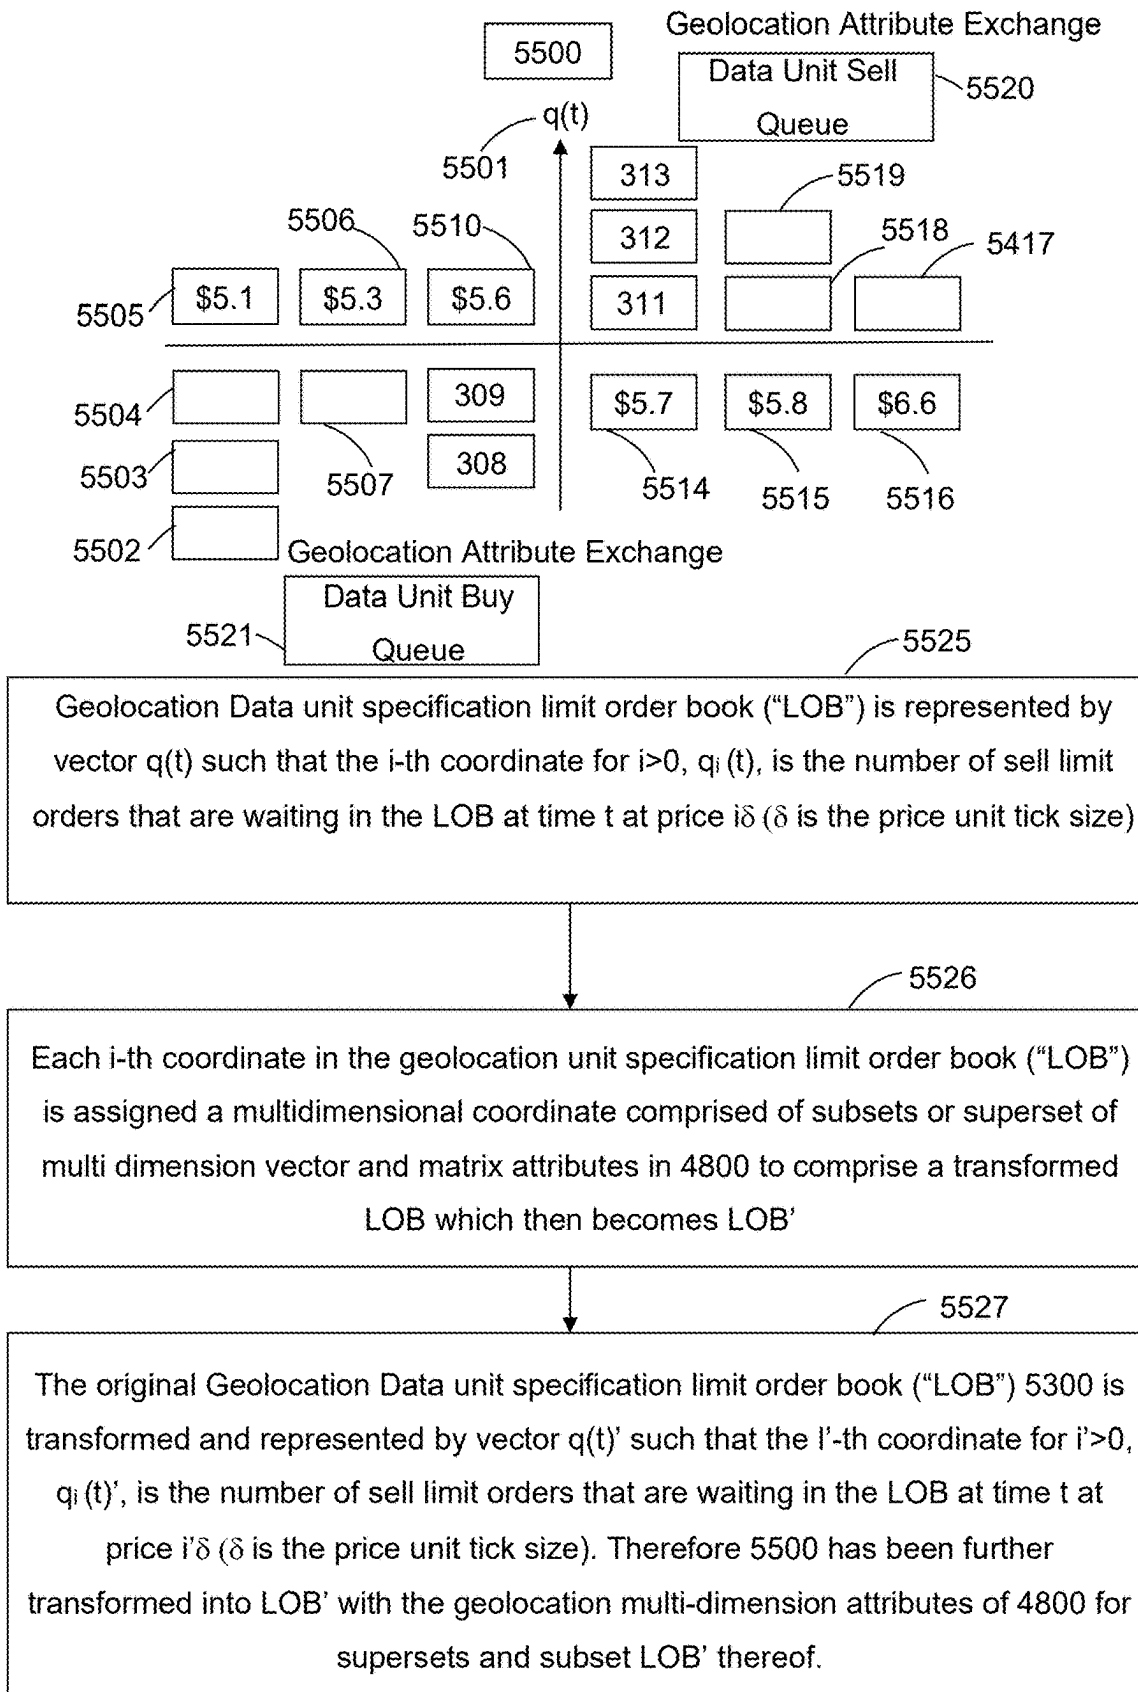


FIG. 55

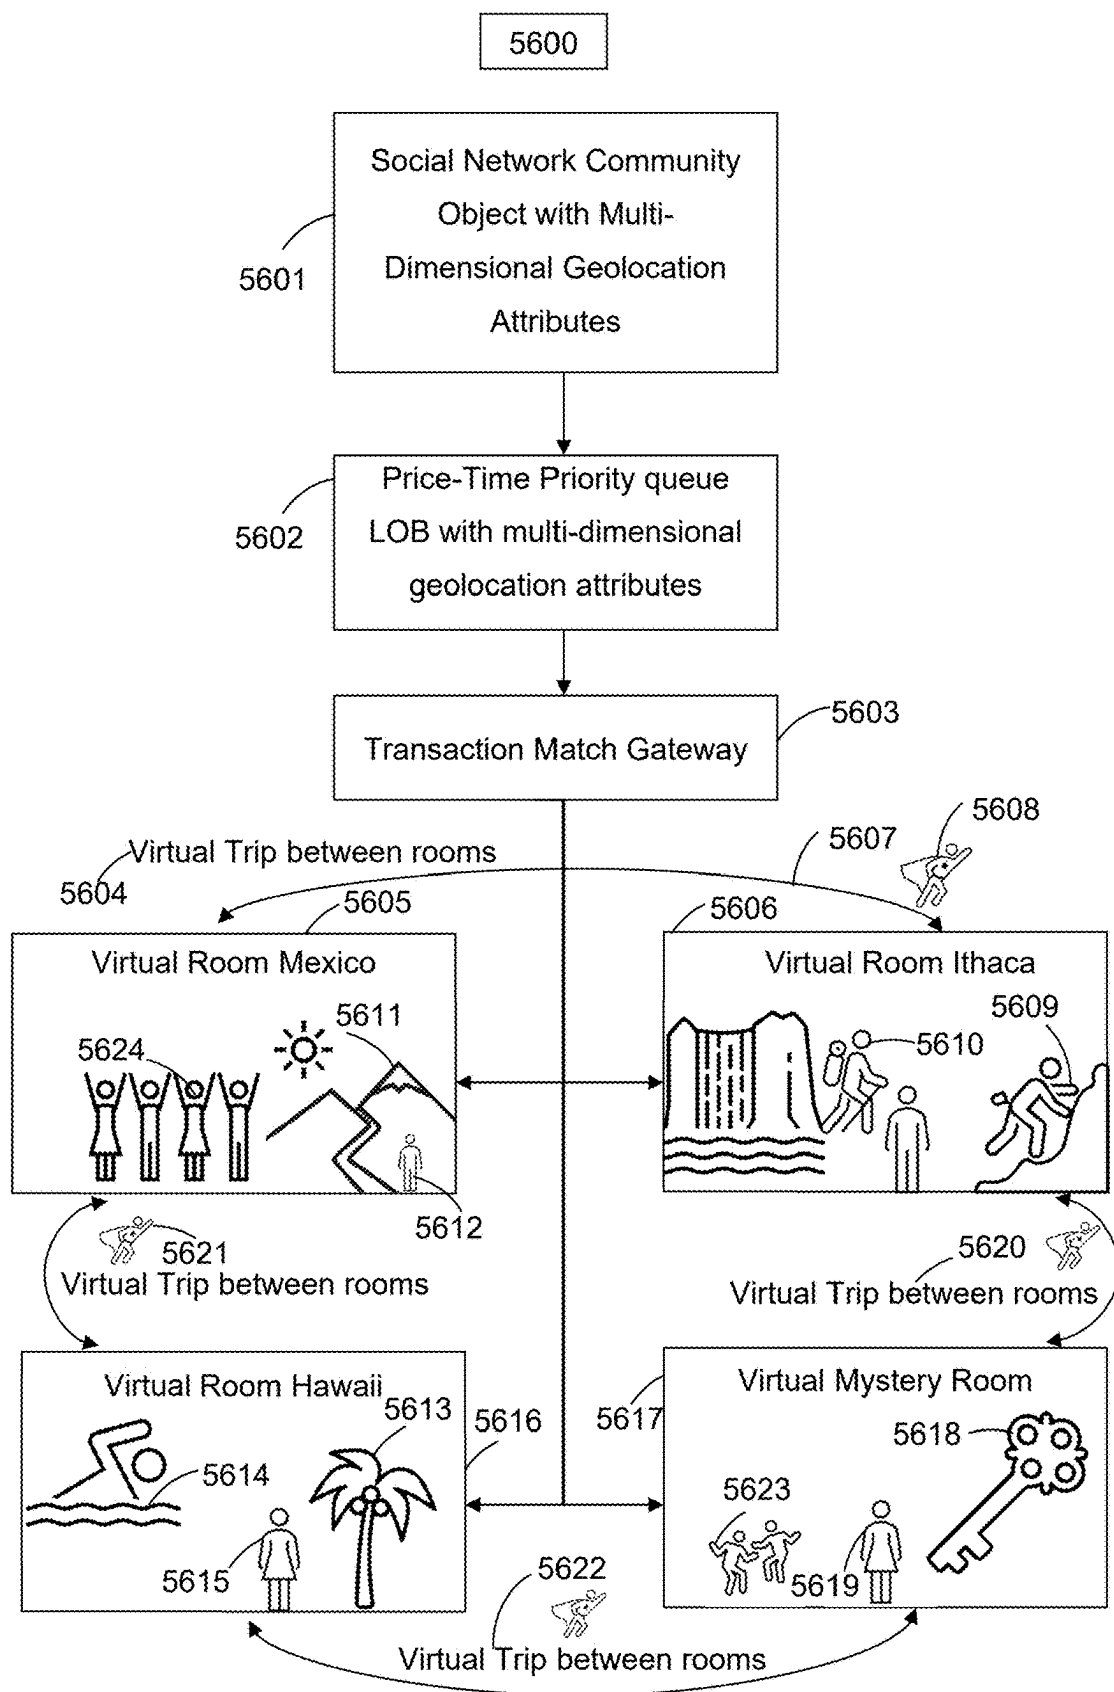


FIG. 56

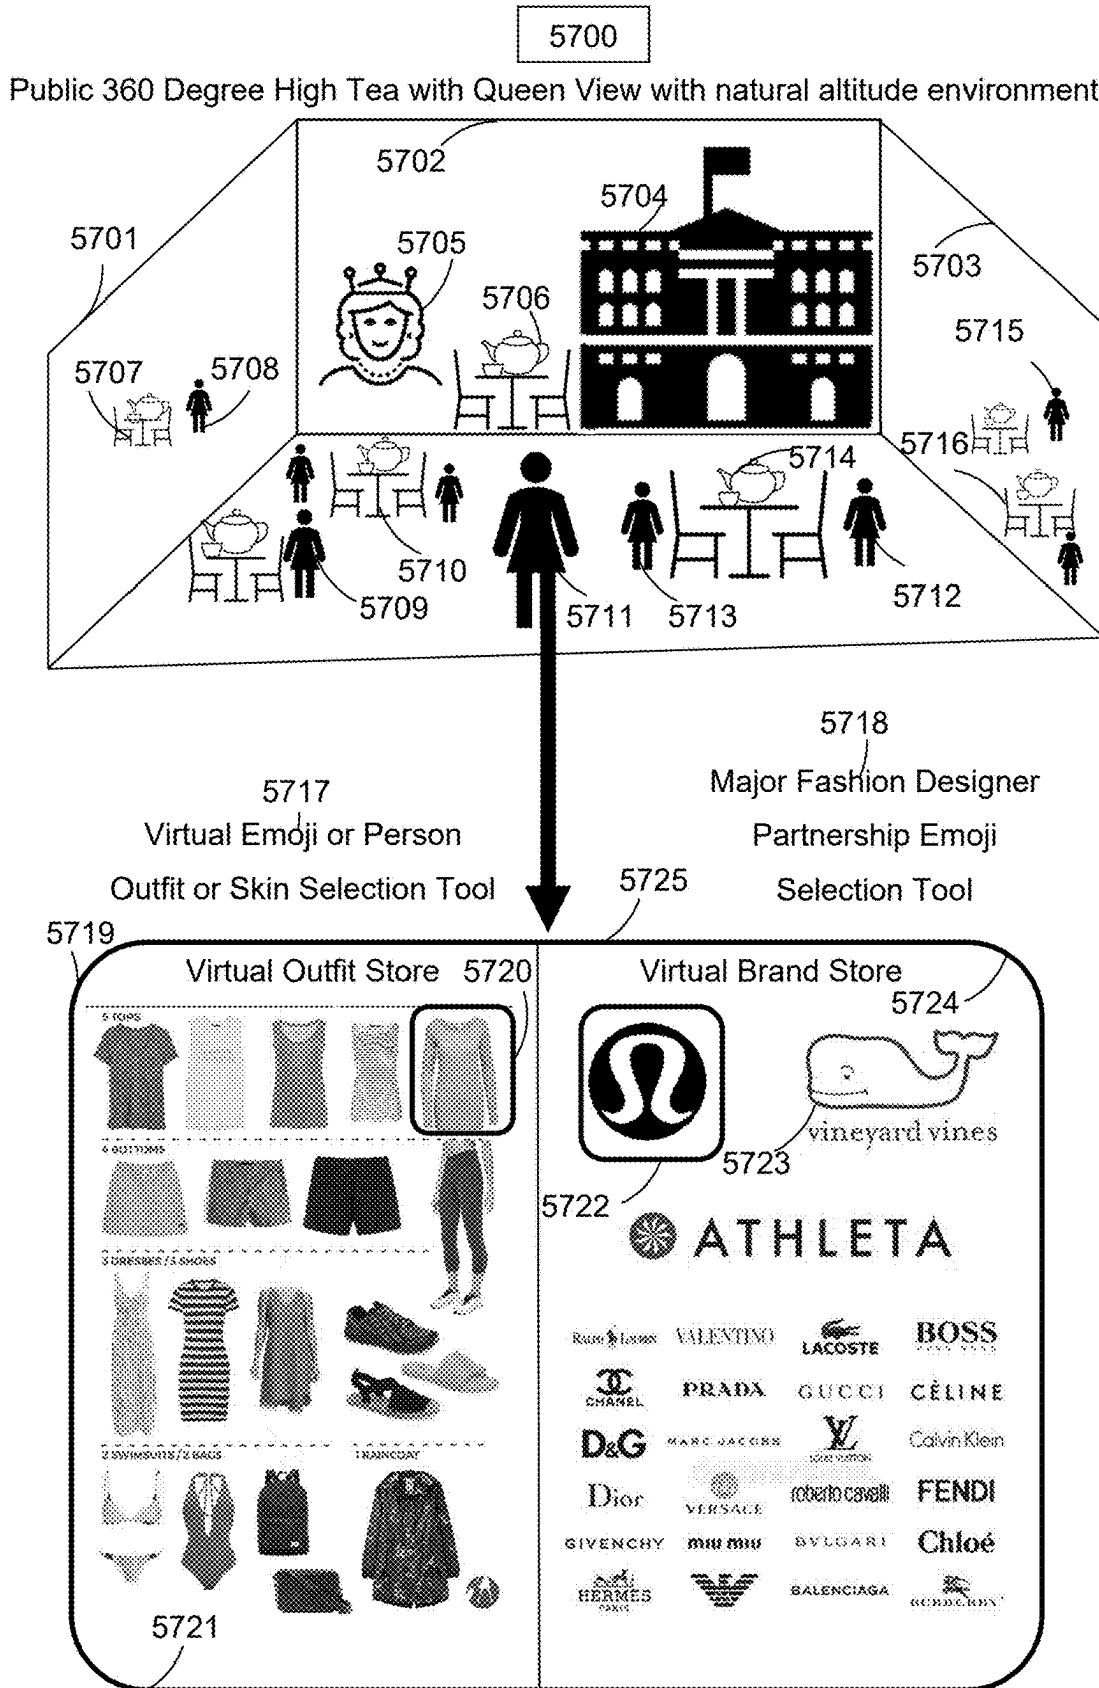


FIG. 57

**VIRTUAL REALITY, AUGMENTED
REALITY, MIXED REALITY DATA
EXCHANGE SOCIAL NETWORK WITH
MULTI DIMENSIONAL MAP TILE PORTING**

**CROSS-REFERENCE TO RELATED
APPLICATIONS**

[0001] This application is a continuation of U.S. patent application Ser. No. 17/349,829, filed 2021 Jun. 16, which claims the benefit of and priority to each of the following: U.S. Provisional Patent Application No. 63/039,918, filed 2020 Jun. 16; U.S. Provisional Patent Application No. 63/044,997, filed 2020 Jun. 26; U.S. Provisional Patent Application No. 63/051,373, filed 2020 Jul. 13; and U.S. Provisional Patent Application No. 63/052,159, filed 2020 Jul. 15. All of these applications are incorporated by reference herein in their entireties.

[0002] In addition, U.S. patent application Ser. No. 17/349,829, filed 2021 Jun. 16 and mentioned above, is a continuation-in-part of each of the following: U.S. patent application Ser. No. 17/324,051, filed 2021 May 18, which claims the benefit of and priority to U.S. Provisional Application No. 63/027,344, filed 2020 May 19; U.S. patent application Ser. No. 17/082,254, filed 2020 Oct. 28, which claims the benefit of and priority to U.S. Provisional Application No. 62/927,081 filed 2019 Oct. 28; U.S. patent application Ser. No. 17/069,597, filed 2020 Oct. 13, which claims the benefit of and priority to U.S. Provisional Application No. 62/914,427 filed 2019 Oct. 12; U.S. patent application Ser. No. 16/589,229, filed 2019 Oct. 1; U.S. patent application Ser. No. 16/556,838, filed 2019 Aug. 30 and issued as U.S. patent Ser. No. 11/555,709 on 2023 Jan. 17; U.S. patent application Ser. No. 16/397,685, filed 2019 Apr. 29 and issued as U.S. patent Ser. No. 12/154,183 on 2024 Nov. 26; U.S. patent application Ser. No. 16/359,841, filed 2019 Mar. 20 and issued as U.S. patent Ser. No. 12/141,885 on 2024 Nov. 12; U.S. patent application Ser. No. 16/357,241, filed 2019 Mar. 18 and issued as U.S. patent Ser. No. 12/165,223 on 2024 Dec. 10; U.S. patent application Ser. No. 16/274,490, filed 2019 Feb. 13, and issued as U.S. patent Ser. No. 11/215,466 on 2022 Jan. 4, which is a continuation-in-part of U.S. patent application Ser. No. 16/258,658, filed 2019 Jan. 27 and issued as U.S. patent Ser. No. 11/035,682 on 2021 Jun. 15; U.S. patent application Ser. No. 16/257,032, filed 2019 Jan. 24; U.S. patent application Ser. No. 16/242,981, filed 2019 Jan. 8; U.S. patent application Ser. No. 16/242,967, filed 2019 Jan. 8 and issued as U.S. patent Ser. No. 12/001,999 on 2024 Jun. 4; U.S. patent application Ser. No. 16/239,485, filed 2019 Jan. 3; U.S. patent application Ser. No. 16/183,647, filed 2018 Nov. 7 and issued as U.S. patent Ser. No. 11/861,527 on 2024 Jan. 2; U.S. patent application Ser. No. 16/167,525, filed 2018 Oct. 22 and issued as U.S. patent Ser. No. 11/810,023 on 2023 Nov. 7; U.S. patent application Ser. No. 15/877,393, filed 2018 Jan. 23 and issued as U.S. patent Ser. No. 12/124,976 on 2024 Oct. 22; U.S. patent application Ser. No. 15/266,326, filed 2016 Sep. 15 and issued as U.S. patent Ser. No. 11/138,827 on 2021 Oct. 5. All of these applications are incorporated by reference herein in their entireties.

BACKGROUND OF THE INVENTION

[0003] The following descriptions and examples are not admitted as prior art by virtue of their inclusion within this section.

[0004] In some scenarios, virtual environments and the ability to replicate physical environments are becoming increasingly important as chip processing speeds and data storage continue to become more efficient improving user experience. Current virtual environments are a long way from physical environments in software implementation and software and hardware tools remain considerably challenged and limited in scope and mostly residing in static or very limited dynamic environments. Open source data tools such as open street maps have expanded greatly, but it is exceptionally challenging to programmatically interface with the data or maintain the data in an organized framework. This situation is unfortunate as many people in the world simply have limited means to travel, personal safety and general health may be compromised with some forms of physical interaction and travel and organizations do not have the resources to send workers all over the world. Lastly, physical travel is very high cost and most people simply never leave their home area which causes lack of education. Further, physical travel uses a great deal of limited environmental resources which can be very costly to the environment.

[0005] To avoid problems associated with limited resources and high cost physical experiences, computing devices may be improved by integrating a plurality of dimensions from Internet of Things edge devices, map tile database structures with social networks and price time priority queue exchanges and securitization transformations which may add additional dimensions to improve user experience and engagement while reducing the cost of personal interaction.

[0006] Accordingly, due to the aforementioned deficiencies, there is a need for implementations of various methods to couple a multi-dimension mapping database (latitude, longitude, altitude, sound, sensory, time, weather, temperature, picture, scale, micro-scale, nano-scale, chemistry dimension, cross-product dimension, nth dimension), data exchange, rendering engine, CPU devices, securitization transformations, social networking and time exchange.

SUMMARY

[0007] Described herein are implementations of various technologies relating to price time priority queues for multi-dimensional mapping database exchange (latitude, longitude, altitude, sound, sensory, time, weather, temperature, picture, scale, micro-scale, nano-scale, chemistry dimension, cross-product dimension, nth dimension). The above deficiencies and other problems associated with systems incapable of dynamically changing the users virtual environment with a dynamic multi-dimensional map tile database and data exchange with private and public social networks are eliminated or reduced by the disclosed multi-function device and method. Current systems of technology to integrate computing into everyday life have largely been accepted when human users can trust the other users of the technology. Many users simply are unable to travel and mapping software does not function like a social network in any dynamic relational method. Social networks rely on static content pictures, static videos, live videos and delayed messaging systems. Video conferencing allows live dynamic conversations, but they don't allow dynamic mapped environments or virtual objects to mix. The isolated nature of CPU, desktop, laptop or mobile computing is accepted because it remains obvious if one user is recording another user and typically this is forbidden in standard social settings

because it violates a human social contract of trust between each other. Innovations such as Google Glass or Microsoft HaloLens or other augmented or virtual reality devices have struggled with adoption because they violate social contracts between humans and breach trust between humans. Information is power and if humans know they have different levels of power, they will typically not interact freely. This problem has caused a rift to form between humans and humans with technology. Further, augmented and virtual reality requires mapping a user's environment so that the virtual objects can interact with real objects that have been mapped into a database. Mapping databases are not designed as social networks and social networks are not designed for mapping hence virtual experiences are void of the dynamic real world in any dynamic sense or implementation. Virtual, augmented or mixed reality software does not integrate with dynamic maps. Typical companies are protective over captured data and do not share data openly. Open source solutions for data tend to require massive overhead to maintain as the architecture is brought together by a non-unified volunteer workforce. Further, there are not consistent compensation schemes for open source software, so solutions tend to lack architecture, unification, completeness and continuity. Implementations of alternative methods thus far have introduced non-sharing technologies which then pit one user against another user in turn causing low levels of adoption and violate human social contracts of trust. Lastly, implementations of alternative methods and systems thus far have dealt with the first person perspective rather than the proposed invention which allows the first person and third person omniscient perspective, which, alongside methods and systems of social networks, dynamic multi-dimension map tile databases, data exchanges, artificial intelligence iterative feedback, the ability for a user to not only listen to music, but be part of the band, it allows not only the ability to watch a movie, but to be in the movie alongside existing actors and actresses, it allows not only the ability to watch a lesson in cooking or music or athletics, but to be alongside the teacher or instructing professional in an augmented or mixed reality environment in a dynamic social network and multi-dimension map tile database virtual environment perspective.

[0008] In one implementation, a method may include receiving origin location data and destination location data from a first user, where the origin location data corresponds to a geographic origin and the destination location data corresponds to a geographic destination. In some embodiments, the invention of systems and methods to accelerate the adoption of mixed reality, augmented reality and virtual reality is directed towards a multi-function CPU devices with a geolocation multi-dimension map tiled database and data exchange with a CPU rendering engine view over a plurality of social networks and virtual travel modes in route to destination in the context of private and public social networks. In some embodiments, the geolocation multi-dimension map tiled database and data exchange with a CPU rendering engine view over a plurality of social networks and virtual travel modes has the ability to record/map environments while pairing to other users in a private or public social network group. In some embodiments, the shared device or single user device has the function of building social contract trust so that users can equally build the groups information advantage rather than destroying group trust because the technology is potentially being used

against a group member creating biased or skewed information advantage. In some embodiments, the shared device or single user device also has the functional ability to display a first person or third person omniscient perspective with artificial intelligence iterative feedback, for a user to not only listen to music, but be part of the band, it allows not only the ability to watch a movie, but to be in the movie alongside existing actors and actresses, it allows not only the ability to watch a lesson in cooking or music or athletics, but to be alongside the teacher or instructing professional in an augmented environment, it allows not only the ability to invent something, but to be alongside the inventor or mentor in an augmented or mixed reality environment.

[0009] In some embodiments, a plurality of users may be communicatively paired with the device for group interaction settings. In some embodiments, the plurality of users may command the device independently for the benefit of the private group. In some embodiments, the plurality of users is then connected to the local or remote application server through the ball device or a general use CPU device. In some embodiments, the ball CPU or general use CPU and application host or the network server then connects users to a plurality of application functions. In some embodiments, the ball CPU or general use CPU device is not only capable of pairing users to transmit data and electromagnetic light to users, but it also maps the user's environment for interaction with the application server and a data exchange interface to a multi-dimensional geolocation tile server database. In some embodiments, the users may use the device privately as one would use a mobile smart phone or they may pair with other users for group purposes to ease social contract stress. In some embodiments, the shared or private applications may include but are not limited to multi-dimension map data exchange, calendar, photos, camera, videos, maps, weather, credit cards, crypto currency, digital currency, notes, clocks, music, application hosting servers, settings, physical fitness, news, video conferencing, hologram conferencing, home security, home lighting, home watering systems, home energy or temperature settings, home cooking, phone, texting services, mail, internet, social networking, blogs, investments, books, television, movies, device location, flashlights, music tuners, airlines, navigation, transportation, identification, translation, gaming, real estate, shopping, food, commodities, technology, memberships, applications, web applications, audio media, visual media, touch media, general communication, internet, or other common data exchange interface applications.

[0010] In one embodiment of the invention, the application server may use price-time priority queues with multi-dimension geolocation data transformations to provide an algorithm to more efficiently provide the user with organized services or applications that are needed after the device has scanned the common area for the group or private user who has been paired with the device. In some embodiments, the application server may display through the ball or CPU display device most frequently used applications as well as recommending more efficient application for data patterns of the user or group of users.

[0011] In another embodiment of the invention, the application server uses machine learning clustering to analyze and contrast the user's biomechanical movement for such exercises as athletics, music, performing arts, cooking, teaching, conferencing, or other behavior against more efficient methods of movement. In some embodiments, the

visualization allows both the first person and third person omniscient perspective because of the positioning of the camera and projection relative to the waveguide lens or CPU display device. In some embodiments, the ball or general CPU device may be able to provide the user of the CPU ball or general CPU device with an augmented reality companion to teach them. In some embodiments, the augmented reality companion may be a professional at the service such as but not limited to tennis with John McEnroe or football with Nick Sabin or cooking with *Julia* Child or piano with Beethoven or acting alongside Harrison Ford in Star Wars or singing alongside Carrie Underwood on stage or in a private performance or many other examples. In some embodiments, the ball CPU or general CPU device may analyze the user's movements and provide customized feedback and interaction with other projected human holograms and objects based on machine learning k-clustering to optimize the differences in movements inherent in the augmented reality system.

[0012] In another embodiment of the invention, the ball CPU or general CPU device is docked on a drone that will then transport the device within a fixed set radius of the user to scan the associated area of the user into a database. In some embodiments, the drone docked CPU ball or general CPU may use the ability to scan the user's area and navigate hallways, stairways, rooms, and outside places within a fixed radius of the user as well as the users movements. In some embodiments, the application server that the ball CPU or generalized CPU device accesses locally or remotely may then be able to draw upon the database to speed processing times and reduce memory leak.

[0013] In another embodiment of the invention, multiple users who each have the CPU ball or cube device or general CPU may lock the other devices to a common group share over a network if a group of users is working together. In some embodiments, the bounded group lock features are in place to build technology trust amongst users while not violating human social contracts. In some embodiments, the implementation allows for all users to experience the common recording in their viewing through the planar waveguide lens or general CPU to disallow asymmetric information which violates human social contracts of trust.

[0014] In another embodiment of the invention, reflective light and electromagnetic waves are projected from the CPU ball device onto the eyeglasses then from the eyeglasses through the aqueous humor lens and vitreous humor which then project onto the photo receptors of the retina. In some embodiments, the projected images to provide the augmented reality experience reside within the structures at reactive variable depths of the eyeglasses or contact lenses. In some embodiments, the impulses then synapse with the optic nerve to transmit images to the brain. In some embodiments, the adjustments to the pupil and lens allow for the adjustment of light transmission to the retina. In some embodiments, the features augment the users visual experience from not only the natural world but also the CPU ball generated objects to make a mixed reality or augmented reality experience. In some embodiments, the multi-dimension map tile data exchange database images may also be on a more traditional CPU display.

[0015] In some embodiments, the users may use eye glasses or contacts because the cornea and the length of the eye are often mismatched. In some embodiments, the name for the mismatch is correlation error in optometry. In some

embodiments, the user one is near sighted the cornea does not project all the way back to the retina and when user one is far sighted the image is projected too far past the retina. In some embodiments, the glasses to correct near sightedness are thinner in the middle and thicker on the edges which allows light to diffuse and diverge and project images further back toward the retina. In some embodiments, the user may correct far sightedness, the glasses are thicker in the middle and thinner on the edges which allows for light to converge more quickly and the images are brought in further to project onto the retina accurately which allows for focus. In some embodiments, the more or less glasses "trick" the eye by moving the light toward different focal points and these optic changes may be present on the CPU display to reduce or eliminate the need for glasses.

[0016] In some embodiments, the coherent laser light and electromagnetic waves are projected from the mobile CPU ball or general CPU or simply refracted on the CPU surface. In some embodiments, the refracted images from light transmission into the structures in the glasses or contacts make the holographic images inside the contacts or eyeglasses. In some embodiments, the refraction allows for the laser image that is projected to the head mounted eye glasses or contacts to be properly transmitted to the optic nerves for interpretation.

[0017] The disclosed price-time priority queue organized multi-dimension map tile data and data exchange allows electronic devices to behave and organize social networks, virtual objects, augmented reality objects, mixed reality objects and actual objects in a manner that greatly improves the time and efficiency by which the objects may be utilized by a plurality of users despite former lack of organizational structure to the data.

[0018] The above referenced summary section is provided to introduce a selection of concepts in a simplified form that are further described below in the detailed description section. The summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended to be used to limit the scope of the claimed subject matter. Furthermore, the claimed subject matter is not limited to implementations that solve any or all disadvantages noted in any part of this disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] Implementations of various technologies will hereafter be described with reference to the accompanying drawings. It should be understood, however, that the accompanying drawings illustrate only the various implementations described herein and are not meant to limit the scope of various technologies described herein.

[0020] FIG. 1 illustrates an exemplary schematic diagram of implementations of the mobile CPU and plurality of multi-form factored CPU devices networked with the multi-dimension map tile database, proxy database and data exchange to present virtual, mixed and augmented reality rendered background environments and virtual objects in a single or multi-user virtual environment.

[0021] FIG. 2 illustrates an exemplary schematic diagram of implementations of methods considering multiple users using the method and system to schedule a multi-stop virtual trip utilizing the multi-dimension map tile database server, rendering engine, proxy dimension database server, data exchange server and multi-dimension rendering CPU device

for both multi-user virtual objects and virtual backgrounds in virtual, mixed or augmented reality settings.

[0022] FIGS. 3A and 3B illustrate an exemplary schematic diagram of implementations of methods considering the separation of the CPU ball device from the breakable head-mounted glasses which increases the technological capability while increasing durability and reducing stress from adding technology near the head which decreases biomechanical movement and balance as well as adding unwanted magnetic and radio waves near the brain.

[0023] FIGS. 4A and 4B illustrate an exemplary schematic in further detail the holographic images inside the eyeglass or contact lens structures projected from the mobile networked CPU ball. Refraction allows for the augmented reality hologram to be seen by the user against the real physical world from both a first person and third person omniscient perspective.

[0024] FIGS. 5A and 5B illustrate an exemplary schematic diagram of the implementation of methods from the system of the user's projected image to allow the user to visualize both a first person and third person omniscient augmented interactive artificial intelligence iterative environments where the users not only are able watch the band or musical performing artist but also may participate in the band as a singer, drummer, guitar player or other instrument player with interaction such that the user is a band member.

[0025] FIGS. 6A and 6B illustrate an exemplary schematic diagram of the implementation of methods from the system of the user's projected image to allow the user to visualize both a first person and third person omniscient augmented interactive artificial intelligence iterative environments where the users not only are able to watch the movie or performing artist but also may participate in the movie as an actor or actress, with interaction such that the user is a band member.

[0026] FIGS. 7A and 7B illustrate an exemplary schematic diagram of the implementation of methods from the system of the user's projected image to allow the user to visualize both a first person and third person omniscient augmented interactive artificial intelligence iterative environments where the users not only are able to watch the chef or cook but also may participate in the cooking experience, with interaction such that the user is a chef.

[0027] FIGS. 8A and 8B illustrate an exemplary schematic diagram of the implementation of methods from the system of the user's projected image to allow the user to visualize both a first person and third person omniscient augmented interactive artificial intelligence iterative environments where the users not only are able to watch the author or reader read but also may participate in the story telling experience, with interaction such that the user is a co-story teller or author.

[0028] FIGS. 9A and 9B illustrate an exemplary schematic diagram of the implementation of methods from the system of the user's projected image to allow the user to visualize both a first person and third person omniscient augmented interactive artificial intelligence iterative environments where the users not only are able to watch the inventor, architect or educator but also may participate in the creative experience, with interaction such that the user is a co-inventor or architect or educator.

[0029] FIGS. 10A and 10B illustrate an exemplary schematic diagram of the implementation of methods from the system of the user's projected image to allow the user to

visualize both a first person and third person omniscient augmented interactive artificial intelligence iterative environments where the users not only are able to watch the athlete or coach but also may participate in the sporting experience, with interaction such that the user is a participant.

[0030] FIG. 11 illustrates an exemplary diagram of the mobile computer ball device or general CPU device in accordance with some embodiments.

[0031] FIG. 12 illustrates an exemplary user interface for selecting a plurality of applications in accordance with some embodiments.

[0032] FIGS. 13A and 13B illustrate an exemplary schematic diagram of the implementation of methods from the system where the exemplary user is able to visualize 3d augmented reality food menus and food options at a plurality of establishments using interactive artificial intelligence iterative environments and geofence and geolocation technology where the users may order food and prepay for food delivered at any participating restaurant or food retailer while being transported in a vehicle or from a static location.

[0033] FIGS. 14A and 14B illustrate an exemplary schematic diagram of the implementation of methods from the system where the exemplary user is able to visualize themselves in a 3d augmented reality clothing or textiles or consumer good both in a first person and third person omniscient augmented interactive artificial intelligence iterative environments for the purpose of customized manufacturing, purchases and delivery.

[0034] FIGS. 15A and 15B illustrate an exemplary schematic diagram of the implementation of methods from the system of the user's projected image to allow the user to visualize both a first person and third person omniscient augmented interactive artificial intelligence iterative environment where the users not only are able to see a demonstration of a professional athlete, but compare their movement variances for analysis.

[0035] FIG. 16 illustrates an exemplary user interface with various modes of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments.

[0036] FIG. 17 illustrates an exemplary user interface with various modes and distances before the launch of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments.

[0037] FIG. 18 illustrates an exemplary user interface with various virtual travel options for the rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments.

[0038] FIG. 19 illustrates an exemplary multi-node, multi-stop virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments.

[0039] FIG. 20 illustrates an exemplary multi-factor user verification prior to rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments.

[0040] FIG. 21 illustrates an exemplary multi-stop virtual trip and messaging interface between users of the social network structure prior to start of rendering of virtual travel for the multi-dimension map database and data exchange

linked with associated price-time priority queues in accordance with some embodiments.

[0041] FIG. 22 illustrates an exemplary multi-stop virtual trip and messaging interface between users of the social network structure during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments.

[0042] FIGS. 23A and 23B illustrate an exemplary single panel or multi-panel rendering display of virtual objects, real objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments.

[0043] FIG. 24 illustrates an exemplary multi-stop virtual trip and messaging interface between users of the social network structure as the transaction gateway of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments.

[0044] FIG. 25 illustrates an exemplary multi-stop virtual trip and setting interface between users of the social network structure as the settings and privacy gateway of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments.

[0045] FIG. 26 illustrates an exemplary multi-stop virtual trip and virtual object package scan interface between users of the social network structure as the virtual object scan creation gateway of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments.

[0046] FIGS. 27A and 27B illustrate an exemplary single panel or multi-panel rendering display of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments.

[0047] FIG. 28 illustrates an exemplary user background and security check prior to rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments.

[0048] FIG. 29 illustrates an exemplary user account and tax and payment module prior to rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments.

[0049] FIG. 30 illustrates an exemplary network configuration in corroboration with other embodiments.

[0050] FIGS. 31A and 31B illustrate an exemplary single panel or multi-panel rendering display of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments highlighting hiking in a natural environment and telemedicine in a natural environment.

[0051] FIGS. 32A and 32B illustrate an exemplary single panel or multi-panel rendering display of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension

map database and data exchange linked with associated price-time priority queues in accordance with some embodiments highlighting hiking in a natural environment and further steps in the hiking natural environment.

[0052] FIGS. 33A and 33B illustrate an exemplary single panel or multi-panel rendering display of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments highlighting hiking in a natural environment and using the zoom and micro-zoom and nano-zoom features of the multi-dimension map database and data exchange.

[0053] FIGS. 34A and 34B illustrate an exemplary single panel or multi-panel rendering display of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments highlighting hiking in a natural environment and using the zoom and micro-zoom and nano-zoom features of the multi-dimension map database and data exchange.

[0054] FIGS. 35A and 35B illustrate an exemplary single panel or multi-panel rendering display of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments highlighting lake or ocean or water views and underwater view features of the multi-dimension map database and data exchange.

[0055] FIGS. 36A and 36B illustrate an exemplary single panel or multi-panel rendering display of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments highlighting flying drone or eagle view at a plurality of altitudes to illustrate features of the multi-dimension map database and data exchange.

[0056] FIGS. 37A and 37B illustrate an exemplary single panel or multi-panel rendering display of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments highlighting private and public virtual object views of high tea with the queen to illustrate features of the multi-dimension map database and data exchange.

[0057] FIGS. 38A and 38B illustrate an exemplary single panel or multi-panel rendering display of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments highlighting public virtual object views and virtual messaging within of the high tea with the queen virtual experience and trip with a plurality of social network users to illustrate features of the multi-dimension map database and data exchange.

[0058] FIG. 39 illustrates an exemplary single panel or multi-panel rendering display of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map data-

base and data exchange linked with associated price-time priority queues in accordance with some embodiments highlighting virtual emoji and virtual character selection within the high tea with the queen virtual experience and trip with a plurality of social network users to illustrate features of the multi-dimension map database and data exchange.

[0059] FIGS. 40A and 40B illustrate an exemplary single panel or multi-panel rendering display of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments highlighting private and public virtual domains within the Venice beach lifting with Arnold Schwarzenegger or Dwayne the Rock Johnson or other lifter virtual experience and trip with a plurality of social network users to illustrate features of the multi-dimension map database and data exchange.

[0060] FIG. 41 illustrates an exemplary single panel or multi-panel rendering display of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments highlighting public virtual domain within the walking in the woods with a Nobel laureate learning virtual experience and trip with a plurality of social network users to illustrate features of the multi-dimension map database and data exchange.

[0061] FIG. 42 illustrates an exemplary social network object of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments highlighting coffee in Paris social network object community virtual experience and trip with a plurality of social network users to illustrate features of the multi-dimension map database and data exchange.

[0062] FIG. 43 illustrates an exemplary network object step diagram of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments with a plurality of social network users to illustrate features of the multi-dimension map database and data exchange.

[0063] FIG. 44 illustrates an exemplary social network listing and search network object diagram of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments with a plurality of social network users to illustrate features of the multi-dimension map database and data exchange.

[0064] FIG. 45 illustrates an exemplary social network object of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments highlighting James Hardin social network object community virtual experience and trip with a plurality of social network users to illustrate features of the multi-dimension map database and data exchange.

[0065] FIG. 46 illustrates an exemplary social network object of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments highlighting multi linked virtual objects social network object community virtual combined experience and trip with a plurality of social network users to illustrate features of the multi-dimension map database and data exchange.

[0066] FIG. 47 illustrates exemplary menu objects of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments with a plurality of social network users to illustrate features of the multi-dimension map database and data exchange.

[0067] FIG. 48 illustrates an exemplary multi-dimension map tile database with such object transformations as latitude, longitude, altitude, sound, sensory, time, weather, temperature, scale, micro-scale, nano-scale, chemistry, color, aperture, speed, type, cross product combinations and nth dimensions with associated proxy database servers and CPU rendering engine.

[0068] FIG. 49 illustrates an exemplary social network object of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments highlighting multi linked virtual objects and texting between virtual objects and buying of food and beverage between virtual objects in a social network object community virtual combined experience and trip with a plurality of social network users to illustrate features of the multi-dimension map database and data exchange.

[0069] FIG. 50 illustrates an exemplary social network object of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments highlighting rocket ship travel and travel object selection tools for virtual travel.

[0070] FIG. 51 illustrates an exemplary social network object of virtual objects, real objects, gaming objects and background virtual objects during rendering of virtual travel for the multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments highlighting inside rocket ship views for virtual travel and travel object selection tools for virtual travel.

[0071] FIG. 52 illustrates an exemplary multi-object device capture and network communication on the data exchange for ingest of multi-dimension map database and data exchange linked with associated price-time priority queues in accordance with some embodiments highlighting data ingesting into the network from a plurality of devices and users under the organizational format of the data exchange price time priority queue with encryption processors and buyers and sellers of ingest data on the exchange.

[0072] FIG. 53 illustrates an exemplary price time priority queue for multi-dimension mapping data geolocation exchange data objects and construction of a limit order book to organize the value of the objects for the database to exchange.

[0073] FIG. 54 illustrates an exemplary price time priority queue for multi-dimension mapping data mining geolocation exchange data objects and construction of a limit order book to organize the value of the objects for the database to exchange.

[0074] FIG. 55 illustrates an exemplary price time priority queue for a multi-dimension mapping data mining geolocation exchange data objects and construction of a limit order book to organize the value of the objects for the database to exchange to make data superset and subset objects which trade on the price time priority queue for a multi-dimension mapping data mining geolocation exchange.

[0075] FIG. 56 illustrates an exemplary price time priority queue for a multi-dimension mapping data mining geolocation exchange data object with a secondary matching gateway to construct a plurality of virtual party rooms for the virtual travel experience and trip between rooms with a plurality of virtual object hosts and social network users as actual or virtual or augmented or mixed reality objects.

[0076] FIG. 57 illustrates an exemplary price time priority queue for a multi-dimension mapping data mining geolocation exchange data object with a secondary matching gateway to construct a plurality of virtual party rooms for the virtual travel experience and trip between rooms with a plurality of virtual object hosts and social network users as actual or virtual or augmented or mixed reality objects with associated skins and outfits for social network members to shop for virtual outfits and skins.

DETAILED DESCRIPTION

[0077] The discussion below is directed to certain specific implementations. It is to be understood that the discussion below is only for the purpose of enabling a person with ordinary skill in the art to make and use any subject matter defined now or later by the patent “claims” found in any issued patent herein. In other instances, well-known methods, procedures, components, circuits and networks have not been described in detail so as not to unnecessarily obscure aspects of the embodiments.

[0078] It will also be understood that, although certain elements of the invention and subject matter will be described in a certain order, the order is not intended to be limiting to the invention as many steps may be performed in a plurality of configurations to accomplish the invention of using various technologies to participate, trade and transact virtual trip data community linked transmission and virtual trip data units with associated price-time priority queues as a physical forward commodity. It will be further understood that the terms “comprises” or “comprising,” when used in this specification, specify the presence of stated features, integers, steps, operations, elements, and/or components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

[0079] The terminology used in the description of the invention herein is for the purpose of describing particular embodiments only and is not intended to be limiting of the invention. As used in the description of the invention, the singular forms “a”, “an” and “the” are intended to also include the plural forms as well, unless the context clearly indicates otherwise. It will also be understood that the term “and/or” as used herein refers to and encompasses any and all possible combinations of one or more of the associated listed items. It will be further understood that the terms

“comprises” and/or “comprising,” when used in this specification, specify the presence of stated features, integers, steps, operations, elements, components, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or groups thereof.

[0080] As used herein, the term “if” may be construed to mean “when” or “upon” or “in response to determining” or “in response to detecting,” depending on the context. Similarly the phrase “if it is determined” or “if [a stated condition or event] is detected” may be construed to mean “upon determining” or “in response to determining” or “upon detecting [the stated condition or event]” or “in response to detecting [the stated condition or event],” depending on the context.

[0081] A computing device, as described herein, may include any computing implementation known to those skilled in the art, including mobile computing devices. In some implementations, a fixed stationary computing device, a virtual reality headset, a mixed reality headset, an augmented reality headset, or an audio interfaced computer device may be used instead. In another implementation, the computing device may be used in conjunction with a projection computing device. The computing device may be used with or include any device which communicates and integrates the use of: a network, community route processor, my route processor, sequence route processor, global positioning system (GPS) network, routing algorithms based on dynamic market inputs, servers, forward commodity forward market auction database, grouping software instructions for hubs, securitization transformations and specifications, game servers, indexing algorithms for transportation and freight unit securities, forwards, futures, options, swaps and contracts on various navigation routes, navigation servers, routing sequence algorithms, virtual hub topology methods and systems, transparent open access user interface pricing systems with price time priority queues, blockchain audit and safety methods, facial recognition, fingerprint recognition or photo recognition of users for security and identity check, and/or algorithms for no arbitrage conditions and constraints. A computing device, as described herein, may utilize a user interface (e.g., a graphical user interface) formatted on mobile or stationary computing devices over various mediums. Such devices may be connected through a network for the purpose of grouping users into virtual hub sequences of community objects as a gateway to participating, transacting, and/or trading transportation or freight capacity units between combinations of virtual hubs as a forward commodity in an auction.

[0082] Various implementations directed to price time priority queue routing for transportation capacity units will now be described in the following paragraphs with reference to FIGS. 1-57.

[0083] In some embodiments, elements of the system have the ability to be docked in a drone cradle which creates a database map of the user’s nearby environment while not being utilized by the user for an immediate task. In some embodiments, the CPU or CPU(s) form factor may be expressed as a CPU mobile device, tablet device, stationary computing device, augmented reality device, virtual reality device, sensory device, audio device, visual device or other general computing device, such as those described in U.S. patent Ser. Nos. 10,460,520 B2, “Computer Ball Device for Mixed Reality, Virtual Reality or Augmented Reality,” filed

Jan. 13, 2017, the contents of which are hereby incorporated by reference in their entirety. In some embodiments, multi-dimensional map tile database elements may replicate virtual environments or immerse social network participants in virtual environments. In some embodiments, social network participants may virtually appear on with other virtual participants in common or non-common virtual background environments. The device may decouple the traditional design of head mounted virtual and mixed reality wherein the traditional design places the camera or central processing unit (“CPU”) addition to the standard eyeglass which then violates human social contracts or concern the user or nearby bystanders are being recorded. The mobile computer ball device may in some embodiments be decoupled from the waveguide lens so that a third person view of the user can be obtained in addition to a first person view. The multi form factor CPU device may also simply record the participation of the social network member and place them inside multi-dimensional virtual user environments with a plurality of users. The multi form factor CPU device may also simply record the participation of the social network member and place them inside multi-dimensional virtual user environments with a plurality of users. In some embodiments, the plurality of user social networks may include both public and private views. In some embodiments, the plurality of user social network private view may display invite only participants. In some embodiments, the plurality of user social network public view may display multiple virtual environment participants with their derived placement in the database virtual, augmented or mixed reality environment. In some embodiments, the computerized ball device may embody standard shape eyeglasses to be coupled with the device in both a private user to ball setting or a device (ball) to private group setting. In some embodiments, the device may have superior design to existing implementations of mixed and virtual reality technology with bulky head mounted apparatus which add weight that disturbs social contracts and bio-mechanical movement and weight distribution and does not allow for both first person and third person view points in the waveguide display. In some embodiments, the family use of the technology may allow for natural sharing of a coupled group technology sharing of experience. In some embodiments, the commercial and industrial work team use of the technology may allow for natural sharing of a coupled group sharing of technology experience. In some embodiments, the technology may be a superior implementation of the way humans collaborate and work in groups. In some embodiments, the technology may be a superior implementation to extend natural human interaction without drawing attention to the technology instead of the shared human experience. In some embodiments, the current technology deployment for computerized devices has focused on individual experience at the expense of group interaction. In some embodiments, the implementation of the multi-dimensional virtual, mixed and augmented reality environment allows for a superior group experience. In some embodiments, the plurality of form factors for the multi-dimensional map tile database, data exchange, proxy dimension database and machine learning proxy algorithm provide efficient user experiences for virtual travel as well as arranged meetings from the time exchange as described in U.S. provisional patent application Ser. No. 63,027,344, “Time interval geolocation community objects with price-time priority queues for transformed time

interval geolocation units,” filed May 19, 2020, the contents of which are hereby incorporated by reference in their entirety.

[0084] The following paragraphs provide a brief summary of various techniques described herein such as illustrated in FIG. 1. In one implementation as illustrated in FIG. 1, the ball CPU device **170** may be mounted on a drone charging base **170**. In yet another implementation, the multi-form factor CPU **120** may come in the form of a tablet CPU **165** or waveguide lens device **166** or laptop or stationary CPU **167** or audio CPU **168** or headset augmented, mixed or virtual reality device **169** or internet of things edge CPU device **171**. The multi-form factor CPU device **120**, **170** may gather preliminary information to complete and transmit a map tile database **160** utilizing the wireless network **150** and wireless GPS location network **130** of the users environment from a fixed radius from the users **110**. The map tiles from the database server **160** are then transferred to the multi-form factor CPU device **170**, **120** on a wireless network **150** from the database server **160**. In some embodiments, the multi-dimension map tile database **160** by interpolate missing data within the multi-dimension map tile database **160** with a proxy dimension database server **161** which relies upon algorithms in a machine learning missing tile proxy clustering CPU **162** to replicate missing data in the primary multi-dimension map tile database **160**. In some embodiments, the multi-form factor CPUs **170**, **120** render multi-dimension geolocation data with a multi-dimension rendering CPU engine **163** which presents multi-dimension map tile database data over multiple coordinate matrices and vectors to render the requested user configuration from the multi-form factor CPU devices **170**, **120**. The users **164** environment is periodically scanned for change analysis to the map tiles by the CPU devices **120** and **170**. Images may also be projected by laser light to the user **120**. In some embodiments, the virtual, mixed and augmented reality rendered background **164** may dynamically render virtual representations of other members of the network **150** such as athletes **175**, musicians **180**, cooks and chefs **190** or a plurality of other persons **110** and users **110**. In some embodiments, users **110** may configure various elements of the multi-dimension map tile database with dimensions that include but are not limited to longitude, latitude, altitude, sounds, sensory, time, weather, temperature, scale, micro-scale, nano-scale, chemistry, color, lens filters, aperture filters, type filters, cross-product combination dimensions and nth dimension vectors and matrices **160** of coordinate tiles to mix and match dimensions for user rendering for the user network **150**. In some embodiments, users **110** may use the multi-form factor CPUs **120** and **170** to upload multi-dimension map tile data **160** over the network **150** with GPS coordinates from the GPS location network **130** which are uploaded using a data exchange method **5200**, **5300**, **5400**, **5500** covered in greater detail with respect to the formulas and transformations of data to organize the system and method.

[0085] The embodiment illustrated in FIG. 2 illustrates an exemplary network sequencing from a plurality of users **201**, **202**, **203**, **204** of the social network configuration setting a mapping sequence for a virtual trip **205** originating in New York, New York **207** in route to Paris, France **206** with a final destination of Hawaii **208**. In some embodiments, the multi-dimension map tile rendered trip sequence **205** may render a plurality of users **210**, **212** whereby social

network object users of the trip sequence 205 may use a plurality of modes such as scooter, motorcycle, drone view, airplane view, underwater view, eagle view or many other views with many dimensions with the geo-dimension rendering CPU engine 211 over a plurality of buildings such as the Eiffel tower 214 along the Seine river or the Louvre 213 or a plurality of other virtual images which have been acquired by the multi-dimension map tile database 215 with gap rendering by the proxy dimension database server 217 and the multi-dimension geo CPU rendering engine 216 to a plurality of multi-form factor devices such as in the screen view 218 rendered by the multi-dimensional map tile database server 215. In some embodiments, the user 212 may pair with a plurality of other users and personalities such as musicians 226 and chefs 225 and athletes 224 with a plurality of virtual objects such as a beach chair 222 or beach chair(s) 222, 223. In some embodiments, the virtual background 218 may have the dimension of water and land with trees 219, the virtual background 218 may have the dimension of waves 220 and 221. In some embodiments, the virtual background 218 rendered may correspond to a destination 208 or stop 207, 206 on the virtual trip 205. In some embodiments, the users 226, 225, 224, 212, 210, 201, 202, 203, 204 may join with other users 212 in the virtual background 218 along the virtual trip 205. In some embodiments, the users 226, 225, 224, 212, 210, 201, 202, 203, 204 may upload virtual background data through the network with vector and matrix coordinates for the data exchange 5200 and 5300 to earn money from the data exchange platform in exchange for data.

[0086] The embodiment illustrated in FIG. 3A. Illustrates the network based ball CPU device 330 projecting laser light and infrared light 370 to the users 310 head mounted glasses 320 or contacts 320.

[0087] The embodiment illustrated in FIG. 3B illustrates the mobile network based ball CPU projection device 340 projecting laser light and infrared light 370 to the head mounted glass or contact lens 350. FIG. 3B shows a side view of the lens 350 taken from the front view of FIG. 3A glasses or contacts 320. Laser light and infrared light is refracted internally in 350 to project holographic images inside the lens 350 such that the user's eye 360 can interpret the images against the real world from both a first person and third person omniscient perspective. In some embodiments, the CPU projection device may take multiple forms such as a mobile CPU device 330 or a plurality of other form factors 120 including but not limited to the form of a tablet CPU 165 or waveguide lens device 166 or laptop or stationary CPU 167 or audio CPU 168 or headset augmented, mixed or virtual reality device 169 or other internet of things edge CPU device 171.

[0088] The embodiment illustrated in FIG. 4A illustrates the same embodiment as FIG. 3B, but is repeated so it can be compared and expanded for the purposes of FIG. 4B which expands the explanation and the physical mechanics of light refraction to the users eye 440.

[0089] The embodiment illustrated in FIG. 4B. Illustrates the infrared and laser light 420 projecting from the wireless network based CPU ball 410 in greater detail as it moves through the waveguide lens 490 to project the hologram 460. Again laser light and infrared light are projected from the wireless network based CPU ball to the lens 490 where light is refracted by structures 480 within the lens 490 that then project the holographic image 460 to the user's eye 460.

Both structures 470 and 480 allow for refraction to project the hologram to the user's eye 460 within the lens structure 490. Many of these structures are present within the lens 490 so that the user may change the angles as which they look at both the real world and holograms 460 against the real world.

[0090] The embodiment illustrated in FIG. 4B, further illustrates the use of the infrared light and laser light transmission 420 in sequence with the users eyeball 460. The laser light and infrared light may scan the users eyeball 460 to recognize the user 310 for purposes of identity security.

[0091] The embodiment illustrated in FIG. 4B could be any object 460 hologram such as but not limited to a word processor application, spreadsheet application, presentation application, keyboard, voice activated assistant, voice activated recorder, productivity application, movie application, music application, health application, companion chef instructor, companion to talk with who is remotely connected through network chat or messaging or video text, companion personal coach, companion athletic trainer, companion music or performing arts instructor, companion reading application, companion writing application for authors, companion personal trainer, or any personal instructor of any type that performs analysis through the camera in the ball CPU device 450 that transmits user 310 movements for analysis to the wireless network 130 and database server 160. The database server 160 and wireless network 150 can then transmit analysis from the database server or processors in the database server 160 or CPU devices 120, 170 to then project a holographic image 460 to the user 310 for interaction, companionship, and self-improvement, analysis or a plurality of other uses. Similarly, in some embodiments, the rendered background 160 from the multi-dimension map tile database 160 with a plurality of virtual network members 110, 180, 190, 175 over a virtual trip 205 with a single destination or multi-stop itinerary 206, 207, 208 may render to multiple device display mechanisms 120, 170 or form factors.

[0092] The embodiment illustrated in FIG. 5A illustrates the mobile network based CPU projection device 510 projecting laser light and infrared light 520 to the head mounted glass or contact lens 530. Laser light and infrared light and electromagnetic waves are refracted internally in the lens 530 to project holographic images inside the lens 530 such that the user's eye 540 can interpret the images against the real world from both a first person and third person omniscient perspective. In other embodiments the rendered virtual images and virtual trip and experience backgrounds 164 may be presented on a plurality of device form factors 120, 170.

[0093] The embodiment illustrated in FIG. 5B illustrates a schematic diagram of the implementation of methods from the system 510 and 570 of the user's projected image 560 to allow the user 550 to visualize both a first person 550 and third person omniscient 592 augmented interactive artificial intelligence interactive environments where the users 591 and 590 not only are able watch the band 560 or musical performing artist 590 but also may participate in the band as a singer 591, drummer 580, guitar player 560 or other instrument player with interaction such that the user 591 is a band member. The multi-dimension map tile database 160 of the system 510 and methods change music from an observed experience to an immersive and participatory

experience with a plurality of users **591** and **590** over the network **150**. The dynamic multi-dimension map tile database **160** content allows for a variety of trip endings or trip paths based on the user's interaction with the existing content. The camera **1113** also allows for the user **550** to record the music with the user **550** in the band for posting to social media or other local or cloud based networks subject to copyright laws. In some embodiments, the content of the multi-dimension map tile database **160** may include the environment of the musicians when they were inspired by the story or song or the virtual environment of the origin of the story and song itself as the music or story was being produced. In some embodiments, natural language processors in the rendering engine **163** and multi-dimension map tile database **160** may present virtual backgrounds which have been linked by the proxy database and multi-dimension map tile database **160** to the natural language processing instructions in the rendering engine **163**. In some embodiments, a user may upload content for the multi-dimension map tile database **160** through the data exchange **5200**, **5300**, **5400**, **5500** method.

[0094] The embodiment illustrated in FIG. 6A illustrates the mobile network based CPU projection device **610** projecting laser light and infrared light **620** to the head mounted glass or contact lens **630**. Laser light and infrared light and electromagnetic waves are refracted internally in the lens **630** to project holographic images inside the lens **630** such that the user's eye **640** can interpret the images against the real world from both a first person and third person omniscient perspective. In other embodiments the rendered virtual images and virtual trip and experience backgrounds **164** may be presented on a plurality of device form factors **120**, **170**.

[0095] The embodiment illustrated in FIG. 6B illustrates a schematic diagram of the implementation of methods from the system **610** and **670** of the user's projected image **680** to allow the user **650** to visualize both a first person **650** and third person omniscient **680** augmented interactive multi-dimension map tile database **160** interactive environments where the users **650** and **680** not only are able watch the movie **660** or performing artist **690** but also may participate in the movie as an actor **690** or actress **680**, with interaction such that the user **650** is an actor or actress in the movie or theatrical production. The multi-dimension map tile database **160** of the system **610** and methods change movies and theatrical arts from an observed experience to an immersive and participatory experience with a plurality of users **680** and **690**. The multi-dimension map tile database **160** dynamic content allows for a variety of trip endings or trip paths **205** based on the user's interaction with the existing content. The camera **1113** also allows for the user **680** to record the movie with the user **680** in the movie for posting to social media or other local or cloud based networks subject to copyright laws. In some embodiments, the content of the multi-dimension map tile database **160** may include the environment of the actors or actresses and movie directors and movie producers when they were inspired by the story or the virtual environment of the origin of the story itself as the movie or story was being produced. In some embodiments, natural language processors in the rendering engine **163** and multi-dimension map tile database **160** may present virtual backgrounds which have been linked by the proxy database and multi-dimension map tile database **160** to the natural language processing instructions in the ren-

dering engine **163**. In some embodiments, a user may upload content for the multi-dimension map tile database **160** through the data exchange **5200**, **5300**, **5400**, **5500** method. [0096] The embodiment illustrated in FIG. 7A, illustrates the mobile network based CPU projection device **710** projecting laser light and infrared light **720** to the head mounted glass or contact lens **730**. Laser light and infrared light and electromagnetic waves **720** are refracted internally in the lens **730** to project holographic images inside the lens **730** such that the user's eye **740** can interpret the images against the real world from both a first person and third person omniscient perspective. In other embodiments the rendered virtual images and virtual trip and experience backgrounds **164** may be presented on a plurality of device form factors **120**, **170**.

[0097] The embodiment illustrated in FIG. 7B illustrates a schematic diagram of the implementation of methods from the system **710** and **770** of the user's projected image **760** to allow the user **750** to visualize both a first person and third person omniscient augmented interactive multi-dimension map tile database **160** interactive environments **790** where the users **790** not only are able to watch the chef **780** or cook **780** but also may participate in the cooking experience **760**, with interaction such that the user is a chef **780**. The multi-dimension map tile database **160** of the system **710** and **770** and methods change cooking instruction **780** from an observed experience to an immersive and participatory experience with a plurality of users **750** and **790**. The multi-dimension map tile database **160** content allows for a variety of endings or paths based on the user's interaction with the existing content and other users. The camera **1113** also allows for the user **790** to record the cooking experience with the user **790** in the cooking experience for posting to social media or other local or cloud based networks subject to copyright laws. In some embodiments, the content of the multi-dimension map tile database **160** may include the environment of the chef when they inspired by the recipe or the virtual environment of the origin of the food itself as the recipe is being prepared. In some embodiments, natural language processors in the rendering engine **163** and multi-dimension map tile database **160** may present virtual backgrounds which have been linked by the proxy database and multi-dimension map tile database **160** to the natural language processing instructions in the rendering engine **163**. In some embodiments, a user may upload content for the multi-dimension map tile database **160** through the data exchange **5200**, **5300**, **5400**, **5500** method.

[0098] The embodiment illustrated in FIG. 8A illustrates the mobile network based ball CPU projection device **810** projecting laser light and infrared light **820** to the head mounted glass or contact lens **830**. Laser light and infrared light and electromagnetic waves **820** are refracted internally in the lens **830** to project holographic images inside the lens **830** such that the user's eye **840** can interpret the images against the real world from both a first person and third person omniscient perspective. In other embodiments the rendered virtual images and virtual trip and experience backgrounds **164** may be presented on a plurality of device form factors **120**, **170**.

[0099] The embodiment illustrated in FIG. 8B illustrates a schematic diagram of the implementation of methods from the system **810** and **870** of the user's projected image **860** to allow the user **850** to visualize both a first person and third person omniscient augmented interactive multi-dimension

map tile database 160 interactive environments 890 where the users 890 not only are able to watch the author 880 or reader 880 read but also may participate in the story telling experience 860, with interaction such that the user 850 is a co-story teller or author 890. The multi-dimension map tile database 160 of the system and methods change reading from an observed experience to an immersive and participatory experience with a plurality of users. The multi-dimension map tile database 160 content allows for a variety of endings or paths based on the user's interaction with the existing content. The camera 1113 also allows for the user 890 to record the reading experience with the user 890 in the reading experience for posting to social media or other local or cloud based networks subject to copyright laws. In some embodiments, the content of the multi-dimension map tile database 160 may include the environment of the author of the book when they wrote the book or the virtual environment of the story itself as the story is being told. In some embodiments, natural language processors in the rendering engine 163 and multi-dimension map tile database 160 may present virtual backgrounds which have been linked by the proxy database and multi-dimension map tile database 160 to the natural language processing instructions in the rendering engine 163. In some embodiments, a user may upload content for the multi-dimension map tile database 160 through the data exchange 5200, 5300, 5400, 5500 method.

[0100] The embodiment illustrated in FIG. 9A illustrates the mobile network based ball CPU projection device 910 projecting laser light and infrared light 920 to the head mounted glass or contact lens 930. Laser light and infrared light and electromagnetic waves 920 are refracted internally in the lens 930 to project holographic images inside the lens 930 such that the user's eye 940 can interpret the images against the real world from both a first person and third person omniscient perspective. In other embodiments the rendered virtual images and virtual trip and experience backgrounds 164 may be presented on a plurality of device form factors 120, 170.

[0101] The embodiment illustrated in FIG. 9B illustrates a schematic diagram of the implementation of methods from the system 910 and 970 of the user's projected image 960 to allow the user to visualize both a first person and third person omniscient augmented interactive artificial intelligence interactive environments 990 where the users 990 not only are able to watch the inventor 980, architect 980 or educator 980 but also may participate in the creative experience 960, with interaction such that the user 950 is a co-inventor or co-architect or co-educator 990. The artificial intelligence of the system and methods will change the creative process from an observed experience to an immersive and participatory experience with a plurality of users 990. The artificial intelligence content allows for a variety of endings or paths based on the user's interaction with the existing content. The camera 1113 also allows for the user 990 to record the co-invention or co-architect or co-educator with the user 990 in the co-invention or co-architect or co-educator for posting to social media or other local or cloud based networks subject to copyright laws. In some embodiments, the content of the multi-dimension map tile database 160 may include the environment of the inventor of the idea when they originally wrote down or were inspired to create the idea or the virtual environment of the invention itself as the invention is being produced. In some embodiments, natural language processors in the rendering engine

163 and multi-dimension map tile database 160 may present virtual backgrounds which have been linked by the proxy database and multi-dimension map tile database 160 to the natural language processing instructions in the rendering engine 163. In some embodiments, a user may upload content for the multi-dimension map tile database 160 through the data exchange 5200, 5300, 5400, 5500 method.

[0102] The embodiment illustrated in FIG. 10A illustrates the mobile network based ball CPU projection device 1010 projecting laser light and infrared light 1020 to the head mounted glass or contact lens 1030. Laser light and infrared light and electromagnetic waves 1020 are refracted internally in the lens 1030 to project holographic images inside the lens 1030 such that the user's eye 1040 can interpret the images against the real world from both a first person and third person omniscient perspective. In other embodiments the rendered virtual images and virtual trip and experience backgrounds 164 may be presented on a plurality of device form factors 120, 170.

[0103] The embodiment illustrated in FIG. 10B illustrates a schematic diagram of the implementation of methods from the system 1010 and 1070 of the user's projected image 1060 to allow the user 1070 to visualize both a first person and third person omniscient augmented interactive artificial intelligence interactive environments 1090 where the users 1090 not only are able to watch the athlete 1091 or coach 1080 but also may participate in the sporting experience, with interaction such that the user 1090 is a participant. The artificial intelligence of the system and methods will change the video from an observed experience to an immersive and participatory experience with a plurality of users 1090. The artificial intelligence content allows for a variety of endings or paths based on the user's interaction with the existing content. The camera 1113 also allows for the user 1090 to record the sporting experience with the user 1090 in the sporting experience for posting to social media or other local or cloud based networks subject to copyright laws. In some embodiments, the content of the multi-dimension map tile database 160 may include the environment of the athlete while competing in a competition or providing athletic instruction or the virtual environment of the competition itself as the invention is being produced. In some embodiments, natural language processors in the rendering engine 163 and multi-dimension map tile database 160 may present virtual backgrounds which have been linked by the proxy database and multi-dimension map tile database 160 to the natural language processing instructions in the rendering engine 163. In some embodiments, a user may upload content for the multi-dimension map tile database 160 through the data exchange 5200, 5300, 5400, 5500 method.

[0104] The embodiment illustrated in FIG. 11 illustrates the mobile network based CPU projection device 1125. The device 1125 may include a memory 1102, a memory controller 1103, one or more processing units (CPUs) 1104, a peripherals interface 1105, RF circuitry 1106, audio circuitry 1108, one or more speakers 1107 and 1115, a microphone 1109, an input/output (I/O) subsystem 1110, input control devices 1111, an external port 1112, optical sensors 1116, camera 1113, one or more laser projection systems 1114, power supply 1117, battery 1118, wifi module 1119, GPS receiver 1120, accelerometer 1121, Ambient light sensor 1122, location sensor 1123, barometer 1124, USB port 1125.

The device **1125** may include more or fewer components or may have a different configuration or arrangement of components

[0105] The CPUs **1104** run or execute various instructions compiled by software and applications which are stored in the memory **1102** that perform various functions on the device **1125**. The RF circuitry **1106** receives and sends RF signals. The RF circuitry **1106** converts electrical signals to/from electromagnetic signals and communicates with communications networks **150** and **130** and other communication devices via the electromagnetic signals. The RF circuitry may be comprised of but not limited to an antenna system, a tuner, a digital signal processor, an analogue signal processor, various CODECs, a SIM card, memory, amplifiers, an oscillator and a transceiver. The wireless communication components may use a plurality of standard industry protocols such as Global System for Mobile Communication (“GSM”), Voice over internet protocol (“VOIP”), long-term evolution (“LTE”), code division multiple access (“CDMA”), Wireless Fidelity (“WiFi”), Bluetooth, Post office Protocol (“POP”), instant messaging, Enhanced Data GSM Environment (“EDGE”), short message service (“SMS”), or other communication protocol invented or not yet invented as of the filing or publish date of this document.

[0106] The input/output subsystem **1110** couples with input/output peripherals **1105** and other control devices **1111** and other laser projection systems **1114** to control the device **1125**. The laser projection system **1114** and camera **1113** take infrared tracking information feedback from the user **120** into the peripheral interface **1105** and CPU **1104** to combine the data with instructions in the CPU **1104** and memory **1102** that provide an iterative instruction for the graphical user interface which is displayed in the waveguide lens **240** or **210** after comparison with information in the memory from the database server **260**. The input control devices **1111** may be controlled by user **120** movements that are recorded by the laser projection system **1114** and camera **1113**. The input control devices **1111** may include instructions from the user **110** movements based on interactions with the graphical user interface module that is a hologram **460** in the waveguide lens **350** or image on a multi-form factor CPU device **120**. Holograms **460** may take the form of representations of such things as graphical user interface modules which represent virtual keyboards, voice recognition, translation services, physical buttons, dials, sliders, joysticks, video game controllers, physical sporting equipment **1091**, user **1050**, comparisons of the user **1050** to a professional athlete **1080** or inventor **980** or author **880** or chef **780** or actress **680** or actor **690** or a musician **590**, fashion apparel designer **980**, weapons, cooking utensils **780**, musical instruments **580**, microphones, tools, books **880**, movies **660**, music **580**, ordering food **1360** or drink **1380** with geofence location services, or ordering clothing **1460** or **1490**, ordering retail goods in a virtual store **1460** or **1490**, comparing the user **1591** and **1590** to a professional athlete **1560** using artificial intelligence on the database server **160** through interaction with the device **140** through the wireless network **150** or **130**, virtual shopping **1225**, virtual restaurant drive thru **1224** or other equipment for completing tasks.

[0107] The audio circuitry **1108**, one or more speakers **1107** and **1115** and the microphone **1119** provide an audio interface between the user and the device **1125**. The audio circuitry **1108** receives audio data from the peripherals

interface **1105**, converting the data to an electrical signal, and transmits the electrical signal to the speakers **1107** and **1115**. The speakers **1107** and **1115** convert the electrical signals to human audible sound waves which are mechanotransduced into electrical impulses along auditory nerve fibers and further processed into the brain as neural signals. The audio circuitry **1108** also receives electrical signals converted by the microphone **1109** from sound waves. The audio circuitry **1108** converts the electrical signal to audio data and transmits the audio data to the peripherals interface **1105** for processing. Audio data may be retrieved and/or transmitted to memory **1102** and/or the RF circuitry **1106** by the peripherals interface **1105**. In some embodiments the RF circuitry may produce ultra-high frequency waves that transmit to wireless headphones which then convert the electrical signals to human audible sound waves which are mechanotransduced into electrical impulses along auditory nerve fibers and further processed into the brain as neural signals.

[0108] In some embodiments, the graphical user interface hologram objects **460**, **592**, **660**, **760**, **860**, **960**, **1060**, **1360**, **1492**, **1592** and other objects and representations of humans or objects interact with the user **110** through the general CPU projection system **120** or laser projection system **1114** and camera **1113** take infrared tracking information feedback from the user **120** into the peripheral interface **1105** and CPU **1104** to combine the data with instructions in the CPU **1104** and memory **1102** that provide an iterative instruction for the graphical user interface which is displayed in the waveguide lens **490** or **410** after comparison with information in the memory from the database server **160**. Both a first person and third person omniscient perspective mode are available due to the remote separation of the camera **1113** and laser projection system from the waveguide lens **490**. The user **1550** may compare their movement **1590** from a third person omniscient perspective to the movements of a professional athlete **1560**. The artificial intelligence algorithms on the network **150** and database server **160** provide real time analytical feedback to the user **110** on the biomechanical motion differences between the user **1550** and professional athlete **1590**.

[0109] The device **1125** also includes a power supply **1117** and battery **1118** for powering the various components. The USB port **1125** may be used for providing power to the battery **1118** for storage of power.

[0110] Optical sensors **1116** are used in conjunction with the camera **1113** and laser projection system **1114** to capture images and movements by the user **110** and its environment **164** to capture images or video. If other users **180** are near the user **110**, both users may couple to the device **120** utilizing the laser projection system **1114**, RF circuitry **1106** and optical sensors **1116** to allow both users **175** and **190** or a plurality of users to view the same digital projection which then reduces the technological problem of asymmetric information or the “are you recording me” syndrome and assimilates the technology into more common social conventions and unwritten trust contracts.

[0111] The location sensor **1123** couples with the peripherals interface **1105** or input/output subsystem **1110** to disable the device if the device **1125** is placed in a pocket, purse or other dark area to prevent unnecessary power loss when the device **1125** is not being used.

[0112] The device **1125** may also utilize data from an accelerometer **1121** to assist in the detection of user motion in addition to the infrared laser light projection system to

more efficiently process the location of the user 120 in relation to the device 120 and other objects 660 projected by the laser light projection system 1114 to the waveguide lens 670.

[0113] In some embodiments, FIG. 12 the software instructions stored in the memory 1102 may include an operating system (LINUX, OS X, WINDOWS, UNIX, or a proprietary operating system) of instructions of various graphical user interfaces 592, 660, 760, 860, 960, 1060 or other variations which include instructions for object hologram embodiments of a calendar 1201, photos 1212, camera 1212, videos 1209, maps 1211, weather 1202, credit cards 1215, banking 1215, crypto currency 1215, notes, clocks 1213, music 1206, application hosting servers 1220, settings 1220, physical fitness 1203, news 1216, video conferencing 1209, home security 1208, home lighting 1208, home watering systems 1208, home energy 1208 or temperature settings 1208, home cooking 1207, phone 1214, texting services, mail 1218, internet 1217, social networking 1219, blogs 1219, investments 1210, books, television 1209, movies 1209, device location, flashlights, music tuners 1206, airlines 1205, transportation 1205, identification 1219, translation, gaming 1221, real estate 1208, shopping, food 1207, commodities 1215, technology 1217, memberships, applications 1220, web applications 1217, audio media 1206, visual media 1209, mapping or GPS 1211, touch media 1217, general communication 1214, internet 1217, mail 1218, contacts 1219, cloud services 1220, games 1221, translation services 1223, virtual drive through with geofence location services for nearby restaurants to allow advance ordering of food and payment 1224, virtual shopping with custom measurements through infrared scans 1225, etc., and facilitates communication between various hardware and software components. Artificial Intelligence algorithms on the network 150 and database server 160 provide iterative analytical feedback to the user 110. Software applications are not limited to the aforementioned embodiments. The operating system includes various software components and/or drivers for controlling and managing general system tasks such as but not limited to memory management, storage device control, power management, etc. . . .)

[0114] Examples of other applications in FIG. 12 that may be stored in memory 1102 include voice and word processing application, JAVA applications, HTML5 or subsequent web version language applications, encryption, digital rights management, voice recognition, human movement recognition, or human electromagnetic impulse recognition. In conjunction with images projected onto the planar waveguide lens 1030, the mobile CPU device 1125 and laser projection system and infrared tracking system 1114 may be used to manage the calendar 1201 or contacts 1214, including: adding name(s) to the calendar or address book; deleting names from the calendar and address contact list or book; associating names or contacts with phone numbers or emails or social networks or other networks; verifying identity from a network database; sorting names; distributing communication identity for voice, video or hologram communication, third person omniscient analysis 1560 and 1590 with network 150 and 130 database server 160 feedback using artificial intelligence to interact with the user 110.

[0115] In conjunction with RF circuitry 1106, audio circuitry 1108, speakers 1107, microphone 1109, laser projection and infrared detection laser systems 1114 the graphical

user interface may be used to communicate with other users through the hologram connection communication system 1214. Hologram communication may be recorded for delayed delivery or conducted live. The remote recording capability of the recording CPU computing device may allow the user 120 to transmit text like communication as holograms or in script text. The artificial intelligence of the CPU 140 and database 160 may be used to communicate in multiple languages to any user 120 on the network 150. Hologram communication may be used to speak a language such as English and have the receiving user hear the hologram speak in Chinese. The translation module 1223 compiles network neurons to provide phrase mapping across various literary styles of writing in various languages. Phrase mapping is used along with neural networks for translation services 1223. Cooking assisted lessons from famous chefs 190 are on the cooking application 1207 with the ability to provide feedback in cooking technique and recipe variation from artificial intelligence on the network 150 and database server 160.

[0116] In conjunction with laser projection and infrared detection laser systems 1114, optical sensors 1116, camera 1113, microphone 1109, the graphical user interface may be used to capture still images or video (including a video stream) or hologram representation and store them into memory 1102. The user 110 may modify characteristics of a still image or video or hologram or delete them. The user 110 may arrange, modify, manipulate, present, store or delete still images or videos or holograms. The user 110 may play back videos, hologram representations stored in memory 1102 or accessed through the network 150 and multi-dimension map tile database server 160.

[0117] In conjunction with laser projection and infrared detection laser systems 1114, optical sensors 1116, camera 1113, microphone 1109, the graphical user interface may be used to browse the internet module 1217 with traditional still representations, video representation or holographic representation.

[0118] In conjunction with laser projection and infrared detection laser systems 1114, optical sensors 1116, camera 1113, microphone 1109, calendar module 1201, contact module 1219, email module 1218, the graphical user interface may be used to search for a plurality of widgets or modules. In some embodiments a widget or module may include an HTML5 (recent or future version of a Hypertext Markup Language), CSS (cascading style sheets) or JavaScript or any future set of instructions the CPU can process for the holographic representation of the module or CPU device 120 form factor representation of the module and data exchange 5200, 5300, 5400, 5500 for the multi-dimension map tile database 160.

[0119] In conjunction with RF circuitry 1106, audio circuitry 1108, speakers 1107, microphone 1109, GPS receiver 1120, laser projection and infrared detection laser systems 1114 the graphical user interface may utilize the virtual transportation module 1205 which provides mathematical algorithms to minimize cost and transportation time across a variety of transportation systems. One embodiment of the transportation module 1205 utilizes the hub and spoke model which is more efficient than the point to point model. The point to point model consists of 45 routes for a network of N nodes where N=10 destination points. The hub and spoke model in the transportation module 1205 utilizes N-1 routes to optimize on miles driven subject to the constraint

of maximizing persons in each vehicle. The hub and spoke model in the transportation module 1205 utilizes only 9 routes to service all 45 possible point combinations in a system of N=10 destination nodes subject to the constraint of maximizing vehicle capacity.

[0120] In conjunction with RF circuitry 1106, audio circuitry 1108, speakers 1107, microphone 1109, GPS receiver 1120, laser projection and infrared detection laser systems 1114, the graphical user interface may utilize the Shopping module 1225 which provides consumer good design creators the ability to display merchandise with three dimensional holograms. The three dimensional holograms have the ability to show the user 110 in both the first person and third person omniscient perspective where the graphical user interface shows the clothing on the user 110 by utilizing the laser projection and infrared detection laser systems 1114 to detect the current size and shape of the user to appropriately match and size consumer goods in the shopping module with the user 120.

[0121] In conjunction with RF circuitry 1106, audio circuitry 1108, speakers 1107, microphone 1109, GPS receiver 1120, laser projection and infrared detection laser systems 1114, the graphical user interface may utilize the real estate module 1208 to buy or sell houses or rent properties on an exchange based system. The user 120 may buy or sell capacity in a house on a temporary or permanent basis through the real estate module 1208. The graphical user interface utilizes the laser projection and infrared projection system 1114 to display three dimensional hologram renderings and property tours for rent or purchase.

[0122] In conjunction with RF circuitry 1106, audio circuitry 1108, speakers 1107, microphone 1109, GPS receiver 1120, laser projection and infrared detection laser systems 1114, the graphical user interface may utilize the stock trading and commodity, currency and bond module 1210 to buy or sell securities on an exchange based system. The user 110 may tour the factory facilities of an investment with a hologram experience provided by the company who is seeking investment or is publicly or privately traded. The user 110 may participate in three dimensional hologram analyst calls or presentation with the management in real time. The infrared and laser detection system 1114 may record the eye movements and body language of company management to assess risky behavior or lying from the artificial intelligence database server 160 and network 150 to alert the user 110 of potential risk analysis.

[0123] In conjunction with RF circuitry 1106, audio circuitry 1108, speakers 1107, microphone 1109, GPS receiver 1120, laser projection and infrared detection laser systems 1114, the graphical user interface may the weather module 1202 to see hologram renderings of rain, cloud formations, sunrise or sunsets, tornado warnings, hurricane warnings, flood watches, and other weather data relevant to the user 110. The weather module 1202 may synchronize with the user's 120 calendar 1201 to alert the user for activities that will correspond to the users 110 calendar 1201 to alert the user 110 of proper clothing to wear or to reschedule appointments or outside activities that are at odds with the then current forecast in the weather module 1202.

[0124] In conjunction with RF circuitry 1106, audio circuitry 1108, speakers 1107, microphone 1109, GPS receiver 1120, laser projection and infrared detection laser systems 1114, the graphical user interface may be used for gaming and social media module 1221 to link everyday activity and

transactions with helping people in developing areas of the world. Additional description of the module to link everyday transactions with helping people in developing areas of the world can be found in U.S. patent application Ser. No. 15/266,326, "Business exchange transaction method," filed Sep. 15, 2016, the content of which is hereby incorporated by reference in its entirety.

[0125] In conjunction with RF circuitry 1106, audio circuitry 1108, speakers 1107, microphone 1109, GPS receiver 1120, laser projection and infrared detection laser systems 1114, the graphical user interface may be used for listening to music with the music module 1206 with a live band in the room. The holograms of band members and instruments may be interactive with the laser projection and infrared detection laser system 1114 to include the user 110 in the band as a singer or musician. Artificial intelligence feedback from the database server 160 and network 150 may provide the user with interactive feedback and dialogue with band members. The camera 1113 may also record renderings of the user 591 performing with the band for posting on social media or local or cloud based network platforms. In some embodiments, the content of the multi-dimension map tile database 160 may include the environment of a plurality of users 110 on the network 150. In some embodiments, natural language processors in the rendering engine 163 and multi-dimension map tile database 160 may present virtual backgrounds which have been linked by the proxy database and multi-dimension map tile database 160 to the natural language processing instructions in the rendering engine 163. In some embodiments the natural language processing interface instructions may render virtual environments 164 and virtual network user representations 175, 180, 190, 110 of the social network and rendering engine 163 for the virtual trip sequence 205, 207, 206, 208, 209. In some embodiments, a user 110 may upload content for the multi-dimension map tile database 160 through the data exchange 5200, 5300, 5400, 5500 method.

[0126] In some embodiments, FIGS. 13A and 13B, in conjunction with RF circuitry 1106, audio circuitry 1108, speakers 1107, microphone 1109, GPS receiver 1120, laser projection and infrared detection laser systems 1114, the graphical user interface may be used to order food with the cooking and food module 1207 and 1225. The GPS receiver locates prepared and raw ingredient alternative shopping locations within a geofence near the user 1350 where the user 1350 sees three dimensional holograms rendering of the prepared or raw product. In some embodiments, a user 110 may upload restaurant content 1390 for the multi-dimension map tile database 160 through the data exchange 5200, 5300, 5400, 5500 method. The multi-dimension map tile database and rendering engine processing algorithms based on analysis from the user's 1350 blood markers and saliva markers provide mathematically optimized food intake based on the science of the user's 1350 specific body chemistry. Based on the user's 1350 selection of the three dimensional rendering of the food product 1390, the food product 1390 may be delivered to the user's 1350 place of work or residence or another alternative meeting point including but not limited to, the place at which the food was produced or prepared. The transaction for the food product 1390 is connected to the user's 1350 financial account information where the user 1350 stored the information in

the memory 1102 or multi-dimension map tile database server 160 to provide instant payment to the vendor or service provider.

[0127] In some embodiments, FIGS. 14A and 14B, in conjunction with RF circuitry 1106, audio circuitry 1108, speakers 1107, microphone 1109, GPS receiver 1120, laser projection and infrared detection laser systems 1114, the graphical user interface may be used to order custom fit clothing 1460 or consumer goods 1490 based upon the measurements provided by the laser projection and infrared detection laser systems 1114. In some embodiments, a user 110 may upload fashion content 1490 for the multi-dimension map tile database 160 through the data exchange 5200, 5300, 5400, 5500 method. The three dimensional rendering of the clothing or consumer goods has the option to view with a model rendered by the merchant or from a third person omniscient perspective placing the clothing or consumer good on the user 1491 and 1490. Based on the user's 1450 selection of the three dimensional rendering of the clothing 1490 or consumer good 1460, the product may be delivered to the user's 1450 place of work or residence or another alternative meeting point including but not limited to the place at which the product was produced or prepared. The transaction for the product 1490 is connected to the user's 1450 financial account information where the user 1450 stored the information in the memory 1102 or database server 160 to provide instant payment to the vendor or service provider.

[0128] In some embodiments, FIGS. 15A and 15B, in conjunction with RF circuitry 1106, audio circuitry 1108, speakers 1107, microphone 1109, GPS receiver 1120, laser projection and infrared detection laser systems 1114, the graphical user interface may be used to perform analysis on the biomechanical movements of the user 1550 or 1590 or 1591 compared to the movements of a professional athlete 1560 or trained professional 1560 based upon the measurements of the user's 1590 movements provided by the laser projection and infrared detection laser systems 1114 and in contrast to the movements of the trained professional 1560. In some embodiments, a user 110 may upload athletic movement and biomechanic movement content 1390 for the multi-dimension map tile database 160 through the data exchange 5200, 5300, 5400, 5500 method. The change analysis between the two three dimensional holographic renderings are geared towards competitive training and instruction in any given field of athletics, music, work or other trained skill. The three dimensional rendering of the trained professional has the option to view stand alone or from a third person omniscient perspective placing the trained professional hologram on the user 1591 and 1590. Based on the user's 1550 movement of the three dimensional rendering of the trained professional 1560, an instructive video may be rendered for the user 1550 or for the user 1550 to post to social media or another cloud based network subject to copyright laws.

[0129] FIG. 1600 illustrates an exemplary user interface 1601 for selecting virtual travel modes for the virtual environments 164 as a single dimension of the multi-dimension map tile database 160 and associated data exchange 5200, 5300, 5400, 5500 on a portable multifunction device in accordance with some embodiments. In some embodiments, the user interface 1601 includes the following elements, or a subset or superset thereof:

[0130] virtual hub and virtual travel path 205 unit modes 1610 (a data transformation);

[0131] setting button 1640 to transmit the virtual hub and virtual travel path community linked virtual hub transmission capacity unit modes 1610;

[0132] hamburger button 1670 to instruct the GUI 1610 to take the user 110 to the menu screen.

[0133] In some embodiments, user interface 1610 may be used by the user 110 to select a plurality of virtual hub and virtual travel modes for the virtual travel path 205 community linked virtual hub transformed transmission capacity unit security modes 1610 specifications. In some embodiments, virtual travel path and virtual environment community linked virtual hub transmission capacity unit mode selections 1610 may include a subset or superset thereof: virtual 1611; air 1612; autonomous vehicle 1613; bike 1614; boat 1615; bus 1616; drone 1617; hand glider 1618; motor-cycle 1619; moped and scooter 1620; shuttle 1621; space 1622; subway 1623; underwater fish mode 1624; train 1625; underwater shark mode 1626; air eagle mode 1627; t-rex dinosaur mode 1628; in person mode 1629; automobile 1630. In some embodiments, virtual travel hub community linked transmission capacity unit modes are simply that a user 110 would have a virtual transmission or travel capacity unit on their t-rex dinosaur mode 1628 or underwater fish mode 1624 as examples, but not limiting by example. In some embodiments, the user 110 may bid on in person 1629 or data export capacity 1628 in any mode or multi-modal of transformed virtual social network travel rendering community linked transmission or virtual travel capacity between a combination of virtual travel capacity community linked transmission hub locations. In some embodiments, the user 110 may use one or multiple modes of virtual travel capacity community linked transmission between a combination of virtual travel capacity community linked virtual transmission hub capacity points. In some embodiments, the user 110, may contact the "set" button 1640 to transmit the transformed virtual travel capacity community linked transmission or virtual travel capacity unit specification mode data by using the GUI 1610 may instantiate instructions in the memory of the mobile computing device 1610 which then transmits virtual travel capacity community linked transmission or virtual travel capacity data 241 through the network 150 or wireless GPS network 130 to call upon instruction routines and instruction sub-routines on the virtual travel capacity community linked transmission forward market multi-dimension map tile database server 160, proxy dimension database server 161, network member database server 3050, virtual travel capacity community route processor 3085, virtual hub database server 3080, and memory which all interface together to make one system which may deliver virtual travel path data and backgrounds community linked transmission or virtual travel capacity units to users 110 from and to a plurality of virtual hubs 3030, 3040, 3020, 3010 with a plurality of specifications at specific market prices on the data exchange processors 5200, 5300, 5400, 5500. In some embodiments, the plurality of virtual travel modes 1610 may render in a plurality of virtual environments 164 provided by the multi-user network 150 data exchanges 5200, 5300, 5400, 5500.

[0134] FIG. 17 illustrates an exemplary virtual trip user interface 1710 with location information between the two users and the suggested virtual trip path between two multi-dimensional spaces in the multi-dimension map tile

database **160**. In some embodiments, a multi-form factor CPU device may be in the form of a portable multifunction device such as is illustrated in **1701**, but not limited to this exemplary form factor. In some embodiments, a user **110** may select a topic or person or subject with then may have associated multi-dimension vector and matrix coordinates in the multi-dimension map tile database **160**. In some embodiments, the dimension in the multi-dimension map tile database may be comprised of latitude, longitude and altitude coordinate vectors **1720** as a physical or virtual address as well as a plurality of other dimensions. In some embodiments, a virtual time exchange may arrange a meeting between two more users **110** using processes and methods described in U.S. provisional application Ser. No. 63,027,344, "Time Interval Geolocation community objects with price time priority queues for transformed time interval geolocation units", filed on May 19, 2020, which is hereby incorporated by reference in its entirety. As an example, but not limiting by example the time exchange may associate a virtual pick up address **1720** and a virtual drop off address **1730** for the virtual trip between two locations for users **110** on the social network. In some embodiments, the map location elements of the user interface **1710** may be adjusted or scrolled to change the virtual points or to explore other activity around the virtual locations **1760**, **1750**.

[0135] FIG. **18** illustrates an exemplary virtual trip user interface constraint settings **1810** with location information between the two users and the suggested virtual trip path between two multi-dimensional spaces in the multi-dimension map tile database **160**. In some embodiments, the user interface **1810** on a multi-form factor plurality of devices **120** may toggle a plurality of constraints to the virtual trip and virtual trip background **164** such as cheapest mode subject **1811**, single mode **1812**, multi-mode **1813**, fastest subject mode **1814**, most scenic virtual route **1815**, highest rated virtual trip background rendering **1816**, most available virtual trip background **1817**, highest volume virtual trip background **1818**, most frequent virtual trip background **1819**, service level for virtual trip background **1820**, security and safety level setting for virtual trip background **1821** and group restriction constraints **1822**. In some embodiments, the user interface **1810** may including fixing the settings **1840** and moving to the application menu through the application menu button **1870** on the user interface **1810**. In some embodiments, the user **110** may select the most scenic **1815** virtual travel route for a meeting as defined by other users in the rating system to explore new methods of taking a virtual trip such as a voyage to the moon on the way to Beijing, China from New York, New York with a plurality of users on the network. In yet other embodiments, the user **110** may select multi-mode **1813** which may link multiple trip methods such as eagle view **1627** with fish mode **1624** with hand glider mode **1618** on the way from Paris, France to Berlin, Germany with a plurality of users **110** on the network **150**. In some embodiments, users **110** may select security mode **1821** for end to end encryption or group restricted mode **1822** which would not allow other users to join a specified trip or virtual experience on the network **150**.

[0136] FIG. **19** illustrates an exemplary multi-node and multi-dimension vector matrix of coordinates on the multi-dimension map tile database **160**. In some embodiments, certain configurations of the system may provide for multi-stop trips with latitude, longitude and altitude coordinates **1913**, **1910**, **1902**, **1905**, **1907** which may also combine new

dimensions such as a sound tile dimension vector to add the sound of walking in the woods if that element were requested in the multi-dimension map tile database **160**. Pluralities of dimensions, modes, settings, paths or other system combinations may be mixed and matched by the rendering engine **163** from the multi-dimension map tile database **160** to render the experience **164**.

[0137] FIG. **20** illustrates an exemplary check in and security database configuration **2000** for a virtual background trip community linked transmission or virtual background trip unit multi layered network node topology in one exemplary implementation of participating, transacting and/or trading transformed virtual background trip community linked transmission or virtual background trip capacity units or securities in accordance with some embodiments. In some embodiments, the multi layered network node topology of participating, transacting and/or trading virtual background trip community linked transmission or virtual background trip capacity configuration **2000** includes the following security configuration elements, or a subset or superset thereof:

- [0138] exemplary user interface **2001**;
- [0139] exemplary checkin **2050** for multi-factor authentication **2050**;
- [0140] exemplary user interface menu **2070**;
- [0141] exemplary multi-factor verification of the seller of the virtual unit **2051**;
- [0142] exemplary multi-factor verification of the buyer of the virtual unit **2052**;
- [0143] exemplary user **2010**;
- [0144] exemplary fingerprint scan **2020** of a buyer and seller user;
- [0145] exemplary facial recognition or retina scan of a buyer and seller user **2030**;
- [0146] exemplary virtual trip community linked seller transport or virtual trip or transport seller unit user interface **2051** to confirm identity verification against a plurality of crime databases;
- [0147] exemplary virtual trip community linked passenger unit or virtual trip unit user interface **2052** to confirm identity verification against a plurality of crime databases;
- [0148] exemplary handshake verification user interface **2053** to confirm both buyer and seller of virtual trip community linked transmission or virtual trip units were correctly verified against crime databases;

[0149] In some embodiments, a plurality of crime databases UCR Database **2854**, State and Province Database **2855**, NIBRS database **2856**, INTERPOL database **2857**, API/ABC database **2860**, National database **2858**, Internal system database **2859** are used to confirm a user **110**, has been confirmed not to have criminal history in accordance with instructions on the method and system. In some embodiments, virtual trip community linked transmission or virtual trip unit security may be a subset or superset of the aforementioned in the formation of an open forward market auction for a multi layered network node topology for a forward market of virtual trip community linked transmission and virtual trip units. Such security checks are standard in airports, but they are not automated and they are not utilized in other modes of transmission which degrades the overall safety of other transmission methods if they are not utilized. In some embodiments, the check in instructions may reject a user from confirmed verified transmission if

they fail the plurality of safety checks. In some embodiments, confirmed no crime history users **110** do not have activity reported in the plurality of crime databases UCR Database **2854**, State and Province Database **2855**, NIBRS database **2856**, INTERPOL database **2857**, API/ABC database **2860**, National database **2858**, Internal system database **2859** and are confirmed to virtual trip community linked transport verified status **2853** in the system.

[0150] FIG. 21 illustrates an exemplary virtual delivery and pick up status configuration **2100** once a virtual trip community linked transmission or virtual trip unit delivery has started in one exemplary implementation of participating, transacting and/or trading virtual trip community linked transmission or virtual trip capacity units in accordance with some embodiments. In some embodiments, the delivery and pick up status configuration **2100** includes the following elements, or a subset or superset thereof:

- [0151] computing device unit GUI **2101** to display method of multi layered network node topology for virtual trip community linked forward market of transmission and virtual trip data units;
- [0152] hamburger menu toggle **2170** to move between different application configurations;
- [0153] virtual trip community linked virtual Hub 1 pickup address and virtual trip community linked Virtual Hub 2 destination address at a transformed contract specification with regards to quality, day, date and time **2103** of delivery of a transmission or virtual trip data unit;
- [0154] trip status of started of virtual trip data community linked transmission or virtual trip data unit or security **2102**;
- [0155] finish trip buyer or virtual trip data status for virtual trip data community linked transmission unit **2104** once a virtual trip data community linked transmission or virtual trip data unit has been delivered;
- [0156] messaging texts and instructions between users to make ingest pick-up, on-going route status and delivery complete of virtual trip data community linked transmission or virtual trip data capacity units **2105**;
- [0157] call between system users with number masking for privacy security **2106**;
- [0158] GPS map location of user **2109** who is a user or if virtual trip data community linked virtual trip data, user location **2109**;
- [0159] GPS map location of user **2108** who is a user or if virtual trip data community linked virtual trip data, carrier unit location **2108**;
- [0160] GPS map of transmission or virtual trip data unit delivery and pickup or ingest **2110**;
- [0161] texting message window for virtual trip data or virtual trip data community linked transmission unit communication between users **2112**;
- [0162] starting point of virtual hub for forward virtual trip data community linked transmission or virtual trip data units **2107**;
- [0163] security button to report security issues to 911 and system database **2111**;
- [0164] drop off address for delivery of user or virtual trip data for transmission or virtual trip data unit **2111**.
- [0165] In some embodiments, the GUI **210** transmits delivery instructions to the users **110** to help the user have a rendering or virtual map of their virtual or actual GPS location **2109** relative to the selling user **2108** of trans-

formed virtual trip data community linked virtual trip data or transmission units or securities. In some embodiments, the GUI **210** displays the trips status such as Started **2102** status, the trip status may include subsets or supersets of various status conditions such as PickUp, Started, leaving, on-going, in-progress, arriving, arrived or a plurality of other trip status conditions. In some embodiments, the trip view of the GUI **210** may include a Finish **2104** button to confirm a user or virtual trip data community linked virtual trip data transmission unit has been delivered or completed by the virtual trip data community linked transmission unit object which could be a virtual environment, wire, home, business, car, airplane, autonomous vehicle, bike, boat, ship, bus, drone, limo, motorcycle, moped, shuttle, spaceship, subway, taxi, train, cargo or other types of transmission modes. In some embodiments, the user **110** may transmit a message using the message **2105** button which may transmit audio, visual or text messages between users **110**, **2109**, **2108**. In some embodiments, the users **110**, **2109**, **2109** may call each other using the call **2106** button to communicate pickup or delivery instructions or other necessary communication. In some embodiments, a user **110**, **2109**, **2108** may message another user **110**, **2109**, **2108** to communicate using the Message-User window **2112** which may utilize visual, audio or text communication modes as well as log a message history between users. In some embodiments the users **110**, **2109**, **2108** may toggle to other modes of the application using the menu hamburger button **2170**. In some embodiments the GPS display of a map with the relative position of a transformed virtual trip data community linked transmission or virtual trip data unit or security seller **2108** and a transformed virtual trip data community linked transmission or virtual trip data unit or security buyer **2109** are displayed to help users **110** understand each others relative position and location on a map **2110**. In some embodiments the GPS location of the virtual trip data community linked transmission and virtual trip data unit seller **2108** and virtual trip data community linked transmission or virtual trip data unit buyer **2109** are tracked in real time with location updates on the map **2110**.

[0166] FIG. 22 illustrates an exemplary delivery and pick up status configuration **2200** once a transmission or virtual trip data unit delivery is ongoing in one exemplary implementation of participating, transacting and/or trading transformed virtual trip data community linked transmission or virtual trip data capacity units or securities in accordance with some embodiments. In some embodiments, the delivery and pick up status configuration **2200** includes the following elements, or a subset or superset thereof:

- [0167] computing device unit GUI **2201** to display method of multi layered network node topology for forward market of virtual trip data community linked transmission and virtual trip data units;
- [0168] hamburger menu toggle **2270** to move between different application configurations;
- [0169] virtual trip data community linked virtual Hub 1 pickup or ingest address and virtual trip data community linked virtual Hub 2 destination or delivery address at a contract specification with regards to quality, day, date and time **2201** of delivery of a virtual trip data community linked transmission or virtual trip data unit;
- [0170] trip status of ongoing for virtual trip data community linked transmission or virtual trip data unit **2202**;

[0171] finish trip passenger or virtual trip data status button for virtual trip data community linked transmission unit **2203** once a virtual trip data community linked transmission or virtual trip data unit has been delivered;

[0172] messaging texts and instructions between users to make pick-up or ingest, on-going route status and delivery complete of virtual trip data community linked transmission or virtual trip data capacity units **2204**;

[0173] call between system users with number masking for privacy security **2205**;

[0174] GPS map location of user **2209** who is a rider or if virtual trip data community linked virtual trip data, user location **2209**;

[0175] GPS map location of user **2208** who is a driver or if virtual trip data community linked virtual trip data, carrier unit location **2207**;

[0176] GPS map of virtual trip data community linked transmission or virtual trip data unit delivery and pickup or ingest **2206**;

[0177] texting message window for virtual trip data community linked virtual trip data or transmission unit communication between users **2211**;

[0178] starting point of virtual hub for forward virtual trip data community linked transmission or virtual trip data units **2206**;

[0179] security button to report and record security issues to 911 and system database **2210**;

[0180] drop off address for delivery of passenger or virtual trip data community linked virtual trip data for transmission or virtual trip data unit **2212**.

[0181] In some embodiments, the GUI **210** transmits delivery instructions to the users **110** to help the user **110** have a rendering or map of their GPS location **2207** relative to the selling user **2208** of virtual trip data community linked virtual trip data or transmission units. In some embodiments, the GUI **2201** displays the trips status such as On-Going **2202** status, the trip status may include subsets or supersets of various status conditions such as PickUp or ingest, Started, leaving, on-going, in-progress, arriving, arrived or a plurality of other trip status conditions. In some embodiments, the trip view of the GUI **2201** may include a Finish **2203** button to confirm a passenger or virtual trip data community linked virtual trip data transmission unit or security has been delivered or completed by the transmission unit object which could be a wire, home, business, car, airplane, autonomous vehicle, bike, boat, ship, bus, drone, limo, motorcycle, moped, shuttle, spaceship, subway, taxi, train, cargo or other types of transmission modes. In some embodiments, the user **110** may transmit a message using the message **2204** button which may transmit audio, visual or text messages between users **110**, **2207**, **2208**. In some embodiments, the users **110**, **2207**, **2208** may call each other using the call **2205** button to communicate pickup or delivery instructions or other necessary communication. In some embodiments, a user **110**, **2207**, **2208** may message another user **110**, **2207**, **2208** to communicate using the Message-User window **2211** which may utilize visual, audio or text communication modes as well as log a message history between users **110**, **2207**, **2208**. In some embodiments the users **110**, **2207**, **2208** may toggle to other modes of the application using the menu hamburger button **2270**. In some embodiments the GPS display of a map with the relative position of a virtual trip data community linked transmission

or virtual trip data unit seller **2208** and a virtual trip data community linked transmission or virtual trip data unit buyer **2207** are displayed to help users **110** understand each other's relative position and location on a map **2209**. In some embodiments the GPS location of the virtual trip data community linked transmission and virtual trip data unit seller **2208** and virtual trip data community linked transmission or virtual trip data unit buyer **2207** are tracked in real time with location updates on the map **2209**. In some embodiments, the GUI **210** may display the delivery or Drop Off Address **2212** of the virtual trip data community linked transmission or virtual trip data unit. In some embodiments a user **110**, **2207**, **2208** may use a 911 button **2210** to submit a recording to the system servers and to authorities who are connected to the system if anything has occurred that may compromise the security of any user or virtual trip data community linked transmission unit.

[0182] FIGS. **23A** and **23B** illustrates an exemplary user interface for a plurality of virtual rooms that have been rendered by the rendering engine **163** from the multi-dimension map tile database to a virtual, mixed, augmented or rendered background reality virtual trip data environment **164** to a multi-form factor CPU device **120**. In some embodiments, a user **2304** may configure the rendering engine **163** to display to one single panel **2302** or structured panoramic multi-panel views **2301**, **2302**, **2303** which may take the form of flat surface panels, curved surface panels, holographic display panels in glasses or head mounted devices or other computing devices. In some embodiments, a user **2304** may invite multiple users **2308**, **2306**, **2309** who may each have disparate relative positions in the multi-dimension map tile database so that the rendering engine **163** places the virtual representations in different vector and matrix coordinate positions. In some embodiments, the rendered virtual background **164** may have a plurality of virtual objects from the multi-dimension map tile database **160** such as by example, but not limiting by example, mountains **2311**, trees **2305**, pathways **2307**, oak trees **2310** or many other virtual objects which have been obtained in the multi-dimension map tile database **160** through the data import and export exchange **5200**, **5300**, **5400**, **5500**. In yet other embodiments, such as rendered in FIG. **23B**, the virtual environment may be displayed on a plurality of panels **2313**, **2315**, **2314** or a single form factor panel **120** or augmented, mixed and virtual reality devices **120**. In some embodiments, the virtual trip background **164** may render pluralities of flowers **2312**, mountains **2320**, trees **2321**, distant mountains **2319**, pathways or roadways **2318** with a plurality of users participating in a plurality of activities such as running **2317** or bicycling **2316** or a plurality of other activities over a network **150** of users **2317**, **2316**.

[0183] FIG. **24** illustrates an exemplary delivery and pick up configuration **2400** for a virtual trip data community linked transmission or virtual trip data unit multi layered network node topology in one exemplary implementation of participating, transacting and/or trading virtual trip data community linked transmission or virtual trip data capacity units in accordance with some embodiments. In some embodiments, the multi layered network node topology of participating, transacting and/or trading virtual trip data community linked transmission or virtual trip data capacity configuration **2400** includes the following elements, or a subset or superset thereof:

[0184] computing device unit GUI **2420** to display method of multi layered network node topology for forward market of virtual trip data community linked transmission and virtual trip data units;

[0185] hamburger menu toggle **2470** to move between different application configurations;

[0186] from node starting point **2401** of a multi layered network node topology for forward market of virtual trip data community linked transmission and virtual trip data units;

[0187] to or destination node ending point **2402** of a multi layered network node topology for forward market of virtual trip data community linked transmission and virtual trip data units;

[0188] date module **2403** in GUI **210** of an auction for a multi layered network node topology for virtual trip data community linked forward market of transformed transmission and virtual trip data units or securities;

[0189] time module **2404** in GUI **2470** of pickup and delivery of an auction for a multi layered network node topology for virtual trip data community linked forward market of transmission and virtual trip data units;

[0190] go button **2405** to form a price-time priority queue auction for a multi layered network node topology for virtual trip data community linked forward market of transformed transmission and virtual trip data units or securities;

[0191] my meetings button **2406** to quickly obtain common From **2401** or To **2402** points in a price-time priority auction for a multi layered network node topology for virtual trip data community linked forward market of transformed transmission and virtual trip data units for a user on the system;

[0192] multi-hub network for multi-dimension map tile database **2407**, **2408**, **2409**, **2410** which may form a single dual node price-time priority auction **2407** to **2408** or **2407** to **2410** or any possible node combination or a multi-node auction series for a multi layered network node topology for virtual trip data community linked forward market of transmission and virtual trip data units for a user on the system.

[0193] In some embodiments, the GUI **210** transmits a From node **2401** and To node **2402** with instructions to the users **110** with a specific date **2403** and time **2404** of a multi layered network node topology for forward market of transformed virtual trip data community linked transmission and virtual trip data units for a user on the system to perform an auction by pressing the Go button **2405**. The system may use a plurality of constraints such as but not limited by cheapest route **1811**, single mode of virtual trip data community linked transmission **1812**, multi type method mode of virtual trip data community linked transmission **1813**, fastest route **1814**, most scenic route **1815**, highest rated route or highest rated transmission **1816**, most available transmission route **1817**, highest volume route **1818**, most frequent route **1819**, service level route **1820**, security and safety of route **1821**, group restricted email or group criteria **1822** to use any two node points **2407**, **2408**, **2409**, **2410** or any combination of points **2407**, **2408**, **2409**, **2410**. In some embodiments the system may use no constraint, one constraint or a plurality of constraints to allow the user **110** to participate, transact or trade in a multi layered network node topology for virtual trip data community linked forward market of transmission and virtual trip data units in a price-time priority queue

auction. In some embodiments the price-time priority queue auction for virtual trip data community linked forward market transformed transmission or virtual trip data units or securities may be comprised of an auction between only two points or a plurality of points subject to a plurality of constraints. In some embodiments the from or starting point or ingest virtual hub may be **2407**, but the system selects an auction between **2408** and **2409** rather than starting at **2407** because one or more constraints were selected to frame the price-time priority queue auction for virtual trip data community linked forward market transmission or virtual trip data units. In some embodiments, an auction may be comprised of multiple modes of virtual trip data community linked transmission comprising a vehicle virtual trip data community linked transmission or virtual trip data unit auction between **2407** and **2408** points, followed by an virtual trip data community linked solar transmission or virtual trip data unit auction between **2408** and **2409**, followed by an virtual trip data community linked wind auction between **2410** and **2409** for virtual trip data community linked transmission or virtual trip data units. In some embodiments the various plurality of auctions may be displayed as one price-time priority auction or a series of price-time priority auctions. In some embodiments, auctions for a multi layered network node topology for a virtual trip data community linked forward market of transmission and virtual trip data units may consist of any subset or superset of the aforementioned possibilities including any constraints **1800** or any plurality of modes **1600**.

[0194] FIG. **25** illustrates an exemplary setting configuration **2500** for an virtual trip data community linked transmission or virtual trip data unit multi layered network node topology in one exemplary implementation of participating, transacting and/or trading virtual trip data community linked transmission or virtual trip data capacity units in accordance with some embodiments. In some embodiments, the multi layered network node topology of participating, transacting and/or trading virtual trip data community linked transmission or virtual trip data capacity configuration **2500** includes the following setting elements, or a subset or superset thereof:

[0195] computing device unit GUI **2501** to display method of multi layered network node topology for forward market of transformed virtual trip data community linked transmission and virtual trip data units or securities.

[0196] hamburger menu toggle **2502** to move between different application configurations;

[0197] open markets setting toggle **2510** which allows a user to see all market participants of a given auction on a multi layered network node topology for a forward market of transformed virtual trip data community linked transmission and virtual trip data units or securities;

[0198] restricted markets setting By Organization **2520**, By Sex **2530**, By Rating **2540**, By Security **2550** or by any other restriction the user **110** defines which limit the price-time priority queue auction participants for the user;

[0199] privacy settings which restrict push notifications **2560**, location information **2570**; Sync with contacts **2580**, or other privacy settings;

[0200] In some embodiments, a user **110** may select open markets **2510** which show every participant in a given

auction for a multi layered network node topology for a forward market of virtual trip data community linked transmission and virtual trip data units. In some embodiments, participants or users **110** may select to restrict the market view of the GUI such as **400** by organization email **2520** or by sex **2530** or by rating of driver **2540** or rating of user **2540** or by security **2550** or by a plurality of other restrictions but not limited to those restrictions. In some embodiments, users **110** may change privacy settings which restrict push notifications **2560**, location settings **2570**, Sync with Contacts settings **2580** or a plurality of other settings. In some embodiments, the toggle switches **2510**, **2520**, **2530**, **2540**, **2550**, **2560**, **2570**, **2580** may be set to off or on depending on if they hold a right or left toggle switch position. The restricted market settings **2520**, **2530**, **2540**, **2550** may be a subset or superset of the aforementioned in the formation of an open market price-time priority auction for a multi layered network node topology for a forward market of virtual trip data community linked transmission and virtual trip data units.

[0201] FIG. 26 illustrates an exemplary setting for an inbound data or outbound data configuration **2600** for a transformed virtual trip data community linked transmission or virtual trip data unit multi layered network node topology in one exemplary implementation of participating, transacting and/or trading virtual trip data community linked transmission or virtual trip data capacity units in accordance with some embodiments. In some embodiments, the multi layered network node topology of participating, transacting and/or trading virtual trip data community linked transmission or virtual trip data capacity configuration **2600** includes the following setting for a an inbound data or outbound data elements, or a subset or superset thereof:

[0202] computing device unit GUI **2601** to display method of multi layered network node topology for forward market of virtual trip data community linked transformed transmission and virtual trip data units.

[0203] hamburger menu toggle **2602** to move between different application configurations;

[0204] inbound data or outbound data module **2610** to document the status and position of transformed forward market virtual trip data or virtual trip data community linked transmission units or security;

[0205] inbound data or outbound data or received module **2692** to scan an inbound data or outbound data configuration in the context of a plurality of data sizes such as picture for a single frame, cargo for a multi-frame small video unit or trailer unit for a larger multi-frame video unit or container size for multi-frame video units with multi dimensions and scalars and attributes for the multi-dimension tile map database **160**, or other transformed virtual trip data community linked transmission or virtual trip data unit identifier or security;

[0206] inbound data or outbound data Inbound scan toggle switch **2620** to scan an inbound data or outbound data configuration for the multi-dimension tile map database **160**, or other transformed virtual trip data community linked transmission or virtual trip data unit identifier or security;

[0207] inbound data or outbound data toggle switch **2640** to scan an inbound data or outbound data configuration for the multi-dimension tile map database

160, or other transformed virtual trip data community linked transmission or virtual trip data unit identifier or security;

[0208] trailer battery unit Inbound scan toggle switch **2650** to scan an inbound data or outbound data configuration for the multi-dimension tile map database **160**, or other transformed virtual trip data community linked transmission or virtual trip data unit identifier or security;

[0209] container battery unit Inbound scan toggle switch **2660** to scan an inbound data or outbound data configuration for the multi-dimension tile map database **160**, or other transformed virtual trip data community linked transmission or virtual trip data unit identifier or security;

[0210] an inbound data or outbound data configuration for the multi-dimension tile map database **160** or delivered module **2693** to scan an inbound data or outbound data configuration for the multi-dimension tile map database **160**, or other transformed virtual trip data community linked transmission or virtual trip data unit or security identifier or security;

[0211] an inbound data or outbound data configuration for the multi-dimension tile map database **160** or delivered scan toggle **2670** to scan a an inbound data or outbound data configuration for the multi-dimension tile map database **160**, or other transformed virtual trip data community linked transmission or virtual trip data unit identifier or security;

[0212] an inbound data or outbound data configuration for the multi-dimension tile map database **160** scan toggle **2680** to scan an inbound data or outbound data configuration for the multi-dimension tile map database **160**, or other transformed virtual trip data community linked transmission or virtual trip data unit identifier;

[0213] an inbound data or outbound data configuration for the multi-dimension tile map database **160** scan toggle **2690** to scan an inbound data or outbound data configuration for the multi-dimension tile map database **160**, or other transformed virtual trip data community linked transmission or virtual trip data unit identifier;

[0214] an inbound data or outbound data configuration for the multi-dimension tile map database **160** scan toggle **2691** to scan an inbound data or outbound data configuration for the multi-dimension tile map database **160**, or other transformed virtual trip data community linked transmission or virtual trip data unit identifier.

[0215] In some embodiments, a user **110** may select the package battery or cargo battery unit scan module **2610** to scan or take a picture of an inbound data or outbound data configuration for the multi-dimension tile map database **160** characteristic. In some embodiments, the user **110** may select the inbound Scan/Picture toggle **2620** which captures the identification characteristic which may include QR Codes, Uniform Product Codes, Serial Numbers, an inbound data or outbound data configuration for the multi-dimension tile map database **160** or other an inbound data or outbound data configuration for the multi-dimension tile map database **160** identification characteristics of a an inbound data or outbound data configuration for the multi-dimension tile map database **160** community linked transmission or virtual trip data unit. In some embodiments, inbound cargo may include a larger unit structure than an inbound data or outbound data configuration for the multi-dimension tile

map database **160** such as a very large database or video meta file with multi-dimension tile map database unit with identification characteristics which may include QR Codes, Uniform Product Codes, Serial Numbers, an inbound data or outbound data configuration for the multi-dimension tile map database **160** or other cargo identification characteristics, for such larger units a user **110** may use the Scan an inbound data or outbound data configuration for the multi-dimension tile map database **160** Unit toggle **2640** to capture the an inbound data or outbound data configuration for the multi-dimension tile map database **160** identification characteristic for inbound receipt of the virtual trip data community linked transmission or virtual trip data unit. In some embodiments, an inbound Scan an inbound data or outbound data configuration for the multi-dimension tile map database **160** Unit toggle **2650** option may be used by a user **110** to instruct the system configuration that receipt of a an inbound data or outbound data configuration for the multi-dimension tile map database **160** unit such as an inbound data or outbound data configuration for the multi-dimension tile map database **160** unit, may be scanned to identify the virtual trip data community linked transmission or virtual trip data unit. In some embodiments, an inbound Scan Container Unit **2660** toggle may be utilized to track the receipt or location of an inbound data or outbound data configuration for the multi-dimension tile map database **160** element or virtual object. In some embodiments, a user **110** may select the outbound package or cargo unit scan module **2693** to scan or take a picture of a an inbound data or outbound data configuration for the multi-dimension tile map database **160** object identification code such as a QR code, Uniform Product code, an inbound data or outbound data configuration for the multi-dimension tile map database **160** or other identifying characteristic to confirm delivery to a delivery address of the virtual trip data community linked transmission or virtual trip data unit. In some embodiments, the user **110** may select the outbound Scan/Picture an inbound data or outbound data configuration for the multi-dimension tile map database **160** toggle **2670** which captures the identification characteristic of a package or data structure virtual trip data community linked transmission or virtual trip data unit once the unit is delivered to the delivery address which may be a server location. In some embodiments, cargo may include a larger unit structure such as a plurality of pictures and multi-dimension map tile database elements than a an inbound data or outbound data configuration for the multi-dimension tile map database **160** such as a large database or drone flyover dataset unit with identification characteristics which may include QR Codes, Uniform Product Codes, Serial Numbers, inbound data or outbound data configuration for the multi-dimension tile map database **160** or other cargo identification characteristics, for such larger units a user **110** may use the outbound Scan an inbound data or outbound data configuration for the multi-dimension tile map database **160** toggle **2680** to capture the cargo virtual trip data identification characteristic for outbound receipt of the transformed virtual trip data community linked transmission or virtual trip data unit or security. In some embodiments, an outbound Scan an inbound data or outbound data configuration for the multi-dimension tile map database **160** Unit toggle **2690** option may be used by a user **110** to instruct the system configuration that delivery of a large virtual trip data unit such as an large virtual trip database unit, may be scanned to identify

the virtual trip data community linked transmission or virtual trip data unit and confirm delivery. In some embodiments, the virtual trip data unit **2680** may be installed in a home or business to allow for virtual trip data storage of the virtual trip data community linked unit. In some embodiments, an outbound Scan virtual trip data Unit **2691** toggle may be utilized to track the delivery or location of a shipping virtual trip data which has been delivered. In some embodiments, transformed virtual trip data community linked transmission or virtual trip data units or securities may be a subset or superset of the aforementioned in the formation of an open forward market auction for a multi layered network node topology for a forward market of transformed virtual trip data community linked transmission and virtual trip data units or securities. In some embodiments, CPU units **120** may be placed as dash cameras to ingest data and export to the virtual trip data exchange during the delivery of goods and services using processes described in U.S. patent application Ser. No. 15,877,393, "Electronic forward market exchange for transportation seats and capacity in transportation vehicles and spaces," filed Jan. 18, 2018, which is hereby incorporated by reference in its entirety.

[0216] FIGS. 27A and 27B illustrate exemplary virtual trip data rendering from the virtual trip rendering engine **163** to the virtual, mixed, augmented reality rendered background **164** on multi-form factor CPU devices **120**. In some embodiments, virtual environments may be rendered on a plurality of display devices and sizes of devices **2701**, **2702**, **2703**. In some embodiments, the virtual objects may be participants **2706**, **2707**, **2708**, **2705** in the social network for transactions such as described in U.S. patent application Ser. No. 15,266,326, "Implementations of a computerized business transaction exchange for various users," filed Sep. 15, 2016, which is hereby incorporated by reference in its entirety. In some embodiments, the images and dynamically rendered multi-dimension map tile database my render data from the data exchange **5200**, **5300**, **5400**, **5500** which have been uploaded and processed into the multi-dimension map tile database **160** for further processing with the proxy dimension database server **161** and machine learning missing tile proxy clustering processor **162** for rendering to the multi-geolocation dimension CPU rendering engine **163** to a contextualized configured virtual environment **164**. In some embodiments, the rendered images may include mountains **2709**, paths **2704**, table objects **271** such as shown in FIG. 27A. Similarly, in other embodiments, such as shown in FIG. 27B, rendered images may include emoji virtual objects **2715** of other members of the network **150**. In some embodiments, additional virtual images such as flowers **2717**, paths or roads **2716**, trees **2718** or network members **2714** may be rendered by the multi-dimension CPU rendering engine **163** with dynamic objects which have been placed into the multi-dimension map tile database **160** through the data exchange **5200**, **5300**, **5400**, **5500** which have been uploaded and processed into the multi-dimension map tile database **160** for further processing with the proxy dimension database server **161** and machine learning missing tile proxy clustering processor **162** for rendering to the multi-geolocation dimension CPU rendering engine **163** to a contextualized configured virtual environment **164**.

[0217] FIG. 28 illustrates an exemplary check in and security database configuration **2800** for an virtual trip data community linked transmission or virtual trip data unit multi layered network node topology in one exemplary implemen-

tation of participating, transacting and/or trading transformed virtual trip data community linked transmission or virtual trip data capacity units or securities in accordance with some embodiments. In some embodiments, the multi layered network node topology of participating, transacting and/or trading virtual trip data community linked transmission or virtual trip data capacity configuration **2800** includes the following security configuration elements, or a subset or superset thereof:

- [0218] exemplary uniform crime reporting (“UCR”) database **2854** from international agencies who report crime;
- [0219] exemplary International State or Provincial crime reporting database **2855** from international governments who report crime;
- [0220] exemplary International National Incident Based Reporting System (“NIBRS”) crime reporting database **2856** from international governments who report crime;
- [0221] exemplary Interpol crime reporting database **2857** from international governments who report crime which connects National Central Bureaus (“NCBs”);
- [0222] exemplary International application program interface and ABC (“API/ABC”) crime reporting database **2860** from international governments who report crime;
- [0223] exemplary national crime reporting database **2858** from international governments who report crime;
- [0224] exemplary internal system crime reporting database **2859** from crimes which occurred on system;
- [0225] exemplary facial scan to identify user **2810** against a plurality of crime databases;
- [0226] exemplary fingerprint scan to identify user **2820** against a plurality of crime databases;
- [0227] exemplary photo or photo scan to identify user **2830** against a plurality of crime databases;
- [0228] exemplary voice scan to identify user **2810** against a plurality of crime databases;
- [0229] exemplary Computing device unit GUI **2801** to display method of multi layered network node topology for forward market of virtual trip data community linked transmission and virtual trip data units;
- [0230] hamburger menu toggle **2802** to move between different application configurations;
- [0231] exemplary virtual trip data community linked Driver or Virtual trip data transport or virtual trip data or transport seller unit user interface **2851** to confirm identity verification against a plurality of crime databases;
- [0232] exemplary virtual trip data community linked passenger unit or virtual trip data unit user interface **2852** to confirm identity verification against a plurality of crime databases;
- [0233] exemplary handshake verification user interface **2853** to confirm both buyer and seller of virtual trip data community linked transmission or virtual trip data units were correctly verified against crime databases;
- [0234] In some embodiments, a plurality of crime databases UCR Database **2854**, State and Province Database **2855**, NIBRS database **2856**, INTERPOL database **2857**, API/ABC database **2860**, National database **2858**, Internal system database **2859** are used to confirm a user **110**, has been confirmed not to have criminal history in accordance

with instructions on the method and system. In some embodiments, virtual trip data community linked transmission or virtual trip data unit security may be a subset or superset of the aforementioned in the formation of an open forward market auction for a multi layered network node topology for a forward market of virtual trip data community linked transmission and virtual trip data units. Such security checks are standard in airports, but they are not automated and they are not utilized in other modes of transmission which degrades the overall safety of other transmission methods if they are not utilized. In some embodiments, the check in instructions may reject a user from confirmed verified transmission if they fail the plurality of safety checks. In some embodiments, confirmed no crime history users **110** do not have activity reported in the plurality of crime databases UCR Database **2854**, State and Province Database **2855**, NIBRS database **2856**, INTERPOL database **2857**, API/ABC database **2860**, National database **2858**, Internal system database **2859** and are confirmed to virtual trip data community linked transport verified status **2853** in the system.

[0235] FIG. 29 illustrates an exemplary user accounting configuration **2900** for a transformed virtual trip data community linked transmission or virtual trip data unit or security multi layered network node topology in one exemplary implementation of participating, transacting and/or trading transformed virtual trip data community linked transmission or virtual trip data capacity unit auctions in accordance with some embodiments. In some embodiments, the multi layered network node topology of participating, transacting and/or trading transformed virtual trip data community linked transmission or virtual trip data capacity configuration **2900** includes the following accounting elements, or a subset or superset thereof:

- [0236] computing device unit GUI **2901** to display method of multi layered network node topology for forward market of virtual trip data community linked transmission and virtual trip data units.
- [0237] exemplary hamburger menu toggle **270** to move between different application configurations;
- [0238] exemplary account button **2910** to edit or confirm user account data;
- [0239] exemplary deposit button **2920** to add transaction funds or transaction currency or transaction balances to the user account;
- [0240] exemplary deposit method button **2930** to add transaction funds or transaction currency or transaction balances to the user account through Debit, Credit, Cash, Check, virtual currency, digital currency or a plurality of other payment methods;
- [0241] exemplary withdrawal button **2940** to send transaction funds or transaction currency or transaction balances to the user account in a different institution;
- [0242] exemplary withdrawal method button **2970** to send transaction funds or transaction currency or transaction balances to the user account at a different institution through Debit, Credit, Cash, Check, virtual currency, digital currency or a plurality of other payment methods;
- [0243] exemplary balances button **2950** to confirm user account balances;
- [0244] exemplary tax button **2960** to track user account activity for taxation reporting;

[0245] exemplary month to date tax reporting button **2980**;
 [0246] exemplary year to date tax reporting button **2990**;
 [0247] exemplary prior year tax reporting button **2991**;
 [0248] exemplary “911” security button **2991**;
 [0249] exemplary Network Member Database Server **160**;
 [0250] exemplary cloud and CPU and Network configuration **190** to send and receive Network Member account data.

[0251] In some embodiments, user account **2910** data may be displayed with voice or screen or non-screen computing devices with instructions from the GUI **2901** in accordance with instructions on the method and system. In some embodiments, user deposit **2920** data may be displayed with voice or screen or non-screen computing devices with instructions from the GUI **2901** in accordance with instructions on the method and system. In some embodiments, user deposit method **2930** data such as Debit, Credit, Cash, Check, virtual currency, digital currency or a plurality of other payment methods may be displayed with voice or screen or non-screen computing devices with instructions from the GUI **2901** in accordance with instructions on the method and system. In some embodiments, user withdrawal **2940** data may be displayed with voice or screen or non-screen computing devices with instructions from the GUI **2901** in accordance with instructions on the method and system. In some embodiments, user withdrawal method **2970** data such as Debit, Credit, Cash, Check, virtual currency, digital currency or a plurality of other payment methods may be displayed with voice or screen or non-screen computing devices with instructions from the GUI **2901** in accordance with instructions on the method and system to place money in the system account into a different institution specified by the user **110**. In some embodiments, user balances **2950** data may be displayed with voice or screen or non-screen computing devices with instructions from the GUI **2901** in accordance with instructions on the method and system. In some embodiments, user tax button **2960** data may be displayed with voice or screen or non-screen computing devices with instructions from the GUI **2901** in accordance with instructions on the method and system. In some embodiments, user month to date tax data button **2980**, year to date tax data button **2990**, prior year tax data button **2991** may be displayed with voice or screen or non-screen computing devices with instructions from the GUI **2901** in accordance with instructions on the method and system. In some embodiments, the accounting and tax information may be stored in the Network Member Database Server **2903** and transmitted through the cloud, network and CPUs **150**, **2904** to the GUI computing device **2901**. In some embodiments, transmission or virtual trip data unit accounting and fund interfaces may be a subset or superset of the aforementioned in the formation of an open forward market price-time priority auction for a multi layered network node topology for a forward market of virtual trip data community linked transmission and virtual trip data units.

[0252] FIG. 30 illustrates an exemplary network configuration **3000** for a virtual trip data community linked transmission or virtual trip data unit multi layered network node topology in one exemplary implementation of participating, transacting and/or trading transmission or virtual trip data capacity unit auctions in accordance with some embodi-

ments. In some embodiments, the multi layered network node topology of participating, transacting and/or trading virtual trip data community linked transmission or virtual trip data capacity configuration **3000** includes the following accounting elements, or a subset or superset thereof:

[0253] exemplary wireless GPS Network and Server **3083**;

[0254] exemplary wireless computing device that is audio, video, screen or non-screen interfaced **3082**;

[0255] exemplary Network Member Database Server **3050**;

[0256] exemplary virtual trip data community linked Data Transmission Forward Market Database Server **3060**;

[0257] exemplary virtual trip data community linked Data Transmission Forward Market Database Server **3060**;

[0258] exemplary virtual trip data community linked No Arbitrage Condition Database Server **3070**;

[0259] exemplary virtual trip data community linked Virtual Hub Database Server **3080**;

[0260] exemplary Network, Network Cloud, and local CPUs **3081**;

[0261] exemplary Network Multi Layered Network Virtual Hub Node Topology for forward market virtual trip data community linked transmission of virtual trip data unit price-time priority auctions **3010**, **3020**, **3030**, **3040**.

[0262] In some embodiments, the network topology **3010** may utilize a voice or screen or non-screen computing device **3082** to interface with system and method instructions over a Network and Network Cloud and Networked CPUs **3081** to use instructions on CPUs to order a constrained or unconstrained virtual hub network topology auction over two or more virtual hub nodes **3010**, **3020**, **3030**, **3040** over one or multiple modes of virtual trip data community linked transmission or virtual trip data with instructions and data from the Virtual Hub Database Server **3080**, the No Arbitrage Condition Database Server **3070**, the virtual trip data community linked Transmission Forward Market Database Server **3060**, the Network Member Database Server **3050** and the Wireless GPS Network Server **3083**. Network Data may be displayed with voice or screen or non-screen computing devices with instructions from the GUI **2901** in accordance with instructions on the method and system.

[0263] FIGS. 31A and 31B illustrate an exemplary plurality of views from the multi-dimension map tile data exchange linked database **160**. FIG. 31A illustrates an exemplary three hundred and sixty degree view of hiking with a natural environment with multiple panel views **3101**, **3102**, **3103** from a plurality of multi-form factor CPU devices **120**. In some embodiments, a user **3108** may hike with a plurality of other network **150** members **3109**, **3106**, **3105** through a plurality of scenes such as mountains **3104** or picnic areas in a state park **3110** or down a path in the forest **3107** with many trees **3120**. In some embodiments, an accelerometer **1100** associated with the user **3108** may gauge steps into the virtual environment or movements in hand gestures from the user **3108** may gauge movement or steps or progress into the virtual environment. FIG. 31B illustrates an exemplary telemedicine appointment in a forest virtual environment by a physician using the multi-dimension map tile data exchange linked database **160**. In

some embodiments, device screens 3111,120 may render flowers in a field 3118 or in other embodiments, the rendering engine 163 may display on a multi-function device panel 3111 a patient 3114 on an examination table 3119 with a physician 3113 which are both members of the network 150. In some embodiments, the patient 3114 or physician 3113 may configure the virtual environment 164 as a forest examination with the multi-dimension map tile data exchange linked database 160. In some embodiments, the physician may utilize the multi-dimension map tile data exchange linked database 160 to request patient 3114 medical records and make block chained evaluation comments and analysis and encrypted health record hand offs as in U.S. provisional patent application Ser. No. 63/027,344, "Time interval geolocation community objects with price-time priority queues for transformed time interval geolocation units," filed May 19, 2020, the contents of which are hereby incorporated by reference in their entirety.

[0264] FIGS. 32A and 32B illustrate an exemplary plurality of views from the multi-dimension map tile data exchange linked database 160. FIG. 32A illustrates an exemplary three hundred and sixty degree view of hiking with a natural environment while FIG. 32B illustrates the same view with further steps or progress into the multi-dimension map tile data exchange linked database 160 as rendered with the virtual environment 164. In some embodiments, such as displayed in FIG. 32A, exemplary panels 3201 may display mountains 3210 and additional panels 3202, 3203 may display additional network 150 members 3211, 3207, 3205 in a user 3209 configured virtual environment 164. In some embodiments, the virtual environment 164 may contain trees 3204, 3222 and paths and roadways 3208 as well as incremental scenery 3206. In some embodiments, an accelerometer 1100 associated with the user 3221 may gauge steps into the virtual environment or movements in hand gestures from the user 3221 may gauge movement or steps or progress into the virtual environment. In some embodiments, incremental trees 3217, 3218 may scale from image 3222 which is more distant to image 3218 which is more near as the virtual user subject 3221 approaches the virtual object 3218 in multi-dimension map tile data exchange linked database 160. In some embodiments, incremental network 150 users 3213, 3215 may appear in the virtual environment 164 of the multi-dimension map tile data exchange linked database 160.

[0265] FIGS. 33A and 33B illustrate an exemplary plurality of views from the multi-dimension map tile data exchange linked database 160. FIG. 33A illustrates an exemplary three hundred and sixty degree view of hiking with a natural environment while FIG. 33B illustrates the same view with micro and nano zoom or progress into the multi-dimension map tile data exchange linked database 160 as rendered with the virtual environment 164. In some embodiments, such as displayed in FIG. 33A, exemplary panels 3301 may display mountains and additional panels 3302, 3303 may display additional network 150 members 3305 and 3309 in a user 3308 configured virtual environment 164. In some embodiments, the virtual environment 164 may contain trees 3306, 3304 and paths and roadways as well as incremental tree scenery 3306. In some embodiments, an accelerometer 1100 associated with the user 3308 may gauge steps into the virtual environment or movements in hand gestures from the user 3308 may gauge movement or steps or progress into the virtual environment. In some

embodiments, incremental flowers 3307 may scale from image 3307 which is more distant to image 3314 which is more near or image 3313 which is in micro scale level or image 3315 which is nano zoom level for the same flower 3307 with different scale vectors and matrices 4808 as the virtual user subject 3316 approaches the virtual object 3307 in multi-dimension map tile data exchange linked database 160. In some embodiments, incremental network 150 users 3305, 3309 may appear in the virtual environment 164 of the multi-dimension map tile data exchange linked database 160. In some embodiments, the user 3316 may have bionic eyes to move into matter such as a flower 3307 at scale levels not seen before due to the organization of the multi-dimension map tile data exchange linked database 160 and machine learning missing tile proxy clustering CPU instructions 162 and proxy dimension database server 161.

[0266] FIGS. 34A and 34B illustrate an exemplary plurality of views from the multi-dimension map tile data exchange linked database 160. FIG. 34A illustrates an exemplary three hundred and sixty degree view of hiking with a natural environment while FIG. 34B illustrates the same view with micro and nano zoom or progress into the multi-dimension map tile data exchange linked database 160 as rendered with the virtual environment 164. In some embodiments, such as displayed in FIG. 34A, exemplary panels 3401 may display mountains 3405 and additional panels 3402, 3403 may display additional network 150 members 3404 and 3411 in a user 3404 configured virtual environment 164. In some embodiments, the virtual environment 164 may contain flowers 3406 and paths 3408 and roadways as well as incremental tree scenery 3412. In some embodiments, an accelerometer 1100 associated with the user 3408 may gauge steps into the virtual environment or movements in hand gestures from the user 3404 may gauge movement or steps or progress into the virtual environment. In some embodiments, incremental flowers 3410 may scale from image 3406 which is more distant to image 3417 which is more near or image 3419 which is in micro scale level or image 3418 which is nano zoom level for the same flower 3406 with different scale vectors and matrices 4808 as the virtual user subject 3416 approaches the virtual object 3406 in multi-dimension map tile data exchange linked database 160. In some embodiments, incremental network 150 users 3411 may appear in the virtual environment 164 of the multi-dimension map tile data exchange linked database 160. In some embodiments, the user 3416 may have bionic eyes to move into matter such as a flower 3406 at scale levels not seen before due to the organization of the multi-dimension map tile data exchange linked database 160 and machine learning missing tile proxy clustering CPU instructions 162 and proxy dimension database server 161.

[0267] FIGS. 35A and 35B illustrate an exemplary plurality of views from the multi-dimension map tile data exchange linked database 160. FIG. 35A illustrates an exemplary three hundred and sixty degree view of a lake and ocean view with a natural environment while FIG. 35B illustrates the same view with micro and nano zoom or progress into the water or underwater view from the multi-dimension map tile data exchange linked database 160 as rendered with the virtual environment 164. In some embodiments, such as displayed in FIG. 35A, exemplary panels 3501 may display palm trees 3506, 3507 and additional panels 3503 may display additional network 150 members 3504 in a user 3505 configured virtual environment 164. In

some embodiments, the virtual environment **164** may water views **3506** and network swimmers **3504** and roadways as well as incremental palm tree scenery **3506**. In some embodiments, an accelerometer **1100** associated with the user **3505** may gauge steps or moving underwater into the virtual environment or movements in hand gestures from the user **3505** may gauge movement or steps or progress into the virtual environment. In some embodiments, incremental underwater virtual objects **3517** may scale from image **3516** which is more distant to image **3509** which is more near or image **3518** which is in micro scale level or image **3418** which is nano zoom level for the same fish **3516** with different scale vectors and matrices **4808** as the virtual user subject **3511** approaches the virtual object **3516** in multi-dimension map tile data exchange linked database **160**. In some embodiments, incremental network **150** users **3511** may appear in the virtual environment **164** of the multi-dimension map tile data exchange linked database **160**. In some embodiments, the user **3511** may have bionic eyes to move into matter such as a fish scale **3518** at scale levels not seen before due to the organization of the multi-dimension map tile data exchange linked database **160** and machine learning missing tile proxy clustering CPU instructions **162** and proxy dimension database server **161**. In other embodiments, a user **3505** may request a live stream of a coordinate spot on the map from the multi-dimension map tile data exchange linked database **160**, **4800**, and the user **3505** is a buyer on the data exchange and the user who provides the data to the multi-dimension map tile data exchange linked database **160** is the seller of the view provided by the rendering engine **163**.

[0268] FIGS. **36A** and **36B** illustrate an exemplary plurality of views from the multi-dimension map tile data exchange linked database **160**. FIG. **36A** illustrates an exemplary three hundred and sixty degree view of an eagle altitude view with a natural environment while FIG. **36B** illustrates the same view with altitude variants or progress over positional coordinates from the multi-dimension map tile data exchange linked database **160** as rendered with the virtual environment **164**. In some embodiments, such as displayed in FIG. **36A**, exemplary panels **3601** may display palm trees **3609**, **3611** and additional panels **3602** may display additional network **150** members **3620** in a user **3610** configured virtual environment **164**. In some embodiments, the virtual environment **164** may display water views **3607** and birds **3608** and weather vectors **3612** as well as incremental palm tree scenery **3611**. In some embodiments, an accelerometer **1100** associated with the user **3610** may gauge steps or moving over air into the virtual environment or movements in hand gestures from the user **3610** may gauge movement or steps or air altitude, longitude, latitude progress into the virtual environment. In some embodiments, incremental building virtual objects **3606** may scale from image **3605** which is more distant to image **3615** which is more near or image **3622** which is in micro scale level or image **3621** which is nano zoom level for the same tree **3611** with different scale vectors and matrices **4808** as the virtual user subject **3610** approaches the virtual object **3622** in multi-dimension map tile data exchange linked database **160**. In some embodiments, incremental network **150** users **3610** may appear in the virtual environment **164** of the multi-dimension map tile data exchange linked database **160**. In some embodiments, the user **3610** may have bionic eyes to move into matter such as an eagle scale **3607** at scale

levels not seen before such as fish beneath the water due to the organization of the multi-dimension map tile data exchange linked database **160** and machine learning missing tile proxy clustering CPU instructions **162** and proxy dimension database server **161**. In other embodiments, a user **3610** may request a live stream of a coordinate spot on the map from the multi-dimension map tile data exchange linked database **160**, **4800**, and the user **3620** is a buyer on the data exchange and the user who provides the data to the multi-dimension map tile data exchange linked database **160** is the seller of the view provided by the rendering engine **163**.

[0269] FIGS. **37A** and **37B** illustrate an exemplary plurality of views from the multi-dimension map tile data exchange linked database **160**. FIG. **37A** illustrates an exemplary three hundred and sixty degree private view of high tea with the Queen of England view with a natural environment while FIG. **37B** illustrates the same view with public accessibility from network members **150** from the multi-dimension map tile data exchange linked database **160** as rendered with the virtual environment **164**. In some embodiments, such as displayed in FIG. **37A**, exemplary panels **3701** may display pine trees **3706**, **3707** and additional panels **3702** may display additional network **150** members **3711** or the Queen of England **3708** in a live or archived buffer video in a user **3711** configured virtual environment **164**. In some embodiments, the virtual environment **164** may display Buckingham Palace views **3710** and trees **3704** and weather vectors as well as incremental tree scenery **3705**, **3706**, **3707**. In some embodiments, an accelerometer **1100** associated with the user **3711** may gauge steps or movement into the virtual environment or movements in hand gestures from the user **3711** may gauge movement or steps or air altitude, longitude, latitude progress into the virtual environment. In some embodiments, incremental building virtual objects **3715** may scale from image **3710** which is more distant to image **3715** which is more near with different scale vectors and matrices **4808** as the virtual user subject **3711** approaches the virtual object **3717** in multi-dimension map tile data exchange linked database **160**. In some embodiments, incremental network **150** users **3722**, **3723**, **3718** may appear in the virtual environment **164** as the public view FIG. **37B** allows for many network **150** members to obtain virtual presence in the virtual environment **164** and even interaction between members, whereas the private view FIG. **37A** allows for exclusive meetings which may be served simultaneously by the network servers **160** without the other network members seeing each other, of the multi-dimension map tile data exchange linked database **160**. In some embodiments, the user **3721** may have the ability to move between tables **3724**, **3719**, **3717** due to the organization of the multi-dimension map tile data exchange linked database **160** and machine learning missing tile proxy clustering CPU instructions **162** and proxy dimension database server **161**. In other embodiments, a user **3721** may request a live stream of a coordinate spot on the map from the multi-dimension map tile data exchange linked database **160**, **4800**, and the user **3721** is a buyer on the data exchange and the user who provides the data to the multi-dimension map tile data exchange linked database **160** is the seller of the data view provided by the rendering engine **163**.

[0270] FIGS. **38A** and **38B** illustrate an exemplary plurality of views from the multi-dimension map tile data exchange linked database **160**. FIG. **38A** illustrates an

exemplary three hundred and sixty degree public view of high tea with the Queen of England view with a natural environment while FIG. 38B illustrates the conversation view in the virtual environment 164 with public accessibility from network members 150 from the multi-dimension map tile data exchange linked database 160 as rendered with the virtual environment 164. In some embodiments, such as displayed in FIG. 38A, exemplary panels 3801 may display tea settings 3813, 3806 and additional panels 3804 may display additional network 150 members 3809 or the Queen of England 3708 in a live or archived buffer video in a user 3810 configured virtual environment 164. In some embodiments, the virtual environment 164 may display Buckingham Palace views 3803 and high tea 3806 and weather vectors as well as incremental scenery 3811, 3813, 3807. In some embodiments, an accelerometer 1100 associated with the user 3810 may gauge steps or movement into the virtual environment or movements in hand gestures from the user 3810 may gauge movement or steps or air altitude, longitude, latitude progress into the virtual environment. In some embodiments, incremental building virtual objects 3816 may scale from image 3816 which is more distant to image 3811 which is more near with different scale vectors and matrices 4808 as the virtual user subject 3811 approaches the virtual object 3813 in multi-dimension map tile data exchange linked database 160. In some embodiments, incremental network 150 users 3812, 3808, 3805 may appear in the virtual environment 164 as the public view FIG. 38A allows for many network 150 members to obtain virtual presence in the virtual environment 164 and even interaction between members, whereas the conversation view FIG. 38B allows for exclusive or group conversation which may be served simultaneously by the network servers 160 without the other network members seeing each other from the multi-dimension map tile data exchange linked database 160. In some embodiments, the user 3815 may have the ability to converse with another network member 3817 who they know or a member who they do not know 3819 due to the organization of the multi-dimension map tile data exchange linked database 160 and machine learning missing tile proxy clustering CPU instructions 162 and proxy dimension database server 161. In other embodiments, a user 3810 may request a live stream of a coordinate spot on the map from the multi-dimension map tile data exchange linked database 160, 4800, and the user 3815 is a buyer on the data exchange and the user who provides the data to the multi-dimension map tile data exchange linked database 160 is the seller of the data view provided by the rendering engine 163. In some embodiments, a user Amy 3817 may be requested to have a virtual cup of coffee and conversation by a participating network 150 user 3810 and Amy may choose to respond or not respond 3818.

[0271] FIG. 39 illustrates an exemplary view from the multi-dimension map tile data exchange linked database 160. FIG. 39 illustrates an exemplary three hundred and sixty degree public view of high tea with the Queen of England view with a natural environment while 3919 illustrates the emoji or virtual character option 3917 view while the user 3911 may also select from the major studio emoji partnership view 3918 in the virtual environment 164 with public accessibility from network members 150 from the multi-dimension map tile data exchange linked database 160 as rendered with the virtual environment 164. In some embodiments, such as displayed in 3900, exemplary panels

3901 may display tea settings 3907, 3916 and additional panels 3902 may display additional network 150 members 3915 or the Queen of England 3905 in a live or archived buffer video in a user 3911 configured virtual environment 164. In some embodiments, the virtual environment 164 may display Buckingham Palace views 3904 and high tea 3914 and weather vectors as well as incremental scenery 3910, 3907, 3916. In some embodiments, an accelerometer 1100 associated with the user 3911 may gauge steps or movement into the virtual environment or movements in hand gestures from the user 3911 may gauge movement or steps or air altitude, longitude, latitude progress into the virtual environment. In some embodiments, incremental building virtual objects 3904 may scale from image 3906 which is more distant to image 3914 which is more near with different scale vectors and matrices 4808 as the virtual user subject 3911 approaches the virtual object 3914 in multi-dimension map tile data exchange linked database 160. In some embodiments, incremental network 150 users 3912, 3908, 3915 may appear in the virtual environment 164 as the public view 3900 allows for many network 150 members to obtain virtual presence in the virtual environment 164 and even interaction between members, whereas the emoji selection view allows for exclusive or group conversation which may be served simultaneously by the network servers 160 without the other network members seeing each other from the multi-dimension map tile data exchange linked database 160. In some embodiments, the user 3911 may have the ability to converse with another network member 3913 who they know or a member who they do not know 3908 due to the organization of the multi-dimension map tile data exchange linked database 160 and machine learning missing tile proxy clustering CPU instructions 162 and proxy dimension database server 161. In other embodiments, a user 3911 may request a live stream of a coordinate spot on the map from the multi-dimension map tile data exchange linked database 160, 4800, and the user 3909 is a buyer on the data exchange and the user who provides the data to the multi-dimension map tile data exchange linked database 160 is the seller of the data view provided by the rendering engine 163. In some embodiments, a user 3911 may select a Batman emoji 3920 or a wonder woman emoji 3921 or a super man emoji 3922 or a Bart Simpson emoji 3924 or a Homer Simpson emoji 3923 or a standard doctor emoji 3929 or a woman emoji 3930 or a beard emoji 3931 or a woman with glasses emoji 3932 or wide variety of emojis 3933 to suit the virtual multi-dimension map tile data exchange linked database 160 and rendered view 164.

[0272] FIGS. 40A and 40B illustrate an exemplary plurality of views from the multi-dimension map tile data exchange linked database 160. FIG. 40A illustrates an exemplary three hundred and sixty degree private view of lifting on Venice Beach, California view with a natural environment while FIG. 40B illustrates the same view with public accessibility from network members 150 from the multi-dimension map tile data exchange linked database 160 as rendered with the virtual environment 164. In some embodiments, such as displayed in FIG. 40A, exemplary panels 4001 may display ocean view 4004, 4006 and additional panels 4002 may display additional network 150 members 4023 or Arnold Schwarzenegger 4005 in a live or archived buffer video in a user 5008 configured virtual environment 164. In some embodiments, the virtual environment 164 may display Venice Beach views 4010 and

lifting pits **4018** and weather vectors as well as incremental lifting scenery **4015**, **4019**, **4022**. In some embodiments, an accelerometer **1100** associated with the user **4021** may gauge steps or movement into the virtual environment or movements in hand gestures from the user **4021** may gauge movement or steps or air altitude, longitude, latitude progress into the virtual environment. In some embodiments, incremental building virtual objects **4018** may scale from image **4018** which is more distant to image **4019** which is more near with different scale vectors and matrices **4808** as the virtual user subject **4021** approaches the virtual object **4022** in multi-dimension map tile data exchange linked database **160**. In some embodiments, incremental network **150** users **4020**, **4012**, **4017**, **4018**, **4022** may appear in the virtual environment **164** as the public view FIG. **40B** allows for many network **150** members to obtain virtual presence in the virtual environment **164** and even interaction between members, whereas the private view FIG. **40A** allows for exclusive meetings which may be served simultaneously by the network servers **160** without the other network members seeing each other of the multi-dimension map tile data exchange linked database **160**. In some embodiments, the user **4021** may have the ability to move between lifting stations **4019**, **4022**, **4018** due to the organization of the multi-dimension map tile data exchange linked database **160** and machine learning missing tile proxy clustering CPU instructions **162** and proxy dimension database server **161**. In other embodiments, a user **4021** may request a live stream of a coordinate spot on the map from the multi-dimension map tile data exchange linked database **160**, **4800**, and the user **4021** is a buyer on the data exchange and the user who provides the data to the multi-dimension map tile data exchange linked database **160** is the seller of the data view provided by the rendering engine **163**.

[0273] FIG. **41** illustrates an exemplary view from the multi-dimension map tile data exchange linked database **160**. **4100** illustrates an exemplary three hundred and sixty degree public view of a walk with Nobel Laureate Lecture with Cornell University Harold Varmus in Physiology while walking in the woods view with a natural environment while **4116** illustrates a student or virtual character option **3917** view while the user **4125** may also select to speak with the professor while walking **4126** and other students may also join the conversation **4128** in the virtual environment **164** with public accessibility from network members **150** from the multi-dimension map tile data exchange linked database **160** as rendered with the virtual environment **164**. In some embodiments, such as displayed in **4100**, exemplary panels **4101** may display background hiking or walking environments **4109**, **4106** and additional panels **4102** may display additional network **150** members **4110** or Harold Varmus **4108** in a live or archived buffer video in a user **4115** configured virtual environment **164**. In some embodiments, the virtual environment **164** may display walking trail views **4102** and mountains **4101** and weather vectors as well as incremental scenery **4104**, **4105**. In some embodiments, an accelerometer **1100** associated with the user **4115** may gauge steps or movement into the virtual environment or movements in hand gestures from the user **4115** may gauge movement or steps or air altitude, longitude, latitude progress into the virtual environment. In some embodiments, incremental natural virtual objects **4104** may scale from image **4106** which is more distant to image **4109** which is more near with different scale vectors and matrices **4808** as

the virtual user subject **4115** approaches the virtual object **4104** in multi-dimension map tile data exchange linked database **160**. In some embodiments, incremental network **150** users **4113**, **4111**, **4107** may appear in the virtual environment **164** as the public view **4100** allows for many network **150** members to obtain virtual presence in the virtual environment **164** and even interaction between members, whereas the emoji selection view allows for exclusive or group conversation which may be served simultaneously by the network servers **160** without the other network members seeing each other from the multi-dimension map tile data exchange linked database **160**. In some embodiments, the user **4115** may have the ability to converse with another network member **4125** who they know or a member who they do not know **4129** due to the organization of the multi-dimension map tile data exchange linked database **160** and machine learning missing tile proxy clustering CPU instructions **162** and proxy dimension database server **161**. In other embodiments, a user **4115** may request a live stream of a coordinate spot on the map from the multi-dimension map tile data exchange linked database **160**, **4800**, and the user **4115** is a buyer on the data exchange and the user who provides the data to the multi-dimension map tile data exchange linked database **160** is the seller of the data view provided by the rendering engine **163**. In some embodiments, a user **4125** may review the education student credentials **4118**, **4116** with the class selection **4118**, GPA **4120**, next test date **4121**, percentage complete of the semester or term **4122** as well as the ability to chat with the instructor **4123** in the multi-dimension map tile data exchange linked database **160** and rendered view **164**.

[0274] FIG. **42** illustrates an exemplary user interface **4200** for the My Virtual Communities Group **4215** for a specific transformed data structure of a transformed multi-dimension map tile data exchange linked community virtual hub sequence **4220**. In some embodiments, the meta data virtual hub sequence **#CoffeeInParis 4220** may list the long form route details in the About the Community **4222** community linked route section **4222**. In some embodiments, the specific virtual hub sequence **#CoffeeInParis 4220** may list the amount of followers and an option to follow **4260**. In some embodiments, the specific hub sequence **#CoffeeInParis 4220** may list the ability to share the multi-dimension map tile data exchange linked community group with another social network or text or email or other network protocol. In some embodiments, the specific hub sequence **#CoffeeInParis 4220** may list group as public **4250** or private **4245**. In some embodiments, the specific hub sequence **#CoffeeInParis 4520** may list the gateway to buy or sell **4240** transformed transmission units using the LOB **5200**, **5300**, **5400**, **5500** for a virtual community **4215**. In some embodiments, the specific hub sequence **#CoffeeInParis 4220** may list specific pick up hub address location **4235** or drop off point address **4230** which may be a physical address match or virtual delivery match with video conferencing methods. In some embodiments, the specific hub sequence **#CoffeeInParis 4520** may list the activity statistics and data with respect to the number of buyers **4225**, number of sellers **4225**, number of intervals **4225**, number of trades **4225**, frequency of virtual units **4225**, volume of virtual community linked transmission units **4225**, daily high price for transmission units **4225**, daily low price for virtual community linked transmission units on the community object of **#CoffeeInParis 4220**, yearly high price **4225**, yearly low

price **4225**, news, research, trending, feeds for the #Coffee-InParis **4220** virtual hub sequence.

[0275] FIG. 43 illustrates an exemplary flow chart **4300** of user **110** experience during a transformed virtual transmission unit or security life cycle. In some embodiments the user **110** may login **4301** to the system which requires the user to go to a plurality of menu options **4302** or user input for origin and destination of the multi-dimension map tile data exchange linked community group **4311** alongside user inputs of time and date **4312** for a given specification that may contain a subset or superset of attributes such as virtual environment **164**, virtual multi-dimension map tile data exchange linked coordinates **4800**, multi-dimension map tile data exchange linked community end point **4230** and start point **4235**, or a plurality of other specifications. In some embodiments, the user may save a route to the “My Subjects” **4313** in “Add My Subjects” **4314** whereby the user virtual route is saved in the system for one touch retrieval in the future. In some embodiments, the user may enter a price or quantity to buy or sell a transformed multi-dimension map tile data exchange linked community transmission unit or security of a given specification or specification combination **4303** which has many steps involved with the transformation of the multi-dimension map tile data exchange linked community transmission unit or security. In some embodiments, additional data transformations occur to process **4305**, market transmission navigation virtual route options and indexing **4305**, virtual hub or virtual hub combination data transformations **4305**, multi-dimension map tile data exchange linked community transmission unit transformations **4305** and many other subsets or supersets of transformed transmission unit combinations and combination specifications **4305**. In some embodiments, if a transformed multi-dimension map tile data exchange linked community transmission unit or security matches **4306** in price and specification, then the transformed multi-dimension map tile data exchange linked community transmission unit or security moves into delivery **4308** and the deliver process has many steps of virtual signal handoff **4308**, **4309** and security checks **4308**, **4309**, 911 system checks **4308**, **4309**, GPS server and user **110** position checks **4308**, **4309** as well as transmission unit rating checks **4308**, **4309** and many other possible checks for all the data elements of the transformed multi-dimension map tile data exchange linked community transmission unit or security for verification of delivery **4308**, **4309**. In some embodiments, if prices of the buyer and seller queue do not match **4307**, then the steps of processing **4304**, **4305**, **4306** repeat until a match is made **4306** to **4308** or an order is cancelled before it expires for the transformed multi-dimension map tile data exchange linked community transmission unit or security.

[0276] FIG. 44 illustrates an exemplary user interface **4410** for the My Time Communities functions **4411**. In some embodiments, the user interface **4410** may have a menu option **4451** to move to other areas of the method and system. In some embodiments, the virtual time community linked transmission hub sequence as an object may be meta data tag #BarackObama **4412** to represent virtual or physical time with Barack Obama. In some embodiments, #BarackObama **4412** may have an option for the user **110** to Follow or Join or subscribe, or add **4426** the virtual time community linked virtual transmission hub sequence #BarackObama **4412**. In some embodiments, the number of followers or network members who are joined to that community object

transformed data structure **4412** are 502k **4426**. In some embodiments, the virtual transmission hub sequence as an object may be meta data tag #JamesHardin **4413** to represent virtual or physical time with James Hardin. In some embodiments, #JamesHardin **4413** may have an option for the user **110** to Follow or Join or subscribe, or add **4427** the virtual time community linked transmission hub sequence #JamesHardin **4413**. In some embodiments, the number of followers or network members who are joined to that community object transformed data structure **4413** are 100k **4427**. In some embodiments, the virtual time community linked transmission hub sequence as an object may be meta data tag #BillGates **4414** to represent virtual or physical time with Bill Gates. In some embodiments, #BillGates **4414** may have an option for the user **110** to Follow or Join or subscribe, or add **4428** the virtual renewable energy community linked transmission hub sequence #Bill Gates **4414**. In some embodiments, the number of followers or network members who are joined to that community object transformed data structure **4414** are 42k **4428**. In some embodiments, the virtual time and data community linked transmission hub sequence as an object may be meta data tag #LadyGaga **4415** to represent physical or virtual time with Lady Gaga. In some embodiments, #LadyGaga **4415** may have an option for the user **110** to Follow or Join or subscribe, or add **4429** the virtual time and data community linked transmission hub sequence #LadyGaga **4415**. In some embodiments, the number of followers or network members who are joined to that community object transformed data structure **4415** are 15k **4429**. In some embodiments, the virtual time and data community linked transmission hub sequence as an object may be meta data tag #ChristianoRonaldo **4416** to represent virtual or physical time with Christiano Ronaldo. In some embodiments, #ChristianoRonaldo **4416** may have an option for the user **110** to Follow or Join or subscribe, or add **4430** the virtual renewable energy community linked transmission hub sequence #ChristianoRonaldo **4416**. In some embodiments, the number of followers or network members who are joined to that community object transformed data structure **4416** are 3k **4430**. In some embodiments, the virtual renewable energy community linked transmission hub sequence as an object may be meta data tag #TaylorSwift **4417** to represent physical or virtual time with Taylor Swift. In some embodiments, #TaylorSwift **4417** may have an option for the user **110** to Follow or Join or subscribe, or add **4431** the virtual time and data community linked transmission hub sequence #TaylorSwift **4417**. In some embodiments, the number of followers or network members who are joined to that community object transformed data structure **4417** are 1k **4431**. In some embodiments, the virtual time and data community linked transmission hub sequence as an object may be meta data tag #KatyPerry **4418** to represent physical or virtual time with Katy Perry. In some embodiments, #KatyPerry **4418** may have an option for the user **110** to Follow or Join or subscribe, or add **4432** the virtual time and data community linked transmission hub sequence #KatyPerry **4418**. In some embodiments, the number of followers or network members who are joined to that community object transformed data structure **4418** are 380k **4432**. In some embodiments, the virtual time and data community linked transmission hub sequence as an object may be meta data tag #Oprah **4419** to represent physical or virtual time with Oprah. In some embodiments, #Oprah **4419** may have an option for the user

110 to Follow or Join or subscribe, or add **4433** the virtual time and data community linked transmission hub sequence **#Oprah 4419**. In some embodiments, the number of followers or network members who are joined to that community object transformed data structure **4419** are 400k **4433**. In some embodiments, the virtual transmission hub sequence as an object may be meta data tag **#EllenDeGeneres 4420** to represent physical or virtual time with Ellen DeGeneres. In some embodiments, **#EllenDeGeneres 4420** may have an option for the user **110** to Follow or Join or subscribe, or add **4434** the virtual time and data community linked transmission hub sequence **#EllenDeGeneres 4420**. In some embodiments, the number of followers or network members who are joined to that community object transformed data structure **4420** are 280k **4434**. In some embodiments, the virtual transmission hub sequence as an object may be meta data tag **#JimmyFallon 4421** to represent physical or virtual time with Jimmy Fallon. In some embodiments, **#JimmyFallon 4421** may have an option for the user **110** to Follow or Join or subscribe, or add **4435** the virtual time and data community linked transmission hub sequence **#JimmyFallon 4421**. In some embodiments, the number of followers or network members who are joined to that community object transformed data structure **4421** are 19k **4435**. In some embodiments, the time and data community linked transmission hub sequence as an object may be meta data tag **#Shakira 4422** to represent physical or virtual time with Shakira. In some embodiments, **#Shakira 4422** may have an option for the user **110** to Follow or Join or subscribe, or add **4436** the virtual time and data community linked transmission hub sequence **#Shakira 4422**. In some embodiments, the number of followers or network members who are joined to that time and data community linked community object transformed data structure **4422** are 100k **4436**. In some embodiments, the virtual time and data community linked transmission hub sequences may be recommended **4423** to follow as an object may be meta data tag **#NarendraModi 4424** to represent physical or virtual time with Narendra Modi. In some embodiments, **#NarendraModi 4424** may have an option for the user **110** to Follow or Join or subscribe, or add **4437** the virtual time and data community linked transmission hub sequence **#NarendraModi 4424**. In some embodiments, the number of followers or network members who are joined to that community object transformed data structure **4424** are 89k **4437**. In some embodiments, the virtual renewable energy community linked transmission hub sequences may be recommended **4423** to follow as an object may be meta data tag **#SelenaGomez 4425** to represent physical or virtual time with Selena Gomez. In some embodiments, **#SelenaGomez 4425** may have an option for the user **110** to Follow or Join or subscribe, or add **4438** the virtual time and data community linked transmission hub sequence **#SelenaGomez 4425**. In some embodiments, the number of followers or network members who are joined to that renewable energy community linked community object transformed data structure **4425** are 39k **4438**. In some embodiments, buyers or sellers of the multi-dimension map tile data exchange linked database **160** may be notified with the notification system in the social network **150** that data opportunities to buy or sell may exist to promote filling holes in the multi-dimension map tile data exchange linked database **160** to promote actual data over proxy data.

[0277] FIG. 45 illustrates an exemplary user interface **4500** for the My Virtual Communities Group **4515** for a

specific transformed data structure of a transformed multi-dimension map tile data exchange linked community virtual hub sequence **4520**. In some embodiments, the meta data virtual hub sequence **#JamesHardin 4520** may list the long form details in the About the Community **4522** community linked route section **4522**. In some embodiments, the specific virtual hub sequence **#JamesHardin 4520** may list the amount of followers and an option to follow **4560**. In some embodiments, the specific hub sequence **#JamesHardin 4520** may list the ability to share the multi-dimension map tile data exchange linked community group with another social network or text or email or other network protocol. In some embodiments, the specific hub sequence **#JamesHardin 4520** may list group as public **4550** or private **4545**. In some embodiments, the specific hub sequence **#JamesHardin 4520** may list the gateway to buy or sell **4540** transformed transmission units using the LOB **5200**, **5300**, **5400**, **5500** for a virtual community **4515**. In some embodiments, the specific hub sequence **#JamesHardin 4520** may list specific pick up hub address location **4535** or drop off point address **4530** which may be a physical address match or virtual delivery match with video conferencing methods. In some embodiments, the specific hub sequence **#JamesHardin 4520** may list the activity statistics and data with respect to the number of buyers **4525**, number of sellers **4525**, number of intervals **4525**, number of trades **4525**, frequency of virtual units **4525**, volume of virtual community linked transmission units **4525**, daily high price for transmission units **4525**, daily low price for virtual community linked transmission units on the community object of **#JamesHardin 4520**, yearly high price **4525**, yearly low price **4225**, news, research, trending, feeds for the **#JamesHardin 4220** virtual hub sequence.

[0278] FIG. 46 illustrates an exemplary user interface **4600** with respect to My Virtual Communities **4615** which may transform sequences with more than two virtual hubs into sequences as two or three or more series of transmission route sequences **4620**. In some embodiments, **#Gates #Gaga 4620** may represent an origin virtual hub sequence of Bill Gates followed by a secondary sequence of Lady Gaga **4620**. Multi leg virtual hub sequences allow for the power of the data transformation to link the villages, cities or states from a network virtual time and data community linked transmission topology structure from multiple providers of renewable energy community linked transmission units to provide higher levels of frequency and market opportunity to link public and private systems among many other benefits. In some embodiments, **#Gates #Gaga 4620** may allow input from users to join, follow, subscribe or become a member of multi leg sequences which help solve potential last mile issues within time and data community linked transmission systems **4680**. In some embodiments, **#Gomez #Federer 4625**, may allow for a time and data community linked transmission unit seller or buyer to connect two disparate time and data community linked transmission networks to provide last mile time and data community linked transmission to a destination at the lowest market cost because each leg or series of time and data community linked virtual hub sequences has an independent market associated with the leg or time and data community linked virtual hub sequence **#Gomez #Federer 4625**. In some embodiments, **#Gomez #Federer 4625** may allow input from users to join, follow, subscribe or become a member of multi leg sequences which help solve potential last mile issues

within renewable energy community linked transmission systems **4675**. In some embodiments, three two leg sequences may be attached through data transformations such that #Nelson then takes a transmission unit to #Kayne which then takes a transmission unit to #AriannaGrande. The #Nelson #Kayne #AriannaGrande **4635** three leg virtual hub sequence combination may further solve time management issues for buyers and seller alike **4665** or users understand options and piece multiple time and data community linked transmission systems onto a single community based object to aggregate communication and transaction benefits of the system. In some embodiments, prior history navigation searches and locations may be used to build recommended additional sequences **4640** which may be recommended for users to subscribe, join, follow or become a member. In some embodiments, the virtual hub route sequence may link 4 or more virtual hub sequence pairs or even combinations of already linked community object pairs **4645**. In some embodiments, #Trump #Swift #Rihanna **4645** may be linked to provide a requested user sequence. Traversing a series of linked trips, time, experiences or data may allow for the cost of non-linked trips to be dramatically lower due to using a series of connected local time and data resources. The transformed virtual hub sequence methodology allows for time and data community linked transmission systems to be integrated in ways that were not formerly possible because the systems were disparate or simply did not allow for linked trips or linked community objects that could optimize topological network structures over existing inefficient structures. In some embodiments, virtual hub sequences which have been linked **4645** may also allow users to subscribe **4660**. In some embodiments, #JRTolkien #Modi **4650** may be linked to provide specific user sequences. In some embodiments, virtual hub sequences which have been linked **4650** may also allow users to subscribe **4655**.

[0279] FIG. 47 illustrates an exemplary user menu interface **4700**. In some embodiments, menu options may list as buy/sell/trade **4716** to go to the renewable energy community linked transmission unit gateway trading platform for virtual hub combinations and virtual hub sequences. In some embodiments, the user interface may allow a user to go to the transmission navigation **4717** module for price based transmission navigation or route selection based on cost or earnings from a route as described in U.S. patent application Ser. No. 16/242,967, "Price Based Navigation," filed Jan. 8, 2019; the entirety of which is incorporated by reference herein. Furthermore, as described in U.S. patent application Publication Ser. No. 15/877,393, "Electronic Forward market exchange for transmission seats and capacity in transmission spaces and vehicles," filed Jan. 23, 2018, the entirety of which is incorporated by reference herein. In some embodiments, a user **110** may select my routes **4718** to toggle to routes that are important to their user profile or needs in the network member database. In some embodiments, trips **4719** may be selected to toggle to the trip delivery view. In some embodiments, orders **4720** may be selected to toggle to cancel or adjust orders in the system that are unfilled. In some embodiments, users may toggle to the account **4721** page or time and data community linked communities object page **4400** or the virtual route sequences page **4723**. In some embodiments, users **110** may add additional hubs **4724** or may toggle to the gaming interface **3700**. In some embodiments, renewable energy community

linked time and data transmission units may need to be scanned on the time and data scanning module **4726**. In some embodiments, users may select the reward program module **4727** or the dashboard module **4728**. In some embodiments, the user may select the music **4729** or shopping module **4730**. In some embodiments, the user may select help **4731** or settings **4732** to update account information or privacy settings. In some embodiments, users **110** may invite friends **4733** for rewards or bonuses or cash or credits **4733**. In some embodiments, users may also logout **4734**.

[0280] FIG. 48 illustrates an exemplary multi-dimension map tile database structure **4801** with vector and matrix coordinate for each element of the multi-dimension map tile database structure. In some embodiments, there may be a multi-geolocation dimension CPU rendering engine **4815** as well as a machine learning missing and change data proxy map tile proxy clustering CPU **4816** that works with a proxy dimension database server **4814** to take like kind objects or high probability like kind objects to fill in missing cluster data in the primary multi-dimension map tile database **4801**. In some embodiments, multi-dimension map tile database elements may be missing for the rendering engine **4815** so the proxy dimension database server **4814** may work with the machine learning missing data or change data tile proxy clustering CPU processor to fill in missing data in the primary multi-dimension map tile database server **4801**. In some embodiments, the machine learning missing data processor **4816** uses a standard neural network deep learning iterative weight algorithm to process like probability weights to make a layer transformation so that the missing data in the main database **4801** may have continuity from the proxy dimension database server **4814**. In some embodiments, proxy dimension data **4814** is logged in the primary original data database **4801** such that at a time when the actual data may be updated with proxy data. By example, but not limiting by example, a rendering of a dynamic walk in the woods may have certain trees that are missing at the multi-dimension map tile database such that the rendering engine may not pull the multi-dimension coordinate vector of scale **4808**, so the deep learning processor **4816** may call upon the proxy dimension database server **4814** to place a tree of similar type as measured by probability weights of actual nearby data in the original database server **4801**. By further example, but not limiting by example the deep learning processor **4816** may call proxy data **4814** from a sound vector **4803** for the noise of user walking steps in a forest with similar probability weights from actual dimension data **4801** that may link to the movement of the accelerometer **1100** in the CPU device **120**. In some embodiments, the multi-dimension map tile database may store dimension and vector coordinate data for latitude, longitude, altitude vectors and matrices **4802**, sound vectors and matrices **4803**, sensory vectors and matrices **4804**, time or history vectors and matrices **4805**, weather vectors and matrices **4806**, temperature vectors and matrices **4807**, scale, micro-scale, nano-scale vectors, scalars, and matrices **4808**, chemistry vectors and matrices **4809**, color and filter vectors and matrices **4810**, aperture and speed vectors and matrices **4811**, product type and cross product combination vectors and matrices **4812** and nth dimension vectors and matrices **4813**. While most machine learning processes three dimensions or four dimensions such as color channel or color depth, height, width, and sample identification measured and

stored as coordinates, the multi-dimension map-tile database also stores many additional dimensions such as longitude, latitude, altitude, sound, sensory feel, sensory smell, sensory touch, sensory electromagnetic waves, time dimension, time history dimension, time style dimension, time growth dimension, weather dimension, temperatures dimension, scale of picture dimension, microscopic scale dimension, nano-scale dimension, chemistry state dimension, chemistry feeling dimension, color depth dimension, filter color dimension, lens focus aperture dimension, lens speed dimension, type dimension, cross product blend dimension of multiple dimensions blended together to make a new dimension, or a yet to be defined nth dimension, in some embodiments, tensor storage vectors and matrices may exceed traditional three, four and five dimension tensors. In some embodiments, the deep learning processor 4816 may calculate the probability distribution over the nth dimension classification vector, where output [i] is the probability that the sample belongs to class i, the best loss function in this case is categorical crossentropy which measures the distance between to probability distributions. In the aforementioned case, the distance between the probability distribution output by the deep learning network and the true distribution of the labels. By minimizing the distance between the two distributions, the deep learning network may properly classify proxy dimension database tile output as close to possible of the actual output for the true multi-dimension map tile database. In some embodiments, new dimensions may be created by using cross product vectors and matrices 4812 to combine weather dimensions 4806 with eighteen hundred and sixty-five year dimension in the United States during the civil war time period 4805 with clothing vectors and matrices 4813 and images may come in an out of focus with relative depth dimensions 4811 or water may turn into steam with the chemistry dimension 4809 or a flower in a field may be observed by zooming or expanding the view at the microscope level or nano-scale level 4808. In some other embodiments, a Tesla car may be seen at the traditional scale level 4808, or a user 110 may explore to go inside the battery to see the nano-trains providing the super conductivity for electricity storage at the nano-scale level 4808 and while the nano-scale level of that particular Tesla car may have not been observed and logged in the primary database 4801, the proxy dimension database 4814 may provide the additional scale by proxy from the deep learning cluster to associate the Tesla vehicle with the scale coordinate where a nano-scale lithium ion graphene to see morphological optimization and performance enhancement of nano-scale chemistry in component parts.

[0281] FIG. 49 illustrates an exemplary view from the multi-dimension map tile data exchange linked database 160. 4900 illustrates an exemplary three hundred and sixty degree public view of a Bier Garten in Muchen, Deutschland during Oktoberfest with a natural environment where user may converse with other in the virtual environment while 4910 illustrates a user or virtual character option view while the user 4910 may also select to speak with another user 4911 while walking 4910 and other users 4904 may also join the conversation 4925 in the virtual environment 164 with public accessibility from network members 150 from the multi-dimension map tile data exchange linked database 160 as rendered with the virtual environment 164. In some embodiments, such as displayed in 4900, exemplary panels 4901 may display background mountain environments 4901

and additional panels 4902 may display additional network 150 members 4906 or friends 4907 in a live or archived buffer video in a user 4908 configured virtual environment 164. In some embodiments, the virtual environment 164 may display Bier Garten views 4905 and mountains 4901 and weather vectors as well as incremental scenery 4902. In some embodiments, an accelerometer 1100 associated with the user 4910 may gauge steps or movement into the virtual environment or movements in hand gestures from the user 4910 may gauge movement or steps or air altitude, longitude, latitude progress into the virtual environment. In some embodiments, incremental natural virtual objects 4905 may scale from image 4905 which is more distant to image 4926 which is more near with different scale vectors and matrices 4808 as the virtual user subject 44910 approaches the virtual object 4905 in multi-dimension map tile data exchange linked database 160. In some embodiments, incremental network 150 users 4904, 4911, 4907 may appear in the virtual environment 164 as the public view 4900 allows for many network 150 members to obtain virtual presence in the virtual environment 164 and even interaction between members, whereas the emoji selection view allows for exclusive or group conversation which may be served simultaneously by the network servers 160 without the other network members seeing each other from the multi-dimension map tile data exchange linked database 160. In some embodiments, the user 4910 may have the ability to converse with another network member 44911 who they know or a member who they do not know 4907 due to the organization of the multi-dimension map tile data exchange linked database 160 and machine learning missing tile proxy clustering CPU instructions 162 and proxy dimension database server 161. In other embodiments, a user 44913 may request a live stream of a coordinate spot on the map from the multi-dimension map tile data exchange linked database 160, 4800, and the user 4910 is a buyer on the data exchange and the user who provides the data to the multi-dimension map tile data exchange linked database 160 is the seller of the data view provided by the rendering engine 163. In some embodiments, a user 4910 may review the setting credentials 4914, 4915, 4916, 4917, 4918, 4919 with the setting selection 4927, similarly the user 4924 may participate in a virtual conversation 4925 with a virtual user 4922 to buy a beer 4923 in the multi-dimension map tile data exchange linked database 160 and rendered view 164.

[0282] FIG. 50 illustrates an exemplary view from the multi-dimension map tile data exchange linked database 160. FIG. 50 illustrates an exemplary three hundred and sixty degree private view of high tea with the Queen of England view with a natural environment while 5016 illustrates the virtual travel mode skin option 5015 view while the user 5008 may also select from the major licensed store partnership view 5014 in the virtual environment 164 with public accessibility from network members 150 from the multi-dimension map tile data exchange linked database 160 as rendered with the virtual environment 164. In some embodiments, such as displayed in 5000, exemplary panels 5001 may display tea settings 5003, 5010 and additional panels 5002 may display virtual travel route sequences from New York 5004 to London via Mars 5005 in a live or archived buffer video in a user 5008 configured virtual environment 164. In some embodiments, the virtual environment 164 may display Buckingham Palace views 5012 and high tea 5014 and weather vectors as well as incremental

scenery **5009**, **5010**. In some embodiments, an accelerometer **1100** associated with the user **5008** may gauge steps or movement into the virtual environment or movements in hand gestures from the user **5008** may gauge movement or steps or air altitude, longitude, latitude progress into the virtual environment. In some embodiments, a rocket ship virtual travel mode may be selected **5018** with launch mode **5001** on a rocket ship **5006** with network **150** members **5007** as the virtual user subject **5008** approaches the virtual object **5009** in multi-dimension map tile data exchange linked database **160**. In some embodiments, incremental network **150** users **5013** may appear in the virtual environment **164** as the private view **5000** allows for invite only network **150** members to obtain virtual presence in the virtual environment **164** and even interaction between members, whereas the travel mode selection view allows for selection of jet travel **5017**, auto travel **5019**, scooter travel **5020**, rocket ship travel **5018**, Tesla model S vehicle **5023**, Tesla Model X vehicle **5024**, BMW three series **5021**, Rivan eTruck **5022** or a plurality of additional travel modes which may be served simultaneously by the network servers **160** without the other network members seeing each other from the multi-dimension map tile data exchange linked database **160**. In some embodiments, the user **5008** may have the ability to converse with another network member **5007** who they know or a member who they do not know **5009** due to the organization of the multi-dimension map tile data exchange linked database **160** and machine learning missing tile proxy clustering CPU instructions **162** and proxy dimension database server **161**. In other embodiments, a user **5008** may request a live stream of a coordinate spot on the map from the multi-dimension map tile data exchange linked database **160**, **4800**, and the user **5008** is a buyer on the data exchange and the user who provides the data to the multi-dimension map tile data exchange linked database **160** is the seller of the data view provided by the rendering engine **163**. In some embodiments, a user **5008** may also switch travel selection mid trip from Tesla **5023** to Rivan **5022**.

[0283] FIG. 51 illustrates an exemplary view from the multi-dimension map tile data exchange linked database **160**. FIG. 51 illustrates an exemplary three hundred and sixty degree private view of inside the rocket cockpit view **5102** for social network **150** members while **5110** illustrates the virtual travel mode skin option **5119** view while the user **5108** may also select from the major licensed store partnership view **5120** in the virtual environment **164** with private accessibility from network members **150** from the multi-dimension map tile data exchange linked database **160** as rendered with the virtual environment **164**. In some embodiments, such as displayed in **5100**, exemplary panels **5106** may display star view and additional panels **5105** may display moon view sequences from New York **5004** to London via Mars **5005** in a live or archived buffer video in a user **5008** configured virtual environment **164**. In some embodiments, the virtual environment **164** may display earth views **5017** and weather vectors as well as incremental scenery **5105**, **5106**. In some embodiments, an accelerometer **1100** associated with the user **5108** may gauge steps or movement into the virtual environment or movements in hand gestures from the user **5108** may gauge movement or steps or air altitude, longitude, latitude progress into the virtual environment. In some embodiments, a rocket ship virtual travel mode may be selected **5112** with launch mode **5101** on a rocket ship **5103** with network **150** members **5109**

as the virtual user subject **5108** approaches the virtual moon object **5105** in multi-dimension map tile data exchange linked database **160**. In some embodiments, incremental network **150** users **5104** may appear in the virtual environment **164** as the private view **5100** allows for invite only network **150** members to obtain virtual presence in the virtual environment **164** and even interaction between members, whereas the travel mode selection view allows for selection of jet travel **5111**, auto travel **5113**, scooter travel **5114**, rocket ship travel **5112**, Tesla model S vehicle **5115**, Tesla Model X vehicle **5116**, Winged air copter **5117**, Rivan eTruck **5118** or a plurality of additional travel modes which may be served simultaneously by the network servers **160** without the other network members seeing each other from the multi-dimension map tile data exchange linked database **160**. In some embodiments, the user **5108** may have the ability to converse with another network member **5109** who they know or a member who they do not know **5104** due to the organization of the multi-dimension map tile data exchange linked database **160** and machine learning missing tile proxy clustering CPU instructions **162** and proxy dimension database server **161**. In other embodiments, a user **5108** may request a live stream of a coordinate spot on the map from the multi-dimension map tile data exchange linked database **160**, **4800**, and the user **5108** is a buyer on the data exchange and the user who provides the data to the multi-dimension map tile data exchange linked database **160** is the seller of the data view provided by the rendering engine **163**. In some embodiments, a user **5108** may also switch travel selection mid trip from Tesla **5115** to Rivan **5118**.

[0284] FIG. 52 illustrates an exemplary connected device network data exchange where a plurality of network members **110** and devices **5208**, **5204**, **5206**, **5217**, **5214**, **5207** send multi-dimension map tile database coordinate and dimension information data through a GPS network **5202** and a general network **5218** into a geolocation multi-dimension map tile data exchange where user **110** identity may be encrypted by the anonymity and encryption processor **5221** using a plurality of hash table or linear matrices transformations to encrypt user identity while storing the multi-dimension geolocation map tile data in the multi dimension database **5223**, **160** and proxy dimension database **161** with the deep learning category processor **5224**, **163** and the price time priority queue processor **5225** the multi-dimension geolocation exchange **5226**. In some embodiments, users **110** may exchange multi-dimension data with the exchange for payment from the exchange **5219** or buyers may request to exchange multi-dimension data with the exchange for payment to the exchange **5220**. In some embodiments, buyers and sellers may have ownership structure in the multi-dimension geolocation exchange as provided for in methods from U.S. patent application Ser. No. 16,183,647, "Financial Swap Structure method and system on transportation capacity units," filed Nov. 7, 2018, the entirety of the contents provided for as reference herein, and U.S. patent application Ser. No. 16,257,032, "Securitization of transportation units," filed Jan. 24, 2019, the entirety of the contents provided for as reference herein, and U.S. patent application Ser. No. 16,556,838, "Financial Swap and Index," filed Aug. 30, 2019, the entirety of the contents provided for as reference herein, and U.S. patent application Ser. No. 16,589,229, "Transportation Capacity Unit legal transformation," filed Oct. 1, 2019, the entirety of the contents provided for as reference herein, and U.S.

provisional patent application Ser. No. 62,969,301, “Web browser and OS vault with advertising serving transportation database and geolocation meta data and price time priority queues,” filed Feb. 3, 2020 the entirety of the contents provided for as reference herein, and U.S. provisional patent application Ser. No. 62,977,559, “method to transmit geolocation exchange based markets as news ticker,” filed Feb. 17, 2020, the entirety of the contents provided for as reference herein, and U.S. provisional patent application Ser. No. 62,977,225, “IPOs for TMAs and associated price time priority queues for secondary market,” filed Feb. 16, 2020, the entirety of the contents provided for as reference herein. In some embodiments, the connected device network data exchange overcomes many deficiencies of open source methods of data sharing as there is no oversight architecture in traditional open source projects such as linux or open street maps which then leave large problems in the maintenance, support and organization of open source projects. In yet other embodiments, the connected device network data exchange provides an efficient method to organize and acquire the missing data layers in the multi-dimension geolocation map tile data base **160** through use of the social network layer **4200** to organize communication activity for various data layers which must be acquired into the central multi-dimension geolocation map tile database **4801**, **160** and associated price time priority queues to organize the priority, time and value of the data exchanged for the multi-dimension geolocation map tile database **160**.

[0285] FIG. 53 illustrates exemplary user price-time priority queue **5300** for transacting or matching transformed multi-dimension geolocation data community linked transmission unit data, participating, transacting and/or trading multi-dimension geolocation data community linked transmission, representing the transformed multi-dimension geolocation data community linked transmission unit value as a homogeneous asset specification or multi-dimension geolocation data as a physical forward commodity security between combinations of virtual hubs over various transmission modes and nodes. In some embodiments, user transformed multi-dimension geolocation data community linked transmission unit(s) or transformed multi-dimension geolocation data community linked transmission unit(s) associated with multi-dimension geolocation data community linked route community objects interface **5300** includes the following instructions, transformations and elements, or a subset or superset thereof:

[0286] exemplary transformed multi-dimension geolocation data community linked transmission unit price-time priority sell queue **5320**;

[0287] exemplary transformed multi-dimension geolocation data community linked transmission unit price-time priority buy queue **5321**;

[0288] exemplary transformed multi-dimension geolocation data community linked transmission unit price priority bucket **5305** in the transmission unit buy queue of \$5.10;

[0289] exemplary transformed multi-dimension geolocation data community linked transmission unit price priority bucket **5306** in the transmission unit buy queue of \$5.30;

[0290] exemplary transformed multi-dimension geolocation data community linked transmission unit price priority bucket **5310** in the transmission unit buy queue of \$5.60;

[0291] exemplary transformed multi-dimension geolocation data community linked transmission unit price priority bucket **5314** in the transmission unit sell queue of \$5.70;

[0292] exemplary transformed multi-dimension geolocation data community linked transmission unit price priority bucket **5315** in the transmission unit sell queue of \$5.80;

[0293] exemplary transformed multi-dimension geolocation data community linked transmission unit price priority bucket **5316** in the transmission unit sell queue of \$6.60;

[0294] exemplary transformed multi-dimension geolocation data community linked transmission unit price-time priority buy price **5304** in the first time position of the price priority bucket **5305** of \$5.10;

[0295] exemplary transformed multi-dimension geolocation data community linked transmission unit price-time priority buy price **5303** in the second time position of the price priority bucket **5305** of \$5.10;

[0296] exemplary transformed multi-dimension geolocation data community linked transmission unit price-time priority buy price **5302** in the third time position of the price priority bucket **5305** of \$5.10;

[0297] exemplary transformed multi-dimension geolocation data community linked transmission unit price-time priority buy price **5307** in the first time position of the price priority bucket **5306** of \$5.30;

[0298] exemplary transformed multi-dimension geolocation data community linked transmission unit price-time priority buy price **5309** in the first time position of the price priority bucket **5310** of \$5.60;

[0299] exemplary transformed multi-dimension geolocation data community linked transmission unit price-time priority buy price **5308** in the second time position of the price priority bucket **5310** of \$5.60;

[0300] exemplary transformed multi-dimension geolocation data community linked transmission unit price-time priority sell price **5311** in the first time position of the price priority bucket **5314** of \$5.70;

[0301] exemplary transformed multi-dimension geolocation data community linked transmission unit price-time priority sell price **5312** in the second time position of the price priority bucket **5314** of \$5.70;

[0302] exemplary transformed multi-dimension geolocation data community linked transmission unit price-time priority sell price **5313** in the third time position of the price priority bucket **5314** of \$5.70;

[0303] exemplary transformed multi-dimension geolocation data community linked transmission unit price-time priority sell price **5318** in the first time position of the price priority bucket **5315** of \$5.80;

[0304] exemplary transformed multi-dimension geolocation data community linked transmission unit price-time priority sell price **5319** in the second time position of the price priority bucket **5315** of \$5.80;

[0305] exemplary transformed multi-dimension geolocation data community linked transmission unit price-time priority sell price **5317** in the first time position of the price priority bucket **5316** of \$6.60;

[0306] exemplary transformed multi-dimension geolocation data community linked transmission unit price time priority limit order book ("LOB") **5325** is represented by the vector $q(t)$ **5301**, such that the i -th coordinate for $i > 0$, $q_i(t)$, is the number of sell limit orders of transformed transmission units that are waiting in the LOB at time t a price $i\Delta$ (Δ is the price unit tick size of the transformed multi-dimension geolocation data community linked transmission unit), the number of buy limit orders for transformed multi-dimension geolocation data community linked transmission units at $i\Delta$ are represented with a negative sign $q_i(t)$;

[0307] exemplary benchmark price **5326** of all sell limit orders at time t are computed as $s(t) = s(q(t)) = \min(\min\{0 < i\Delta : q_i(t) > 0\})$, if $q_i(t)$ is less than or equal to 0 for all $i > 0$, then $s(q(t)) = \text{infinity}$;

[0308] exemplary benchmark price **5327** of all buy limit orders at time t are computed as $b(t) = b(q(t)) = \max(\max\{i\Delta > 0 : q_i(t) < 0\})$, if $q_i(t)$ is greater than or equal to 0 for all $i > 0$, then $b(q(t)) = \text{negative infinity}$;

[0309] exemplary order match **5328** in the transformed multi-dimension geolocation data community linked transmission unit limit order book where $s(t) = b(t)$, which then moves the method and system to the matched transformed multi-dimension geolocation data community linked transmission unit limit order confirmation and delivery process;

[0310] exemplary limit order book status of no order match **5329**, where $s(t) > b(t)$;

[0311] exemplary limit order book i -th $q_i(t)$ element **5330** of LOB is cancelled, remove from queue;

[0312] exemplary i -th $q_i(t)$ element is a new transformed multi-dimension geolocation data community linked transmission unit order **5331** in LOB, insert into respective limit order buy queue **5321** or limit order sell queue **5320** with priority of price, then time into the price time priority queues **5300**.

[0313] In some embodiments, the price-time priority queue **5300** for transformed multi-dimension geolocation data community linked transmission units may be assigned to a multi-dimension geolocation data community linked commute community object **4200** which is a waypoint sequence of transformed multi-dimension geolocation data community linked transmission units. In some embodiments, the price-time priority queue **5300** may be assigned to two waypoints as an multi-dimension geolocation data community linked commute community object **4200** or the price-time prior queue **5300** may be assigned to an multi-dimension geolocation data community linked commute community waypoint object sequence of many waypoints **205** to **206** to **207** to **208** which have been added together to form one continuous multi-dimension geolocation data community linked commute community object **4200** and respective price-time priority queue for transformed multi-dimension geolocation data community linked transmission units through processing instructions from the multi-dimension geolocation data community linked Community Route Processor **216** and multi-dimension geolocation data community linked Transmission Sequence Route Processor **215**, **217** via the network(s) **150**. In some embodiments, the limit order book **5301** vector may be assigned to a specific date and time for the multi-dimension geolocation data community linked commute community waypoint object which is a

forward market price for transformed multi-dimension geolocation data community linked transmission unit(s) **4200** and multi-dimension geolocation data community linked commute community waypoint object(s) **4200**. In some embodiments, a specific transformed multi-dimension geolocation data community linked transmission unit price-time priority queue limit buy order **5304** with a specific price stamp bucket **5305** of \$5.10, may be cancelled, if the **5304** order is cancelled, the **5303** price-time priority limit order book buy queue price then moves to the higher price-time priority queue position of **5304** and price-time priority price of **5302** moves to position **5303**. In some embodiments, the price-time priority limit order sell price **5319** of price-time priority bucket price **5315** of \$5.80 may be cancelled, if **5319** price-time priority of the transformed multi-dimension geolocation data community linked transmission unit is cancelled, then order **5317** moves to a higher position in the overall transformed multi-dimension geolocation data community linked transmission queue **5320** even though the limit order book price **5317** remains in the price bucket of **5316** which is \$6.60. In some embodiments, price-time priority insertion may occur where a new order is inserted into either the transformed multi-dimension geolocation data community linked transmission unit buy queue **5320** or transformed multi-dimension geolocation data community linked transmission unit sell queue **5321**. In some embodiments, by example but not limiting by example, a new price-time limit order for a transformed multi-dimension geolocation data community linked transmission unit may be inserted as a sell order at a price of \$5.70 at position **5313** which would then assume order **5312** was also at a price of \$5.70 and that order **5312** was placed with a time that was before order **5313** was placed. In the aforementioned example of the price-time order insertion of **5313**, price-time orders of **5319**, **5318** and **5317** have moved lower in their relative position even though they remain in distinctly different price buckets of **5315** and **5316** respectively as the price-time priority queue **5300**, price is first priority, then time stamp in the price-time priority queue **5300** for transformed multi-dimension geolocation data community linked transmission units.

[0314] In some embodiments, the lowest selling price $s(t)$ **5326** may equal the highest buying price $b(t)$ **5327**, in which case the highest transformed multi-dimension geolocation data community linked transmission unit buy queue price bucket **5310** is equal to the lowest transformed multi-dimension geolocation data community linked transmission unit sell queue **5320** selling bucket price **5314**. In the example **5300** of the limit order book **5301**, but not limiting by example, the highest transformed multi-dimension geolocation data community linked transmission unit buy price **5310** of \$5.60 is lower than the lowest multi-dimension geolocation data community linked transmission unit sell queue **5320** lowest selling bucket **5314** of \$5.70 so no match occurs because $s(t) > b(t)$ **5329**. In some embodiments, many order insertions **5331** or order cancellations **330** may occur for transformed multi-dimension geolocation data community linked transmission units from the multi-dimension geolocation data community linked transmission forward market database server **5224** associated with multi-dimension geolocation data community linked community objects which are series of waypoints **4200**.

[0315] In some embodiments, the LOB **5300** for transformed multi-dimension geolocation data community linked

transmission units may contain many different types of instruction structures and specifications such as limit orders, market orders, market if touched orders, snap market orders, snap mid orders, snap to primary orders, peg to benchmark orders, or adaptive custom orders which are custom customer designed instructions which are all standard order types for anyone skilled in the art of markets. In some embodiments, the LOB **5300** for transformed transmission units may also contain instructions for order times such as good for the day, good till cancelled, immediate or cancel, good till date, day till cancelled or a plurality of additional custom instructions for the timing of the order of the transformed transmission unit in the LOB **5300** that is associate with an multi-dimension geolocation data community linked commute community object **241**. In some embodiments, a plurality of additional instructions and specifications may also be unique to each transformed multi-dimension geolocation data community linked transmission unit LOB **5300** such as virtual mode **1611**, automobile mode **1630**, air mode **1612**, autonomous vehicle mode **1613**, bike mode **1614**, boat mode **1615**, bus mode **1616**, drone mode **1617**, limo mode **1618**, motorcycle mode **1619**, moped mode **1620**, shuttle mode **1612**, spaceship mode **1622**, subway mode **1623**, fish mode **1624**, train mode **1625**, shark mode **1626** which may combine many modes **1610** or a single mode **1610** for a waypoint commute community object **4200** or waypoint multi-dimension geolocation data community linked sequence **205** to **206** to **207** to **208** of many multi-dimension geolocation data community linked commute communities **4200**.

[0316] In some embodiments, the LOB **5300** may be assigned to transformed multi-dimension geolocation data community linked transmission unit T-Rex dinosaur mode **1628** that have associated multi-dimension geolocation data community linked commute community objects **4200**. In some embodiments, the LOB **5300** for transformed transmission units may be assigned to in person **1629** for an actual in person meeting of a transformed multi-dimension geolocation data community linked transmission unit. In some embodiments, the LOB **5300** may even be assigned to the virtual transformed multi-dimension geolocation data community linked transmission unit **1611** which would be space along a packet moving medium such as a telecom pipeline, satellite telecom or wireless telecom that moves packets of power which are transformed transmission units. In some embodiments, the LOB **5300** may be assigned to a home or business at a certain transmission waypoint **205**, **206**, **207**, **208**.

[0317] FIG. **54** illustrates exemplary user price-time priority queue **5400** for transacting or matching transformed multi-dimension data mining community linked transmission unit data, participating, transacting and/or trading data mining geolocation data community linked transmission, representing the transformed data mining geolocation data community linked transmission unit value as a homogeneous asset specification or data mining geolocation data as a physical forward commodity security between combinations of virtual hubs over various transmission modes and nodes. In some embodiments, user transformed data mining geolocation data community linked transmission unit(s) or transformed data mining geolocation data community linked transmission unit(s) associated with data mining geolocation data community linked route community objects interface

5300 includes the following instructions, transformations and elements, or a subset or superset thereof:

- [0318] exemplary transformed data mining geolocation data community linked transmission unit price-time priority sell queue **5420**;
- [0319] exemplary transformed data mining geolocation data community linked transmission unit price-time priority buy queue **5421**;
- [0320] exemplary transformed data mining geolocation data community linked transmission unit price priority bucket **5405** in the transmission unit buy queue of \$5.10;
- [0321] exemplary transformed data mining geolocation data community linked transmission unit price priority bucket **5406** in the transmission unit buy queue of \$5.30;
- [0322] exemplary transformed data mining geolocation data community linked transmission unit price priority bucket **5410** in the transmission unit buy queue of \$5.60;
- [0323] exemplary transformed data mining geolocation data community linked transmission unit price priority bucket **5414** in the transmission unit sell queue of \$5.70;
- [0324] exemplary transformed data mining geolocation data community linked transmission unit price priority bucket **5415** in the transmission unit sell queue of \$5.80;
- [0325] exemplary transformed data mining geolocation data community linked transmission unit price priority bucket **5416** in the transmission unit sell queue of \$6.60;
- [0326] exemplary transformed data mining geolocation data community linked transmission unit price-time priority buy price **5404** in the first time position of the price priority bucket **5405** of \$5.10;
- [0327] exemplary transformed data mining geolocation data community linked transmission unit price-time priority buy price **5403** in the second time position of the price priority bucket **5405** of \$5.10;
- [0328] exemplary transformed data mining geolocation data community linked transmission unit price-time priority buy price **5402** in the third time position of the price priority bucket **5405** of \$5.10;
- [0329] exemplary transformed data mining geolocation data community linked transmission unit price-time priority buy price **5407** in the first time position of the price priority bucket **5406** of \$5.30;
- [0330] exemplary transformed data mining geolocation data community linked transmission unit price-time priority buy price **5409** in the first time position of the price priority bucket **5410** of \$5.60;
- [0331] exemplary transformed data mining geolocation data community linked transmission unit price-time priority buy price **5308** in the second time position of the price priority bucket **5410** of \$5.60;
- [0332] exemplary transformed data mining geolocation data community linked transmission unit price-time priority sell price **5411** in the first time position of the price priority bucket **5414** of \$5.70;
- [0333] exemplary transformed data mining geolocation data community linked transmission unit price-time priority sell price **5412** in the second time position of the price priority bucket **5414** of \$5.70;

- [0334] exemplary transformed data mining geolocation data community linked transmission unit price-time priority sell price **5413** in the third time position of the price priority bucket **5414** of \$5.70;
- [0335] exemplary transformed data mining geolocation data community linked transmission unit price-time priority sell price **5418** in the first time position of the price priority bucket **5415** of \$5.80;
- [0336] exemplary transformed data mining geolocation data community linked transmission unit price-time priority sell price **5419** in the second time position of the price priority bucket **5415** of \$5.80;
- [0337] exemplary transformed data mining geolocation data community linked transmission unit price-time priority sell price **5417** in the first time position of the price priority bucket **5416** of \$6.60;
- [0338] exemplary transformed data mining geolocation data community linked transmission unit price time priority limit order book ("LOB") **5425** is represented by the vector $q(t)$ **5401**, such that the i -th coordinate for $i > 0$, $q_i(t)$, is the number of sell limit orders of transformed transmission units that are waiting in the LOB at time t a price $i\Delta$ (Δ is the price unit tick size of the transformed data mining geolocation data community linked transmission unit), the number of buy limit orders for transformed data mining geolocation data community linked transmission units at $i\Delta$ are represented with a negative sign $q_i(t)$;
- [0339] exemplary benchmark price **5426** of all sell limit orders at time t are computed as $s(t) = s(q(t)) = \min(\min\{0 < i\Delta: q_i(t) > 0\})$, if $q_i(t)$ is less than or equal to 0 for all $i > 0$, then $s(q(t)) = \text{infinity}$;
- [0340] exemplary benchmark price **5427** of all buy limit orders at time t are computed as $b(t) = b(q(t)) = \max(\max\{i\Delta > 0: q_i(t) < 0\})$, if $q_i(t)$ is greater than or equal to 0 for all $i > 0$, then $b(q(t)) = \text{negative infinity}$;
- [0341] exemplary order match **5428** in the transformed data mining geolocation data community linked transmission unit limit order book where $s(t) = b(t)$, which then moves the method and system to the matched transformed data mining geolocation data community linked transmission unit limit order confirmation and delivery process;
- [0342] exemplary limit order book status of no order match **5429**, where $s(t) > b(t)$;
- [0343] exemplary limit order book i -th $q_i(t)$ element **5430** of LOB is cancelled, remove from queue;
- [0344] exemplary i -th $q_i(t)$ element is a new transformed data mining geolocation data community linked transmission unit order **5431** in LOB, insert into respective limit order buy queue **5421** or limit order sell queue **5420** with priority of price, then time into the price time priority queues **5400**.
- [0345] In some embodiments, the price-time priority queue **5400** for transformed data mining geolocation data community linked transmission units may be assigned to a data mining geolocation data community linked commute community object **4200** which is a waypoint sequence of transformed data mining geolocation data community linked transmission units. In some embodiments, the price-time priority queue **5400** may be assigned to two waypoints as an data mining geolocation data community linked commute community object **4200** or the price-time prior queue **5400** may be assigned to an data mining geolocation data com-

munity linked commute community waypoint object sequence of many waypoints **205** to **206** to **207** to **208** which have been added together to form one continuous data mining geolocation data community linked commute community object **4200** and respective price-time priority queue for transformed data mining geolocation data community linked transmission units through processing instructions from the data mining geolocation data community linked Community Route Processor **216** and data mining geolocation data community linked Transmission Sequence Route Processor **215**, **217** via the network(s) **150**. In some embodiments, the limit order book **5301** vector may be assigned to a specific date and time for the data mining geolocation data community linked commute community waypoint object which is a forward market price for transformed data mining geolocation data community linked transmission unit(s) **4200** and data mining geolocation data community linked commute community waypoint object(s) **4200**. In some embodiments, a specific transformed data mining geolocation data community linked transmission unit price-time priority queue limit buy order **5404** with a specific price stamp bucket **5405** of \$5.10, may be cancelled, if the **5404** order is cancelled, the **5403** price-time priority limit order book buy queue price then moves to the higher price-time priority queue position of **5404** and price-time priority price of **5402** moves to position **5403**. In some embodiments, the price-time priority limit order sell price **5419** of price-time priority bucket price **5415** of \$5.80 may be cancelled, if **5419** price-time priority of the transformed data mining geolocation data community linked transmission unit is cancelled, then order **5417** moves to a higher position in the overall transformed data mining geolocation data community linked transmission queue **5420** even though the limit order book price **5417** remains in the price bucket of **5416** which is \$6.60. In some embodiments, price-time priority insertion may occur where a new order is inserted into either the transformed data mining geolocation data community linked transmission unit buy queue **5420** or transformed data mining geolocation data community linked transmission unit sell queue **5421**. In some embodiments, by example but not limiting by example, a new price-time limit order for a transformed data mining geolocation data community linked transmission unit may be inserted as a sell order at a price of \$5.70 at position **5313** which would then assume order **5412** was also at a price of \$5.70 and that order **5312** was placed with a time that was before order **5413** was placed. In the aforementioned example of the price-time order insertion of **5413**, price-time orders of **5419**, **5418** and **5417** have moved lower in their relative position even though they remain in distinctly different price buckets of **5415** and **5416** respectively as the price-time priority queue **5400**, price is first priority, then time stamp in the price-time priority queue **5400** for transformed data mining geolocation data community linked transmission units.

[0346] In some embodiments, the lowest selling price $s(t)$ **5426** may equal the highest buying price $b(t)$ **5427**, in which case the highest transformed data mining geolocation data community linked transmission unit buy queue price bucket **5410** is equal to the lowest transformed data mining geolocation data community linked transmission unit sell queue **5420** selling bucket price **5414**. In the example **5400** of the limit order book **5401**, but not limiting by example, the highest transformed data mining geolocation data community linked transmission unit buy price **5410** of \$5.60 is

lower than the lowest data mining geolocation data community linked transmission unit sell queue **5420** lowest selling bucket **5414** of \$5.70 so no match occurs because $s(t) > b(t)$ **5429**. In some embodiments, many order insertions **5431** or order cancellations **330** may occur for transformed data mining geolocation data community linked transmission units from the data mining geolocation data community linked transmission forward market database server **5424** associated with data mining geolocation data community linked community objects which are series of waypoints **4200**.

[0347] In some embodiments, the LOB **5400** for transformed data mining geolocation data community linked transmission units may contain many different types of instruction structures and specifications such as limit orders, market orders, market if touched orders, snap market orders, snap mid orders, snap to primary orders, peg to benchmark orders, or adaptive custom orders which are custom customer designed instructions which are all standard order types for anyone skilled in the art of markets. In some embodiments, the LOB **5400** for transformed transmission units may also contain instructions for order times such as good for the day, good till cancelled, immediate or cancel, good till date, day till cancelled or a plurality of additional custom instructions for the timing of the order of the transformed transmission unit in the LOB **5400** that is associate with an data mining geolocation data community linked commute community object **241**. In some embodiments, a plurality of additional instructions and specifications may also be unique to each transformed data mining geolocation data community linked transmission unit LOB **5400** such as virtual mode **1611**, automobile mode **1630**, air mode **1612**, autonomous vehicle mode **1613**, bike mode **1614**, boat mode **1615**, bus mode **1616**, drone mode **1617**, limo mode **1618**, motorcycle mode **1619**, moped mode **1620**, shuttle mode **1612**, spaceship mode **1622**, subway mode **1623**, fish mode **1624**, train mode **1625**, shark mode **1626** which may combine many modes **1610** or a single mode **1610** for a waypoint commute community object **4200** or waypoint data mining geolocation data community linked sequence **205** to **206** to **207** to **208** of many data mining geolocation data community linked commute communities **4200**.

[0348] In some embodiments, the LOB **5400** may be assigned to transformed data mining geolocation data community linked transmission unit T-Rex dinosaur mode **1628** that have associated data mining geolocation data community linked commute community objects **4200**. In some embodiments, the LOB **5400** for transformed transmission units may be assigned to in person **1629** for an actual in person meeting of a transformed data mining geolocation data community linked transmission unit. In some embodiments, the LOB **5400** may even be assigned to the virtual transformed data mining geolocation data community linked transmission unit **1611** which would be space along a packet moving medium such as a telecom pipeline, satellite telecom or wireless telecom that moves packets of power which are transformed transmission units. In some embodiments, the LOB **5400** may be assigned to a home or business at a certain transmission waypoint **205**, **206**, **207**, **208**.

[0349] FIG. 55 illustrates exemplary user price-time priority queue **5500** for transacting or matching transformed geolocation attribute exchange data community linked transmission unit data, participating, transacting and/or trading

geolocation attribute exchange data community linked transmission, representing the transformed geolocation attribute exchange data community linked transmission unit value as a homogeneous asset specification or geolocation attribute exchange data as a physical forward commodity security between combinations of virtual hubs over various transmission modes and nodes. In some embodiments, user transformed geolocation attribute exchange data community linked transmission unit(s) or transformed geolocation attribute exchange data community linked transmission unit(s) associated with geolocation attribute exchange data community linked route community objects interface **5300** includes the following instructions, transformations and elements, or a subset or superset thereof:

[0350] exemplary transformed geolocation attribute exchange data community linked transmission unit price-time priority sell queue **5520**;

[0351] exemplary transformed geolocation attribute exchange data community linked transmission unit price-time priority buy queue **5521**;

[0352] exemplary transformed geolocation attribute exchange data community linked transmission unit price priority bucket **5505** in the transmission unit buy queue of \$5.10;

[0353] exemplary transformed geolocation attribute exchange data community linked transmission unit price priority bucket **5506** in the transmission unit buy queue of \$5.30;

[0354] exemplary transformed geolocation attribute exchange data community linked transmission unit price priority bucket **5510** in the transmission unit buy queue of \$5.60;

[0355] exemplary transformed geolocation attribute exchange data community linked transmission unit price priority bucket **5514** in the transmission unit sell queue of \$5.70;

[0356] exemplary transformed geolocation attribute exchange data community linked transmission unit price priority bucket **5515** in the transmission unit sell queue of \$5.80;

[0357] exemplary transformed geolocation attribute exchange data community linked transmission unit price priority bucket **5516** in the transmission unit sell queue of \$6.60;

[0358] exemplary transformed geolocation attribute exchange data community linked transmission unit price-time priority buy price **5504** in the first time position of the price priority bucket **5505** of \$5.10;

[0359] exemplary transformed geolocation attribute exchange data community linked transmission unit price-time priority buy price **5503** in the second time position of the price priority bucket **5505** of \$5.10;

[0360] exemplary transformed geolocation attribute exchange data community linked transmission unit price-time priority buy price **5502** in the third time position of the price priority bucket **5505** of \$5.10;

[0361] exemplary transformed geolocation attribute exchange data community linked transmission unit price-time priority buy price **5507** in the first time position of the price priority bucket **5506** of \$5.30;

[0362] exemplary transformed geolocation attribute exchange data community linked transmission unit price-time priority buy price **5509** in the first time position of the price priority bucket **5510** of \$5.60;

- [0363] exemplary transformed geolocation attribute exchange data community linked transmission unit price-time priority buy price **5508** in the second time position of the price priority bucket **5510** of \$5.60;
- [0364] exemplary transformed geolocation attribute exchange data community linked transmission unit price-time priority sell price **5511** in the first time position of the price priority bucket **5514** of \$5.70;
- [0365] exemplary transformed geolocation attribute exchange data community linked transmission unit price-time priority sell price **5512** in the second time position of the price priority bucket **5514** of \$5.70;
- [0366] exemplary transformed geolocation attribute exchange data community linked transmission unit price-time priority sell price **5513** in the third time position of the price priority bucket **5514** of \$5.70;
- [0367] exemplary transformed geolocation attribute exchange data community linked transmission unit price-time priority sell price **5518** in the first time position of the price priority bucket **5515** of \$5.80;
- [0368] exemplary transformed geolocation attribute exchange data community linked transmission unit price-time priority sell price **5519** in the second time position of the price priority bucket **5515** of \$5.80;
- [0369] exemplary transformed geolocation attribute exchange data community linked transmission unit price-time priority sell price **5517** in the first time position of the price priority bucket **5416** of \$6.60;
- [0370] exemplary transformed geolocation attribute exchange data community linked transmission unit price time priority limit order book ("LOB") **5425** is represented by the vector $q(t)$ **5501**, such that the i -th coordinate for $i > 0$, $q_i(t)$, is the number of sell limit orders of transformed transmission units that are waiting in the LOB at time t a price $i\Delta$ (Δ is the price unit tick size of the transformed geolocation attribute exchange data community linked transmission unit), the number of buy limit orders for transformed geolocation attribute exchange data community linked transmission units at $i\Delta$ are represented with a negative sign $q_i(t)$;
- [0371] exemplary benchmark price **5426** of all sell limit orders at time t are computed as $s(t) = s(q(t)) = \min(\min\{0 < i\Delta: q_i(t) > 0\})$, if $q_i(t)$ is less than or equal to 0 for all $i > 0$, then $s(q(t)) = \text{infinity}$;
- [0372] exemplary benchmark price **5427** of all buy limit orders at time t are computed as $b(t) = b(q(t)) = \max(\max\{i\Delta > 0: q_i(t) < 0\})$, if $q_i(t)$ is greater than or equal to 0 for all $i > 0$, then $b(q(t)) = \text{negative infinity}$;
- [0373] exemplary order match **5428** in the transformed geolocation attribute exchange data community linked transmission unit limit order book where $s(t) = b(t)$, which then moves the method and system to the matched transformed geolocation attribute exchange data community linked transmission unit limit order confirmation and delivery process;
- [0374] exemplary limit order book status of no order match **5429**, where $s(t) > b(t)$;
- [0375] exemplary limit order book i -th $q_i(t)$ element **5430** of LOB is cancelled, remove from queue;
- [0376] exemplary i -th $q_i(t)$ element is a new transformed geolocation attribute exchange data community linked transmission unit order **5431** in LOB, insert into respective limit order buy queue **5521** or limit order sell

queue **5520** with priority of price, then time into the price time priority queues **5500**.

[0377] In some embodiments, the price-time priority queue **5500** for transformed geolocation attribute exchange data community linked transmission units may be assigned to a geolocation attribute exchange data community linked commute community object **4200** which is a waypoint sequence of transformed geolocation attribute exchange data community linked transmission units. In some embodiments, the price-time priority queue **5500** may be assigned to two waypoints as an geolocation attribute exchange data community linked commute community object **4200** or the price-time prior queue **5500** may be assigned to an geolocation attribute exchange data community linked commute community waypoint object sequence of many waypoints **205** to **206** to **207** to **208** which have been added together to form one continuous geolocation attribute exchange data community linked commute community object **4200** and respective price-time priority queue for transformed geolocation attribute exchange data community linked transmission units through processing instructions from the geolocation attribute exchange data community linked Community Route Processor **216** and geolocation attribute exchange data community linked Transmission Sequence Route Processor **215**, **217** via the network(s) **150**. In some embodiments, the limit order book **5501** vector may be assigned to a specific date and time for the geolocation attribute exchange data community linked commute community waypoint object which is a forward market price for transformed geolocation attribute exchange data community linked transmission unit(s) **4200** and geolocation attribute exchange data community linked commute community waypoint object(s) **4200**. In some embodiments, a specific transformed geolocation attribute exchange data community linked transmission unit price-time priority queue limit buy order **5504** with a specific price stamp bucket **5505** of \$5.10, may be cancelled, if the **5504** order is cancelled, the **5503** price-time priority limit order book buy queue price then moves to the higher price-time priority queue position of **5504** and price-time priority price of **5502** moves to position **5503**. In some embodiments, the price-time priority limit order sell price **5519** of price-time priority bucket price **5515** of \$5.80 may be cancelled, if **5519** price-time priority of the transformed geolocation attribute exchange data community linked transmission unit is cancelled, then order **5517** moves to a higher position in the overall transformed geolocation attribute exchange data community linked transmission queue **5520** even though the limit order book price **5517** remains in the price bucket of **5516** which is \$6.60. In some embodiments, price-time priority insertion may occur where a new order is inserted into either the transformed geolocation attribute exchange data community linked transmission unit buy queue **5520** or transformed geolocation attribute exchange data community linked transmission unit sell queue **5521**. In some embodiments, by example but not limiting by example, a new price-time limit order for a transformed geolocation attribute exchange data community linked transmission unit may be inserted as a sell order at a price of \$5.70 at position **5513** which would then assume order **5512** was also at a price of \$5.70 and that order **5512** was placed with a time that was before order **5513** was placed. In the aforementioned example of the price-time order insertion of **5513**, price-time orders of **5519**, **5518** and **5517** have moved lower in their relative position even

though they remain in distinctly different price buckets of **5515** and **5516** respectively as the price-time priority queue **5500**, price is first priority, then time stamp in the price-time priority queue **5500** for transformed geolocation attribute exchange data community linked transmission units.

[0378] In some embodiments, the lowest selling price $s(t)$ **5426** may equal the highest buying price $b(t)$ **5427**, in which case the highest transformed geolocation attribute exchange data community linked transmission unit buy queue price bucket **5510** is equal to the lowest transformed geolocation attribute exchange data community linked transmission unit sell queue **5520** selling bucket price **5514**. In the example **5500** of the limit order book **5501**, but not limiting by example, the highest transformed geolocation attribute exchange data community linked transmission unit buy price **5510** of \$5.60 is lower than the lowest geolocation attribute exchange data community linked transmission unit sell queue **5520** lowest selling bucket **5514** of \$5.70 so no match occurs because $s(t) > b(t)$ **5429**. In some embodiments, many order insertions **5431** or order cancellations **330** may occur for transformed geolocation attribute exchange data community linked transmission units from the geolocation attribute exchange data community linked transmission forward market database server **5424** associated with geolocation attribute exchange data community linked community objects which are series of waypoints **4200**.

[0379] In some embodiments, the LOB **5500** for transformed geolocation attribute exchange data community linked transmission units may contain many different types of instruction structures and specifications such as limit orders, market orders, market if touched orders, snap market orders, snap mid orders, snap to primary orders, peg to benchmark orders, or adaptive custom orders which are custom customer designed instructions which are all standard order types for anyone skilled in the art of markets. In some embodiments, the LOB **5500** for transformed transmission units may also contain instructions for order times such as good for the day, good till cancelled, immediate or cancel, good till date, day till cancelled or a plurality of additional custom instructions for the timing of the order of the transformed transmission unit in the LOB **5500** that is associate with an geolocation attribute exchange data community linked commute community object **241**. In some embodiments, a plurality of additional instructions and specifications may also be unique to each transformed data mining geolocation data community linked transmission unit LOB **5500** such as virtual mode **1611**, automobile mode **1630**, air mode **1612**, autonomous vehicle mode **1613**, bike mode **1614**, boat mode **1615**, bus mode **1616**, drone mode **1617**, limo mode **1618**, motorcycle mode **1619**, moped mode **1620**, shuttle mode **1612**, spaceship mode **1622**, subway mode **1623**, fish mode **1624**, train mode **1625**, shark mode **1626** which may combine many modes **1610** or a single mode **1610** for a waypoint commute community object **4200** or waypoint data mining geolocation data community linked sequence **205** to **206** to **207** to **208** of many data mining geolocation data community linked commute communities **4200**.

[0380] In some embodiments, the LOB **5500** may be assigned to transformed data mining geolocation data community linked transmission unit T-Rex dinosaur mode **1628** that have associated data mining geolocation data community linked commute community objects **4200**. In some embodiments, the LOB **5500** for transformed transmission

units may be assigned to in person **1629** for an actual in person meeting of a transformed data mining geolocation data community linked transmission unit. In some embodiments, the LOB **5500** may even be assigned to the virtual transformed data mining geolocation data community linked transmission unit **1611** which would be space along a packet moving medium such as a telecom pipeline, satellite telecom or wireless telecom that moves packets of power which are transformed transmission units. In some embodiments, the LOB **5500** may be assigned to a home or business at a certain transmission waypoint **205**, **206**, **207**, **208**. In some embodiments, the geolocation attribute exchange data may be transformed from a specific LOB **5525** and then assigned a transpose or cross product **4800** matrix **4812**, **4813** which may transform LOB **5525** into LOB' **5527** with new LOB' contract pricing.

[0381] FIG. **56** illustrates an exemplary social network structure object **5601** with associated price time priority queue for multi dimension geolocation attribute data **5602** which serves as a transaction gateway **5603** to a plurality of party rooms **5605**, **5606**, **5616**, **5617** with virtual trips **5607**, **5621**, **5622**, **5620** between the rooms. In some embodiments, a user **110** or plurality of users of the network **150** may use the social network transaction gateway **5603** for virtual party rooms associated with the price-time priority queue exchange data **5602**. In some embodiments, the plurality of users **5604**, **5612** may commence the virtual experience in Mexico City **5605** with mountain scenery in the virtual background **5611**. In some embodiments, the plurality of social network users may or may not know each other depending on the configuration settings. In some embodiments, the plurality of users **5604** may depart individually **5612** or collectively on a virtual journey **5621** to the Hawaii virtual room **5616** which may contain virtual palm trees **5616**, virtual water **5616** and additional virtual social network members **5615**. In some embodiments, the plurality of users **5624** may further continue on their single stop or multi-stop virtual journey to a mystery room **5617** which is to be unlocked **5618** with additional social network members **5623** and **5619**. In some embodiments, a plurality of social network members may continue to extend their journey to a virtual party room in Ithaca, New York for hiking **5606** where a plurality of waterfalls and hiking **5609** and hiking network member users **5610** may be present. In some embodiments, network users **5610**, **5623**, **5614**, **5624** may travel in different orders between the virtual party rooms on virtual journeys which may span many virtual transportation modes such as eagle view or drone view or boat view or train view as they import a plurality of virtual backgrounds through the multi-dimension map tile database exchange **160**, **5602**.

[0382] FIG. **57** illustrates an exemplary public **360'** high tea with the Queen view **5700** with natural altitude environment coupled with a virtual emoji or person outfit or skin selection tool **5719** associated with many virtual store brands **5724**. In some embodiments, the virtual room **164** rendered by the rendering engine **163** may host virtual network members **5708**, **5709**, **5711**, **5713**, **5712**, **5715** to select a plurality of virtual outfits **5720** in a virtual store **5721** through the virtual selection tool graphical user interface **5719** for the emoji or virtual real life render **5717** of the network member which may select a plurality of major brand stores or major brands **5718** such as Athleta or LuLu **5722** or vineyard vines **5723** or a plurality of other names

which may then adjust the store selection in the left side view 5721. In some embodiments the virtual room may render with multiple screens 5701, 2702, 5703 or single screen view 5702 which such background virtual elements as Buckingham palace 5704 or virtual tea 5706, 5716, 5707, 5710, 5714 with a plurality of network members 5708, 5709, 5711, 5713, 5712, 5715 or the Queen of England 5705 where users may know each other or they may be unknown to each other and they may talk or decide not to talk based on a plurality of virtual configuration settings. In some embodiments, users 5711 may change virtual outfits 5720 from the virtual store 5719 during a virtual meeting 5719. In some embodiments, user may have selected similar or matching outfits and users may decide to go shopping during the virtual meeting so that they are wearing unique outfits 5719. In some embodiments, virtual stores may upload multi dimension geolocation data which contains clothing dimensions for virtual appearance or emoji appearance to increase the variety and to transform the experience via the multi dimension geolocation data exchange method 5300, 5400, 5500.

What is claimed is:

1. A method, comprising:

receiving request data from a user device, wherein the request data comprises:

sensor data acquired using one or more sensors of the user device while the user device is disposed at one or more geographic locations; and

data corresponding to a request for one or more coordinate objects relating to the sensor data, wherein the one or more coordinate objects comprise one or more data objects relating to color, color channel, color depth, height, width, longitude, latitude, altitude, sensory feel, sensory smell, sensory touch, sensory electromagnetic waves, time, historical data, time style, time growth, weather, temperature, image scaling, microscopic image scaling, nanoscopic image scaling, chemistry, chemistry state, chemistry feeling, filters, filter color, lens focus, aperture, lens speed, lens type, speed, cross product blend, product type, or combinations thereof;

retrieving the one or more coordinate objects from one or more multidimensional object databases based on the request data; and

transmitting the one or more coordinate objects to the user device, wherein the user device is configured to generate an interactive environment based on the one or more coordinate objects.

2. The method of claim 1, wherein:

the interactive environment comprises an augmented reality (AR) environment, a mixed reality (MR) environment, or a virtual reality (VR) environment; and the user device comprises a mobile computing device, a tablet computing device, a laptop computing device, a stationary computing device, an augmented reality (AR) computing device, a mixed reality (MR) computing device, a virtual reality (VR) computing device, an Internet of Things (IoT) computing device, or combinations thereof.

3. The method of claim 1, wherein the sensor data comprises photographic data, video data, location data, latitude data, longitude data, altitude data, time data, temperature data, weather data, accelerometer data, or combinations thereof.

4. The method of claim 1, wherein the one or more sensors comprise one or more optical sensors, one or more cameras, one or more microphones, one or more satellite navigation system receivers, one or more accelerometers, one or more light sensors, one or more location sensors, one or more barometers, one or more thermometers, or combinations thereof.

5. The method of claim 1, wherein the one or more multidimensional object databases are configured to store one or more data objects, wherein the one or more data objects comprise: the one or more coordinate objects, data corresponding to one or more images associated with one or more real objects, one or more images associated with one or more virtual objects, one or more sounds associated with one or more real objects, one or more sounds associated with one or more virtual objects, one or more latitudes associated with one or more real objects, one or more longitudes associated with one or more real objects, one or more altitudes associated with one or more real objects, time associated with one or more real objects, weather associated with one or more real objects, one or more temperatures associated with one or more real objects, one or more image scaling associated with one or more virtual objects, chemistry associated with one or more real objects, one or more colors associated with one or more real objects, one or more filters associated with one or more real objects, one or more apertures associated with one or more real objects, one or more speeds associated with one or more real objects, one or more product types associated with one or more real objects, historical data associated with one or more real objects, or combinations thereof.

6. The method of claim 1, wherein the one or more multidimensional object databases comprises one or more multidimension map tile databases, one or more proxy dimension databases, or combinations thereof.

7. The method of claim 1, wherein the user device is configured to:

generate the interactive environment in real-time or near real-time while the user device is disposed at the one or more geographic locations;

generate the interactive environment in coordination with one or more virtual rooms, one or more virtual trips, or combinations thereof;

communicate with one or more other user devices using the interactive environment; or combinations thereof.

8. The method of claim 1, wherein retrieving the one or more coordinate objects comprises:

retrieving the one or more coordinate objects from one or more multidimension map tile databases of the one or more multidimensional object databases based on the request data;

retrieving proxy data from one or more proxy dimension databases of the one or more multidimensional object databases based on the request data and the one or more coordinate objects, wherein data of the one or more proxy dimension databases is different than data of the one or more multidimension map tile databases; and

transmitting the proxy data and the one or more coordinate objects to the user device, wherein the user device is configured to generate the interactive environment based on the proxy data and the one or more coordinate objects.

9. The method of claim 1, wherein retrieving the proxy data comprises retrieving the proxy data from the one or more proxy dimension databases of the one or more multidimensional object databases based on the request data and the one or more coordinate objects using one or more machine learning algorithms.

10. A method, comprising:

receiving request data from a user device, wherein the request data comprises:

sensor data acquired using one or more sensors of the user device while the user device is disposed at one or more geographic locations, wherein the sensor data comprises audio data; and

data corresponding to a request for one or more coordinate objects relating to the audio data, wherein the one or more coordinate objects comprise one or more data objects relating to color, color channel, color depth, height, width, longitude, latitude, altitude, sensory feel, sensory smell, sensory touch, sensory electromagnetic waves, time, historical data, time style, time growth, weather, temperature, image scaling, microscopic image scaling, nanoscopic image scaling, chemistry, chemistry state, chemistry feeling, filters, filter color, lens focus, aperture, lens speed, lens type, speed, cross product blend, product type, or combinations thereof;

retrieving the one or more coordinate objects from one or more multidimensional object databases based on the request data; and

transmitting the one or more coordinate objects to the user device, wherein the user device is configured to generate an interactive environment based on the one or more coordinate objects.

11. The method of claim 10, wherein:

the interactive environment comprises an augmented reality (AR) environment, a mixed reality (MR) environment, or a virtual reality (VR) environment; and
the user device comprises a mobile computing device, a tablet computing device, a laptop computing device, a stationary computing device, an augmented reality (AR) computing device, a mixed reality (MR) computing device, a virtual reality (VR) computing device, an Internet of Things (IoT) computing device, or combinations thereof.

12. The method of claim 10, wherein the one or more sensors comprise one or more optical sensors, one or more cameras, one or more microphones, one or more satellite navigation system receivers, one or more accelerometers, one or more light sensors, one or more location sensors, one or more barometers, one or more thermometers, or combinations thereof.

13. The method of claim 10, wherein the one or more multidimensional object databases are configured to store one or more data objects, wherein the one or more data objects comprise: the one or more coordinate objects, data corresponding to one or more images associated with one or more real objects, one or more images associated with one or more virtual objects, one or more sounds associated with one or more real objects, one or more sounds associated with one or more virtual objects, one or more latitudes associated with one or more real objects, one or more longitudes associated with one or more real objects, one or more altitudes associated with one or more real objects, time associated with one or more real objects, weather associated

with one or more real objects, one or more temperatures associated with one or more real objects, one or more image scaling associated with one or more virtual objects, chemistry associated with one or more real objects, one or more colors associated with one or more real objects, one or more filters associated with one or more real objects, one or more apertures associated with one or more real objects, one or more speeds associated with one or more real objects, one or more product types associated with one or more real objects, historical data associated with one or more real objects, or combinations thereof.

14. The method of claim 10, wherein the one or more multidimensional object databases comprises one or more multidimension map tile databases, one or more proxy dimension databases, or combinations thereof.

15. The method of claim 10, wherein retrieving the one or more coordinate objects comprises:

retrieving the one or more coordinate objects from one or more multidimension map tile databases of the one or more multidimensional object databases based on the request data;

retrieving proxy data from one or more proxy dimension databases of the one or more multidimensional object databases based on the request data and the one or more coordinate objects, wherein data of the one or more proxy dimension databases is different than data of the one or more multidimension map tile databases; and

transmitting the proxy data and the one or more coordinate objects to the user device, wherein the user device is configured to generate the interactive environment based on the proxy data and the one or more coordinate objects.

16. The method of claim 10, wherein retrieving the proxy data comprises retrieving the proxy data from the one or more proxy dimension databases of the one or more multidimensional object databases based on the request data and the one or more coordinate objects using one or more machine learning algorithms.

17. A method, comprising:

receiving request data from a user device, wherein the request data comprises:

sensor data acquired using one or more sensors of the user device while the user device is disposed at one or more geographic locations, wherein the sensor data comprises image data; and

data corresponding to a request for one or more coordinate objects relating to the image data, wherein the one or more coordinate objects comprise one or more data objects relating to color, color channel, color depth, height, width, longitude, latitude, altitude, sensory feel, sensory smell, sensory touch, sensory electromagnetic waves, time, historical data, time style, time growth, weather, temperature, image scaling, microscopic image scaling, nanoscopic image scaling, chemistry, chemistry state, chemistry feeling, filters, filter color, lens focus, aperture, lens speed, lens type, speed, cross product blend, product type, or combinations thereof;

retrieving the one or more coordinate objects from one or more multidimensional object databases based on the request data; and

transmitting the one or more coordinate objects to the user device, wherein the user device is configured to generate an interactive environment based on the one or more coordinate objects.

18. The method of claim 17, wherein:

the interactive environment comprises an augmented reality (AR) environment, a mixed reality (MR) environment, or a virtual reality (VR) environment; and the user device comprises a mobile computing device, a tablet computing device, a laptop computing device, a stationary computing device, an augmented reality (AR) computing device, a mixed reality (MR) computing device, a virtual reality (VR) computing device, an Internet of Things (IoT) computing device, or combinations thereof.

19. The method of claim 17, wherein the one or more multidimensional object databases are configured to store one or more data objects, wherein the one or more data objects comprise: the one or more coordinate objects, data corresponding to one or more images associated with one or more real objects, one or more images associated with one or more virtual objects, one or more sounds associated with one or more real objects, one or more sounds associated with one or more virtual objects, one or more latitudes associated with one or more real objects, one or more longitudes associated with one or more real objects, one or more altitudes associated with one or more real objects, time associated with one or more real objects, weather associated with one or more real objects, one or more temperatures

associated with one or more real objects, one or more image scaling associated with one or more virtual objects, chemistry associated with one or more real objects, one or more colors associated with one or more real objects, one or more filters associated with one or more real objects, one or more apertures associated with one or more real objects, one or more speeds associated with one or more real objects, one or more product types associated with one or more real objects, historical data associated with one or more real objects, or combinations thereof.

20. The method of claim 17, wherein retrieving the one or more coordinate objects comprises:

retrieving the one or more coordinate objects from one or more multidimension map tile databases of the one or more multidimensional object databases based on the request data;

retrieving proxy data from one or more proxy dimension databases of the one or more multidimensional object databases based on the request data and the one or more coordinate objects, wherein data of the one or more proxy dimension databases is different than data of the one or more multidimension map tile databases; and

transmitting the proxy data and the one or more coordinate objects to the user device, wherein the user device is configured to generate the interactive environment based on the proxy data and the one or more coordinate objects.

* * * * *