



US 20250277357A1

(19) **United States**

(12) **Patent Application Publication**
Detlaff et al.

(10) **Pub. No.: US 2025/0277357 A1**

(43) **Pub. Date: Sep. 4, 2025**

(54) **WORKSTATION SINKS AND ACCESSORIES**

(71) Applicant: **Kohler Co.**, Kohler, WI (US)

(72) Inventors: **Ryan Detlaff**, Kohler, WI (US); **Karl Hinkfuss**, Kohler, WI (US)

(21) Appl. No.: **19/048,818**

(22) Filed: **Feb. 7, 2025**

A47L 19/04 (2006.01)

E03C 1/182 (2006.01)

F25C 5/182 (2018.01)

(52) **U.S. Cl.**

CPC **E03C 1/186** (2013.01); **A47J 43/24** (2013.01); **A47J 43/283** (2013.01); **A47J 47/005** (2013.01); **A47J 47/16** (2013.01); **A47J 47/18** (2013.01); **A47J 47/20** (2013.01); **A47L 19/04** (2013.01); **F25C 5/182** (2013.01); **E03C 1/182** (2013.01)

Related U.S. Application Data

(60) Provisional application No. 63/557,273, filed on Feb. 23, 2024.

Publication Classification

(51) **Int. Cl.**

E03C 1/186 (2019.01)

A47J 43/24 (2006.01)

A47J 43/28 (2006.01)

A47J 47/00 (2006.01)

A47J 47/16 (2006.01)


A47J 47/18 (2006.01)

A47J 47/20 (2019.01)

(57)

ABSTRACT

The present disclosure generally relates to workstation sinks and related accessories. More specifically, the present disclosure relates to workstation sinks designed for use with several different sink and kitchen accessories to create a functional sink workplace. One example is a workstation sink system having a faucet, a basin, and one or more accessories configured for use in the basin or neighboring countertops and ledges. Another example is a workstation sink accessory kit containing two or more accessories for use with a basin or neighboring countertops and ledges. A user may select any number of accessories their particular kitchen and sink needs.

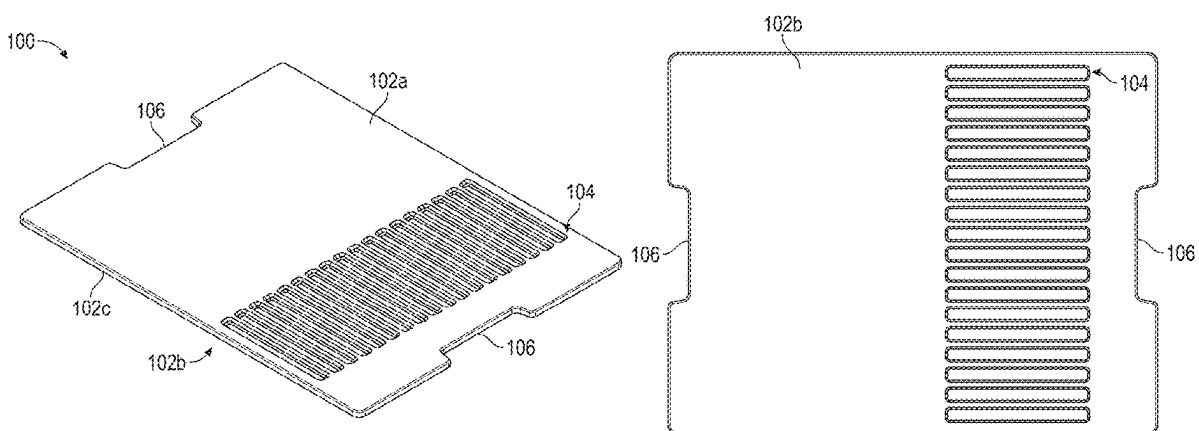

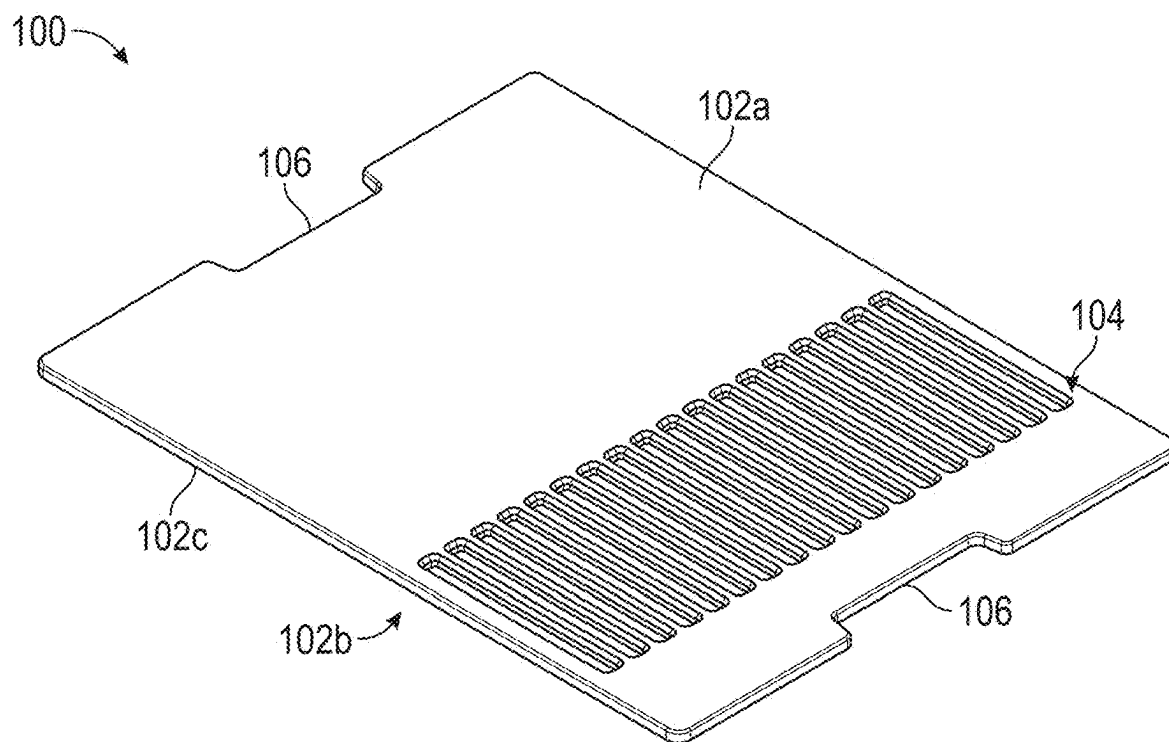


FIG. 1A

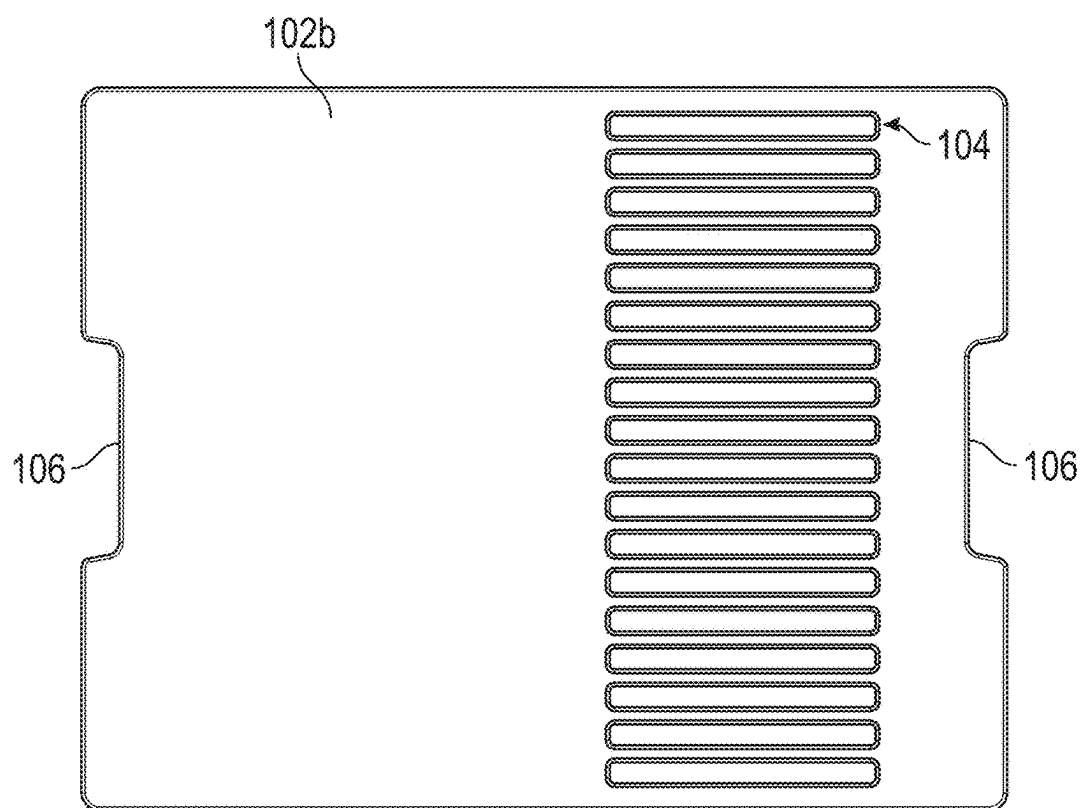


FIG. 1B

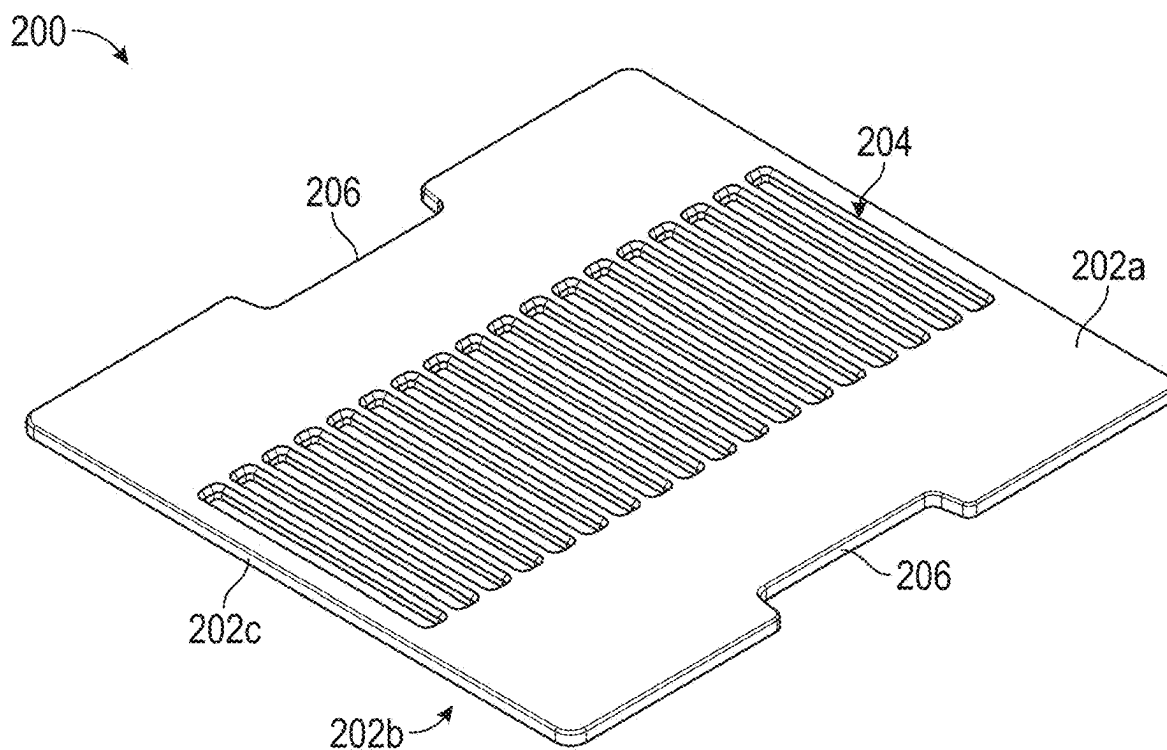


FIG. 2A

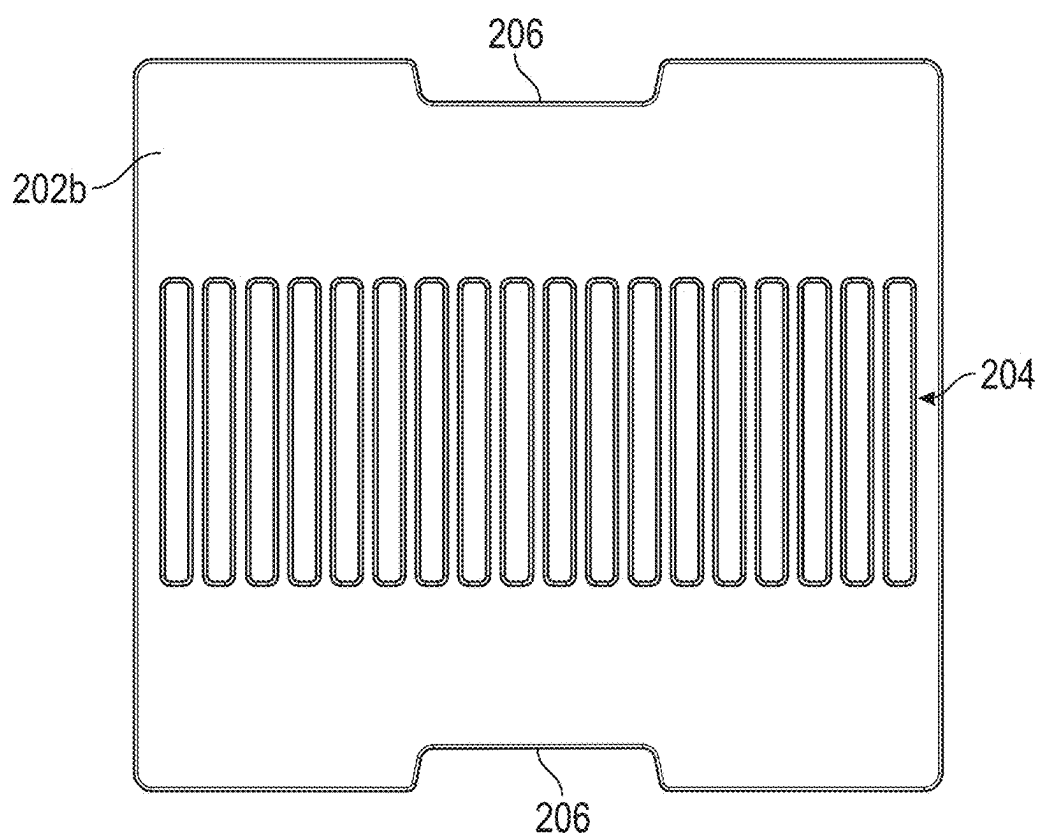


FIG. 2B

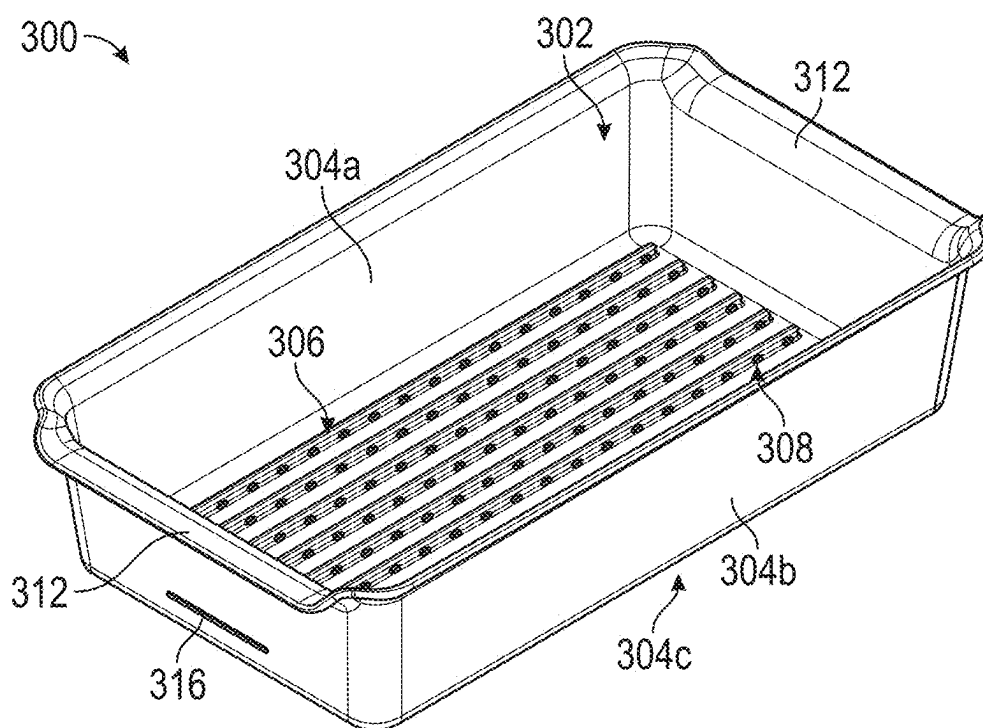


FIG. 3A

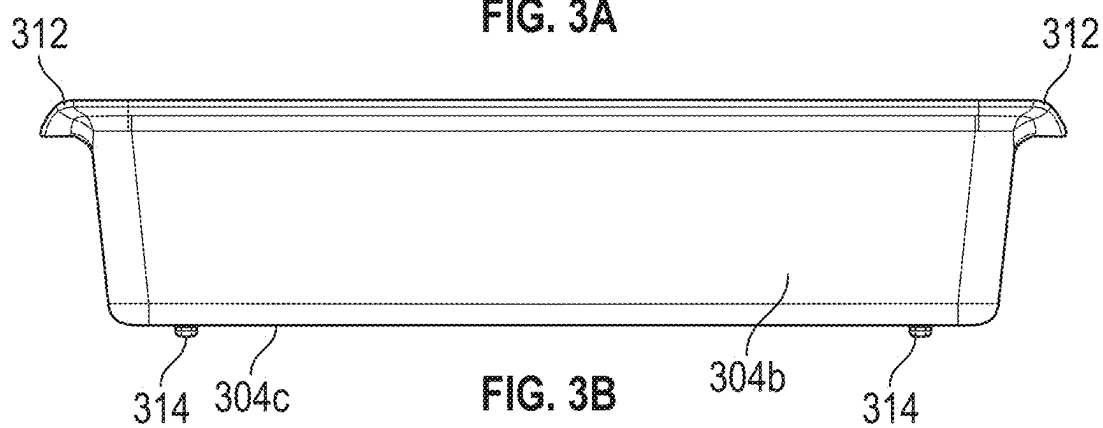


FIG. 3B

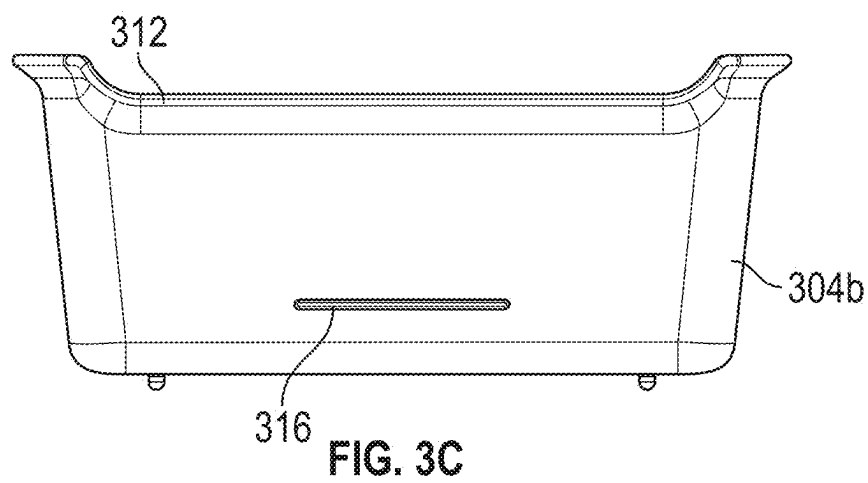


FIG. 3C

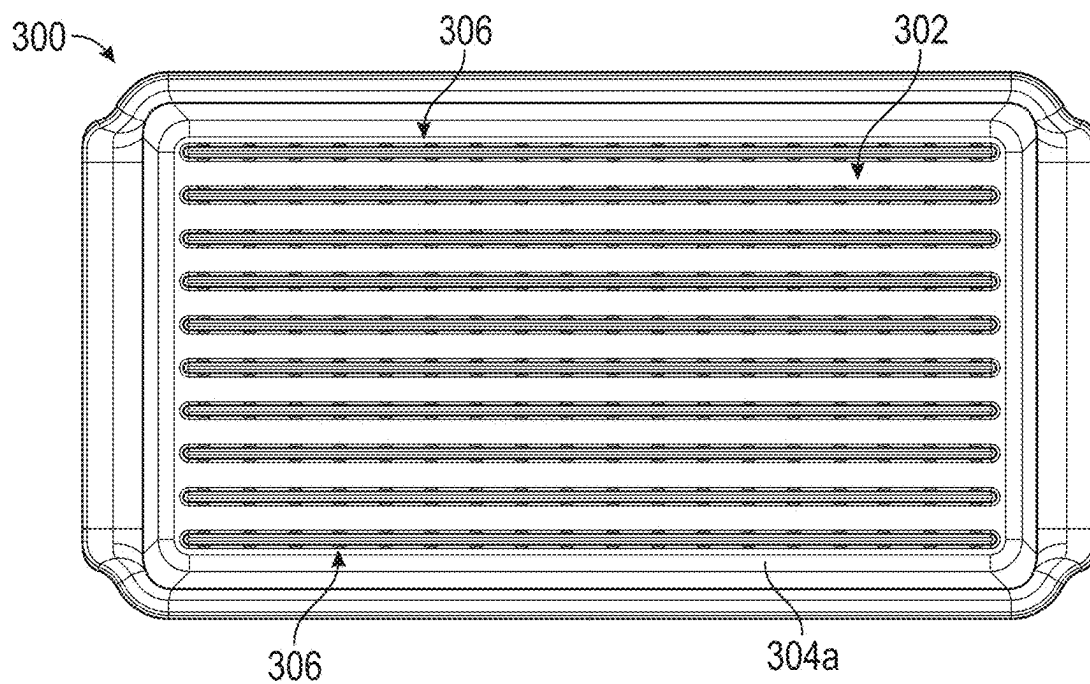


FIG. 3D

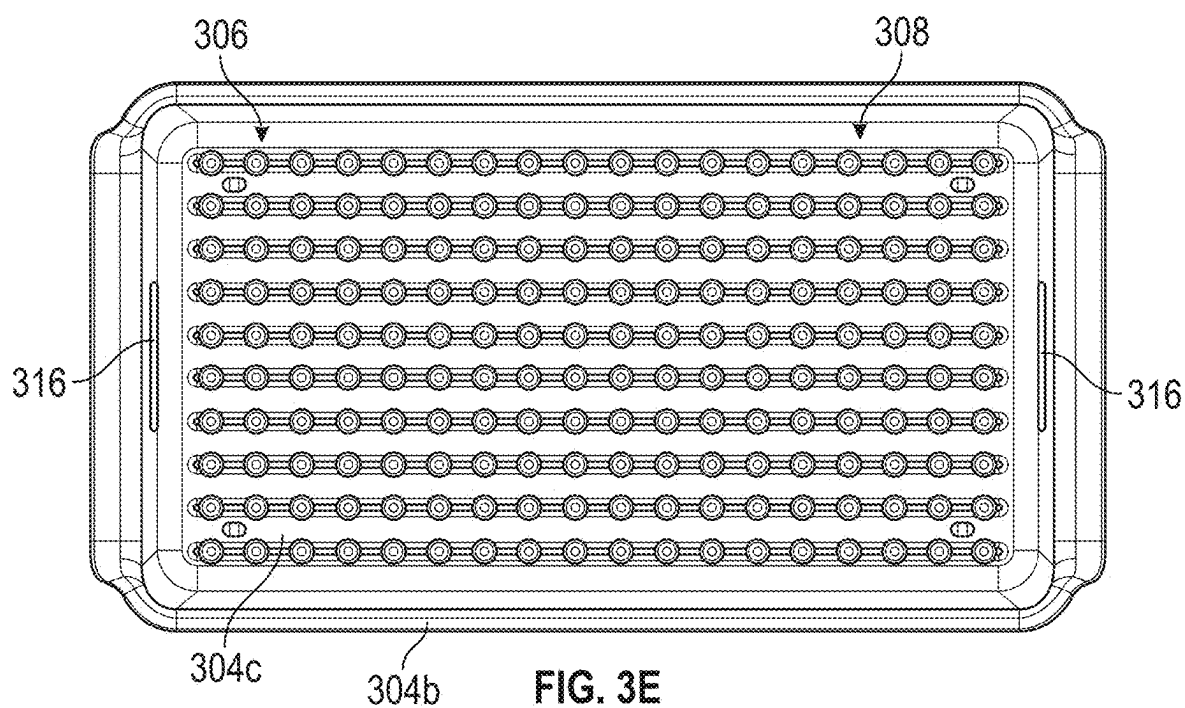


FIG. 3E

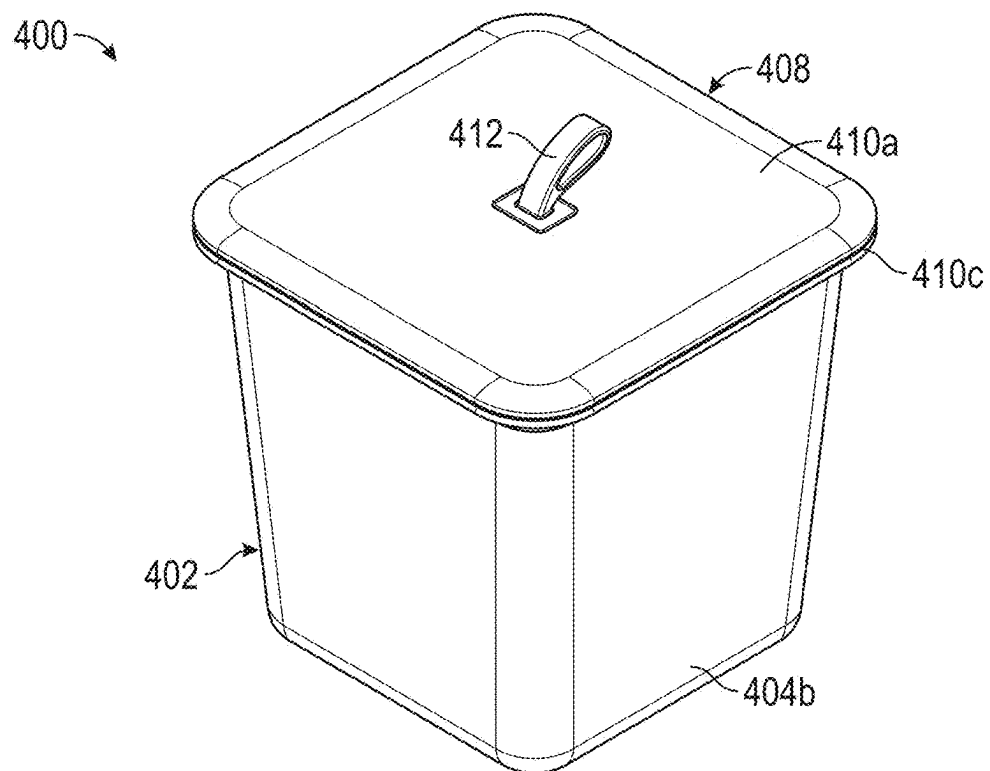


FIG. 4A

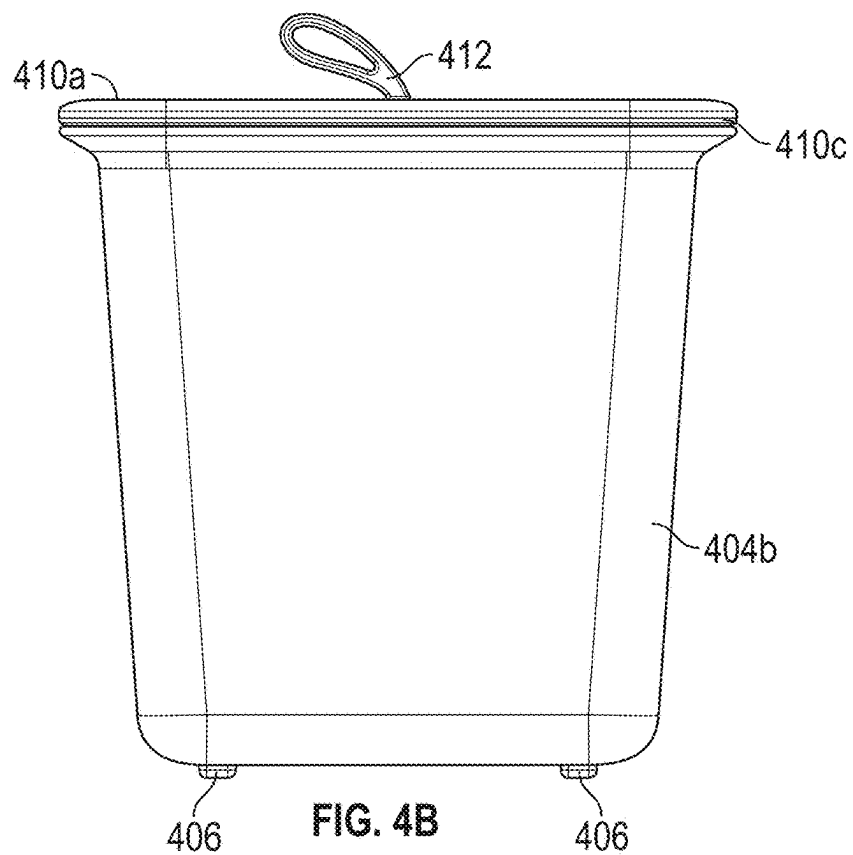


FIG. 4B

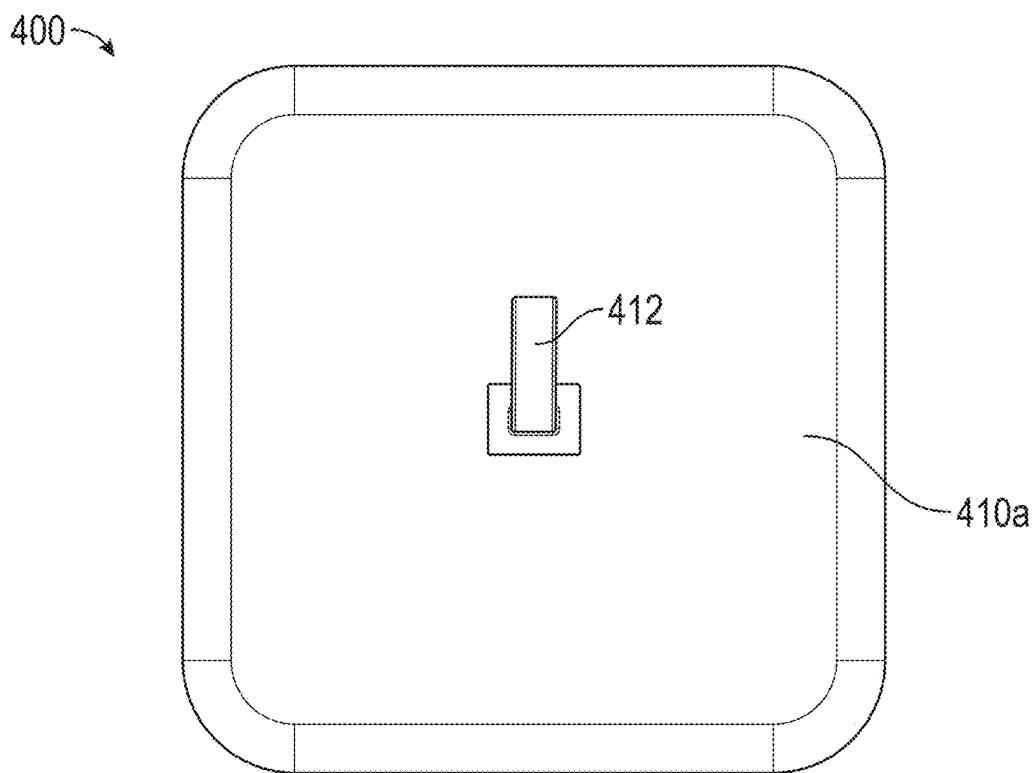


FIG. 4C

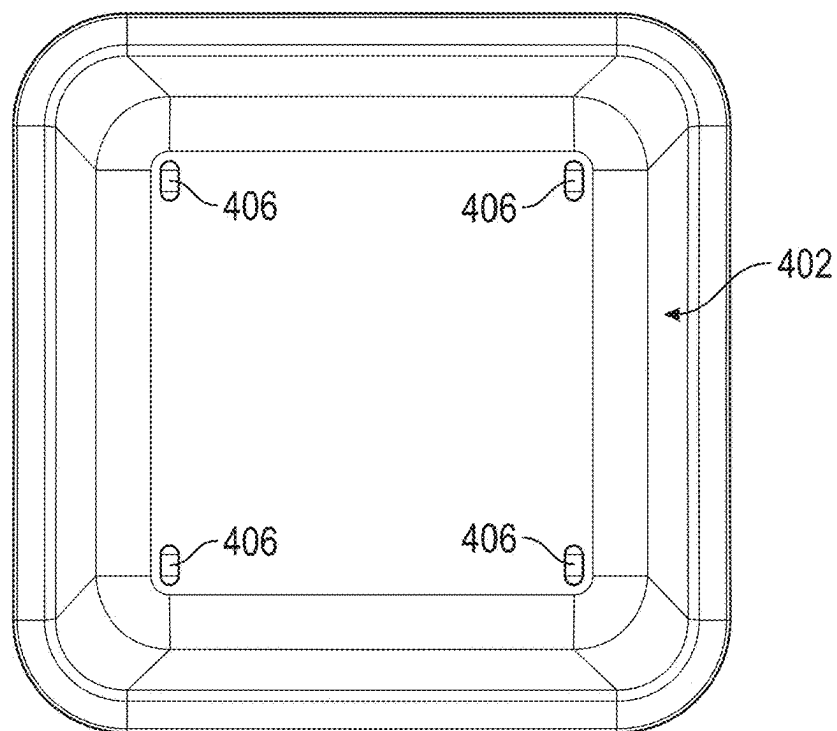


FIG. 4D

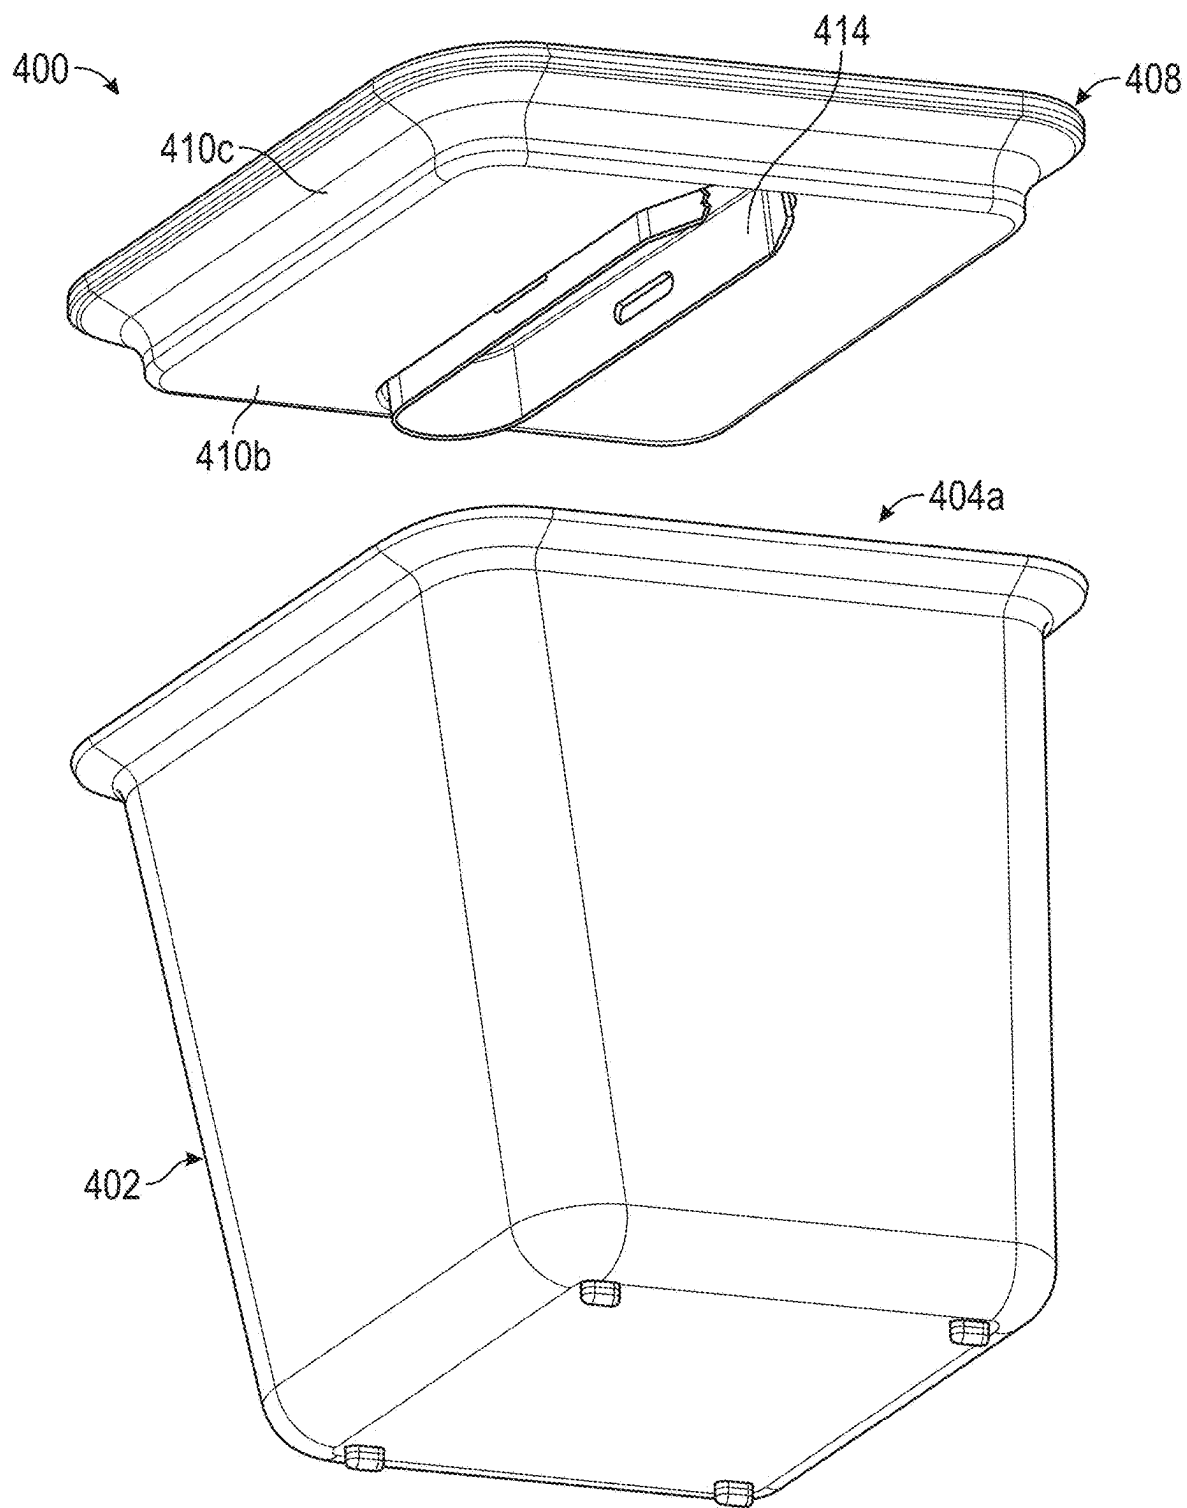


FIG. 4E

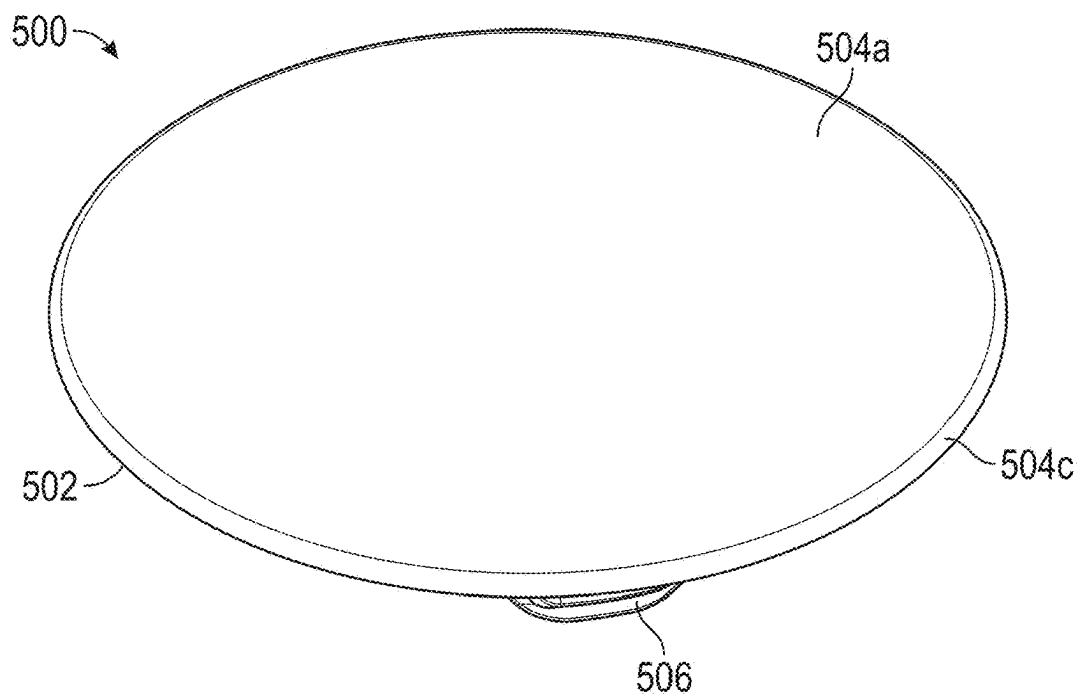


FIG. 5A

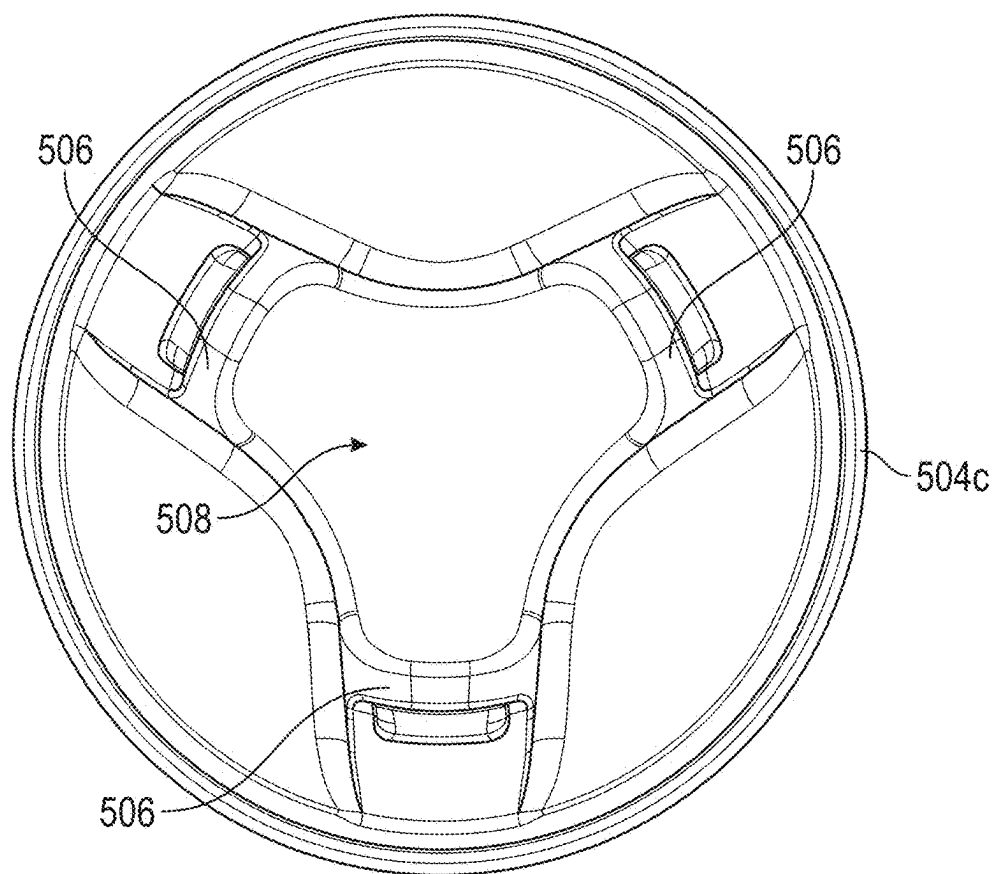


FIG. 5B

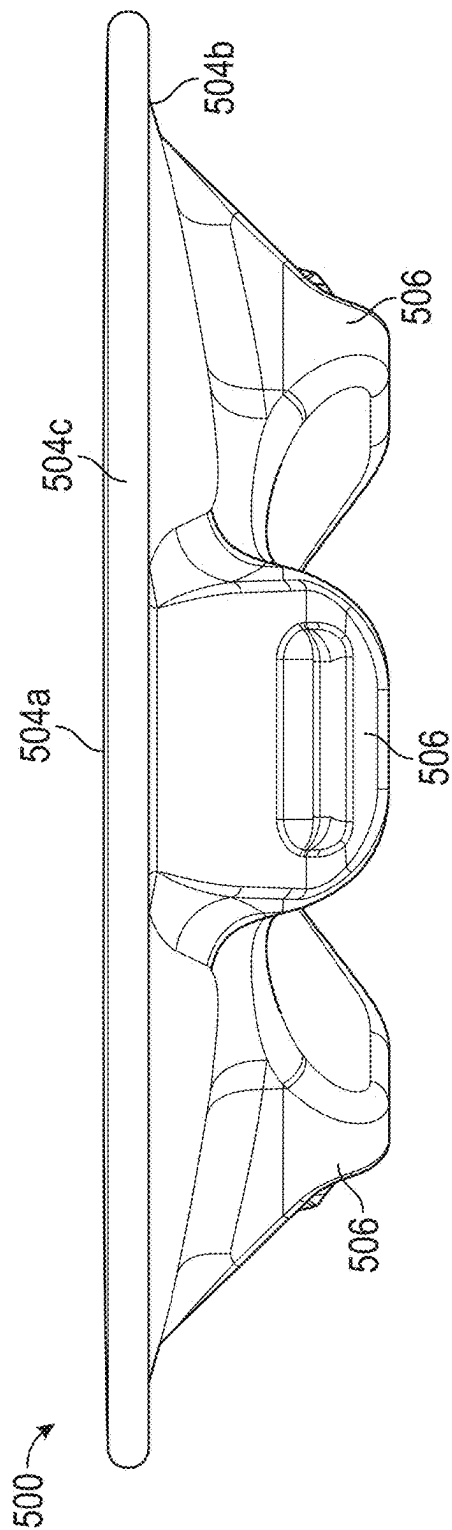


FIG. 5C

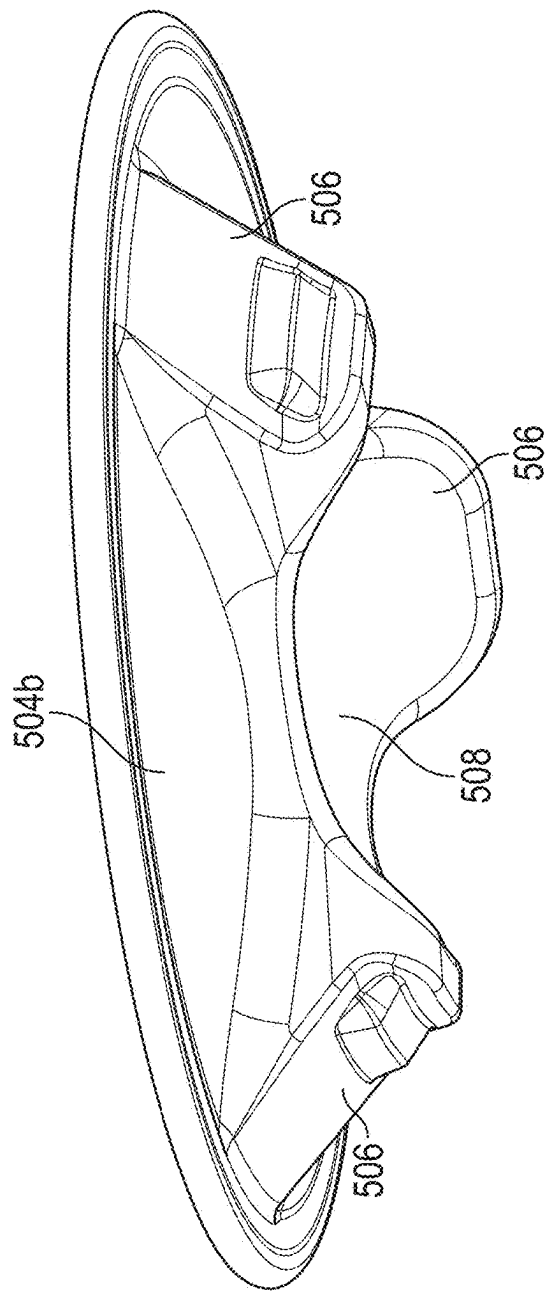


FIG. 5D

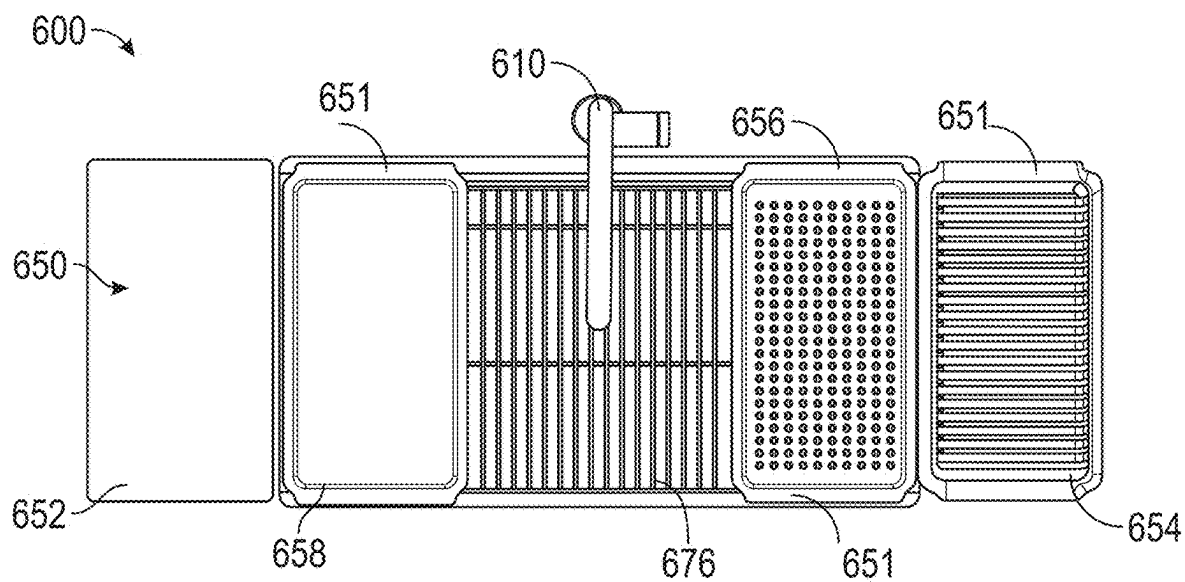


FIG. 6A

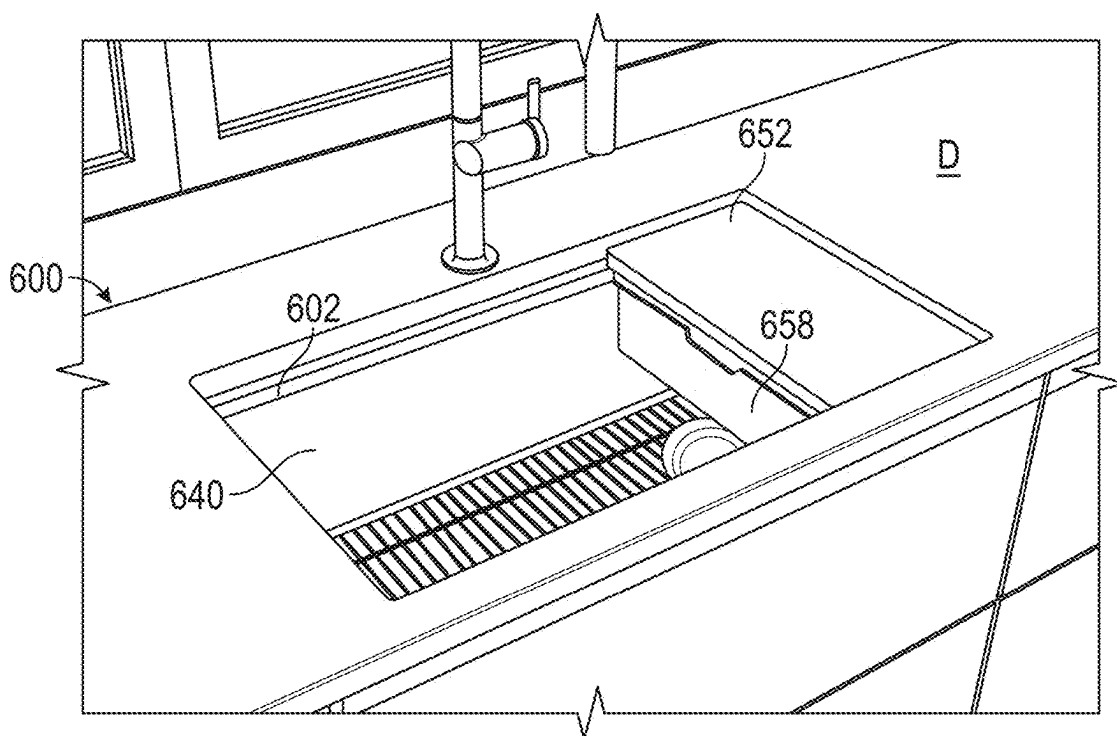


FIG. 6B

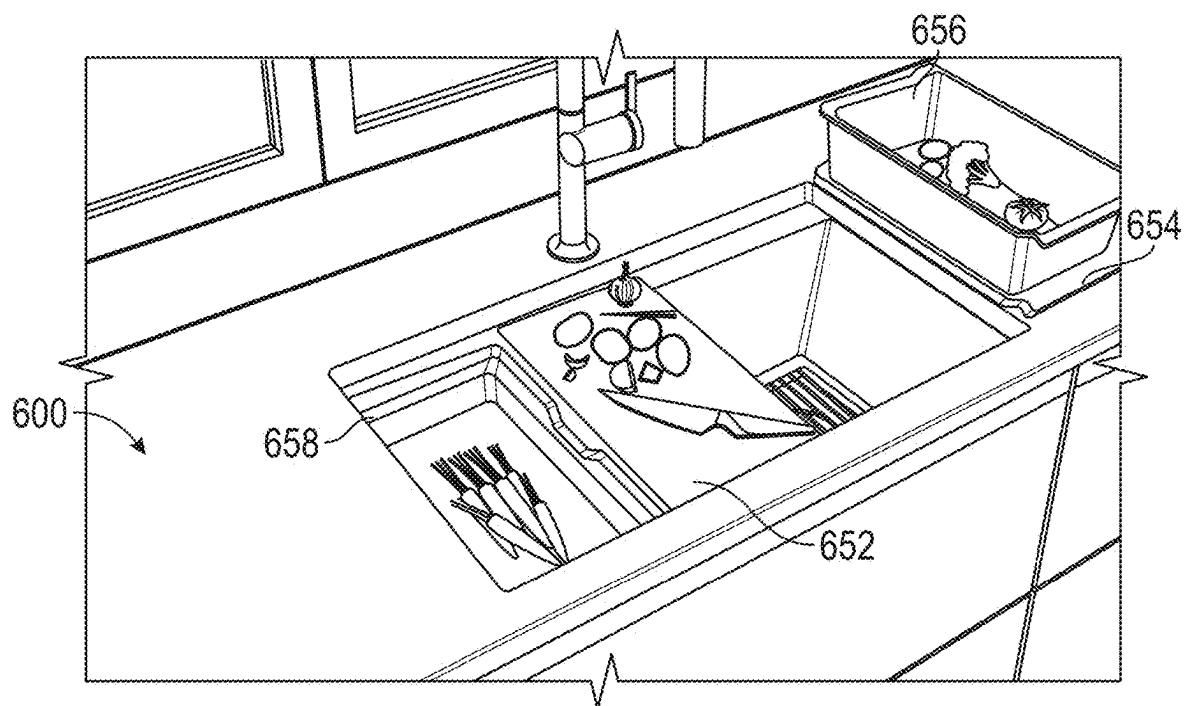


FIG. 6C

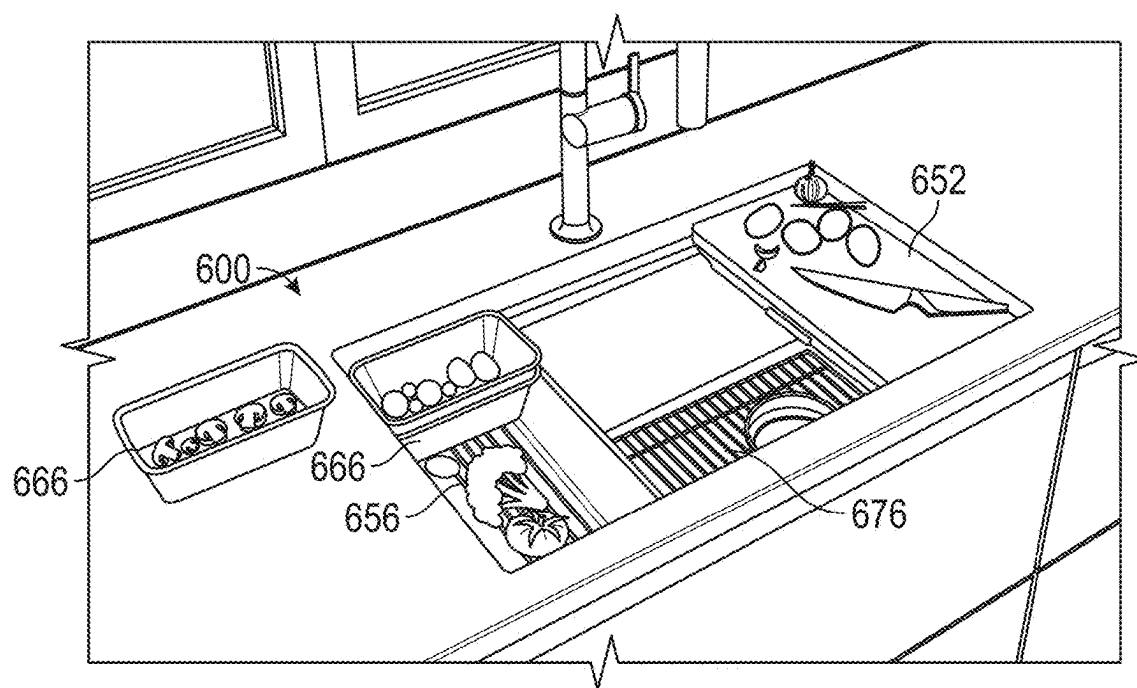


FIG. 6D

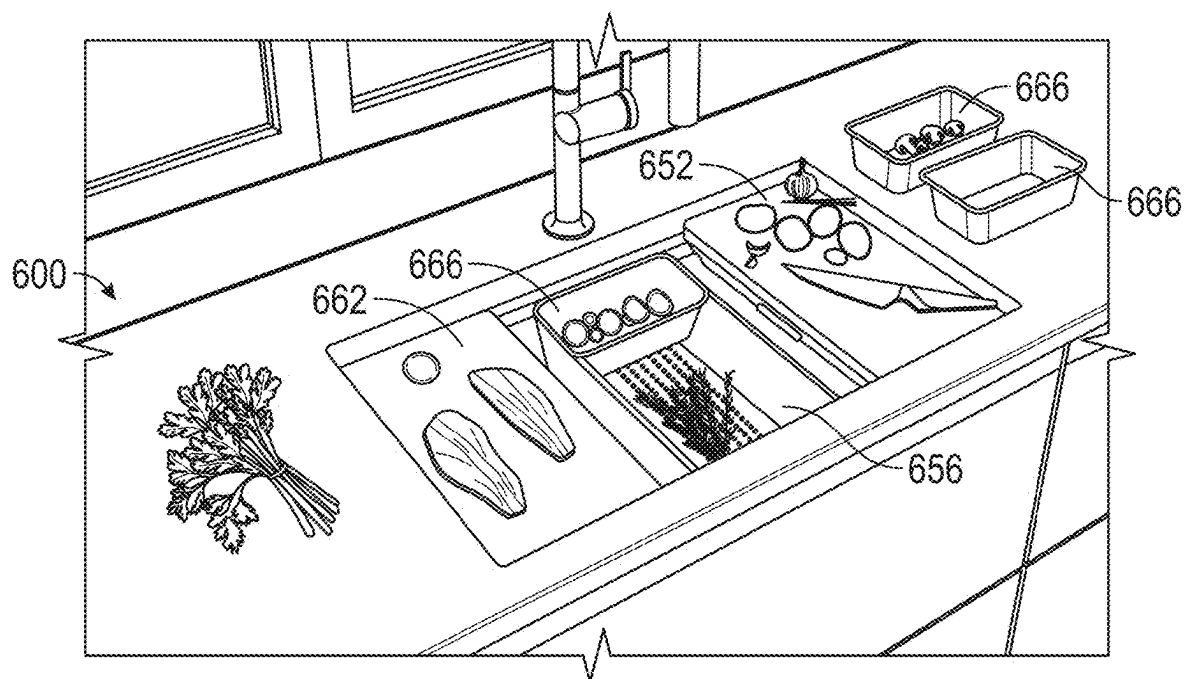


FIG. 6E

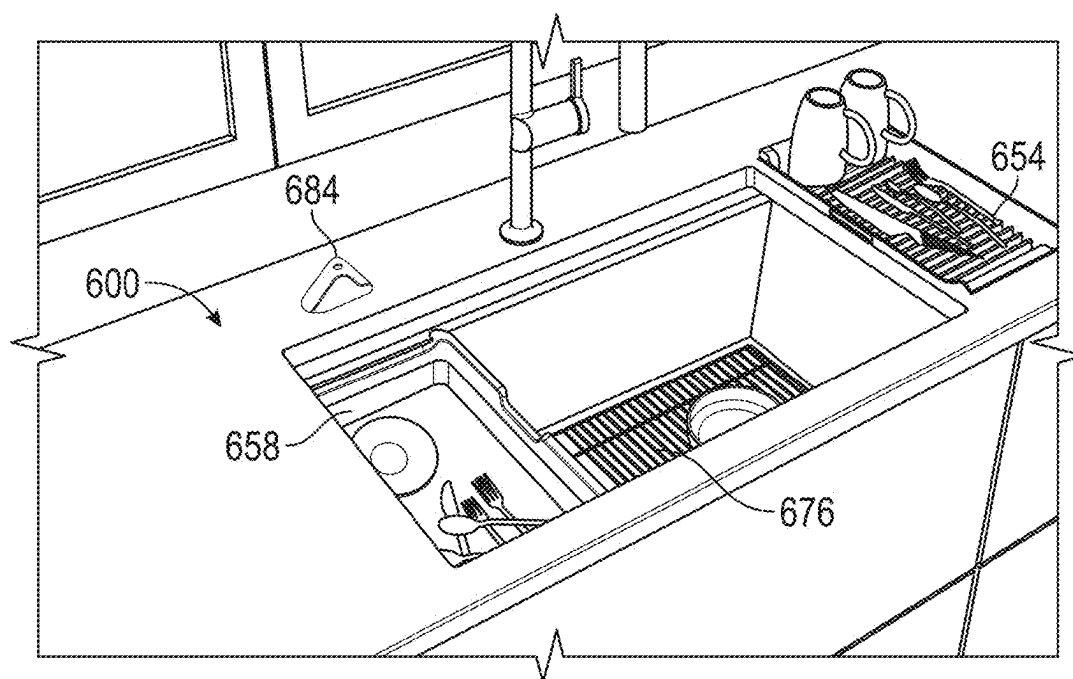


FIG. 6F

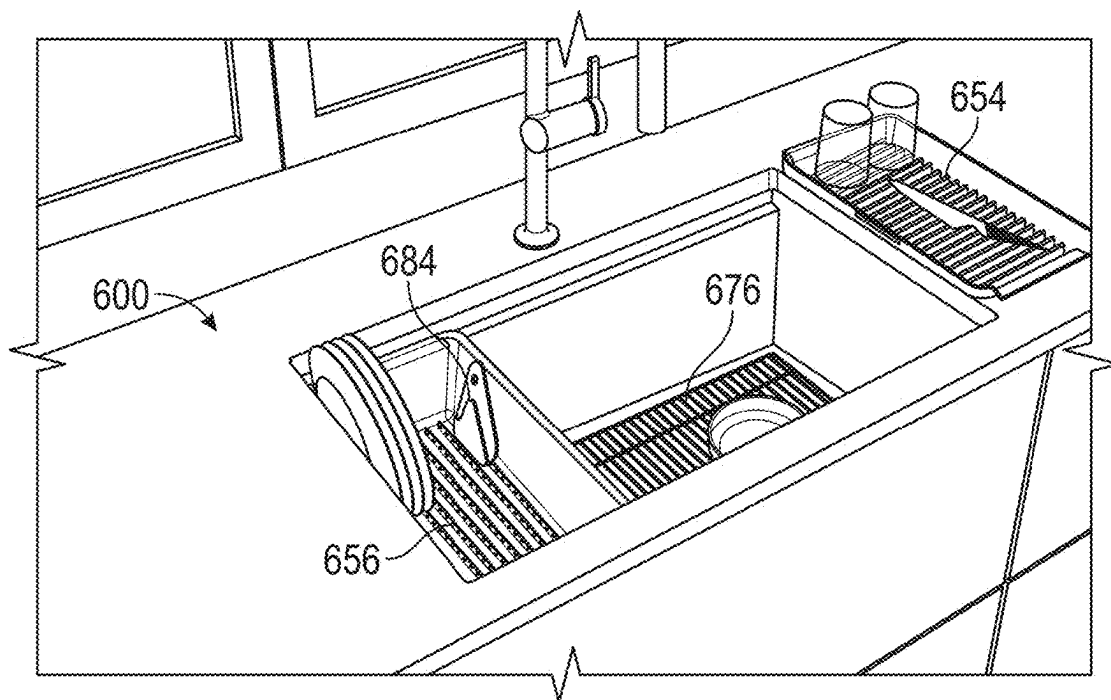


FIG. 6G

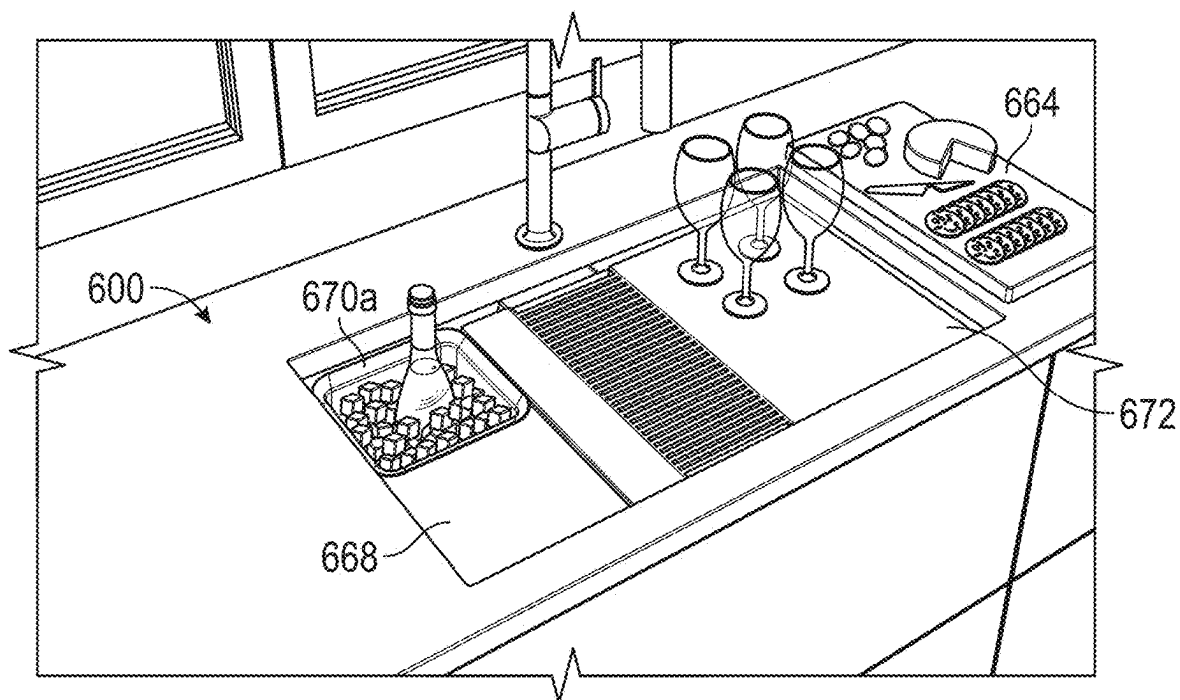


FIG. 6H

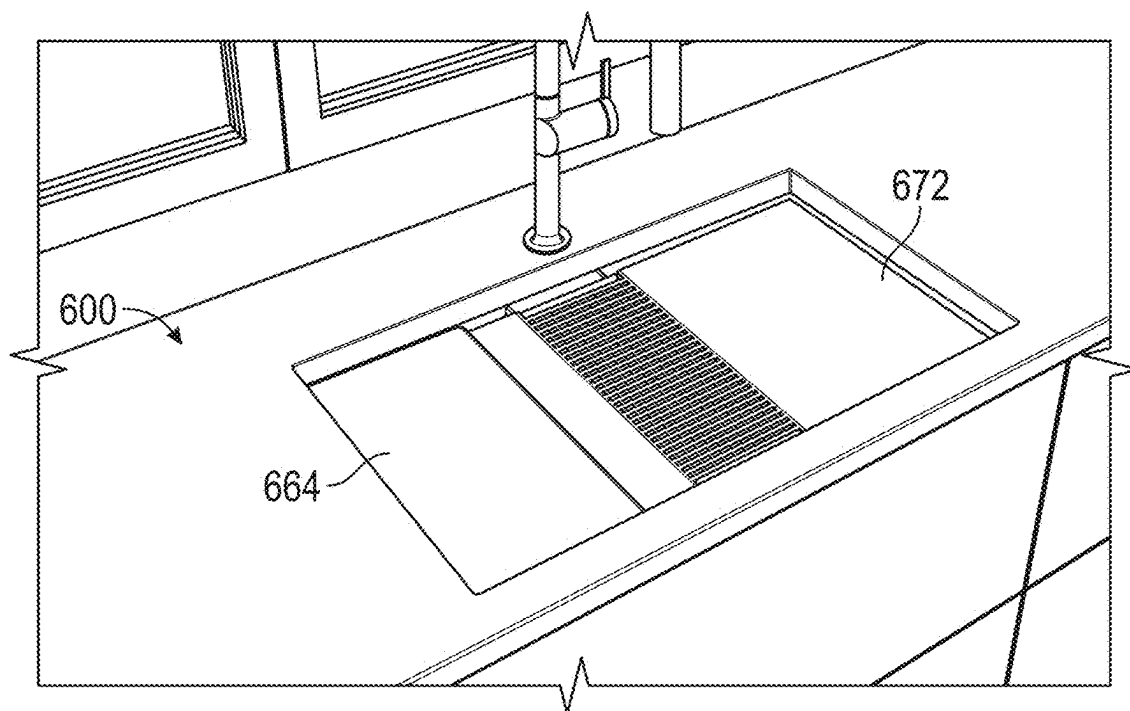


FIG. 6

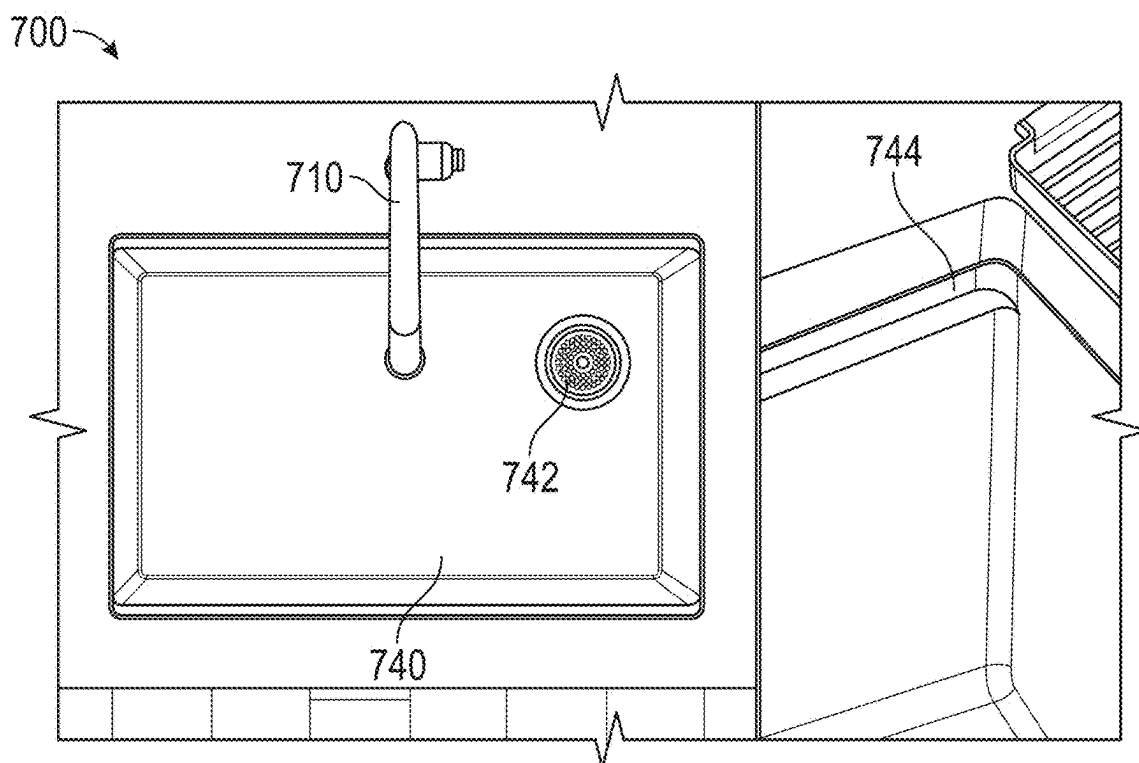


FIG. 7

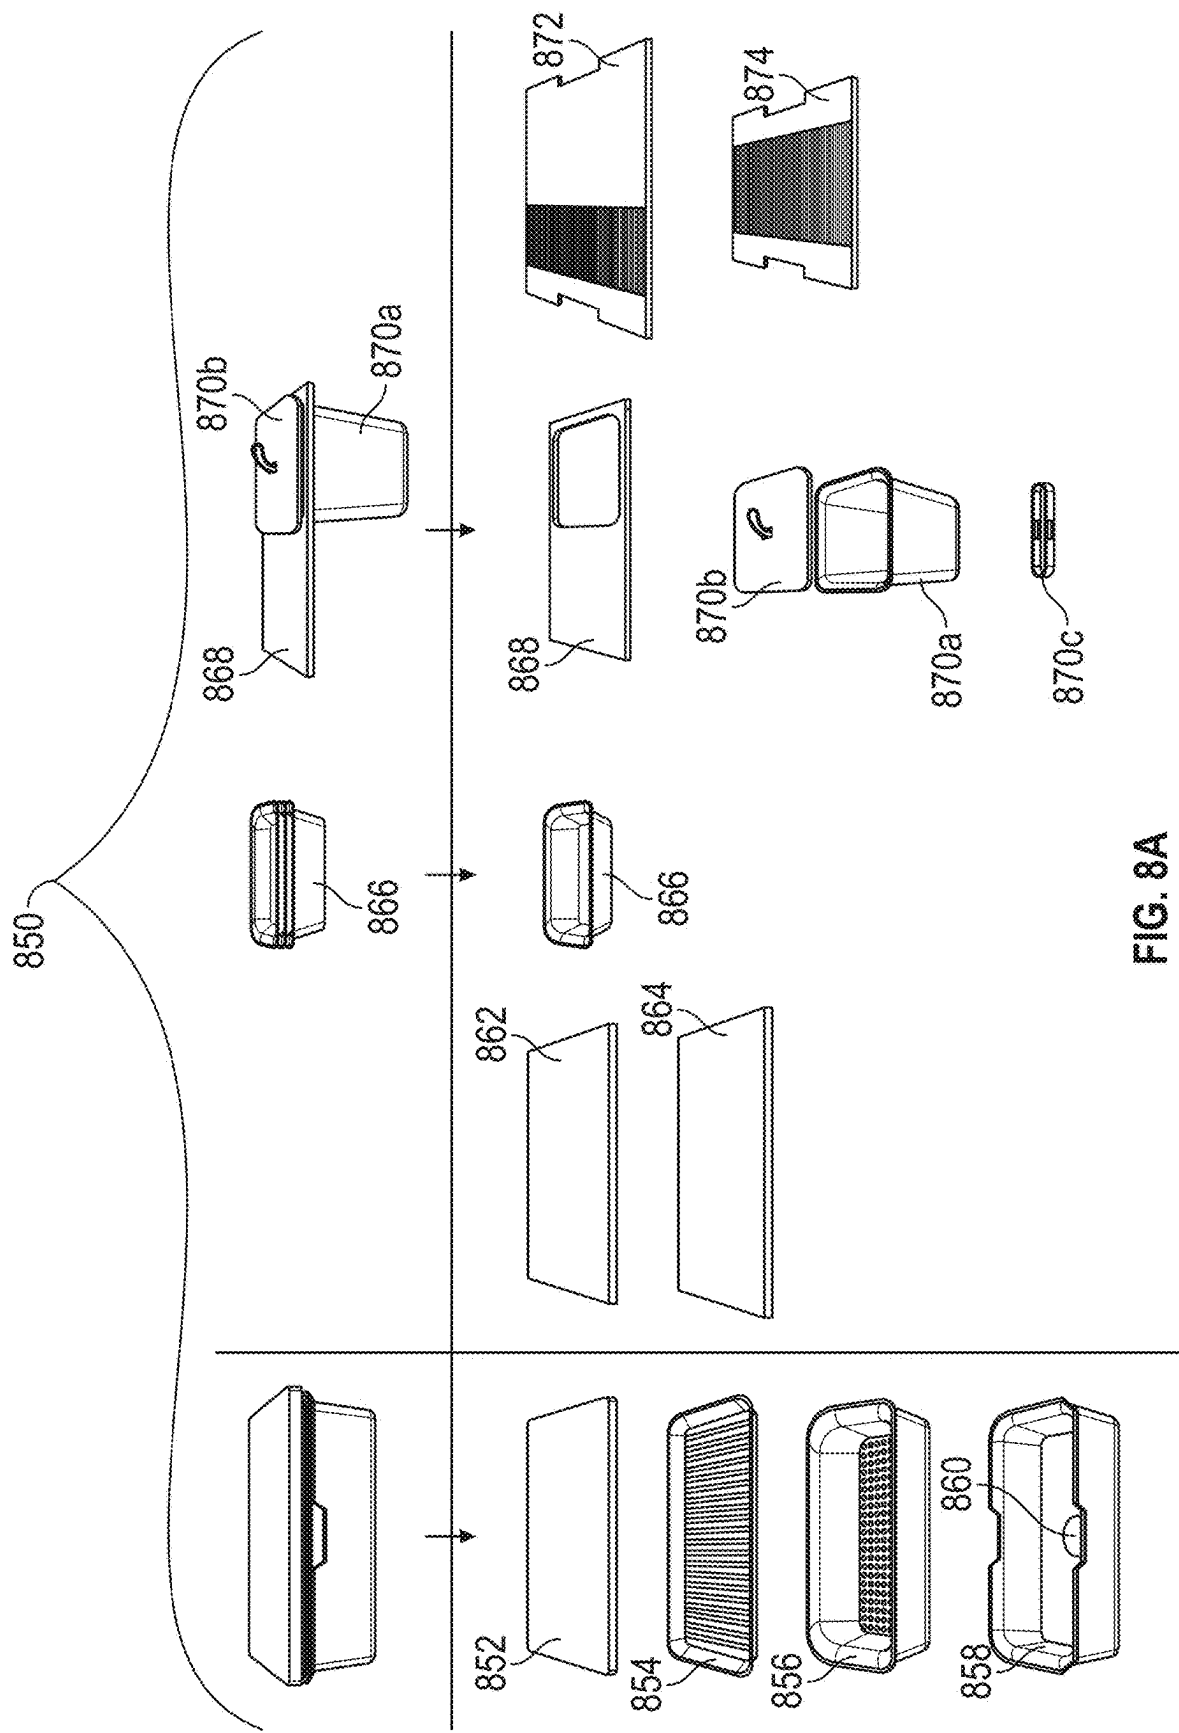


FIG. 8A

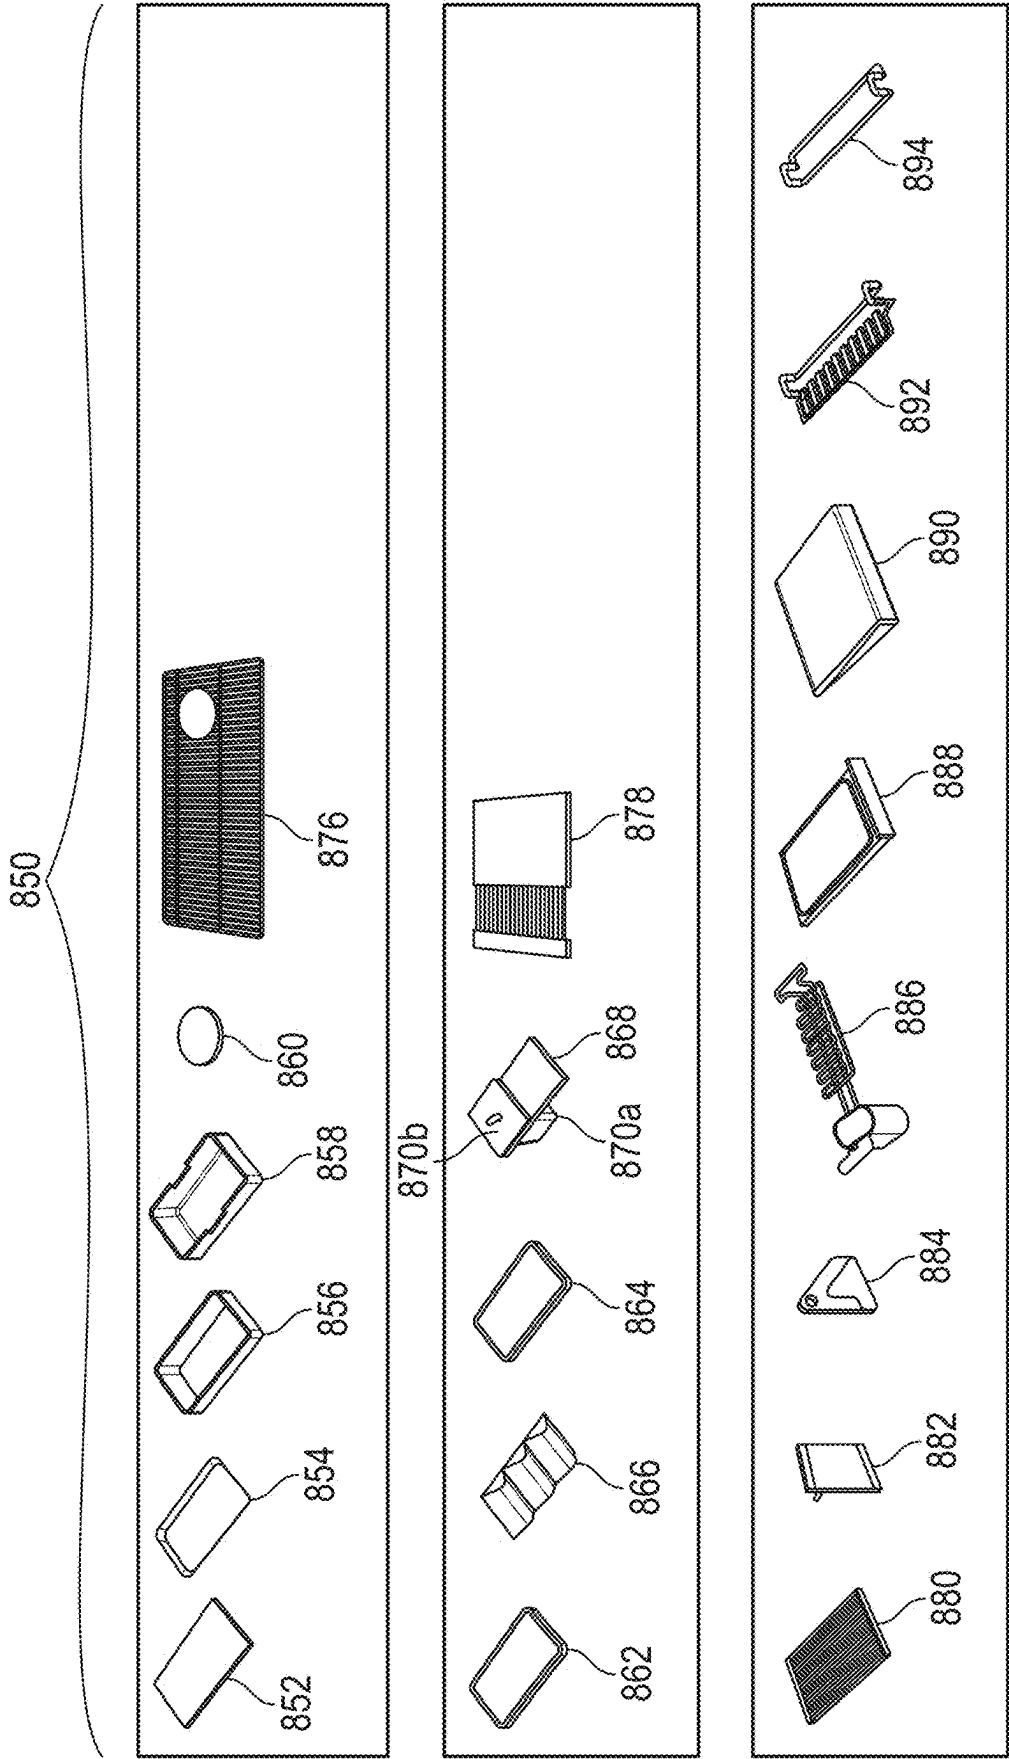


FIG. 8B

WORKSTATION SINKS AND ACCESSORIES

RELATED APPLICATIONS

[0001] The present application claims the benefit of U.S. Provisional Application Ser. No. 63/557,273, filed Feb. 23, 2024, which is hereby incorporated by reference in its entirety.

TECHNICAL FIELD

[0002] The present disclosure generally relates to workstation sinks and related accessories. More specifically, the present disclosure relates to workstation sinks designed for use with sink and kitchen accessories to create a functional sink workplace.

BACKGROUND

[0003] Sinks are often used in kitchens along with countertops, cutting boards, colanders, wash basins, and other related accessories for the preparation of food or drink items and for cleaning dishes and other kitchen utensils. It can be difficult to combine a sink and faucet with various kitchen accessories to create a single functional workplace. Difficulties arise based on kitchen size restrictions, material constraints, and lack of overall compatibility between various accessories such as cutting boards and wash basins. New workstation sinks and related accessories are thus needed to remedy issues associated with conventional sink-faucet-accessory combinations. The present disclosure addresses this need through description of various workstation sinks, workstation sinks systems, related workstation sink accessories, and workstation sink accessory kits intended to create a functional sink workplace suitable to a variety of user needs and kitchen scenarios (e.g., prepping food and drinks, storing food and drinks, cleaning dishes and kitchen utensils, etc.).

SUMMARY

[0004] Examples of the present disclosure relate, in part, to workstation sink systems that improve the kitchen experience by providing a single functional sink workplace suitable to a variety of user needs and kitchen scenarios. Examples disclosed herein enable users to personalize their kitchen experience without adding clutter to sinks or neighboring countertops, improve the usability of various kitchen and sink accessories by placing them near each other and near a faucet and sink, and provide aesthetically desirable scenes to the kitchen setting. Other advantages of the present disclosure over conventional designs will become apparent in subsequent sections.

[0005] In an example, a workstation sink system may include a faucet, a basin, and one or more accessories for use with the faucet and the basin. In an example, the one or more accessories may include a first sink cover having one or more openings for receiving fluids and debris, a second sink cover having one or more openings for receiving fluids and debris, a colander having ridges for storing items and openings defined in the ridges for receiving fluids and debris, a bucket for storing items such as ice and bottles, the bucket having a corresponding lid and a pair of tongs couplable to the lid, and a drain cover configured to cover a wash basin drain or sink basin drain hole but still allow for fluids and debris to be removed through the drain hole. In an

example, two or more accessories may be combined into a workstation sink accessory kit for use in a kitchen setting.

[0006] The above summary is not intended to describe each illustrated example or every implementation of the subject matter hereof. The figures and the detailed description that follow more particularly exemplify various examples.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] The disclosure may be more completely understood in consideration of the following detailed description of examples of the disclosure in connection with the accompanying drawing, in which:

[0008] FIG. 1A is a perspective view of a first sink cover, according to an example of the present disclosure.

[0009] FIG. 1B is a bottom view of the first sink cover of FIG. 1A.

[0010] FIG. 2A is a perspective view of a second sink cover, according to an example of the present disclosure.

[0011] FIG. 2B is a bottom view of the second sink cover of FIG. 2A.

[0012] FIG. 3A is a perspective view of a colander, according to an example of the present disclosure.

[0013] FIGS. 3B and 3C are side and front views, respectively, of the colander of FIG. 3A.

[0014] FIGS. 3D and 3E are top and bottom views, respectively, of the colander of FIG. 3A.

[0015] FIG. 4A is a perspective view of a bucket, according to an example of the present disclosure.

[0016] FIGS. 4B, 4C, and 4D are side, top, and bottom views, respectively, of the bucket of FIG. 4A.

[0017] FIG. 4E is an exploded view of the bucket of FIG. 4A.

[0018] FIG. 5A is a perspective view of a drain cover, according to an example of the present disclosure.

[0019] FIGS. 5B, 5C, and 5D are bottom, side, and tilted views of the drain cover of FIG. 5A.

[0020] FIGS. 6A-6I are perspective views of a workstation sink with accessories, according to examples of the present disclosure.

[0021] FIG. 7 is a perspective view of a workstation sink, according to an example of the present disclosure.

[0022] FIGS. 8A and 8B are product views of workstation sink accessory kits, according to examples of the present disclosure.

[0023] While various examples are amenable to various modifications and alternative forms, specifics thereof have been shown by way of example in the drawings and will be described in detail. It should be understood, however, that the intention is not to limit the claimed inventions to the particular examples described. On the contrary, the intention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the subject matter as defined by the claims.

DETAILED DESCRIPTION OF THE DRAWINGS

[0024] The following detailed description should be read with reference to the drawings in which similar elements in different drawings are numbered the same. The drawings, which are not necessarily to scale, depict illustrative examples and are not intended to limit the scope of the disclosure.

[0025] Referring generally to FIGS. 1A and 1B, a first sink cover **100** may include a top side **102a** separated from a bottom side **102b** by a perimeter edge **102c** to form a generally rectangular shape. The distance between top and bottom sides **102a,b** defined by perimeter edge **102c** can be in the range of $\frac{1}{32}$ inches to 1 inch, for example. In other contemplated examples, first sink cover **100** may comprise geometric configurations such as circular, triangular, other regular polygonal shapes, or irregular polygonal shapes. First sink cover **100** may include one or more openings **104** defined between the top side **102a** and the bottom side **102b**. The one or more openings **104** may comprise 18 individual openings **104** as illustrated in the figures, or any number of openings **104** less than or greater than 18. For example, first sink cover **100** may include two or three rows of openings **104** defined in an ordered or irregular pattern between top and bottom sides **102a,b**. The one or more openings **104** can be slotted openings arranged in horizontal, vertical, diagonal, or irregular patterns along top side **102a**.

[0026] The one or more openings **104** can be positioned in any suitable location along top side **102a**, for example along a middle portion, a left-side portion, or a right-side portion of top side **102a**. As illustrated in FIGS. 1A and 1B, the one or more openings **104** can be slotted openings arranged in a horizontal pattern along a right-side portion of top side **102a** (or left-side portion depending on the perspective of the viewer). In other contemplated examples, one or more of the one or more openings **104** can be arranged irregularly along top side **102a** with respect to any other one or more openings **104**. For example, a first opening **104** can be arranged at a diagonal, a second opening **104** can be arranged horizontally, and a third opening **104** can be arranged vertically. Other openings **104** can be arranged in a combination of diagonal, horizontal, or vertical patterns with respect to any other openings **104** defined in top side **102a**. The one or more openings **104** can have any suitable length to width ratio, for example ratios between 1:1 and 10:1. The one or more openings **104** can have chamfered, filleted, or beveled edges between the top and bottom sides **102a,b**, to minimize splashing when first sink cover **100** is used with a faucet.

[0027] First sink cover **100** may include a pair of cutouts **106** defined on opposing sides (e.g., cutout **106** defined between top and bottom sides **102a,b** on a right side of first sink cover **100** with another cutout **106** defined on the opposing left side of first sink cover **100**). The pair of cutouts **106** may have a generally rectangular shape with rounded edges, or any other suitable regular or irregular polygonal shape (e.g., circular, triangular, oval, etc.). The pair of cutouts **106** may have a variety of suitable lengths and widths, such as lengths and widths in the range of $\frac{1}{32}$ inches to 5 inches, for example. A length of the pair of cutouts **106** may be oriented perpendicular or parallel to the one or more openings **104**, or at an angle if the one or more openings **104** are oriented diagonally. The pair of cutouts **106** may be oriented along a central axis of first sink cover **100**, or offset from the central axis by a distance (i.e., the pair of cutouts **106** can be off center rather than generally centered as illustrated in the figures).

[0028] First sink cover **100** can comprise a variety of suitable lengths and widths configured to match corresponding sink basin lengths. For example, first sink cover **100** may have a length of approximately 23 inches, approximately 29 inches which can leave a gap for access to a sink, or approximately 33 inches to allow for use with a separate

accessory such as a cutting board. Two first sink covers **100** having a combined length of approximately 44 inches may be used to completely cover a sink having a length equal to or approximately 44 inches. As the name suggests, first sink cover **100** may cover the basin portion of a sink while allowing fluids from a faucet or other materials to pass through the one or more openings **104** during use. First sink cover **100** advantageously provides a flat surface portion for the placement of items such as cooking utensils, dishes, or food and drink items while still enabling access to the sink basin via the one or more openings **104**. First sink cover **100** may be manufactured from a variety of materials including, but not limited to, polymers such as polypropylene and polyethylene, wood materials and wood composites, marble, ceramics, metals, RICHLLITE, which is a paper-based material manufactured by the Richlite Company, or combinations thereof.

[0029] Referring now generally to FIGS. 2A and 2B, second sink cover **200** may include a top side **202a** separated from a bottom side **202b** by a perimeter edge **202c** to form a polygonal shape such as a generally rectangular shape. Second sink cover **200** may further include one or more openings **204** defined between the top side **202a** and the bottom side **202b**, and a pair of cutouts **206** defined on opposing sides (e.g., cutout **206** defined between top and bottom sides **202a,b** on a right side of second sink cover **200** with another cutout **206** defined on the opposing left side of second sink cover **200**). The one or more openings **204** may be arranged along a middle portion of top side **202a** in a vertical orientation as illustrated in the figures. In a contemplated example, the one or more openings **204** can be chamfered or filleted (i.e. includes a chamfer edge or fillet edge) to minimize splashing when second sink cover **200** is used with a faucet.

[0030] Second sink cover **200** has many similarities to first sink cover **100**, and for simplicity the description of common components is not repeated entirely herein. Like reference numerals and feature names may designate like features names throughout that are corresponding or analogous. Second sink cover **200** may include the same geometrical configurations, orientations, shapes, measurements, and materials as first sink cover **100**. Like first sink cover **100**, second sink cover **200** may be configured for use with a sink to enable fluids or other materials to pass through the one or more openings **204** into the sink basin. Second sink cover **200** likewise advantageously provides a flat surface portion for the placement of items while still enabling access to the sink basin during use via the one or more openings **204**. Like that of first sink cover **100**, the geometry of the flat surface portion is determined largely by the number and orientation of the one or more openings **204** defined between the top and bottom sides **202a,b** of the second sink cover **200**.

[0031] Referring now generally to FIGS. 3A-3E, a colander **300** may include a basin **302** defining an inner perimeter wall **304a** and a floor surface, an outer perimeter wall **304b** opposite the inner perimeter wall **304a**, and a bottom side **304c** opposite the floor surface of the basin **302**. Colander **300** may further include one or more ridges **306** defined in the floor surface of the basin **302**. The one or more ridges **306** may define one or more openings **308** extending from the one or more ridges **306** to the bottom side **304c** of the colander **300**. Colander **300** may further include a pair of ledges **312** arranged opposite each other on opposing sides

of the inner perimeter wall **304a**. In a contemplated example, the pair of ledges **312** may extend completely around a top portion of the inner perimeter wall **304a**. Colander **300** may further include one or more feet **314** couplable to the bottom side **304c**, and a pair of external openings **316** defined opposite each other on opposing sides of the inner perimeter wall **304a** (this may be the same opposing sides as pair of ledges **312** or different sides of colander **300**). The pair of external openings **316** may extend from the inner perimeter wall **304a** to the outer perimeter wall **304b** in a contemplated example.

[0032] The one or more ridges **306** of colander **300** may be formed in any suitable pattern such as horizontal, vertical, or diagonal with respect to the basin **302** floor surface. As illustrated particularly in FIGS. 3D and 3E, the one or more ridges **306** can be slotted and arranged in a horizontal pattern parallel with the length of the basin **302**. In other contemplated examples, one or more of the one or more ridges **306** can be arranged irregularly along the basin **302** floor surface with respect to any other one or more ridges **306**. For example, a first ridge **306** can be arranged at a diagonal, a second ridge **306** can be arranged horizontally, and a third ridge **306** can be arranged vertically, all with respect to the basin **302** floor surface. The one or more ridges **306** may be approximately evenly divided or dispersed at different distances apart. Each ridge **306** may define one or more openings **308** equally spaced apart or at different distances apart. As illustrated in FIGS. 3D and 3E, the ridges **306** and the openings **308** are generally spaced approximately equal distances apart with the feet **314** separating the outermost and next outermost ridges **306** on the bottom side **304c**.

[0033] In a contemplated example, the edges of inner and outer perimeter walls **304a,b** of colander **300** may be rounded as illustrated in the figures. In a contemplated example, the pair of ledges **312** and the remaining top portion of the inner perimeter wall **304a** may be rounded or chamfered as illustrated in the figures. Colander **300** may have a length approximately equal to the width of a sink basin so that colander **300** can fit inside the basin. For example, colander **300** can be configured for use with sinks ranging from approximately 23 inches to approximately 44 inches in width, for example, or sinks with widths less than or greater than this range. Colander **300** may be manufactured from a variety of materials including, but not limited to, polymers, wood materials and wood composites, marble, ceramics, metals, paper-based materials such as Richlite®, or combinations thereof.

[0034] Advantageously, colander **300** can be configured for use both inside a sink basin and with a drain board placed on a countertop near the sink, as illustrated particularly in FIG. 6C with corresponding colander **656** (i.e., colander **656** can be equivalent to colander **300**). Because colander **300** has one or more ridges **306** defining one or more openings **308**, it can function additionally as a drying rack for dishes and other kitchen utensils by allowing fluids to exit the colander **300** through the one or more openings **308**. For example, FIG. 6G illustrates corresponding colander **656** having several dishes and kitchen utensils placed in ridges defined in the floor surface of the colander basin. Colander **656** enables drying of the dishes and kitchen utensils because the ridges each define several openings through which washing fluid, such as water, can exit the colander

basin. As such, colander **300/656** is a multifunctional structure configured for several different uses inside or outside of a sink basin.

[0035] Referring now generally to FIGS. 4A-4E, a bucket **400** for storing ice or other items may include a housing **402** having an inner perimeter wall **404a** separated from an outer perimeter wall **404b** by a thickness, and one or more feet **406** on a bucket bottom surface. The bucket **400** may further include a lid **408** couplable to a top surface of the housing **402**, the lid **408** being defined by a top surface **410a** separated from a bottom surface **410b** by a perimeter edge **410c**. Bucket **400** may further include a strap **412** couplable to the top surface **410a** of the lid **408**, and a pair of tongs **414** for grabbing ice or other items stored inside the housing **402**, the pair of tongs **414** being couplable to the bottom surface **410b** of the lid **408** as illustrated in the exploded view of FIG. 4E.

[0036] In a contemplated example, bucket **400** may have a generally rectangular structure with rounded edges. In other contemplated examples, bucket **400** may have a cylindrical structure, a spherical structure, a different regular polygonal structure, or an irregular polygonal structure. Bucket **400** can be received within a bucket frame positioned in a sink basin as discussed in a subsequent section. Bucket **400** may be manufactured from a variety of materials including, but not limited to, polymers, wood materials and wood composites, marble, ceramics, metals, paper-based materials such as RICHLLITE, or combinations thereof.

[0037] The combination of inner perimeter wall **404a**, outer perimeter wall **404b**, and bucket bottom surface create an interior space for bucket **400** with one end closed (i.e., the bucket bottom surface end) and another end open for receiving items. The interior space can be configured to receive a portion of lid **408** formed by bottom surface **410b** and perimeter edge **410c** therein. To achieve this, the area of bottom surface **410b** and perimeter edge **410c** is approximately the same as the area of inner perimeter **404a** such that lid **408** can be securely and removably received within housing **402**. The pair of tongs **414** may also be received within housing **402** when lid **408** is coupled (i.e., securely and removably received) to housing **402**.

[0038] When lid **408** is removed from housing **402**, the pair of tongs **414** can be decoupled from lid **408** and used to remove items from, or add items to, the interior space of housing **402**. Bucket **400** thus advantageously provides a storage device with an integrated pair of tongs **414** that can be coupled to and decoupled from the removable lid **408** using any suitable mechanism (e.g., fasteners, adhesives, straps, magnetics, holding structure, etc.). In a contemplated example, bottom surface **410a** of lid **408** may include an indented portion for receiving the pair of tongs **414** therein (e.g., one or more tabs on bottom surface **410a** configured to receive the pair of tongs **414** and restrict their movement while coupled).

[0039] Referring now generally to FIGS. 5A-5D, a drain cover **500** for use with a drain hole in a sink basin or a wash basin may include a cover structure **502** having a top surface **504a** separated from a bottom surface **504b** by a perimeter edge **504c**, and a plurality of interconnected tabs **506** couplable to the bottom surface **504b**. Cover structure **502** may have a circular cross-section and a generally cylindrical shape as illustrated, or may have a rectangular cross-section and shape in a different example, or can have the geometry of other suitable regular polygons (e.g., spherical, triangular)

or irregular polygons in other contemplated examples. The distance between top and bottom surfaces **504a,b** defined by perimeter edge **504c** is generally in the range of $\frac{1}{64}$ inches to 1 inch, though other suitable measurements can be used for cover structure **502**. Cover structure **502** generally has a diameter equal to or greater than the diameter of a drain hole in a wash basin or a sink basin (i.e., a diameter of a few inches, for example).

[0040] The plurality of interconnected tabs **506** may comprise three individual tabs **506** connected together as illustrated in the figures, or may comprise more than or less than three tabs **506** in other contemplated examples. Each of the plurality of interconnected tabs **506** may be oriented 120 degrees apart in a circular formation when three tabs **506** are used with drain cover **500**, or 90 degrees apart when four tabs are used, for example. Plurality of interconnected tabs **506** may connect at a middle portion **508** that is generally concave with respect to a drain hole when drain cover **500** is inserted therein. In a contemplated example, each of the plurality of interconnected tabs **506** may be removable from the bottom surface **504b** for replacement with new tabs **506**.

[0041] In use, the plurality of interconnected tabs **506** may be inserted into a drain hole with the bottom surface **504b** of the cover structure **502** covering the drain hole when the tabs **506** are inserted. Given the concavity of the middle portion **508**, debris and fluids may still flow through the openings defined between the individual tabs **506** and into the drain hole for final disposal. Drain cover **500** thus functions as an accessible cover for drain holes rather than a plug which blocks all debris and fluids from exiting the wash or sink basin. Drain cover **500** may be manufactured from a variety of materials including, but not limited to, polymers such as acrylonitrile butadiene styrene (ABS), metals such as stainless steel, ceramics, or combinations thereof such as an ABS material body with a stainless-steel wrap over the body.

[0042] Referring now generally to FIGS. 6A-6I, a workstation sink system **600** may include a faucet **610** proximate a basin **640**, and one or more accessories **650** configured for use with the basin **640** and/or a countertop proximate the faucet **610** and the basin **640**. Faucet **610** may be any standard faucet known to one of ordinary skill in the art, such as a compression washer faucet, a cartridge faucet, a disc faucet, a ball faucet, a motion-activated faucet, or a touch-activated faucet, for example. Basin **640** may be any standard basin known to one of ordinary skill in the art, such as a basin used with an apron-front sink or a basin used with an undermount sink, for example. Basin **640** may have a length ranging from 23 inches to 44 inches, for example, to match the length of the one or more accessories **650** used therein. Further, basin **640** can have rounded corners **602** or ledges for ease of cleaning. In examples, each accessory **650** is configured to rest on corners **602** such that accessory **650** is suspended in basin **640**. In some examples (not shown), basin **640** can include multiple stepped ledges or floating ledges at different heights for supporting accessories at different heights within basin **640**.

[0043] In an example, basin **640** can comprise an undermount sink that is mounted via a rim or flange (not shown) to an undersurface of deck D. In other examples, basin **640** can comprise an overmount sink that mounts via a rim or flange to an upper surface of deck D.

[0044] As illustrated throughout the figures, the one or more accessories **650** may include: a wood cutting board **652** for cutting and storing food items; a drain board **654**

having a plurality of openings for receiving debris or fluids; a colander **656** (which may be identical to colander **300**); a wash basin **658**, with or without a drain hole, for washing items such as food and dishes; a drain cover **660** for use with the wash basin **658** or a sink basin; a polymer cutting board **662** made from polypropylene or polyethylene, for example, for cutting and storing food items; a marble cutting board **664** for cutting and storing food items; one or more nestable prep bowls **666** for storing items such as food, the one or more prep bowls **666** being configured for side-by-side and/or nesting use in a sink basin; a bucket frame **668** for receiving a bucket **670a** (which may be identical to bucket **400**) in a sink basin; a lid **670b** and pair of tongs **670c** (which may be identical to lid **408** and pair of tongs **414**) for use with the bucket **670a**; a first sink cover **672** (which may be identical to first sink cover **100**); and a second sink cover **674** (which may be identical to second sink cover **200**).

[0045] In examples, accessories such as colander **656**, wash basin **658**, drain board **654**, prep bowls **666**, and others can include one or more flanges **651** on one or more sides of a top perimeter thereof for resting on corner **602**. Other accessories, such as planar accessories like cutting boards **652**, **662**, and covers **672**, **674** can rest on ledge **602** and/or cover the accessories resting on ledge **602** via flange **651**.

[0046] The one or more accessories **650** may further include: a basin rack **676** for use within a sink basin; a sink cover with pass-through grate **678** for use over a sink basin; a roll-up rack **680** for drying and storing items; a squeegee **682** for cleaning kitchen surfaces; a scraper **684** for scraping debris off dishes or kitchen countertop surfaces; a standard utility rack **686** for drying and storing dishes and other kitchen utensils; a first universal cutting board **688** for cutting and storing food items; a second universal cutting board **690** for cutting and storing food items; a saddle utility rack **692** for drying and storing dishes and other kitchen utensils; and a saddle utility bar **694** for drying and storing dishes and other kitchen utensils.

[0047] In a contemplated example, the one or more accessories **650**, independent or together with the faucet **610** and the basin **640**, may form a kit for use in a kitchen setting. The one or more accessories **650** may be used in several different combinations suitable to the needs of the user. Example combinations include: the wood cutting board **652** with the wash basin **658** as illustrated in FIG. 6B; the wood cutting board **652** with the drain board **654**, the colander **656**, and the wash basin **658** as illustrated in FIG. 6C; the wood cutting board **652** with the colander **656**, several prep bowls **666**, and a basin rack as illustrated in FIG. 6D; the wood cutting board **652** with the colander **656**, the polymer cutting board **662**, and several prep bowls **666** as illustrated in FIG. 6E; the drain board **654** with the wash basin **658**, the basin rack **676**, and the scraper **684** as illustrated in FIG. 6F; the drain board **654** with the colander **656**, the basin rack **676**, and the scraper **684** as illustrated in FIG. 6G; the marble cutting board **664** with the bucket frame **668** containing a bucket **670a** filled with ice and a bottle, and a first sink cover **672** as illustrated in FIG. 6H; and a marble cutting board **664** with a first sink cover **672** as illustrated in FIG. 6I. The present disclosure contemplates use of the one or more accessories **650** in any combination so long as there is sufficient space in the sink basin and on the neighboring countertops and ledges for receiving accessories **650**.

[0048] Referring now to FIG. 7, a workstation sink system **700** may include a faucet **710** and a basin **740** having a drain

hole **742** and rounded edges **744** that form an angle of exactly or approximately **90** degrees (i.e., each rounded edge **744** is formed with a small radius). Workstation sink system **700** has many similarities to workstation sink system **600**, and for simplicity the description of common components is not repeated entirely herein. Like reference numerals and feature names may designate like features names throughout that are corresponding or analogous. Workstation sink system **700** may include the same geometrical configurations, orientations, shapes, measurements, materials, and accessories as workstation sink system **600**. For example, workstation sink system **700** may include one or more accessories (not depicted) matching the one or more accessories **650** of workstation sink system **600**. In a contemplated example, basin **740** may be formed of NEOROC which is a granite composite material (i.e., a mixture of natural stone and resin) manufactured by Kohler Corporation. Other suitable materials for basin **740** are contemplated by the present disclosure. In contemplated examples, basin **740** may have a length ranging from 18 inches to 33 inches, for example a length of 27 inches or 30 inches.

[0049] Referring now generally to FIGS. **8A** and **8B**, a workstation sink accessory kit **850** may include a wood cutting board **852**, a drying rack **854**, a colander **856**, a wash basin **858** with or without a drain hole, a drain cover **860**, a polymer cutting board **862**, a marble cutting board **864**, one or more nestable prep bowls **866**, a bucket frame **868**, a bucket **870a** having a lid **870b** and a pair of tongs **870c**, a first sink cover **872**, a second sink cover **874**, a basin rack **876**, a sink cover with pass-through grate **878**, a roll-up rack **880**, a squeegee **882**, a scraper **884**, a standard utility rack **886**, a first universal cutting board **888**, a second universal cutting board **890**, a saddle utility rack **892**, and a saddle utility bar **894**. Workstation sink accessory kit **850** has many similarities to the one or more accessories **650** of workstation sink system **600**, and for simplicity the description of common components is not repeated entirely herein. Like reference numerals and feature names may designate like features names throughout that are corresponding or analogous.

[0050] Two or more individual items in workstation accessory kit **850** may be provided to a user for subsequent combination and use in a kitchen setting. The individual items in workstation accessory kit **850** may be packaged together and combined in any suitable manner to fit the needs of the user (e.g., prepping food and drink items, storing food and drink items, entertaining guests, cleaning dishes and kitchen utensils, etc.).

[0051] The disclosure may be embodied in other specific forms without departing from the essential attributes. Therefore, the illustrated examples should be considered illustrative and not restrictive in all respects. Any claims provided herein are to ensure adequacy of the present application for establishing foreign priority and for no other purpose.

[0052] Various examples of systems, devices, and methods have been described herein. These examples are given only by way of example and are not intended to limit the scope of the claimed disclosures. It should be appreciated, moreover, that the various features of the examples that have been described may be combined in various ways to produce numerous additional examples. Moreover, while various material, dimensions, shapes, configurations, locations, etc. have been described for use with disclosed examples, others

besides those disclosed may be utilized without exceeding the scope of the claimed disclosures.

[0053] Persons of ordinary skill in the relevant arts will recognize that the subject matter hereof may comprise fewer features than illustrated in any individual example described above. The examples described herein are not meant to be an exhaustive presentation of the ways in which the various features of the subject matter hereof may be combined. Accordingly, the examples are not mutually exclusive combinations of features; rather, the various examples can comprise a combination of different individual features selected from different individual examples, as understood by persons of ordinary skill in the art. Moreover, elements described with respect to one example can be implemented in other examples even when not described in such examples unless otherwise noted.

[0054] Any incorporation of reference of documents above is further limited such that no claims included in the documents are incorporated by reference herein. Any incorporation by reference of documents above is yet further limited such that any definitions provided in the documents are not incorporated by reference herein unless expressly included herein.

[0055] For purposes of interpreting the claims, it is expressly intended that the provisions of 35 U.S.C. § 112 (f) are not to be invoked unless the specific terms “means for” or “step for” are recited in a claim.

1-11. (canceled)

12. A workstation sink accessory kit for use with a sink system including a sink basin and faucet, the kit comprising:

a plurality of accessories, each accessory being mountable and removably positionable within the sink basin such that the accessory is suspended within the basin, wherein the accessory is selected from the group consisting of a sink cover, cutting board, a colander, an ice bucket assembly, a wash basin, a prep bowl, a bucket, a bucket frame for receiving the bucket, a drain board, a drying rack, a roll-up rack, a saddle utility rack, a saddle utility bar, and combinations thereof.

13. The workstation sink accessory kit of claim **12**, wherein at least one accessory of the plurality of accessories includes a flange extending from a top perimeter thereof, the flange being configured to rest on a ledge of the sink basin such that the accessory is suspended within the basin.

14. The workstation sink accessory kit of claim **12**, wherein the plurality of accessories comprises a plurality of nestable prep bowls and at least one cutting board.

15. The workstation sink accessory kit of claim **12**, wherein the plurality of accessories comprises a bucket frame and a bucket, wherein the bucket frame includes structure defining an opening configured to receive and support the bucket within such that the bucket extends below the bucket frame within the sink basin.

16. The workstation sink accessory kit of claim **15**, wherein the bucket comprises an ice bucket assembly including a bucket, a lid, and tongs, wherein a bottom side of the lid comprises structure for receiving and removably securing the tongs thereto.

17. The workstation sink accessory kit of claim **12**, wherein the plurality of accessories comprises a nestable accessory assembly, the nestable accessory assembly comprising a wash basin, and at least one of a colander nestable within the wash basin, a drying rack nestable within the

wash basin or the colander if present, and a cutting board dimensioned to cover the wash basin.

18-20. (canceled)

21. A workstation sink accessory kit for use with a sink basin, the kit comprising:

a plurality of accessories, each accessory being mountable and removably positionable within the sink basin such that the accessory is at least partially suspended within the basin,

wherein the plurality of accessories are configured to rest on an inner surface of the sink basin when at least partially suspended therein.

22. The workstation sink accessory kit of claim **21**, wherein the plurality of accessories comprises a drain board defining a plurality of openings for receiving fluids and debris, the drain board further defining a workspace configured to receive items.

23. The workstation sink accessory kit of claim **21**, wherein the plurality of accessories comprises a colander having one or more ridges configured to receive items, the colander defining at least one opening for receiving fluids and debris.

24. The workstation sink accessory kit of claim **23**, wherein the items comprise one or more prep bowls configured for side-by-side or nesting use in the colander.

25. The workstation sink accessory kit of claim **21**, wherein the plurality of accessories comprises a wash basin and a cutting board, the cutting board being positionable over the wash basin.

26. The workstation sink accessory kit of claim **21**, wherein the plurality of accessories comprises one or more nestable prep bowls configured for side-by-side placement in the sink basin.

27. The workstation sink accessory kit of claim **21**, wherein the plurality of accessories comprises a bucket frame and a bucket assembly, the bucket frame defining an opening for receiving at least a portion of the bucket assembly.

28. The workstation sink accessory kit of claim **27**, wherein the bucket assembly comprises a bucket, a lid, and tongs, and wherein a bottom side of the lid comprises structure for receiving and removably securing the tongs thereto.

29. The workstation sink accessory kit of claim **21**, wherein the plurality of accessories comprises a first sink cover and a second sink cover, and wherein the first sink cover and the second sink cover are positioned along the sink basin to form a workspace thereon.

30. A workstation sink system, the system comprising:

a sink basin having two or more ledges formed along at least one sidewall, the two or more ledges positioned at different heights of the sink basin along the at least one sidewall; and

a plurality of accessories removably mounted on at least one of the two or more ledges, such that the plurality of accessories are suspended at least partially within the sink basin, wherein at least one first accessory of the plurality of accessories is nestable within at least one second accessory of the plurality of accessories.

31. The workstation sink system of claim **30**, wherein the plurality of accessories are movable along the two or more ledges of the sink basin.

32. The workstation sink system of claim **30**, wherein the at least one second accessory comprises a colander or a wash basin, and wherein the at least one first accessory comprises one or more prep bowls.

33. The workstation sink system of claim **30**, wherein the plurality of accessories comprise:

a first sink cover arranged along at least one of the two or more ledges, the first sink cover defining a plurality of openings for receiving fluids and debris, the first sink cover further defining a workspace for receiving items;

a bucket frame arranged along at least one of the two or more ledges, the bucket frame defining an opening and a workspace for receiving items; and

a bucket assembly at least partially received through the opening of the bucket frame, the bucket assembly comprising a bucket, a lid, and tongs, wherein a bottom side of the lid comprises structure for receiving and removably securing the tongs thereto.

34. The workstation sink system of claim **30**, wherein the plurality of accessories comprise:

a wash basin defining a drain hole;

a colander at least partially nestable within the wash basin, the colander defining one or more ridges for receiving items, the colander further defining at least one opening for receiving fluids and debris, wherein the at least one opening of the colander is in fluid communication with the wash basin;

a drying rack at least partially nestable within the colander, the drying rack defining at least one opening for receiving fluids and debris, and wherein the at least one opening of the drying rack is in fluid communication with the colander; and

a cutting board arranged along the drying rack, wherein the wash basin, the colander, the drying rack, and the cutting board are each arranged along at least one of the two or more ledges defined by the sink basin, and wherein fluids and debris can flow from the drying rack through the colander and the drain hole of the wash basin.

* * * * *