



US012398734B2

(12) **United States Patent**
Le Doux, Jr. et al.

(10) **Patent No.:** **US 12,398,734 B2**

(45) **Date of Patent:** **Aug. 26, 2025**

(54) **PISTONS FOR USE IN FLUID EXCHANGE DEVICES AND RELATED DEVICES, SYSTEMS, AND METHODS**

(71) Applicant: **FLOWSERVE PTE. LTD.**, Singapore (SG)

(72) Inventors: **Norman R. Le Doux, Jr.**, Orefield, PA (US); **Jason Bandi**, Irving, TX (US); **Neil Havrilla**, Coplay, PA (US); **David Olexson**, Irving, TX (US); **Andreas Dreiss**, Hamburg (DE)

(73) Assignee: **Flowserve Pte. Ltd.**, Singapore (SG)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **18/545,378**

(22) Filed: **Dec. 19, 2023**

(65) **Prior Publication Data**

US 2024/0117820 A1 Apr. 11, 2024

Related U.S. Application Data

(63) Continuation of application No. 17/671,283, filed on Feb. 14, 2022, now Pat. No. 11,852,169, which is a continuation of application No. 16/679,037, filed on Nov. 8, 2019, now Pat. No. 11,286,958.

(60) Provisional application No. 62/758,373, filed on Nov. 9, 2018.

(51) **Int. Cl.**
F04F 13/00 (2009.01)
F16K 11/07 (2006.01)
F16K 31/08 (2006.01)
F15B 3/00 (2006.01)

(52) **U.S. Cl.**

CPC **F04F 13/00** (2013.01); **F16K 11/0716** (2013.01); **F16K 31/084** (2013.01); **F15B 3/00** (2013.01)

(58) **Field of Classification Search**

CPC **F04F 13/00**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

1,577,242 A	3/1926	Andersen
1,647,189 A	11/1927	Mueller
1,647,734 A	11/1927	Kelly
1,769,672 A	7/1930	Blair
1,970,591 A	8/1934	Barks
2,365,046 A	12/1944	Bottomley
(Continued)		

FOREIGN PATENT DOCUMENTS

CN	101705930	5/2010
CN	102421513 A	4/2012
(Continued)		

OTHER PUBLICATIONS

PCT International Patent Application No. PCT/US2019/060621, International Search Report dated Mar. 19, 2020, 2 pp.

(Continued)

Primary Examiner — Kenneth Rinehart


Assistant Examiner — Nicole Gardner

(74) *Attorney, Agent, or Firm* — BKRIIP LLC

(57) **ABSTRACT**

Pistons and related methods may be configured to separate fluids and to at least partially prohibit one fluid from traveling to one side of the piston from another side of the piston. Pressure exchange devices and systems may include such pistons.

20 Claims, 4 Drawing Sheets

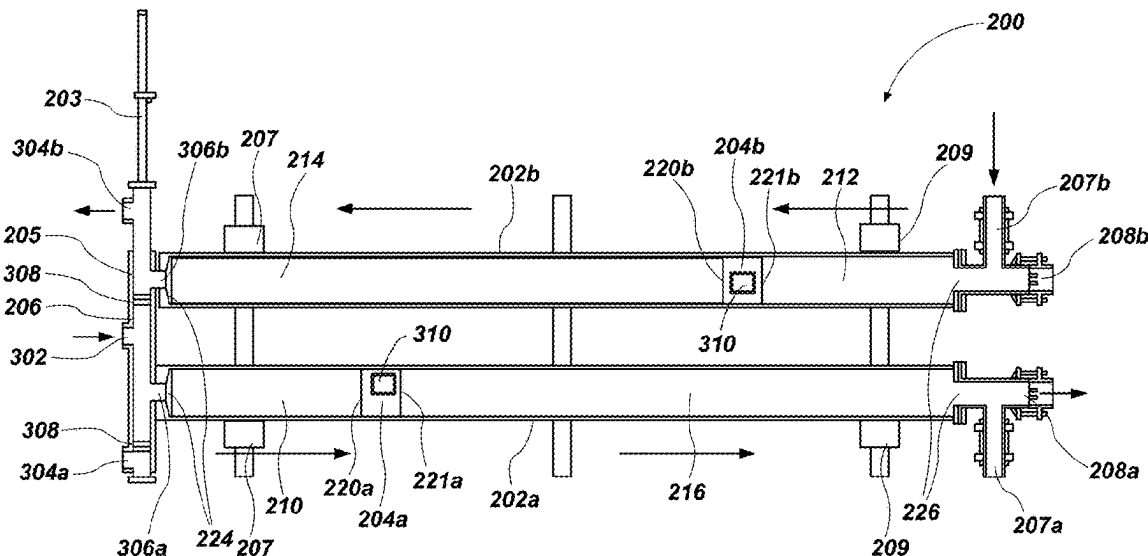

(56)

References Cited

U.S. PATENT DOCUMENTS

2,600,836	A	6/1952	Boyd	8,360,250	B2	1/2013	Nguyen
2,615,465	A	10/1952	Woodward	8,465,000	B2	6/2013	Bartell, Jr.
2,881,706	A	4/1959	Haynes	8,579,603	B2	11/2013	Oklejas
3,089,504	A	5/1963	Crawford	8,603,218	B2	12/2013	Montie
3,223,173	A	12/1965	Paul, Jr.	8,622,714	B2	1/2014	Andrews
3,347,554	A	10/1967	Jagger	9,108,162	B2	8/2015	Takahashi
3,570,510	A	3/1971	Tsutsumi	9,163,737	B2	10/2015	Andersson
3,583,606	A	6/1971	Ewald	9,328,743	B2	5/2016	Hirosawa
3,595,265	A	7/1971	Cryder	9,435,354	B2	9/2016	Lehner
3,612,361	A	10/1971	Ewald	9,440,895	B2	9/2016	Arluck
3,661,167	A	5/1972	Hussey	9,500,394	B2	11/2016	Manzo
3,661,400	A	5/1972	Weinand	9,523,261	B2	12/2016	Flores
3,675,825	A	7/1972	Morane	9,546,671	B2	1/2017	Hirosawa
3,675,935	A	7/1972	Ludwig	9,556,736	B2	1/2017	Sigurdsson
3,741,243	A	6/1973	Deibler	9,587,752	B2	3/2017	Montague
3,749,291	A	7/1973	Prussin	9,604,889	B2	3/2017	Arluck
3,756,273	A	9/1973	Hengesbach	9,611,948	B1	4/2017	Andersson
3,776,278	A	12/1973	Allen	9,683,574	B2	6/2017	Winkler
4,024,891	A	5/1977	Engel	9,695,795	B2	7/2017	Martin
4,123,332	A	10/1978	Rotter	9,739,128	B2	8/2017	Ghasripoor
4,133,346	A	1/1979	Smith	9,739,275	B2	8/2017	Robison
4,134,454	A	1/1979	Taylor	9,759,054	B2	9/2017	Gay
4,176,063	A	11/1979	Tyler	9,764,272	B2	9/2017	Martin
4,234,010	A	11/1980	Jenkins	9,835,018	B2	12/2017	Krish
4,236,547	A	12/1980	Harasewych	9,885,372	B2	2/2018	Arluck
4,244,555	A	1/1981	Maggioni	9,920,774	B2	3/2018	Ghasripoor
4,249,868	A	2/1981	Koty	9,945,210	B2	4/2018	Theodossiou
4,308,103	A	12/1981	Rotter	9,945,216	B2	4/2018	Ghasripoor
4,321,021	A	3/1982	Pauliukonis	9,970,281	B2	5/2018	Ghasripoor
4,350,176	A	9/1982	Lace	9,975,789	B2	5/2018	Ghasripoor
4,412,632	A	11/1983	Berger	9,976,573	B2	5/2018	Martin
4,424,917	A	1/1984	Berger	10,001,030	B2	6/2018	Krish
4,479,356	A	10/1984	Gill	10,006,524	B2	6/2018	Crump
4,510,963	A	4/1985	Presley	10,024,496	B2	7/2018	Hauge
4,518,006	A	5/1985	Hoffmann	10,030,372	B2	7/2018	Di Monte, Sr.
4,566,485	A	1/1986	Ruhle	10,072,675	B2	9/2018	McLean, Jr.
4,570,853	A	2/1986	Schmied	10,119,379	B2	11/2018	Richter
4,579,511	A	4/1986	Burns	10,125,796	B2	11/2018	Hauge
4,586,692	A	5/1986	Stephens	10,138,907	B2	11/2018	Pinto
4,627,461	A	12/1986	Gordon	10,167,710	B2	1/2019	Ghasripoor
4,726,530	A	2/1988	Miller	10,167,712	B2	1/2019	Ghasripoor
4,768,542	A	9/1988	Morris	2002/0025264	A1	2/2002	Polizos
4,834,193	A	5/1989	Leitko, Jr.	2002/0092571	A1	7/2002	Misumi
4,999,872	A	3/1991	Jentsch	2004/0118462	A1	6/2004	Baumann
5,033,557	A	7/1991	Askew	2005/0103386	A1	5/2005	Magda
5,070,817	A	12/1991	Momont	2005/0166978	A1	8/2005	Brueckmann
5,172,918	A	12/1992	Pecht	2006/0145426	A1	7/2006	Schroeder
5,232,013	A	8/1993	Morris	2006/0196474	A1	9/2006	Magel
5,234,031	A	8/1993	Pickett	2006/0231577	A1	10/2006	Powling
5,240,036	A	8/1993	Morris	2007/0204916	A1	9/2007	Clayton
5,299,859	A	4/1994	Tackett	2009/0057084	A1	3/2009	Mahawili
5,300,041	A	4/1994	Haber	2009/0104046	A1	4/2009	Martin
5,357,995	A	10/1994	King	2009/0313737	A1	12/2009	Richard
5,797,429	A	8/1998	Shumway	2012/0024249	A1	2/2012	Fuhrmann
5,951,169	A	9/1999	Oklejas	2012/0061595	A1	3/2012	Canjuga
5,992,289	A	11/1999	George	2012/0067825	A1	3/2012	Pique
6,036,435	A	3/2000	Oklejas	2014/0026608	A1	1/2014	Manzo
6,126,418	A	10/2000	Sinnl	2014/0048143	A1	2/2014	Lehner
6,293,245	B1	9/2001	Bock	2014/0284058	A1	9/2014	Watson
RE37,921	E	12/2002	Martin	2015/0096739	A1	4/2015	Ghasripoor
6,516,897	B2	2/2003	Thompson	2015/0130142	A1	5/2015	Zheng
6,540,487	B2	4/2003	Polizos	2015/0184540	A1	7/2015	Winkler
6,607,368	B1	8/2003	Ross	2015/0184678	A1	7/2015	Arluck
6,647,938	B2	11/2003	Gaessler	2015/0292310	A1	10/2015	Ghasripoor
6,659,731	B1	12/2003	Hauge	2016/0032691	A1	2/2016	Richter
7,128,084	B2	10/2006	Long	2016/0032702	A1	2/2016	Gay
7,201,557	B2	4/2007	Stover	2016/0039054	A1	2/2016	Ghasripoor
7,306,437	B2	12/2007	Hauge	2016/0062370	A1	3/2016	Gaines-Germain
7,474,013	B2	1/2009	Greenspan	2016/0101307	A1	4/2016	Montague
7,670,482	B2	3/2010	Wietham	2016/0102536	A1	4/2016	Knoeller
7,871,522	B2	1/2011	Stover	2016/0138649	A1	5/2016	Anderson
RE42,432	E	6/2011	Stover	2016/0146229	A1	5/2016	Martin
7,997,853	B2	8/2011	Pique	2016/0153551	A1	6/2016	Schiele
8,075,281	B2	12/2011	Martin	2016/0160849	A1	6/2016	Gains-Germain
8,297,303	B2	10/2012	DeSantis	2016/0160881	A1	6/2016	Anderson
				2016/0160882	A1	6/2016	Morphew
				2016/0160887	A1	6/2016	Anderson
				2016/0160888	A1	6/2016	Morphew
				2016/0160889	A1	6/2016	Hoffman

(56)

References Cited

U.S. PATENT DOCUMENTS

2016/0160890	A1	6/2016	Anderson	
2016/0160917	A1	6/2016	Deshpande	
2016/0222985	A1 *	8/2016	Oklejas, Jr.	F04B 9/08
2016/0377096	A1	12/2016	Lehner	
2017/0108131	A1	4/2017	Andersson	
2017/0130743	A1	5/2017	Anderson	
2017/0254474	A1	9/2017	Sauer	
2017/0306986	A1	10/2017	McLean, Jr.	
2017/0306987	A1	10/2017	Theodossiou	
2017/0350428	A1	12/2017	Martin	
2017/0370500	A1	12/2017	Haines	
2018/0030968	A1	2/2018	Verma	
2018/0056211	A1	3/2018	Seabrook	
2018/0087364	A1	3/2018	Krish	
2018/0094648	A1	4/2018	Hoffman	
2018/0120197	A1	5/2018	Di Monte	
2018/0195370	A1	7/2018	Theodossiou	
2018/0209254	A1	7/2018	Ghasripoor	
2018/0252239	A1	9/2018	Martin	
2018/0306672	A1	10/2018	Pattom	
2018/0347601	A1	12/2018	Hoffman	
2019/0071340	A1	3/2019	Imrie	
2020/0149362	A1	5/2020	Terwilliger	
2020/0149380	A1	5/2020	Procita	
2020/0149556	A1	5/2020	Judge	
2020/0149557	A1	5/2020	Le Doux, Jr.	
2020/0149657	A1	5/2020	Christian	
2020/0150698	A1	5/2020	Judge	

FOREIGN PATENT DOCUMENTS

CN	103114924	A	5/2013
CN	103298731	A	9/2013
CN	105683586	A	6/2016
CN	206158951		5/2017
EP	0163897	B1	7/1988
EP	1486706	A1	12/2004
EP	1948942	A1	7/2008
EP	3177429	A1	6/2017
JP	6386657	B2	9/2018
KR	20010081640	A	8/2001
NZ	503937	A	6/2002
RU	2284423	C1	9/2006
RU	2010145595	A	5/2012
RU	2511638	C2	4/2014
SU	410199	A1	1/1974
WO	2002066816	A1	8/2002
WO	2009113877	A2	9/2009
WO	2010031162	A9	11/2010
WO	2016022706	A1	2/2016
WO	2016063194	A3	7/2016
WO	2017083500	A1	5/2017
WO	2018035201	A1	2/2018
WO	2018085740	A2	5/2018

OTHER PUBLICATIONS

PCT International Patent Application No. PCT/US2019/060621, Written Opinion dated Mar. 19, 2020, 5 pp.
 Vorteq Pure Grit, This changes everything, Brochure, Energy Recovery Inc, 8 pages, Dec. 2014.

* cited by examiner

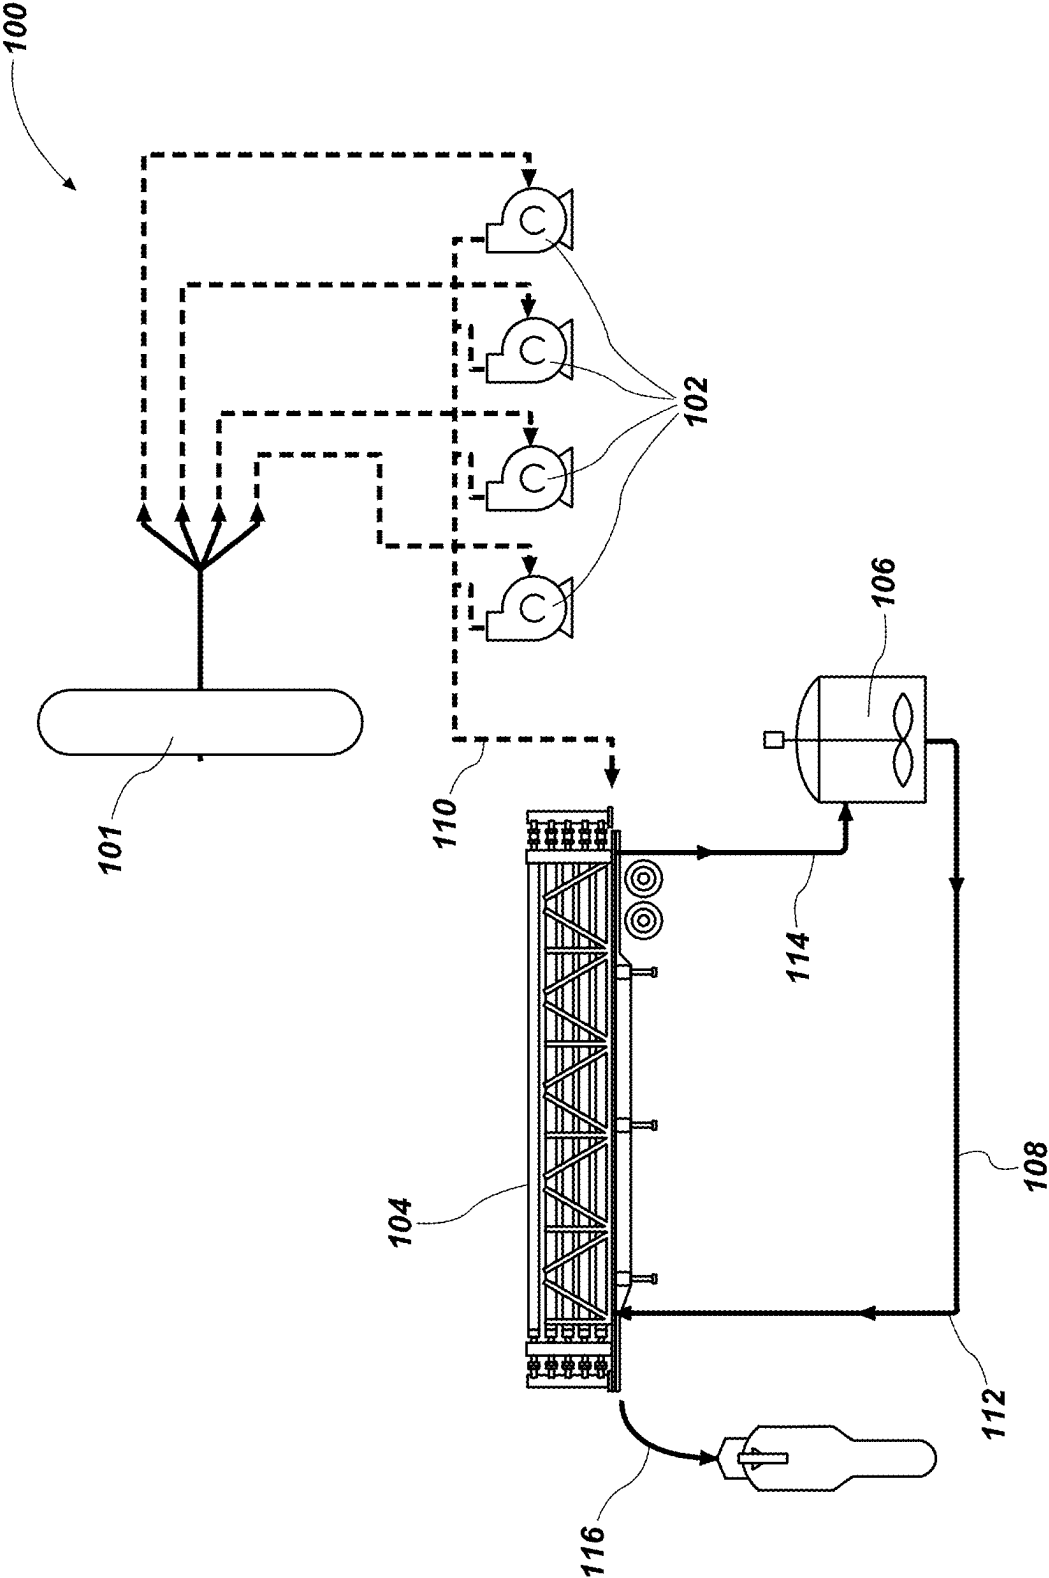


FIG. 1

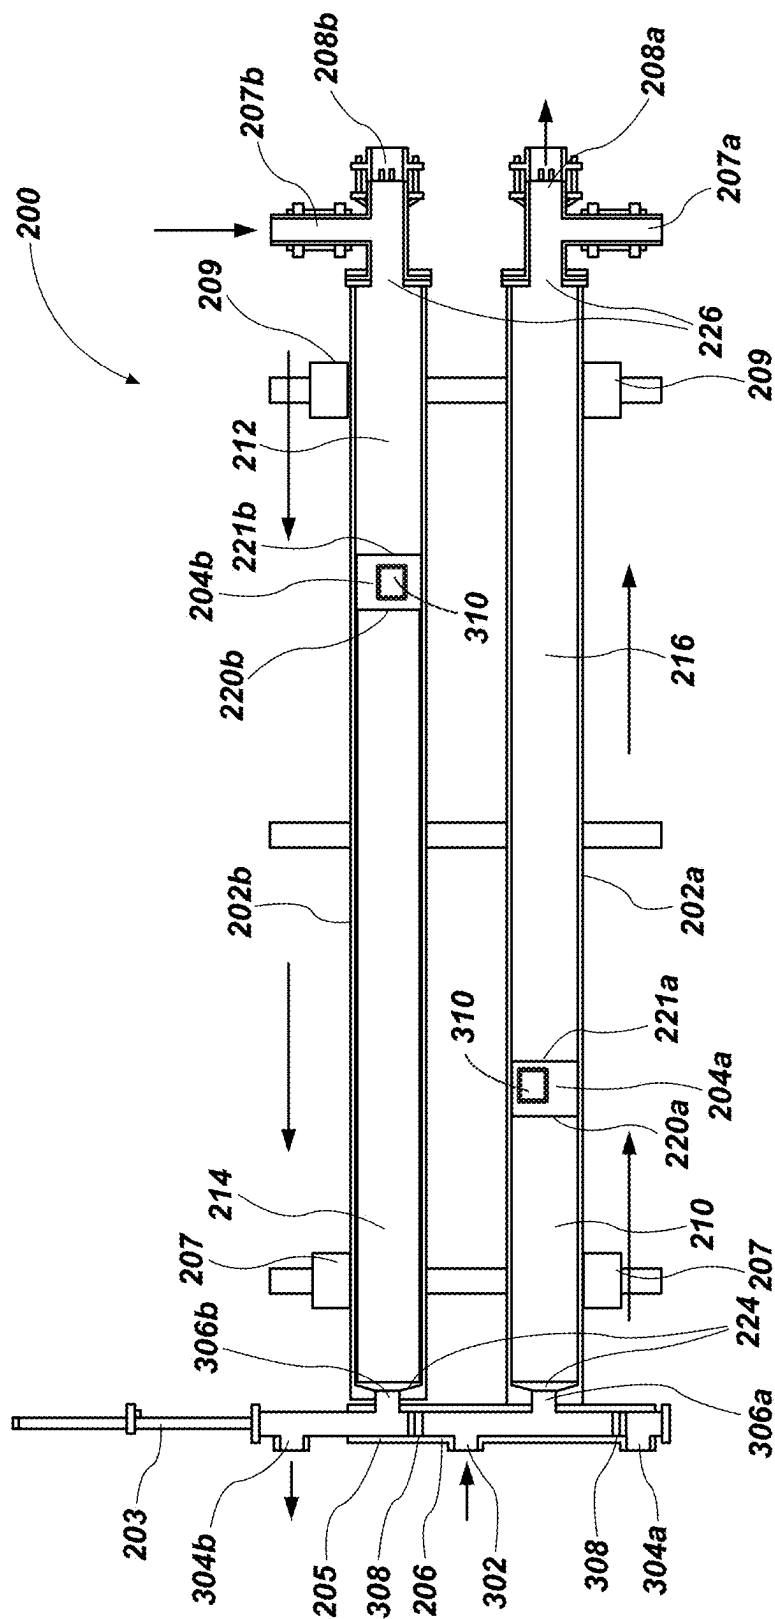


FIG. 2

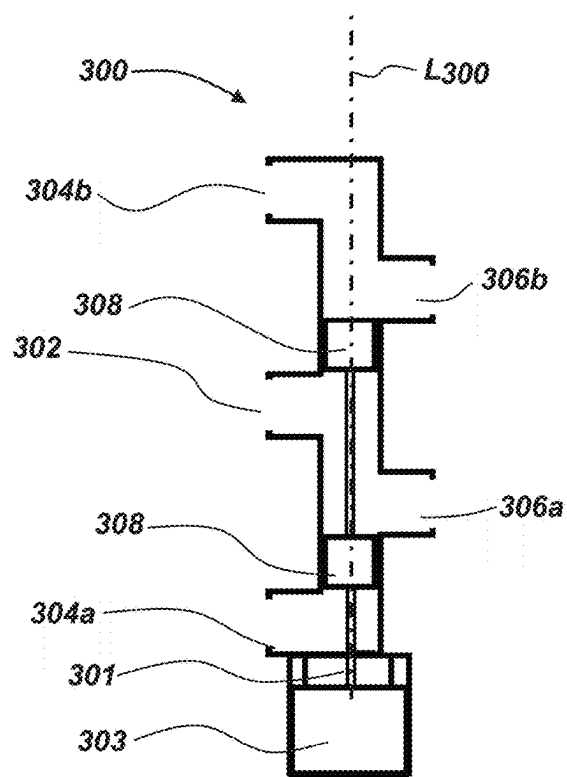


FIG. 3A



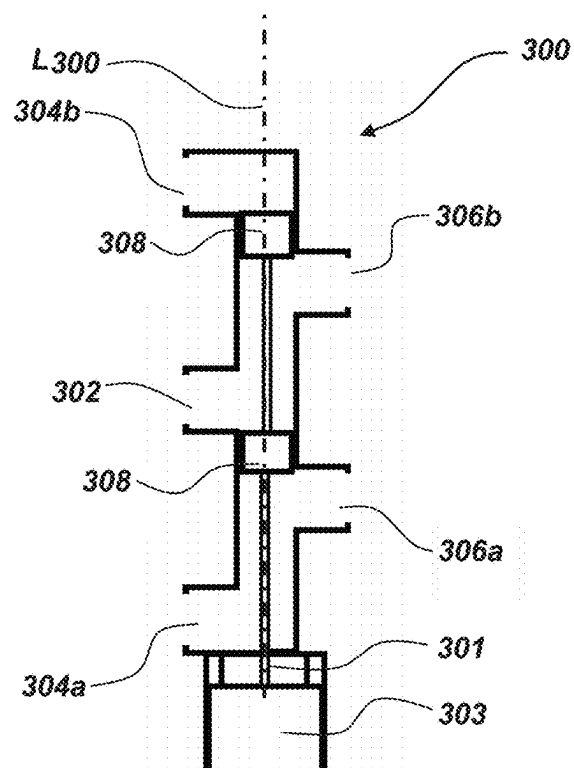


FIG. 3B

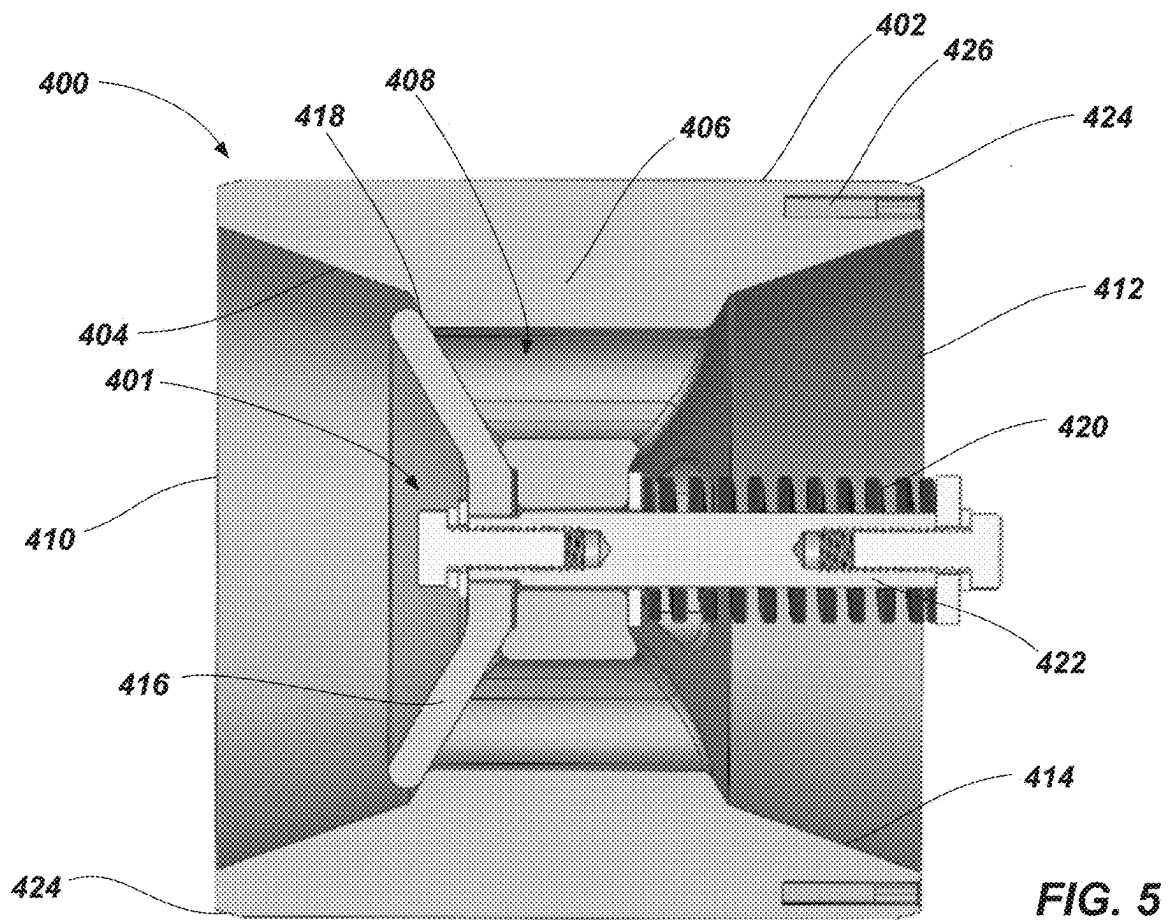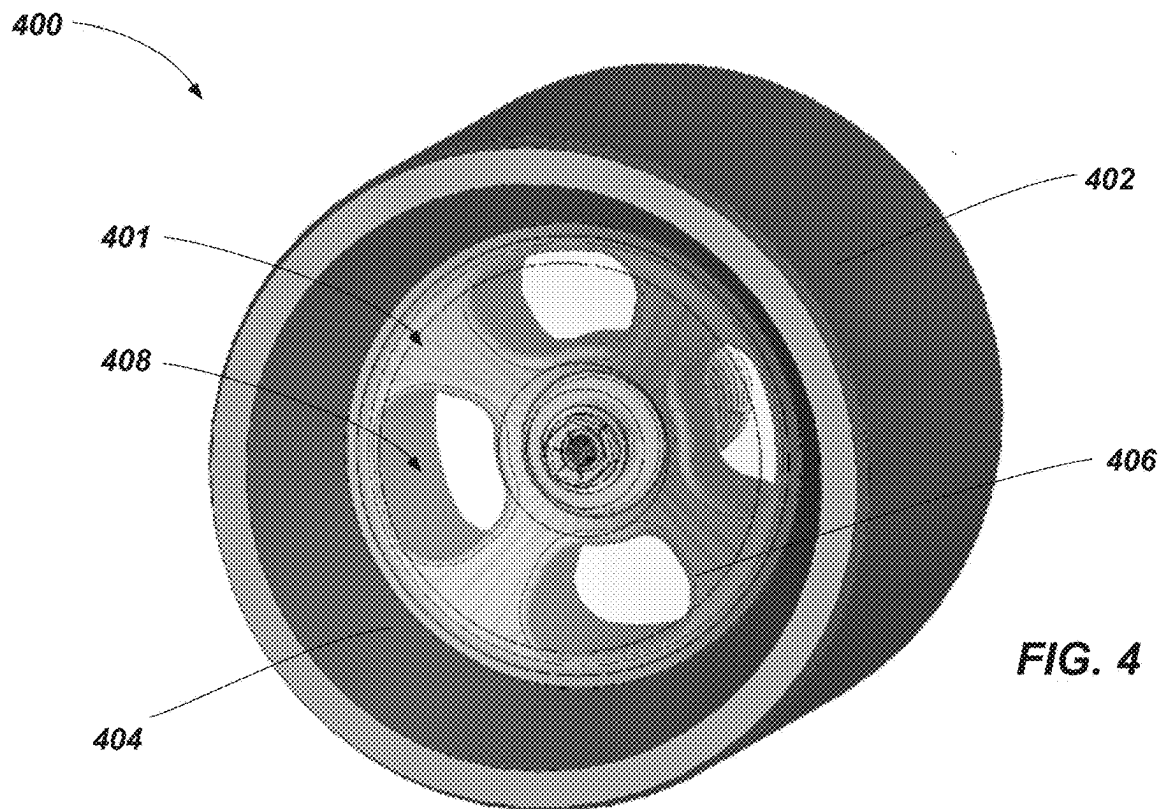

1

PISTONS FOR USE IN FLUID EXCHANGE DEVICES, SYSTEMS, AND METHODS

CROSS-REFERENCE TO RELATED APPLICATION

This application is a continuation of U.S. patent application Ser. No. 17/671,283, filed Feb. 14, 2022, for “PISTONS FOR USE IN FLUID EXCHANGE DEVICES AND RELATED DEVICES, SYSTEMS, AND METHODS,” which is a continuation of U.S. patent application Ser. No. 16/679,037, filed Nov. 8, 2019, for “PISTONS FOR USE IN FLUID EXCHANGE DEVICES AND RELATED DEVICES, SYSTEMS, AND METHODS,” which application claims the benefit under 35 U.S.C. § 119(e) of U.S. Provisional Patent Application Ser. No. 62/758,373, filed Nov. 9, 2018, for “PISTONS FOR USE IN FLUID EXCHANGE DEVICES AND RELATED DEVICES, SYSTEMS, AND METHODS,” the disclosure of each of which is hereby incorporated herein in its entirety by this reference.

TECHNICAL FIELD

The present disclosure relates generally to pistons for exchange devices. More particularly, embodiments of the present disclosure relate to pistons for use in fluid exchange devices for one or more of exchanging properties (e.g., pressure) between fluids and systems and methods.

BACKGROUND

Industrial processes often involve hydraulic systems including pumps, valves, impellers, etc. Pumps, valves, and impellers may be used to control the flow of the fluids used in the hydraulic processes. For example, some pumps may be used to increase (e.g., boost) the pressure in the hydraulic system, other pumps may be used to move the fluids from one location to another. Some hydraulic systems include valves to control where a fluid flows. Valves may include control valves, ball valves, gate valves, globe valves, check valves, isolation valves, combinations thereof, etc.

Some industrial processes involve the use of caustic fluids, abrasive fluids, and/or acidic fluids. These types of fluids may increase the amount of wear on the components of a hydraulic system. The increased wear may result in increased maintenance and repair costs or require the early replacement of equipment. For example, abrasive, caustic, or acidic fluid may increase the wear on the internal components of a pump such as an impeller, shaft, vanes, nozzles, etc. Some pumps are rebuildable and an operation may choose to rebuild a worn pump replacing the worn parts which may result in extended periods of downtime for the worn pump resulting in either the need for redundant pumps or a drop in productivity. Other operations may replace worn pumps at a larger expense but a reduced amount of downtime.

Well completion operations in the oil and gas industry often involve hydraulic fracturing (often referred to as fracking or fracing) to increase the release of oil and gas in rock formations. Hydraulic fracturing involves pumping a fluid (e.g., frac fluid, fracking fluid, etc.) containing a combination of water, chemicals, and proppant (e.g., sand, ceramics) into a well at high pressures. The high pressures of the fluid increases crack size and crack propagation through the rock formation releasing more oil and gas, while the proppant prevents the cracks from closing once the fluid

2

is depressurized. Fracturing operations use high-pressure pumps to increase the pressure of the fracking fluid. However, the proppant in the fracking fluid increases wear and maintenance on and substantially reduces the operation lifespan of the high-pressure pumps due to its abrasive nature.

BRIEF SUMMARY

Various embodiments may include a device or system for exchanging pressure between fluids. The device may include at least one tank, at least one piston in the at least one tank, and a valve device. The tank may include a clean side for receiving a clean fluid at a higher pressure and a dirty side for receiving a downhole fluid (e.g., a fracking fluid, a drilling fluid) at a lower pressure. The piston may be configured to separate the clean fluid from the downhole fluid to at least partially prohibit fluid the downhole fluid from traveling from the dirty side to the clean side. The valve device may be configured to selectively place the clean fluid at the higher pressure in communication with the downhole fluid at the lower pressure through the piston to pressurize the downhole fluid to a second higher pressure.

Another embodiment may include a device or system for exchanging at least one property between fluids. The device may include at least one tank, at least one piston in the at least one tank, and a valve device. The tank may include a first end for receiving a first fluid (e.g., a clean fluid) with a first property and a second end for receiving a second fluid (e.g., a dirty fluid) with a second property. The piston may be configured to separate the clean fluid from the dirty fluid and to substantially prohibit fluid the dirty fluid from traveling from the second side to the first side.

Another embodiment may include a piston for at least partially separating at least two fluid streams. The piston may be implemented in the devices or systems discussed above. The piston includes a body having an opening extending along an axis of the body where the opening defines a fluid pathway through the piston, and at least one valve obstructing the opening. The at least one valve is configured to enable fluid flow in one direction along the fluid pathway through the opening and to at least partially inhibit fluid flow in another, opposing direction along the fluid pathway through the opening.

Another embodiment may include a method of operating a pressure exchange device comprising supplying a high pressure fluid to a high pressure inlet of a valve configured to direct flow of the high pressure fluid to a chamber; transferring a pressure from the high pressure fluid to a dirty fluid through a piston in the chamber; enabling some of the high pressure fluid to pass through the piston; and substantially prohibiting the dirty fluid from passing through the piston to the high pressure fluid.

BRIEF DESCRIPTION OF THE DRAWINGS

While the specification concludes with claims particularly pointing out and distinctly claiming what are regarded as embodiments of the present disclosure, various features and advantages of embodiments of the disclosure may be more readily ascertained from the following description of example embodiments of the disclosure when read in conjunction with the accompanying drawings, in which:

FIG. 1 is schematic view of a hydraulic fracturing system according to an embodiment of the present disclosure;

FIG. 2 is cross-sectional view of a fluid exchanger device according to an embodiment of the present disclosure;

3

FIG. 3A is a cross-sectional view of a control valve in a first position according to an embodiment of the present disclosure;

FIG. 3B is a cross-sectional view of a control valve in a second position according to an embodiment of the present disclosure;

FIG. 4 is a isometric view of a piston according to an embodiment of the present disclosure; and

FIG. 5 is a cross-sectional view of a piston according to an embodiment of the present disclosure.

DETAILED DESCRIPTION

The illustrations presented herein are not meant to be actual views of any particular fluid exchanger or component thereof, but are merely idealized representations employed to describe illustrative embodiments. The drawings are not necessarily to scale. Elements common between figures may retain the same numerical designation.

As used herein, relational terms, such as “first,” “second,” “top,” “bottom,” etc., are generally used for clarity and convenience in understanding the disclosure and accompanying drawings and do not connote or depend on any specific preference, orientation, or order, except where the context clearly indicates otherwise.

As used herein, the term “and/or” means and includes any and all combinations of one or more of the associated listed items.

As used herein, the terms “vertical” and “lateral” refer to the orientations as depicted in the figures.

As used herein, the term “substantially” or “about” in reference to a given parameter means and includes to a degree that one skilled in the art would understand that the given parameter, property, or condition is met with a small degree of variance, such as within acceptable manufacturing tolerances. For example, a parameter that is substantially met may be at least 90% met, at least 95% met, at least 99% met, or even 100% met.

As used herein, the term “fluid” may mean and include fluids of any type and composition. Fluids may take a liquid form, a gaseous form, or combinations thereof, and, in some instances, may include some solid material. In some embodiments, fluids may convert between a liquid form and a gaseous form during a cooling or heating process as described herein. In some embodiments, the term fluid includes gases, liquids, and/or pumpable mixtures of liquids and solids.

Embodiments of the present disclosure may relate to exchange devices that may be utilized to exchange one or more properties between fluids (e.g., a pressure exchanger). Such exchangers (e.g., pressure exchangers) are sometimes called “flow-work exchangers” or “isobaric devices” and are machines for exchanging pressure energy from a relatively high-pressure flowing fluid system to a relatively low-pressure flowing fluid system.

In some industrial processes, elevated pressures are required in certain parts of the operation to achieve the desired results, following which the pressurized fluid is depressurized. In other processes, some fluids used in the process are available at high-pressures and others at low-pressures, and it is desirable to exchange pressure energy between these two fluids. As a result, in some applications, great improvement in economy can be realized if pressure can be efficiently transferred between two fluids.

In some embodiments, exchangers as disclosed herein may be similar to and include the various components and configurations of the pressure exchangers disclosed in U.S.

4

Pat. No. 5,797,429 to Shumway, issued Aug. 25, 1998, the disclosure of which is hereby incorporated herein in its entirety by this reference.

Although some embodiments of the present disclosure are depicted as being used and employed as a pressure exchanger between two or more fluids, persons of ordinary skill in the art will understand that the embodiments of the present disclosure may be employed in other implementations such as, for example, the exchange of other properties (e.g., temperature, density, etc.) and/or composition between one or more fluids and/or mixing of two or more fluids.

In some embodiments, a pressure exchanger may be used to protect moving components (e.g., pumps, valves, impellers, etc.) in processes where high pressures are needed in a fluid that has the potential to damage the moving components (e.g., abrasive fluid, caustic fluid, acidic fluid, etc.).

For example, pressure exchange devices according to embodiments of the disclosure may be implemented in hydrocarbon related processes, such as, hydraulic fracturing or other drilling operations (e.g., subterranean downhole drilling operations).

As discussed above, well completion operations in the oil and gas industry often involve hydraulic fracturing, drilling operations, or other downhole operations that use high-pressure pumps to increase the pressure of the downhole fluid (e.g., fluid that is intended to be conducted into a subterranean formation or borehole, such as, fracking fluid, drilling fluid, drilling mud). The proppants, chemicals, additives to produce mud, etc. in these fluids often increase wear and maintenance on the high-pressure pumps.

In some embodiments, a hydraulic fracturing system may include a hydraulic energy transfer system that transfers pressure between a first fluid (e.g., a clean fluid, such as a partially (e.g., majority) or substantially proppant free fluid or a pressure exchange fluid) and a second fluid (e.g., fracking fluid, such as a proppant-laden fluid, an abrasive fluid, or a dirty fluid). Such systems may at least partially (e.g., substantially, primarily, entirely) isolate the high-pressure first fluid from the second dirty fluid while still enabling the pressurizing of the second dirty fluid with the high-pressure first fluid and without having to pass the second dirty fluid directly through a pump or other pressurizing device.

While some embodiments discussed herein may be directed to fracking operations, in additional embodiments, the exchanger systems and devices disclosed herein may be utilized in other operations. For example, devices, systems, and/or method disclosed herein may be used in other downhole operations, such as, for example, downhole drilling operations. Further, embodiments of the pistons disclosed herein may be implemented in any other suitable fluid-handling application.

FIG. 1 illustrates a system diagram of an embodiment of hydraulic fracturing system 100 utilizing a pressure exchanger between a first fluid stream (e.g., clean fluid stream) and a second fluid stream (e.g., a fracking fluid stream). Although not explicitly described, it should be understood that each component of the system 100 may be directly connected or coupled via a fluid conduit (e.g., pipe) to an adjacent (e.g., upstream or downstream) component. The hydraulic fracturing system 100 may include one or more devices for pressurizing the first fluid stream, such as, for example, frack pumps 102 (e.g., reciprocating pumps, centrifugal pumps, scroll pumps, etc.). The system 100 may include multiple frack pumps 102, such as at least two frack pumps 102, at least four frack pumps 102, at least ten frack pumps 102, at least sixteen frack pumps, or at least twenty

frack pumps **102**. In some embodiments, the frack pumps **102** may provide relatively and substantially clean fluid at a high pressure to a pressure exchanger **104** from a fluid source **101**. In some embodiments, fluid may be provided separately to each pump **102** (e.g., in a parallel configuration). After pressurization in the pumps **102**, the high pressure clean fluid **110** may be combined and transmitted to the pressure exchanger **104** (e.g., in a serial configuration).

As used herein, “clean” fluid may describe fluid that is at least partially or substantially free (e.g., substantially entirely or entirely free) of chemicals and/or proppants typically found in a downhole fluid and “dirty” fluid may describe fluid that at least partially contains chemicals, other additives and/or proppants typically found in a downhole fluid.

The pressure exchanger **104** may transmit the pressure from the high pressure clean fluid **110** to a low pressure fracking fluid (e.g., fracking fluid **112**) in order to provide a high pressure fracking fluid **116**. The clean fluid may be expelled from the pressure exchanger **104** as a low pressure fluid **114** after the pressure is transmitted to the low pressure fracking fluid **112**. In some embodiments, the low pressure fluid **114** may be an at least partially or substantially clean fluid that substantially lacks chemicals and/or proppants aside from a small amount that may be passed to the low pressure fluid **114** from the fracking fluid **112** in the pressure exchanger **104**.

In some embodiments, the pressure exchanger **104** may include one or more pressure exchanger devices (e.g., operating in parallel). In such configurations, the high pressure inputs may be separated and provided to inputs of each of the pressure exchanger devices. The outputs of each of the pressure exchanger devices may be combined as the high pressure fracking fluid exits the pressure exchanger **104**. For example, and as discussed below with reference to FIG. 4, the pressure exchanger **104** may include two or more (e.g., three) pressure exchanger devices operating in parallel. As depicted, the pressure exchanger **104** may be provided on a mobile platform (e.g., a truck trailer) that may be relatively easily installed and removed from a fracking well site.

After being expelled from the pressure exchanger **104**, the low pressure clean fluid **114** may travel to and be collected in a mixing chamber **106** (e.g., blender unit, mixing unit, etc.). In some embodiments, the low pressure fluid **114** may be converted (e.g., modified, transformed, etc.) to the low pressure fracking fluid **112** in the mixing chamber **106**. For example, a proppant may be added to the low pressure clean fluid **114** in the mixing chamber **106** creating a low pressure fracking fluid **112**. In some embodiments, the low pressure clean fluid **114** may be expelled as waste.

In many hydraulic fracturing operations, a separate process may be used to heat the fracking fluid **112** before the fracking fluid **112** is discharged downhole (e.g., to ensure proper blending of the proppants in the fracking fluid). In some embodiments, using the low pressure clean fluid **114** to produce the fracking fluid **112** may eliminate the step of heating the fracking fluid. For example, the low pressure clean fluid **114** may be at an already elevated temperature as a result of the fracking pumps **102** pressurizing the high pressure clean fluid **110**. After transferring the pressure in the high pressure clean fluid **110** that has been heated by the pumps **102**, the now low pressure clean fluid **114** retains at least some of that heat energy as it is passed out of the pressure exchanger **104** to the mixing chamber **106**. In some embodiments, using the low pressure clean fluid **114** at an already elevated temperature to produce the fracking fluid may result in the elimination of the heating step for the

fracking fluid. In other embodiments, the elevated temperature of the low pressure clean fluid **114** may result in a reduction of the amount of heating required for the fracking fluid.

After the proppant is added to the low pressure fluid **114**, now fracking fluid, the low pressure fracking fluid **112** may be expelled from the mixing chamber **106**. The low pressure fracking fluid **112** may then enter the pressure exchanger **104** on the fracking fluid end through a fluid conduit **108** connected (e.g., coupled) between the mixing chamber **106** and the pressure exchanger **104**. Once in the pressure exchanger **104**, the low pressure fracking fluid **112** may be pressurized by the transmission of pressure from the high pressure clean fluid **110** through the pressure exchanger **104**. The high pressure fracking fluid **116** may then exit the pressure exchanger **104** and be transmitted downhole.

Hydraulic fracturing systems generally require high operating pressures for the high pressure fracking fluid **116**. In some embodiments, the desired pressure for the high pressure fracking fluid **116** may be between about 8,000 PSI (55,158 kPa) and about 12,000 PSI (82,737 kPa), such as between about 9,000 PSI (62,052 kPa) and about 11,000 PSI (75,842 kPa), or about 10,000 PSI (68,947 kPa).

In some embodiments, the high pressure clean fluid **110** may be pressurized to a pressure at least substantially the same or slightly greater than the desired pressure for the high pressure fracking fluid **116**. For example, the high pressure clean fluid **110** may be pressurized to between about 0 PSI (0 kPa) and about 1000 PSI (6,894 kPa) greater than the desired pressure for the high pressure fracking fluid **116**, such as between about 200 PSI (1,379 kPa) and about 700 PSI (4,826 kPa) greater than the desired pressure, or between about 400 PSI (2,758 kPa) and about 600 PSI (4,137 kPa) greater than the desired pressure, to account for any pressure loss during the pressure and exchange process.

FIG. 2 illustrates an embodiment of a pressure exchanger **200**. The pressure exchanger **200** may be a linear pressure exchanger in the sense that it is operated by moving or translating an actuation assembly substantially along a linear path. For example, the actuation assembly may be moved linearly to selectively place the low and high pressure fluids in at least partial communication (e.g., indirect communication where the pressure of the high pressure fluid may be transferred to the low pressure fluid) as discussed below in greater detail.

The linear pressure exchanger **200** may include one or more (e.g., two) chambers **202a**, **202b** (e.g., tanks, collectors, cylinders, tubes, pipes, etc.). The chambers **202a**, **202b** (e.g., parallel chambers **202a**, **202b**) may include pistons **204a**, **204b** configured to substantially maintain the high pressure clean fluid **210** and low pressure clean fluid **214** (e.g., the clean side) separate from the high pressure dirty fluid **216** and the low pressure dirty fluid **212** (e.g., the dirty side) while enabling transfer of pressure between the respective fluids **210**, **212**, **214**, and **216**. The pistons **204a**, **204b** may be sized (e.g., the outer diameter of the pistons **204a**, **204b** relative to the inner diameter of the chambers **202a**, **202b**) to enable the pistons **204a**, **204b** to travel through the chamber **202a**, **202b** while minimizing fluid flow around the pistons **204a**, **204b**.

The linear pressure exchanger **200** may include a clean control valve **206** configured to control the flow of high pressure clean fluid **210** and low pressure clean fluid **214**. Each of the chambers **202a**, **202b** may include one or more dirty control valves **207a**, **207b**, **208a**, and **208b** configured to control the flow of the low pressure dirty fluid **212** and the high pressure dirty fluid **216**.

While the embodiment of FIG. 2 contemplates a linear pressure exchanger 200, other embodiments, may include other types of pressure exchangers that involve other mechanisms for selectively placing the low and high pressure fluids in at least partial communication (e.g., a rotary actuator such as those disclosed in U.S. Pat. No. 9,435,354, issued Sep. 6, 2016, the disclosure of which is hereby incorporated herein in its entirety by this reference, etc.).

In some embodiments, the clean control valve 206, which includes an actuation stem 203 that moves one or more stoppers 308 along (e.g., linearly along) a body 205 of the valve 206, may selectively allow (e.g., input, place, etc.) high pressure clean fluid 210 provided from a high pressure inlet port 302 to enter a first chamber 202a on a clean side 220a of the piston 204a. The high pressure clean fluid 210 may act on the piston 204a moving the piston 204a in a direction toward the dirty side 221a of the piston 204a and compressing the dirty fluid in the first chamber 202a to produce the high pressure dirty fluid 216. The high pressure dirty fluid 216 may exit the first chamber 202a through the dirty discharge control valve 208a (e.g., outlet valve, high pressure outlet). At substantially the same time, the low pressure dirty fluid 212 may be entering the second chamber 202b through the dirty fill control valve 207b (e.g., inlet valve, low pressure inlet). The low pressure dirty fluid 212 may act on the dirty side 221b of the piston 204b moving the piston 204b in a direction toward the clean side 220b of the piston 204b in the second chamber 202b. The low pressure clean fluid 214 may be discharged (e.g., emptied, expelled, etc.) through the clean control valve 206 as the piston 204b moves in a direction toward the clean side 220b of the piston 204b reducing the space on the clean side 220b of the piston 204b within the second chamber 202b. A cycle of the pressure exchanger is completed once each piston 204a, 204b moves the substantial length (e.g., the majority of the length) of the respective chamber 202a, 202b (which “cycle” may be a half cycle with the piston 204a, 204b moving in one direction along the length of the chamber 202a, 202b and a full cycle includes the piston 204a, 204b moving in the one direction along the length of the chamber 202a, 202b and then moving in the other direction to return to substantially the original position). In some embodiments, only a portion of the length may be utilized (e.g., in reduced capacity situations). Upon the completion of a cycle, the actuation stem 203 of the clean control valve 206 may change positions enabling the high pressure clean fluid 210 to enter the second chamber 202b, thereby changing the second chamber 202b to a high pressure chamber and changing the first chamber 202a to a low pressure chamber and repeating the process.

In some embodiments, each chamber 202a, 202b may have a higher pressure on one side of the pistons 204a, 204b to move the piston in a direction away from the higher pressure. For example, the high pressure chamber may experience pressures between about 8,000 PSI (55,158 kPa) and about 13,000 PSI (89,632 kPa) with the highest pressures being in the high pressure clean fluid 210 to move the piston 204a, 204b away from the high pressure clean fluid 210 compressing and discharging the dirty fluid to produce the high pressure dirty fluid 216. The low pressure chamber 202a, 202b may experience much lower pressures, relatively, with the relatively higher pressures in the currently low pressure chamber 202a, 202b still being adequate enough in the low pressure dirty fluid 212 to move the piston 204a, 204b in a direction away from the low pressure dirty fluid 212 discharging the low pressure clean fluid 214. In some embodiments, the pressure of the low pressure dirty

fluid 212 may be between about 100 PSI (689 kPa) and about 700 PSI (4,826 kPa), such as between about 200 PSI (1,379 kPa) and about 500 PSI (3,447 kPa), or between about 300 PSI (2,068 kPa) and about 400 PSI (2,758 kPa).

Referring back to FIG. 1, in some embodiments, the system 100 may include an optional device (e.g., a pump) to pressurize the low pressure dirty fluid 212 (e.g., to a pressure level that is suitable to move the piston 204a, 204b toward the clean side) as it is being provided into the chambers 202a, 202b.

Referring again to FIG. 2, if any fluid pushes past the piston 204a, 204b (e.g., leak by, blow by, etc.) it will generally tend to flow from the higher pressure fluid to the lower pressure fluid. The high pressure clean fluid 210 may be maintained at the highest pressure in the system such that the high pressure clean fluid 210 may not generally become substantially contaminated. The low pressure clean fluid 214 may be maintained at the lowest pressure in the system. Therefore, it is possible that the low pressure clean fluid 214 may become contaminated by the low pressure dirty fluid 212. In some embodiments, the low pressure clean fluid 214 may be used to produce the low pressure dirty fluid 212 substantially nullifying any detriment resulting from the contamination. Likewise, any contamination of the high pressure dirty fluid 216 by the high pressure clean fluid 210 would have minimal effect on the high pressure dirty fluid 216.

In some embodiments, the dirty control valves 207a, 207b, 208a, 208b may be check valves (e.g., clack valves, non-return valves, reflux valves, retention valves, or one-way valves). For example, one or more of the dirty control valves 207a, 207b, 208a, 208b may be a ball check valve, diaphragm check valve, swing check valve, tilting disc check valve, clapper valve, stop-check valve, lift-check valve, in-line check valve, duckbill valve, etc. In additional embodiments, one or more of the dirty control valves 207a, 207b, 208a, 208b may be actuated valves (e.g., solenoid valves, pneumatic valves, hydraulic valves, electronic valves, etc.) configured to receive a signal from a controller and open or close responsive to the signal.

The dirty control valves 207a, 207b, 208a, 208b may be arranged in opposing configurations such that when the chamber 202a, 202b is in the high pressure configuration the high pressure dirty fluid opens the dirty discharge control valve 208a, 208b while the pressure in the chamber 202a, 202b holds the dirty fill control valve 207a, 207b closed. For example, the dirty discharge control valve 208a, 208b comprises a check valve that opens in a first direction out of the chamber 202a, 202b, while the dirty fill control valve 207a, 207b comprises a check valve that opens in a second, opposing direction into the chamber 202a, 202b.

The dirty discharge control valves 208a, 208b may be connected to a downstream element (e.g., a fluid conduit, a separate or common manifold) such that the high pressure in the downstream element holds the dirty discharge valve 208a, 208b closed in the chamber 202a, 202b that is in the low pressure configuration. Such a configuration enables the low pressure dirty fluid to open the dirty fill control valve 207a, 207b and enter the chamber 202a, 202b.

FIGS. 3A and 3B illustrate a cross sectional view of an embodiment of a clean control valve 300 at two different positions. In some embodiments, the clean control valve 300 may be similar to the control valve 206 discussed above. The clean control valve 300 may be a multiport valve (e.g., 4 way valve, 5 way valve, LinX® valve, etc.). The clean control valve 300 may have one or more high pressure inlet ports (e.g., one port 302), one or more low pressure outlet ports

(e.g., two ports **304a**, **304b**), and one or more chamber connection ports (e.g., two ports **306a**, **306b**). The clean control valve **300** may include at least two stoppers **308** (e.g., plugs, pistons, discs, valve members, etc.). In some embodiments, the clean control valve **300** may be a linearly actuated valve. For example, the stoppers **308** may be linearly actuated such that the stoppers **308** move along a substantially straight line (e.g., along a longitudinal axis L_{300} of the clean control valve **300**).

The clean control valve **300** may include an actuator **303** configured to actuate the clean control valve **300** (e.g., an actuator coupled to a valve stem **301** of the clean control valve **300**). In some embodiments, the actuator **303** may be electronic (e.g., solenoid, rack and pinion, ball screw, segmented spindle, moving coil, etc.), pneumatic (e.g., tie rod cylinders, diaphragm actuators, etc.), or hydraulic. In some embodiments, the actuator **303** may enable the clean control valve **300** to move the valve stem **301** and stoppers **308** at variable rates (e.g., changing speeds, adjustable speeds, etc.).

FIG. 3A illustrates the clean control valve **300** in a first position. In the first position, the stoppers **308** may be positioned such that the high pressure clean fluid may enter the clean control valve **300** through the high pressure inlet port **302** and exit into a first chamber through the chamber connection port **306a**. In the first position, the low pressure clean fluid may travel through the clean control valve **300** between the chamber connection port **306b** and the low pressure outlet port **304b** (e.g., may exit through the low pressure outlet port **304b**).

FIG. 3B illustrates the clean control valve **300** in a second position. In the second position, the stoppers **308** may be positioned such that the high pressure clean fluid may enter the clean control valve **300** through the high pressure inlet port **302** and exit into a second chamber through the chamber connection port **306b**. The low pressure clean fluid may travel through the clean control valve **300** between the chamber connection port **306a** and the low pressure outlet port **304a** (e.g., may exit through the low pressure outlet port **304a**).

Now referring to FIGS. 2, 3A, and 3B, the clean control valve **206** is illustrated in the first position with the high pressure inlet port **302** connected to the chamber connection port **306a** providing high pressure clean fluid to the first chamber **202a**. Upon completion of the cycle, the clean control valve **206** may move the stoppers **308** to the second position thereby connecting the high pressure inlet port **302** to the second chamber **202b** through the chamber connection port **306b**.

In some embodiments, the clean control valve **206** may pass through a substantially fully closed position in the middle portion of a stroke between the first position and the second position. For example, in the first position, the stoppers **308** may maintain a fluid pathway between the high pressure inlet port **302** and the chamber connection port **306a** and a fluid pathway between the chamber connection port **306b** and the low pressure outlet port **304b**. In the second position, the stoppers **308** may maintain a fluid pathway between the high pressure inlet port **302** and the chamber connection port **306b** and a fluid pathway between the chamber connection port **306a** and the low pressure outlet port **304a**. Transitioning between the first and second positions may involve at least substantially closing both fluid pathways to change the connection of the chamber connection port **306a** from the high pressure inlet port **302** to the low pressure outlet port **304a** and to change the connection of the chamber connection port **306b** from the

low pressure outlet port **304b** to the high pressure inlet port **302**. The fluid pathways may at least substantially close at a middle portion of the stroke to enable the change of connections. Opening and closing valves, where fluids are operating at high pressures may result in pressure pulsations (e.g., water hammer) that can result in damage to components in the system when high pressure is suddenly introduced or removed from the system. As a result, pressure pulsations may occur in the middle portion of the stroke when the fluid pathways are closing and opening respectively.

In some embodiments, the actuator **303** may be configured to move the stoppers **308** at variable speeds along the stroke of the clean control valve **206**. As the stoppers **308** move from the first position to the second position, the stoppers **308** may move at a high rate of speed while traversing a first portion of the stroke that does not involve newly introducing flow from the high pressure inlet port **302** into the chamber connection ports **306a**, **306b**. The stoppers **308** may decelerate to a low rate of speed as the stoppers **308** approach a closed position (e.g., when the stoppers **308** block the chamber connection ports **306a**, **306b** during the transition between the high pressure inlet port **302** connection and the low pressure outlet port **304a**, **304b** connection) at a middle portion of the stroke. The stoppers **308** may continue at a lower rate of speed, as the high pressure inlet port **302** is placed into communication with one of the chamber connection ports **306a**, **306b**. After, traversing the chamber connection ports **306a**, **306b**, the stoppers **308** may accelerate to another high rate of speed as the stoppers **308** approach the second position. The low rate of speed in the middle portion of the stroke may reduce the speed that the clean control valve **206** opens and closes enabling the clean control valve to gradually introduce and/or remove the high pressure from the chambers **202a**, **202b**.

In some embodiments, the motion of the pistons **204a**, **204b** may be controlled by regulating the rate of fluid flow (e.g., of the incoming fluid) and/or a pressure differential between the clean side **220a**, **220b** of the pistons **204a**, **204b**, and the dirty side **221a**, **221b** of the pistons **204a**, **204b** at least partially with the movement of the clean control valve **206**. In some embodiments, it may be desirable for the piston **204a**, **204b** in the low pressure chamber **202a**, **202b** to move at substantially the same speed as the piston **204a**, **204b** in the high pressure chamber **202a**, **202b** either by manipulating their pressure differentials in each chamber and/or by controlling the flow rates of the fluid in and out of the chambers **202a**, **202b**. However, the piston **204a**, **204b** in the low pressure chamber **202a**, **202b** may tend to move at a greater speed than the piston **204a**, **204b** in the high pressure chamber **202a**, **202b**.

In some embodiments, the rate of fluid flow and/or the pressure differential may be varied to control acceleration and deceleration of the pistons **204a**, **204b** (e.g., by manipulating and/or varying the stroke of the clean control valve **206** and/or by manipulating the pressure in the fluid streams with one or more pumps). For example, increasing the flow rate and/or the pressure of the high pressure clean fluid **210** when the piston **204a**, **204b** is near a clean end **224** of the chamber **202a**, **202b** at the beginning of the high pressure stroke may increase the rate of fluid flow and/or the pressure differential in the chamber **202a**, **202b**. Increasing the rate of fluid flow and/or the pressure differential may cause the piston **204a**, **204b** to accelerate to or move at a faster rate. In another example, the flow rate and/or the pressure of the high pressure clean fluid **210** may be decreased when the piston **204a**, **204b** approaches a dirty end **226** of the chamber

11

202a, 202b at the end of the high pressure stroke. Decreasing the rate of fluid flow and/or the pressure differential may cause the piston 204a, 204b to decelerate and/or stop before reaching the dirty end of the respective chamber 202a, 202b.

Similar control with the stroke of the clean control valve 206 may be utilized to prevent the piston 204a, 204b from traveling to the furthest extent of the clean end of the chambers 202a, 202b. For example, the clean control valve 206 may close off one of the chamber connection ports 306a, 306b before the piston 204a, 204b contacts the furthest extent of the clean end of the chambers 202a, 202b by preventing any further fluid flow and slowing and/or stopping the piston 204a, 204b. In some embodiments, the clean control valve 206 may open one the chamber connection ports 306a, 306b into communication with the high pressure inlet port 302 before the piston 204a, 204b contacts the furthest extent of the clean end of the chambers 202a, 202b in order to slow, stop, and/or reverse the motion of the piston 204a, 204b.

If the pistons 204a, 204b reach the clean end 224 or dirty end 226 of the respective chambers 202a, 202b the higher pressure fluid may bypass the piston 204a, 204b and mix with the lower pressure fluid. In some embodiments, mixing the fluids may be desirable. For example, if the pistons 204a, 204b reach the dirty end 226 of the respective chambers 202a, 202b during the high pressure stroke, the high pressure clean fluid 210 may bypass the piston 204a, 204b (e.g., by traveling around the piston 204a, 204b or through a valve in the piston 204a, 204b) flushing any residual contaminants from the surfaces of the piston 204a, 204b. In some embodiments, mixing the fluids may be undesirable. For example, if the pistons 204a, 204b reach the clean end 224 of the respective chambers 202a, 202b during the low pressure stroke, the low pressure dirty fluid 212 may bypass the piston 204a, 204b and mix with the low pressure clean fluid contaminating the clean area in the clean control valve 206 with the dirty fluid.

In some embodiments, the system 100 may prevent the pistons 204a, 204b from reaching the clean end 224 of the respective chambers 202a, 202b. For example, the clean control valve 206 may include a control device 209 (e.g., sensor, safety, switch, etc.) to trigger the change in position of the clean control valve 206 on detecting the approach of the piston 204a, 204b to the clean end 224 of the respective chamber 202a, 202b such that the system 100 may utilize the clean control valve 206 to change flow path positions before the piston 204a, 204b reaches the clean end 224 of the chamber 202a, 202b.

In some embodiments, the system 100 may be configured to enable the pistons 204a, 204b to reach the dirty end 226 of the respective chambers 202a, 202b during the high pressure stroke. In some embodiments, the clean control valve 206 may include a control device 209 to trigger the change in position of the clean control valve 206 on detecting the approach of the piston 204a, 204b to the dirty end 226 of the respective chamber 202a, 202b. In some embodiments, the control device may be configured such that the control valve 206 does not complete the change in direction of the piston 204a, 204b until the piston 204a, 204b has reached the furthest extent of the dirty end 226 of the respective chamber 202a, 202b. In some embodiments, the control device may include a time delay through programming or mechanical delay that enables the piston 204a, 204b to reach the furthest extent of the dirty end 226 of the chamber 202a, 202b.

In some embodiments, the system 100 may be configured to enable the pistons 204a, 204b to reach the dirty end 226

12

of the respective chambers 202a, 202b during the high pressure stroke and prevent the pistons 204a, 204b from reaching the clean end 224 of the respective chambers 202a, 202b during the low pressure stroke. For example, the system 100 may drive both of the pistons 204a, 204b a select distance through the respective chambers 202a, 202b where the pistons 204a, 204b is maintained a select distance from the clean end 224 while enabling the pistons 204a, 204b to travel relatively closer to or come in contact with, the dirty end 226. In some embodiments, the system 100 may be configured such that the pressure differential across the piston 204a, 204b in the low pressure chamber 202a, 202b may be less than the pressure differential across the piston 204a, 204b in the high pressure chamber 202a, 202b such that the piston 204a, 204b travels slower during the low pressure cycle than the high pressure cycle.

In some embodiments, the control device 209 may be configured to trigger the change in position of the clean control valve 206 on detecting the approach of the piston 204a, 204b to the clean end 224 of the respective chamber 202a, 202b such that the clean control valve 206 may change positions before the piston 204a, 204b reaches the clean end 224 of the chamber 202a, 202b. In some embodiments, the control device 209 may be configured to trigger the change in position of the clean control valve 206 on detecting the approach of the piston 204a, 204b to the dirty end 226 of the respective chamber 202a, 202b. In some embodiments, the control device may be configured to trigger the change in position of the clean control valve 206 by evaluating both of the pistons 204a, 204b as they respectively approach the clean end 224 and the dirty end 226 of the chambers 202a, 202b. For example, the control device 209 may detect the approach of the piston 204a, 204b to the dirty end 226 of the chamber 202a, 202b and begin a timer (e.g., mechanical timer, electronic timer, programmed time delay, etc.) If the control device 209 detects the approach of the piston 204a, 204b to the clean end 224 of the chamber 202a, 202b before the time triggers the change in position of the clean control valve 206, the control device 209 may override the timer and change the position of the clean control valve 206 to prevent the piston 204a, 204b from reaching the clean end 224 of the chamber 202a, 202b.

In some embodiments, an automated controller may produce signals that may be transmitted to the clean control valve 206 directing the clean control valve 206 to move from the first position to the second position or from the second position to the first position (e.g., at a constant and/or variable rate).

Referring back to FIG. 2, the pressure exchanger 200 may include one or more bypass features 310 (e.g., in one or more of the chambers 202a, 202b and/or in one or more of the pistons 204a, 204b) for bypassing fluid around and/or through the pistons 204a, 204b. For example, the pistons 204a, 204b may include a bypass feature 310 for enabling fluid to pass through the pistons 204a, 204b. In some embodiments, the bypass feature 310 may be associated with each of the pistons 204a, 204b (e.g., positioned in the pistons 204a, 204b) where the bypass feature 310 comprises a valve, such as a one-way check valve, or another type of suitable valve, such as those listed above, that may limit flow in one or more directions while enabling flow in one or more other directions.

In additional embodiments, the chambers 202a, 202b may define all or a portion of the bypass feature 310. For example, an entirety of the bypass feature 310 may be in the

chambers 202a, 202b may be defined partially by the chambers 202a, 202b and partially by the pistons 204a, 204b.

As discussed above, the system 100 may enable the pistons 204a, 204b to reach an end (e.g., the dirty end 226) of the respective chambers 202a, 202b during a stroke. In such an event, the bypass feature 310 may enable fluid to the pass through the bypass feature 310 in order to reach one or more of the control valves 207a, 207b, 208a, and 208b (e.g., in an underflush in supplying an overflow of high pressure fluid into the chambers 202a, 202b). For example, the system 100 may drive both of the pistons 204a, 204b a select distance through the respective chambers 202a, 202b enabling the pistons 204a, 204b to travel closer to, or come in contact with, the end 226. As the pistons 204a, 204b approach and/or come in contact with the end 226, the bypass feature 310 may be activated (e.g., by the overcoming of a biasing feature) and begin to enable fluid to pass around and/or through the bypass feature 310. For example, the obstruction of the end 226 of the chambers 202a, 202b and/or increasing fluid pressure as the pistons 204a, 204b approach the end 226 may resist further movement of the pistons 204a, 204b, applying an opposing force to the pistons 204a, 204b. As the force of the fluid flow is no longer being substantially utilized to move the pistons 204a, 204b, the fluid may then overcome the bypass feature 310 (e.g., when a selected differential pressure is exceeded) in order to enable fluid flow past the pistons 204a, 204b.

Is such an embodiment, the bypass feature 310 may be utilized to over supply fluid (e.g., clean fluid) on one side of the pistons 204a, 204b into the chambers 202a, 202b. The fluid may pass through the bypass feature 310 of the pistons 204a, 204b to another side of the pistons 204a, 204b.

As also discussed above, the system 100 may prevent the pistons 204a, 204b from reaching an end (e.g., the clean end 224) of the respective chambers 202a, 202b during a stroke. However, even if the pistons 204a, 204b approach or reach the end 224, the bypass feature 310 may prevent fluid from passing through the bypass feature 310 in order to, for example, reach one or more of the clean control valve 206 (e.g., in an oversupply of low pressure dirty fluid into the chambers 202a, 202b).

The pistons 204a, 204b (e.g., an outer diameter of the pistons 204a, 204b) may be sized relative to an inner dimension of the chambers 202a, 202b to enable the pistons 204a, 204b to pass through the chambers 202a, 202b without binding while minimizing leakage around the pistons 204a, 204b (e.g., minimizing contamination of the clean fluid). The geometry of pistons 204a, 204b relative to an inner dimension of the chambers 202a, 202b may minimize proppants (e.g., sand) in the dirty fluid from traveling, and becoming trapped, between the pistons 204a, 204b to pass through the chambers 202a, 202b.

In some embodiments, the pistons 204a, 204b may include materials that are abrasion resistant or that include an abrasion resistant coating (e.g., ceramics, carbides, metals, polymers, etc.). In addition, the material of the pistons 204a, 204b may be selected to exhibit a medium density. Such an embodiment may provide at least some buoyancy of the pistons 204a, 204b in fluid, thereby reducing wear on the bottom of the chambers 202a, 202b that may occur due to the gravity of the pistons 204a, 204b.

FIG. 4 is an isometric view of a piston 400 with a portion of a bypass feature 401 shown in a transparent view for clarity. In some embodiments, the piston 400 and the bypass feature 401 may be similar to, and include one or more components of, the pistons 204a, 204b and the bypass

features 310 discussed above in relation to FIG. 2. As shown in FIG. 4, the piston 400 includes an outer sidewall 402 (e.g., a radial sidewall) defining an outermost extent (e.g., an outer diameter) the piston 400.

The outer sidewall 402 may surround (e.g., encircle) an inner portion of the piston 400 including the bypass feature 401. As depicted, the piston 400 may include a first recess 404 defined in the piston 400 such that the bypass feature 401 is positioned at a central portion 406 of the piston 400 at a base of the recess 404. The central portion 406 of the piston 400 may be defined as a web with openings 408 (e.g., one, two three, four, or more openings or channels through the central portion 406 of the piston 400) that enable fluid to pass through the piston 400 when the bypass feature 401 is an open position enabling fluid flow through the piston 400.

FIG. 5 is a cross-sectional view of a piston (e.g., the piston 400 shown in FIG. 4). As shown in FIG. 5, the piston 400 includes a first axial end 410 and a second, opposing axial end 412. The first recess 404 (e.g., having a cylindrical, conical, or frustoconical shape) may extend from the first axial end 410 into the piston 400 to the central portion 406. A second recess 414 (e.g., having a cylindrical, conical, or frustoconical shape) may extend from the second axial end 412 into the piston 400 to the central portion 406.

The openings 408 at the central portion 406 of the piston 400 may extend between and connect (e.g., place in fluid communication) the first and second recesses 404, 414.

The bypass feature 401 may be positioned at the central portion 406 of the piston 400 between the first and second recesses 404, 414. As depicted, the bypass feature 401 may include a valve member 416 that contacts and defines a seal between a portion of the piston 400 (e.g., a seating portion 418 of the central portion 406) in the first recess 404. As depicted, the bypass feature 401 may comprise a one-way check valve. As noted above, in additional embodiments, the bypass feature 401 may comprise another fluid flow restriction feature, such as, a multiple-way check valve or other type of valve.

In a closed position (e.g., as shown in FIG. 5), the valve member 416 may contact the seating portion 418 and at least partially prevent (e.g., substantially entirely prevent) fluid from passing through the openings 408 to the second recess 414. For example, in the closed position, the valve member 416 may prevent fluid flow from the first axial end 410 to the second axial end 412.

In some embodiments, the valve member 416 may be biased into the closed position. For example, the valve member 416 may be coupled to a biasing feature (e.g., a spring 420, such as, a compression spring, a torsion spring, a Belleville spring, a constant force spring, an extension spring, etc.) on a mounting structure 422 (e.g., a rod coupled to the valve member 416 and the spring 420). The mounting structure 422 may enable the valve member 416 to move (e.g., along an axis of the piston 400) to an open position while compressing the spring 420 under the force of fluid flow from the second axial end 412 to the first axial end 410. When the force of the spring 420 overcomes the force of the fluid flow, the spring 420 may force the valve member 416 back into the closed position.

In the open position, the valve member 416 may move (e.g., axially displace) from the seating portion 418 and enable fluid to pass through the openings 408 from the second recess 414 to the first recess 404. For example, clean fluid may pass from the second axial end 412 to the first axial end 410, which first axial end 410 may be positioned on a dirty side of the piston 400 in communication with a dirty

15

fluid. In embodiments with a biasing feature, movement of the valve member **416** from the seating portion **418** may compress the spring **420**.

In some embodiments, the dimension and/or geometry of the piston **400** (e.g., proximate the outermost diameter of the piston **400** may be selected to minimize abrasion of the piston **400** and the chamber **202a**, **202b** (FIG. 2). For example, the piston **400** may include a chamfered edge or surface **424** (e.g., a chamfered cylindrical wall) at one or both of the first axial end **410** and the second axial end **412**. The chamfered surface **424** may extend from a respective axial end **410**, **412** to the outer sidewall **402**. As depicted, an entirety of the outermost surface of the piston **400** at both axial ends **410**, **412** may comprise an arcuate continuous surface leading from the axial ends **410**, **412** to the outer sidewall **402**. In some embodiments, the piston **400** including the chamfered surfaces **424** may act to create fluid vortices at the chamfered surfaces **424** (e.g., an interface between the piston **400** and an inner wall of the chamber **202a**, **202b**) that may suspend particles in the fluid through which the piston **400** is traveling in order to at least partially prevent the particles from becoming wedged between the piston **400** and the chamber **202a**, **202b** (FIG. 2).

As discussed above, the piston **400** may be utilized in a system (e.g., system **100**) that may sense or otherwise monitor the position of the piston **400**. In some embodiments, the piston **400** may include one or more position detection features that enable detection of the presence of the piston **400** through, for example, a sensor (e.g., a contact or contactless sensor, such as a magnetic sensor, an optical sensor, an inductive proximity sensors, a Hall Effect sensor, an ultrasonic sensor, a capacitive proximity sensors, a contact, a button, a switch, etc.). For example, the piston **400** may include one or more position detection features comprising one or more magnets **426** (e.g., relatively strong permanent magnets) positioned about the piston **400** (e.g., spaced at intervals about the circumference of the piston **400**). The magnetic field produced the magnets **426** may be detected by a complementary sensor (e.g., part of the control system of linear pressure exchanger **200** (FIG. 2)) to determine a position of the piston **400** (e.g., detect the passing of the piston **400** by the sensor).

Pressure exchangers may reduce the amount of wear experienced by high pressure pumps, turbines, and valves in systems with abrasive, caustic, or acidic fluids. The reduced wear may allow the systems to operate for longer periods with less down time resulting in increased revenue or productivity for the systems. Additionally, the repair costs may be reduced as fewer parts may wear out. In operations such as fracking operations, where abrasive fluids are used at high temperatures, repairs and downtime can result in millions of dollars of losses in a single operation. Embodiments of the present disclosure may result in a reduction in wear experienced by the components of systems where abrasive, caustic, or acidic fluids are used at high temperatures. The reduction in wear will result in cost reduction and increased revenue production.

Pistons in accordance with some embodiments of the instant disclosure may act to minimize fluid from one side of the piston (e.g., a fracking fluid) from contaminating fluid (e.g., clean fluid) from the other side of the piston. Further, the piston may enable fluid flow through a valve of the piston to enable fluid in one direction (e.g., enabling clean fluid to flow to a dirty side of the piston) while prohibiting fluid flow in another direction (e.g., preventing dirty fluid from traveling to a clean side of the piston). The geometry and/or material of the piston may further reduce abrasion on

16

the piston as it moves through a chamber while minimizing unwanted fluid flow around the piston and particle from becoming stuck around an outer circumference of the piston. Further, the geometry may create fluid vortices that may suspend particles in the fluid through which the piston is traveling in order to at least partially prevent the particles from becoming wedged between the piston and the chamber. Finally, the piston may include one or more features for enabling the detection of the position of the piston.

While the present disclosure has been described herein with respect to certain illustrated embodiments, those of ordinary skill in the art will recognize and appreciate that it is not so limited. Rather, many additions, deletions, and modifications to the illustrated embodiments may be made without departing from the scope of the disclosure as hereinafter claimed, including legal equivalents thereof. In addition, features from one embodiment may be combined with features of another embodiment while still being encompassed within the scope of the disclosure as contemplated by the inventors.

What is claimed is:

1. A device for exchanging pressure between fluids, the device comprising:

at least one tank comprising:

- a first side for receiving a first fluid at a higher pressure; and
- a second side for receiving a second fluid at a lower pressure;

at least one piston in the at least one tank, the at least one piston configured to separate the first fluid from the second fluid, the at least one piston comprising a bypass feature, the bypass feature configured to:

- substantially prohibit the second fluid from traveling from the second side to the first side; and
- enable the first fluid to travel from the first side to the second side;

a valve device at the first side of the at least one tank, the valve device configured to selectively place the first fluid at the higher pressure in communication with the second fluid at the lower pressure in order to pressurize the second fluid to a second higher pressure; and

at least one sensor configured to detect a presence of the at least one piston, the at least one sensor spaced from an end of the at least one tank such that the at least one-piston is configured to travel past and beyond the at least one sensor toward the end of the at least one tank before contacting the end of the at least one tank.

2. The device of claim 1, wherein the at least one piston is independently disposed in the at least one tank and configured to travel unconstrained within the at least one tank from a first axial end to a second axial end of the at least one tank.

3. The device of claim 1, wherein the bypass feature of the at least one piston enables at least some of the first fluid and/or the second fluid to pass through the bypass feature in order to exit the at least one tank at the second side.

4. The device of claim 3, wherein the at least one piston is configured to approach and/or contact the second side of the at least one tank to force the at least some of the first fluid and/or the second fluid through the bypass feature of the at least one piston.

5. The device of claim 4, wherein the at least one piston approaching and/or contacting the second side of the at least one tank is configured to overcome a biasing force of the bypass feature to enable the at least some of the first fluid and/or the second fluid to travel through the bypass feature of the at least one piston.

17

6. The device of claim 1, wherein the bypass feature of the at least one piston enables the device to perform a fluid flush through the at least one tank from the first side to the second side.

7. The device of claim 1, wherein the bypass feature of the at least one piston is configured to at least partially prevent the second fluid from traveling through the bypass feature from the second side to the first side when the at least one piston is positioned proximate to the first side.

8. The device of claim 1, wherein the bypass feature of the at least one piston is configured to at least partially prevent the second fluid from traveling through the bypass feature to the valve device.

9. The device of claim 1, further comprising a controller configured to receive a signal from the at least one sensor on the at least one tank, the controller configured to, when the at least one sensor detects the at least one piston, instruct the valve device to increase flow of the first fluid at the higher pressure at the first side of the at least one tank in order to open the bypass feature in the at least one piston as the at least one piston approaches and/or contacts the second side.

10. The device of claim 9, wherein the controller is further configured to enable the at least one piston to contact the second side while at least partially preventing the at least one piston from contacting the first side.

11. The device of claim 1, further comprising a controller configured to receive a signal from the at least one sensor on the at least one tank, the controller configured to, when the at least one sensor detects the at least one piston, instruct the valve device to reduce flow of the first fluid at the higher pressure at the first side of the at least one tank in order to slow and stop movement of the at least one piston in the at least one tank as the at least one piston approaches and before the at least one piston contacts the first side or the second side.

12. A system for exchanging pressure between at least two fluid streams, the system comprising:

a pressure exchange device for exchanging at least one property between fluids, the pressure exchange device comprising:

at least one tank comprising:

a first end for receiving a clean fluid with a first property; and

a second end for receiving a dirty fluid with a second property;

at least one piston in the at least one tank, the at least one piston configured to separate the clean fluid from the dirty fluid, wherein the at least one piston comprises at least one valve enabling fluid flow through the at least one piston;

a valve device positioned at the first end of the at least one tank, the valve device configured to selectively place the clean fluid in communication with the dirty fluid in order to at least partially transfer the first property of the clean fluid to the dirty fluid, wherein

18

the valve device is configured to force the at least one piston into contact with the second end of the at least one tank; and

at least one sensor configured to detect a position of the at least one piston as the at least one piston passes the at least one sensor along a length of the at least one tank.

13. The system of claim 12, wherein the at least one valve in the at least one piston comprises a check valve.

14. The system of claim 13, wherein the check valve is configured to move to an open position when a fluid traveling through the at least one piston overcomes a biasing force of the check valve.

15. The system of claim 14, wherein the check valve is configured to move to the open position to enable the clean fluid to pass to the second end of the at least one tank.

16. The system of claim 12, wherein the at least one sensor comprises at least two sensors configured to detect a presence of the at least one piston, wherein a first sensor is located near, but spaced from, the first end of the at least one tank and a second sensor is located near, but spaced from, the second end of the at least one tank.

17. The system of claim 16, wherein the at least two sensors are configured to each transmit a signal to the valve device responsive the position of the at least one piston and the valve device is configured to change from a first position to a second position responsive the signal from the first sensor and change from the second position to the first position responsive the signal from the second sensor.

18. A method of controlling a pressure exchange device comprising:

supplying a high pressure fluid to a high pressure inlet of a valve configured to direct flow of the high pressure fluid to a chamber;

transferring a pressure from the high pressure fluid to a dirty fluid in the chamber;

monitoring a location of a piston with at least one sensor as the piston passes and travels beyond the at least one sensor along an axial length of the chamber;

changing a position of the valve responsive the location of the piston;

redirecting the flow of the high pressure fluid into the chamber by the changing of the position of the valve; and

enabling some of the high pressure fluid to pass through the piston.

19. The method of claim 18, further comprising forcing the piston into a distal axial end of the chamber with the high pressure fluid to enable some of the high pressure fluid to pass through the piston, a proximate axial end of the chamber being positioned at the valve and the distal axial end being positioned away from the valve opposite the proximal axial end of the chamber.

20. The method of claim 18, further comprising substantially prohibiting the dirty fluid from passing through the piston to the high pressure fluid.

* * * * *