



(12) **United States Patent**
Choi et al.

(10) **Patent No.:** **US 12,410,369 B2**
(45) **Date of Patent:** **Sep. 9, 2025**

- (54) **FLAT PUSH HOT CAR FOR FOUNDRY COKE AND ASSOCIATED SYSTEMS AND METHODS**
- (71) Applicant: **SUNCOKE TECHNOLOGY AND DEVELOPMENT LLC**, Lisle, IL (US)
- (72) Inventors: **Chun Wai Choi**, Chicago, IL (US); **John Francis Quanci**, Haddonfield, NJ (US)
- (73) Assignee: **SUNCOKE TECHNOLOGY AND DEVELOPMENT LLC**, Lisle, IL (US)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

- (21) Appl. No.: **18/954,882**
- (22) Filed: **Nov. 21, 2024**

- (65) **Prior Publication Data**
US 2025/0163329 A1 May 22, 2025

- Related U.S. Application Data**
- (60) Provisional application No. 63/601,490, filed on Nov. 21, 2023.
- (51) **Int. Cl.**
B01D 50/20 (2022.01)
C10B 33/00 (2006.01)
(Continued)
- (52) **U.S. Cl.**
CPC **C10B 43/14** (2013.01); **B01D 50/20** (2022.01); **C10B 33/00** (2013.01); **C10B 39/14** (2013.01);
(Continued)
- (58) **Field of Classification Search**
None
See application file for complete search history.

- (56) **References Cited**

U.S. PATENT DOCUMENTS

425,797 A 4/1890 Hunt
469,868 A 3/1892 Osbourn
(Continued)

FOREIGN PATENT DOCUMENTS

CA 1172895 8/1984
CA 2775992 5/2011
(Continued)

OTHER PUBLICATIONS

U.S. Appl. No. 18/770,274, filed Jul. 11, 2024, Quanci et al.
(Continued)



Primary Examiner — Dung H Bui

(74) *Attorney, Agent, or Firm* — Perkins Coie LLP; Vijay S. Kumar

- (57) **ABSTRACT**

Industrial cars for holding high-temperature materials, such as flat push hot cars for transporting hot coke and deposits, and associated systems and methods are disclosed herein. In some embodiments, an industrial car can include an at least partially enclosed hot box with a base and sidewalls, and one or more of the base or sidewalls can be covered by surface plates. The surface plates can be arranged in a floating configuration with gaps therebetween, such that the surface plates can move relative to one another and thermally expand without exerting excessive compressive force against adjacent surface plates. In some embodiments, the hot box can also include a roof with a first non-curved member and a second non-curved member abutting the first non-curved member. In some embodiments, the industrial car can include one or more emission ducts to remove dust and exhaust from within and around the industrial car.

9 Claims, 12 Drawing Sheets

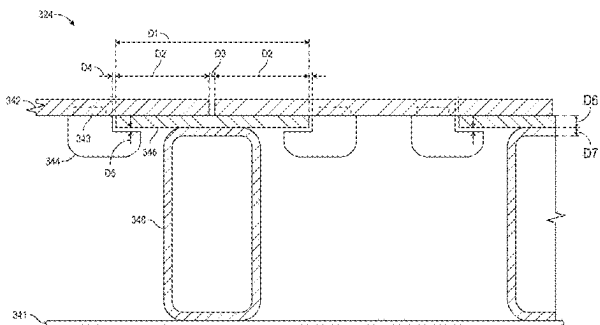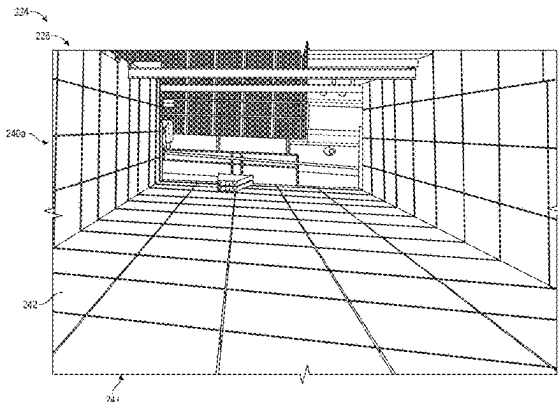

(51)	Int. Cl.		3,448,012 A	6/1969	Allred
	C10B 39/14	(2006.01)	3,453,839 A	7/1969	Sabin
	C10B 43/14	(2006.01)	3,462,345 A	8/1969	Kernan
	F27D 15/00	(2006.01)	3,462,346 A	8/1969	Kernan et al.
	F27D 17/30	(2025.01)	3,511,030 A	5/1970	Brown et al.
	F27D 17/25	(2025.01)	3,542,650 A	11/1970	Kulakov
			3,545,470 A	12/1970	Paton
(52)	U.S. Cl.		3,587,198 A	6/1971	Hensel
	CPC	F27D 15/00 (2013.01); F27D 17/30 (2025.01); F27D 17/25 (2025.01)	3,591,827 A	7/1971	Hall
			3,592,742 A	7/1971	Thompson
			3,616,408 A	10/1971	Hickam
			3,623,511 A	11/1971	Levin
(56)	References Cited		3,630,852 A	12/1971	Nashan et al.
	U.S. PATENT DOCUMENTS		3,652,403 A	3/1972	Knappstein et al.
			3,676,305 A	7/1972	Cremer
			3,709,794 A	1/1973	Kinzler et al.
			3,710,551 A	1/1973	Sved
			3,746,626 A	7/1973	Morrison, Jr.
			3,748,235 A	7/1973	Pries
			3,784,034 A	1/1974	Thompson
			3,788,236 A	1/1974	Edgar et al.
			3,806,032 A	4/1974	Pries
			3,811,572 A	5/1974	Tatterson
			3,836,161 A	9/1974	Buhl
			3,839,156 A	10/1974	Jakobi et al.
			3,844,900 A	10/1974	Schulte
			3,857,758 A	12/1974	Mole
			3,868,309 A	2/1975	Sustarsic et al.
			3,875,016 A	4/1975	Schmidt-Balve
			3,876,143 A	4/1975	Rossow et al.
			3,876,506 A	4/1975	Dix et al.
			3,878,053 A	4/1975	Hyde
			3,894,302 A	7/1975	Lasater
			3,897,312 A	7/1975	Armour et al.
			3,897,313 A	7/1975	Ibaragi et al.
			3,906,992 A	9/1975	Leach
			3,912,091 A	10/1975	Thompson
			3,912,597 A	10/1975	MacDonald
			3,917,458 A	11/1975	Polak
			3,928,144 A	12/1975	Jakimowicz
			3,930,961 A	1/1976	Sustarsic et al.
			3,933,443 A	1/1976	Lohrmann
			3,957,591 A	5/1976	Riecker
			3,959,084 A	5/1976	Price
			3,963,582 A	6/1976	Helm et al.
			3,969,191 A	7/1976	Bollenbach
			3,975,148 A	8/1976	Fukuda et al.
			3,979,870 A	9/1976	Moore
			3,984,289 A	10/1976	Sustarsic et al.
			3,990,948 A	11/1976	Lindgren
			4,004,702 A	1/1977	Szendroi
			4,004,983 A	1/1977	Pries
			4,010,695 A	3/1977	Mantione
			4,019,963 A	4/1977	Hanley, Jr.
			4,025,395 A	5/1977	Ekholm et al.
			4,040,910 A	8/1977	Knappstein et al.
			4,045,056 A	8/1977	Kandakov et al.
			4,045,299 A	8/1977	McDonald
			4,059,885 A	11/1977	Oldengott
			4,065,059 A	12/1977	Jablin
			4,067,462 A	1/1978	Thompson
			4,077,848 A	3/1978	Grainer et al.
			4,083,753 A *	4/1978	Rogers C10B 39/14 105/235
			4,086,231 A	4/1978	Ikio
			4,093,245 A	6/1978	Connor
			4,100,033 A	7/1978	Holter
			4,100,491 A	7/1978	Newman, Jr. et al.
			4,100,889 A	7/1978	Chayes
			4,111,757 A	9/1978	Carimboli
			4,124,450 A	11/1978	MacDonald
			4,131,070 A	12/1978	Jonnet
			4,133,720 A	1/1979	Franzer et al.
			4,135,948 A	1/1979	Mertens et al.
			4,135,986 A	1/1979	Cain et al.
			4,141,299 A	2/1979	Friend et al.
			4,141,796 A *	2/1979	Clark C10B 33/003 105/271
			4,143,104 A	3/1979	van Konijnenburg et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

4,145,195 A	3/1979	Knappstein et al.	4,439,277 A	3/1984	Dix
4,147,230 A	4/1979	Ormond et al.	4,440,098 A	4/1984	Adams
4,162,546 A	7/1979	Shortell et al.	4,441,892 A	4/1984	Schuster
4,176,013 A	11/1979	Garthus et al.	4,445,977 A	5/1984	Husher
4,181,459 A	1/1980	Price	4,446,018 A	5/1984	Cerwick
4,189,272 A	2/1980	Gregor et al.	4,448,541 A	5/1984	Lucas
4,194,951 A *	3/1980	Pries C10B 39/14	4,452,749 A	6/1984	Kolvek et al.
		202/227	4,459,103 A	7/1984	Gieskieng
4,196,053 A *	4/1980	Grohmann C10B 33/00	4,469,446 A	9/1984	Goodboy
		414/152	4,474,344 A	10/1984	Bennett
4,196,054 A	4/1980	Becker, Jr. et al.	4,487,137 A	12/1984	Horvat et al.
4,211,608 A	7/1980	Kwasnoski et al.	4,498,786 A	2/1985	Ruscheweyh
4,211,611 A	7/1980	Bocsanczy	4,506,025 A	3/1985	Kleeb et al.
4,213,489 A *	7/1980	Cain C10B 39/14	4,508,539 A	4/1985	Nakai
		141/70	4,518,461 A	5/1985	Gelfand
4,213,827 A	7/1980	Calderon	4,527,488 A	7/1985	Lindgren
4,213,828 A *	7/1980	Calderon C10B 39/04	4,529,407 A	7/1985	Johnston et al.
		202/253	4,564,420 A	1/1986	Spindeler et al.
4,222,748 A	9/1980	Argo et al.	4,568,424 A	2/1986	Bauer
4,222,824 A	9/1980	Flockenhaus et al.	4,568,426 A	2/1986	Orlando
4,224,109 A	9/1980	Flockenhaus et al.	4,570,670 A	2/1986	Johnson
4,225,393 A	9/1980	Gregor et al.	4,614,567 A	9/1986	Stahlherm et al.
4,226,113 A	10/1980	Pelletier et al.	4,643,327 A	2/1987	Campbell
4,230,498 A	10/1980	Ruecki	4,645,513 A	2/1987	Kubota et al.
4,235,830 A	11/1980	Bennett et al.	4,655,193 A	4/1987	Blacket
4,239,602 A	12/1980	La Bate	4,655,804 A	4/1987	Kercheval et al.
4,248,671 A *	2/1981	Belding C10B 39/14	4,666,675 A	5/1987	Parker et al.
		201/39	4,680,167 A	7/1987	Orlando
4,249,997 A	2/1981	Schmitz	4,681,662 A	7/1987	Kutsumura et al.
4,263,099 A	4/1981	Porter	4,690,689 A	9/1987	Malcosky et al.
4,268,360 A	5/1981	Tsuzuki et al.	4,704,195 A	11/1987	Janicka et al.
4,271,814 A	6/1981	Lister	4,720,262 A	1/1988	Durr et al.
4,284,478 A	8/1981	Brommel	4,724,976 A	2/1988	Lee
4,285,772 A	8/1981	Kress	4,726,465 A *	2/1988	Kwasnik C10B 39/14
4,287,024 A	9/1981	Thompson			202/230
4,289,479 A	9/1981	Johnson	4,732,652 A	3/1988	Durselen et al.
4,289,584 A	9/1981	Chuss et al.	4,749,446 A	6/1988	van Laar et al.
4,289,585 A	9/1981	Wagener et al.	4,793,981 A	12/1988	Doyle et al.
4,296,938 A	10/1981	Offermann et al.	4,821,473 A	4/1989	Cowell
4,298,497 A	11/1981	Colombo	4,824,614 A	4/1989	Jones et al.
4,299,666 A	11/1981	Ostmann	4,889,698 A	12/1989	Moller et al.
4,302,935 A	12/1981	Cousimano	4,898,021 A	2/1990	Weaver et al.
4,303,615 A	12/1981	Jarmell et al.	4,918,975 A	4/1990	Voss
4,307,673 A	12/1981	Caughey	4,919,170 A	4/1990	Kallinich et al.
4,312,711 A	1/1982	Brown et al.	4,929,179 A	5/1990	Breidenbach et al.
4,312,712 A	1/1982	Kwasnik et al.	4,941,824 A	7/1990	Holter et al.
4,314,787 A	2/1982	Kwasnik et al.	5,013,408 A	5/1991	Asai et al.
4,316,435 A	2/1982	Nagamatsu et al.	5,052,922 A	10/1991	Stokman et al.
4,324,568 A	4/1982	Wilcox et al.	5,062,925 A	11/1991	Durselen et al.
4,330,372 A	5/1982	Cairns et al.	5,078,822 A	1/1992	Hodges et al.
4,334,963 A	6/1982	Stog	5,087,328 A	2/1992	Wegerer et al.
4,336,107 A	6/1982	Irwin	5,114,542 A	5/1992	Childress et al.
4,336,843 A	6/1982	Petty	5,213,138 A	5/1993	Presz
4,340,445 A *	7/1982	Kucher C10B 39/14	5,227,106 A	7/1993	Kolvek
		202/262	5,228,955 A	7/1993	Westbrook, III
4,342,195 A	8/1982	Lo	5,234,601 A	8/1993	Janke et al.
4,344,820 A	8/1982	Thompson	5,318,671 A	6/1994	Pruitt
4,344,822 A	8/1982	Schwartz et al.	5,370,218 A	12/1994	Johnson et al.
4,353,189 A	10/1982	Thiersch et al.	5,398,543 A	3/1995	Fukushima et al.
4,366,029 A *	12/1982	Bixby B61D 9/02	5,423,152 A	6/1995	Kolvek
		202/262	5,447,606 A	9/1995	Pruitt
4,373,244 A	2/1983	Mertens et al.	5,480,594 A	1/1996	Wilkerson et al.
4,375,388 A	3/1983	Hara et al.	5,542,650 A	8/1996	Abel et al.
4,385,962 A	5/1983	Stewen et al.	5,597,452 A	1/1997	Hippe et al.
4,391,674 A	7/1983	Velmin et al.	5,603,810 A	2/1997	Michler
4,392,824 A	7/1983	Struck et al.	5,622,280 A	4/1997	Mays et al.
4,394,217 A	7/1983	Holz et al.	5,659,110 A	8/1997	Herden et al.
4,395,269 A	7/1983	Schuler	5,670,025 A	9/1997	Baird
4,396,394 A	8/1983	Li et al.	5,687,768 A	11/1997	Albrecht et al.
4,396,461 A	8/1983	Neubaum et al.	5,705,037 A	1/1998	Reinke et al.
4,406,619 A	9/1983	Oldengott	5,715,962 A	2/1998	McDonnell
4,407,237 A	10/1983	Merritt	5,720,855 A	2/1998	Baird
4,421,070 A	12/1983	Sullivan	5,745,969 A	5/1998	Yamada et al.
4,431,484 A	2/1984	Weber et al.	5,752,548 A	5/1998	Matsumoto et al.
			5,752,993 A	5/1998	Eatough et al.
			5,787,821 A	8/1998	Bhat et al.
			5,810,032 A	9/1998	Hong et al.
			5,816,210 A	10/1998	Yamaguchi
			5,857,308 A	1/1999	Dismore et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

5,881,551	A	3/1999	Dang	9,238,778	B2	1/2016	Quanci et al.
5,913,448	A	6/1999	Mann et al.	9,243,186	B2	1/2016	Quanci et al.
5,928,476	A	7/1999	Daniels	9,249,357	B2	2/2016	Quanci et al.
5,966,886	A	10/1999	Di Loreto	9,273,249	B2	3/2016	Quanci et al.
5,968,320	A	10/1999	Sprague	9,273,250	B2	3/2016	Choi et al.
6,002,993	A	12/1999	Naito et al.	9,321,965	B2	4/2016	Barkdoll
6,003,706	A	12/1999	Rosen	9,359,554	B2	6/2016	Quanci et al.
6,017,214	A	1/2000	Sturgulewski	9,404,043	B2	8/2016	Kim
6,022,112	A	2/2000	Isler et al.	9,463,980	B2	10/2016	Fukada et al.
6,059,932	A	5/2000	Sturgulewski	9,476,547	B2	10/2016	Quanci et al.
6,126,910	A	10/2000	Wilhelm et al.	9,498,786	B2	11/2016	Pearson
6,139,692	A	10/2000	Tamura et al.	9,580,656	B2	2/2017	Quanci et al.
6,152,668	A	11/2000	Knoch	9,672,499	B2	6/2017	Quanci et al.
6,156,688	A	12/2000	Ando et al.	9,683,740	B2	6/2017	Rodgers et al.
6,173,679	B1	1/2001	Bruckner et al.	9,708,542	B2	7/2017	Quanci et al.
6,187,148	B1	2/2001	Sturgulewski	9,862,888	B2	1/2018	Quanci et al.
6,189,819	B1	2/2001	Racine	9,976,089	B2	5/2018	Quanci et al.
6,290,494	B1	9/2001	Barkdoll	10,016,714	B2	7/2018	Quanci et al.
6,412,221	B1	7/2002	Emsbo	10,041,002	B2	8/2018	Quanci et al.
6,424,457	B1	7/2002	Koonmen et al.	10,047,295	B2	8/2018	Chun et al.
6,495,268	B1	12/2002	Harth, III et al.	10,047,296	B2	8/2018	Chun et al.
6,539,602	B1	4/2003	Ozawa et al.	10,053,627	B2	8/2018	Sarpen et al.
6,596,128	B2	7/2003	Westbrook	10,233,392	B2	3/2019	Quanci et al.
6,626,984	B1	9/2003	Taylor	10,308,876	B2	6/2019	Quanci et al.
6,699,035	B2	3/2004	Brooker	10,323,192	B2	6/2019	Quanci et al.
6,712,576	B2	3/2004	Skarzenski et al.	10,392,563	B2	8/2019	Kim et al.
6,758,875	B2	7/2004	Reid et al.	10,435,042	B1	10/2019	Weymouth
6,786,941	B2	9/2004	Reeves et al.	10,526,541	B2	1/2020	West et al.
6,830,660	B1	12/2004	Yamauchi et al.	10,526,542	B2	1/2020	Quanci et al.
6,907,895	B2	6/2005	Johnson et al.	10,578,521	B1	3/2020	Dinakaran et al.
6,946,011	B2	9/2005	Snyder	10,611,965	B2	4/2020	Quanci et al.
6,964,236	B2	11/2005	Schucker	10,619,101	B2	4/2020	Quanci et al.
7,056,390	B2	6/2006	Fratello	10,732,621	B2	8/2020	Cella et al.
7,077,892	B2	7/2006	Lee	10,760,002	B2	9/2020	Ball et al.
7,314,060	B2	1/2008	Chen et al.	10,851,306	B2	12/2020	Crum et al.
7,331,298	B2	2/2008	Barkdoll et al.	10,877,007	B2	12/2020	Steele et al.
7,433,743	B2	10/2008	Pistikopoulos et al.	10,883,051	B2	1/2021	Quanci et al.
7,497,930	B2	3/2009	Barkdoll et al.	10,920,148	B2	2/2021	Quanci et al.
7,547,377	B2	6/2009	Inamasu et al.	10,927,303	B2	2/2021	Choi et al.
7,611,609	B1	11/2009	Valia et al.	10,947,455	B2	3/2021	Quanci et al.
7,644,711	B2	1/2010	Creel	10,968,393	B2	4/2021	West et al.
7,722,843	B1	5/2010	Srinivasachar	10,968,395	B2	4/2021	Quanci et al.
7,727,307	B2	6/2010	Winkler	10,975,309	B2	4/2021	Quanci et al.
7,785,447	B2	8/2010	Eatough et al.	10,975,310	B2	4/2021	Quanci et al.
7,803,627	B2	9/2010	Hodges et al.	10,975,311	B2	4/2021	Quanci et al.
7,823,401	B2	11/2010	Takeuchi et al.	11,008,517	B2	5/2021	Chun et al.
7,827,689	B2	11/2010	Crane	11,008,518	B2	5/2021	Quanci et al.
7,998,316	B2	8/2011	Barkdoll	11,021,655	B2	6/2021	Quanci et al.
8,071,060	B2	12/2011	Ukai et al.	11,053,444	B2	7/2021	Quanci et al.
8,079,751	B2	12/2011	Kapila et al.	11,060,032	B2	7/2021	Quanci et al.
8,080,088	B1	12/2011	Srinivasachar	11,071,935	B2	7/2021	Quanci et al.
8,146,376	B1	4/2012	Williams et al.	11,098,252	B2	8/2021	Quanci et al.
8,152,970	B2	4/2012	Barkdoll et al.	11,117,087	B2	9/2021	Quanci
8,172,930	B2	5/2012	Barkdoll	11,142,699	B2	10/2021	West et al.
8,236,142	B2	8/2012	Westbrook	11,186,778	B2	11/2021	Crum et al.
8,266,853	B2	9/2012	Bloom et al.	11,193,069	B2	12/2021	Quanci et al.
8,311,777	B2	11/2012	Suguira et al.	11,214,739	B2	1/2022	Quanci et al.
8,383,055	B2	2/2013	Palmer	11,261,381	B2	3/2022	Quanci et al.
8,398,935	B2	3/2013	Howell et al.	11,359,145	B2	6/2022	Ball et al.
8,409,405	B2	4/2013	Kim et al.	11,359,146	B2	6/2022	Quanci et al.
8,500,881	B2	8/2013	Orita et al.	11,365,355	B2	6/2022	Quanci et al.
8,515,508	B2	8/2013	Kawamura et al.	11,395,989	B2	7/2022	Quanci et al.
8,568,568	B2	10/2013	Schuecker et al.	11,441,077	B2	9/2022	Quanci et al.
8,640,635	B2	2/2014	Bloom et al.	11,441,078	B2	9/2022	Quanci et al.
8,647,476	B2	2/2014	Kim et al.	11,486,572	B2	11/2022	Quanci et al.
8,800,795	B2	8/2014	Hwang	11,505,747	B2	11/2022	Quanci et al.
8,956,995	B2	2/2015	Masatsugu et al.	11,508,230	B2	11/2022	Quanci et al.
8,980,063	B2	3/2015	Kim et al.	11,597,881	B2	3/2023	Quanci et al.
9,039,869	B2	5/2015	Kim et al.	11,643,602	B2	5/2023	Quanci et al.
9,057,023	B2	6/2015	Reichelt et al.	11,680,208	B2	6/2023	Quanci et al.
9,103,234	B2	8/2015	Gu et al.	11,692,138	B2	7/2023	Quanci et al.
9,169,439	B2	10/2015	Sarpen et al.	11,746,296	B2	9/2023	Choi et al.
9,193,913	B2	11/2015	Quanci et al.	11,760,937	B2	9/2023	Quanci et al.
9,193,915	B2	11/2015	West et al.	11,767,482	B2	9/2023	Quanci et al.
9,200,225	B2	12/2015	Barkdoll et al.	11,788,012	B2	10/2023	Quanci et al.
				11,795,400	B2	10/2023	West et al.
				11,807,812	B2	11/2023	Quanci et al.
				11,819,802	B2	11/2023	Quanci et al.
				11,845,037	B2	12/2023	Quanci et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

11,851,724	B2	12/2023	Quanci et al.	2012/0125709	A1	5/2012	Merchant et al.
11,939,526	B2	3/2024	West et al.	2012/0152720	A1	6/2012	Reichelt et al.
11,946,108	B2	4/2024	Quanci et al.	2012/0177541	A1	7/2012	Mutsuda et al.
12,060,525	B2	8/2024	Quanci et al.	2012/0179421	A1	7/2012	Dasgupta
12,110,458	B2	10/2024	Quanci et al.	2012/0180133	A1	7/2012	Ai-Harbi et al.
12,195,671	B2	1/2025	Quanci et al.	2012/0195815	A1	8/2012	Moore et al.
12,215,289	B2	2/2025	Quanci et al.	2012/0210635	A1	8/2012	Edwards
12,227,699	B2	2/2025	Quanci et al.	2012/0228115	A1	9/2012	Westbrook
2002/0170605	A1	11/2002	Shiraishi et al.	2012/0247939	A1	10/2012	Kim et al.
2003/0014954	A1	1/2003	Ronning et al.	2012/0285080	A1	11/2012	Despen et al.
2003/0015809	A1	1/2003	Carson	2012/0305380	A1	12/2012	Wang et al.
2003/0057083	A1	3/2003	Eatough et al.	2012/0312019	A1	12/2012	Rechtman
2004/0016377	A1	1/2004	Johnson et al.	2013/0020781	A1	1/2013	Kishikawa
2004/0220840	A1	11/2004	Bonissone et al.	2013/0045149	A1	2/2013	Miller
2005/0087767	A1	4/2005	Fitzgerald et al.	2013/0213114	A1	8/2013	Wetzig et al.
2005/0096759	A1	5/2005	Benjamin et al.	2013/0216717	A1	8/2013	Rago et al.
2006/0029532	A1	2/2006	Breen et al.	2013/0220373	A1	8/2013	Kim
2006/0102420	A1	5/2006	Huber et al.	2013/0306462	A1*	11/2013	Kim C10B 39/14
2006/0149407	A1	7/2006	Markham et al.				202/117
2007/0087946	A1	4/2007	Quest et al.	2014/0039833	A1	2/2014	Sharpe, Jr. et al.
2007/0102278	A1	5/2007	Inamasu et al.	2014/0156584	A1	6/2014	Motukuri et al.
2007/0116619	A1	5/2007	Taylor et al.	2014/0183026	A1*	7/2014	Quanci C10B 39/04
2007/0181717	A1	8/2007	Fuller				202/262
2007/0205091	A1*	9/2007	Barkdoll C10B 33/10	2014/0208997	A1	7/2014	Alferyev et al.
			104/295	2014/0224123	A1	8/2014	Walters
2007/0251198	A1	11/2007	Witter	2014/0245803	A1	9/2014	Forsythe et al.
2008/0028935	A1	2/2008	Andersson	2015/0041304	A1	2/2015	Kim et al.
2008/0116052	A1	5/2008	Eatough et al.	2015/0075962	A1	3/2015	Shimoyama et al.
2008/0179165	A1	7/2008	Chen et al.	2015/0122629	A1	5/2015	Freimuth et al.
2008/0250863	A1	10/2008	Moore	2015/0143908	A1	5/2015	Cetinkaya
2008/0257236	A1	10/2008	Green	2015/0175433	A1	6/2015	Micka et al.
2008/0271985	A1	11/2008	Yamasaki	2015/0176095	A1	6/2015	Connors et al.
2008/0289305	A1	11/2008	Gironi	2015/0219530	A1	8/2015	Li et al.
2009/0007785	A1	1/2009	Kimura et al.	2015/0226499	A1	8/2015	Mikkelsen
2009/0032385	A1	2/2009	Engle	2016/0026193	A1	1/2016	Rhodes et al.
2009/0105852	A1	4/2009	Wintrich et al.	2016/0048139	A1	2/2016	Samples et al.
2009/0152092	A1	6/2009	Kim et al.	2016/0149944	A1	5/2016	Obermeier et al.
2009/0162269	A1	6/2009	Barger et al.	2016/0154171	A1	6/2016	Kato et al.
2009/0217576	A1	9/2009	Kim et al.	2016/0370082	A1	12/2016	Olivo
2009/0257932	A1	10/2009	Canari et al.	2016/0377430	A1	12/2016	Kalagnanam et al.
2009/0283395	A1	11/2009	Hippe	2017/0173519	A1	6/2017	Naito
2010/0015564	A1	1/2010	Chun et al.	2017/0182447	A1	6/2017	Sappok et al.
2010/0095521	A1	4/2010	Kartal et al.	2017/0218274	A1	8/2017	Yu et al.
2010/0106310	A1	4/2010	Grohman	2017/0226425	A1	8/2017	Kim et al.
2010/0113266	A1	5/2010	Abe et al.	2017/0261417	A1	9/2017	Zhang
2010/0115912	A1	5/2010	Worley	2017/0313943	A1	11/2017	Valdevies
2010/0119425	A1	5/2010	Palmer	2019/0317167	A1	10/2019	LaBorde et al.
2010/0159247	A1	6/2010	Kaya et al.	2020/0071190	A1	3/2020	Wiederin et al.
2010/0181297	A1	7/2010	Whysail	2020/0139273	A1	5/2020	Badiei
2010/0196597	A1	8/2010	Di Loreto	2020/0173679	A1	6/2020	O'Reilly et al.
2010/0276269	A1	11/2010	Schuecker et al.	2020/0208063	A1	7/2020	Quanci
2010/0287871	A1	11/2010	Bloom et al.	2021/0261877	A1	8/2021	Despen et al.
2010/0300867	A1	12/2010	Kim et al.	2021/0363427	A1	11/2021	Quanci et al.
2010/0314234	A1	12/2010	Knoch et al.	2022/0056342	A1	2/2022	Quanci et al.
2011/0000284	A1	1/2011	Kumar et al.	2022/0356410	A1	11/2022	Quanci et al.
2011/0014406	A1	1/2011	Coleman et al.	2023/0258326	A1	8/2023	Quanci et al.
2011/0048917	A1	3/2011	Kim et al.	2023/0330596	A1	10/2023	Bumb et al.
2011/0083314	A1	4/2011	Baird	2023/0360511	A1	11/2023	Quanci et al.
2011/0088600	A1	4/2011	McRae	2023/0416629	A1	12/2023	Quanci et al.
2011/0100273	A1	5/2011	Ptacek	2024/0059994	A1	2/2024	Quanci et al.
2011/0120852	A1	5/2011	Kim	2024/0110103	A1	4/2024	Quanci et al.
2011/0144406	A1	6/2011	Masatsugu et al.	2024/0150659	A1	5/2024	Quanci et al.
2011/0156902	A1	6/2011	Wang et al.	2024/0158709	A1	5/2024	Quanci et al.
2011/0162265	A1	7/2011	Krumpp et al.	2024/0158877	A1	5/2024	Quanci et al.
2011/0168482	A1	7/2011	Merchant et al.	2024/0209265	A1	6/2024	Quanci et al.
2011/0174301	A1	7/2011	Haydock et al.	2024/0229172	A1	7/2024	Quanci et al.
2011/0192395	A1	8/2011	Kim	2024/0229173	A1	7/2024	Quanci et al.
2011/0198206	A1	8/2011	Kim et al.	2025/0027177	A1	1/2025	Quanci et al.
2011/0223088	A1	9/2011	Chang et al.				
2011/0253521	A1	10/2011	Kim				
2011/0272508	A1	11/2011	Krebs et al.				
2011/0291827	A1	12/2011	Baldocchi et al.				
2011/0313218	A1	12/2011	Dana				
2011/0315538	A1	12/2011	Kim et al.				
2012/0031076	A1	2/2012	Frank et al.				

FOREIGN PATENT DOCUMENTS

CA	2822841	7/2012
CA	2822857	7/2012
CA	2905110	9/2014
CN	87212113	U 6/1988
CN	87107195	A 7/1988
CN	2064363	U 10/1990
CN	2139121	Y 7/1993
CN	1092457	A 9/1994

(56)

References Cited

FOREIGN PATENT DOCUMENTS

CN	1255528	A	6/2000	DE	102005015301	10/2006
CN	1270983	A	10/2000	DE	102006004669	8/2007
CN	2528771	Y	2/2002	DE	102006026521	12/2007
CN	1358822	A	7/2002	DE	102009031436	1/2011
CN	2521473	Y	11/2002	DE	102011052785	12/2012
CN	1468364	A	1/2004	EA	010510	B1 10/2008
CN	1527872	A	9/2004	EP	0126399	A1 11/1984
CN	2668641	1/2005		EP	0208490	A1 1/1987
CN	1957204	A	5/2007	EP	0418801	A1 3/1991
CN	101037603	A	9/2007	EP	0433498	A1 6/1991
CN	101058731	A	10/2007	EP	0903393	A2 3/1999
CN	101157874	A	4/2008	EP	1538503	A1 6/2005
CN	101211495	A	7/2008	EP	1860034	A1 11/2007
CN	201121178	Y	9/2008	EP	2295129	A1 3/2011
CN	101362971	A	2/2009	EP	2468837	A1 6/2012
CN	101395248	A	3/2009	FR	2339664	8/1977
CN	100510004	C	7/2009	FR	2517802	6/1983
CN	101486017	A	7/2009	FR	2764978	12/1998
CN	201264981	Y	7/2009	GB	364236	A 1/1932
CN	101497835	A	8/2009	GB	368649	A 3/1932
CN	101509427	A	8/2009	GB	441784	1/1936
CN	101886466	A	11/2010	GB	606340	8/1948
CN	101910530	A	12/2010	GB	611524	11/1948
CN	101921643	A	12/2010	GB	725865	3/1955
CN	102072829	A	5/2011	GB	783720	A 9/1957
CN	102155300	A	8/2011	GB	871094	6/1961
CN	2509188	Y	11/2011	GB	923205	A 5/1963
CN	202226816	5/2012		GB	2000193	A 1/1979
CN	202265541	U	6/2012	JP	S50148405	11/1975
CN	102584294	A	7/2012	JP	S5319301	A 2/1978
CN	202415446	U	9/2012	JP	54054101	4/1979
CN	202470353	U	10/2012	JP	S5453103	A 4/1979
CN	103399536	A	11/2013	JP	57051786	3/1982
CN	103468289	A	12/2013	JP	57051787	3/1982
CN	103468841	A	12/2013	JP	57083585	5/1982
CN	103756699	A	4/2014	JP	57090092	6/1982
CN	103913193	A	7/2014	JP	S57172978	A 10/1982
CN	203981700	U	12/2014	JP	58091788	5/1983
CN	104498059	A	4/2015	JP	59051978	3/1984
CN	105001914	A	10/2015	JP	59053589	3/1984
CN	105137947	A	12/2015	JP	59071388	4/1984
CN	105189704	A	12/2015	JP	59108083	6/1984
CN	105264448	A	1/2016	JP	59145281	8/1984
CN	105467949	A	4/2016	JP	60004588	1/1985
CN	105842065	A	8/2016	JP	61106690	5/1986
CN	106399607	A	2/2017	JP	62011794	1/1987
CN	106661456	A	5/2017	JP	62285980	12/1987
CN	106687564	A	5/2017	JP	01103694	4/1989
CN	107022359	A	8/2017	JP	01249886	10/1989
CN	107267183	A	10/2017	JP	H0319127	3/1991
CN	107445633	A	12/2017	JP	03197588	8/1991
CN	108219807	A	6/2018	JP	04159392	6/1992
CN	110141947	A	8/2019	JP	H04178494	A 6/1992
CN	100500619	C	6/2020	JP	H05230466	A 9/1993
CN	111778048	A	10/2020	JP	H0649450	A 2/1994
CN	113322085	A	8/2021	JP	H0654753	U 7/1994
CN	113462415	A	10/2021	JP	H06264062	9/1994
CN	114517099	A	5/2022	JP	H06299156	A 10/1994
CN	101921643	B	12/2022	JP	H0776713	A 3/1995
CN	116606664	A	8/2023	JP	07188668	7/1995
DE	201729	C	9/1908	JP	07216357	8/1995
DE	212176	7/1909		JP	H07204432	8/1995
DE	1212037	B	3/1966	JP	H0843314	A 2/1996
DE	2212544	A	1/1973	JP	H08104875	A 4/1996
DE	2720688	A1	11/1978	JP	08127778	5/1996
DE	3231697	C1	1/1984	JP	H08218071	A 8/1996
DE	3328702	A1	2/1984	JP	H09310074	A 12/1997
DE	3315738	C2	3/1984	JP	H10273672	A 10/1998
DE	3329367	C	11/1984	JP	H11131074	5/1999
DE	3407487	C1	6/1985	JP	H11256166	A 9/1999
DE	19545736	6/1997		JP	2000204373	A 7/2000
DE	19803455	8/1999		JP	2000219883	A 8/2000
DE	10122531	A1	11/2002	JP	2001055576	A 2/2001
DE	10154785	5/2003		JP	2001187887	A 7/2001
DE	102004062936	A1	7/2006	JP	2001200258	7/2001
				JP	2002097472	A 4/2002
				JP	2002106941	4/2002
				JP	2003041258	2/2003
				JP	2003041618	A 2/2003

(56)

References Cited

FOREIGN PATENT DOCUMENTS

JP 2003051082 A 2/2003
 JP 2003071313 A 3/2003
 JP 2003292968 A 10/2003
 JP 2003342581 A 12/2003
 JP 2004169016 A 6/2004
 JP 2005503448 A 2/2005
 JP 2005135422 A 5/2005
 JP 2005154597 A 6/2005
 JP 2005263983 A 9/2005
 JP 2005344085 A 12/2005
 JP 2006188608 A 7/2006
 JP 2006257252 A 9/2006
 JP 2007063420 A 3/2007
 JP 3924064 B2 6/2007
 JP 2007169484 A 7/2007
 JP 2007231326 A 9/2007
 JP 4101226 B2 6/2008
 JP 2008231278 A 10/2008
 JP 2009001640 A 1/2009
 JP 2009019106 A 1/2009
 JP 2009073864 A 4/2009
 JP 2009073865 A 4/2009
 JP 2009135276 A 6/2009
 JP 2009144121 A 7/2009
 JP 2009209286 A 9/2009
 JP 2010229239 A 10/2010
 JP 2010248389 A 11/2010
 JP 2011504947 A 2/2011
 JP 2011068733 A 4/2011
 JP 2011102351 A 5/2011
 JP 2012072389 A 4/2012
 JP 2012102302 A 5/2012
 JP 2012102325 A 5/2012
 JP 2013006957 A 1/2013
 JP 2013510910 A 3/2013
 JP 2013189322 A 9/2013
 JP 2014009284 A 1/2014
 JP 2014040502 A 3/2014
 JP 2015094091 A 5/2015
 JP 2015199791 A 11/2015
 JP 2016169897 A 9/2016
 JP 2020007472 A 1/2020
 KR 1019960008754 10/1996
 KR 19990017156 U 5/1999
 KR 1019990054426 7/1999
 KR 20000042375 A 7/2000
 KR 100296700 B1 10/2001
 KR 20030011016 A 2/2003
 KR 20030012458 A 2/2003
 KR 1020040020883 A 3/2004
 KR 20040107204 A 12/2004
 KR 20050053861 A 6/2005
 KR 20060132336 A 12/2006
 KR 100737393 B1 7/2007
 KR 100797852 1/2008
 KR 20080069170 A 7/2008
 KR 20110010452 A 2/2011
 KR 101314288 4/2011
 KR 20120033091 A 4/2012
 KR 20130050807 5/2013
 KR 101318388 10/2013
 KR 20140042526 A 4/2014
 KR 20140076155 A 6/2014
 KR 20150011084 A 1/2015
 KR 20150068557 A 6/2015
 KR 20170038102 A 4/2017
 KR 20170058808 A 5/2017
 KR 20170103857 A 9/2017
 KR 101862491 B1 5/2018
 KR 20230118420 A 8/2023
 RU 2083532 C1 7/1997
 RU 2441898 C2 2/2012
 RU 2493233 C2 9/2013
 SU 1535880 A1 1/1990
 TW 201241166 A1 10/2012

TW 201245431 A1 11/2012
 UA 50580 10/2002
 WO WO9012074 10/1990
 WO WO9945083 9/1999
 WO WO02062922 8/2002
 WO WO2003025093 3/2003
 WO WO2005023649 3/2005
 WO WO2005031297 4/2005
 WO WO2005115583 12/2005
 WO WO2006010432 2/2006
 WO WO2007103649 9/2007
 WO WO2008034424 3/2008
 WO WO2008105269 9/2008
 WO WO2009147983 12/2009
 WO WO2010032734 3/2010
 WO WO2010103992 9/2010
 WO WO2010107513 9/2010
 WO WO2011000447 1/2011
 WO WO2011126043 10/2011
 WO 2012037454 A2 3/2012
 WO WO2012029979 3/2012
 WO WO2012031726 3/2012
 WO WO2013023872 2/2013
 WO WO2013145679 10/2013
 WO WO2013153557 10/2013
 WO WO2014021909 2/2014
 WO WO2014043667 3/2014
 WO WO2014105064 7/2014
 WO WO2014153050 9/2014
 WO WO2016004106 1/2016
 WO WO2016033511 3/2016
 WO WO2016033515 3/2016
 WO WO2016086322 6/2016
 WO WO2016109854 7/2016
 WO WO2022159604 7/2022
 WO WO2022235839 11/2022
 WO 2023129090 A2 7/2023

OTHER PUBLICATIONS

U.S. Appl. No. 18/954,859, filed Nov. 21, 2024, Quanci.
 U.S. Appl. No. 18/955,181, filed Nov. 21, 2024, Choi et al.
 U.S. Appl. No. 18/958,671, filed Nov. 25, 2024, Quanci et al.
 U.S. Appl. No. 18/972,005, filed Dec. 6, 2024, Quanci et al.
 U.S. Appl. No. 18/971,912, filed Dec. 6, 2024, Quanci et al.
 U.S. Appl. No. 18/977,609, filed Dec. 11, 2024, Quanci et al.
 U.S. Appl. No. 19/054,358, filed Feb. 14, 2025, Quanci et al.
 “Asbestos”, Virginia Department of Health, <https://www.vdh.virginia.gov/environmental-health/public-health-toxicology/asbestos/>, updated 2023, 2 pages.
 ASTM D5341-99(2010)e1, Standard Test Method for Measuring Coke Reactivity Index (CRI) and Coke Strength After Reaction (CSR), ASTM International, West Conshohocken, PA, 2010.
 Astrom, et al., “Feedback Systems: An Introduction for Scientists and Engineers,” Sep. 16, 2006, available online at <http://people.duke.edu/~hpgavin/SystemID/References/Astrom-Feedback-2006.pdf>; 404 pages.
 Basset et al., “Calculation of steady flow pressure loss coefficients for pipe junctions,” Proc Instn Mech Engrs., vol. 215, Part C, p. 861-881 IMechE 2001.
 Beckman et al., “Possibilities and limits of cutting back coking plant output,” Stahl Und Eisen, Verlag Stahleisen, Dusseldorf, DE, vol. 130, No. 8, Aug. 16, 2010, pp. 57-67.
 Bloom, et al., “Modular cast block—The future of coke oven repairs,” Iron & Steel Technol, AIST, Warrendale, PA, vol. 4, No. 3, Mar. 1, 2007, pp. 61-64.
 Boyes, Walt. (2003), Instrumentation Reference Book (3rd Edition)—34.7.4.6 Infrared and Thermal Cameras, Elsevier. Online version available at: <https://app.knovel.com/hotlink/pdf/id:kt004QMGV6/instrumentation-reference-2/ditigal-video>.
 Item HT 56107 Briquette, ‘H’ Type Household or Domestic Use, SECV Brown Coal Mine, Yallourn, Victoria, circa 1925, Museums Victoria Collections, <https://collections.museumsvictoria.com.au/items/2286568>, published on Mar. 2, 2021; 3 pages.

(56)

References Cited

OTHER PUBLICATIONS

- "Ceramic fibers wool—to 1,300° C", gTeek, Dec. 29, 2017 (date obtained from google search tools), <https://www.gteek.com/ceramic-fibers-woolp-to-1-300-%C2%B0C>, 15 pages.
- Chaudhari, K., Cupola Furnace, engineersgalary.com Jan. 24, 2016; 4 pages.
- Clean coke process: process development studies by USS Engineers and Consultants, Inc., Wisconsin Tech Search, request date Oct. 5, 2011, 17 pages.
- "Conveyor Chain Designer Guild", Mar. 27, 2014 (date obtained from wayback machine), Renold.com, Section 4, available online at: http://www.renold.com/upload/renoldswitzerland/conveyor_chain_-_designer_guide.pdf.
- Costa, et al., "Edge Effects on the Flow Characteristics in a 90 deg Tee Junction," Transactions of the ASME, Nov. 2006, vol. 128, pp. 1204-1217.
- Crelling, et al., "Effects of Weathered Coal on Coking Properties and Coke Quality", Fuel, 1979, vol. 58, Issue 7, pp. 542-546.
- Database WPI, Week 199115, Thomson Scientific, Lond, GB; AN 1991-107552.
- De Cordova, et al. "Coke oven life prolongation—A multidisciplinary approach." 10.5151/2594-357X-2610 (2015) 12 pages.
- Diez, et al., "Coal for Metallurgical Coke Production: Predictions of Coke Quality and Future Requirements for Cokemaking", International Journal of Coal Geology, 2002, vol. 50, Issue 1-4, pp. 389-412.
- "High Alumina Cement-Manufacture, Characteristics and Uses," TheConstructor.org, <https://theconstructor.org/concrete/high-alumina-cement/23686/>; 12 pages.
- "How Glass Is Made," Corning, <https://www.corning.com/worldwide/en/innovation/materials-science/glass/how-glass-made.html>, 2 pages.
- Industrial Furnace Design Handbook, Editor-in-Chief: First Design Institute of First Ministry of Machinery Industry, Beijing: Mechanical Industry Press, pp. 180-183, Oct. 1981.
- Ishiwata, et al. "Effect of coke diameter and oxygen concentration of blast on cupola operation." ISIJ International, 2011, vol. 51, pp. 1353-1359.
- Ivanova, V. A. "Analysis of the requirements for foundry coke." IOP Conference Series: Materials Science and Engineering, 2020, vol. 986, pp. 1-6.
- Joseph, B., "A tutorial on inferential control and its applications," Proceedings of the 1999 American Control Conference (Cat. No. 99CH36251), San Diego, CA, 1999, pp. 3106-3118 vol. 5.
- Kerlin, Thomas (1999), Practical Thermocouple Thermometry—1.1 The Thermocouple. ISA. Online version available at <https://app.knovel.com/pdf/id:kt007XPTM3/practical-thermocouple/the-thermocouple>.
- Kochanski et al., "Overview of Uhde Heat Recovery Cokemaking Technology," AISTech Iron and Steel Technology Conference Proceedings, Association for Iron and Steel Technology, U.S., vol. 1, Jan. 1, 2005, pp. 25-32.
- Knoerzer et al. "Jewell-Thompson Non-Recovery Cokemaking", Steel Times, Fuel & Metallurgical Journals Ltd. London, GB, vol. 221, No. 4, Apr. 1, 1993, pp. 172-173, 184.
- Kusiorowski, et al., "Thermal decomposition of different types of asbestos," Journal of Thermal Analysis and Calorimetry • Feb. 2012, 109, 693-704 (2012).
- Lin, Rongying et al., "Study on the synergistic effect of calcium and aluminum on improving ash fusion temperature of semi-coke," International Journal of Coal Preparation and Utilization, May 31, 2019 (published online), vol. 42, No. 3, pp. 556-564.
- Lipunov, et al. "Diagnostics of the Heating System and Lining of Coke Ovens," Coke and Chemistry, 2014, Vopl. 57, No. 12, pp. 489-492.
- Madias, et al., "A review on stamped charging of coals" (2013). Available at https://www.researchgate.net/publication/263887759_A_review_on_stamped_charging_of_coals.
- Metallurgical Coke MSDS, ArcelorMittal, May 30, 2011, available online at <http://dofasco.arcelormittal.com/-/media/Files/A/Arcelormittal-Canada/material-safety/metallurgical-coke.pdf>.
- "Middletown Coke Company HRSRG Maintenance BACT Analysis Option 1—Individual Spray Quenches Sun Heat Recovery Coke Facility Process Flow Diagram Middletown Coke Company 100 Oven Case #1-24.5 VM", (Sep. 1, 2009), URL: <http://web.archive.org/web/20090901042738/http://epa.ohio.gov/portals/27/transfer/ptiApplication/mcc/new/262504.pdf>, (Feb. 12, 2016), XP055249803 [X] 1-13 * p. 7 * * pp. 8-11 *.
- Office of the Federal Register, National Archives and Records Administration. (Apr. 14, 2005). 70 FR 19992—National Emission Standards for Coke Oven Batteries. [Government]. Office of the Federal Register, National Archives and Records Administration. <https://www.govinfo.gov/app/details/FR-2005-04-15/05-6942>.
- Pearson, D.E., "Influence of Geology on CSR (Coke Strength After Reaction with CO2)," 2009, 8 pages.
- Practical Technical Manual of Refractories, Baoyu Hu, etc., Beijing: Metallurgical Industry Press, Chapter 6; 2004, 6-30.
- Powell, et al. "Cupola Furnaces", ASM International, downloaded from <http://dl.asminternational.org/handbooks/edited-volume/chapter-pdf/501030/a0005197.pdf>; 9 pages.
- Refractories for Ironmaking and Steelmaking: A History of Battles over High Temperatures; Kyoshi Sugita (Japan, Shaolin Zhang), 1995, p. 160, 2004, 2-29.
- "Refractory Castables," Vitas.com, Dec. 28, 2011 (date obtained from WayBack Machine), <https://www.vitcas.com/refractory-castables/>; 5 pages.
- Rose, Harold J., "The Selection of Coals for the Manufacture of Coke," American Institute of Mining and Metallurgical Engineers, Feb. 1926, 8 pages.
- Schlueter, R. "What's so good about coke made from coal, Aug. 29, 2016," Bellevue News-Democrat, Rschlueter@bnd.com; 4 pages.
- Seal School, Coal v. Coke/Fast differences and Comparison. Viewable on YouTube (Year:2020).
- Tiwari, et al., "A novel technique for assessing the coking potential of coals/cole blends for non-recovery coke making process," Fuel, vol. 107, May 2013, pp. 615-622.
- Waddell, et al., "Heat-Recovery Cokemaking Presentation," Jan. 1999, pp. 1-25.
- Walker D N et al, "Sun Coke Company's heat recovery cokemaking technology high coke quality and low environmental impact", Revue De Metallurgie—Cahiers D'informations Techniques, Revue De Metallurgie. Paris, Fr, (Mar. 1, 2003), vol. 100, No. 3, ISSN 0035-1563, p. 23.
- Westbrook, "Heat-Recovery Cokemaking at Sun Coke," AISE Steel Technology, Pittsburg, PA, vol. 76, No. 1, Jan. 1999, pp. 25-28.
- "What is dead-band control," forum post by user "wireaddict" on AllAboutCircuits.com message board, Feb. 8, 2007, accessed Oct. 24, 2018 at <https://forum.allaboutcircuits.com/threads/what-is-dead-band-control.4728/>; 8 pages.
- Yu et al., "Coke Oven Production Technology," Lianoning Science and Technology Press, first edition, Apr. 2014, pp. 356-358.
- "Resources and Utilization of Coking Coal in China," Mingxin Shen ed., Chemical Industry Press, first edition, Jan. 2007, pp. 242-243, 247.
- U.S. Appl. No. 07/587,742, filed Sep. 25, 1990, now U.S. Pat. No. 5,114,542, titled Nonrecovery Coke Oven Battery and Method of Operation.
- U.S. Appl. No. 07/878,904, filed May 6, 1992, now U.S. Pat. No. 5,318,671, titled Method of Operation of Nonrecovery Coke Oven Battery.
- U.S. Appl. No. 09/783,195, filed Feb. 14, 2001, now U.S. Pat. No. 6,596,128, titled Coke Oven Flue Gas Sharing.
- U.S. Appl. No. 07/886,804, filed May 22, 1992, now U.S. Pat. No. 5,228,955, titled High Strength Coke Oven Wall Having Gas Flues Therein.
- U.S. Appl. No. 08/059,673, filed May 12, 1993, now U.S. Pat. No. 5,447,606, titled Method of and Apparatus for Capturing Coke Oven Charging Emissions.
- U.S. Appl. No. 08/914,140, filed Aug. 19, 1997, now U.S. Pat. No. 5,928,476, titled Nonrecovery Coke Oven Door.
- U.S. Appl. No. 09/680,187, filed Oct. 5, 2000, now U.S. Pat. No. 6,290,494, titled Method and Apparatus for Coal Coking.
- U.S. Appl. No. 10/933,866, filed Sep. 3, 2004, now U.S. Pat. No. 7,331,298, titled Coke Oven Rotary Wedge Door Latch.

(56)

References Cited**OTHER PUBLICATIONS**

U.S. Appl. No. 11/424,566, filed Jun. 16, 2006, now U.S. Pat. No. 7,497,930, titled Method and Apparatus for Compacting Coal for a Coal Coking Process.

U.S. Appl. No. 12/405,269, filed Mar. 17, 2009, now U.S. Pat. No. 7,998,316, titled Flat Push Coke Wet Quenching Apparatus and Process.

U.S. Appl. No. 13/205,960, filed Aug. 9, 2011, now U.S. Pat. No. 9,321,965, titled Flat Push Coke Wet Quenching Apparatus and Process.

U.S. Appl. No. 11/367,236, filed Mar. 3, 2006, now U.S. Pat. No. 8,152,970, titled Method and Apparatus for Producing Coke.

U.S. Appl. No. 12/403,391, filed Mar. 13, 2009, now U.S. Pat. No. 8,172,930, titled Cleanable in Situ Spark Arrestor.

U.S. Appl. No. 12/849,192, filed Aug. 3, 2010, now U.S. Pat. No. 9,200,225, titled Method and Apparatus for Compacting Coal for a Coal Coking Process.

U.S. Appl. No. 13/631,215, filed Sep. 28, 2012, now U.S. Pat. No. 9,683,740, titled Methods for Handling Coal Processing Emissions and Associated Systems and Devices.

U.S. Appl. No. 13/730,692, filed Dec. 28, 2012, now U.S. Pat. No. 9,193,913, titled Reduced Output Rate Coke Oven Operation With Gas Sharing Providing Extended Process Cycle.

U.S. Appl. No. 14/655,204, now U.S. Pat. No. 10,016,714, filed Jun. 24, 2015, titled Systems and Methods for Removing Mercury From Emissions.

U.S. Appl. No. 16/000,516, now U.S. Pat. No. 11,117,087, filed Jun. 5, 2018, titled Systems and Methods for Removing Mercury From Emissions.

U.S. Appl. No. 17/459,380, now U.S. Pat. No. 11,845,037, filed Jun. 5, 2018, titled Systems and Methods for Removing Mercury From Emissions.

U.S. Appl. No. 13/830,971, filed Mar. 14, 2013, now U.S. Pat. No. 10,047,296, titled Non-Perpendicular Connections Between Coke Oven Uptakes and a Hot Common Tunnel, and Associated Systems and Methods, now U.S. Pat. No. 10,047,295.

U.S. Appl. No. 16/026,363, filed Jul. 3, 2018, now U.S. Pat. No. 11,008,517, titled Non-Perpendicular Connections Between Coke Oven Uptakes and a Hot Common Tunnel, and Associated Systems and Methods.

U.S. Appl. No. 13/730,796, filed Dec. 28, 2012, now U.S. Pat. No. 10,883,051, titled Methods and Systems for Improved Coke Quenching.

U.S. Appl. No. 17/140,564, filed Jan. 4, 2021, now U.S. Pat. No. 11,807,812, titled Methods and Systems for Improved Coke Quenching.

U.S. Appl. No. 13/730,598, filed Dec. 28, 2012, now U.S. Pat. No. 9,238,778, titled Systems and Methods for Improving Quenched Coke Recovery.

U.S. Appl. No. 14/952,267, filed Nov. 25, 2015, now U.S. Pat. No. 9,862,888, titled Systems and Methods for Improving Quenched Coke Recovery.

U.S. Appl. No. 15/830,320, filed Dec. 4, 2017, now U.S. Pat. No. 10,323,192, titled Systems and Methods for Improving Quenched Coke Recovery.

U.S. Appl. No. 13/730,735, filed Dec. 28, 2012, now U.S. Pat. No. 9,273,249, titled Systems and Methods for Controlling Air Distribution in a Coke Oven.

U.S. Appl. No. 14/655,013, filed Jun. 23, 2015, now U.S. Pat. No. 11,142,699, titled Vent Stack Lids and Associated Systems and Methods.

U.S. Appl. No. 17/471,491, filed Sep. 10, 2021, now U.S. Pat. No. 11,939,526, titled Vent Stack Lids and Associated Systems and Methods.

U.S. Appl. No. 13/843,166, filed Mar. 15, 2013, now U.S. Pat. No. 9,273,250, titled Methods and Systems for Improved Quench Tower Design.

U.S. Appl. No. 15/014,547, filed Feb. 3, 2016, now U.S. Pat. No. 10,927,303, titled Methods for Improved Quench Tower Design.

U.S. Appl. No. 17/155,818, filed Jan. 22, 2021, now U.S. Pat. No. 11,746,296, titled Methods and Systems for Improved Quench Tower Design.

U.S. Appl. No. 14/655,003, filed Jun. 23, 2015, now U.S. Pat. No. 10,760,002, titled Systems and Methods for Maintaining a Hot Car in a Coke Plant.

U.S. Appl. No. 16/897,957, filed Jun. 10, 2020, now U.S. Pat. No. 11,359,145, titled Systems and Methods for Maintaining a Hot Car in a Coke Plant.

U.S. Appl. No. 13/829,588, filed Mar. 14, 2013, now U.S. Pat. No. 9,193,915, titled Horizontal Heat Recovery Coke Ovens Having Monolith Crowns.

U.S. Appl. No. 15/322,176, filed Dec. 27, 2016, now U.S. Pat. No. 10,526,541, titled Horizontal Heat Recovery Coke Ovens Having Monolith Crowns.

U.S. Appl. No. 15/511,036, filed Mar. 14, 2017, now U.S. Pat. No. 10,968,383, titled Coke Ovens Having Monolith Component Construction.

U.S. Appl. No. 17/190,720, now U.S. Pat. No. 11,795,400, filed Mar. 3, 2021, titled Coke Ovens Having Monolith Component Construction.

U.S. Appl. No. 13/589,009, filed Aug. 17, 2012, now U.S. Pat. No. 9,359,554, titled Automatic Draft Control System for Coke Plants.

U.S. Appl. No. 15/139,568, filed Apr. 27, 2016, now U.S. Pat. No. 10,947,455, titled Automatic Draft Control System for Coke Plants.

U.S. Appl. No. 17/176,391, now U.S. Pat. No. 11,692,138, filed Feb. 16, 2021, titled Automatic Draft Control System for Coke Plants.

U.S. Appl. No. 18/321,530, filed May 22, 2023, now U.S. Pat. No. 12,195,671, titled Automatic Draft Control System for Coke Plants.

U.S. Appl. No. 18/977,609, filed Dec. 11, 2024, titled Automatic Draft Control System for Coke Plants.

U.S. Appl. No. 13/588,996, filed Aug. 17, 2012, now U.S. Pat. No. 9,243,186, titled Coke Plant Including Exhaust Gas Sharing.

U.S. Appl. No. 14/959,450, filed Dec. 4, 2015, now U.S. Pat. No. 10,041,002, titled Coke Plant Including Exhaust Gas Sharing.

U.S. Appl. No. 16/047,198, filed Jul. 27, 2018, now U.S. Pat. No. 10,611,965, titled Coke Plant Including Exhaust Gas Sharing.

U.S. Appl. No. 16/828,448, filed Mar. 24, 2020, now U.S. Pat. No. 11,441,077, titled Coke Plant Including Exhaust Gas Sharing.

U.S. Appl. No. 13/589,004, filed Aug. 17, 2012, now U.S. Pat. No. 9,249,357, titled Method and Apparatus for Volatile Matter Sharing in Stamp-Charged Coke Ovens.

U.S. Appl. No. 13/730,673, filed Dec. 28, 2012, now U.S. Pat. No. 9,476,547, titled Exhaust Flow Modifier, Duct Intersection Incorporating the Same, and Methods Therefor.

U.S. Appl. No. 15/281,891, filed Sep. 30, 2016, now U.S. Pat. No. 10,975,309, titled Exhaust Flow Modifier, Duck Intersection Incorporating the Same, and Methods Therefor.

U.S. Appl. No. 17/191,119, filed March 3, 2021, titled Exhaust Flow Modifier, Duck Intersection Incorporating the Same, and Methods Therefor.

U.S. Appl. No. 13/598,394, filed Aug. 29, 2012, now U.S. Pat. No. 9,169,439, titled Method and Apparatus for Testing Coal Coking Properties.

U.S. Appl. No. 14/865,581, filed Sep. 25, 2015, now U.S. Pat. No. 10,053,627, titled Method and Apparatus for Testing Coal Coking Properties, now U.S. Pat. No. 10,053,627.

U.S. Appl. No. 14/839,384, filed Aug. 28, 2015, now U.S. Pat. No. 9,580,656, titled Coke Oven Charging System.

U.S. Appl. No. 15/443,246, filed Feb. 27, 2017, now U.S. Pat. No. 9,976,089, titled Coke Oven Charging System.

U.S. Appl. No. 14/587,670, filed Dec. 31, 2014, now U.S. Pat. No. 10,619,101, titled Methods for Decarbonizing Coking Ovens, and Associated Systems and Devices.

U.S. Appl. No. 16/845,530, filed Apr. 10, 2020, now U.S. Pat. No. 11,359,146, titled Methods for Decarbonizing Coking Ovens, and Associated Systems and Devices.

U.S. Appl. No. 14/984,489, filed Dec. 30, 2015, now U.S. Pat. No. 10,975,310, titled Multi-Modal Beds of Coking Material.

U.S. Appl. No. 14/983,837, filed Dec. 30, 2015, now U.S. Pat. No. 10,968,395, titled Multi-Modal Beds of Coking Material.

U.S. Appl. No. 14/986,281, filed Dec. 31, 2015, now U.S. Pat. No. 10,975,311, titled Multi-Modal Beds of Coking Material.

(56)

References Cited**OTHER PUBLICATIONS**

U.S. Appl. No. 17/222,886, filed Apr. 12, 2021, titled Multi-Modal Beds of Coking Material.

U.S. Appl. No. 14/987,625, filed Jan. 4, 2016, now U.S. Pat. No. 11,060,032, titled Integrated Coke Plant Automation and Optimization Using Advanced Control and Optimization Techniques.

U.S. Appl. No. 17/172,476, filed Feb. 10, 2021, now U.S. Pat. No. 11,788,012, titled Integrated Coke Plant Automation and Optimization Using Advanced Control and Optimization Techniques.

U.S. Appl. No. 14/839,493, filed Aug. 28, 2015, now U.S. Pat. No. 10,233,392, titled Method and System for Optimizing Coke Plant Operation and Output.

U.S. Appl. No. 16/251,352, filed Jan. 18, 2019, now U.S. Pat. No. 11,053,444, titled Method and System for Optimizing Coke Plant Operation and Output.

U.S. Appl. No. 14/839,551, filed Aug. 28, 2015, now U.S. Pat. No. 10,308,876, titled Burn Profiles for Coke Operations.

U.S. Appl. No. 16/428,014, filed May 31, 2019, now U.S. Pat. No. 10,920,148, titled Improved Burn Profiles for Coke Operations.

U.S. Appl. No. 17/155,719, filed Jan. 22, 2021, now U.S. Pat. No. 11,441,078, titled Improved Burn Profiles for Coke Operations.

U.S. Appl. No. 14/839,588, filed Aug. 28, 2015, now U.S. Pat. No. 9,708,542, titled Method and System for Optimizing Coke Plant Operation and Output.

U.S. Appl. No. 15/392,942, filed Dec. 28, 2016, now U.S. Pat. No. 10,526,542, titled Method and System for Dynamically Charging a Coke Oven.

U.S. Appl. No. 16/735,103, filed Jan. 6, 2020, now U.S. Pat. No. 11,214,739, titled Method and System for Dynamically Charging a Coke Oven.

U.S. Appl. No. 15/614,525, filed Jun. 5, 2017, now U.S. Pat. No. 11,508,230, titled Methods and Systems for Automatically Generating a Remedial Action in an Industrial Facility.

U.S. Appl. No. 18/047,916, filed Oct. 19, 2022, now U.S. Pat. No. 12,190,701, titled Methods and Systems For Automatically Generating a Remedial Action in an Industrial Facility.

U.S. Appl. No. 18/958,671, filed Nov. 25, 2024, titled Methods and Systems for Automatically Generating a Remedial Action in an Industrial Facility.

U.S. Appl. No. 15/987,860, filed May 23, 2018, now U.S. Pat. No. 10,851,306, titled System and Method for Repairing a Coke Oven.

U.S. Appl. No. 17/076,563, filed Oct. 21, 2020, now U.S. Pat. No. 11,186,778, titled System and Method for Repairing a Coke Oven.

U.S. Appl. No. 17/521,061, now U.S. Pat. No. 11,845,898, filed Nov. 8, 2021, titled System and Method for Repairing a Coke Oven.

U.S. Appl. No. 17/135,483, filed Dec. 28, 2020, now U.S. Pat. No. 12,227,699, titled Oven Health Optimization Systems and Methods.

U.S. Appl. No. 19,054,358, filed Feb. 14, 2025, titled Oven Health Optimization Systems and Methods.

U.S. Appl. No. 16/729,053, filed Dec. 27, 2019, now U.S. Pat. No. 11,760,937, titled Oven Uptakes.

U.S. Appl. No. 16/729,036, filed Dec. 27, 2019, now U.S. Pat. No. 11,365,355, titled Systems and Methods for Treating a Surface of a Coke Plant.

U.S. Appl. No. 17/747,708, filed May 18, 2022, now U.S. Pat. No. 12,060,525, titled Systems and Methods for Treating a Surface of a Coke Plant.

U.S. Appl. No. 18/770,264, filed Jul. 11, 2024, titled Systems and Methods for Treating a Surface of a Coke Plant.

U.S. Appl. No. 16/729,201, filed Dec. 27, 2019, titled Gaseous Tracer Leak Detection.

U.S. Appl. No. 16/729,122, filed Dec. 27, 2019, now U.S. Pat. No. 11,395,989, titled Methods and Systems for Providing Corrosion Resistant Surfaces in Contaminant Treatment Systems.

U.S. Appl. No. 17/843,164, filed Jun. 17, 2022, now U.S. Pat. No. 11,819,802, titled Methods and Systems for Providing Corrosion Resistant Surfaces in Contaminant Treatment Systems.

U.S. Appl. No. 16/729,068, filed Dec. 27, 2019, now U.S. Pat. No. 11,486,572, titled Systems and Methods for Utilizing Flue Gas.

U.S. Appl. No. 17/947,520, filed Sep. 19, 2022, titled Systems and Methods for Utilizing Flue Gas.

U.S. Appl. No. 16/729,129, filed Dec. 27, 2019, now U.S. Pat. No. 11,008,518, titled Coke Plant Tunnel Repair and Flexible Joints.

U.S. Appl. No. 17/320,343, filed May 14, 2021, now U.S. Pat. No. 11,597,881, titled Coke Plant Tunnel Repair and Flexible Joints.

U.S. Appl. No. 18/168,142, filed Feb. 13, 2023, titled Coke Plant Tunnel Repair and Flexible Joints.

U.S. Appl. No. 16/729,170, now U.S. Pat. No. 11,193,069, filed Dec. 27, 2019, titled Coke Plant Tunnel Repair and Anchor Distribution.

U.S. Appl. No. 17/532,058, now U.S. Pat. No. 11,505,747, filed Nov. 22, 2021, titled Coke Plant Tunnel Repair and Anchor Distribution.

U.S. Appl. No. 17/967,615, filed Oct. 17, 2022, titled Coke Plant Tunnel Repair and Anchor Distribution.

U.S. Appl. No. 16/729,157, filed Dec. 27, 2019, now U.S. Pat. No. 11,071,935, titled Particulate Detection for Industrial Facilities, and Associated Systems and Methods.

U.S. Appl. No. 16/729,057, filed Dec. 27, 2019, now U.S. Pat. No. 11,021,655, titled Decarbonization of Coke Ovens and Associated Systems and Methods.

U.S. Appl. No. 17/321,857, filed May 17, 2021, now U.S. Pat. No. 11,643,602, titled Decarbonization of Coke Ovens and Associated Systems and Methods.

U.S. Appl. No. 18/313,622, filed May 8, 2023, titled Decarbonization of Coke Ovens and Associated Systems and Methods.

U.S. Appl. No. 16/729,212, filed Dec. 27, 2019, now U.S. Pat. No. 11,261,381, titled Heat Recovery Oven Foundation.

U.S. Appl. No. 17/584,672, now U.S. Pat. No. 11,845,897, filed Jan. 26, 2022, titled Heat Recovery Oven Foundation.

U.S. Appl. No. 18/492,913, filed Oct. 24, 2023, titled Heat Recovery Oven Foundation.

U.S. Appl. No. 16/729,219, now U.S. Pat. No. 11,098,252, filed Dec. 27, 2019, titled Spring-Loaded Heat Recovery Oven System and Method.

U.S. Appl. No. 17/388,874, filed Jul. 29, 2021, now, U.S. Pat. No. 11,680,208, titled Spring-Loaded Heat Recovery Oven System and Method.

U.S. Appl. No. 17/736,960, filed May 20, 2022, titled Foundry Coke Products, and Associated Systems and Methods.

U.S. Appl. No. 17/306,895, now U.S. Appl. No. 11/767,482, filed May 3, 2021, now U.S. Pat. No. 11,767,482, titled High-Quality Coke Products.

U.S. Appl. No. 18/363,465, filed Aug. 1, 2023, titled High-Quality Coke Products.

U.S. Appl. No. 18/466,549, filed Sep. 13, 2023, titled High-Quality Coke Products.

U.S. Appl. No. 18/793,631, filed Aug. 2, 2024, now U.S. Pat. No. 12,215,289, titled High-Quality Coke Products.

U.S. Appl. No. 18/971,912, filed Dec. 6, 2024, titled Systems for Filtering Fines From Coke Products and Associated Devices and Methods.

U.S. Appl. No. 18/501,488, filed Nov. 3, 2023, now U.S. Pat. No. 12,110,458, titled Coal Blends, Foundry Coke Products, and Associated Systems, Devices, and Methods.

U.S. Appl. No. 18/501,795, filed Nov. 3, 2023, titled Coal Blends, Foundry Coke Products, and Associated Systems, Devices, and Methods.

U.S. Appl. No. 18/052,739, filed Nov. 4, 2022, now U.S. Pat. No. 11,946,108, titled Foundry Coke Products and Associated Processing Methods Via Cupolas.

U.S. Appl. No. 18/586,236, filed Feb. 23, 2024, titled Foundry Coke Products and Associated Processing Methods Via Cupolas.

U.S. Appl. No. 18/954,859, filed Nov. 21, 2024, titled Systems, Devices and Methods for Screening Industrial Products.

U.S. Appl. No. 18/052,760, filed Nov. 2, 2022, now U.S. Pat. No. 11,851,724, titled Foundry Coke Products, and Associated Systems, Devices, and Methods.

U.S. Appl. No. 18/506,746, filed Nov. 10, 2023, titled Foundry Coke Products, and Associated Systems, Devices, and Methods.

U.S. Appl. No. 18/892,228, filed Sep. 20, 2024, titled Foundry Coke Products, and Associated Systems, Devices, and Methods.

(56)

References Cited

OTHER PUBLICATIONS

U.S. Appl. No. 18/955,181, filed Nov. 21, 2024, titled Emissions Recovery Systems for Industrial Facilities, and Associated Assemblies and Methods.

U.S. Appl. No. 18/972,005, filed Dec. 6, 2024, titled Milling Systems and Methods for Producing Materials With a Particular Particle Size Distribution.

U.S. Appl. No. 18/971,647, filed Dec. 6, 2024, titled Systems and Methods for Capturing Greenhouse Gases From Coke Production Facilities.

U.S. Appl. No. 18/511,148, filed Nov. 16, 2023, titled Products Comprising Char and Carbon, and Associated Systems, Devices, and Methods.

U.S. Appl. No. 18/511,621, filed Nov. 16, 2023, titled Pelletized Products and Associated Systems, Devices, and Methods.

U.S. Appl. No. 18/949,426, filed Nov. 15, 2024, titled Pelletized Products and Associated Systems, Devices and Methods.

Gkotsis, et al., "Membrane-Based Technologies for Post-Combustion CO₂ Capture from Flue Gases: Recent Progress in Commonly Employed Membrane Materials," *Membranes* 2023, 13, 898; 27 pages.

Mitsubishi Heavy Industries America, Inc., 'Development and demonstration of wasteheat integration with solvent process for more efficient CO₂ removal from coal fired flue gas', 2017NETL CO₂ Capture Technology Project Review Meeting, Aug. 22, 2017, pp. 1-43.

International Search Report and Written Opinion issued Mar. 10, 2025 for PCT/US2024/056843; 11 pages.

* cited by examiner

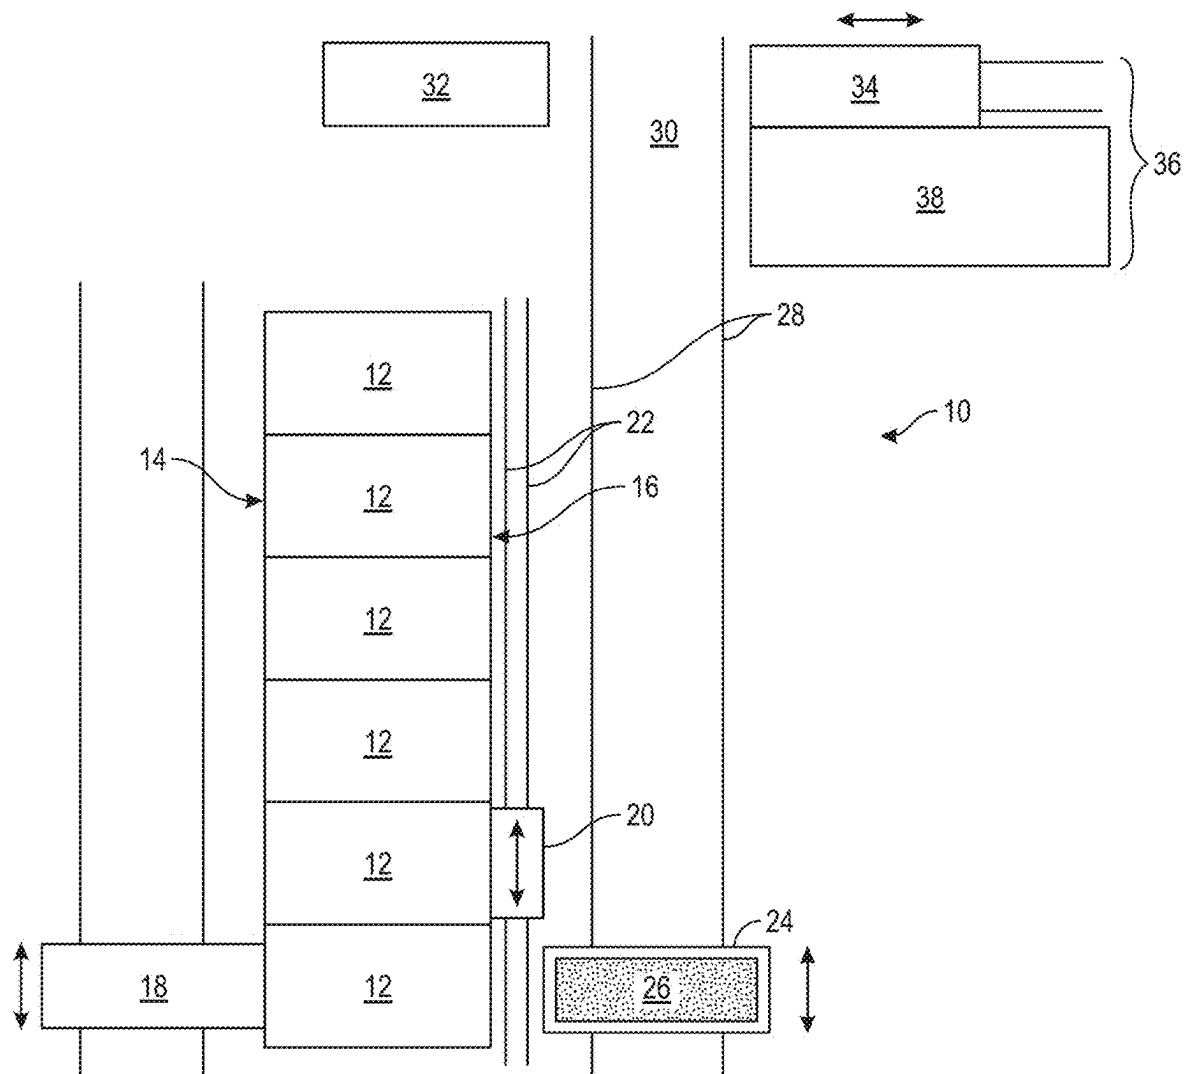
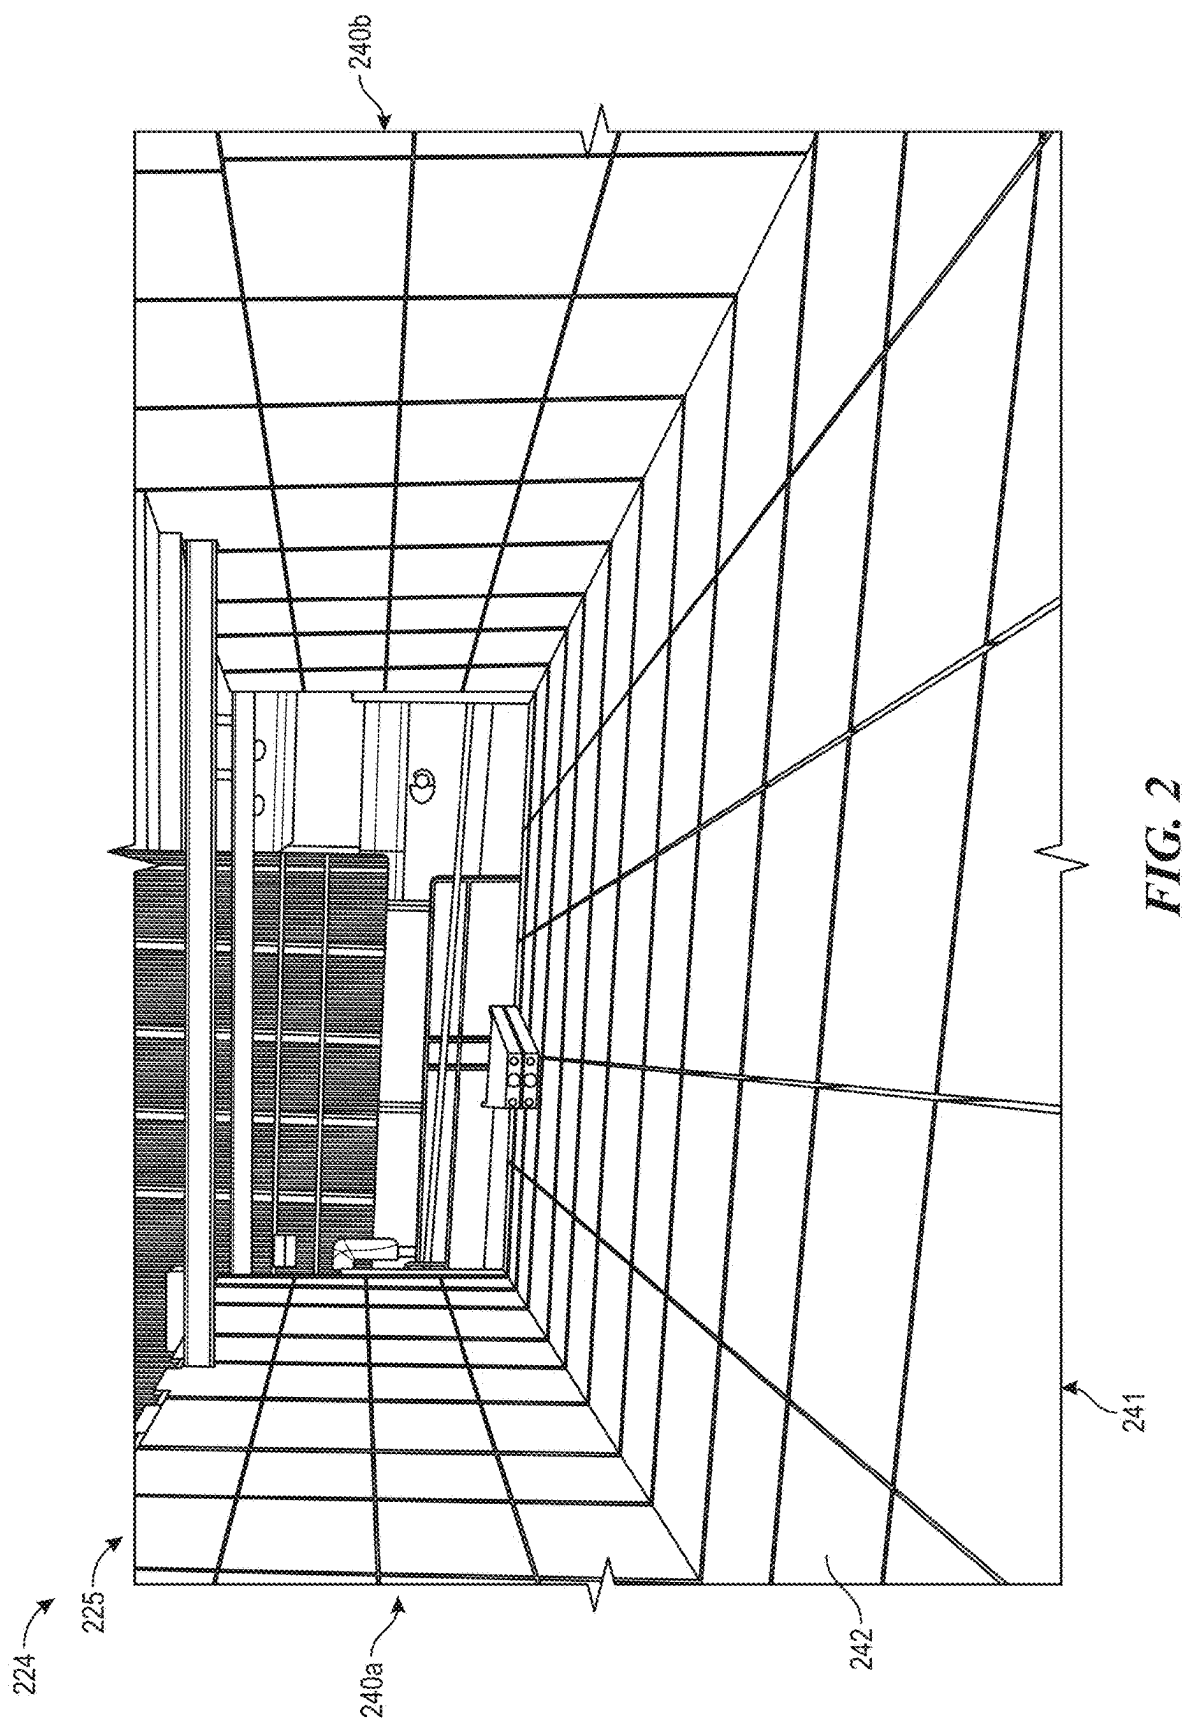


FIG. 1



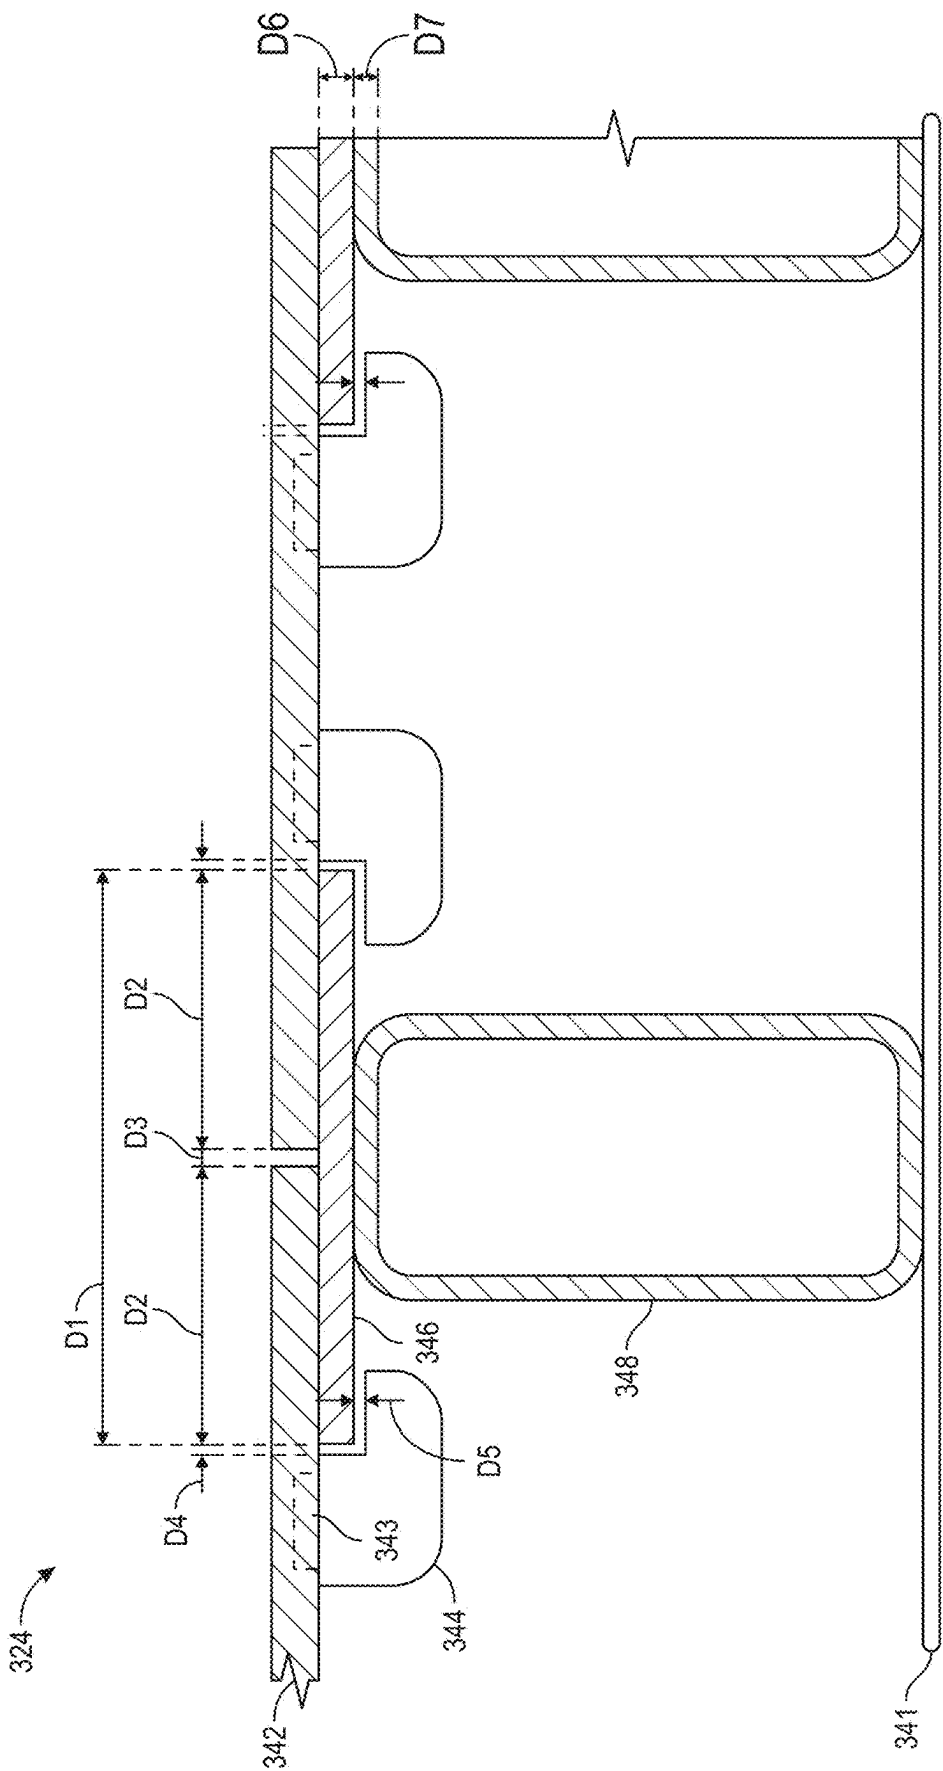


FIG. 3

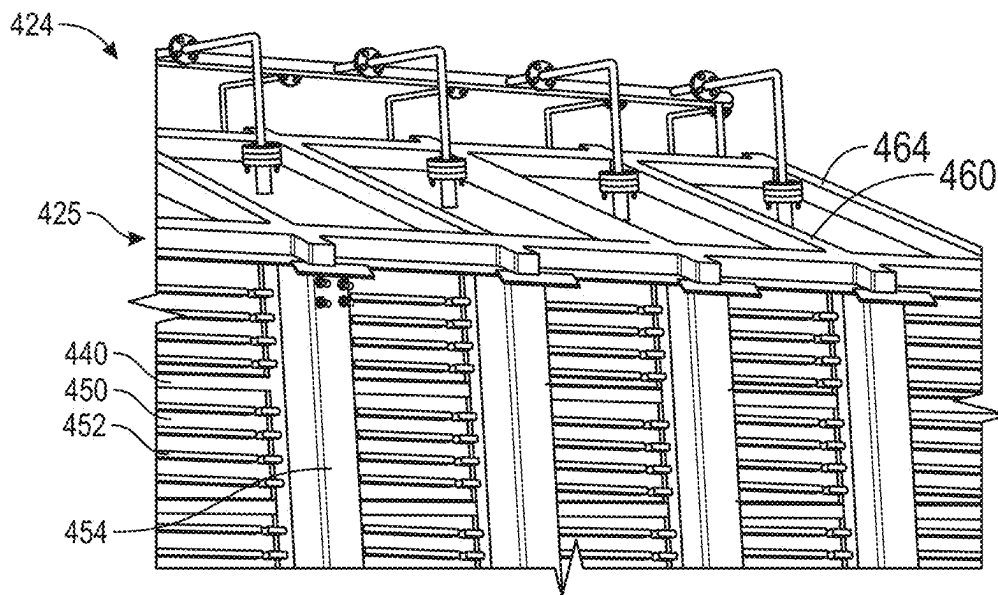


FIG. 4A

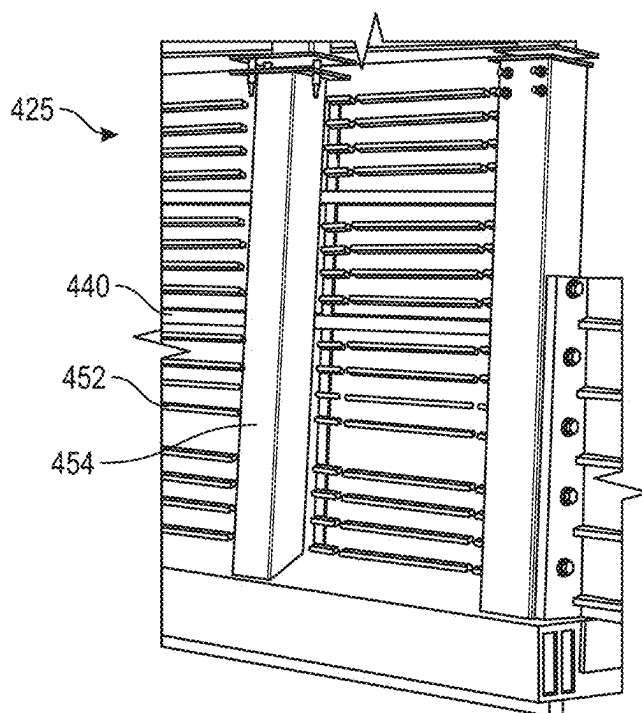


FIG. 4B

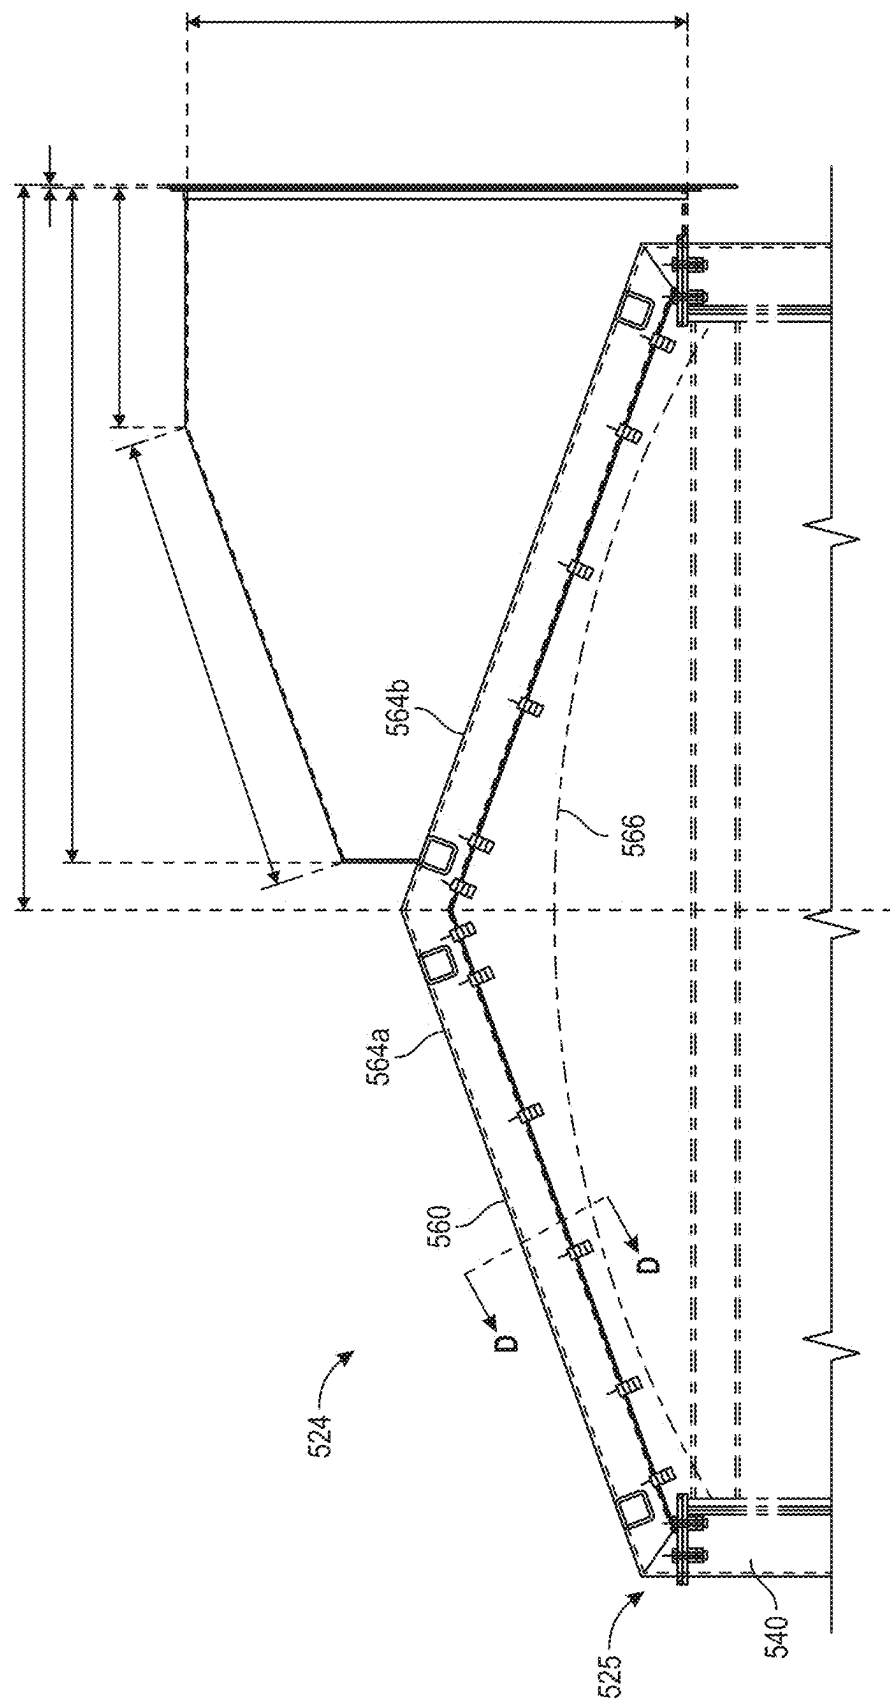


FIG. 5

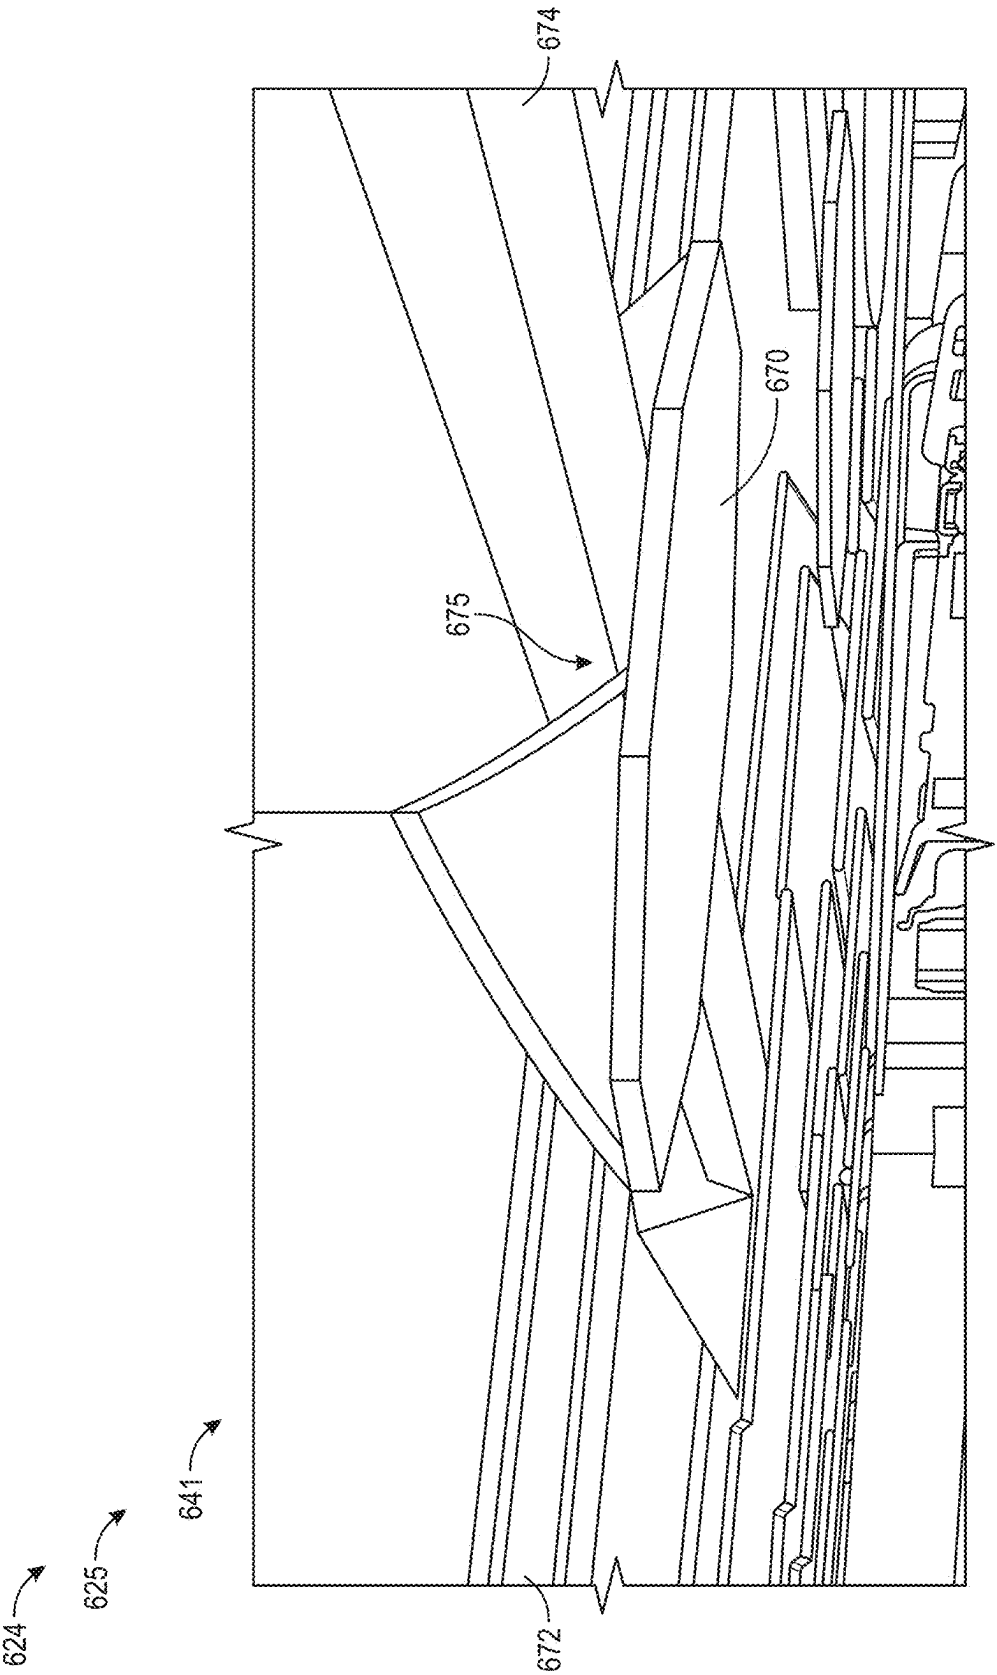


FIG. 6

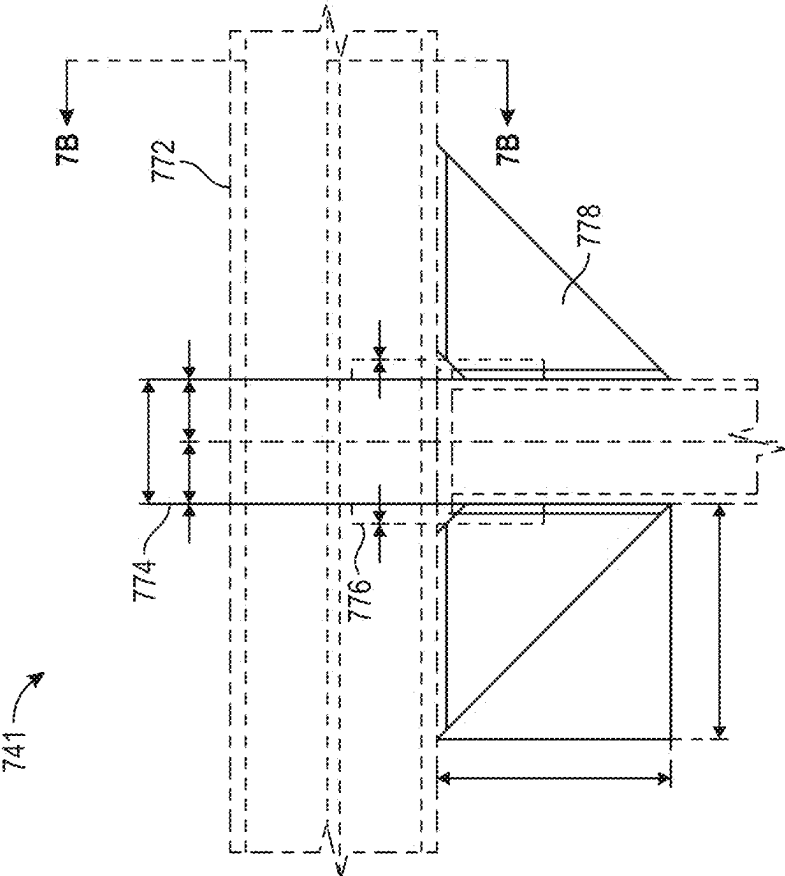


FIG. 7A

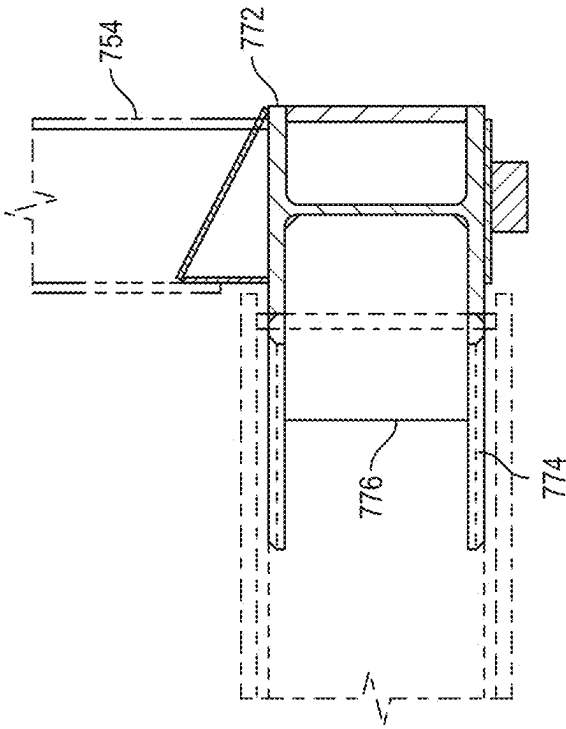


FIG. 7B

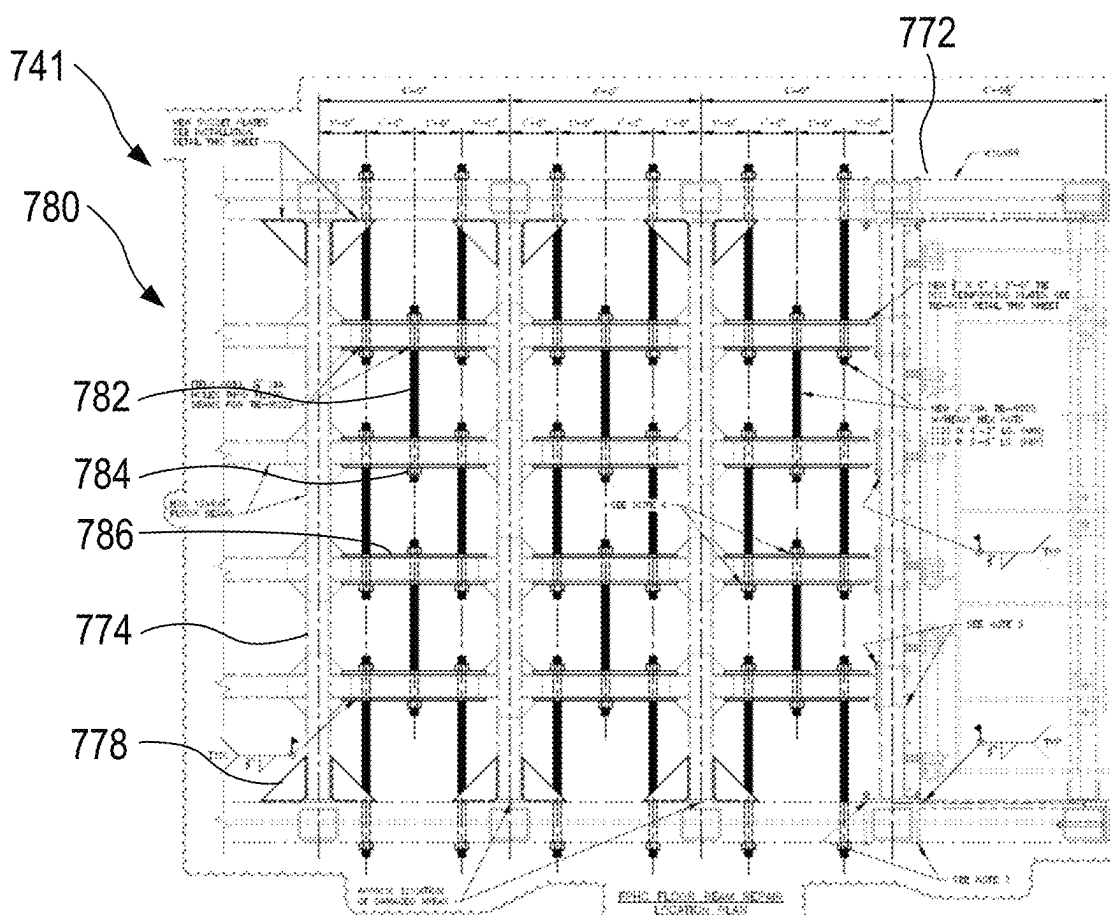


FIG. 7C

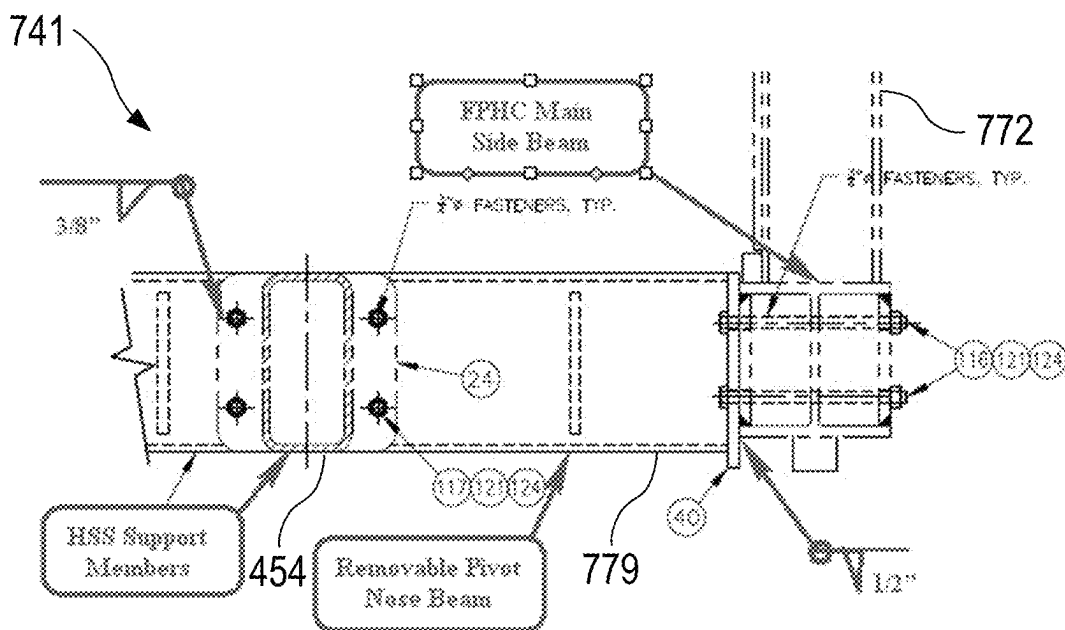


FIG. 7D

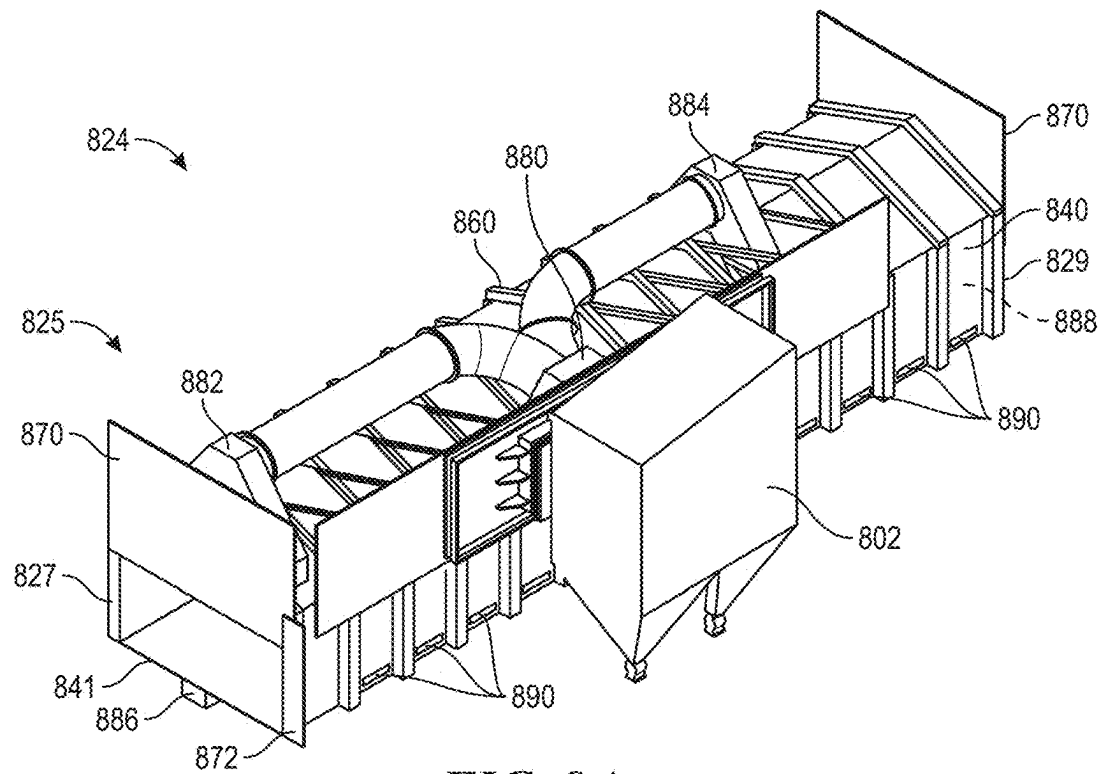


FIG. 8A

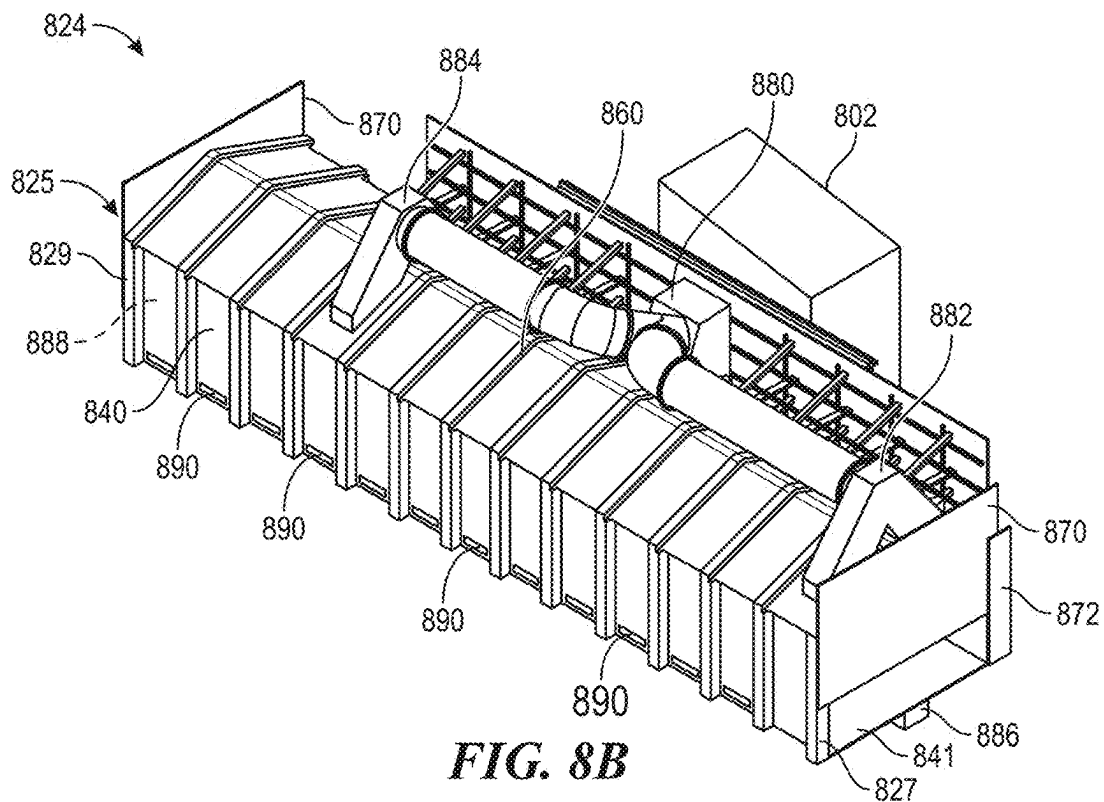


FIG. 8B

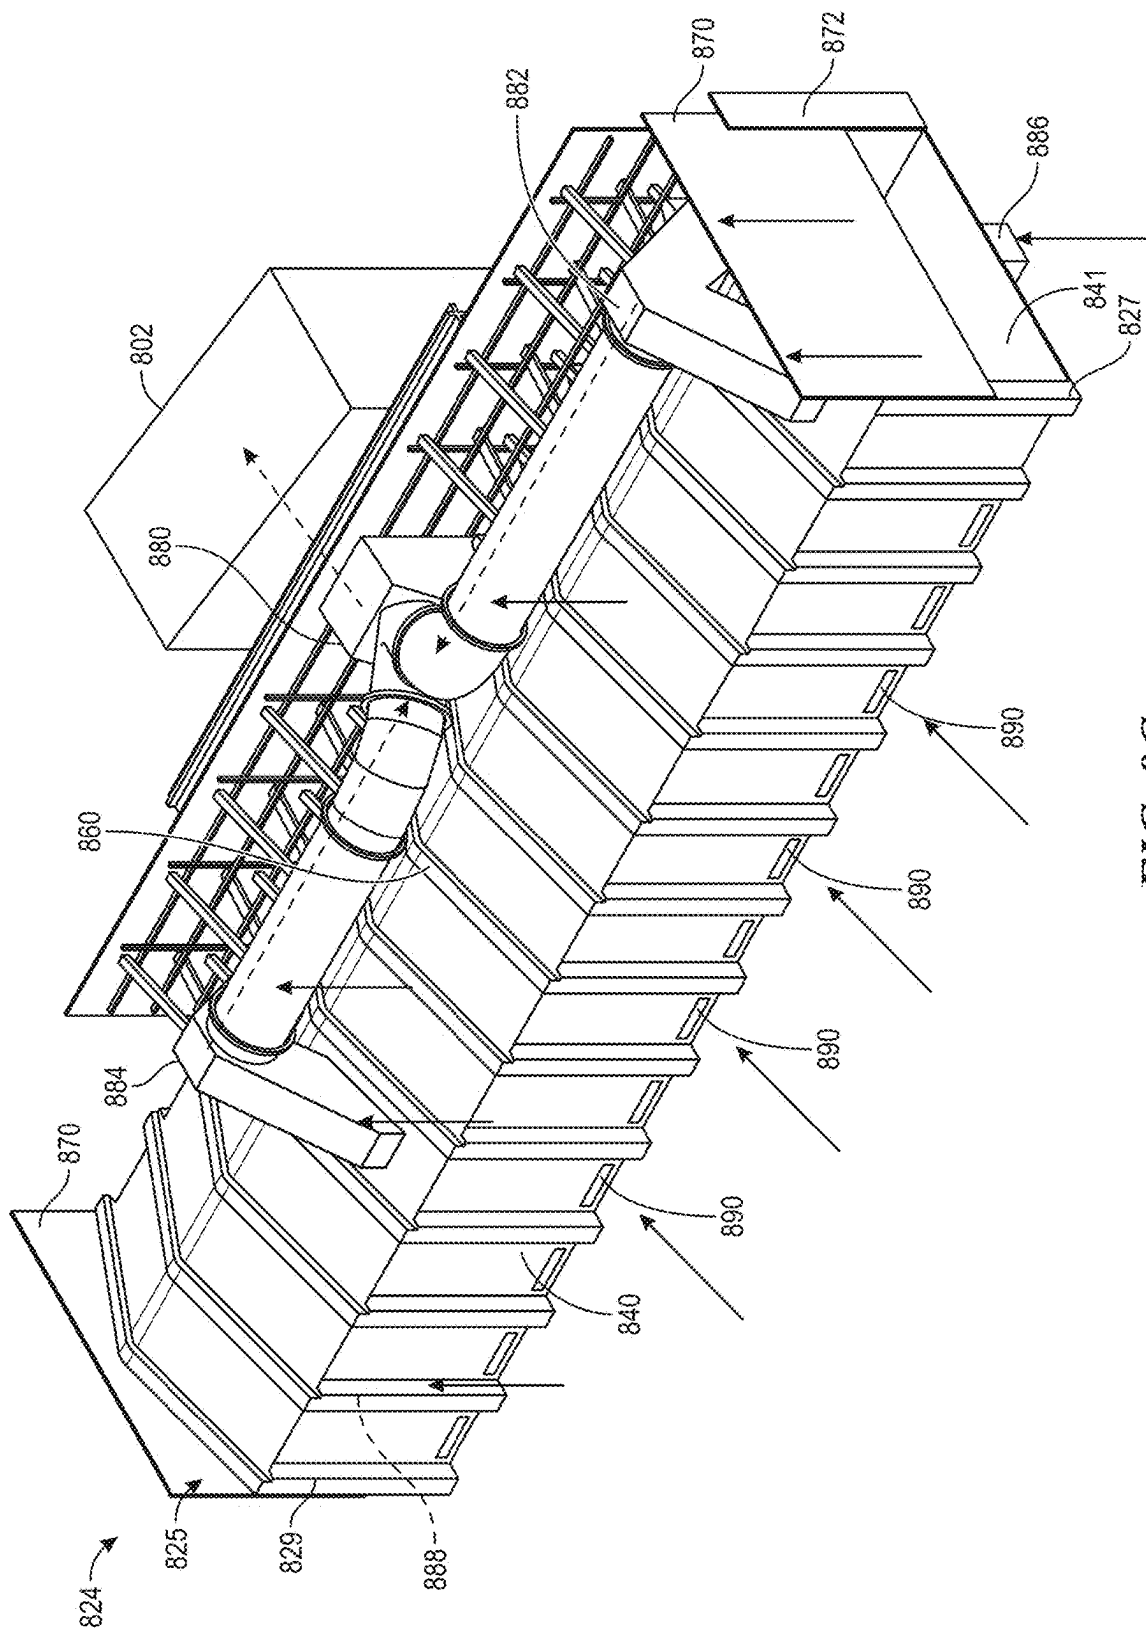


FIG. 8C

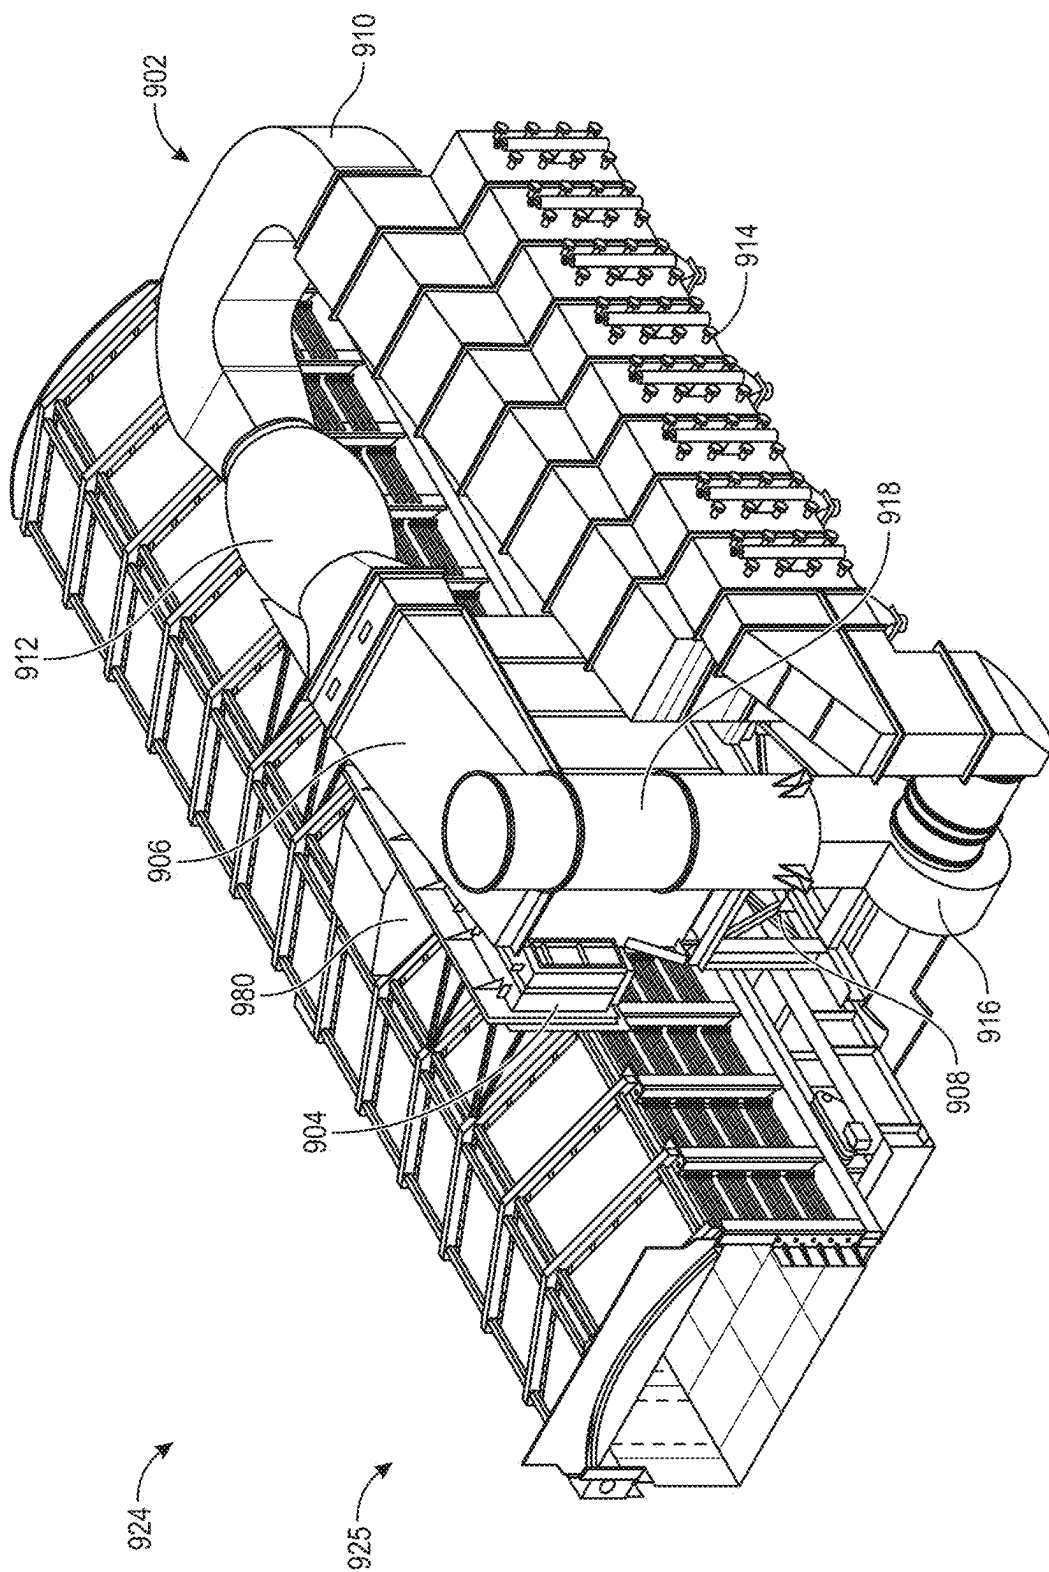
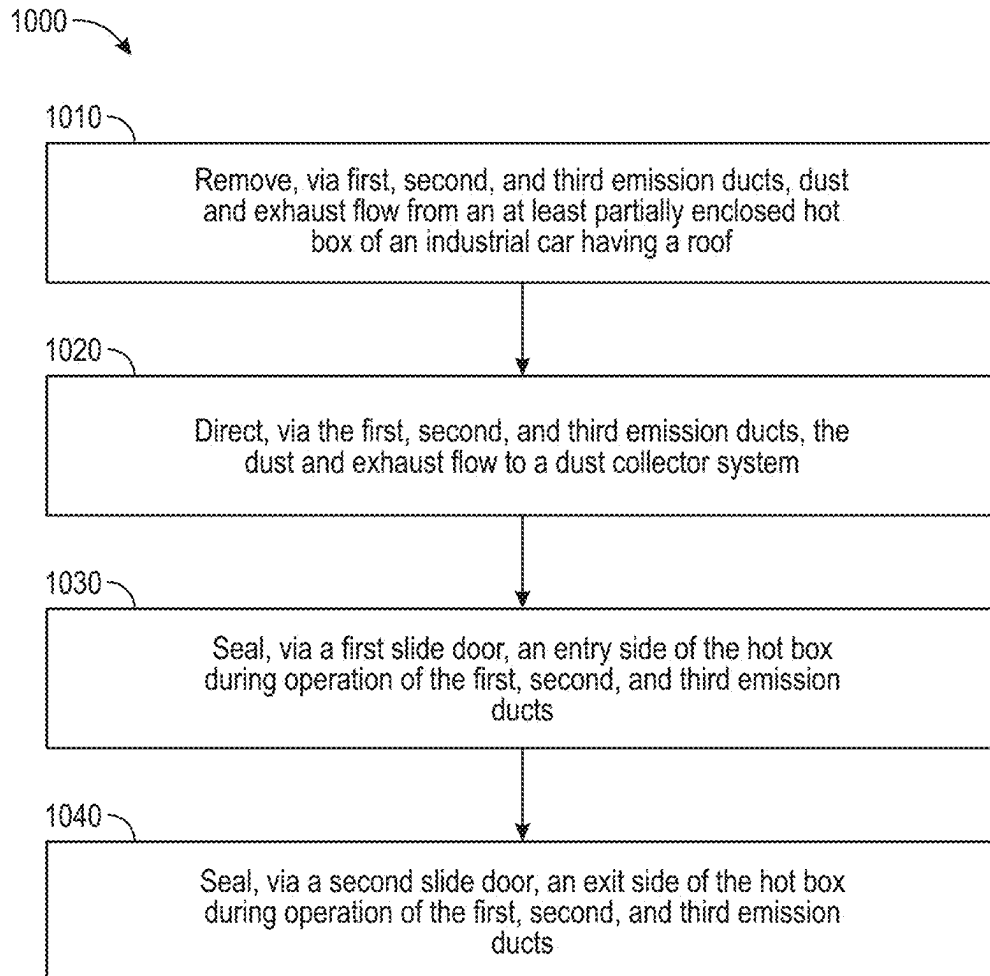


FIG. 9

**FIG. 10**

1

FLAT PUSH HOT CAR FOR FOUNDRY COKE AND ASSOCIATED SYSTEMS AND METHODS

CROSS-REFERENCE TO RELATED APPLICATION(S)

The present application claims the benefit of U.S. Provisional Patent Application No. 63/601,490, filed Nov. 21, 2023, the disclosure of which is incorporated herein by reference in its entirety.

TECHNICAL FIELD

The present disclosure relates to industrial hot cars for transporting industrial material, and associated systems and methods. Some embodiments relate to systems, devices, and methods for transporting foundry coke using a flat push hot car.

BACKGROUND

Coke is a solid carbon fuel and carbon source used to melt and reduce iron ore in the production of steel. To make coke, finely crushed coal is fed into a coke oven and heated in an oxygen depleted environment under closely controlled atmospheric conditions. Such an environment drives off volatile compounds in the coal, leaving behind coke. In some coking plants, once the coal is “coked out” or fully coked, an oven door is opened and the hot coke is pushed from the oven into a hot box of a flat push hot car (“hot car”). The hot car then transports the hot coke from the coke oven to a quenching area (e.g., wet or dry quenching) to cool the coke below its ignition temperature. After being quenched, the coke is screened and loaded into rail cars or trucks for shipment or later use.

Over time, the volatile coal constituents (i.e., water, coal-gas, coal-tar, etc.) released during the coking process can accumulate on the interior surfaces of the coke oven, forming gummy, solidified by-product deposits. As used herein, “deposit(s)” refers to one or more coking by-products that can accumulate within the coke oven, such as, for example, clinkers, ash, and others. Such deposits can have a variety of adverse effects on coke production, including slowing and/or complicating the hot coke pushing operation, decreasing the effective dimensions of the oven, and lowering the thermal conductivity of the oven walls and/or floor. Because of such adverse effects, deposit removal (“decarbonization”) is a mandatory aspect of routine coke oven maintenance in order to maintain coke plant efficiency and yield.

To remove deposits from the coke ovens, oven operation (and thus coke production) must be interrupted so that the deposits can be targeted and pushed out of the ovens and into the hot car hot box for disposal. Much like the hot coke, deposits are extremely hot and exert a large amount of thermal and mechanical stress on the hot box in addition to the wear and tear of routine hot coke transportation. For these reasons, the hot box and/or the hot box’s individual components can have a relatively short life. Many conventional coke plants attempt to mitigate damage to the hot box by breaking up large deposits and transporting them to a quench tower for cooling in manageable, smaller portions. However, such an iterative approach takes a long time to remove the waste, thus keeping the ovens/quench tower out of operation and coke production at a halt. In addition, removing the waste in pieces increases the number of

2

transports required of the hot cars, exposing hot cars and/or its individual components to increased amount of thermal and mechanical stress.

BRIEF DESCRIPTION OF THE DRAWINGS

Features, aspects, and advantages of the presently disclosed technology may be better understood with regard to the following drawings.

FIG. 1 is a plan schematic view of a portion of a coke plant in accordance with embodiments of the present technology.

FIG. 2 is an elevational end view of an industrial car in accordance with embodiments of the present technology.

FIG. 3 is an enlarged, schematic cross-sectional view of a base of an industrial car in accordance with embodiments of the present technology.

FIGS. 4A and 4B are side views of an industrial car in accordance with embodiments of the present technology.

FIG. 5 is an enlarged, schematic cross-sectional view of a roof of an industrial car in accordance with embodiments of the present technology.

FIG. 6 is a bottom perspective view of an industrial car in accordance with embodiments of the present technology.

FIG. 7A is a top view of a base of an industrial car with supporting gusset plates in accordance with embodiments of the present technology.

FIG. 7B is an enlarged cross-sectional view of the base of FIG. 7A along section 7B-7B.

FIG. 7C is a top view of a base of an industrial car with a tie rod system in accordance with embodiments of the present technology.

FIG. 7D is a top view of a base of an industrial car with a welded pivot nose beam in accordance with embodiments of the present technology.

FIGS. 8A and 8B are right and left perspective views, respectively, of an industrial car in accordance with embodiments of the present technology.

FIG. 8C illustrates fluid flow into and out of the industrial car of FIG. 8B.

FIG. 9 is a right perspective view of an industrial car and a dust collector system in accordance with embodiments of the present technology.

FIG. 10 is a flowchart illustrating a method of directing emission from an industrial car for use in a coke plant in accordance with embodiments of the present technology.

A person skilled in the relevant art will understand that the features shown in the drawings are for purposes of illustrations, and variations, including different and/or additional features and arrangements thereof, are possible.

DETAILED DESCRIPTION

I. Overview

Embodiments of the present technology relate to industrial cars for holding high-temperature materials, and associated systems and methods. Some examples relate to flat push hot cars (“hot cars”) for transporting coke (e.g., foundry coke) and deposits (e.g., coking by-products). To make coke, finely crushed coal is fed into a coke oven and heated in an oxygen depleted environment under closely controlled atmospheric conditions. The heating process drives off volatile compounds in the coal, leaving behind hot coke. The hot coke can then be pushed into a hot car for transportation to a quenching area. Over time, the volatile coal constituents (i.e., water, coal-gas, coal-tar, etc.) released

during the coking process can accumulate on the interior surfaces of the coke oven, forming gummy, solidified by-product deposits. Such deposits can have a variety of adverse effects on coke production, including slowing and/or complicating the hot coke pushing operation, decreasing the effective dimensions of the oven, and lowering the thermal conductivity of the oven walls and/or floor. Because of such adverse effects, deposit removal ("decarbonization") is a mandatory aspect of routine coke oven maintenance in order to maintain coke plant efficiency and yield.

In some coke plants, oven operation (and thus coke production) is interrupted so that the deposits can be targeted and pushed out of the ovens and into the hot car hot box for disposal. Much like the hot coke, deposits are extremely hot and exert a large amount of thermal and mechanical stress on the hot car in addition to the wear and tear of routine hot coke transportation. In conventional hot cars, plates or other protective structures can be bolted onto the base (e.g., the floor) and/or sidewalls of the hot box. However, because the plates are fixedly coupled to the base and sidewalls (e.g., at the locations of the bolts), the plates are unable to freely expand upon thermal expansion (due to exposure to hot industrial materials), leading to high mechanical stress levels and warping. For these reasons, the hot car and/or the hot car's individual components can have a relatively short life and/or require frequent maintenance.

Many conventional coke plants attempt to mitigate damage to the hot box by breaking up large deposits and transporting them to a quench tower for cooling in manageable, smaller portions. However, such an iterative approach takes a long time to remove the waste, thus keeping the ovens/quench tower out of operation and coke production at a halt. In addition, removing the waste in pieces increases the number of transports required of the hot cars, exposing hot cars and/or its individual components to increased amount of thermal and mechanical stress. It can also be important to properly remove any dust or emissions, which can be environmental hazards, from within the hot cars.

Embodiments of the present technology address at least some of the above described issues. For example, embodiments of the present technology include an industrial car configured to hold materials at high temperatures, such as temperatures in excess of 2000° F. The industrial car can include an at least partially enclosed hot box having a base and a pair of opposing sidewalls extending upward from the base. Cross members and coupling members can be fixedly coupled to at least one of the base or the sidewalls, while surface plates are disposed adjacent to the coupling members. Because the surface plates are not directly coupled to the coupling members, but rather "float" thereon, the surface plates can move or expand in response to exposure to hot industrial materials. Clips coupled to the surface plates can keep the surface plates adjacent the corresponding coupling members while still maintaining clearance between adjacent surface plates.

In some embodiments, an industrial car includes an at least partially enclosed hot box having a base and a pair of opposing sidewalls extending upward from the base. Each sidewall can comprise vertical beams extending upward from the base, side plates coupled between successive ones of the vertical beams, and stiffeners coupled to exterior surfaces of the side plates. The stiffeners can comprise sloped cover plates configured to reduce material build-up on the sidewall.

Some conventional industrial cars include curved roofs that can be costly or difficult to manufacture or replace, and can reach high levels of mechanical stress in operation. In

some embodiments, an industrial car includes an at least partially enclosed hot box having a base, a pair of opposing sidewalls extending upward from the base, and a roof. The roof can comprise a first non-curved member and a second non-curved member abutting the first non-curved member.

Industrial materials such as hot coke or deposits, when carried into, out of, and/or by industrial cars, can create dust, exhaust gas, and other emissions that can deteriorate the quality of the industrial materials and be hazardous to the environment when released from the industrial car. In some embodiments, a method of directing emission from an industrial car includes removing, via first, second, and third emission ducts, dust and exhaust flow from an at least partially enclosed hot box of the industrial car having a roof, and directing, via the first, second, and third emission ducts, the dust and exhaust flow to a dust collector system. The first emission duct can extend from a central portion of the roof, the second emission duct can extend from a first side portion of the roof, and the third emission duct can extend from a second side portion of the roof. The roof can comprise a first non-curved member and a second non-curved member abutting the first non-curved member.

In the Figures, identical or similar reference numbers identify generally similar, and/or identical, elements. Many of the details, dimensions, and other features shown in the Figures are merely illustrative of particular embodiments of the disclosed technology. Accordingly, other embodiments can have other details, dimensions, and features without departing from the spirit or scope of the disclosure. In addition, those of ordinary skill in the art will appreciate that further embodiments of the various disclosed technologies can be practiced without several of the details described below.

II. Industrial Facility Utilizing a Hot Car

FIG. 1 is a plan view of a coke oven battery 10 and associated equipment, including an industrial car 24 (also referred to as "hot car 24"), according to embodiments of the technology. As used herein, "hot car" may comprise a flat push hot car, train, and/or a combined flat push hot car/quench car. The typical coke oven battery 10 contains a plurality of side-by-side coke ovens 12. Each of the coke ovens 12 has a coal inlet end 14 and a coke outlet end 16 opposite the inlet end 14. Once the coal is fully coked (typically 24-120 hours), an exit door removing device 20 is positioned adjacent the outlet end 16 of the oven 12 and removes an exit door of the oven 12. After removing the exit door, the door removing device 20 is moved away from the outlet end 16 of the oven 12 along door removal rails 22. A discharge ram 18 positioned adjacent to the inlet end 14 of the oven 12 pushes the hot coke and/or deposits out of the oven 12. The discharge ram 18 may include a device for removing an inlet end 14 oven door prior to pushing the coke out of the oven 12.

A hot car 24 (described in greater detail below) is positioned adjacent to the outlet end 16 of the oven 12 for collection of hot coke and/or deposits 26 pushed from the oven by the discharge ram 18. In some embodiments, the hot coke and/or deposits 26 pushed into the hot car 24 form a relatively intact cake of coke having negligible breakage. The term "cake," as used herein, can refer to a solid, cohesive mass that remains largely whole and does not easily disintegrate into smaller pieces or fines during handling and transportation. Once the hot coke or deposits 26 is loaded onto the hot car 24, the car 24 is transported on rails 28 to a quench car area 30. In the quench car area 30, the hot

coke slab or deposits 26 on the hot car 24 is pushed by a stationary pusher 32 onto a quench car 34. Once the quench car 34 receives the hot coke or deposits 26, the quench car 34 is positioned in a quench station 36 wherein the hot coke or deposits 26 is quenched with sufficient water to cool the coke or deposits 26 to below a coking temperature. The quenched coke is then dumped onto a receiving dock 38 for further cooling and transport to a coke storage area.

In some embodiments described herein, a single hot car 24 may be used for multiple coke batteries 10 since the coke is quenched in a separate quench car 34. As soon as the hot coke or deposits 26 is pushed from the hot car 24 onto the quench car 34, the hot car 24 may be repositioned adjacent to the outlet end 16 of another oven 12 for collection of coke or deposits 26 from that oven 12. In further embodiments, the hot car 24 can be a combined hot car/quench car.

III. Industrial Cars for Transporting Hot Industrial Material

FIG. 2 is an elevational end view of an industrial car 224 in accordance with embodiments of the present technology. The industrial car 224 can be a flat push hot car (e.g., the hot car 24) to be used in a coke plant. The industrial car 224 can include an at least partially enclosed hot box 225 having a base 241, a first sidewall 240a extending upward from the base 241, and a second sidewall 240b also extending upward from the base 241 (collectively referred to as "sidewalls 240"). The industrial car 224 can also include wear plates or surface plates 242 coupled to and covering the base 241 and/or the sidewalls 240 (obscuring the base 241 and the sidewalls 240 from view). In some embodiments, the industrial car 224 includes the surface plates 242 coupled to and covering the ceiling of the industrial car 224 (not shown). In the illustrated embodiment, the surface plates 242 each have a rectangular shape and are arranged in a grid-like pattern with gaps therebetween.

During operation of the industrial car 224, materials at high temperatures (e.g., in excess of 2000° F.) can be put into the hot box 225. The materials can include hot coke, broken clinkers, bio-char coke, petcoke, coal, anthracite, breeze, biochar, biomaterials, lignite, met coals, thermal coal, coke, pad coal, pad coke, other high thermally treated coal and/or coke products, other carbon-containing products, and/or other industrial products. The gaps between the surface plates 242 can be sized to prevent materials with a dimension above a threshold from passing through. As described in further detail herein, the surface plates 242 are able to shift or vibrate relative to one another (e.g., move into and out of the gaps) such that the surface plates 242 appear to "float" on the base 241 or the sidewalls 240. As the hot box 225 receives and holds the high-temperature materials, the surface plates 242, which contact the materials, can freely move and distribute any force (e.g., upon impact between the materials and the surface plates), reducing overall wear of the industrial car 224. In addition, as heat is transferred from the high-temperature materials to the surface plates 242, the surface plates 242 can thermally expand into the gaps without excessively abutting against or overlapping with adjacent surface plates 242, reducing overall wear of the industrial car 224.

The surface plates 242 can be made of metal (e.g., steel, wear metals), ceramic, refractory, and/or other suitable material. In some embodiments, the surface plates 242 can have different shapes or be arranged differently. For example, the surface plates 242 can each have a triangular, pentagonal, hexagonal, or other shape. The surface plates

242 can also be coupled to only one or two of the base 241, the first sidewall 240a, and the second sidewall 240b.

FIG. 3 is an enlarged, schematic cross-sectional view of a base 341 (e.g., the base 241) of an industrial car 324 (e.g., the industrial car 224) in accordance with embodiments of the present technology. In the illustrated embodiment, cross members 348 are coupled to the base 341, and coupling members 346 are each coupled to at least one of the cross members 348. Individual ones of wear plates or surface plates 342 (e.g., the surface plates 242) are adjacent at least two of the coupling members 346, but are not directly coupled to the coupling members 346. Clips 344 are coupled to the surface plates 342. In the illustrated embodiment, each clip 344 has an L-shape and curves around and/or complements one or more sides of the coupling members 346.

In some embodiments, the coupling members 346 are welded to corresponding ones of the cross members 348. Additionally or alternatively, the surface plates 342 can be oriented substantially parallel to the coupling members 346. In some embodiments, the clips 344 are coupled to the surface plates 342 via fasteners and/or protrusions 343 that fit into recesses of the surface plates 342, or via welding. In some embodiments, individual ones of the surface plates 342 are coupled to at least one, two, three, four, five, six, seven, eight, nine, ten, or more clips 344.

Each coupling member 346 can have dimension D1 (e.g., length or width), which can be at least 10 inches, 12 inches, 14 inches, or 10-14 inches. Each surface plate 342 can interface one of the coupling members 346 across dimension D2, which can be at least 4 inches, 6 inches, 8 inches, or 4-8 inches. Adjacent surface plates 342 can be spaced apart from another by dimension D3 (e.g., gap) that is equal to or greater than a predetermined threshold distance, which can be at least 0.1 inch, 0.3 inch, 0.5 inch, or 0.1-0.5 inch. Each clip 344 can be spaced apart from one of the coupling members 346 by horizontal dimension D4 and vertical dimension D5, each of which can be at least 0.1 inch, 0.2 inch, 0.3 inch, or 0.1-0.3 inch. Each surface plate 342 can have thickness D6, which can be at least 0.8 inch, 1 inch, 1.2 inch, or 0.8-1.2 inch. Each coupling member 346 can have thickness D7, which can be at least 0.5 inch, 0.8 inch, 1 inch, or 0.5-1 inch. As described further herein, because the surface plates 342 are not directly coupled to the coupling members 346 and are free to shift or thermally expand, the dimensions D1-D7 represent average dimensions when the components of the industrial car 324 are at room temperature.

During operation of the industrial car 324, high-temperature materials that are loaded therein can move around and exert force on the surface plates 342. The coupling members 346 remain fixed to the corresponding cross members 348, and the clips 344 remain fixed to the corresponding surface plates 342. The surface plates 342 are not directly coupled to, but instead "float" on, the coupling members 346 such that the surface plates 342 are movable independent from the coupling members 346. Therefore, the surface plates 342 are free to move in any direction, as the gaps or clearance (e.g., defined by dimensions D3, D4, and D5) allow for such movement. The clips 344 can be configured to keep the surface plates 342 adjacent the corresponding two successive ones of the coupling members 346. Moreover, as the surface plates 342 thermally expand due to the heat from the high-temperature materials, the surface plates 342 can thermally expand independently of the coupling members 346, and can expand into the gap defined by dimension D3, avoiding excessive compressive force between adjacent surface plates 342. For example, as the temperatures of the

surface plates 342 rise during operation, one or more dimensions of the surface plates 342 can increase by between 0.5-5%, 1-2%, or other percentage range. The coupling members 346 can remain fixed relative to the cross members 348, and the clips 344 can remain fixed relative to the surface plates 342. Furthermore, in some embodiments, the surface plates 342 are removable from the industrial car 324. For example, individual ones of the surface plates 342 can be separated from the clips 344 by, e.g., disengaging the fasteners and/or protrusions 343. Thus, the surface plates 342 can be easily removed for maintenance and/or replacement without the need to remove other components such as the coupling members 346, which are expected to have longer lifespans.

FIGS. 4A and 4B are side views of an industrial car 424 (e.g., the industrial car 224) in accordance with embodiments of the present technology. The industrial car 424 can include an at least partially enclosed hot box 425 (e.g., the hot box 225) having a base (not shown), sidewalls 440, and a roof 460. The sidewalls 440 can include vertical beams 454 extending upward from the base, side plates 450 coupled between individual ones of the vertical beams 454, and stiffeners 452 coupled to exterior surfaces of the side plates 450. Adjacent stiffeners 452 can be spaced apart from one another by no more than 1 inch, 2 inches, 3 inches, 6 inches, 9 inches, 12 inches, 24 inches, 36 inches, etc. In some embodiments, the stiffeners 452 comprise sloped or angled cover plates. The sloped cover plates can extend or be sloped horizontally or in a downward direction (e.g., at an acute angle relative to the direction of gravity). The roof 460 can include angled beams 464 extending from each sidewall 440. In some embodiments, the angled beams 464 are oriented at an acute angle relative to the vertical beams 454. In some embodiments, individual ones of the vertical beams 454 and/or the angled beams 464 comprise hollow structural section (HSS) beams. In some embodiments, individual ones of the HSS beams include at least one open end.

During operation of the industrial car 424, the stiffeners 452 can reduce warping of the side plates 450, which can result from mechanical loads, fatigue, thermal expansion and contraction, etc. The stiffeners 452 can also be configured to reduce material build-up (e.g., rust, dust, the high-temperature materials, corrosive substances from the operating environment) on the side plates 450. The use of HSS beams (e.g., as opposed to I-beams) can similarly provide increased structural strength to the sidewalls 440 and the roof 460, and reduce material build-up and corrosion. In some embodiments, individual ones of the HSS beams include at least one vent hole such that any hot air, pressurized air, moisture, etc. built up within the HSS beams can be released therethrough.

FIG. 5 is an enlarged, schematic cross-sectional view of a roof 560 (e.g., the roof 460) of an industrial car 524 (e.g., the industrial car 224) in accordance with embodiments of the present technology. The industrial car 524 can include an at least partially enclosed hot box 525 (e.g., the hot box 225) having sidewalls 540 (e.g., the sidewalls 440) and the roof 560, and a furnace door opening 566. The roof 560 can include one or more first non-curved members 564a (e.g., the angled beams 464) extending from one of the sidewalls 540, and one or more second non-curved members 564b (e.g., the angled beams 464) extending from the other one of the sidewalls 540 and abutting the one or more first non-curved members 564a. In some embodiments, the first and second non-curved members 564a, 564b join at an obtuse angle to define the peaked shape of the roof 560.

The peaked shape of the roof 560 can have several advantages over other roof designs (e.g., curved, rolled roof designs). For example, the roof 560 can have lower manufacturing costs and can be easier to replace parts for maintenance purposes. The roof 560 is also expected to have decreased stress at connection points and thermally expand in one direction, providing increased predictability of the stress points throughout the life of the industrial car 524. Furthermore, as described further herein, the peaked shape of the roof 560 facilitates dust and emissions removal.

FIG. 6 is a bottom perspective view of an industrial car 624 (e.g., the industrial car 224) in accordance with embodiments of the present technology. The industrial car 624 can include an at least partially enclosed hot box 625 (e.g., the hot box 225) having a base 641 (e.g., the base 241). The base 641 can include main floor beams 672 extending in a first direction and cross floor beams 674 extending in a second direction. The main floor beams 672 and the cross floor beams 674 can be arranged in a grid-like pattern and intersect at joints 675. In some embodiments, the joints 675 are welded joints. The industrial car 624 can also include load plates 670 coupled to individual ones of the joints 675. In the illustrated embodiment, the load plate 670 has an octagonal shape. In other embodiments, the load plate 670 can have other suitable shapes to cover the joints 675. In some embodiments, sloped plates are added to the load plates 670.

During operation of the industrial car 624, the load plates 670 can distribute mechanical load and stress points at the joints 675 to the main floor beams 672 and the cross floor beams 674. If the joints 675 are welded, for example, the weld can be a primary source of mechanical failure, so distributing the load from the welded joints 675 to the main floor beams 672 and the cross floor beams 674 can help prevent weld cracks or other failures. The sloped plates can help prevent material build-up and corrosion on the load plates 670.

FIG. 7A is a top view of a base 741 (e.g., the base 241) of an industrial car in accordance with embodiments of the present technology. FIG. 7B is an enlarged cross-sectional view along section 7B-7B in FIG. 7A, or an enlarged cross-sectional side view of the base 741. The industrial car can include an at least partially enclosed hot box 625 (e.g., the hot box 225) having the base 741 and sidewalls. The base 741 includes main floor beams 772 (e.g., the main floor beams 672), cross floor beams 774 (e.g., the cross floor beams 674), and gussets 778. The industrial car can also include vertical beams 754 (FIG. 7B) (e.g., the vertical beams 454) that form the sidewalls.

The cross floor beams 774 can include tabs or protrusions 776 that extend at least partially into the main floor beams 772 and/or the vertical beams 754. In some embodiments, the main floor beams 772 and/or the vertical beams 754 comprise I-beams and the protrusions 776 can fit into the recess of the I-beam shape. In some embodiments, the main floor beams 772 and/or the vertical beams 754 comprise HSS beams with apertures configured to receive and hold the protrusion 776.

During operation of the industrial car, the weight of the materials loaded thereon can cause separation of the cross floor beams 774 from the main floor beams 772 and/or the vertical beams 754. The protrusions 776 can provide structural support to the industrial car by forming a stronger connection between the cross floor beams 774, the main floor beams 772, and the vertical beams 754. Furthermore,

the protrusions 776 can distribute the load on the cross floor beams 774 to the sides of the industrial car, which can be supported by rollers.

FIG. 7C is a top view of the base 741 of an industrial car with a tie rod system 780 in accordance with embodiments of the present technology. In the illustrated embodiment, the tie rod system 780 includes tie rods 782 coupled between adjacent main floor beams 772. More specifically, one or two tie rods 782 are coupled between adjacent main floor beams 772 and positioned between adjacent cross floor beams 774. The tie rods 782 can comprise metal rods extending through apertures in the main floor beams 772 and secured by fasteners 784 (e.g., the tie rods 782 can be threaded and the fasteners 784 can comprise nuts). During operation of the industrial car, the tie rod system 780 can provide mechanical support by keeping the components of the base 741 together. For example, the tie rods 782 can be configured to be under tension and hold the main floor beams 772 together, reducing risk of industrial car separation.

In some embodiments, the main floor beams 772 are laminated with reinforcement pad plates 786 (e.g., metal plates) such that the force exerted by the fasteners 784 is distributed across the plates 786, and such that damage to the main floor beams 772 is avoided or at least reduced. The thickness of each plate 786 can be at least $\frac{1}{2}$ inch, $\frac{3}{4}$ inch, 1 inch, $1\frac{1}{4}$ inch, $1\frac{1}{2}$ inch, or more. Additionally or alternatively, the tie rod system 780 can include tie rods 782 coupled between adjacent cross floor beams 774.

FIG. 7D is a top view of the base 741 of an industrial car with a welded pivot nose beam 779 in accordance with embodiments of the present technology. In conventional industrial cars, the pivot nose beam may be removably coupled to other components of the industrial car, such as the main floor beams 772 (e.g., via bolts or other fasteners). The coupling can become loose, resulting in the pivot nose beam 779, which supports the pivot nose and thus often forming the location of highest mechanical stress, becoming unsupported. Therefore, it can be advantageous to weld in place or otherwise fixedly secure the pivot nose beam 779 to other components of the base 741, such as the main floor beams 772, the vertical support beams 454 (e.g., HSS beams), etc.

IV. Systems and Methods for Removing or Directing Emissions from Industrial Operations

FIGS. 8A and 8B are right and left perspective views, respectively, of an industrial car 824 (e.g., the industrial car 224) and a dust collector system 802 in accordance with embodiments of the present technology. The industrial car 824 can include an at least partially enclosed hot box 825 (e.g., the hot box 225) having a base 841, sidewalls 840 extending upward from the base 841, and a roof 860. In some embodiments, the roof 860 comprises a first non-curved member and a second non-curved member abutting the first non-curved member. The hot box 825 can include an entry 827 for receiving high-temperature materials (e.g., receiving hot coke from a coke oven) and an exit 829 for releasing the materials (e.g., transferring hot coke to a quench car).

The industrial car 824 can also include one or more emission ducts fluidly coupled to the interior of the hot box 825. For example, the industrial car 824 can include a first emission duct 880 extending from an intermediate portion of the roof 860, a second emission duct 882 extending from a first side portion of the roof 860 peripheral to the intermediate portion (e.g., towards the entry 827), and a third emission duct 884 extending from a second side portion of

the roof 860 peripheral to the intermediate portion (e.g., towards the exit 829). The first, second, and third emission ducts 880, 882, 884 can be fluidly coupled to the dust collector system 802 positioned adjacent the sidewall 840. In some embodiments, the industrial car 824 can also include a fourth emission duct 886 coupled to an underside of the base 841 adjacent the entry 827 and a fifth emission duct 888 coupled to the underside of the base 841 adjacent the exit 829. In some embodiments, the industrial car 824 includes a first slide door 870a coupled to the entry 827 and/or a second slide door 870b coupled to the exit 829 (collectively referred to as "slide doors 870"), or other suitable sealing mechanisms. In some embodiments, the industrial car 824 omits one or both of the slide doors 870, and the corresponding sides of the industrial car 824 can remain open or sealed instead. In some embodiments, the industrial car 824 includes one or more air knives 872 positioned adjacent the entry 827 and/or the exit 829. In some embodiments, one or more of the sidewalls 840 includes one or more slot openings 890 (e.g., at a lower portion of the sidewalls 840) allowing fluid connection between the interior of the hot box 825 and the environment.

FIG. 8C illustrates fluid flow into and out of the industrial car 824. As indicated by vertical arrows pointing upwards, the first, second, and third emission ducts 880, 882, 884 can be configured to draw in dust, exhaust flow, and other environmental and/or operational hazards from the interior of the hot box 825 (e.g., via a pressure differential). And as indicated by dotted arrows, the dust and exhaust flow can be mixed and then directed to the dust collector system 802. Properly removing emissions from the hot box 825 can be important for several reasons. Depending on the nature of the operation for which the industrial car 824 is used, the emissions produced can be environmental hazards if released into the environment freely. Removing the emissions can also help keep the materials less contaminated with pollutants when sent for further processing.

Similarly, the fourth and fifth emission ducts 886, 888 can be configured to direct dust and exhaust flow from underneath the hot box 825 to the dust collector system 802. More specifically, the fourth emission duct 886 can uptake dust and other substances that fall while the materials are being loaded onto the hot box 825 through the entry 827. The fifth emission duct 888 can uptake dust and other substances that fall while the materials are being removed from the hot box 825 through the exit 829.

In some embodiments, the slide doors 870 can be configured to open (via actuators or manually) when materials are being loaded onto (through the entry 827) or out of (through the exit 829), and at least partially fluidly seal the entry 827 and the exit 829 when the industrial car 824 is in operation. The slide doors 870 can help prevent emissions from exiting the hot box 825 through the entry 827 and the exit 829 such that they are directed to the first, second, and third emission ducts 880, 882, 884 instead.

The one or more air knives 872 can operate as a blower air knife configured to blow air out and/or a vacuum air knife configured to suck air, emission, and other fluids. The air knives 872 can blow or suck fluid out or in along a plane adjacent (e.g., parallel to, at) the entry 827 and/or the exit 829. The air knives 872 can advantageously reduce emission or other exhaust flow from inside the industrial car 824 to the environment.

The one or more slot openings 890 can be configured to allow air from the environment, which can be at a much lower temperature than inside the hot box 825, to enter the hot box 825 and cool the exhaust and other emissions prior

11

to entering the dust collector system **802**. Cooling the interior of the hot box **825** can reduce wear on the overall industrial car **824** (e.g., by reducing thermal expansion and contraction of components) and increase the level of overall safety of the system.

FIG. **9** is a right perspective view of an industrial car **924** (e.g., the industrial car **224**) and a dust collector system **902** (e.g., the dust collector system **802**) in accordance with embodiments of the present technology. The industrial car **924** can include an at least partially enclosed hot box **925** (e.g., the hot box **225**) with an emission duct **980** (e.g., the third emission duct **880**) fluidly coupled to the interior of the hot box **925**. The dust collector system **902** can include an entrance piece **904**, a cyclone unit **906**, hoppers **908**, an exhaust duct **910**, a spark arrester **912** (e.g., a quencher), a baghouse **914**, a fan **916**, and a chimney **918**.

The cyclone unit **906** include a side header (e.g., an opening) fluidly coupled to an outlet of the hot box **925** and configured to receive emissions (e.g., hot exhaust gas) from the interior of the hot box **925**. The entrance piece **904** can be coupled to the cyclone unit **906** proximate the side header, and can be designed to engage the industrial car **924** and minimize leakage of the emissions to the environment. The cyclone unit **906** can comprise multiclones, high speed cyclones, and/or other types of dust separator assemblies. The hoppers **908** can be coupled to or be integrated with the cyclone unit **906** (e.g., at a lower portion of the cyclone unit **906**, as shown). The exhaust duct **910** can extend and be fluidly coupled between the cyclone unit **906** and the baghouse **914**. In the illustrated embodiment, the spark arrester **912** is included along the exhaust duct **910** adjacent the cyclone unit **906**. The baghouse **914** can include ceramic filters, bag filters, or other types of filters. The fan **916** can be positioned between the baghouse **914** and the chimney **918**. In some embodiments, the fan **916** comprises an induced draft fan or a vacuum pump. The chimney **918** can extend vertically, as shown.

During operation of the dust collector system **902**, the emission duct **980** (and optionally additional or alternative emission ducts) direct emissions from the interior of the hot box **925** to the cyclone unit **906** via the entrance piece **904**. The cyclone unit **906** can be configured to filter or otherwise separate particulates from the emissions gas and collect the particulates in the hoppers **908**. The exhaust duct **910** can then direct the filtered emissions (e.g., cleaner exhaust gas) towards the baghouse **914**. The spark arrester **912** can be configured to extinguish embers, sparks, and/or ignited particles collected by the exhaust duct **910**, as well as reduce the likelihood for ignition of particles or other matter collected by the exhaust duct **910**. In some embodiments, the spark arrester **236** includes angled vanes and/or fins configured to disturb laminar flow such that particles within the airflow can be accelerated and oxidant concentration can be reduced, thereby extinguishing, and/or reducing the ignition likelihood of, the particles before reaching the baghouse **914**. As noted above, the baghouse **914** can include filters configured to further filter the emissions and separate dust and other particulates. The fan **907** can operate to facilitate the flow of the filtered emissions toward and out through the chimney **918**.

In some embodiments, the dust collector system **902** includes HVAC units and controls to cool down the incoming emissions gas (e.g., from approximately 1000° F. to approximately 250° F.). The lowered temperature can reduce the likelihood of, for example, the baghouse **914** burning and increase the overall safety of the dust collector system **902**.

12

The dust collector system **902** and the industrial car **924** (and/or the industrial car **824**) can efficiently and effectively capture emissions produced by the industrial products in the hot box **925** with minimal leakage to the environment. For example, the dust collector system **902** can remove dust with at least 99%, 99.5%, or 99.9% efficiency. In some embodiments, the cyclone unit **906** is configured to filter the emissions such that the collected particulates are in the form of fine powder, indicating a high degree of dust removal from the emissions.

It will be appreciated that while FIG. **9** illustrates the dust collector system **902** as including the cyclone unit **906** and the baghouse **914**, among other components, the dust collector system **902** can include additional or alternative dust collector components. For example, in some embodiments, the dust collector system **902** includes a sintered filter rated for high temperatures and/or an air cooler, a fin fan, and/or the like, which may be coupled to the baghouse **914** downstream. Furthermore, in some embodiments, the dust collector system **902** further includes a temperature monitoring system, a fire monitoring system, a fire suppression system, and/or the like to, e.g., prevent or reduce damage due to a potential fire at the baghouse **914** (e.g., caused by high temperature sparks reaching the baghouse **914**).

FIG. **10** is a flowchart illustrating a method **1000** of directing emission from an industrial car for use in a coke plant in accordance with embodiments of the present technology. The method **1000** can include removing—via first, second, and third emission ducts (e.g., the first, second, and third emission ducts **880**, **882**, **884**)—dust and exhaust flow (and other emissions) from an at least partially enclosed hot box (e.g., the hot box **825**) of an industrial car (e.g., the industrial car **824**) having a roof (e.g., the roof **860**) (process portion **1010**). As shown in FIGS. **8A-8C**, in some embodiments, the first emission duct extends from a central portion of the roof, the second emission duct extends from a first side portion of the roof, and the third emission duct extends from a second side portion of the roof. In some embodiments, the roof comprises a first non-curved member and a second non-curved member abutting the first non-curved member (e.g., as illustrated in FIGS. **8A-8C**).

The method **1000** can then include directing—via the first, second, and third emission ducts—the dust and exhaust flow to a dust collector system (e.g., the dust collector system **802**) (process portion **1020**). The method **1000** can then include sealing, via a first slide door, an entry side (e.g., the entry **827**) of the hot box during operation of the first, second, and third emission ducts (process portion **1030**). The method can also include sealing, via a second slide door, an exit side (e.g., the exit **829**) of the hot box during operation of the first, second, and third emission ducts (process portion **1040**). As discussed above, the first and second slide doors can help prevent emissions from leaving the hot box into the environment through the entry and exit sides, and help direct the emissions to the first, second, and third emission ducts instead.

In some embodiments, the method **1000** can further include directing—via fourth and fifth emission ducts (e.g., the fourth and fifth emission ducts **886**, **888**)—dust and exhaust flow from underneath the hot box to the dust collector system. In some embodiments, the method **1000** can further include allowing or enabling—via one or more slot openings (e.g., the slot openings **890**) airflow from the environment into the hot box. The airflow, which can be at a much lower temperature than inside the hot box, can cool the exhaust and other emissions prior to entering the dust collector system.

It will be apparent to those having skill in the art that changes may be made to the details of the above-described embodiments without departing from the underlying principles of the present disclosure. In some cases, well known structures and functions have not been shown or described in detail to avoid unnecessarily obscuring the description of the embodiments of the present technology. Although steps of methods may be presented herein in a particular order, alternative embodiments may perform the steps in a different order. Similarly, certain aspects of the present technology disclosed in the context of particular embodiments can be combined or eliminated in other embodiments. Furthermore, while advantages associated with certain embodiments of the present technology may have been disclosed in the context of those embodiments, other embodiments can also exhibit such advantages, and not all embodiments need necessarily exhibit such advantages or other advantages disclosed herein to fall within the scope of the technology. Accordingly, the disclosure and associated technology can encompass other embodiments not expressly shown or described herein, and the invention is not limited except as by the appended claims.

Throughout this disclosure, the singular terms “a,” “an,” and “the” include plural referents unless the context clearly indicates otherwise. Additionally, the term “comprising,” “including,” and “having” should be interpreted to mean including at least the recited feature(s) such that any greater number of the same feature and/or additional types of other features are not precluded.

Reference herein to “one embodiment,” “an embodiment,” “some embodiments” or similar formulations means that a particular feature, structure, operation, or characteristic described in connection with the embodiment can be included in at least one embodiment of the present technology. Thus, the appearances of such phrases or formulations herein are not necessarily all referring to the same embodiment. Furthermore, various particular features, structures, operations, or characteristics may be combined in any suitable manner in one or more embodiments.

Unless otherwise indicated, all numerical parameters set forth in the following specification and attached claims are approximations that may vary depending upon the desired properties sought to be obtained by the present technology. At the very least, and not as an attempt to limit the application of the doctrine of equivalents to the scope of the claims, each numerical parameter should at least be construed in light of the number of reported significant digits and by applying ordinary rounding techniques. Additionally, all ranges disclosed herein are to be understood to encompass any and all subranges subsumed therein. For example, a range of “1 to 10” includes any and all subranges between (and including) the minimum value of 1 and the maximum value of 10, i.e., any and all subranges having a minimum value of equal to or greater than 1 and a maximum value of equal to or less than 10, e.g., 5.5 to 10.

The disclosure set forth above is not to be interpreted as reflecting an intention that any claim requires more features than those expressly recited in that claim. Rather, as the following claims reflect, inventive aspects lie in a combination of fewer than all features of any single foregoing disclosed embodiment. Thus, the claims following this Detailed Description are hereby expressly incorporated into this Detailed Description, with each claim standing on its

own as a separate embodiment. This disclosure includes all permutations of the independent claims with their dependent claims.

The present technology is illustrated, for example, according to various aspects described below as numbered clauses (1, 2, 3, etc.) for convenience. These are provided as examples and do not limit the present technology. It is noted that any of the dependent clauses may be combined in any combination, and placed into a respective independent clause. The other clauses can be presented in a similar manner.

1. An industrial car configured to hold materials having temperatures in excess of 2000° F., the industrial car comprising:

an at least partially enclosed hot box having a base, and a pair of opposing sidewalls each extending upward from the base;
cross members coupled to at least one of the base or the sidewalls;
coupling members each coupled to at least one of the cross members;
surface plates disposed adjacent to the coupling members, wherein adjacent surface plates are spaced apart from another by at least a predetermined threshold distance, and wherein, in operation, the surface plates are movable independent from the coupling members; and
clips coupled to the surface plates, wherein the clips are configured to keep the surface plates adjacent to the coupling members.

2. The industrial car of any one of the clauses herein, wherein, when the industrial car is heated, the coupling members remain fixed relative to the cross members.

3. The industrial car of any one of the clauses herein, wherein, when the industrial car is heated, the clips remain fixed relative to the surface plates.

4. The industrial car of any one of the clauses herein, wherein, when the industrial car is heated, the adjacent surface plates thermally expand without overlapping and independently of the coupling members.

5. The industrial car of any one of the clauses herein, wherein the surface plates are not directly coupled to the coupling members.

6. The industrial car of any one of the clauses herein, wherein the materials comprise hot coke, and wherein the industrial car comprises a flat push hot car configured to receive and hold the hot coke.

7. The industrial car of any one of the clauses herein, wherein the industrial car comprises a flat push hot car configured to receive and hold industrial products.

8. The industrial car of any one of the clauses herein, wherein the adjacent surface plates are spaced apart from one another along a first dimension, wherein the clips and the coupling members are spaced apart from one another along a second dimension that is normal to or different from the first dimension.

9. The industrial car of any one of the clauses herein, wherein the surface plates are oriented substantially parallel to the coupling members.

10. The industrial car of any one of the clauses herein, wherein, when the industrial car is heated, a dimension of individual ones of the surface plates is configured to increase by 1-2%.

11. The industrial car of any one of the clauses herein, wherein the predetermined threshold distance and/or an average clearance between individual ones of the coupling members and individual ones of the clips ranges between 0.1 inch and 0.3 inch.

15

12. The industrial car of any one of the clauses herein, wherein an average clearance between adjacent surface plates ranges between 0.3 inch and 0.5 inch.

13. The industrial car of any one of the clauses herein, wherein individual ones of the coupling members are welded to corresponding ones of the cross members.

14. The industrial car of any one of the clauses herein, wherein individual ones of the coupling members have a thickness that ranges between 0.5 inch and 1 inch.

15. The industrial car of any one of the clauses herein, wherein individual ones of the surface plates have a thickness that ranges between 0.8 inch and 1.2 inch.

16. The industrial car of any one of the clauses herein, wherein individual ones of the surface plates are each coupled to four of the clips.

17. The industrial car of any one of the clauses herein wherein:

each of the cross members has a generally rectangular cross-section and extends substantially normal to the base or the sidewalls,

each of the coupling members includes a plate coupled to, centered with, and oriented substantially perpendicular to a corresponding one of the cross members,

each of the surface plates is disposed over at least two adjacent ones of the coupling members,

at least two of the clips are coupled to a same one of the surface plates and positioned between two adjacent ones of the coupling members, and

each of the clips includes a protrusion configured to be positioned in a corresponding recess of one of the surface plates.

18. An industrial car for use in a coke plant, the industrial car comprising:

an at least partially enclosed hot box having a base and a pair of opposing sidewalls extending upward from the base, wherein each sidewall comprises:

vertical beams extending upward from the base;

side plates, wherein individual ones of the side plates are coupled between successive ones of the vertical beams; and

stiffeners that are elongate and coupled to exterior surfaces of the side plates, wherein the stiffeners extend laterally over the exterior surfaces and comprise downward-sloped cover plates configured to reduce material build-up on the sidewall.

19. The industrial car of any one of the clauses herein, wherein individual ones of the vertical beams comprise hollow structural section (HSS) beams.

20. The industrial car of any one of the clauses herein wherein individual ones of the vertical beams comprise hollow structural section (HSS) beams including at least one open end.

21. The industrial car of any one of the clauses herein, wherein the hot box further includes a roof comprising:

angled beams extending from each sidewall, wherein the angled beams are at oriented at an acute angle relative to the vertical beams.

22. The industrial car of any one of the clauses herein, wherein the hot box further includes a roof comprising:

angled beams extending from each sidewall, wherein the angled beams extending from a first one of the sidewalls and the angled beams extending from a second one of the sidewalls join at an obtuse angle.

16

23. The industrial car of any one of the clauses herein, wherein the base of the hot box comprises:

main floor beams extending in a first direction;

cross floor beams extending in a second direction, wherein the main floor beams and the cross floor beams intersect at joints; and

load plates coupled to individual ones of the joints.

24. The industrial car of any one of the clauses herein, wherein the base of the hot box comprises:

main floor beams extending in a first direction;

cross floor beams extending in a second direction, wherein the main floor beams and the cross floor beams intersect at welded joints; and

load plates coupled to individual ones of the welded joints, wherein the load plates are configured to distribute mechanical stress at the welded joints to the main floor beams and the cross floor beams.

25. The industrial car of any one of the clauses herein, wherein the base of the hot box comprises:

main floor beams extending in a first direction;

cross floor beams extending in a second direction, wherein the main floor beams and the cross floor beams intersect at joints;

load plates coupled to individual ones of the joints; and sloped plates coupled to the load plates, wherein the sloped plates are configured to reduce material build-up on the load plates.

26. The industrial car of any one of the clauses herein, wherein the base of the hot box comprises cross floor beams extending between the sidewalls, wherein individual ones of the cross floor beams include protrusions configured to extend into recesses of the vertical beams.

27. The industrial car of any one of the clauses herein wherein:

individual ones of the vertical beams comprise hollow structural section (HSS) beams including at least one open end,

the stiffeners include cover plates angled downward relative to the side plates and spaced apart from one another by no more than 12 inches, and

the base includes:

a plurality of main floor beams extending in a first direction,

a plurality of cross floor beams extending in a second direction, wherein the main floor beams and the cross floor beams intersect at a plurality of welded joints, and

a plurality of octagonal load plates coupled to corresponding ones of the welded joints, wherein the octagonal load plates are configured to distribute mechanical stress at the welded joints to the main floor beams and the cross floor beams.

28. An industrial car for use in a coke plant, the industrial car comprising:

an at least partially enclosed hot box having a base, a pair of opposing sidewalls extending upward from the base, and a roof, wherein the roof comprises a first non-curved member and a second non-curved member abutting the first non-curved member;

a first emission duct extending from an intermediate portion of the roof;

a second emission duct extending from a first side portion of the roof peripheral to the intermediate portion; and

a third emission duct extending from a second side portion of the roof peripheral to the intermediate portion,

17

wherein the first, second, and third emission ducts are configured to direct dust and exhaust flow from the hot box to a dust collector system.

29. The industrial car of any one of the clauses herein, further comprising:

a fourth emission duct coupled to an underside of the base adjacent an entry side of the hot box; and
a fifth emission duct coupled to the underside of the base adjacent an exit side of the hot box,

wherein the fourth and fifth emission ducts are configured to direct dust and exhaust flow from underneath the hot box to the dust collector system.

30. The industrial car of any one of the clauses herein, further comprising:

a first slide door coupled to an entry side of the hot box; and

a second slide door coupled to an exit side of the hot box, wherein the first and second slide doors are configured to seal the entry and exit sides, respectively, during operation of the industrial car to prevent dust and exhaust flow from exiting the hot box through the entry or exit side.

31. The industrial car of any one of the clauses herein, wherein a lower portion of each of the sidewalls includes slot openings configured to allow airflow into the hot box.

32. The industrial car of any one of the clauses herein, wherein:

the first emission duct extends through the first non-curved member of the roof,

the second emission duct extends through each of the first non-curved member and the second non-curved member of the roof, and extends from a first end portion of the hot box,

the third emission duct extends through each of the first non-curved member and the second non-curved member of the roof, and extends from a portion of the roof between a second end portion opposite the first end and the first emission duct,

each of the second emission duct and the third emission duct is configured to direct dust and exhaust flow toward the first emission duct, and

the first emission duct is configured to direct dust and exhaust flow from the first, second, and third emission ducts to the dust collector system.

33. A method of directing emission from an industrial car for use in a coke plant, the method comprising:

removing, via first, second, and third emission ducts, dust and exhaust flow from an at least partially enclosed hot box of the industrial car having a roof, wherein the first emission duct extends from an intermediate portion of the roof, wherein the second emission duct extends from a first side portion of the roof peripheral to the intermediate portion, wherein the third emission duct extends from a second side portion of the roof peripheral to the intermediate portion, wherein the roof comprises a first non-curved member and a second non-curved member abutting the first non-curved member; and

directing, via the first, second, and third emission ducts, the dust and exhaust flow to a dust collector system.

34. The method of any one of the clauses herein, wherein the dust and exhaust flow from the first, second, and third emission ducts are mixed prior to being directed to the dust collector system.

18

35. The method of any one of the clauses herein, further comprising:

removing, via fourth and fifth emission ducts, dust and exhaust flow from underneath the hot box, wherein the fourth emission duct is coupled to an underside of a base of the hot box adjacent an entry side of the hot box, wherein the fifth emission duct is coupled to the underside of the base adjacent an exit side of the hot box; and

directing, via the fourth and fifth emission ducts, the dust and exhaust flow to the dust collector system.

36. The method of any one of the clauses herein, further comprising:

sealing, via a first slide door, an entry side of the hot box during operation of the first, second, and third emission ducts; and

sealing, via a second slide door, an exit side of the hot box during operation of the first, second, and third emission ducts.

37. The method of any one of the clauses herein, further comprising:

allowing, via slot openings included in lower portions of sidewalls of the hot box, airflow into the hot box, wherein the airflow is configured to cool the dust and exhaust flow removed by the first, second, and third emission ducts.

We claim:

1. An industrial car configured to hold materials having temperatures in excess of 2000° F., the industrial car comprising:

an at least partially enclosed hot box having a base, and a pair of opposing sidewalls each extending upward from the base;

cross members coupled to at least one of the base or the sidewalls;

coupling members each coupled to at least one of the cross members;

surface plates disposed adjacent to the coupling members, wherein the surface plates are configured to support materials having temperatures in excess of 2000° F. wherein adjacent surface plates are spaced apart from another by at least a predetermined threshold distance, and wherein, in operation, the surface plates are movable independent from the coupling members; and

clips coupled to the surface plates, wherein the clips are configured to keep the surface plates adjacent to the corresponding coupling members,

wherein the industrial car is configured to hold and transport the materials.

2. The industrial car of claim 1 wherein, when the industrial car is heated, the coupling members remain fixed relative to the cross members.

3. The industrial car of claim 1 wherein, when the industrial car is heated, the adjacent surface plates thermally expand without overlapping and independently of the coupling members.

4. The industrial car of claim 1 wherein the surface plates are not directly coupled to the coupling members.

5. The industrial car of claim 1 wherein the industrial car comprises a flat push hot car configured to receive and hold industrial products.

6. The industrial car of claim 1 wherein the adjacent surface plates are spaced apart from one another along a first dimension, wherein the clips and the coupling members are spaced apart from one another along a second dimension that is normal to or different from the first dimension.

7. The industrial car of claim 1 wherein the surface plates are oriented substantially parallel to the coupling members.

8. The industrial car of claim 1 wherein, when the industrial car is heated, a dimension of individual ones of the surface plates is configured to increase by 1-2%. 5

9. The industrial car of claim 1 wherein:

each of the cross members has a generally rectangular cross-section and extends substantially normal to the base or the sidewalls,

each of the coupling members includes a plate coupled to, 10
centered with, and oriented substantially perpendicular to a corresponding one of the cross members, each of the surface plates is disposed over at least two adjacent ones of the coupling members,

at least two of the clips are coupled to a same one of the 15
surface plates and positioned between two adjacent ones of the coupling members, and

each of the clips includes a protrusion configured to be positioned in a corresponding recess of one of the surface plates. 20

* * * * *