



US 20250268409A1

(19) **United States**

(12) **Patent Application Publication**
YING

(10) **Pub. No.: US 2025/0268409 A1**

(43) **Pub. Date: Aug. 28, 2025**

(54) **MULTIFUNCTIONAL FOOT PAD**

(71) Applicant: **SMART INTERNATIONAL TRADE**
CO.,LTD, ELK GROVE, CA (US)

(72) Inventor: **HONGJIE YING**, Taizhou (CN)

(73) Assignee: **SMART INTERNATIONAL TRADE**
CO.,LTD, ELK GROVE, CA (US)

(21) Appl. No.: **18/588,218**

(22) Filed: **Feb. 27, 2024**

Publication Classification


(51) **Int. Cl.**
A47G 27/02 (2006.01)

(52) **U.S. Cl.**

CPC **A47G 27/02** (2013.01)

(57) **ABSTRACT**

Provided is a multifunctional foot pad, which relates to the technical field of daily articles. The foot pad includes a foot pad body, where the foot pad body is a rectangular thin pad having a round corner, a circle of rectangular convex groove is provided on a top surface of the thin pad, a side edge of the groove is upward tapered, a lower surface of a groove bottom of the groove is groove-shaped, an opening of the lower surface is provided on a bottom surface of the foot pad, and the groove on the top surface of the thin pad can match and be combined with various foot pads or ornaments. Two foot pads can be combined into a whole to form a foot pad having two convex grooves.

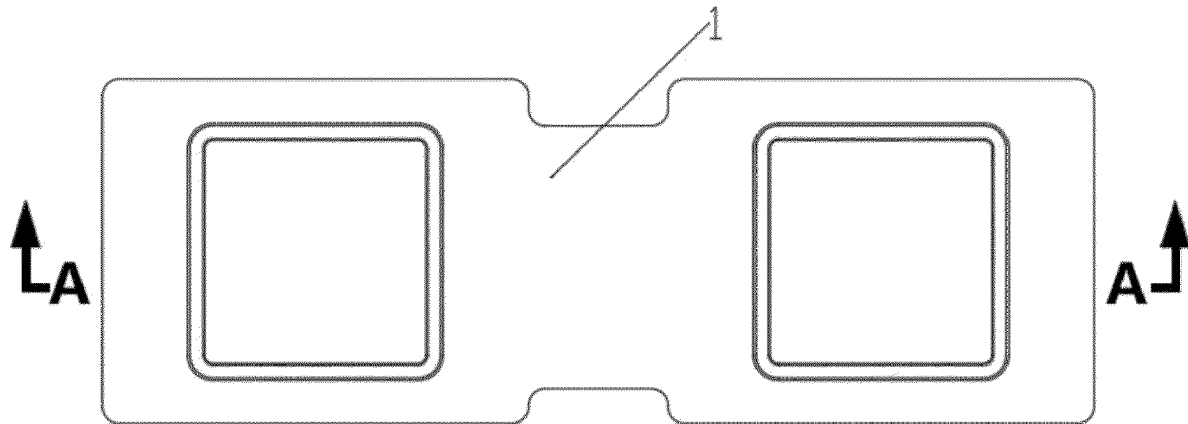

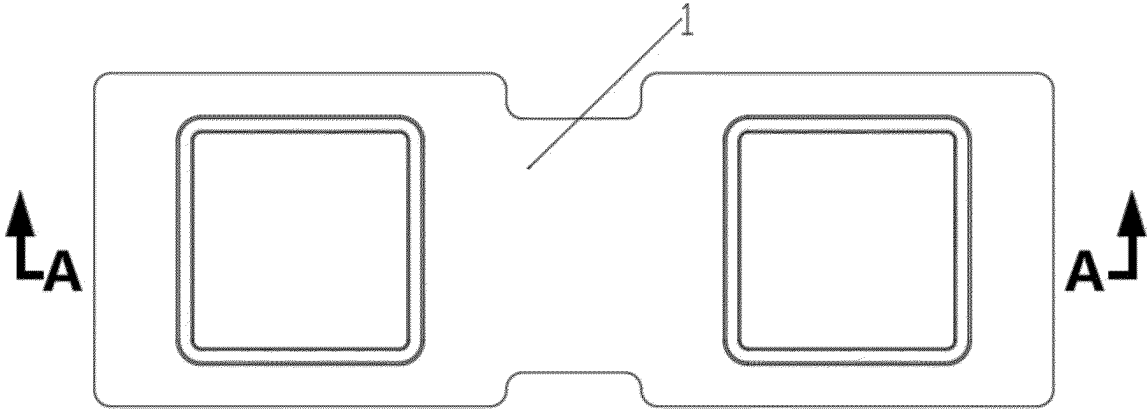


FIG. 1

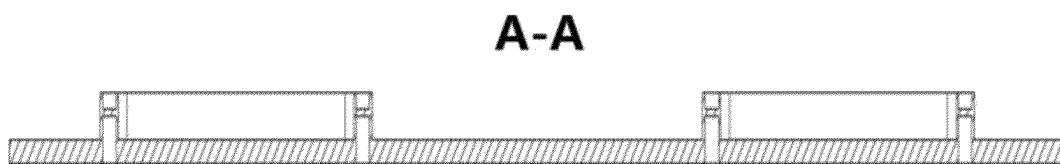


FIG. 2

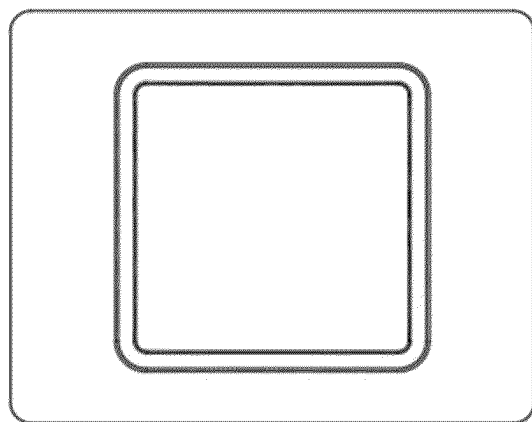


FIG. 3

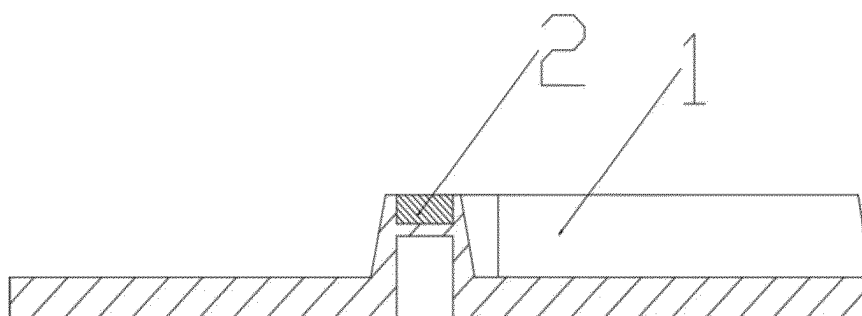


FIG. 4

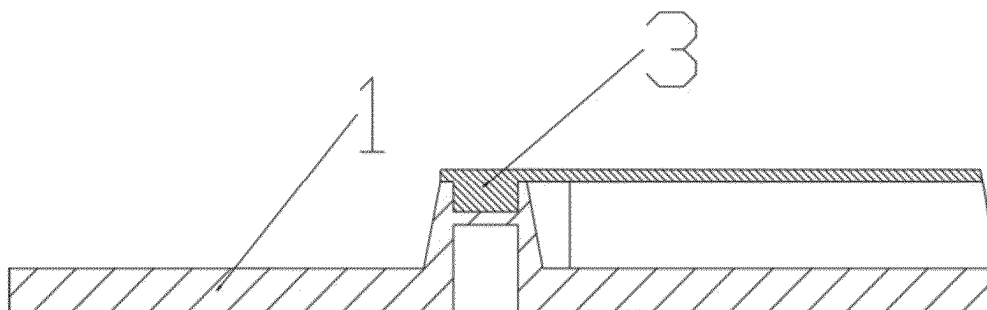


FIG. 5

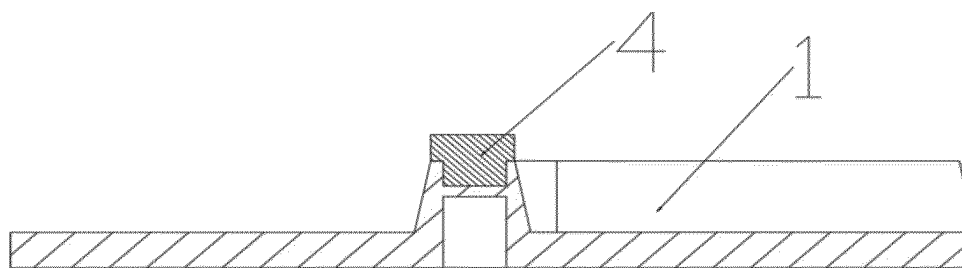


FIG. 6

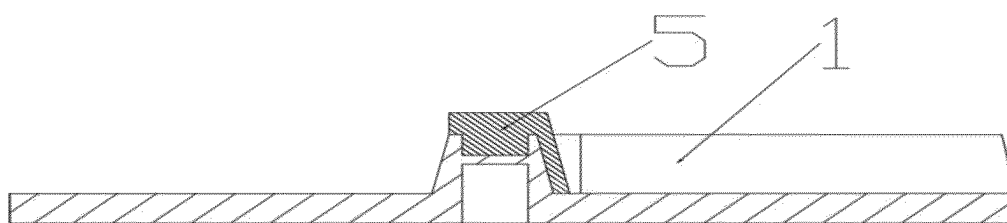


FIG. 7

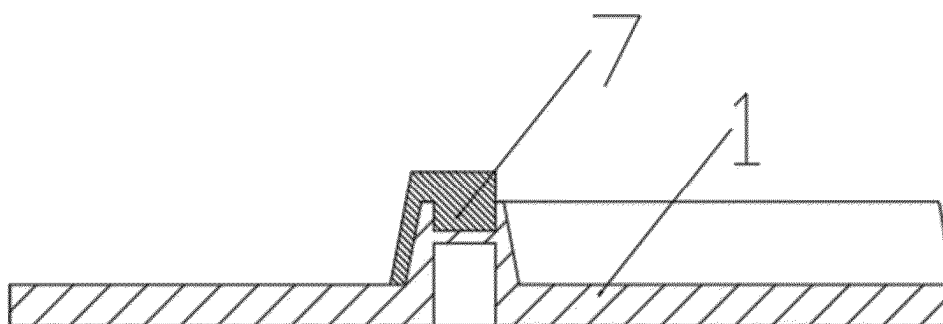


FIG. 8

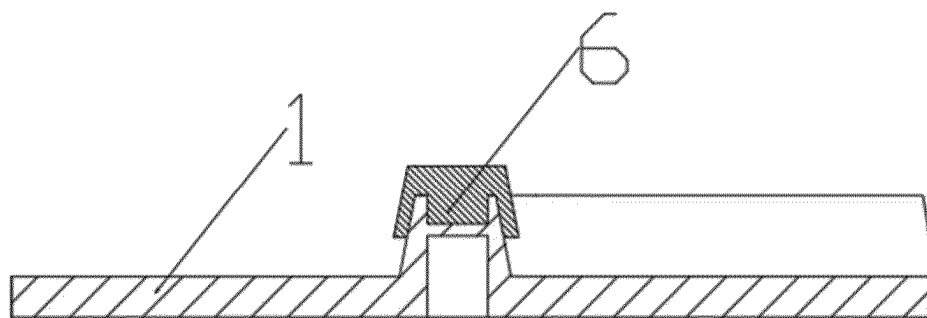


FIG. 9

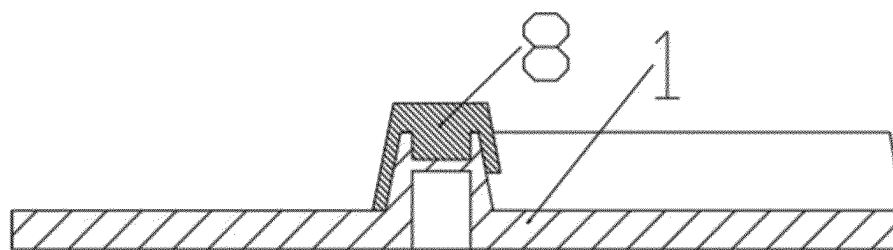


FIG. 10

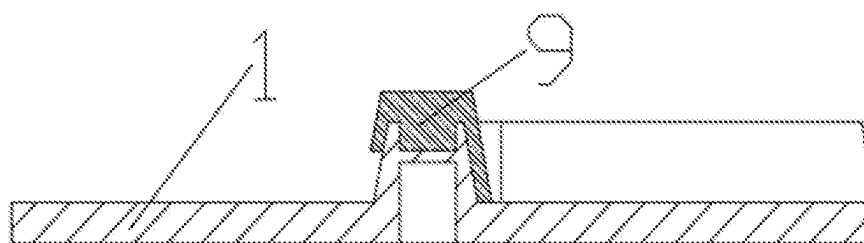


FIG. 11

MULTIFUNCTIONAL FOOT PAD

TECHNICAL FIELD

[0001] The present disclosure relates to the technical field of daily articles, and particularly relates to a multifunctional foot pad.

BACKGROUND

[0002] Most single foot pads on the market cannot achieve two-in-one combination, so do-it-yourself (DIY) cannot be performed or styles of the foot pads cannot be changed according to ideas of guests. We develop a multifunctional foot pad that can be assembled to other foot pads or ornaments, so as to solve the above problems.

SUMMARY

[0003] A main objective of the present disclosure is to provide a multifunctional foot pad, so as to effectively solve the problems in the background art.

[0004] In order to realize the above objective, the present disclosure employs the technical solution as follows: a multifunctional foot pad includes a foot pad body. The foot pad body is a rectangular thin pad having a round corner. A circle of rectangular convex groove is provided on a top surface of the thin pad. A side edge of the groove is upward tapered. A lower surface of a groove bottom of the groove is groove-shaped. An opening of the lower surface is provided on a bottom surface of the foot pad. The groove on the top surface of the thin pad can match and be combined with various foot pads or ornaments.

[0005] Preferably, two foot pads can be combined into a whole to form a foot pad having two convex grooves.

[0006] Preferably, a matching and connection manner of a foot pad or an ornament matching the groove on the top surface of the foot pad is that a circle of boss fitting the groove in size is arranged on the foot pad or the ornament, and the boss is inserted into the groove on the top surface of the foot pad.

[0007] Preferably, the foot pad or the ornament matching the groove on the top surface of the foot pad is a flat pad. A circle of boss fitting the groove in size is arranged on a lower side of the flat pad. The boss is inserted into the groove on the top surface of the foot pad.

[0008] Preferably, a T-shaped boss is arranged on a bottom surface of the foot pad or the ornament matching the groove on the top surface of the foot pad. A vertical protrusion of the T-shaped boss is inserted into the groove on the top surface of the foot pad.

[0009] Preferably, a circle of convex thin edge which is downward tapered is arranged on a bottom surface of the foot pad or the ornament matching the groove on the top surface of the foot pad. The convex thin edge is closely attached to a tapered inner side surface of the groove on the top surface of the foot pad. A circle of boss is arranged on an outer side of the convex thin edge which is downward tapered. The boss is inserted into the groove on the top surface of the foot pad.

[0010] Preferably, a circle of convex thin edge which is downward tapered is arranged on a bottom surface of a foot pad or an ornament matching the groove on the top surface of the foot pad. The convex thin edge is closely attached to a tapered outer side surface of the groove on the top surface of the foot pad. A circle of boss is arranged on an inner side

of the convex thin edge which is downward tapered. The boss is inserted into the groove on the top surface of the foot pad.

[0011] Preferably, a circle of inverted epsilon-shaped boss is arranged on a bottom surface of a foot pad or an ornament matching the groove on the top surface of the foot pad. A boss in a middle is inserted into the groove on the top surface of the foot pad. Two bosses on side edges are closely attached to two tapered edges of the groove of the foot pad.

[0012] Preferably, a circle of inverted epsilon-shaped boss is arranged on a bottom surface of a foot pad or an ornament matching the groove on the top surface of the foot pad. A boss in a middle is inserted into the groove on the top surface of the foot pad. A longer boss on an outer side extends to the bottom surface of the foot pad and is closely attached to an outer side edge of the groove of the foot pad. Another boss on an inner side is shorter and closely attached to an inner side edge of the groove of the foot pad.

[0013] Preferably, a circle of inverted epsilon-shaped boss is arranged on a bottom surface of a foot pad or an ornament matching the groove on the top surface of the foot pad. A boss in a middle is inserted into the groove on the top surface of the foot pad. A longer boss on an inner side extends to the bottom surface of the foot pad and is closely attached to an inner side edge of the groove of the foot pad. Another boss on an outer side is shorter and closely attached to an outer side edge of the groove of the foot pad.

[0014] Beneficial effects of the present disclosure are as follows: do-it-yourself (DIY) can be carried out or a style of the foot pad can be changed according to ideas of guests, and a novel foot pad combination structural design is provided.

BRIEF DESCRIPTION OF DRAWINGS

[0015] FIG. 1 is a schematic structural diagram of two-pad integration according to the present disclosure.

[0016] FIG. 2 is a sectional view along A-A of FIG. 1.

[0017] FIG. 3 is a schematic structural diagram of a single pad according to the present disclosure.

[0018] FIG. 4 is a schematic structural diagram of Example 1 according to the present disclosure.

[0019] FIG. 5 is a schematic structural diagram of Example 2 according to the present disclosure.

[0020] FIG. 6 is a schematic structural diagram of Example 3 according to the present disclosure.

[0021] FIG. 7 is a schematic structural diagram of Example 4 according to the present disclosure.

[0022] FIG. 8 is a schematic structural diagram of Example 5 according to the present disclosure.

[0023] FIG. 9 is a schematic structural diagram of Example 6 according to the present disclosure.

[0024] FIG. 10 is a schematic structural diagram of Example 7 according to the present disclosure.

[0025] FIG. 11 is a schematic structural diagram of Example 8 according to the present disclosure.

[0026] In FIGS. 1-11, foot pad 1, combination A2, combination B3, combination C4, combination D5, combination E6, combination F7, combination G8 and combination H9.

DETAILED DESCRIPTION OF THE EMBODIMENTS

[0027] Technical solutions in examples of the present disclosure will be clearly and completely described below in combination with the examples of the present disclosure.

Apparently, the described examples are merely some examples rather than all examples of the present disclosure. On the basis of the examples of the present disclosure, all other examples obtained by those of ordinary skill in the art without making creative efforts all fall within the scope of protection of the present disclosure.

[0028] As shown in FIGS. 1-11, a multifunctional foot pad includes a foot pad body 1. The foot pad body is a rectangular thin pad having a round corner. A circle of rectangular convex groove is provided on a top surface of the thin pad. A side edge of the groove is upward tapered. A lower surface of a groove bottom of the groove is groove-shaped. An opening of the lower surface is provided on a bottom surface of the foot pad. The groove on the top surface of the thin pad can match and be combined with various foot pads or ornaments. Two foot pads can be combined into a whole (see FIG. 1) to form a foot pad having two convex grooves. Alternatively, the pad (see FIG. 3) can be singly used.

Example 1

[0029] With reference to FIG. 4, a matching and connection manner of a foot pad or an ornament matching the groove on the top surface of the foot pad 1 is that a circle of boss fitting the groove in size is arranged on combination A2, and the boss is inserted into the groove on the top surface of the foot pad.

Example 2

[0030] With reference to FIG. 5, combination B3 matching the groove on the top surface of the foot pad 1 is a flat pad. A circle of boss fitting the groove in size is arranged on a lower side of the flat pad. The boss is inserted into the groove on the top surface of the foot pad.

Example 3

[0031] With reference to FIG. 6, a T-shaped boss is arranged on a bottom surface of combination C4 matching the groove on the top surface of the foot pad 1. A vertical protrusion of the T-shaped boss is inserted into the groove on the top surface of the foot pad.

Example 4

[0032] With reference to FIG. 7, a circle of convex thin edge which is downward tapered is arranged on a bottom surface of combination D5 matching the groove on the top surface of the foot pad 1. The convex thin edge is closely attached to a tapered inner side surface of the groove on the top surface of the foot pad. A circle of boss is arranged on an outer side of the convex thin edge which is downward tapered. The boss is inserted into the groove on the top surface of the foot pad.

Example 5

[0033] With reference to FIG. 8, a circle of convex thin edge which is downward tapered is arranged on a bottom surface of combination E6 matching the groove on the top surface of the foot pad 1. The convex thin edge is closely attached to a tapered outer side surface of the groove on the top surface of the foot pad. A circle of boss is arranged on an inner side of the convex thin edge which is downward tapered. The boss is inserted into the groove on the top surface of the foot pad.

Example 6

[0034] With reference to FIG. 9, a circle of inverted epsilon-shaped boss is arranged on a bottom surface of combination F7 matching the groove on the top surface of the foot pad 1. A boss in a middle is inserted into the groove on the top surface of the foot pad. Two bosses on side edges are closely attached to two tapered edges of the groove of the foot pad.

Example 7

[0035] With reference to FIG. 10, a circle of inverted epsilon-shaped boss is arranged on a bottom surface of combination G8 matching the groove on the top surface of the foot pad 1. A boss in a middle is inserted into the groove on the top surface of the foot pad. A longer boss on an outer side extends to the bottom surface of the foot pad and is closely attached to an outer side edge of the groove of the foot pad. Another boss on an inner side is shorter and closely attached to an inner side edge of the groove of the foot pad.

Example 8

[0036] With reference to FIG. 11, a circle of inverted epsilon-shaped boss is arranged on a bottom surface of combination H9 matching the groove on the top surface of the foot pad 1. A boss in a middle is inserted into the groove on the top surface of the foot pad. A longer boss on an inner side extends to the bottom surface of the foot pad and is closely attached to an inner side edge of the groove of the foot pad. Another boss on an outer side is shorter and closely attached to an outer side edge of the groove of the foot pad.

[0037] Although the present disclosure has been described in detail with reference to the foregoing examples, those skilled in the art can still modify technical solutions described in the foregoing examples, or make equivalent substitutions for their some technical features. Any modification, equivalent substitution, improvement, etc. made within the spirit and principle of the present disclosure shall fall within the scope of protection of the present disclosure.

What is claimed is:

1. A multifunctional foot pad, comprising a foot pad body, wherein the foot pad body is a rectangular thin pad having a round corner, a circle of rectangular convex groove is provided on a top surface of the thin pad, a side edge of the groove is upward tapered, a lower surface of a groove bottom of the groove is groove-shaped, an opening of the lower surface is provided on a bottom surface of the foot pad, and the groove on the top surface of the thin pad can match and be combined with various foot pads or ornaments.

2. A multifunctional foot pad according to claim 1, wherein two foot pads are combined into a whole to form a foot pad having two convex grooves.

3. The multifunctional foot pad according to claim 1, wherein a matching and connection manner of a foot pad or an ornament matching the groove on the top surface of the foot pad is that a circle of boss fitting the groove in size is arranged on the foot pad or the ornament, and the boss is inserted into the groove on the top surface of the foot pad.

4. The multifunctional foot pad according to claim 1, wherein the foot pad or the ornament matching the groove on the top surface of the foot pad is a flat pad, a circle of boss fitting the groove in size is arranged on a lower side of the flat pad, and the boss is inserted into the groove on the top surface of the foot pad.

5. The multifunctional foot pad according to claim 1, wherein a T-shaped boss is arranged on a bottom surface of the foot pad or the ornament matching the groove on the top surface of the foot pad, and a vertical protrusion of the T-shaped boss is inserted into the groove on the top surface of the foot pad.

6. A multifunctional foot pad according to claim 1, wherein a circle of convex thin edge which is downward tapered is arranged on a bottom surface of the foot pad or the ornament matching the groove on the top surface of the foot pad, the convex thin edge is closely attached to a tapered inner side surface of the groove on the top surface of the foot pad, a circle of boss is arranged on an outer side of the convex thin edge which is downward tapered, and the boss is inserted into the groove on the top surface of the foot pad.

7. The multifunctional foot pad according to claim 1, wherein a circle of convex thin edge which is downward tapered is arranged on a bottom surface of a foot pad or an ornament matching the groove on the top surface of the foot pad, the convex thin edge is closely attached to a tapered outer side surface of the groove on the top surface of the foot pad, a circle of boss is arranged on an inner side of the convex thin edge which is downward tapered, and the boss is inserted into the groove on the top surface of the foot pad.

8. A multifunctional foot pad according to claim 1, wherein a circle of inverted epsilon-shaped boss is arranged

on a bottom surface of a foot pad or an ornament matching the groove on the top surface of the foot pad, a boss in a middle is inserted into the groove on the top surface of the foot pad, and two bosses on side edges are closely attached to two tapered edges of the groove of the foot pad.

9. A multifunctional foot pad according to claim 1, wherein a circle of inverted epsilon-shaped boss is arranged on a bottom surface of a foot pad or an ornament matching the groove on the top surface of the foot pad, a boss in a middle is inserted into the groove on the top surface of the foot pad, a longer boss on an outer side extends to the bottom surface of the foot pad and is closely attached to an outer side edge of the groove of the foot pad, and another boss on an inner side is shorter and closely attached to an inner side edge of the groove of the foot pad.

10. A multifunctional foot pad according to claim 1, wherein a circle of inverted epsilon-shaped boss is arranged on a bottom surface of a foot pad or an ornament matching the groove on the top surface of the foot pad, a boss in a middle is inserted into the groove on the top surface of the foot pad, a longer boss on an inner side extends to the bottom surface of the foot pad and is closely attached to an inner side edge of the groove of the foot pad, and another boss on an outer side is shorter and closely attached to an outer side edge of the groove of the foot pad.

* * * * *