



US0D1090770S

(12) **United States Design Patent**
Skelton et al.

(10) **Patent No.:** **US D1,090,770 S**

(45) **Date of Patent:** **** Aug. 26, 2025**

(54) **FAST MOUNTING DEVICE FOR MULTIPLE
SLOT INTERFACE**

(71) Applicant: **Sarissa Innovations LLC**, Wilmington,
DE (US)

(72) Inventors: **Tyler Skelton**, Missouri City, TX (US);
Joseph Gaddini, Wilmington, NC (US)

(73) Assignee: **SARISSA INNOVATIONS LLC**,
Wilmington, DE (US)

(**) Term: **15 Years**

(21) Appl. No.: **29/894,020**

(22) Filed: **Jun. 5, 2023**

Related U.S. Application Data

(63) Continuation of application No. 18/098,454, filed on
Jan. 18, 2023, now Pat. No. 11,976,899.

(51) **LOC (15) Cl.** **22-01**

(52) **U.S. Cl.**
USPC **D22/109**

(58) **Field of Classification Search**
None

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,303,479 A * 4/1994 Rudovsky F41G 1/467
124/87
D733,249 S * 6/2015 Cheng D22/108
(Continued)

OTHER PUBLICATIONS

Kinetic Development Group, Kinect—3 Slot Picatinny, retrieved on
Jan. 17, 2023, <https://kineticdgd.com/product/kinectmlok-3-slot-single-mlok-picatinny-section/>, 4 pages.

Primary Examiner — Michael A. Pratt

(74) *Attorney, Agent, or Firm* — Brian S. Steinberger;
Hilary F. Steinberger; Steinberger IP Law

(57) **CLAIM**

The ornamental design for fast mounting device for multiple
slot interface, as shown and described.

DESCRIPTION

FIG. 1 is a lower rear perspective view of the assembled
mounting device.

FIG. 2 is an upper front perspective view of the mounting
device of FIG. 1.

FIG. 3 is side view of the mounting device of FIG. 1.

FIG. 4 is top view of the mounting device of FIG. 1.

FIG. 5 is a bottom view of the mounting device of FIG. 1.

FIG. 6 is a rear end view of the mounting device of FIG. 1.

FIG. 7 is a front end view of the mounting device of FIG. 1.

FIG. 8 is a lower exploded perspective view of the mounting
device of FIG. 1.

FIG. 9 is an upper exploded perspective view of the mount-
ing device of FIG. 1.

FIG. 10 is another an upper exploded perspective view of the
mounting device of FIG. 9

FIG. 11 is a lower front right side perspective view of the
double wedge member of the preceding figures.

FIG. 12 is another lower front right side perspective view of
the double wedge member of the preceding figures

FIG. 13 is an upper left side perspective view of the double
wedge member of the preceding figures.

FIG. 14 is a rear side perspective view of the double wedge
member of the preceding figures.

FIG. 15 is a right side view of the double wedge member of
FIG. 11.

FIG. 16 is a left side view of the double wedge member of
FIG. 11.

FIG. 17 is a top view of the double wedge member of FIG.
11.

FIG. 18 is a bottom view of the double wedge member of
FIG. 11.

FIG. 19 is a front view of the double wedge member of FIG.
11.

(Continued)

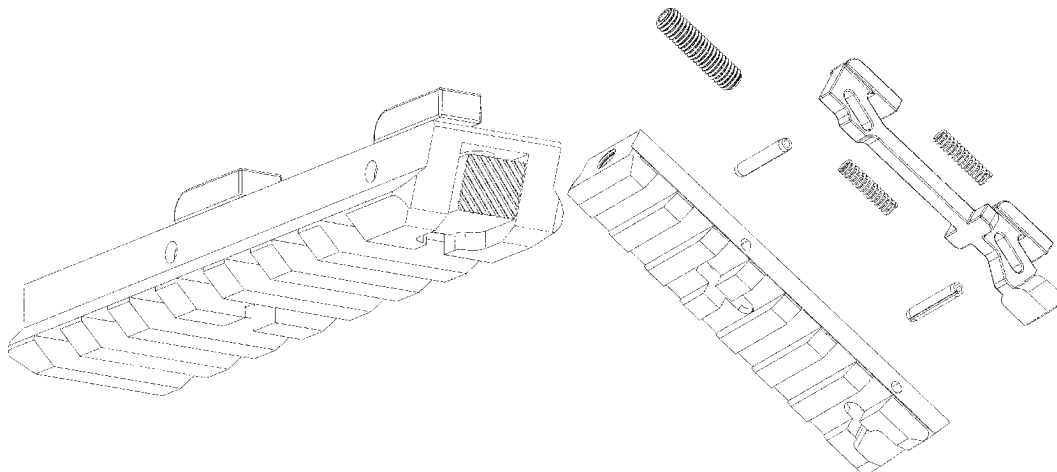


FIG. 20 is a rear view of the double wedge member of FIG. 11.

FIG. 21 is an upper front right perspective view of the picatinny base mount of FIGS. 1-10.

FIG. 22 is an upper rear perspective view of the picatinny base mount of FIG. 21.

FIG. 23 is a lower front left perspective view of the picatinny base mount of FIG. 21.

FIG. 24 is a lower rear right perspective view of the picatinny base mount of FIG. 21.

FIG. 25 is a front view of the picatinny base mount of FIG. 21.

FIG. 26 is a rear view of the picatinny base mount of FIG. 21.

FIG. 27 is a top view of the picatinny base mount of FIG. 21.

FIG. 28 is a bottom view of the picatinny base mount of FIG. 21.

FIG. 29 is a right side view of the picatinny base mount of FIG. 21.

FIG. 30 is a left side view of the picatinny base mount of FIG. 21.

FIG. 31 is a side cross-sectional view of the assembled mounting device detached from a multiple slot rail (mounting interface) on a firearm.

FIG. 32 shows the mounting device of FIG. 31 with push button depressed causing the two wedge legs to extend below the assembly, ready to be positioned into a pair of slots on the rail.

FIG. 33 shows the mounting device of FIG. 32 sitting flush on the mounting interface of the rail with the wedge legs within the two slots (with button still depressed).

FIG. 34 shows the mounting device of FIG. 33 with the wedge legs moving in the direction of arrow X to locked positions, as the button is being released.

FIG. 35 shows the mounting device of FIG. 33 with a thinner wall thickness on the multiple slot rail (mounting interface) on a firearm, with the wedge legs moving in the direction of arrow X to locked positions, as the button is being released.

FIG. 36 is another view of FIGS. 34-35, using a secondary locking 15 feature with the rear screw torqued down to prevent the wedge legs from moving out of their locked positions.

FIG. 37 is a lower side perspective view of FIG. 31.

FIG. 38 is a lower side perspective view of FIG. 32.

FIG. 39 is a lower side perspective view of FIG. 33.

FIG. 40 is a lower side perspective view of FIG. 34.

FIG. 41 is a lower side perspective view of FIG. 35.

FIG. 42 is a lower side perspective view of FIG. 36.

FIG. 43 is a bottom view of FIG. 31.

FIG. 44 is a bottom view of FIG. 32.

FIG. 45 is a bottom view of FIG. 33.

FIG. 46 is a bottom view of FIG. 34.

FIG. 47 is a bottom view of FIG. 35; and,

FIG. 48 is a bottom view of FIG. 36.

The broken lines in FIGS. 1-48 are for illustrative purposes and form no part of the claimed design.

1 Claim, 18 Drawing Sheets

(52) **U.S. Cl.**
CPC **F41C 27/00** (2013.01); **F41G 11/003** (2013.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

9,857,142	B2 *	1/2018	Sharron		F41G 11/003
10,101,126	B2	10/2018	Sharron		
10,151,557	B2 *	12/2018	Sharron		F41C 27/00
10,371,482	B2	8/2019	Roberts		
10,393,481	B2	8/2019	Langevin		
11,150,055	B2	10/2021	Gehring		
D940,813	S	1/2022	Weigand		
D954,169	S	6/2022	Zimmer		
2008/0034638	A1 *	2/2008	Spuhr		F41G 11/006
					42/127
2016/0209175	A1	7/2016	Sharron		

* cited by examiner

FIG. 1

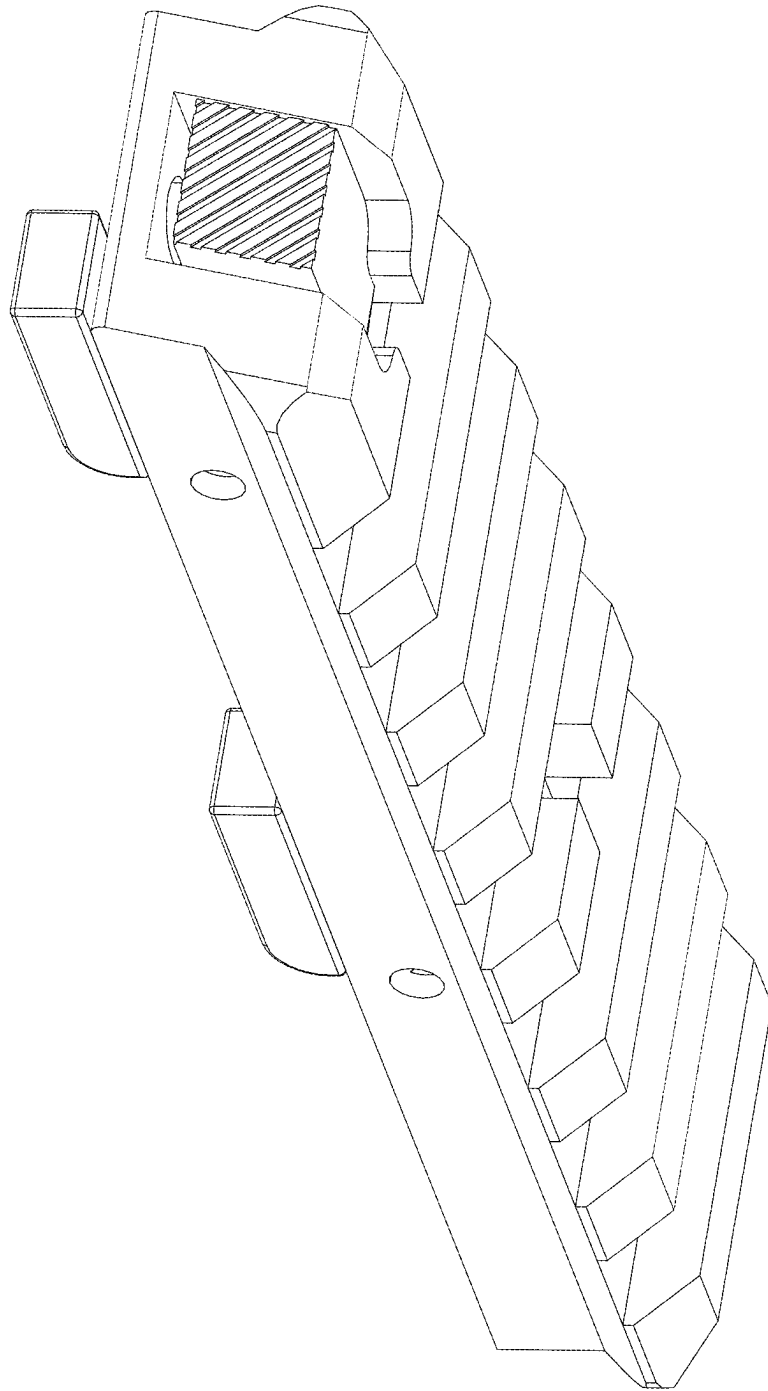


FIG. 2

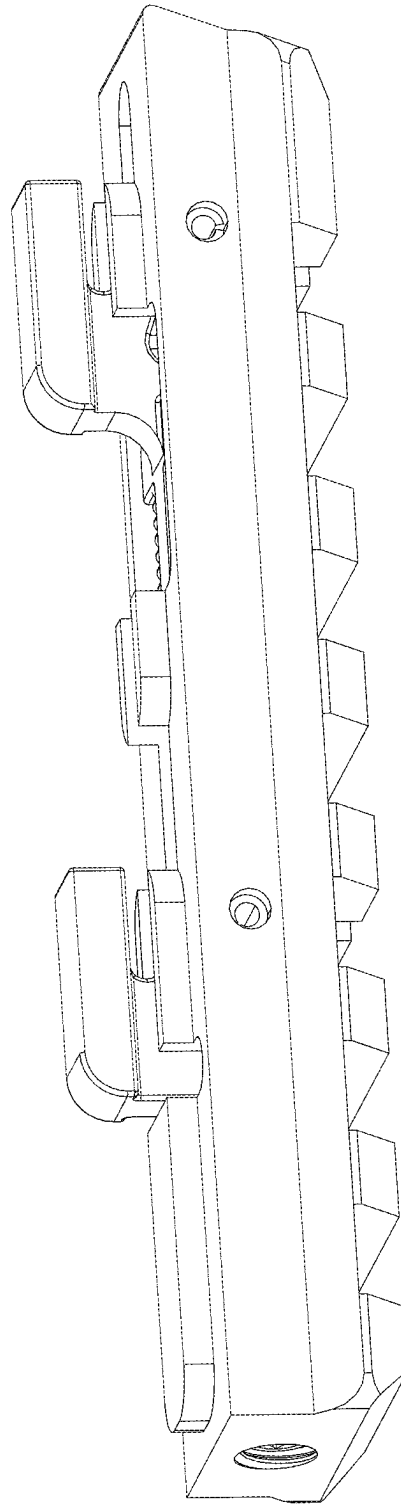


FIG. 3

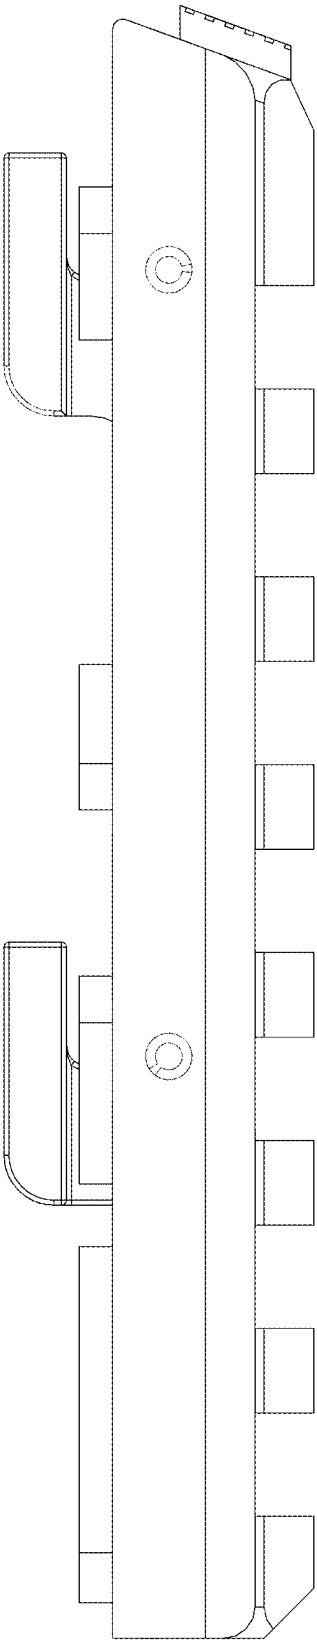


FIG. 4

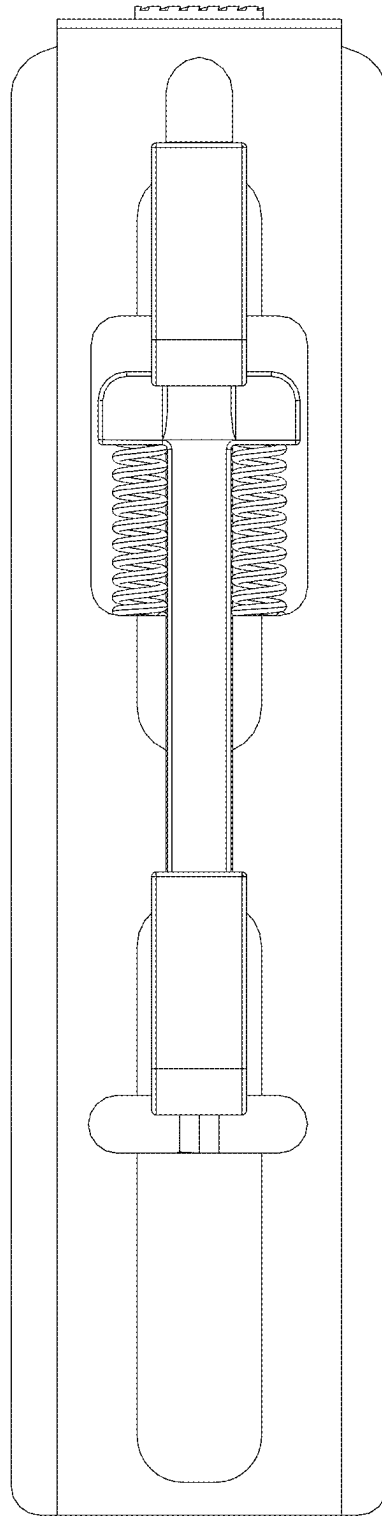


FIG. 5

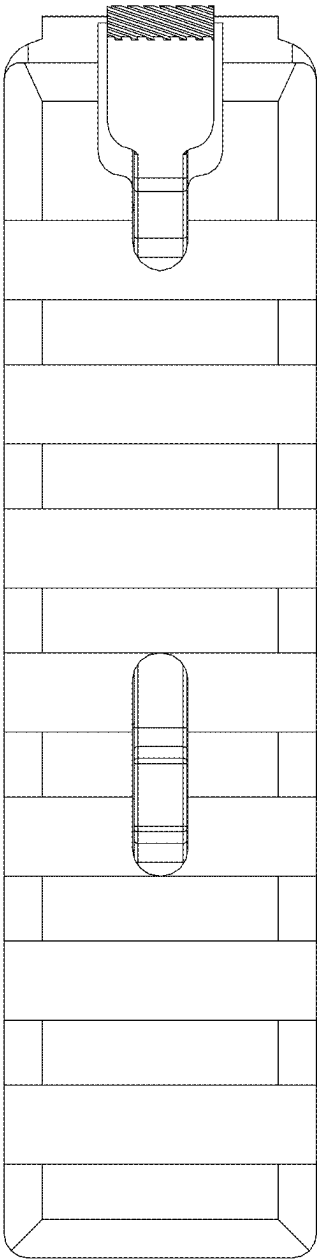


FIG. 6

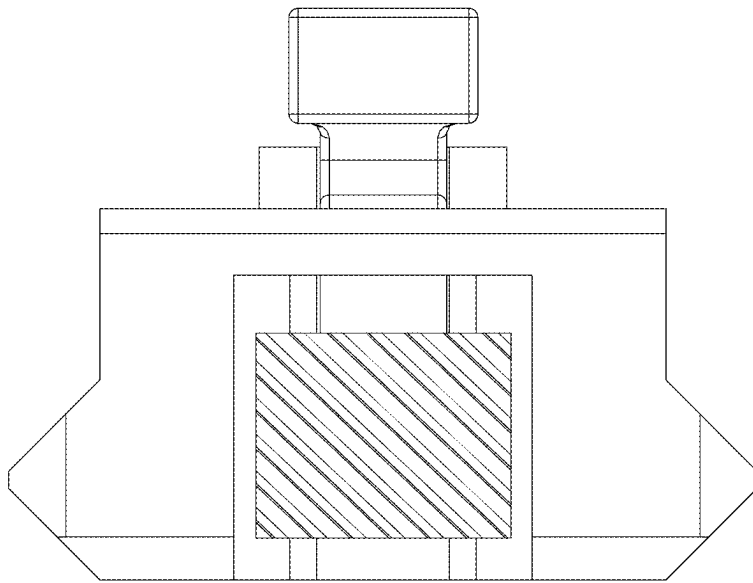


FIG. 7

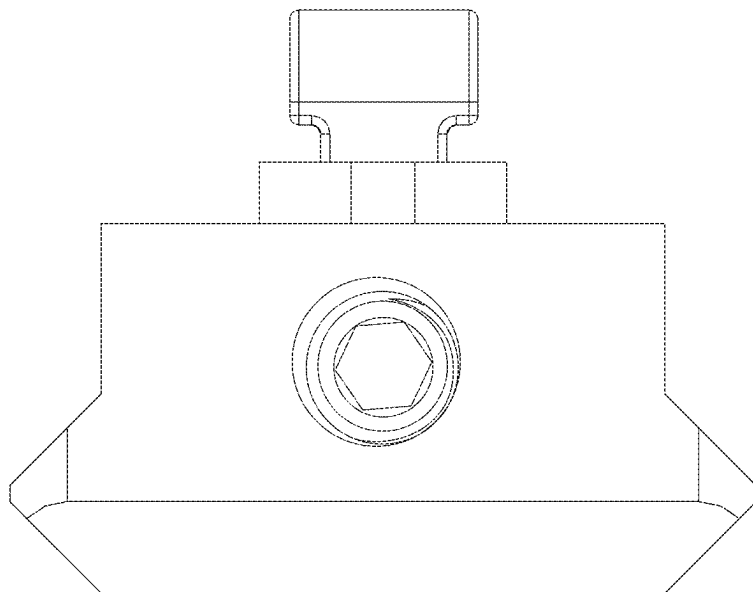


FIG. 8

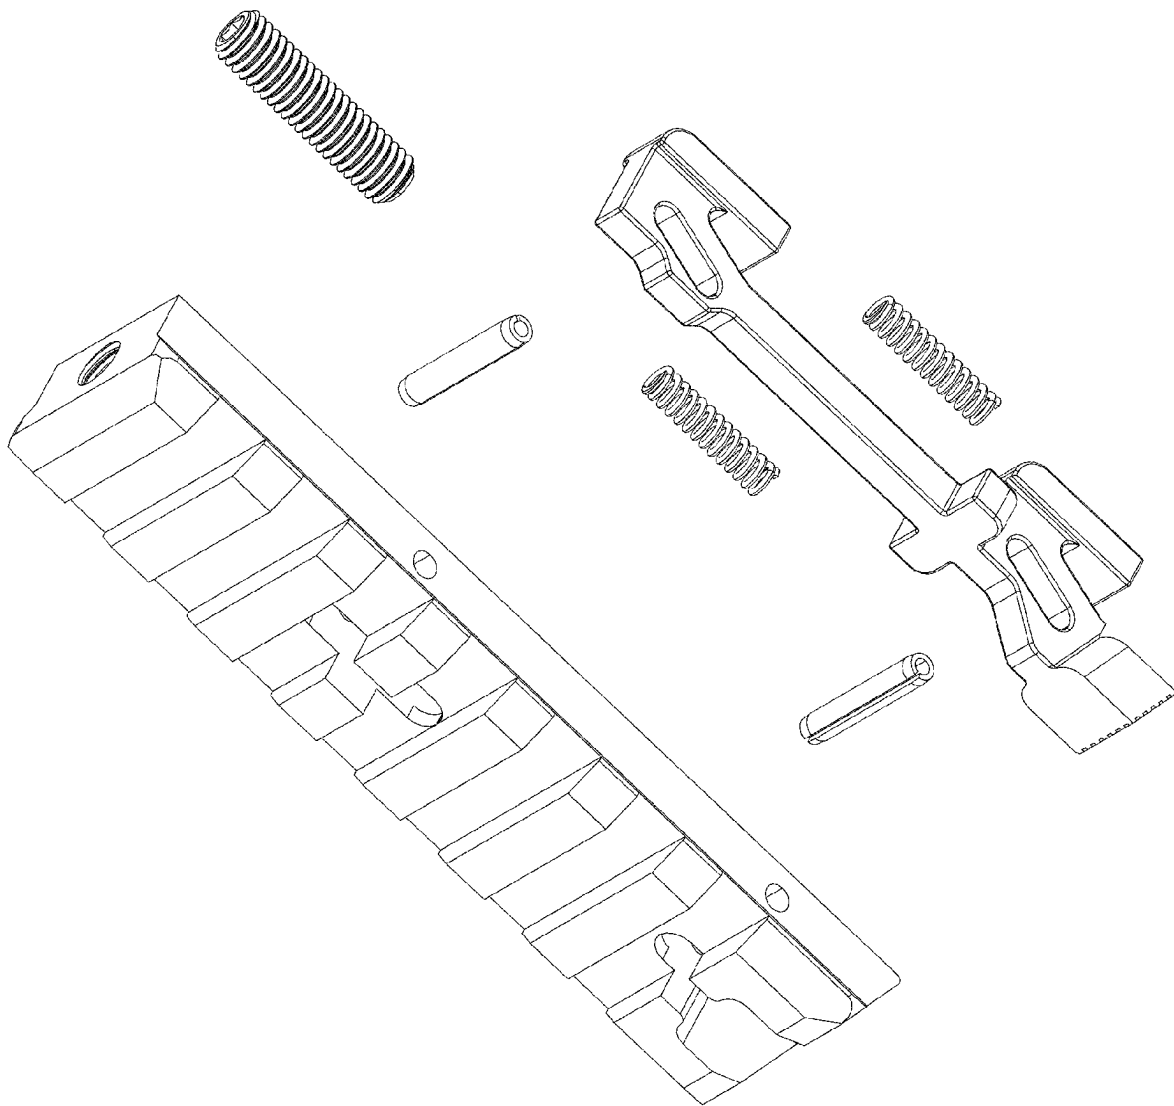


FIG. 9

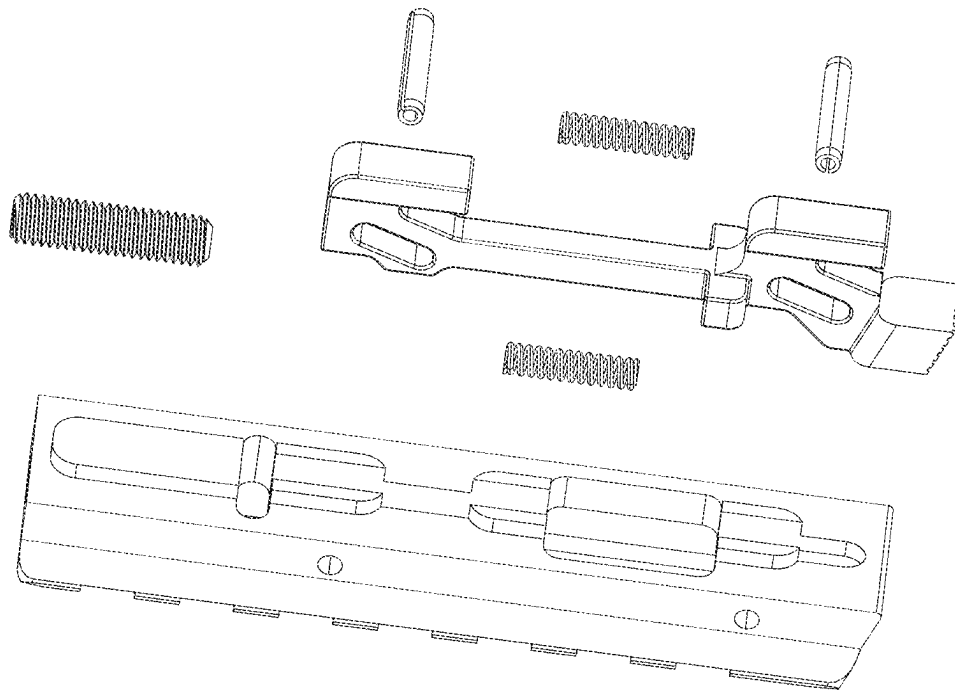


FIG. 10

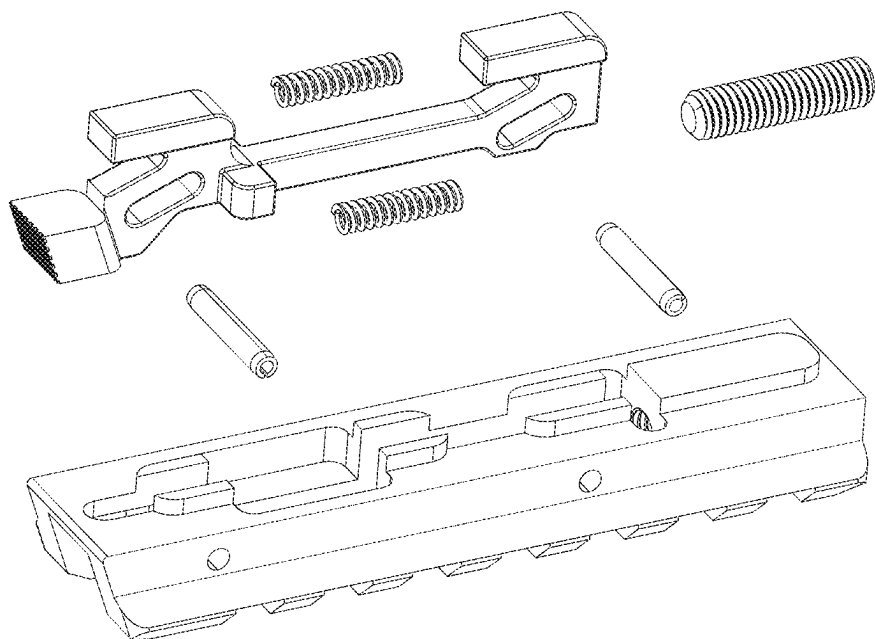


FIG. 14

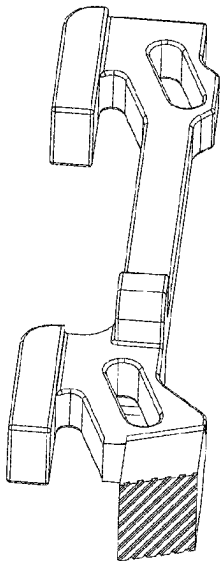


FIG. 13

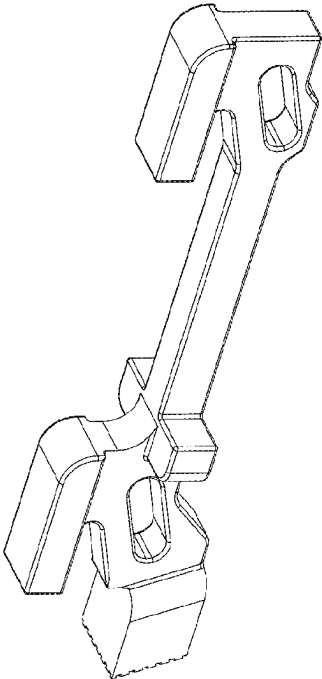


FIG. 11

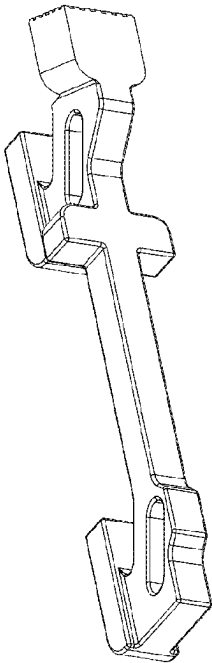


FIG. 12

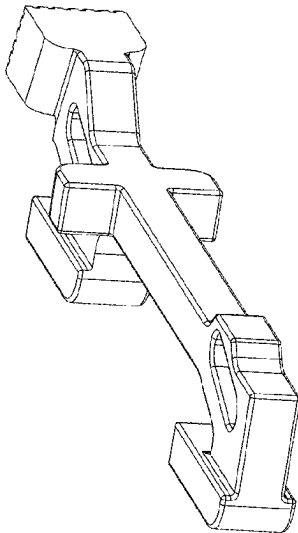


FIG. 15

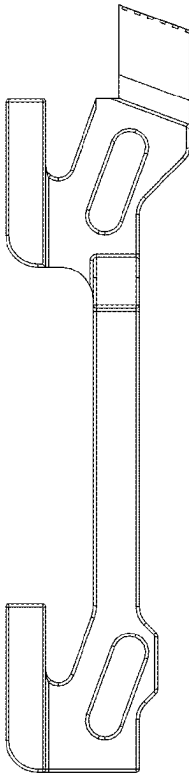


FIG. 16

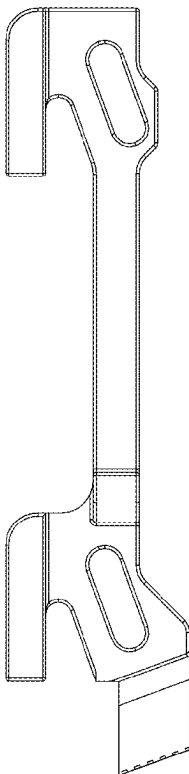


FIG. 18




FIG. 17




FIG. 20




FIG. 19




FIG. 24

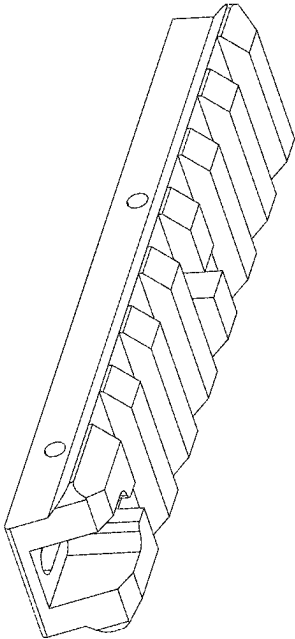


FIG. 23

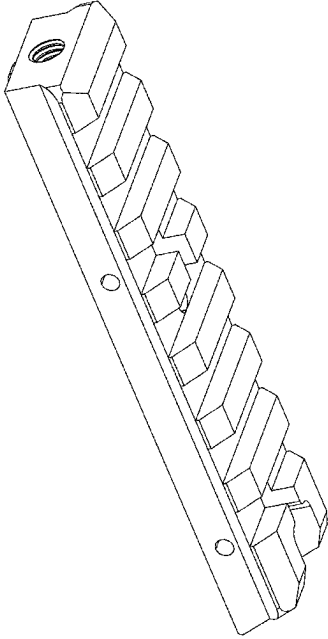


FIG. 21

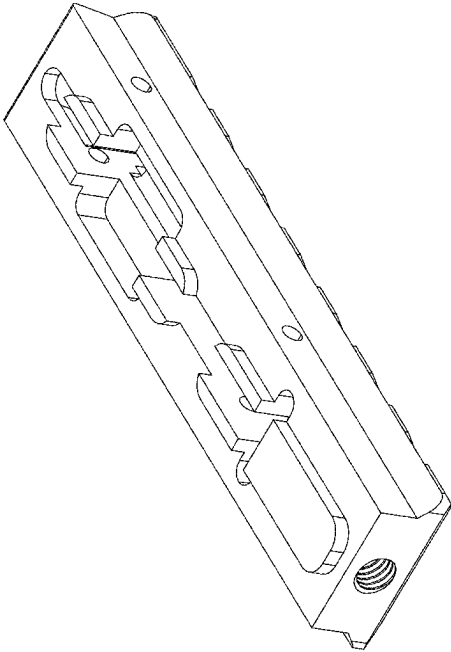


FIG. 22

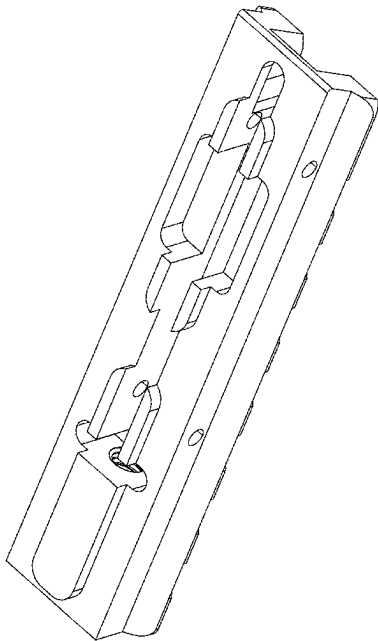


FIG. 25




FIG. 26

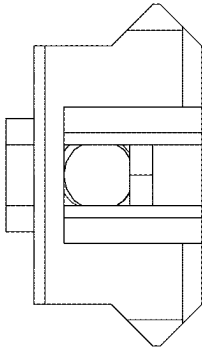


FIG. 28

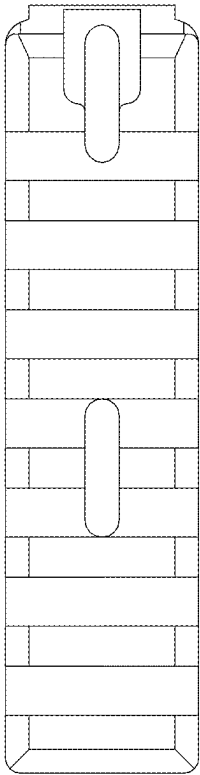


FIG. 27

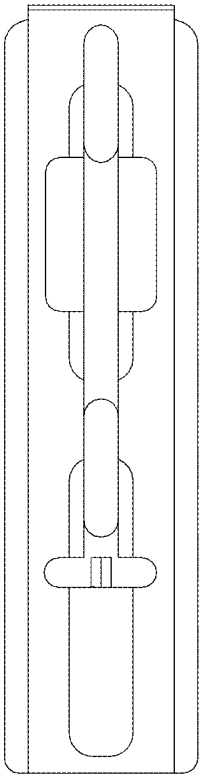


FIG. 29




FIG. 30




FIG. 31

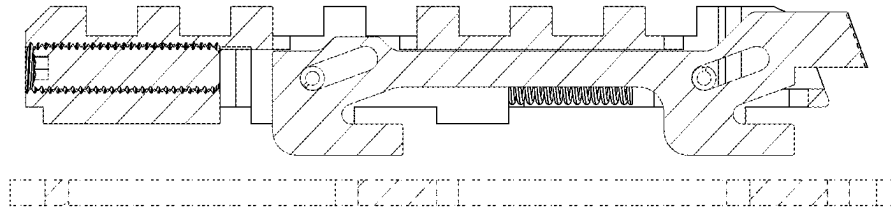


FIG. 32

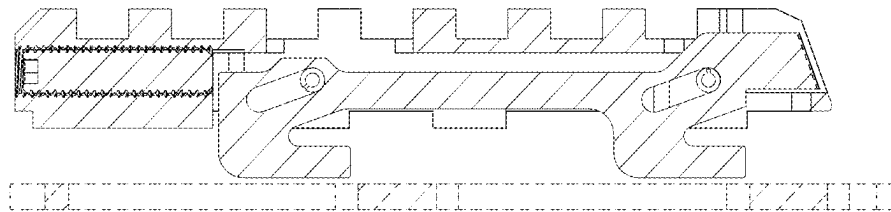


FIG. 33

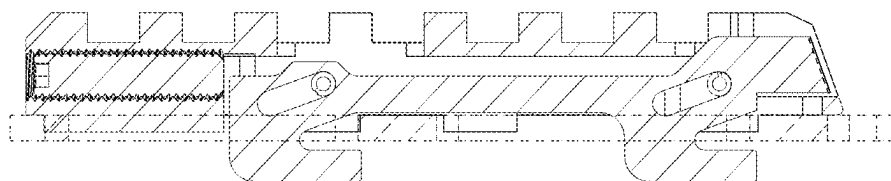


FIG. 34

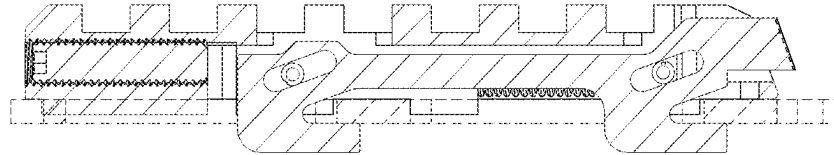


FIG. 35

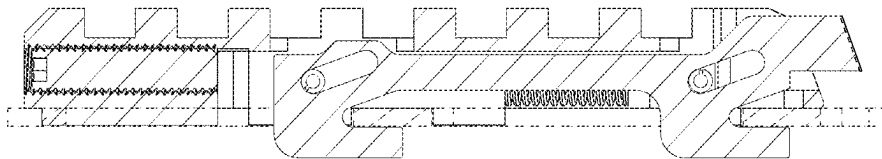


FIG. 36

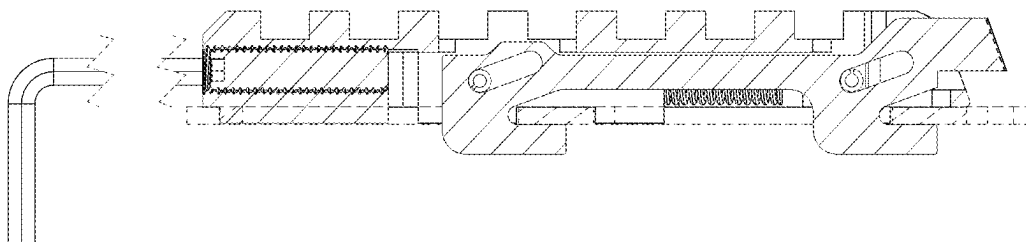


FIG. 37

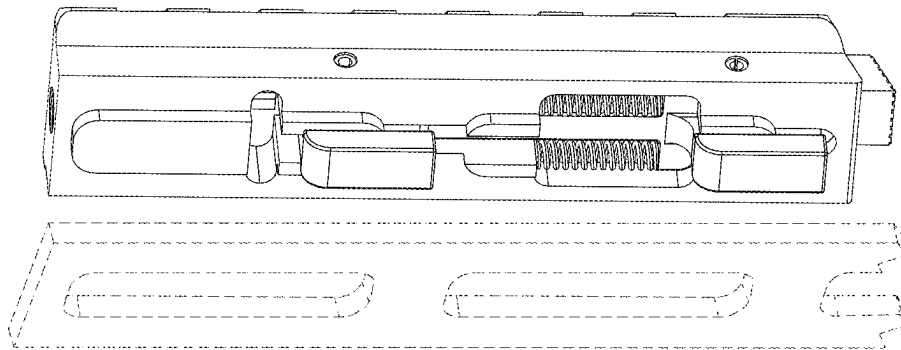


FIG. 38

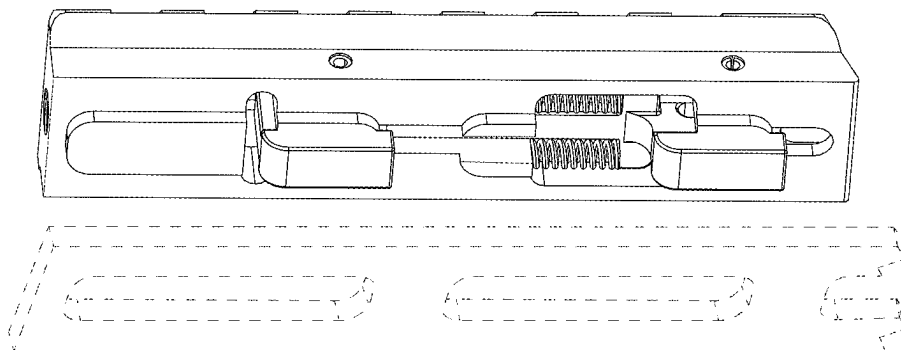


FIG. 39

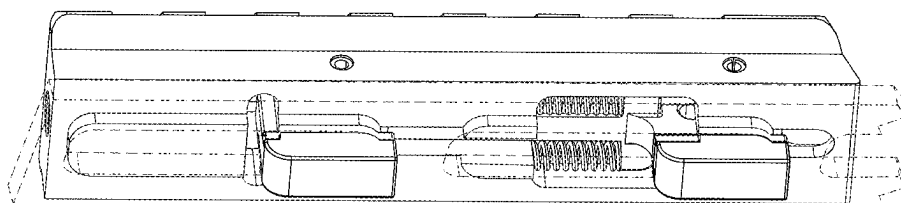


FIG. 40

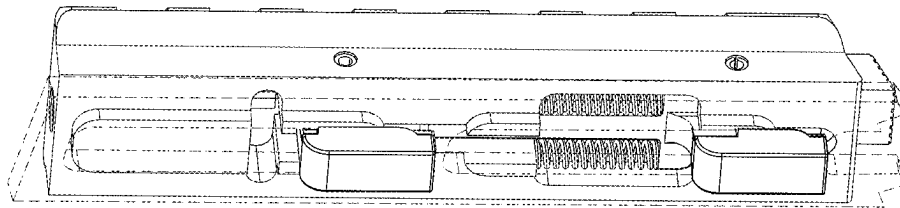


FIG. 41

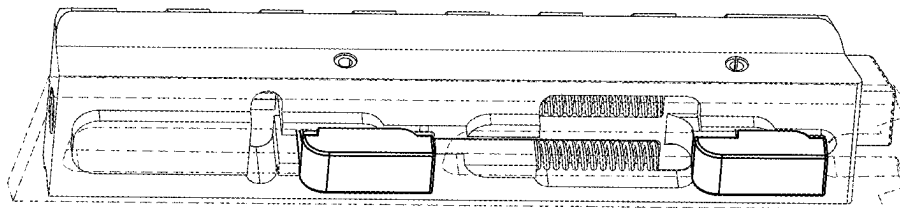


FIG. 42

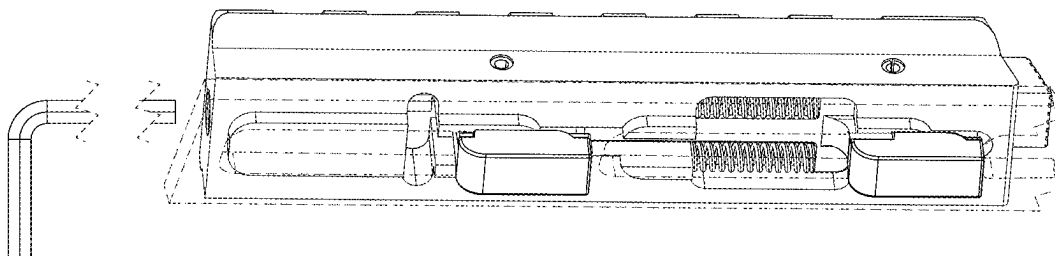


FIG. 43

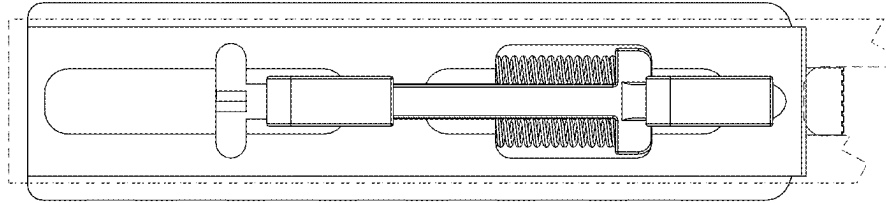


FIG. 44

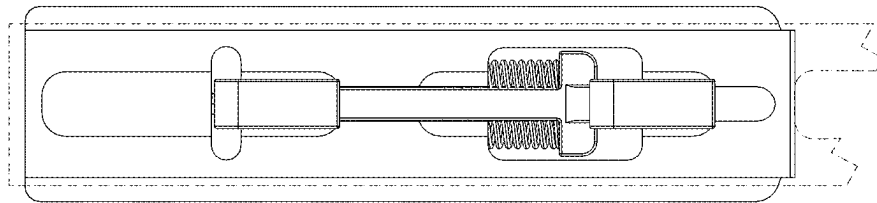


FIG. 45

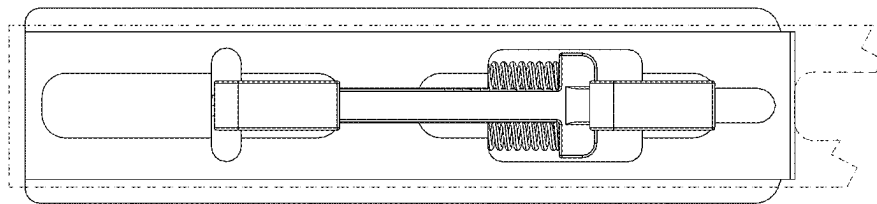


FIG. 46

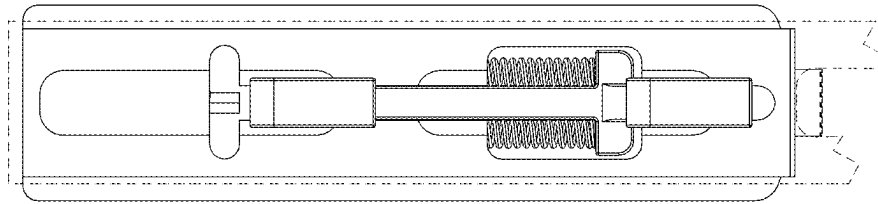


FIG. 47

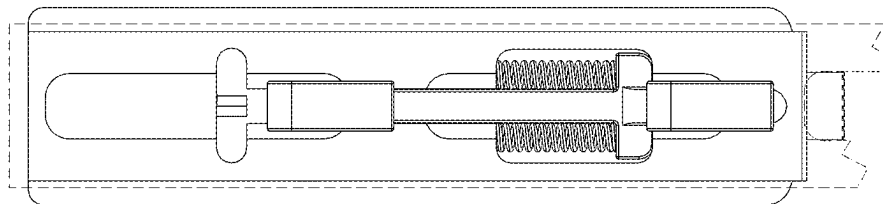


FIG. 48

