



US012415310B2

(12) **United States Patent**
Lee et al.

(10) **Patent No.:** **US 12,415,310 B2**
(45) **Date of Patent:** **Sep. 16, 2025**

(54) **OVERLAY APPLICATOR MACHINES AND METHODS OF PROVIDING THE SAME**

(71) Applicant: **Belkin International, Inc.**, El Segundo, CA (US)

(72) Inventors: **Eric Lee**, Cypress, CA (US); **Stanley Cheung**, Winnetka, CA (US); **Steven Lane**, Orange, CA (US); **Kazuyoshi Raijin Otani**, Los Angeles, CA (US); **David A. Kleeman**, Marina Del Rey, CA (US); **John F. Wadsworth**, Burbank, CA (US); **Aaron Ka Hoo Poon**, Arcadia, CA (US)

(73) Assignee: **BELKIN INTERNATIONAL, INC.**, El Segundo, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **18/821,432**

(22) Filed: **Aug. 30, 2024**

(65) **Prior Publication Data**

US 2024/0416579 A1 Dec. 19, 2024

Related U.S. Application Data

(63) Continuation of application No. 18/738,956, filed on Jun. 10, 2024, which is a continuation of application No. 17/180,481, filed on Feb. 19, 2021, now Pat. No. 12,005,628.

(51) **Int. Cl.**
B29C 63/00 (2006.01)
B29C 63/02 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **B29C 63/0004** (2013.01); **B29C 63/02** (2013.01); **H04B 1/3888** (2013.01);
(Continued)

(58) **Field of Classification Search**

CPC B29C 63/0004; B29C 63/02; B29C 2063/0008; H04B 1/3888; B29L 2031/3437

See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,082,873 A 4/1978 Williams
4,285,559 A 8/1981 Koch

(Continued)

FOREIGN PATENT DOCUMENTS

CN 201456516 5/2010
CN 201538078 8/2010

(Continued)

OTHER PUBLICATIONS

English machine translation of CN207089749 U; Inventor Lin; Mar. 13, 2018; 12 pages. (Year: 2018).*

English machine translation of WO-2014021486-A1, Seo, 15 pages, Feb. 6, 2014. 2014.

Translation of KR-10-1135144, retrieved from the Internet on Jun. 9, 2017. 2017.

(Continued)

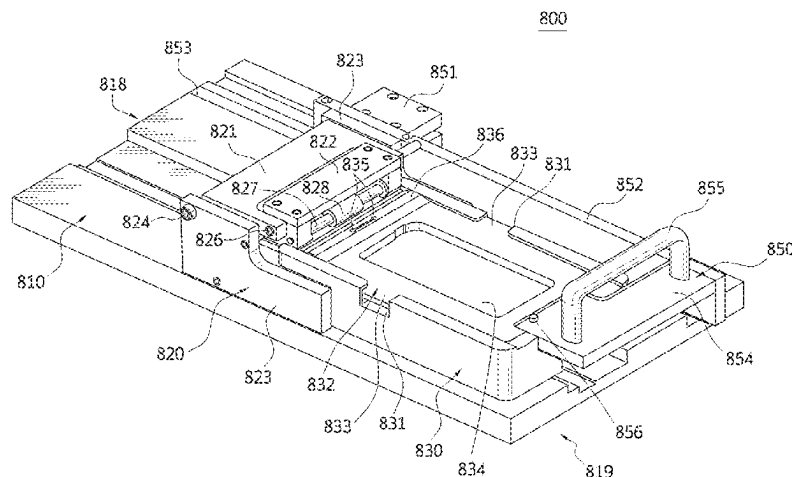
Primary Examiner — Linda L Gray

(74) *Attorney, Agent, or Firm* — BRYAN CAVE
LEIGHTON PAISNER LLP

(57) **ABSTRACT**

A machine including an adjustable cradle configured to hold, individually at different times, electronic devices having different dimensions. The machine also can include an alignment base configured to engage, individually at different times, with alignment mechanisms of overlay applicators, each respective one of the overlay applicators comprising a respective overlay configured to be applied to a respective surface of each of the electronic devices. The machine can be configured to facilitate applying, individually at different times, the respective overlays to the respec-

(Continued)



tive surfaces of the electronic devices. The adjustable cradle can include a fixed corner holder and an adjustable corner holder. The adjustable corner holder can be configured to hold each of the electronic devices between the adjustable corner holder and the fixed corner holder when each of the electronic devices is held within the adjustable cradle. Other embodiments are described.

20 Claims, 99 Drawing Sheets

(60) Provisional application No. 62/978,812, filed on Feb. 19, 2020.

(51) **Int. Cl.**
H04B 1/3888 (2015.01)
B29L 31/34 (2006.01)

(52) **U.S. Cl.**
 CPC B29C 2063/0008 (2013.01); B29L 2031/3437 (2013.01)

(56) References Cited

U.S. PATENT DOCUMENTS

D305,648 S 1/1990 Edington
 4,895,231 A 1/1990 Yamaguchi et al.
 5,069,732 A 12/1991 Levine
 5,609,938 A 3/1997 Shields
 5,680,709 A 10/1997 Stone
 5,805,251 A 9/1998 Ozawa
 6,406,758 B1 6/2002 Bottari et al.
 7,084,859 B1 8/2006 Pryor
 D578,164 S 10/2008 Ingle
 D598,024 S 8/2009 Scott et al.
 D601,959 S 10/2009 Lee et al.
 D601,960 S 10/2009 Dai
 7,697,827 B2 4/2010 Konicek
 D627,826 S 11/2010 Halimi
 7,957,524 B2 6/2011 Chipping
 7,966,861 B2 6/2011 Yee et al.
 D641,210 S 7/2011 Hamilton
 8,044,942 B1 10/2011 Leonhard et al.
 8,047,365 B1 11/2011 Lin et al.
 D651,214 S 12/2011 Yoo et al.
 D651,791 S 1/2012 Cataldo et al.
 D658,164 S 4/2012 Chan
 D665,809 S 8/2012 Wang et al.
 8,369,072 B1 2/2013 Alonzo et al.
 8,388,243 B1 3/2013 Smith
 8,393,377 B2 3/2013 Patel et al.
 D679,753 S 4/2013 Sato et al.
 D680,166 S 4/2013 Sato et al.
 8,517,367 B1 8/2013 Napier
 D690,704 S 10/2013 Padilla et al.
 8,564,538 B2 10/2013 Wadsworth
 D694,240 S 11/2013 Cho
 8,640,759 B2 2/2014 Chen
 8,675,353 B1 3/2014 Alonzo et al.
 D707,217 S 6/2014 Toulotte
 D710,843 S 8/2014 Akana et al.
 D713,397 S 9/2014 Du et al.
 D714,053 S 9/2014 Yoo
 8,821,659 B2 9/2014 Ng et al.
 D715,301 S 10/2014 Ashcraft et al.
 D715,784 S 10/2014 Lin et al.
 D720,353 S 12/2014 Nakamura
 8,905,107 B2 12/2014 Patel et al.
 D721,359 S 1/2015 Kim
 8,931,770 B1 1/2015 Kaminski
 9,001,502 B1 4/2015 Cowan
 9,010,396 B2 4/2015 Patel et al.
 D729,235 S 5/2015 Nagao et al.
 9,033,019 B2 5/2015 Patel et al.

D734,311 S 7/2015 Takamoto et al.
 9,089,085 B2 7/2015 Patel et al.
 9,159,260 B2 10/2015 Oh et al.
 D743,402 S 11/2015 Ehara et al.
 D746,265 S 12/2015 Colby et al.
 D747,320 S 1/2016 Snyder et al.
 D751,556 S 3/2016 Conley et al.
 D751,557 S 3/2016 Lane
 D759,640 S 6/2016 Wadsworth
 D767,550 S 9/2016 Beaupre et al.
 D769,857 S 10/2016 Shin et al.
 D772,199 S 11/2016 Igarashi
 9,481,159 B2 11/2016 Wang
 D773,927 S 12/2016 Cernokus et al.
 D776,123 S 1/2017 Akana et al.
 D777,714 S 1/2017 Akana et al.
 D778,869 S 2/2017 Kim et al.
 D781,861 S 3/2017 Lane et al.
 D783,024 S 4/2017 Conley et al.
 9,662,860 B2 5/2017 Wadsworth
 9,688,016 B2 6/2017 Rostami
 9,701,062 B2 7/2017 Wadsworth et al.
 9,701,096 B2 7/2017 Beaupre
 9,757,934 B2 9/2017 Wadsworth
 D800,126 S 10/2017 Wadsworth et al.
 D800,127 S 10/2017 Beaupre et al.
 D800,128 S 10/2017 Beaupre et al.
 D800,129 S 10/2017 Wadsworth et al.
 D800,130 S 10/2017 Beaupre et al.
 D800,131 S 10/2017 Wadsworth et al.
 D800,714 S 10/2017 Lee et al.
 D802,594 S 11/2017 Beaupre et al.
 D811,404 S 2/2018 Wadsworth
 D811,405 S 2/2018 Wadsworth et al.
 D811,406 S 2/2018 MacDonald et al.
 D811,407 S 2/2018 Wadsworth et al.
 D811,408 S 2/2018 Wadsworth et al.
 9,902,111 B2 2/2018 Wadsworth et al.
 D812,061 S 3/2018 MacDonald et al.
 D812,062 S 3/2018 MacDonald et al.
 D812,063 S 3/2018 Lane et al.
 9,918,418 B2 3/2018 Chou
 9,931,823 B2 4/2018 Patel et al.
 10,021,818 B2 7/2018 Patel et al.
 10,065,365 B2 9/2018 Lane
 10,076,894 B2 9/2018 Lin et al.
 10,091,341 B1 10/2018 Cha et al.
 D833,439 S 11/2018 MacDonald et al.
 D835,108 S 12/2018 MacDonald et al.
 10,155,370 B2 12/2018 Wadsworth
 10,399,315 B2 9/2019 Patel et al.
 10,675,817 B2 6/2020 MacDonald et al.
 10,782,746 B2 9/2020 Kleeman et al.
 12,005,628 B2 6/2024 Lee et al.
 2002/0054030 A1 5/2002 Murphy
 2004/0109096 A1 6/2004 Anderson et al.
 2004/0246386 A1 12/2004 Thomas et al.
 2005/0030296 A1 2/2005 Stohrer et al.
 2005/0164148 A1 7/2005 Sinclair
 2007/0013662 A1 1/2007 Fauth
 2007/0021068 A1 1/2007 Dewhurst
 2007/0058990 A1 3/2007 Weaver et al.
 2007/0115621 A1 5/2007 Guillen
 2007/0229962 A1 10/2007 Mason, Jr.
 2007/0247793 A1 10/2007 Carnevali
 2007/0293282 A1 12/2007 Lewis et al.
 2009/0015509 A1 1/2009 Gottwald et al.
 2009/0133219 A1 5/2009 Lowry et al.
 2009/0186181 A1 7/2009 Mase
 2009/0245565 A1 10/2009 Mittleman et al.
 2009/0314400 A1 12/2009 Liu
 2010/0053926 A1 3/2010 Shi et al.
 2010/0079972 A1 4/2010 Chen et al.
 2010/0097757 A1 4/2010 Wang
 2010/0309152 A1 12/2010 Kusuda et al.
 2011/0188179 A1 8/2011 Myers et al.
 2011/0206887 A1 8/2011 Kim
 2011/0267793 A1 11/2011 Cohen et al.
 2011/0279383 A1 11/2011 Wilson et al.

(56)	References Cited			CN	203681932	7/2014
	U.S. PATENT DOCUMENTS			CN	203902881	10/2014
				CN	203997012	12/2014
				CN	203997014	12/2014
2011/0309608	A1	12/2011	Flynn et al.	CN	104118600	B 10/2015
2012/0043015	A1	2/2012	Feller	CN	104150008	B 1/2016
2012/0063077	A1	3/2012	Tomobe et al.	CN	205087201	3/2016
2012/0076967	A1	3/2012	Muramatsu	CN	105500879	4/2016
2012/0087072	A1	4/2012	McGuire et al.	CN	105829070	A 8/2016
2012/0110868	A1	5/2012	Abbondanzio	CN	106476262	3/2017
2012/0183712	A1	7/2012	Leonhard et al.	CN	304152067	5/2017
2012/0211168	A1	8/2012	Patel et al.	CN	206826987	1/2018
2012/0211170	A1	8/2012	Patel et al.	CN	107719745	2/2018
2012/0261930	A1	10/2012	Bethea	CN	207000900	2/2018
2012/0268394	A1	10/2012	Hsu et al.	CN	304514721	2/2018
2012/0276318	A1	11/2012	Franke	CN	207060487	3/2018
2013/0020005	A1	1/2013	Koblick et al.	CN	207089749	U 3/2018
2013/0020020	A1	1/2013	Liu	CN	107985667	5/2018
2013/0040088	A1	2/2013	Hirayama et al.	CN	207658144	7/2018
2013/0048203	A1	2/2013	Yau et al.	CN	108454081	8/2018
2013/0113348	A1	5/2013	Holben et al.	CN	207889127	9/2018
2013/0156999	A1	6/2013	Braesch et al.	CN	207889128	9/2018
2013/0184845	A1	7/2013	Hales	CN	207889129	9/2018
2013/0237296	A1	9/2013	Chen	CN	108724691	11/2018
2013/0264235	A1	10/2013	Lin	CN	108748969	11/2018
2014/0047708	A1	2/2014	Chae	CN	108819207	11/2018
2014/0055927	A1	2/2014	Wang et al.	CN	208035358	11/2018
2014/0124146	A1	5/2014	Patel et al.	CN	109080122	12/2018
2014/0130971	A1	5/2014	Wu et al.	CN	208263434	12/2018
2014/0250964	A1	9/2014	Dai et al.	CN	208291553	12/2018
2014/0332417	A1	11/2014	Wicks et al.	CN	208438723	1/2019
2014/0338829	A1	11/2014	Peng et al.	CN	208438727	1/2019
2015/0000831	A1	1/2015	Wang	CN	109333989	2/2019
2015/0041069	A1	2/2015	Wadsworth et al.	CN	208452294	2/2019
2015/0047773	A1	2/2015	Wadsworth et al.	CN	109591280	4/2019
2015/0107767	A1	4/2015	Wadsworth et al.	CN	208646031	4/2019
2015/0121691	A1	5/2015	Wang	CN	208697960	4/2019
2015/0136314	A1	5/2015	Napier	CN	208714487	4/2019
2015/0227226	A1	8/2015	Wierenga et al.	CN	305133996	4/2019
2015/0246514	A1	9/2015	LaColla et al.	CN	109822880	5/2019
2015/0314523	A1	11/2015	Mason et al.	CN	105766077	B 7/2019
2015/0362736	A1	12/2015	Kowasie	CN	209080265	7/2019
2016/0009024	A1	1/2016	Mason	CN	209096015	7/2019
2016/0176101	A1	6/2016	Fan	CN	110126248	8/2019
2016/0253039	A1	9/2016	Heo et al.	CN	209290791	8/2019
2016/0288470	A1	10/2016	Wadsworth	CN	110202780	9/2019
2017/0001364	A1	1/2017	MacDonald et al.	CN	209506199	10/2019
2017/0094039	A1	3/2017	Lu	CN	209506202	10/2019
2017/0253014	A1	9/2017	Kleeman et al.	CN	209521263	10/2019
2018/0324987	A1	11/2018	Patel et al.	CN	305395645	10/2019
2019/0381775	A1	12/2019	Patel et al.	CN	209599846	11/2019
				CN	209617594	11/2019
				CN	209699847	11/2019
				CN	209832653	12/2019
				CN	110641003	1/2020
CN	102632674	8/2012		DE	202013102944	U1 7/2013
CN	202395823	8/2012		DE	102013021563	6/2015
CN	202463101	10/2012		EP	2489495	6/2014
CN	302141011	10/2012		EP	0024866540001	6/2014
CN	202540892	11/2012		EP	0024866540002	6/2014
CN	202609123	12/2012		EP	0024866540003	6/2014
CN	202623469	12/2012		EP	0024866540004	6/2014
CN	302239597	12/2012		EP	0024866540005	6/2014
CN	202657286	1/2013		EP	0024866540006	6/2014
CN	202686811	1/2013		EP	0024866540007	6/2014
CN	202896928	U 4/2013		EP	0024866540008	6/2014
CN	202923909	5/2013		EP	0024866960001	6/2014
CN	202953197	U 5/2013		EP	0024866960002	6/2014
CN	103129767	A 6/2013		EP	0024866960003	6/2014
CN	202967060	U 6/2013		EP	0024866960004	6/2014
CN	202987565	6/2013		EP	0024866960005	6/2014
CN	302452344	6/2013		EP	0024866960006	6/2014
CN	203032965	7/2013		EP	0024866960007	6/2014
CN	203077741	7/2013		EP	0024866960008	6/2014
CN	203094507	U 7/2013		EP	0024866960009	6/2014
CN	103273716	A 9/2013		EP	0024866960010	6/2014
CN	203255376	10/2013		EP	0024866960011	6/2014
CN	302740093	2/2014		EP	0024866960012	6/2014
CN	302795168	4/2014		EP	0024866960013	6/2014
CN	203652157	6/2014		EP		

(56)

References Cited

FOREIGN PATENT DOCUMENTS

EP	0024866960014	6/2014
EP	0024866960015	6/2014
EP	0024866960016	6/2014
EP	0024867120001	6/2014
EP	0024867120002	6/2014
EP	0024867120003	6/2014
EP	0024867120004	6/2014
EP	0024867120005	6/2014
EP	0024867120006	6/2014
EP	0024867120007	6/2014
EP	0024867120008	6/2014
EP	0024867120009	6/2014
EP	0024867120010	6/2014
EP	0024867120011	6/2014
EP	0024867120012	6/2014
EP	0024867120013	6/2014
EP	0024867120014	6/2014
EP	0024867120015	6/2014
EP	0024867120016	6/2014
EP	3046262 A1	7/2016
JP	10199422	7/1998
JP	2002049327	2/2002
JP	2002057764	2/2002
JP	2003066419	3/2003
JP	2006145918	6/2006
JP	2006155452	6/2006
JP	3124275	8/2006
JP	3180690	12/2012
JP	3182856	4/2013
JP	2016049742	4/2016
JP	3221751	6/2019
KR	200454225	6/2011
KR	20110008023 U	8/2011
KR	101080018	10/2011
KR	101103436	1/2012
KR	101135144	4/2012
KR	101176316	8/2012
KR	1020130007791	1/2013
KR	101250080 B1	4/2013
KR	1020130043720	5/2013
KR	300704457	8/2013
KR	300704458	8/2013
KR	300704459	8/2013
KR	300704460	8/2013
KR	1020130092713	8/2013
KR	1020130092804	8/2013
KR	300720375	12/2013
KR	300720376	12/2013
KR	101408663 B1	6/2014
KR	1020140070046	6/2014
KR	1020140076245	6/2014
KR	101441640 B1	9/2014
KR	101468710	11/2014
KR	200475419	11/2014
KR	200475420	11/2014
KR	1020140136596	12/2014
KR	1020140142904	12/2014
KR	1020140143262	12/2014
KR	1020150006910	1/2015
KR	200476916	4/2015
KR	1020150039292	4/2015
KR	2020150001663	5/2015
KR	300804459	7/2015
KR	1020160022665	3/2016
KR	1020160022755	3/2016
KR	1020160061078	5/2016
KR	1020160088067	7/2016
KR	1020160091491	8/2016
KR	20160144625	12/2016
KR	2020170000128	1/2017
KR	102002105	7/2019
TM	TWM443629 U	12/2012
TM	TWM449696 U	4/2013
TW	M431133	6/2012

TW	M452053 U	5/2013
TW	1401223	7/2013
TW	M547122	8/2017
TW	201910109	3/2019
WO	2003093879	11/2003
WO	2004005141	1/2004
WO	2005058705	6/2005
WO	2011065796 A2	6/2011
WO	2011163151	12/2011
WO	2012074802	6/2012
WO	2012141505	10/2012
WO	2013009149 A2	1/2013
WO	2013109788 A1	7/2013
WO	2014021486	2/2014
WO	2014045468 A1	3/2014
WO	2015035679 A1	3/2015
WO	2015038883 A1	3/2015
WO	2018053333	3/2018
WO	2018177590	10/2018
WO	2019140932	7/2019

OTHER PUBLICATIONS

International Search Report and Written Opinion for PCT/US2014/050420 dated Nov. 19, 2014. Nov. 19, 2014.

International Search Report and Written Opinion for PCT/US2014/060300 dated Jan. 27, 2015. Jan. 27, 2015.

International Search Report and Written Opinion for PCT/US2014/071767 dated Apr. 24, 2015. Apr. 24, 2015.

Amzer—Kristal Screen Protectors—<http://www.amzer.com/kristal/>, Mar. 21, 2014. 2014.

MyScreenPROTECTOR—<https://www.myscreenprotector.com/?lng=3&view=cms&txt=about-my-screen-protector>, Mar. 21, 2014. 2014.

PureGear—PureTek Roll-On Kit—<http://www.pure-gear.com/shop-by-category/screen/puretek-roll-on-kit-antibacterial-antiglare-anti-fingerprint.html>, Mar. 21, 2014. 2014.

Tytl Alin Perfect Alignment Screen Protection—<http://www.tytl.com/alin/>, Mar. 21, 2014. 2014.

Zagg Introduces invisibleSHIELD On Demand and invisible Shield Glass at CES 2—<http://investors.zagg.com/releasedetail.cfm?ReleaseID=817526>, Mar. 21, 2014. 2014.

International Search Report and Written Opinion for PCT/US 09/61553, dated Dec. 17, 2009. Dec. 17, 2009.

Protrusion on “F” key of computer keyboard; 1 page; picture taken Oct. 20, 2008. Oct. 20, 2008.

Protrusion on “5” key of telephone; 1 page; picture taken Oct. 20, 2008. Oct. 20, 2008.

Systech Displays, Inc.; Home page; <http://www.systechdisplays.com/>; Oct. 21, 2008. Oct. 21, 2008.

Belkin Ez Frame Iris Anti-glare Film, posted at ebay.com, posting date Jul. 26, 2017, Copyright (C) 1995-2017 eBay Inc., [online], [site visited Mar. 20, 2017]. Available from Internet, <URL: <http://www.ebay.com/itm/BelkinEzFrameIrisAntiglareFilmwithEasylInstallFrameforIphone55S/171728155795>> Jul. 26, 2016.

Belkin InvisiGlass Ultra Screen Protection for iPhone 7, posted at apple.com, posting date not given, Copyright (C) 2017 Apple Inc., [online], [site visited Mar. 20, 2017]. Available from Internet, <URL: <http://www.apple.com/shop/product/HKF2ZM/B/belkininvisiultrascreenprotectionforiphone7>> 2017.

Belkin ScreenForce Transparent Screen Protector, posted at belkin.com, (C) 2017 Belkin International, Inc., [online], [site visited Mar. 20, 2017]. Available from Internet, <URL: <http://www.belkin.com/US/F8W526-3/p/P-F8W526-3/>> 2017.

International Search Report and Written Opinion for PCT/US2017/051882, dated Nov. 29, 2017. 2017.

Machine Translation of DE102013021563, published Jun. 18, 2015. Jun. 18, 2015.

International Search Report and Written Opinion for PCT/US2021/018889, dated Jun. 8, 2021. 2021.

Machine Translation of KR101103436B1 Jul. 3, 2022.

* cited by examiner




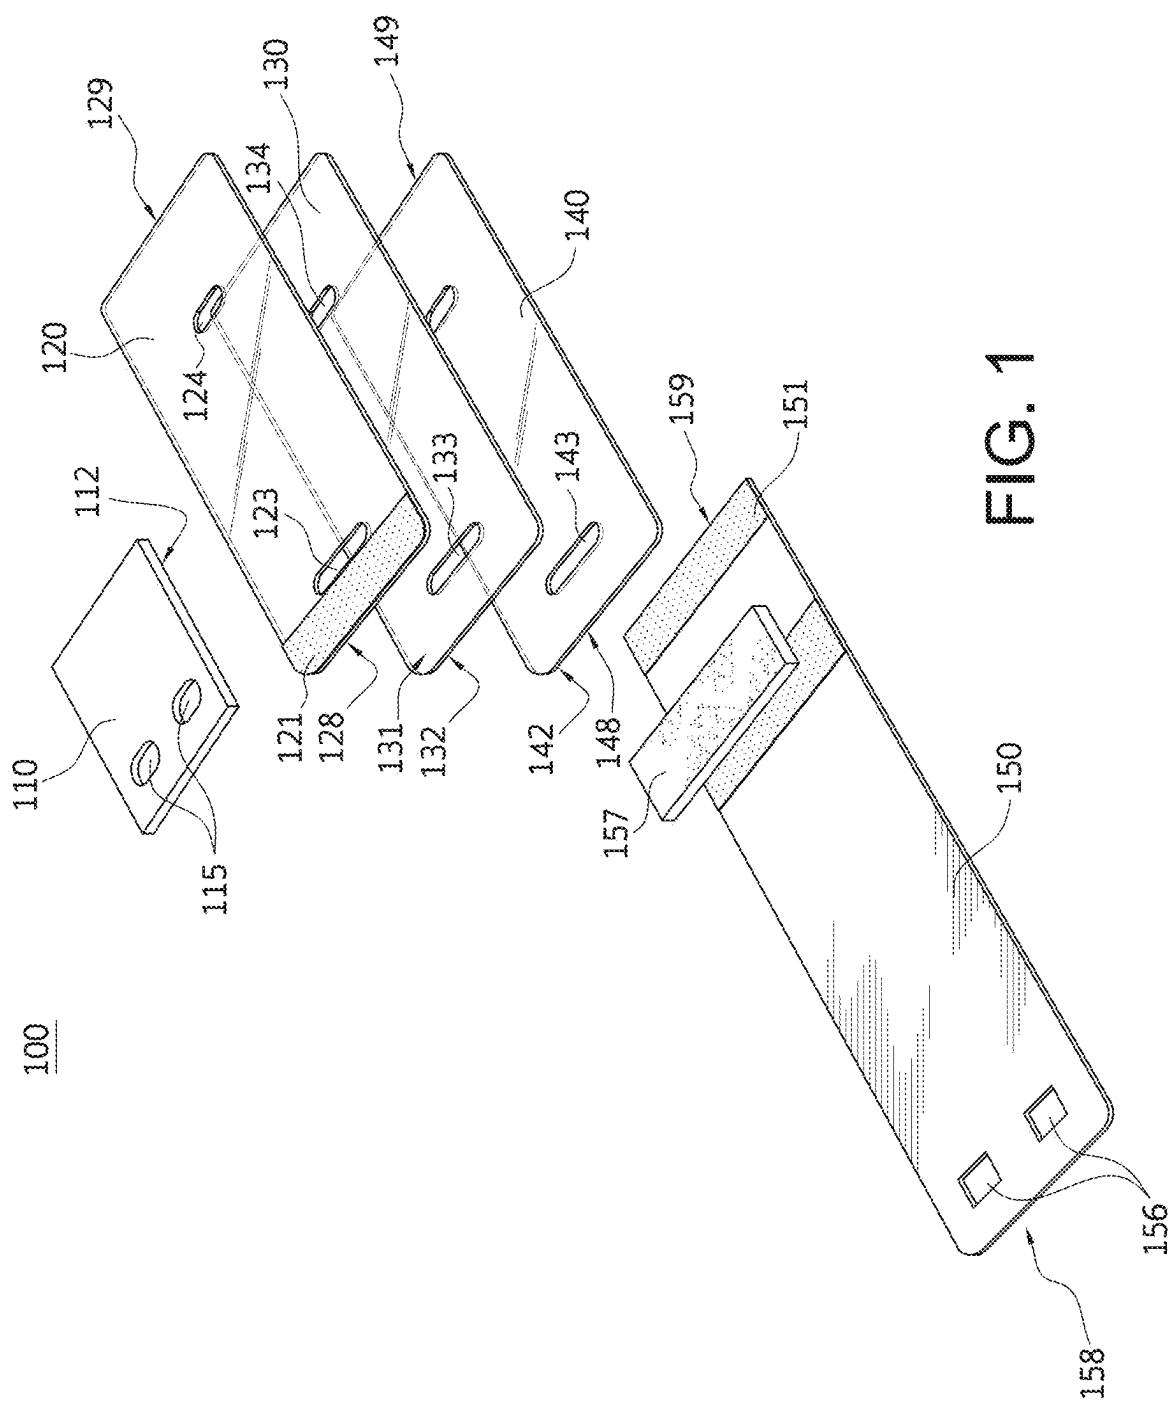
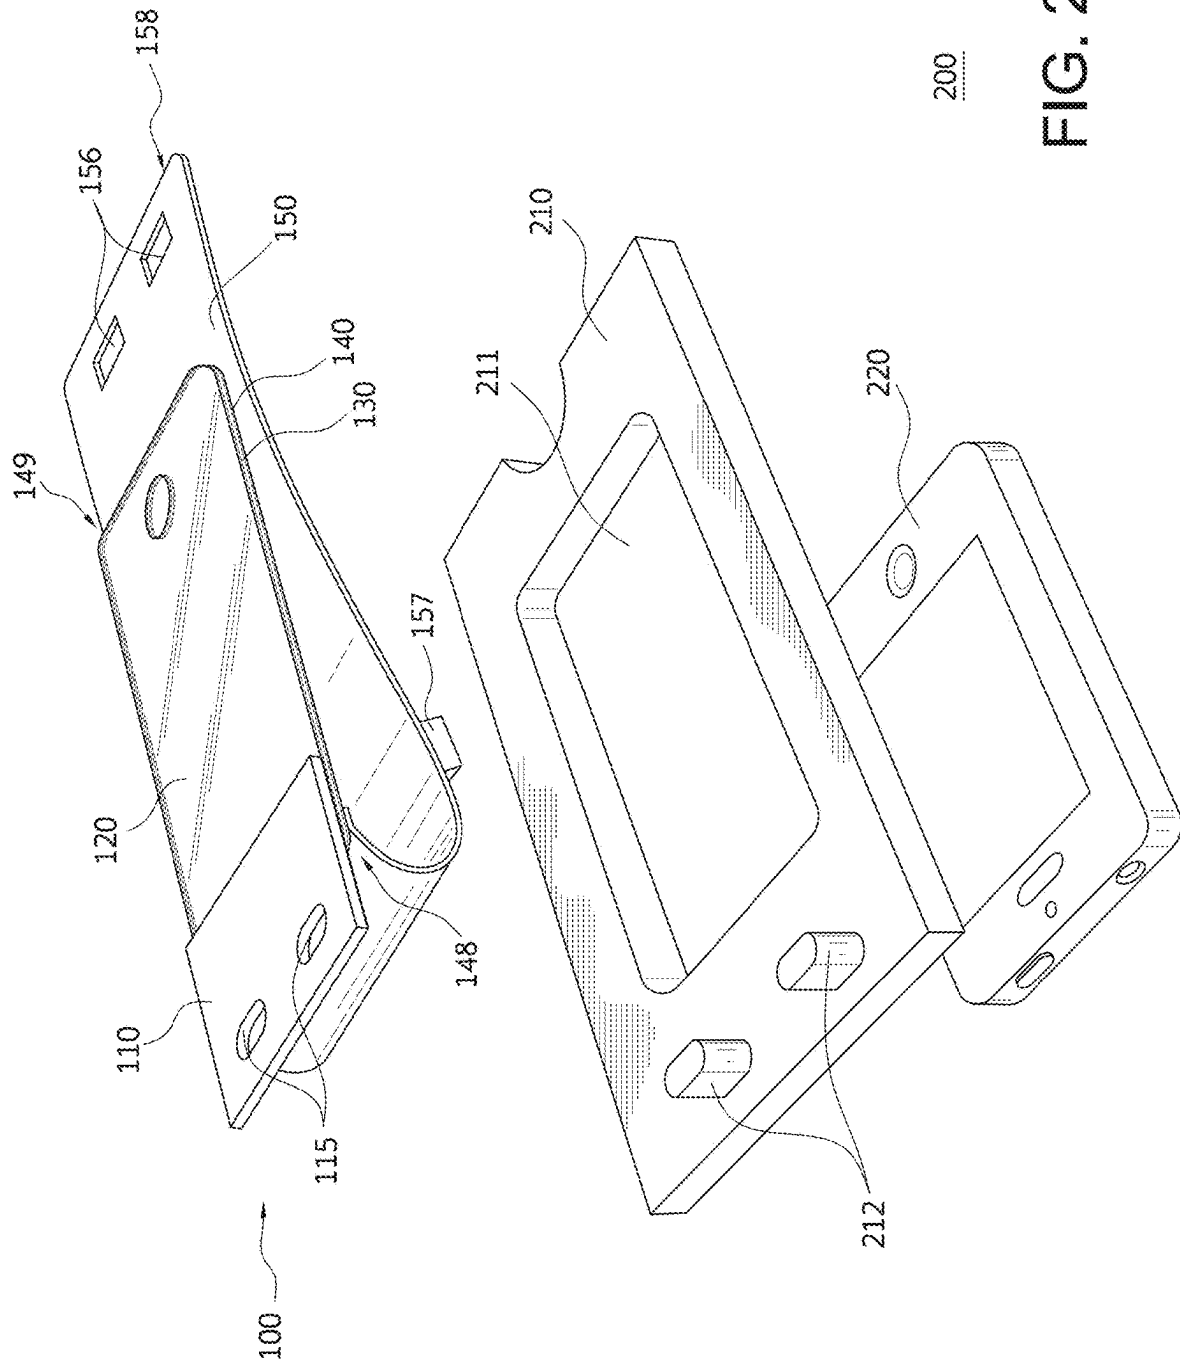


FIG. 1

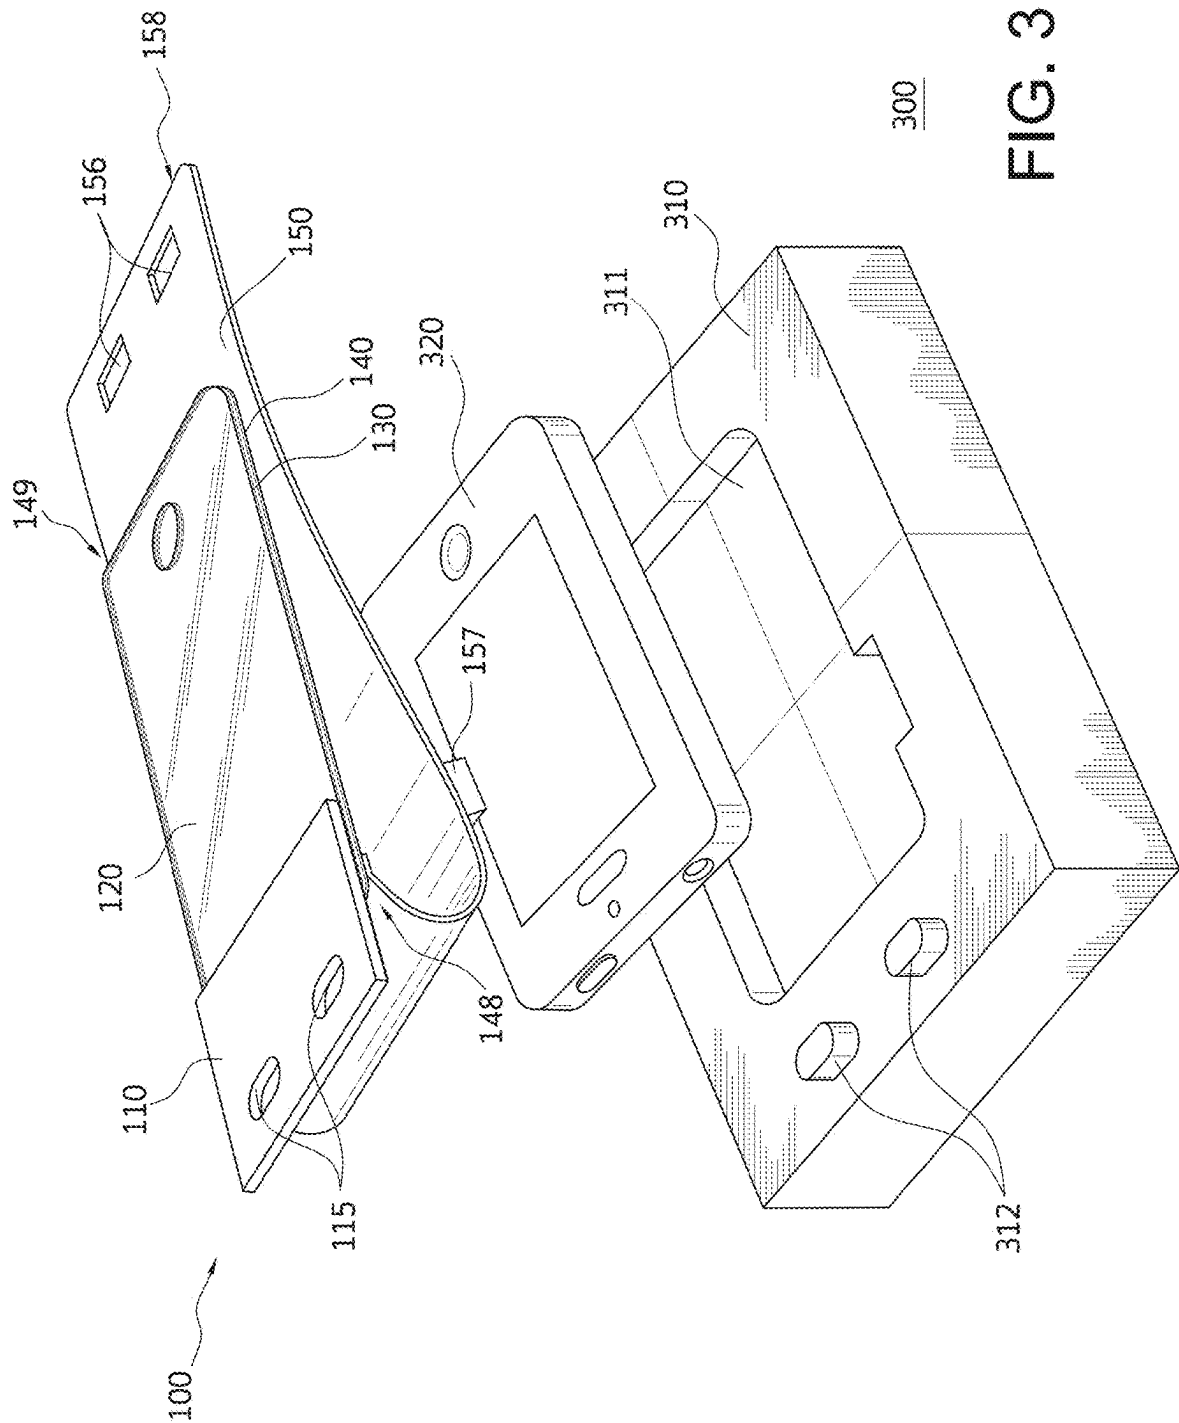

256

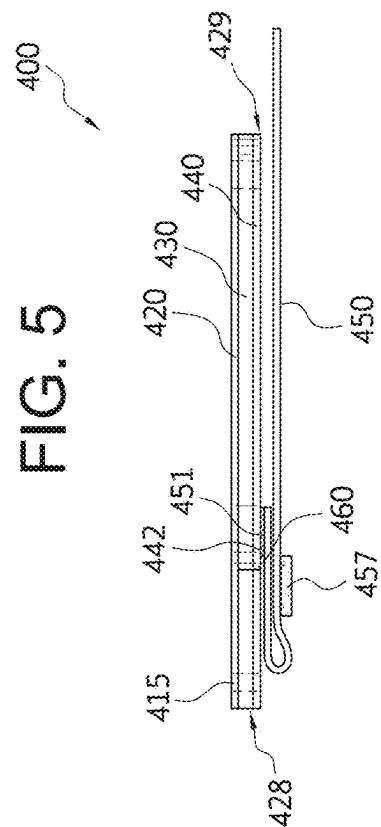

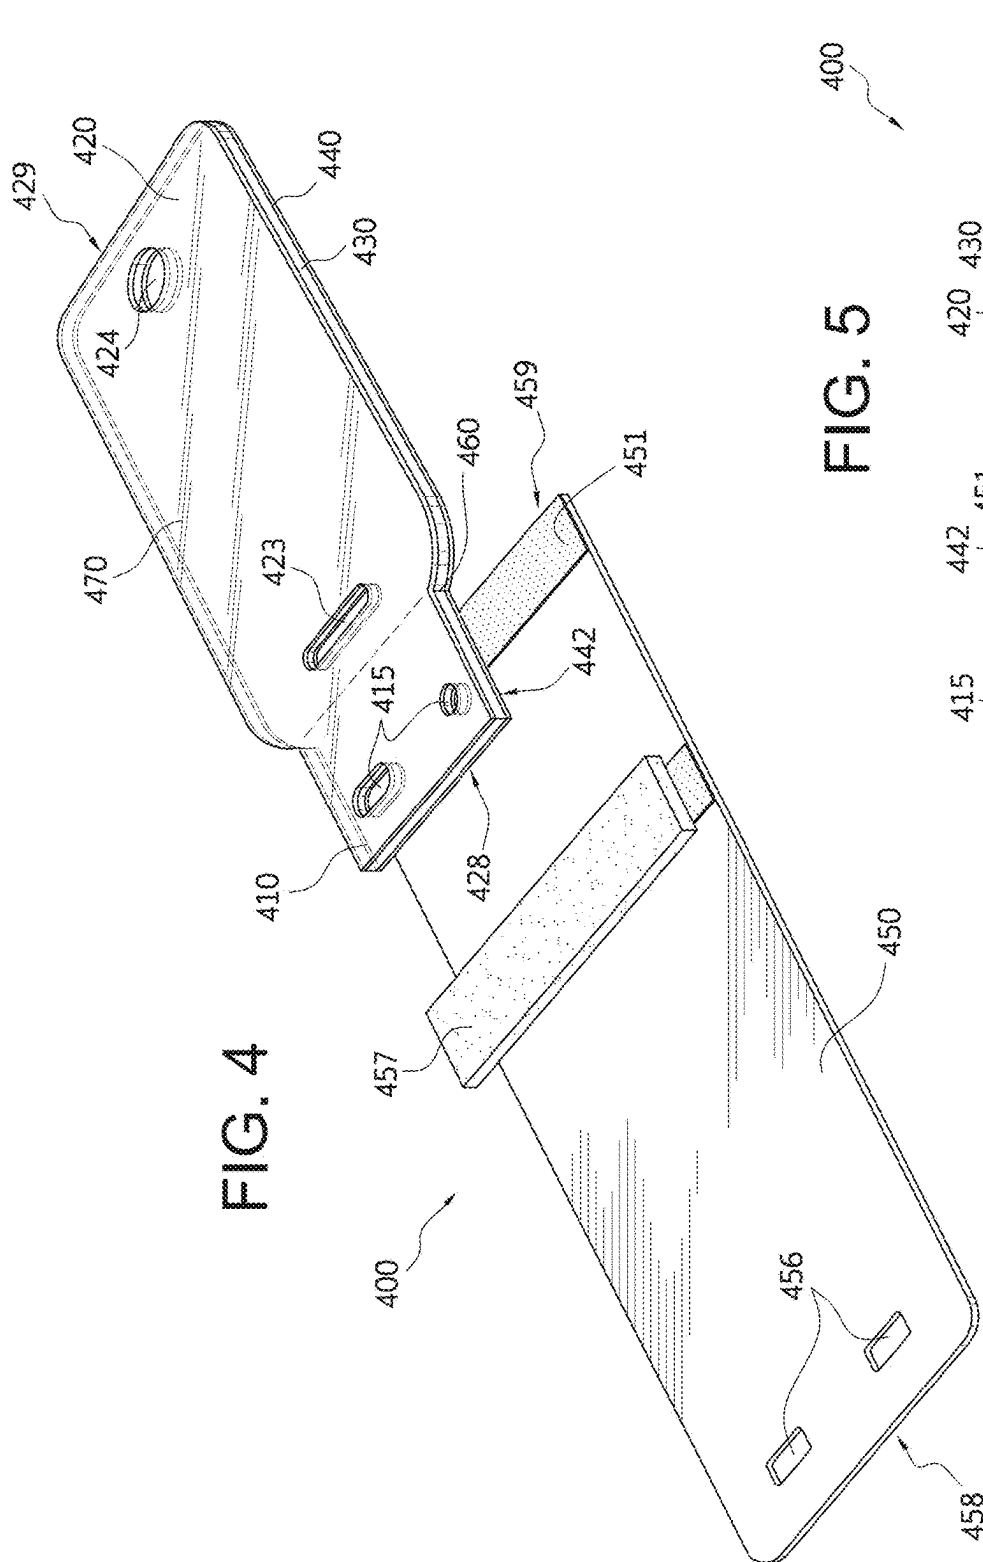

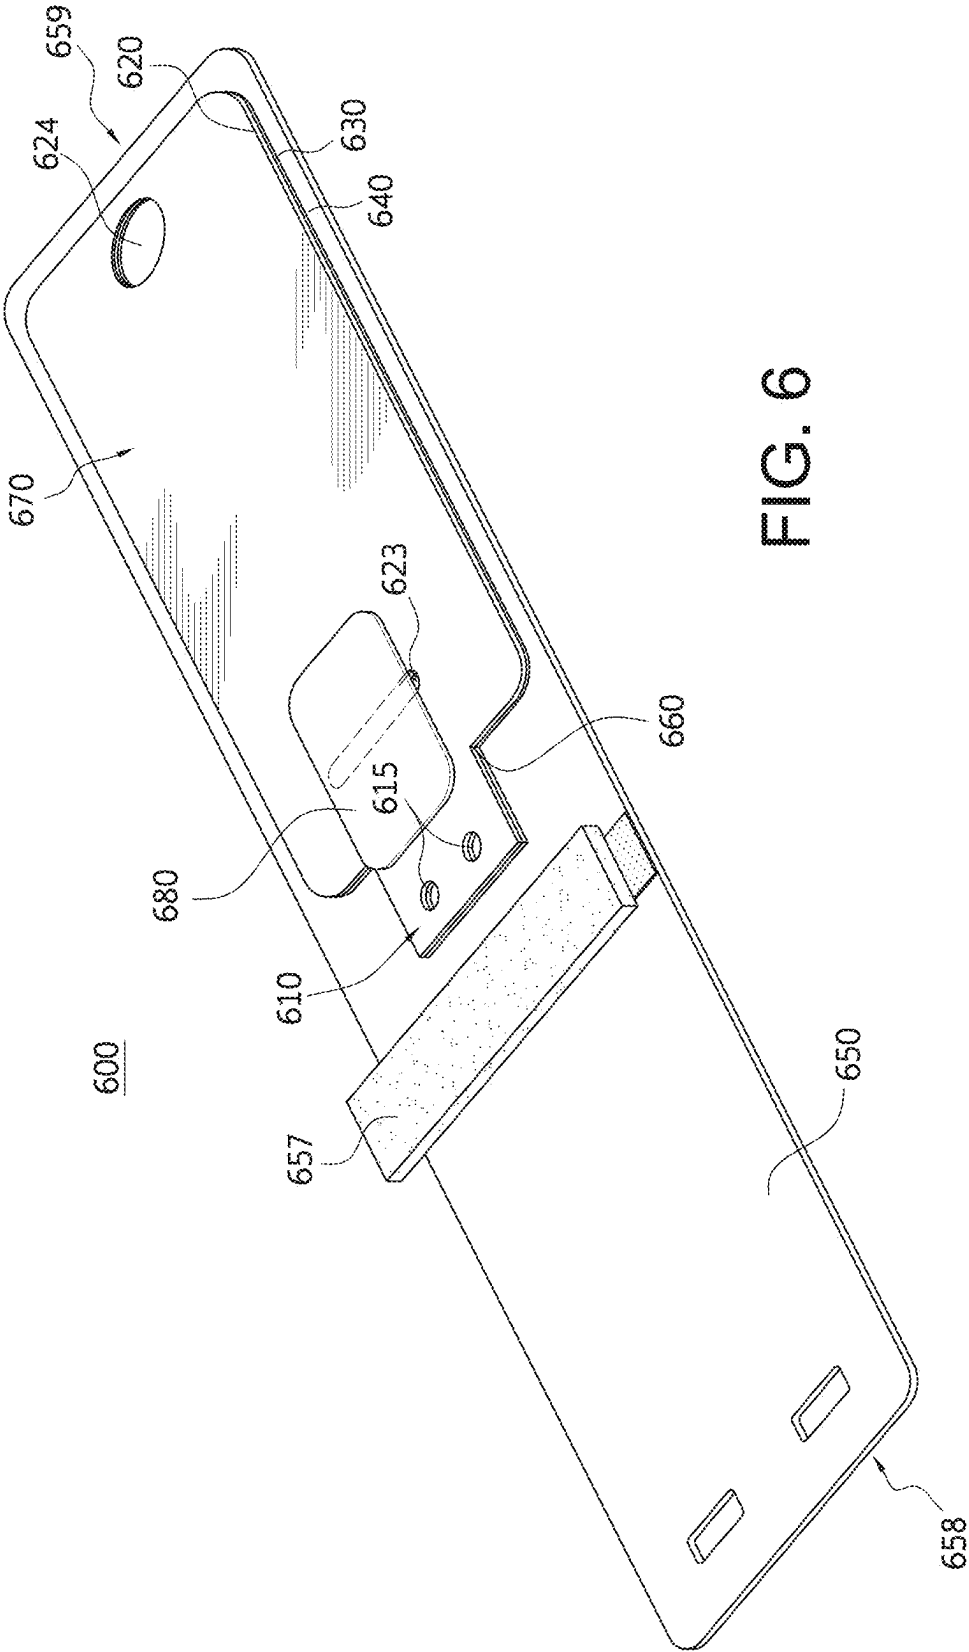


FIG. 6



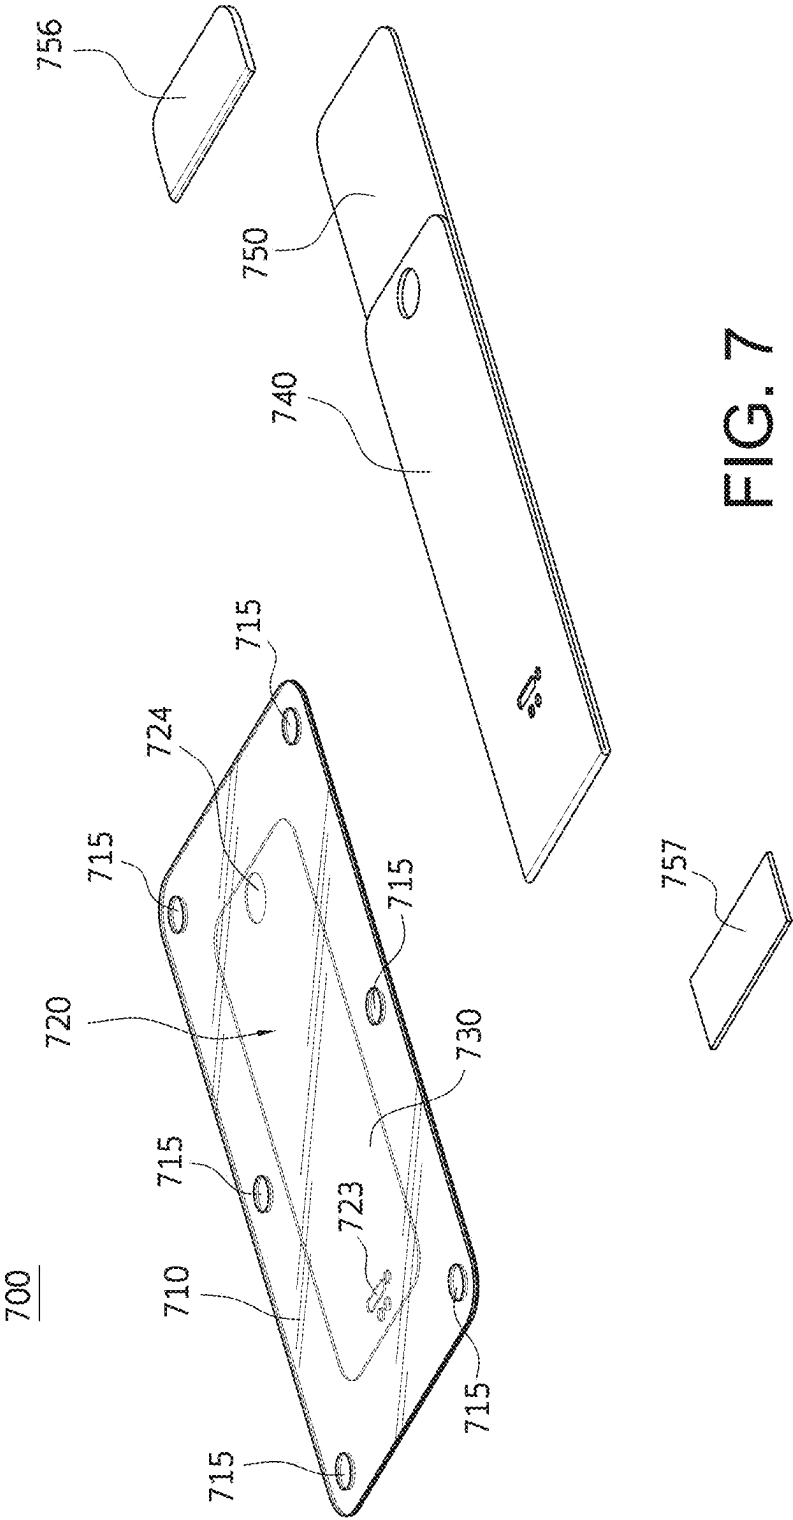


FIG. 7

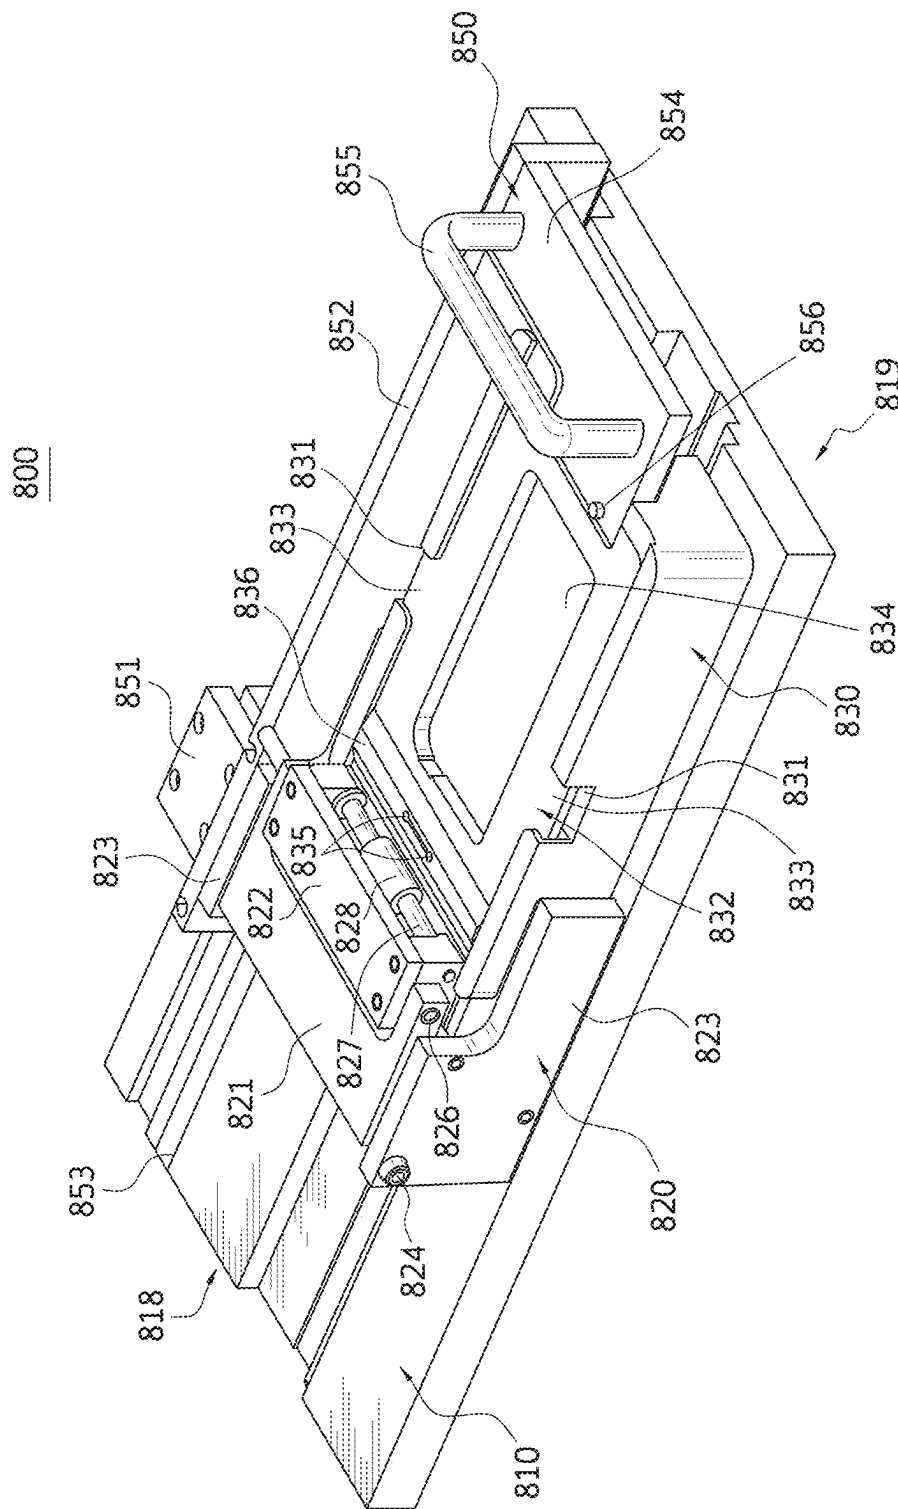

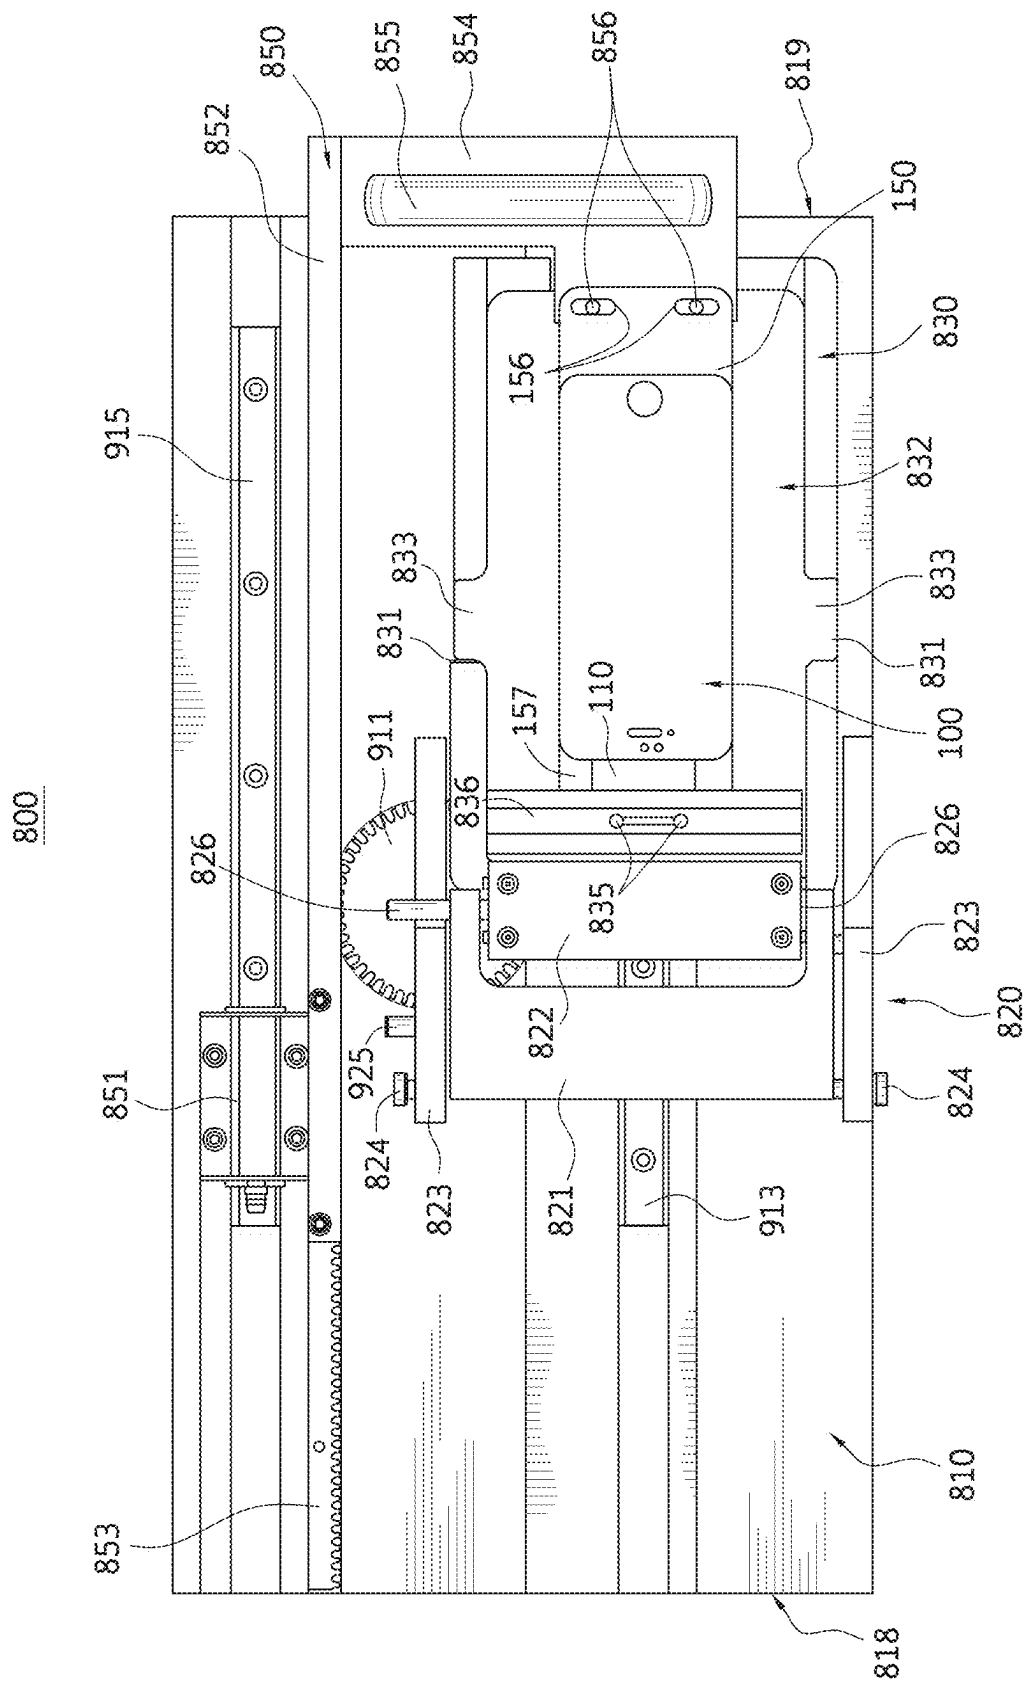

၈၆၂




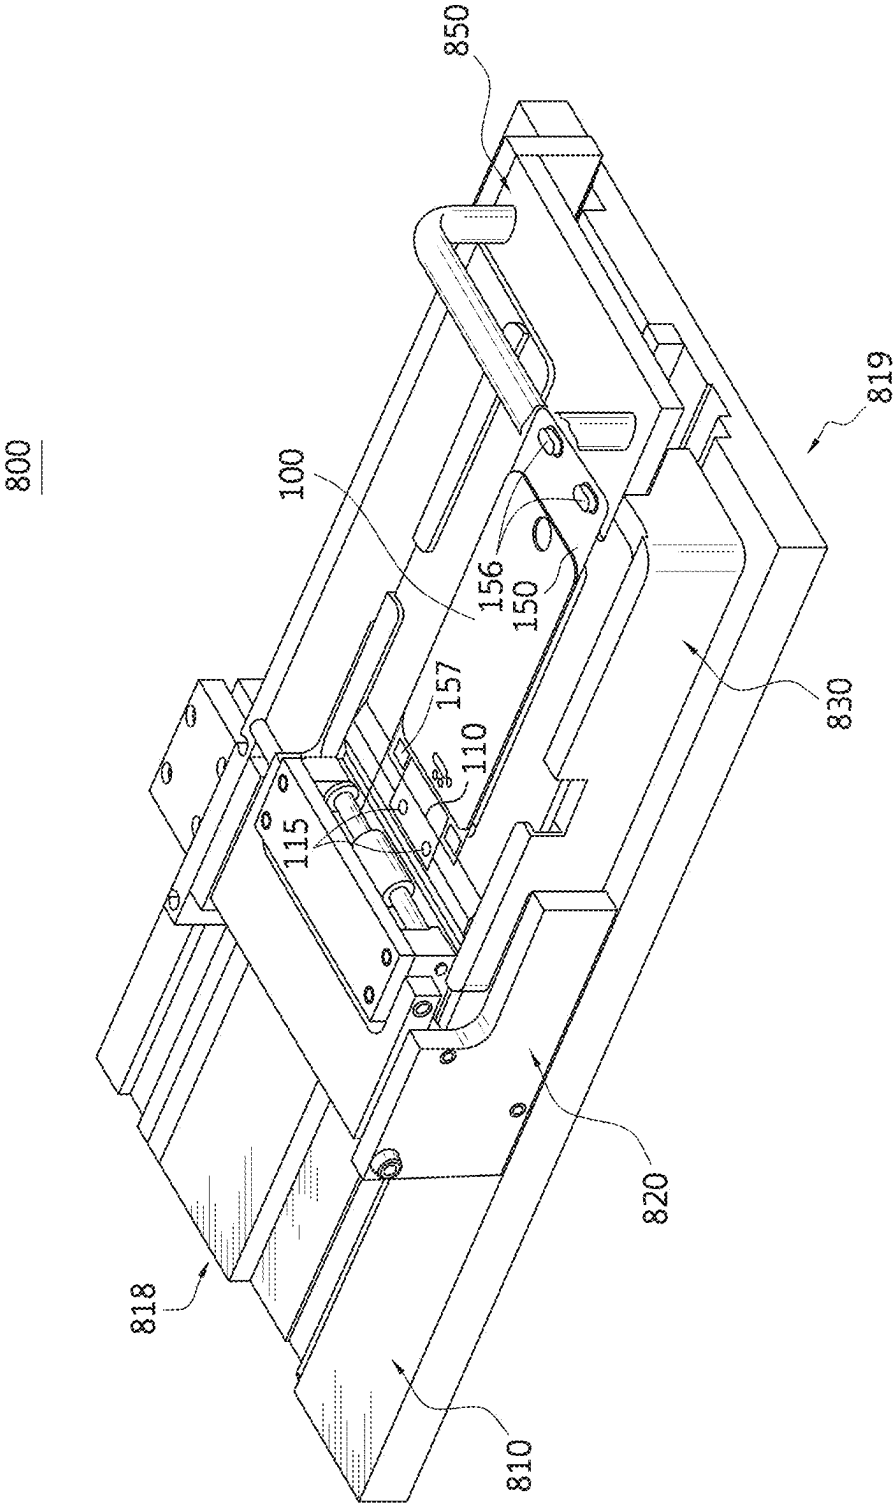



FIG. 10

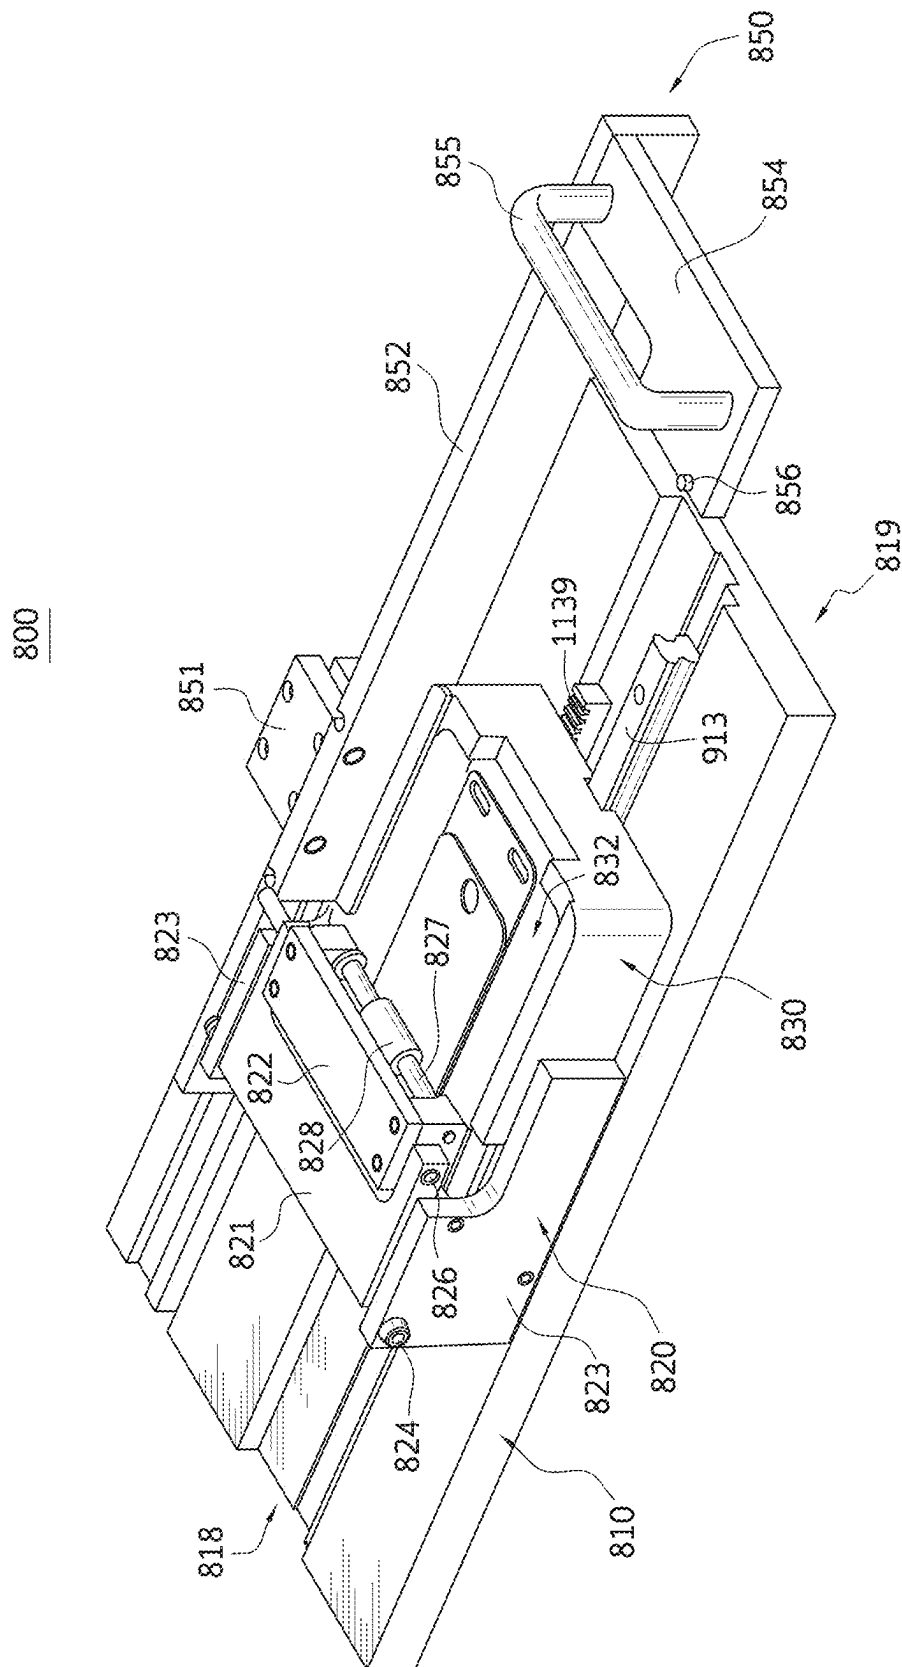

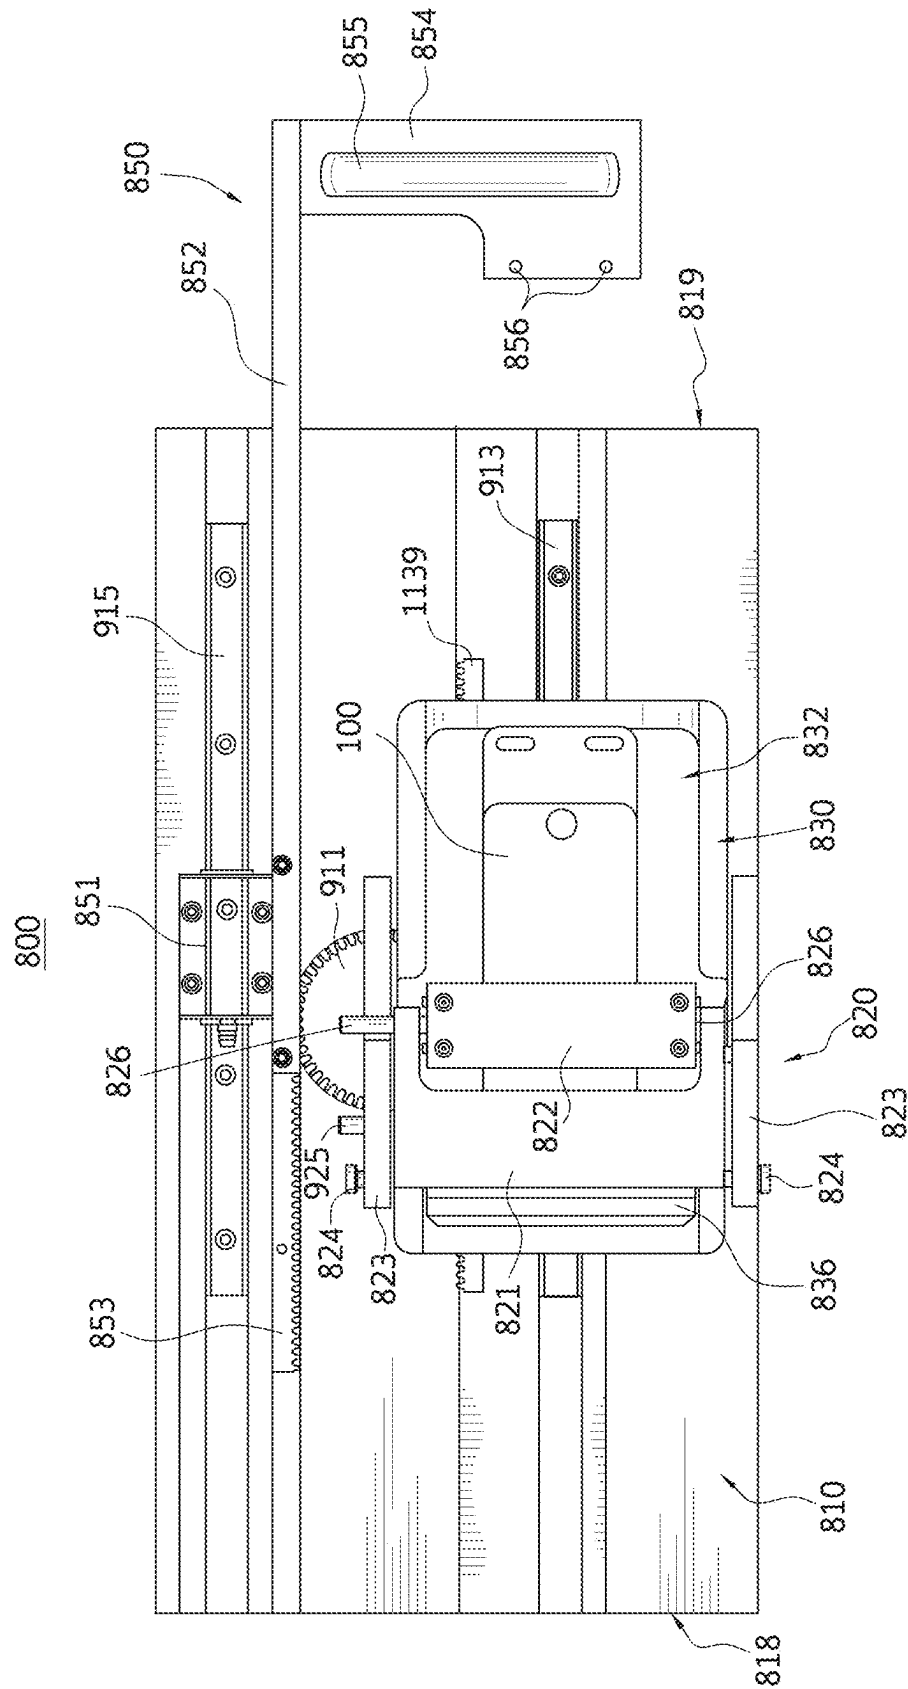

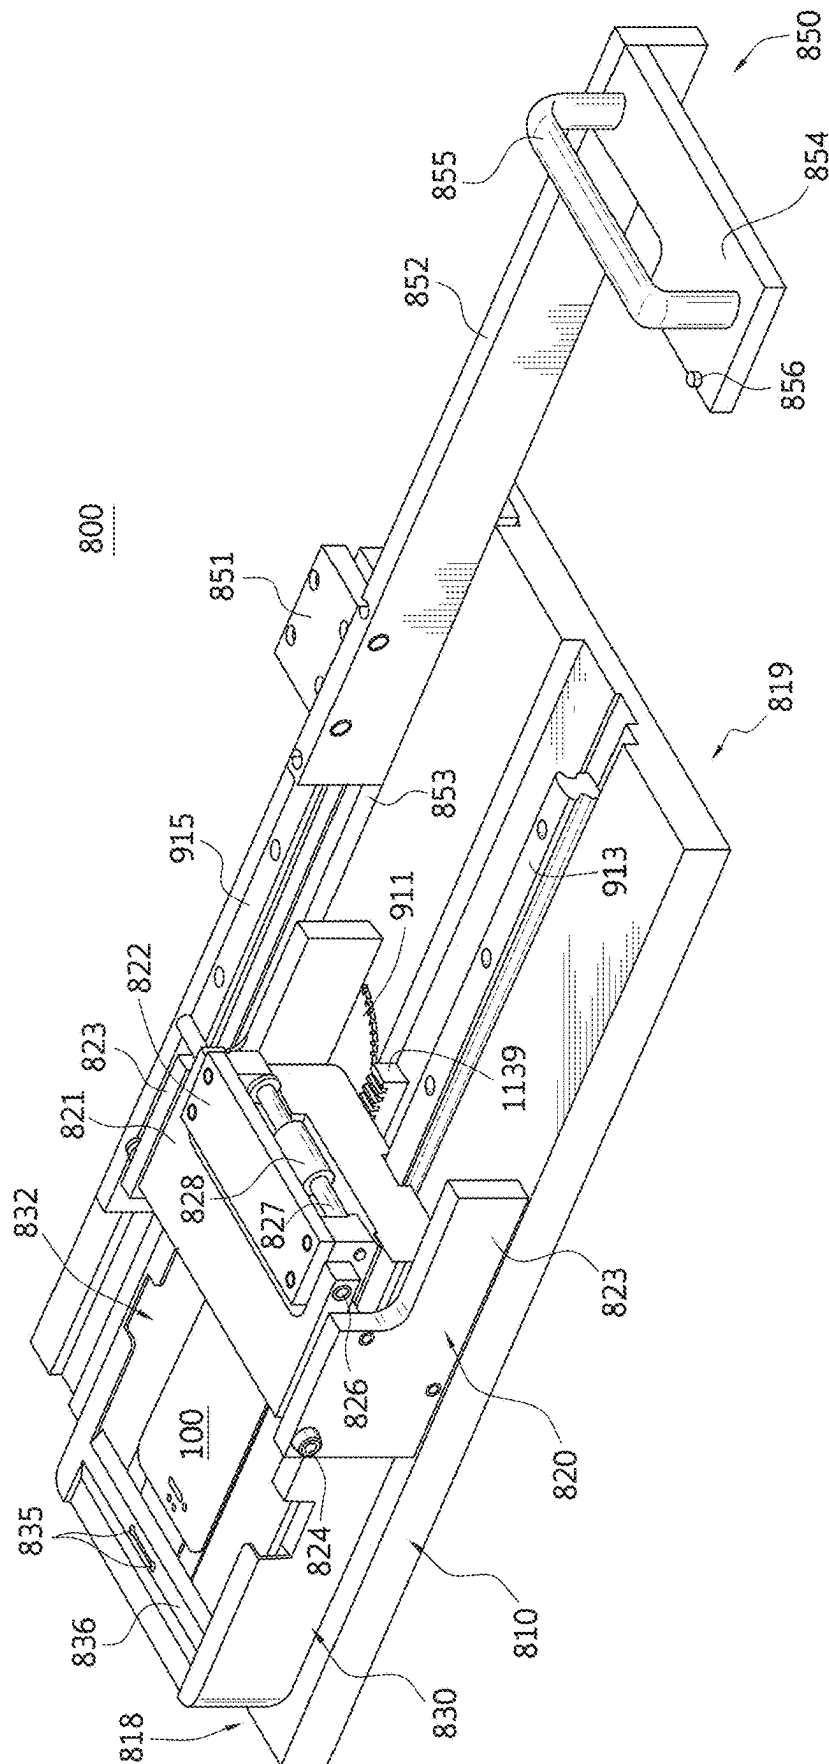

3
7
5
6
4

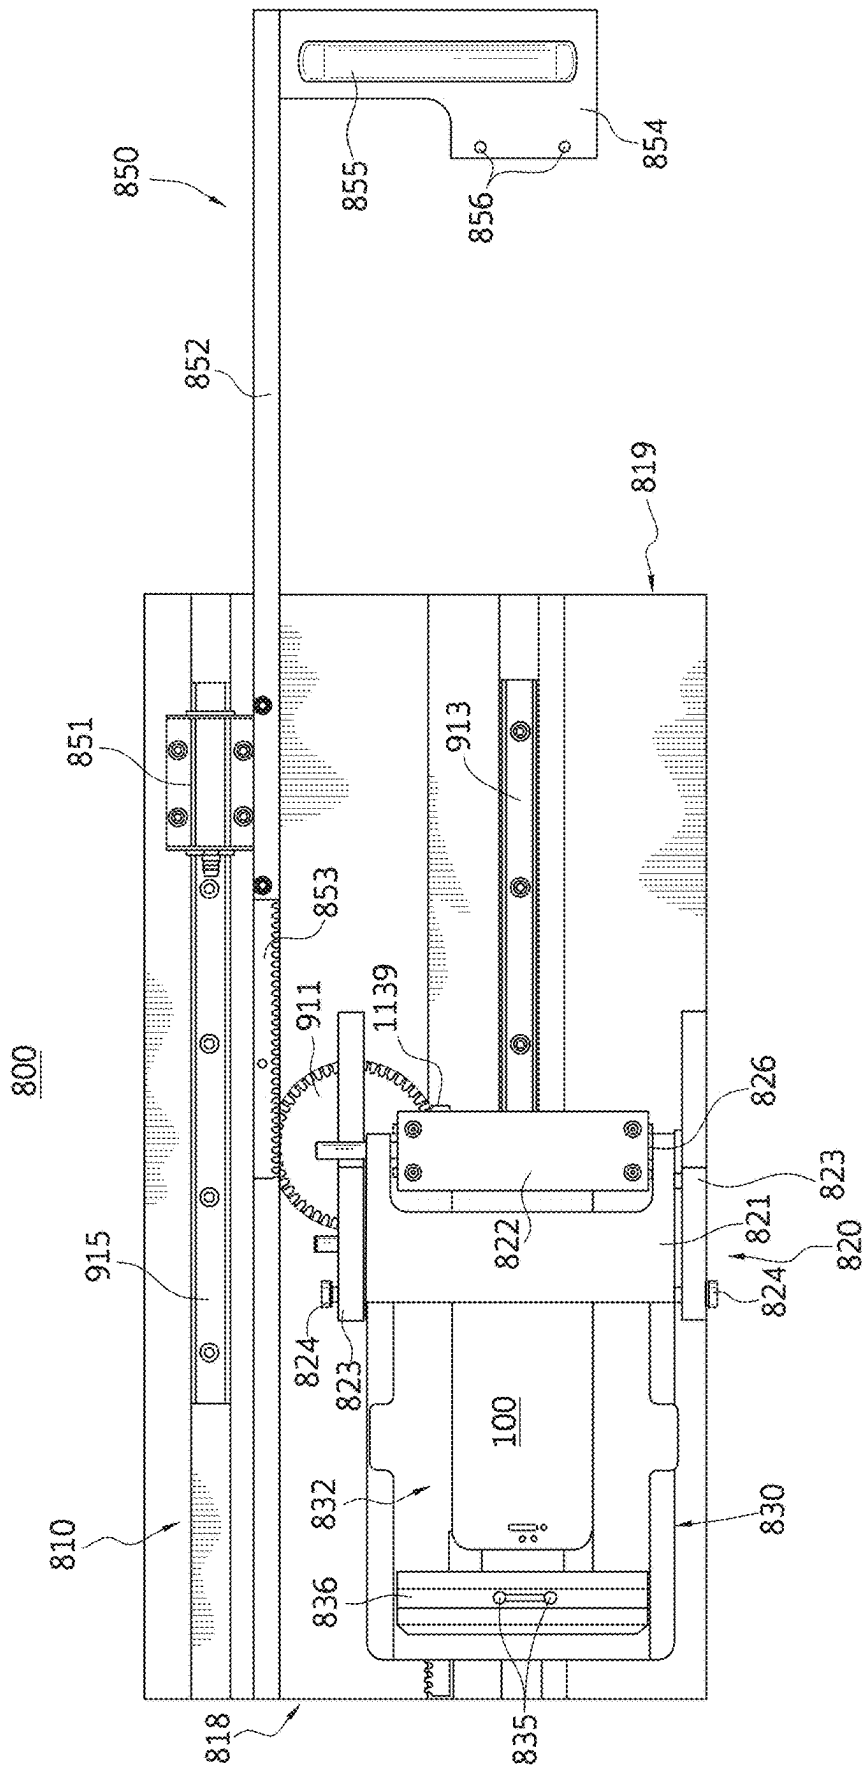

ॐ

1500




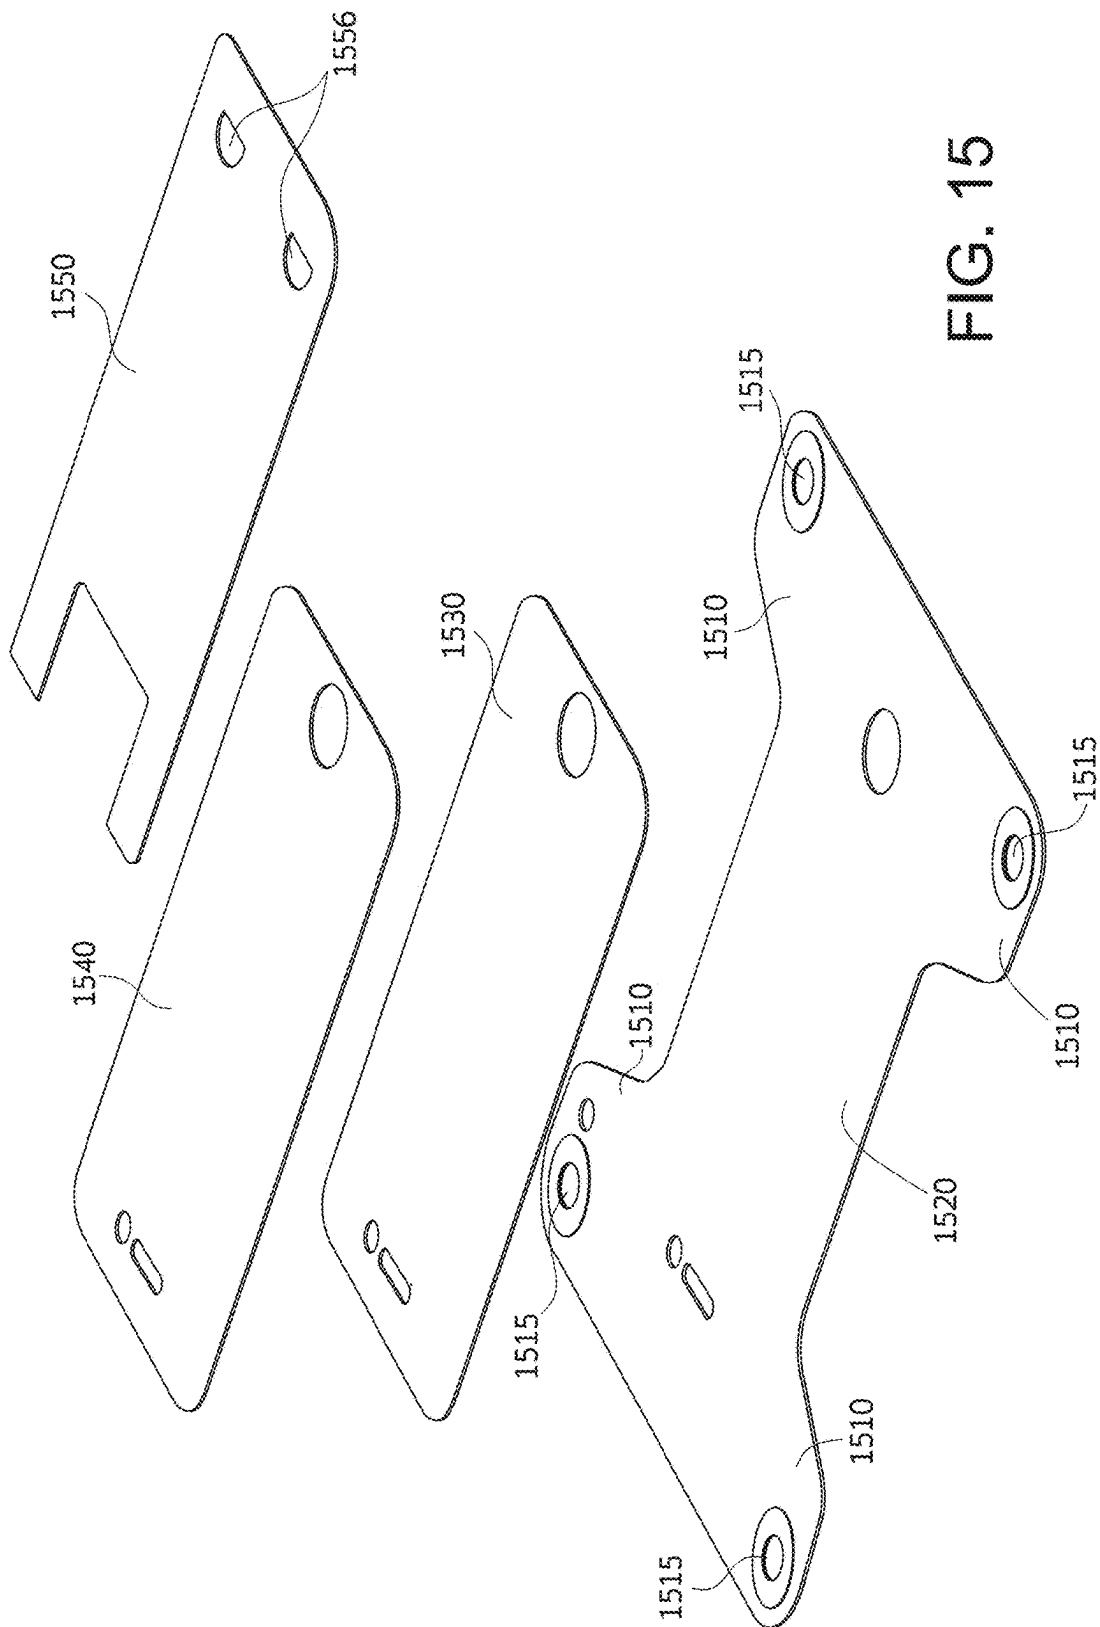
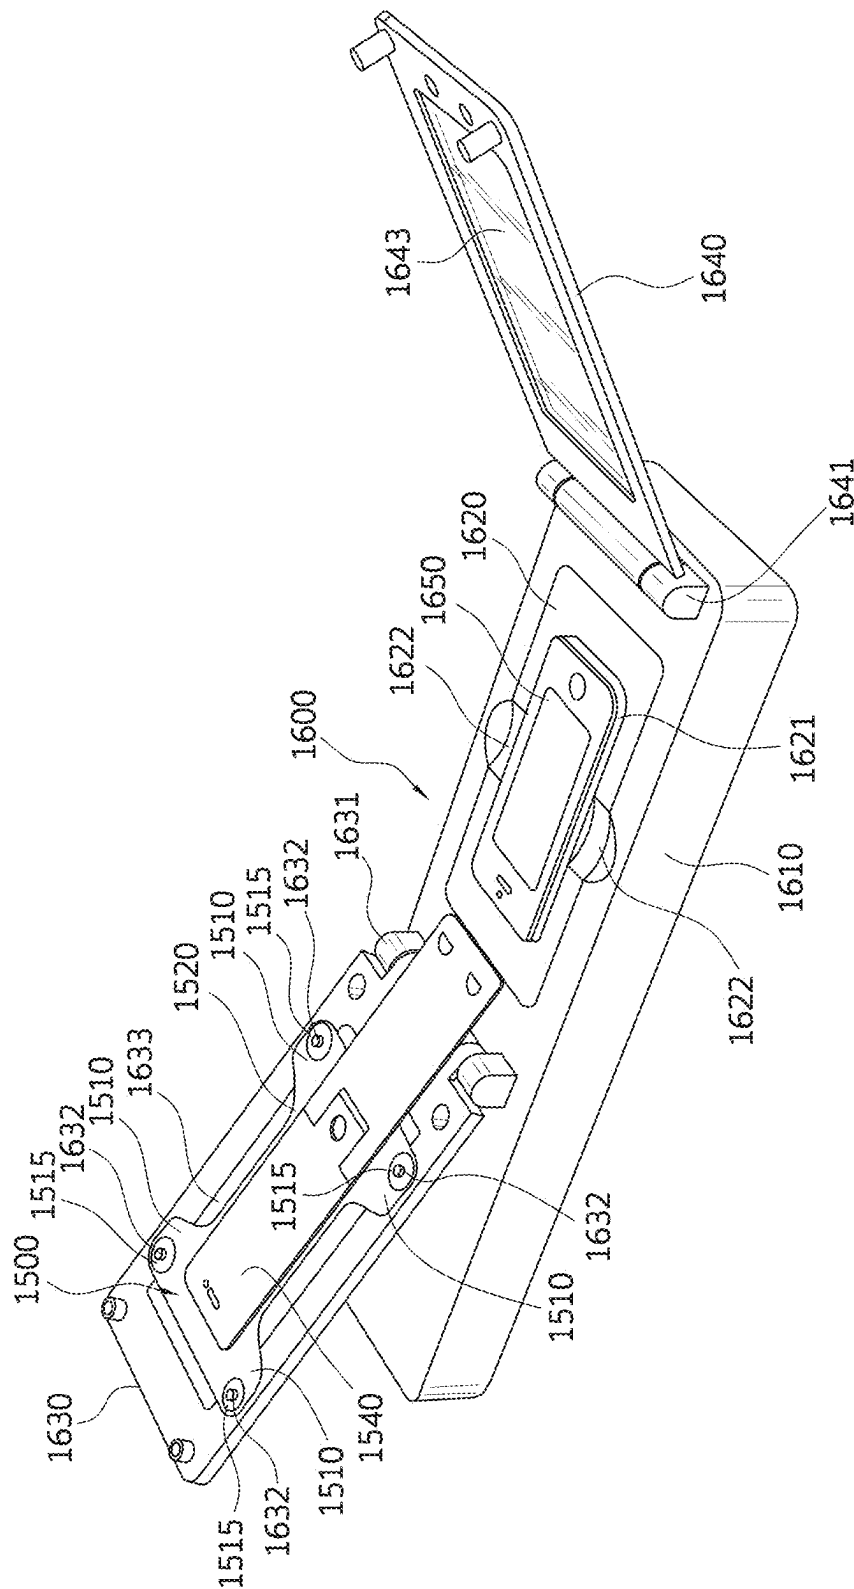


FIG. 15

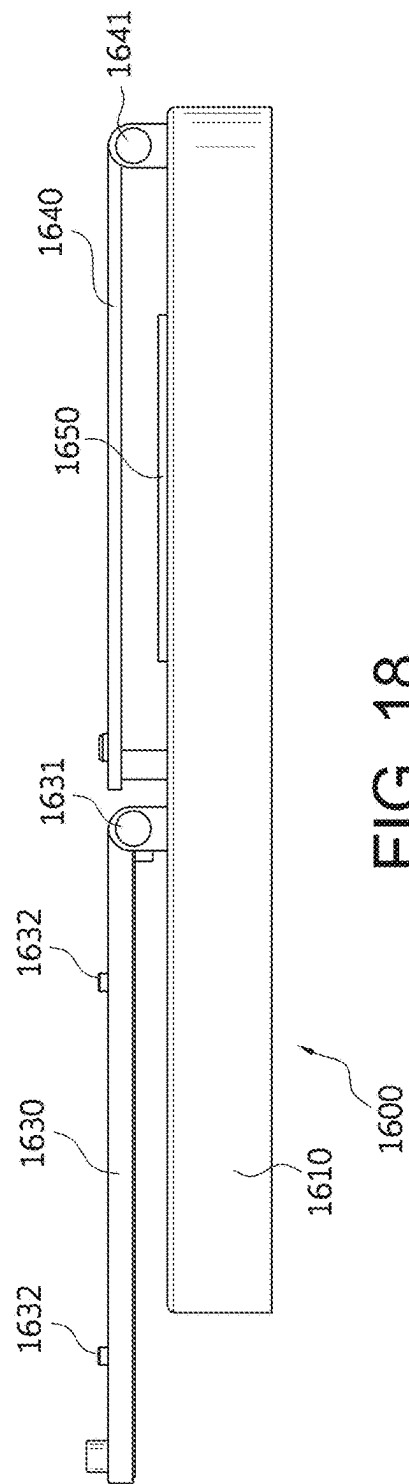

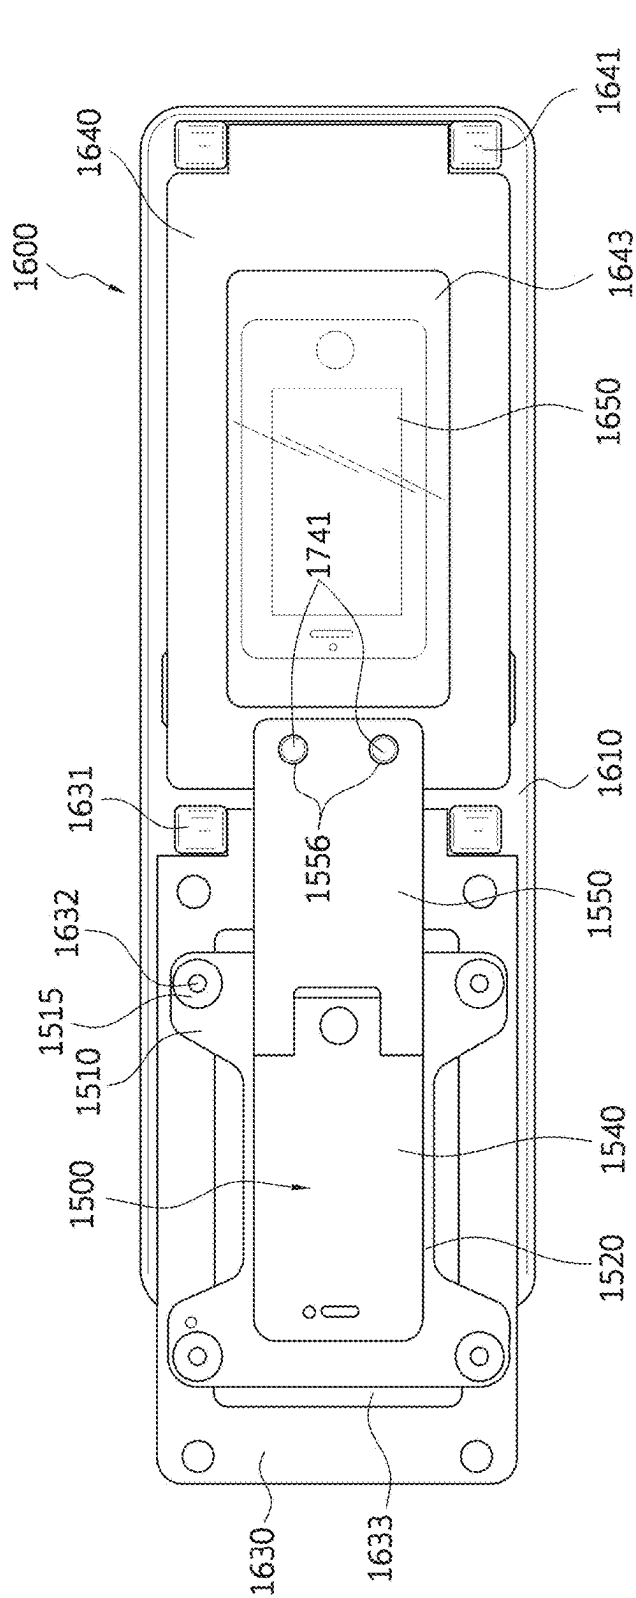

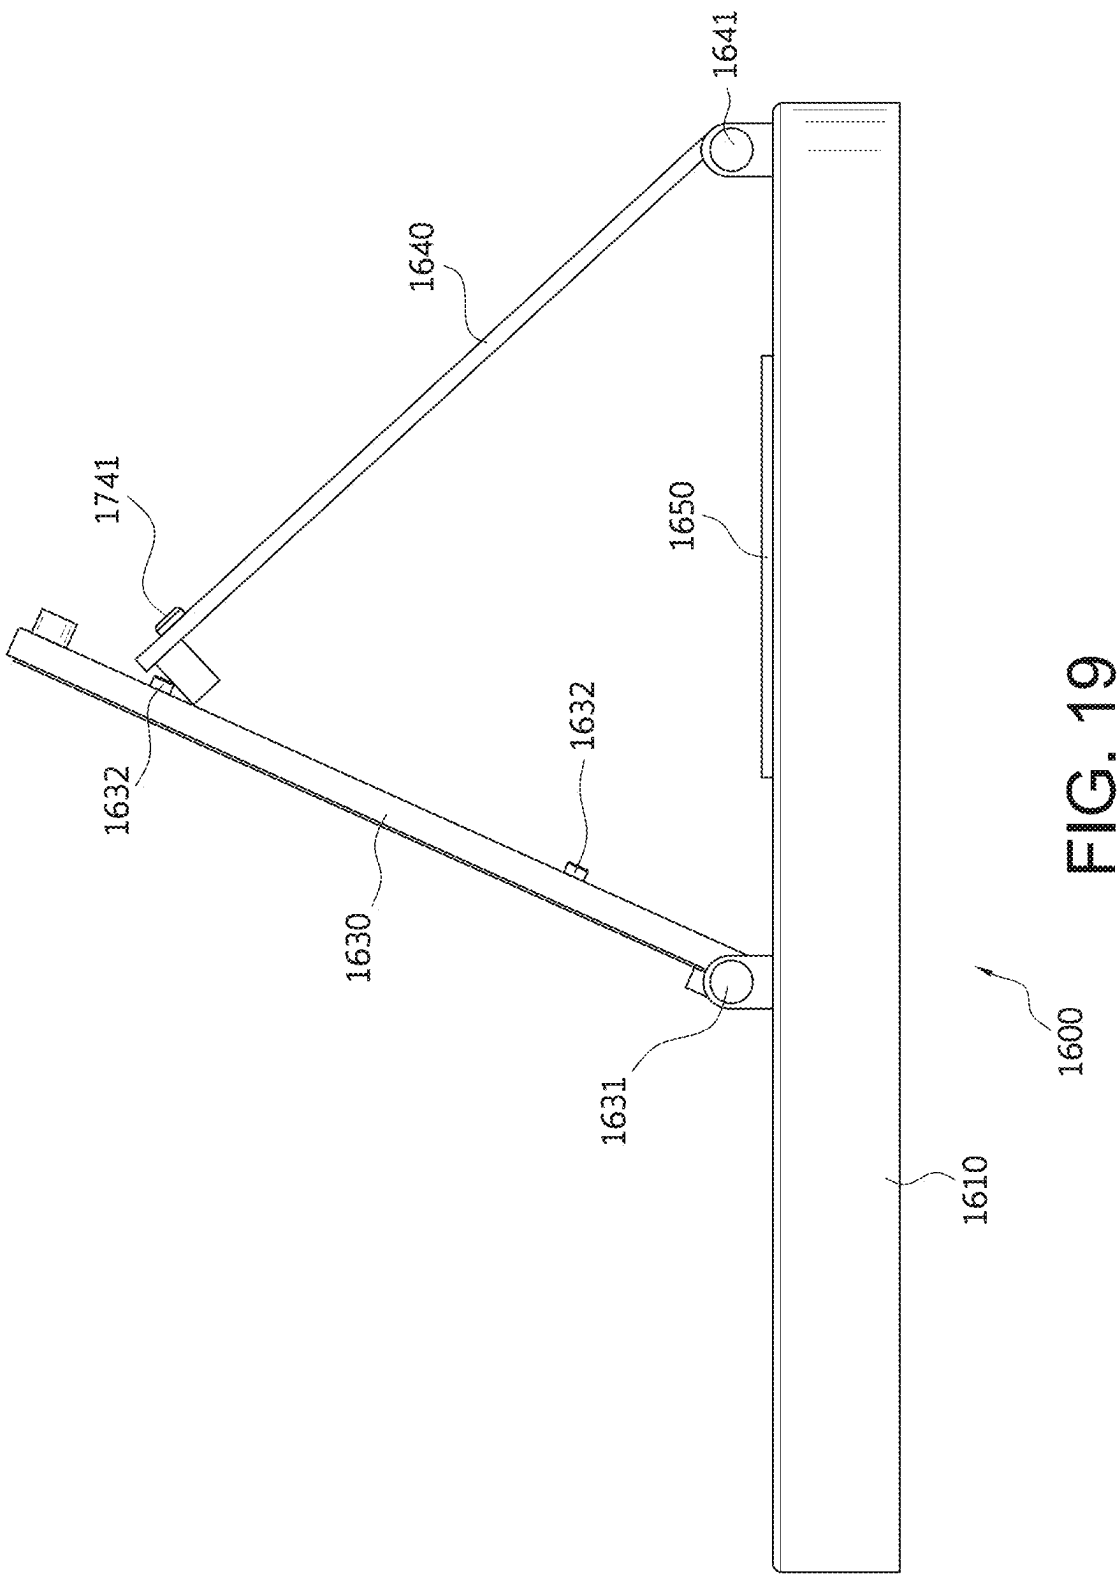

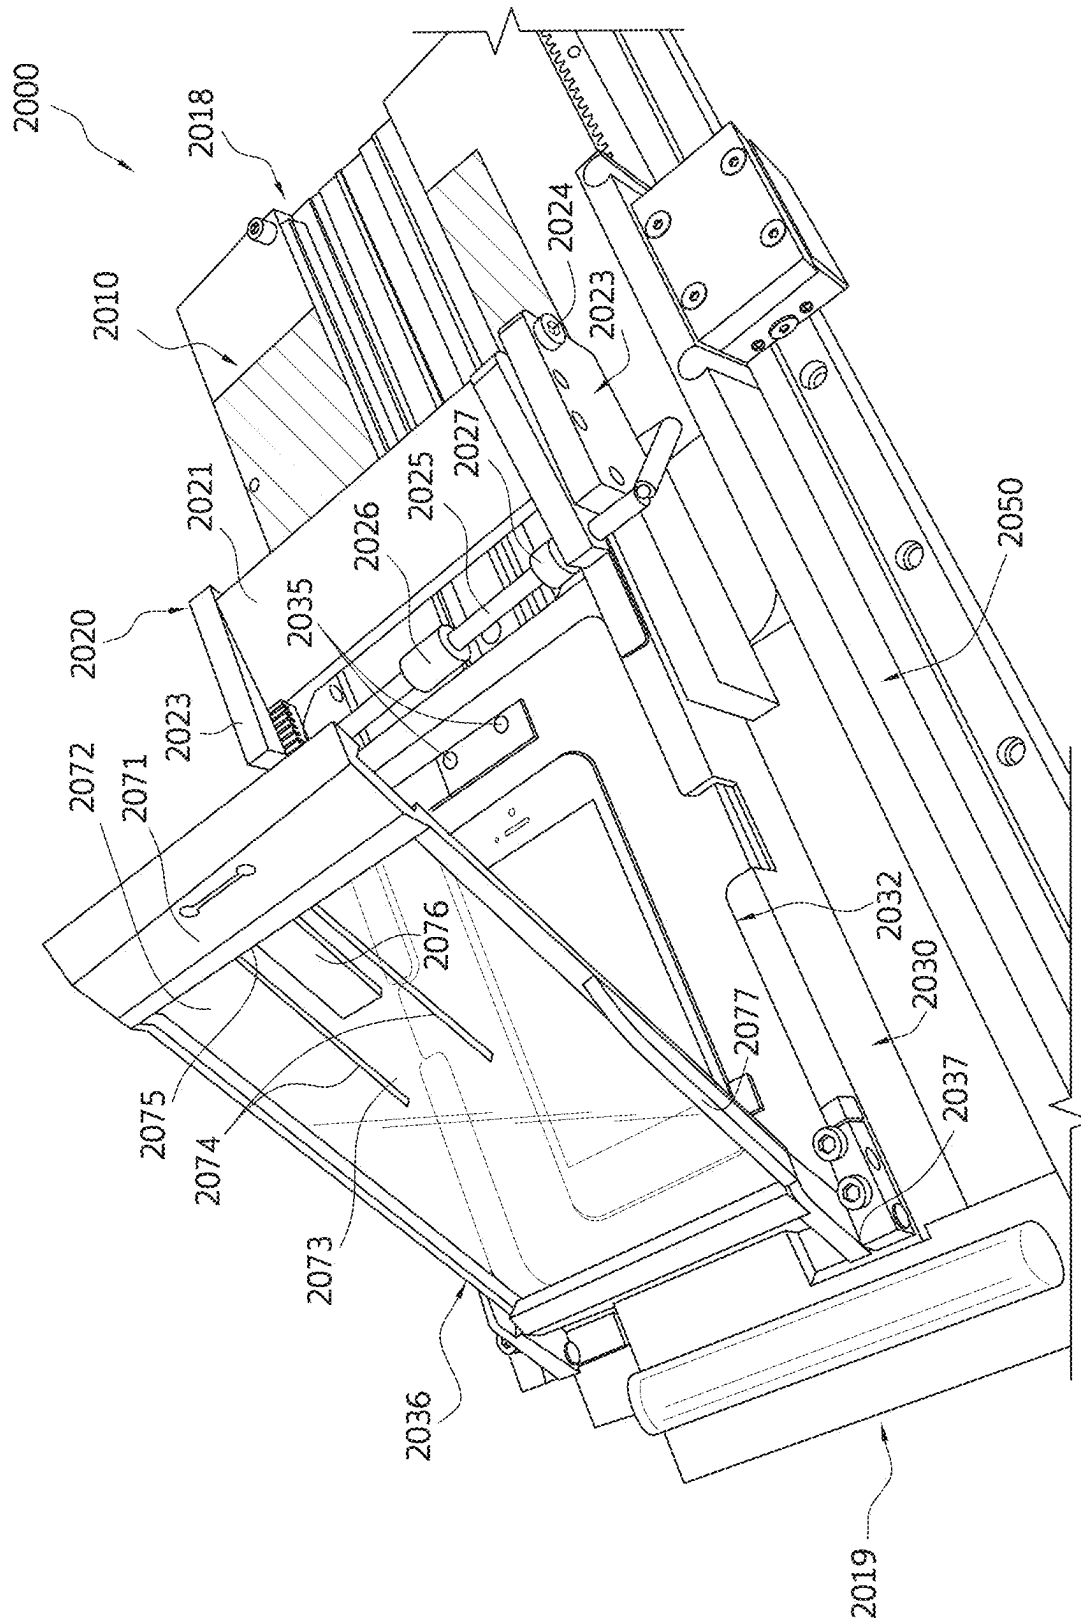


FIG. 20


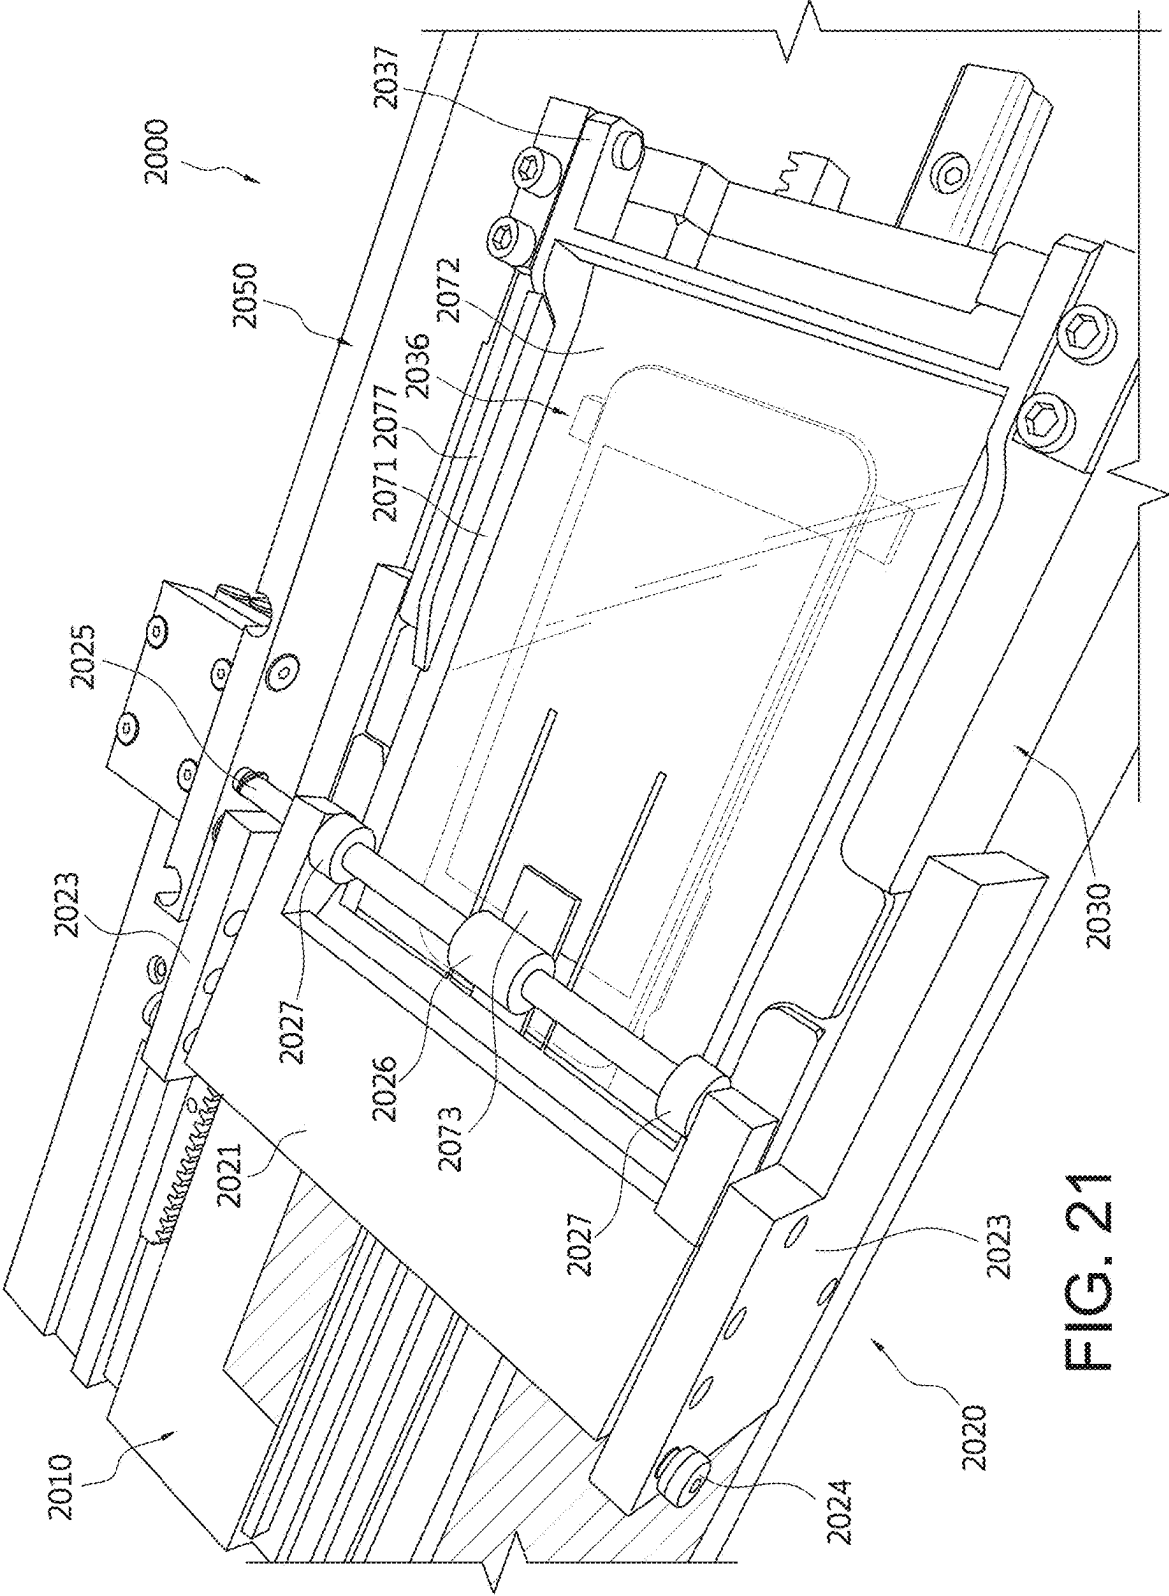


FIG. 21

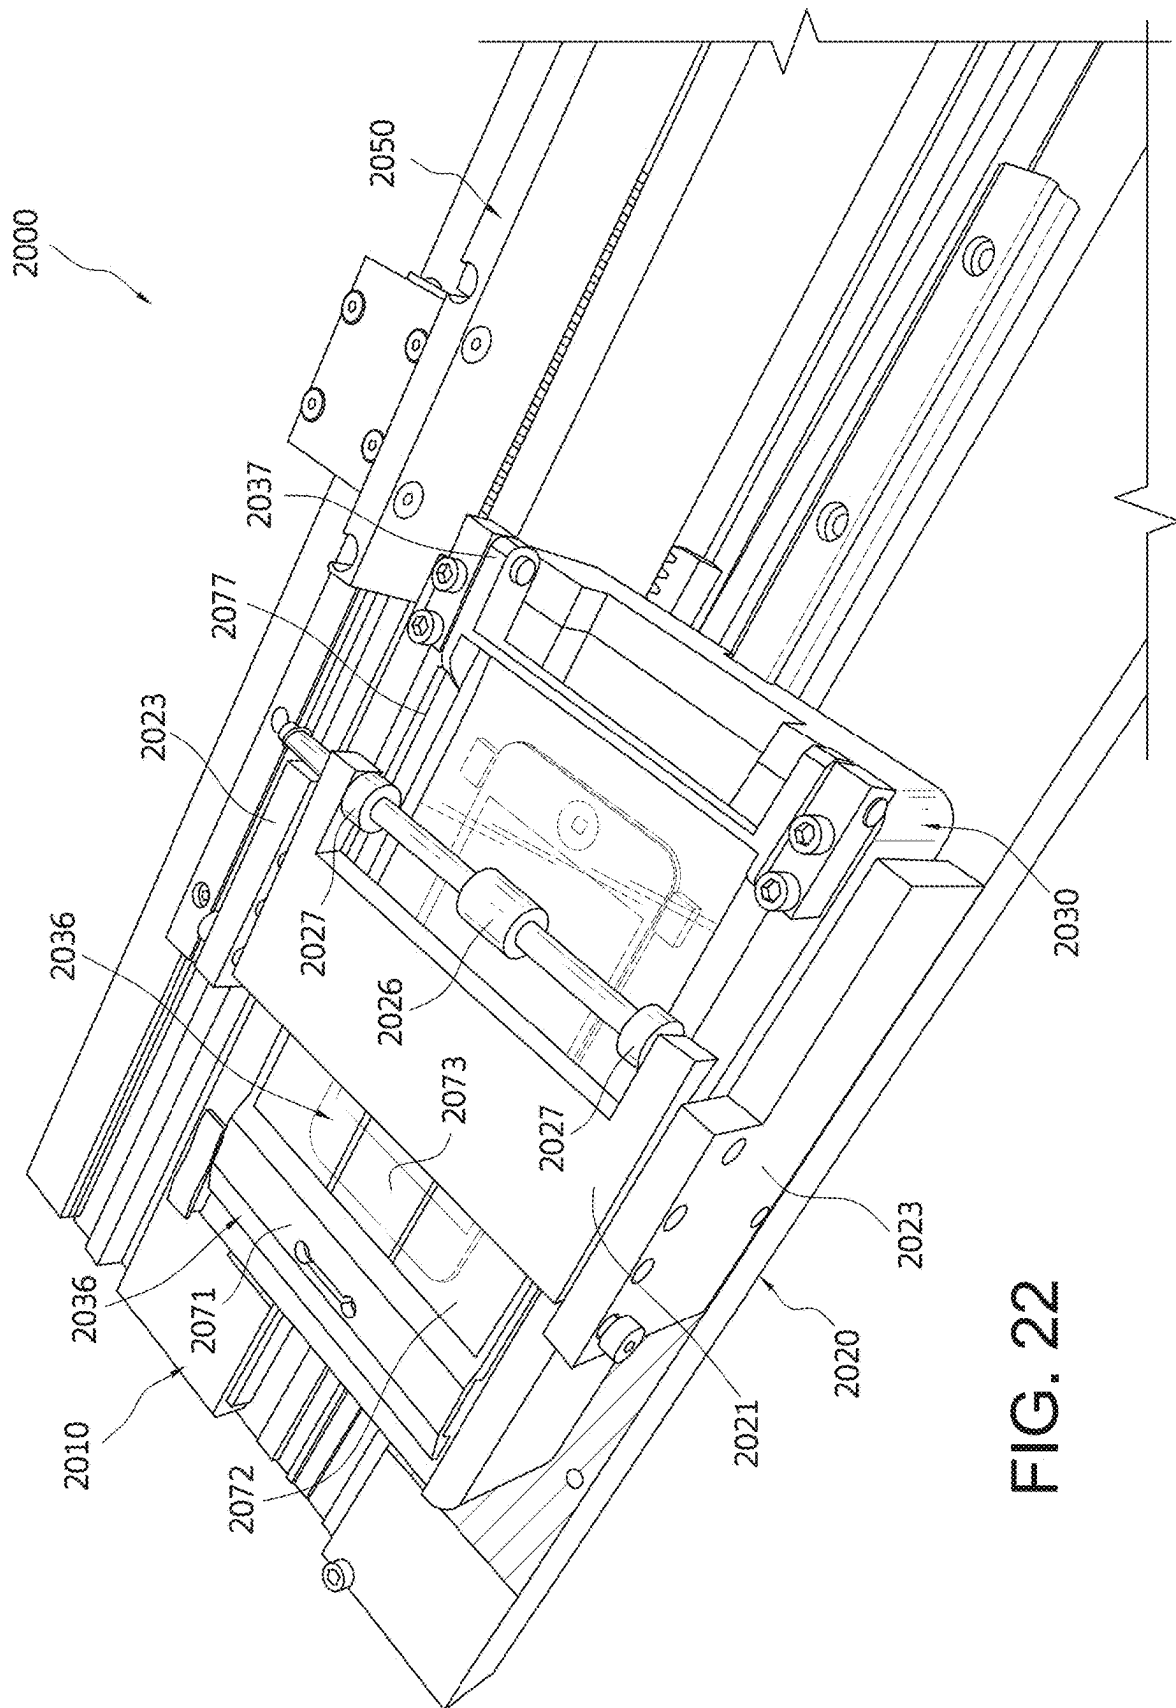

F/G. 22

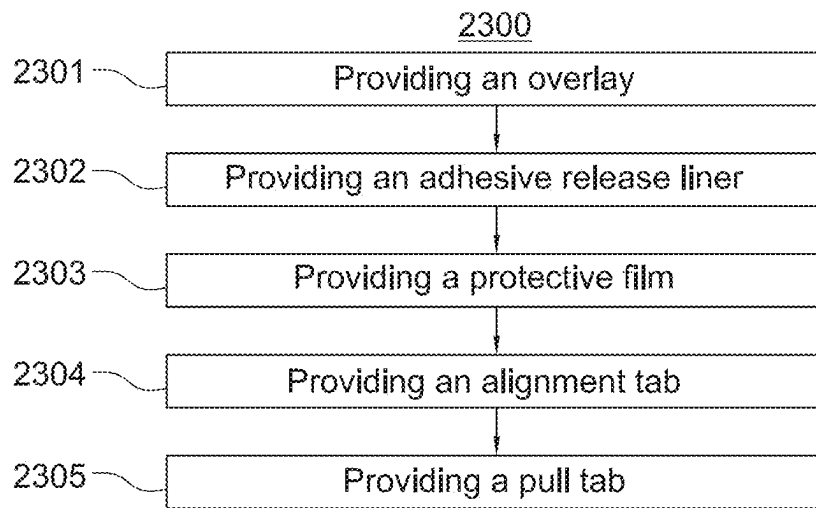


FIG. 23

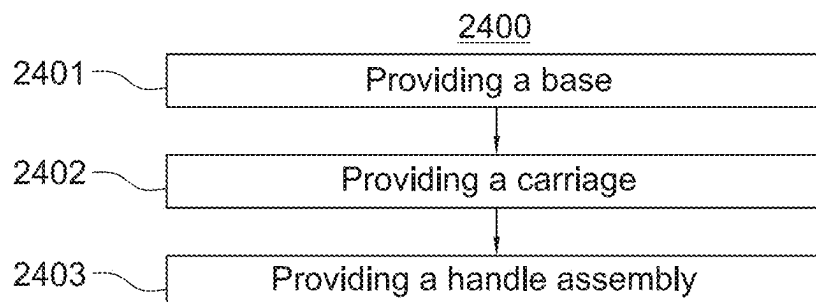


FIG. 24

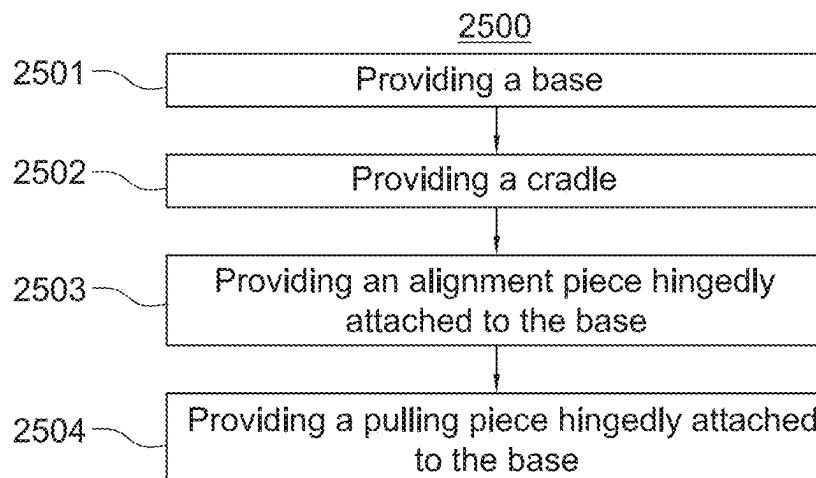


FIG. 25


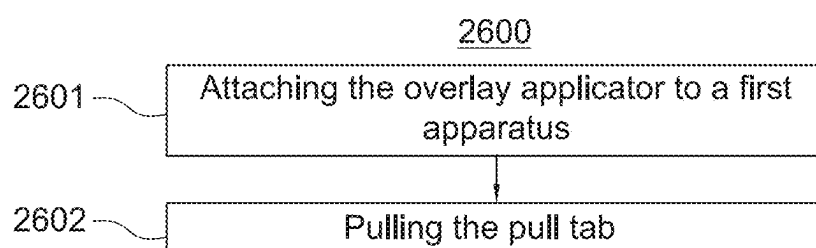


FIG. 26

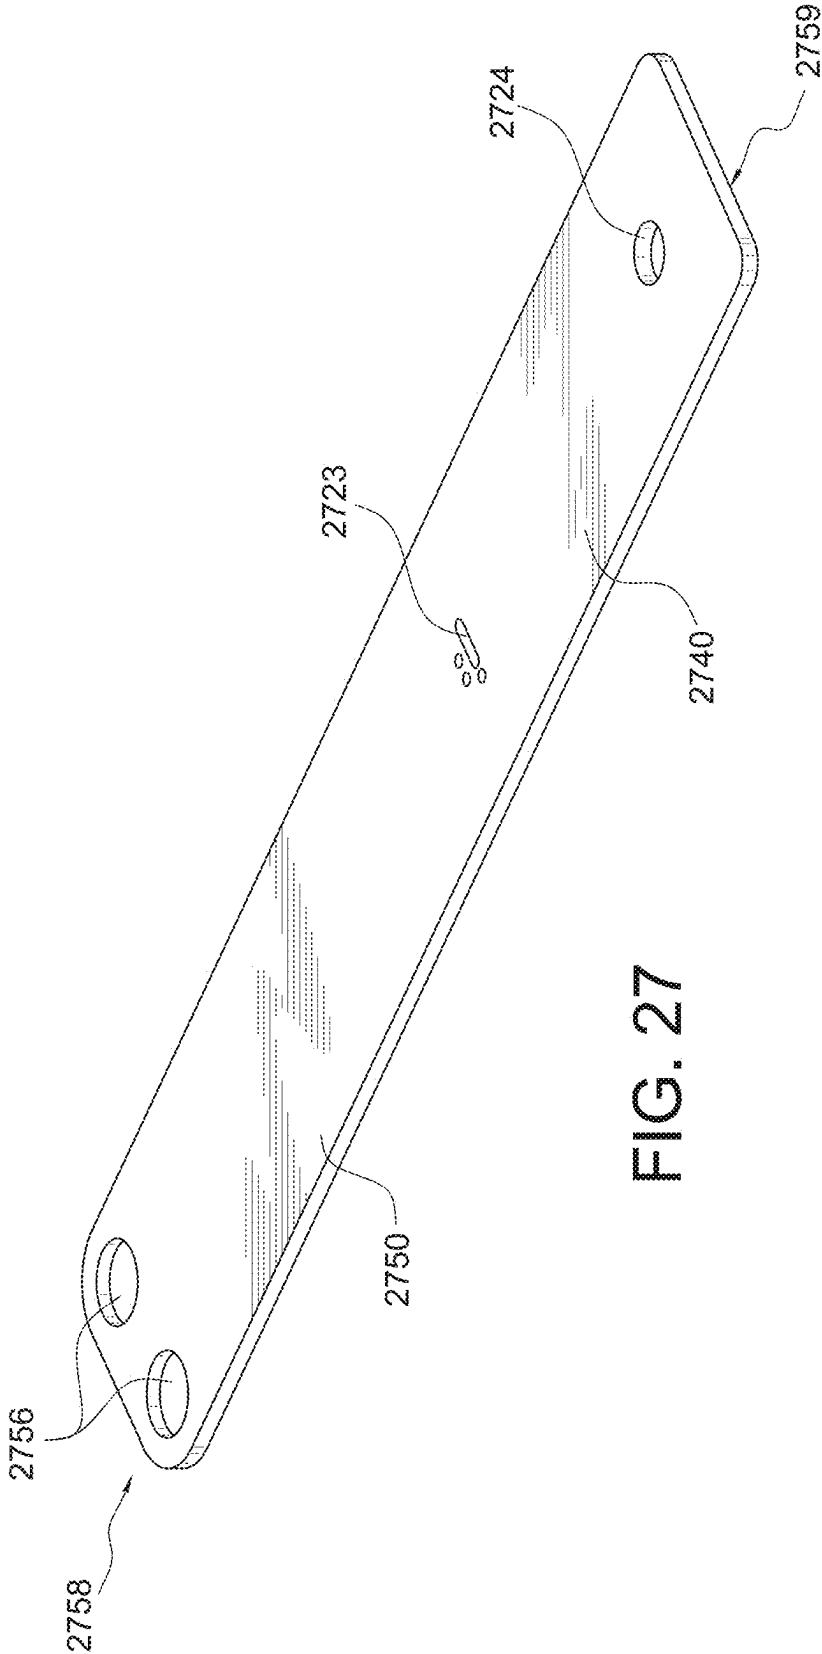

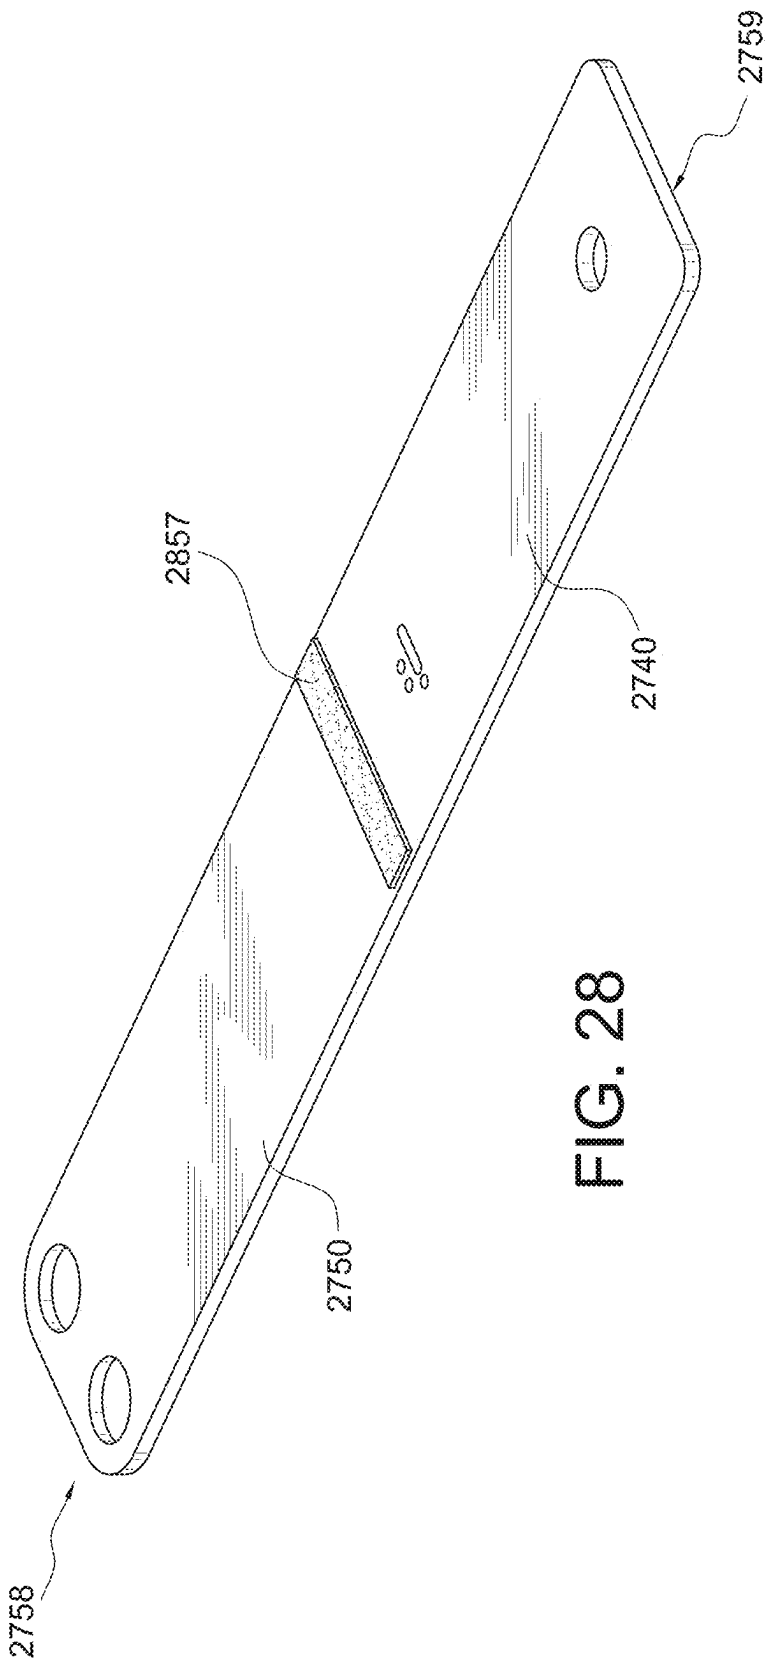


FIG. 28


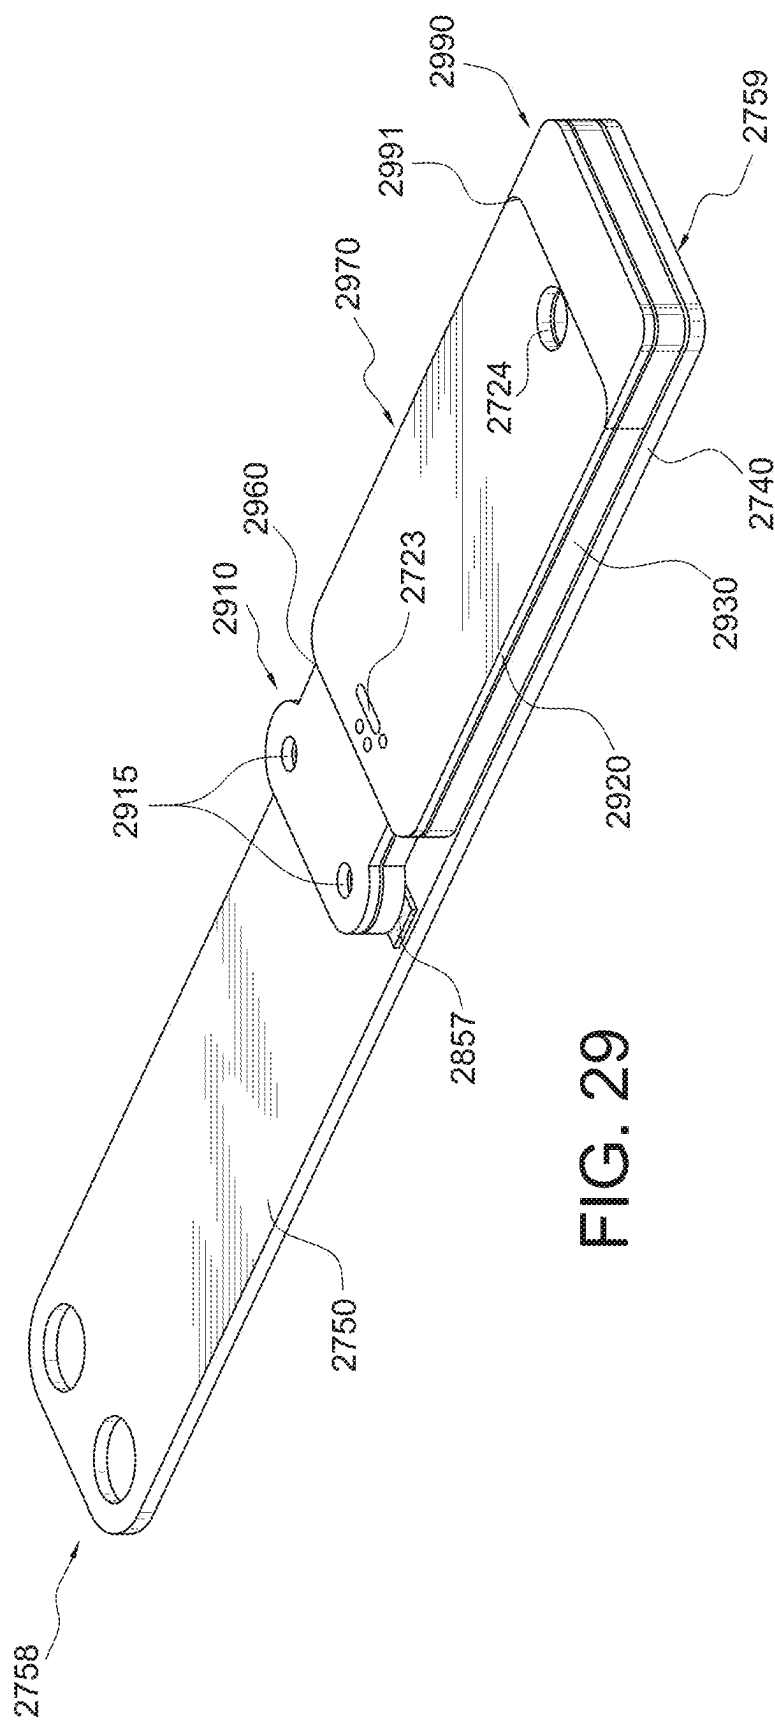


FIG. 29

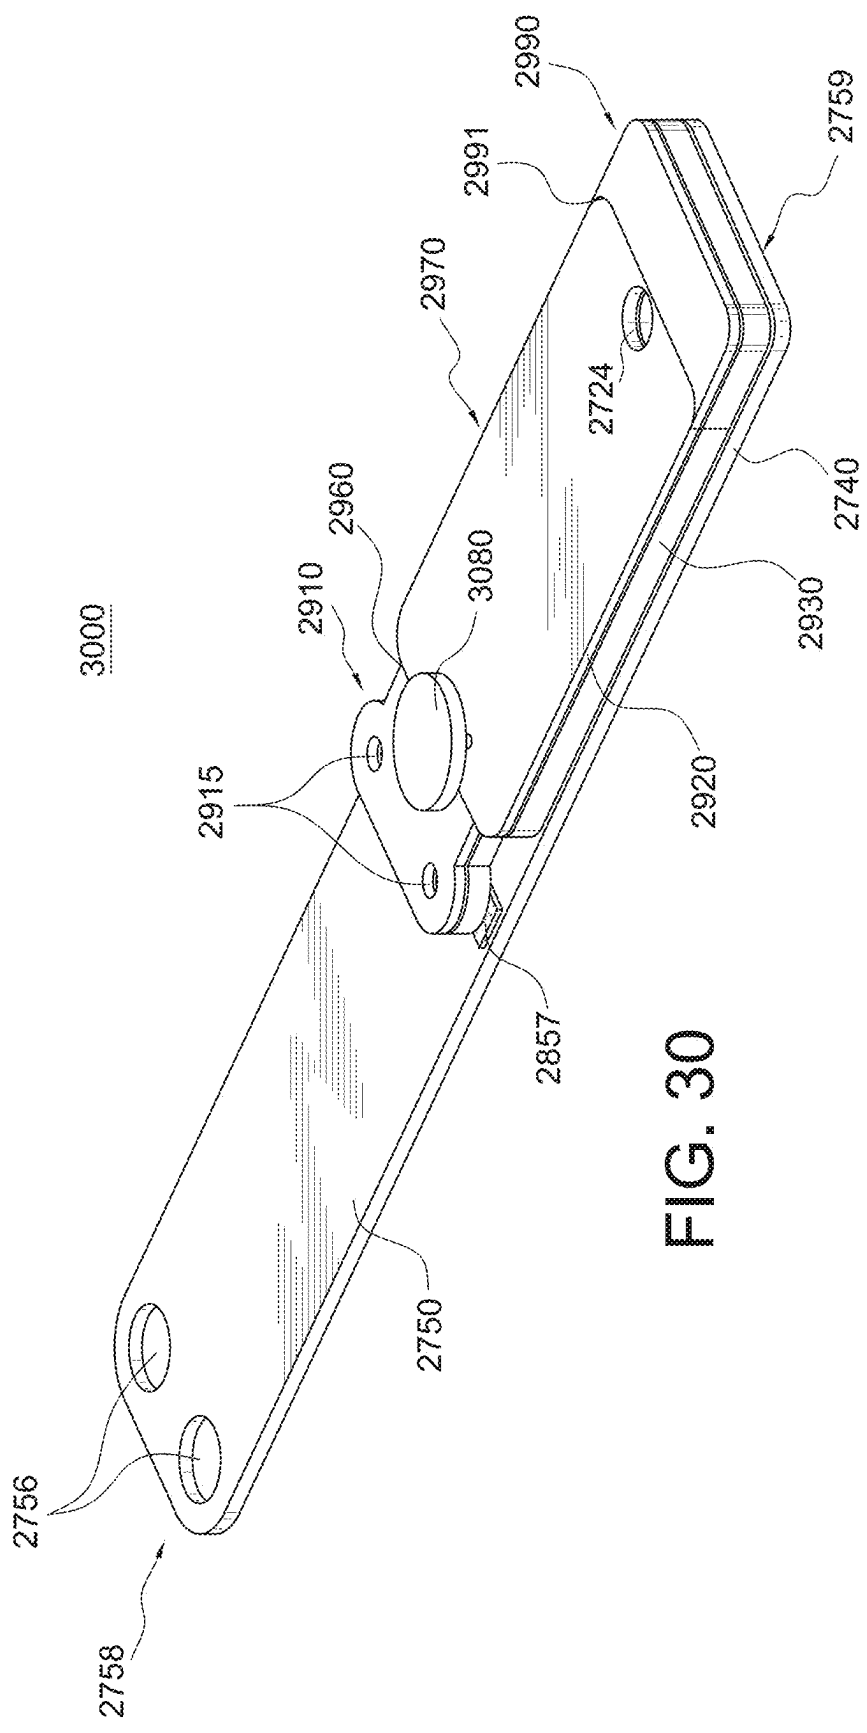

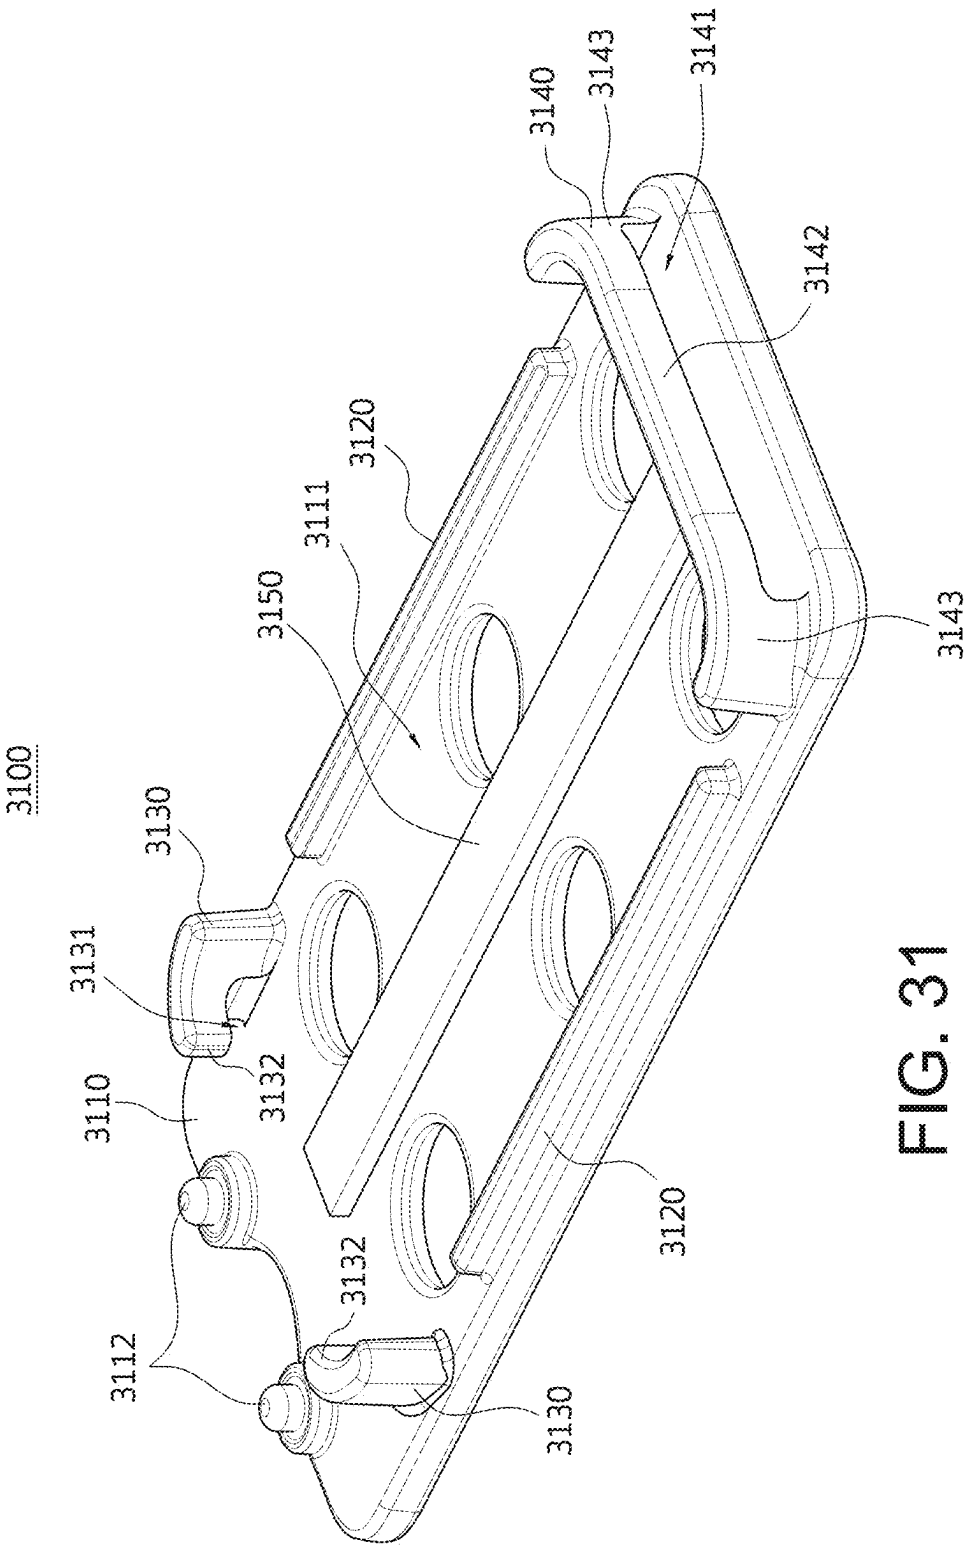


FIG. 31

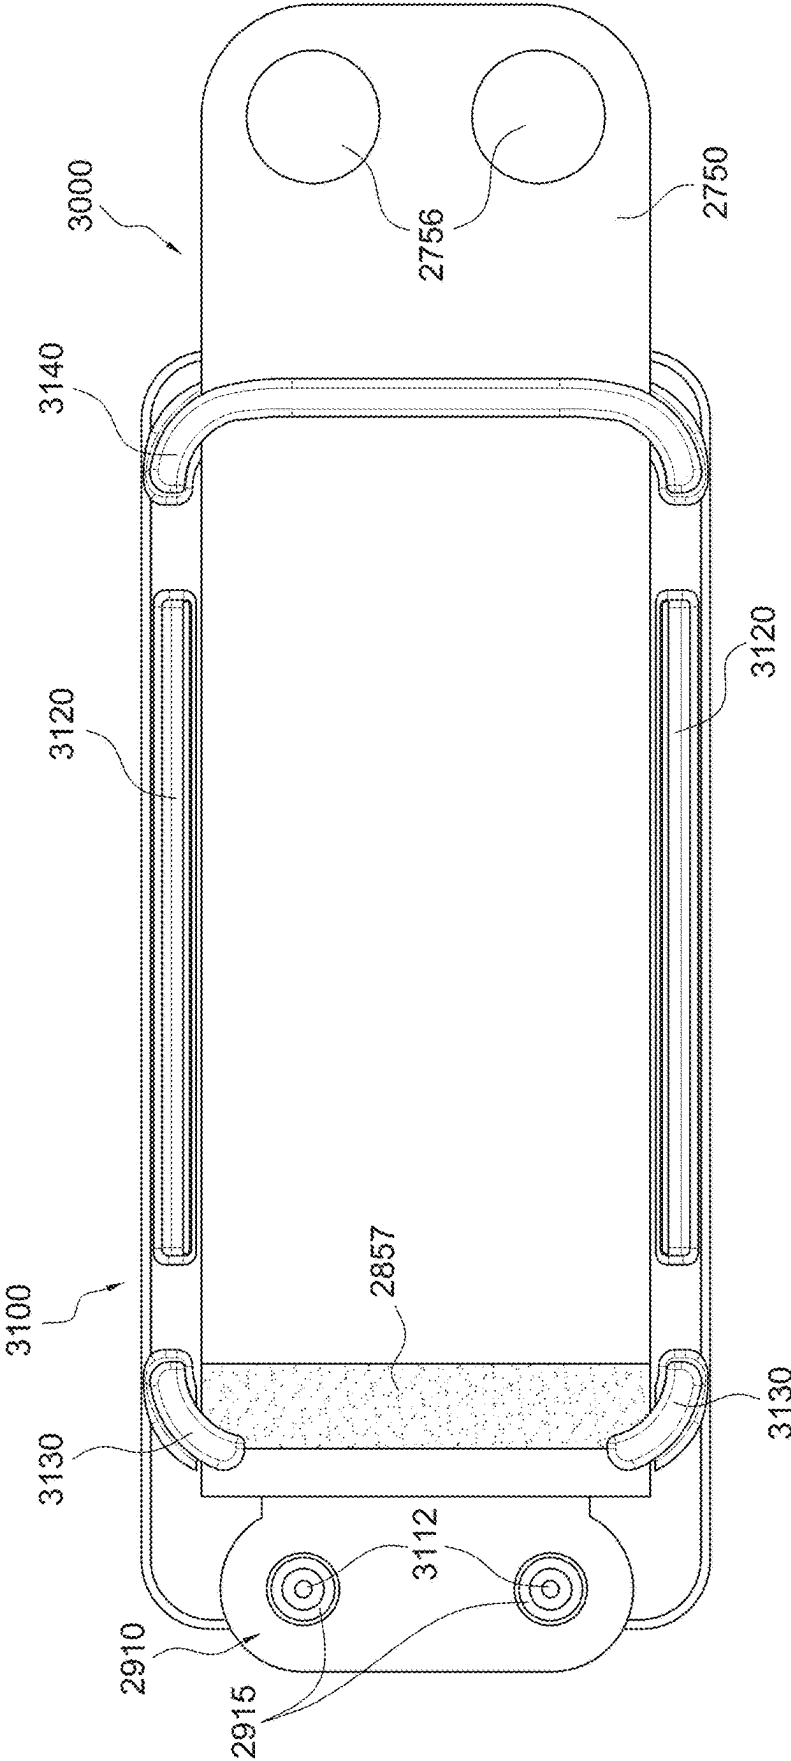


FIG. 32

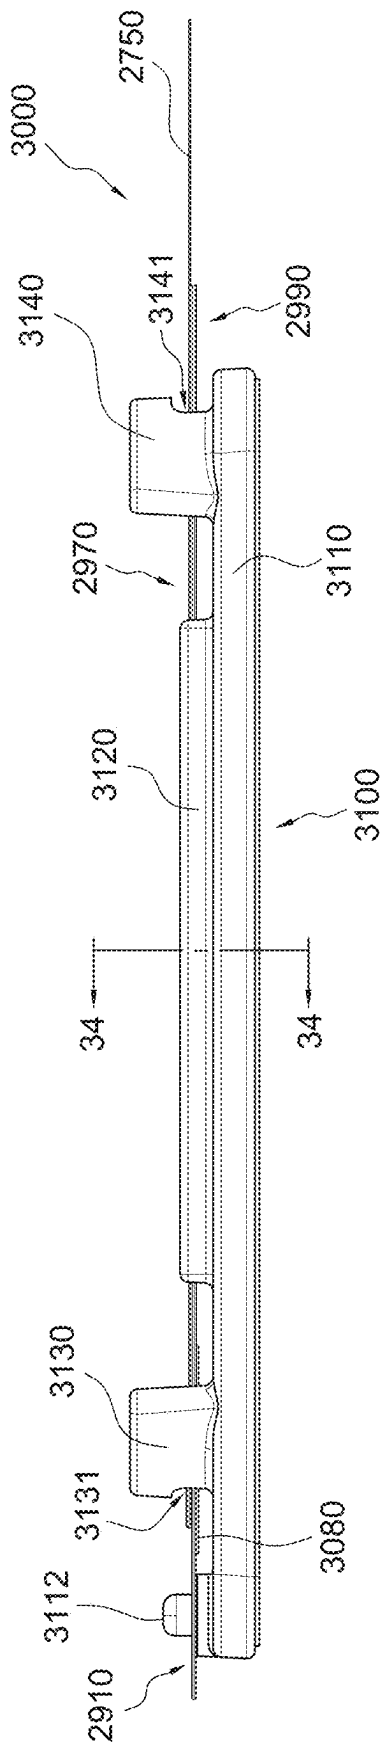


FIG. 33

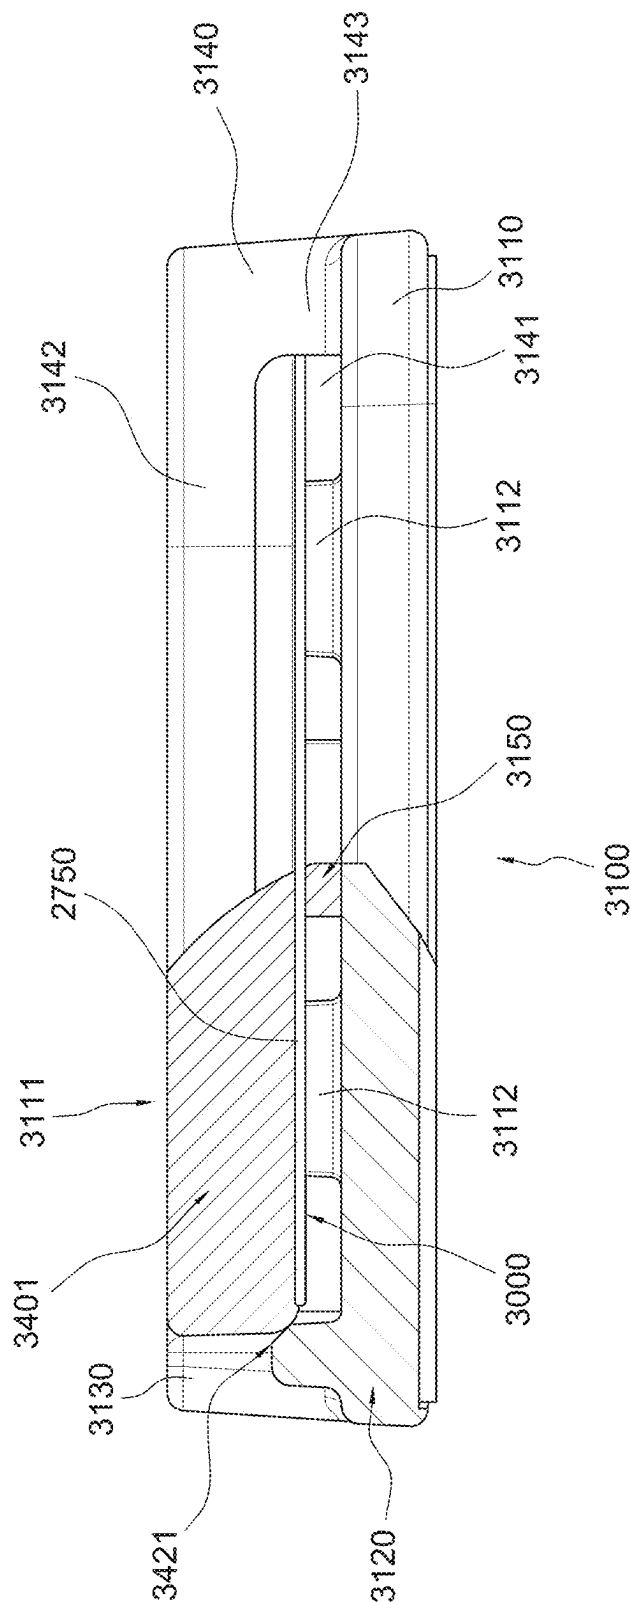


FIG. 34

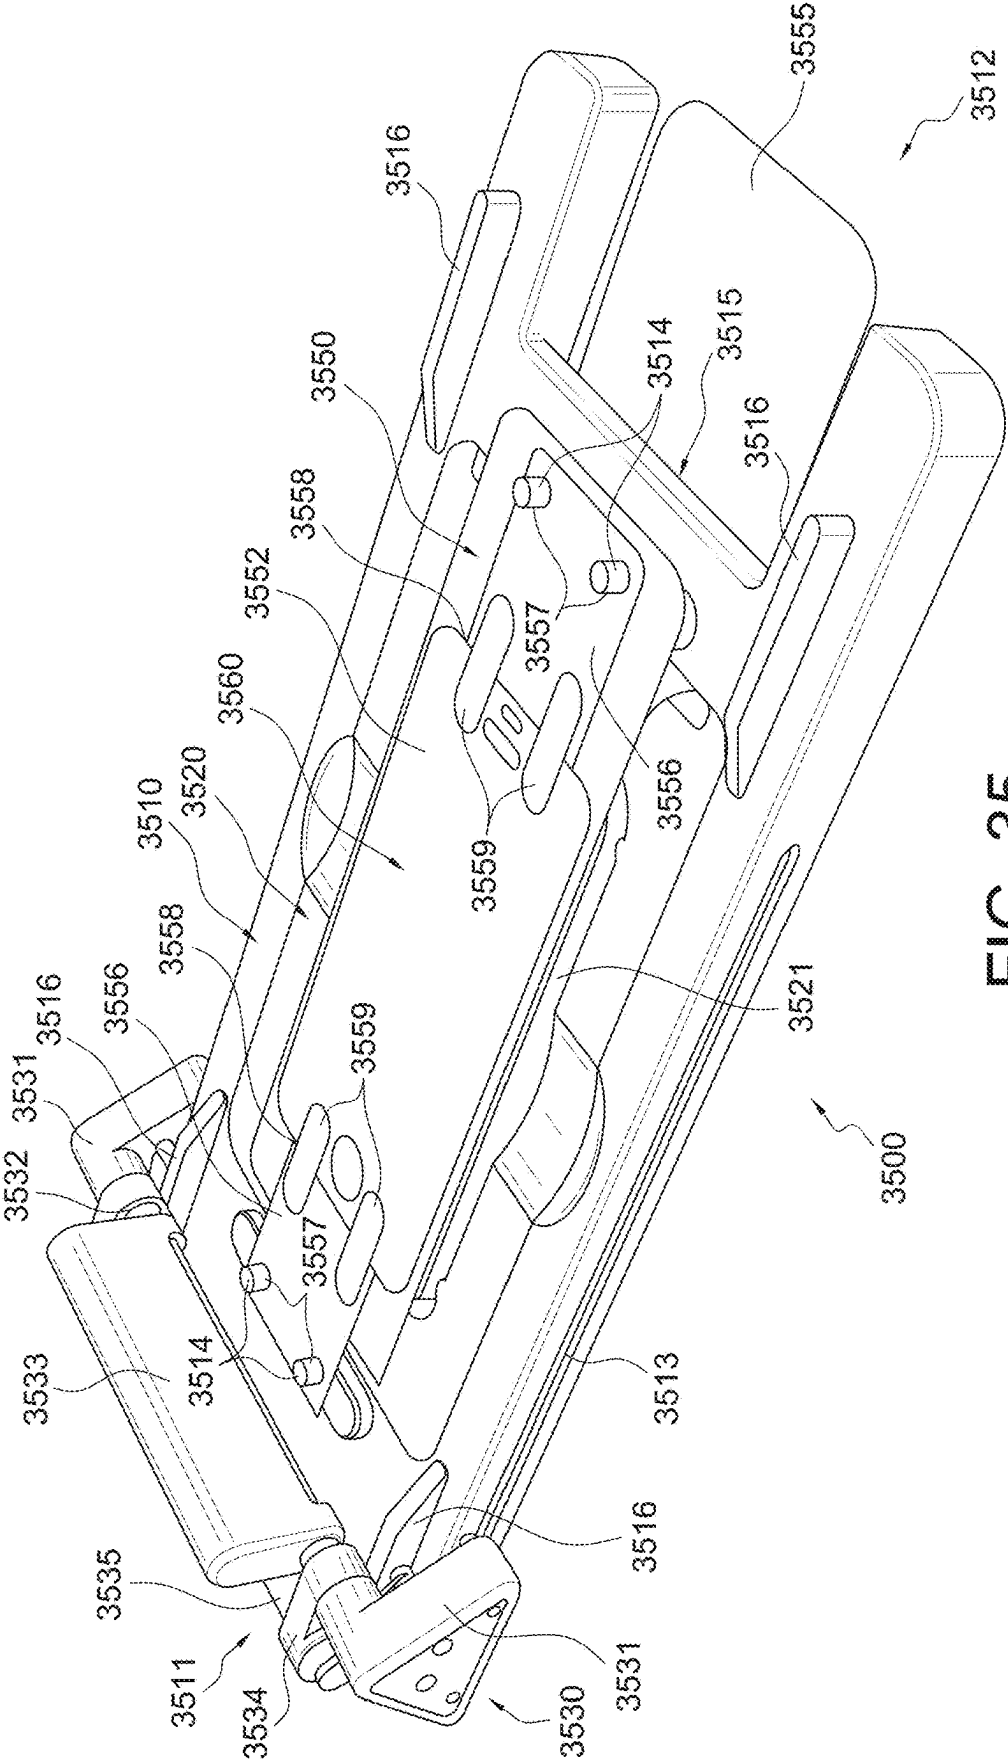


FIG. 35


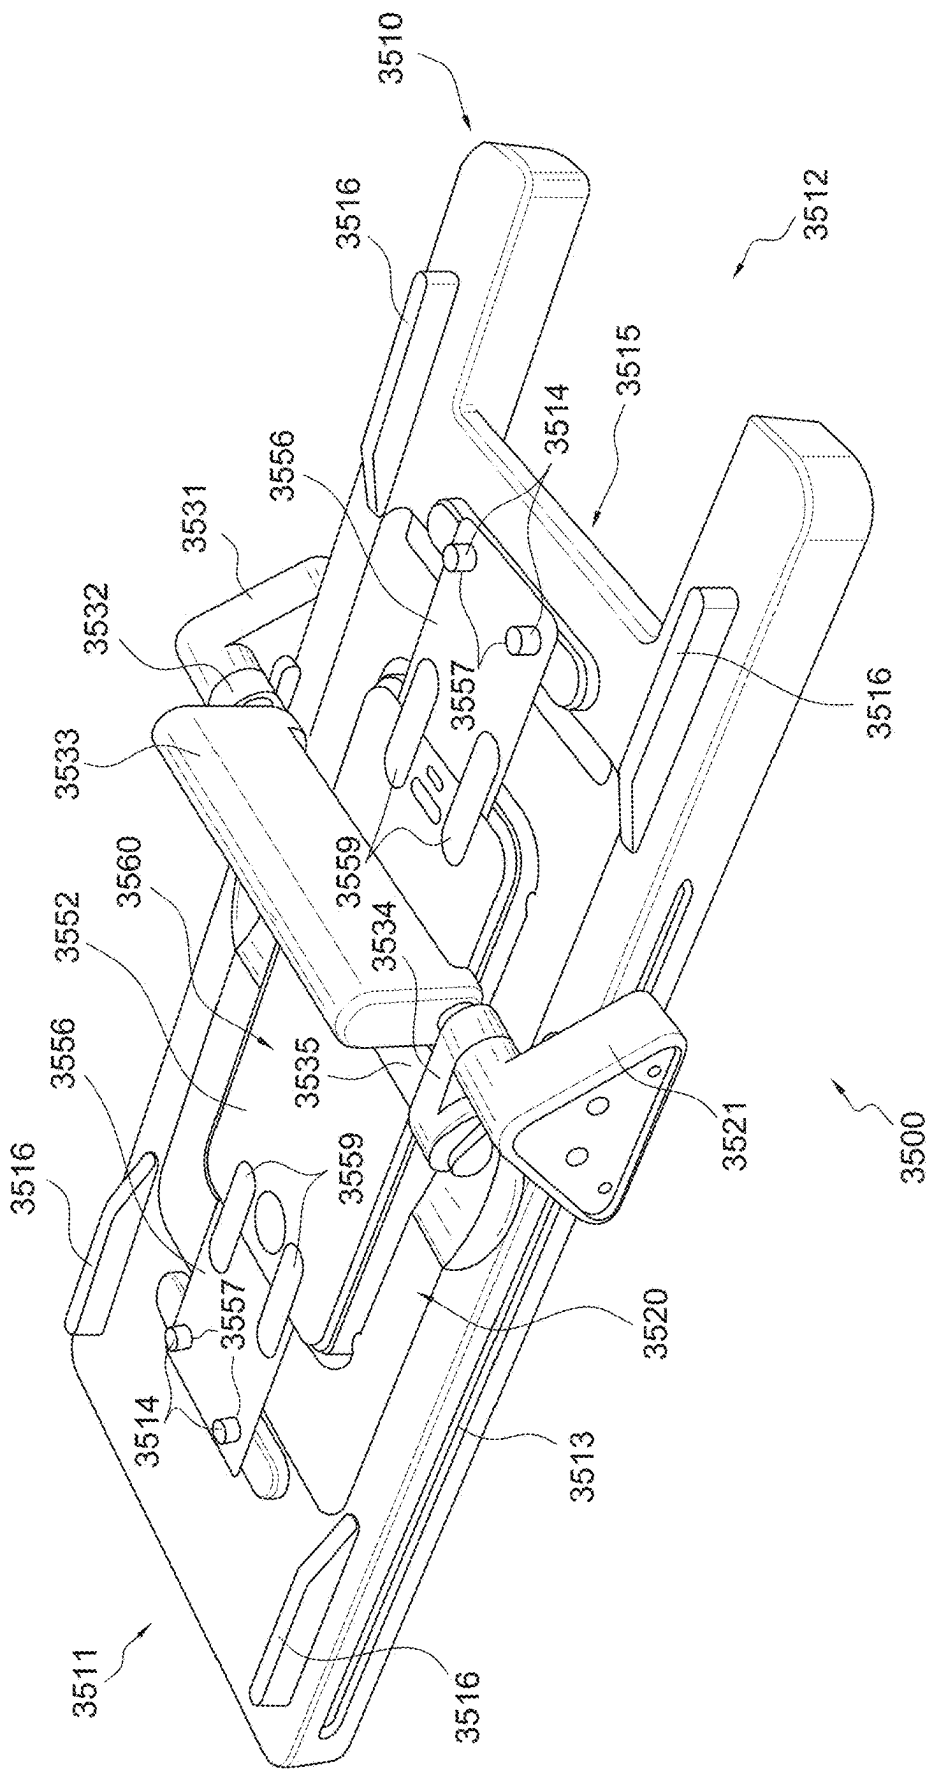


FIG. 36

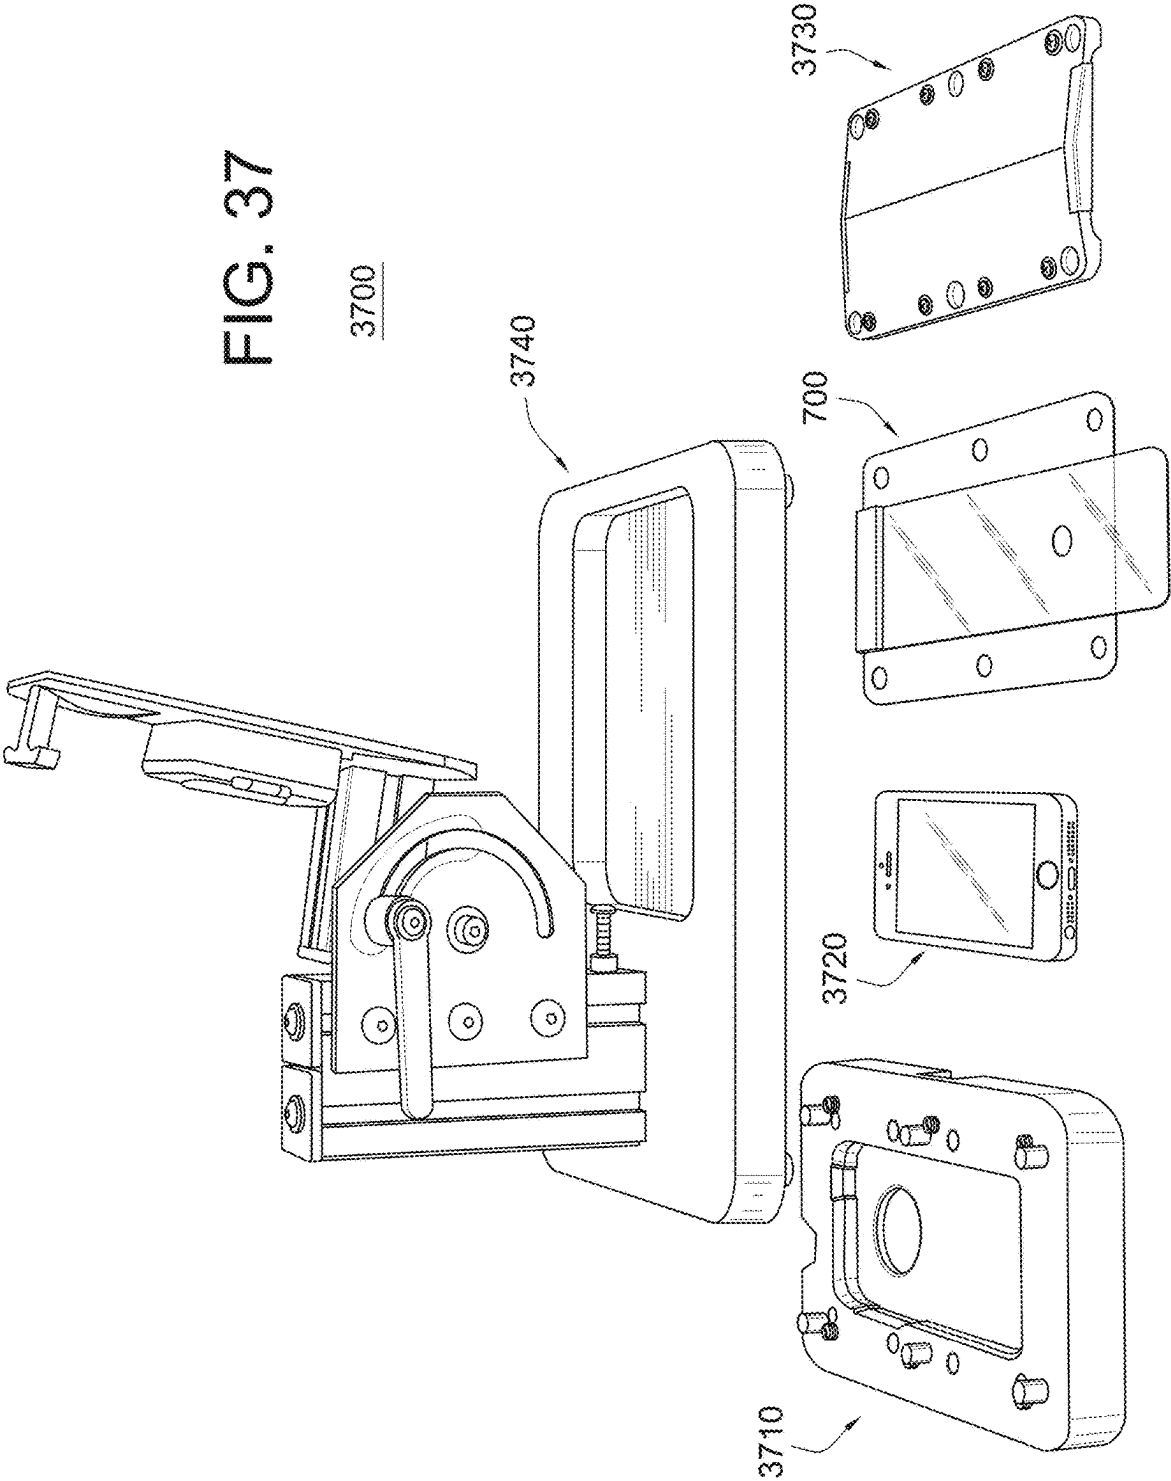

3710

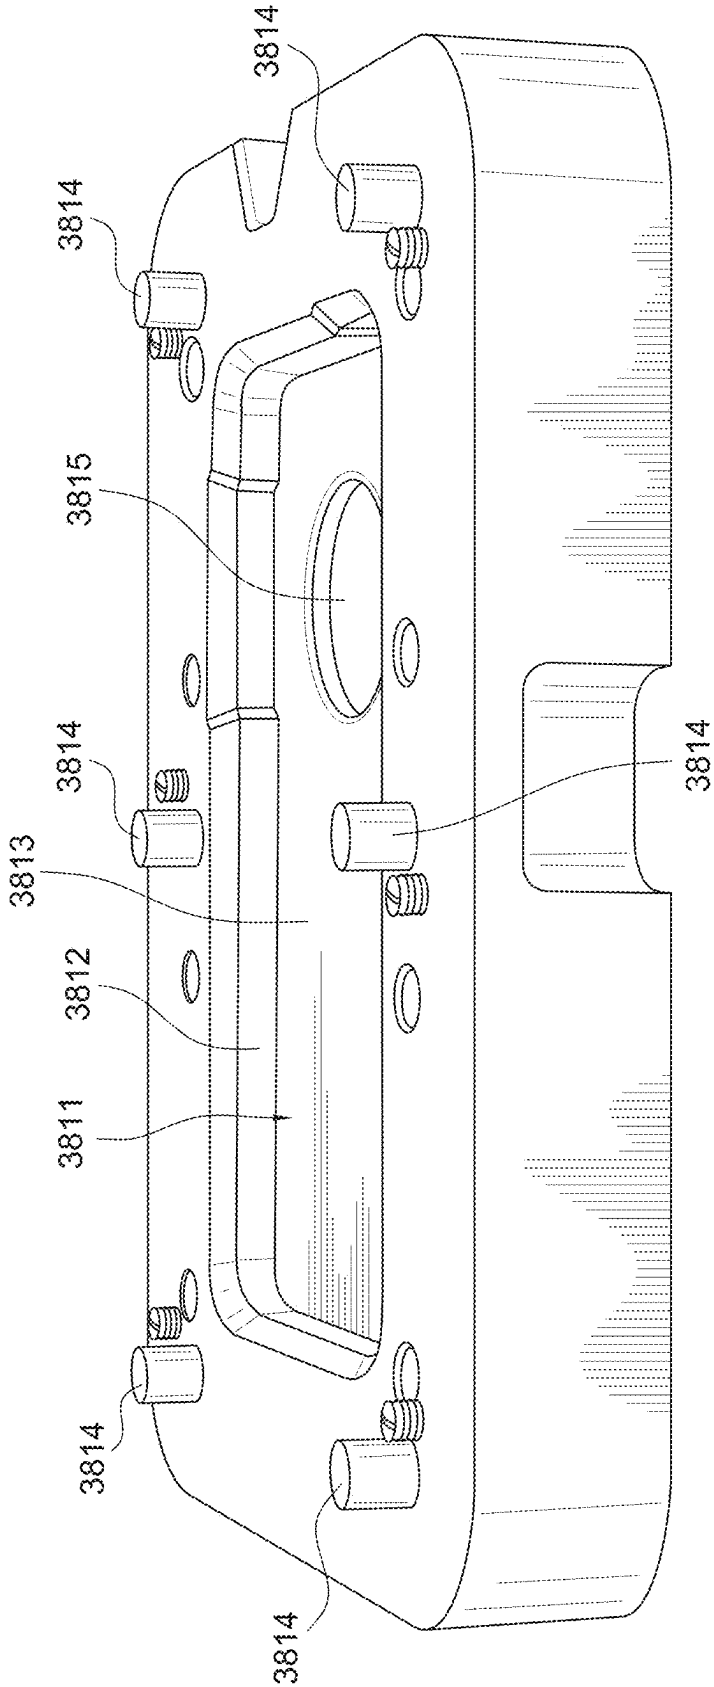


FIG. 38

3730

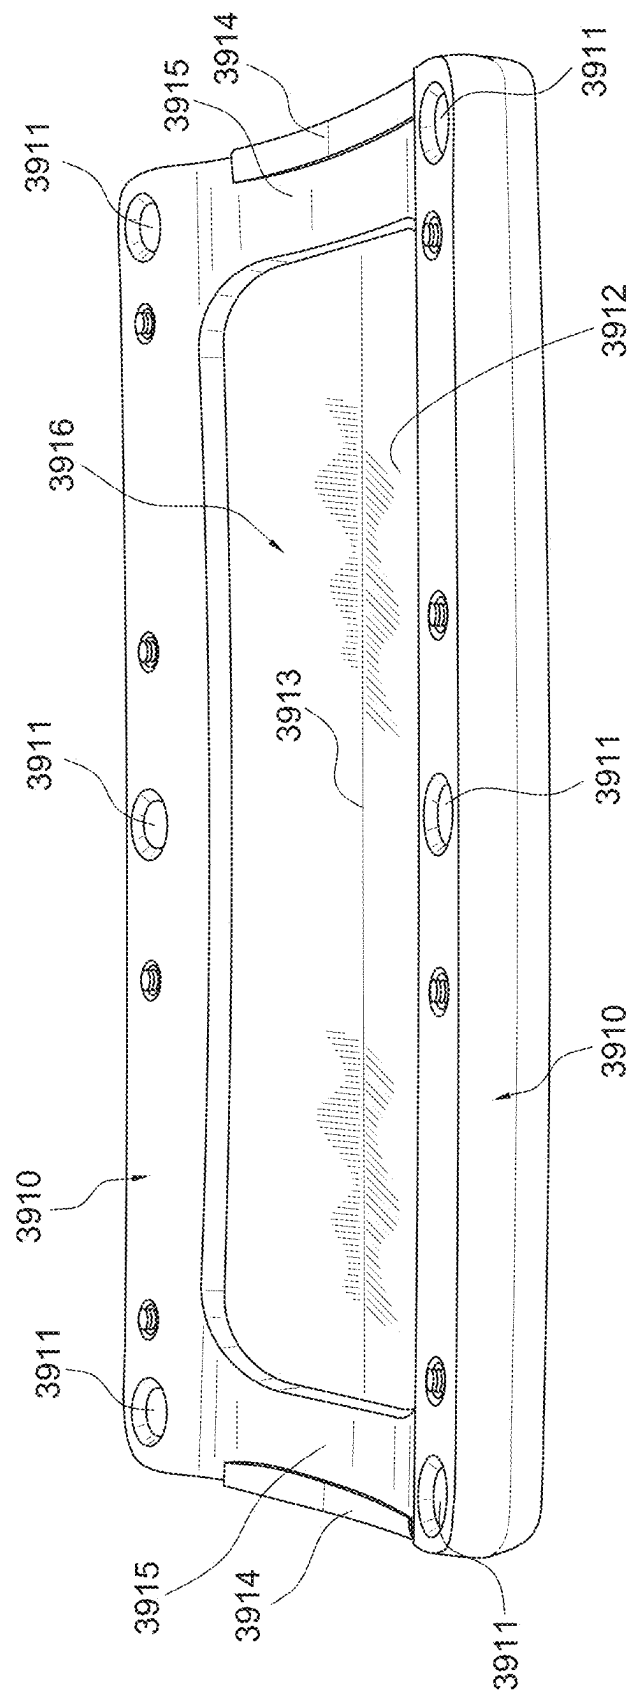


FIG. 39

3730

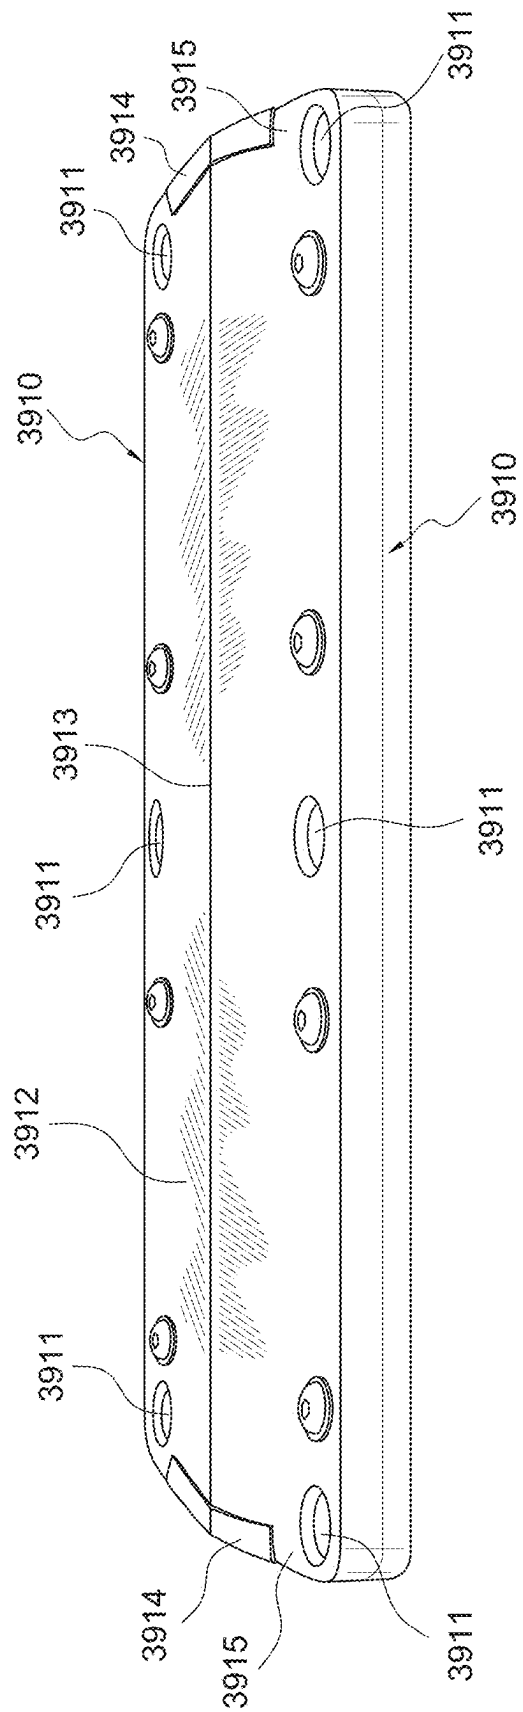


FIG. 40



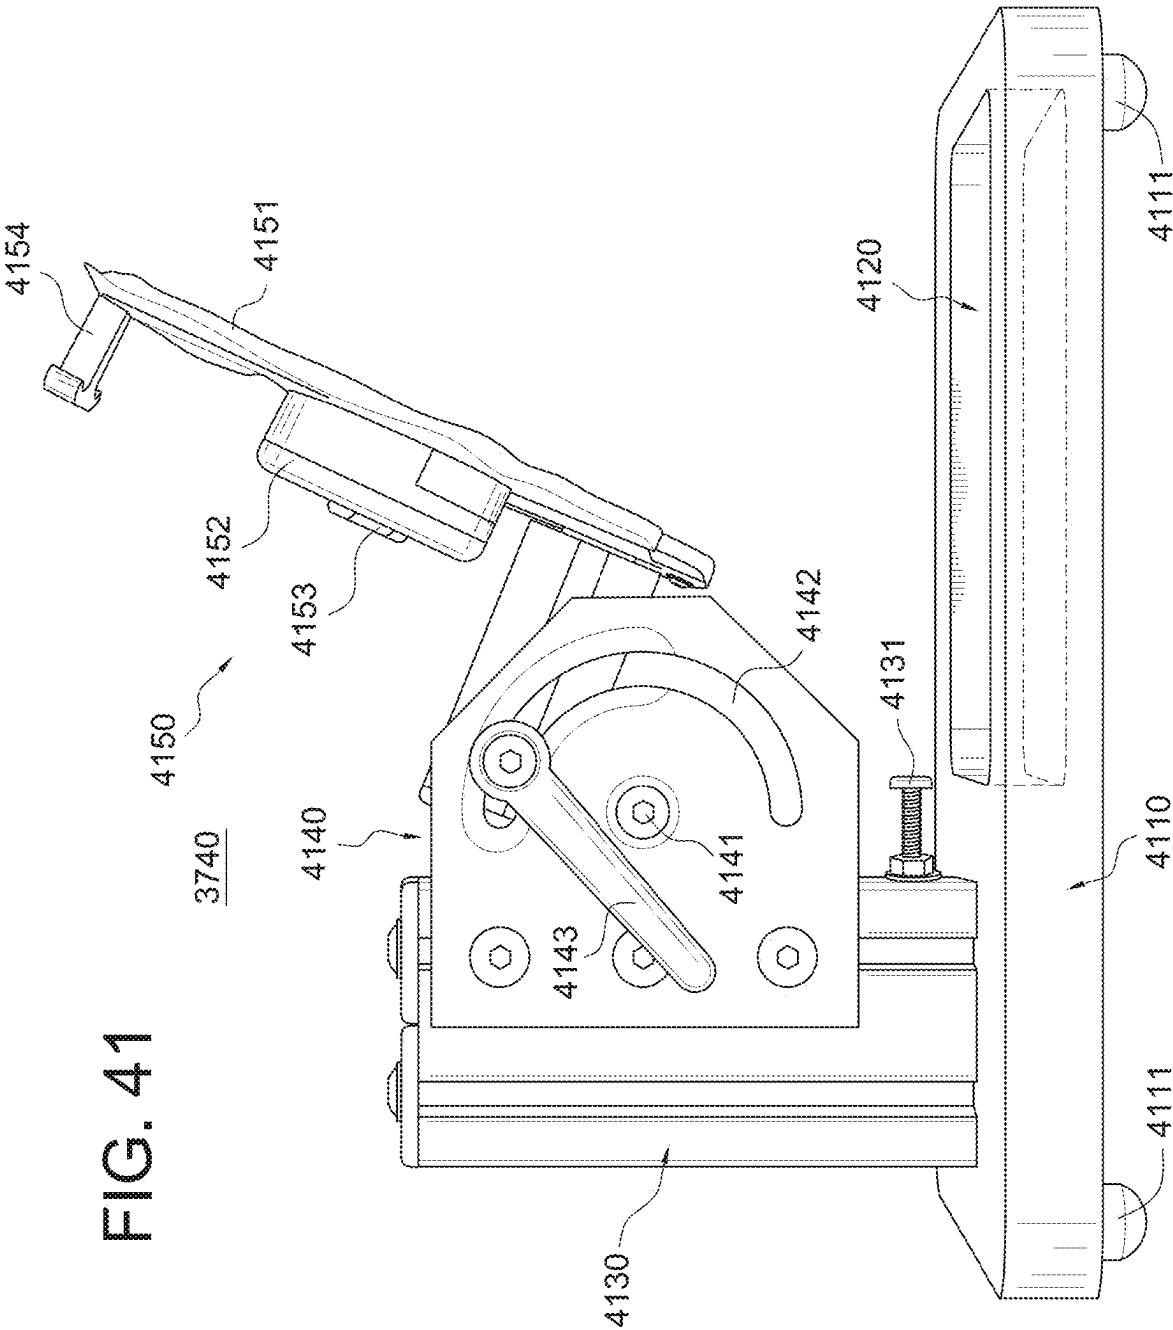


FIG. 42

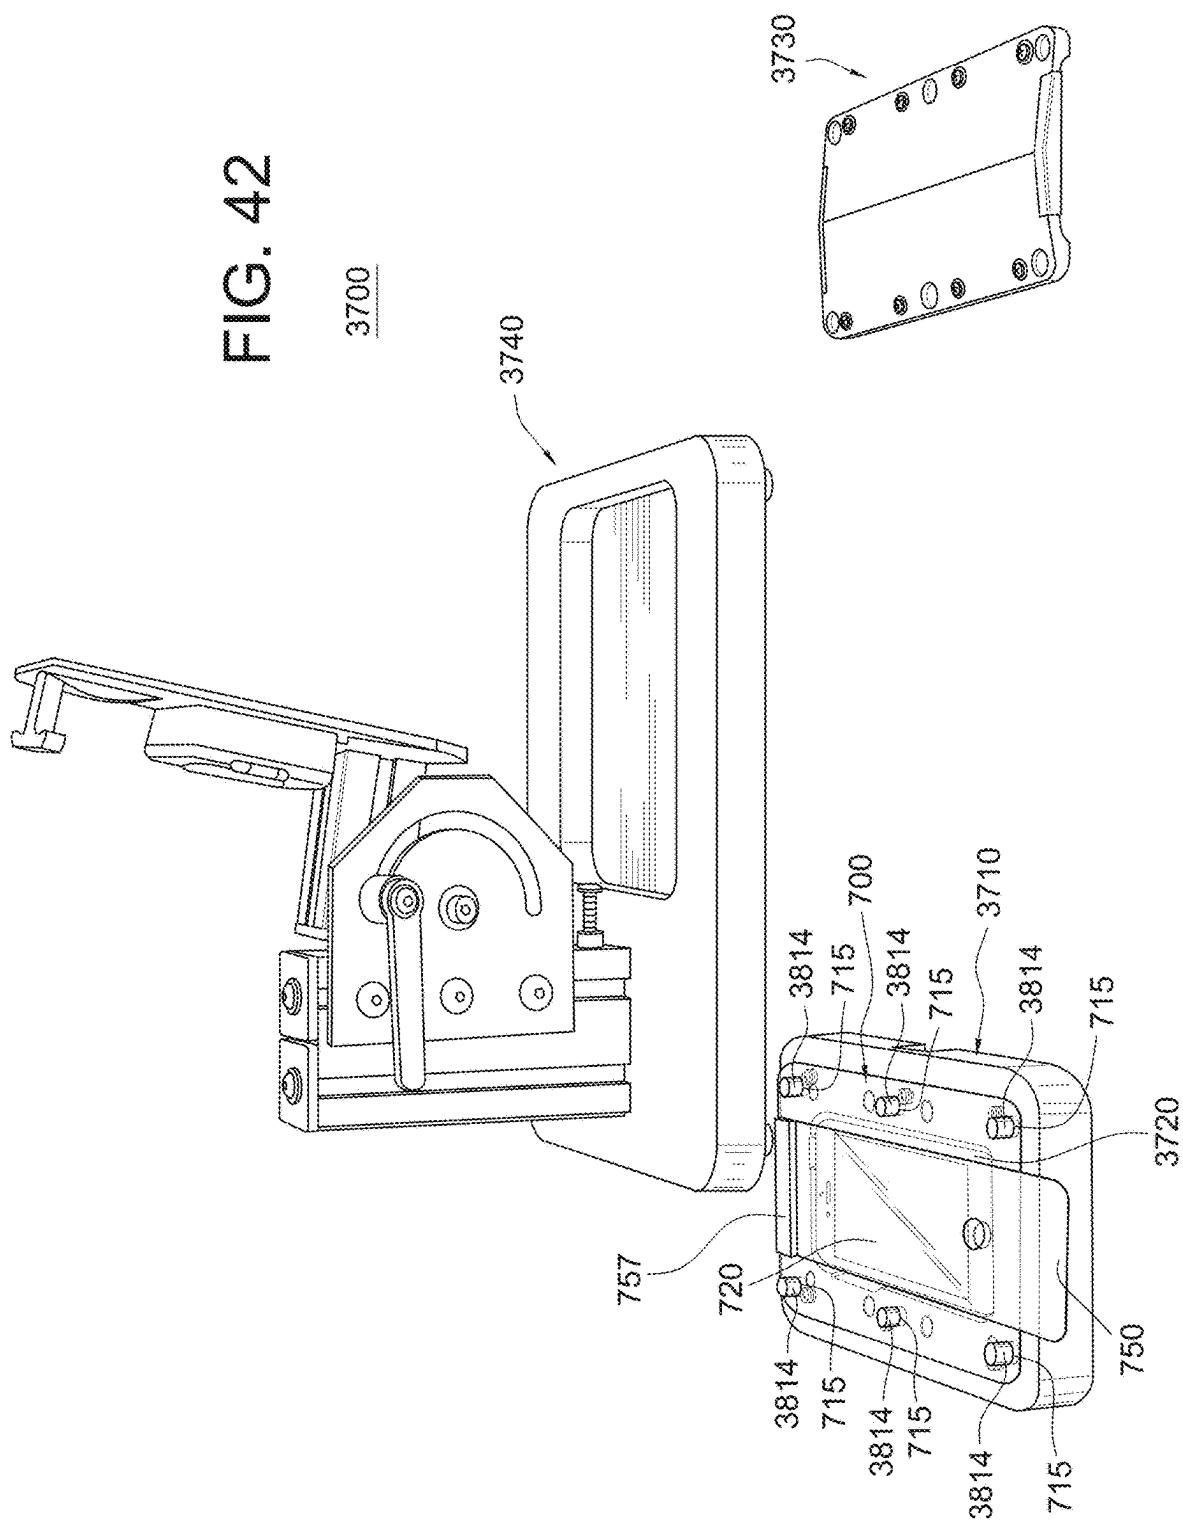

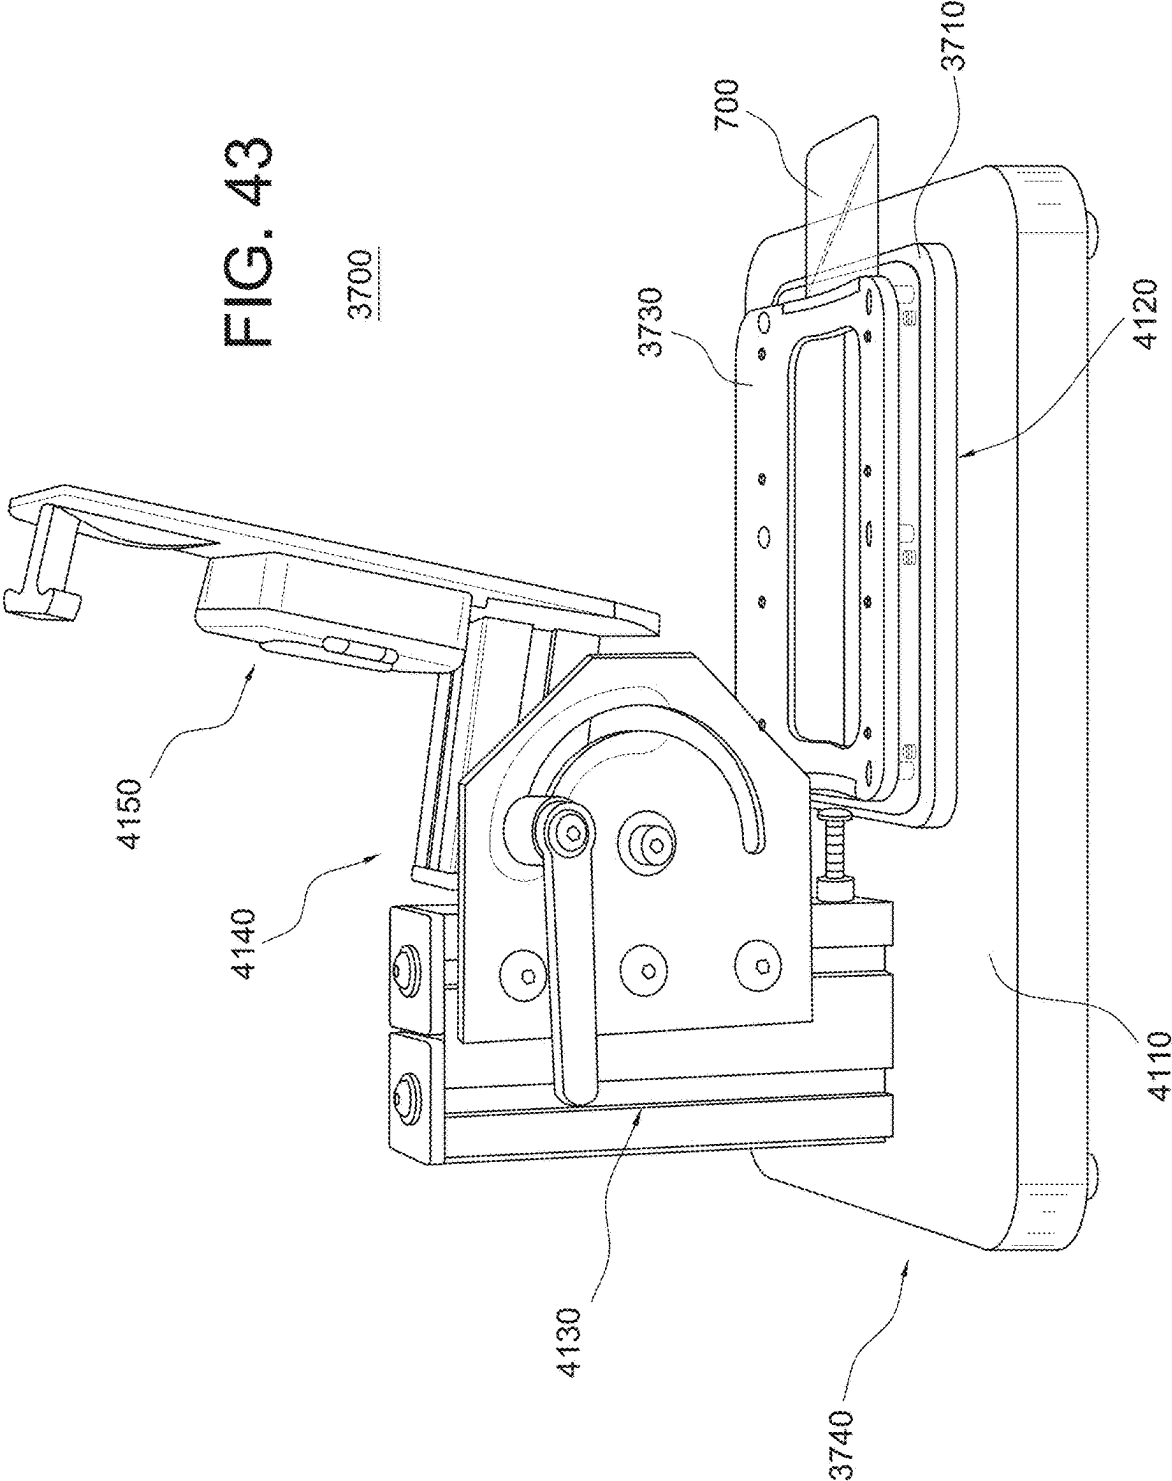


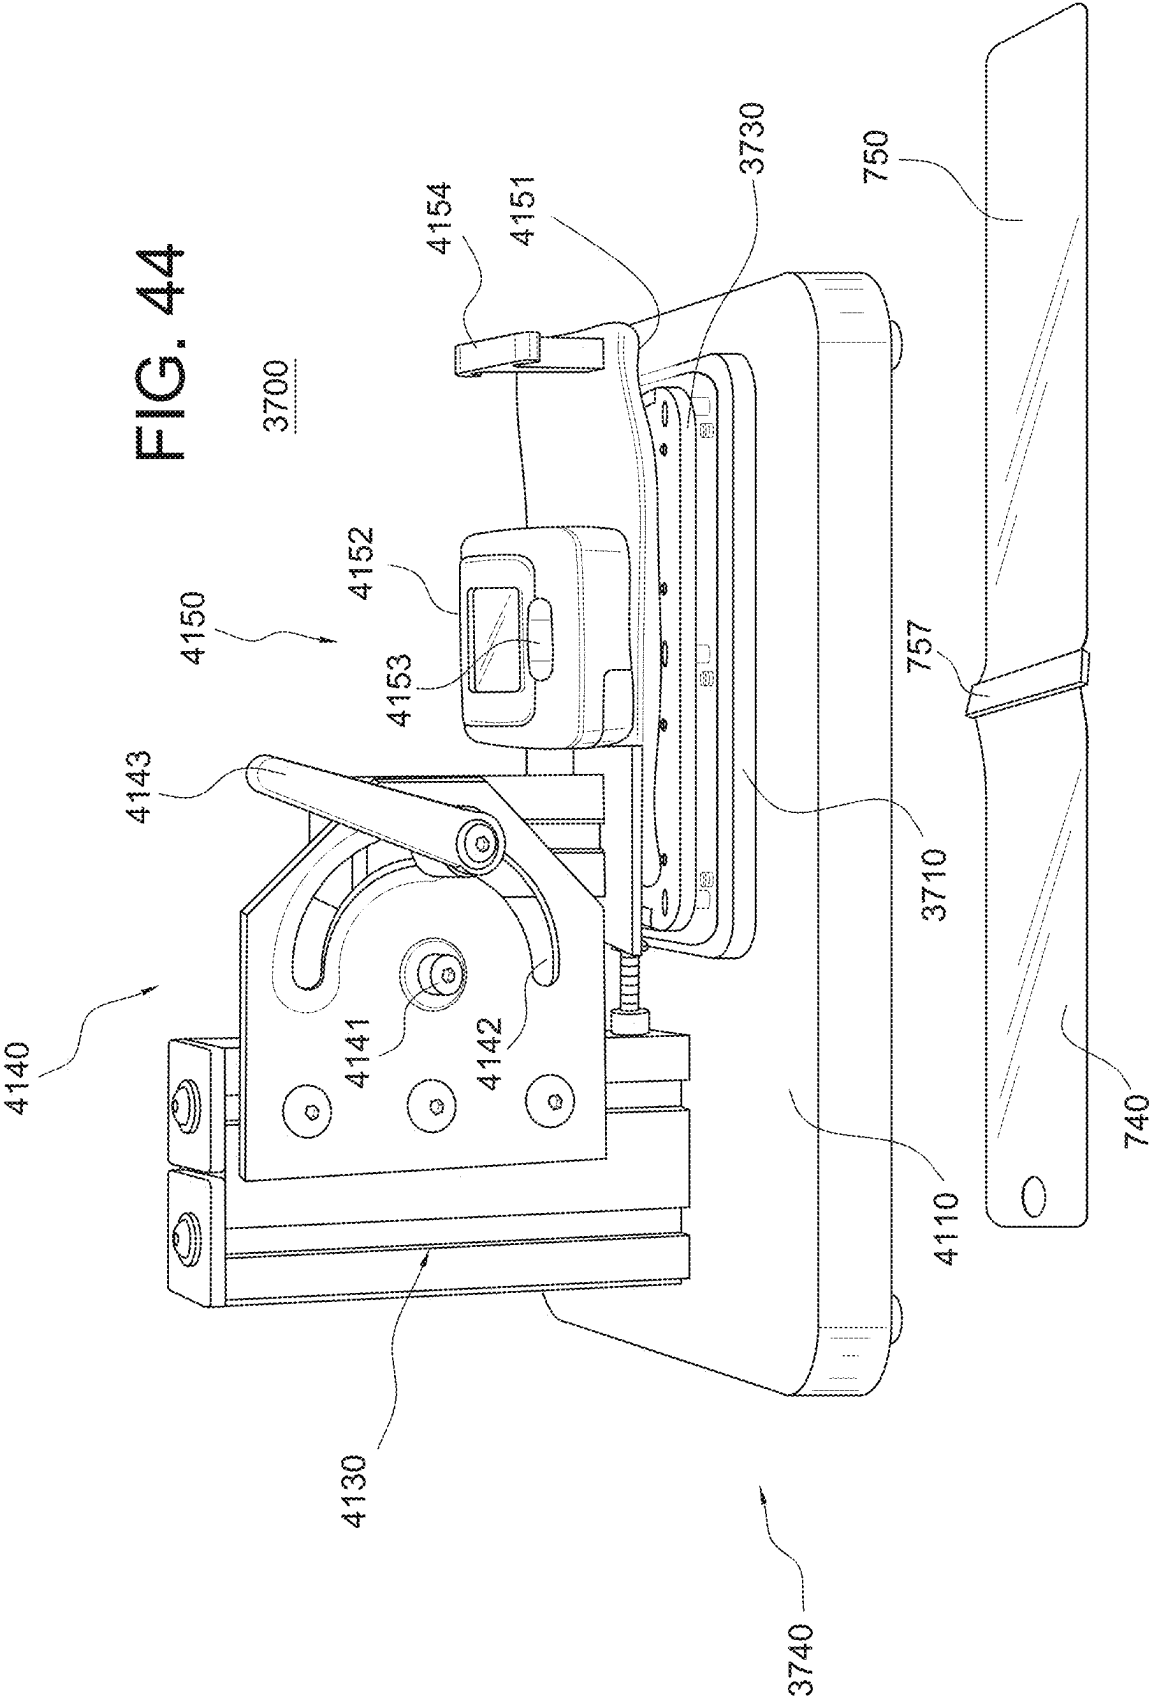


FIG. 45

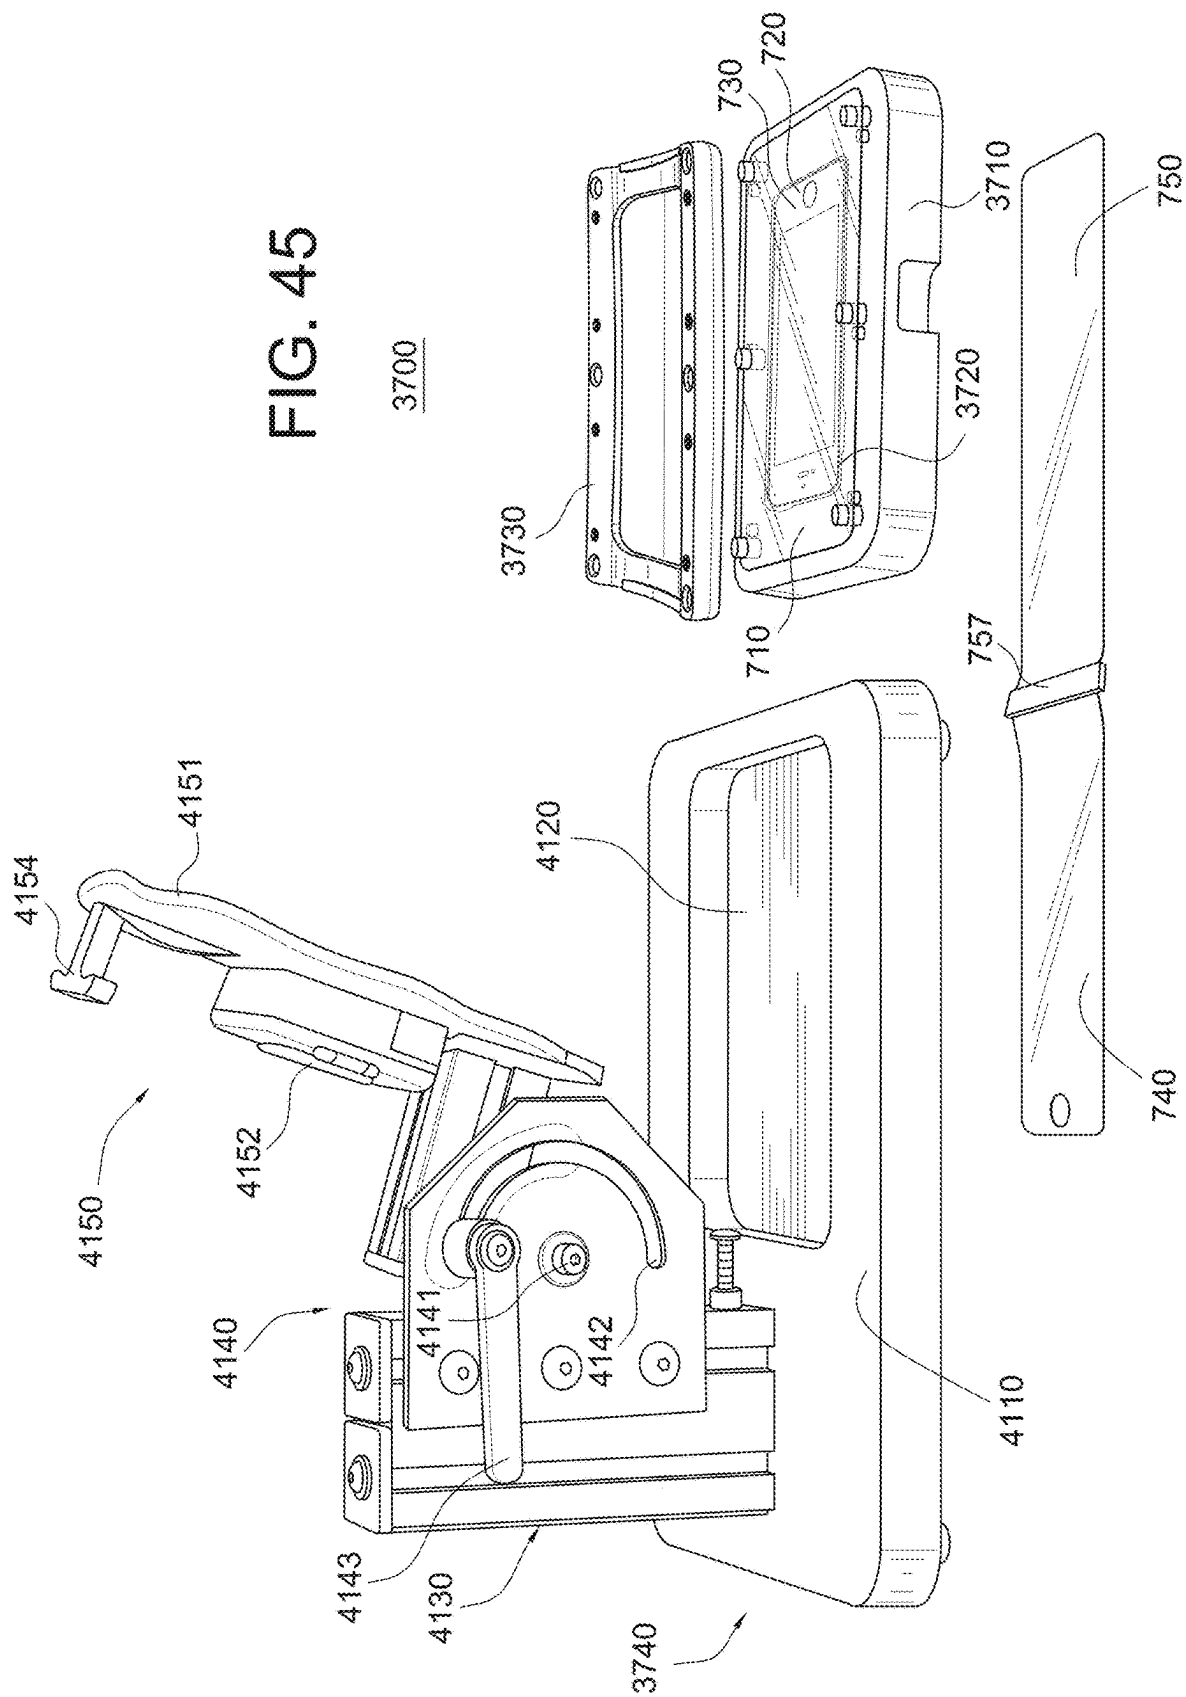




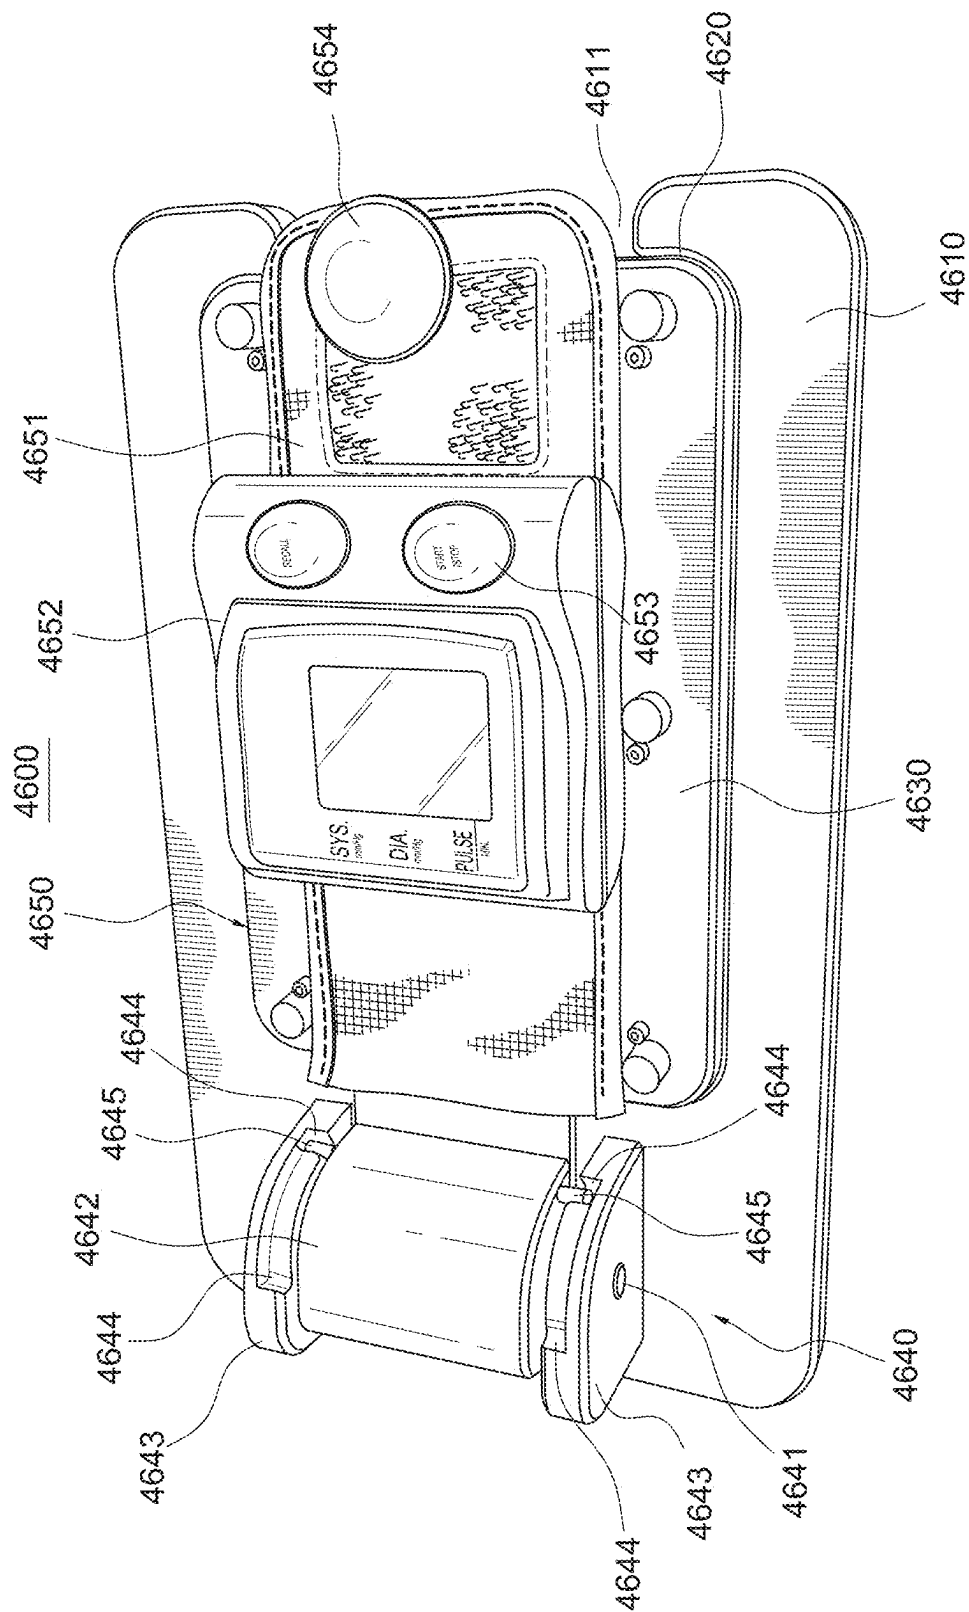


FIG. 46

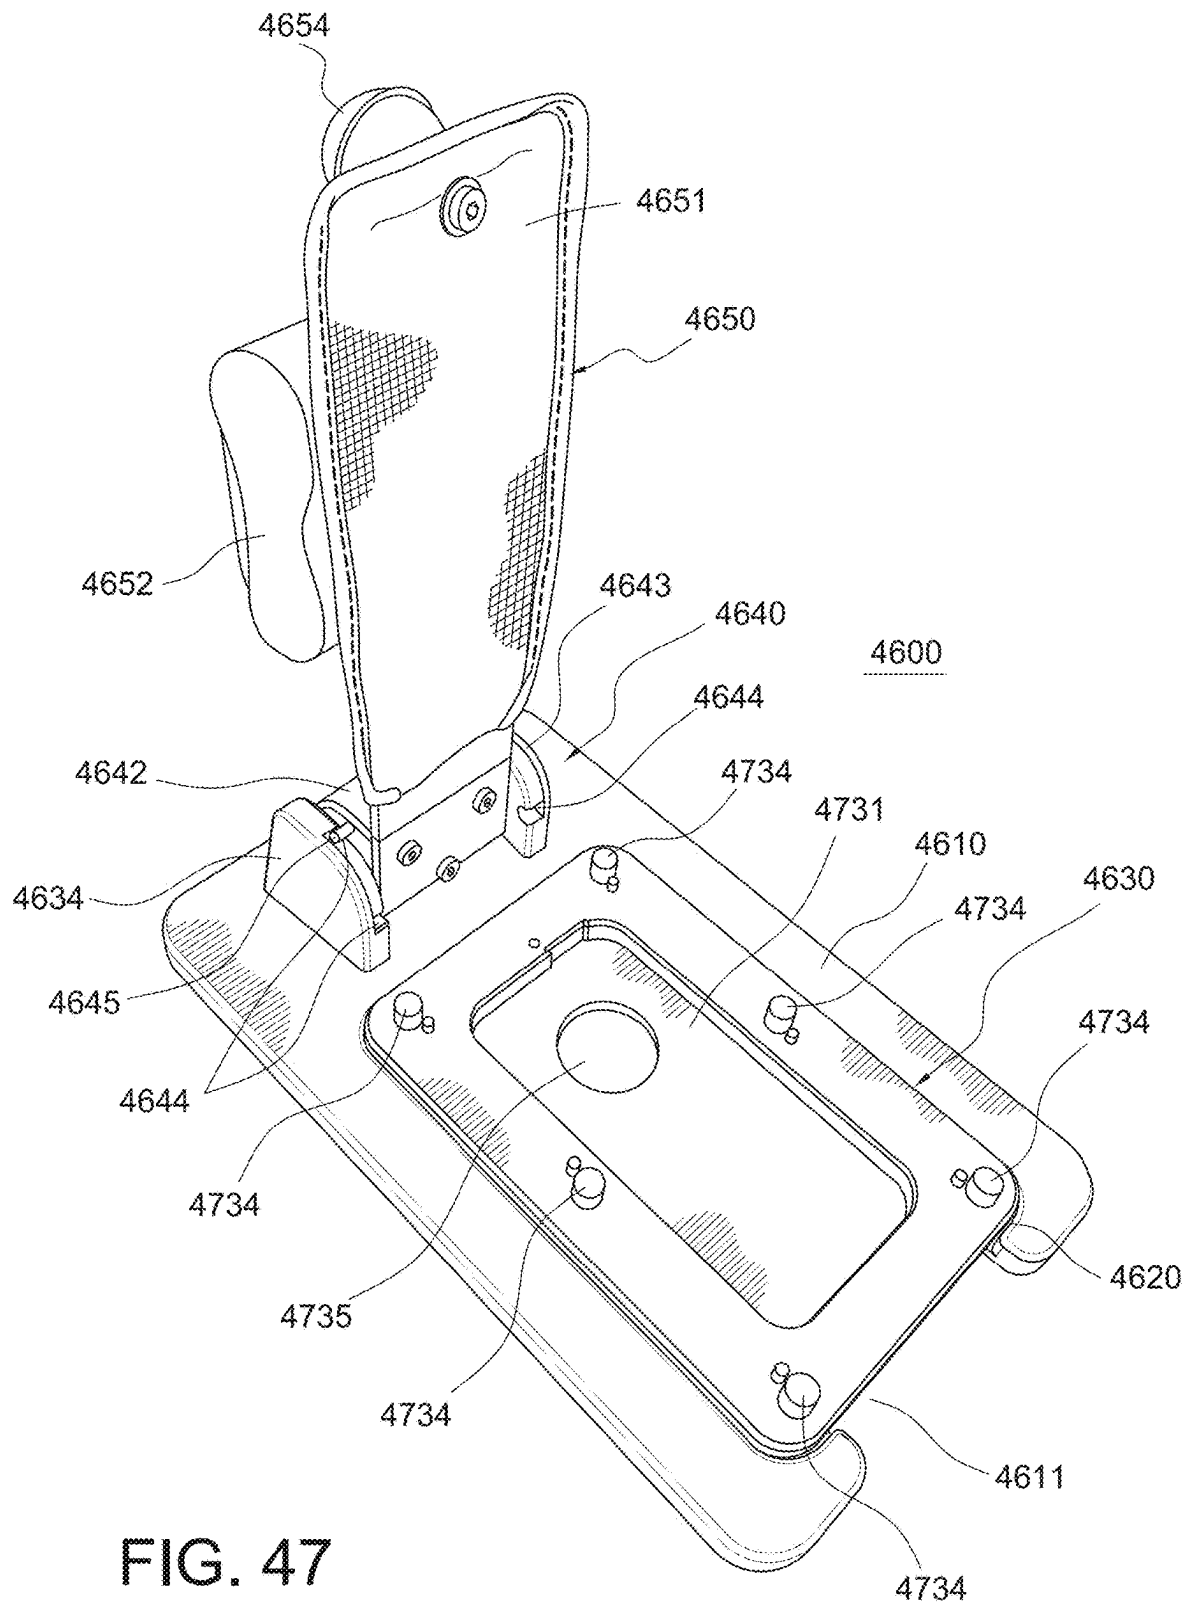

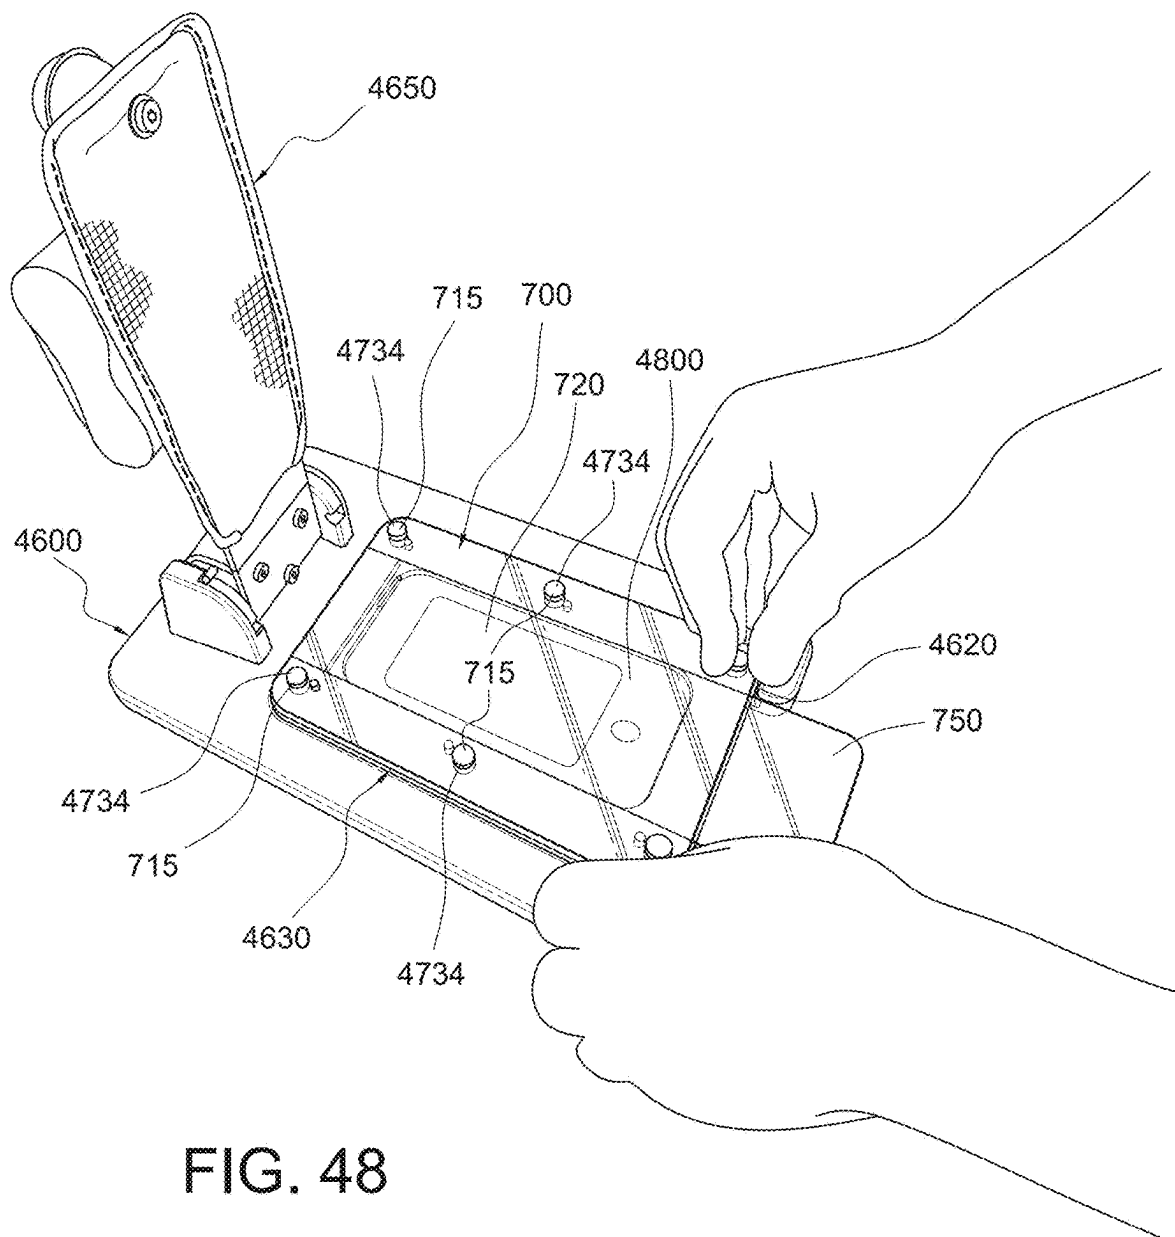

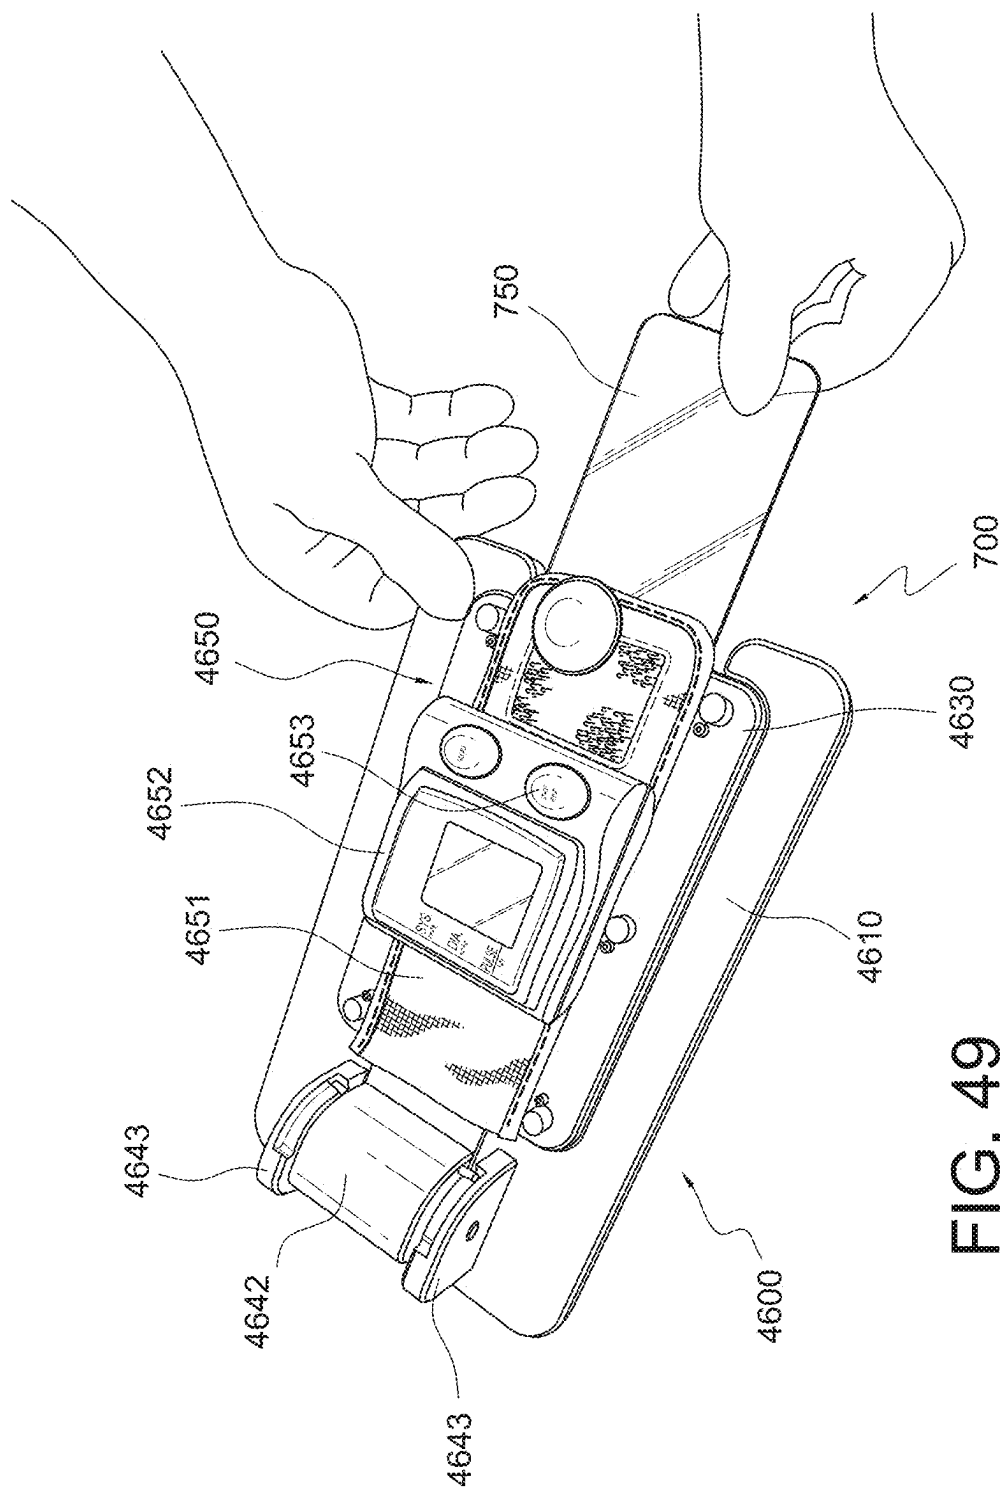

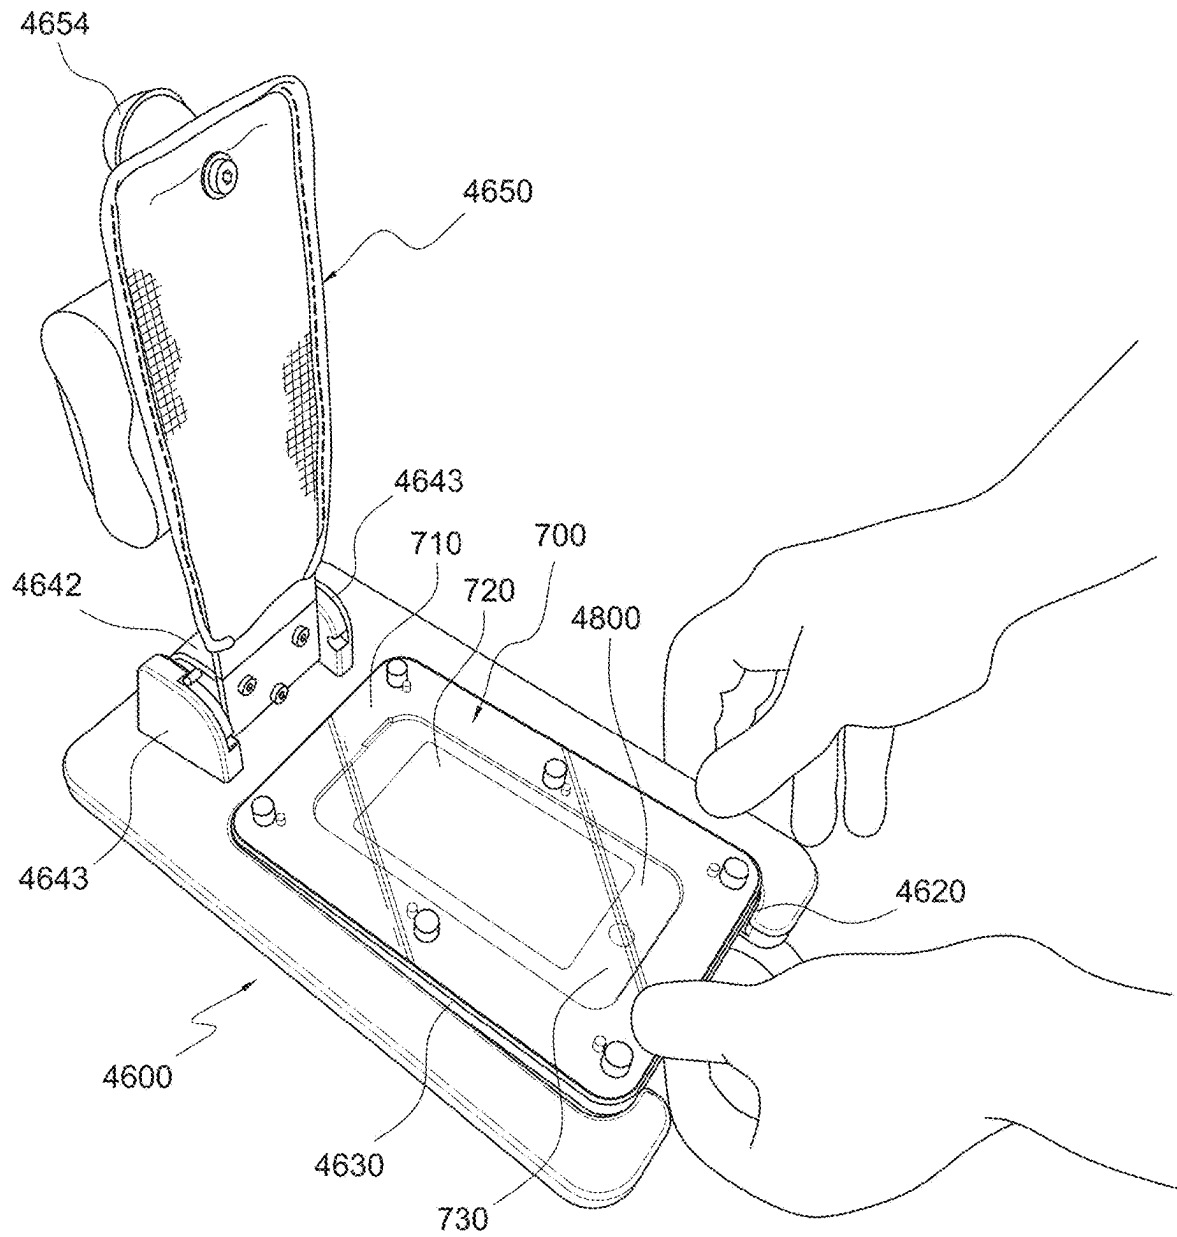


FIG. 50

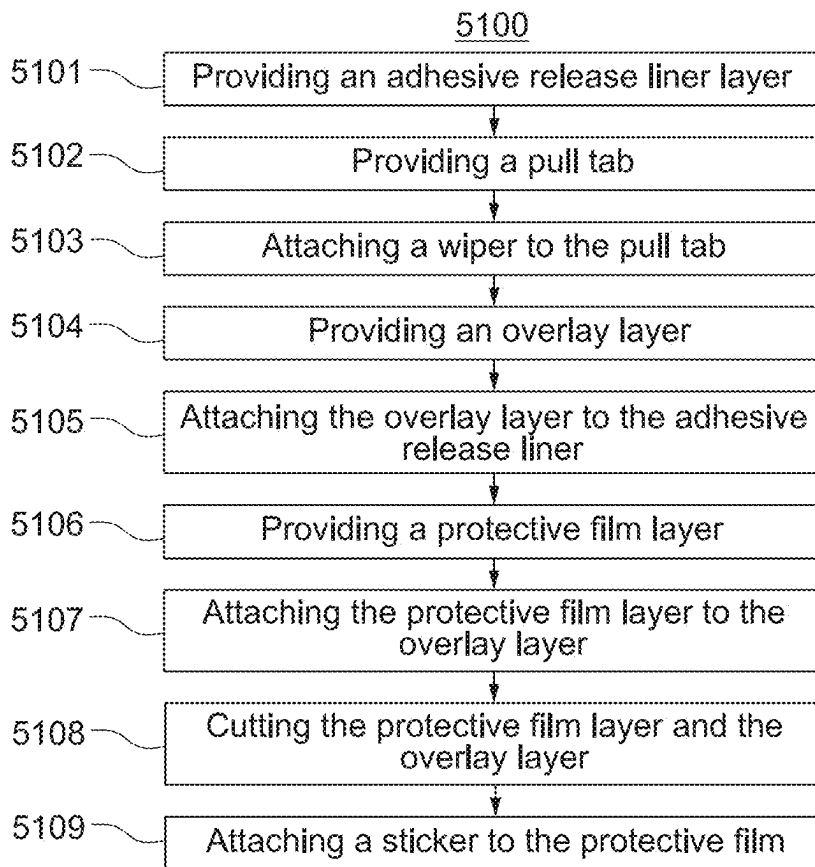


FIG. 51

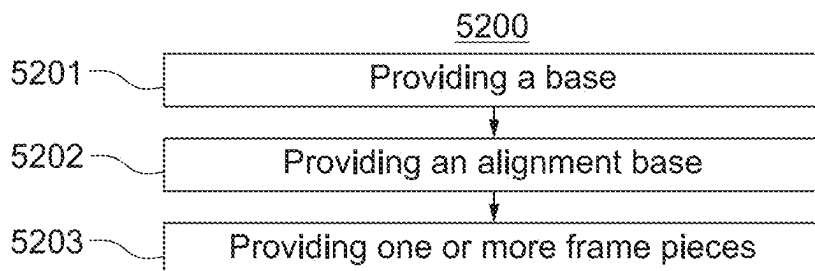


FIG. 52

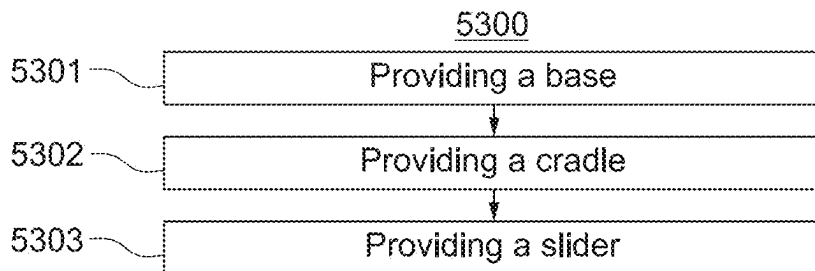


FIG. 53

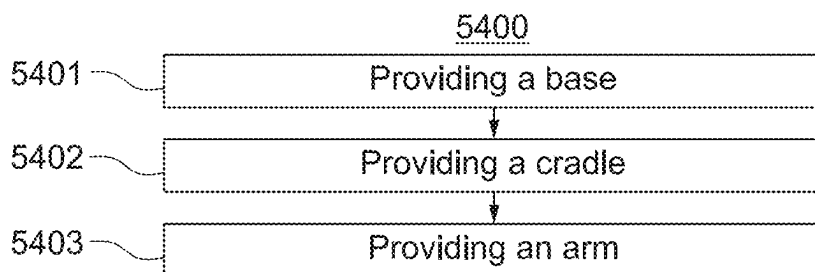


FIG. 54

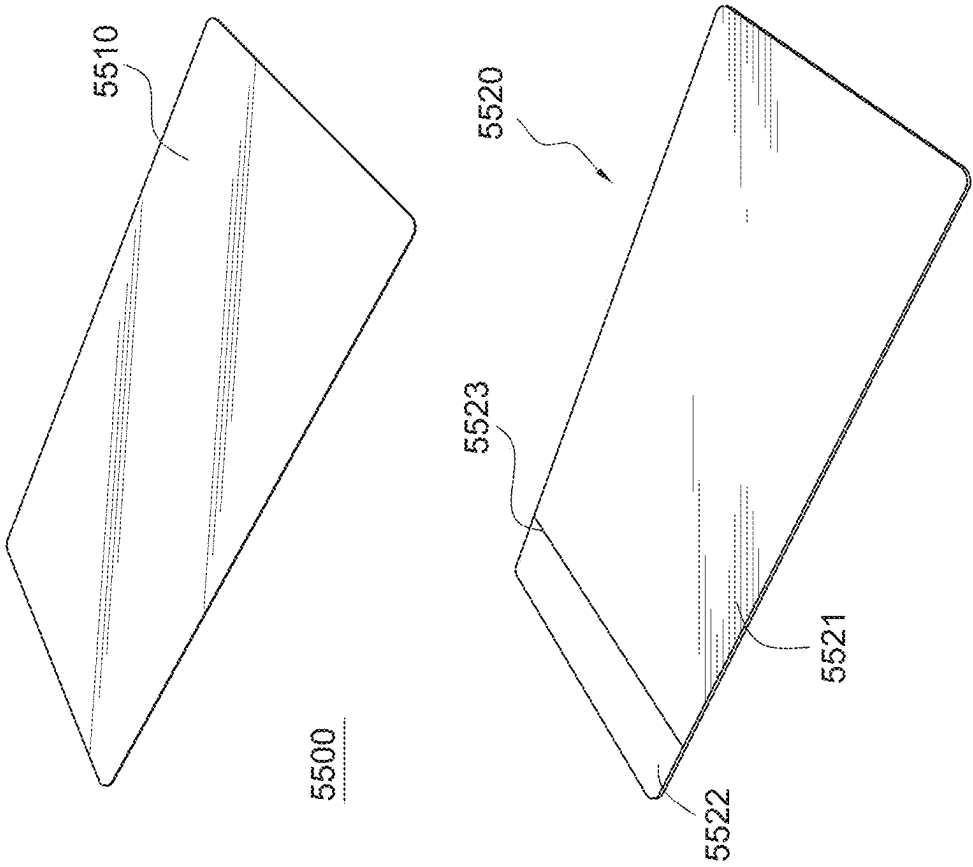


FIG. 55

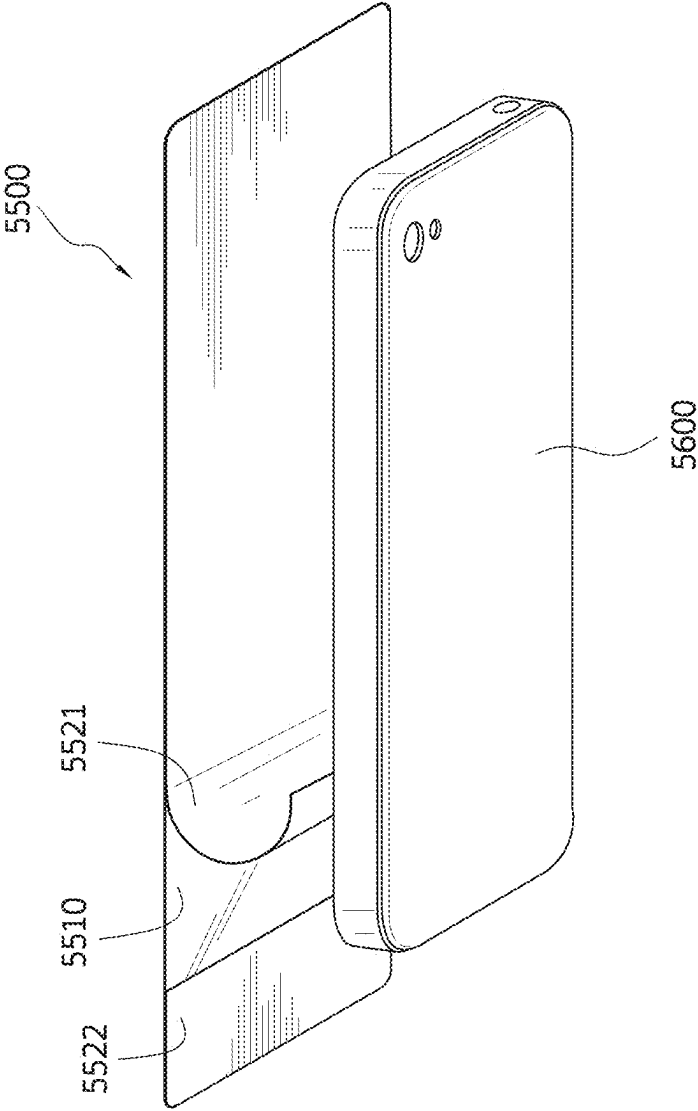


FIG. 56

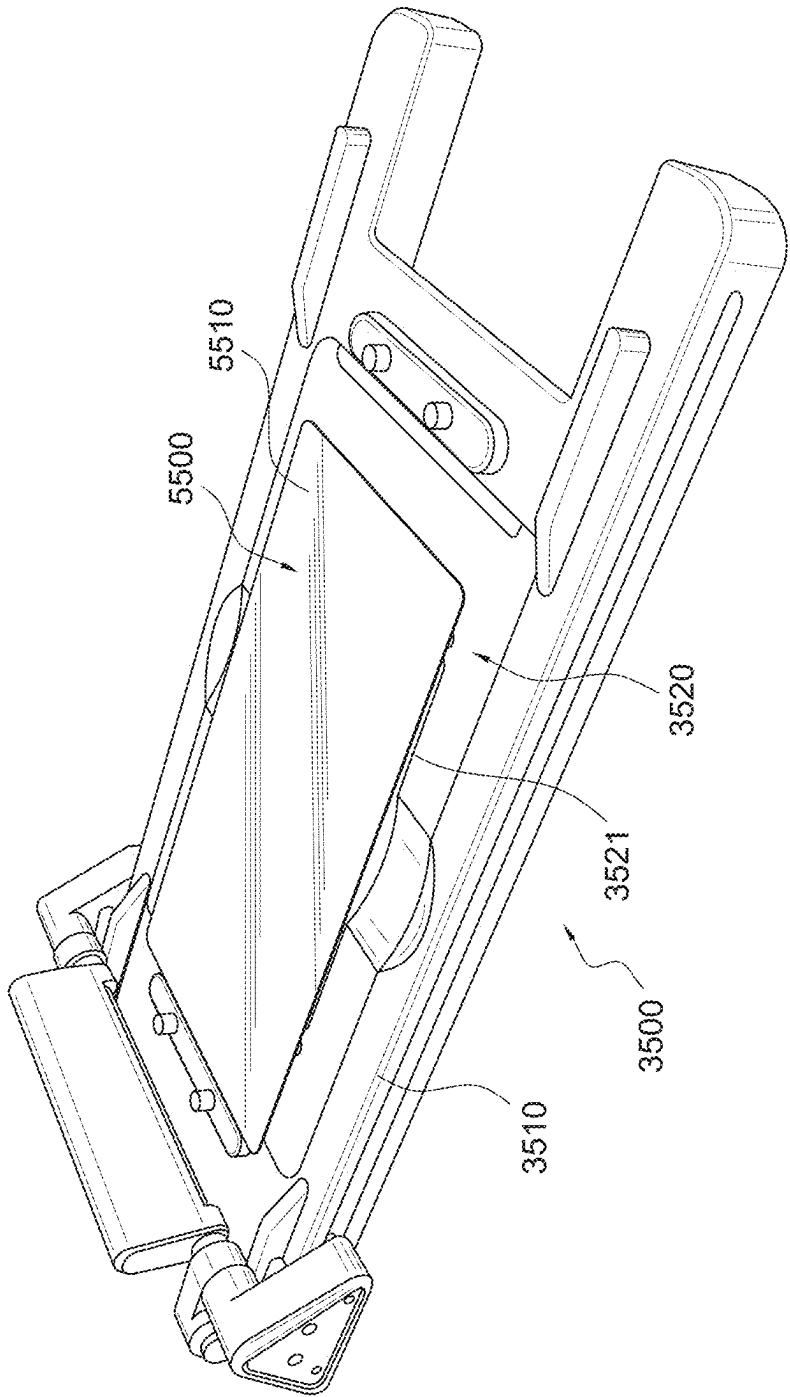


FIG. 57



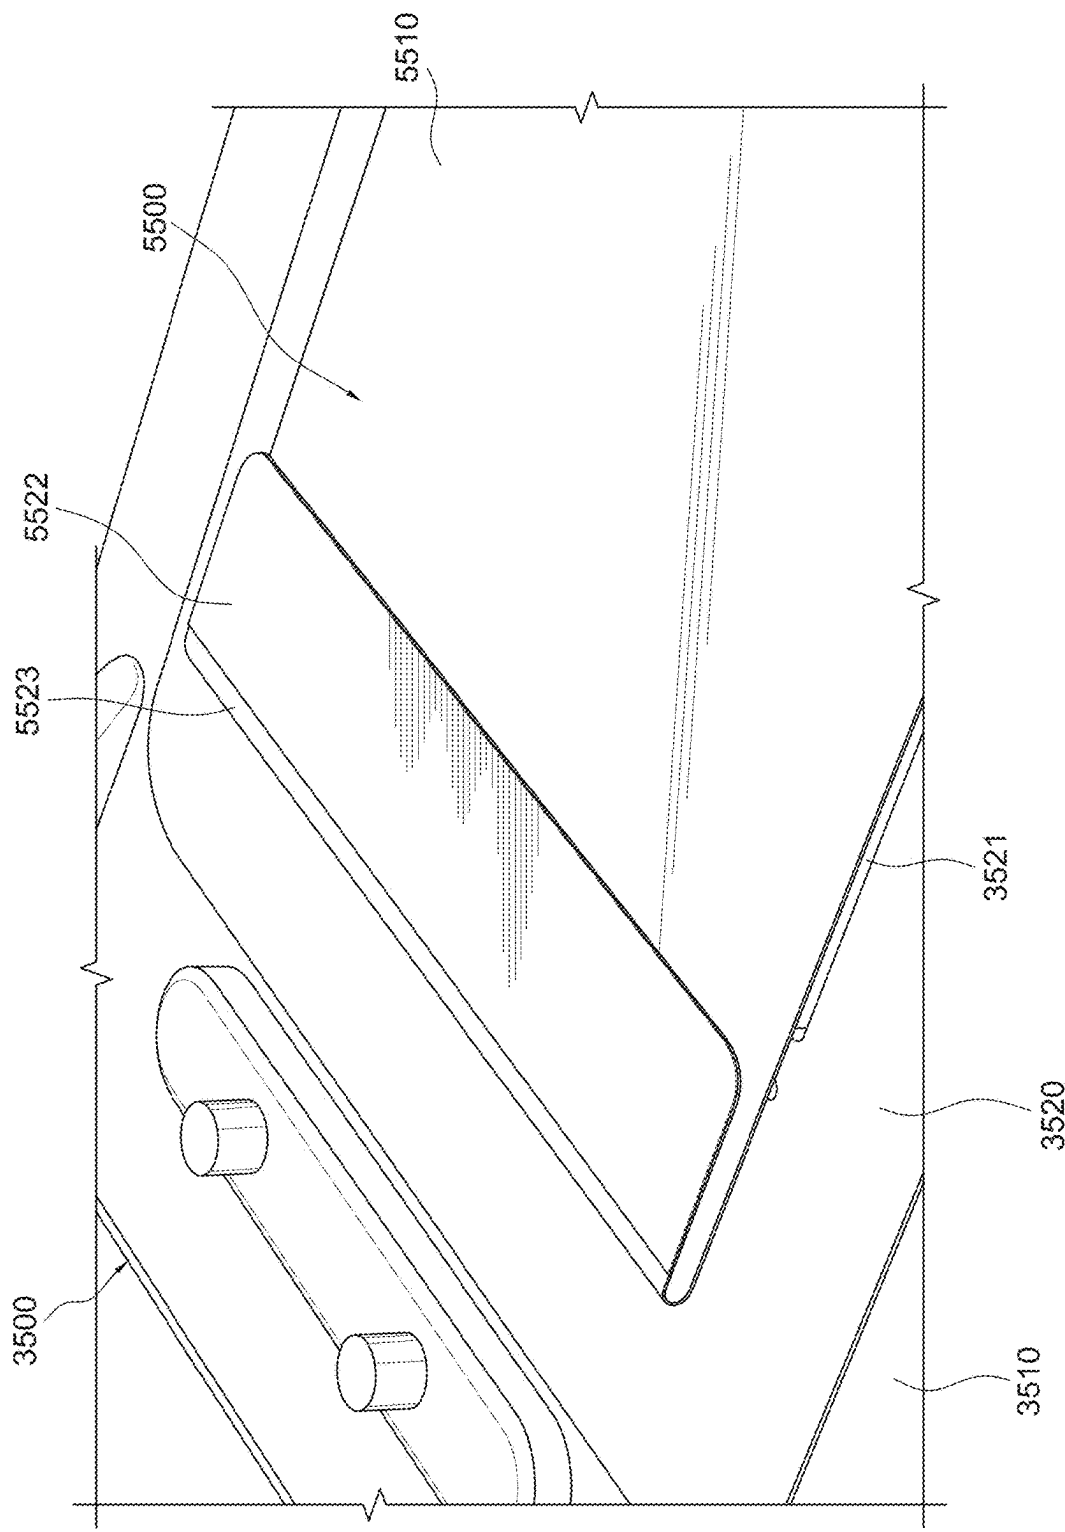


FIG. 58

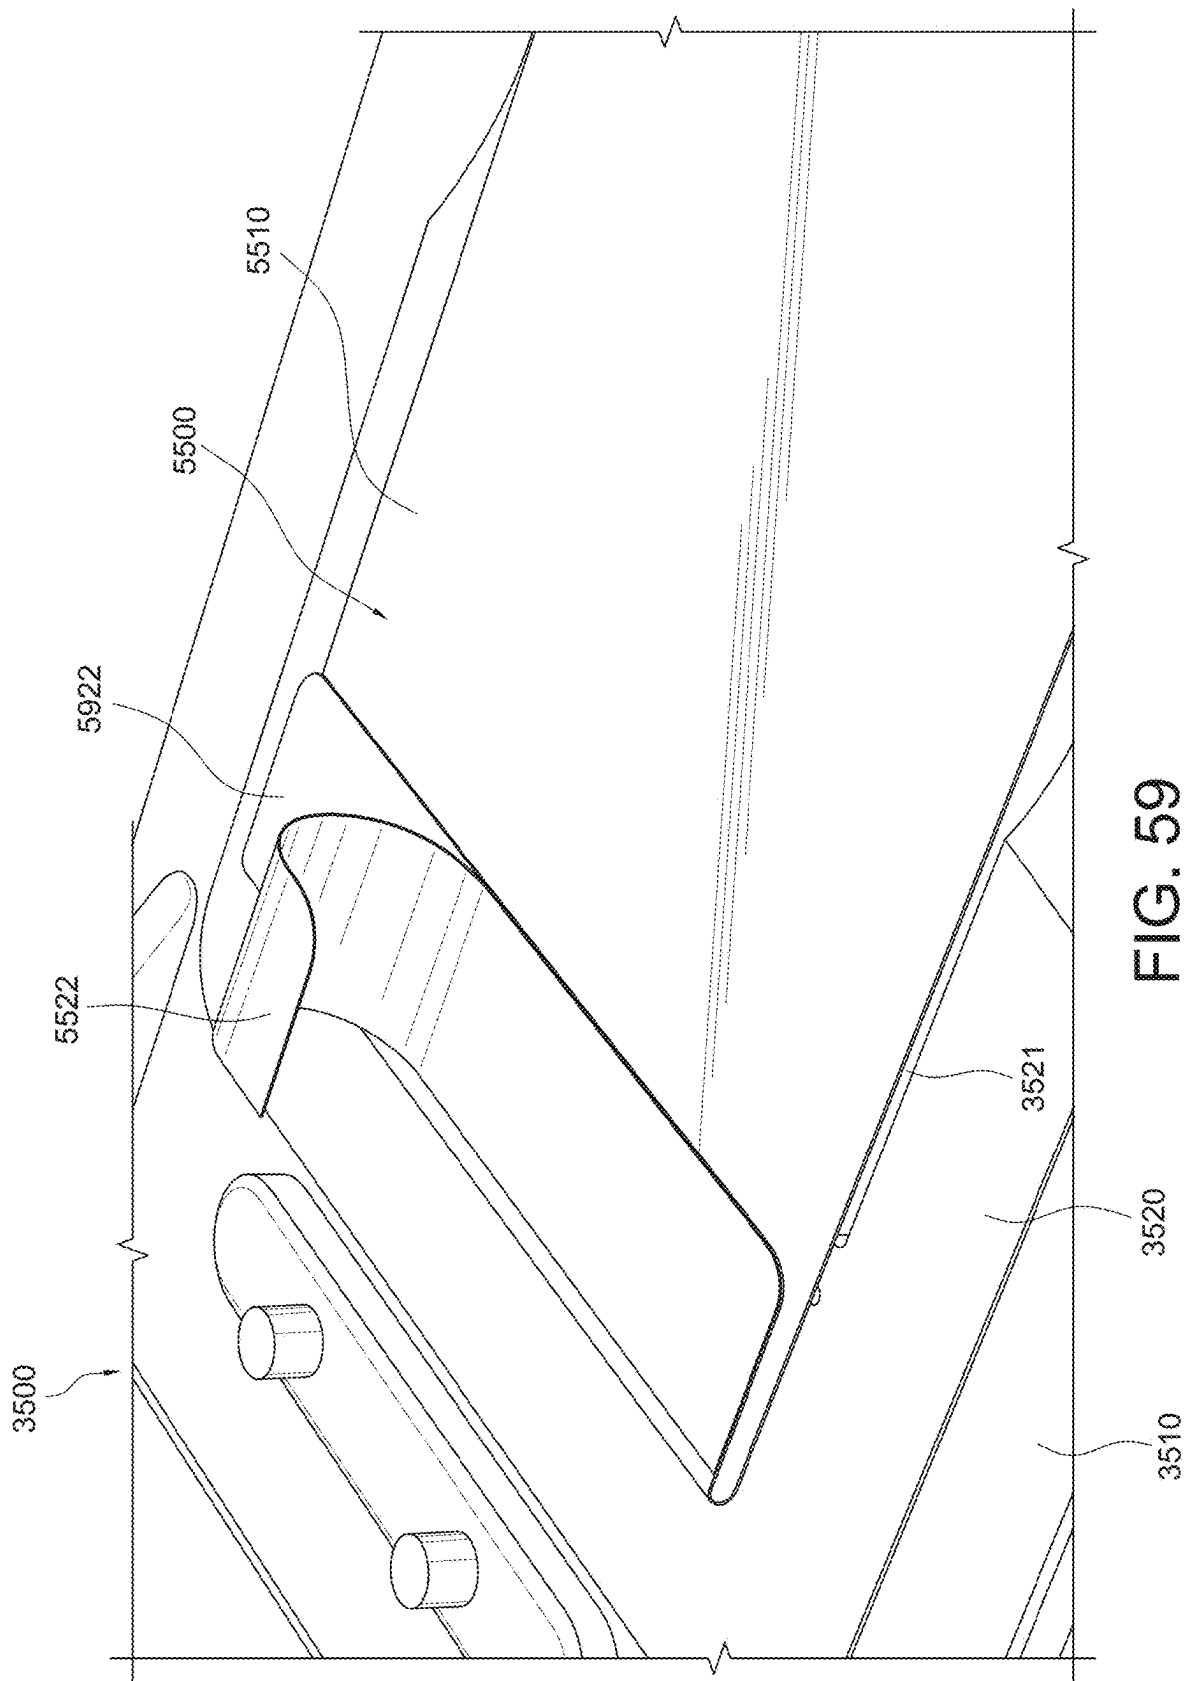

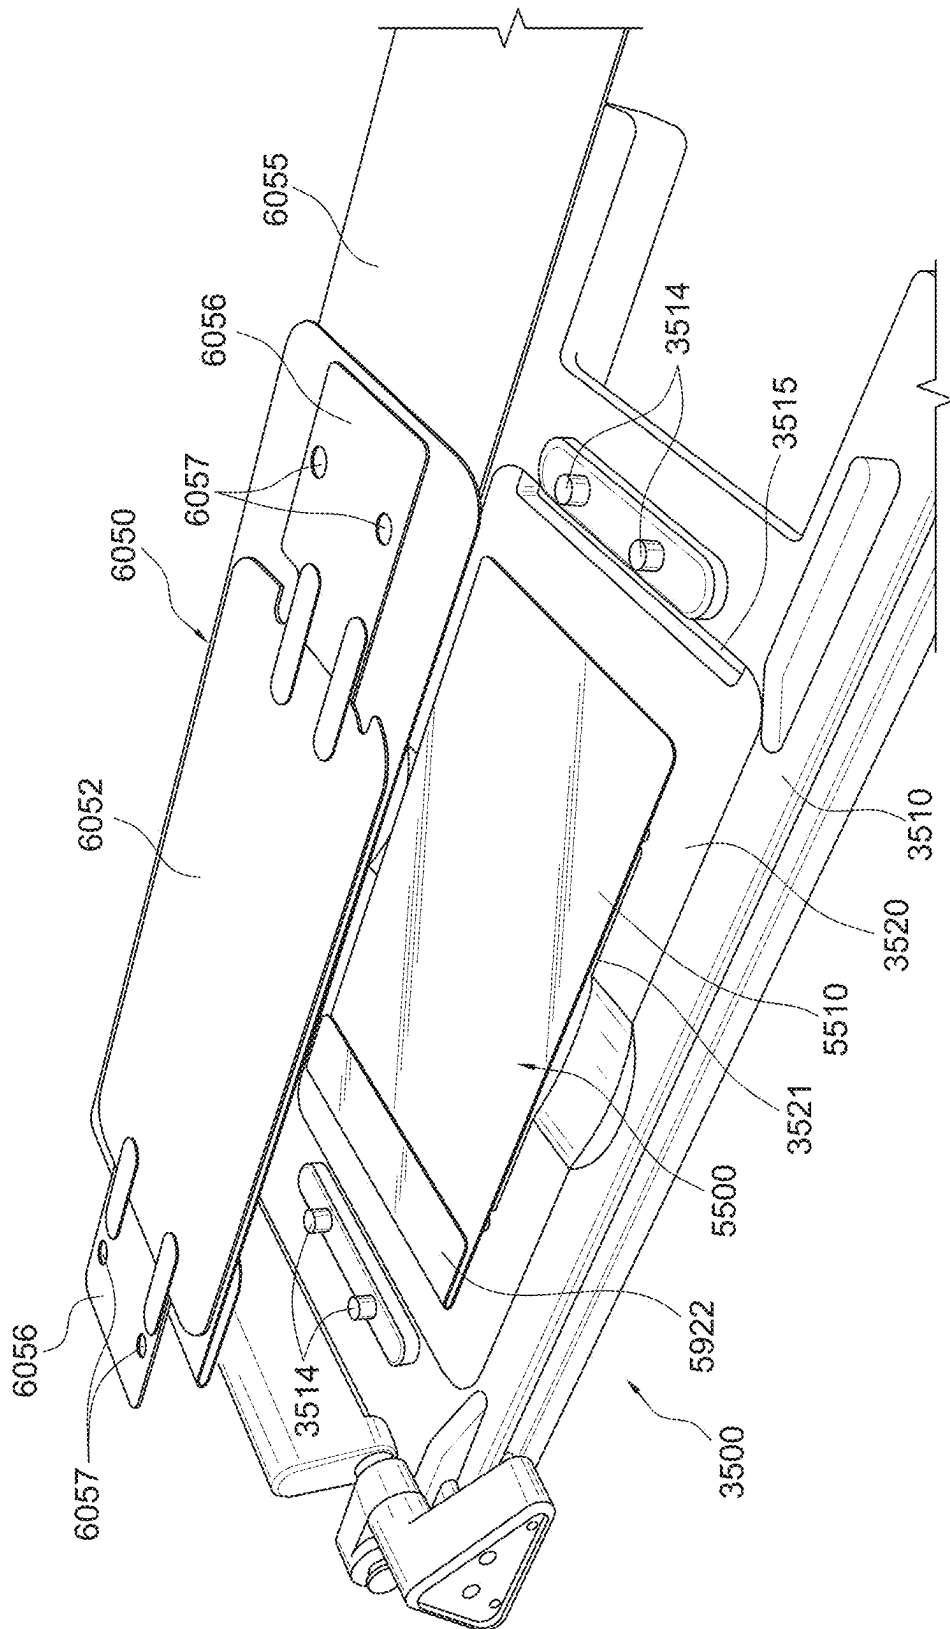



 DEPARTMENT OF HEALTH AND HUMAN SERVICES


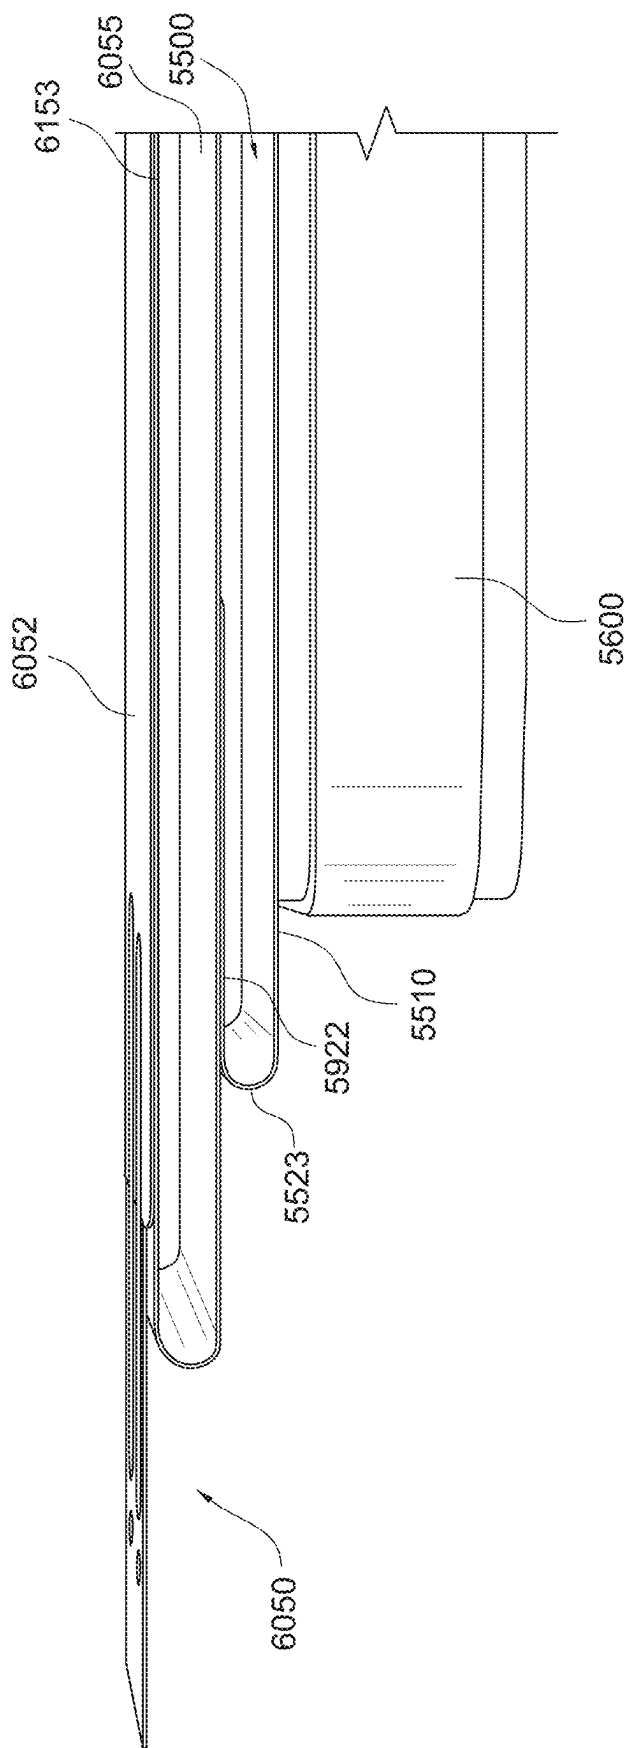
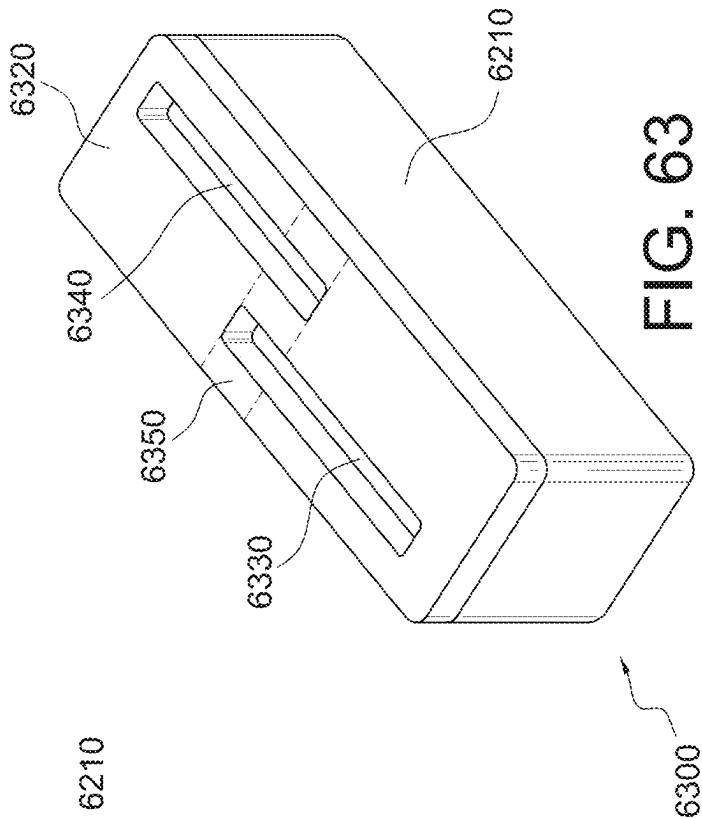


FIG. 61

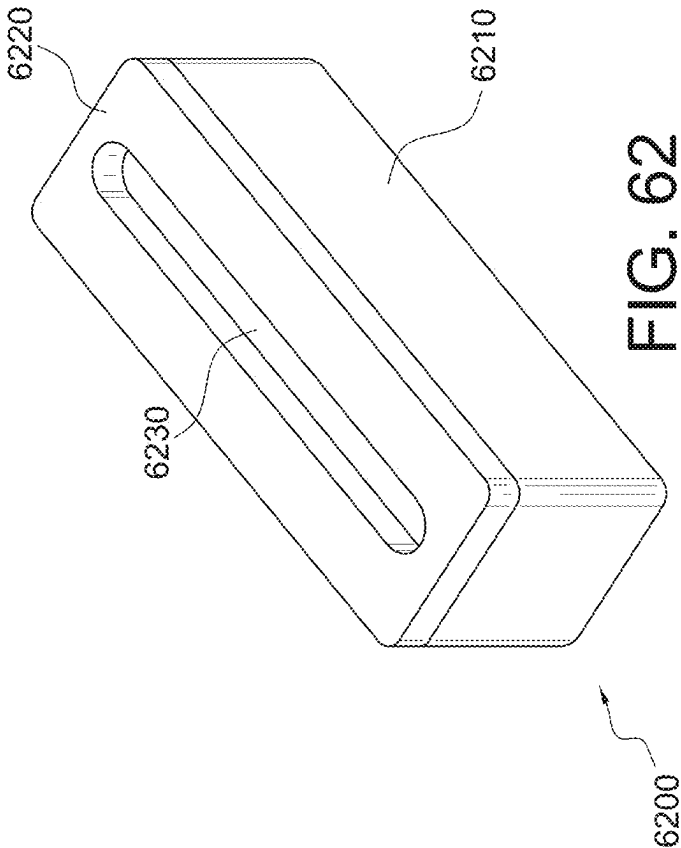




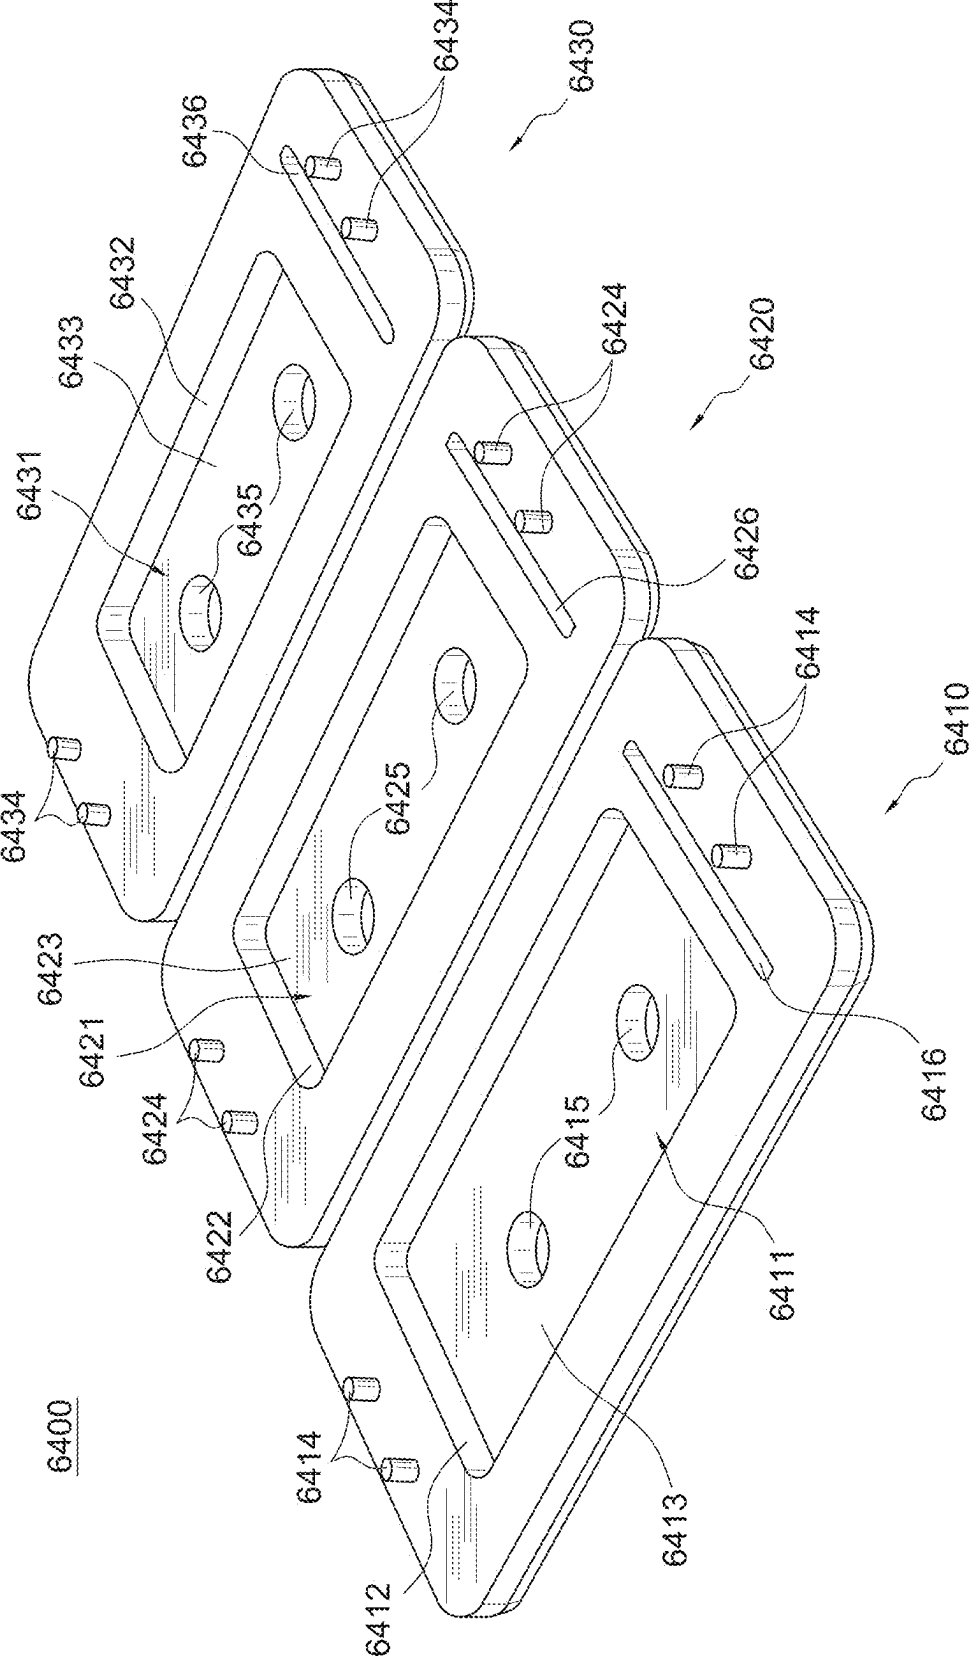
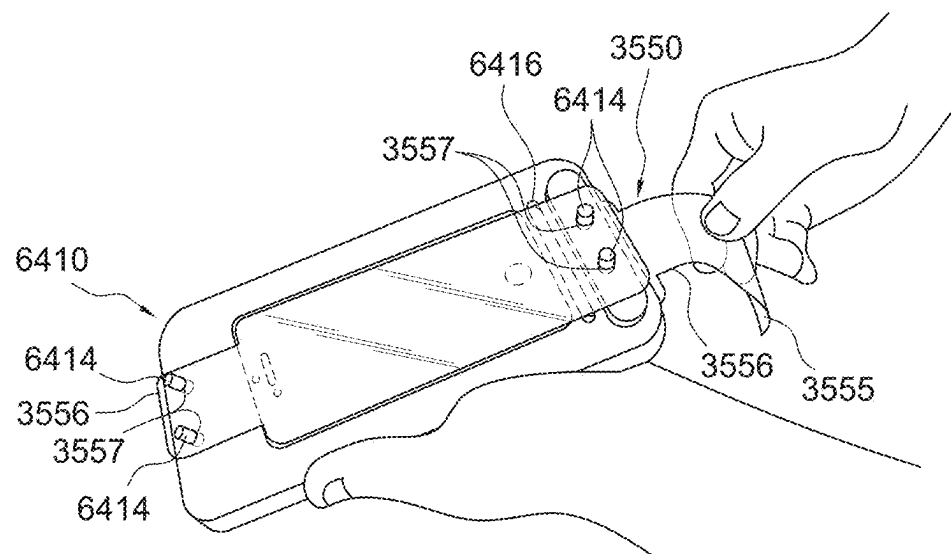
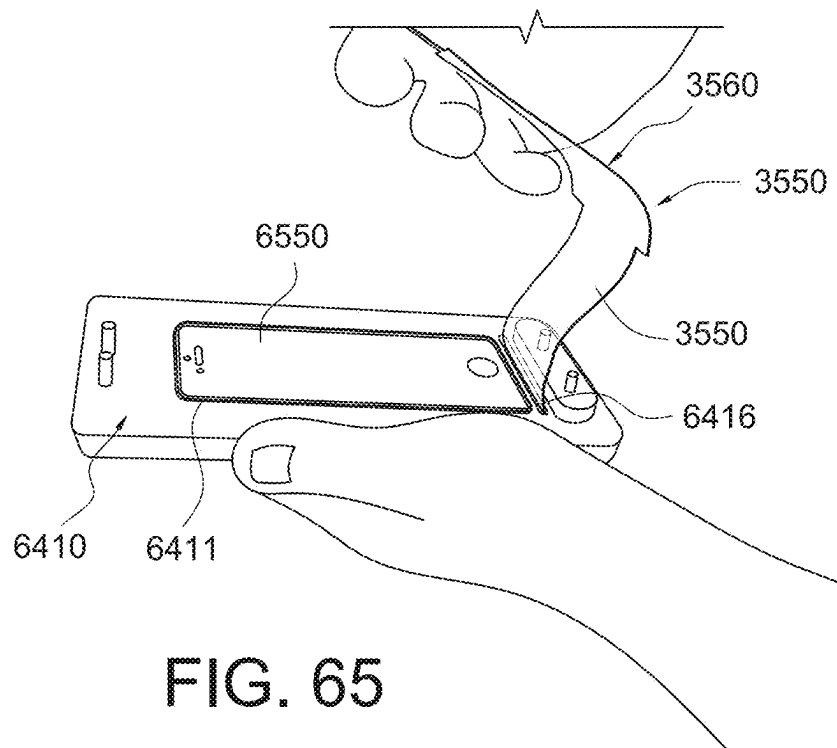


FIG. 64

56/99

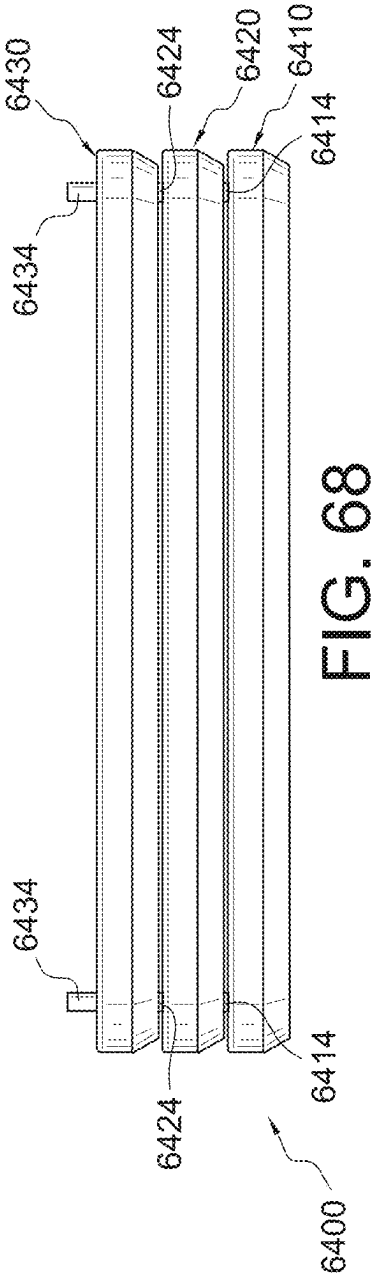

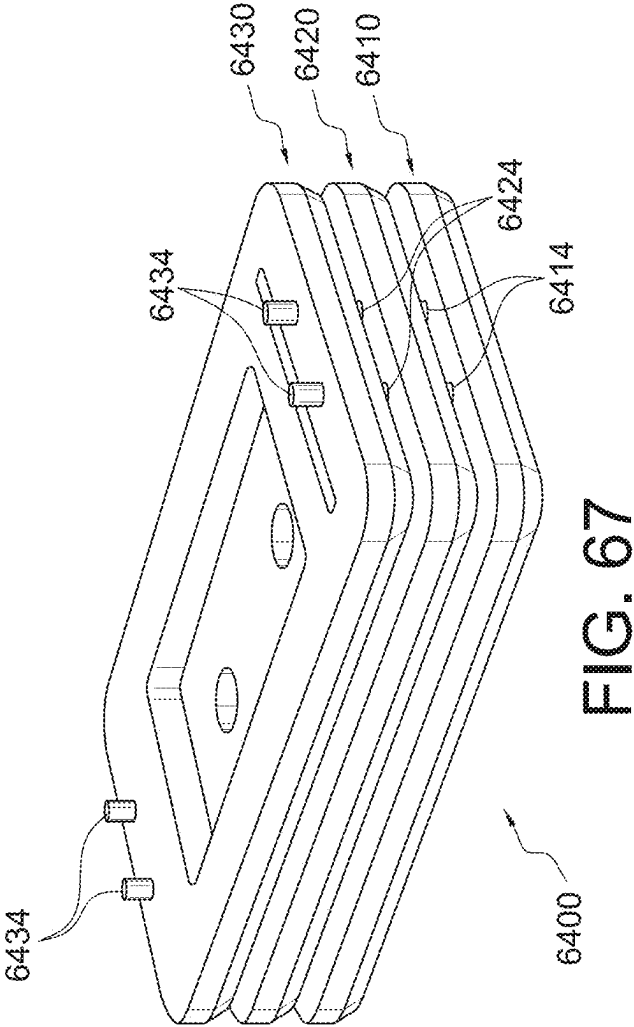

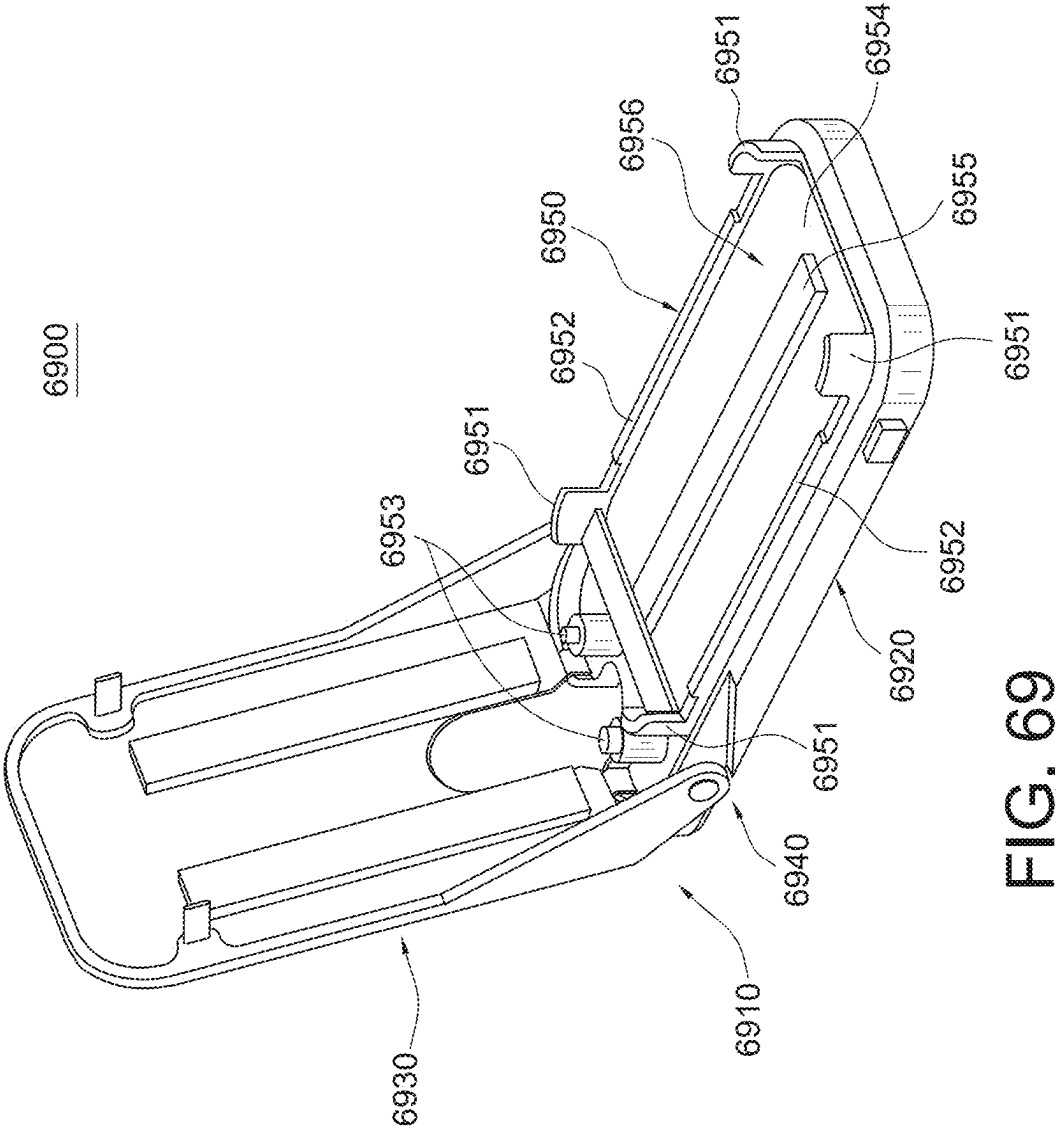

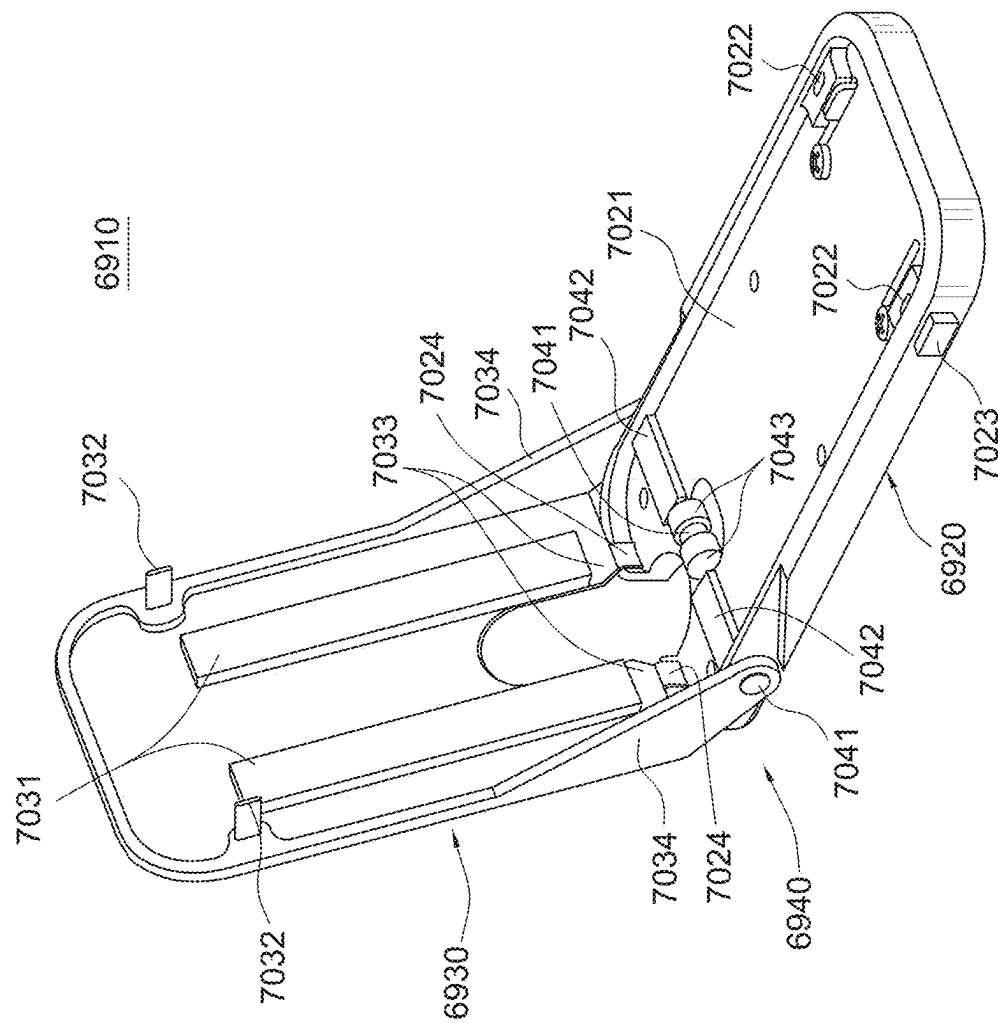


FIG. 70

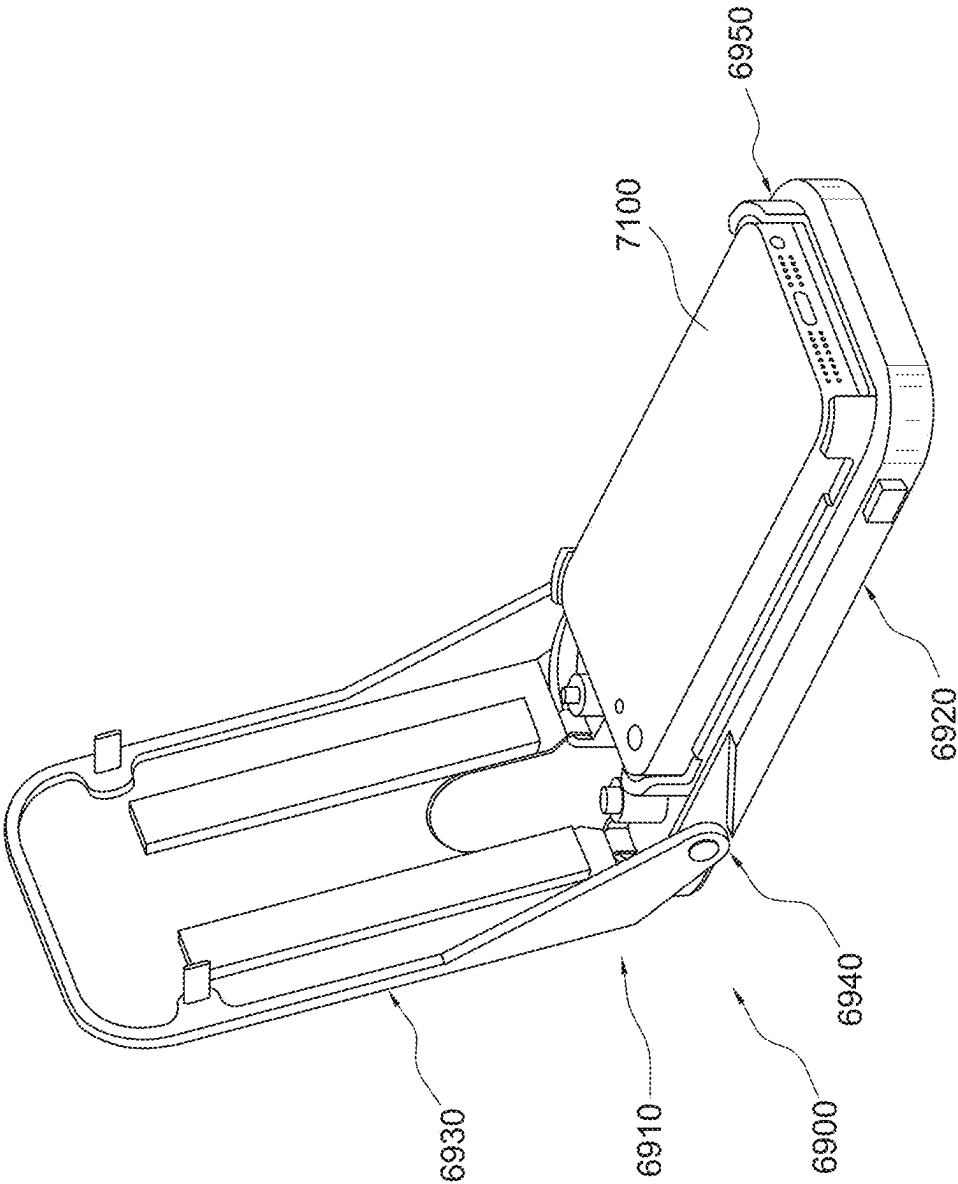


FIG. 71

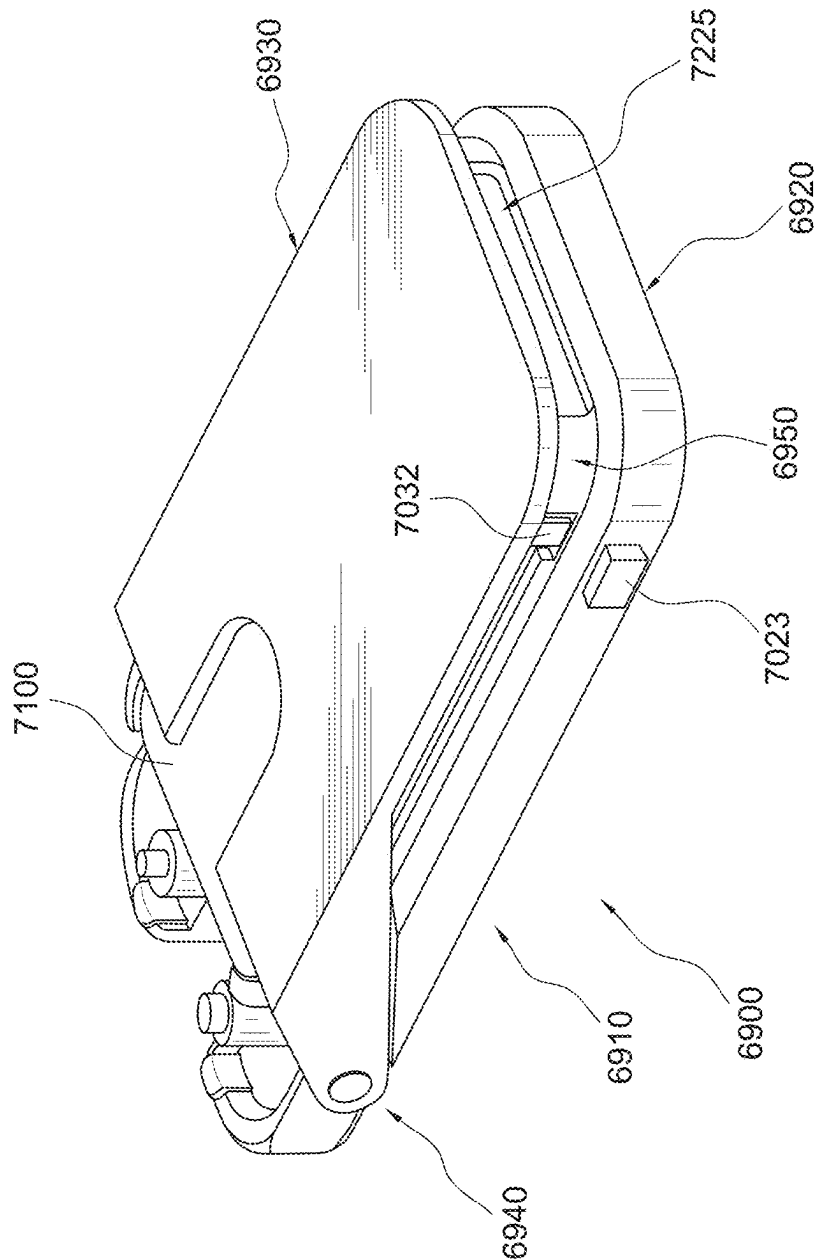


FIG. 72

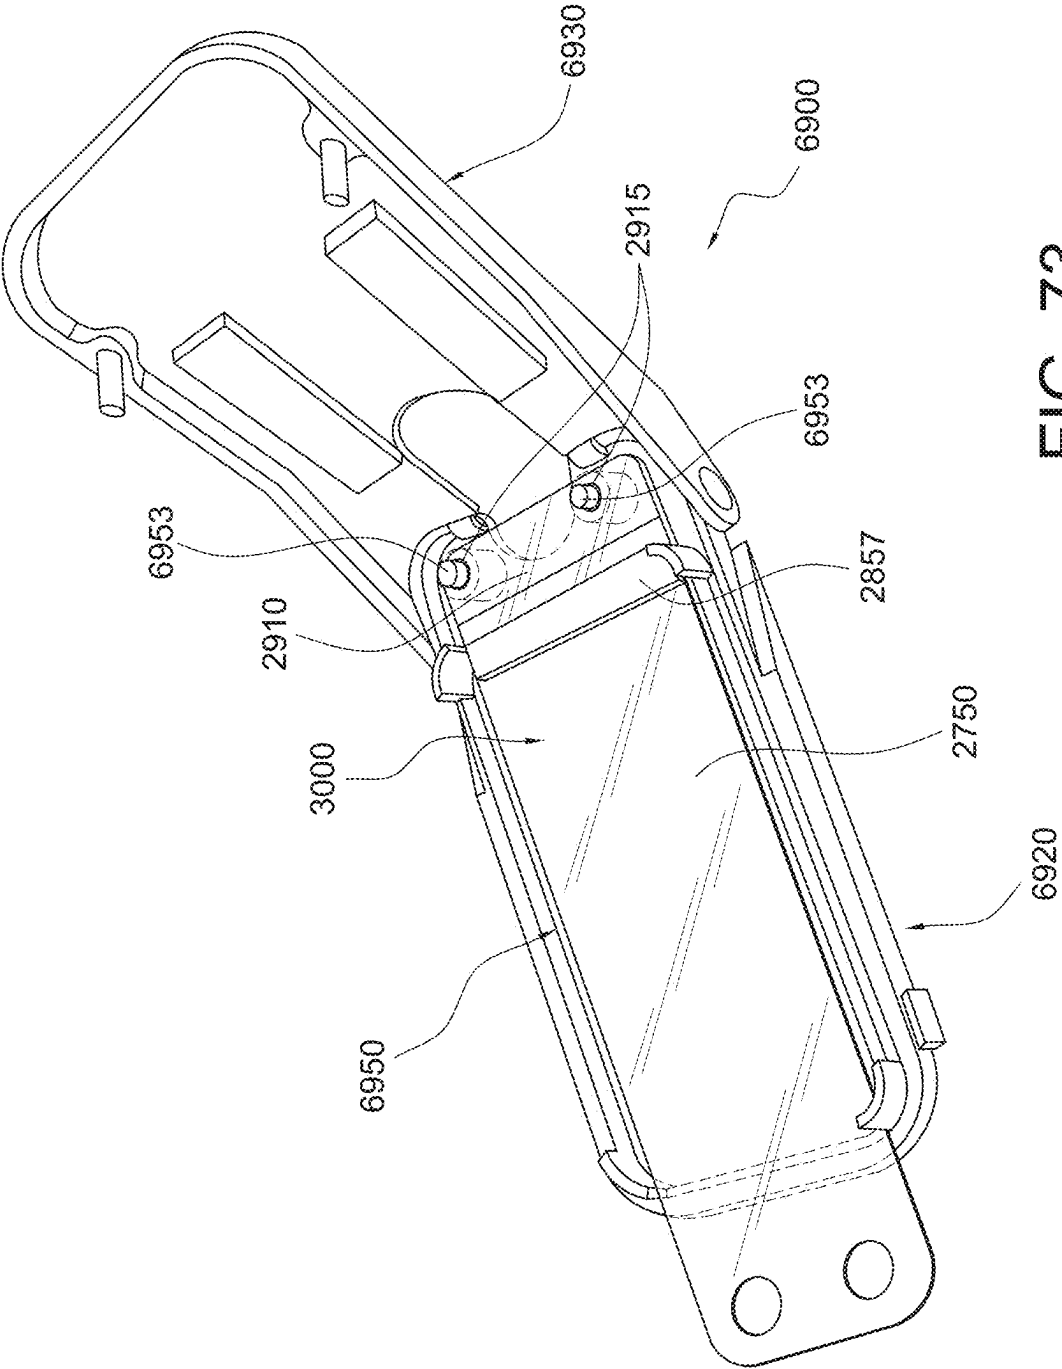


FIG. 73

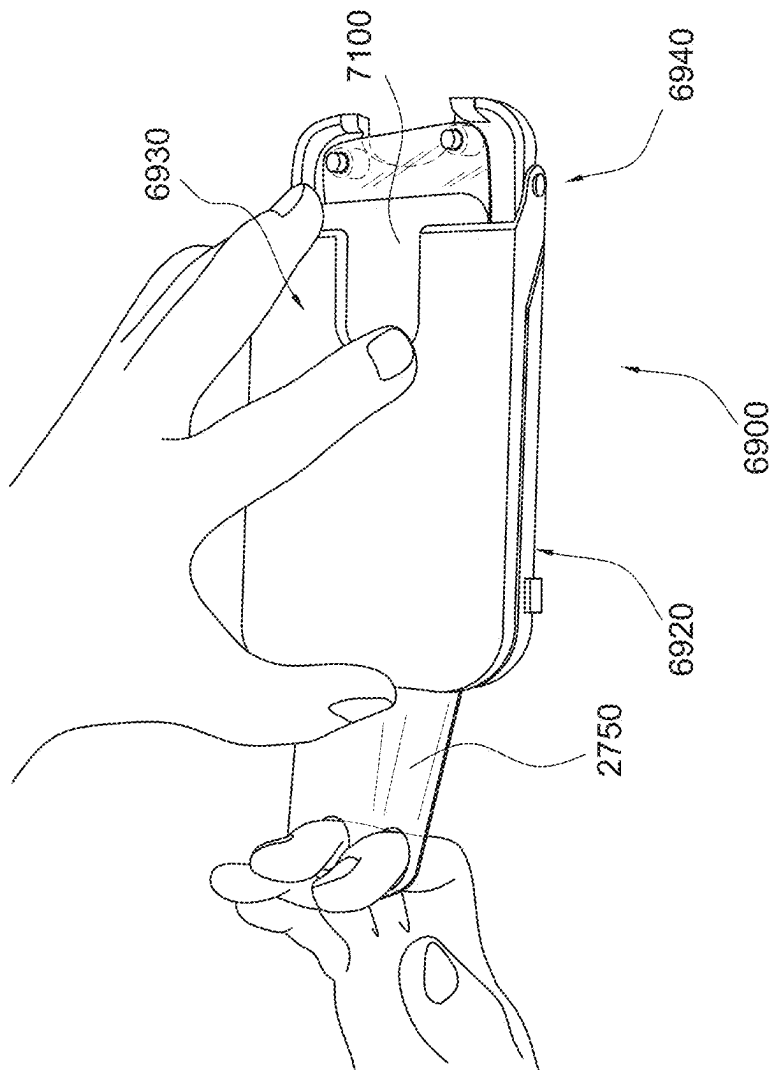
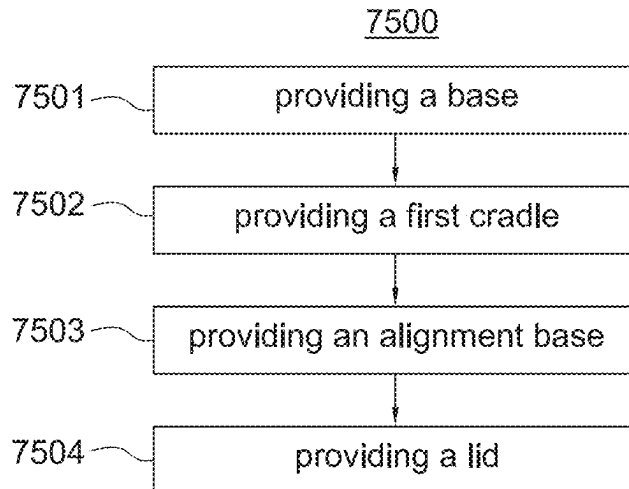
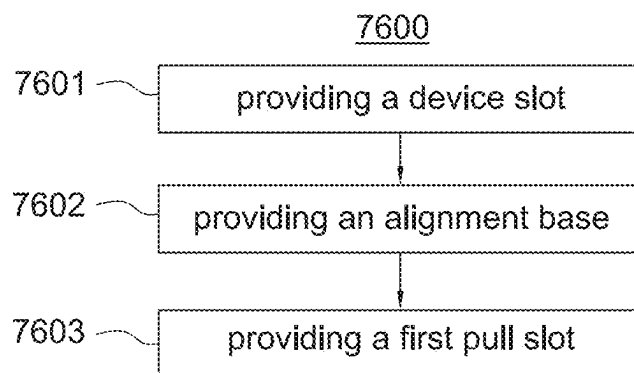
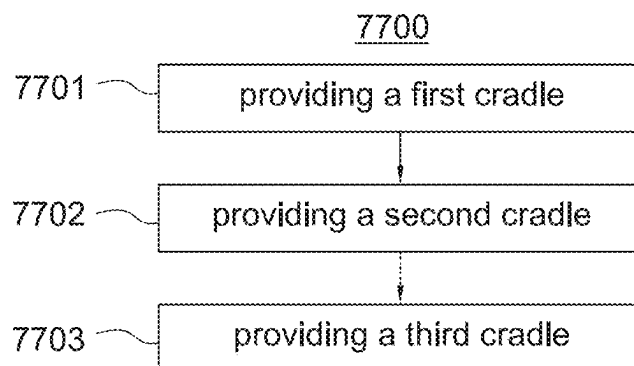


FIG. 74

**FIG. 75****FIG. 76****FIG. 77**


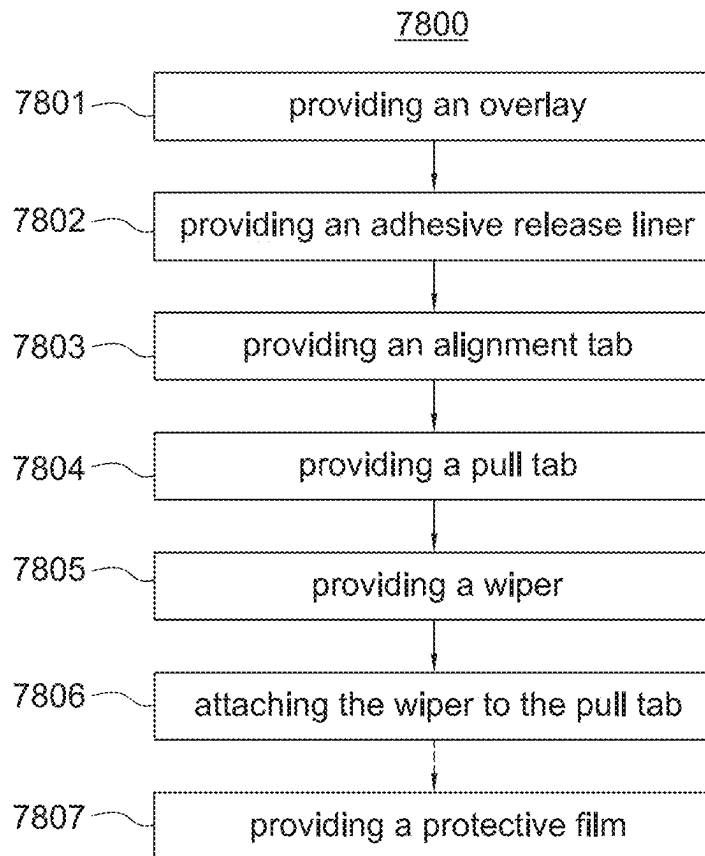
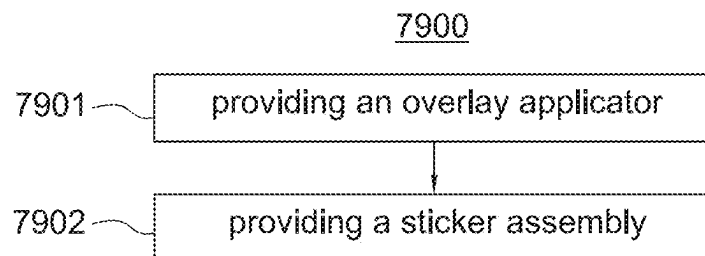
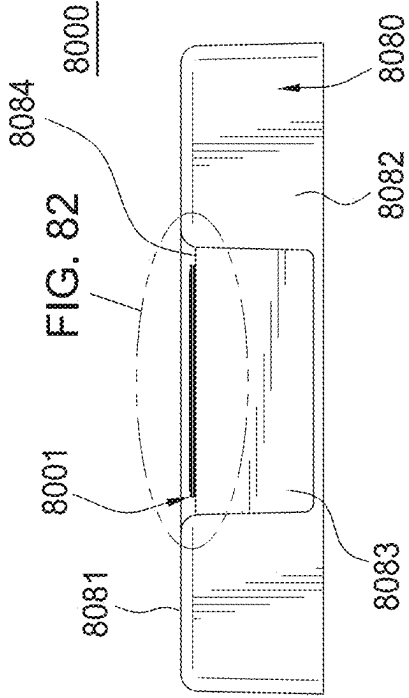
**FIG. 78****FIG. 79**

FIG. 80

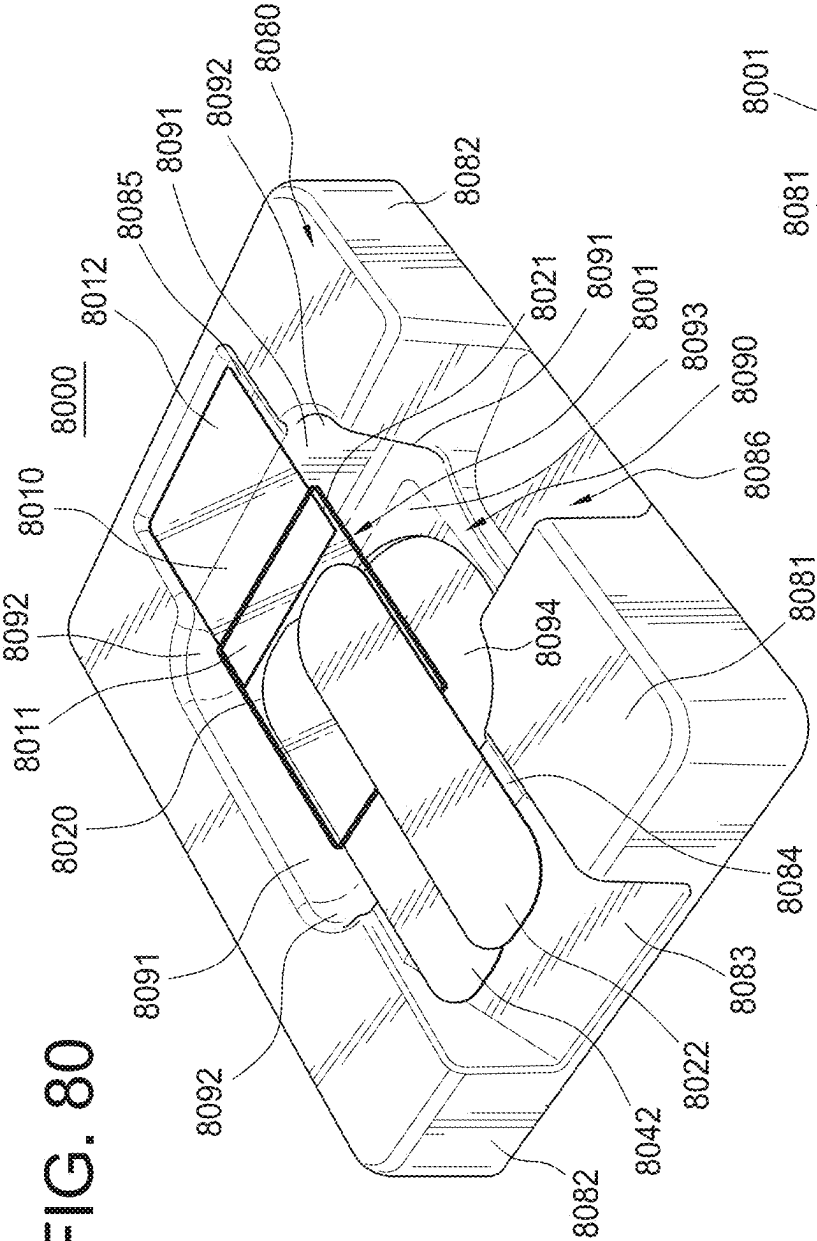

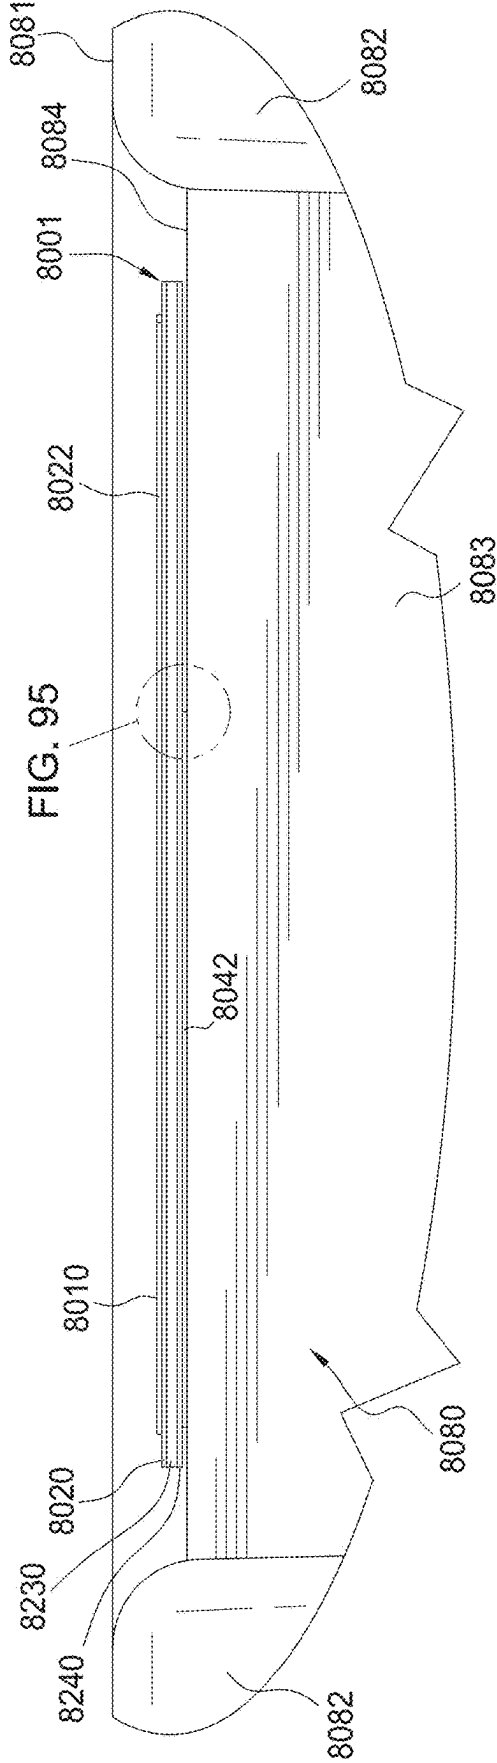


FIG. 82

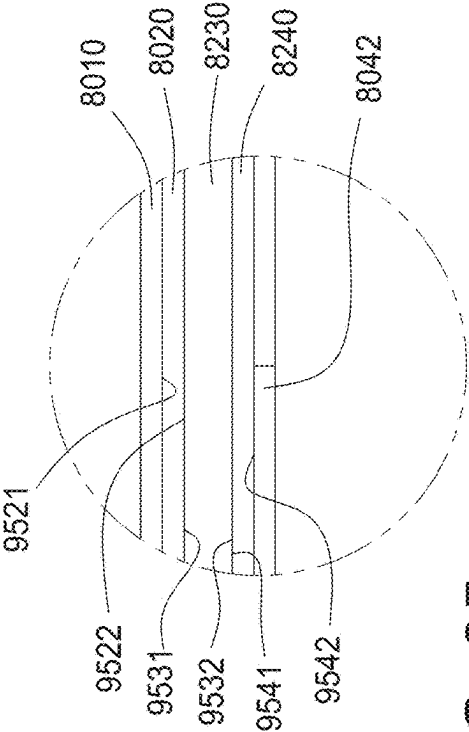


FIG. 95

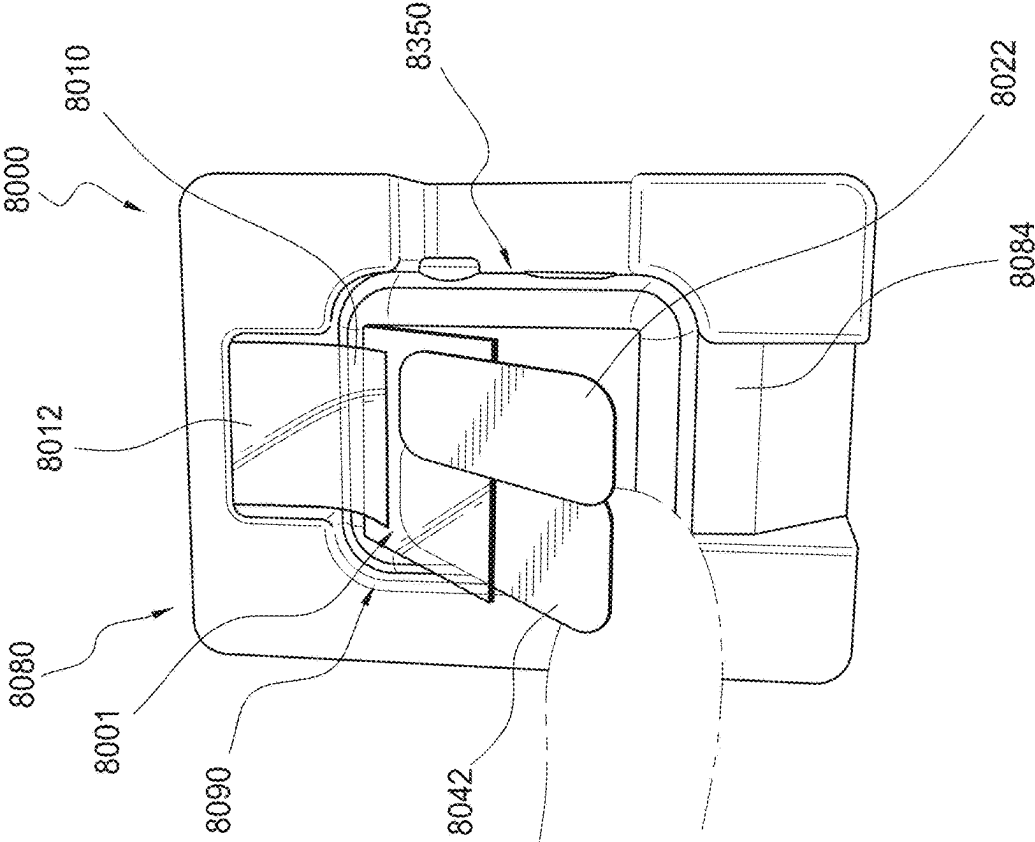


FIG. 83


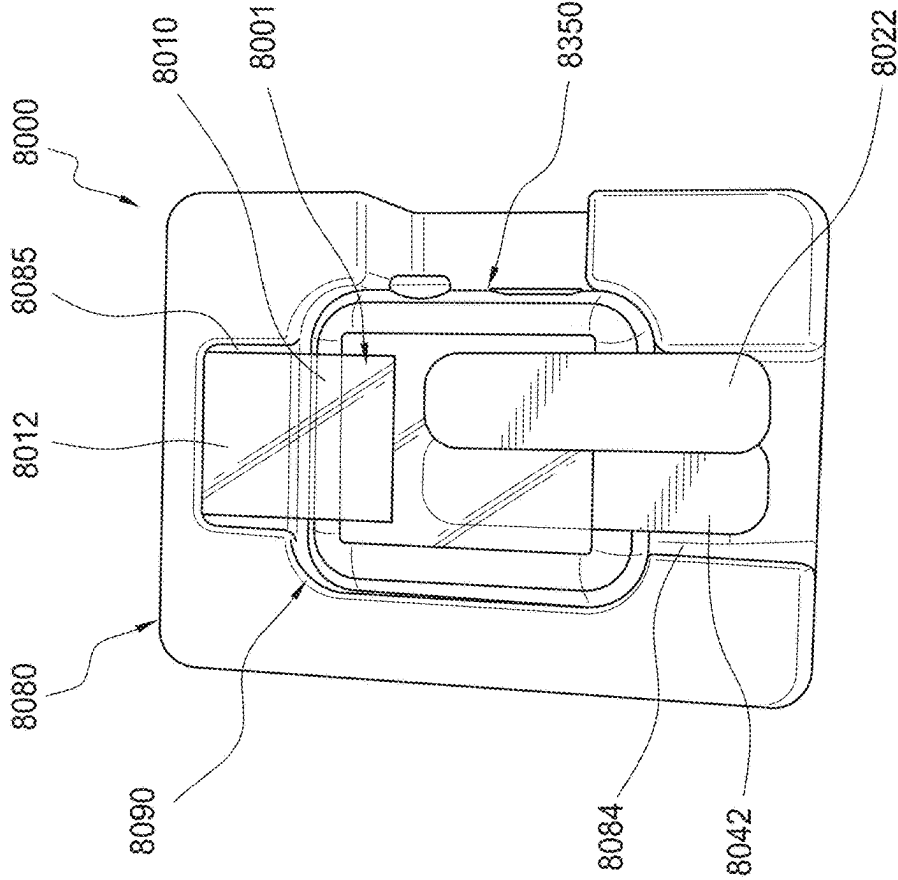


FIG. 84

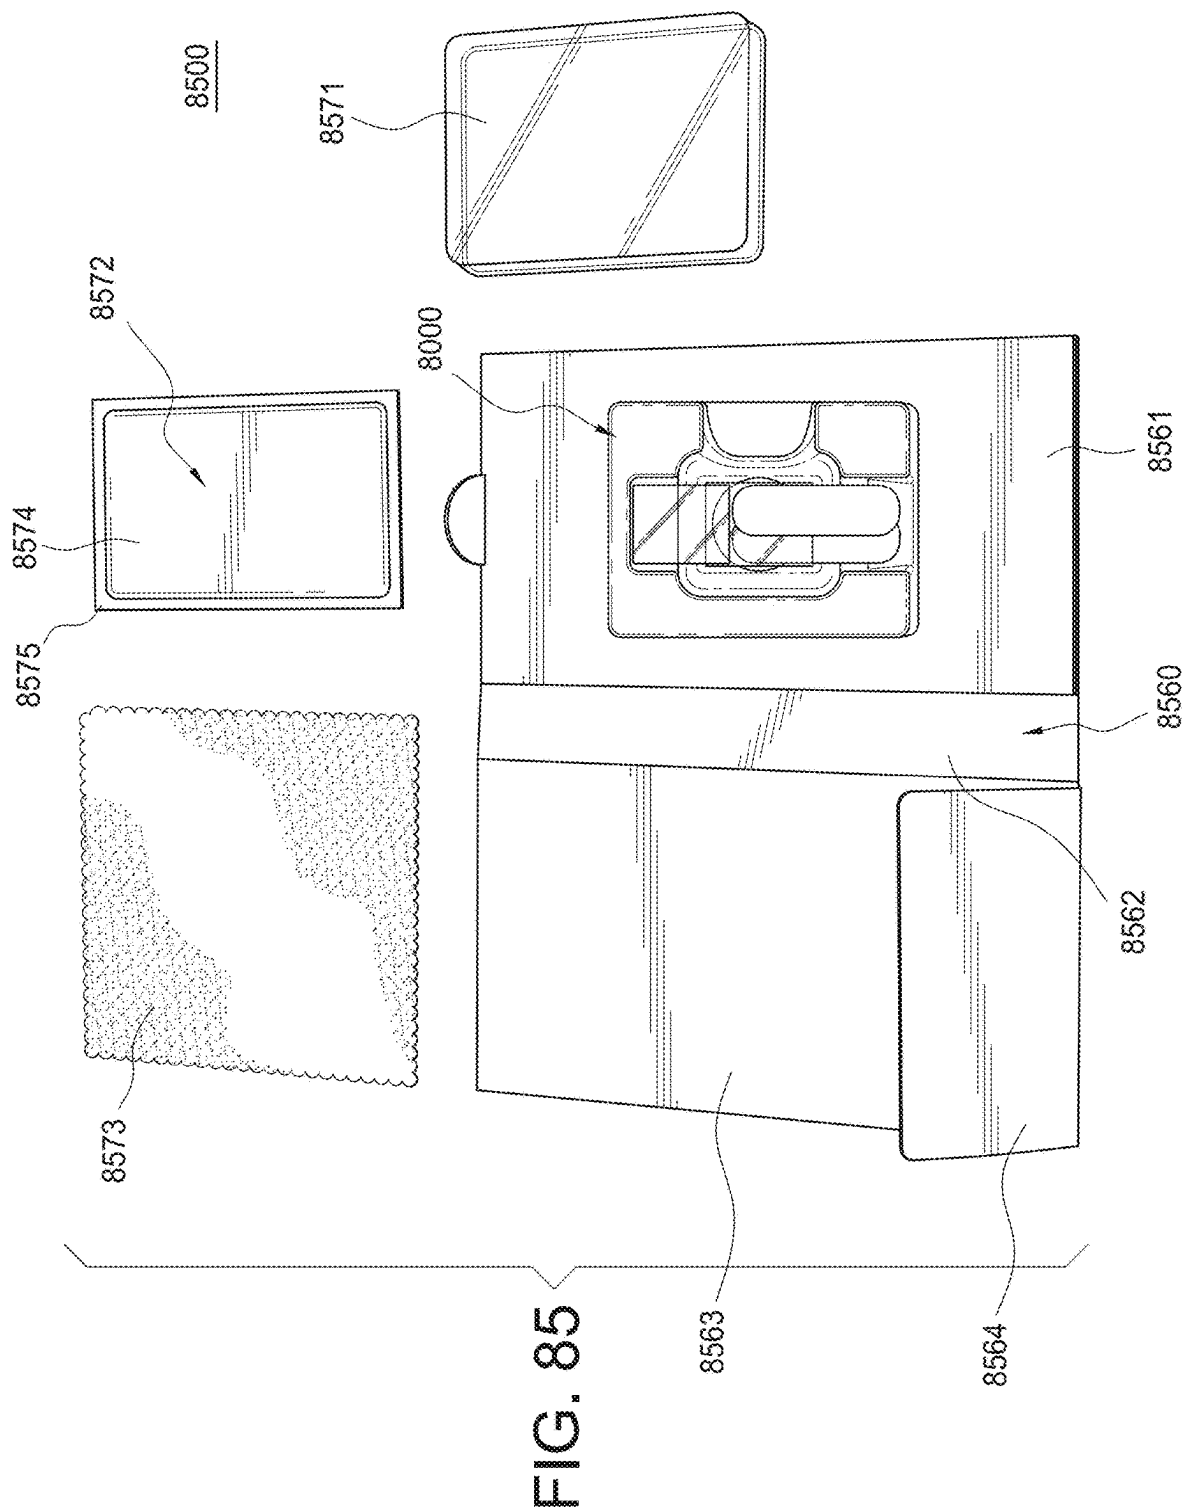

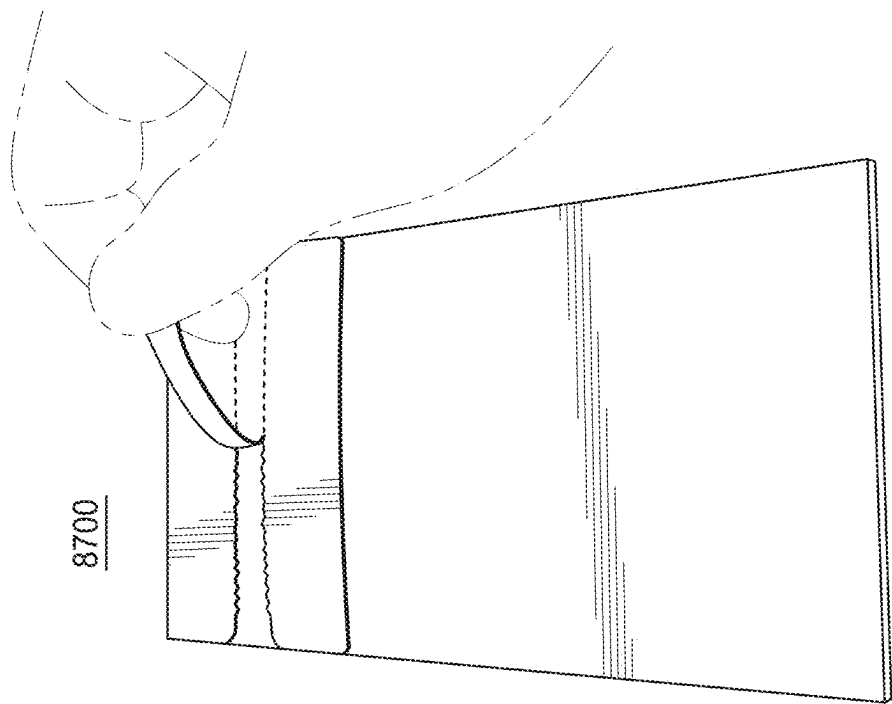


FIG. 87




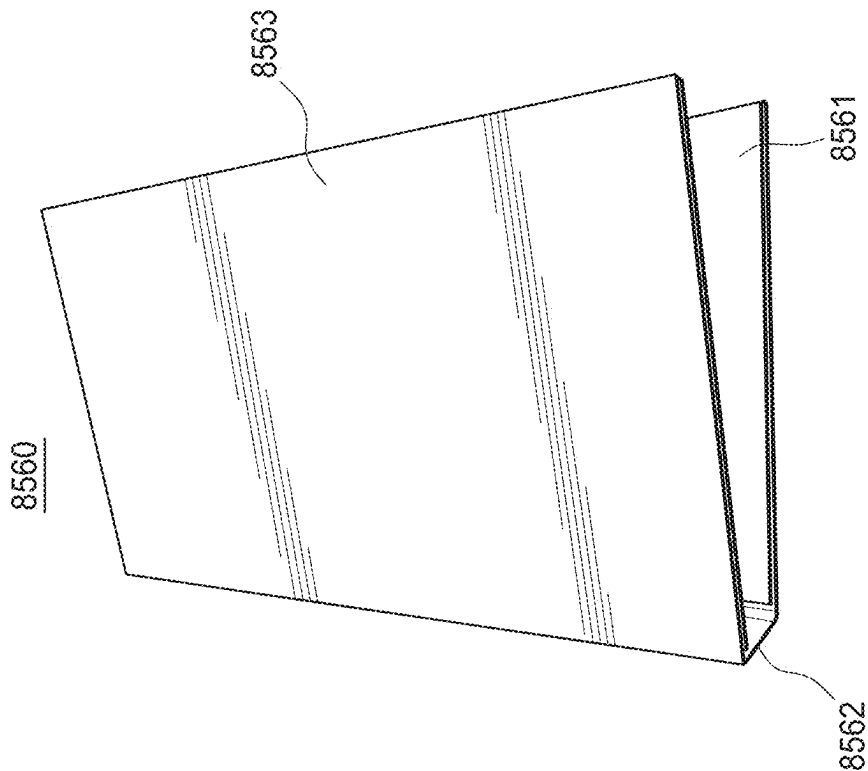
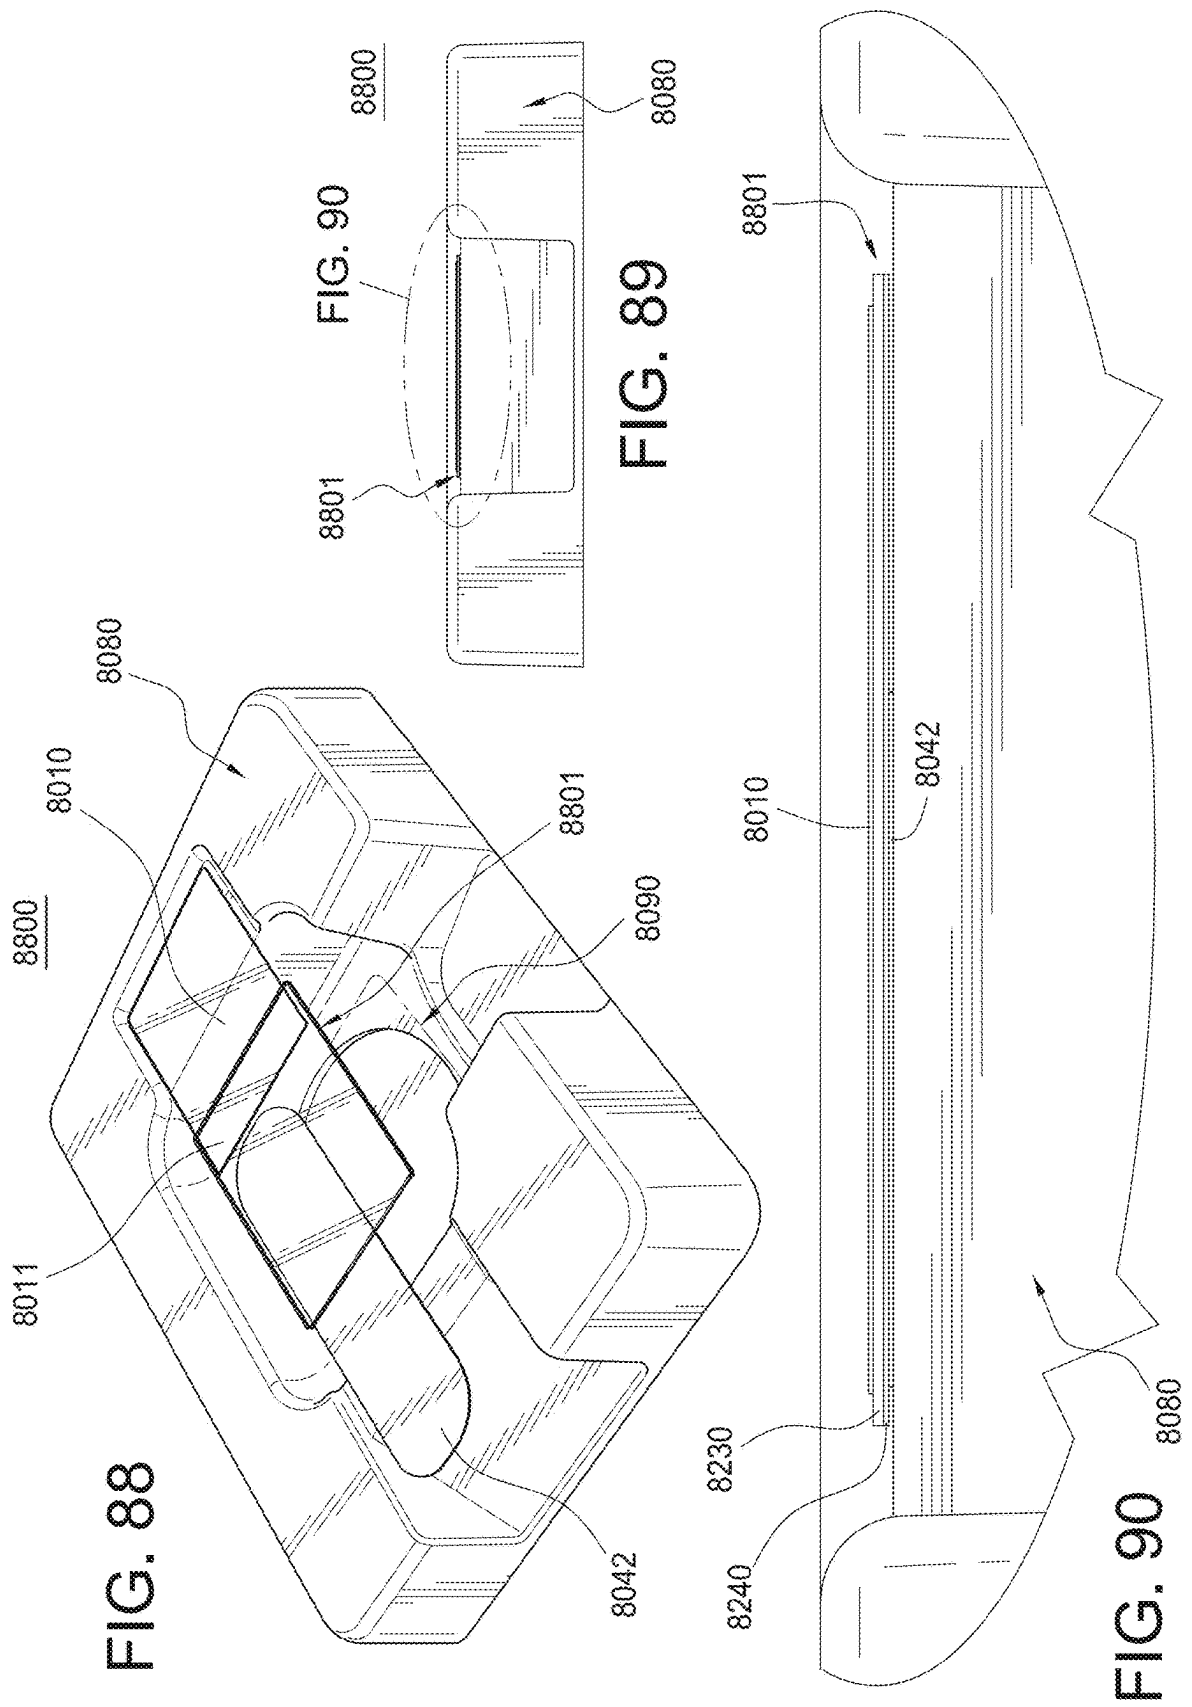


FIG. 86

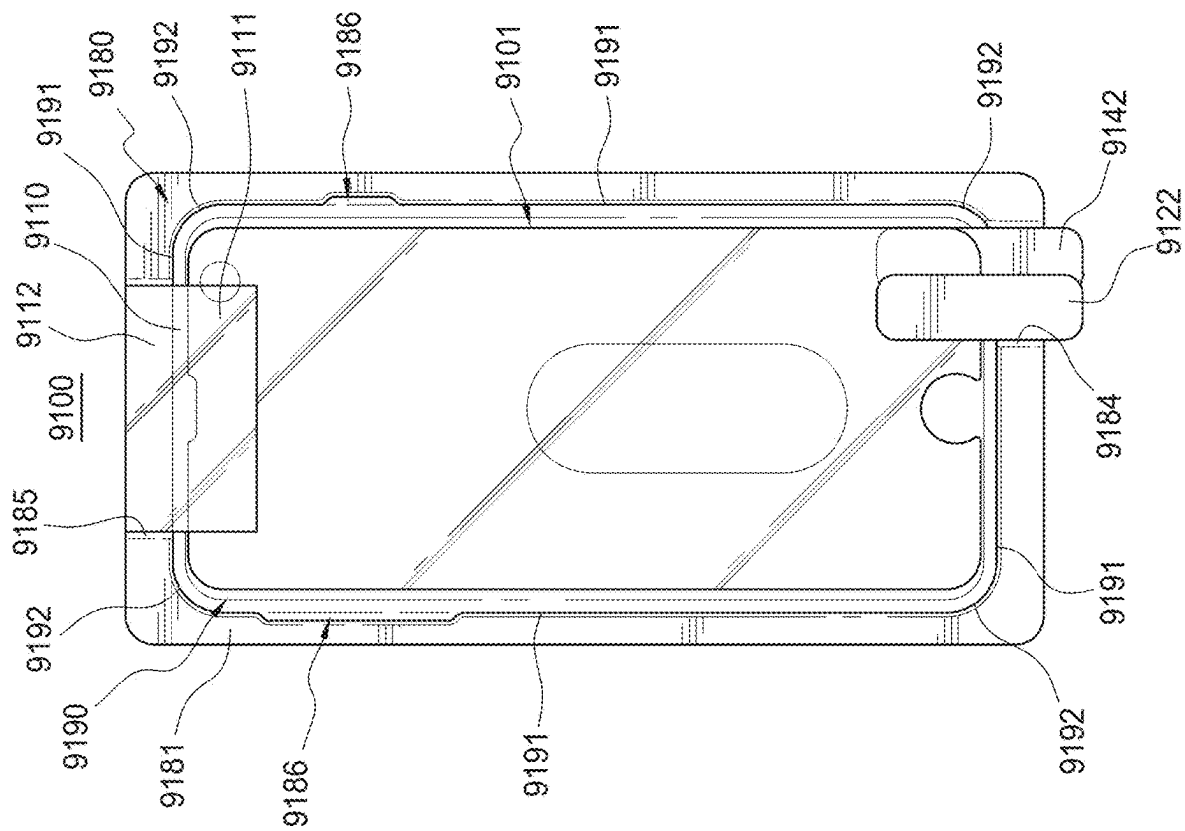

506

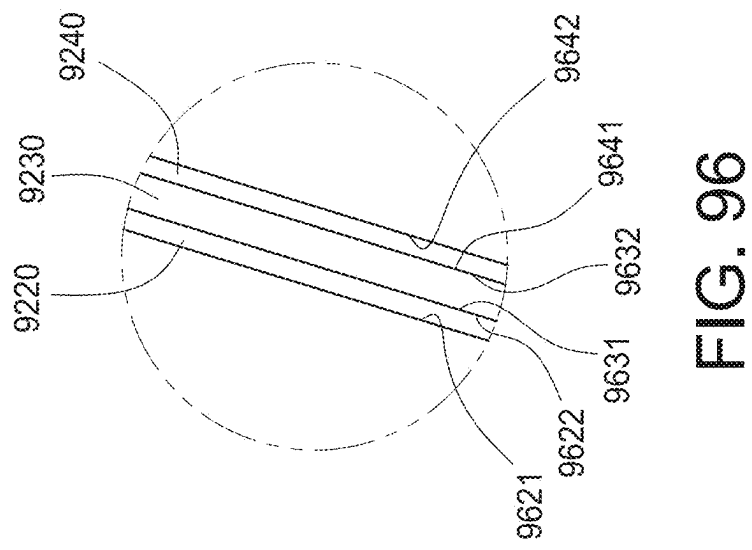

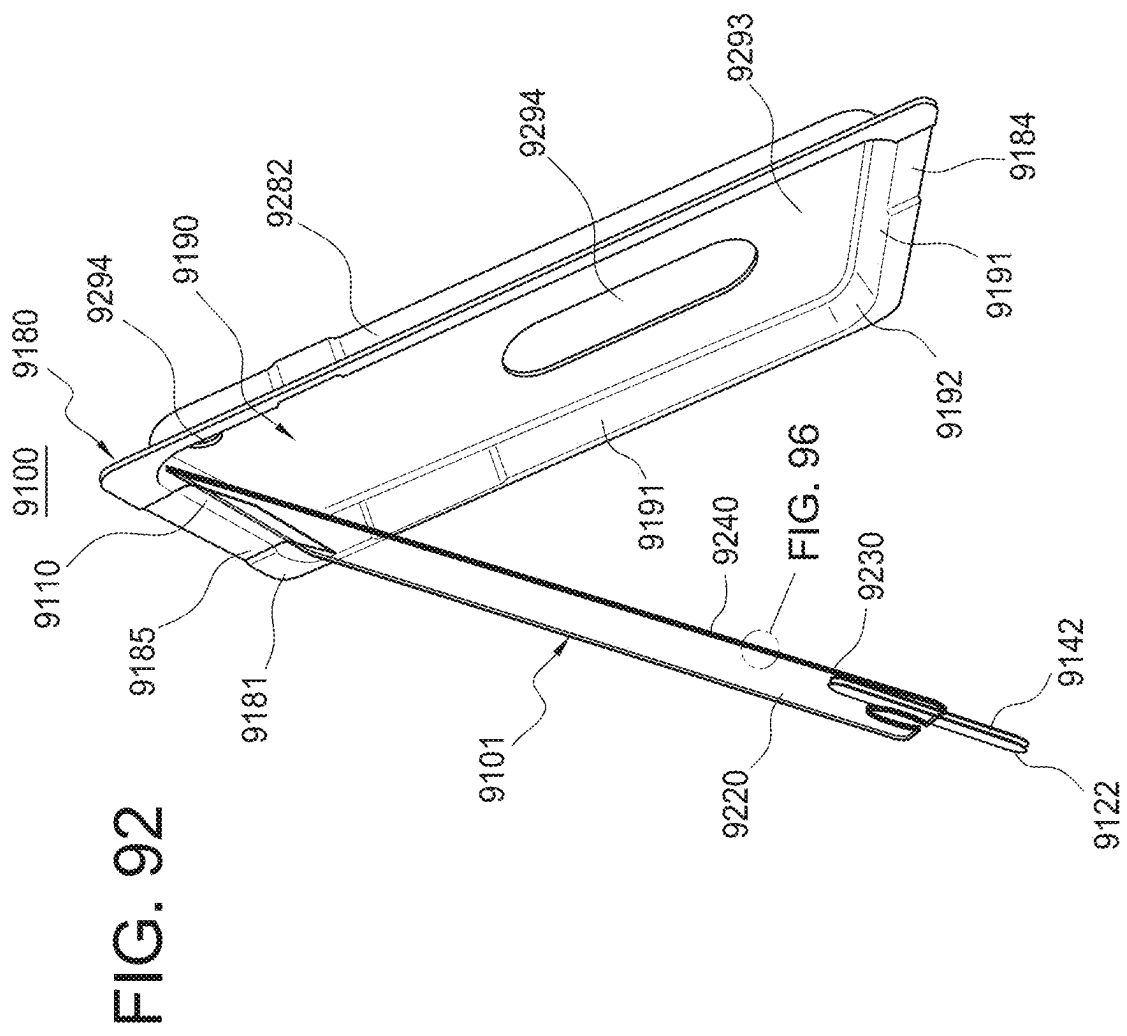

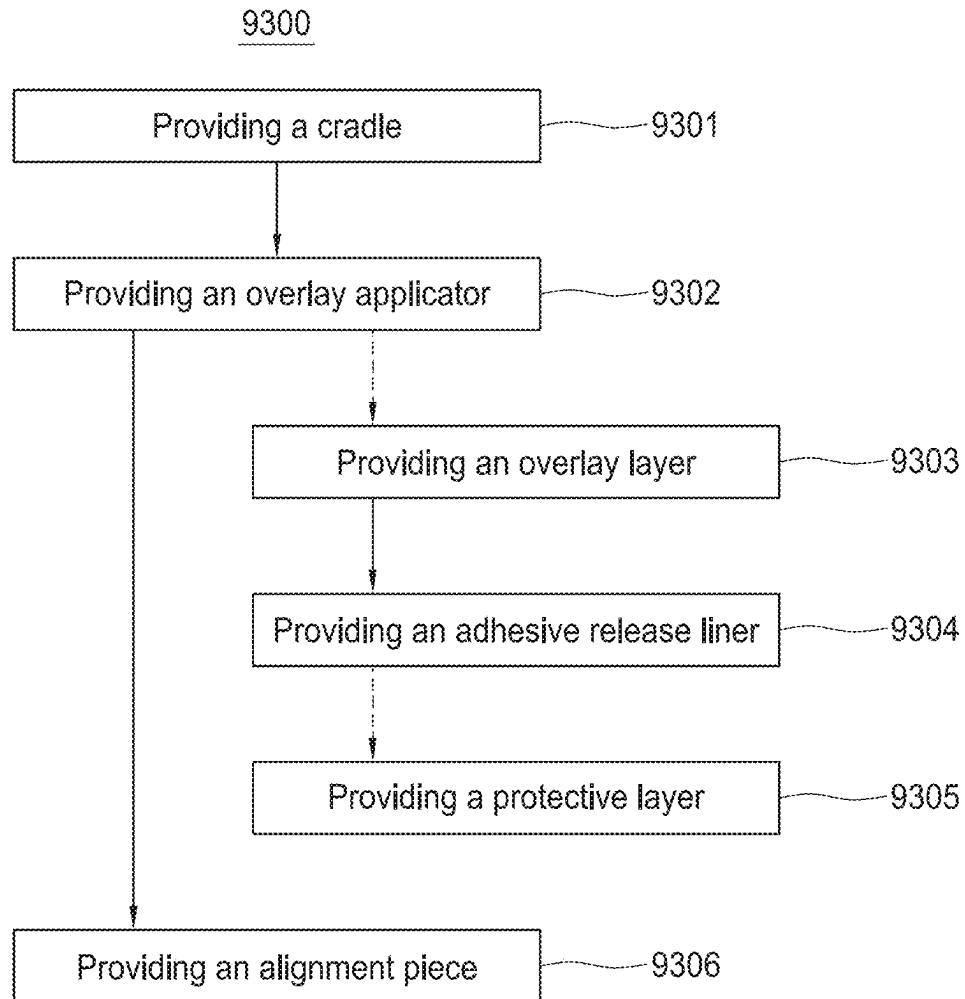


FIG. 93



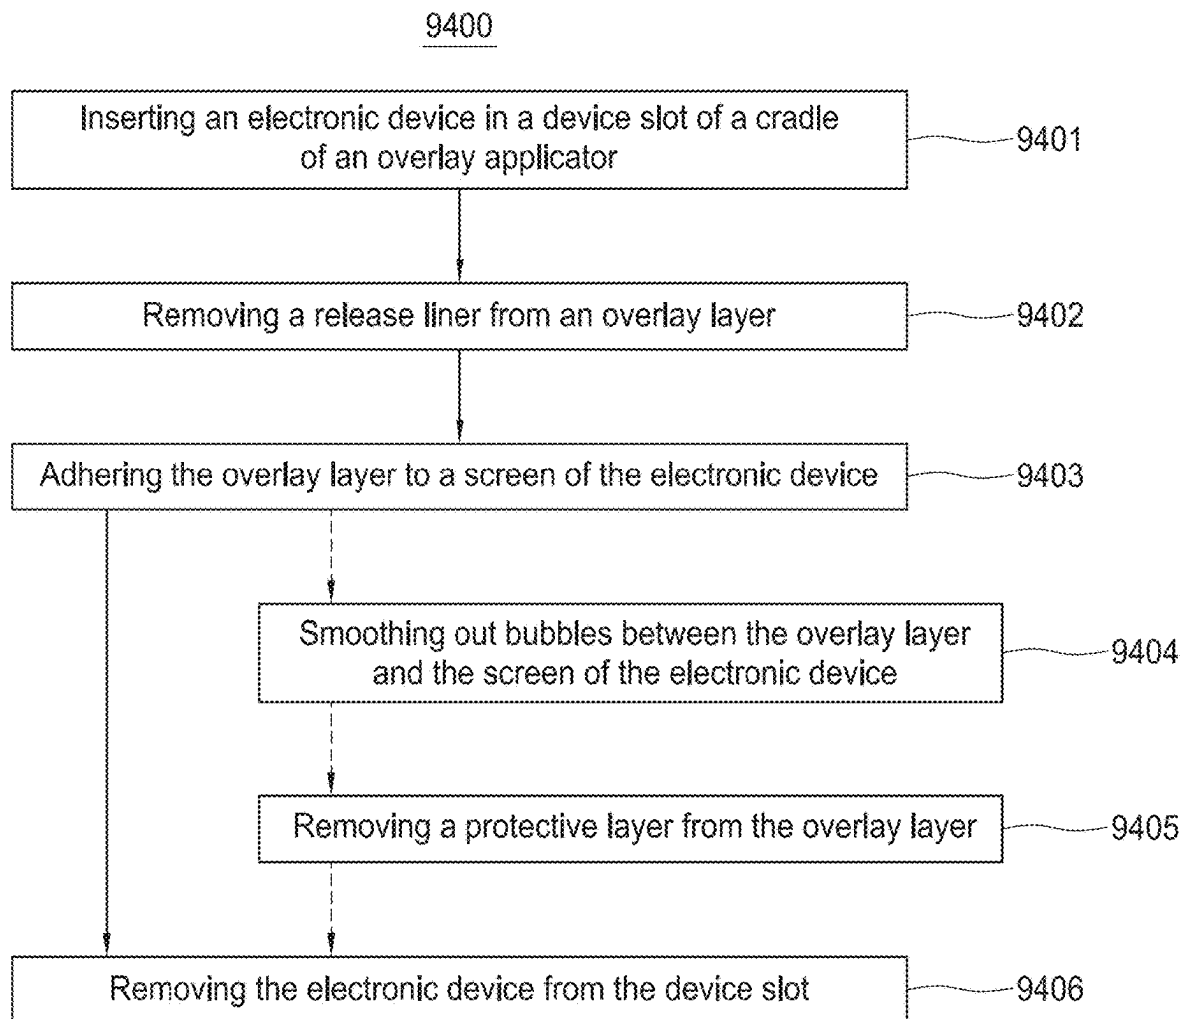
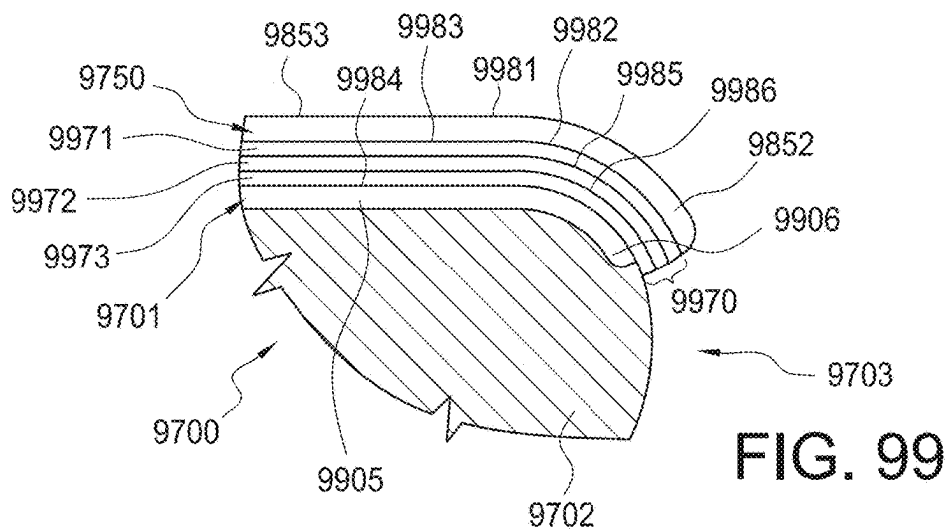
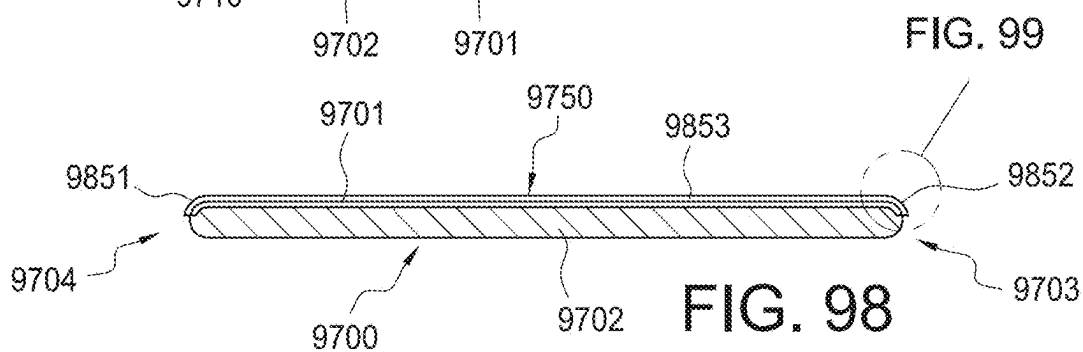
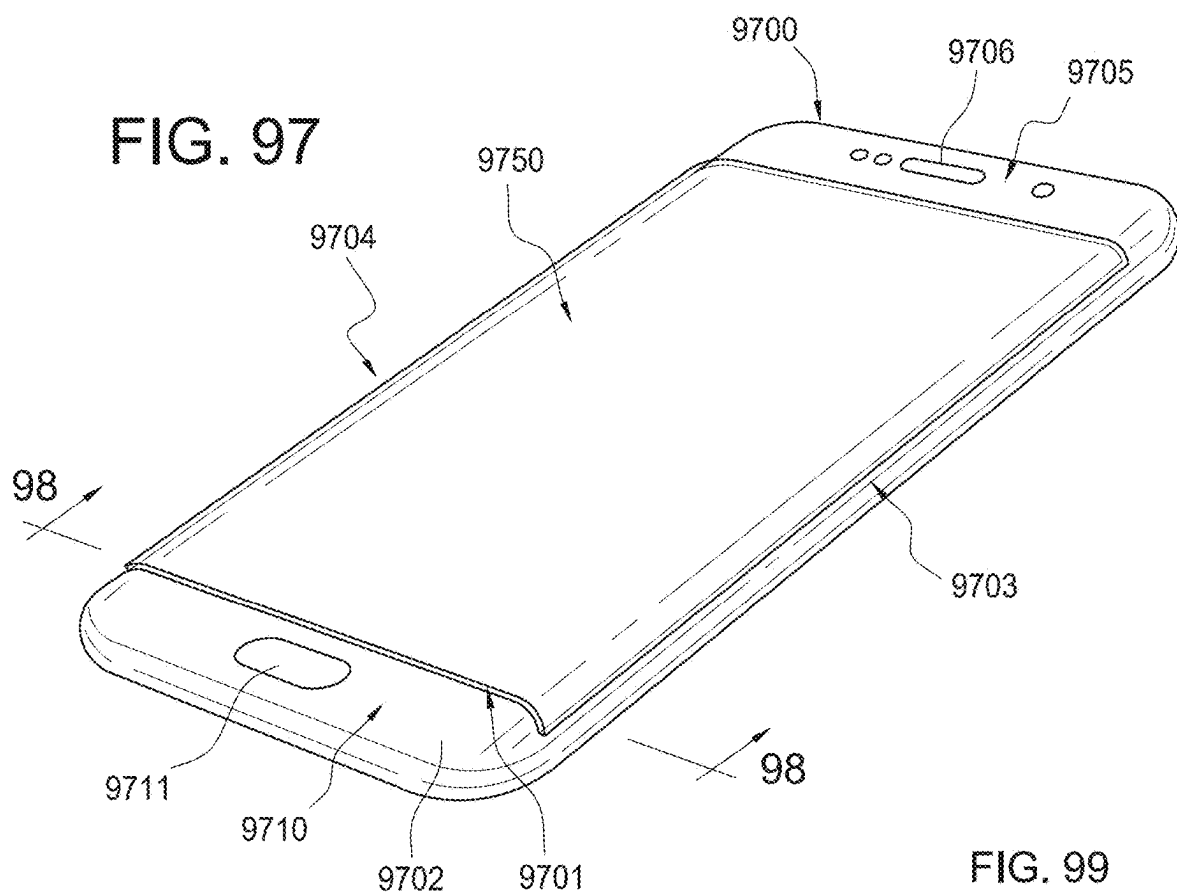
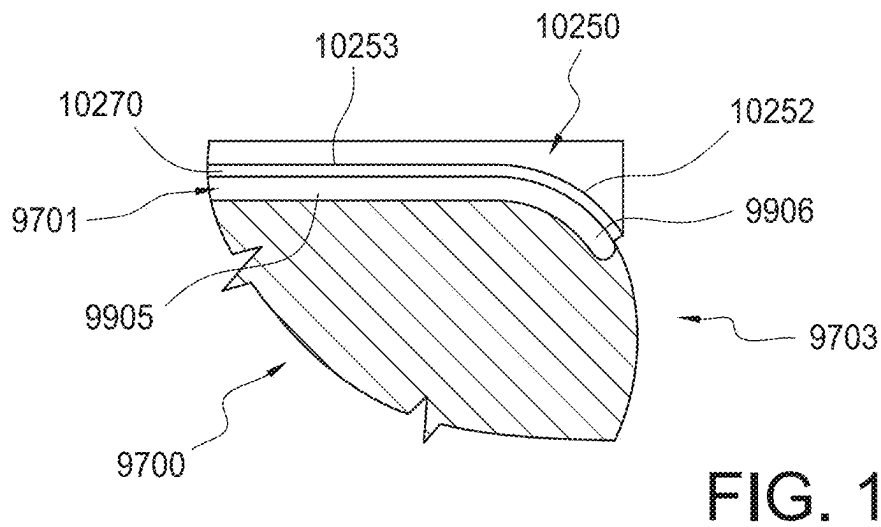


FIG. 94

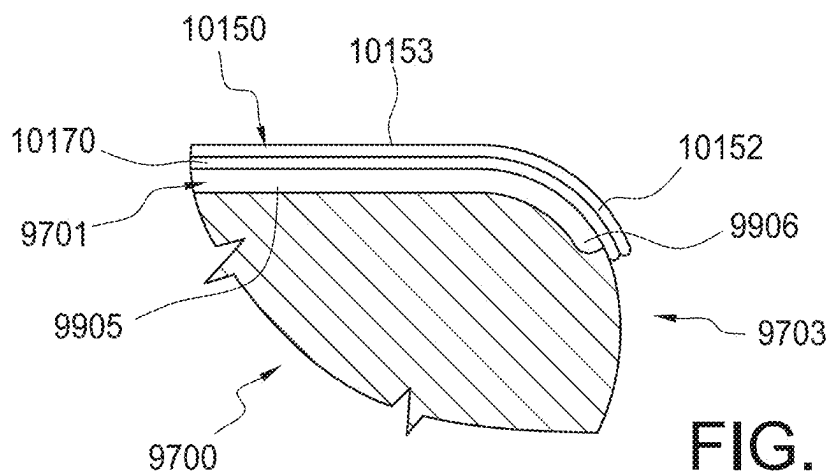

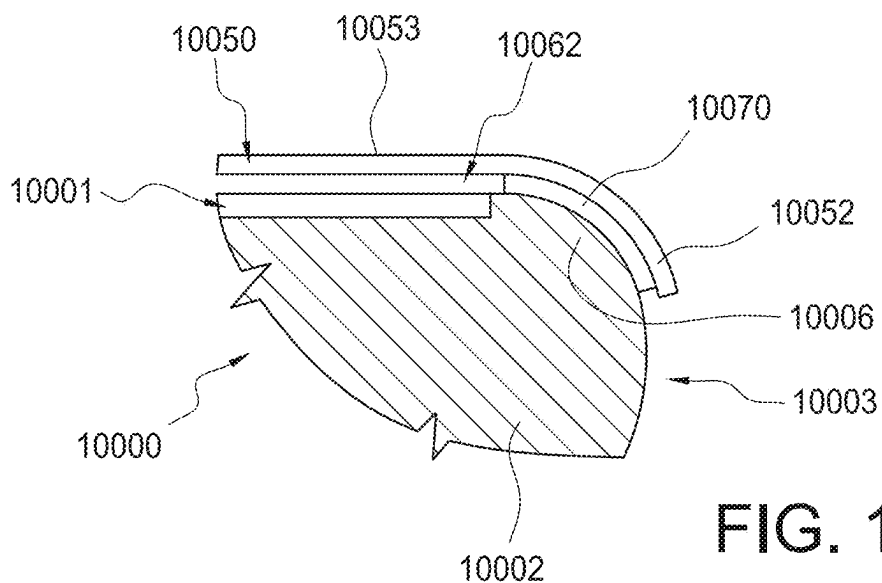

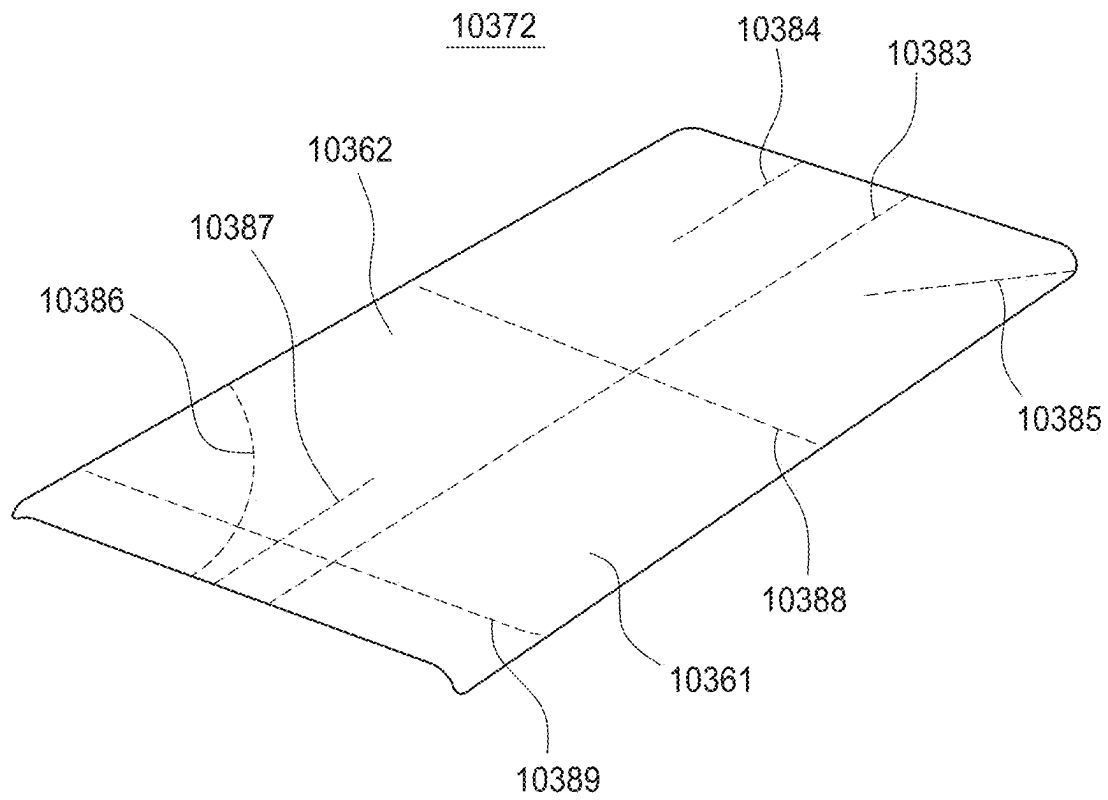


FIG. 103

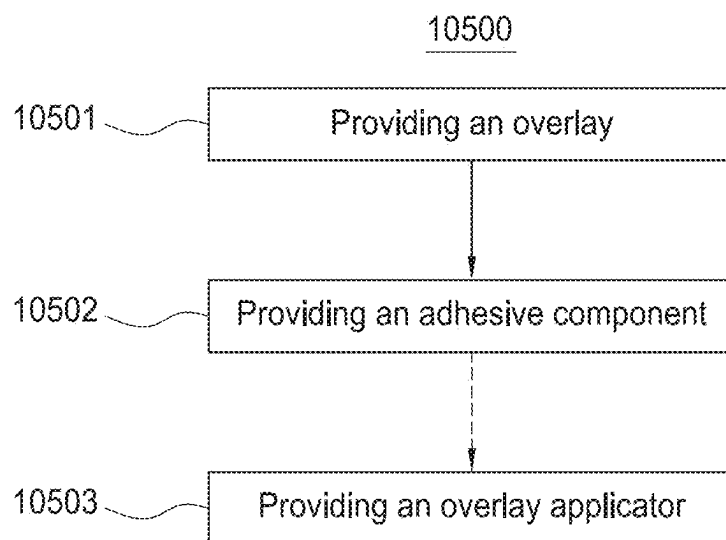
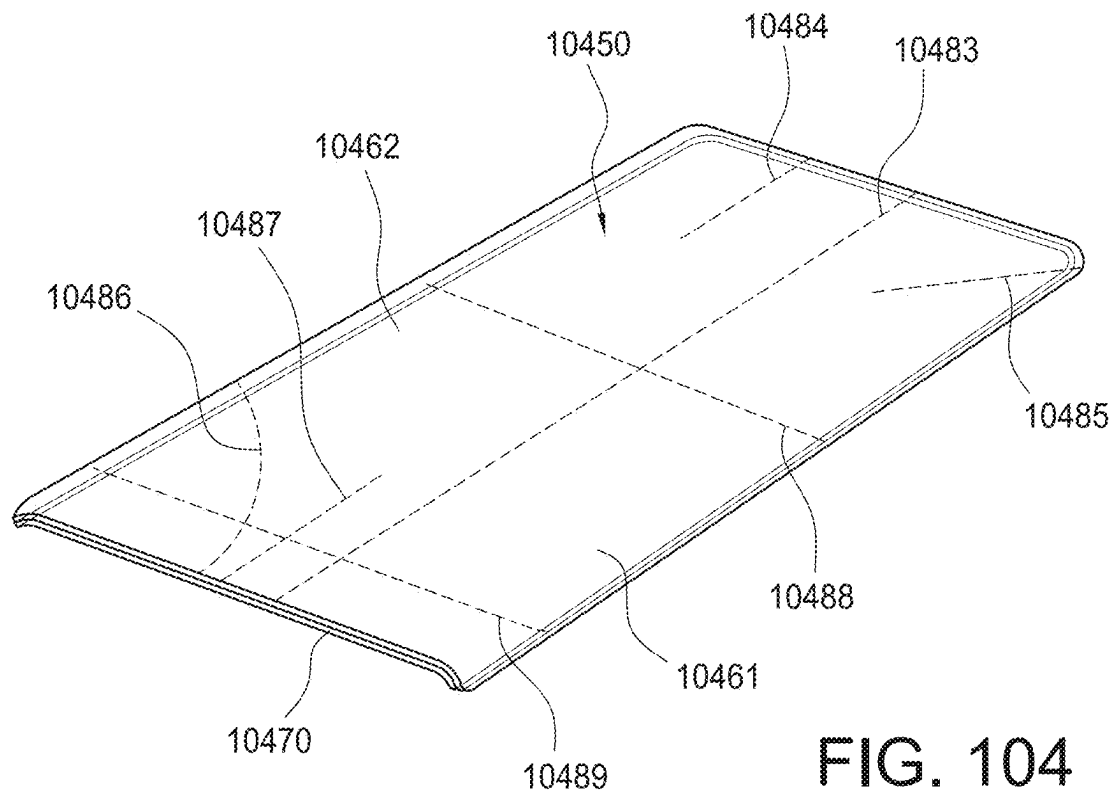


FIG. 105

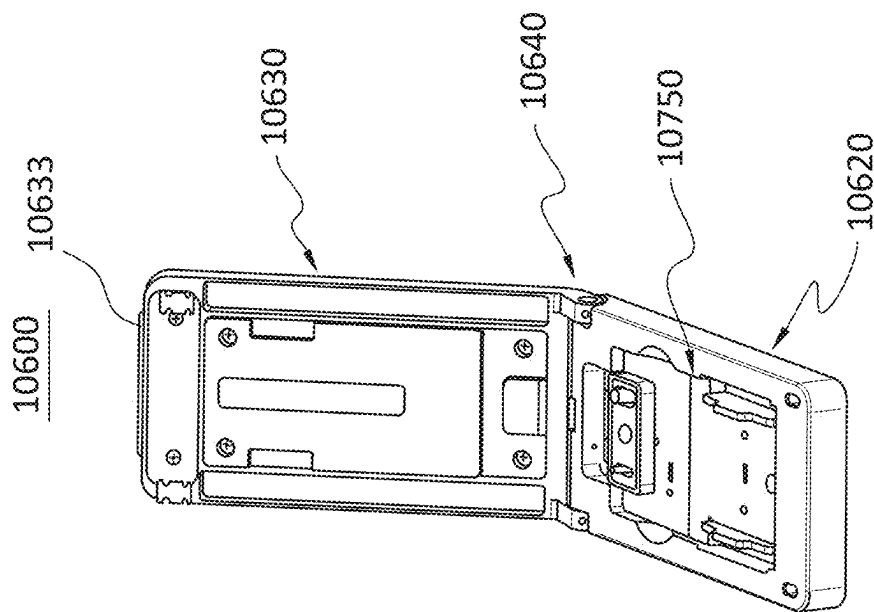


FIG. 107

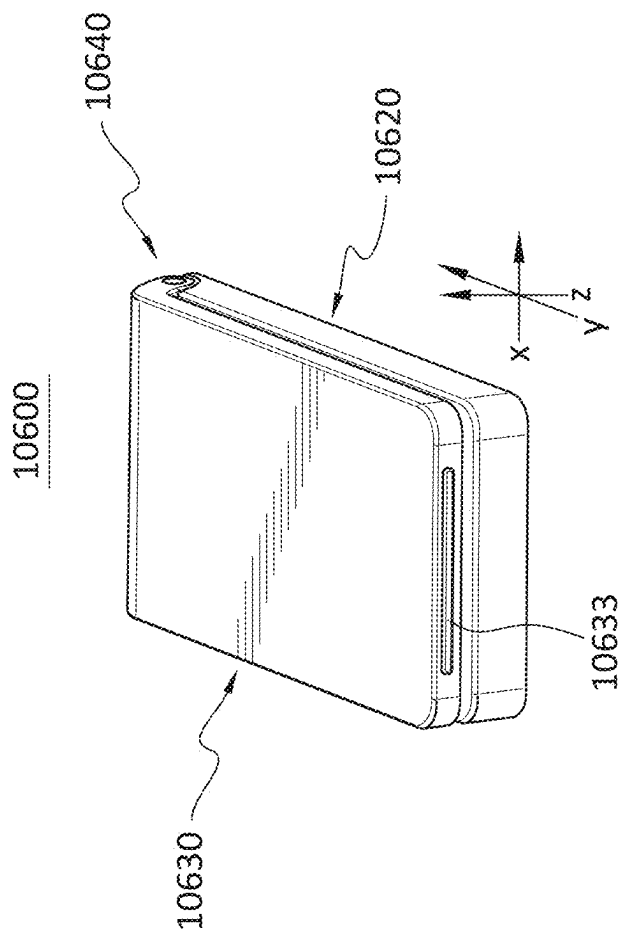


FIG. 106

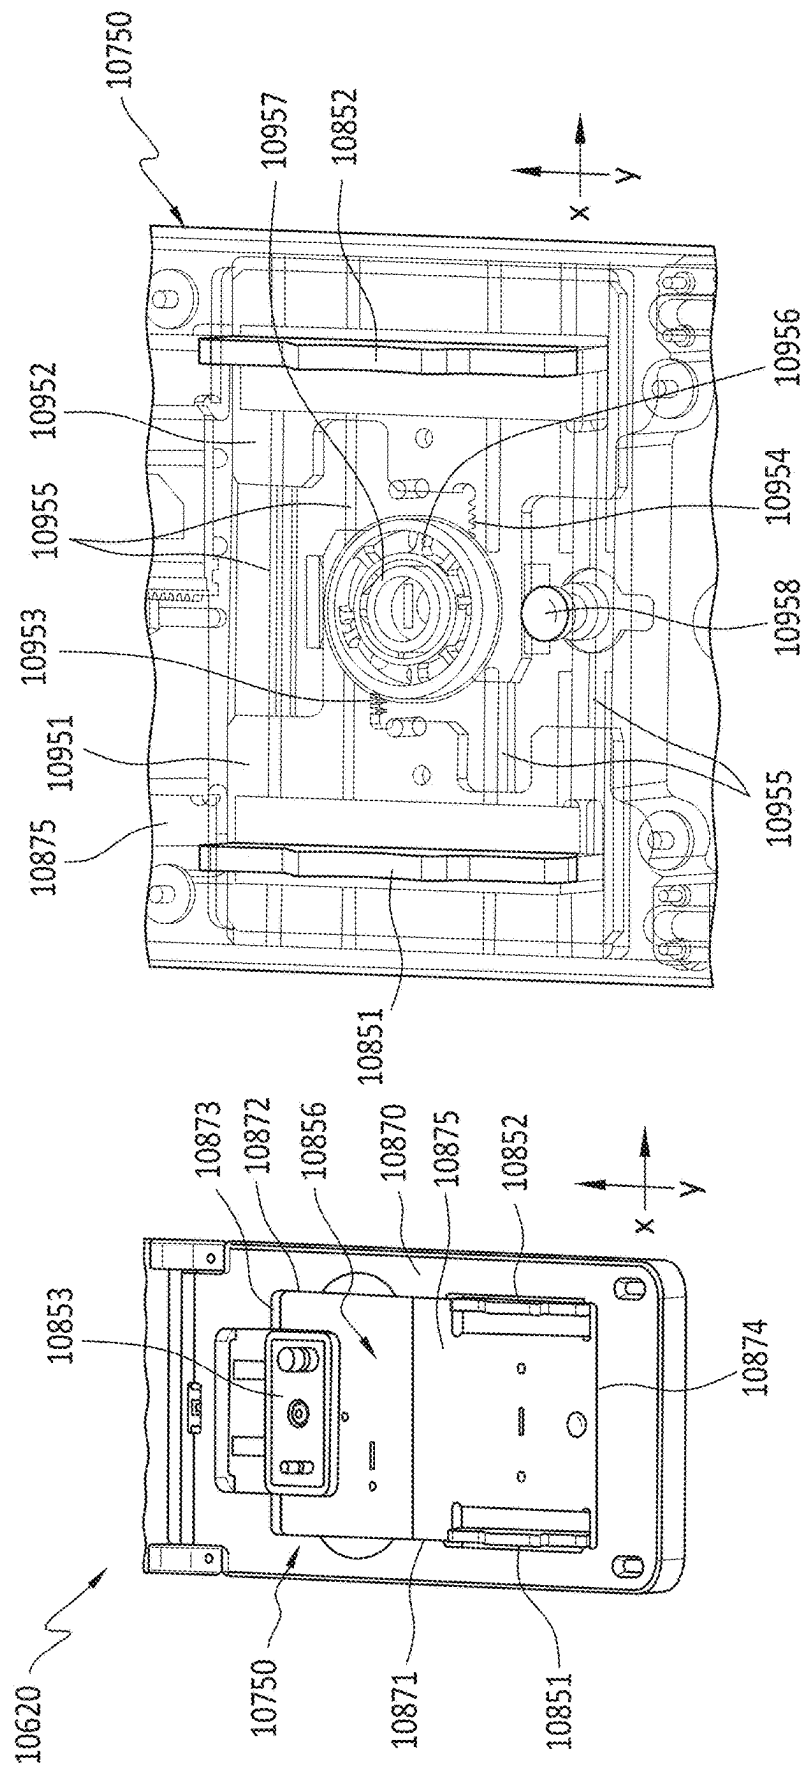


FIG. 108

FIG. 109

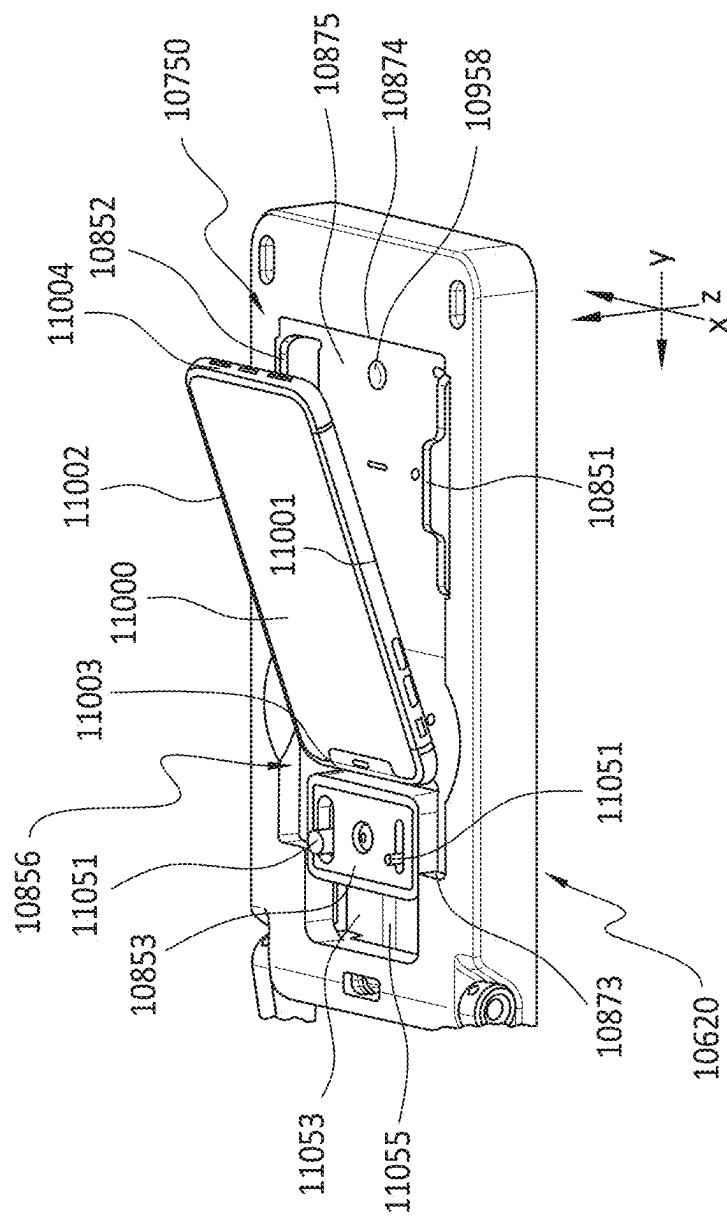


FIG. 110

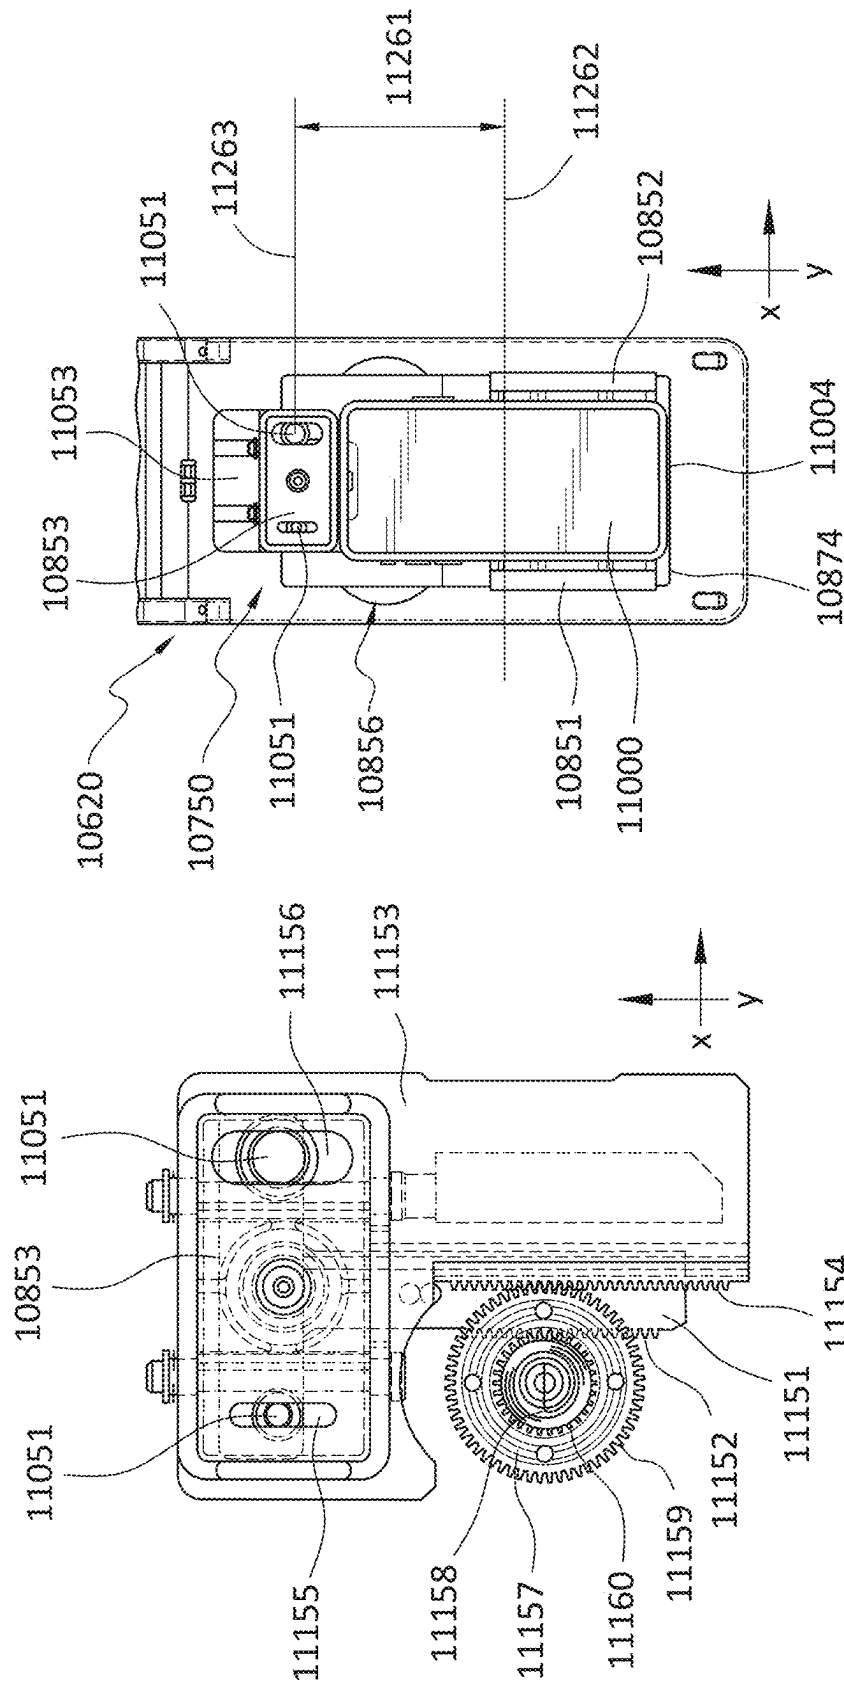


FIG. 111

FIG. 112

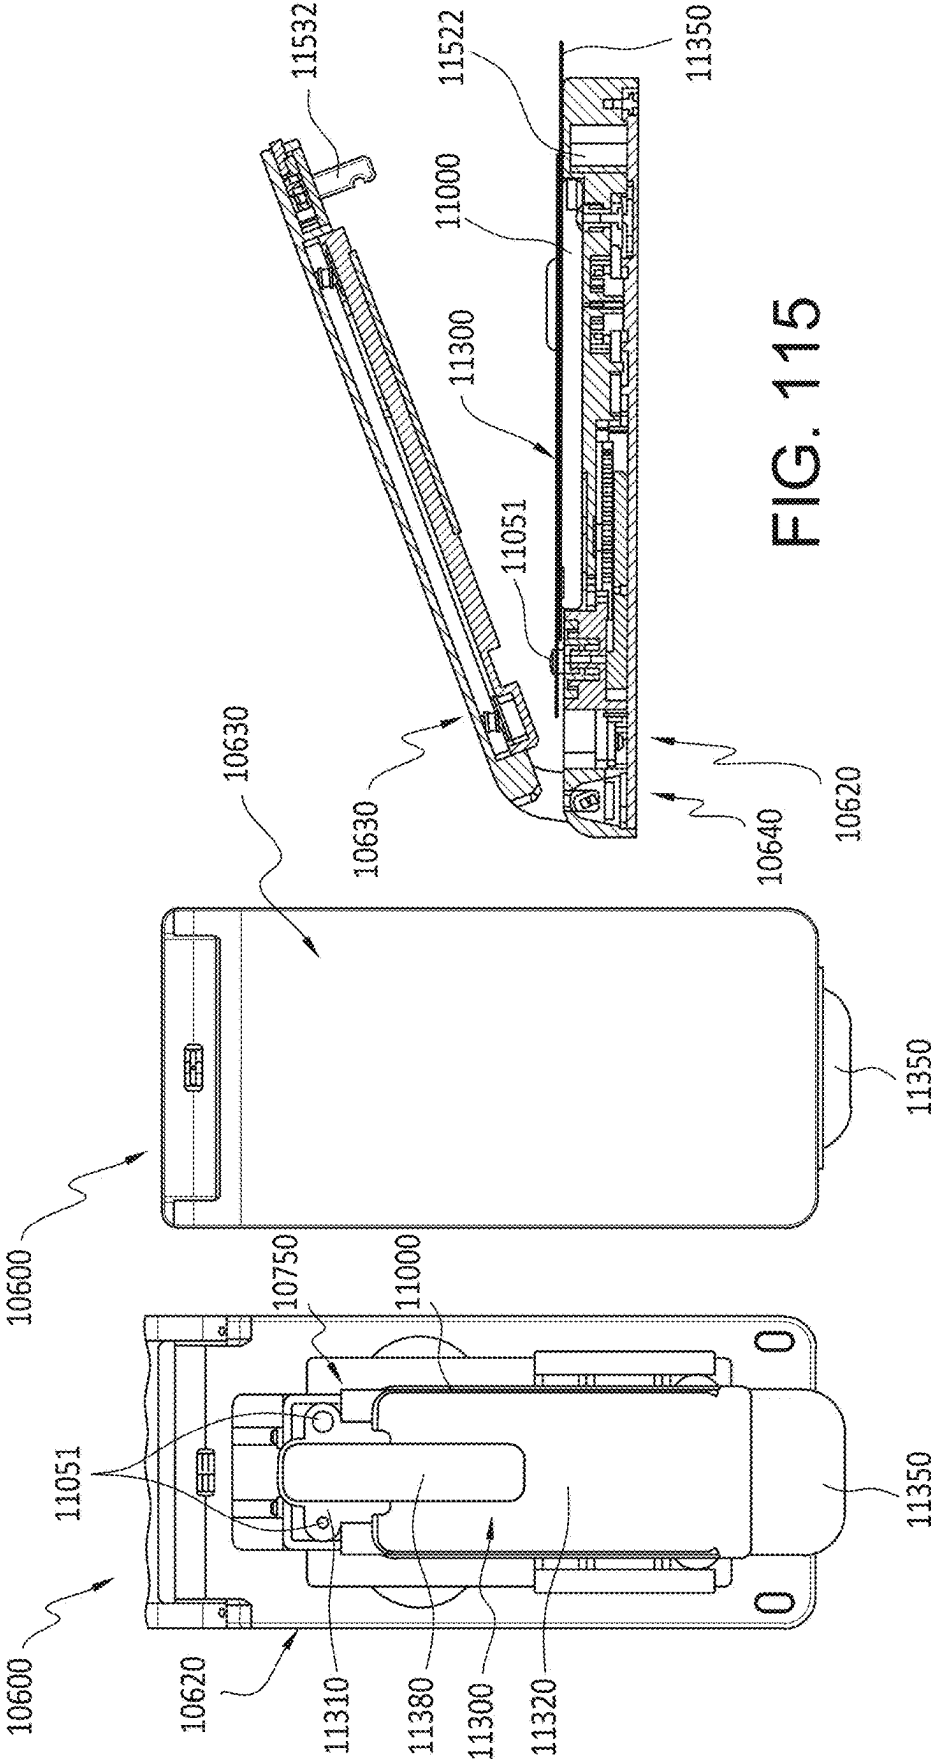


FIG. 115

FIG. 114

FIG. 113

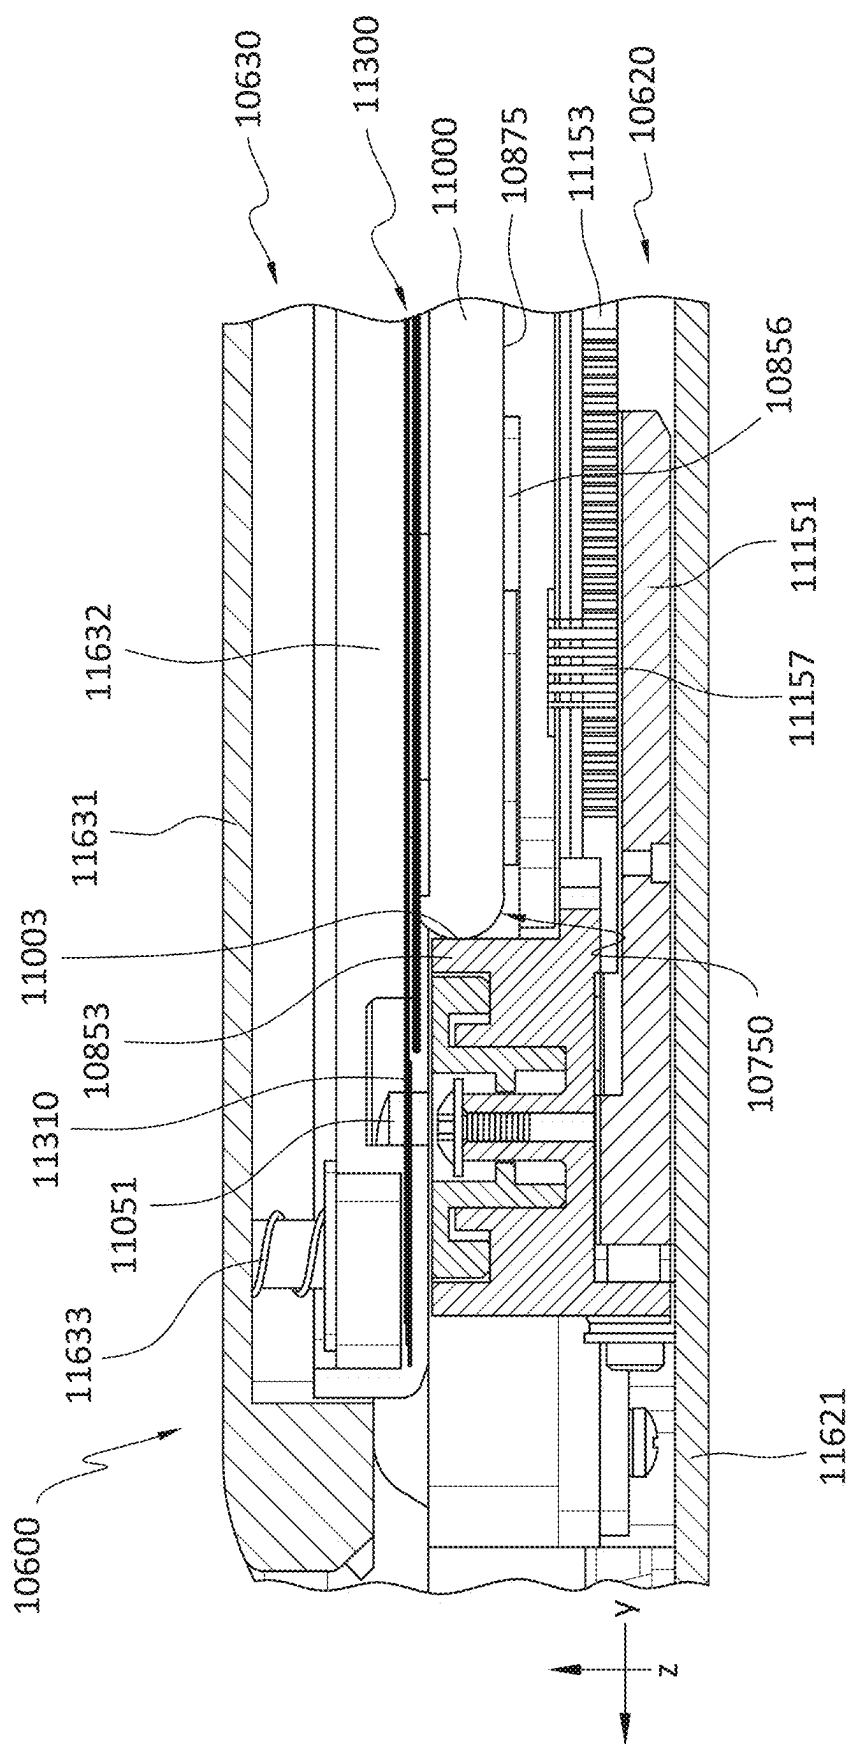


FIG. 116


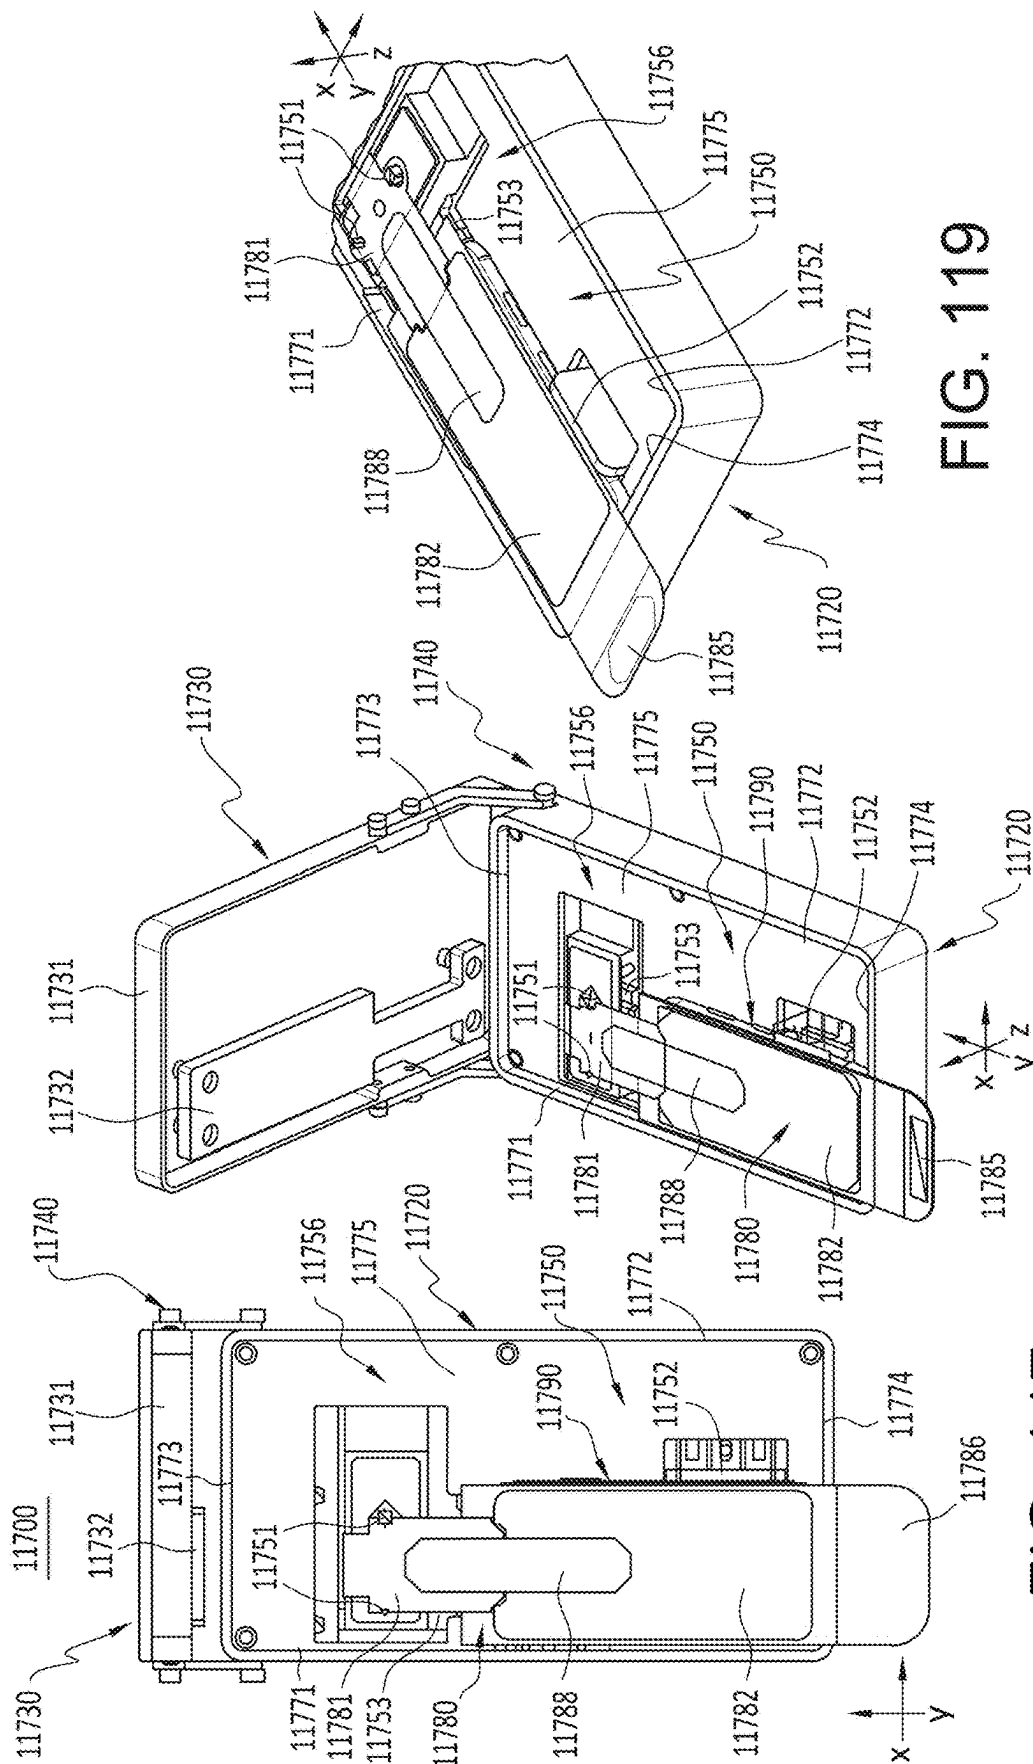
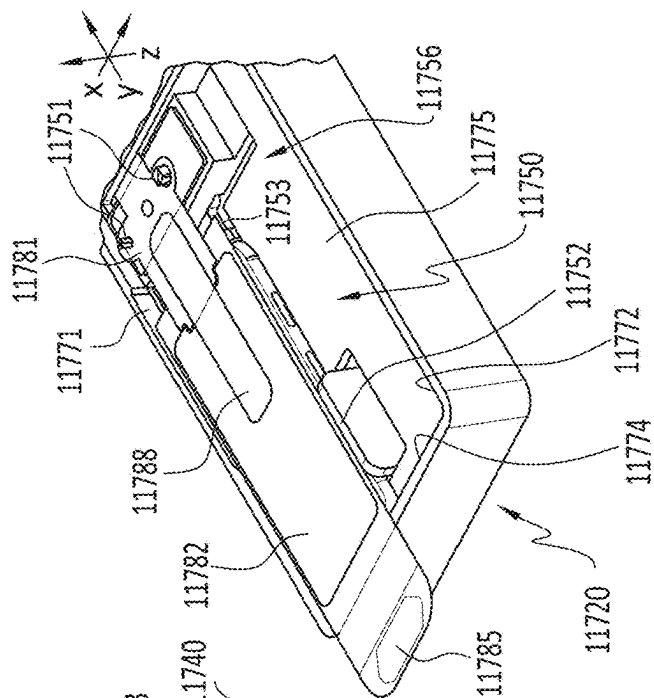


FIG. 117

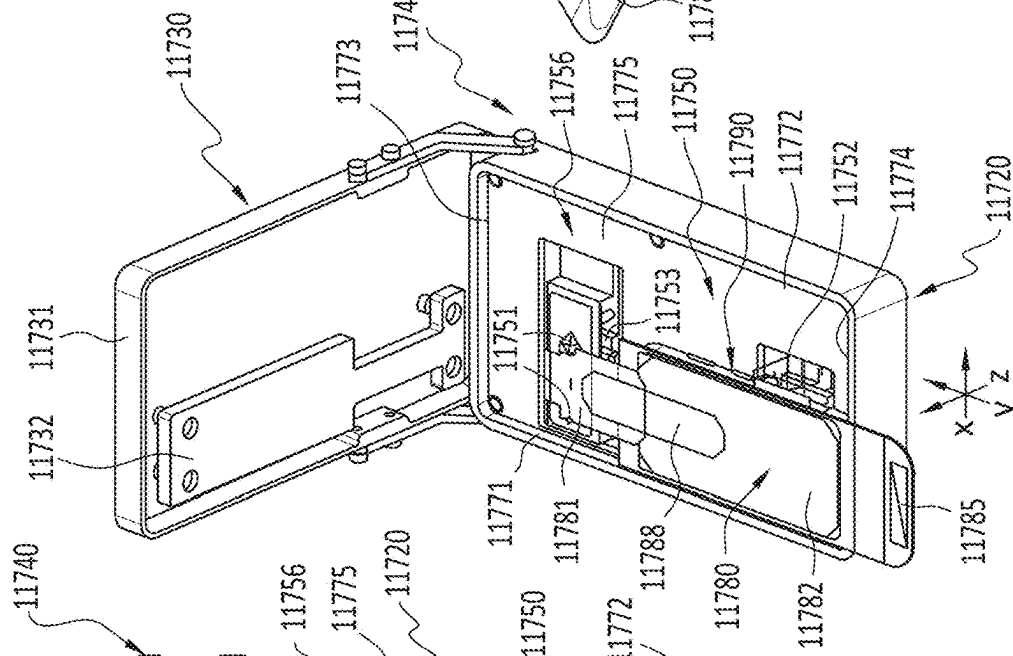

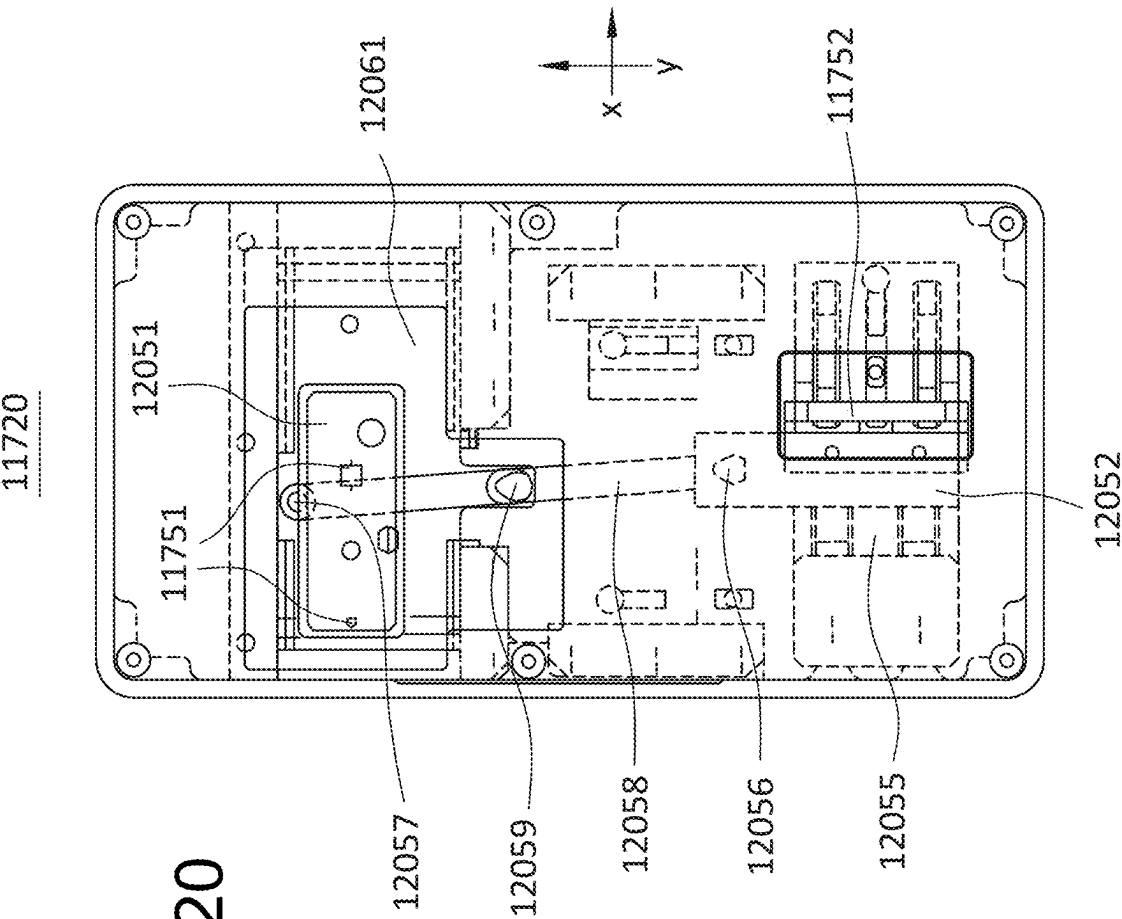


FIG. 120

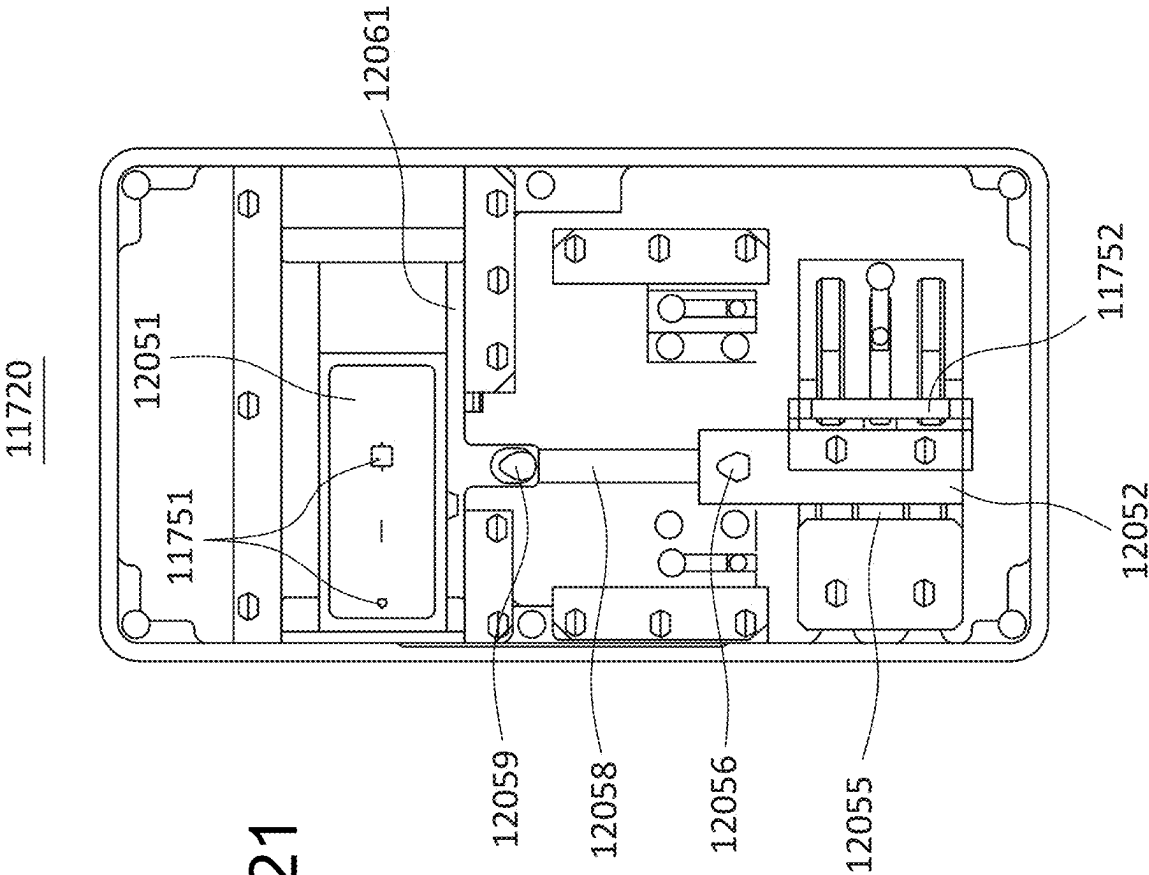


FIG. 121

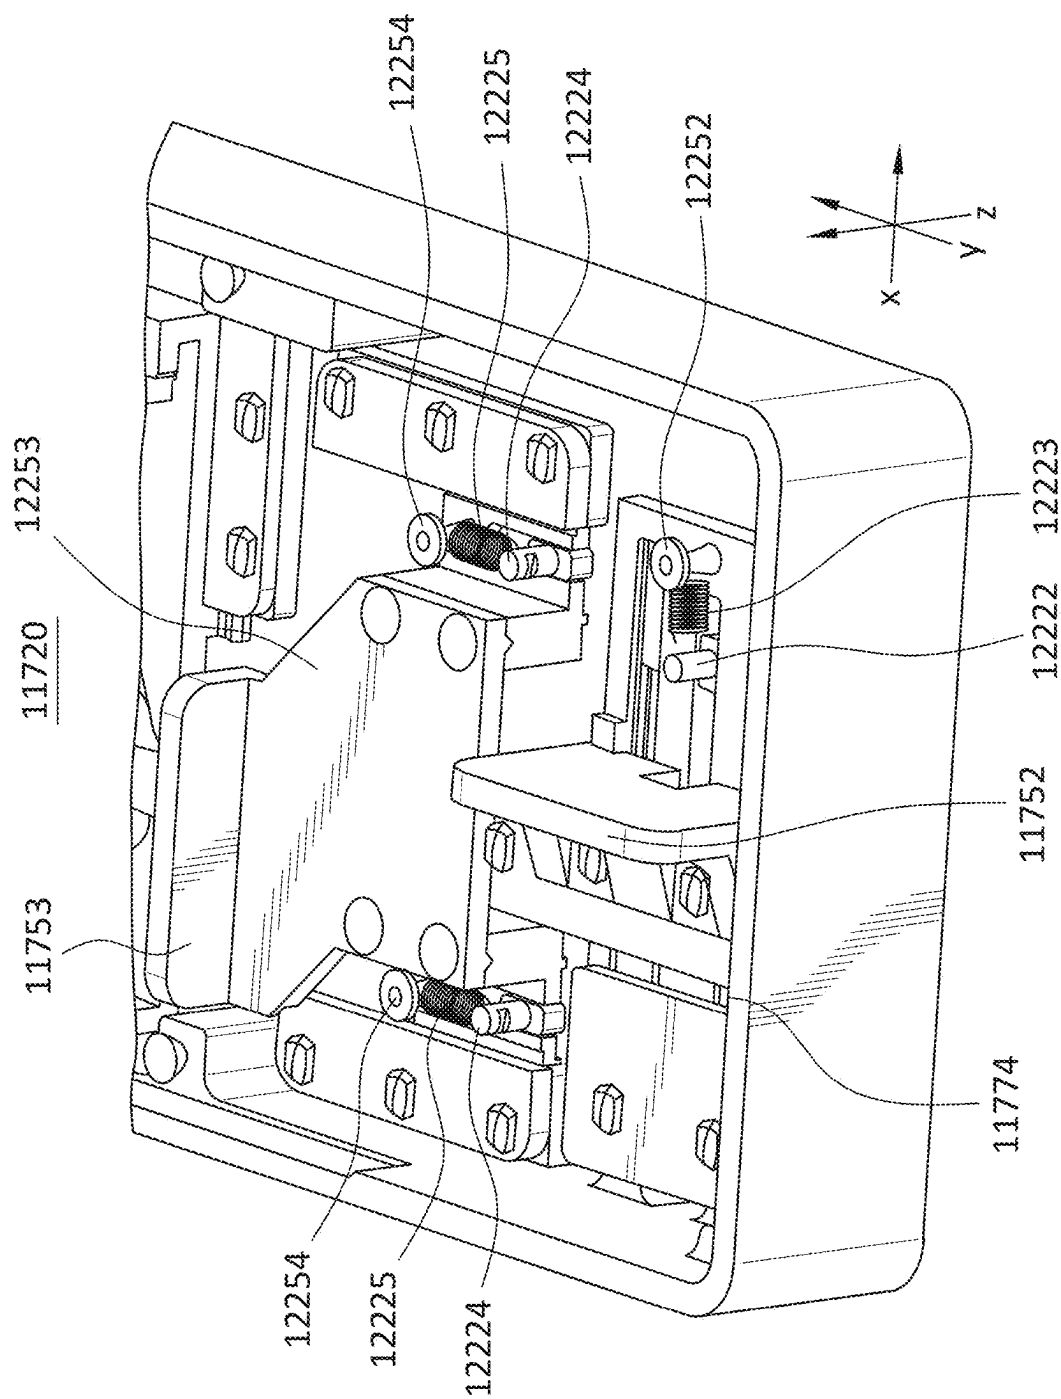


FIG. 122

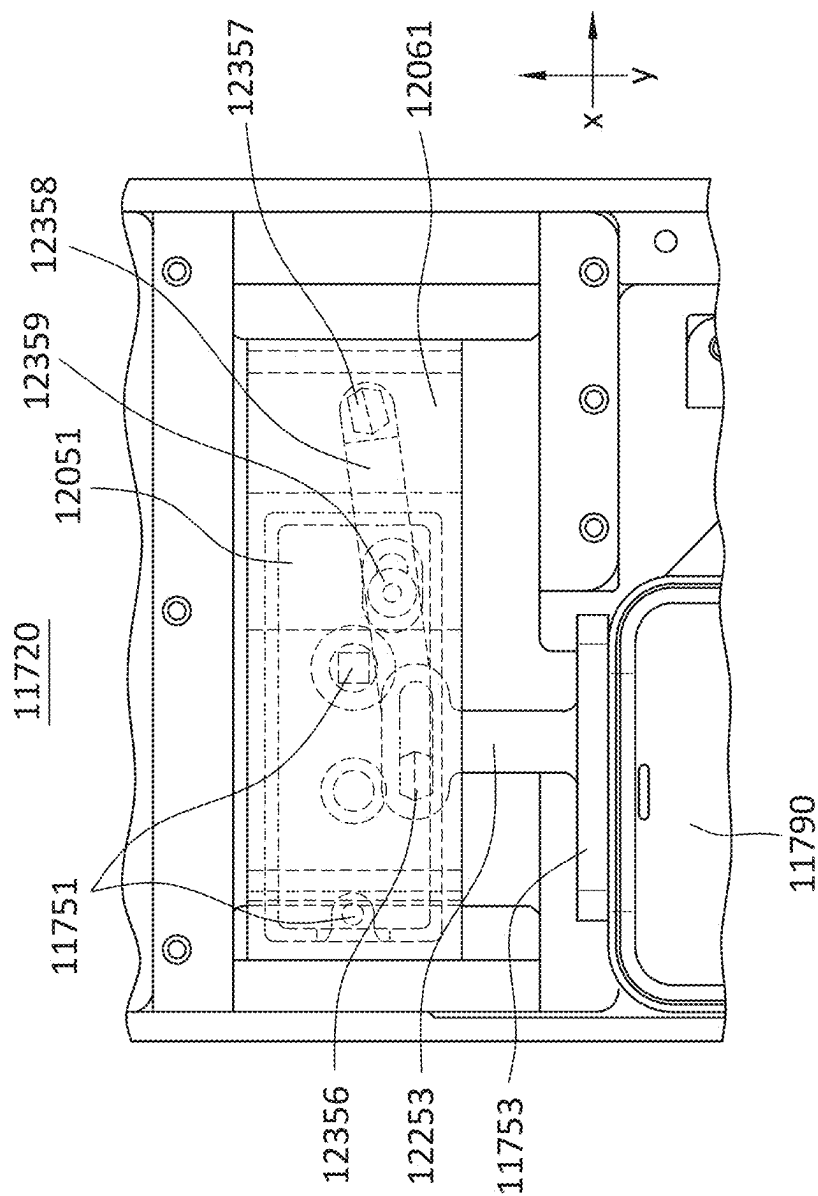


FIG. 123

11720

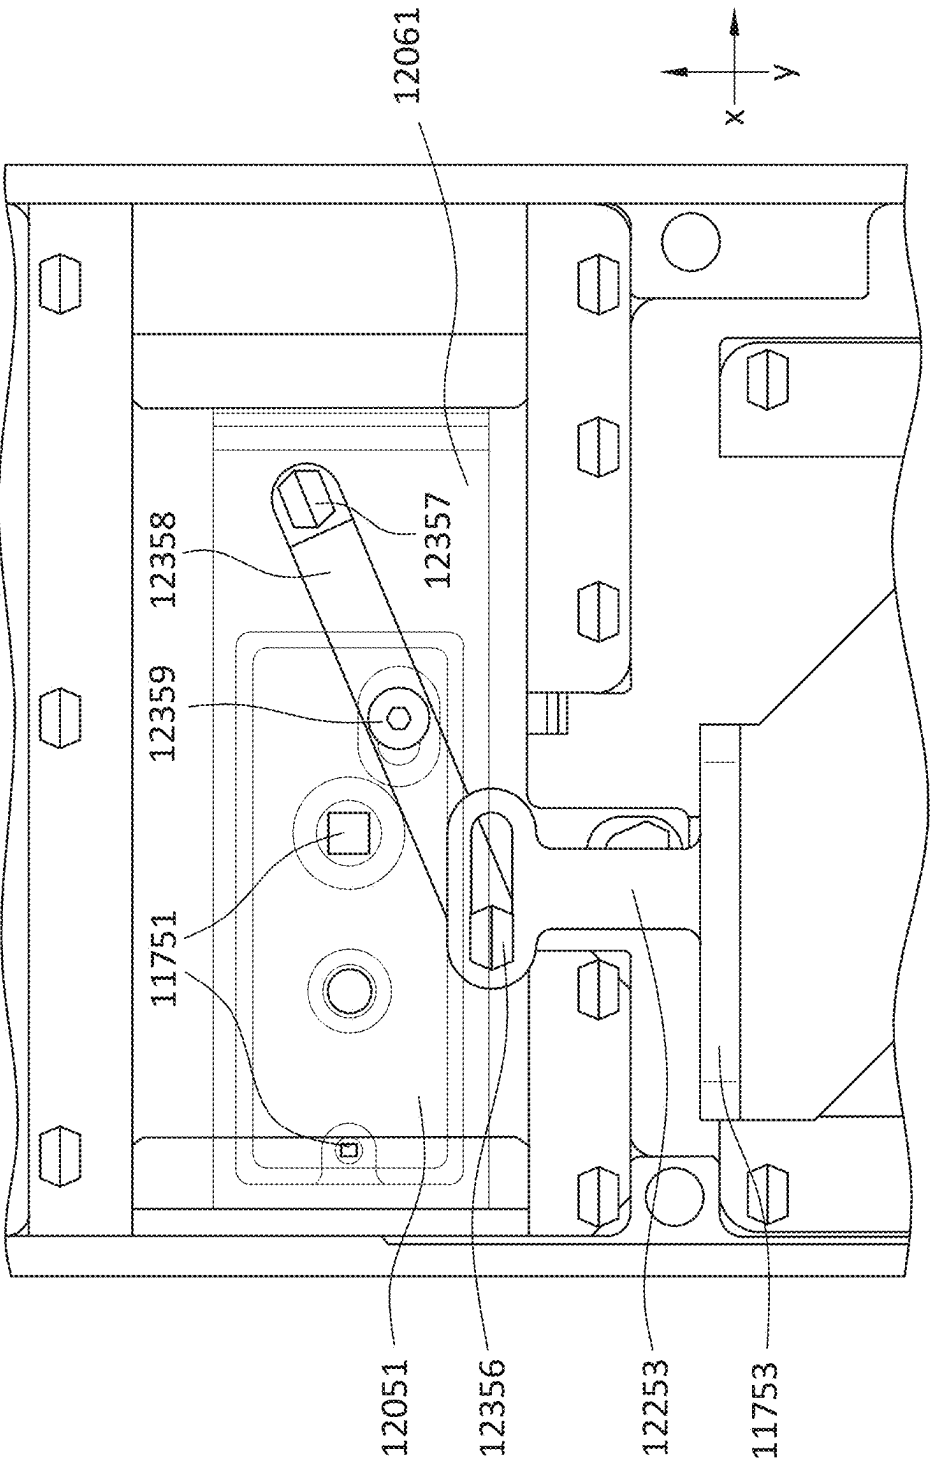


FIG. 124




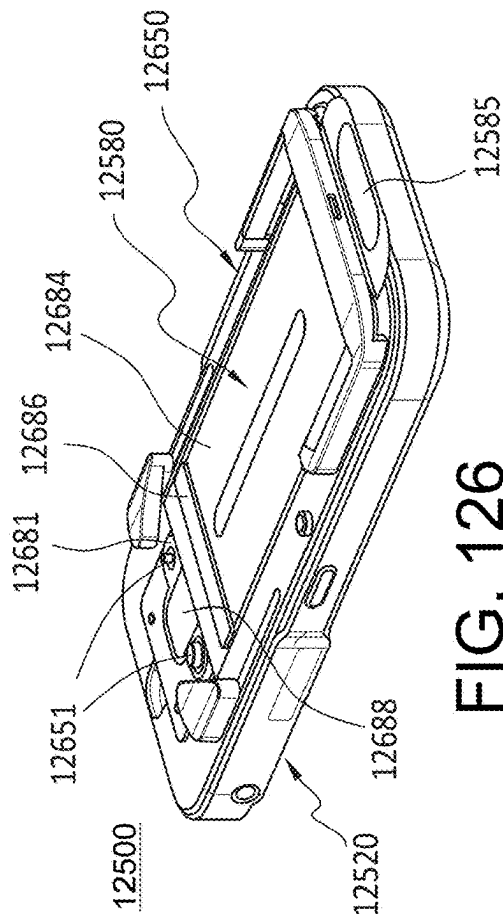


FIG. 126

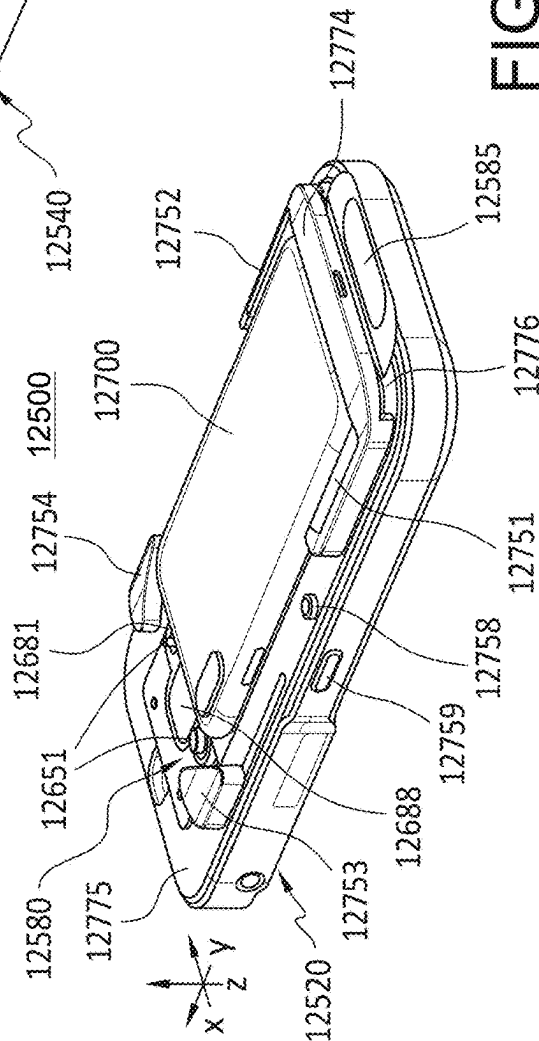

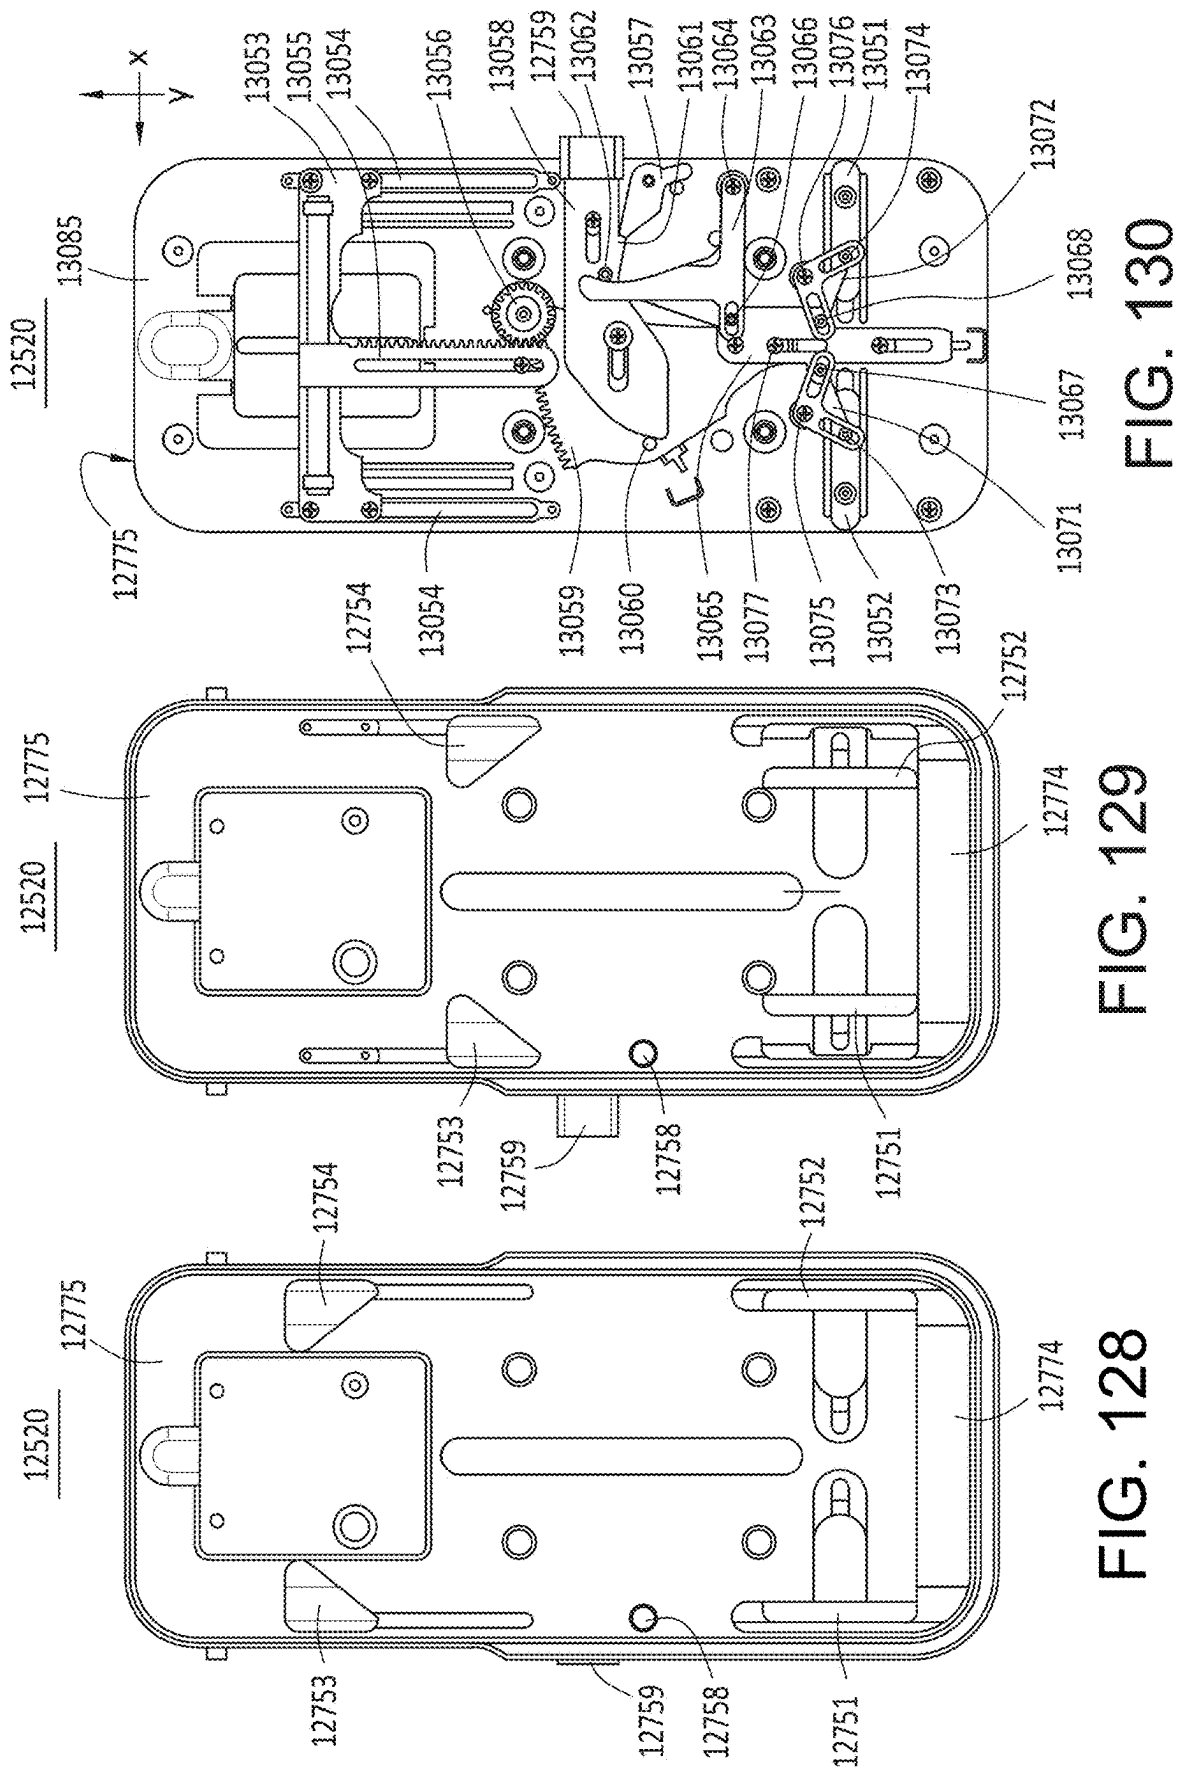

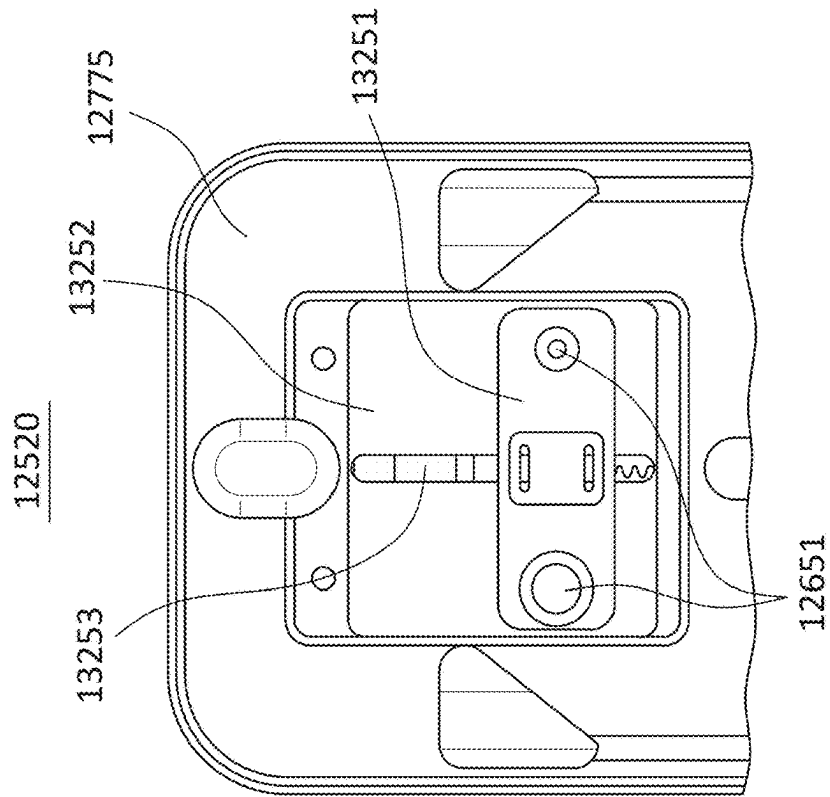

132

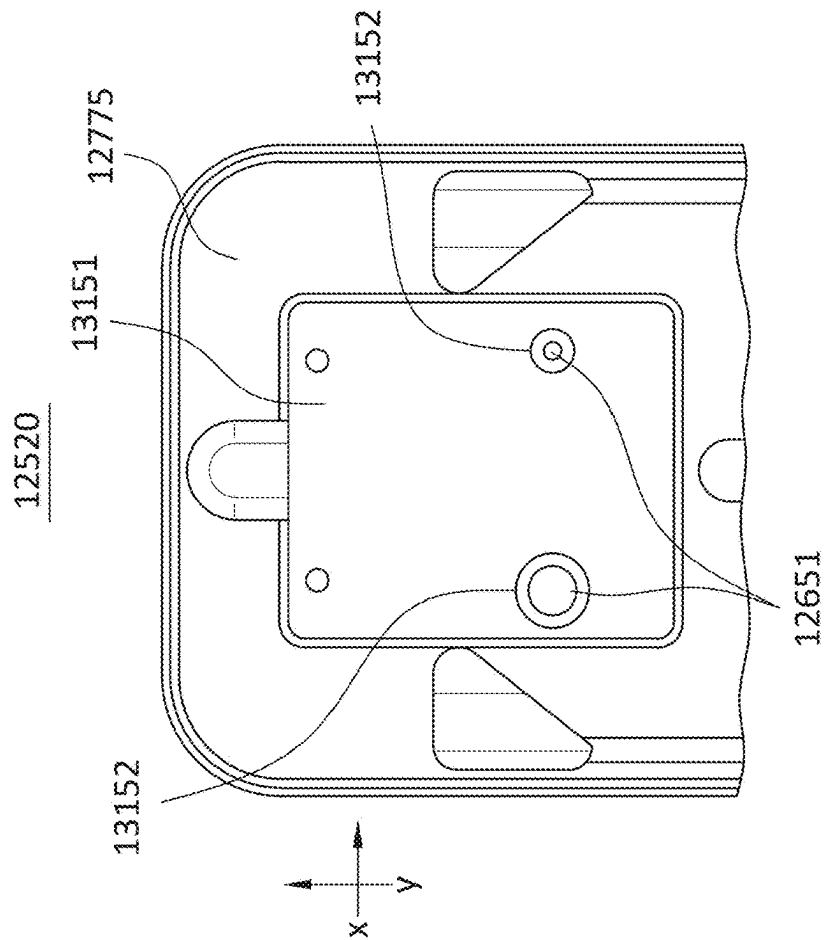


FIG. 131



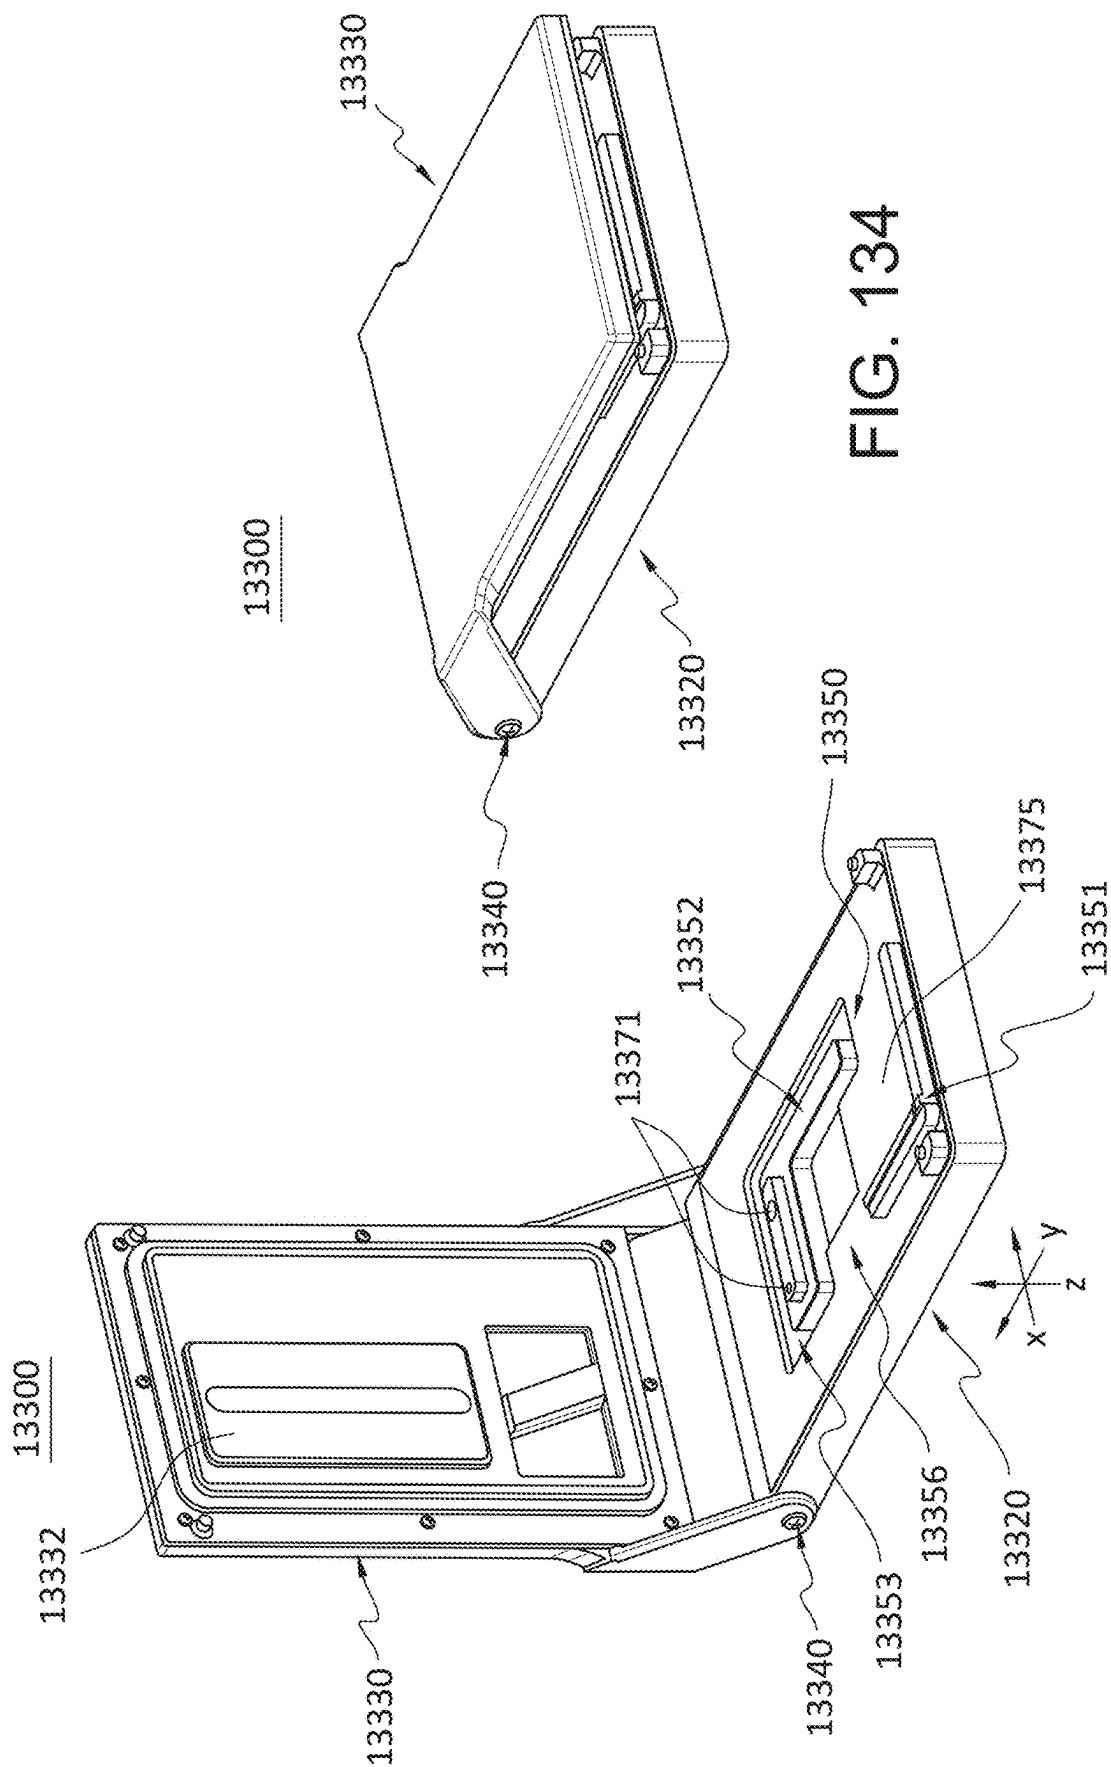
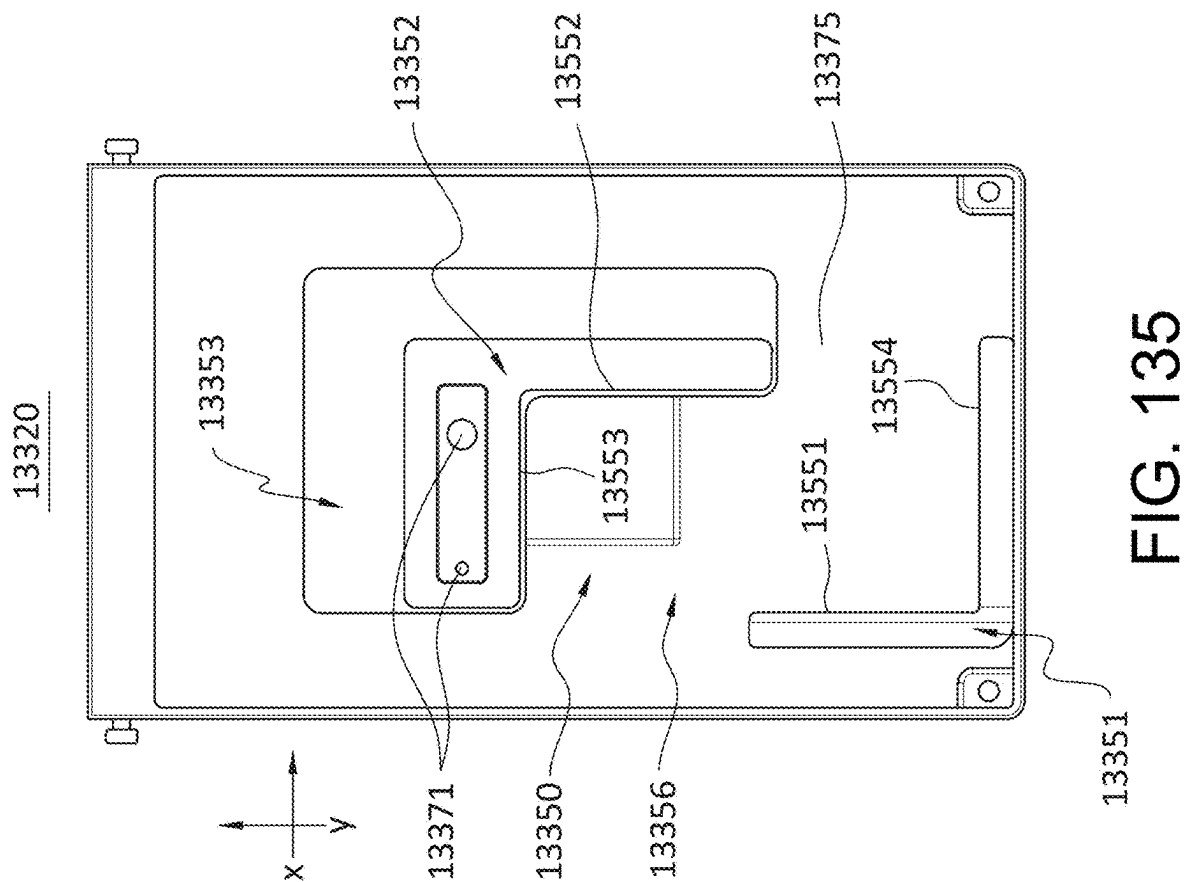
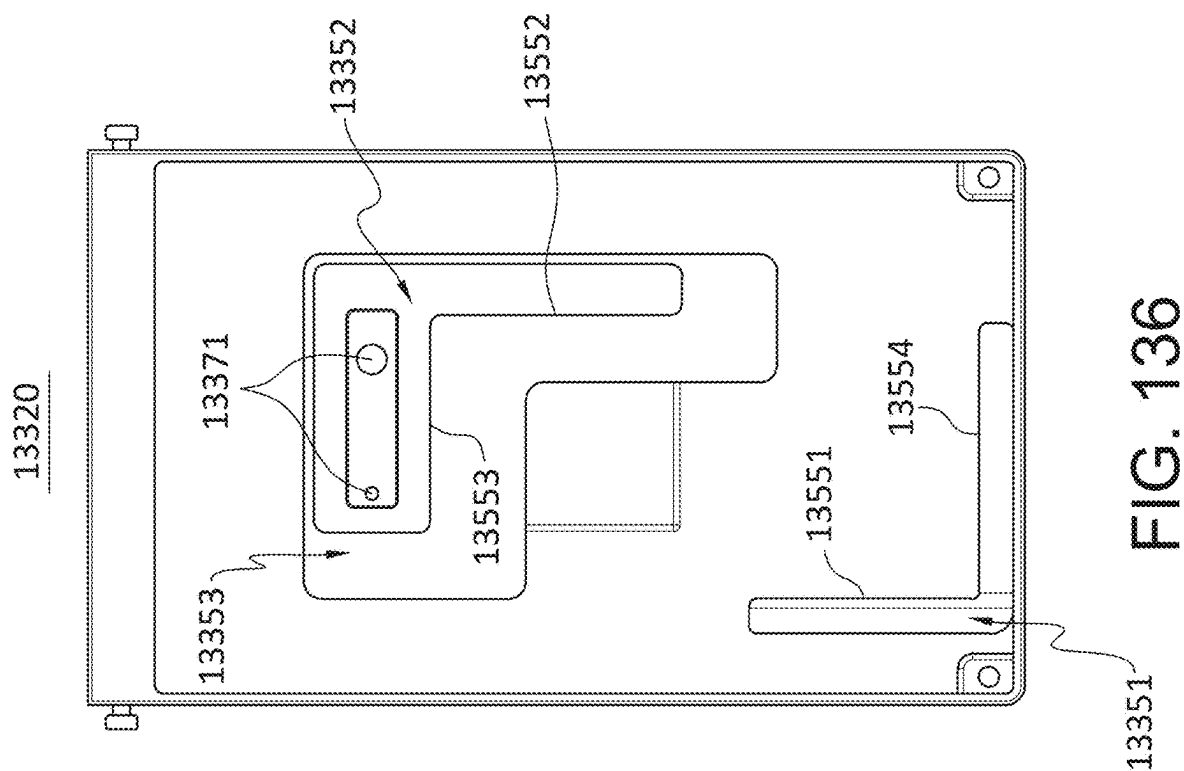


FIG. 134

FIG. 133

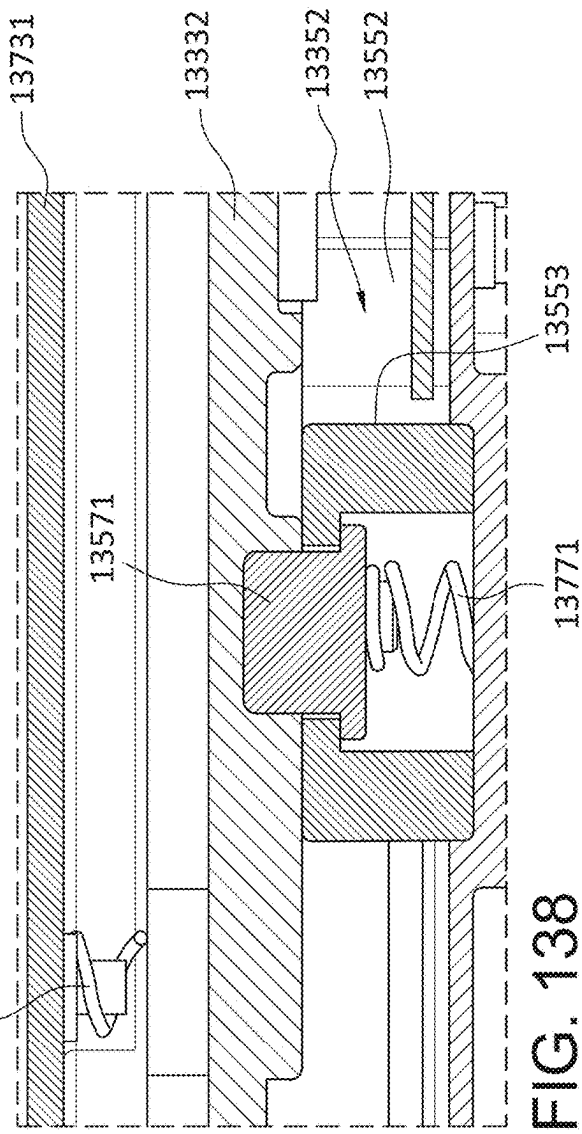

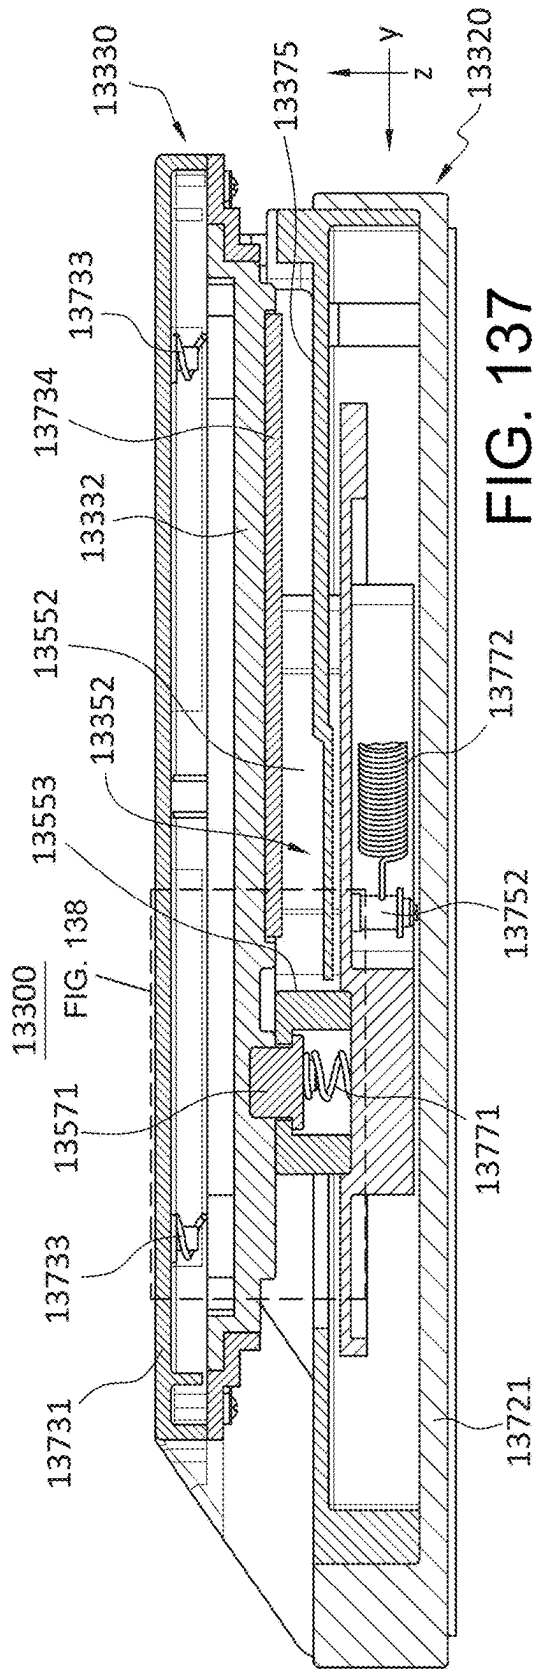

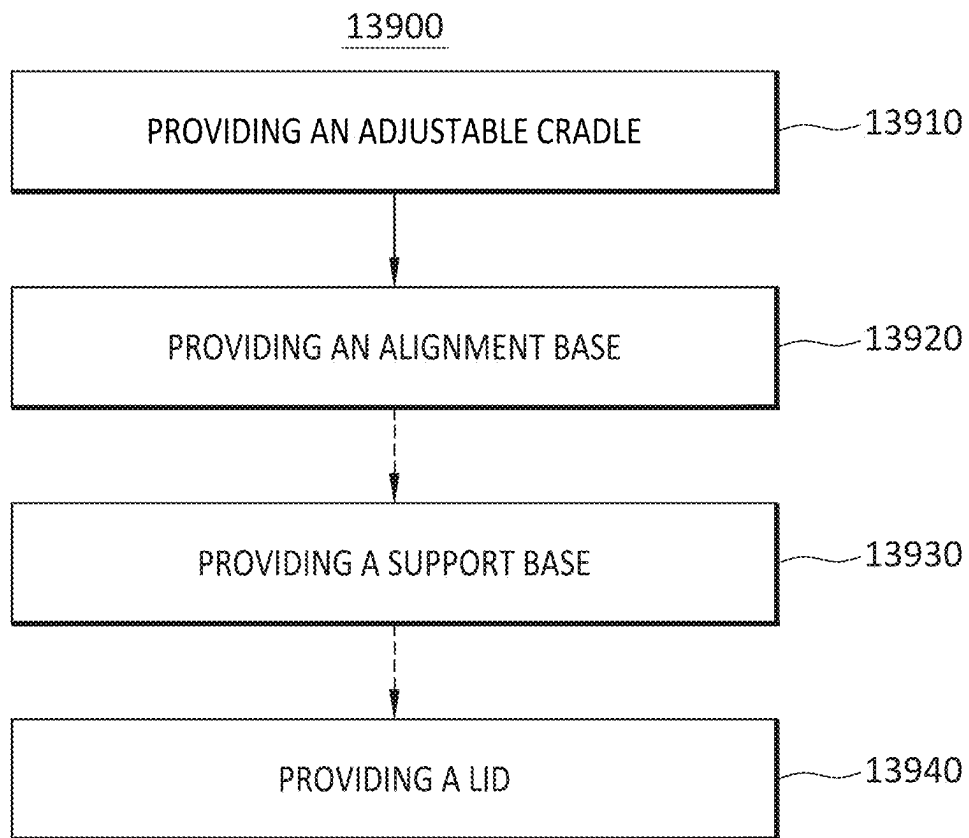


FIG. 139

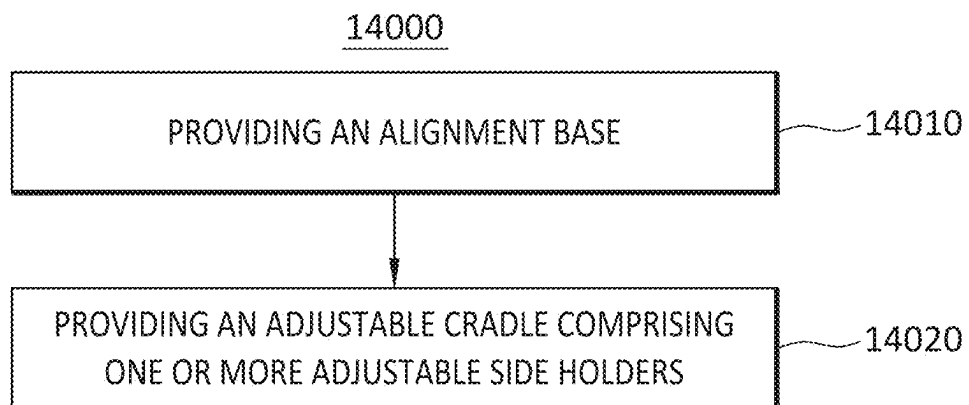


FIG. 140

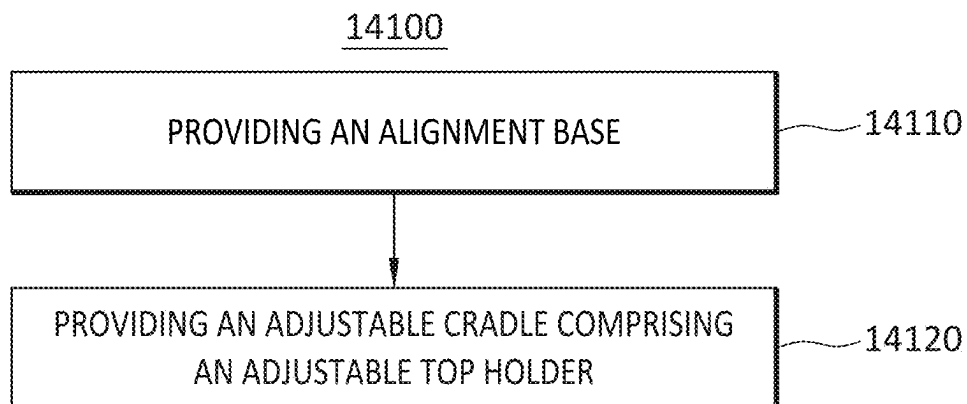


FIG. 141

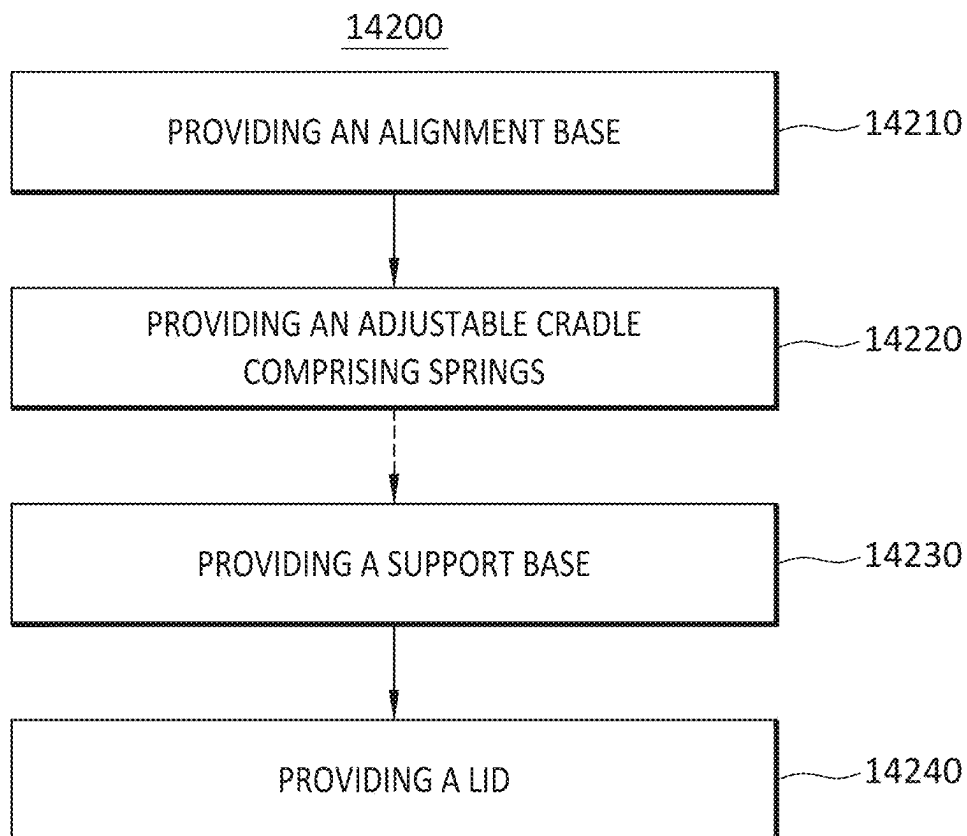


FIG. 142

1

OVERLAY APPLICATOR MACHINES AND METHODS OF PROVIDING THE SAME

CROSS-REFERENCE TO RELATED APPLICATION

This application is a continuation of U.S. patent application Ser. No. 18/738,956, filed Jun. 10, 2024, which is a continuation of U.S. patent application Ser. No. 17/180,481, filed Feb. 19, 2021, which claims the benefit of U.S. Provisional Application No. 62/978,812, filed Feb. 19, 2020. U.S. patent application Ser. Nos. 18/738,956 and 17/180,481, and U.S. Provisional Application No. 62/978,812 are incorporated herein by reference in their entirety.

TECHNICAL FIELD

This disclosure relates generally to overlays and relates more particularly to overlay applicator machines and methods of providing the same.

BACKGROUND

Electronic devices, such as smartphones, tablet computing devices, media players, etc., have gained widespread popularity. These devices generally have screens, and many of these devices have touchscreens, such as capacitive touchscreens. To protect these screens, many manufacturers now produce clear film overlays, which can be applied to the screens to keep the screens clear and protect against damage, such as accidental scratching. Many of these films include a self-wetting adhesive to adhere to the screens of the electronic devices. Oftentimes, application of an overlay to the screen of a device results in misalignment of the overlay on the device, air bubbles between the overlay and the screen of the device, and/or dirt (such as dust, fingerprints, oil, and/or other particulates) between the overlay and the screen of the device.

BRIEF DESCRIPTION OF THE DRAWINGS

To facilitate further description of the embodiments, the following drawings are provided in which:

FIG. 1 illustrates an exploded isometric view of an overlay applicator, according to an embodiment;

FIG. 2 illustrates an isometric view of a system for using the overlay applicator of FIG. 1 to apply an overlay to a device with a frame, according to another embodiment;

FIG. 3 illustrates an isometric view of a system for using the overlay applicator of FIG. 1 to apply an overlay to a device with a cradle, according to another embodiment;

FIG. 4 illustrates an exploded isometric view of an overlay applicator, according to another embodiment;

FIG. 5 illustrates a side view of the overlay applicator of FIG. 4;

FIG. 6 illustrates an isometric view of an overlay applicator, according to another embodiment;

FIG. 7 illustrates an exploded isometric view of an overlay applicator, according to another embodiment;

FIG. 8 illustrates an isometric view of a machine for using an overlay applicator to apply an overlay to a device, according to another embodiment;

FIG. 9 illustrates a top view of the machine of FIG. 8;

FIG. 10 illustrates an isometric view of the machine of FIG. 8, with a handle assembly not extended, and showing an outline of the overlay applicator of FIG. 1;

2

FIG. 11 illustrates an isometric view of the machine of FIG. 8, with the handle assembly partially extended;

FIG. 12 illustrates a top view of the machine of FIG. 8, with the handle assembly partially extended;

FIG. 13 illustrates an isometric view of the machine of FIG. 8, with the handle assembly fully extended;

FIG. 14 illustrates a top view of the machine of FIG. 8, with the handle assembly fully extended;

FIG. 15 illustrates an exploded isometric view of an overlay applicator, according to another embodiment;

FIG. 16 illustrates an isometric view of a machine in a first configuration, according to another embodiment;

FIG. 17 illustrates a top view of the machine of FIG. 16 in a second configuration;

FIG. 18 illustrates a side view of the machine of FIG. 16 in a second configuration;

FIG. 19 illustrates a side view of the machine of FIG. 16 in a third configuration;

FIG. 20 illustrates an isometric view of a machine for using an overlay applicator to apply an overlay to a device, showing an overlay cover extended, according to another embodiment;

FIG. 21 illustrates an isometric view of the machine of FIG. 20 with the overlay cover engaged and the roller pressing against a tongue of the overlay cover;

FIG. 22 illustrates an isometric view of the machine of FIG. 20 with the overlay cover engaged and the roller disengaged from the overlay cover;

FIG. 23 illustrates a flow chart for a method of providing an overlay applicator, according to another embodiment;

FIG. 24 illustrates a flow chart for a method of providing a machine, according to another embodiment;

FIG. 25 illustrates a flow chart for a method of providing a machine, according to another embodiment;

FIG. 26 illustrates a flow chart for a method of using an overlay applicator to apply an overlay to a screen of an electronic device, according to another embodiment;

FIG. 27 illustrates a perspective view of components of an overlay applicator, according to the embodiment of FIG. 30;

FIG. 28 illustrates a perspective view of components of the overlay applicator of FIG. 30;

FIG. 29 illustrates a perspective view of components of the overlay applicator of FIG. 30;

FIG. 30 illustrates a perspective view of an overlay applicator, according to an embodiment;

FIG. 31 illustrates a perspective view of a cradle, according to an embodiment;

FIG. 32 illustrates a top view of the cradle of FIG. 31 being used with an overlay applicator;

FIG. 33 illustrates a side view of the cradle of FIG. 31 being used with an overlay applicator;

FIG. 34 illustrates a partial cross-sectional view of the cradle of FIG. 31 being use with an overlay applicator;

FIG. 35 illustrates a perspective view of a machine and an overlay applicator, according to an embodiment;

FIG. 36 illustrates a perspective view of the machine of FIG. 36 with a slider being used to apply pressure to an overlay;

FIG. 37 illustrates a system for using an overlay applicator to apply an overlay to a device, according to an embodiment;

FIG. 38 illustrates a top side view of a cradle, according to the embodiment of FIG. 37;

FIG. 39 illustrates a top side view of a cradle frame, according to the embodiment of FIG. 37;

FIG. 40 illustrates a bottom side view of the cradle frame of FIG. 39;

FIG. 41 illustrates a left side view of a machine in an open configuration, according to the embodiment of FIG. 37;

FIG. 42 illustrates the system of FIG. 37 with the device placed in the cradle;

FIG. 43 illustrates the system of FIG. 37 with the cradle placed in the machine;

FIG. 44 illustrates the system of FIG. 37 with the machine in a closed configuration;

FIG. 45 illustrates the system of FIG. 37 with the machine in an open configuration;

FIG. 46 illustrates a perspective view of a machine in a closed configuration, according to another embodiment;

FIG. 47 illustrates a perspective view of the machine of FIG. 46 in an open configuration;

FIG. 48 illustrates a perspective view of the machine of FIG. 46 in an open configuration with a device in the cradle and an overlay applicator above the device on the cradle;

FIG. 49 illustrates a perspective view of the machine of FIG. 46 in a closed configuration with the pull tab of the overlay applicator being pulled;

FIG. 50 illustrates a perspective view of the machine of FIG. 46 in an open configuration with portions of the overlay applicator remaining on the device;

FIG. 51 illustrates a flow chart for a method of providing an overlay applicator, according to another embodiment;

FIG. 52 illustrates a flow chart for a method of providing a cradle, according to another embodiment;

FIG. 53 illustrates a flow chart for a method of providing a machine, according to another embodiment;

FIG. 54 illustrates a flow chart for a method of providing a machine, according to another embodiment;

FIG. 55 illustrates an exploded view of a dust sticker assembly, according to another embodiment;

FIG. 56 illustrates a bottom perspective view the dust sticker assembly of FIG. 55 and a device;

FIG. 57 illustrates a perspective view of the machine of FIG. 35, the dust sticker assembly of FIG. 55, and the device of FIG. 56;

FIG. 58 illustrates a perspective view of a portion of the machine of FIG. 35 and the dust sticker assembly of FIG. 55;

FIG. 59 illustrates a perspective view of a portion of the machine of FIG. 35 and the dust sticker assembly of FIG. 55, with an end portion of a release liner being peeled away from a dust removal sticker of the dust sticker assembly of FIG. 55;

FIG. 60 illustrates a perspective view of the machine of FIG. 35, the dust sticker assembly of FIG. 55, and an overlay applicator;

FIG. 61 illustrates a side elevational view of a portion of the dust sticker assembly of FIG. 55 as attached to the device of FIG. 56 and the overlay applicator of FIG. 60;

FIG. 62 illustrates a perspective view of a wiper, according to another embodiment;

FIG. 63 illustrates a perspective view of a wiper, according to another embodiment;

FIG. 64 illustrates a top side view of a set of cradles, according to another embodiment;

FIG. 65 illustrates a perspective view of the overlay applicator of FIG. 35 being utilized with one of the cradles of the set of cradles of FIG. 64, the cradle holding a device;

FIG. 66 illustrates a perspective view of the overlay applicator of FIG. 35 being utilized with the cradle of FIG. 65, which is holding the device of FIG. 65;

FIG. 67 illustrates a perspective view of the set of cradles of FIG. 64 in a stacked configuration;

FIG. 68 illustrates a side view of the set of cradles of FIG. 64 in a stacked configuration;

FIG. 69 illustrates a perspective view of a machine, according to another embodiment;

FIG. 70 illustrates a perspective view of a clamshell frame of the machine of FIG. 69;

FIG. 71 illustrates a perspective view of the machine of FIG. 69 in an open configuration while holding a device;

FIG. 72 illustrates a perspective view of the machine of FIG. 69 in a closed configuration while holding the device of FIG. 71;

FIG. 73 illustrates a perspective view of the machine of FIG. 69 in an open configuration with the overlay applicator of FIG. 30 placed on a cradle of the machine;

FIG. 74 illustrates a perspective view of the machine of FIG. 69 in a closed configuration holding the overlay applicator of FIG. 30 and the device of FIG. 71, with a pull tab of the overlay applicator being pulled

FIG. 75 illustrates a flow chart for a method of providing a machine, according to another embodiment;

FIG. 76 illustrates a flow chart for a method of providing a cradle, according to another embodiment;

FIG. 77 illustrates a flow chart for a method of providing a set of cradles, according to another embodiment;

FIG. 78 illustrates a flow chart for a method of providing an overlay applicator, according to another embodiment;

FIG. 79 illustrates a flow chart for a method of providing a system, according to another embodiment;

FIG. 80 illustrates a top, front, right side perspective view of an overlay applicator tray, according to another embodiment;

FIG. 81 illustrates a front side elevational view of the overlay applicator tray of FIG. 80;

FIG. 82 illustrates an enlarged front side elevational view of a portion of the overlay applicator tray of FIG. 80, as identified in FIG. 81;

FIG. 83 illustrates a top view of the overlay applicator tray of FIG. 80, with an electronic device being held in a device slot of FIG. 80, and with an overlay applicator of FIG. 80 resting on the electronic device;

FIG. 84 illustrates a top view of the overlay applicator tray of FIG. 80, with the electronic device of FIG. 83 being held in the device slot of FIG. 80, and with the overlay applicator of FIG. 80 being folded upwards;

FIG. 85 illustrates a top view of an overlay applicator tray kit with an overlay applicator tray book in an open configuration, according to another embodiment;

FIG. 86 illustrates a top, front view of the overlay applicator tray book of FIG. 85 in a closed configuration;

FIG. 87 illustrates a bottom, front view of a package used to enclose the overlay applicator tray kit of FIG. 85, according to another embodiment;

FIG. 88 illustrates a top, front, right side perspective view of an overlay applicator tray, according to another embodiment;

FIG. 89 illustrates a front side elevational view of the overlay applicator tray of FIG. 88;

FIG. 90 illustrates an enlarged front side elevational view of a portion of the overlay applicator tray of FIG. 88, as identified in FIG. 89;

FIG. 91 illustrates a top view of an overlay applicator tray with an overlay applicator in a lowered position, according to another embodiment;

FIG. 92 illustrates a top, right side view of the overlay applicator tray of FIG. 91 with the overlay applicator of FIG. 91 in a raised position;

FIG. 93 illustrates a flow chart for a method, according to another embodiment;

5

FIG. 94 illustrates a flow chart for a method, according to another embodiment;

FIG. 95 illustrates an enlarged front side elevational view of a portion of an overlay applicator of the overlay applicator tray of FIG. 80, as identified in FIG. 82;

FIG. 96 illustrates an enlarged top, right side view of a portion of the overlay applicator of FIG. 91, as identified in FIG. 92;

FIG. 97 illustrates a perspective view of an exemplary overlay attached to an electronic device, according to another embodiment;

FIG. 98 illustrates a cross-sectional view of the electronic device of FIG. 98 along cross-section line 98-98 in FIG. 97, and the bottom edge of the touchscreen of FIG. 97 and the overlay of FIG. 97;

FIG. 99 illustrates an enlarged cross-sectional view of a portion of the electronic device of FIG. 97 along cross-section line 98-98 in FIG. 97, and a portion of the bottom edge of the touchscreen of FIG. 97 and the overlay of FIG. 97, as identified in FIG. 98;

FIG. 100 illustrates an enlarged cross-sectional view of an electronic device, and the bottom edge of a touchscreen of the electronic device, and an overlay, according to another embodiment;

FIG. 101 illustrates a cross-sectional view of the electronic device of FIG. 97 along cross-section line 98-98 in FIG. 97, and a portion of the bottom edge of the touchscreen of FIG. 97, as identified in FIG. 98, and an overlay, according to another embodiment;

FIG. 102 illustrates a cross-sectional view of the electronic device of FIG. 97 along cross-section line 98-98 in FIG. 97, and a portion of the bottom edge of the touchscreen of FIG. 97, as identified in FIG. 98, and an overlay, according to another embodiment;

FIG. 103 illustrates a perspective view of an adhesive carrier, according to another embodiment;

FIG. 104 illustrates a perspective view of an overlay and an adhesive component, according to another embodiment; and

FIG. 105 illustrates a flow chart for an embodiment of a method, according to another embodiment.

FIG. 106 illustrates a perspective view of a machine in a closed configuration, according to another embodiment;

FIG. 107 illustrates a perspective view of the machine of FIG. 106 in an opened configuration;

FIG. 108 illustrates a perspective view of the base and the adjustable cradle of the machine of FIG. 106;

FIG. 109 illustrates a perspective view of a portion of the adjustable cradle of the machine of FIG. 106, showing internal components of a portion of the adjustable cradle;

FIG. 110 illustrates a perspective view of the base of the machine of FIG. 106, in which an electronic device is being inserted into the adjustable cradle;

FIG. 111 illustrates a plan view of various components of the machine of FIG. 106, including an alignment base, a pin holder plate, a top holder, a top holder plate, a spur gear, and a rotor spring;

FIG. 112 illustrates a plan view of the base of the machine of FIG. 106, in which the electronic device of FIG. 110 is seated within the adjustable cradle;

FIG. 113 illustrates a plan view of a portion of the machine of FIG. 106 in an opened configuration with the electronic device of FIG. 110 seated within the adjustable cradle, with a screen or other surface of the electronic device facing outwards (in a z-direction) and an overlay applicator

6

attached to an alignment base of the machine so as to be positioned over the screen or other surface of electronic device;

FIG. 114 illustrates a plan view of the machine of FIG. 106 in a closed configuration, after the electronic device of FIG. 110 and the overlay applicator of FIG. 113 have been installed inside the machine;

FIG. 115 illustrates a cross-sectional elevational view of the machine of FIG. 106 as the lid of the machine is being closed, but ajar, before the lid has been latched into the base of the machine;

FIG. 116 illustrates a cross-sectional elevational view of a portion of the machine of FIG. 106 in a closed configuration with the electronic device of FIG. 110 seated within the adjustable cradle of the machine;

FIG. 117 illustrates a plan view of a machine in an opened configuration, according to another embodiment;

FIG. 118 illustrates a perspective view of the machine of FIG. 117 in an opened configuration;

FIG. 119 illustrates a perspective view of a portion of the base of the machine of FIG. 117;

FIG. 120 illustrates a plan view of the base of FIG. 117, showing various external and internal components of the base, with a side holder of FIG. 117 in a partially opened position;

FIG. 121 illustrates a plan view of the base of FIG. 117, showing various external and internal components of the base, with the side holder of FIG. 117 in a closed position;

FIG. 122 illustrates a perspective view of a portion of the base of FIG. 117, showing various external and internal components of the base, with the side holder of FIG. 117 in a closed position;

FIG. 123 illustrates a plan view of a portion of the base of FIG. 117, showing various external and internal components of the base, with a top holder of FIG. 117 in a seated position holding an electronic device of FIG. 117;

FIG. 124 illustrates a plan view of a portion of the base of FIG. 117, showing various external and internal components of the base, with the top holder of FIG. 117 in a closed position;

FIG. 125 illustrates a perspective view of a machine in a closed configuration with an overlay applicator installed, according to another embodiment;

FIG. 126 illustrates a perspective view of a base of the machine of FIG. 125 with the overlay applicator of FIG. 125 installed and without an electronic device installed;

FIG. 127 illustrates a perspective view of the base of FIG. 125 with the overlay applicator of FIG. 125 and an electronic device installed;

FIG. 128 illustrates a plan view of the base of FIG. 125 with a left side holder, a right side holder, a left top corner holder, and a right top corner holder in an opened position;

FIG. 129 illustrates a plan view of the base of FIG. 125 with the left side holder, the right side holder, the left top corner holder, and the right top corner holder in a closed (released) position;

FIG. 130 illustrates a plan view of a portion of the base of FIG. 125 below a base support surface to view an under surface on the opposite side of the base support surface;

FIG. 131 illustrates a plan view of a portion of the base of FIG. 125 with an alignment plate installed;

FIG. 132 illustrates a plan view of a portion of the base of FIG. 125 with the alignment plate removed;

FIG. 133 illustrates a perspective view of a machine in an opened configuration, according to another embodiment;

FIG. 134 illustrates a perspective view of the machine of FIG. 133 in a closed configuration;

7

FIG. 135 illustrates a plan view of the base of FIG. 133 with a right top corner holder in a closed position;

FIG. 136 illustrates a plan view of the base of FIG. 133 with the right top corner holder an opened position;

FIG. 137 illustrates a cross-sectional elevational view of the machine of FIG. 133 in a closed configuration;

FIG. 138 illustrates an enlarged cross-sectional view of a portion of the machine of FIG. 133, as identified in FIG. 137, in the closed configuration;

FIG. 139 illustrates a flow chart for an embodiment of a method of providing a machine, according to another embodiment;

FIG. 140 illustrates a flow chart for an embodiment of a method of providing a machine, according to another embodiment;

FIG. 141 illustrates a flow chart for an embodiment of a method of providing a machine, according to another embodiment; and

FIG. 142 illustrates a flow chart for an embodiment of a method of providing a machine, according to another embodiment.

For simplicity and clarity of illustration, the drawing figures illustrate the general manner of construction, and descriptions and details of well-known features and techniques may be omitted to avoid unnecessarily obscuring the present disclosure. Additionally, elements in the drawing figures are not necessarily drawn to scale. For example, the dimensions of some of the elements in the figures may be exaggerated relative to other elements to help improve understanding of embodiments of the present disclosure. The same reference numerals in different figures denote the same elements.

The terms “first,” “second,” “third,” “fourth,” and the like in the description and in the claims, if any, are used for distinguishing between similar elements and not necessarily for describing a particular sequential or chronological order. It is to be understood that the terms so used are interchangeable under appropriate circumstances such that the embodiments described herein are, for example, capable of operation in sequences other than those illustrated or otherwise described herein. Furthermore, the terms “include,” and “have,” and any variations thereof, are intended to cover a non-exclusive inclusion, such that a process, method, system, article, device, or apparatus that comprises a list of elements is not necessarily limited to those elements, but may include other elements not expressly listed or inherent to such process, method, system, article, device, or apparatus.

The terms “left,” “right,” “front,” “back,” “top,” “bottom,” “over,” “under,” and the like in the description and in the claims, if any, are used for descriptive purposes and not necessarily for describing permanent relative positions. It is to be understood that the terms so used are interchangeable under appropriate circumstances such that the embodiments of the apparatus, methods, and/or articles of manufacture described herein are, for example, capable of operation in other orientations than those illustrated or otherwise described herein.

The terms “couple,” “coupled,” “couples,” “coupling,” and the like should be broadly understood and refer to connecting two or more elements mechanically and/or otherwise. Two or more electrical elements may be electrically coupled together, but not be mechanically or otherwise coupled together. Coupling may be for any length of time, e.g., permanent or semi-permanent or only for an instant. “Electrical coupling” and the like should be broadly understood and include electrical coupling of all types. The

8

absence of the word “removably,” “removable,” and the like near the word “coupled,” and the like does not mean that the coupling, etc. in question is or is not removable. “Mechanical coupling” and the like should be broadly understood and include mechanical coupling of all types.

The absence of the word “removably,” “removable,” and the like near the word “coupled,” and the like does not mean that the coupling, etc. in question is or is not removable.

As defined herein, two or more elements are “integral” if they are comprised of the same piece of material. As defined herein, two or more elements are “non-integral” if each is comprised of a different piece of material.

As defined herein, “approximately” can, in some embodiments, mean within plus or minus ten percent of the stated value. In other embodiments, “approximately” can mean within plus or minus five percent of the stated value. In further embodiments, “approximately” can mean within plus or minus three percent of the stated value. In yet other embodiments, “approximately” can mean within plus or minus one percent of the stated value.

DESCRIPTION OF EXAMPLES OF EMBODIMENTS

Various embodiments include an overlay applicator. The overlay applicator can include an overlay. The overlay can include a top side and a bottom side. The bottom side can include an adhesive agent configured to adhere to a screen of an electronic device. The overlay applicator also can include an adhesive release liner. The adhesive release liner can include a top side and a bottom side. The top side of the adhesive release liner can be removably attached to the bottom side of the overlay. The adhesive release liner can be configured to protect the adhesive agent at the bottom side of the overlay from contaminants. The overlay applicator further can include a protective film removably attached to the top side of the overlay. The overlay applicator also can include an alignment tab. The alignment tab can include an alignment mechanism. The overlay applicator further can include a pull tab. The pull can include a wiper. The pull tab, including the wiper, and the adhesive release liner can be configured such that the pull tab can be folded across the bottom side of the adhesive release liner and can be pulled to remove the adhesive release liner from the bottom side of the overlay to expose the adhesive agent. The pull tab, including the wiper, and the adhesive release liner can be configured such that, when the pull tab is pulled, the wiper can be configured to wipe across and clean the screen of the electronic device.

A number of embodiments can include a method of providing an overlay applicator. The method can include providing an overlay. The overlay can include a top side and a bottom side. The bottom side can include an adhesive agent configured to adhere to a screen of an electronic device. The method also can include providing an adhesive release liner. The adhesive release liner can include a top side and a bottom side. The top side of the adhesive release liner can be removably attached to the bottom side of the overlay. The adhesive release liner can be configured to protect the adhesive agent at the bottom side of the overlay from contaminants. The method further can include providing a protective film removably attached to the top side of the overlay. The method also can include providing an alignment tab. The alignment tab can include an alignment mechanism. The method further can include providing a pull tab. The pull tab can include a wiper. The pull tab, including the wiper, and the adhesive release liner can be configured

such that the pull tab can be folded across the bottom side of the adhesive release liner and can be pulled to remove the adhesive release liner from the bottom side of the overlay to expose the adhesive agent. The pull tab, including the wiper, and the adhesive release liner can be configured such that, when the pull tab is pulled, the wiper can be configured to wipe across and clean the screen of the electronic device.

Some embodiments include a machine. The machine can include a base. The machine also can include a carriage. The carriage can include a first cradle configured to securely hold a first electronic device. The carriage also can include an alignment base configured to engage with an alignment mechanism of an overlay applicator. The machine further can include a handle assembly. The handle assembly can include a handle and a pulling mechanism configured to engage with a pull tab of the overlay applicator. The machine can be configured such that the handle assembly can be pulled in a first direction relative to the base from a first handle position to a second handle position. The machine can be configured such that when the handle assembly is moved from the first handle position to the second handle position, the carriage can move in a second direction relative to the base from a first carriage position to a second carriage position. The second direction can be opposite the first direction. The machine can be configured such that when (a) the alignment base is engaged with the alignment mechanism of the overlay applicator, (b) the pulling mechanism is engaged with the pull tab of the overlay applicator, (c) the first cradle is holding the first electronic device, and (d) the handle assembly is pulled in the first direction relative to the base from the first handle position to the second handle position, an adhesive release liner of the overlay applicator can be removed from an overlay of the overlay applicator starting at a leading edge of the overlay and continuing to a trailing edge of the overlay to expose an adhesive agent of the overlay to a screen of the first electronic device.

Many embodiments include a method of providing a machine. The method can include providing a base. The method also can include providing a carriage. The carriage can include a first cradle configured to securely hold a first electronic device. The carriage also can include an alignment base configured to engage with an alignment mechanism of an overlay applicator. The method further can include providing a handle assembly. The handle assembly can include a handle and a pulling mechanism configured to engage with a pull tab of the overlay applicator. The machine can be configured such that the handle assembly can be pulled in a first direction relative to the base from a first handle position to a second handle position. The machine can be configured such that when the handle assembly is moved from the first handle position to the second handle position, the carriage can move in a second direction relative to the base from a first carriage position to a second carriage position. The second direction can be opposite the first direction. The machine can be configured such that when (a) the alignment base is engaged with the alignment mechanism of the overlay applicator, (b) the pulling mechanism is engaged with the pull tab of the overlay applicator, (c) the first cradle is holding the first electronic device, and (d) the handle assembly is pulled in the first direction relative to the base from the first handle position to the second handle position, an adhesive release liner of the overlay applicator can be removed from an overlay of the overlay applicator starting at a leading edge of the overlay and continuing to a trailing edge of the overlay to expose an adhesive agent of the overlay of the overlay applicator to a screen of the first electronic device.

Several embodiments include a machine. The machine can include a base. The machine also can include a cradle configured to securely hold a first electronic device. The machine further can include an alignment piece hingedly attached to the base. The alignment piece can include an alignment base configured to engage with an alignment mechanism of an overlay applicator. The machine also can include a pulling piece hingedly attached to the base. The pulling piece can include a pulling mechanism configured to engage with a pull tab of the overlay applicator. The machine can be configured such that the pulling piece can be rotated relative to the base in a first direction from a first pulling piece position to a second pulling piece position. The first pulling piece position can be proximate to the cradle. The machine can be configured such that the alignment piece can be rotated relative to the base in the first direction from a first alignment piece position to a second alignment piece position. The second alignment piece position can be proximate to the cradle. The machine can be configured such that when (a) the alignment base is engaged with the alignment mechanism of the overlay applicator, (b) the pulling mechanism is engaged with the pull tab of the overlay applicator, (c) the cradle is holding the first electronic device, and (d) the pulling piece is rotated relative to the base in the first direction from the first pulling piece position to the second pulling piece position, the alignment piece can be rotated relative to the base in the first direction from the first alignment piece position to the second alignment piece position, and an adhesive release liner of the overlay applicator can be removed from an overlay of the overlay applicator to expose an adhesive agent of an overlay to a screen of the first electronic device.

Further embodiments include a method of providing a machine. The method can include providing a base. The method also can include providing a cradle configured to securely hold a first electronic device. The method further can include providing an alignment piece hingedly attached to the base. The alignment piece can include an alignment base configured to engage with an alignment mechanism of an overlay applicator. The method also can include providing a pulling piece hingedly attached to the base. The pulling piece can include a pulling mechanism configured to engage with a pull tab of the overlay applicator. The machine can be configured such that the pulling piece can be rotated relative to the base in a first direction from a first pulling piece position to a second pulling piece position. The first pulling piece position can be proximate to the cradle. The machine can be configured such that the alignment piece can be rotated relative to the base in the first direction from a first alignment piece position to a second alignment piece position. The second alignment piece position can be proximate to the cradle. The machine can be configured such that when (a) the alignment base is engaged with the alignment mechanism of the overlay applicator, (b) the pulling mechanism is engaged with the pull tab of the overlay applicator, (c) the cradle is holding the first electronic device, and (d) the pulling piece is rotated relative to the base in the first direction from the first pulling piece position to the second pulling piece position, the alignment piece can be rotated relative to the base in the first direction from the first alignment piece position to the second alignment piece position to pull the pull tab of the overlay applicator, and an adhesive release liner of the overlay applicator can be removed from an overlay of the overlay applicator to expose an adhesive agent of an overlay to a screen of the first electronic device.

11

Yet further embodiments include a method of using an overlay applicator to apply an overlay to a screen of an electronic device. The method can include attaching the overlay applicator to a first apparatus securely holding the electronic device. The overlay applicator can include an overlay. The overlay can include a top side and a bottom side. The bottom side can include an adhesive agent configured to adhere to the screen of the electronic device. The overlay applicator also can include an adhesive release liner. The adhesive release liner can include a top side and a bottom side. The top side of the adhesive release liner can be removably attached to the bottom side of the overlay. The adhesive release liner can be configured to protect the adhesive agent at the bottom side of the overlay from contaminants. The overlay applicator further can include a protective film removably attached to the top side of the overlay. The overlay applicator also can include an alignment tab. The alignment tab can include an alignment mechanism configured to engage with an alignment base of the first apparatus. The overlay applicator further can include a pull tab. The pull can include a wiper. The method also can include pulling the pull tab across the bottom side of the adhesive release liner to remove the adhesive release liner from the bottom side of the overlay to expose the adhesive agent to the screen of the electronic device. Still further embodiments include a method of providing an overlay applicator. The method can include providing an adhesive release liner including a top side and a bottom side. The method also can include providing a pull tab including a top side and a bottom side. The method further can include attaching a wiper to the top side of the pull tab. The method additionally can include providing an overlay layer including a top side and a bottom side. The bottom side can include an adhesive agent configured to adhere to a screen of an electronic device. The method further can include attaching the bottom side of the overlay layer to the top side of the adhesive release liner. The method additionally can include providing a protective film layer including a top side and a bottom side. The method further can include attaching the bottom side of the protective film layer to the top side of the overlay layer. The method additionally can include cutting the protective film layer and the overlay layer to create an interface slit between an alignment tab and a device portion, and to create a tail slit between a tail portion and the device portion. The method further can include attaching a sticker to the top side of the protective film. The sticker can span the interface slit between the device portion and the alignment tab. The device portion of the overlay layer can be configured to adhere to a screen of an electronic device. The device portion can have dimensions approximately the same as dimensions of the screen of the electronic device.

Additional embodiments include a cradle. The cradle can include a base. The cradle also can include an alignment base configured to engage with an alignment mechanism of an overlay applicator. The cradle further can include one or more frame pieces configured to securely hold an electronic device in a device slot in a fixed position with respect to the alignment base. The base, the alignment base, and the one or more frame pieces can be configured to hold the overlay applicator between the base and a screen of the electronic device when the screen of the electronic device is facing toward the base; and facilitate applying an overlay of the overlay applicator to the screen of the electronic device.

Further embodiments include a method of providing a cradle. The method can include providing a base. The method also can include providing an alignment base configured to engage with an alignment mechanism of an

12

overlay applicator. The method further can include providing one or more frame pieces configured to securely hold an electronic device in a device slot in a fixed position with respect to the alignment base. The base, the alignment base, and the one or more frame pieces can be configured to hold the overlay applicator between the base and a screen of the electronic device when the screen of the electronic device is facing toward the base; and facilitate applying an overlay of the overlay applicator to the screen of the electronic device.

Still further embodiments include a machine. The machine can include a base. The base can include a first end and a second end. The base also can include an alignment base configured to engage with an alignment mechanism of an overlay applicator. The overlay applicator can include a first alignment tab and a second alignment tab. The first alignment tab can include a first portion of the alignment mechanism. The second alignment tab can include a second portion of the alignment mechanism. The alignment base can include a first side proximate the first end of the base. The first side can be configured to engage with the first portion of the alignment mechanism of the overlay applicator. The alignment base also can include a second side proximate the second end of the base. The second side can be configured to engage with the second portion of the alignment mechanism of the overlay applicator. The base further can include a pull slot. The machine further can include a cradle located between the first side of the alignment base and the second side of the alignment base. The cradle can be configured to securely hold an electronic device. The machine additionally can include a slider configured to move between the first and second ends of the base. The slider can include a bar. The bar can be configured to press an overlay of the overlay applicator toward a screen of the electronic device when the slider is moved between the first and second ends of the base.

Yet further embodiments can include a method of providing a machine. The method can include providing a base. The base can include a first end and a second end. The base also can include an alignment base configured to engage with an alignment mechanism of an overlay applicator. The overlay applicator can include a first alignment tab and a second alignment tab. The first alignment tab can include a first portion of the alignment mechanism. The second alignment tab can include a second portion of the alignment mechanism. The alignment base can include a first side proximate the first end of the base. The first side can be configured to engage with the first portion of the alignment mechanism of the overlay applicator. The alignment base also can include a second side proximate the second end of the base. The second side can be configured to engage with the second portion of the alignment mechanism of the overlay applicator. The base further can include a pull slot. The method further can include providing a cradle located between the first side of the alignment base and the second side of the alignment base. The cradle can be configured to securely hold an electronic device. The method additionally can include providing a slider configured to move between the first and second ends of the base. The slider can include a bar. The bar can be configured to press an overlay of the overlay applicator toward a screen of the electronic device when the slider is moved between the first and second ends of the base.

Additional embodiments can include a machine. The machine can include a base. The machine also can include a cradle configured to securely hold an electronic device. The cradle can include an alignment base configured to engage with an alignment mechanism of an overlay applicator.

13

cator. The machine further can include an arm. The arm can include an expandable bladder and a pumping mechanism configured to inflate the expandable bladder. The arm can be configured to be hingedly rotated between an open configuration and a closed configuration. The machine can be configured such that when the arm is in the closed configuration and the expandable bladder is inflated, the expandable bladder can press an overlay of the overlay applicator toward a screen of the electronic device to adhere an adhesive side of the overlay to the screen of the electronic device.

Further embodiments can include a method of providing a machine. The method can include providing a base. The method also can include providing a cradle configured to securely hold an electronic device. The cradle can include an alignment base configured to engage with an alignment mechanism of an overlay applicator. The method further can include providing an arm. The arm can include an expandable bladder and a pumping mechanism configured to inflate the expandable bladder. The arm can be configured to be hingedly rotated between an open configuration and a closed configuration. The machine can be configured such that when the arm is in the closed configuration and the expandable bladder is inflated, the expandable bladder can press an overlay of the overlay applicator toward a screen of the electronic device to adhere an adhesive side of the overlay to the screen of the electronic device.

Additional embodiments can include a machine. The machine can include a support base. The machine also can include a first cradle configured to hold a first electronic device. The machine further can include an alignment base configured to engage with an alignment mechanism of an overlay applicator. The overlay applicator can include an overlay configured to be applied to a screen of the first electronic device. The machine also can include a lid hingedly attached to the support base. The machine can be configured such that the lid can be rotated with respect to the support base between an open configuration and a closed configuration. The machine can be configured in the closed configuration to facilitate applying the overlay of the overlay applicator to the screen of the first electronic device.

Further embodiments can include a method of providing a machine. The method can include providing a support base. The method also can include providing a first cradle configured to hold a first electronic device. The method further can include providing an alignment base configured to engage with an alignment mechanism of an overlay applicator. The overlay applicator can include an overlay configured to be applied to a screen of the first electronic device. The method also can include providing a lid hingedly attached to the support base. The machine can be configured such that the lid can be rotated with respect to the support base between an open configuration and a closed configuration. The machine can be configured in the closed configuration to facilitate applying the overlay of the overlay applicator to the screen of the first electronic device.

Still further embodiments can include a cradle. The cradle can include a device slot configured to securely hold an electronic device. The cradle also can include an alignment base configured to engage with an alignment mechanism of an overlay applicator. The overlay applicator can include a first alignment tab and a second alignment tab. The first alignment tab can include a first portion of the alignment mechanism. The second alignment tab can include a second portion of the alignment mechanism. The alignment base can include a first side configured to engage with the first portion of the alignment mechanism of the overlay applicator.

14

The alignment base also can include a second side configured to engage with the second portion of the alignment mechanism of the overlay applicator. The cradle further can include a pull slot disposed between the device slot and the second side of the alignment base.

Yet further embodiments can include a method of providing a cradle. The method can include providing a device slot configured to securely hold an electronic device. The method also can include providing an alignment base configured to engage with an alignment mechanism of an overlay applicator. The overlay applicator can include a first alignment tab and a second alignment tab. The first alignment tab can include a first portion of the alignment mechanism. The second alignment tab can include a second portion of the alignment mechanism. The alignment base can include a first side configured to engage with the first portion of the alignment mechanism of the overlay applicator. The alignment base also can include a second side configured to engage with the second portion of the alignment mechanism of the overlay applicator. The method further can include providing a pull slot disposed between the device slot and the second side of the alignment base.

Additional embodiments can include a set of cradles. The set of cradles can include a first cradle. The first cradle can include a first device slot including first dimensions and configured to securely hold a first electronic device. The first cradle also can include a first alignment base configured to engage with an alignment mechanism of a first overlay applicator. The first overlay applicator can include an overlay configured to be applied to a screen of the first electronic device. The set of cradles also can include a second cradle. The second cradle can include a second device slot including second dimensions and configured to securely hold a second electronic device. The second cradle also can include a second alignment base configured to engage with an alignment mechanism of a second overlay applicator. The second overlay applicator can include an overlay configured to be applied to a screen of the second electronic device. The first dimensions of the first device slot of the first cradle can be different from the second dimensions of the second device slot of the second cradle. The first cradle and the second cradle can be configured to be stacked in a first coterminous configuration.

Further embodiments can include a method of providing a set of cradles. The method can include providing a first cradle. The first cradle can include a first device slot including first dimensions and configured to securely hold a first electronic device. The first cradle also can include a first alignment base configured to engage with an alignment mechanism of a first overlay applicator. The first overlay applicator can include an overlay configured to be applied to a screen of the first electronic device. The method also can include providing a second cradle. The second cradle can include a second device slot including second dimensions and configured to securely hold a second electronic device. The second cradle also can include a second alignment base configured to engage with an alignment mechanism of a second overlay applicator. The second overlay applicator can include an overlay configured to be applied to a screen of the second electronic device. The first dimensions of the first device slot of the first cradle can be different from the second dimensions of the second device slot of the second cradle. The first cradle and the second cradle can be configured to be stacked in a first coterminous configuration.

Still further embodiments can include an overlay applicator. The overlay applicator can include an overlay including a top side and a bottom side. The bottom side can include

15

an adhesive agent configured to adhere to a screen of an electronic device. The overlay applicator also can include an adhesive release liner including a top side and a bottom side. The top side of the adhesive release liner can be removably attached to the bottom side of the overlay. The adhesive release liner can be configured to protect the adhesive agent at the bottom side of the overlay from contaminants. The overlay applicator further can include an alignment tab including an alignment mechanism. The overlay applicator also can include a pull tab. The overlay applicator further can include a wiper. The wiper can include a surface and a first slot extending at least partially through the surface of the wiper. The wiper can be attached to the pull tab. The pull tab, the wiper, and the adhesive release liner can be configured such that the pull tab can be folded across the bottom side of the adhesive release liner and can be pulled to remove the adhesive release liner from the bottom side of the overlay to expose the adhesive agent. The pull tab, the wiper, and the adhesive release liner can be configured such that, when the pull tab is pulled, the wiper can wipe across and clean the screen of the electronic device.

Yet further embodiments can include a method of providing an overlay applicator. The method can include providing an overlay comprising a top side and a bottom side. The bottom side can include an adhesive agent configured to adhere to a screen of an electronic device. The method also can include providing an adhesive release liner comprising a top side and a bottom side. The top side of the adhesive release liner can be removably attached to the bottom side of the overlay. The adhesive release liner can be configured to protect the adhesive agent at the bottom side of the overlay from contaminants. The method further can include providing an alignment tab including an alignment mechanism. The method also can include providing a pull tab. The method further can include providing a wiper. The wiper can include a surface and a first slot extending at least partially through the surface of the wiper. The method also can include attaching the wiper to the pull tab. The pull tab, the wiper, and the adhesive release liner can be configured such that the pull tab can be folded across the bottom side of the adhesive release liner and can be pulled to remove the adhesive release liner from the bottom side of the overlay to expose the adhesive agent. The pull tab, the wiper, and the adhesive release liner can be configured such that, when the pull tab is pulled, the wiper can wipe across and clean the screen of the electronic device.

Additional embodiments can include a system. The system can include an overlay applicator. The overlay applicator can include an overlay including a top side and a bottom side. The bottom side can include a first adhesive agent configured to adhere to a screen of an electronic device. The overlay applicator also can include an adhesive release liner including a top side and a bottom side. The top side of the adhesive release liner can be removably attached to the bottom side of the overlay. The adhesive release liner can be configured to protect the first adhesive agent at the bottom side of the overlay from contaminants. The overlay applicator further can include a protective film removably attached to the top side of the overlay. The overlay applicator also can include an alignment tab including an alignment mechanism. The overlay applicator also can include a pull tab. The system also can include a sticker assembly. The sticker assembly can include a sticker including a top side and a bottom side and an end portion. The bottom side can include a second adhesive agent configured to removably adhere to the screen of the electronic device. The sticker assembly also can include a release liner removably attached

16

to the bottom side of the sticker. The release liner can include a device portion and an end portion. The end portion of the release liner can be removably attached to the end portion of the sticker. The sticker assembly can be configured such that, when the device portion of the release liner is removed to expose the second adhesive agent, the second adhesive agent of the bottom side of the sticker can be adhered to the screen of the electronic device, and the end portion of the sticker can be folded back over the top side of the sticker to expose the end portion of the release liner. The pull tab and the adhesive release liner can be configured such that the pull tab can be folded across the bottom side of the adhesive release liner. The sticker assembly can be configured such that, when the end portion of the sticker is folded back over the top side of the sticker and the end portion of the release liner is removed from the sticker to expose the second adhesive agent, the end portion of the sticker can be adhered to the pull tab while the pull tab is folded across the bottom side of the adhesive release liner. The overlay applicator and sticker assembly can be configured such that, when the end portion of the sticker is adhered to the pull tab, the pull tab can be pulled to remove the sticker from the screen of the electronic device and to remove the adhesive release liner from the bottom side of the overlay to expose the first adhesive agent to the screen of the device. The sticker can be configured to remove dust from the screen of the electronic device when the sticker is removed from the screen of the electronic device.

Further embodiments include a method. The method can include providing an overlay applicator. The overlay applicator can include an overlay including a top side and a bottom side. The bottom side can include a first adhesive agent configured to adhere to a screen of an electronic device. The overlay applicator also can include an adhesive release liner including a top side and a bottom side. The top side of the adhesive release liner can be removably attached to the bottom side of the overlay. The adhesive release liner can be configured to protect the first adhesive agent at the bottom side of the overlay from contaminants. The overlay applicator further can include a protective film removably attached to the top side of the overlay. The overlay applicator also can include an alignment tab including an alignment mechanism. The overlay applicator also can include a pull tab. The method also can include providing a sticker assembly. The sticker assembly can include a sticker including a top side and a bottom side and an end portion. The bottom side can include a second adhesive agent configured to removably adhere to the screen of the electronic device. The sticker assembly also can include a release liner removably attached to the bottom side of the sticker. The release liner can include a device portion and an end portion. The end portion of the release liner can be removably attached to the end portion of the sticker. The sticker assembly can be configured such that, when the device portion of the release liner is removed to expose the second adhesive agent, the second adhesive agent of the bottom side of the sticker can be adhered to the screen of the electronic device, and the end portion of the sticker can be folded back over the top side of the sticker to expose the end portion of the release liner. The pull tab and the adhesive release liner can be configured such that the pull tab can be folded across the bottom side of the adhesive release liner. The sticker assembly can be configured such that, when the end portion of the sticker is folded back over the top side of the sticker and the end portion of the release liner is removed from the sticker to expose the second adhesive agent, the end portion of the sticker can be adhered to the pull tab while the pull tab is folded across the

17

bottom side of the adhesive release liner. The overlay applicator and sticker assembly can be configured such that, when the end portion of the sticker is adhered to the pull tab, the pull tab can be pulled to remove the sticker from the screen of the electronic device and to remove the adhesive release liner from the bottom side of the overlay to expose the first adhesive agent to the screen of the device. The sticker can be configured to remove dust from the screen of the electronic device when the sticker is removed from the screen of the electronic device.

Additional embodiments include an overlay applicator tray. The overlay applicator tray can include a cradle including a device slot. The device slot can be configured to securely hold an electronic device in the device slot. The overlay applicator tray also can include an overlay applicator. The overlay layer can include a first side and a second side. The second side can be configured to be adhered to a screen of the electronic device. The overlay applicator also can include a release liner. The release liner can be configured to be removed from the second side of the overlay layer to permit the second side of the overlay layer to be adhered to the screen of the electronic device. The overlay applicator tray additionally can include an alignment piece coupling the cradle to the overlay applicator such that the overlay layer is aligned with the screen of the electronic device when the electronic device is securely held in the device slot as the overlay applicator is applied to the screen of the electronic device.

A number of embodiments can include an overlay applicator tray. The overlay applicator tray can include a cradle including a device slot. The device slot can be configured to securely hold an electronic device in the cradle. The overlay applicator tray also can include an overlay applicator. The overlay applicator can include an overlay layer and an adhesive release liner. The overlay layer can include a top side and a bottom side. The bottom side can be configured to be adhered to a screen of the electronic device. The adhesive release liner can be removable from and/or removably attached to the bottom side of the overlay layer. The overlay applicator tray additionally can include an alignment piece coupling the cradle to the overlay applicator. The alignment piece can align the overlay layer of the overlay applicator with the screen as the overlay layer is applied to the screen when the electronic device is securely held in the device slot. In some embodiments, the alignment of the overlay layer with the screen by the alignment piece is automatic or self-aligned.

Embodiments also can include an overlay applicator tray. The overlay applicator tray can include a cradle including a device slot. The device slot can be configured to hold an electronic device in the cradle. The overlay applicator tray also can include an overlay applicator. The overlay applicator can include an overlay layer and an adhesive release liner. The overlay layer can include a first side and a second side. In some embodiments, the first side is a bottom side, and the second side is a top side, and in other embodiments, the first side is a top side, and the second side is a bottom side. The first side can be configured to be adhered to a screen of the electronic device. The adhesive release liner can be removable from and/or removably attached to the first side of the overlay layer. The overlay applicator tray additionally can include an alignment piece coupling the cradle to the overlay applicator. The alignment piece can align the overlay layer of the overlay applicator with the screen as the overlay layer is applied to the screen when the electronic device is held in the device slot. In some embodi-

18

ments, the device slot can hold the electronic device in the cradle in a secure manner, and in the same or different embodiments, the alignment of the overlay layer with the screen by the alignment piece is automatic or self-aligned.

Further embodiments can include a method. The method can include inserting an electronic device into a device slot of a cradle of an overlay applicator tray. The device slot can be configured to securely hold the electronic device in the cradle. The overlay applicator tray can include an overlay applicator and an alignment piece coupling the cradle to the overlay applicator. The method also can include rotating the overlay applicator with respect to the cradle to apply an overlay layer of the overlay applicator to a screen of the electronic device. The overlay layer can include a top side and a bottom side. The bottom side can be configured to be adhered to the screen. The alignment piece can align the overlay layer with the screen and maintain the coupling of the cradle to the overlay applicator as the overlay layer is applied to the screen. In some embodiments, the alignment of the overlay layer with the screen by the alignment piece is automatic or self-aligned.

Further embodiments can include a method. The method can include inserting an electronic device into a device slot of a cradle of an overlay applicator tray. The device slot can be configured to hold the electronic device in the cradle. The overlay applicator tray can include an overlay applicator and an alignment piece coupling the cradle to the overlay applicator. The method also can include rotating the overlay applicator with respect to the cradle to apply an overlay layer of the overlay applicator to a screen of the electronic device. The overlay layer can include a first side and a second side. In some embodiments, the first side is a bottom side, and the second side is a top side, and in other embodiments, the first side is a top side, and the second side is a bottom side. The first side can be configured to be adhered to the screen. The alignment piece can align the overlay layer with the screen and maintain the coupling of the cradle to the overlay applicator as the overlay layer is applied to the screen. In some embodiments, the device slot can hold the electronic device in the cradle in a secure manner, and in the same or different embodiments, the alignment of the overlay layer with the screen by the alignment piece is automatic or self-aligned.

Additional embodiments can include an apparatus. The apparatus can include an overlay including a top side and a bottom side. The apparatus also can include an adhesive component including a top side and a bottom side. The top side of the adhesive component can be adhered to the bottom side of the overlay. The adhesive component can be configured to adhere the bottom side of the overlay to a screen of an electronic device in a single-use application of the overlay by adhering the bottom side of the adhesive component to the screen of the electronic device. The apparatus can be configured such that, when the overlay is removed from being adhered to the screen of the electronic device after the single-use application of the overlay, at least a portion of the adhesive component is detached from at least a portion of the overlay.

Further embodiments can include a method. The method can include providing an overlay. The overlay can include a top side and a bottom side. The method also can include providing an adhesive component. The adhesive component can include a top side and a bottom side. The top side of the adhesive component can be adhered to the bottom side of the overlay. The adhesive component can be configured to adhere the bottom side of the overlay to a screen of an electronic device in a single-use application of the overlay

by adhering the bottom side of the adhesive component to the screen of the electronic device. The overlay and the adhesive component can be configured such that, when the overlay is removed from being adhered to the screen of the electronic device after the single-use application of the overlay, at least a portion of the adhesive component can be detached from at least a portion of the overlay.

Additional embodiments include a machine. The machine can include a base including a first cradle. The first cradle can include a device slot being configured to securely hold a first electronic device. The machine also can include an alignment piece hingedly attached to the base at a hinge. The alignment piece can include an alignment base configured to engage with an alignment mechanism of an overlay applicator. The machine additionally can include a pulling piece movably attached to the base. The pulling piece can be configured to remove an adhesive release liner of the overlay applicator to expose an adhesive agent of an overlay of the overlay applicator when the alignment piece is rotated relative to the base around the hinge from a first alignment piece position to a second alignment piece position.

Additional embodiments include a method of providing a machine. The method can include providing a machine including a base including a first cradle. The first cradle can include a device slot being configured to securely hold a first electronic device. The method also can include providing an alignment piece hingedly attached to the base at a hinge. The alignment piece can include an alignment base configured to engage with an alignment mechanism of an overlay applicator. The method additionally can include providing a pulling piece movably attached to the base. The pulling piece can be configured to remove an adhesive release liner of the overlay applicator to expose an adhesive agent of an overlay of the overlay applicator when the alignment piece is rotated relative to the base around the hinge from a first alignment piece position to a second alignment piece position.

Various embodiments of an overlay applicator can be configured to facilitate application of an overlay on the screen of a device. In some embodiments, the overlay applicator can be configured to facilitate removing dust from the screen of the device immediately before application. In certain embodiments, the overlay applicator can facilitate keeping dust and fingerprints from coming into contact with adhesive on the overlay. In various embodiments, the overlay applicator can be configured to facilitate alignment of the overlay with the screen of the device during application.

A number of embodiments include a machine. The machine can include an adjustable cradle configured to hold, individually at different times, electronic devices having different dimensions. The machine also can include an alignment base configured to engage, individually at different times, with alignment mechanisms of overlay applicators. Each respective one of the overlay applicators can include a respective overlay configured to be applied to a respective surface of each of the electronic devices. The machine can be configured to facilitate applying, individually at different times, the respective overlays to the respective surfaces of the electronic devices.

Various embodiments include a method of providing a machine. The method can include providing an adjustable cradle configured to hold, individually at different times, electronic devices having different dimensions. The method also can include providing an alignment base configured to engage, individually at different times, with alignment mechanisms of overlay applicators. Each respective one of the overlay applicators can include a respective overlay

configured to be applied to a respective surface of each of the electronic devices. The machine can be configured to facilitate applying, individually at different times, the respective overlays to the respective surfaces of the electronic devices.

A number of embodiments include a machine. The machine can include an alignment base. The machine also can include an adjustable cradle including one or more adjustable side holders configured to center an electronic device held in the adjustable cradle with respect to the alignment base.

Various embodiments include a method of providing a machine. The method can include providing an alignment base. The method also can include providing an adjustable cradle including one or more adjustable side holders configured to center an electronic device held in the adjustable cradle with respect to the alignment base.

A number of embodiments include a machine. The machine can include an alignment base. The machine also can include an adjustable cradle including a first adjustable holder configured to (a) be pushed in a first direction toward a first side wall of the adjustable cradle by a first side of an electronic device upon insertion of the electronic device into the adjustable cradle and (b) hold the electronic device against a second side wall of the adjustable cradle opposite the first side wall when the electronic devices is held within the adjustable cradle.

Various embodiments include a method of providing a machine. The method can include providing an alignment base. The method also can include providing an adjustable cradle including a first adjustable holder configured to (a) be pushed in a first direction toward a first side wall of the adjustable cradle by a first side of an electronic device upon insertion of the electronic device into the adjustable cradle and (b) hold the electronic device against a second side wall of the adjustable cradle opposite the first side wall when the electronic devices is held within the adjustable cradle.

A number of embodiments include a machine. The machine can include an alignment base. The machine can include an adjustable cradle including springs configured to adjust an inward position of the adjustable cradle for a thickness of an electronic device held in the adjustable cradle.

Various embodiments include a method of providing a machine. The method can include providing an alignment base. The method also can include providing an adjustable cradle including springs configured to adjust an inward position of the adjustable cradle for a thickness of an electronic device held in the adjustable cradle.

A number of embodiments include a machine. The machine can include an adjustable cradle configured to hold, individually at different times, electronic devices having different dimensions. The machine also can include an alignment base configured to engage, individually at different times, with alignment mechanisms of overlay applicators, each respective one of the overlay applicators comprising a respective overlay configured to be applied to a respective surface of each of the electronic devices. The machine can be configured to facilitate applying, individually at different times, the respective overlays to the respective surfaces of the electronic devices. The adjustable cradle can include a second adjustable holder and a third adjustable holder opposite the second adjustable holder. The second adjustable holder and the third adjustable holder can be configured to adjust a respective position of each of the electronic devices held in the adjustable cradle with respect to the alignment base.

21

Various embodiments include a method of providing a machine. The method can include providing an adjustable cradle configured to hold, individually at different times, electronic devices having different dimensions. The method also can include providing an alignment base configured to engage, individually at different times, with alignment mechanisms of overlay applicators, each respective one of the overlay applicators comprising a respective overlay configured to be applied to a respective surface of each of the electronic devices. The machine can be configured to facilitate applying, individually at different times, the respective overlays to the respective surfaces of the electronic devices. The adjustable cradle can include a second adjustable holder and a third adjustable holder opposite the second adjustable holder. The second adjustable holder and the third adjustable holder can be configured to adjust a respective position of each of the electronic devices held in the adjustable cradle with respect to the alignment base.

A number of embodiments include a machine. The machine can include an adjustable cradle configured to hold, individually at different times, electronic devices having different dimensions. The machine also can include an alignment base configured to engage, individually at different times, with alignment mechanisms of overlay applicators, each respective one of the overlay applicators comprising a respective overlay configured to be applied to a respective surface of each of the electronic devices. The machine can be configured to facilitate applying, individually at different times, the respective overlays to the respective surfaces of the electronic devices. The adjustable cradle can include a fixed corner holder and an adjustable corner holder. The adjustable corner holder can be configured to hold each of the electronic devices between the adjustable corner holder and the fixed corner holder when each of the electronic devices is held within the adjustable cradle.

Various embodiments include a method of providing a machine. The method can include providing an adjustable cradle configured to hold, individually at different times, electronic devices having different dimensions. The method also can include providing an alignment base configured to engage, individually at different times, with alignment mechanisms of overlay applicators, each respective one of the overlay applicators comprising a respective overlay configured to be applied to a respective surface of each of the electronic devices. The machine can be configured to facilitate applying, individually at different times, the respective overlays to the respective surfaces of the electronic devices. The adjustable cradle can include a fixed corner holder and an adjustable corner holder. The adjustable corner holder can be configured to hold each of the electronic devices between the adjustable corner holder and the fixed corner holder when each of the electronic devices is held within the adjustable cradle.

Turning to the drawings, FIG. 1 illustrates an exploded view showing various elements of an overlay applicator 100. Overlay applicator 100 is merely exemplary and embodiments of the overlay applicator are not limited to embodiments presented herein. The overlay applicator can be employed in many different embodiments or examples not specifically depicted or described herein. In a number of embodiments, overlay applicator 100 can include an alignment tab 110, a protective film 120, an overlay 130, an adhesive release liner 140, and/or a pull tab 150. Overlay 130 can be a protective film for protecting the screen of an electronic device, such as a mobile phone, a tablet computer, or a smart phone, such as an iPhone, developed and sold by Apple, Inc., of Cupertino, California, among other devices.

22

Overlay 130 can be made of polyethylene terephthalate (PET) or another suitable material. Overlay 130 can have dimensions such that it partially or fully covers the screen of the electronic device. In some embodiments, overlay 130 can have one or more holes, slots, or apertures. For example, overlay 130 can include a speaker slot 133, which can allow sound from a speaker on the device to pass through overlay 130. Overlay 130 can include a button slot 134, which can allow a user to push a button on the face of the device without touching, stretching, or otherwise affecting overlay 130. Overlay 130 can include a top side 131 and a bottom side 132. In some embodiments, top side 131 can include a hard coating. In certain embodiments, top side 131 can include an optical coating. In many embodiments, bottom side 132 can include an adhesive agent to adhere overlay 130 to the screen of the device.

In a number of embodiments, protective film 120 can be attached to top side 131 of overlay 130. In many embodiments, protective film 120 can have dimensions substantially similar to the dimensions of overlay 130. Protective film 120 can have a first side 129 and a second side 128. Protective film 120 can provide protection for the hard coating or optical coating on overlay 130 during installation of overlay 130 on the device. In some embodiments, protective film 120 can be a thick flexible film and can have a thickness of approximately 0.1 to approximately 0.4 millimeters (mm), for example. In many embodiments, protective film 120 does not stretch or distort, which can advantageously facilitate alignment of overlay 130 on the device. In a number of embodiments, protective film 120 can be made of a suitable plastic or paper, or another suitable material. Protective film 120 can be configured such that it can be peeled away from top side 131 of overlay 130. In certain embodiments, protective film 120 can include one or more holes, slots, or apertures. For example, protective film 120 can include a speaker slot 123 and a button slot 124, which can be aligned with speaker slot 133 and button slot 134 when protective film 120 is attached to overlay 130.

In some embodiments, protective film 120 can include an adhesive region 121, which can be adhered to alignment tab 110 at an adhesive region 112. In many embodiments, protective film 120 can be removably attached to top side 131 of overlay 130. In certain embodiments, adhesive region 121 of protective film 120 can be adhered to adhesive region 112 of alignment tab 110 using an adhesive agent. In some embodiments, protective film 120 can be attached to alignment tab 110 using a suitable fastening mechanism, such as one or more rivets or hook and loop tape, as examples. When alignment tab 110 is attached to protective film 120, alignment tab 110 can extend beyond protective film 120, in some embodiments, such that a portion of alignment tab 110 is not adhered to or touching protective film 120. In some embodiments, alignment tab 110 can include an alignment mechanism 115 at the portion of alignment tab 110 that is not adhered to or touching protective film 120. Alignment mechanism 115 can facilitate aligning alignment tab 110, protective film 120, and overlay 130 with various features of the device during application of overlay 130. Alignment mechanism 115 can be one or more holes, slots, or other suitable alignment aid features. In some embodiments, alignment tab 110 does not stretch or distort, which can help facilitate accurate alignment of overlay 130 on the device. Alignment tab 110 can be made of plastic or cardboard, and can be thicker than protective film 120. In certain embodiments, protective film 120 and at least a portion of alignment tab 110 can be integral, or in other words, made of the same piece of material. In such embodiments, protective

film **120** can be made of a thicker material, such as alignment tab **110**, so as to provide sufficient structural support for alignment mechanism **115**.

In a number of embodiments, adhesive release liner **140** can be attached to bottom side **132** of overlay **130**. In many embodiments, adhesive release liner **140** can have dimensions substantially similar to the dimensions of overlay **130**. Adhesive release liner **140** can have a first side **149** and a second side **148**. By being attached to bottom side **132** of overlay **130**, adhesive release liner **140** can keep the adhesive agent on bottom side **132** covered and protected until the overlay **130** is ready to be adhered to the screen of the device. In many embodiments, a top side of adhesive release liner **140** can be removably attached to bottom side **132** of overlay **130**, and/or can be configured to protect the adhesive agent on bottom side **132** of overlay **130** from contaminants. In some embodiments, adhesive release liner **140** can be a thin flexible film and can have a thickness of approximately 0.1 mm to approximately 0.25 mm. In certain embodiments, adhesive release liner **140** can be made of a material that can stretch and/or distort. In certain other embodiments, adhesive release liner **140** can be made of a material that does not stretch or distort. In a number of embodiments, adhesive release liner **140** can be made of a suitable thin plastic film or paper, or another suitable material. Adhesive release liner **140** can be configured such that it can be peeled away from bottom side **132** of overlay **130**. In certain embodiments, adhesive release liner **140** can include one of more holes, slots, or apertures. For example, adhesive release liner **140** can include a speaker slot **143** and a button slot **144**, which can be aligned with speaker slot **133** and button slot **134** when adhesive release liner **140** is attached to overlay **130**.

In some embodiments, pull tab **150** can facilitate removal of adhesive release liner **140**. Pull tab **150** can include a first side **159** and a second side **158**. In some embodiments, adhesive release liner **140** can include an adhesive region **142** at second side **148**, which can be adhered to pull tab **150** at an adhesive region **151** at first side **159**. In certain embodiments, adhesive region **142** of adhesive release liner **140** can be adhered to adhesive region **151** of pull tab **150** using an adhesive agent. In other embodiments, adhesive release liner **140** can be attached to pull tab **150** using another suitable fastening mechanism, such as rivets or hook and loop tape. When pull tab **150** is attached to adhesive release liner **140**, alignment tab **110** can extend beyond adhesive release liner **140**, such that a portion of pull tab **150** is not adhered to or touching adhesive release liner **140**. In a number of embodiments, pull tab **150** can have a dimension such that a distance from first side **159** to second side **158** of pull tab **150** is longer than a dimension from first side **149** to second side **148** of adhesive release liner **140**. In many embodiments, when pull tab **150** is attached to adhesive release liner **140**, pull tab **150** can be folded back near first side **159** and can extend across the length of and beyond first side **149** of adhesive release liner **140**. In a number of embodiments, pull tab **150** can be folded across the bottom side of adhesive release liner **140** and pulled to remove adhesive release liner **140** from bottom side **132** of overlay **130** to expose the adhesive agent. Pull tab **150** can be made of a flexible plastic or paper, or another suitable material. In certain embodiments, adhesive release liner **140** and pull tab **150** can be integral. In such embodiments, adhesive release liner **140** can be made of a thicker material, pull tab **150**, so as to provide sufficient structural support for pulling on adhesive release liner **140**.

In some embodiments, pull tab **150** can include a pulling aid **156**. Pulling aid **156** can facilitate pulling pull tab **150**,

and can be or include one or more holes, slots, grooves, ridges, channels, etc. For example, pulling aid **156** can be two holes in which a user can place two fingers to assist in pulling pull tab **150** or in which an applicator machine can insert tabs to engage with pull tab **150**. Pulling aid **156** can also assist a user in differentiating the ends of pull tab **150** and in knowing which end to pull when installing overlay **130** on the device.

In many embodiments, overlay applicator **100** and/or pull tab **150** can include a wiper **157**. Wiper **157** can remove dust from the screen of the device and can facilitate application of overlay **130** to the screen of the device without dust between overlay **130** and the screen. In a number of embodiments, wiper **157** can be adhered to a top side of pull tab **150**. Wiper **157** can be made of microfiber cloth, soft silicone, an extruded rubber profile wiper blade, and/or other suitable materials. In various embodiments, wiper **157** can be a solid block, a row of fins, or of another suitable form for cleaning the screen of the device. In many embodiments, wiper **157** can be configured such that when pull tab **150** is pulled, wiper **157** can wipe across and clean the screen of the device, as described below in further detail. In a number of embodiments, the wiper can be configured to wipe across a length of the screen of the device. In some embodiments, the length of the screen of the device can be greater than a width of the screen of the device.

In many embodiments, overlay applicator **100** can be manufactured such that protective film **120**, overlay **130**, and adhesive release liner **140** are each attached and are coterminous with each other. For example, protective film **120**, overlay **130**, and adhesive release liner **140** can be attached and then cut, such that the sides and other features of protective film **120**, overlay **130**, and adhesive release liner **140** are aligned. Alignment tab **110** can then be adhered to protective film **120**, and pull tab **150** can be adhered to adhesive release liner **140**. In certain embodiments, as described above, protective film **120** and at least a portion of alignment tab **110** can be integral. For example, adhesive release liner **140** can be adhered to overlay **130** and overlay can be adhered to protective film **120**, and overlay **130** and adhesive release liner **140** can be cut to size without cutting protective film **120**.

Turning ahead in the drawings, FIG. 2 illustrates a system **200** for using overlay applicator **100** to apply overlay **130** to a device. System **200** is merely exemplary and embodiments of the system are not limited to embodiments presented herein. The system can be employed in many different embodiments or examples not specifically depicted or described herein. System **200** can include overlay applicator **100**, a frame **210**, and a device **220** (e.g., a smart phone). Frame **210** can include a hole **211** in which device **220** can be placed with the screen of device **220** facing upwards or away from frame **210**. In some embodiments, hole **211** is conformal with device **220**. In other embodiments, hole **211** can have dimensions large enough that it can fit around a several different electronic devices. Frame **210** can have a height substantially similar to the height of device **220**. In many embodiments, frame **210** can include an alignment base **212**, which can engage with alignment mechanism **115**. In some embodiments, alignment base **212** can be one or more protrusions that can fit inside the one or more slots of alignment mechanism **115**. Alignment base **212** and alignment mechanism **115** can be configured and positioned such that when alignment mechanism **115** is engaged with alignment base **212**, overlay **130** can be positioned directly above the screen of the device, and aligned such that overlay **130**

25

will be adhered in an accurate position on the screen when adhesive release liner 140 is removed.

In some embodiments, overlay applicator 100 can be used to apply overlay 130 to device 220 in frame 210. Pull tab 150 can be folded such that second side 158 of pull tab 150 is pulled under adhesive release liner 140 from second side 148 to first side 149, as shown in FIG. 2. Overlay applicator 100 can be placed on frame 210 such that alignment mechanism 115 engages with alignment base 212. Frame 210 can be placed over device 220 with the screen of device 220 facing up. In many embodiments, by placing frame 210 over device 200, wiper 157 can come in contact with the screen of device 220. While holding frame 210, a user can pull on pull tab 150, e.g., by using pulling aid 156, such that wiper 157 is pulled across the screen of device 220, which can remove dust or other particles from the screen of device 220. In a number of embodiments, as pull tab 150 is pulled, adhesive release liner 140 is removed from bottom side 132 (FIG. 1) of overlay 130, and overlay 130 adheres to the screen of device 220 in an accurately aligned position. After overlay 130 is adhered to the screen of device 220, the user can smooth overlay 130 on device 220 to remove any bubbles between overlay 130 and the screen of device 220. Protective film 120 can be removed from overlay 130. In some embodiments, protective film can be removed by lifting and/or pulling alignment tab 110. In many embodiments, protective film 120 is removed after smoothing out any bubbles, so that protective film 120 can prevent damage to overlay 130 from forceful pushing or rubbing involved in smoothing the bubbles. For example, optical coated overlays can be damaged by objects, such as credit cards, being used to smooth out bubbles. Device 220 can be removed from frame 210 with overlay 130 installed.

Turning ahead in the drawings, FIG. 3 illustrates a system 300 for using overlay applicator 100 to apply overlay 130 to a device. System 300 is merely exemplary and embodiments of the system are not limited to embodiments presented herein. The system can be employed in many different embodiments or examples not specifically depicted or described herein. System 300 can include overlay applicator 100, a cradle 310, and a device 320 (e.g., a smart phone). Cradle 310 can include a slot 311 in which device 320 can be placed with screen facing upwards or away from cradle 310. In some embodiments, slot 311 is conformal with device 320. In other embodiments, slot 311 can have dimensions large enough that several different electronic devices can fit within it. Slot 311 can have sides and a bottom, and cradle 310 can have a height greater than the height of device 320. In many embodiments, cradle 310 can include an alignment base 312, which can engage with alignment mechanism 115. In some embodiments, alignment base 312 can be one or more protrusions that can fit inside the one or more slots of alignment mechanism 115. Alignment base 312 and alignment mechanism 115 can be configured and positioned such that when alignment mechanism 115 is engaged with alignment base 312, overlay 130 can be positioned directly above the screen of the device, and aligned such that overlay 130 will be adhered in an accurate position on the screen when adhesive release liner 140 is removed.

In some embodiments, overlay applicator 100 can be used to apply overlay 130 to device 320 in cradle 310. Pull tab 150 can be folded such that second side 158 of pull tab 150 is pulled under adhesive release liner 140 from second side 148 to first side 149, as shown in FIG. 3. Device 320 can be placed in cradle 310, with the screen of device 320 facing up. Overlay applicator 100 can be placed on cradle 310 such

26

that alignment mechanism 115 engages with alignment base 312. In many embodiments, by placing overlay applicator 110 on cradle 210, wiper 157 can come in contact with the screen of device 320. While holding cradle 310, a user can pull on pull tab 150, e.g., by using pulling aid 156, such that wiper 157 is pulled across the screen of device 320, which can remove dust or other particles from the screen of device 320. In a number of embodiments, as pull tab 150 is pulled, adhesive release liner 140 is removed from bottom side 132 (FIG. 1) of overlay 130, and overlay 130 adheres to the screen of device 320 in an accurately aligned position. After overlay 130 is adhered to the screen of device 320, the user can smooth overlay 130 on device 320 to remove any bubbles between overlay 130 and the screen of device 320. Protective film 120 can be removed from overlay 130. In some embodiments, protective film 120 can be removed by lifting and/or pulling alignment tab 110. In many embodiments, protective film 120 is removed after smoothing out any bubbles, so that protective film 120 can prevent damage to overlay 130 from forceful pushing or rubbing involved in smoothing the bubbles, as explained above. Device 320 can be removed from cradle 310 with overlay 130 installed.

In yet other embodiments, overlay applicator 100 can be used with a machine, such as the machine shown in FIGS. 8-14 and 16-20, and described below, which can semi-automatically align overlay applicator 100 with a device and engage with pull tab 150 and/or alignment tab 110 to install overlay 130 on the device.

Advantageously, overlay applicator 100 can be used to install overlay 130 without dust or particles between overlay 130 and the screen of the device. Frame 210 (FIG. 2) or frame 310 (FIG. 3) can be used with overlay applicator 100 to accurately position overlay 130 relative to features of the device. Advantageously, by wiping the screen of the device immediately before applying overlay 130, overlay applicator 100 can clean any dust or particles on the screen. Beneficially, by removing adhesive release liner 140 immediately before applying overlay 130 minimizes exposure of the adhesive agent on bottom side 132, which can prevent dust or other particles from coming in contact with the adhesive agent. As another advantage, by using pull tab 150 to remove adhesive release liner 140 and/or by holding overlay 130 in position by using alignment tab 110, a user does not need to hold the sides of overlay 130, which can prevent the user from inadvertent contact with the adhesive agent on bottom side 132 of overlay 130.

Turning ahead in the drawings, FIG. 4 illustrates an isometric view of an overlay applicator 400. FIG. 5 illustrates a side view of overlay applicator 400. Overlay applicator 400 is merely exemplary and embodiments of the overlay applicator are not limited to embodiments presented herein. The overlay applicator can be employed in many different embodiments or examples not specifically depicted or described herein. Overlay applicator 400 can be similar to overlay applicator 100 (FIG. 1), and various components and/or constructions of overlay applicator 400 can be substantially identical or similar to various components of overlay applicator 100 (FIG. 1). Overlay applicator 400 can include a protective film 420, an overlay 430, an adhesive release liner 440, and/or a pull tab 450. Protective film 420 can be similar to protective film 120 (FIG. 1), overlay 430 can be similar to overlay 130 (FIG. 1), adhesive release liner 440 can be similar to adhesive release liner 140 (FIG. 1), and/or pull tab 450 can be similar to pull tab 150 (FIG. 1).

In some embodiments, overlay applicator can include a speaker slot 423 and/or a button slot 424. Speaker slot 423 and/or button slot 424 can extend through protective film

420, overlay 430, and adhesive release liner 440. In a number of embodiments, overlay applicator 400 can include a device portion 470 and an alignment tab 410. Alignment tab 410 can be similar to alignment tab 110 (FIG. 1). In some embodiments, device portion 470 and alignment tab 410 can be made of the layers used for protective film 420, overlay 430, and adhesive release liner 440. Alignment tab 410 can include alignment mechanism 415. Alignment mechanism 415 can be one or more holes, slots, or other suitable alignment aid features, which can facilitate aligning alignment tab 410, protective film 420, overlay 430, and adhesive release liner 440 with various features of the device during application of overlay 430.

In many embodiments, construction of overlay applicator 400 can include adhering and/or attaching layers of material for protective film 420, overlay 430, and adhesive release liner 440. After attaching the layers, protective film 420, overlay 430, and adhesive release liner 440 can be cut to predetermined dimensions of device portion 470 and alignment tab 410. In some embodiments, the cutting of device portion 470 and alignment tab 410 to size can include cutting speaker slot 423, button slot 424, and/or alignment mechanism 415. As a result of the cut, device portion 470 and alignment tab 410 can be adjoined and integral on all three layers of protective film 420, overlay 430, and adhesive release liner 440, and can extend from first side 429 to second side 428. Construction of overlay applicator 400 also can include a die cut between alignment tab 410 and device portion 470 to create an interface slit 460. The die cut can be a kiss cut through adhesive release liner 440 and overlay 430, but not protective film 420. In a number of embodiments, alignment tab 410 can include a top layer that is integral with the protective film, a middle layer attached to the top layer, and/or a bottom layer attached to the middle layer. In some embodiments, overlay applicator 400 can include a cut between the middle layer of alignment tab 410 and overlay 530, and a cut between the bottom layer of alignment tab 410 and adhesive release liner 440. As a result of the kiss cut, the dimensions of device portion 470 at overlay 430 and adhesive release liner 440 can be equal to the dimensions of the screen of the device. The process of cutting the layers (protective film 420, overlay 430, and adhesive release liner 440) to size, cutting alignment mechanism 415, and other feature slots (e.g., speaker slot 423 and button slot 424), and kiss cutting to create interface slit 460 can advantageously provide a simpler method of constructing overlay applicator 400, and/or can provide overlay applicator 400 with a very accurate alignment of alignment mechanism 415 with respect to overlay 430 and its features.

In a number of embodiments, after kiss cutting alignment tab 410 and device portion 470 to size, pull tab 450 can be attached to adhesive release liner 440. Pull tab 450 can be substantially similar or identical to pull tab 150 (FIG. 1), and various components or constructions of pull tab 450 can be the same as various components of pull tab 150 (FIG. 1). Pull tab 450 can facilitate removal of adhesive release liner 440. Construction of overlay applicator 400 can include adhering pull tab 450 to adhesive release liner 440. Pull tab can include a first side 459 and a second side 458. Pull tab 450 can include an adhesive region 451 at or near first side 459. Adhesive release liner 440 can include an adhesive region 442 at device portion 470 next to interface slit 460. Adhesive region 451 can be adhered to adhesive region 442 to attach pull tab 450 to adhesive release liner 440. Pull tab 450 can include a wiper 457, which can remove dust from the screen of the device, and can be similar to wiper 157 (FIG. 1). Pull tab 450 can include a pulling aid 156 at or near

second side 458, which can assist a user and/or an applicator machine in engaging with and pulling pull tab 450, as describe above in connection with pull tab 150 (FIG. 1). After pull tab 450 is attached to adhesive release liner 440, a user and/or machine can pull on pull tab 450 to peel back and remove adhesive release liner 440 starting at interface slit 460 and peeling back to first side 429.

Turning ahead in the drawings, FIG. 6 illustrates an isometric view of an overlay applicator 600. Overlay applicator 600 is merely exemplary and embodiments of the overlay applicator are not limited to embodiments presented herein. The overlay applicator can be employed in many different embodiments or examples not specifically depicted or described herein. Overlay applicator 600 can be similar to overlay applicator 100 (FIG. 1) and/or overlay applicator 400 (FIGS. 4-5), and various components and/or constructions of overlay applicator 600 can be substantially identical or similar to various components of overlay applicator 100 (FIG. 1) and/or overlay applicator 400 (FIGS. 4-5). Overlay applicator 600 can include a protective film 620, an overlay 630, an adhesive release liner 640, and/or a pull tab 650. Protective film 620 can be similar to protective film 120 (FIG. 1) and/or protective film 420 (FIGS. 4-5), overlay 630 can be similar to overlay 130 (FIG. 1) and/or overlay 430 (FIGS. 4-5), adhesive release liner 640 can be similar to adhesive release liner 140 (FIG. 1) and/or adhesive release liner 440 (FIGS. 4-5), and/or pull tab 650 can be similar to pull tab 150 (FIG. 1) and/or pull tab 450 (FIGS. 4-5).

In a number of embodiments, overlay applicator 600 can include a device portion 670 and an alignment tab 610. Alignment tab 610 can be similar to alignment tab 110 (FIG. 1) and/or alignment tab 410 (FIG. 4). Device portion 670 can be similar to device portion 470 (FIGS. 4-5). In some embodiments, device portion 670 and alignment tab 610 can be made of the layers used for protective film 620, overlay 630, and adhesive release liner 640. Alignment tab 610 can include an alignment mechanism 615, which can be similar to alignment mechanism 115 (FIG. 1) and/or alignment mechanism 415 (FIGS. 4-5), and which can facilitate aligning alignment tab 610, protective film 620, overlay 630, and adhesive release liner 640 with various features of the device during application of overlay 630. Pull tab 650 can be integral with release liner 640 and can be a single layer of material, such as plastic, paper, or another suitable liner film. Pull tab 450 can facilitate removal of adhesive release liner 440.

In many embodiments, construction of overlay applicator 600 can include adhering and/or attaching layers of material for protective film 620, overlay 630, and adhesive release liner 640. After attaching the layers, protective film 620 and overlay 630 can be kiss cut to predetermined dimensions of device portion 670 and alignment tab 610, without cutting adhesive release liner 640 and/or pull tab 650. Excess material from the layers for protective film 620 and overlay 630 can be removed. In some embodiments, the kiss cutting of device portion 670 and alignment tab 610 to size at the layers of protective film 620 and overlay 630 can include cutting a speaker slot 623, a button slot 624, and/or alignment mechanism 615. The kiss cutting can also include cutting an interface slit 660 between alignment tab 610 and device portion 670 through the layers of protective film 620 and overlay 630, but not adhesive release liner 640. As a result of the kiss cut, the dimensions of device portion 670 at overlay 630 and protective film 620 can be equal to the dimensions of the screen of the device. In many embodiments, alignment tab 610 can include a top layer and a bottom layer attached to the top layer, and overlay applicator

600 can include a cut between the top layer of alignment tab 610 and protective film 620, and a cut between the bottom layer of the alignment tab and overlay 630.

In a number of embodiments, after kiss cutting alignment tab 610 and device portion 670 to size at the layers of protective film 620 and overlay 630, and cutting interface slit 660, construction of overlay applicator 600 can include adhering a joining sticker 680 on the top the layer of protective film 620 to span interface slit 660 and join device portion 670 of protective film 620 with the top layer of alignment tab 610. Joining sticker 680 can help maintain alignment between alignment tab 610 and device portion 670. In many embodiments, joining sticker 680 does not stretch or distort, which can advantageously facilitate alignment of alignment mechanism 615 with overlay 630, such that overlay 630 can be accurately positioned on the screen of the device.

In a number of embodiments, after kiss cutting alignment tab 610 and device portion 670 to size, a wiper 657 can be attached to pull tab 650. Wiper 657 can remove dust from the screen of the device, and can be similar to wiper 157 (FIG. 1) and/or wiper 457 (FIGS. 4-5). In certain embodiments, after joining sticker 680 has been attached between alignment tab 610 and device portion 670, pull tab 650 can be folded back, such that a second side 658 is folded beneath release liner 640 to a first side 659. Pull tab 650 and release liner 640 can be peeled back off of a portion of alignment tab 610, such that alignment mechanism 615 is uncovered by release liner 640, allowing alignment mechanism to engage with an alignment base, such as alignment base 212 (FIG. 2) or alignment base 312 (FIG. 3). The process of kiss cutting the layers at protective film 620 and overlay 630 can advantageously provide a simpler method of constructing overlay applicator 600, and/or can provide overlay applicator 600 with a very accurate alignment of alignment mechanism 615 with respect to overlay 630 and its features.

Turning ahead in the drawings, FIG. 7 illustrates an exploded isometric view of an overlay applicator 700. Overlay applicator 700 is merely exemplary and embodiments of the overlay applicator are not limited to embodiments presented herein. The overlay applicator can be employed in many different embodiments or examples not specifically depicted or described herein. Overlay applicator 700 can be similar to overlay applicator 100 (FIG. 1), overlay applicator 400 (FIGS. 4-5), and/or overlay applicator 600 (FIG. 6), and various components and/or constructions of overlay applicator 700 can be substantially identical or similar to various components of overlay applicator 100 (FIG. 1), overlay applicator 400 (FIGS. 4-5), and/or overlay applicator 600 (FIG. 6). Overlay applicator 700 can include a protective film 720, an overlay 730, an adhesive release liner 740, and/or a pull tab 750. Protective film 720 can be similar to protective film 120 (FIG. 1), protective film 420 (FIGS. 4-5), and/or protective film 620 (FIG. 6); overlay 730 can be similar to overlay 130 (FIG. 1), overlay 430 (FIGS. 4-5), and/or overlay 630 (FIG. 6); adhesive release liner 740 can be similar to adhesive release liner 140 (FIG. 1), adhesive release liner 440 (FIGS. 4-5), and/or adhesive release liner 640 (FIG. 6); and/or pull tab 750 can be similar to pull tab 150 (FIG. 1), pull tab 450 (FIGS. 4-5), and/or pull tab 650 (FIG. 6).

In many embodiments, protective film 720 can include an alignment frame 710 extending around each side of overlay 730. Alignment frame 710 can be similar to alignment tab 110 (FIGS. 1-3), alignment tab 410 (FIGS. 4-5), and/or alignment tab 610 (FIG. 6). In many embodiments, alignment frame 710 can be integral with protective film 720.

Alignment frame 710 can include an alignment mechanism 715. In some embodiments, alignment mechanism 715 can include multiple holes surrounding overlay 730. For example, as shown in FIG. 7, alignment mechanism 715 can include six holes spaced relatively evenly around alignment frame 710, surrounding overlay 730. In other embodiments, alignment mechanism 715 can include more or fewer holes than six. Alignment mechanism 715 can engage with an alignment base (e.g., similar to alignment base 212 (FIG. 2), and/or alignment base 312 (FIG. 3)). For example, overlay 700 can be used on a cradle, similar to cradle 310, which has alignment base pins configured to engage with alignment mechanism 715. Alignment frame 710 can provide alignment at multiple points around the overlay and the device, which can advantageously provide accurate alignment and help reduce distortion.

In some embodiments, construction of overlay applicator 700 can include adhering and/or attaching layers of material for protective film 720 and overlay 730. After attaching the layers of material for protective film 720 and overlay 730, constructing overlay applicator 700 can include cutting the layers for protective film 720 and overlay 730 to the appropriate dimensions of protective film 720. Such cutting can include cutting a button hole 724 and/or a speaker hole 723. Construction of overlay applicator 700 also can include kiss cutting through the layer of material for overlay 730 to cut overlay 730 to its appropriate dimension, i.e., to the size of the screen of the device. In many embodiments, the kiss cut through the layer of material for overlay 730 does not extend into protective film 720.

In a number of embodiments, after kiss cutting overlay 730, overlay 700 can be constructed by adhering adhesive release liner 740 and pull tab 750 to overlay 730. Pull tab 750 can be integral with release liner 740 and can be a single layer of material, such as plastic, paper, or another suitable liner film. Pull tab 750 can facilitate removal of adhesive release liner 740. Pull tab 750 can include a pulling aid 756, which can be a tab that allows a user and/or machine to pull on pull tab 750 and peel back adhesive release liner 740 from overlay 730. Pull tab 750 also can include a wiper 757. Wiper 757 can remove dust from the screen of the device, and can be similar to wiper 157 (FIG. 1), wiper 457 (FIGS. 4-5), and/or wiper 657 (FIG. 6).

Turning ahead in the drawings, FIG. 8 illustrates an isometric view of a machine 800 for using an overlay applicator to apply an overlay to a device. FIG. 9 illustrates a top view of machine 800. FIG. 10 illustrates an isometric view of machine 800, with a handle assembly not extended, and showing an outline of overlay applicator 100. FIG. 11 illustrates an isometric view of machine 800 with the handle assembly partially extended. FIG. 12 illustrates a top view of machine 800 with the handle assembly partially extended. FIG. 13 illustrates an isometric view of machine 800 with the handle assembly fully extended. FIG. 14 illustrates a top view of machine 800 with the handle assembly fully extended. Machine 800 is merely exemplary and embodiments of the machine are not limited to embodiments presented herein. The machine can be employed in many different embodiments or examples not specifically depicted or described herein. Machine 800 can be used with overlay applicator 100 to apply overlay 130 (not shown) to the device. Machine 800 also can be used with other overlay applicators (e.g., overlay applicator 400 (FIGS. 4-5), or overlay applicator 600 (FIG. 6)). In many embodiments, machine 800 can include a base 810, a carriage 830, and a handle assembly 850. In some embodiments, base 810 can extend from a first side 819 to a second side 818. Base 810

31

can include a gear **911** (FIGS. **9** and **12-14**), a carriage rail **913** (FIGS. **9** and **11-14**), and a handle rail **915** (FIGS. **9** and **12-14**). Carriage rail **913** and handle rail **915** can extend partially or fully across base **810** in the direction from first side **819** to second side **818**.

In certain embodiments, handle assembly **850** can include a handle sliding mechanism **851**, which can engage with handle rail **915** to attach handle assembly **850** to base **810** and to allow handle assembly **850** to slide back and forth along base **810** along the direction of handle rail **915**. In several embodiments, handle assembly **850** can include a handle extender **852** and a handle base **854**. In some embodiments, handle extender **852** can extend parallel to handle rail **915** and handle base **854** can be substantially perpendicular to handle extender **852**. Handle extender **852** can include handle gear teeth **853**, which can engage with gear **911** of base **810**. Handle base **854** can include a handle **855**, which a user can use to pull handle assembly **850** and extend handle assembly **850** with respect to base **810**. In several embodiments, handle base **854** can include a pulling mechanism **856**. In certain embodiments, pulling mechanism **856** can be one or more knobs or pins, which can engage with pulling aid **156** of pull tab **150** on overlay applicator **100**, as shown in FIG. **9**.

In some embodiments, carriage **830** can include a carriage sliding mechanism (not shown), which can engage with carriage rail **913** to attach carriage **830** to base **810** and to allow carriage **830** to slide back and forth along base **810** along the direction of carriage rail **913**. In many embodiments, carriage **830** can include carriage gear teeth **1139** (FIGS. **11-14**), which can engage with gear **911** of base **810**. In a number of embodiments, carriage **830** can include one or more carriage slots **831** and/or a cradle **832**. In some embodiments, cradle **832** can include one or more cradle tabs **833** that can engage in carriage slots **831** to hold cradle **832** in position. In some embodiments, carriage **830** can be used with multiple different sizes of cradles, which can be used for different devices. Carriage slots **831** and cradle tabs **833** can advantageously allow carriage **830** to removably hold cradle **832**, which can allow machine **800** to be used to apply overlays to multiple different types of devices. For example, carriage **830** can be configured to hold one or more additional cradles that are different than cradle **832**. The one or more additional cradles can be configured to securely hold one or more devices having one or more different dimensions than the device that fits in cradle **832**. In some embodiments, cradle **832** can be integral with carriage **830**. Cradle **832** can include a recess **834** in which a device can be placed with screen facing upwards or away from cradle **832**. Recess **834** can have sides and a bottom, and cradle **832** can have a height greater than the height of the device. In many embodiments, recess **834** is conformal with the device.

In some embodiments, cradle **832** can include an alignment base **835**, which can engage with alignment mechanism **115**, as shown in FIG. **10**. In the same or other embodiments, carriage **830** can include alignment base **835**. In some embodiments, alignment base **835** can be one or more protrusions that can fit inside the one or more slots of alignment mechanism **115**. Alignment base can be configured to engage with alignment mechanism **115**. Alignment base **835** and alignment mechanism **115** can be configured and positioned such that when alignment mechanism **115** is engaged with alignment base **835**, overlay **130** (FIG. **1**) can be positioned directly above the screen of the device, and

32

aligned such that overlay **130** (FIG. **1**) will be adhered in an accurate position on the screen when adhesive release liner **140** (FIG. **1**) is removed.

In many embodiments, cradle **832** can include an overlay cover **836**. In some embodiments, overlay cover **836** can partially cover overlay applicator **100** and can hold overlay applicator **100** to cradle **832**. As shown in FIGS. **8-9**, overlay cover **836** can cover alignment mechanism **115** and hold overlay applicator **100** to alignment base **835** when alignment mechanism **115** is engaged with alignment base **835**. In various embodiments, overlay cover **836** can be removably attached to carriage **830** and/or cradle **832**. In other embodiments, overlay cover **836** can be hingedly attached to carriage **830** and/or cradle **832**. In some embodiments, overlay cover **836** can snap onto cradle **832** and/or alignment base **835**. In other embodiments, overlay cover **836** can be attached to cradle **832** through a spring hinge, which can allow overlay cover **836** to be removably placed over overlay applicator **100** and to hold overlay applicator **100** close to cradle **832**, and/or to retain alignment mechanism **115** on alignment base **835**. In some embodiments, overlay cover **836** can have a trapezoidal shape or curved shape, so as to allow one or more rollers (described below) to roll over overlay cover **836**.

In many embodiments, the device can be placed in cradle **832**, with the screen of the device facing up. Overlay applicator **100** can be placed on cradle **832**, as described above, and as shown in FIG. **9**, such that alignment mechanism **115** engages with alignment base **835**. Overlay cover **836** can be placed over overlay applicator **100**.

In many embodiments, when handle assembly **850** is not extended, as shown in FIGS. **8-10**, carriage **830** can be located at a first side **819** of base **810**. As a user pulls handle assembly **855** and extends handle assembly **855** with respect to base **810**, as shown in FIGS. **11-14**, handle gear teeth **853** move toward first side **819**, which can result in gear **911** rotating clockwise, and can further result in carriage gear teeth **1139** and carriage **830** moving toward second side **818**. As handle assembly **850** moves away from carriage **830**, pulling mechanism **856** can pull on pull tab **150**, which can pull wiper **157** across the screen of the device and remove dust or other particles from the screen of the device, and which can peel away adhesive release liner **140** (FIG. **1**) to expose the adhesive agent on bottom side **132** (FIG. **1**) to the screen of the device. In many embodiments, handle assembly **850** can be pulled in a direction from second side **818** to first side **819**. For example, handle assembly **850** can be pulled from a first handle position, such as shown in FIGS. **8-10**, to a second handle position, such as shown in FIGS. **13-14**. In several embodiments, when handle assembly **850** is moved from the first handle position, such as shown in FIGS. **8-10**, to the second handle position, such as shown in FIGS. **13-14**, carriage **830** can move in a second direction from first side **819** to second side **818**, which is opposite from the first direction of movement by handle assembly **850**. For example, carriage **830** can move from a first carriage position, such as shown in FIGS. **8-10**, to a second carriage position, such as shown in FIGS. **13-14**. In a number of embodiments, machine **800** can be configured such that when alignment base **835** is engaged with alignment mechanism **115**, pulling mechanism **856** is engaged with pull tab **150**, cradle **832** is holding the device, and handle assembly **850** is pulled in the first direction from the first handle position to the second handle position, adhesive release liner **140** (FIG. **1**) of overlay applicator **100** can be removed from overlay **130** (FIG. **1**) starting at a leading edge of overlay **130** (FIG. **1**) (e.g., proximate to alignment

mechanism 115) and continuing to a trailing edge of overlay 130 (FIG. 1) to expose the adhesive agent of overlay 130 (FIG. 1) to the screen of the device.

In a number of embodiments, base 810 can include a roller assembly 820. In some embodiments, roller assembly 820 can include roller assembly supports 823, a first roller assembly 821, and/or a second roller assembly 822. Roller assembly supports 823 can be attached to base 810 and extend upward or away from base 810 to provide support for first roller assembly 821 and/or second roller assembly 822. Roller assembly supports 823 can be configured such that carriage 830 can slide back and forth between roller assembly supports 823 and under first roller assembly 821 and/or second roller assembly 822. First roller assembly 821 can be attached to roller assembly supports 823 at axle 824. First roller assembly 821 can include a first roller axle 925 (FIGS. 9 and 12), which can have a first roller surface (not shown) with a width at least equal to the width of the device. In some embodiments, axle 824 can be spring-loaded to provide downward pressure for first roller axle 925 as it rolls over overlay applicator 100.

Second roller assembly 822 can be attached to first roller assembly 821 at axle 826. Second roller assembly 822 can include a second roller axle 827, which can have a second roller surface 828. The width of second roller surface 828 can be less than the width of the device. In some embodiments, axle 826 can be spring-loaded to provide downward pressure for second roller axle 827 as it rolls over overlay applicator 100. The width of second roller surface 828 can be less than the width of the first roller surface (not shown). In many embodiments, roller assembly 820 can include one or more rollers, such as first roller axle 925 and/or second roller axle 827. In some embodiments, the width of the second roller surface 828 can be half the width of the device, and second roller surface 828 can be centered over the device as carriage 830 moves through roller assembly 820 from first side 819 to second side 818. As carriage 830 moves from first side 819 to second side 818, and as release liner 140 (FIG. 1) is removed, second roller surface 828 can roll along the middle of the top surface of protective film 120 (FIG. 1) to adhere overlay 130 (FIG. 1) to the screen of the device. Second roller surface 828 can roll along over the top surface of protective film 120 before first roller surface (not shown) rolls over the top surface of protective film 120 (FIG. 1) when carriage 830 moves from a first carriage position, such as shown in FIGS. 8-10, to a second carriage position, such as shown in FIGS. 13-14. In some embodiments, when carriage 830 moves from the first carriage position to the second carriage position, the first roller surface (not shown) and second roller surface 828 can roll over and press downward on overlay applicator 100 to adhere the exposed adhesive agent of overlay 130 (FIG. 1) to the screen of the device. In various embodiments, when carriage 830 moves from the first carriage position to the second carriage position, one or more of the rollers, such as the first roller surface (not shown) and/or second roller surface 828 can roll fully over a length of the screen of the device. By rolling over protective film 120 (FIG. 1) with second roller surface 828 before rolling over protective film 120 (FIG. 1) (having the wider first roller surface (not shown)), roller assembly 820 can advantageously apply overlay 130 (FIG. 1) to the screen of the device with fewer air bubbles, as air bubbles in the middle can be initially pushed outward by second roller surface 828.

In many embodiments, as a user pulls handle 855 and pull tab 150 is pulled, adhesive release liner 140 (FIG. 1) is peeled back from bottom side 132 (FIG. 1) of overlay 130

(FIG. 1) at the same rate as cradle 832 rolls through roller assembly 820, which can advantageously adhere overlay 130 (FIG. 1) to the screen of the device very shortly after it is exposed from the peeling of adhesive release liner 140 (FIG. 1), which can keep dust from adhering to overlay 130 (FIG. 1). In many embodiments, carriage 830 can move away from handle 855 at twice the rate that carriage 830 moves through roller assembly 820, which can advantageously allow pull tab 150 and adhesive release liner 140 (FIG. 1) to be fully peeled from off of overlay 130 (FIG. 1).

After overlay 130 (FIG. 1) is adhered to the screen of the device, the user can smooth overlay 130 (FIG. 1) on the device to remove bubbles, if there are any, between overlay 130 (FIG. 1) and the screen of the device. Protective film 120 (FIG. 1) can be removed from overlay 130 (FIG. 1). In some embodiments, protective film 120 (FIG. 1) can be removed by lifting and/or pulling alignment tab 110. In many embodiments, protective film 120 (FIG. 1) is removed after smoothing out any bubbles, so that protective film 120 (FIG. 1) can prevent damage to overlay 130 (FIG. 1) from forceful pushing or rubbing involved in smoothing the bubbles, as explained above. The device can be removed from cradle 832 with overlay 130 (FIG. 1) installed.

In some embodiments, overlay cover 836 can have a dimension such that it can fully cover protective cover 120 (FIG. 1). Overlay cover 836 can hold overlay applicator 100 close and/or securely to alignment base 835 and/or the device, such that, as handle 855 is extended, as pulling mechanism 856 pulls pulling aid 156, and as wiper 157 is pulled across the device, wiper 157 is held close to the device to remove any dust or other particles from the device. In some embodiments, overlay cover 836 can be a slightly flexible material that is rigid enough to hold overlay applicator 100 close to the device, but is flexible enough to allow second roller surface 828 and/or first roller surface (not shown) to provide local downward pressure through overlay cover 836 to adhere overlay 130 (FIG. 1) to the device and facilitate removing any air bubbles. For example, overlay cover 836 can be a clear plastic material having a thickness of approximately 1 mm to approximately 2 mm. Clear plastic can advantageously allow the user to see through overlay cover 836 to ensure alignment and proper operation of machine 800.

In other embodiments, machine 800 does not include roller assembly 820, overlay cover 836 can have a dimension such that it can fully cover protective cover 120 (FIG. 1). Overlay cover 836 can be rigid, and can be hinged to cradle 832 and/or carriage 830. Overlay cover 836 can include a snap or other attachment mechanism on the side opposite the hinge, which can hold overlay cover 836 at a predetermined distance from the device screen and facilitate wiping of the device screen by wiper 157. In another embodiment, the hinge connecting overlay cover 836 to cradle 832 and/or carriage 830 can be spring-loaded to hold overlay cover 836 close to overlay applicator 100.

Turning ahead in the drawings, FIG. 15 illustrates an exploded isometric view of an overlay applicator 1500. Overlay applicator 1500 is merely exemplary and embodiments of the overlay applicator are not limited to embodiments presented herein. The overlay applicator can be employed in many different embodiments or examples not specifically depicted or described herein. Overlay applicator 1500 can be similar to overlay applicator 100 (FIG. 1), overlay applicator 400 (FIGS. 4-5), overlay applicator 600 (FIG. 6), and/or overlay applicator 700 (FIG. 7), and various components and/or constructions of overlay applicator 1500 can be substantially identical or similar to various compo-

nents of overlay applicator **100** (FIG. 1), overlay applicator **400** (FIGS. 4-5), overlay applicator **600** (FIG. 6), and/or overlay applicator **700** (FIG. 7). Overlay applicator **1500** can include a protective film **1520**, an overlay **1530**, an adhesive release liner **1540**, and/or a pull tab **1550**. Protective film **1520** can be similar to protective film **120** (FIG. 1), protective film **420** (FIGS. 4-5), protective film **620** (FIG. 6), and/or protective film **720** (FIG. 7); overlay **1530** can be similar to overlay **130** (FIG. 1), overlay **430** (FIGS. 4-5), overlay **630** (FIG. 6), and/or overlay **730** (FIG. 7); adhesive release liner **1540** can be similar to adhesive release liner **140** (FIG. 1), adhesive release liner **440** (FIGS. 4-5), adhesive release liner **640** (FIG. 6), and/or adhesive release liner **740** (FIG. 7); and/or pull tab **1550** can be similar to pull tab **150** (FIG. 1), pull tab **450** (FIGS. 4-5), pull tab **650** (FIG. 6), and/or pull tab **750** (FIG. 7). In some embodiments, protective film **1520**, overlay **1530**, and adhesive release liner **1540** can be attached to each other, and pull tab **1550** can be adhered to adhesive release liner **1540**, similarly as shown above in FIG. 1, described above.

In many embodiments, protective film **1520** can include an alignment flaps **1510** extending at each corner of overlay **1530**. Alignment flaps **1510** can be similar to alignment tab **110** (FIGS. 1-3), alignment tab **410** (FIGS. 4-5), alignment tab **610** (FIG. 6), and/or alignment frame **710** (FIG. 7). In a number of embodiments, alignment flaps **1510** can be integral with protective film **1520**. Alignment flaps **1510** can include an alignment mechanism **1515**. In some embodiments, alignment mechanism **1515** can include multiple holes surrounding overlay **1530**. For example, as shown in FIG. 15, alignment mechanism **1515** can include a hole at each of alignment flaps **1510**, at each corner surrounding overlay **1530**. Alignment flaps **1510** can provide alignment at multiple points around overlay **1530**, which can advantageously provide accurate alignment and help reduce distortion. In some embodiments, pull tab **1550** can include pulling aid **1556**, which can be similar to pulling aid **156** (FIG. 1) and/or pulling aid **456** (FIGS. 4-5).

Turning ahead in the drawings, FIG. 16 illustrates an isometric view of an machine **1600** in a first configuration. FIG. 17 illustrates a top view of machine **1600** in a second configuration. FIG. 18 illustrates a side view of machine **1600** in a second configuration. FIG. 19 illustrates a side view of machine **1600** in a third configuration. Machine **1600** is merely exemplary and embodiments of the machine are not limited to embodiments presented herein. The machine can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiment, machine **1600** can include a base **1610**, a cradle **1620**, a first frame **1630**, and/or a second frame **1640**. In some embodiments first frame **1630** can be an alignment piece hinged attached to base **1610**. In a number of embodiments, second frame **1640** can be a pulling piece hinged attached to base **1610**. Cradle **1620** can include a slot **1621** in which a device **1650** (e.g., a smart phone) can be placed with the screen facing upwards or away from cradle **1620**. Cradle **1620** can also include recesses **1622** surrounding slot **1621** to allow a user to remove the device from cradle **1620**. In some embodiments, slot **1621** is conformal with device **1650**. In some embodiments, cradle **1620** can be integral with base **1610**. In other embodiments, cradle **1620** can be removable from base **1610**. For example, base **1610** can be configured to hold one or more additional cradles that are different than cradle **1620**. The one or more additional cradles can be configured to securely hold one or more devices having one or more different dimensions than the device that fits in cradle **1620**.

In several embodiments, first frame **1630** can be attached to base **1610** at first hinge **1631**, and can rotate around first hinge **1631**. For example, first frame **1630** can be rotated relative to base **1610** in a first direction from a first position, such as shown in FIGS. 16-18, to a second position proximate to cradle **1620**, such as shown in FIG. 19. In many embodiments, second frame **1640** can be attached to base **1610** at second hinge **1641**, and can rotate around second hinge **1641**. For example, second frame **1640** can be rotated relative to base **1610** in the first direction from a first position proximate to cradle **1620**, such as shown in FIGS. 17-18, to a second position, such as shown in FIG. 16. First frame **1630** can include an alignment base **1632**, which can engage with alignment mechanism **1515** to secure overlay applicator **1500** to first frame **1630**. In certain embodiments, when machine **1600** is in a first configuration with cradle **1620** uncovered, as shown in FIG. 16, device **1650** can be placed in slot **1621**, and overlay applicator **1500** can be attached to first frame **1630**, with overlay applicator **1500** oriented with protective film **1520** facing first frame **1630** and adhesive release liner **1540** facing upward or away from first frame **1630**. In some embodiments, first frame **1630** can include an aperture or window **1633**, and/or second frame **1640** can include an aperture or window **1643**. Aperture or window **1633** and/or aperture or window **1643** can allow a user to reach through and/or see through first frame **1630** and second frame **1640**.

When machine **1600** is in a second position with second frame **1640** covering cradle **1620**, as shown in FIGS. 17-18, pull tab **1550** can be attached to second frame **1640** at the same time as overlay applicator **1500** is attached to first frame **1630**. Second frame **1640** can include a pulling mechanism **1741**, which can engage with pulling aid **1556** of pull tab **1550**. Pulling mechanism **1741** can be a protrusion or other suitable attachment mechanism. In a number of embodiments, machine **1600** can be configured such that when alignment base **1632** is engaged with alignment mechanism (such as alignment flaps **1510**), pulling mechanism **1741** is engaged with pull tab **1550**, cradle **1620** is holding the device, and second frame **1640** is rotated relative to base **1610** in the first direction from the first position proximate, such as shown in FIGS. 17-18, to the second position, such as shown in FIG. 16, first frame **1630** can be rotated relative to base **1610** in the first direction from the first position, such as shown in FIGS. 16-18, to the second position, such as shown in FIG. 19, and adhesive release liner **1540** can be removed from overlay **1530** (FIG. 15) to expose the adhesive agent of overlay **1530** (FIG. 15) to the screen of the device.

To illustrate, for example, after pull tab **1550** is attached to second frame **1640**, a user can lift second frame **1640**, which can pull on pull tab **1550** and begin to peel adhesive release liner **1540** from overlay **1530** (FIG. 15). Raising second frame **1640** from base **1610** and pulling on pull tab **1550**, can result in first frame **1630** being raised from base **1610**, around first hinge **1631**, as shown in FIG. 19. Continuing to rotate second frame **1640** around second hinge **1641** can result in adhesive release liner **1540** being peeling away from overlay **1530** (FIG. 15), exposing the adhesive agent on the bottom of overlay **1530** (FIG. 15). In many embodiments, second frame **1640** can be raised and rotated sufficiently around second hinge **1641** while pulling on pull tab **1550** and removing adhesive release liner **1540** to allow first frame **1630** to be further rotated around first hinge **1631** and lowered toward device **1650**. When second frame **1640** has rotated fully around second hinge **1641**, adhesive release liner **1540** can be completely removed from overlay **1530**.

(FIG. 15), and first frame can be lowered completely onto device 1650. After overlay 1530 (FIG. 15) is adhered to the screen of device 1650, the user can reach through aperture 1633 to smooth overlay 1530 (FIG. 15) on device 1650 to remove any bubbles between overlay 1530 (FIG. 15) and the screen of device 1650. First frame 1630 can be lifted and removed from protective film 1520. Protective film 1520 can be removed from overlay 1530 (FIG. 15). In some embodiments, protective film 1520 can be removed by lifting and/or pulling alignment flaps 1510. In many embodiments, protective film 1520 is removed after smoothing out any bubbles, so that protective film 1520 can prevent damage to overlay 1530 (FIG. 15) from forceful pushing or rubbing involved in smoothing the bubbles, as explained above. Device 1650 can be removed from cradle 1620 with overlay 1530 (FIG. 15) installed. In many embodiments, machine 1600 can be lightweight and easily portable, for example, such that it can be carried around by a sales associate.

Turning ahead in the drawings, FIG. 20 illustrates an isometric view of a machine 2000 for using an overlay applicator to apply an overlay to a device, showing the overlay cover extended. FIG. 21 illustrates an isometric view of machine 2000 with the overlay cover engaged and the roller pressing against the tongue of the overlay cover. FIG. 22 illustrates an isometric view of machine 2000 with the overlay cover engaged and the roller disengaged from the overlay cover. Machine 2000 is merely exemplary and embodiments of the machine are not limited to embodiments presented herein. The machine can be employed in many different embodiments or examples not specifically depicted or described herein. Machine 2000 can be used with an overlay applicator, such as overlay applicator 100 (FIG. 1), to apply an overlay, such as overlay 130 (FIG. 1), to the device. Machine 2000 also can be used with other overlay applicators (e.g., overlay applicator 400 (FIGS. 4-5), and/or overlay applicator 600 (FIG. 6). Machine 2000 can be similar to machine 800 (FIGS. 8-14) and various components or constructions of machine 2000 can be substantially identical or similar to various components of machine 800 (FIGS. 8-14), but can include variations in the roller assembly and the overlay cover. The operation of machine 2000 can be similar to the operation of machine 800 (FIGS. 8-14).

In many embodiments, machine 2000 can include a base 2010, a carriage 2030, and a handle assembly 2050, and can operate in a substantially similar manner to the operation of base 810, carriage 830 and handle assembly 850, respectively, of machine 800 (FIGS. 8-14). Base 2010 can extend from a first side 2019 to a second side 2018. Carriage 2030 can be configured to hold a cradle 2032, which can be substantially similar to cradle 832 (FIGS. 8-14). Carriage 2030 can be used with various different cradles, which can be configured for different devices. Cradle 2032 can include an alignment base 2035, which can engage with alignment mechanism 115 (FIG. 1).

Carriage 2030 can include an overlay cover 2036, which can cover overlay applicator 100 (FIG. 1) and can hold overlay applicator 100 (FIG. 1) to cradle 2032. In many embodiments, the device can be placed in cradle 2032, with the screen of the device facing up, as shown in FIGS. 20-22. Overlay applicator 100 (FIG. 1) can be placed on cradle 2032, such that alignment mechanism 115 (FIG. 1) engages with alignment base 2035. Overlay cover 2036 can be placed over overlay applicator 100. Overlay cover 2036 can be attached to carriage 2030 at an end of carriage 2030 closer to first end 2019, and/or can be attached with a hinge 2037. In other embodiments, overlay cover 2036 can be attached instead to cradle 2032. In many embodiments, hinge 2037

can be a spring-loaded hinge, which can bias overlay cover to cover overlay applicator 100 (FIG. 1). In other embodiments, overlay cover 2036 can include a snap or other attachment mechanism on the side opposite hinge 2037. Overlay cover 2036 can hold overlay applicator 100 (FIG. 1) within a predetermined distance from the device screen and can provide sufficient pressure to wiper 157 (FIG. 1) as it is pulled in order to clean the screen of the device.

Overlay cover 2036 can include a frame 2071 extending around a cover sheet 2072. Frame 2071 and/or cover sheet 2072 can be substantially rectangular. In many embodiments, cover sheet 2072 can be a piece of flexible or semi-flexible plastic. Cover sheet 2072 can be configured to press wiper 157 (FIG. 1) downward toward the screen of the device as wiper 157 (FIG. 1) moves across the screen of the device. In a number of embodiments, cover sheet 2072 can to secure overlay 130 (FIG. 1) proximate to the screen of the device. Cover sheet 2072 can be approximately 1.5 mm. In a number of embodiments, cover sheet 2072 can include a tongue 2073, which can be formed by two slits 2074 through the thickness of cover sheet 2072. In some embodiments, cover sheet 2072 can be attached to frame 2071 around the entire perimeter of frame 2071 except at a tongue interface 2075 in which tongue 2073 contacts frame 2071. Tongue 2073 can be centered between the sides of cover sheet 2072 and/or can extend through cover sheet 2072 from the side of opposite hinge 2037 partially toward of hinge 2037. Tongue 2073 can be configured to cover overlay applicator 100 (FIG. 1) proximate to the leading edge of overlay 130 (FIG. 3), near alignment mechanism 115 (FIG. 1). Tongue 2073 can include a central pad 2076. Central pad 2076 can be made of foam or an elastomeric material.

Base 2010 can include a roller assembly 2020. Roller assembly 2020 can be similar to roller assembly 820 (FIGS. 8-14). Roller assembly 2020 can include roller assembly supports 2023 and/or a roller cross support 2021. Roller assembly supports 2023 can be attached to base 2010 and extend upward or away from base 2010 to provide support for roller cross support 2021. Roller assembly supports 2023 can be configured such that carriage 2030 can slide back and forth between roller assembly supports 2023 and under roller cross support 2021. Roller cross support 2021 can be attached to roller assembly supports 2023 at axle 2024. Roller cross support 2021 can include a roller 2025, which can have a central roller surface 2026 with a width less than or equal to the width of tongue 2073 and can roll across the center between the two sides of overlay cover 2036. Roller 2025 can include one or more side rollers surfaces 2027, which can roll along the sides of frame 2071. In some embodiments, axle 2024 can be spring-loaded to provide downward pressure for roller 2025 as central roller surface 2026 rolls over overlay cover 2036.

In some embodiments, as handle assembly 2050 is extended and carriage 2030 moves from first side 2019 to second side 2018, central roller surface 2026 can roll along the central top side of overlay cover 2036. In many embodiments, as handle assembly 2050 is extended and pull tab 150 is pulled, wiper 157 (FIG. 1) is pulled away from the leading edge of overlay cover 2036 opposite hinge 2037, such that wiper 157 (FIG. 1) can be beyond the region near tongue interface 2075 when central roller surface 2026 first contacts tongue 2073 at tongue interface 2075. In many embodiments, as central roller surface 2026 rolls over tongue 2073, as shown in FIG. 21, it can provide sufficient pressure to depress tongue 2073 to adhere the exposed adhesive of overlay 130 (FIG. 1) to the surface of the device and push out air bubbles. Central pad 2076 can distribute the pressure

to and provide a controlled pressure at the leading edge of overlay **130** (FIG. **1**) near tongue interface **2075**. By providing a solid adherence between overlay **130** (FIG. **1**) and the screen of the device in the middle, the adhesive of overlay **130** (FIG. **1**) can wet out to adhere toward the edges of overlay **130** (FIG. **1**).

In many embodiments, one or both sides of frame **2071** can include a cam **2077**. In some embodiments, cam **2077** can be configured to raise roller **2025**, such as by side rollers **2027** rolling over the ramp and raised portions of cam **2077**, so as to prevent central roller surface **2026** from pressing down on overlay cover **2036**. In many embodiments, after central roller surface **2026** rolls over the length of tongue **2073**, cam **2077** can raise roller **2025**, which can disengage roller surface **2026** from overlay cover **2036** and allow machine **2000** to more easily pull away adhesive release liner **140** (FIG. **1**) under the portion of overlay cover **2036** near hinge **2037**, as shown in FIG. **22**. Cam **2077** can be located proximate to the trailing edge of overlay **130** opposite from alignment mechanism **115** (FIG. **1**).

Turning ahead in the drawings, FIG. **23** illustrates a flow chart for an embodiment of a method **2300** of providing an overlay applicator. Method **2300** is merely exemplary and is not limited to the embodiments presented herein. Method **2300** can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method **2300** can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method **2300** can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method **2300** can be combined or skipped. In some embodiments, the overlay applicator can be similar or identical to overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), and/or overlay applicator **1500** (FIG. **15**).

Referring to FIG. **23**, method **2300** can include a block **2301** of providing an overlay. In many embodiments, the overlay can be similar or identical to overlay **130** (FIG. **1**), overlay **430** (FIGS. **4-5**), overlay **630** (FIG. **6**), overlay **730** (FIG. **7**), and/or overlay **1530** (FIG. **15**). In a number of embodiments, the overlay can have a top side and a bottom side. The top side of the overlay can be similar or identical to top side **131** (FIG. **1**) of overlay **130** (FIG. **1**). The bottom side of the overlay can be similar or identical to bottom side **132** (FIG. **1**) of overlay **130** (FIG. **1**). In various embodiments, the bottom side can include an adhesive agent configured to adhere to a screen of an electronic device.

In some embodiments, method **2300** can include a block **2302** of providing an adhesive release liner. The adhesive release liner can be similar or identical to adhesive release liner **140** (FIG. **1**), adhesive release liner **440** (FIGS. **4-5**), adhesive release liner **640** (FIG. **6**), adhesive release liner **740** (FIG. **7**); and/or adhesive release liner **1540** (FIG. **15**). In a number of embodiments, the adhesive release liner can have a top side and a bottom side. The top side of the adhesive release liner can be removably attached to the bottom side of the overlay. In some embodiments, the adhesive release liner can be configured to protect the adhesive agent at the bottom side of the overlay from contaminants.

In a number of embodiments, method **2300** can include a block **2303** of providing a protective film. In some embodiments, the protective film can be similar or identical to protective film **120** (FIG. **1**), protective film **420** (FIGS. **4-5**),

protective film **620** (FIG. **6**), protective film **720** (FIG. **7**), and/or protective film **1520** (FIG. **15**). In many embodiments, the protective film can be removably attached to the top side of the overlay.

In many embodiments, method **2300** can include a block **2304** of providing an alignment tab. In some embodiments, the alignment tab can be similar or identical to alignment tab **110** (FIG. **1**), alignment tab **410** (FIGS. **4-5**), alignment tab **610** (FIG. **6**), alignment frame **710** (FIG. **7**), and/or alignment flaps **1510** (FIG. **15**). In many embodiments, the alignment tab can include an alignment mechanism. The alignment mechanism can be similar or identical to alignment mechanism **115** (FIG. **1**), alignment mechanism **415** (FIG. **4**), alignment mechanism **615** (FIG. **6**), alignment mechanism **715** (FIG. **7**), and/or alignment mechanism **1515** (FIG. **15**). In various embodiments, the alignment mechanism of the alignment tab can be configured to engage with an alignment base, such as alignment base **212** (FIG. **2**), alignment base **312** (FIG. **3**), alignment base **835** (FIGS. **8-9**, **13-14**), alignment base **1632** (FIGS. **16-19**), and/or alignment base **2035** (FIG. **20**), to align the overlay with the screen of the electronic device.

In a number of embodiments, the alignment tab can include a top layer that is integral with the protective film, a middle layer attached to the top layer; and a bottom layer attached to the middle layer. In some embodiments, method **2300** of providing the overlay applicator can include providing a cut between the middle layer of the alignment tab and the overlay, and between the bottom layer of the alignment tab and the adhesive release liner.

In various embodiments, the alignment tab can include a top layer and a bottom layer attached to the top layer. In some embodiments, method **2300** of providing the overlay applicator can include providing a cut between the top layer of the alignment tab and the protective film, and between the bottom layer of the alignment tab and the overlay. In certain embodiments, method **2300** of providing the overlay applicator can include providing a sticker attached to and spanning the cut between the protective film and the top layer of the alignment tab.

In some embodiments, the alignment tab can include an alignment frame extending around each side of the overlay. In several embodiments, the alignment frame can be integral with the protective film. In a number of embodiments, the alignment frame can include the alignment mechanism. In various embodiments, the alignment mechanism can include at least six holes.

In a number of embodiments, the alignment tab can include alignment flaps extending at each corner of the overlay. In certain embodiments, the alignment flaps can be integral with the protective film. In various embodiments, the alignment flaps can include alignment mechanism.

In several embodiments, method **2300** can include a block **2305** of providing a pull tab. In some embodiments, the pull tab can be similar or identical to pull tab **150** (FIG. **1**), pull tab **450** (FIGS. **4-5**), pull tab **650** (FIG. **6**), pull tab **750** (FIG. **7**), and/or pull tab **1550** (FIG. **15**). In many embodiments, the pull tab can include a wiper. The wiper can be similar or identical to wiper **157** (FIG. **1**), wiper **457** (FIG. **4**), wiper **657** (FIG. **6**), and/or wiper **757** (FIG. **7**). In certain embodiments, the pull tab can be integral with the adhesive release liner. In many embodiments, the pull tab, including the wiper, and the adhesive release liner can be configured such that the pull tab can be folded across the bottom side of the adhesive release liner and be pulled to remove the adhesive release liner from the bottom side of the overlay to expose the adhesive agent. In several embodiments, the pull tab,

41

including the wiper, and the adhesive release liner can be configured such that when the pull tab is pulled, the wiper can be configured to wipe across and clean the screen of the electronic device. In several embodiments the pull tab, including the wiper, and the adhesive release liner can be configured such that when the pull tab is pulled, the wiper can be configured to wipe across a length of the screen of the electronic device that is greater than a width of the screen of the electronic device.

Proceeding to the next drawing, FIG. 24 illustrates a flow chart for an embodiment of a method 2400 of providing a machine. Method 2400 is merely exemplary and is not limited to the embodiments presented herein. Method 2400 can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method 2400 can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method 2400 can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method 2400 can be combined or skipped. In some embodiments, the machine can be similar or identical to machine 800 (FIGS. 8-14) and/or machine 2000 (FIGS. 20-22).

Referring to FIG. 24, method 2400 can include a block 2401 of providing a base. In many embodiments, the base can be similar or identical to base 810 (FIGS. 8-14) and/or base 2010 (FIGS. 20-22). In various embodiments, the base can include a roller assembly. The roller assembly can be similar or identical to roller assembly 820 (FIGS. 8-14) and/or roller assembly 2020 (FIGS. 20-22). The roller assembly can include one or more rollers, such as the first roller surface or second roller surface 828 (FIGS. 8, 11, 13), central roller surface 2026 (FIGS. 20-22), and/or side roller surfaces 2027 (FIGS. 20-22).

In some embodiments, method 2400 can include a block 2402 of providing a carriage. The carriage can be similar or identical to carriage 830 (FIGS. 8-14) and/or carriage 2030 (FIGS. 20-22). In a number of embodiments, the carriage can include a first cradle. The first cradle can be similar or identical to cradle 832 (FIGS. 8-9, 12-14) and/or cradle 2032 (FIG. 20). The first cradle can be configured to securely hold a first electronic device. In many embodiments, the carriage can include an alignment base. The alignment base can be similar or identical to alignment base 212 (FIG. 2), alignment base 312 (FIG. 3), alignment base 835 (FIGS. 8-9, 13-14), alignment base 1632 (FIGS. 16-19), and/or alignment base 2035 (FIG. 20). The alignment base can be configured to engage with an alignment mechanism, such as alignment mechanism 115 (FIG. 1), alignment mechanism 415 (FIG. 4), alignment mechanism 615 (FIG. 6), alignment mechanism 715 (FIG. 7), and/or alignment mechanism 1515 (FIG. 15), of an overlay applicator, such as overlay applicator 100 (FIG. 1), overlay applicator 400 (FIGS. 4-5), overlay applicator 600 (FIG. 6), overlay applicator 700 (FIG. 7), and/or overlay applicator 1500 (FIG. 15).

In a number of embodiments, method 2400 can include a block 2403 of providing a handle assembly. The handle assembly can be similar or identical to handle assembly 850 (FIGS. 8-14) and/or handle assembly 2050 (FIGS. 20-22). In some embodiments, the handle assembly can include a handle. The handle can be similar or identical to handle 855 (FIGS. 8-9, 11-14). In several embodiments, the handle assembly can include a pulling mechanism. The pulling mechanism can be similar or identical to pulling mechanism 856 (FIGS. 8-9, 11-14) and/or pulling mechanism 1741

42

(FIGS. 17, 19). In a number of embodiments, the pulling mechanism can be configured to engage with a pull tab, such as pull tab 150 (FIG. 1), pull tab 450 (FIGS. 4-5), pull tab 650 (FIG. 6), pull tab 750 (FIG. 7), and/or pull tab 1550 (FIG. 15), of the overlay applicator.

In many embodiments, the machine can be configured such that the handle assembly can be pulled in a first direction relative to the base from a first handle position to a second handle position. In many embodiments, the machine can be configured such that when the handle assembly is moved from the first handle position to the second handle position, the carriage can move in a second direction relative to the base from a first carriage position to a second carriage position. The second direction can be opposite the first direction. In several embodiments, the machine can be configured such that when the alignment base is engaged with the alignment mechanism of the overlay applicator, the pulling mechanism is engaged with the pull tab of the overlay applicator, the first cradle is holding the first electronic device, and the handle assembly is pulled in the first direction relative to the base from the first handle position to the second handle position, an adhesive release liner of the overlay applicator can be removed from an overlay of the overlay applicator starting at a leading edge of the overlay and continuing to a trailing edge of the overlay to expose an adhesive agent of the overlay of the overlay applicator to a screen of the first electronic device.

In some embodiments, the machine can be configured such that when the carriage moves from the first carriage position to the second carriage position, the one or more rollers can be configured to roll over and press downward on the overlay applicator to adhere the exposed adhesive agent of the overlay to the screen of the first electronic device. In a number of embodiments, method 2400 can include providing an overlay cover. The overlay cover can be similar or identical to overlay cover 836 (FIGS. 8-9, 12-14) and/or overlay cover 2036 (FIGS. 20-22). In various embodiments, the overlay cover can be configured to secure the overlay applicator to the alignment base when the alignment mechanism of the overlay applicator is engaged with the alignment base.

Proceeding to the next drawing, FIG. 25 illustrates a flow chart for an embodiment of a method 2500 of providing a machine. Method 2500 is merely exemplary and is not limited to the embodiments presented herein. Method 2500 can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method 2500 can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method 2500 can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method 2500 can be combined or skipped. In some embodiments, the machine can be similar or identical to machine 1600 (FIGS. 16-19).

Referring to FIG. 25, method 2500 can include a block 2501 of providing a base. In many embodiments, the base can be similar or identical to base 1610 (FIGS. 16-19).

In some embodiments, method 2500 can include a block 2502 of providing a cradle. The cradle can be similar or identical to cradle 1620 (FIG. 16). The cradle can be configured to securely hold a first electronic device.

In a number of embodiments, method 2500 can include a block 2503 of providing an alignment piece. The alignment piece can be similar or identical to first frame 1630 (FIGS.

16-19). In many embodiments, the alignment piece can be hingedly attached to the base. In several embodiments, the alignment piece can include an alignment base. The alignment base can be similar or identical to alignment base 212 (FIG. 2), alignment base 312 (FIG. 3), alignment base 835 (FIGS. 8-9, 13-14), alignment base 1632 (FIGS. 16-19), and/or alignment base 2035 (FIG. 20). The alignment base can be configured to engage with an alignment mechanism, such as alignment mechanism 115 (FIG. 1), alignment mechanism 415 (FIG. 4), alignment mechanism 615 (FIG. 6), alignment mechanism 715 (FIG. 7), and/or alignment mechanism 1515 (FIG. 15), of an overlay applicator, such as overlay applicator 100 (FIG. 1), overlay applicator 400 (FIGS. 4-5), overlay applicator 600 (FIG. 6), overlay applicator 700 (FIG. 7), and/or overlay applicator 1500 (FIG. 15).

In a number of embodiments, method 2500 can include a block 2504 of providing a pulling piece. The pulling piece can be similar or identical to second frame 1640 (FIGS. 16-19). In many embodiments, the pulling piece can be hingedly attached to the base. In several embodiments, the pulling piece can include a pulling mechanism. The pulling mechanism can be similar or identical to pulling mechanism 856 (FIGS. 8-9, 11-14) and/or pulling mechanism 1741 (FIGS. 17, 19). In a number of embodiments, the pulling mechanism can be configured to engage with a pull tab, such as pull tab 150 (FIG. 1), pull tab 450 (FIGS. 4-5), pull tab 650 (FIG. 6), pull tab 750 (FIG. 7), and/or pull tab 1550 (FIG. 15), of the overlay applicator.

In some embodiments, the machine can be configured such that the pulling piece can be rotated relative to the base in a first direction from a first pulling piece position to a second pulling piece position. The first pulling piece position can be proximate to the cradle. In many embodiments, the machine can be configured such that the alignment piece can be rotated relative to the base in the first direction from a first alignment piece position to a second alignment piece position. The second alignment piece position can be proximate to the cradle. In many embodiments, the machine can be configured such that when the alignment base is engaged with the alignment mechanism of the overlay applicator, the pulling mechanism is engaged with the pull tab of the overlay applicator, the cradle is holding the first electronic device, and the pulling piece is rotated relative to the base in the first direction from the first pulling piece position to the second pulling piece position, the alignment piece can be rotated relative to the base in the first direction from the first alignment piece position to the second alignment piece position to pull the pull tab of the overlay applicator, and an adhesive release liner of the overlay applicator can be removed from an overlay of the overlay applicator to expose an adhesive agent of an overlay to a screen of the first electronic device.

Proceeding to the next drawing, FIG. 26 illustrates a flow chart for an embodiment of a method 2600 of using an overlay applicator to apply an overlay to a screen of an electronic device. Method 2600 is merely exemplary and is not limited to the embodiments presented herein. Method 2600 can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method 2600 can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method 2600 can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method 2600 can be combined or skipped. In some embodiments, the overlay applicator can be similar

or identical to overlay applicator 100 (FIG. 1), overlay applicator 400 (FIGS. 4-5), overlay applicator 600 (FIG. 6), overlay applicator 700 (FIG. 7), and/or overlay applicator 1500 (FIG. 15). In many embodiments, the overlay can be similar or identical to overlay 130 (FIG. 1), overlay 430 (FIGS. 4-5), overlay 630 (FIG. 6), overlay 730 (FIG. 7), and/or overlay 1530 (FIG. 15).

Referring to FIG. 26, method 2600 can include a block 2601 of attaching the overlay applicator to a first apparatus. In some embodiments, the first apparatus can be a frame. The frame can be similar or identical to frame 210 (FIG. 2). In many embodiments, the first apparatus can be a cradle. The cradle can be similar or identical to cradle 310 (FIG. 3), cradle 832 (FIGS. 8-9, 12-14) and/or cradle 2032 (FIG. 20). In several embodiments, the first apparatus can be a machine. The machine can be similar or identical to machine 800 (FIGS. 8-14), machine 1600 (FIGS. 16-19), and/or machine 2000 (FIGS. 20-22). In many embodiments, the first apparatus can securely hold the electronic device.

In many embodiments, the overlay applicator can include an overlay. In many embodiments, the overlay can be similar or identical to overlay 130 (FIG. 1), overlay 430 (FIGS. 4-5), overlay 630 (FIG. 6), overlay 730 (FIG. 7), and/or overlay 1530 (FIG. 15). In a number of embodiments, the overlay can have a top side and a bottom side. The top side of the overlay can be similar or identical to top side 131 (FIG. 1) of overlay 130 (FIG. 1). The bottom side of the overlay can be similar or identical to bottom side 132 (FIG. 1) of overlay 130 (FIG. 1). In various embodiments, the bottom side can include an adhesive agent configured to adhere to the screen of the electronic device.

In a number of embodiments, the overlay applicator can include an adhesive release liner. The adhesive release liner can be similar or identical to adhesive release liner 140 (FIG. 1), adhesive release liner 440 (FIGS. 4-5), adhesive release liner 640 (FIG. 6), adhesive release liner 740 (FIG. 7), and/or adhesive release liner 1540 (FIG. 15). In a number of embodiments, the adhesive release liner can have a top side and a bottom side. The top side of the adhesive release liner can be removably attached to the bottom side of the overlay. In some embodiments, the adhesive release liner can be configured to protect the adhesive agent at the bottom side of the overlay from contaminants.

In several embodiments, the overlay applicator can include a protective film. In some embodiments, the protective film can be similar or identical to protective film 120 (FIG. 1), protective film 420 (FIGS. 4-5), protective film 620 (FIG. 6), protective film 720 (FIG. 7), and/or protective film 1520 (FIG. 15). In many embodiments, the protective film can be removably attached to the top side of the overlay.

In various embodiments, the overlay applicator can include an alignment tab. In some embodiments, the alignment tab can be similar or identical to alignment tab 110 (FIG. 1), alignment tab 410 (FIGS. 4-5), alignment tab 610 (FIG. 6), alignment frame 710 (FIG. 7), and/or alignment flaps 1510 (FIG. 15). In many embodiments, the alignment tab can include an alignment mechanism. The alignment mechanism can be similar or identical to alignment mechanism 115 (FIG. 1), alignment mechanism 415 (FIG. 4), alignment mechanism 615 (FIG. 6), alignment mechanism 715 (FIG. 7), and/or alignment mechanism 1515 (FIG. 15). In various embodiments, the alignment mechanism of the alignment tab can be configured to engage with an alignment base, such as alignment base 212 (FIG. 2), alignment base 312 (FIG. 3), alignment base 835 (FIGS. 8-9, 13-14), alignment base 1632 (FIGS. 16-19), and/or alignment base 2035 (FIG. 20), of the first apparatus.

In several embodiments, the overlay applicator can include a pull tab. In some embodiments, the pull tab can be similar or identical to pull tab 150 (FIG. 1), pull tab 450 (FIGS. 4-5), pull tab 650 (FIG. 6), pull tab 750 (FIG. 7), and/or pull tab 1550 (FIG. 15). In many embodiments, the pull tab can include a wiper. The wiper can be similar or identical to wiper 157 (FIG. 1), wiper 457 (FIG. 4), wiper 657 (FIG. 6), and/or wiper 757 (FIG. 7).

In some embodiments, method 2600 can include a block 2602 of pulling the pull tab across the bottom side of the adhesive release liner to remove the adhesive release liner from the bottom side of the overlay to expose the adhesive agent to the screen of the electronic device.

Turning ahead in the drawings, FIGS. 27-30 illustrate a perspective view of components of an overlay applicator 3000, which is shown in its entirety in FIG. 30, and illustrate a method of constructing overlay applicator 3000. Overlay applicator 3000 is merely exemplary and embodiments of the overlay applicator are not limited to embodiments presented herein. The overlay applicator can be employed in many different embodiments or examples not specifically depicted or described herein. Overlay applicator 3000 can be similar to overlay applicator 100 (FIG. 1), overlay applicator 400 (FIGS. 4-5), overlay applicator 600 (FIG. 6), overlay applicator 700 (FIG. 7), and/or overlay applicator 1500 (FIG. 15), and various components and/or constructions of overlay applicator 3000 can be substantially identical or similar to various components of overlay applicator 100 (FIG. 1), overlay applicator 400 (FIGS. 4-5), overlay applicator 600 (FIG. 6), overlay applicator 700 (FIG. 7), and/or overlay applicator 1500 (FIG. 15).

As shown in FIG. 27, overlay applicator 3000 (FIG. 30) can be constructed to include an adhesive release liner 2740 and a pull tab 2750. In some embodiments, pull tab 2750 can be integral with release liner 2740 and can be a single layer of material, such as plastic, paper, or another suitable liner film. Pull tab 2750 can facilitate removal of adhesive release liner 2740. Pull tab 2750 can be at a second side 2758 of the material and adhesive release liner 2740 can be at a first side 2759. Pull tab 2750 can include a pulling aid 2756, which can be similar to pulling aid 156 (FIG. 1), pulling aid 456 (FIGS. 4-5), and/or pulling aid 1556 (FIG. 15). Release liner 2740 also can include a speaker slot 2723, a button slot 2724, and/or one or more other slots for a front side camera, a camera flash, a status indicator, etc. Pull tab 2750 and adhesive release liner 2740 can be cut as one piece of material, and pulling aid 2756, speaker slot 2723, button slot 2724, etc., can be cut out from pull tab 2750 and adhesive release liner 2740.

In a number of embodiments, after cutting pull tab 2750 and adhesive release liner 2740, such as shown in FIG. 27, a wiper 2857 can be added to pull tab 2750, as shown in FIG. 28. Wiper 2857 can remove dust from the screen of the device, and can be similar to wiper 157 (FIG. 1), wiper 457 (FIGS. 4-5), wiper 657 (FIG. 6), and/or wiper 757 (FIG. 7).

In various embodiments, after adhering or otherwise attaching wiper 2857 to pull tab 2750, construction of overlay applicator 3000 (FIG. 30) can include adhering and/or attaching layers of material for overlay 2930 and protective film 2920, as shown in FIG. 29. Protective film 2920 can be similar to protective film 120 (FIG. 1), protective film 420 (FIGS. 4-5), protective film 620 (FIG. 6), protective film 720 (FIG. 7) and/or protective film 1520 (FIG. 15). Overlay 2930 can be similar to overlay 130 (FIG. 1), overlay 430 (FIGS. 4-5), overlay 630 (FIG. 6), overlay 730 (FIG. 7), and/or overlay 1530 (FIG. 15). In a number of embodiments, overlay applicator 3000 (FIG. 30) can include

an alignment tab 2910, a device portion 2970 and/or a tail portion 2990. Alignment tab 2910 can be similar to alignment tab 110 (FIG. 1), alignment tab 410 (FIG. 4), and/or alignment tab 610 (FIG. 6). Device portion 2970 can be similar to device portion 470 (FIGS. 4-5) and/or device portion 670 (FIG. 6). In some embodiments, device portion 2970 and alignment tab 2910 can be made of the layers used for protective film 2920, overlay 2930, and adhesive release liner 2740. Alignment tab 2910 can include an alignment mechanism 2915, which can be similar to alignment mechanism 115 (FIG. 1), alignment mechanism 415 (FIGS. 4-5), and/or alignment mechanism 615 (FIG. 6), and which can facilitate aligning alignment tab 2910, protective film 2920, overlay 2930, and adhesive release liner 2740 with various features of the device during application of overlay 2930.

After attaching the layers, protective film 2920 and overlay 2930 can be kiss cut to predetermined dimensions of alignment tab 2910, device portion 2970, and/or tail portion 2990, without cutting adhesive release liner 2740 and/or pull tab 2750. In some embodiments, excess material from the layers for protective film 2920 and overlay 2930 can be removed. In various embodiments, the kiss cutting of device portion 2970, alignment tab 2910, and tail portion 2990 to size at the layers of protective film 2920 and overlay 2930 can include cutting speaker slot 2723, button slot 2724, and other slots, as described above, and/or cutting alignment mechanism 2915. The kiss cutting can also include cutting an interface slit 2960 between alignment tab 2910 and device portion 2970, and/or cutting a tail slit 2991 between device portion 2970 and tail portion 2990, such that the kiss cutting is through the layers of protective film 2920 and overlay 2930, but not through adhesive release liner 2740. As a result of the kiss cut, the dimensions of device portion 2970 at overlay 2930 and protective film 2920 can be approximately equal or similar to the dimensions of the screen of the device.

As shown in FIG. 30, in a number of embodiments, after kiss cutting alignment tab 2910, device portion 2970, and tail portion 2990 to size at the layers of protective film 2920 and overlay 2930, and cutting interface slit 2960 and tail slit 2991, construction of overlay applicator 3000 can include adhering a joining sticker 3080 on top of the layer of protective film 2920 to span interface slit 2960 and join device portion 2970 of protective film 2920 with the top layer of alignment tab 2910, as shown in FIG. 30. Joining sticker 3080 can help maintain alignment between alignment tab 2910 and device portion 2970, which can advantageously maintain alignment during application of overlay 2930. In many embodiments, joining sticker 3080 does not stretch or distort, which can advantageously facilitate alignment of alignment mechanism 2915 with overlay 2930, such that overlay 2930 can be accurately positioned on the screen of the device.

In certain embodiments, after joining sticker 3080 has been attached between alignment tab 2910 and device portion 2970, pull tab 2750 can be folded back, such that second side 2758 is folded beneath adhesive release liner 2740 to first side 2759. Pull tab 2750 and adhesive release liner 2740 can be peeled back off of at least a portion of alignment tab 2910, such that alignment mechanism 2915 is uncovered by adhesive release liner 2740, allowing alignment mechanism to engage with an alignment base, such as alignment base 212 (FIG. 2) or alignment base 312 (FIG. 3), alignment base 835 (FIGS. 8-9, 13-14), alignment base 1632 (FIGS. 16-19), alignment base 2035 (FIG. 20) and/or alignment base 3112 (FIG. 31, described below). The process of kiss cutting the layers at protective film 2920 and overlay

47

2930 can advantageously provide a simpler method of constructing overlay applicator 3000, and/or can provide overlay applicator 3000 with a very accurate alignment of alignment mechanism 2915 with respect to overlay 2930 and its features.

Turning ahead in the drawings, FIG. 31 illustrates a perspective view of a cradle 3100 that can be used with an overlay applicator, such as overlay applicator 3000 (FIG. 30), to apply an overlay, such as overlay 2930 (FIGS. 29-30), to a device. FIG. 32 illustrates a top view of cradle 3100 being used with overlay applicator 3000. FIG. 33 illustrates a side view of cradle 3100 being used with overlay applicator 3000. FIG. 34 illustrates a partial cross-sectional view of cradle 3100 being used with overlay applicator 3000 and a device. Cradle 3100 is merely exemplary and embodiments of the cradle are not limited to embodiments presented herein. The cradle can be employed in many different embodiments or examples not specifically depicted or described herein. In many embodiments, cradle 3100 can include an alignment base 3112, which can engage with alignment mechanism 2915, as shown in FIG. 32. In some embodiments, alignment base 3112 can be one or more protrusions that can fit inside the one or more slots of alignment mechanism 2915. Alignment base 3112 and alignment mechanism 2915 can be configured and positioned such that when alignment mechanism 2915 is engaged with alignment base 3112, overlay 2930 (FIGS. 29-30) can be positioned directly above the screen of the device held by cradle 3100, and aligned such that overlay 2930 (FIGS. 29-30) will be adhered in an accurate position on the screen when adhesive release liner 2740 is removed, as described below.

In many embodiments, cradle 3100 can include a bottom frame 3110, side frames 3120, corner frames 3130, and/or an end frame 3140. Side frames 3120, corner frames 3130, and/or end frame 3140 can provide a device slot 3111 for a device by partially or fully providing support along the sides and/or ends of the device, and can be positioned so as to provide a snug fit for the device to prevent movement of the device with respect to other portions of cradle 3100.

In certain embodiments, corner frames 3130 can provide a corner support for the device, and can be attached to bottom frame 3110. In many embodiments, each corner frame 3130 can include a corner end 3132 that can be configured to extend around an end of the device, and can provide a corner slot 3131 between corner end 3132 and bottom frame 3110. Corner slots 3131 can allow overlay applicator 3000 to extend under and be secured by corner end 3132, as shown in FIGS. 32-33.

In a number of embodiments, end frame 3140 can provide corner supports for the device, and can be attached to bottom frame 3110 at end frame attachments 3143. In some embodiments, end frame 3140 can include an end bar 3142, which can provide an end slot 3141 between end bar 3142 and bottom frame 3110. End slot 3141 can allow overlay applicator to 3000 to extend under and be secured by end bar 3142, as shown in FIGS. 32-33. In a number of embodiments, end frame attachments 3143 can provide side supports for overlay applicator 3000, which can help to keep overlay applicator 3000 within end slot 3141 and properly aligned with respect to the device held by cradle 3100.

In some embodiments, cradle 3100 can include a central support 3150, which can be positioned between the sides of cradle 3100 and can extend from one end to the other end of the device when the device is held by cradle 3100 in device slot 3111. Central support 3150 can be made of foam or an elastomeric material. Central support 3150 can provide

48

support for overlay applicator 3000 and press overlay 2930 (FIGS. 29-30) against the screen of the device as adhesive release liner 2740 (FIGS. 27-30) is peeled away from overlay 2930 (FIGS. 29-30), as described below.

As shown in FIGS. 32-33, overlay applicator 3000 can be placed on cradle 3100 such that alignment base 3112 can engage with alignment mechanism 2915. Overlay applicator 3000 can extend through corner slots 3131 and end slot 3141. Overlay applicator 3000 can be positioned on cradle 3100 such that protective film 2920 is placed against central support 3150, and adhesive release liner 2740 (FIGS. 27-30) and pull tab 2750 are above protective film 2920. Pull tab 2750 can be folded back across adhesive release liner 2740 (FIGS. 27-30), such that alignment tab 2910 is partially or fully uncovered and wiper 2857 is face up. When overlay applicator 3000 is placed on cradle 3100, central support 3150 (FIG. 31) can support overlay applicator 3000 above bottom frame 3110 of cradle 3100. Joining sticker 3080 can be positioned near the region of corner slots 3131. Device portion 2970 can be positioned between corner frames 3130 and end frame 3140, and tail portion 2990 can extend through, be supported within, and/or be positioned within end slot 3141. In a number of embodiments, pull tab 2750 can extend past the end of tail portion 2990, which can allow a user to pull on pull tab 2750 to remove adhesive release liner 2740 (FIGS. 27-30).

As shown in the cross-section cut-out in FIG. 34, after overlay applicator 3000 is placed on cradle 3100, a device, such as device 3401, can be placed on overlay applicator 3000 within slot 3111 of cradle 3100, with the screen of device 3401 facing downward against pull tab 2750. Device 3401 can be cradled within slot 3111. As shown in FIG. 34, central support 3150 can support overlay applicator 3000 above bottom frame 3110 of cradle 3100. Side frames 3120 can each include a beveled edge 3421, which can support device 3401 above bottom frame 3110. The inner width between each of side frames 3120 be wider than overlay applicator 3000, as shown in FIG. 34, but can be narrower than the width of device 3401.

After device 3401 is secured within slot 3111 above overlay applicator 3000, as shown in FIG. 34, pull tab 2750 can be pulled to pull wiper 2857 (FIG. 28-30) across the screen of device 3401 and to remove adhesive release liner 2740 (FIGS. 27-30). Central support 3150 can provide pressure against protective film 2920 (FIGS. 29-30) to press wiper 2857 against the screen of device 3401 as it is wiped across the screen of device 3401. As adhesive release liner 2740 (FIGS. 27-30) is pulled, it can be folded across itself, can move along the screen of device 3401, and can expose the adhesive on overlay 2930 (FIGS. 29-30) to the screen of device 3401. Central support 3150 can be depressed slightly as the fold in adhesive release liner 2740 (FIGS. 27-30) moves from one end to the other end of device 3401, and can rebound to provide pressure against protective film 2920 (FIGS. 29-30) to press the overlay 2930 (FIGS. 29-30) against the screen of device 3401 as it is exposed. Central support 3150 can advantageously allow the center of overlay 2930 (FIGS. 29-30) to be adhered and can facilitate removing any air bubbles at the center of overlay 2930 (FIGS. 29-30). Beginning the adhesion of overlay 2930 (FIGS. 29-30) to device 3401 at the center can advantageously allow the remainder of overlay 2930 (FIGS. 29-30) to be accurately adhered to the screen of device 3401 without wrinkles and/or with minimal or no bubbles.

Turning ahead in the drawings, FIG. 35 illustrates a perspective view of a machine 3500 that can be used with an overlay applicator 3550 to apply an overlay to a device. FIG.

36 illustrates a perspective view of machine 3500 with the slider being used to apply pressure to the overlay. Machine 3500 is merely exemplary and embodiments of the machine are not limited to embodiments presented herein. The machine can be employed in many different embodiments or examples not specifically depicted or described herein. Overlay applicator 3550 is merely exemplary and embodiments of the overlay applicator are not limited to embodiments presented herein. The overlay applicator can be employed in many different embodiment or examples not specifically depicted or described herein. Overlay applicator 3550 can be similar to overlay applicator 100 (FIG. 1), overlay applicator 400 (FIGS. 4-5), overlay applicator 600 (FIG. 6), overlay applicator 700 (FIG. 7), overlay applicator 1500 (FIG. 15), and/or overlay applicator 3000 (FIG. 30), and various components and/or constructions of overlay applicator 3550 can be substantially identical or similar to various components of overlay applicator 100 (FIG. 1), overlay applicator 400 (FIGS. 4-5), overlay applicator 600 (FIG. 6), overlay applicator 700 (FIG. 7), overlay applicator 1500 (FIG. 15), and/or overlay applicator 3000 (FIG. 30).

In some embodiments, overlay applicator 3550 can include an adhesive release liner (not shown), a pull tab 3555, an overlay (not shown), and/or a protective film 3552. In some embodiments, pull tab 3555 can be integral with the adhesive release liner and can be a single layer of material, such as plastic, paper, or another suitable liner film. Pull tab 3555 can facilitate removal of the adhesive release liner from the overlay. In a number of embodiments, overlay applicator 3550 can include alignment tabs 3556. Alignment tabs 3556 can be located at each end of overlay applicator 3550 and/or can be located at each end of a device portion 3560 of overlay applicator 3550. Device portion 3560 can be similar to device portion 470 (FIGS. 4-5), device portion 670 (FIG. 6), and/or device portion 2970 (FIGS. 29-30). In some embodiments, device portion 3560 and alignment tabs 3556 can be made of the layers used for protective film 3552, the overlay, and/or the adhesive release liner. Each of alignment tabs 3556 can include an alignment mechanism 3557, which can be similar to alignment mechanism 115 (FIG. 1), alignment mechanism 415 (FIGS. 4-5), alignment mechanism 615 (FIG. 6), and/or alignment mechanism 2915 (FIGS. 29-30), and which can facilitate aligning alignment tab 3556, protective film 3552, the overlay, and the adhesive release liner with various features of the device during application of the overlay.

Protective film 3552 and the overlay can be kiss cut to predetermined dimensions of alignment tabs 3556 and device portion 3560, without cutting the adhesive release liner and/or pull tab 3555. In some embodiments, excess material from the layers for protective film 3552 and the overlay can be removed. In some embodiments, the kiss cutting of device portion 3560 and alignment tabs 3556 to size at the layers of protective film 3552 and the overlay can include cutting speaker slots, button slots, and/or other slots, as described above, and/or cutting alignment mechanism 3557. The kiss cutting can also include cutting interface slits 3558 between alignment tabs 3556 and device portion 3560, such that the cutting is through the layers of protective film 3552 and the overlay, but not the adhesive release liner. As a result of the kiss cut, the dimensions of device portion 3560 at the overlay and protective film 3552 can be approximately equal or similar to the dimensions of the screen of the device.

In a number of embodiments, after the kiss cutting, construction of overlay applicator 3550 can include adhering joining stickers 3559 on the top the layer of protective film

3552 to span interface slits 3558 and join device portion 3560 of protective film 3552 with the top layer of alignment tabs 3556, as shown in FIG. 35. Joining stickers 3559 can help maintain alignment between alignment tabs 3556 and device portion 3560, which can advantageously maintain alignment during application of the overlay. In many embodiments, joining stickers 3559 does not stretch or distort, which can advantageously facilitate alignment of alignment mechanisms 3557 with the overlay, such that the overlay can be accurately positioned on the screen of the device. In certain embodiments, after joining stickers 3559 have been attached between alignment tabs 3556 and device portion 3560, pull tab 3555 can be folded back beneath the adhesive release liner, as described above in other embodiments.

In many embodiments, machine 3500 can include a base 3510, a cradle 3520, and a slider 3530. Base 3510 can extend from a first end 3511 to a second end 3512. In some embodiments, base 3510 can be used with multiple different cradles, which can be used for different devices. Cradle 3520 can include a recess 3521 in which a device can be placed with screen facing upwards or away from recess 3521. Recess 3521 can have sides and a bottom, and cradle 3520 can have a thickness greater than the thickness of the device. In many embodiments, recess 3521 is conformal with the device.

In some embodiments, base 3510 can include an alignment base 3514. In many embodiments, alignment base 3514 can be one or more protrusions that can secure overlay applicator to base 3510, such as by engaging with alignment mechanisms 3557. In some embodiments, such as shown in FIGS. 35-36, alignment base 3514 can be located on base 3510 beyond the each end of cradle 3520. In other embodiments, alignment base 3514 can be located on cradle 3520, such as at each end of cradle 3520. In a number of embodiments, the lines of support between each side of alignment base 3514 can be in line with and within overlay applicator 3550. Alignment base 3514 and alignment mechanism 3557 can be configured and positioned such that when alignment mechanism 3557 is engaged with alignment base 3514, the overlay can be positioned directly above the screen of the device. In a number of embodiments, alignment base 3514 can be configured to secure overlay applicator 3550 slightly above the screen of the device.

In a number of embodiments, base 3510 can include a pull slot 3515. In many embodiments, pull slot 3515 is below one side of alignment base 3514. In many embodiments, pull tab 3555 can be inserted through pull slot 3515, which can allow pull tab 3555 to be pulled while overlay applicator 3550 is secured on alignment base 3514.

In some embodiments, overlay applicator 3550 can include a wiper (not shown), which can be similar to wiper 157 (FIG. 1), wiper 457 (FIGS. 4-5), wiper 657 (FIG. 6), wiper 757 (FIG. 7), and/or wiper 2857 (FIG. 28). The wiper can remove dust from the screen of the device. In other embodiments, after inserting the device in cradle 3520, a cloth (not shown), such as a microfiber cloth or another suitable cleaning cloth, which can have dimensions similar to pull tab 3555, can be draped across the screen of the device between the screen of the device and overlay applicator 3550. One end of the cloth can be inserted through pull slot 3515. In some embodiments, pull tab 3555 and the cloth can be inserted together through pull slot 3515, and as pull tab 3555 and the cloth are pulled, the cloth can remove dust from the screen of the device.

In many embodiments, pull tab 3555 can be pulled through pull slot 3515, and, in certain embodiments, along

51

with a wiper, cloth, or sticker to clean the screen of the device, and the adhesive release liner can be removed to expose the adhesive on the overlay. In a number of embodiments, after the adhesive release liner is removed and the adhesive of the overlay is exposed, the overlay can be secured slightly above the screen of the device, such that adhesion between the overlay and the screen of the device does not occur. In other embodiments, the overlay can be secured at the screen of the device, such that adhesion can begin to occur upon removal of the adhesive release liner.

In some embodiments, base can include a track **3513** on each side, which can allow slider **3530** to move between first end **3511** to second end **3512**. In many embodiments, slider **3530** can include slider side supports **3531**. In a number of embodiments, slider side supports **3531** can include pins (not shown) that can engage in tracks **3513** and allow slider side supports **3531** to slide along tracks **3513**. Slider side supports **3531** can be connected and/or held within tracks **3513** by a slider cross support **3532**. In some embodiments, slider **3530** can include a handle **3533**, which can be used to move slider **3530** back and forth between first end **3511** and second end **3512**. Slider **3530** can include a pressure bar support **3534** on each side of a pressure bar **3535**. Pressure bar supports **3534** can be spring loaded or elastically attached to slider cross support **3532** and/or slider side supports **3531** such that pressure bar **3535** can provide downward pressure. In various embodiments, base **3510** can include cams **3516** in the regions near alignment base **3514**, which can raise pressure bar **3535** such that slider **3530** can move back and forth from first side **3511** to second side **3512** without interference from alignment base **3514**.

In many embodiments, after pull tab **3555** is pulled and the adhesive release liner is partially or fully removed from the overlay, slider **3530** can be moved from first side **3511** partially or fully toward second side **3512** such that pressure bar **3535** provides downward pressure on protective film **3552** to adhere the overlay to the screen of the device, as shown in FIG. 36. Pressure bar **3535** can provide sufficient pressure to prevent and/or remove any air bubbles. In a number of embodiments, pressure bar **3535** can be a roller. In other embodiments, pressure bar **3535** can be a fixed bar that slides along the top of overlay applicator **3550**. Machine **3500** can thus advantageously be used to accurately align the overlay on the screen of the device without dust or air bubbles.

Turning ahead in the drawings, FIG. 37 illustrates a system **3700** for using an overlay applicator, such as overlay applicator **700** (FIG. 7), to apply an overlay, such as overlay **730** (FIG. 7), to a device. System **3700** is merely exemplary and embodiments of the system are not limited to embodiments presented herein. The system can be employed in many different embodiments or examples not specifically depicted or described herein. System **3700** can include overlay applicator **700**, a cradle **3710**, a device **3720** (e.g., a smart phone), a cradle frame **3730**, and a machine **3740**. Cradle **3710** can be similar to cradle **310** (FIG. 3), and various components and/or constructions of cradle **3710** can be substantially identical or similar to various components of cradle **300** (FIG. 3).

Turning ahead in the drawings, FIG. 38 illustrates a top side view of cradle **3710**. Cradle **3710** is merely exemplary and embodiments of the cradle are not limited to embodiments presented herein. The cradle can be employed in many different embodiments or examples not specifically depicted or described herein. Cradle **3710** can include a slot **3811** in which device **3720** (FIG. 37) can be placed with the screen of device **3720** (FIG. 37) facing upwards or away

52

from slot **3811**. In some embodiments, slot **3811** is conformal with device **3720** (FIG. 37). Slot **3811** can have sides **3812** and a bottom **3813**. Cradle **3710** can have a thickness greater than the thickness of device **3720** (FIG. 37). In many embodiments, cradle **3710** can include an alignment base **3814**, which can engage with alignment mechanism **715** (FIG. 7). In some embodiments, alignment base **3814** can be one or more protrusions that can fit inside the one or more slots of alignment mechanism **715** (FIG. 7). For example, as shown in FIG. 7, alignment mechanism **715** (FIG. 7) can include six holes spaced relatively evenly around alignment frame **710** (FIG. 7). Alignment base **3814** can include six protrusions configured to engage with the six holes of alignment mechanism **715** (FIG. 7). In some embodiments, the protrusions of alignment base **3814** can be spring loaded. Alignment base **3814** and alignment mechanism **715** (FIG. 7) can be configured and positioned such that when alignment mechanism **715** (FIG. 7) is engaged with alignment base **3814**, overlay **730** (FIG. 7) can be positioned directly above the screen of device **3720** (FIG. 37) in slot **3811**, and aligned such that overlay **730** (FIG. 7) will be adhered in an accurate position on the screen when adhesive release liner **740** (FIG. 7) is removed. In certain embodiments, cradle **3710** can include a bottom aperture **3815**, which can facilitate removal of device **3720** (FIG. 37) from cradle **3710**.

Turning ahead in the drawings, FIG. 39 illustrates a top side view of cradle frame **3730**. FIG. 40 illustrates a bottom side view of cradle frame **3730**. Cradle frame **3730** is merely exemplary and embodiments of the cradle frame are not limited to embodiments presented herein. The cradle frame can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, cradle frame **3730** can include side frames **3910**, which can include alignment holes **3911** that can engage with alignment base **3814** (FIG. 38). Cradle frame **3730** can include a bottom plate **3912**, which can be bent at a crease **3913** midway between the two sides and extending partially or fully from one end to the other end of cradle frame **3730**. Bottom plate **3912** can be made of a flexible or semi-flexible plastic. In various embodiments, the bend in bottom plate **3912** at crease **3913** can be maintained by end caps **3914**, which can be centered at each end of cradle frame **3730**. End caps **3914** can be made of a rigid material, such as a rigid metal or polycarbonate (PC). In many embodiments, cradle frame **3730** can include end frames **3915** extending at each end of cradle frame **3730** between side frames **3910**. In certain embodiments, end frame **3915** can be less thick than side frames **3710**, which can allow flexibility for bottom plate **3912** to be depressed and semi-flexibly bent downward, such as in the region of crease **3913**. In a number of embodiments, cradle frame **3730** can include a recess **3916** between side frames **3910** and end frames **3915**, and bounded at the bottom by bottom plate **3912**. Recess **3916** can have dimensions substantially similar to overlay **730** (FIG. 7) and/or the screen of device **3720** (FIG. 37).

Turning ahead in the drawings, FIG. 41 illustrates a left side view of machine **3740** with the arm in a raised configuration. Machine **3740** is merely exemplary and embodiments of the machine are not limited to embodiments presented herein. The machine can be employed in many different embodiments or examples not specifically depicted or described herein. In many embodiments, machine **3740** can include a base **4110**, a cradle support **4120**, a stand **4130**, a hinge assembly **3740**, and an arm **4150**. In many embodiments, base **4110** can provide a sturdy support base for machine **3740**. In certain embodiments, base **4110** can

include feet **4111** made from an elastomeric material for non-slip, cushioned, and/or balanced support. In some embodiments, cradle support **4120** can be a recess in base **4110**, as shown in FIG. 41. Cradle support **4120** can be configured to hold a cradle, such as cradle **3710** (FIGS. 37-38). Cradle support **4120** can be used with various different cradles, which can be configured for different devices.

In many embodiments, stand **4130** can provide support for arm **4150**. In certain embodiments, stand **4130** can extend upright from base **4110**, and, in some embodiments, can be substantially perpendicular to base **4110**. Stand **4130** can be connected to arm **4150** at hinge assembly **4140**. In many embodiments, hinge assembly **4140** can include a hinge axis **4141**. In some embodiments, hinge assembly **4140** can include a hinge track **4142** to allow arm **4150** to move along a predetermined arc. In a number of embodiments, hinge assembly **4140** can include a hinge clamp **4143**, which can allow arm **4150** to be secured at desired and/or predetermined positions. For example, arm **4150** can be raised to a raised configuration, as shown in FIG. 41, or lowered to a lowered position, as shown in FIG. 44, described below. When arm **4150** is raised, cradle **3710** (FIGS. 37-38) can be inserted or removed from cradle support **4120**. When arm **4150** is lowered, overlay applicator **700** (FIGS. 7, 37) can be used apply overlay **730** (FIG. 7), as described below. In some embodiments, stand **4130** can include a positioning piece **4131**, which can prevent arm **4150** from lowering below a predetermined position.

In certain embodiments, arm **4150** can include a handle **4154**, which can be used to assist in raising and/or lowering arm **4150** when hinge assembly **4140** is unclamped. In some embodiments, arm **4150** can include an expandable bladder **4151**, such as an air bladder. In many embodiments, expandable bladder **4151** can be connected to a pumping mechanism **4152**, which can fill expandable bladder **4151** with air, as shown in FIG. 44, described below. In certain embodiments, expandable bladder **4151** and/or pumping mechanism **4152** can be a part of a portable (e.g., battery powered) blood pressure monitor and cuff, which can include a microprocessor and a start/stop button **4153** to initiate or terminate the inflation and/or deflation of expandable bladder **4151** with air.

Turning ahead in the drawings, FIGS. 42-45 illustrate using system **3700** with machine **3740**, cradle **3710**, overlay applicator **700**, and cradle frame **3730** to apply overlay **730** (FIG. 7) to device **3720**. FIG. 42 illustrates machine **3740**, cradle frame **3730**, device **3720** located in cradle **3710**, and overlay applicator **700** located on cradle **3710** above device **3720**. In many embodiments, device **3720** can be placed in slot **3811** in cradle **3710** with the screen facing upwards or away from slot **3811**, as shown in FIG. 42. After placing device **3720** in cradle **3710**, overlay applicator **700** can be placed on cradle **3710** above device **3720** (FIG. 37), with protective film **720** facing up and above overlay **730** (FIG. 7), adhesive release liner **740** (FIG. 7), and pull tab **750**. In many embodiments, pull tab **750** and wiper **757** can be facing downward, and resting upon or proximate to the screen of device **3720** (FIG. 37). In some embodiments, overlay applicator **700** can be secured to cradle **3710** by alignment base **3814** engaging with alignment mechanism **715**.

FIG. 43 illustrates cradle **3710** located in cradle support **4120** of machine **3740**, with cradle frame **3730** upon cradle **3710**. Cradle frame **3730** can be placed upon cradle **3710** above overlay applicator **700** and device **3720** (FIG. 37). In some embodiments, bottom plate **3912** (FIGS. 39-40) can

protrude slightly downward toward overlay applicator **700**. In various embodiments, alignment holes **3911** (FIGS. 39-40) can engage with alignment base **3814** (FIG. 38) to secure cradle frame **3730** to cradle **3710**. Cradle **3710**, along with device **3720** (FIG. 37), overlay applicator **700**, and cradle frame **3730**, as assembled as described above, can be placed in cradle support **4120** of machine **3740**. In many embodiments, arm **4150** of machine **3740** can be in a raised position to facilitate insertion of cradle **3710** in cradle support **4120**.

FIG. 44 illustrates machine **3740** with arm **4150** in a lowered position and expandable bladder **4151** filled, and with pull tab **750** and adhesive release liner **740** removed. In many embodiments, arm **3850** can be lowered to a lowered position, as shown in FIG. 44. In many embodiments, hinge clamp **4143** can be disengaged to allow arm **4150** to rotate along hinge track **4142** around hinge axis **4141** to the lowered position, and then reengaged at the lowered position. In several embodiments, handle **4154** can be used to assist lowering arm **4150**. In various embodiments when arm **4150** is in a lowered position, expandable bladder **4151** can rest upon cradle frame **3730**, and, in some embodiments, can rest within recess **3916** (FIG. 39).

In some embodiments, pull tab **750** can be pulled to remove adhesive release liner **740** from the adhesive side of overlay **730** (FIG. 7). In many embodiments, as pull tab **750** is pulled, wiper **757** can wipe across the screen of device **3720** (FIG. 37) to remove any dust. In some embodiments, bottom plate **3912** (FIG. 39) of cradle frame **3730** can be positioned so as to provide enough pressure on wiper **757** such that wiper **757** can stay in contact with the screen of device **3720** (FIG. 37) and effectively clean off any dust. In many embodiments, after pull tab **750** has been pulled out and adhesive release liner **740** has been removed from covering overlay **730** (FIG. 7), overlay **730** (FIG. 7) can be secured such that it remains above and does not adhere to the screen of device **3720** (FIG. 37).

In many embodiments, pumping mechanism **4152** can be activated to fill expandable bladder **4151**. In many embodiments, start/stop button **4153** can be activated to fill expandable bladder **4151** with air. As shown in FIG. 44, expandable bladder **4151** can expand as it fills with air. In some embodiments, the expansion of expandable bladder **4151** can provide downward force on bottom plate **3912** (FIG. 39). Crease **3913** (FIG. 39) can push down on overlay applicator **700** (FIG. 7) such that overlay **730** (FIG. 7) can begin to adhere to the screen of device **3720** (FIG. 37) along the center line between the sides of device **3720** (FIG. 37). As expandable bladder **4151** continues to inflate, other regions of bottom plate **3912** (FIG. 39) can press down on overlay **730** (FIG. 7), extending outward from the center. Beginning the adhesion of overlay **730** (FIG. 7) to device **3720** (FIG. 37) at the center of device **3720** (FIG. 37) can advantageously allow the remainder of overlay **730** (FIG. 7) to be accurately adhered to the screen of device **3720** (FIG. 37) without wrinkles and/or with minimal or no bubbles.

FIG. 45 illustrates machine **3740** with arm **4150** in a raised position, with cradle **3710** removed from cradle support **4120**, with cradle frame **3730** removed off of cradle **3710**, and with pull tab **750** and adhesive release liner **740** removed. In many embodiments, pumping mechanism **4152** can be deactivated to stop the inflation of expandable bladder **4151** and/or to begin the deflation of expandable bladder **4151**. In many embodiments, start/stop button **4153** can be deactivated to deflate expandable bladder **4151**. In other embodiments, pumping mechanism **4152** can be pre-programmed to stop the inflation of expandable bladder

4151 and to begin the deflation of expandable bladder **4151** after expandable bladder reaches a predetermined level of inflation.

In several embodiments, arm **4150** can be raised to a raised position. In many embodiments, hinge clamp **4143** can be disengaged to allow arm **4150** to rotate along hinge track **4142** around hinge axis **4141** to the raised position, and then reengaged at the raised position. In many embodiments, handle **4154** can help facilitate moving arm **4150**. Arm **4150** of machine **3740** can be in a raised position to facilitate removal of cradle **3710** from cradle support **3720** of machine **3740**.

In a number of embodiments, cradle **3710** can be removed, along with device **3720**, overlay applicator **700** (FIG. 7), and cradle frame **3730** from cradle support **4120** of machine **3740**. In several embodiments, cradle frame **3730** can next be removed from cradle **3710** to uncover protective film **720** and alignment frame **710**, which in many embodiments can be integral with protective film **720**, as described above. In some embodiments, device **3720**, along with the protective film **720**, alignment frame **710**, and overlay **730**, can be removed from cradle **3710**. In many embodiments, removal of device **3720** can be accomplished by manually reaching through bottom aperture **3815** (FIG. 38) of cradle **3710** to push upward or away from bottom aperture **3815** on device **3720**. In a number of embodiments, alignment frame **710** and protective film **720** can be peeled away from overlay **730**, which is adhered to device **3720**. After alignment frame **710** and protective film **720** have been peeled away from overlay **730**, application of overlay **730** to the screen of device **3720** can be complete.

Turning ahead in the drawings, FIG. 46 illustrates a perspective view of a machine **4600** in a closed configuration. FIG. 47 illustrates a perspective view of machine **4600** in an open configuration. Machine **4600** can be used with an overlay applicator to apply an overlay to a device. Machine **4600** is merely exemplary and embodiments of the machine are not limited to the embodiments presented herein. The machine can be employed in many different embodiments or examples not specifically depicted or described herein. In various embodiments, machine **4600** can include a base **4610**, a cradle support **4620**, a cradle **4630**, a hinge assembly **4640**, an arm **4650**.

In many embodiments, base **4610** can provide a sturdy support base for machine **4600**. In some embodiments, cradle support **4620** can be a recess in base **4610**. In a number of embodiments, base **4610** can include an indented region **4611**, which can extend partially along a side of base **4610** and/or cradle support **4620**, and which can facilitate removal of cradle **4630** from cradle support **4620**. Cradle support **4620** can be configured to hold a cradle, such as cradle **4630**. In various embodiments, cradle support **4620** can be used interchangeably with various different cradles, such as cradles configured for various different devices.

Cradle **4630** can be similar to cradle **3710** (FIGS. 37-38), and various components and/or constructions of cradle **4630** can be substantially identical or similar to various components of cradle **3710** (FIGS. 37-38). Cradle **4630** can be configured to be used with an overlay applicator, such as overlay applicator **700** (FIG. 7). As shown in FIG. 47, cradle **4630** can include a slot **4731** in which a device can be placed with the screen of the device facing upwards or away from slot **4731**. In some embodiments, slot **4731** can be conformal with the device. Cradle **4630** can have a thickness greater than the thickness of the device. In many embodiments, cradle **4630** can include an alignment base **4734**, which can engage with an alignment mechanism, such as alignment

mechanism **715** (FIG. 7), of an overlay applicator, such as overlay applicator **700** (FIG. 7). In some embodiments, alignment base **4734** can be one or more protrusions that can fit inside the one or more slots of alignment mechanism **715** (FIG. 7). For example, as shown in FIG. 7, alignment mechanism **715** (FIG. 7) can include six holes spaced relatively evenly around alignment frame **710** (FIG. 7). Alignment base **4734** can include six protrusions configured to engage with the six holes of alignment mechanism **715** (FIG. 7). In some embodiments, the protrusions of alignment base **4734** can be spring loaded. Alignment base **4734** and alignment mechanism **715** (FIG. 7) can be configured and positioned such that when alignment mechanism **715** (FIG. 7) is engaged with alignment base **4734**, overlay **730** (FIG. 7) can be positioned directly above the screen of the device in slot **4731**, and aligned such that overlay **730** (FIG. 7) will be adhered in an correct position on the screen when adhesive release liner **740** (FIG. 7) is removed. In certain embodiments, cradle **4630** can include a bottom aperture **4735**, which can facilitate removal of the device from cradle **4630**.

In many embodiments, base **4610** can be connected to arm **4650** at hinge assembly **4640**. In many embodiments, hinge assembly **4640** can allow arm **4650** to rotate relative to base **4610**. In some embodiments, hinge assembly **4640** can lock in two positions, which can allow arm to be held at a raised position and at a lowered position. Hinge assembly **4640** can include a hinge axle **4641**, which can connect a hinge central member **4642** to side supports **4643** through a hinge axis of rotation. In several embodiments, hinge side supports **4643** can include notches **4644**, and hinge central member **4642** can include a locking rod **4645**, which can engage in notches **4644** to lock hinge assembly **4640** such that arm **4650** can be held at a raised position and/or at a lowered position. In many embodiments, locking rod **4645** can have a spring-loaded bias to remain in notches **4644**. Arm **4650** can be raised to a raised configuration, as shown in FIG. 47, or lowered to a lowered position, as shown in FIG. 46. When arm **4650** is raised, cradle **4630** can be inserted or removed from cradle support **4620**. When arm **4650** is lowered, overlay applicator **700** (FIG. 7) can be used apply overlay **730** (FIG. 7), as described below.

In certain embodiments, arm **4650** can include a handle **4654**, which can be used to assist in raising and/or lowering arm **4650** with respect to base **4610** about hinge assembly **4640**. In some embodiments, arm **4650** can include an expandable bladder **4651**, such as an air bladder. In many embodiments, expandable bladder **4651** can be connected to a pumping mechanism **4652**, which can fill expandable bladder **4651** with air. Pumping mechanism **4652** can be similar or identical to pumping mechanism **4152** (FIG. 41), and/or expandable bladder **4651** can be similar or identical to expandable bladder **4151** (FIG. 41). In certain embodiments, expandable bladder **4651** and/or pumping mechanism **4652** can be a part of a portable (e.g., battery powered) blood pressure monitor and cuff, which can include a microprocessor and a start/stop button **4653** to initiate or terminate the inflation and/or deflation of expandable bladder **4651** with air.

Turning ahead in the drawings, FIGS. 48-50 illustrate using machine **4600** to apply overlay **730** (FIG. 7) to the screen of a device. FIG. 48 illustrates a perspective view of a machine **4600** in an open configuration, with a device in cradle **4630**, and an overlay applicator **700** above the device on cradle **4630**. As shown in FIG. 48, a device **4800** can be placed in slot **4731** (FIG. 47) of cradle **4630** with the screen of device **4800** facing upwards or away from cradle **4630**. In

57

some embodiments, cradle **4630** can be placed in cradle support **4620** (FIGS. **46-47**) prior to inserting device **4800** in cradle **4630**. In other embodiments, cradle **4630** can be placed in cradle support **4620** (FIGS. **46-47**) after inserting device **4800** in cradle **4630**. In many embodiments, arm **4650** of machine **4600** can be in a raised position to facilitate insertion of cradle **4630** in cradle support **4620** (FIGS. **46-47**) and/or insertion of device **4800** in cradle **4630**.

In a number of embodiments, overlay applicator **700** can be placed on cradle **4630** above device **4800**, with protective film **720** facing up and above overlay **730** (FIG. **7**), adhesive release liner **740** (FIG. **7**), and pull tab **750**. In many embodiments, pull tab **750** and wiper **757** (FIG. **7**) can be facing downward, and resting upon or proximate to the screen of device **4800**. In some embodiments, overlay applicator **700** can be secured to cradle **4630** by alignment base **4734** engaging with alignment mechanism **715**.

FIG. **49** illustrates a perspective view of a machine **4600** in a closed configuration, with pull tab **750** of overlay applicator **700** being pulled. In several embodiments, arm **4650** can next be lowered to a lowered position, as shown in FIG. **49**. In many embodiments, hinge central member **4642** can rotate with respect to hinge side supports **4643**, and locking rod **4645** (FIGS. **46-47**) can disengage with one or more of notches **4644** (FIGS. **46-47**) and reengage with a different one or more of notches **4644** (FIGS. **46-47**). In various embodiments when arm **4650** is in a lowered position, expandable bladder **4651** can rest upon overlay applicator **700**.

In several embodiments, pull tab **750** can be pulled to remove adhesive release liner **740** (FIG. **7**) from the adhesive side of overlay **730** (FIG. **7**). In many embodiments, as pull tab **750** is pulled, wiper **757** (FIG. **7**) can wipe across the screen of device **4800** (FIG. **48**) to remove any dust from the screen of device **4800** (FIG. **48**). In many embodiments, after pull tab **750** has been pulled out and adhesive release liner **740** (FIG. **7**) has been removed from covering overlay **730** (FIG. **7**), overlay **730** (FIG. **7**) can be secured such that it remains above and does not adhere to the screen of device **4800** (FIG. **48**). In some embodiments, pulling on pull tab **750** to remove adhesive release liner **740** (FIG. **7**) from the adhesive side of overlay **730** (FIG. **7**) can occur before lowering arm **4650** to a lowered position.

In some embodiments, pumping mechanism **4652** can next be activated to fill expandable bladder **4651**. In many embodiments, start/stop button **4653** can be activated to fill expandable bladder **4651** with air. Expandable bladder **4651** can expand as it fills with air. In some embodiments, the expansion of expandable bladder **4651** can provide downward force on protective film **720** (FIG. **7**) such that overlay **730** (FIG. **7**) can begin to adhere to the screen of device **4800** (FIG. **48**). Adhering overlay **730** (FIG. **7**) to device **4800** (FIG. **48**) by applying pressure with expandable bladder **4651** can advantageously allow the overlay **730** (FIG. **7**) to be accurately adhered to the screen of device **4800** (FIG. **48**) without wrinkles and/or with minimal or no bubbles. In certain embodiments, expandable bladder **4651** can be configured to begin inflation at the center of expandable bladder **4651** and continue inflating out to the perimeter regions of expandable bladder **4651**, which can adhere overlay **730** (FIG. **7**) beginning at the center of the screen of device **4800** (FIG. **48**), and continue the adhesion out to the perimeter regions of the screen of device **4800** (FIG. **48**), which can advantageously cause overlay **730** (FIG. **7**) to be adhered to the screen of device **4800** (FIG. **48**) with minimal or no air bubbles.

58

In many embodiments, pumping mechanism **4652** can be deactivated to stop the inflation of expandable bladder **4651** and/or to begin the deflation of expandable bladder **4651**. In many embodiments, start/stop button **4653** can be pressed to deactivate pumping mechanism **4652** to deflate expandable bladder **4651**. In other embodiments, pumping mechanism **4652** can be pre-programmed to stop the inflation of expandable bladder **4651** and to begin the deflation of expandable bladder **4651** after expandable bladder reaches a predetermined level of inflation.

FIG. **50** illustrates a perspective view of a machine **4600** in an open configuration, with portions of overlay applicator **700** remaining on device **4800**. In a number of embodiments, arm **4650** can be raised to a raised position, as shown in FIG. **50**. In many embodiments, hinge central member **4642** can rotate with respect to hinge side supports **4643**, and locking rod **4645** (FIGS. **46-47**) can disengage with one or more of notches **4644** (FIGS. **46-47**) and reengage with a different one or more of notches **4644** (FIGS. **46-47**). In many embodiments, handle **4654** can help facilitate lifting and/or moving arm **4650**. Arm **4650** of machine **4600** can be in a raised position to facilitate removal of cradle **4630** from cradle support **4620**, and/or removal of device **4800** from cradle **4630**.

In several embodiments, cradle **4630**, along with device **4800** and overlay applicator **700**, can next be removed from cradle support **4620** of machine **4600**. In a number of embodiments, device **4800**, along with the protective film **720**, alignment frame **710**, and overlay **730**, can be removed from cradle **4630**. In many embodiments, removal of device **4800** can be accomplished by manually reaching through bottom aperture **4735** (FIG. **47**) of cradle **4630** to push upward (or away from bottom aperture **4735**) on device **4800**. In several embodiments, alignment frame **710** and protective film **720**, which can be integral, can be peeled away from overlay **730**, which is adhered to device **4800**. After alignment frame **710** and protective film **720** have been peeled away from overlay **730**, application of overlay **730** to the screen of device **4800** can be complete.

Turning ahead in the drawings, FIG. **51** illustrates a flow chart for an embodiment of a method **5100** of providing an overlay applicator. Method **5100** is merely exemplary and is not limited to the embodiments presented herein. Method **5100** can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method **5100** can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method **5100** can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method **5100** can be combined or skipped. In some embodiments, the overlay applicator can be similar or identical to overlay applicator **3000** (FIG. **30**).

Referring to FIG. **51**, method **5100** can include a block **5101** of providing an adhesive release liner. In many embodiments, the adhesive release liner layer can be similar or identical to adhesive release liner **140** (FIG. **1**), adhesive release liner **440** (FIGS. **4-5**), adhesive release liner **640** (FIG. **6**), adhesive release liner **740** (FIG. **7**); adhesive release liner **1540** (FIG. **15**), and/or adhesive release liner **2740** (FIGS. **27-30**). In a number of embodiments, the adhesive release liner can include a top side and a bottom side.

In some embodiments, method **5100** can include a block **5102** of providing a pull tab. In various embodiments, the pull tab can be similar or identical to pull tab **150** (FIG. **1**),

59

pull tab **450** (FIGS. 4-5), pull tab **650** (FIG. 6), pull tab **750** (FIG. 7), pull tab **1550** (FIG. 15), and/or pull tab **2750** (FIGS. 27-30). In some embodiments, the pull tab can include a top side and a bottom side. In various embodiments, the adhesive release liner can be integral with the pull tab. In a number of embodiments, method **5100** can include adhering the adhesive release liner to the pull tab.

In a number of embodiments, method **5100** can include a block **5103** of attaching a wiper to the top side of the pull tab. In several embodiments, the wiper can be similar or identical to wiper **157** (FIG. 1), wiper **457** (FIG. 4), wiper **657** (FIG. 6), wiper **757** (FIG. 7), and/or wiper **2857** (FIGS. 28-30).

In various embodiments, method **5100** can include a block **5104** of providing an overlay layer. The overlay layer can be similar or identical to the layer of material for overlay **2930** (FIGS. 29-30). In a number of embodiments, the overlay layer can include a top side and a bottom side. In some embodiments, the bottom side can include an adhesive agent configured to adhere to the top side of the adhesive release liner.

In many embodiments, method **5100** can include a block **5105** of attaching the bottom side of the overlay layer to the top side of the adhesive release liner.

In some embodiments, method **5100** can include a block of **5106** of providing a protective film layer. In a number of embodiments, the protective film layer can be similar or identical to the layer of material for protective film layer **2920** (FIGS. 29-30). In various embodiments, the protective film layer can include a top side and a bottom side.

In several embodiments, method **5100** can include a block **5107** of attaching the bottom side of the protective film layer to the top side of the overlay layer.

In various embodiments, method **5100** can include a block **5108** of cutting the protective film layer and the overlay layer to create an interface slit between an alignment tab and a device portion, and to create a tail slit between a tail portion and the device portion. In some embodiments, the interface slit can be similar or identical to interface slit **2960** (FIGS. 29-30). In a number of embodiments, the tail slit can be similar or identical to tail slit **2991** (FIGS. 29-30). In some embodiments, the alignment tab can be similar or identical to alignment tab **110** (FIG. 1), alignment tab **410** (FIGS. 4-5), alignment tab **610** (FIG. 6), and/or alignment tab **2910** (FIGS. 29-30). In many embodiments, the device portion can be similar or identical to device portion **470** (FIGS. 4-5), device portion **670** (FIG. 6), device portion **2970** (FIGS. 29-30), and/or device portion **3560** (FIG. 35). In some embodiments, the tail portion can be similar or identical to tail portion **2990** (FIGS. 29-30). In several embodiments, the alignment tab can be configured to engage with an alignment base to align the overlay with the screen of the device.

In many embodiments, method **5100** can include a block **5109** of attaching a sticker to the top side of the protective film. In several embodiments, the sticker can be similar or identical to joining sticker **680** (FIG. 6), joining sticker **3080** (FIG. 30), and/or joining stickers **3559** (FIG. 35). In some embodiments, the sticker can span the interface slit between the device portion and the alignment tab. In a number of embodiments, the sticker can include a non-stretching material.

Proceeding to the next drawing, FIG. 52 illustrates a flow chart for an embodiment of a method **5200** of providing a cradle. Method **5200** is merely exemplary and is not limited to the embodiments presented herein. Method **5200** can be employed in many different embodiments or examples not

60

specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method **5200** can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method **5200** can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method **5200** can be combined or skipped. In some embodiments, the cradle can be similar or identical to cradle **3100** (FIGS. 31-34).

Referring to FIG. 52, method **5200** can include a block **5201** of providing a base. In a number of embodiments, the base can be similar or identical to bottom frame **3110** (FIG. 31).

In many embodiments, method **5200** can include a block **5202** of providing an alignment base. In several embodiments, the alignment base can be similar or identical to alignment base, such as alignment base **212** (FIG. 2) or alignment base **312** (FIG. 3), alignment base **835** (FIGS. 8-9, 13-14), alignment base **1632** (FIGS. 16-19), alignment base **2035** (FIG. 20) and/or alignment base **3112** (FIG. 31). In various embodiments, the alignment base can be configured to engage with an alignment mechanism of an overlay applicator. The overlay applicator can be similar or identical to overlay applicator **100** (FIG. 1), overlay applicator **400** (FIGS. 4-5), overlay applicator **600** (FIG. 6), and/or overlay applicator **3000** (FIG. 30). In a number of embodiments, the alignment mechanism can be similar or identical to alignment mechanism **115** (FIG. 1), alignment mechanism **415** (FIGS. 4-5), alignment mechanism **615** (FIG. 6), and/or alignment mechanism **2915** (FIGS. 29-30).

In some embodiments, method **5200** can include a block **5203** of providing one or more frame pieces. In several embodiments, the one or more frame pieces can include two corner frames located at a first end of the base proximate to the alignment base. The corner frames can be similar or identical to corner frames **3130** (FIG. 31). In many embodiments, the one or more frame pieces can include an end frame located at a second end of the base opposite the first end. The end frame can be similar or identical to end frame **3140** (FIG. 31). In several embodiments, the one or more frame pieces can include two side frames located at each side of the base between the first end and the second end. The side frames can be similar or identical to side frames **3120** (FIG. 31).

In some embodiments, the frame pieces can be configured to securely hold an electronic device in a device slot in a fixed position with respect to the alignment base. The device slot can be similar or identical to device slot **3111** (FIG. 31). In various embodiments, the base, the alignment base, and the one or more frame pieces can be configured to hold the overlay applicator between the base and a screen of the electronic device when the screen of the electronic device is facing toward the base. In a number of embodiments, the base, the alignment base, and the one or more frame pieces can be configured to facilitate applying an overlay of the overlay applicator to the screen of the electronic device. The overlay can be similar or identical to overlay **130** (FIG. 1), overlay **430** (FIGS. 4-5), overlay **630** (FIG. 6), overlay **730** (FIG. 7), overlay **1530** (FIG. 15), and/or overlay **2930** (FIGS. 29-30). In many embodiments, the one or more frame pieces can be configured to align the overlay applicator as the overlay of the overlay applicator is applied to the screen of the electronic device.

In several embodiments, the one or more frame pieces can include a pull tab slot configured to allow a pull tab of the overlay applicator to extend beyond the device slot. The pull

61

tab slot can be similar or identical to end slot **3141** (FIG. **31**). The pull tab can be similar or identical to pull tab **150** (FIG. **1**), pull tab **450** (FIGS. **4-5**), pull tab **650** (FIG. **6**), and/or pull tab **2750** (FIGS. **27-30**). For example, the pull tab can extend beyond the device slot as shown in FIGS. **32-33**.

In a number of embodiments, the base can include a support piece extending in a first direction. The support piece can be similar or identical to central support **3150** (FIG. **31**). In some embodiments, the support piece can be configured to press an adhesive side of the overlay of the overlay applicator toward the screen of the electronic device when the screen of the electronic device is facing toward the support piece and the pull tab of the overlay applicator is pulled in the first direction to remove an adhesive release liner of the overlay applicator and expose the adhesive side of the overlay to the screen of the electronic device. In a number of embodiments, the support piece can include an elastomeric material. In various embodiments, the support piece can be configured to press the adhesive side of the overlay against the screen of the electronic device when the adhesive release liner of the overlay applicator is removed to expose the adhesive side of the overlay. In various embodiments, the support piece can be configured to press a wiper of the pull tab toward the screen of the electronic device as the wiper moves across the screen of the electronic device in the first direction. The wiper can be similar or identical to wiper **157** (FIG. **1**), wiper **457** (FIG. **4**), wiper **657** (FIG. **6**), wiper **757** (FIG. **7**), and/or wiper **2857** (FIGS. **28-30**).

Proceeding to the next drawing, FIG. **53** illustrates a flow chart for an embodiment of a method **5300** of providing a machine. Method **5300** is merely exemplary and is not limited to the embodiments presented herein. Method **5300** can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method **5300** can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method **5300** can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method **5300** can be combined or skipped. In some embodiments, the machine can be similar or identical to machine **3500** (FIGS. **35-36**).

Referring to FIG. **53**, method **5300** can include a block **5301** of providing a base. In a number of embodiments, the base can be similar or identical to base **3510** (FIGS. **35-36**). In several embodiments, the base can include a first end. The first end can be similar or identical to first end **3511** (FIGS. **35-36**). In many embodiments, the base can include a second end. The second end can be similar or identical to second end **3512** (FIGS. **35-36**). In some embodiments, the base can include an alignment base. The alignment base can be similar or identical to alignment base **3514** (FIGS. **35-36**). In many embodiments, the alignment base can be configured to engage with an alignment mechanism of an overlay applicator. The alignment mechanism can be similar or identical to alignment mechanism **3557** (FIGS. **35-36**). The overlay applicator can be similar or identical to overlay applicator **3550** (FIGS. **35-36**).

In a number of embodiments, the overlay applicator can include a first alignment tab and a second alignment tab. The first and second alignment tabs can be similar or identical to alignment tabs **3556** (FIGS. **35-36**). In several embodiments, the first alignment tab can include a first portion of the alignment mechanism, and the second alignment tab including a second portion of the alignment mechanism. In many embodiments, the alignment base can include a first side

62

proximate the first end of the base. In a number of embodiments, the first side can be configured to engage with the first portion of the alignment mechanism of the overlay applicator. In many embodiments, a second side proximate the second end of the base, the second side can be configured to engage with the second portion of the alignment mechanism of the overlay applicator.

In a number of embodiments, the base can include a pull slot. The pull slot can be similar or identical to pull slot **3515** (FIGS. **35-36**). In some embodiments, the pull slot can be located between the cradle and the second side of the alignment base.

In many embodiments, method **5300** can include a block **5302** of providing a cradle. The cradle can be similar or identical to cradle **3520** (FIGS. **35-36**). In several embodiments, the cradle can be located between the first side of the alignment base and the second side of the alignment base. In some embodiments, the cradle can be configured to securely hold an electronic device. In various embodiments, the cradle can be integral with the base. In many embodiments, the cradle can be removably coupled to the base.

In some embodiments, method **5300** can include a block **5303** of providing a slider configured to move between the first and second ends of the base. The slider can be similar or identical to slider **3530** (FIGS. **35-36**). In a number of embodiments, the slider can include a bar. The bar can be similar or identical to pressure bar **3535** (FIGS. **35-36**). In many embodiments, the bar can be configured to press an overlay of the overlay applicator toward a screen of the electronic device when the slider is moved between the first and second ends of the base. The overlay can be similar or identical to overlay **130** (FIG. **1**), overlay **430** (FIGS. **4-5**), overlay **630** (FIG. **6**), overlay **730** (FIG. **7**), overlay **1530** (FIG. **15**), and/or overlay **2930** (FIGS. **29-30**). In several embodiments, the bar can be spring-loaded to press downward toward the base. In a number of embodiments, the base can include one or more tracks configured to engage with the slider and allow the slider to move between the first and second ends of the base. The tracks can be similar or identical to track **3513** (FIGS. **35-36**).

In several embodiments, the base can include one or more first cams at the first end of the base and one or more second cams at the second end of the base. In first and second cams can be similar or identical to cams **3516**. In many embodiments, the one or more first cams can be configured to prevent the bar from contacting the first side of the alignment base when the slider is moved between the first and second ends of the base. The one or more second cams can be configured to prevent the bar from contacting the second side of the alignment base when the slider is moved between the first end and second ends of the base.

In many embodiments, the machine can be configured such that when the alignment base is engaged with the alignment mechanism of the overlay applicator and the cradle is holding the electronic device, a pull tab of the overlay applicator can be pulled through the pull slot to remove an adhesive release liner of the overlay applicator and expose an adhesive side of the overlay to the screen of the electronic device. The pull tab be similar or identical to pull tab **3555** (FIG. **35**). In various embodiments, the machine can be further configured such that when the adhesive release liner of the overlay applicator is removed to expose the adhesive side of the overlay to the screen of the electronic device and the slider is moved between the first and second ends of the base, the bar can be configured to press the adhesive side of the overlay against the screen of the electronic device.

63

Proceeding to the next drawing, FIG. 54 illustrates a flow chart for an embodiment of a method 5400 of providing a machine. Method 5400 is merely exemplary and is not limited to the embodiments presented herein. Method 5400 can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method 5400 can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method 5400 can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method 5400 can be combined or skipped. In some embodiments, the machine can be similar or identical to machine 3700 (FIGS. 37, 41-45) and/or machine 4600 (FIGS. 46-50).

Referring to FIG. 54, method 5400 can include a block 5401 of providing a base. In a number of embodiments, the base can be similar or identical to base 4110 (FIG. 41) and/or base 4610 (FIG. 46).

In many embodiments, method 5400 can include a block 5402 of providing a cradle configured to securely hold an electronic device. The cradle can be similar or identical to cradle 3710 (FIGS. 37-38) and/or cradle 4630 (FIGS. 46-50). The electronic device can be similar or identical to device 3720 (FIG. 37) and/or device 4800 (FIG. 48). In several embodiments, the cradle can include an alignment base configured to engage with an alignment mechanism of an overlay applicator. The alignment base can be similar or identical to alignment base 3814 (FIG. 38) and/or alignment base 4734 (FIG. 47). The alignment mechanism can be similar or identical to alignment mechanism 715 (FIGS. 7, 48). In several embodiments, the alignment base can include six protrusions configured to engage with an alignment frame of the overlay applicator. In some embodiments, the cradle can be integral with the base. In many embodiments, the base can include a cradle support configured to removably hold the cradle. The cradle support can be similar or identical to cradle support 4120 (FIG. 41) and/or cradle support 4620 (FIG. 46).

In some embodiments, method 5400 can include a block 5403 of providing an arm. The arm can be similar or identical to arm 4150 (FIG. 41) and/or arm 4650 (FIG. 46). In several embodiments, the arm can include an expandable bladder. The expandable bladder can be similar or identical to expandable bladder 4151 (FIG. 41) and/or expandable bladder 4651 (FIG. 46). In a number of embodiments, the arm can include a pumping mechanism configured to inflate the expandable bladder. The pumping mechanism can be similar or identical to pumping mechanism 4152 (FIG. 41) and/or pumping mechanism 4652 (FIG. 46). In some embodiments, the arm can include a handle. The handle can be similar or identical to handle 4154 (FIG. 41) and/or handle 4654 (FIG. 46). In various embodiments, the arm can be configured to be hingedly rotated between an open configuration and a closed configuration. The open configuration can be similar or identical to the configuration shown in FIGS. 41-43 and 45 for machine 4100, and/or the configuration shown in FIGS. 47-48 and 50 for machine 4600. The closed configuration can be similar or identical to the configuration shown in FIG. 44 for machine 4100 and/or the configuration shown in FIGS. 46 and 49 for machine 4600. In some embodiments, the pumping mechanism can include a button configured to control inflation of the expandable bladder. The button can be similar or identical to start/stop button 4153 (FIGS. 41, 44-45) and/or start/stop button 4653 (FIG. 46, 49). In various embodiments, the arm can be

64

hingedly attached to the base, such as in shown in FIGS. 46-50 for machine 4600. In a number of embodiments, method 5400 can include the providing a stand attached to the base and hingedly attached to the arm. The stand can be similar or identical to stand 4130 (FIG. 41).

In various embodiments, the machine can be configured such that when the arm is in the closed configuration and the expandable bladder is inflated, the expandable bladder can press an overlay of the overlay applicator toward a screen of the electronic device to adhere an adhesive side of the overlay to the screen of the electronic device. The overlay can be similar or identical to overlay 730 (FIGS. 7, 45, 50). In some embodiments, the machine can be further configured such that when (a) the arm is in the closed configuration, (b) a pull tab of the overlay applicator is pulled to remove an adhesive release liner and expose the adhesive side of the overlay to the screen of the electronic device, and (c) the expandable bladder is inflated, the expandable bladder can be configured to press the adhesive side of the overlay against the screen of the electronic device. The pull tab can be similar or identical to pull tab 750 (FIGS. 7, 42, 44-45, 48-49).

In some embodiments, method 5400 can include providing a cradle frame configured to engage with the cradle and secure the overlay applicator to the cradle. The cradle frame can be similar or identical to cradle frame 3730 (FIGS. 37, 39-40). In a number of embodiments, the cradle frame can include a bottom plate. The bottom plate can be similar or identical to bottom plate 3912 (FIGS. 39-40). In many embodiments, the bottom plate can include a crease configured to press downward on the overlay applicator to adhere the adhesive side of the overlay to the screen of the electronic device. The crease can be similar or identical to crease 3913 (FIGS. 39-40). In several embodiments, the cradle frame can include a recess. The recess can be similar or identical to recess 3916 (FIG. 39). In various embodiments, the expandable bladder can be configured to be positioned within the recess of the cradle frame when the arm is in the closed configuration. In several embodiments, the cradle frame can include alignment holes configured to engage with alignment base. The alignment holes can be similar or identical to alignment holes 3911 (FIGS. 39-40).

Turning ahead in the drawings, FIG. 55 illustrates an exploded view of a dust sticker assembly 5500. Dust sticker assembly 5500 is merely exemplary and embodiments of the dust sticker assembly are not limited to embodiments presented herein. The dust sticker assembly can be employed in many different embodiments or examples not specifically depicted or described herein. In many embodiments, dust sticker assembly 5500 can include a dust removal sticker 5510 and/or a release liner 5520. In many embodiments, a bottom side of dust removal sticker 5510 can include an adhesive. In many embodiments, release liner 5520 can be attached to the bottom side of dust removal sticker 5510 and/or can cover the adhesive on the bottom side of dust removal sticker 5510. In a number of embodiments, release liner 5520 can include a device portion 5521 and an end portion 5522. Device portion 5521 and end portion 5522 can be separated at a fold line 5523. In many embodiments, fold line 5523 can be formed by a cut through release liner 5520 to form device portion 5521 and end portion 5522.

Turning ahead in the drawings, FIG. 56 illustrates a bottom perspective view of dust sticker assembly 5500 and a device 5600. In a number of embodiments, dust removal sticker 5510 can be applied to device 5600 by peeling off device portion 5521 from the bottom of dust removal sticker 5510 and adhering dust removal sticker 5510 to cover the

65

screen of device **5600**. In a number of embodiments, after dust removal sticker **5510** is adhered to the screen of device **5600**, end portion **5522** can extend beyond an end of the screen of device **5600**.

Turning ahead in the drawings, FIG. **57** illustrates a perspective view of machine **3500** (as shown in FIGS. **35-36** and described above) and dust sticker assembly **5500**, which can be used together to remove dust from the screen of device **5600** (FIG. **56**). Device **5600** (FIG. **56**) can be placed in recess **3521** of cradle **3520**. In many embodiments, dust removal sticker **5510** can be adhered to the screen of device **5600** (FIG. **56**) before placing device **5600** (FIG. **56**) in cradle **3520**. In other embodiments, dust removal sticker **5510** can be adhered to the screen of device **5600** (FIG. **56**) after placing device **5600** (FIG. **56**) in cradle **3520**.

Turning ahead in the drawings, FIG. **58** illustrates a perspective view of a portion of machine **3500** and dust sticker assembly **5500**. FIG. **59** illustrates a perspective view of a portion of machine **3500** and dust sticker assembly **5500**, with end portion of release liner **5520** being peeled away from dust removal sticker **5510**. In a number of embodiments, end portion **5522** and a portion of dust removal sticker **5510** attached to end portion **5522** can be folded back at fold line **5523**, as shown in FIG. **58**, such that end portion **5522** of release liner **5520** (FIG. **55**) can be exposed. With end portion **5522** folded back, end portion **5522** of release liner **5520** (FIG. **55**) can be peeled away from dust removal sticker **5510**, as shown in FIG. **59**, to expose an adhesive end region **5922** of dust removal sticker **5510**.

Turning ahead in the drawings, FIG. **60** illustrates a perspective view of machine **3500**, dust sticker assembly **5500**, and an overlay applicator **6050**. Overlay applicator **6050** can be similar to overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), overlay applicator **1500** (FIG. **15**), overlay applicator **3000** (FIG. **30**) and/or overlay applicator **3550** (FIG. **35**), and various components and/or constructions of overlay applicator **6050** can be substantially identical or similar to various components of overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), overlay applicator **1500** (FIG. **15**), overlay applicator **3000** (FIG. **30**), and/or overlay applicator **3550** (FIG. **35**). In some embodiments, overlay applicator **6050** can include an adhesive release liner (not shown), a pull tab **6055**, an overlay (not shown), a protective film **6052**, and/or alignment tabs **6056**.

In some embodiments, alignment tabs **6056** can be similar to alignment tabs **3556** (FIG. **35**), and can include an alignment mechanism **6057**, which can engage with alignment base **3514** to position overlay applicator **6050** so that the overlay is positioned directly above the screen of device **5600** (FIG. **56**). In many embodiments, when overlay applicator **6050** is lowered onto alignment base **3514**, adhesive end region **5922** can be attached to pull tab **6055**, as shown in FIG. **61**, described below. In some embodiments, pull tab **6055** can be integral with the adhesive release liner and can be a single layer of material, such as plastic, paper, or another suitable liner film. In many embodiments, pull tab **6055** can be inserted through pull slot **3515**, which can allow pull tab **6055** to be pulled while overlay applicator **6050** is secured to machine **3500** on alignment base **3514**. As pull tab **6055** is pulled, such as through pull slot **3515**, adhesive end region **5922** can be pulled along with pull tab **6055**, which can peel off dust removal sticker **5510** from the screen of device **5600** (FIG. **56**). As dust removal sticker **5510** is

66

peel off the screen of device **5600** (FIG. **56**), dust, dirt, and/or finger smudges can be removed from the screen of device **5600** (FIG. **56**). As dust removal sticker **5510** is peeled off the screen of device **5600** (FIG. **56**), the bottom, adhesive side of dust removal sticker **5510** can be folded over to face and/or attach to pull tab **6055** and/or the adhesive release liner.

Turning ahead in the drawings, FIG. **61** illustrates a side elevational view of a portion of dust sticker assembly **5500** as attached to device **5600** and overlay applicator **6050**. Dust removal sticker **5510** can be adhered to the screen of device **5600**, and adhesive end region **5922** can be folded back at fold line **5523** and exposed such that it can be adhered to pull tab **6055**, which is folded back along an adhesive release liner **6153** of overlay applicator **6050**. In many embodiments, adhesive end region **5922** can be adhered to pull tab **6055** after end portion **5522** (FIG. **55**) of release liner **5520** (FIG. **55**) is removed from adhesive end region **5922** of dust removal sticker **5510**.

Turning ahead in the drawings, FIG. **62** illustrates a perspective view of a wiper **6200**. Wiper **6200** is merely exemplary and embodiments of the wiper are not limited to embodiments presented herein. The wiper can be employed in many different embodiments or examples not specifically depicted or described herein. Wiper **6200** can be similar to wiper **157** (FIG. **1**), wiper **457** (FIGS. **4-5**), wiper **657** (FIG. **6**), wiper **757** (FIG. **7**), and/or wiper **2857** (FIG. **28**), and various components and/or constructions of wiper **6200** can be substantially identical or similar to various components of wiper **157** (FIG. **1**), wiper **457** (FIGS. **4-5**), wiper **657** (FIG. **6**), wiper **757** (FIG. **7**), and/or wiper **2857** (FIG. **28**). In many embodiments, wiper **6200** can be used with an overlay applicator, such as overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), and/or overlay applicator **3000** (FIG. **30**) to remove dust, dirt, smudges, etc., from the screen of a device prior to adhering an overlay to the screen of the device. In many embodiments, wiper **6200** can be attached to a pull tab, such as pull tab **150** (FIG. **1**), pull tab **450** (FIGS. **4-5**), pull tab **650** (FIG. **6**), pull tab **750** (FIG. **7**), and/or pull tab **2750** (FIGS. **27-30**).

In a number of embodiments, wiper **6200** can include a wiper support **6210** and a wiper surface **6220** at a top side of wiper support **6210**. In various embodiments, an opposite bottom side of wiper support **6210** can be configured to attach to the pull tab. In many embodiments, wiper support **6210** can be made of foam or an elastomeric material. Wiper support **6210** can have sufficient thickness to ensure a close contact and/or pressure between wiper surface **6220** and the screen of the device when wiper surface **6220** is pulled across the screen of the device. In many embodiments, wiper surface **6220** can be made of a fabric (e.g., a microfiber cloth), soft silicone, an extruded rubber, or another suitable material. In a number of embodiments, wiper surface **6220** can include a slot **6230**. In some embodiments, slot **6230** can extend partially or fully through the thickness of wiper surface **6220**. In some embodiments, slot **6230** can be debossed in wiper surface **6220**. In certain embodiments, wiper surface **6220** can be as long as, or slightly longer than, the width of the screen of the device. In some embodiments, slot **6230** can be as long as the width of the screen of the device, and wiper surface **6220** can extend an additional approximately 2 mm on each side of slot **6230**. In a number of embodiments, wiper surface **6220** can have a width of approximately 10 mm, slot **6230** can have a width of approximately 2 mm, and wiper surface **6220** can extend 4 mm on each side of slot **6230**.

67

In many embodiments, as wiper **6200** is pulled across the screen of the device, the leading edge and/or the material of wiper surface **6220** can intercept dust particles. Slot **6230** can intercept dust particles that are not intercepted by the leading edge or the material of wiper surface **6220**, such as a rounded dirt particle that rolls across wiper surface **6220**. In a number of embodiments, including slot **6230** in wiper surface **6220** can advantageously decrease the surface area of wiper surface **6220**, which can advantageously increase the pressure of the remaining surface of wiper surface **6220** on the screen of the device during wiping and forestall dust and/or dirt particles from rolling past the leading edge of wiper surface **6220** or slot **6230**.

Other embodiments of wipers, such as wiper **6200**, can have additional slots. For example, FIG. **63** illustrates a perspective view of a wiper **6300**. Wiper **6300** is merely exemplary and embodiments of the wiper are not limited to embodiments presented herein. The wiper can be employed in many different embodiments or examples not specifically depicted or described herein. Wiper **6300** can be similar to wiper **157** (FIG. **1**), wiper **457** (FIGS. **4-5**), wiper **657** (FIG. **6**), wiper **757** (FIG. **7**), wiper **2857** (FIG. **28**), and/or wiper **6200** (FIG. **62**), and various components and/or constructions of wiper **6200** can be substantially identical or similar to various components of wiper **157** (FIG. **1**), wiper **457** (FIGS. **4-5**), wiper **657** (FIG. **6**), wiper **757** (FIG. **7**), wiper **2857** (FIG. **28**), and/or wiper **6200** (FIG. **62**). In many embodiments, wiper **6300** can include wiper support **6210** and a wiper surface **6320** at the top side of wiper support **6210**. The bottom side of wiper support **6210** can be configured to attach to a pull tab, as described above.

In a number of embodiments, wiper surface **6320** can include a slot **6330** and slot **6340**. In some embodiments, slots **6330** and **6340** can extend partially across the length of wiper surface **6320**. In a number of embodiments, slot **6330** can extend across one half of the length of wiper surface **6320** and slot **6340** can extend across the other half of the length of wiper surface **6320**. In certain embodiments, slots **6330** and **6340** can each extend into an overlap region **6350**. In some embodiments, overlap region **6350** can extend approximately 4 mm. Overlap region **6350** can advantageously provide sufficient overlap in the wiping paths of slots **6330** and **6340** as slots **6330** and **6340** wipe across the screen of the device to ensure rolling dust particles roll in either slot **6330** or slot **6340**. In other embodiments, slots **6330** and **6340** can each extend across the length of wiper surface **6320** and/or the width of the screen of the device, such that rolling dust particles could be intercepted by two slots. In yet additional embodiments, slots **6330** and **6250** can be positioned in another suitable configuration and/or wiper **6300** can include additional slots.

Turning ahead in the drawings, FIG. **64** illustrates a top side view of a set of cradles **6400**. Set of cradles **6400** can include a cradle **6410** for a first device, a cradle **6420** for a second device, and cradle **6430** for a third device. Cradles **6410**, **6420**, and **6430** are merely exemplary and embodiments of the cradles are not limited to embodiments presented herein. The cradles can be employed in many different embodiments or examples not specifically depicted or described herein. Cradles **6410**, **6420**, and/or **6430** can be similar to cradle **310** (FIG. **3**), cradle **832** (FIG. **8**), cradle **1620** (FIG. **16**), cradle **2032** (FIG. **20**), cradle **3100** (FIG. **31**), cradle **3520** (FIG. **35**), cradle **3710** (FIGS. **37-38**) and/or cradle **4630** (FIGS. **46-50**), and various components and/or constructions of cradles **6410**, **6420**, and/or **6430** can be substantially identical or similar to various components of cradle **310** (FIG. **3**), cradle **832** (FIG. **8**), cradle **1620**

68

(FIG. **16**), cradle **2032** (FIG. **20**), cradle **3100** (FIG. **31**), cradle **3520** (FIG. **35**), cradle **3710** (FIGS. **37-38**) and/or cradle **4630** (FIGS. **46-50**). Cradles **6410**, **6420**, and/or **6430** can be used with an overlay applicator, e.g., overlay applicator **3550** (FIG. **35**), to apply an overlay to the screen of the device.

Cradle **6410** can include a device slot **6411** in which a first device can be placed with the screen of the first device facing upwards or away from device slot **6411**. In some embodiments, device slot **6411** is conformal with the first device. Device slot **6411** can have sides **6412** and a bottom **6413**. Cradle **6410** can have a thickness greater than the thickness of device slot **6411** and/or the first device. Similarly, cradle **6420** can include a device slot **6421**, which can include sides **6422** and a bottom **6423**, and/or cradle **6430** can include a device slot **6431**, which can include sides **6432** and a bottom **6433**. Device slot **6421** can be configured to hold a second device with the screen of the second device facing upwards or away from device slot **6421**, and/or device slot **6431** can be configured to hold a third device with the screen of the third device facing upwards or away from device slot **6431**. Device slot **6421** can be conformal with the second device, and/or device slot **6431** can be conformal with the third device. Cradle **6420** can have a thickness greater than the thickness of device slot **6421** and/or the second device, and cradle **6430** can have a thickness greater than the thickness of device slot **6431** and/or the third device.

In many embodiments, cradle **6410** can include an alignment base **6414**, which can engage with an alignment mechanism of the overlay applicator, such as alignment mechanism **3557** (FIG. **35**) on overlay applicator **3550** (FIG. **35**). In some embodiments, alignment base **6414** can be one or more protrusions that can fit inside the one or more slots of alignment mechanism **3557** (FIG. **35**). For example, as shown in FIG. **35**, alignment mechanism **3557** can include two holes on each of alignment tabs **3556** at each end of overlay applicator **3550**. Alignment base **6414** can include two protrusions at each end of cradle **6410** configured to engage with the two holes at each end of alignment mechanism **3557** (FIG. **35**). Alignment base **6414** and alignment mechanism **3557** (FIG. **35**) can be configured and positioned such that when alignment mechanism **3557** (FIG. **35**) is engaged with alignment base **6414**, the overlay can be positioned directly above the screen of the first device in device slot **6411**, and aligned such that the overlay will be adhered in an accurate position on the screen when the adhesive release liner is removed. In certain embodiments, cradle **6410** can include one or more bottom apertures **6415**, which can facilitate removal of the first device from cradle **6410**.

In various embodiments, cradle **6410** can include a pull slot **6416**. Pull slot **6416** can be similar to pull slot **3515** (FIG. **35**). In many embodiments, pull slot **6416** can be located between device slot **6411** and one side of alignment base **6414** and can extend to the bottom and/or side of cradle **6410**. In many embodiments, a pull tab, such as pull tab **3555** (FIG. **35**) can be inserted through pull slot **6416**, which can allow pull tab **3555** (FIG. **35**) to be pulled while overlay applicator **3550** (FIG. **35**) is secured at both ends of alignment base **6414**.

Cradle **6420** can include an alignment base **6424**, and/or cradle **6430** can include an alignment base **6434**. Alignment base **6424** and/or alignment base **6434** can be similar or identical to alignment base **6414**. Cradle **6420** can include one or more bottom apertures **6425**, and/or cradle **6430** can include one or more bottom apertures **6435**. Bottom aper-

69

tures 6425 and/or bottom apertures 6435 can be similar or identical to bottom apertures 6415. Cradle 6420 can include a pull slot 6426, and/or cradle 6430 can include a pull slot 6436. Pull slot 6426 and/or pull slot 6436 can be similar or identical to pull slot 6416.

Set of cradles 6400 can be used with overlay applicators, such as overlay applicator 3550 (FIG. 35), to apply overlays to various different devices. For example, cradle 6410 can be configured to apply an overlay on the first device (e.g., a Samsung Galaxy S® 4), cradle 6420 can be configured to apply an overlay on the second device (e.g., an Apple iPhone® 5), and cradle 6430 can be configured to apply an overlay on the third device (e.g., an Apple iPhone® 4). In other embodiments, set of cradles 6400 can include fewer or additional cradles, and/or can include cradles configured to be used with overlay applicator 3550 (FIG. 35) to apply overlays on additional devices.

Turning ahead in the drawings, FIG. 65 illustrates a perspective view of overlay applicator 3550 being utilized with cradle 6410, which is holding a device 6550. As shown in FIG. 65, device 6550 can be inserted in device slot 6411 with the screen of device 6550 facing upwards or away from device slot 6411. Next, pull tab 3555 can be inserted in and/or lowered through pull slot 6416 until device portion 3560 of overlay applicator 3550 is positioned over the screen of device 6550.

FIG. 66 illustrates a perspective view of overlay applicator 3550 being utilized with cradle 6410, which is holding a device 6550. As shown in FIG. 66, overlay applicator 3550 can be secured to cradle 6410 by engaging alignment mechanism 3557 on alignment tabs 3556 with alignment base 6414. After overlay applicator 3550 is secured to cradle 6410, pull tab 3555 can be pulled to remove the adhesive release liner from the bottom of the overlay and expose the adhesive on the bottom of the overlay to the screen of device 6550 (FIG. 65). As the adhesive release liner is removed, or alternatively, after the adhesive release liner is partially or fully removed, from the overlay, the overlay can be adhered to the screen of device 6550 (FIG. 65). In some embodiments, the overlay can be secured at the screen of device 6550 (FIG. 65), such that adhesion can begin to occur upon removal of the adhesive release liner. After the overlay is adhered to the screen of device 6550 (FIG. 65), device 6550 (FIG. 65) can be removed from cradle 6410 and protective film 3552 (FIG. 35) can be peeled off of the overlay.

Turning ahead in the drawings, FIG. 67 illustrates a perspective view of set of cradles 6400, with cradles 6410, 6420, and 6430 in a stacked configuration. FIG. 68 illustrates a side view of set of cradles 6400 in a stacked configuration. In a number of embodiments, each cradle in set of cradles 6400 can be stackable with the other cradles in set of cradles 6400. In various embodiments, each cradle of set of cradles 6400 can include stacking slots (not shown) at each end on the bottom side of the cradle (e.g., 6410, 6420, 6430), which can engage with an alignment base (e.g., 6414, 6424, 6434) of the next lower cradle in the stacked set of cradles 6400. For example, as shown in FIGS. 67-68, alignment base 6414 of cradle 6410 can engage with stacking slots (not shown) on cradle 6420 to secure cradle 6420 above cradle 6410, and alignment base 6424 of cradle 6420 can engage with stacking slots (not shown) on cradle 6430 to secure cradle 6430 above cradle 6420, such that cradle 6410, cradle 6420, and cradle 6430 are stacked in a coterminous configuration. Stacking each cradle of set of cradles 6400 can advantageously save table space and allow set of cradles to be kept in a stable compact arrangement.

70

Turning ahead in the drawings, FIG. 69 illustrates a perspective view of a machine 6900, which can be used with an overlay applicator, such as overlay applicator 3000 (FIG. 30), to apply an overlay, such as overlay 2930 (FIGS. 29-30) to the screen of a device. Machine 6900 is merely exemplary and embodiments of the machine are not limited to the embodiments presented herein. The machine can be employed in many different embodiments or examples not specifically depicted or described herein. In various embodiments, machine 6900 can include a clamshell frame 6910 and a cradle 6950. In a number of embodiments, clamshell frame 6910 can include a support base 6920, a lid 6930, and a hinge mechanism 6940. In some embodiments, cradle 6950 can be removably attached to support base 6920.

Cradle 6950 can be similar to cradle 3100 (FIG. 31-34). In some embodiments, cradle 6950 can include a bottom frame 6954, corner frames 6951, and/or side frames 6952, which together can form a device slot 6956, and which can provide support for the device and/or provide a snug fit for the device to prevent movement of the device when held by cradle 6950. In many embodiments, cradle 6950 can include an alignment base 6953, which can engage with alignment mechanism 2915 (FIGS. 29-30) of overlay applicator 3000 (FIG. 30). In some embodiments, alignment base 6953 can be one or more protrusions that can fit inside the one or more slots of alignment mechanism 2915 (FIGS. 29-30). Alignment base 6953 and alignment mechanism 2915 (FIGS. 29-30) can be configured and positioned such that when alignment mechanism 2915 (FIGS. 29-30) is engaged with alignment base 6953, overlay 2930 (FIGS. 29-30) can be positioned directly above the screen of the device held by cradle 6950, and aligned such that overlay 2930 (FIGS. 29-30) can be adhered in an accurate position on the screen of the device when adhesive release liner 2740 (FIGS. 27-30) is removed, as described below.

In many embodiments, cradle 6950 can include central support 6955. Central support 6955 can be similar to central support 3150 (FIG. 31). In many embodiments, central support 6955 can provide support for overlay applicator 3000 (FIG. 30). In a number of embodiments, central support 6955 can press overlay applicator 3000 (FIG. 30) against the screen of the device as adhesive release liner 2740 (FIGS. 27-30) is peeled away from overlay 2930 (FIGS. 29-30), as described below.

Turning ahead in the drawings, FIG. 70 illustrates a perspective view of clamshell frame 6910. In several embodiments, support base 6920 can include a cradle support 7021, which can securely hold cradle 6950 (FIG. 69). In a number of embodiments, cradle 6950 (FIG. 69) can be removably inserted in cradle support 7021. In other embodiments, cradle 6950 (FIG. 69) can be fixedly attached to cradle support 7021. In a number of embodiments, cradle support 7021 can hold various different cradles, such as cradles configured for various different devices.

In various embodiments, hinge mechanism 6940 attach lid 6930 to support base 6920, and/or can allow lid 6930 rotate with respect to support base 6920 between an open configuration, as shown in FIGS. 70-71 (FIG. 71 is described below), and a closed configuration, as shown in FIG. 72, described below. In some embodiments, hinge mechanism 6940 can include one or more axles 7041. In certain embodiments, axles 7041 can be secured in one or more base axle mounts 7042, and/or can be attached to lid 6930 by one or more lid axle supports 7034. In a number of embodiments, lid axle supports 7034 can be fixedly attached to axles 7041. In various embodiments, hinge mechanism 6940 can include one or more springs 7043, which can be

71

attached to axles 7041 and support base 6920, and which can bias lid 6930 to rotate away from support base 6920 in an open configuration, as shown in FIGS. 70-71.

In many embodiments, support base 6920 can include one or more latching slots 7022, one or more release buttons 7023, and/or one or more latches (not shown). Lid 6930 can include one or more catches 7032. In a number of embodiments, when machine 6900 (FIG. 69) is in the closed configuration, as shown in FIG. 72, catches 7032 can be inserted inside latching slots 7022 and can be engaged with the latches to secure lid 6930 proximate to support base 6920 in the closed configuration. In various embodiments, release buttons 7023 can be pressed to release catches 7032 from the latches, which can allow lid 6930 to rotate open away from support base 6920, so as to allow machine 6900 to open to the open configuration, as shown in FIG. 70. As described above, hinge assembly 6940 can be spring-loaded such that, upon pressing release buttons 7023 when machine 6900 is in a closed configuration, as shown in FIG. 72, machine 6900 (FIG. 69) can open to an open configuration, as shown in FIGS. 70-71. In certain embodiments, support base 6920 can include one or more bumpers 7024, which can support one or more rear portions 7033 of lid 6930 when machine 6900 (FIG. 69) is in an open configuration, and can prevent lid 6930 from opening further.

In a number of embodiments, lid 6930 can include one or more pads 7031. Pads 7031 can be made of foam or an elastomeric material. In a number of embodiments, pads 7031 can press the device down upon overlay applicator 2930 (FIGS. 29-30) when machine 6900 (FIG. 69) is in a closed configuration, as shown in FIG. 72.

Turning ahead in the drawings, FIG. 71 illustrates a perspective view of machine 6900 in an open configuration while holding a device 7100. In the open configuration, lid 6930 can be rotated about hinge assembly 6940 away from support base 6920. In many embodiments, cradle 6950 can be inserted and/or removed from clamshell frame 6910 while machine 6900 is in the open configuration. In several embodiments, overlay applicator 3000 (FIG. 30) can be attached to cradle 6950 while machine 6900 is in the open configuration. Overlay applicator 3000 (FIG. 30) can be positioned on cradle 6950 such that protective film 2920 (FIGS. 29-30) is placed against central support 6955, and adhesive release liner 2740 (FIGS. 27-30) and pull tab 2750 are above protective film 2920 (FIGS. 29-30). Pull tab 2750 (FIGS. 27-30) can be folded back across adhesive release liner 2740 (FIGS. 27-30), such that alignment tab 2910 (FIGS. 29-30) is partially or fully uncovered and wiper 2857 (FIGS. 28-30) is face up. In a number of embodiments, device 7100 can be inserted in device slot 6956 of cradle 6950. Device 7100 can be inserted with the screen of device 7100 facing downward against overlay applicator 3000 (FIG. 30).

Turning ahead in the drawings, FIG. 72 illustrates a perspective view of machine 6900 in a closed configuration while holding device 7100. In a closed configuration, lid 6930 can be rotated about hinge assembly 6940 proximate to support base 6920. As described above, catches 7032 can engage with the latches in support base 6920 to securely hold machine 6900 in a closed configuration. In many embodiments, pads 7031 (FIG. 70) can press down upon the back of device 7100 to press the screen of device 7100 against overlay applicator 3000 (FIG. 30). In many embodiments, machine 6900 can include an end slot 7225 in clamshell frame 6910 and/or cradle 6950 through which pull

72

tab 2750 (FIGS. 27-30) can extend and be pulled to remove adhesive release liner 2740 (FIGS. 27-30) from overlay 2930 (FIGS. 29-30).

Turning ahead in the drawings, FIGS. 73-74 illustrate using machine 6900 to apply overlay 2930 (FIGS. 29-30) to the screen of device 7100 (FIG. 71). FIG. 73 illustrates a perspective view of machine 6900 in an open configuration with overlay applicator 3000 placed on cradle 6950. Overlay applicator 3000 can be positioned such that protective film 2920 (FIGS. 29-30) is placed against central support 6955 (FIG. 69), and adhesive release liner 2740 (FIGS. 27-30) and pull tab 2750 are above protective film 2920 (FIGS. 29-30). Pull tab 2750 can be folded back across adhesive release liner 2740 (FIGS. 27-30), such that alignment tab 2910 is partially or fully uncovered and wiper 2857 is face up. In many embodiments, alignment mechanism 2915 of alignment tab 2910 can be inserted on alignment base 6953 of cradle 6950. Machine 6900 can be in an open configuration, with lid 6930 opened away from support base 6920 when overlay applicator 3000 is placed on cradle 6950.

In many embodiments, device 7100 can be placed in device slot 6956 (FIG. 69) of cradle 6950. In many embodiments, device 7100 can be placed in device slot 6956 (FIG. 69) with the screen of device 7100 facing downwards. In various embodiments, the screen of device 7100 can rest against or be proximate to pull tab 2750 and/or wiper 2857.

FIG. 74 illustrates a perspective view of machine 6900 in a closed configuration holding overlay applicator 3000 (FIG. 73) and device 7100, with pull tab 2750 being pulled. In many embodiments, lid 6930 can be lowered until catches 7032 (FIG. 70) engage with the latches in latching slots 7022 (FIG. 70), so as to change machine 6900 to a closed configuration. In many embodiments, lid 6930 can rotate with respect to support base 6920 about hinge mechanism 6940. In a closed configuration, pads 7031 (FIG. 70) can press downward on the back of device 7100 and hold device 7100 securely within machine 6900. In many embodiments, central support 6955 (FIG. 69) and pads 7031 (FIG. 70) can press the screen of device 7100 and overlay applicator 3000 (FIG. 73) closely together.

As shown in FIG. 74, pull tab 2750 can be pulled to remove adhesive release liner 2740 (FIGS. 27-30) from the adhesive side of overlay 2930 (FIGS. 29-30). In many embodiments, as pull tab 2750 is pulled, wiper 2857 (FIG. 73) can wipe across the screen of device 7100 to remove any dust from the screen of device 7100. In a number of embodiments, as pull tab 2750 is pulled and adhesive release liner 2740 (FIGS. 27-30) is removed, central support 6955 (FIG. 69) can be depressed slightly as the fold in adhesive release liner 2740 (FIGS. 27-30) moves from one end to the other end of device 7100, and can rebound to provide pressure against protective film 2920 (FIGS. 29-30) to press the exposed adhesive of overlay 2930 (FIGS. 29-30) against the screen of device 7100 as it is exposed.

In many embodiments, lid 6930 can next be raised so as to change machine 6900 to an open configuration. In a number of embodiments, lid 6930 can be raised by pushing release buttons 7023, so as to release catches 7032 (FIG. 70) from the latches in latching slots 7022 (FIG. 70), such that springs 7043 (FIG. 70) cause axles 7041 (FIG. 70) to rotate and open lid 6930. Lid 6930 can be raised to an open configuration to facilitate removal of device 7100 from cradle 6950.

In a number of embodiments, device 7100 can be removed, along with overlay 2930 (FIGS. 29-30) and protective film 2920 (FIGS. 29-30), from cradle 6950 of machine 6900. Protective film 2920 (FIGS. 29-30) can be

73

removed from overlay **2930** (FIGS. **29-30**), which is adhered to device **7100**. After protective film **2920** (FIGS. **29-30**) has been peeled away from overlay **2930** (FIGS. **29-30**), application of overlay **2930** (FIGS. **29-30**) to the screen of device **7100** can be complete.

Proceeding to the next drawing, FIG. **75** illustrates a flow chart for an embodiment of a method **7500** of providing a machine. Method **7500** is merely exemplary and is not limited to the embodiments presented herein. Method **7500** can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method **7500** can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method **7500** can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method **7500** can be combined or skipped. In some embodiments, the machine can be similar or identical to machine **6900** (FIGS. **69-74**).

Referring to FIG. **75**, method **7500** can include a block **7501** of providing a base. In a number of embodiments, the base can be similar or identical to support base **6920** (FIGS. **69-74**). In some embodiments, the base can include a first attachment mechanism. In various embodiments, the first attachment mechanism can be similar or identical to latching slots **7022** (FIG. **70**) and/or release buttons **7023** (FIGS. **70, 72**).

In many embodiments, method **7500** next can include a block **7502** of providing a first cradle. The cradle can be similar or identical to cradle **3100** (FIGS. **31-34**) and/or **6950** (FIGS. **69, 71-73**). In several embodiments, the cradle can be configured to hold a first electronic device. The first electronic device can be similar or identical to device **7100** (FIG. **71-72, 74**). In some embodiments, the first cradle can be integral with the base. In other embodiments, the first cradle can be removable from the base. In a number of embodiments, the base can be configured to hold a second cradle different from the first cradle. The second cradle can be similar or identical to cradle **3100** (FIGS. **31-34**) and/or cradle **6950** (FIGS. **69, 71-72**). The second cradle can be configured to hold a second electronic device having one or more different dimensions than the first electronic device.

In various embodiments, method **7500** next can include a block **7503** of providing an alignment base. The alignment base can be similar or identical to alignment base **212** (FIG. **2**), alignment base **312** (FIG. **3**), alignment base **835** (FIGS. **8-9, 13-14**), alignment base **1632** (FIGS. **16-19**), alignment base **2035** (FIG. **20**), alignment base **3112** (FIGS. **31-34**), alignment base **3514** (FIGS. **35-36**), alignment base **3814** (FIG. **38**), alignment base **4734** (FIG. **47**), alignment base **6414** (FIG. **64**), alignment base **6424** (FIG. **64**), alignment base **6434** (FIG. **64**), and/or alignment base **6953** (FIGS. **69, 73**). In some embodiments, the first cradle can include the alignment base. In a number of embodiments, the base can include the alignment base.

In several embodiments, the alignment base can be configured to engage with an alignment mechanism of an overlay applicator. The overlay applicator can be similar or identical to overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), overlay applicator **1500** (FIG. **15**), overlay applicator **3000** (FIG. **30**), overlay applicator **3550** (FIGS. **35-36**), and/or overlay applicator **6050** (FIG. **60**). In many embodiments, the alignment mechanism can be similar or identical to alignment mechanism **115** (FIG. **1**), alignment mechanism **415** (FIG. **4**), alignment

74

mechanism **615** (FIG. **6**), alignment mechanism **715** (FIG. **7**), alignment mechanism **1515** (FIG. **15**), alignment mechanism **2915** (FIGS. **29-30**), and/or alignment mechanism **3557** (FIGS. **35-36**). The overlay applicator can include an overlay configured to be applied to a screen of the first electronic device. The overlay can be similar or identical to overlay **130** (FIG. **1**), overlay **430** (FIGS. **4-5**), overlay **630** (FIG. **6**), overlay **730** (FIG. **7**), and/or overlay **1530** (FIG. **15**), and/or overlay **2930** (FIGS. **29-30**). In several embodiments, the alignment base can be configured to align the overlay applicator as the overlay of the overlay applicator is applied to the screen of the first electronic device.

In some embodiments, the first cradle can include one or more frame pieces configured to securely hold the first electronic device in a device slot in a fixed position with respect to the alignment base. The one or more frame pieces can be similar or identical to bottom frame **6954** (FIG. **69**), corner frames **6951** (FIG. **69**), and/or side frames **6952** (FIG. **69**). The device slot can be similar or identical to device slot **6956** (FIG. **69**). In some embodiments, the one or more frame pieces can include four corner frames located at each corner of the first cradle. For example, the four corner frames can be similar or identical to corner frames **6951** (FIG. **69**). In a number of embodiments, the machine can be configured to hold the overlay applicator between the first cradle and the screen of the electronic device when the screen of the first electronic device is facing toward the first cradle, such as shown in FIG. **71**, for example.

In many embodiments, method **7500** next can include a block **7504** of providing a lid. The lid can be similar or identical to lid **6930** (FIGS. **69-74**). In some embodiments, the lid can be hingedly attached to the base. For example, the lid can be hingedly attached to the base at hinge mechanism **6940** (FIGS. **69-72, 74**). In several embodiments, the machine can be configured such that the lid can be rotated with respect to the base between an open configuration, as shown in FIGS. **69-71** and **73**, and a closed configuration, as shown in FIGS. **72** and **74**. In many embodiments, the machine can be configured in the closed configuration to facilitate applying the overlay of the overlay applicator to the screen of the first electronic device.

In many embodiments, the machine can be configured in the open configuration such that the overlay applicator and the first electronic device can be inserted and removed from the machine. In some embodiments, the machine can be configured in the closed configuration to prevent removal of the first electronic device and at least a portion of the overlay applicator from the machine. In various embodiments, the machine can be configured in the closed configuration such that a pull tab of the overlay applicator can be pulled to remove an adhesive release liner of the overlay applicator from the overlay to expose an adhesive agent of the overlay to the screen of the first electronic device. The pull tab can be similar or identical to pull tab **150** (FIG. **1**), pull tab **450** (FIGS. **4-5**), pull tab **650** (FIG. **6**), pull tab **750** (FIGS. **7, 42, 44-45, 48-49**), pull tab **1550** (FIG. **15**), pull tab **2750** (FIGS. **27-30**) and/or pull tab **6055** (FIG. **60**). The adhesive release liner can be similar or identical to adhesive release liner **140** (FIG. **1**), adhesive release liner **440** (FIGS. **4-5**), adhesive release liner **640** (FIG. **6**), adhesive release liner **740** (FIG. **7**), adhesive release liner **1540** (FIG. **15**), and/or adhesive release liner **2740** (FIGS. **27-30**).

In some embodiments, the lid can include one or more pads configured to press the first electronic device toward the overlay applicator when (a) the first electronic device is in first cradle, (b) the overlay applicator is engaged with the alignment base, and (c) the machine is in the closed con-

75

figuration. In various embodiments, the lid can include a second attachment mechanism configured to removably attach to the first attachment mechanism to hold the lid in the closed configuration. The second attachment mechanism can be similar or identical to catches **7032**.

In various embodiments, the first cradle can include a support piece extending in a first direction. The support piece can be similar or identical to central support **3150** (FIG. **31**) and/or central support **6955**. In many embodiments, the support piece can include an elastomeric material. The support piece can be configured to press the adhesive agent of the overlay of the overlay applicator toward the screen of the first electronic device when the screen of the first electronic device is facing toward the support piece and the adhesive release liner of the overlay applicator is removed to expose the adhesive agent of the overlay to the screen of the first electronic device. In a number of embodiments, the support piece can be configured to press a wiper of the pull tab toward the screen of the first electronic device as the wiper moves across the screen of the electronic device in first direction when the pull tab is pulled in the first direction. The wiper can be similar or identical to wiper **157** (FIG. **1**), wiper **457** (FIG. **4**), wiper **657** (FIG. **6**), wiper **757** (FIG. **7**), wiper **2857** (FIGS. **28-30**), wiper **6200** (FIG. **62**), and/or wiper **6300** (FIG. **63**).

Proceeding to the next drawing, FIG. **76** illustrates a flow chart for an embodiment of a method **7600** of providing a cradle. Method **7600** is merely exemplary and is not limited to the embodiments presented herein. Method **7600** can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method **7600** can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method **7600** can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method **7600** can be combined or skipped. In some embodiments, the cradle can be similar or identical to cradle **6410** (FIGS. **64-68**), cradle **6420** (FIGS. **64, 67-68**), and/or cradle **6430** (FIGS. **64, 67-68**).

Referring to FIG. **76**, method **7600** can include a block **7601** of providing a device slot. In a number of embodiments, the device slot can be similar or identical to device slot **6411** (FIG. **64**), device slot **6421** (FIG. **64**), and/or device slot **6431** (FIG. **64**). In many embodiments, the device slot can be configured to securely hold an electronic device. The electronic device can be similar or identical to device **6550**.

In many embodiments, method **7600** next can include a block **7602** of providing an alignment base. The alignment base can be similar or identical to alignment base **212** (FIG. **2**), alignment base **312** (FIG. **3**), alignment base **835** (FIGS. **8-9, 13-14**), alignment base **1632** (FIGS. **16-19**), alignment base **2035** (FIG. **20**), alignment base **3112** (FIGS. **31-34**), alignment base **3514** (FIGS. **35-36**), alignment base **3814** (FIG. **38**), alignment base **4734** (FIG. **47**), alignment base **6414** (FIG. **64**), alignment base **6424** (FIG. **64**), alignment base **6434** (FIG. **64**), and/or alignment base **6953** (FIGS. **69, 73**). In several embodiments, the alignment base can be configured to engage with an alignment mechanism of an overlay applicator. The overlay applicator can be similar or identical to overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), overlay applicator **1500** (FIG. **15**), overlay applicator **3000** (FIG. **30**), overlay applicator **3550** (FIGS. **35-36**), and/or overlay applicator **6050**

76

(FIG. **60**). In many embodiments, the alignment mechanism can be similar or identical to alignment mechanism **115** (FIG. **1**), alignment mechanism **415** (FIG. **4**), alignment mechanism **615** (FIG. **6**), alignment mechanism **715** (FIG. **7**), alignment mechanism **1515** (FIG. **15**), alignment mechanism **2915** (FIGS. **29-30**), and/or alignment mechanism **3557** (FIGS. **35-36**).

In a number of embodiments, the overlay applicator can include a first alignment tab and a second alignment tab. The first alignment tab can include a first portion of the alignment mechanism. The second alignment tab can include the second portion of the alignment mechanism. In a number of embodiments, the alignment base can include a first side configured to engage with the first portion of the alignment mechanism of the overlay applicator and a second side configured to engage with the second portion of the alignment mechanism of the overlay applicator. The first and second sides of the alignment base can be similar or identical to alignment base **3514**.

In many embodiments, method **7600** next can include a block **7603** of providing a first pull slot. The first pull slot can be similar or identical to pull slot **3515** (FIGS. **35-36**), pull slot **6416** (FIGS. **64-65**), pull slot **6426** (FIG. **64**), and/or pull slot **6436** (FIG. **64**). In a number of embodiments, the pull slot can be disposed between the device slot and the second side of the alignment base. In various embodiments, the cradle can be configured, when the electronic device is held within the device slot with a screen of the electronic device facing upwards or away from the device slot and/or the cradle, to hold the overlay applicator over the electronic device such that a pull tab of the overlay applicator can be pulled through the pull slot to expose an overlay of the overlay applicator to the screen of the electronic device. The pull tab can be similar or identical to pull tab **150** (FIG. **1**), pull tab **450** (FIGS. **4-5**), pull tab **650** (FIG. **6**), pull tab **750** (FIGS. **7, 42, 44-45, 48-49**), pull tab **1550** (FIG. **15**), pull tab **2750** (FIGS. **27-30**) and/or pull tab **6055** (FIG. **60**). The overlay can be similar or identical to overlay **130** (FIG. **1**), overlay **430** (FIGS. **4-5**), overlay **630** (FIG. **6**), overlay **730** (FIG. **7**), and/or overlay **1530** (FIG. **15**), and/or overlay **2930** (FIGS. **29-30**).

Proceeding to the next drawing, FIG. **77** illustrates a flow chart for an embodiment of a method **7700** of providing a set of cradles. Method **7700** is merely exemplary and is not limited to the embodiments presented herein. Method **7700** can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method **7700** can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method **7700** can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method **7700** can be combined or skipped. In some embodiments, the set of cradles can be similar or identical to set of cradles **6400** (FIGS. **64, 67-68**).

Referring to FIG. **77**, method **7700** can include a block **7701** of providing a first cradle. The first cradle can be similar or identical to cradle **6410** (FIGS. **64-68**), cradle **6420** (FIGS. **64, 67-68**), and/or cradle **6430** (FIGS. **64, 67-68**). In a number of embodiments, the first cradle can include a first device slot having first dimensions. In a number of embodiments, the first device slot can be similar or identical to device slot **6411** (FIG. **64**), device slot **6421** (FIG. **64**), and/or device slot **6431** (FIG. **64**). In many embodiments, the first device slot can be configured to

securely hold a first electronic device. The first electronic device can be similar or identical to device **6550**.

In various embodiments, the first cradle can include a first alignment base. The first alignment base can be similar or identical to alignment base **212** (FIG. 2), alignment base **312** (FIG. 3), alignment base **835** (FIGS. 8-9, 13-14), alignment base **1632** (FIGS. 16-19), alignment base **2035** (FIG. 20), alignment base **3112** (FIGS. 31-34), alignment base **3514** (FIGS. 35-36), alignment base **3814** (FIG. 38), alignment base **4734** (FIG. 47), alignment base **6414** (FIG. 64), alignment base **6424** (FIG. 64), alignment base **6434** (FIG. 64), and/or alignment base **6953** (FIGS. 69, 73). In several embodiments, the first alignment base can be configured to engage with an alignment mechanism of a first overlay applicator. The first overlay applicator can be similar or identical to overlay applicator **100** (FIG. 1), overlay applicator **400** (FIGS. 4-5), overlay applicator **600** (FIG. 6), overlay applicator **700** (FIG. 7), overlay applicator **1500** (FIG. 15), overlay applicator **3000** (FIG. 30), overlay applicator **3550** (FIGS. 35-36), and/or overlay applicator **6050** (FIG. 60). In many embodiments, the alignment mechanism can be similar or identical to alignment mechanism **115** (FIG. 1), alignment mechanism **415** (FIG. 4), alignment mechanism **615** (FIG. 6), alignment mechanism **715** (FIG. 7), alignment mechanism **1515** (FIG. 15), alignment mechanism **2915** (FIGS. 29-30), and/or alignment mechanism **3557** (FIGS. 35-36). In a number of embodiments, the first overlay applicator can include an overlay configured to be applied to a screen of the first electronic device. The overlay can be similar or identical to overlay **130** (FIG. 1), overlay **430** (FIGS. 4-5), overlay **630** (FIG. 6), overlay **730** (FIG. 7), and/or overlay **1530** (FIG. 15), and/or overlay **2930** (FIGS. 29-30).

In a number of embodiments, the first alignment base can include a first side and a second side. The first and second sides of the first alignment base can be similar or identical to alignment base **3514**. The first side of the first alignment base can be configured to engage with a first portion of the alignment mechanism of the first overlay applicator. The second side of the first alignment base can be configured to engage with a second portion of the alignment mechanism of the first overlay applicator. The first and second portions of the alignment mechanism can be similar or identical to alignment tabs **3556** and/or alignment mechanisms **3557**. In several embodiments, the first device slot can be disposed between the first side of the first alignment base and the second side of the first alignment base.

In many embodiments, the first cradle can further include a first pull slot. The first pull slot can be similar or identical to pull slot **3515** (FIGS. 35-36), pull slot **6416** (FIGS. 64-65), pull slot **6426** (FIG. 64), and/or pull slot **6436** (FIG. 64). In a number of embodiments, the first pull slot can be disposed between the first device slot and the second side of the first alignment base.

In various embodiments, the first cradle can be configured, when the first electronic device is held within the first device slot with the screen of the first electronic device facing upwards or away from the first device slot and/or the first cradle, to hold the first overlay applicator over the first electronic device such that a pull tab of the first overlay applicator can be pulled through the first pull slot to expose the overlay of the first overlay applicator to the screen of the first electronic device. The pull tab of the first overlay applicator can be similar or identical to pull tab **150** (FIG. 1), pull tab **450** (FIGS. 4-5), pull tab **650** (FIG. 6), pull tab **750** (FIGS. 7, 42, 44-45, 48-49), pull tab **1550** (FIG. 15), pull tab **2750** (FIGS. 27-30) and/or pull tab **6055** (FIG. 60).

In many embodiments, method **7700** next can include a block **7702** of providing a second cradle. The second cradle can be similar or identical to cradle **6410** (FIGS. 64-68), cradle **6420** (FIGS. 64, 67-68), and/or cradle **6430** (FIGS. 64, 67-68). In a number of embodiments, the second cradle can include a second device slot having second dimensions. In many embodiments, the first dimensions of the first device slot of the first cradle can be different from the second dimensions of the second device slot of the second cradle. In a number of embodiments, the second device slot can be similar or identical to device slot **6411** (FIG. 64), device slot **6421** (FIG. 64), and/or device slot **6431** (FIG. 64). In many embodiments, the second device slot can be configured to securely hold a second electronic device. The second electronic device can be similar or identical to device **6550**. In many embodiments, the first cradle and the second cradle can be configured to be stacked in a first coterminous configuration, such as shown in FIGS. 67-68, for example.

In various embodiments, the second cradle can include a second alignment base. The second alignment base can be similar or identical to alignment base **212** (FIG. 2), alignment base **312** (FIG. 3), alignment base **835** (FIGS. 8-9, 13-14), alignment base **1632** (FIGS. 16-19), alignment base **2035** (FIG. 20), alignment base **3112** (FIGS. 31-34), alignment base **3514** (FIGS. 35-36), alignment base **3814** (FIG. 38), alignment base **4734** (FIG. 47), alignment base **6414** (FIG. 64), alignment base **6424** (FIG. 64), alignment base **6434** (FIG. 64), and/or alignment base **6953** (FIGS. 69, 73). In several embodiments, the second alignment base can be configured to engage with an alignment mechanism of a second overlay applicator. The second overlay applicator can be similar or identical to overlay applicator **100** (FIG. 1), overlay applicator **400** (FIGS. 4-5), overlay applicator **600** (FIG. 6), overlay applicator **700** (FIG. 7), overlay applicator **1500** (FIG. 15), overlay applicator **3000** (FIG. 30), overlay applicator **3550** (FIGS. 35-36), and/or overlay applicator **6050** (FIG. 60). In many embodiments, the alignment mechanism can be similar or identical to alignment mechanism **115** (FIG. 1), alignment mechanism **415** (FIG. 4), alignment mechanism **615** (FIG. 6), alignment mechanism **715** (FIG. 7), alignment mechanism **1515** (FIG. 15), alignment mechanism **2915** (FIGS. 29-30), and/or alignment mechanism **3557** (FIGS. 35-36). In a number of embodiments, the second overlay applicator can include an overlay configured to be applied to a screen of the second electronic device. The overlay can be similar or identical to overlay **130** (FIG. 1), overlay **430** (FIGS. 4-5), overlay **630** (FIG. 6), overlay **730** (FIG. 7), and/or overlay **1530** (FIG. 15), and/or overlay **2930** (FIGS. 29-30).

In a number of embodiments, the second alignment base can include a first side and a second side. The first and second sides of the second alignment base can be similar or identical to alignment base **3514**. The first side of the second alignment base can be configured to engage with a first portion of the alignment mechanism of the second overlay applicator. The second side of the second alignment base can be configured to engage with a second portion of the alignment mechanism of the second overlay applicator. The first and second portions of the alignment mechanism can be similar or identical to alignment tabs **3556** and/or alignment mechanisms **3557**. In several embodiments, the second device slot can be disposed between the first side of the second alignment base and the second side of the second alignment base.

In many embodiments, the second cradle can further include a second pull slot. The second pull slot can be similar or identical to pull slot **3515** (FIGS. 35-36), pull slot

6416 (FIGS. **64-65**), pull slot **6426** (FIG. **64**), and/or pull slot **6436** (FIG. **64**). In a number of embodiments, the second pull slot can be disposed between the second device slot and the second side of the second alignment base.

In various embodiments, the second cradle can be configured, when the second electronic device is held within the second device slot with the screen of the second electronic device facing upwards or away from the second device slot and/or the second cradle, to hold the second overlay applicator over the second electronic device such that a pull tab of the second overlay applicator can be pulled through the second pull slot to expose the overlay of the second overlay applicator to the screen of the second electronic device. The pull tab of the second overlay applicator can be similar or identical to pull tab **150** (FIG. **1**), pull tab **450** (FIGS. **4-5**), pull tab **650** (FIG. **6**), pull tab **750** (FIGS. **7, 42, 44-45, 48-49**), pull tab **1550** (FIG. **15**), pull tab **2750** (FIGS. **27-30**) and/or pull tab **6055** (FIG. **60**).

In some embodiments, method **7700** optionally can include a block **7703** of providing a third cradle. The third cradle can be similar or identical to cradle **6410** (FIGS. **64-68**), cradle **6420** (FIGS. **64, 67-68**), and/or cradle **6430** (FIGS. **64, 67-68**). In a number of embodiments, the third cradle can include a third device slot having third dimensions. In many embodiments, the third dimensions of the third device slot of the third cradle can be different from the first dimensions of the first device slot of the first cradle and the second dimensions of the second device slot of the second cradle. In a number of embodiments, the third device slot can be similar or identical to device slot **6411** (FIG. **64**), device slot **6421** (FIG. **64**), and/or device slot **6431** (FIG. **64**). In many embodiments, the third device slot can be configured to securely hold a third electronic device. The third electronic device can be similar or identical to device **6550**. In many embodiments, the third cradle can be configured to be stacked with the first cradle and the second cradle in a second coterminous configuration, such as shown in FIGS. **67-68**, for example.

In various embodiments, the third cradle can include a third alignment base. The third alignment base can be similar or identical to alignment base **212** (FIG. **2**), alignment base **312** (FIG. **3**), alignment base **835** (FIGS. **8-9, 13-14**), alignment base **1632** (FIGS. **16-19**), alignment base **2035** (FIG. **20**), alignment base **3112** (FIGS. **31-34**), alignment base **3514** (FIGS. **35-36**), alignment base **3814** (FIG. **38**), alignment base **4734** (FIG. **47**), alignment base **6414** (FIG. **64**), alignment base **6424** (FIG. **64**), alignment base **6434** (FIG. **64**), and/or alignment base **6953** (FIGS. **69, 73**). In several embodiments, the third alignment base can be configured to engage with an alignment mechanism of a third overlay applicator. The third overlay applicator can be similar or identical to overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), overlay applicator **1500** (FIG. **15**), overlay applicator **3000** (FIG. **30**), overlay applicator **3550** (FIGS. **35-36**), and/or overlay applicator **6050** (FIG. **60**). In many embodiments, the alignment mechanism can be similar or identical to alignment mechanism **115** (FIG. **1**), alignment mechanism **415** (FIG. **4**), alignment mechanism **615** (FIG. **6**), alignment mechanism **715** (FIG. **7**), alignment mechanism **1515** (FIG. **15**), alignment mechanism **2915** (FIGS. **29-30**), and/or alignment mechanism **3557**. In a number of embodiments, the third overlay applicator can include an overlay configured to be applied to a screen of the third electronic device. The overlay can be similar or identical to overlay **130** (FIG. **1**), overlay

430 (FIGS. **4-5**), overlay **630** (FIG. **6**), overlay **730** (FIG. **7**), and/or overlay **1530** (FIG. **15**), and/or overlay **2930** (FIGS. **29-30**).

Turning ahead in the drawings, FIG. **78** illustrates a flow chart for an embodiment of a method **7800** of providing an overlay applicator. Method **7800** is merely exemplary and is not limited to the embodiments presented herein. Method **7800** can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method **7800** can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method **7800** can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method **7800** can be combined or skipped. In some embodiments, the overlay applicator can be similar or identical to overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), overlay applicator **1500** (FIG. **15**), overlay applicator **3000** (FIG. **30**), overlay applicator **3550** (FIGS. **35-36**), and/or overlay applicator **6050** (FIG. **60**).

Referring to FIG. **78**, method **7800** can include a block **7801** of providing an overlay. In many embodiments, the overlay can be similar or identical to overlay **130** (FIG. **1**), overlay **430** (FIGS. **4-5**), overlay **630** (FIG. **6**), overlay **730** (FIG. **7**), and/or overlay **1530** (FIG. **15**), and/or overlay **2930** (FIGS. **29-30**). In a number of embodiments, the overlay can have a top side and a bottom side. The top side of the overlay can be similar or identical to top side **131** (FIG. **1**) of overlay **130** (FIG. **1**). The bottom side of the overlay can be similar or identical to bottom side **132** (FIG. **1**) of overlay **130** (FIG. **1**). In various embodiments, the bottom side can include an adhesive agent configured to adhere to a screen of an electronic device.

In some embodiments, method **7800** next can include a block **7802** of providing an adhesive release liner. The adhesive release liner can be similar or identical to adhesive release liner **140** (FIG. **1**), adhesive release liner **440** (FIGS. **4-5**), adhesive release liner **640** (FIG. **6**), adhesive release liner **740** (FIG. **7**), adhesive release liner **1540** (FIG. **15**), and/or adhesive release liner **2740** (FIGS. **27-30**). In a number of embodiments, the adhesive release liner can have a top side and a bottom side. The top side of the adhesive release liner can be removably attached to the bottom side of the overlay. In some embodiments, the adhesive release liner can be configured to protect the adhesive agent at the bottom side of the overlay from contaminants.

In many embodiments, method **7800** next can include a block **7803** of providing an alignment tab. In some embodiments, the alignment tab can be similar or identical to alignment tab **110** (FIG. **1**), alignment tab **410** (FIGS. **4-5**), alignment tab **610** (FIG. **6**), alignment frame **710** (FIG. **7**), and/or alignment flaps **1510** (FIG. **15**), alignment tab **2910** (FIGS. **29-30**), and/or alignment tab **3556** (FIGS. **35-36**). In many embodiments, the alignment tab can include an alignment mechanism. The alignment mechanism can be similar or identical to alignment mechanism **115** (FIG. **1**), alignment mechanism **415** (FIG. **4**), alignment mechanism **615** (FIG. **6**), alignment mechanism **715** (FIG. **7**), alignment mechanism **1515** (FIG. **15**), alignment mechanism **2915** (FIGS. **29-30**), and/or alignment mechanism **3557** (FIGS. **35-36**).

In several embodiments, method **7800** next can include a block **7804** of providing a pull tab. In some embodiments, the pull tab can be similar or identical to pull tab **150** (FIG. **1**), pull tab **450** (FIGS. **4-5**), pull tab **650** (FIG. **6**), pull tab

81

750 (FIGS. 7, 42, 44-45, 48-49), pull tab 1550 (FIG. 15), pull tab 2750 (FIGS. 27-30) and/or pull tab 6055 (FIG. 60).

In many embodiments, method 7800 next can include a block 7805 of providing a wiper. The wiper can be similar or identical to wiper 157 (FIG. 1), wiper 457 (FIG. 4), wiper 657 (FIG. 6), wiper 757 (FIG. 7), wiper 2857 (FIGS. 28-30), wiper 6200 (FIG. 62), and/or wiper 6300 (FIG. 63). In some embodiments, the wiper can include a surface. The surface can be similar or identical to wiper surface 6220 (FIG. 62) and/or wiper surface 6320 (FIG. 62). In several embodiments, the wiper can include a first slot. The first slot can be similar or identical to slot 6230 (FIG. 62), slot 6330 (FIG. 63), and/or slot 6340 (FIG. 63). In many embodiments, the first slot can extend at least partially through the surface of the wiper. In a number of embodiments, the wiper can include a second slot. The second slot can be similar or identical to slot 6230 (FIG. 62), slot 6330 (FIG. 63), and/or slot 6340 (FIG. 63). In many embodiments, the second slot can extend at least partially through the surface of the wiper. In some embodiments, the wiper can include a support portion disposed between the surface of the wiper and the pull tab. The support portion can be similar or identical to wiper support 6210 (FIGS. 62-63).

In a number of embodiments, method 7800 next can include a block 7806 of attaching the wiper to the pull tab. In several embodiments, the wiper can be attached to the pull tab with an adhesive. In many embodiments, the pull tab, the wiper, and the adhesive release liner can be configured such that the pull tab can be folded across the bottom side of the adhesive release liner and can be pulled to remove the adhesive release liner from the bottom side of the overlay to expose the adhesive agent. In various embodiments, the pull tab, the wiper, and the adhesive release liner can be configured such that, when the pull tab is pulled, the wiper can wipe across and clean the screen of the electronic device

In some embodiments, method 7800 optionally can include a block 7807 of providing a protective film. In some embodiments, the protective film can be similar or identical to protective film 120 (FIG. 1), protective film 420 (FIGS. 4-5), protective film 620 (FIG. 6), protective film 720 (FIG. 7), protective film 1520 (FIG. 15), protective film 2920 (FIGS. 29-30), protective film 3552 (FIG. 35), and/or protective film 6052 (FIG. 60). In many embodiments, the protective film can be removably attached to the top side of the overlay.

Proceeding to the next drawing, FIG. 79 illustrates a flow chart for an embodiment of a method 7900 of providing a system. Method 7900 is merely exemplary and is not limited to the embodiments presented herein. Method 7900 can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method 7900 can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method 7900 can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method 7900 can be combined or skipped.

Referring to FIG. 79, method 7900 can include a block 7901 of providing an overlay applicator. In many embodiments, the overlay applicator can be similar or identical to overlay applicator overlay applicator 100 (FIG. 1), overlay applicator 400 (FIGS. 4-5), overlay applicator 600 (FIG. 6), overlay applicator 700 (FIG. 7), overlay applicator 1500 (FIG. 15), overlay applicator 3000 (FIG. 30), overlay applicator 3550 (FIGS. 35-36), and/or overlay applicator 6050

82

(FIG. 60). In a number of embodiments, the overlay applicator can include an overlay. In many embodiments, the overlay can be similar or identical to overlay 130 (FIG. 1), overlay 430 (FIGS. 4-5), overlay 630 (FIG. 6), overlay 730 (FIG. 7), and/or overlay 1530 (FIG. 15), and/or overlay 2930 (FIGS. 29-30). In a number of embodiments, the overlay can have a top side and a bottom side. The top side of the overlay can be similar or identical to top side 131 (FIG. 1) of overlay 130 (FIG. 1). The bottom side of the overlay can be similar or identical to bottom side 132 (FIG. 1) of overlay 130 (FIG. 1). In various embodiments, the bottom side can include an adhesive agent configured to adhere to a screen of an electronic device.

In several embodiments, the overlay applicator can include an adhesive release liner. The adhesive release liner can be similar or identical to adhesive release liner 140 (FIG. 1), adhesive release liner 440 (FIGS. 4-5), adhesive release liner 640 (FIG. 6), adhesive release liner 740 (FIG. 7), adhesive release liner 1540 (FIG. 15), and/or adhesive release liner 2740 (FIGS. 27-30). In a number of embodiments, the adhesive release liner can have a top side and a bottom side. The top side of the adhesive release liner can be removably attached to the bottom side of the overlay. In some embodiments, the adhesive release liner can be configured to protect the adhesive agent at the bottom side of the overlay from contaminants.

In some embodiments, the overlay applicator can include a protective film. The protective film can be similar or identical to protective film 120 (FIG. 1), protective film 420 (FIGS. 4-5), protective film 620 (FIG. 6), protective film 720 (FIG. 7), protective film 1520 (FIG. 15), protective film 2920 (FIGS. 29-30), protective film 3552 (FIG. 35), and/or protective film 6052 (FIG. 60). In many embodiments, the protective film can be removably attached to the top side of the overlay.

In many embodiments, the overlay applicator can include an alignment tab. In some embodiments, the alignment tab can be similar or identical to alignment tab 110 (FIG. 1), alignment tab 410 (FIGS. 4-5), alignment tab 610 (FIG. 6), alignment frame 710 (FIG. 7), and/or alignment flaps 1510 (FIG. 15), alignment tab 2910 (FIGS. 29-30), and/or alignment tab 3556 (FIGS. 35-36). In many embodiments, the alignment tab can include an alignment mechanism. The alignment mechanism can be similar or identical to alignment mechanism 115 (FIG. 1), alignment mechanism 415 (FIG. 4), alignment mechanism 615 (FIG. 6), alignment mechanism 715 (FIG. 7), alignment mechanism 1515 (FIG. 15), alignment mechanism 2915 (FIGS. 29-30), and/or alignment mechanism 3557 (FIGS. 35-36). In many embodiments, the alignment tab can include a first alignment portion extending at and/or toward a first end of the overlay applicator; and a second alignment portion extending at and/or toward a second end of the overlay applicator. The first alignment portion and the second alignment portion can include the alignment mechanism.

In some embodiments, the alignment tab can be configured to engage with an alignment base. The alignment base can be similar or identical to alignment base 212 (FIG. 2), alignment base 312 (FIG. 3), alignment base 835 (FIGS. 8-9, 13-14), alignment base 1632 (FIGS. 16-19), alignment base 2035 (FIG. 20), alignment base 3112 (FIGS. 31-34), alignment base 3514 (FIGS. 35-36), alignment base 3814 (FIG. 38), alignment base 4734 (FIG. 47), alignment base 6414 (FIG. 64), alignment base 6424 (FIG. 64), alignment base 6434 (FIG. 64), and/or alignment base 6953 (FIGS. 69, 73). The alignment base can include a first portion and a second portion. The first alignment portion can be configured to

engage with the first portion of the alignment base. The second alignment portion can be configured to engage with the second portion of the alignment base. The first and second portions of the alignment mechanism can be similar or identical to alignment mechanisms **3557** and/or alignment mechanisms **6057** (FIG. **60**).

In various embodiments, the overlay applicator can include a pull tab. In some embodiments, the pull tab can be similar or identical to pull tab **150** (FIG. **1**), pull tab **450** (FIGS. **4-5**), pull tab **650** (FIG. **6**), pull tab **750** (FIGS. **7**, **42**, **44-45**, **48-49**), pull tab **1550** (FIG. **15**), pull tab **2750** (FIGS. **27-30**) and/or pull tab **6055** (FIG. **60**).

In many embodiments, method **7900** next can include a block **7902** of providing a sticker assembly. In some embodiments, the sticker assembly can be similar or identical to dust sticker assembly **5500** (FIGS. **55-61**). In several embodiments, the sticker assembly can include a sticker. The sticker can be similar or identical to dust removal sticker **5510** (FIGS. **55-61**). The sticker can include a top side and a bottom side and an end portion. The end portion of the sticker can be similar or identical to adhesive end region **5922** (FIGS. **59-61**). The bottom side can include a second adhesive agent configured to removably adhere to the screen of the electronic device.

In some embodiments, the sticker assembly can include a release liner. The release liner can be similar or identical to release liner **5520** (FIG. **55**). In many embodiments, the release liner can be removably attached to the bottom side of the sticker. In some embodiments, the release liner can include a device portion and an end portion. The device portion can be similar or identical to device portion **5521** (FIGS. **55-56**). The end portion of the release liner can be similar or identical to **5522** (FIGS. **55-56**, **58-59**). In several embodiments, the end portion of the release liner can be removably attached to the end portion of the sticker, such as shown in FIGS. **56** and **58-59**.

In many embodiments, the sticker assembly can be configured such that, when the device portion of the release liner is removed to expose the second adhesive agent, such as shown in FIG. **56**, the second adhesive agent of the bottom side of the sticker can be adhered to the screen of the electronic device, and the end portion of the sticker can be folded back over the top side of the sticker to expose the end portion of the release liner, such as shown in FIG. **58**. In a number of embodiments, the pull tab and the adhesive release liner can be configured such that the pull tab can be folded across the bottom side of the adhesive release liner, such as shown in FIGS. **60-61**. In some embodiments, the sticker assembly can be configured such that, when the end portion of the sticker is folded back over the top side of the sticker and the end portion of the release liner is removed from the sticker to expose the second adhesive agent, such as shown in FIG. **59**, the end portion of the sticker can be adhered to the pull tab while the pull tab is folded across the bottom side of the adhesive release liner, such as shown in FIG. **60-61**. In several embodiments, the overlay applicator and sticker assembly can be configured such that, when the end portion of the sticker is adhered to the pull tab, the pull tab can be pulled to remove the sticker from the screen of the electronic device and to remove the adhesive release liner from the bottom side of the overlay to expose the first adhesive agent to the screen of the device. In a number of embodiments, the sticker can be configured to remove dust from the screen of the electronic device when the sticker is removed from the screen of the electronic device.

In certain embodiments, the overlay applicator and the sticker assembly can be configured such that, when the pull

tab is pulled to remove the sticker from the screen of the electronic device and to remove the adhesive release liner from the bottom side of the overlay, at least a portion of the sticker is adhered to at least a portion of the adhesive release liner. In many embodiments, the overlay applicator and the sticker assembly can be configured such that, when (a) the first alignment portion is engaged with the first portion of the alignment base, (b) the second alignment portion is engaged with the second portion of the alignment base, and (c) the pull tab is pulled, the pull tab, the sticker, and the adhesive release liner can be pulled through a pull slot. The pull slot can be similar or identical to pull slot **3515** (FIGS. **35-36**), pull slot **6416** (FIGS. **64-65**), pull slot **6426** (FIG. **64**), and/or pull slot **6436** (FIG. **64**).

Turning ahead in the drawings, FIG. **80** illustrates a top, front, right side perspective view of an overlay applicator tray **8000**, according to another embodiment. FIG. **81** illustrates a front side elevational view of overlay applicator tray **8000**. FIG. **82** illustrates an enlarged front side elevational view of a portion of overlay applicator tray **8000**, as identified in FIG. **81**. FIG. **95** illustrates an enlarged front side elevational view of a portion of an overlay applicator **8001** of overlay applicator tray **8000**, as identified in FIG. **82**. Overlay applicator tray **8000** is merely exemplary, and embodiments of the overlay applicator tray are not limited to the embodiments presented herein. The overlay applicator tray can be employed in many different embodiments or examples not specifically depicted or described herein.

In various embodiments, overlay applicator tray **8000** can include overlay applicator **8001**, a cradle **8080**, and/or an alignment piece **8010**. In many embodiments, overlay applicator **8001** can be similar to overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), overlay applicator **1500** (FIG. **15**), overlay applicator **3000** (FIG. **30**), overlay applicator **3550** (FIGS. **35-36**), and/or overlay applicator **6050** (FIG. **60**), and various components and/or constructions of overlay applicator **8001** can be substantially identical or similar to various components of overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), overlay applicator **1500** (FIG. **15**), overlay applicator **3000** (FIG. **30**), overlay applicator **3550** (FIGS. **35-36**), and/or overlay applicator **6050** (FIG. **60**).

In a number of embodiments, overlay applicator **8001** can include an overlay **8230** (FIG. **82**). In many embodiments, overlay **8230** (FIG. **82**) can be similar or identical to overlay **130** (FIG. **1**), overlay **430** (FIGS. **4-5**), overlay **630** (FIG. **6**), overlay **730** (FIG. **7**), and/or overlay **1530** (FIG. **15**), and/or overlay **2930** (FIGS. **29-30**). In a number of embodiments, overlay **8230** (FIG. **82**) can have a top side **9531** (FIG. **95**) and a bottom side **9532** (FIG. **95**). Top side **9531** (FIG. **95**) of overlay **8230** (FIG. **82**) can be similar or identical to top side **131** (FIG. **1**) of overlay **130** (FIG. **1**). Bottom side **9532** (FIG. **95**) of overlay **8230** (FIG. **82**) can be similar or identical to bottom side **132** (FIG. **1**) of overlay **130** (FIG. **1**). In various embodiments, bottom side **9532** (FIG. **95**) of overlay **8230** (FIG. **82**) can include an adhesive configured to adhere overlay **8230** (FIG. **82**) to a screen of an electronic device.

In several embodiments, overlay applicator **8001** can include an adhesive release liner **8240** (FIG. **82**). Adhesive release liner **8240** (FIG. **82**) can be similar or identical to adhesive release liner **140** (FIG. **1**), adhesive release liner **440** (FIGS. **4-5**), adhesive release liner **640** (FIG. **6**), adhesive release liner **740** (FIG. **7**), adhesive release liner **1540** (FIG. **15**), and/or adhesive release liner **2740** (FIGS. **27-30**).

In a number of embodiments, adhesive release liner **8240** (FIG. **82**) can have a top side **9541** (FIG. **95**) and a bottom side **9542** (FIG. **95**). Top side **9541** (FIG. **95**) of adhesive release **8240** (FIG. **82**) liner can be removably attached to bottom side **9532** (FIG. **95**) of overlay **8230** (FIG. **82**) to cover, and be removed to expose, the adhesive at bottom side **9532** (FIG. **95**) of overlay **8230** (FIG. **82**). In some embodiments, adhesive release liner **8240** (FIG. **82**) can be configured to protect the adhesive agent at or on bottom side **9532** (FIG. **95**) of overlay **8230** (FIG. **82**) from contaminants.

In some embodiments, overlay applicator **8001** can include a protective film **8020**. Protective film **8020** can be similar or identical to protective film **120** (FIG. **1**), protective film **420** (FIGS. **4-5**), protective film **620** (FIG. **6**), protective film **720** (FIG. **7**), protective film **1520** (FIG. **15**), protective film **2920** (FIGS. **29-30**), protective film **3552** (FIG. **35**), and/or protective film **6052** (FIG. **60**). In many embodiments, protective film **8020** can have a top side **9521** (FIG. **95**) and a bottom side **9522** (FIG. **95**). In a number of embodiments, protective film **8020** can be removably attached to top side **9531** (FIG. **95**) of overlay **8230** (FIG. **82**). For example, bottom side **9522** (FIG. **95**) of protective film **8020** can be removably attached to top side **9531** (FIG. **95**) of overlay **8230** (FIG. **82**), such as with an adhesive at or on bottom side **9522** (FIG. **95**) of protective film **8020**.

In several embodiments, overlay applicator **8001** can include a first pull tab **8042** and/or a second pull tab **8022**. In a number of embodiments, first pull tab **8042** can be used to remove adhesive release liner **8240** (FIG. **82**) from overlay **8230** (FIG. **82**). In many embodiments, first pull tab **8042** can advantageously help prevent accidental touching of the adhesive at or on bottom side **9532** (FIG. **95**) of overlay **8230** (FIG. **82**) when removing adhesive release liner **8240** (FIG. **82**) from overlay **8230** (FIG. **82**). In several embodiments, first pull tab **8042** can be affixed to bottom side **9542** (FIG. **95**) of adhesive release liner **8240** (FIG. **82**), such as shown in FIG. **82**. In other embodiments, first pull tab **8042** can be integral with adhesive release liner **8240** (FIG. **82**). In many embodiments, first pull tab **8042** can be adhered to bottom side **9542** (FIG. **95**) of adhesive release liner **8240** (FIG. **82**) with an adhesive or another suitable fastener. In a number of embodiments, the adhesive adhering first pull tab **8042** to adhesive release liner **8240** (FIG. **82**) can have a greater adhesive strength than the adhesive at or on bottom side **9532** (FIG. **95**) of overlay **8230** (FIG. **82**) that adheres adhesive release liner **8240** (FIG. **82**) to overlay **8230** (FIG. **82**), such that first pull tab **8042** can be used to pull and remove adhesive release liner **8240** (FIG. **82**) from overlay **8230** (FIG. **82**) without first pull tab **8042** being removed from adhesive release liner **8240** (FIG. **82**).

In a number of embodiments, second pull tab **8022** can be used to remove protective film **8020** from overlay **8230** (FIG. **82**). In many embodiments, second pull tab **8022** can be affixed to top side **9521** (FIG. **95**) of protective film **8020**, such as shown in FIG. **82**. In other embodiments, second pull tab **8022** can be integral with protective film **8020**. In many embodiments, second pull tab **8022** can be adhered to top side **9521** (FIG. **95**) of protective film **8020** with an adhesive or another suitable fastener. In a number of embodiments, the adhesive adhering second pull tab **8022** to protective film **8020** can have a greater adhesive strength than the adhesive at or on bottom side **9522** (FIG. **95**) of protective film **8020** that adheres protective film **8020** to overlay **8230** (FIG. **82**), such that second pull tab **8022** can be used to pull and remove protective film **8020** from

overlay **8230** (FIG. **82**) without second pull tab **8022** being removed from protective film **8020**.

In many embodiments, cradle **8080** can be similar to cradle **310** (FIG. **3**), cradle **832** (FIG. **8**), cradle **1620** (FIG. **16**), cradle **2032** (FIG. **20**), cradle **3100** (FIG. **31**), cradle **3520** (FIG. **35**), cradle **3710** (FIGS. **37-38**), cradle **4630** (FIGS. **46-50**), cradle **6410** (FIG. **64**), cradle **6420** (FIG. **64**), cradle **6430** (FIG. **64**), and/or cradle **6950** (FIG. **69**), and various components and/or constructions of cradle **8080** can be substantially identical or similar to various components of cradle **310** (FIG. **3**), cradle **832** (FIG. **8**), cradle **1620** (FIG. **16**), cradle **2032** (FIG. **20**), cradle **3100** (FIG. **31**), cradle **3520** (FIG. **35**), cradle **3710** (FIGS. **37-38**), cradle **4630** (FIGS. **46-50**), cradle **6410** (FIG. **64**), cradle **6420** (FIG. **64**), cradle **6430** (FIG. **64**), and/or cradle **6950** (FIG. **69**).

In several embodiments, cradle **8080** can include a device slot **8090**. Device slot can be similar to slot **311** (FIG. **3**), slot **1621** (FIG. **16**), device slot **3111** (FIG. **31**), slot **3811** (FIG. **38**), slot **4731** (FIG. **47**), device slot **6411** (FIG. **64**), device slot **6421** (FIG. **64**), device slot **6431** (FIG. **64**), and/or device slot **6956** (FIG. **69**). In many embodiments, device slot **8090** can be configured to securely hold an electronic device in device slot **8090**. In many embodiments, the electronic device can be similar or identical to device **220** (FIG. **2**), device **320** (FIG. **3**), device **1650** (FIG. **16**), device **3401** (FIG. **34**), device **3720** (FIG. **37**), device **4800** (FIG. **48**), device **5600** (FIG. **56**), device **6550** (FIG. **65**), device **7100**, and/or electronic device **8350** (shown in FIG. **83** and described below). For example, the electronic device can be a smart phone, a tablet, a smart watch (such as electronic device **8350**, shown in FIG. **83** and described below), or another suitable electronic device. In several embodiments, cradle **8080** can be configured for a specific type of electronic device, such as the 38 mm Apple Watch. The watch band of the Apple Watch can be removed before the Apple Watch is positioned in the device slot **8090**. For example, device slot **8090** can be configured to hold an electronic device having the dimensions of the specific type of electronic device.

In many embodiments, the electronic device can be placed within device slot **8090** with a screen of the electronic device facing upwards or away from device slot **8090**. In other embodiments, the electronic device can be placed within device slot **8090** with the screen of the electronic device facing downwards or towards device slot **8090**. In some embodiments, device slot **8090** can be conformal with the electronic device. In a number of embodiments, device slot **8090** can include one or more side walls, such as side walls **8091**, and/or one or more corner walls, such as corner walls **8092**. In several embodiments, device slot **8090** can include a bottom wall **8093**. In some embodiments, bottom wall **8093** can include a bottom wall recess **8094** to accommodate one or more protrusions on a face of the electronic device.

In a number of embodiments, cradle **8080** can have a thickness greater than a thickness of the electronic device. In some embodiments, cradle **8080** can include a top surface **8081** and one or more side surfaces, such as side surfaces **8082**. In many embodiments, top surface **8081** can at least partially surround device slot **8090**. In some embodiments, cradle **8080** can include one or more openings or affordances, such as opening **8086**, which can accommodate one or more protrusions on one or more sides of the electronic device, such as one or more buttons, crowns, dials, etc., of the electronic device, and/or facilitate removal of the electronic device from device slot **8090**. For example, as shown

87

in FIG. 80, opening 8086 can extend through one of side walls 8091 of device slot 8090 and/or through one of side surfaces 8082 of cradle 8080. In many embodiments, an affordance (not shown) can extend through one or more of side walls 8091 of device slot 8090 without extending through one or more of side surfaces 8082 of cradle 8080.

In various embodiments, cradle 8080 can include a tab recess 8083, a tab surface 8084, and/or an attachment surface 8085. In several embodiments, attachment surface 8085 can be a surface of cradle 8080 used to attach overlay applicator 8001 to cradle 8080. In a number of embodiments, tab surface 8084 can be a surface of cradle 8080 upon which first pull tab 8042 and/or second pull tab 8022 can be supported. In several embodiments, tab surface 8084 and/or attachment surface 8085 can be recessed below top surface 8081, such that overlay applicator 8001 can be disposed in overlay applicator tray 8000 in a position that does not extend above top surface 8081, which can beneficially protect overlay applicator 8001 from damage. In many embodiments, tab recess 8083 can provide a structural recess that facilitates ease of access to first pull tab 8042 and/or second pull tab 8022. In several embodiments, tab recess 8083 can allow such ease of access without first pull tab 8042 and/or second pull tab 8022 extending beyond any of side surfaces 8082, which can advantageously protect first pull tab 8042 and/or second pull tab 8022 from damage.

In many embodiments, alignment piece 8010 can couple cradle 8080 to overlay applicator 8001. In some embodiments, alignment piece 8010 can include an overlay attachment portion 8011 and a cradle attachment portion 8012. For example, alignment piece 8010 can include adhesive at cradle attachment portion 8012 to adhere alignment piece 8010 to attachment surface 8085 of cradle 8080, and alignment piece 8010 also can include an adhesive at overlay attachment portion 8011 to adhere alignment piece 8010 to overlay applicator 8001, such as at an attachment region 8021 of protective film 8020. In some embodiments, alignment piece 8010 can be a piece of material separate from the other layers of overlay applicator 8001, such as shown in FIG. 80 and described above. In other embodiments, alignment piece 8010 can be integral with one or more of the layers of overlay applicator 8001, such as protective film 8020 extending beyond the dimensions of overlay 8230 (FIG. 82) to attach to attachment surface 8085 of cradle 8080, for example. In many embodiments, first pull tab 8042 and second pull tab 8022 can extend beyond the other overlay layers (e.g., protective film 8020, overlay 8230 (FIG. 82), adhesive release liner 8240 (FIG. 82)) in a direction opposite from the direction in which alignment piece 8010 extends. In many embodiments, alignment piece 8010 can couple cradle 8080 to overlay applicator 8001 such that overlay 8230 (FIG. 82) of overlay applicator 8001 is aligned with the screen of the electronic device when the electronic device is securely held in device slot 8090. In a number of embodiments, alignment piece 8010 can be made of a flexible material that allows overlay applicator 8001 to be lifted and/or rotated with respect to cradle 8080.

Turning ahead in the drawings, FIG. 83 illustrates a top view of overlay applicator tray 8000, with an electronic device 8350 being held in device slot 8090, and with overlay applicator 8001 resting on or at least over electronic device 8350. FIG. 84 illustrates a top view of overlay applicator tray 8000, with electronic device 8350 being held in device slot 8090, and with overlay applicator 8001 being folded upwards. As shown in FIGS. 83-84, electronic device 8350 is a 38 mm Apple Watch without a watch band. In other embodiments, the electronic device can be another type of

88

electronic device, and device slot 8090 can be configured to securely hold the electronic device within device slot 8090.

In many embodiments, overlay applicator tray 8000 can be used to apply overlay 8230 (FIG. 82) to electronic device 8350. For example, overlay applicator 8001 can be turned upwards, as shown in FIG. 84, and electronic device 8350 can be placed into device slot 8090 of cradle 8080 with the screen of electronic device 8350 facing upwards or away from device slot 8090. In many embodiments, alignment piece 8010 can be flexible to allow overlay applicator 8001 to be lifted upwards, and in some embodiments, to be lifted upwards and folded back over cradle attachment portion 8012. When overlay applicator 8001 is released or folded back down, overlay applicator 8001 can rest upon electronic device 8350 and tab surface 8084, as shown in FIG. 83. In many embodiments, tab surface 8084 and/or attachment surface 8085 can be approximately planar with the screen of electronic device 8350, such that overlay applicator 8001 is approximately planar when resting upon electronic device 8350 and tab surface 8084, as shown in FIG. 83.

In several embodiments, the screen of electronic device 8350 can be cleaned before and/or after being inserted in device slot 8090. For example, overlay applicator 8001 can be folded back over cradle attachment portion 8012, and the screen of electronic device 8350 can be cleaned with a cleaning cloth, such as cleaning cloth 8573 shown in FIG. 85 and described above, and/or cleaned with a dust removal sticker, such as dust removal sticker 8574, shown in FIG. 85 and described below, which can advantageously remove dirt or other particulates.

After the screen of electronic device 8350 is cleaned, in several embodiments, when overlay applicator 8001 is lifted off the screen of electronic device 8350, such as shown in FIG. 84, first pull tab 8042 can be used to remove adhesive release liner 8240 (FIG. 82) to expose the adhesive on bottom 9532 (FIG. 95) side of overlay applicator 8230 (FIG. 82).

Next, in a number of embodiments, overlay applicator 8001 can be returned to rest on the screen of electronic device 8350, such that the adhesive on bottom side 9532 (FIG. 95) of overlay applicator 8230 (FIG. 82) adheres to the screen of electronic device 8350. In many embodiments, alignment piece 8010 can align overlay applicator 8001 with respect to cradle 8080 such that when overlay applicator 8001 is returned to rest upon the screen of electronic device 8350, overlay 8230 (FIG. 82) can be aligned automatically or self-aligned with the screen of electronic device 8350.

Next, in many embodiments, air bubbles, if any, between overlay applicator 8230 (FIG. 82) and the screen of electronic device 8350 can be smoothed out, such as by pushing or rubbing a rigid or semi-rigid object along protective film 8020 (FIG. 80). In several embodiments, protective film 8020 (FIG. 80) can protect and prevent damage to overlay 8230 (FIG. 82) from the forceful pushing or rubbing involved with smoothing the bubbles.

Next, in several embodiments, protective film 8020 (FIG. 80) can be removed, such as by using second pull tab 8022 to remove protective film 8020 (FIG. 80) from overlay 8230 (FIG. 82). In many embodiments, alignment piece 8010 can be attached to protective film 8020, but not to overlay 8230 (FIG. 82), such that overlay 8230 (FIG. 82) can be adhered to the screen of electronic device 8350. Electronic device 8350 can then be removed from device slot 8090 with overlay 8230 (FIG. 82) applied to the screen of electronic device 8350.

Turning ahead in the drawings, FIG. 85 illustrates a top view of an overlay applicator tray kit 8500 with an overlay

applicator tray book **8560** in an open configuration, according to another embodiment. Overlay applicator tray kit **8500** is merely exemplary, and embodiments of the overlay applicator tray kit are not limited to the embodiments presented herein. The overlay applicator tray kit can be employed in many different embodiments or examples not specifically depicted or described herein.

In various embodiments, overlay applicator tray kit **8500** can include overlay applicator tray book **8560**, a protective cover **8571**, a dust sticker assembly **8572**, and/or a cleaning cloth **8573**. In a number of embodiments, applicator tray book **8560** can include a first cover **8561**, a spine **8562**, and/or a rear cover **8563**, and can be foldable between an open configuration, as shown in FIG. **85**, and a closed configuration, as shown in FIG. **86**, described below. In many embodiments, first cover **8561** can be coupled to an overlay applicator tray, such as overlay applicator tray **8000**. In several embodiments, second cover **8563** can include a flap **8564**, which can be used to store dust sticker assembly **8572** and/or cleaning cloth **8573** within overlay applicator tray book **8560**. In many embodiments, overlay applicator tray **8000** can be used when overlay applicator tray book **8560** is in the open configuration shown in FIG. **85**.

In many embodiments, dust sticker assembly **8572** can be similar to dust sticker assembly **5500** (FIG. **55**). For example, dust sticker assembly **8572** can include a dust removal sticker **8574** and/or a release liner **8575**. In many embodiments, release liner **8575** can be attached to the bottom side of dust removal sticker **8574** and/or can cover the adhesive on the bottom side of dust removal sticker **8574**. In many embodiments, release liner **8575** can be removed from the bottom side of dust removal sticker **8574** to expose the adhesive on the bottom side of dust removal sticker **8574**, and dust removal sticker **8574** can be adhered to, and then removed from, the screen of electronic device **8350** (FIGS. **83-84**) to remove dust and other particulates from the screen of electronic device **8350**.

In several embodiments, cleaning cloth **8573** can be a microfiber cloth or another suitable material that can be used to clean the screen of electronic device **8350** (FIGS. **83-84**) without leaving dust or other particulates on the screen of electronic device **8350** (FIGS. **83-84**).

In several embodiments, protective cover **8571** can be used to cover overlay applicator tray **8000**, such as when overlay applicator tray book is closed, to protect overlay applicator tray **8000** and keep dust out from overlay applicator tray **8000**.

In many embodiments, overlay applicator tray kit can include the elements to apply an overlay, such as overlay **8230** (FIG. **82**), to the screen of an electronic device, such as electronic device **8350** (FIGS. **83-84**).

Turning ahead in the drawings, FIG. **86** illustrates a top, front view of overlay applicator tray book **8560** in a closed configuration. FIG. **87** illustrates a bottom, front view of a package **8700** used to enclose overlay applicator tray kit **8500** (FIG. **85**), according to another embodiment. In many embodiments, overlay applicator tray kit **8500** (FIG. **85**) can be included in overlay applicator tray book **8560** in the closed configuration shown in FIG. **86** and packaged within package **8700**. In several embodiments, package **8700** can be a package that can keep dust and other particulates out of overlay applicator tray **8000** (FIGS. **80-85**). In a number of embodiments, packages such as package **8700** can be provided to consumers to allow consumers to accurately and easily apply overlays, such as overlay **8230** (FIG. **82**) to the screens of electronic devices, such as electronic device **8350**

(FIGS. **83-84**). In many embodiments, instructions for the consumer can be provided in and/or on package **8700**.

Turning ahead in the drawings, FIG. **88** illustrates a top, front, right side perspective view of an overlay applicator tray **8800**, according to another embodiment. FIG. **89** illustrates a front side elevational view of overlay applicator tray **8800**. FIG. **90** illustrates an enlarged front side elevational view of a portion of overlay applicator tray **8800**, as identified in FIG. **89**. Overlay applicator tray **8800** is merely exemplary, and embodiments of the overlay applicator tray are not limited to the embodiments presented herein. The overlay applicator tray can be employed in many different embodiments or examples not specifically depicted or described herein. Overlay applicator tray **8800** can be similar to overlay applicator tray **8000** (FIG. **80**), and various components or constructions of overlay applicator tray **8800** can be substantially identical or similar to various components of overlay applicator tray **8000** (FIG. **80**).

In many embodiments, overlay applicator tray **8800** can include cradle **8080**, alignment piece **8010**, and an overlay applicator **8801**. Overlay applicator **8801** can be similar to overlay applicator **8001** (FIG. **80**), and various components or constructions of overlay applicator **8801** can be substantially identical or similar to various components of overlay applicator **8001** (FIG. **80**). In many embodiments, overlay applicator **8801** can include overlay **8230** and adhesive release liner **8240**, as shown in FIG. **90**, but not include protective film **8020** (FIG. **80**). In several embodiments, overlay attachment portion **8011** of alignment piece **8010** can be adhered to overlay **8230**, as shown in FIG. **90**, instead of protective film **8010** (FIG. **80**). In many embodiments, overlay applicator **8801** can include first pull tab **8042**, but not second pull tab **8022** (FIG. **80**). As described above, first pull tab **8042** can be used to remove adhesive release liner **8240** from overlay **8230**, such that overlay **8230** can be adhered to the screen of an electronic device, such as electronic device **8350** (FIGS. **83-84**), when the electronic device is securely held in device slot **8090**.

Turning ahead in the drawings, FIG. **91** illustrates a top view of an overlay applicator tray **9100** with an overlay applicator **9101** in a lowered position, according to another embodiment. FIG. **92** illustrates a top, right side view of overlay applicator tray **9100** with overlay applicator **9101** in a raised position. FIG. **96** illustrates an enlarged top, right side view of a portion of overlay applicator **9101** of overlay applicator tray **9100**, as identified in FIG. **92**. Overlay applicator tray **9100** is merely exemplary, and embodiments of the overlay applicator tray are not limited to the embodiments presented herein. The overlay applicator tray can be employed in many different embodiments or examples not specifically depicted or described herein. In many embodiments, overlay applicator tray **9100** can be similar to overlay applicator tray **8000** (FIG. **80**), and various components or constructions of overlay applicator tray **9100** can be substantially identical or similar to various components of overlay applicator tray **8000** (FIG. **80**).

In various embodiments, overlay applicator tray **9100** can include overlay applicator **9101**, a cradle **9180**, and/or an alignment piece **9110**. In many embodiments, overlay applicator **9101** can be similar to overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), overlay applicator **1500** (FIG. **15**), overlay applicator **3000** (FIG. **30**), overlay applicator **3550** (FIGS. **35-36**), overlay applicator **6050** (FIG. **60**), and/or overlay applicator **8001** (FIG. **80**), and various components and/or constructions of overlay applicator **9101** can be substantially identical or similar to various

91

components of overlay applicator **100** (FIG. 1), overlay applicator **400** (FIGS. 4-5), overlay applicator **600** (FIG. 6), overlay applicator **700** (FIG. 7), overlay applicator **1500** (FIG. 15), overlay applicator **3000** (FIG. 30), overlay applicator **3550** (FIGS. 35-36), overlay applicator **6050** (FIG. 60), and/or overlay applicator **8001** (FIG. 80).

In a number of embodiments, overlay applicator **9101** can include an overlay **9230** (FIG. 92). In many embodiments, overlay **9230** (FIG. 92) can be similar or identical to overlay **130** (FIG. 1), overlay **430** (FIGS. 4-5), overlay **630** (FIG. 6), overlay **730** (FIG. 7), and/or overlay **1530** (FIG. 15), overlay **2930** (FIGS. 29-30), and/or overlay **8230** (FIG. 82). In a number of embodiments, overlay **9230** (FIG. 92) can have a top side **9631** (FIG. 96) and a bottom side **9632** (FIG. 96). Top side **9631** (FIG. 96) of overlay **9230** (FIG. 92) can be similar or identical to top side **131** (FIG. 1) of overlay **130** (FIG. 1). Bottom side **9632** (FIG. 96) of overlay **9230** (FIG. 92) can be similar or identical to bottom side **132** (FIG. 1) of overlay **130** (FIG. 1). In various embodiments, bottom side **9632** (FIG. 96) of overlay **9230** (FIG. 92) can include an adhesive configured to adhere overlay **9230** (FIG. 92) to a screen of an electronic device, such as an electronic device held in cradle **9180**.

In several embodiments, overlay applicator **9001** can include an adhesive release liner **9240** (FIG. 92). Adhesive release liner **9240** (FIG. 92) can be similar or identical to adhesive release liner **140** (FIG. 1), adhesive release liner **440** (FIGS. 4-5), adhesive release liner **640** (FIG. 6), adhesive release liner **740** (FIG. 7), adhesive release liner **1540** (FIG. 15), adhesive release liner **2740** (FIGS. 27-30), and/or adhesive release liner **8240** (FIG. 82). In a number of embodiments, adhesive release liner **9240** (FIG. 92) can have a top side **9641** (FIG. 96) and a bottom side **9642** (FIG. 96). Top side **9641** (FIG. 96) of adhesive release **9240** (FIG. 92) liner can be removably attached to bottom side **9632** (FIG. 96) of overlay **9230** (FIG. 92) to expose the adhesive at bottom side **9632** (FIG. 96) of overlay **9230** (FIG. 82). In some embodiments, adhesive release liner **9240** (FIG. 92) can be configured to protect the adhesive agent at or on bottom side **9632** (FIG. 96) of overlay **9230** (FIG. 92) from contaminants.

In some embodiments, overlay applicator **9001** can include a protective film **9220** (FIG. 92). Protective film **9220** (FIG. 92) can be similar or identical to protective film **120** (FIG. 1), protective film **420** (FIGS. 4-5), protective film **620** (FIG. 6), protective film **720** (FIG. 7), protective film **1520** (FIG. 15), protective film **2920** (FIGS. 29-30), protective film **3552** (FIG. 35), protective film **6052** (FIG. 60), and/or protective film **8020** (FIG. 80). In many embodiments, protective film **9220** (FIG. 92) can have a top side **9621** (FIG. 96) and a bottom side **9622** (FIG. 96). In a number of embodiments, protective film **9220** (FIG. 92) can be removably attached to the top side **9631** (FIG. 96) of overlay **9230** (FIG. 92). For example, bottom side **9622** (FIG. 96) of protective film **9220** (FIG. 92) can be removably attached to top side **9631** (FIG. 96) of overlay **9230** (FIG. 92), such as with an adhesive at or on bottom side **9622** (FIG. 96) of protective film **9220** (FIG. 92).

In several embodiments, overlay applicator **9101** can include a first pull tab **9142** and/or a second pull tab **9122**. First pull tab **9142** can be similar or identical to first pull tab **8042** (FIG. 80), and/or second pull tab **9122** can be similar or identical to second pull tab **8022** (FIG. 80). In a number of embodiments, first pull tab **9142** can be used to remove adhesive release liner **9240** (FIG. 92) from overlay **9230** (FIG. 92). In many embodiments, first pull tab **9142** can advantageously help prevent accidental touching of the

92

adhesive at or on bottom side **9632** (FIG. 96) of overlay **9230** (FIG. 92) when removing adhesive release liner **9240** (FIG. 92) from overlay **9230** (FIG. 92). In several embodiments, first pull tab **9142** can be affixed to bottom side **9642** (FIG. 96) or adhesive release liner **9240** (FIG. 92), such as shown in FIG. 92. In other embodiments, first pull tab **9142** can be integral with adhesive release liner **9240** (FIG. 92). In many embodiments, first pull tab **9142** can be adhered to bottom side **9642** (FIG. 96) of adhesive release liner **9240** (FIG. 92) with an adhesive or another suitable fastener. In a number of embodiments, the adhesive adhering first pull tab **9142** to adhesive release liner **9240** (FIG. 92) can have a greater adhesive strength than the adhesive at or on bottom side **9632** (FIG. 96) of overlay **9230** (FIG. 92) that adheres adhesive release liner **9240** (FIG. 92) to overlay **9230** (FIG. 82), such that first pull tab **9142** can be used to pull and remove adhesive release liner **9240** (FIG. 92) from overlay **9230** (FIG. 92) without first pull tab **9142** being removed from adhesive release liner **9240** (FIG. 92).

In a number of embodiments, second pull tab **9122** can be used to remove protective film **9220** (FIG. 92) from overlay **9230** (FIG. 92). In many embodiments, second pull tab **9122** can be affixed to top side **9621** (FIG. 96) of protective film **9220** (FIG. 92), such as shown in FIG. 92. In other embodiments, second pull tab **9122** can be integral with protective film **9220** (FIG. 92). In many embodiments, second pull tab **9122** can be adhered to top side **9621** (FIG. 96) of protective film **9220** (FIG. 92) with an adhesive or another suitable fastener. In a number of embodiments, the adhesive adhering second pull tab **9122** to protective film **9220** (FIG. 92) can have a greater adhesive strength than the adhesive at or on bottom side **9622** (FIG. 96) of protective film **9220** (FIG. 92) that adheres protective film **9220** (FIG. 92) to overlay **9230** (FIG. 92), such that second pull tab **9122** can be used to pull and remove protective film **9220** (FIG. 92) from overlay **9230** (FIG. 92) without second pull tab **9122** being removed from protective film **9220** (FIG. 92).

In many embodiments, cradle **9180** can be similar to cradle **310** (FIG. 3), cradle **832** (FIG. 8), cradle **1620** (FIG. 16), cradle **2032** (FIG. 20), cradle **3100** (FIG. 31), cradle **3520** (FIG. 35), cradle **3710** (FIGS. 37-38), cradle **4630** (FIGS. 46-50), cradle **6410** (FIG. 64), cradle **6420** (FIG. 64), cradle **6430** (FIG. 64), cradle **6950** (FIG. 69), and/or cradle **8080** (FIG. 80), and various components and/or constructions of cradle **9180** can be substantially identical or similar to various components of cradle **310** (FIG. 3), cradle **832** (FIG. 8), cradle **1620** (FIG. 16), cradle **2032** (FIG. 20), cradle **3100** (FIG. 31), cradle **3520** (FIG. 35), cradle **3710** (FIGS. 37-38), cradle **4630** (FIGS. 46-50), cradle **6410** (FIG. 64), cradle **6420** (FIG. 64), cradle **6430** (FIG. 64), cradle **6950** (FIG. 69), and/or cradle **8080** (FIG. 80).

In several embodiments, cradle **9180** can include a device slot **9190**. Device slot can be similar to slot **311** (FIG. 3), slot **1621** (FIG. 16), device slot **3111** (FIG. 31), slot **3811** (FIG. 38), slot **4731** (FIG. 47), device slot **6411** (FIG. 64), device slot **6421** (FIG. 64), device slot **6431** (FIG. 64), device slot **6956** (FIG. 69), and/or device slot **8090** (FIG. 80). In many embodiments, device slot **9190** can be configured to securely hold an electronic device in device slot **9190**. In many embodiments, the electronic device can be similar or identical to device **220** (FIG. 2), device **320** (FIG. 3), device **1650** (FIG. 16), device **3401** (FIG. 34), device **3720** (FIG. 37), device **4800** (FIG. 48), device **5600** (FIG. 56), device **6550** (FIG. 65), device **7100**, and/or electronic device **8350** (FIG. 83). For example, the electronic device can be a smart phone, a tablet, a smart watch, or another suitable electronic device. In several embodiments, cradle **9180** can be config-

ured for a specific type of electronic device, such as the iPhone 6 Plus or iPhone 6s Plus. For example, device slot **9190** can be configured to hold an electronic device having the dimensions of the specific type of electronic device.

In many embodiments, the electronic device can be placed within device slot **9190** with a screen of the electronic device facing upwards or away from device slot **9190**. In other embodiments, the electronic device can be placed within device slot **9190** with the screen of the electronic device facing downwards or towards device slot **9190**. In some embodiments, device slot **9190** can be conformal with the electronic device. In a number of embodiments, device slot **9190** can include one or more side walls, such as side walls **9191**, and/or one or more corner walls, such as corner walls **9192**. In several embodiments, device slot **9190** can include a bottom wall **9293** (FIG. 92). In some embodiments, bottom wall **9293** can include one or more recesses or apertures, such as apertures **9294** (FIG. 92) to accommodate one or more protrusions on a face of the electronic device, such as a camera, or two facilitate removal of the electronic device from device slot **9190**.

In a number of embodiments, cradle **9180** can have a thickness greater than a thickness of the electronic device. In some embodiments, cradle **9180** can include a top surface **9181** and one or more side surfaces, such as side surfaces **9282** (FIG. 92). In many embodiments, top surface **9180** can at least partially surround device slot **9190**. In some embodiments, cradle **9180** can include one or more openings or affordances, such as affordances **9186**, which can accommodate one or more protrusions on one or more sides of the electronic device, such as one or more buttons, crowns, dials, etc., of the electronic device, and/or facilitate removal of the electronic device from device slot **9190**. For example, as shown in FIG. 91, affordances **9186** can extend outward from device slot **9190** through one or more of side walls **9191** of device slot **9190** without extending through one or more of side surfaces **9282** (FIG. 92) of cradle **9180**. In other embodiments, an opening (not shown) can extend through one of side walls **9191** of device slot **9190** and/or through one of side surfaces **9282** (FIG. 92) or cradle **9180**.

In various embodiments, cradle **9180** can include a tab surface **9184** and/or an attachment surface **9185**. Tab surface **9184** can be similar or identical to tab surface **8084** (FIG. 80), and/or attachment surface **9185** can be similar or identical to attachment surface **8085** (FIG. 80). In several embodiments, attachment surface **9185** can be a surface of cradle **9180** used to attach overlay applicator **9101** to cradle **9180**. In a number of embodiments, tab surface **9184** can be a surface of cradle **9180** upon which first pull tab **9142** and/or second pull tab **9122** can be supported. In several embodiments, tab surface **9184** and/or attachment surface **9185** can be recessed below top surface **9181**, such that overlay applicator **9101** can be disposed in overlay applicator tray **9100** in a position that does not extend above top surface **9181**, which can beneficially protect overlay applicator **9101** from damage.

In many embodiments, alignment piece **9110** can couple cradle **9180** to overlay applicator **9101**. Alignment piece **9110** can be similar or identical to alignment piece **8010** (FIG. 80). In some embodiments, alignment piece **9110** can include an overlay attachment portion **9111** and a cradle attachment portion **9112**. For example, alignment piece **9110** can include adhesive at cradle attachment portion **9112** to adhere alignment piece **9110** to attachment surface **9185** of cradle **9180**, and alignment piece **9110** also can include an adhesive at overlay attachment portion **9111** to adhere alignment piece **9110** to overlay applicator **9101**. In some

embodiments, alignment piece **9110** can be a piece of material separate from the other layers of overlay applicator **9101**, such as shown in FIGS. 91-92 and described above. In other embodiments, alignment piece **9110** can be integral with one or more of the layers of overlay applicator **9101**, such as protective film **9220** (FIG. 92) extending beyond the dimensions of overlay **9230** (FIG. 92) to attach to attachment surface **9185** of cradle **9180**, for example. In many embodiments, first pull tab **9142** and second pull tab **9122** can extend beyond the other overlay layers (e.g., protective film **922** (FIG. 92), overlay **9230** (FIG. 92), adhesive release liner **9240** (FIG. 92)) in a direction opposite from the direction in which alignment piece **9110** extends. In many embodiments, alignment piece **9110** can couple cradle **9180** to overlay applicator **9101** such that overlay **9230** (FIG. 92) of overlay applicator **9101** is aligned with the screen of the electronic device when the electronic device is securely held in device slot **9190**. In a number of embodiments, alignment piece **9110** can be made of a flexible material that allows overlay applicator **9101** to be lifted and/or rotated with respect to cradle **9180**.

In the embodiments of the overlay applicator trays (e.g., **8000** (FIG. 80), **8800** (FIG. 88), **9100** (FIG. 91)) described above, the first pull tab (e.g., **8022** (FIG. 80), **9122** (FIG. 91)) can be configured to peel the adhesive release liner (e.g., **8240** (FIG. 82), **9240** (FIG. 92)) starting at a side of the overlay (e.g., **8230** (FIG. 82), **9230** (FIG. 92)) that is opposite from the side to which the alignment piece (e.g., **8010** (FIG. 80), **9110** (FIG. 91)) is attached. In other embodiments, the first pull tab can be similar or identical to pull tab **150** (FIG. 1), pull tab **450** (FIGS. 4-5), pull tab **650** (FIG. 6), pull tab **750** (FIGS. 7, 42, 44-45, 48-49), pull tab **1550** (FIG. 15), pull tab **2750** (FIGS. 27-30) and/or pull tab **6055** (FIG. 60), such that the first pull tab is folded under the adhesive release liner (e.g., **8240** (FIG. 82), **9240** (FIG. 92)) proximate to the side at which the alignment piece (e.g., **8010** (FIG. 80), **9110** (FIG. 91)) is attached, and pulling the first pull tab results in the adhesive release liner (e.g., **8240** (FIG. 82), **9240** (FIG. 92)) being peeled starting at the side to which the alignment piece (e.g., **8010** (FIG. 80), **9110** (FIG. 91)) is attached. In some such embodiments, the first pull tab can be integral with the adhesive release liner, and in other such embodiments, the first pull tab can be attached to the adhesive release liner. In some embodiments, the first pull tab can include a wiper, such as wiper **157** (FIG. 1), wiper **457** (FIG. 4), wiper **657** (FIG. 6), wiper **757** (FIG. 7), wiper **2857** (FIGS. 28-30), wiper **6200** (FIG. 62), and/or wiper **6300** (FIG. 63), which can be pulled across the screen of the electronic device when the first pull tab is pulled to remove the adhesive release liner (e.g., **8240** (FIG. 82), **9240** (FIG. 92)) from the overlay (e.g., **8230** (FIG. 82), **9230** (FIG. 92)).

In the embodiments of the overlay applicator trays (e.g., **8000** (FIG. 80), **8800** (FIG. 88), **9100** (FIG. 91)) described above, the electronic device is placed in the device slot (e.g., **8090** (FIG. 80, 88), **9190** (FIG. 91)) of the cradle (e.g., **8080** (FIG. 80, 88), **9180** (FIG. 91)) with the screen of the electronic device facing upwards or away from the device slot (e.g., **8090** (FIG. 80, 88), **9190** (FIG. 91)). In other embodiments, the electronic device can be placed in the device slot (e.g., **8090** (FIG. 80, 88), **9190** (FIG. 91)), such that the screen of the electronic device is downwards or facing towards the device slot (e.g., **8090** (FIG. 80, 88), **9190** (FIG. 91)). For example, the tab surface (e.g., **8084** (FIG. 80), **9184** (FIG. 91)) and/or the attachment surface (e.g., **8085** (FIG. 80), **9185** (FIG. 91)) can be lower so that the overlay applicator can be attached upside-down to accom-

modate applying the overlay (e.g., **8230** (FIG. **82**), **9230** (FIG. **92**)) to the screen of the device when the electronic device is facing the opposite direction.

In several embodiments, the alignment piece (e.g., **8010** (FIG. **80**), **9110** (FIG. **91**)) can be a permanent part of the overlay applicator tray (e.g., **8000** (FIG. **80**), **8800** (FIG. **88**), **9100** (FIG. **91**)) that is integrated during manufacturing. For example, the overlay applicator can be manufacturing with the alignment piece such that the overlay applicator (e.g., **8001** (FIG. **80**), **8801** (FIG. **88**), **9101** (FIG. **91**)) and the cradle (e.g., **8080** (FIG. **80**, **88**), **9180** (FIG. **91**)) are attached and pre-aligned using the alignment piece during the manufacturing process of the overlay applicator tray. When the overlay applicator tray is used by a consumer, the overlay applicator tray can be a single apparatus, due to the attachment and pre-alignment of the alignment piece to the overlay applicator and the cradle, such that the consumer does not need to align the overlay applicator with the cradle using pins, fasteners, adhesive, or any other attachment and/or alignment method. Instead, the consumer need only place the electronic device within the device slot (e.g., **8090** (FIG. **80**, **88**), **9190** (FIG. **91**)) of the cradle (e.g., **8080** (FIG. **80**, **88**), **9180** (FIG. **91**)), and the overlay applicator will be aligned automatically or self-aligned with the electronic device such that the overlay (e.g., **8230** (FIG. **82**)) will be aligned with the screen of the electronic device when adhered to the screen of the electronic device.

In a number of embodiments, the overlay applicator trays (e.g., **8000** (FIG. **80**), **8800** (FIG. **88**), **9100** (FIG. **91**)) can be disposable for one-time use. In several embodiments, the disposable nature of the overlay applicator trays can allow the overlay applicator trays to be procured by individual consumers that prefer to apply an overlay (e.g., **8230** (FIG. **82**), **9230** (FIG. **92**)) to an electronic device (e.g., **8350** (FIG. **83**)) by themselves, and not relinquish full control of their electronic device to another, such as a sales associate.

In many embodiments, the cradles (e.g., **8080** (FIG. **80**, **88**), **9180** (FIG. **91**)) can made using vacuum forming with a thermoplastic or other suitable material. In various embodiments, the vacuum formed manufacturing of the cradle can faster and less expensive to manufacture than a cradle formed with injection molding.

Turning ahead in the drawings, FIG. **93** illustrates a flow chart for an embodiment of a method **9300**, according to another embodiment. Method **9300** is merely exemplary and is not limited to the embodiments presented herein. Method **9300** can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method **9300** can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method **9300** can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method **9300** can be combined or skipped. In many embodiments, method **9300** can be a method of providing an overlay applicator tray. In some embodiments, the overlay applicator tray can be similar or identical to overlay applicator tray **8000** (FIG. **80**), overlay applicator tray **8800** (FIG. **88**), and/or overlay applicator tray **9100** (FIG. **91**).

Referring to FIG. **93**, method **9300** can include a block **9301** of providing a cradle. In many embodiments, the cradle can be similar or identical to cradle **310** (FIG. **3**), cradle **832** (FIG. **8**), cradle **1620** (FIG. **16**), cradle **2032** (FIG. **20**), cradle **3100** (FIG. **31**), cradle **3520** (FIG. **35**), cradle **3710** (FIGS. **37-38**), cradle **4630** (FIGS. **46-50**),

cradle **6410** (FIG. **64**), cradle **6420** (FIG. **64**), cradle **6430** (FIG. **64**), cradle **6950** (FIG. **69**), cradle **8080** (FIG. **80**), and/or cradle **9180** (FIG. **91**). In many embodiments, the cradle can include a device slot. The device slot can be similar or identical to slot **311** (FIG. **3**), slot **1621** (FIG. **16**), device slot **3111** (FIG. **31**), slot **3811** (FIG. **38**), slot **4731** (FIG. **47**), device slot **6411** (FIG. **64**), device slot **6421** (FIG. **64**), device slot **6431** (FIG. **64**), device slot **6956** (FIG. **69**), device slot **8090** (FIG. **80**), and/or device slot **9190** (FIG. **91**). In many embodiments, the device slot can be configured to securely hold an electronic device in the device slot. The electronic device can be to device **220** (FIG. **2**), device **320** (FIG. **3**), device **1650** (FIG. **16**), device **3401** (FIG. **34**), device **3720** (FIG. **37**), device **4800** (FIG. **48**), device **5600** (FIG. **56**), device **6550** (FIG. **65**), device **7100**, and/or electronic device **8350** (FIG. **83**). In many embodiments, the cradle can be provided by being vacuum formed.

In some embodiments, method **9300** next can include a block **9302** of providing an overlay applicator. The overlay applicator can be similar or identical to overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), overlay applicator **1500** (FIG. **15**), overlay applicator **3000** (FIG. **30**), overlay applicator **3550** (FIGS. **35-36**), overlay applicator **6050** (FIG. **60**), overlay applicator **8001** (FIG. **80**), and/or overlay applicator **9101** (FIG. **91**).

In many embodiments, block **9302** optionally can include a block **9303** of providing an overlay layer. The overlay layer can be similar or identical to overlay **130** (FIG. **1**), overlay **430** (FIGS. **4-5**), overlay **630** (FIG. **6**), overlay **730** (FIG. **7**), and/or overlay **1530** (FIG. **15**), overlay **2930** (FIGS. **29-30**), overlay **8230** (FIG. **82**), and/or overlay **9230** (FIG. **92**). In a number of embodiments, the overlay layer can include a first side and a second side. The first side can be similar or identical to top side **9531** (FIG. **95**) and/or top side **9631** (FIG. **96**). The second side can be similar or identical to bottom side **9532** (FIG. **95**) and/or bottom side **9632** (FIG. **96**). In several embodiments, the second side is configured to be adhered to a screen of the electronic device.

In several embodiments, block **9302** next can include a block **9304** of providing a release liner. The release liner can be similar or identical to adhesive release liner **140** (FIG. **1**), adhesive release liner **440** (FIGS. **4-5**), adhesive release liner **640** (FIG. **6**), adhesive release liner **740** (FIG. **7**), adhesive release liner **1540** (FIG. **15**), adhesive release liner **2740** (FIGS. **27-30**), adhesive release liner **8240** (FIG. **82**), and/or adhesive release liner **9240** (FIG. **92**). In many embodiments, the release liner can be configured to be removed from the second side of the overlay layer to permit the second side of the overlay layer to be adhered to the screen of the electronic device.

In many embodiments, block **9302** optionally can include a block **9305** of providing a protective layer. The protective layer can be similar or identical to protective film **120** (FIG. **1**), protective film **420** (FIGS. **4-5**), protective film **620** (FIG. **6**), protective film **720** (FIG. **7**), protective film **1520** (FIG. **15**), protective film **2920** (FIGS. **29-30**), protective film **3552** (FIG. **35**), protective film **6052** (FIG. **60**), protective film **8020** (FIG. **80**), and/or protective film **9220** (FIG. **92**). In several embodiments, a side of the protective layer can be removably attached to the first side of the overlay layer. The side of the protective layer can be similar or identical to second side **9522** (FIG. **95**) or second side **9622** (FIG. **96**).

In a number of embodiments, method **9300** next can include a block **9306** of providing an alignment piece. The alignment piece can be similar or identical to alignment piece **8010** (FIG. **80**) and/or alignment piece **9110** (FIG. **91**).

In a number of embodiments, the alignment piece can couple the cradle to the overlay applicator such that the overlay layer is aligned with the screen of the electronic device when the electronic device is securely held in the device slot as the overlay applicator is applied to the screen of the electronic device.

Turning ahead in the drawings, FIG. 94 illustrates a flow chart for an embodiment of a method 9400, according to another embodiment. Method 9400 is merely exemplary and is not limited to the embodiments presented herein. Method 9400 can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method 9400 can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method 9400 can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method 9400 can be combined or skipped. In many embodiments, method 9400 can be a method of using an overlay applicator tray, such as using an overlay applicator tray to apply an overlay to a screen of an electronic device.

Referring to FIG. 94, method 9400 can include a block 9401 of inserting an electronic device in a device slot of a cradle of an overlay applicator tray. The overlay applicator tray can be similar or identical to overlay applicator tray 8000 (FIG. 80), overlay applicator tray 8800 (FIG. 88), and/or overlay applicator tray 9100 (FIG. 91). The cradle can be similar or identical to cradle 310 (FIG. 3), cradle 832 (FIG. 8), cradle 1620 (FIG. 16), cradle 2032 (FIG. 20), cradle 3100 (FIG. 31), cradle 3520 (FIG. 35), cradle 3710 (FIGS. 37-38), cradle 4630 (FIGS. 46-50), cradle 6410 (FIG. 64), cradle 6420 (FIG. 64), cradle 6430 (FIG. 64), cradle 6950 (FIG. 69), cradle 8080 (FIG. 80), and/or cradle 9180 (FIG. 91). The device slot can be similar or identical to slot 311 (FIG. 3), slot 1621 (FIG. 16), device slot 3111 (FIG. 31), slot 3811 (FIG. 38), slot 4731 (FIG. 47), device slot 6411 (FIG. 64), device slot 6421 (FIG. 64), device slot 6431 (FIG. 64), device slot 6956 (FIG. 69), device slot 8090 (FIG. 80), and/or device slot 9190 (FIG. 91). The electronic device can be to device 220 (FIG. 2), device 320 (FIG. 3), device 1650 (FIG. 16), device 3401 (FIG. 34), device 3720 (FIG. 37), device 4800 (FIG. 48), device 5600 (FIG. 56), device 6550 (FIG. 65), device 7100, and/or electronic device 8350 (FIG. 83). In many embodiments, the device slot can be configured to securely hold the electronic device in the device slot when the electronic device is inserted in the device slot.

In some embodiments, method 9400 next can include a block 9402 of removing a release liner from an overlay layer. In many embodiments, the release liner and the overlay layer can be part of an overlay applicator attached to the cradle using an alignment piece. The overlay applicator can be similar or identical to overlay applicator 100 (FIG. 1), overlay applicator 400 (FIGS. 4-5), overlay applicator 600 (FIG. 6), overlay applicator 700 (FIG. 7), overlay applicator 1500 (FIG. 15), overlay applicator 3000 (FIG. 30), overlay applicator 3550 (FIGS. 35-36), overlay applicator 6050 (FIG. 60), overlay applicator 8001 (FIG. 80), and/or overlay applicator 9101 (FIG. 91). The alignment piece can be similar or identical to alignment piece 8010 (FIG. 80) and/or alignment piece 9110 (FIG. 91).

The release liner can be similar or identical to adhesive release liner 140 (FIG. 1), adhesive release liner 440 (FIGS. 4-5), adhesive release liner 640 (FIG. 6), adhesive release liner 740 (FIG. 7), adhesive release liner 1540 (FIG. 15),

adhesive release liner 2740 (FIGS. 27-30), adhesive release liner 8240 (FIG. 82), and/or adhesive release liner 9240 (FIG. 92). The overlay layer can be similar or identical to overlay 130 (FIG. 1), overlay 430 (FIGS. 4-5), overlay 630 (FIG. 6), overlay 730 (FIG. 7), and/or overlay 1530 (FIG. 15), overlay 2930 (FIGS. 29-30), overlay 8230 (FIG. 82), and/or overlay 9230 (FIG. 92). In a number of embodiments, the alignment piece can couple the cradle to the overlay applicator such that the overlay layer is aligned with the screen of the electronic device when the electronic device is securely held in the device slot as the overlay applicator is applied to the screen of the electronic device.

In several embodiments, block 9402 of removing a release liner from an overlay layer can include lifting (or rotating) the overlay applicator to peel back the release liner from the overlay layer, such as by using a first pull tab of the overlay applicator. The first pull tab can be similar or identical to first pull tab 8042 (FIG. 80) and/or 9122 (FIG. 91). In other embodiments, block 9402 of removing the release liner from the overlay layer can include pulling a pull tab of the overlay applicator when the overlay applicator is disposed proximate to the screen of the electronic device. For example, the overlay applicator can be disposed proximate to the screen of the electronic device by resting on or being held against the screen of the electronic device, such as when the electronic device is inserted in the device slot with the screen up, or disposed between the device slot at the screen of the electronic device, such as when the electronic device is inserted in the device slot with the screen down.

In many embodiments, method 9400 next can include a block 9403 of adhering the overlay layer to a screen of the electronic device. In some embodiments, such as when block 9402 of removing the release liner from the overlay applicator includes lifting (or rotating) the overlay applicator to peel back the release liner from the overlay layer, block 9403 of adhering the overlay layer to the screen of the electronic device can include lowering the overlay applicator to the screen of the electronic device to adhere the overlay layer to the screen of the electronic device. In other embodiments, such as when block 9402 of removing the release liner from the overlay applicator involves pulling a pull tab of the overlay applicator when the overlay applicator is disposed proximate to the screen of the electronic device, block 9403 of adhering the overlay layer to the screen of the electronic device can be performed simultaneously when block 9402 of removing the release liner from the overlay applicator.

In several embodiments, method 9400 optionally can include a block 9404 of smoothing out bubbles between the overlay layer and the screen of the electronic device. In many embodiments, a rigid or semi-rigid object can be used to rub the overlay layer or a protective layer on the overlay layer to work out any bubbles between the overlay layer and the screen of the electronic device.

In many embodiments, method 9400 optionally can include a block 9405 of removing a protective layer from the overlay layer. The protective layer can be similar or identical to protective film 120 (FIG. 1), protective film 420 (FIGS. 4-5), protective film 620 (FIG. 6), protective film 720 (FIG. 7), protective film 1520 (FIG. 15), protective film 2920 (FIGS. 29-30), protective film 3552 (FIG. 35), protective film 6052 (FIG. 60), protective film 8020 (FIG. 80), and/or protective film 9220 (FIG. 92). The protective layer can be part of the overlay applicator. In other embodiments, the overlay applicator does not include a protective layer. In some embodiments in which the protective layer is part of the overlay applicator, a second pull tab can be used to peel

back the protective layer from the overlay layer. The second pull tab can be similar or identical to second pull tab **8022** (FIG. **80**) and/or second pull tab **9122** (FIG. **91**).

In a number of embodiments, method **9400** next can include a block **9406** of removing the electronic device from the device slot. In some embodiments, such as when the protective layer has been removed from the overlay layer, the electronic device can be removed from the device slot with the overlay layer adhered to the screen of the electronic device. In other embodiments, such as when a screen of the electronic device is facing downwards towards the device slot, the removal of the electronic device from the device slot can cause the protective layer to be removed from the overlay layer (thus performing block **9405** of removing the protective layer from the overlay layer), or can cause the electronic device to be removed with the protective layer still attached to the overlay layer, such that block **9404** of smoothing out bubbles between the overlay layer and the screen of the electronic device can be performed after performing block **9406** of removing the electronic device from the device slot.

Turning ahead in the drawings, FIG. **97** illustrates a perspective view of an exemplary overlay **9750** attached to an electronic device **9700**, according to an embodiment. As an example, overlay **9750** can be made of glass, PET, or another suitable material. However, overlay **9750** is merely exemplary, and embodiments of the overlay are not limited to the embodiments presented herein. The overlay can be employed in many different embodiments or examples not specifically depicted or described herein. In several embodiments, overlay **9750** can be similar to overlay **130** (FIG. **1**), overlay **430** (FIGS. **4-5**), overlay **630** (FIG. **6**), overlay **730** (FIG. **7**), and/or overlay **1530** (FIG. **15**), overlay **2930** (FIGS. **29-30**), overlay **8230** (FIG. **82**), and/or overlay **9230** (FIG. **92**). In many embodiments, overlay **9750** can be applied to electronic device **9700** (e.g., to a touchscreen **9701** (FIG. **97**) or electronic device **9700**) using an overlay applicator. For example, the overlay applicator can be similar to overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), overlay applicator **1500** (FIG. **15**), overlay applicator **3000** (FIG. **30**), overlay applicator **3550** (FIGS. **35-36**), overlay applicator **6050** (FIG. **60**), overlay applicator **8001** (FIG. **80**), and/or overlay applicator **9101** (FIG. **91**). In some embodiments, overlay **9750** can be applied to electronic device **9700** using an overlay applicator tray. For example, the overlay applicator tray can be similar to overlay applicator tray **8000** (FIG. **80**) and/or overlay applicator tray **9100** (FIG. **91**).

In many embodiments, electronic device **9700** can be a portable and/or handheld electronic device, such as the Galaxy S6 Edge, Galaxy S7 Edge, and/or Galaxy S8 smartphones developed by Samsung of Seoul, South Korea. In other embodiments, the electronic device can be another suitable portable and/or handheld electronic device. In many embodiments, electronic device **9700** can include a touchscreen **9701** and a non-touchscreen portion **9702**. Touchscreen **9701** can be a capacitive touchscreen or another suitable type of touchscreen. In several embodiments, non-touchscreen portion **9702** can surround touchscreen **9701** on one or more sides, such as on a top end **9705** and a bottom end **9710**, and/or can be beneath touchscreen **9701**, as shown in FIGS. **98-99** and described below. In many embodiments, the non-touchscreen portion **9702** can include buttons, such as button **9711**, speakers, such as speaker **9706**, and/or other elements, such as cameras, light sensors, etc. In many embodiments, overlay **9750** can cover both touchscreen

9701 and all or portions of non-touchscreen portion **9702**, or overlay **9750** can cover only touchscreen **9701** and not cover non-touchscreen portion **9702**.

In a number of embodiments, electronic device **9700** can include curved edges at a right side **9703** and/or left side **9704**. In some embodiments, the curved edges can curve downward from, and/or decline below, the top plane of the face of electronic device **9700** at the sides (e.g., **9703**, **9704**) of electronic device **9700**. In some embodiments, touchscreen **9701** can extend at least partially into the curved edges at right side **9703** and/or left side **9704**. In several embodiments, overlay **9750** can include curves that correspond to the curved edges at right side **9703** and/or left side **9704** of electronic device **9700**, as described below in further detail.

Proceeding to the next drawings, FIG. **98** illustrates a cross-sectional view of electronic device **9700** along cross-section line **98-98** in FIG. **97**, and the bottom edge of touchscreen **9701** and overlay **9750**. FIG. **99** illustrates an enlarged cross-sectional view of a portion of electronic device **9700** along cross-section line **98-98** in FIG. **97**, and a portion of the bottom edge of touchscreen **9701** and overlay **9750**, as identified in FIG. **98**. In many embodiments, touchscreen **9701** can extend over non-touchscreen portion **9702** from right side **9703** to left side **9704** of electronic device **9700**. In some embodiments, as shown in FIG. **99**, touchscreen **9701** can include a flat portion **9905** and one or more curved portions, such as curved portion **9906** at right side **9703**. In a number of embodiments, the curved portions (e.g. **9906**) can curve downward from, and/or decline below, the plane of flat portion **9905** as touchscreen **9701** extends from flat portion **9905** to the side of the device (e.g., right side **9703**).

In many embodiments, as shown in FIG. **98**, overlay **9750** can include a flat overlay portion **9853** and/or curved overlay portions, such as curved overlay portions **9851** and **9852**, which can correspond to the curved edges at left side **9704** and right side **9703**, respectively, of electronic device **9700**. In many embodiments, curved overlay portions **9851** and **9852** can curve downward from and/or decline below, the plane of flat overlay portion **9853** as overlay **9750** extends towards the sides (e.g., **9703**, **9704**) of electronic device **9700**. In a number of embodiments, overlay **9750** can have an approximately uniform thickness, such that the thickness of overlay **9750** at flat overlay portion **9853** is approximately the same as the thickness of curved overlay portions **9851** and **9852**. In several embodiments, overlay **9750** can have a top side **9981** and a bottom side **9982**.

In a number of embodiments, overlay **9750** can be made of glass, tempered glass, silica-infused plastic, polyethylene terephthalate (PET), or another suitable material, which can be optically clear and transmit through light from touchscreen **9701**. In some embodiments, overlay **9750** can be rigid or semi-rigid, such that overlay **9750** can maintain the formed planar shape of flat overlay portion **9853** and maintains the formed curved shape of curved overlay portions **9851** and **9852**. In other embodiments, overlay **9750** can be flexible, such that curved overlay portions **9851** and/or **9852** can be curved manually by the user and/or automatically by gravity to form their curved shape, such as when overlay **9750** is adhered to electronic device **9750**.

In many embodiments, overlay **9750** can be attached and/or adhered to electronic device **9700** with one or more layers of adhesive and/or adhesive carrier. For example, such as shown in FIG. **99**, overlay **9750** can be attached and/or adhered to electronic device **9700** using an adhesive component **9970**. In a number of embodiments, adhesive

component 9970 can include a top side 9983 and a bottom side 9984. In several embodiments, adhesive component 9970 can include an adhesive carrier 9972, a first adhesive layer 9971, and/or a second adhesive layer 9973. In many embodiments, adhesive carrier can have a top side 9985 and a bottom side 9986. In some embodiments, first adhesive layer 9971 can be at top side 9985 of adhesive carrier 9972, and/or second adhesive layer 9973 can be at bottom side 9986 of adhesive carrier 9972. FIGS. 98 and 99 do not necessarily show the proportional thicknesses of overlay 9750, device 9700, and/or adhesive component 9970. For example, in some embodiments, adhesive component 9970 can be the thinnest component of overlay 9750, device 9700, and adhesive component 9970. In these embodiments, overlay 9750 can have a thickness of approximately 0.1 mm to approximately 1.0 mm, and adhesive component 9970 can have a thickness of approximately 0.02 mm to approximately 0.3 mm.

In many embodiments, first adhesive layer 9971 can be configured to attach and/or adhere top side 9985 of adhesive carrier 9972 to bottom side 9981 of overlay 9750. In several embodiments, second adhesive layer 9973 can be configured to attach and/or adhere bottom side 9986 of adhesive carrier 9972 to touchscreen 9701 of electronic device 9700. In a number of embodiments, adhesive carrier 9972 can be an optically clear carrier layer, and can be a thin sheet of PET (polyethylene terephthalate) or other suitable material. For example, in some embodiments, adhesive carrier 9972 can have a thickness of approximately 0.02 millimeters (mm) to approximately 0.2 mm.

In many embodiments, first adhesive layer 9971 and/or second adhesive layer 9973 can be an optically clear adhesive, an adhesive silicone, or another suitable adhesive. In several embodiments, layers 9971-9973 can provide a single-use adhesive of the overlay. For example, in some embodiments, an adhesive strength of second adhesive layer 9973 can be greater than an adhesive strength of first adhesive layer 9971, such that once overlay 9750 is applied to electronic device 9700, layers 9971-9973 can remain on electronic device 9700 if overlay 9750 is removed and/or peeled away from electronic device 9700. In a number of embodiments, after overlay 9750 is removed from electronic device 9700 and layers 9971-9973 are left on electronic device, layers 9971-9973 can be peeled away from electronic device 9900. In several embodiments, removing layers 9971-9973 from electronic device 9700 when peeling away overlay 9750 can beneficially allow for a single-use application of overlay 9750 and layers 9971-9973 without permitting reattachment of the same one of overlay 9750 to electronic device 9700.

In other embodiments, the adhesive strength of first adhesive layer 9971 can be greater than the adhesive strength of second adhesive layer 9973, such that when overlay 9750 is peeled away from electronic device 9700, layers 9971-9973 are removed with overlay 9750, which can allow reattachment of overlay 9750 to electronic device 9700. In each of the embodiments presented in this paragraph, all of layers 9971-9973 can remain on electronic device 9700 or can be removed from electronic device 9700 when removing overlay 9750 from electronic device 9700, or only portions of one or more of layers 9971-9973 can remain on electronic device 9700 or can be removed from electronic device 9700 when removing overlay 9750 from electronic device. In these embodiments, layers 9971-9973 can be designed to make overlay 9750 and layers 9971-9973 a single-use component.

In several embodiments, overlay 9750 can be provided as part of an overlay applicator, as described above, which can facilitate applying overlay 9750 to electronic device 9700. For example, in many embodiments, the overlay applicator can include overlay 9750, layers 9971-9973, an adhesive release liner, and/or other elements or constructions, such as described above. In several embodiments, the adhesive release liner can be similar to adhesive release liner 140 (FIG. 1), adhesive release liner 440 (FIGS. 4-5), adhesive release liner 640 (FIG. 6), adhesive release liner 740 (FIG. 7), adhesive release liner 1540 (FIG. 15), adhesive release liner 2740 (FIGS. 27-30), adhesive release liner 8240 (FIG. 82), and/or adhesive release liner 9240 (FIG. 92). In many embodiments, the adhesive release liner can cover the adhesive and protect it from contaminants until it is ready to be exposed and applied to electronic device 9700. For example, the adhesive release liner can be adhered to second adhesive layer 9973 to cover layers 9971-9973. For embodiments in which the adhesive strength of second adhesive layer 9973 is stronger than the adhesive strength of first adhesive layer 9971, the adhesive release liner can be made of a suitable non-stick material, or treated with a suitable non-stick coating, such that the adhesive release liner can be peeled off from second adhesive layer 9973 without removing first adhesive layer 9971 from overlay 9750. By removing the adhesive release liner and exposing second adhesive layer 9973 in a manner in which layers 9971-9973 remain adhered to overlay 9750, overlay 9750 can be adhered to electronic device 9700 using layers 9971-9973, as shown in FIG. 99.

In many embodiments, overlay 9750 can have dimensions coterminous with touchscreen 9701. In other embodiments, overlay 9750 can extend beyond one or more of the curved sides (e.g., curved portion 9906) of touchscreen 9701 to adhere in part to non-touchscreen portion 9702, as shown in FIG. 99. In many embodiments, adhesive component 9970 can have dimensions coterminous with overlay 9750, such that layers adhesive component 9970 attach overlay 9750 to electronic device 9700 both at flat overlay portion 9853 and at curved overlay portions 9851 and 9852. In a number of embodiments, adhesive carrier 9972 can be flexible to conform to the shape of overlay 9750, such as at flat overlay portion 9853 and at curved overlay portions 9851 and 9852. In certain other embodiments, adhesive component 9970 can have dimensions that extend only to the sides of flat overlay portion 9853, and not extend along the curved overlay portions (e.g., 9851, 9852). In each of the embodiments presented in this paragraph, first adhesive layer 9971 and second adhesive layer 9973 can be configured to avoid having any air pockets between overlay 9750 and touchscreen 9701 across all of flat overlay portion 9853 and/or along the curved overlay portions (e.g., 9851, 9852). In the "certain other embodiments" presented in this paragraph, one or more air gaps or other material can be located between overlay 9750 and electronic device 9700 at curved overlay portions 9851 and/or 9852.

In a different embodiment, second adhesive layer 9973 is eliminated such that adhesive carrier 9972 directly contacts electronic device 9700. In this embodiment, particularly when overlay 9750 is made of glass and touchscreen 9701 also is made of glass, overlay 9750, first adhesive layer 9971, and second adhesive layer 9973 can be part of a protective case for electronic device 9700 such that the case keeps adhesive carrier 9972 (which is not adhesive on bottom side 9986 in this embodiment) in physical contact against touchscreen 9701.

Returning to FIG. 97, although overlay 9750 is shown in FIG. 97 as not extending onto top end 9705 or bottom end

9710, various embodiments of the overlay (e.g., 9750) and/or the adhesive component (e.g., 9970 (FIG. 99)) can be shaped to cover all or portions of top end 9705 or bottom end 9710. In some embodiments, the overlay (e.g., 9750) and/or the adhesive component (e.g., 9970 (FIG. 99)) can include cut-outs for the buttons, such as button 9711, speakers, such as speaker 9706, and/or other elements, such as cameras, light sensors, etc.

Turning ahead in the drawings, FIG. 100 illustrates an enlarged cross-sectional view of an electronic device 10000, and the bottom edge of a touchscreen 10001 of electronic device 10000, and an overlay 10050. The cross-sectional view can be similar to the cross-sectional view in FIG. 99, and can correspond to a cross-section line similar to cross-section line 98-98 in FIG. 97, and the enlarged portion of electronic device 10000 can be similar to the enlarged portion of electronic device 9700 identified in FIG. 98. Overlay 10050 is merely exemplary, and embodiments of the overlay are not limited to the embodiments presented herein. The overlay can be employed in many different embodiments or examples not specifically depicted or described herein. Electronic device 10000 can be similar to electronic device 9700 (FIGS. 97-99), and touchscreen 10001 can be similar to touchscreen 9701 (FIGS. 97-99), but touchscreen 10001 of electronic device 10000 can be flat (e.g., similar to flat portion 9905 of touchscreen 9701) without curved portions (e.g., without curved portions such as curved portions 9906).

In many embodiments, electronic device 10000 can include a non-touchscreen portion 10002, which can be similar to non-touchscreen portion 9702 (FIGS. 97-99), but which can surround touchscreen 10001 on four sides. In several embodiments, non-touchscreen portion 10002 of electronic device 10000 can include declining portions, such as a declining portion 10006 at a curved edge at a right side 10003 of electronic device 10000, at one or more sides of electronic device 10000. In some embodiments, the declining portions (e.g., 10006) can curve downward from, and/or decline below, the plane of the face (e.g., the plane of touchscreen 10001) of electronic device 10000 at the sides (e.g., 10003) of electronic device 10000.

Overlay 10050 can be similar to overlay 9750 (FIGS. 97-99), and elements or constructions of overlay 10050 can be similar or identical to various elements or constructions of overlay 9750 (FIGS. 97-99). For example, overlay 10050 can include a flat overlay portion 10053 and/or curved overlay portions, such as curved overlay portion 10052. In many embodiments, the curved overlay portions (e.g., 10052) can curve downward from and/or decline below, the plane of flat overlay portion 10053 as overlay 10050 extends towards the sides (e.g., 10003) of electronic device 10000.

In many embodiments, overlay 10050 can be adhered to electronic device 10000 using an adhesive component 10070. In some embodiments, adhesive component 10070 can be a single adhesive layer. In other embodiments, adhesive component 10070 can include an adhesive carrier, such as adhesive carrier 9972 (FIG. 97), with adhesive layers on each side, such as first adhesive layer 9971 (FIG. 97) and second adhesive layer 9973 (FIG. 97). In yet other embodiments, the adhesive carrier can be a spacer that spaces overlay 10050 at a predetermined distance away from electronic device 10000, creating an air gap 10062. In some embodiments, the spacer of adhesive component 10070 can space overlay 10050 at a distance near but, not in contact with, touchscreen 10001, which can be a distance of approximately 0.05 mm to approximately 0.5 mm, as examples. In a number of embodiments, the distance can be

sufficiently small to transfer a capacitive value to touchscreen 10001 through overlay 10050 and across air gap 10062 when overlay 10050 is touched.

In several embodiments, adhesive component 10070 can be attached to electronic device 10000 on curved portions and/or declining portions (e.g., 10006) of electronic device 10000. In many embodiments, adhesive component 10070 can be curved to conform to declining portion 10006 and/or curved overlay portion 10052, as shown in FIG. 100. In a number of embodiments, adhesive component 10070 can be attached to electronic device 10000 at non-touchscreen portion 10002, such as on two or more sides surrounding touchscreen 10001. In many embodiments, adhesive component 10070 is not attached to touchscreen 10001. In other embodiments, an adhesive component, such as adhesive component 10070, can be attached on a curved portion of a touchscreen, such as curved portion 9906 (FIG. 99) of touchscreen 9701 (FIGS. 97-99). In many embodiments, adhesive component 10070 can be transparent. For example, the adhesive, adhesive carrier, and/or spacer in the adhesive component (e.g., 10070) can be optically clear and transmit through the light and/or display from the touchscreen (e.g., 10001). In other embodiments, adhesive component 10070 can be non-transparent.

In a different embodiment, air gap 10062 can be filled with a non-adhesive material. For example, air gap 10062 can be replaced with a transparent PET layer that is not adhesive. In the same or different embodiment, adhesive component 10070 can be similar or identical to adhesive component 9970 (FIG. 99), first adhesive layer 9971 (FIG. 99), and/or second adhesive layer 9973 (FIG. 99) while still maintaining air gap 10062.

Proceeding to the next drawing, FIG. 101 illustrates a cross-sectional view of electronic device 9700 along cross-section line 98-98 in FIG. 97, and a portion of the bottom edge of touchscreen 9701, as identified in FIG. 98, and an overlay 10150. Overlay 10150 is merely exemplary, and embodiments of the overlay are not limited to the embodiments presented herein. The overlay can be employed in many different embodiments or examples not specifically depicted or described herein. Overlay 10150 can be similar to overlay 9750 (FIGS. 97-99) and/or overlay 10050 (FIG. 100), and elements or constructions of overlay 10150 can be similar or identical to various elements or constructions of overlay 9750 (FIGS. 97-99) and/or overlay 10050 (FIG. 100). For example, overlay 10150 can include a flat overlay portion 10153 and/or curved overlay portions, such as curved overlay portion 10152. In many embodiments, the curved overlay portions (e.g., 10152) can curve downward from and/or decline below, the plane of flat overlay portion 10153 as overlay 10150 extends towards the sides (e.g., 9703) of electronic device 9700.

In many embodiments, overlay 10150 can be attached to electronic device 9700 using an adhesive component 10170. Adhesive component 10170 can be similar or identical to adhesive component 9970 (FIG. 99), first adhesive layer 9971 (FIG. 99), and/or second adhesive layer 9973 (FIG. 99). In several embodiments, adhesive component 10170 can be a single layer of adhesive that can attach overlay 10150 to electronic device 9700, such that overlay 10150 is adhered to electronic device 9700 (i.e., touchscreen 9701 only, or both touchscreen 9701 and one or more other portions (e.g., non-touchscreen portion 9702 (FIGS. 97-99) of electronic device 9700)) with a single layer of adhesive without an adhesive carrier, such as adhesive carrier 9972 (FIG. 99). In many embodiments, adhesive component 10170 on overlay 10150 can be covered by an adhesive

105

release liner, as described above, which can be peeled off to expose adhesive component **10170** and allow overlay **10150** to be attached to electronic device **9700**.

In some embodiments, overlay **10150** the adhesive strength of adhesive component **10170** can be sufficiently strong such that the overlay breaks, fractures, and/or tears when the overlay is removed from electronic device **9750**, although overlay **10150** is devoid of being manufactured to create vulnerabilities, such as vulnerabilities **10483-10489** (FIG. **104**, described below). In other embodiments, overlay **10150** and/or adhesive component **10170** can be removed from electronic device **9750** without damaging overlay **10150**.

Proceeding to the next drawing, FIG. **102** illustrates a cross-sectional view of electronic device **9700** along cross-section line **98-98** in FIG. **97**, and a portion of the bottom edge of touchscreen **9701**, as identified in FIG. **98**, and an overlay **10250**. Overlay **10250** is merely exemplary, and embodiments of the overlay are not limited to the embodiments presented herein. The overlay can be employed in many different embodiments or examples not specifically depicted or described herein. Overlay **10250** can be similar to overlay **9750** (FIGS. **97-99**), overlay **10050** (FIG. **100**), and/or overlay **10150** (FIG. **101**), and elements or constructions of overlay **10250** can be similar or identical to various elements or constructions of overlay **9750** (FIGS. **97-99**), overlay **10050** (FIG. **100**), and/or overlay **10150** (FIG. **101**). In many embodiments, overlay **10250** can be flat across the top of overlay **10250** from side to side, and the bottom of overlay **10250** can include a flat overlay bottom portion **10253** and one or more curved overlay bottom portions, such as curved overlay bottom portion **10252**. As shown in FIG. **102**, a thickness of overlay **10250** can be greater at the sides around curved overlay bottom portion **10252** than in the middle portion of overlay **10250** around flat overlay bottom portion **10253**.

In many embodiments, overlay **10250** can be attached to electronic device **9700** using an adhesive component **10270**. Adhesive component **10270** can be similar or identical to adhesive component **9970** (FIG. **99**), first adhesive layer **351** (FIG. **3**), second adhesive layer **353** (FIG. **3**), and/or adhesive component **10170** (FIG. **101**). In several embodiments, adhesive component **10270** can be a single layer of adhesive that can attach overlay **10250** to electronic device **9700**, such that overlay **10250** is adhered to electronic device **9700** (i.e., touchscreen **9701** only, or both touchscreen **9701** and one or more other portions (e.g., non-touchscreen portion **9702** (FIGS. **97-99**) of electronic device **9700**)) with a single layer of adhesive without an adhesive carrier, such as adhesive carrier **9972** (FIG. **99**). In other embodiments, adhesive component **10270** can optionally include an adhesive carrier, such as adhesive carrier **9972** (FIG. **99**), as well as adhesive layers on each side, such as first adhesive layer **9971** (FIG. **99**) and second adhesive layer **9973** (FIG. **99**). In many embodiments, adhesive component **10270** on overlay **10250** can be covered by an adhesive release liner, as described above, which can be peeled off to expose adhesive component **10270** and allow overlay **10250** to be attached to electronic device **9700**.

Turning ahead in the drawings, FIG. **103** illustrates a perspective view of an adhesive carrier **10372**. Adhesive carrier **10372** is merely exemplary, and embodiments of the adhesive carrier are not limited to the embodiments presented herein. The adhesive carrier can be employed in many different embodiments or examples not specifically depicted or described herein. Adhesive carrier **10372** can be similar to adhesive carrier **9972** (FIG. **99**), and elements or

106

constructions or adhesive carrier **10372** can be similar or identical to various elements or constructions of adhesive carrier **9972** (FIG. **99**). In many embodiments, adhesive carrier **10372** can be a transparent PET layer or other suitable material. In several embodiments, adhesive carrier **10372** can include one or more perforations, such as perforations **10383-10389**.

In a number of embodiments, the perforations (e.g., **10383-10389**) can include a series of microscopic holes along a line or other path that generally are not visible to the unaided eye. In a number of embodiments, the holes can be sufficiently small to not distort a noticeable amount of the light optically transmitted through adhesive carrier **10372**. For example, the holes can each be less than approximately 0.1 mm in diameter. In some embodiments, for example, the holes can be approximately 0.001 mm to 0.09 mm in diameter. In a number of embodiments, the holes can each extend through the thickness of adhesive carrier **10372**. In other embodiments, the holes can extend partially through the thickness of adhesive carrier **10372**, such as in a top portion and/or a bottom portion of adhesive carrier **10372**, but not extend fully through the thickness of adhesive carrier **10372**.

In many embodiments, adhesive carrier **10372** can be used with adhesive layers on each side, similarly to layers **9971-9973** in FIG. **99**, to attach an overlay (e.g., **9750** (FIGS. **97-99**), **10050** (FIG. **100**), **10150** (FIG. **101**), **10250** (FIG. **102**)) to an electronic device (e.g., **9700** (FIGS. **97-99**), **10000** (FIG. **100**)). The one or more of the perforations (e.g., **10383-10389**) can provide structural vulnerabilities in adhesive carrier **10372**, such that adhesive carrier **10372** can tear at one or more of the perforations (e.g., **10383-10389**) when the overlay is removed from the electronic device. In many embodiments, one or more of the adhesive layers can have a sufficient adhesive strength in certain portions of the adhesive layers such that lifting and/or peeling off the overlay from the electronic device can result in a tear in adhesive carrier **10372** along a perforation (e.g., **10383-10389**). The perforation(s) can assist in making adhesive carrier **10372** a single-use item.

In several embodiments, the perforations (e.g., **10383-10389**) can extend partially or fully across a portion of adhesive carrier **10372**. For example, perforation **10383** can extend fully across adhesive carrier **10372** from one end to the other end. As other examples, perforations **10388** and **10389** can extend fully across adhesive carrier **10372** from one side to the other side. When the overlay is peeled away from the electronic device, adhesive carrier **10372** can tear along the perforations fully across adhesive carrier **10372**. For example, adhesive carrier **10372** includes perforation **10383**, which invisibly divides adhesive carrier **10372** into a first side **10361** and a second side **10362**. In many embodiments, first side **10361** can include a stronger adhesive on the top adhesive layer than on the bottom adhesive layer, and second side **10362** can include a stronger adhesive on the bottom adhesive layer than the top adhesive layer. When the overlay is peeled away from the electronic device, adhesive carrier **10372** can be more strongly adhered to the overlay on first side **10361** and more strongly adhered to the electronic device on second side **10362**, such that peeling across perforation **10383** results in a tear along perforation **10383**.

As further examples, perforations **10384**, **10385**, and **10387** can extend partially across adhesive carrier **10372**. When the overlay is peeled away from the electronic device, adhesive carrier **10372** can start tearing along the partial perforations (e.g., **10384**, **10385**, **10387**) and, in many

embodiments, can continue tearing beyond the end of the perforation as the overlay is peeled away from the electronic device.

As yet another example, perforation **10386** can have a non-linear shape, such as a curved shape shown in FIG. **103**, and can extend from a first side to an adjacent side. When the overlay is peeled away from the electronic device, adhesive carrier **10372** can tear along the curved perforation (e.g., **10386**).

In a number of embodiments, each hole in the series of holes can be spaced apart sufficiently close to facilitate tearing adhesive carrier **10372** when the overlay is peeled away from the electronic device. For example, adjacent holes can be spaced approximately 0.005 mm to approximately 0.2 mm apart from each other, depending on the size of the holes and the strength of the adhesive layers.

Turning ahead in the drawings, FIG. **104** illustrates a perspective view of an overlay **10450** and an adhesive component **10470**. Overlay **10450** and adhesive component **10470** are merely exemplary, and embodiments of the overlay and adhesive component are not limited to the embodiments presented herein. The overlay and adhesive component can be employed in many different embodiments or examples not specifically depicted or described herein. Overlay **10450** can be similar to overlay (e.g., **9750** (FIGS. **97-99**), **10050** (FIG. **100**), **10150** (FIG. **101**), **10250** (FIG. **102**)), and elements or constructions of overlay **10450** can be similar or identical to various elements or constructions of overlay (e.g., **9750** (FIGS. **97-99**), **10050** (FIG. **100**), **10150** (FIG. **101**), **10250** (FIG. **102**)). Adhesive component **10470** can be similar to adhesive component **9970** (FIG. **99**), adhesive component **10170** (FIG. **101**), adhesive component **10270** (FIG. **102**), and/or adhesive carrier **10372** (FIG. **103**), and elements or constructions or adhesive component **10270** can be similar or identical to various elements or constructions of adhesive component **9970** (FIG. **99**), adhesive component **10170** (FIG. **101**), adhesive component **10270** (FIG. **102**), and/or adhesive carrier **10372** (FIG. **103**).

In many embodiments, overlay **10450** can include one or more vulnerabilities, such as vulnerabilities **10483-10489** Vulnerabilities **10483-10489** can be similar or identical to perforations **10383-10389** (FIG. **103**). In several embodiments, vulnerabilities **10483-10489** can be configured such that overlay **10450** breaks when peeled away or removed from the electronic device (e.g., **9700** (FIGS. **97-99**), **10000** (FIG. **100**)). In some overlay embodiments, such as glass overlays, vulnerabilities **10483-10489** can be nicks, perforations, or other vulnerabilities to fracture. In many embodiments, the overlay can be used with a single adhesive layer (e.g., adhesive component **10170** (FIG. **101**), adhesive component **10270** (FIG. **102**)). In other embodiments, the overlay can be used with an adhesive carrier (e.g., **9972** (FIG. **99**), **10372**).

In a number of embodiments, the perforations (e.g., **10383-10389**), nicks, or vulnerabilities in the adhesive carrier (e.g., **10372**) and/or overlay can advantageously allow for single use of the overlay, and destruction of adhesive component e.g., **10470** and/or overlay **10350** upon removal to prevent reattachment of the overlay and adhesive component **10470** to the electronic device. Although adhesive carrier **10372** (FIG. **103**), adhesive component **10470**, and overlay **10750** are shown as rounded at the sides, similar to adhesive carrier **9972** (FIG. **99**), adhesive component **9970** (FIG. **99**), and overlay **9750** (FIGS. **97-99**) respectively, various embodiments of adhesive carrier **10372** (FIG. **103**), adhesive component **10470**, and overlay **10750** can be flat. For example, adhesive carrier **10372** (FIG. **103**), adhesive

component **10470**, and overlay **10750** can be flat and can be attached to a flat touchscreen without curved portions, such as touchscreen **10001** (FIG. **100**) of electronic device **10000** (FIG. **100**).

In several embodiments, the vulnerabilities (e.g., **10483-10489**) can extend partially or fully across a portion of overlay **10450**. For example, when overlay **10450** is peeled away and/or removed from the electronic device, overlay **10450** can tear along the vulnerabilities. For example, overlay **10450** includes vulnerability **10483**, which invisibly divides overlay **10450** into a first side **10461** and a second side **10462**. When overlay **10450** is peeled away from the electronic device, overlay **10450** can break along vulnerability **10483**.

In many embodiments, the overlay (e.g., overlay (e.g., **9750** (FIGS. **97-99**), **10050** (FIG. **100**), **10150** (FIG. **101**), **10250** (FIG. **102**), and/or overlay **10450** (FIG. **104**)), and/or the adhesive component (e.g., adhesive component **9970** (FIG. **99**), adhesive component **10170** (FIG. **101**), adhesive component **10270** (FIG. **102**), adhesive carrier **10372** (FIG. **103**), and/or adhesive component **10470**) can be configured for single-use application of the overlay, such that when the overlay is removed from the electronic device, at least a portion of the adhesive component is detached from at least a portion of the overlay. For example, if overlay **9750** (FIGS. **97-99**) is removed from electronic device **9700** (FIGS. **97-99**), at least a portion of adhesive component **9970** (FIG. **99**) remain adhered to electronic device **9700** (FIGS. **97-99**) and become separated from overlay **9750** (FIGS. **97-99**), such as when the adhesive strength of second adhesive layer **9973** (FIG. **99**) is stronger than the adhesive strength of first adhesive layer **9971** (FIG. **99**). As another example, if overlay **10150** (FIG. **101**) is removed from electronic device **9700** (FIG. **101**), overlay **10150** (FIG. **101**) can break, resulting in at least a portion of adhesive component **10170** (FIG. **101**) becoming separated from overlay **10150** (FIG. **101**). As yet another example, if an overlay (e.g., overlay (e.g., **9750** (FIGS. **97-99**), **10050** (FIG. **100**), **10150** (FIG. **101**), **10250** (FIG. **102**), and/or **10450** (FIG. **104**)) is used with adhesive carrier **10372** (FIG. **103**), adhesive carrier **10372** can tear, such as along one or more of perforations **10383-10389** (FIG. **103**), when the overlay is removed from the electronic device, which can result in at least a portion of adhesive carrier **10372** being detached from the overlay. As a further example, if overlay **10450** (FIG. **104**) and adhesive component **10470** (FIG. **104**) are attached to an electronic device, then removed, overlay **10450** (FIG. **104**) can break, such as along one or more of vulnerabilities **10483-10489** (FIG. **104**), when overlay **10450** (FIG. **104**) is removed from the electronic device, which can result in at least a portion of adhesive component **10470** (FIG. **104**) being detached from overlay **10450** (FIG. **104**).

In many embodiments, the overlay (e.g., overlay (e.g., **9750** (FIGS. **97-99**), **10050** (FIG. **100**), **10150** (FIG. **101**), **10250** (FIG. **102**), and/or **10450** (FIG. **104**)), and/or the adhesive component (e.g., adhesive component **9970** (FIG. **99**), adhesive component **10170** (FIG. **101**), adhesive component **10270** (FIG. **102**), adhesive carrier **10372** (FIG. **103**), and/or adhesive component **10470**) can be configured such that the overlay and/or the adhesive component cannot be re-adhered to the electronic device using the adhesive component after the single-use application of the overlay and after removal of the overlay from the screen of the device. For example, the overlay and/or the adhesive component can be damaged and/or destroyed, such that the overlay and/or the adhesive component cannot be re-adhered in the same way as the initial adhesion of the overlay to the electronic

device in the single-use application of the overlay. In several embodiments, the overlay and/or the adhesive component can be configured such that re-adhesion of the overlay to the electronic device using the adhesive component after the single-use application of the overlay and after removal of the overlay from the electronic device can produce a distortion of at least a portion of a display of the screen (e.g., touchscreen **9701** (FIG. **97**)) of the electronic device (e.g., **9700** (FIG. **97**)) that is seen through the overlay and the adhesive component.

Turning ahead in the drawings, FIG. **105** illustrates a flow chart for an embodiment of a method **10500**, according to another embodiment. Method **10500** is merely exemplary and is not limited to the embodiments presented herein. Method **10500** can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method **10500** can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method **10500** can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method **10500** can be combined or skipped.

Referring to FIG. **105**, method **10500** can include a block **10501** of providing an overlay. The overlay can be similar or identical to overlay **130** (FIG. **1**), overlay **430** (FIGS. **4-5**), overlay **630** (FIG. **6**), overlay **730** (FIG. **7**), and/or overlay **1530** (FIG. **15**), overlay **2930** (FIGS. **29-30**), overlay **8230** (FIG. **82**), overlay **9230** (FIG. **92**), overlay **9750** (FIGS. **97-99**), overlay **10050** (FIG. **100**), overlay **10150** (FIG. **101**), overlay **10250** (FIG. **102**), and/or overlay **10450** (FIG. **104**). In many embodiments, the overlay can include a top side and a bottom side. The top side can be similar or identical to top side **9981** (FIG. **99**). The bottom side can be similar or identical to bottom side **9982** (FIG. **99**).

In a number of embodiments, block **10501** of providing an overlay can include providing the overlay such that the overlay can include one or more curved portions configured to correspond to one or more curved areas of a screen of an electronic device. The curved portions can be similar to curved overlay portions **9851** (FIG. **98**) and/or **9852** (FIGS. **98-99**).

In some embodiments, method **10500** next can include a block **10502** of providing an adhesive component. In the same or different embodiments, block **10502** can include coupling together the overlay and the adhesive component. The adhesive component can be similar or identical to adhesive component **9970** (FIG. **99**), adhesive component **10170** (FIG. **101**), adhesive component **10270** (FIG. **102**), adhesive carrier **10372** (FIG. **103**), and/or adhesive component **10470**. In several embodiments, the adhesive component can include a top side and a bottom side. The top side can be similar or identical to top side **9983** (FIG. **99**). The bottom side can be similar or identical to bottom side **9984** (FIG. **99**). In many embodiments, the top side of the adhesive component can be adhered to the bottom side of the overlay. In a number of embodiments the adhesive component can be configured to adhere the bottom side of the overlay to a screen of an electronic device in a single-use application of the overlay by adhering the bottom side of the adhesive component to the screen of the electronic device. The electronic device can be similar or identical to electronic device **9700** (FIGS. **97-99**) and/or electronic device **10000** (FIG. **100**). The screen can be similar or identical to touchscreen **9701** (FIGS. **97-99**) and/or touchscreen **10001** (FIG. **100**).

In several embodiments, the overlay and the adhesive component can be configured such that, when the overlay is removed from being adhered to the screen of the electronic device after the single-use application of the overlay, at least a portion of the adhesive component can be detached from at least a portion of the overlay.

In various embodiments, the overlay and the adhesive component can be configured such that the overlay cannot be re-adhered to the screen of the electronic device using the adhesive component after the single-use application of the overlay and after removal of the overlay from the screen of the electronic device.

In many embodiments, the overlay and the adhesive component are configured such that re-adhesion of the overlay to the screen of the electronic device using the adhesive component after the single-use application of the overlay and after removal of the overlay from the screen of the electronic device produces a distortion of at least a portion of a display of the screen of the electronic device that is seen through the overlay and the adhesive component.

In several embodiments, the adhesive component can include an adhesive carrier including a top side and a bottom side. The adhesive carrier can be similar or identical to adhesive carrier **9972** (FIG. **99**) and/or adhesive carrier **10372** (FIG. **103**). The top side can be similar or identical to top side **9985** (FIG. **99**). The bottom side can be similar or identical to bottom side **9986** (FIG. **99**). In many embodiments, the adhesive component also can include a first adhesive layer at the top side of the adhesive carrier. The first adhesive layer can be similar or identical to first adhesive layer **9971** (FIG. **99**). In several embodiments, the first adhesive layer can adhere the top side of the adhesive carrier to the bottom side of the overlay. In some embodiments, the adhesive component additionally can include a second adhesive layer at the bottom side of the adhesive carrier. The second adhesive layer can be similar or identical to second adhesive layer **9973** (FIG. **99**). In many embodiments, the second adhesive layer can be configured to adhere the bottom side of the adhesive carrier to the screen of the electronic device in the single-use application of the overlay.

In various embodiments, an adhesive strength of the second adhesive layer is stronger than an adhesive strength of the first adhesive layer. In other embodiments, the adhesive strength of the second adhesive layer can be weaker than or the same as the adhesive strength of the first adhesive layer.

In many embodiments, the adhesive carrier can include one or more perforations. The perforations can be similar or identical to perforations **10383-10389** (FIG. **103**). In several embodiments, the one or more perforations each can include a series of holes extending at least partially through the adhesive carrier. In various embodiments, each hole of the series of holes can have a diameter between approximately 0.001 mm and approximately 0.1 mm.

In several embodiments, the adhesive component can be configured such that the adhesive component includes a single layer of adhesive and is devoid of an adhesive carrier. For example, the adhesive component can be similar or identical to adhesive component **10070** (FIG. **100**), adhesive component **10170** (FIG. **102**), and/or adhesive component **10270** (FIG. **103**). In several embodiments, the overlay can include one or more vulnerabilities to fracture. For example, the vulnerabilities to fracture can be similar or identical to vulnerabilities **10483-10489** (FIG. **104**). In a number of embodiments, the single layer of adhesive can have an adhesive strength such that the overlay fractures at the one or more vulnerabilities to fracture when the overlay is

111

removed from being adhered to the screen of the electronic device after the single-use application of the overlay.

In many embodiments, method 10500 optionally can include a block 10503 of providing an overlay applicator. In the same or different embodiments, block 10503 can include coupling together the overlay applicator and the adhesive component. The overlay applicator can be similar to overlay applicator 100 (FIG. 1), overlay applicator 400 (FIGS. 4-5), overlay applicator 600 (FIG. 6), overlay applicator 700 (FIG. 7), overlay applicator 1500 (FIG. 15), overlay applicator 3000 (FIG. 30), overlay applicator 3550 (FIGS. 35-36), overlay applicator 6050 (FIG. 60), overlay applicator 8001 (FIG. 80), overlay applicator 9101 (FIG. 91), overlay applicator tray 8000 (FIG. 80), and/or overlay applicator tray 9100 (FIG. 91). In many embodiments, the overlay applicator can include the overlay and the adhesive component.

In several embodiments, the overlay applicator can include an adhesive release liner that includes a top side and a bottom side. The adhesive release liner can be similar or identical to adhesive release liner 140 (FIG. 1), adhesive release liner 440 (FIGS. 4-5), adhesive release liner 640 (FIG. 6), adhesive release liner 740 (FIG. 7), adhesive release liner 1540 (FIG. 15), adhesive release liner 2740 (FIGS. 27-30), adhesive release liner 8240 (FIG. 82), and/or adhesive release liner 9240 (FIG. 92). In many embodiments, the top side of the adhesive release liner can be removably attached to the bottom side of the overlay using the adhesive component. In several embodiments, the adhesive release liner can be configured to protect the adhesive component at the bottom side of the overlay from contaminants.

In a number of embodiments, the overlay applicator can include an alignment mechanism. The alignment mechanism can be similar or identical to alignment mechanism 115 (FIG. 1), alignment mechanism 415 (FIG. 4), alignment mechanism 615 (FIG. 6), alignment mechanism 715 (FIG. 7), alignment mechanism 1515 (FIG. 15), alignment mechanism 2915 (FIGS. 29-30), alignment mechanism 3557 (FIGS. 35-36), alignment piece 8010 (FIG. 80), and/or alignment piece 9110 (FIG. 91). In various embodiments, the alignment mechanism can be configured to align the overlay with the screen of the electronic device as the overlay is adhered to the screen of the electronic device.

In several embodiments, the overlay applicator can include a pull tab. The pull tab can be similar or identical to pull tab 150 (FIG. 1), pull tab 450 (FIGS. 4-5), pull tab 650 (FIG. 6), pull tab 750 (FIGS. 7, 42, 44-45, 48-49), pull tab 1550 (FIG. 15), pull tab 2750 (FIGS. 27-30), pull tab 6055 (FIG. 60), first pull tab 8042 (FIG. 80), second pull tab 8022 (FIG. 80), first pull tab 9142 (FIG. 91), and/or second pull tab 9122 (FIG. 91). In a number of embodiments, the pull tab can be configured to facilitate removal of the adhesive release liner from the bottom side of the overlay to expose the adhesive component to the screen of the electronic device.

Turning to the drawings, FIG. 106 illustrates a perspective view of a machine 10600 in a closed configuration, according to an embodiment. FIG. 107 illustrates a perspective view of a machine 10600 in an opened configuration. Machine 10600 is merely exemplary, and embodiments of the machine are not limited to the embodiments presented herein. The machine can be employed in many different embodiments or examples not specifically depicted or described herein. In various embodiments, machine 10600 can include a base 10620, a lid 10630, and/or a hinge mechanism 10640. Machine 10600 can be similar to

112

machine 6900 in FIGS. 69-74, and various elements of machine 10600 can be similar or identical to various elements of machine 6900 in FIGS. 69-74. Base 10620 can be similar to support base 6920 in FIGS. 69-74, and various elements of base 10620 can be similar or identical to various elements of base 6920 in FIGS. 69-74. Lid 10630 can be similar to lid 6930 in FIGS. 69-74, and various elements of lid 10630 can be similar or identical to various elements of lid 6930 in FIGS. 69-74. Hinge 10640 can be similar to hinge 6940 in FIGS. 69-74, and various elements of hinge 10640 can be similar or identical to various elements of hinge 6940 in FIGS. 69-74.

In many embodiments, hinge mechanism 10640 can attach lid 10630 to base 10620, and/or can allow lid 10630 to rotate with respect to base 10620 between a closed configuration, as shown in FIG. 106, and an opened configuration, as shown in FIG. 107, and vice versa. In some embodiments, hinge mechanism 10640 can include one or more axles, base axle mounts, lid axle supports, and/or springs (not shown), which can be similar or identical to corresponding elements of hinge 6940 in FIGS. 69-74. In many embodiments, the one or more springs can bias lid 10630 to rotate away from base 10620 toward an opened configuration, as shown in FIG. 107. In several embodiments, lid 10630 can include a release button 10633. Release button 10633 can be similar to release buttons 7023 in FIG. 71. In several embodiments, when machine 10600 is in the closed configuration, as shown in FIG. 106, release button 10633 can be depressed to release lid 10630 to rotate open to the opened configuration, as shown in FIG. 107.

In many embodiments, base 10620 can include an adjustable cradle 10750, as shown in FIG. 107. Adjustable cradle 10750 can be similar to cradle 6950 in FIG. 69, and various elements of adjustable cradle 10750 can be similar or identical to various elements of cradle 6950 in FIG. 69, but instead of being for a single size of electronic device and/or replaceable with different cradles to hold different device sizes, adjustable cradle 10750 can be configured to hold electronic devices of varying sizes. In many embodiments, adjustable cradle 10750 can be part a permanent part of base 10620.

Turning ahead in the drawings, FIG. 108 illustrates a perspective view of base 10620 and adjustable cradle 10750. As shown in FIG. 108, adjustable cradle 10750 can include a slot 10856, a left side holder 10851, a right side holder 10852, and/or a top holder 10853. Slot 10856 can be similar to slot 6956 in FIG. 69. In a number of embodiments, slot 10856 can include a recessed region below an upper surface 10870 of cradle 10750. In several embodiments, slot 10856 can include a left side wall 10871, a right side wall 10872, a top side wall 10873, a bottom side wall 10874, and/or a slot base surface 10875. In many embodiments, adjustable cradle 10750 can hold an electronic device having a size up to the dimensions of slot 10856. In a number of embodiments, left side holder 10851 and/or right side holder 10852 can be adjustable side-to-side within slot 10856 along an x-direction (as shown in FIGS. 106, 108, 109, 110, 111, and 112) that extends between left side wall 10871 and right side wall 10872 (and vice versa) of slot 10856. In various embodiments, left side holder 10851 can be configured to hold a left side of the electronic device, and/or right side holder 10852 can be configured to hold a right side of the electronic device. In some embodiments, left side holder 10851 can adjust leftward to a fully opened position in which the rightmost face of left side holder 10851 is parallel with left side wall 10871, and/or right side holder 10852 can adjust

113

rightward to a fully opened position in which the leftmost face of right side holder **10852** is parallel with right side wall **10872**.

Continuing to the next drawing, FIG. **109** illustrates a perspective view of a portion of adjustable cradle **10750**, showing internal components of a portion of adjustable cradle **10750**. In many embodiments, left side holder **10851** can be attached to, or integrally formed with, a left side plate **10951**, and/or right side holder **10852** can be attached to, and/or integrally formed with, a right side plate **10952**. In a number of embodiments, left side plate **10951** and/or right side plate **10952** can be positioned internally within base **10620**, below upper surface **10870** (FIG. **108**) and/or slot base surface **10875**. In several embodiments, left side plate **10951** and/or right side plate **10952** can slide side to side (e.g., along the x-direction) along one or more guide rails **10955**. In a number of embodiments, left side plate **10951** can include a gear engagement portion **10953**, and/or right side plate **10952** can include a gear engagement portion **10954**.

In several embodiments, gear engagement portion **10953** and/or gear engagement portion **10954** can be configured to engage with a spur gear **10956**. Spur gear **10956** can rotate counterclockwise when left side plate **10951** and left side holder **10851** move leftward and when right side plate **10952** and right side holder **10852** move rightward. Spur gear **10956** can rotate clockwise when left side plate **10951** and left side holder **10851** move rightward and when right side plate **10952** and right side holder **10852** move leftward. Spur gear **10956** can regulate the movement of left side holder **10851** and right side holder **10852** with respect to each other, such that left side holder **10851** and right side holder **10852** can be approximately the same distance from a center of slot **10856** between left side wall **10871** and right side wall **10872**.

In a number of embodiments, spur gear **10956** can be attached to a rotor spring **10957**, which can bias spur gear clockwise, which can bias left side holder **10851** and right side holder **10852** toward each other (e.g., left side holder **10851** rightward and right side holder **10852** leftward), which can advantageously automatically center an electronic device to the center of slot **10856** between left side wall **10871** and right side wall **10872** when the electronic device is placed between left side holder **10851** and right side holder **10852**. In some embodiments, when left side holder **10851** and right side holder **10852** are opened away from each other beyond a predetermined distance, one or more hooks can engage with left side holder **10851** and/or right side holder **10852** to hold left side holder **10851** and right side holder **10852** open and apart from each other in an opened position until a release latch **10958** is activated (e.g., depressed), after which the spring bias provided by rotor spring **10957** can cause left side holder **10851** and right side holder **10852** to close towards each other to a closed position. In some embodiments, release latch **10958** can be positioned such that an electronic device can activate (e.g., depress) it when the electronic device is seated into adjustable cradle **10750**. In other embodiments, the release latch (e.g., **10958**) can be positioned in another suitable position on base **10620**.

Turning ahead in the drawings, FIG. **110** illustrates a perspective view of base **10620**, in which an electronic device **11000** is being inserted into adjustable cradle **10750**. As shown in FIG. **110**, left side holder **10851** and right side holder **10852** can be held open and apart, as described above, which can allow electronic device **11000** to be inserted between left side holder **10851** and right side holder

114

10852. In a number of embodiments, top holder **10853** can be adjustable within slot **10856** along a y-direction (as shown in FIGS. **106**, **108**, **109**, **110**, **111**, **112**, and **116**, in which the arrow points “top-ward” and the opposite is “bottomward”) that extends between top side wall **10873** and bottom side wall **10874** (and vice versa) of slot **10856**.

In several embodiments, base **10620** can include an alignment base **11051**, which can include a left alignment pin and/or a right alignment pin. Alignment base **11051** can be similar or identical to one or more of the alignment bases described above, such as alignment base **212** (FIG. **2**), alignment base **312** (FIG. **3**), alignment base **835** (FIGS. **8-9**, **13-14**), alignment base **1632** (FIGS. **16-19**), alignment base **2035** (FIG. **20**), alignment base **3112** (FIGS. **31-34**), alignment base **3514** (FIGS. **35-36**), alignment base **3814** (FIG. **38**), alignment base **4734** (FIG. **47**), alignment base **6414** (FIG. **64**), alignment base **6424** (FIG. **64**), alignment base **6434** (FIG. **64**), and/or alignment base **6953** (FIGS. **69**, **73**).

In many embodiments, alignment base **11051** can be configured to hold an alignment tab of an overlay applicator, as described below in further detail. In some embodiments, the alignment pins of alignment base **11051** can be different sizes, such that the alignment tab can be inserted on alignment base **11051** with a first side (e.g., an adhesive side configured to adhere to the screen or other surface of electronic device **11000**) of the overlay applicator face down, but not with the first side of the overlay applicator face up.

In a number of embodiments, top **11003** of device **11000** can be used to press top holder **10853** top-ward away from bottom side wall **10874**. In a number of embodiments, when top holder **10853** is pressed top-ward away from bottom side wall **10874**, a portion or all of top holder **10853** can be positioned within a top holder well **11053**, which can be a recessed cavity extending top-ward (e.g., away from bottom side wall **10874**) beyond top side wall **10873**. In a number of embodiments, base **10620** can include one or more guide rails **11055**. In some embodiments, top holder **10853** can adjust top-ward to a fully opened position in which the bottom most face of top holder **10853** is parallel with top side wall **10873**.

In many embodiments, electronic device **11000** can be manually used to push top holder **10853** top-ward until electronic device **11000** can fit between top holder **10853** and bottom side wall **10874**, at which point electronic device **11000** can be lowered to slot base surface **10875**. When electronic device **11000** approaches slot base surface **10875**, electronic device **11000** can activate (e.g., depress) latch **10958**, which can cause left side holder **10851** and right side holder **10852** to move inward toward each other, which can center electronic device **11000** within slot **10856**. For example, left side holder **10851** can press rightward on a left side **11001** of electronic device **11000**, and right side holder **10852** can press leftward on a right side **11002** of electronic device **11000**. Top holder **10853** can push electronic device **11000** bottomward within slot **10856**, such that a bottom **11004** of electronic device **11000** abuts bottom side wall **10874**. In many embodiments, the electronic device (e.g., **11000**) can be inserted such that a side of the electronic device that is used to push top holder **10853** top-ward runs along a width (e.g., a shorter dimension than the length) of electronic device **11000**, such as top **11003** shown in FIG. **110**. In other embodiments, adjustable cradle **10750** can be configured such that the electronic device can be inserted such that the side of the electronic device that is used to push top holder **10853** top-ward runs along a length of the

115

electronic device, such that slot **10856** is larger in the x-direction than in the y-direction.

Turning ahead to the next drawing, FIG. **111** illustrates a plan view of alignment base **11051**, a pin holder plate **11151**, top holder **10853**, a top holder plate **11153**, a spur gear **11157**, and/or a rotor spring **11158**. In many embodiments, alignment base **11051** can be attached to, or integrally formed with, pin holder side plate **11151**. In several embodiments, top holder **10853** can be attached to, or integrally formed with, top holder plate **11153**. In a number of embodiments, pin holder plate **11151**, top holder plate **11153**, spur gear **11157**, and/or rotor spring **11158** can be positioned internally within base **10620**, below upper surface **10870** (FIG. **108**) and/or slot base surface **10875** (FIG. **108**). In a number of embodiments, pin holder plate **11151** and/or top holder plate **11153** can be adjustable between top and bottom positions (e.g., along the y-direction) along guide rails **11055** (FIG. **110**).

In several embodiments, spur gear **11157** can be a two-step spur gear, with an outer step **11159** and an inner step **11160**. In several embodiments, pin holder plate **11151** can include a gear engagement portion **11152**, which can engage with inner step **11160** of spur gear **11157**, and/or top holder plate **11153** can include a gear engagement portion **11154**, which can engage with outer step **11159** of spur gear **11157**. In many embodiments, rotor spring **11158** can bias spur gear **11157** to rotate clockwise, which can bias top holder **10853** and/or alignment base **11051** bottomward toward bottom side wall **10874** (FIG. **108**). In many embodiments, outer step **11159** of spur gear **11157** can have a radius approximately double a radius of inner step **11160** of spur gear **11157** (e.g., a 2:1 gear ratio), such that when top holder **10853** moves a first distance top-ward or bottomward along the y-direction, alignment base **11051** can move a second distance that is half the first distance top-ward or bottomward, respectively, along the y-direction. In several embodiments, alignment base **11051** can protrude outward (in the z-direction, as shown in FIGS. **106**, **110**, and **116**, in which the arrow points “outward,” and the opposite is “inward”), extending from base **10620** (FIG. **106**) to lid **10630** (FIG. **106**) (and vice versa) through top holder **10853**, and top holder **10853** can include apertures **11155** and **11156**, which can allow alignment base **11051** to move with respect to top holder **10853** when alignment base **11051** and top holder **10853** move different distances along the y-direction. For example, when top holder **10853** is at a bottommost position (e.g., closest to bottom side wall **10874** (FIG. **108**)), alignment base **11051** can be positioned at a topmost position within apertures **11155** and **11156**, and when top holder **10853** is at a topmost relative position (e.g., furthest away from bottom side wall **10874** (FIG. **108**)), alignment base **11051** can be positioned at a bottommost relative position within apertures **11155** and **11156**.

For clarity, as used herein for FIGS. **106-142**, the z-direction (and the associated terms outward and inward) can refer to an axis running orthogonal to a plane of the adjustable cradle (e.g., **10750**) that is parallel to the screen of the electronic device (e.g., **11000**) when the electronic device is seated in the adjustable cradle. For example, the z-direction can be orthogonal to slot base surface **10875**. The x-direction (and the associated terms left/leftward and right/rightward) and the y-direction (and the associated terms top/top-ward and bottom/bottomward) are in the plane that is orthogonal to the z-direction. The machine (e.g., **10600**) can be rotated about the z-direction and used in any orientation. The x-direction and y-direction are not limited to any specific absolute directions, but rather are used as an indi-

116

cation of directions that are orthogonal to the z-direction and perpendicular to each other. The terms “top” and “bottom” in the y-direction are used merely to designate opposite sides, not absolute top or absolute bottom, and are synonymous with a first side and a second side opposite the first side. Similarly, the terms “right” and “left” in the x-direction are used merely to designate opposite sides, and are synonymous with a third side and a fourth side opposite the third side, with the x-direction being perpendicular to the y-direction in the plane that is orthogonal to the z-direction. As an example, regardless of how the adjustable cradle is oriented in front of a user, top holder **10853** can be designated as being at the “top” of adjustable cradle **10750**, while bottom side wall **10874** is at the “bottom” of adjustable cradle **10750** at an opposite side of adjustable cradle **10750**, thus forming the y-direction between the top and the bottom of adjustable cradle **10750**.

Continuing to the next drawing, FIG. **112** illustrates a plan view of base **10620**, in which electronic device **11000** is seated within adjustable cradle **10750**. As shown in FIG. **112**, when electronic device **11000** is seated within adjustable cradle **10750**, bottom **11004** of electronic device **11000** abuts bottom side wall **10874**, and electronic device **11000** is horizontally centered (along the x-direction) within slot **10856**. In many embodiments, adjustable cradle **10750** can advantageously be configured such that, when electronic device **11000** is seated within adjustable cradle **10750** with bottom **11004** abutting bottom side wall **10874**, a distance **11261** between a center **11262** (e.g., top-to-bottom center along the y-direction) of a first dimension (e.g., the length of electronic device **11000** as shown in FIG. **112**, or alternatively, the width of electronic device **11000**) and a y-position **11263** of alignment base **11051** along the y-direction can be approximately the same for any size of electronic device (e.g., **11000**) that is seated within adjustable cradle **10750**. This approximately constant distance for distance **11261** can be maintained by the 2:1 gear ratio of spur gear **11157** (FIG. **111**). By maintaining this approximately constant distance, design and application of overlay applicators for different sizes of electronic devices (e.g., **11000**) can be facilitated. When the electronic device (e.g., **11000**) is horizontally centered (along with x-direction) within slot **10856**, the electronic device (e.g., **11000**) can beneficially be horizontally aligned (along with x-direction) with alignment base **11051**, which can allow an overlay applicator to be used with the electronic device (e.g., **11000**) to apply an overlay to the screen or other surface of the electronic device (e.g., **11000**).

Turning ahead in the drawings, FIG. **113** illustrates a plan view of a portion of machine **10600** in an opened configuration with electronic device **11000** seated within adjustable cradle **10750**, with a screen or other surface of the electronic device **11000** facing outwards (in a z-direction) and an overlay applicator **11300** attached to alignment base **11051** so as to be positioned over the screen or other surface of electronic device **11000**. FIG. **114** illustrates a plan view of machine **10600** in a closed configuration, after electronic device **11000** and overlay applicator **11300** have been installed inside machine **10600**. FIG. **115** illustrate a cross-sectional elevational view of machine **10600** as lid **10630** is being closed, but ajar, before lid **10630** has been latched into base **10620**. Overlay applicator **11300** can be similar or identical to one or more of the overlay applicators described above, such as overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), overlay applicator **1500** (FIG. **15**), overlay applicator **3000** (FIG. **30**), overlay appli-

117

cator 3550 (FIGS. 35-36), overlay applicator 6050 (FIG. 60), overlay applicator 8001 (FIG. 80), and/or overlay applicator 9101 (FIG. 91). In a number of embodiments, overlay applicator 11300 can include an alignment tab 11310, a protective film 11320, an overlay (not shown), an adhesive release liner (not shown), a pull tab 11350, and/or a joining sticker 11380, which can be similar or identical to corresponding components described above.

As shown in FIGS. 113 and 115, once electronic device 11000 is seated within adjustable cradle 10750, overlay applicator 11300 can be installed on alignment base 11051, such as alignment tab 11310 engaging with alignment base 11051. Electronic device 11000 can be positioned such that, when overlay applicator 11300 is installed on alignment base 11051, the overlay of overlay applicator 11300 can be positioned over a screen or other surface of electronic device 11000. Once electronic device 11000 is seated in adjustable cradle 10750 and overlay applicator 11300 is installed on alignment base 11051, lid 11330 can be closed. As shown in FIG. 115, lid 10630 can include one or more catches, such as catch 11532, which can be inserted inside one or more latching slots 11522 in base 10620 to engage with one or more latches inside the latching slots 11522 to secure lid 10630 in the closed configuration, as shown in FIG. 114. In many embodiments, when machine 10600 is in the closed configuration, pull tab 11350 can be pulled to remove the adhesive release liner to expose an adhesive on a bottom side of the overlay to the screen or other surface of electronic device 11000.

Turning ahead in the drawings, FIG. 116 illustrates a cross-sectional elevational view of a portion of machine 10600 in a closed configuration with electronic device 11000 seated within adjustable cradle 10750. As shown in FIG. 116, lid 10630 can include an outer frame 11631, which can provide an outer structural shell, and/or a foam holder 11632. When lid 10630 is closed, in several embodiments, foam holder 11632 can press inwards (in the z-direction) on overlay applicator 11300 to secure overlay applicator on alignment base 11051 and press overlay applicator 11300 down against the screen or other surface of electronic device 11000, such that when pull tab 11350 (FIGS. 113-115) is pulled (e.g., pulled bottomward in the y-direction away from machine 10600), the overlay can be adhered to the screen or other surface of electronic device 11000. In many embodiments, foam holder 11632 can press the exposed adhesive on the overlay to the screen or other surface of electronic device 11000, to apply the overlay to the screen or other surface of electronic device 11000. In a number of embodiments, foam holder 11632 can be pushed inward with one or more springs 11633.

In several embodiments, base 10620 can include, in addition to elements described above, a frame 11621, which can provide an outer structural shell, and/or one or more springs (not shown), which can be configured to bias adjustable cradle 10750 and/or slot base surface 10875 outward (e.g., upward toward lid 10630) along a z-direction that extends between frame 11621 and outer frame 11631. In many embodiments, when lid 10630 is closed, foam holder 11632 can press inward along the z-direction, such that adjustable cradle 10750 and/or slot base surface 10875 are adjusted inward (in the z-direction) to allow electronic device 11000 to fit between foam holder 11632 and overlay applicator 11300 at the top, and slot base surface 10875 at the bottom. The springs can beneficially allow adjustable cradle 10750 and/or slot base surface 10875 to adjust along the z-direction for electronic devices (e.g., 11000) that have different thicknesses, which can advantageously allow machine 10600 to

118

apply overlays to the screen or other surface of electronic devices (e.g., 11000) having various different thicknesses. In many embodiments, machine 10600 can apply overlays to the screens or other surfaces of electronic devices (e.g., 11000) having various different dimensions of length (e.g., in the y-direction, or alternatively, in the x-direction), width (in the x-direction, or alternatively, in the y-direction), and/or thickness (in the z-direction), without replacing the cradle that is used in machine 10600.

Turning ahead in the drawings, FIG. 117 illustrates a plan view of a machine 11700 in an opened configuration, according to another embodiment. FIG. 118 illustrates a perspective view of machine 11700 in an opened configuration. FIG. 119 illustrates a perspective view of a portion of base 11720. Machine 11700 is merely exemplary, and embodiments of the machine are not limited to the embodiments presented herein. The machine can be employed in many different embodiments or examples not specifically depicted or described herein. In various embodiments, machine 11700 can include a base 11720, a lid 11730, and/or a hinge mechanism 11740. Machine 11700 can be similar to machine 6900 in FIGS. 69-74 and/or machine 10600 (FIG. 106), and various elements of machine 11700 can be similar or identical to various elements of machine 6900 in FIGS. 69-74 and/or machine 10600 (FIG. 106). Base 11720 can be similar to support base 6920 in FIGS. 69-74 and/or base 10620 (FIG. 106), and various elements of base 11720 can be similar or identical to various elements of base 6920 in FIGS. 69-74 and/or base 10620 (FIG. 106). Lid 11730 can be similar to lid 6930 in FIGS. 69-74 and/or lid 10630 (FIG. 106), and various elements of lid 11730 can be similar or identical to various elements of lid 6930 in FIGS. 69-74 and/or lid 10630 (FIG. 106). Hinge 11740 can be similar to hinge 6940 in FIGS. 69-74 and/or hinge 10640 (FIG. 106), and various elements of hinge 11740 can be similar or identical to various elements of hinge 6940 in FIGS. 69-74 and/or hinge 10640 (FIG. 106).

In many embodiments, as shown in FIGS. 117-118, lid 11730 can include an outer frame 11731, which can provide an outer structural shell, and/or a foam holder 11732. Outer frame 11731 can be similar or identical to outer frame 11631 (FIG. 116), and foam holder 11732 can be similar or identical to foam holder 11632 (FIG. 116).

In several embodiments, base 11720 can include alignment base 11751, which can include a left alignment pin and/or a right alignment pin. Alignment base 11751 can be similar or identical to one or more of the alignment bases described above, such as alignment base 212 (FIG. 2), alignment base 312 (FIG. 3), alignment base 835 (FIGS. 8-9, 13-14), alignment base 1632 (FIGS. 16-19), alignment base 2035 (FIG. 20), alignment base 3112 (FIGS. 31-34), alignment base 3514 (FIGS. 35-36), alignment base 3814 (FIG. 38), alignment base 4734 (FIG. 47), alignment base 6414 (FIG. 64), alignment base 6424 (FIG. 64), alignment base 6434 (FIG. 64), alignment base 6953 (FIGS. 69, 73), and/or alignment base 11051 (FIG. 110). In many embodiments, alignment base 11751 can be configured to hold an alignment tab of an overlay applicator. In some embodiments, the alignment pins of alignment base 11751 can be different sizes, such that the alignment tab can be inserted on alignment base 11751 with a first side (e.g., an adhesive side configured to adhere to the screen or other surface of an electronic device) of the overlay applicator face down, but not with the first side of the overlay applicator face up.

In several embodiments, as shown in FIGS. 117-119, base 11720 can include an adjustable cradle 11750. Adjustable cradle 11750 can be similar to cradle 6950 in FIG. 69 and/or

119

adjustable cradle **10750** (FIG. **107**), and various elements of adjustable cradle **11750** can be similar or identical to various elements of cradle **6950** in FIG. **69** and/or adjustable cradle **10750** (FIG. **107**). Adjustable cradle **11750** can be configured to hold electronic devices of varying sizes. In many embodiments, instead of being for a single size of electronic device and/or replaceable with different cradles to hold different device sizes, adjustable cradle **11750** can be configured to hold electronic devices of varying sizes. In many embodiments, adjustable cradle **11750** can be part a permanent part of base **11720**.

In several embodiments, adjustable cradle **11750** can include a slot **11756**, a side holder **11752**, and/or a top holder **11753**. Slot **11756** can be similar to slot **6956** in FIG. **69** and/or slot **10856** (FIG. **108**). In a number of embodiments, slot **11756** can include a left side wall **11771**, a right side wall **11772**, a top side wall **11773**, a bottom side wall **11774**, and/or a slot base surface **11775**. In many embodiments, slot **11756** can have dimensions that are larger than an electronic device (e.g., an electronic device **11790**) that can be seated within adjustable cradle **11750**. In a number of embodiments, side holder **11752** can be adjustable within slot **11756** along an x-direction (as shown in FIGS. **117**, **118**, **119**, **120**, **122**, **123**, and **124**) that extends between left side wall **11771** and right side wall **11772** (and vice versa) of slot **11756**. In various embodiments, left side wall **11771** can be configured to hold a left side of electronic device **11790**, and/or right side holder **11752** can be configured to hold a right side of electronic device **11790**.

In a number of embodiments, top holder **11753** can be adjustable within slot **11756** along a y-direction (as shown in FIGS. **117**, **118**, **119**, **120**, **122**, **123**, and **124**, in which the arrow points “top-ward” and the opposite is “bottomward”) that extends between the top side wall **11773** and bottom side wall **11774** (and vice versa) of slot **11756**. In several embodiments, top holder **11753** can be configured to hold a top side of electronic device **11790**, and/or bottom side wall **11774** can be configured to hold a bottom side of electronic device **11790**. In a number of embodiments, alignment base **11751** can be similar or identical to alignment base **11051** (FIG. **110**), and in a number of embodiments can include two pins having different sizes, such as shown in FIG. **117**. In many embodiments, the electronic device (e.g., **11790**) can be inserted such that a side of the electronic device that is used to push top holder **11753** top-ward runs along a width (e.g., a shorter dimension than the length) of electronic device **11790**, as shown in FIG. **117**. In other embodiments, adjustable cradle **11750** can be configured such that the electronic device can be inserted such that the side of the electronic device that is used to push top holder **11753** top-ward runs along a length of the electronic device.

In many embodiments, as shown in FIGS. **117-119**, electronic device **11790** can be seated within adjustable cradle **11750** with the screen or other surface of electronic device **11790** facing outwards (in the z-direction, as shown in FIGS. **118**, **119**, and **122**, in which the arrow points “outward,” and the opposite is “inward”), and an overlay applicator **11780** can be attached to alignment base **11751** above (outward of) the electronic device **11790**. Overlay applicator **11780** can be similar or identical to one or more of the overlay applicators described above, such as overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), overlay applicator **1500** (FIG. **15**), overlay applicator **3000** (FIG. **30**), overlay applicator **3550** (FIGS. **35-36**), overlay applicator **6050** (FIG. **60**), overlay applicator **8001** (FIG. **80**), overlay applicator **9101** (FIG. **91**), and/or overlay applicator

120

11300 (FIG. **113**). In a number of embodiments, overlay applicator **11780** can include an alignment tab **11781**, a protective film **11782**, an overlay (not shown), an adhesive release liner (not shown), a pull tab **11785**, and/or a joining sticker **11788**, which can be similar or identical to corresponding components described above. In many embodiments, when electronic device **11790** has been seated in adjustable cradle **11750** and overlay applicator **11780** has been installed on alignment base **11751**, lid **11730** of machine **11700** can be closed to a closed configuration of machine **11700** (which can be similar to the closed configuration of machine **10600** shown in FIGS. **106** and **114** and described above), and pull tab **11785** can be pulled to remove the adhesive release liner to expose an adhesive on a bottom side of the overlay to the screen or other surface of electronic device **11790**.

Turning ahead in the drawings, FIG. **120** illustrates a plan view of base **11720**, showing various external and internal components of base **11720**, with side holder **11752** in a partially opened position. FIG. **121** illustrates a plan view of base **11720**, showing various external and internal components of base **11720**, with side holder **11752** in a closed position. In many embodiments, alignment base **11751** can be attached to, or integrally formed with, a pin holder **12051**. In many embodiments, pin holder **12051** can be attached to a pin holder plate **12061**. For example, pin holder **12051** can be attached to pin holder plate **12061** using a linkage bar **12358** (FIG. **123**, described below). In a number of embodiments, pin holder plate **12061** can be positioned internally within base **10620**, below slot base surface **11775** (FIG. **117**). In a number of embodiments, side holder **11752** can be attached to, or integrally formed with, a side holder plate **12052**, which can be positioned below slot base surface **11775** (FIG. **117**). In several embodiments, side holder plate **12052** can slide side-to-side (e.g., along the x-direction) along one or more guide rails **12055**.

In many embodiments, side holder plate **12052** can be connected to a first end of a linkage bar **12058** at a pivot **12056**. A second end of linkage bar **12058** can be connected to base **11720** at a pivot **12057**. In a number of embodiments, linkage bar **12058** can be connected at an approximate midpoint between the first end and the second end of linkage bar **12058** to pin holder plate **12061** at a pivot **12059**. In several embodiments, pin holder plate **12061** can move side-to-side along the x-direction when side holder **11752** moves side-to-side along the x-direction. Due to pivot **12059** being located at a midpoint of linkage **12058**, when side holder **11752** moves a first distance left or right in the x-direction, pin holder plate **12061**, pin holder **12051** and/or alignment base **11751** can move a second distance left or right, respectively, in which the second distance is half of the first distance. For example, as shown in FIG. **121**, when side holder **11752** is adjusted leftward to a closed position, alignment base **11751** can be automatically adjusted leftward half the distance that side holder **11752** moves leftward. By alignment base **11751** adjusting half the distance of side holder **11752**, alignment base **11751** can advantageously be approximately centered between the sides (in the x-direction) of electronic devices (e.g., **11790** (FIG. **117**)) that are seated in adjustable cradle **11750** (FIG. **117**), for different widths (or alternatively, lengths) of electronic devices (e.g., **11790** (FIG. **117**)).

Turning ahead in the drawings, FIG. **122** illustrates a perspective view of a portion of base **11720**, showing various external and internal components of base **11720**, with side holder **11752** in a closed position. In many embodiments, side holder plate **12052** can include an attach-

121

ment pin **12252**, which can be attached to a first end of a spring **12223**. In a number of embodiments, base **11720** can include a fixed attachment pin **12222**, which can be attached to a second end of spring **12223**. Spring **12223** can be a retention spring that biases side holder **11752** in the closed position. In some embodiments, attachment pin **12222** can facilitate alignment of side holder plate **12052** when side holder plate **12052** moves in the x-direction.

In several embodiments, top holder **11753** can be attached to, or integrally formed with, a top holder plate **12253**, which can be positioned below slot base surface **11775** (FIG. **117**), and/or which can be configured to slide top-ward and bottomward in the y-direction. In a number of embodiments, top holder plate **12253** can include one or more attachment pins **12254**, which each can be attached to one or more respective first ends of one or more springs **12225**. In several embodiments, base **11720** can include one or more fixed attachment pins **12224**, which each can be attached to one or more respective second ends of springs **12225**. Springs **12225** can be retention springs, which can bias top holder **11753** bottomward toward bottom side wall **11774**. In some embodiments, attachment pins **12224** can facilitate alignment of top holder plate **12253** when top holder plate **12253** moves in the y-direction.

Turning ahead in the drawings, FIG. **123** illustrates a plan view of a portion of base **11720**, showing various external and internal components of base **11720**, with top holder **11753** in a seated position holding electronic device **11790**. FIG. **124** illustrates a plan view of a portion of base **11720**, showing various external and internal components of base **11720**, with top holder **11753** in a closed position. In many embodiments, top holder plate **12253** can be connected to a first end of a linkage bar **12358** at a pivot **12356**. A second end of linkage bar **12358** can be connected to pin holder plate **12061** at a pivot **12357**. In a number of embodiments, linkage bar **12358** can be connected at an approximate midpoint between the first end and the second end of linkage bar **12358** to pin holder **12051** at a pivot **12359**. In several embodiments, pin holder **12051** can move top-ward and bottomward along the y-direction when top holder **11753** moves top-ward and bottomward along the y-direction. Due to pivot **12359** being located at a midpoint of linkage **12358**, when top holder **11753** moves a first distance top-ward or bottomward in the y-direction, pin holder **12051** and/or alignment base **11751** can move a second distance top-ward or bottomward, respectively, in which the second distance is half of the first distance. For example, as shown in FIGS. **123-124**, when top holder **11753** is adjusted from the seated position in FIG. **123** to the closed position in FIG. **124**, alignment base **11751** can be automatically adjusted bottomward half the distance that top holder **11753** moves bottomward. By alignment base **11751** adjusting half the distance of top holder **11753**, alignment base **11751** can advantageously be positioned approximately at a constant distance from the center of the electronic device (e.g., **11790**) seated in adjustable cradle **11750** (FIG. **117**), even when electronic devices with different dimensions are seated in adjustable cradle **11750** (FIG. **117**), for different dimensions (e.g., lengths, or alternatively, widths) of electronic devices (e.g., **11790** (FIG. **117**)).

Turning ahead in the drawings, FIG. **125** illustrates a perspective view of a machine **12500** in a closed configuration with an overlay applicator **12580** installed, according to another embodiment. FIG. **126** illustrates a perspective view of a base **12520** of machine **12500** with overlay applicator **12580** installed and without an electronic device installed. FIG. **127** illustrates a perspective view of base

122

12520 with overlay applicator **12580** and an electronic device **12700** installed. Machine **12500** is merely exemplary, and embodiments of the machine are not limited to the embodiments presented herein. The machine can be employed in many different embodiments or examples not specifically depicted or described herein. In various embodiments, machine **12500** can include base **12520**, a lid **12530**, and/or a hinge mechanism **12540**. Machine **12500** can be similar to machine **6900** in FIGS. **69-74**, machine **10600** (FIG. **106**), and/or machine **11700** (FIG. **117**), and various elements of machine **12500** can be similar or identical to various elements of machine **6900** in FIGS. **69-74**, machine **10600** (FIG. **106**), and/or machine **11700** (FIG. **117**). Base **12520** can be similar to support base **6920** in FIGS. **69-74**, base **10620** (FIG. **106**), and/or base **11720** (FIG. **117**), and various elements of base **12520** can be similar or identical to various elements of base **6920** in FIGS. **69-74**, base **10620** (FIG. **106**), and/or base **11720** (FIG. **117**). Lid **12530** can be similar to lid **6930** in FIGS. **69-74**, lid **10630** (FIG. **106**), and/or lid **11730** (FIG. **117**), and various elements of lid **12530** can be similar or identical to various elements of lid **6930** in FIGS. **69-74**, lid **10630** (FIG. **106**), and/or lid **11730** (FIG. **117**). Hinge **12540** can be similar to hinge **6940** in FIGS. **69-74**, hinge **10640** (FIG. **106**), and/or hinge **11740** (FIG. **117**), and various elements of hinge **12540** can be similar or identical to various elements of hinge **6940** in FIGS. **69-74**, hinge **10640** (FIG. **106**), and/or hinge **11740** (FIG. **117**).

In several embodiments, machine **12500** can be configured to have an overlay applicator, such as overlay applicator **12580** installed, and/or to have an electronic device, such as electronic device **12700**, installed. Overlay applicator **12580** can be similar or identical to one or more of the overlay applicators described above, such as overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), overlay applicator **1500** (FIG. **15**), overlay applicator **3000** (FIG. **30**), overlay applicator **3550** (FIGS. **35-36**), overlay applicator **6050** (FIG. **60**), overlay applicator **8001** (FIG. **80**), overlay applicator **9101** (FIG. **91**), overlay applicator **11300** (FIG. **113**), and/or overlay applicator **11780** (FIG. **117**). In a number of embodiments, overlay applicator **12580** can include an alignment tab **12681**, a protective film (not shown), an overlay (not shown), an adhesive release liner **12684**, a pull tab **12585**, and/or a joining sticker **12688**, which can be similar or identical to corresponding components described above. In several embodiments, pull tab **12585** can include a wiper **12686**, which can be similar or identical to the wipers described above. In many embodiments, when overlay applicator **12580** has been installed on an alignment base **12651** of base **12520**, and electronic device **12700** has been seated (e.g., with electronic device **12700** facing screen down or other surface down toward overlay applicator **12580**) in an adjustable cradle **12650** of base **12520**, lid **12530** of machine **12500** can be closed to a closed configuration of machine **12500**, such as shown in FIG. **125**, and pull tab **12585** can be pulled to remove the adhesive release liner to expose an adhesive on the overlay to the screen or other surface of electronic device **12700**.

In several embodiments, base **12520** can include alignment base **12651**, which can include a left alignment pin and/or a right alignment pin. Alignment base **12651** can be similar or identical to one or more of the alignment bases described above, such as alignment base **212** (FIG. **2**), alignment base **312** (FIG. **3**), alignment base **835** (FIGS. **8-9**, **13-14**), alignment base **1632** (FIGS. **16-19**), alignment base

123

2035 (FIG. 20, alignment base 3112 (FIGS. 31-34), alignment base 3514 (FIGS. 35-36), alignment base 3814 (FIG. 38), alignment base 4734 (FIG. 47), alignment base 6414 (FIG. 64), alignment base 6424 (FIG. 64), alignment base 6434 (FIG. 64), alignment base 6953 (FIGS. 69, 73), alignment base 11051 (FIG. 110), and/or alignment base 11751 (FIG. 117). In many embodiments, alignment base 12651 can be configured to hold an alignment tab of an overlay applicator. In some embodiments, the alignment pins of alignment base 12651 can be different sizes, such that the alignment tab can be inserted on alignment base 12651 with a first side (e.g., an adhesive side configured to adhere to the screen or other surface of an electronic device) of the overlay applicator face down, but not with the first side of the overlay applicator face up.

In several embodiments, base 12520 can include adjustable cradle 12650. Adjustable cradle 12650 can be similar to cradle 6950 in FIG. 69, adjustable cradle 10750 (FIG. 107), and/or adjustable cradle 11750 (FIG. 117), and various elements of adjustable cradle 12650 can be similar or identical to various elements of cradle 6950 in FIG. 69, adjustable cradle 10750 (FIG. 107), and/or adjustable cradle 11750 (FIG. 117). Adjustable cradle 12650 can be configured to hold electronic devices (e.g., 12700) of varying sizes. In many embodiments, instead of being for a single size of electronic device and/or replaceable with different cradles to hold different device sizes, adjustable cradle 12650 can be configured to hold electronic devices of varying sizes. In many embodiments, adjustable cradle 12650 can be part a permanent part of base 12520.

In several embodiments, adjustable cradle 12650 can include a left side holder 12751, a right side holder 12752, a left top corner holder 12753, a right top corner holder 12754, a bottom side support 12774, and/or a base support surface 12775. In many embodiments, alignment tab 12681 of overlay applicator 12580 can engage with alignment base 12651, which, in some embodiments, can be two pins of different sizes, as shown in FIGS. 126-127. In a number of embodiments, pull tab 12585 can extend through a pull tab slot 12776 located between bottom side support 12674 and base support surface 12775.

In a number of embodiments, left side holder 12751 and/or right side holder 12752 can be adjustable along an x-direction (as shown in FIGS. 125, 127, 130, and 131) between the left and right sides of base 12520. In various embodiments, left side holder 12751 can be configured to hold a left side of electronic device 12700, and/or right side holder 12752 can be configured to hold a right side of electronic device 12700. In a number of embodiments, left top corner holder 12753 and/or right top corner holder 12754 can be adjustable along a y-direction (as shown in FIGS. 125, 127, 130, and 131, in which the arrow points “top-ward” and the opposite is “bottomward”) that extends between the top and bottom (and vice versa) of base 12520. In several embodiments, left top corner holder 12753 and/or right top corner holder 12754 can hold a top left corner and a top right corner, respectively, of electronic device 12700, and/or bottom side support 12674 can hold a bottom side of electronic device 12700. In many embodiments, the electronic device (e.g., 12700) can be inserted such that a side of the electronic device that extends between left top corner holder 12753 and right top corner holder 12754 runs along a width (e.g., a shorter dimension than the length) of electronic device 12700, as shown in FIG. 127. In other embodiments, adjustable cradle 12650 can be configured such that the electronic device can be inserted such that the side of the electronic device that extends between left top

124

corner holder 12753 and right top corner holder 12754 runs along a length of the electronic device.

In a number of embodiments, base 12520 can include an opening button 12759, which can open left side holder 12751, right side holder 12752, left top corner holder 12753, and right top corner holder 12754 to an opened position, as shown in FIG. 128 and described below. In many embodiments, base 12520 can include a release button 12758, which can release left side holder 12751, right side holder 12752, left top corner holder 12753, and right top corner holder 12754 to a closed (released) position, as shown in FIG. 129 and described below.

Turning ahead in the drawings, FIG. 128 illustrates a plan view of base 12520 with left side holder 12751, right side holder 12752, left top corner holder 12753, and right top corner holder 12754 in an opened position. FIG. 129 illustrates a plan view of base 12520 with left side holder 12751, right side holder 12752, left top corner holder 12753, and right top corner holder 12754 in a closed (released) position. FIG. 130 illustrates a plan view of a portion of base 12520 below base support surface 12775, as viewed outward (in the z-direction, as shown in FIGS. 125 and 127, in which the arrow points “outward,” and the opposite is “inward”) from below base support surface 12775 to view an under surface 13085 on the opposite side of base support surface 12775.

In many embodiments, when opening button 12759 is depressed leftward (as viewed in FIG. 130), a plate 13058 that is attached to, or integrally formed with, opening button 12759 can move leftward (as viewed in FIG. 130). In a number of embodiments, plate 13058 can include a protrusion 13062, which can engage a plate 13063. Plate 13063 can be pivotably attached to under surface 13085 at a pivot 13064, and can be pivotably attached to a plate 13065 at a pivot 13066, such that when protrusion 13062 pushes leftward (as viewed in FIG. 130), plate 13063 can rotate counterclockwise (as viewed in FIG. 130), which can push plate 13065 bottomward. In many embodiments, plate 13065 can be pivotably attached to plates 13071 and 13072 at pivots 13067 and 13068, respectively. In several embodiments, plate 13071 can be pivotably attached to under surface 13085 at a pivot 13075 and can be pivotably attached to a right holder plate 13052 at a pivot 13073. In various embodiments, plate 13072 can be pivotably attached to under surface 13085 at a pivot 13076 and can be pivotably attached to a left holder plate 13051 at a pivot 13074. When plate 13065 is pushed bottomward, plate 13071 can be rotated clockwise (as viewed in FIG. 130), which can push right holder plate 13052 leftward (as viewed in FIG. 130); and plate 13072 can be rotated counterclockwise (as viewed in FIG. 130), which can push left holder plate 13051 rightward (as viewed in FIG. 130). In several embodiments, left holder plate 13051 can be attached, or integrally formed with, left side holder 12751 (FIGS. 128-129), and/or right holder plate 13052 can be attached, or integrally formed with, right side holder 12752 (FIGS. 128-129), such that when button 12759 is depressed, left side holder 12751 opens leftward (as viewed in FIGS. 128-129), and right side holder 12752 opens rightward (as viewed in FIGS. 128-129) to the opened position shown in FIG. 128.

In a number of embodiments, plate 13058 can include a catch 13061, which can engage with a latch 13057 (e.g., a lock pawl), which can be attached to under surface 13085 and spring loaded to rotate clockwise to engage with catch 13061 when opening button 12759 is depressed. In several embodiments, release button 12758 can be depressed to release latch 13057 from catch 13061, such that plate 13058 can move rightward (as viewed in FIG. 130), based on a

125

spring bias of plate **13058** to move rightward (as viewed in FIG. **130**). When plate **13058** moves rightward (as viewed in FIG. **130**), plate **13063** can rotate clockwise (as viewed in FIG. **130**), based on a spring bias in pivot **13064**, which can ultimately cause left side holder **12751** and right side holder **12752** to move inward to a closed (released) position, as shown in FIG. **129**.

In many embodiments, when opening button **12759** is depressed leftward (as viewed in FIG. **130**), and plate **13058** moves leftward (as viewed in FIG. **130**), plate **13058** can engage with a protrusion **13060** on a plate **13059**. Plate **13059** can be pivotably attached to under surface **13085** at a pivot **13077** (which can be spring biased rightward, as viewed in FIG. **130**), such that when plate **13058** pushes leftward (as viewed in FIG. **130**), plate **13059** can rotate counterclockwise (as viewed in FIG. **130**). In several embodiments, plate **13059** can include a gear engagement region, which can engage with a drive gear **13056** to rotate drive gear **13056** clockwise (as viewed in FIG. **130**). In a number of embodiments, left top corner holder **12753** (FIGS. **128-129**) and/or right top corner holder **12754** (FIGS. **128-129**) can be attached to a top holder plate **13053**, which can include a gear engagement region **13055**, which can engage with drive gear **13056**. When opening button **12759** is depressed and drive gear **13056** rotates clockwise (as viewed in FIG. **130**), top holder plate **13053** can be pushed top-wards along slots **13054**. When opening button **12759** is depressed far enough to latch, left top corner holder **12753** and/or right top corner holder **12754** can be held open in the opened position shown in FIG. **128**. When release button **12758** is depressed to release the latch, the spring bias of pivot **13077** (which can be spring biased rightward, as viewed in FIG. **130**) can cause left top corner holder **12753** and/or right top corner holder **12754** to adjust bottomward to a closed (released) position, as shown in FIG. **129**.

In several embodiments, machine **12500** can be configured such that opening button **12759** can be depressed to open left side holder **12751**, right side holder **12752**, left top corner holder **12753**, and right top corner holder **12754** to an opened position, as shown in FIG. **128**. An electronic device (e.g., **12700** (FIG. **127**)) can be inserted into adjustable cradle **12650**, and release button **12758** can be pressed, which can cause left side holder **12751** and right side holder **12752** to move inward toward electronic device **12700** (FIG. **127**), and can cause left top corner holder **12753**, and right top corner holder **12754** to move bottomward toward electronic device **12700** (FIG. **127**), to seat electronic device **12700** (FIG. **127**) in a horizontally centered position (along with x-direction) and a bottomward position (along the y-direction). This position can allow overlay applicator **12580** to be used to apply the overlay to the screen or other surface of electronic device **12700** (FIG. **127**).

Turning ahead in the drawings, FIG. **131** illustrates a plan view of a portion of base **12520** with an alignment plate **13151** installed. FIG. **132** illustrates a plan view of a portion of base **12520** with alignment plate **13151** removed. In several embodiments, alignment base **12651** can be attached to, or integrally formed with, an alignment base holder **13251**. In several embodiments, alignment base holder **13251** can adjust top-ward and/or bottomward along, within, or about a top-to-bottom slot **13253**. In a number of embodiments, various different alignment plates, such as alignment plate **13151**, can be used for different sizes of electronic devices (e.g., **12700** (FIG. **127**)). Alignment plate **13151** can include holes **13152**, which can be used to define a position for alignment base holder **13251**, where the position can be dependent upon a size of the electronic device (e.g., **12700**

126

(FIG. **127**)) that corresponds with alignment plate **13151**. Other alignment plates (e.g., **13151**) can have holes (e.g., **13152**) in different locations along the y-direction for different devices having different sizes. In many embodiments, alignment plate **13151** can fit within a recess **13252** within base support surface **12775**.

Turning ahead in the drawings, FIG. **133** illustrates a perspective view of a machine **13300** in an opened configuration, according to another embodiment. FIG. **134** illustrates a perspective view of machine **13300** in a closed configuration. Machine **13300** is merely exemplary, and embodiments of the machine are not limited to the embodiments presented herein. The machine can be employed in many different embodiments or examples not specifically depicted or described herein. In various embodiments, machine **13300** can include a base **13320**, a lid **13330**, and/or a hinge mechanism **13340**. Machine **13300** can be similar to machine **6900** in FIGS. **69-74**, machine **10600** (FIG. **106**), and/or machine **11700** (FIG. **117**), and/or machine **12500** (FIG. **125**), and various elements of machine **13300** can be similar or identical to various elements of machine **6900** in FIGS. **69-74**, machine **10600** (FIG. **106**), machine **11700** (FIG. **117**), and/or machine **12500** (FIG. **125**). Base **13320** can be similar to support base **6920** in FIGS. **69-74**, base **10620** (FIG. **106**), **11720** (FIG. **117**), and/or base **12520** (FIG. **125**), and various elements of base **13320** can be similar or identical to various elements of base **6920** in FIGS. **69-74**, base **10620** (FIG. **106**), **11720** (FIG. **117**), and/or base **12520** (FIG. **25**). Lid **13330** can be similar to lid **6930** in FIGS. **69-74**, lid **10630** (FIG. **106**), **11730** (FIG. **117**), and/or lid **12530** (FIG. **125**), and various elements of lid **13330** can be similar or identical to various elements of lid **6930** in FIGS. **69-74**, lid **10630** (FIG. **106**), lid **11730** (FIG. **117**), and/or lid **12530** (FIG. **125**). Hinge **13340** can be similar to hinge **6940** in FIGS. **69-74**, hinge **10640** (FIG. **106**), hinge **11740** (FIG. **117**), and/or hinge **12540** (FIG. **125**), and various elements of hinge **13340** can be similar or identical to various elements of hinge **6940** in FIGS. **69-74**, hinge **10640** (FIG. **106**), hinge **11740** (FIG. **117**), and/or hinge **12540** (FIG. **125**).

In several embodiments, machine **13300** can be configured to have an overlay applicator, such as overlay applicator (not shown) installed, and/or to have an electronic device (now shown) installed. The overlay applicator can be similar or identical to one or more of the overlay applicators described above, such as overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), overlay applicator **1500** (FIG. **15**), overlay applicator **3000** (FIG. **30**), overlay applicator **3550** (FIGS. **35-36**), overlay applicator **6050** (FIG. **60**), overlay applicator **8001** (FIG. **80**), overlay applicator **9101** (FIG. **91**), overlay applicator **11300** (FIG. **113**), overlay applicator **11780** (FIG. **117**), and/or overlay applicator **12580** (FIG. **125**). In many embodiments, when the overlay applicator has been installed on an alignment base **13371** of base **13320**, and an electronic device has been seated in an adjustable cradle **13350** of base **13320**, lid **13330** of machine **13300** can be closed to a closed configuration of machine **13300**, such as shown in FIG. **134**, and a pull tab of the overlay applicator can be pulled to remove the adhesive release liner to expose an adhesive on the overlay to the screen or other surface of the electronic device.

In several embodiments, base **13320** can include alignment base **13371**, which can include a left alignment pin and/or a right alignment pin. Alignment base **13371** can be similar or identical to one or more of the alignment bases described above, such as alignment base **212** (FIG. **2**),

alignment base **312** (FIG. 3), alignment base **835** (FIGS. 8-9, 13-14), alignment base **1632** (FIGS. 16-19), alignment base **2035** (FIG. 20), alignment base **3112** (FIGS. 31-34), alignment base **3514** (FIGS. 35-36), alignment base **3814** (FIG. 38), alignment base **4734** (FIG. 47), alignment base **6414** (FIG. 64), alignment base **6424** (FIG. 64), alignment base **6434** (FIG. 64), alignment base **6953** (FIGS. 69, 73), alignment base **11051** (FIG. 110), alignment base **11751** (FIG. 117), and/or alignment base **12651** (FIG. 126). In many embodiments, alignment base **13371** can be configured to hold an alignment tab of an overlay applicator. In some embodiments, the alignment pins of alignment base **13371** can be different sizes, such that the alignment tab can be inserted on alignment base **13371** with a first side (e.g., an adhesive side configured to adhere to the screen or other surface of an electronic device) of the overlay applicator face down, but not with the first side of the overlay applicator face up.

In several embodiments, base **13320** can include adjustable cradle **13350**. Adjustable cradle **13350** can be similar to cradle **6950** in FIG. 69, adjustable cradle **10750** (FIG. 107), adjustable cradle **11750** (FIG. 117), and/or adjustable cradle **12650** (FIG. 126), and various elements of adjustable cradle **13350** can be similar or identical to various elements of cradle **6950** in FIG. 69, adjustable cradle **10750** (FIG. 107), adjustable cradle **11750** (FIG. 117), and/or adjustable cradle **12650** (FIG. 126). Adjustable cradle **13350** can be configured to hold electronic devices (e.g., **12700** (FIG. 127)) of varying sizes. In many embodiments, instead of being for a single size of electronic device and/or replaceable with different cradles to hold different device sizes, adjustable cradle **13350** can be configured to hold electronic devices of varying sizes. In many embodiments, adjustable cradle **13350** can be part a permanent part of base **13320**.

In several embodiments, adjustable cradle **13350** can include a slot **13356**, a left bottom corner holder **13351**, a right top corner holder **13352**, an adjustment well **13353**, and/or a base support surface **13375**. Slot **13356** can be similar to slot **6956** (FIG. 69), slot **10856** (FIG. 108), and/or slot **11756** (FIG. 117). In many embodiments, slot **13356** can have dimensions that are larger than an electronic device that can be seated within adjustable cradle **13350**. In a number of embodiments, left bottom corner holder **13351** can be fixed in slot **13356**. In many embodiments, right top corner holder **13352** can be adjustable within slot **13356** along an x-direction (as shown in FIGS. 133 and 135) and/or a y-direction (as shown in FIGS. 133, 135, and 137, in which the arrow points “top-ward” and the opposite is “bottomward”). In various embodiments, left bottom corner holder **13351** can be configured to hold a bottom left corner of an electronic device (e.g., a portion of a left side and a bottom side of the electronic device proximate to the bottom left corner), and/or right top corner holder **13352** can be configured to hold a top right corner of the electronic device (e.g., a portion of a right side and a top side of the electronic device proximate to the top right corner). In many embodiments, the electronic device can be inserted such that a top of the electronic device that is used to push right top corner holder **13352** top-ward in the y-direction runs along a width (e.g., a shorter dimension than the length) of the electronic device, such as shown in FIG. 133. In other embodiments, adjustable cradle **13350** can be configured such that the electronic device can be inserted such that the top of the electronic device that is used to push right top corner holder **13352** top-ward in the y-direction runs along a length of the electronic device.

Turning ahead in the drawings, FIG. 135 illustrates a plan view of base **13320** with right top corner holder **13352** in a closed position. FIG. 136 illustrates a plan view of a base **13320** with right top corner holder **13352** in an opened position. In several embodiments, right top corner holder **13352** can be configured to be adjusted in the x-direction and/or y-direction within adjustment well **13353**. In many embodiments, left bottom corner holder **13351** can include a left holder piece **13551** and a bottom holder piece **13554**, and/or right top corner holder **13352** can include a right holder piece **13552** and a top holder piece **13553**. As shown in FIGS. 135 and 136, right top corner holder **13352** can adjust within well **13353** between the closed position in FIG. 135 and the opened position in FIG. 136. In several embodiments, right top corner holder **13352** can be spring biased toward left bottom corner holder **13351**. For example, when an electronic device (not shown) is being inserted in adjustable cradle **13350**, a top right corner of the electronic device can push right top corner holder **13352** top-ward and right-ward toward the opened position, as shown in FIG. 136. The electronic device can be lowered inward (in the z-direction, as shown in FIGS. 133 and 137, in which the arrow points “outward,” and the opposite is “inward”) toward base support surface **13375** and released, such that right top corner holder **13352** moves leftward and bottomward to push the electronic device toward left bottom corner holder **13351** to be held securely between left bottom corner holder **13351** and right top corner holder **13352**. In some embodiments, right top corner holder **13352** can include alignment base **13371**, such that alignment base **13371** can adjust with right top corner holder **13352**. In other embodiments, alignment base **13371** can adjust half the distance of the adjustment of right top corner holder **13352** in the x-direction and/or y-direction, such as described above in connection with machine **11700** (FIG. 117).

Turning ahead in the drawings, FIG. 137 illustrates a cross-sectional elevational view of machine **13300** in a closed configuration. FIG. 138 illustrates an enlarged cross-sectional view of a portion of machine **13300**, as identified in FIG. 137, in the closed configuration. As shown in FIG. 137, lid **13330** can include an outer frame **13331**, which can provide an outer structural shell, and/or a foam holder **13332**. When lid **13330** is closed, in several embodiments, foam holder **13332** can press inwards (in the z-direction) on an overlay applicator (not shown) to secure overlay applicator on alignment base **13571** and press the overlay applicator down against the screen or other surface of an electronic device (not shown), such that when a pull tab of the overlay applicator is pulled (e.g., pulled bottomward in the y-direction away from machine **13300**), the overlay can be adhered to the screen or other surface of the electronic device. In many embodiments, foam holder **13332** can press the exposed adhesive on the overlay to the screen or other surface of the electronic device, to apply the overlay to the screen or other surface of the electronic device. In a number of embodiments, foam holder **13332** can be pushed inward with one or more springs **13733**. In some embodiments, lid **13330** can include foam holder **13734** in addition to, or in alternative to, foam holder **13332**. For example, foam holder **13734** can be narrower than foam holder **13332**, and can be centered in the x-direction in foam holder **13332**, so as to provide additional pressure to a center (in the x-direction) of the overlay as it is adhered to the electronic device.

In several embodiments, base **10620** can include, in addition to elements described above, a frame **13721**, which can provide an outer structural shell. In a number of embodiments, base **10630** can include a spring **13771**, a spring

129

13772, and/or an attachment pin 13752. In many embodiments, attachment pin 13752 can be attached to right top corner holder 13352 below base support surface 13375. In several embodiments, one end of spring 13772 can be attached to attachment pin 13752, and another end of spring 13772 can be attached another attachment pin (not shown) that is attached to a fixed position on base 13320, such as attached to frame 13721 or below left bottom corner holder 13351 (FIG. 133). Spring 13772 can spring bias right top corner holder 13352 toward the left bottom corner. In several embodiments, spring 13771 can press outward in the z-direction on alignment base 13571. In some embodiments, base 13320 can include one or more additional springs (not shown), which can be configured to bias adjustable cradle 13350 (FIG. 133) and/or slot base surface 13375 outward (e.g., toward lid 13330) along a z-direction. In many embodiments, when lid 13330 is closed, foam holder 13332 can press inward along the z-direction, such that adjustable cradle 13350 and/or slot base surface 13375 are adjusted inward (in the z-direction) to allow the electronic device to fit between foam holder 13332 and the overlay applicator at the top, and slot base surface 13375 at the bottom, similar as described above in connection with machine 10600 in FIG. 116. In many embodiments, machine 13300 can apply overlays to the screens or other surfaces of electronic devices having various different dimensions of length (in the y-direction, or alternatively, in the x-direction), width (in the x-direction, or alternatively, in the y-direction), and/or thickness (in the z-direction), without replacing the cradle that is used in machine 13300.

Proceeding to the next drawing, FIG. 139 illustrates a flow chart for an embodiment of a method 13900 of providing a machine. Method 13900 is merely exemplary and is not limited to the embodiments presented herein. Method 13900 can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method 13900 can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method 13900 can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method 13900 can be combined or skipped. The machine can be similar or identical to machine 10600 (FIG. 106), machine 11700 (FIG. 117), machine 12500 (FIG. 125), and/or machine 13300 (FIG. 133).

Referring to FIG. 139, method 13900 can include a block 13910 of providing an adjustable cradle configured to hold, individually at different times, electronic devices having different dimensions. The adjustable cradle can be similar or identical to adjustable cradle 10750 (FIG. 107), adjustable cradle 11750 (FIG. 117), adjustable cradle 12650 (FIG. 126), and/or adjustable cradle 13350 (FIG. 133). The electronic devices can be similar or identical to device 220 (FIG. 2), device 320 (FIG. 3), device 1650 (FIG. 16), device 3401 (FIG. 34), device 3720 (FIG. 37), device 4800 (FIG. 48), device 5600 (FIG. 56), device 6550 (FIG. 65), device 7100, electronic device 8350 (FIG. 83), electronic device 9700 (FIGS. 97-99), electronic device 10000 (FIG. 100), electronic device 11000 (FIG. 110), electronic device 11790 (FIG. 117), and/or electronic device 12700 (FIG. 127).

In a number of embodiments, the electronic devices can include a first electronic device and a second electronic device, and/or other electronic devices having different dimensions (sizes). In some embodiments, the adjustable cradle can be configured to hold, individually at different times, the first electronic device and the second electronic

130

device, and/or the other electronic devices. For example, each electronic device can be inserted separately at different times. In several embodiments, the first electronic device of the electronic devices can have a first length and a first width, and the second electronic device of the electronic devices can have a second length different from the first length and a second width different from the first width. In some embodiments, the different dimensions can include the first length, the first width, the second length, and the second width. In various embodiments, the first electronic device can have a first thickness and the second electronic device can have a second thickness different from the first thickness.

In many embodiments, method 13900 next can include a block 13920 of providing an alignment base configured to engage, individually at different times, with alignment mechanisms of overlay applicators. The alignment base can be similar or identical to one or more of the alignment bases described above, such as alignment base 212 (FIG. 2), alignment base 312 (FIG. 3), alignment base 835 (FIGS. 8-9, 13-14), alignment base 1632 (FIGS. 16-19), alignment base 2035 (FIG. 20), alignment base 3112 (FIGS. 31-34), alignment base 3514 (FIGS. 35-36), alignment base 3814 (FIG. 38), alignment base 4734 (FIG. 47), alignment base 6414 (FIG. 64), alignment base 6424 (FIG. 64), alignment base 6434 (FIG. 64), alignment base 6953 (FIGS. 69, 73), alignment base 11051 (FIG. 110), alignment base 11751 (FIG. 117), alignment base 12651 (FIG. 126), and/or alignment base 13371 (FIG. 133). The alignment mechanism can be similar or identical to alignment mechanism 115 (FIG. 1), alignment mechanism 415 (FIG. 4), alignment mechanism 615 (FIG. 6), alignment mechanism 715 (FIG. 7), alignment mechanism 1515 (FIG. 15), alignment mechanism 2915 (FIGS. 29-30), alignment mechanism 3557 (FIGS. 35-36), alignment piece 8010 (FIG. 80), alignment piece 9110 (FIG. 91), alignment tab 11310 (FIG. 113), alignment tab 11781 (FIG. 117), and/or alignment tab 12681 (FIG. 126). The overlay applicators can be similar or identical to overlay applicators described above, such as overlay applicator 100 (FIG. 1), overlay applicator 400 (FIGS. 4-5), overlay applicator 600 (FIG. 6), overlay applicator 700 (FIG. 7), overlay applicator 1500 (FIG. 15), overlay applicator 3000 (FIG. 30), overlay applicator 3550 (FIGS. 35-36), overlay applicator 6050 (FIG. 60), overlay applicator 8001 (FIG. 80), overlay applicator 9101 (FIG. 91), overlay applicator 11300 (FIG. 113), overlay applicator 11780 (FIG. 117), and/or overlay applicator 12580 (FIG. 125). In several embodiments, each respective one of the overlay applicators can include a respective overlay configured to be applied to a respective surface of each of the electronic devices. The respective surface can be a screen of the electronic device or another surface of the electronic device, such as a rear surface of the electronic device. In a number of embodiments, the machine can be configured to facilitate applying, individually at different times, the respective overlays to the respective surfaces of the electronic devices.

In many embodiments, the machine can be configured in an opened configuration such that (a) either of the first electronic device or the second electronic device and/or (b) a respective one of the overlay applicators can be inserted and removed from the machine. The opened configuration can be similar or identical to the opened configuration shown in FIGS. 107, 113, 117, 118, and 133. In some embodiments, the machine can be configured in a closed configuration to prevent removal of (a) either of the first electronic device or the second electronic device and/or (b) at least a portion of the respective one of the overlay

applicators from the machine. The closed configuration can be similar or identical to the closed configuration shown in FIGS. 106, 114, 116, 125, 133, and 137. In a number of embodiments, the machine can be configured in the closed configuration such that a respective pull tab of the respective one of the overlay applicators can be pulled to remove a respective adhesive release liner of the respective one of the overlay applicators from the respective overlay of the respective one of the overlay applicators to expose an adhesive agent of the respective overlay to the respective surface of the either of the first electronic device or the second electronic device.

In a number of embodiments, the adjustable cradle can include a second adjustable holder and a third adjustable holder opposite the second adjustable holder. The second adjustable holder and the third adjustable holder can be configured to center each of the electronic devices held in the adjustable cradle with respect to the alignment base. The second adjustable holder can be similar or identical to left side holder 10851 (FIG. 108) and/or left side holder 12751 (FIG. 127). The third adjustable holder can be similar or identical to right side holder 10852 (FIG. 108) and/or right side holder 12752 (FIG. 127).

In some embodiments, the adjustable cradle can be configured to hold the second adjustable holder and the third adjustable holder in an opened position until a button is activated by insertion of each of the electronic devices into the adjustable cradle to (a) transition the second adjustable holder and the third adjustable holder from the opened position to a closed position and (b) hold each of the electronic devices within the adjustable cradle. The button can be similar or identical to release latch 10958 (FIG. 109) and/or release button 12758 (FIG. 127).

In a number of embodiments, the adjustable cradle can include a first adjustable holder configured to (a) be pushed in a first direction toward a first side wall of the adjustable cradle by a respective first side of each of the electronic devices upon insertion of each of the electronic devices into the adjustable cradle and/or (b) hold each of the electronic devices against a second side wall of the adjustable cradle opposite the first side wall when each of the electronic devices is held within the adjustable cradle. The first adjustable holder can be similar or identical to top holder 10853 (FIG. 108), top holder 11753 (FIG. 117), left top corner holder 12753 (FIG. 127), and/or right top corner holder 12754 (FIG. 127). The first side wall can be similar or identical to top side wall 10873 (FIG. 108) and/or top side wall 11773 (FIG. 117). In many embodiments, the second side wall can be fixed. The second side wall can be similar or identical to bottom side wall 10874 (FIG. 108), bottom side wall 11774 (FIG. 117), bottom side support 12774 (FIG. 127), left bottom corner holder 13351 (FIG. 133), and/or bottom holder piece 13554 (FIG. 133). In some embodiments, the first side of the electronic device can run along a width of the electronic device. In other embodiments, the first side of the electronic device can run along a length of the electronic device. The first direction can be the y-direction.

In several embodiments, the adjustable cradle can be configured to adjust a position in the first direction (e.g., a position in the y-direction) of the alignment base for different first dimensions of the electronic devices with respect to the first adjustable holder such that a distance between the alignment base and a respective center of a respective first dimension of each of the electronic devices is constant between the electronic devices when each of the electronic devices is held within the adjustable cradle. The distance can

be similar or identical to distance 11261 (FIG. 112). In some embodiments, the first dimension can be the length of the electronic device. In other embodiments, the first dimension can be the width of the electronic device.

In various embodiments, the adjustable cradle can include springs configured to adjust an inward position (e.g., in the z-direction) of the adjustable cradle for different thicknesses of the electronic devices.

In many embodiments, the adjustable cradle can include an adjustable side holder configured to hold each of the electronic devices against a fixed opposing side wall of the adjustable cradle that is opposite the adjustable side holder when each of the electronic devices is held within the adjustable cradle. The adjustable side holder can be similar or identical to side holder 11752 (FIG. 117). The fixed opposing side wall can be similar or identical to left side wall 11771 (FIG. 117). In a number of embodiments, the adjustable cradle can be configured to adjust a position (e.g., a position in the x-direction) of the alignment base to be centered between different second dimensions of the electronic devices when the adjustable side holder holds each of the electronic devices in the adjustable cradle. In some embodiments, the second dimension can be the width of the electronic device. In other embodiments, the second dimension can be the length of the electronic device.

In several embodiments, the adjustable cradle can include a second adjustable holder, a third adjustable holder, and a pair of adjustable corner holders. The second adjustable holder can be similar or identical to left side holder 10851 (FIG. 108) and/or left side holder 12751 (FIG. 127). The third adjustable holder can be similar or identical to right side holder 10852 (FIG. 108) and/or right side holder 12752 (FIG. 127). The adjustable corner holders can be similar or identical to left top corner holder 12753 (FIG. 127) and/or right top corner holder 12754 (FIG. 127). In some embodiments, when each of the electronic devices is held within the adjustable cradle, the second adjustable holder and the third adjustable holder are configured to center each of the electronic devices with respect to the alignment base, and/or the pair of adjustable corner holders are configured to hold each of the electronic devices against a second side wall of the adjustable cradle opposite the pair of adjustable corner holders. In many embodiments, the second side wall can be fixed. The second side wall can be similar or identical to bottom side wall 10874 (FIG. 108), bottom side wall 11774 (FIG. 117), bottom side support 12774 (FIG. 127), left bottom corner holder 13351 (FIG. 133), and/or bottom holder piece 13554 (FIG. 133).

In some embodiments, the adjustable cradle can include one or more buttons configured to: (a) transition the second adjustable holder, the third adjustable holder, and the pair of adjustable corner holders to an opened position to allow insertion of each of the electronic devices into the adjustable cradle, and/or (b) transition the second adjustable holder, the third adjustable right side holder, and the pair of adjustable corner holders to a closed position to hold each of the electronic devices within the adjustable cradle. The open position can be similar or identical to the opened position shown in FIG. 128, and the closed position can be similar or identical to the closed position shown in FIG. 129. The buttons can be similar or identical to release button 12758 (FIG. 127) and/or opening button 12759 (FIG. 127).

In several embodiments, the adjustable cradle can include a fixed corner holder at a first corner of the adjustable cradle and an adjustable corner holder at a second corner of the adjustable cradle opposite the first corner. The fixed corner holder can be similar or identical to left bottom corner holder

133

13351 (FIG. **133**). The adjustable corner can be similar or identical to right top corner holder **13352** (FIG. **133**). In a number of embodiments, the adjustable corner holder can be configured to (a) be pushed diagonally away from the fixed corner holder by a respective first corner of each of the electronic devices upon insertion of each of the electronic devices into the adjustable cradle and (b) hold each of the electronic devices against the fixed corner holder of the adjustable cradle when each of the electronic devices is held within the adjustable cradle.

In a number of embodiments, the walls of the adjustable cradle, such as the second adjustable holder, the third adjustable holder, the adjustable side holder, the first adjustable holder, the adjustable corner holder, and/or other walls of the adjustable cradle, can adjust automatically to fit the size of differently sized electronic device in order to securely hold the electronic devices to apply the overlay to the surface of the electronic device.

In various embodiments, method **13900** additionally and optionally can include a block **13930** of providing a support base including the adjustable cradle and the alignment base. The support base can be similar or identical to base **10620** (FIG. **106**), **11720** (FIG. **117**), base **12520** (FIG. **125**), and/or base **13320** (FIG. **133**). In some embodiments, the alignment base can be adjustable with respect to the support base. In several embodiments, the support base can include a recess configured to hold different alignment plates. In various embodiments, the different alignment plates each can be configured to position the alignment base at a different respective position (e.g., a position along the y-direction) with respect to the support base. The alignment plates can be similar or identical to alignment plate **13151** (FIG. **131**).

In many embodiments, method **13900** further and optionally can include a block **13940** of providing a lid hingedly attached to the support base and configured to rotate with respect to the support base between an opened configuration and a closed configuration. The lid can be similar or identical to lid **10630** (FIG. **106**), lid **11730** (FIG. **117**), lid **12530** (FIG. **125**), and/or lid **13330** (FIG. **133**). In other embodiments, the machine does not include a lid.

Proceeding to the next drawing, FIG. **140** illustrates a flow chart for an embodiment of a method **14000** of providing a machine. Method **14000** is merely exemplary and is not limited to the embodiments presented herein. Method **14000** can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method **14000** can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method **14000** can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method **14000** can be combined or skipped. The machine can be similar or identical to machine **10600** (FIG. **106**), machine **11700** (FIG. **117**), machine **12500** (FIG. **125**), and/or machine **13300** (FIG. **133**).

Referring to FIG. **140**, method **14000** can include a block **14010** of providing an alignment base. The alignment base can be similar or identical to one or more of the alignment bases described above, such as alignment base **212** (FIG. **2**), alignment base **312** (FIG. **3**), alignment base **835** (FIGS. **8-9**, **13-14**), alignment base **1632** (FIGS. **16-19**), alignment base **2035** (FIG. **20**), alignment base **3112** (FIGS. **31-34**), alignment base **3514** (FIGS. **35-36**), alignment base **3814** (FIG. **38**), alignment base **4734** (FIG. **47**), alignment base **6414** (FIG. **64**), alignment base **6424** (FIG. **64**), alignment base **6434** (FIG. **64**), alignment base **6953** (FIGS. **69**, **73**), align-

134

ment base **11051** (FIG. **110**), alignment base **11751** (FIG. **117**), alignment base **12651** (FIG. **126**), and/or alignment base **13371** (FIG. **133**). In many embodiments, the alignment base can engage an alignment mechanism of an overlay applicator. The alignment mechanism can be similar or identical to alignment mechanism **115** (FIG. **1**), alignment mechanism **415** (FIG. **4**), alignment mechanism **615** (FIG. **6**), alignment mechanism **715** (FIG. **7**), alignment mechanism **1515** (FIG. **15**), alignment mechanism **2915** (FIGS. **29-30**), alignment mechanism **3557** (FIGS. **35-36**), alignment piece **8010** (FIG. **80**), alignment piece **9110** (FIG. **91**), alignment tab **11310** (FIG. **113**), alignment tab **11781** (FIG. **117**), and/or alignment tab **12681** (FIG. **126**). The overlay applicator can be similar or identical to overlay applicators described above, such as overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), overlay applicator **1500** (FIG. **15**), overlay applicator **3000** (FIG. **30**), overlay applicator **3550** (FIGS. **35-36**), overlay applicator **6050** (FIG. **60**), overlay applicator **8001** (FIG. **80**), overlay applicator **9101** (FIG. **91**), overlay applicator **11300** (FIG. **113**), overlay applicator **11780** (FIG. **117**), and/or overlay applicator **12580** (FIG. **125**).

In many embodiments, method **14000** next can include a block **14020** of providing an adjustable cradle including one or more adjustable side holders configured to center an electronic device held in the adjustable cradle with respect to the alignment base. The adjustable cradle can be similar or identical to adjustable cradle **10750** (FIG. **107**), adjustable cradle **11750** (FIG. **117**), adjustable cradle **12650** (FIG. **126**), and/or adjustable cradle **13350** (FIG. **133**). The electronic device can be similar or identical to device **220** (FIG. **2**), device **320** (FIG. **3**), device **1650** (FIG. **16**), device **3401** (FIG. **34**), device **3720** (FIG. **37**), device **4800** (FIG. **48**), device **5600** (FIG. **56**), device **6550** (FIG. **65**), device **7100**, electronic device **8350** (FIG. **83**), electronic device **9700** (FIGS. **97-99**), electronic device **10000** (FIG. **100**), electronic device **11000** (FIG. **110**), electronic device **11790** (FIG. **117**), and/or electronic device **12700** (FIG. **127**). The one or more adjustable side holders can be similar or identical to left side holder **10851** (FIG. **108**), left side holder **12751** (FIG. **127**), right side holder **10852** (FIG. **108**), right side holder **12752** (FIG. **127**), side holder **11752** (FIG. **117**), right top corner holder **13352** (FIG. **133**), and/or right holder piece **13552** (FIG. **135**).

In several embodiments, the one or more adjustable side holders of the adjustable cradle can include a second adjustable holder and a third adjustable holder opposite the second adjustable holder. The second adjustable holder and the third adjustable holder can be configured to center a position (e.g., position in the x-direction) of the electronic device within the adjustable cradle. The second adjustable holder can be similar or identical to left side holder **10851** (FIG. **108**) and/or left side holder **12751** (FIG. **127**). The third adjustable holder can be similar or identical to right side holder **10852** (FIG. **108**) and/or right side holder **12752** (FIG. **127**). In some embodiments, a position of the alignment base in a direction between the second adjustable holder and the third adjustable holder (e.g., an x-position) is fixed.

In a number of embodiments, the one or more adjustable side holders of the adjustable cradle can include an adjustable side holder configured to hold the electronic device against a fixed opposing side wall of the adjustable cradle that is opposite the adjustable side holder when the electronic device is held within the adjustable cradle. The adjustable side holder can be similar or identical to side holder **11752** (FIG. **117**), right top corner holder **13352** (FIG.

135

133), and/or right holder piece 13552 (FIG. 135). The fixed opposing side wall can be similar or identical to left side wall 11771 (FIG. 117), left bottom corner holder 13351 (FIG. 133), and/or left holder piece 13551 (FIG. 135). In some embodiments, when the adjustable side holder moves a first distance in a direction between the adjustable side holder and the fixed opposing side wall (e.g., in the x-direction), the alignment base moves a second distance in the direction between the adjustable side holder and the fixed opposing side wall (e.g., the x-direction), and the second distance is half of the first distance.

In various embodiments, the adjustable cradle can include a first adjustable holder configured to (a) be pushed in a first direction toward a first side wall of the adjustable cradle by a first side of the electronic device upon insertion of the electronic device into the adjustable cradle and (b) hold the electronic device against a second side wall of the adjustable cradle opposite the first side wall when the electronic device is held within the adjustable cradle. The first adjustable holder can be similar or identical to top holder 10853 (FIG. 108), top holder 11753 (FIG. 117), left top corner holder 12753 (FIG. 127), right top corner holder 12754 (FIG. 127), right top corner holder 13352 (FIG. 133), and/or top holder piece 13553 (FIG. 135). The first side wall can be similar or identical to top side wall 10873 (FIG. 108) and/or top side wall 11773 (FIG. 117). In many embodiments, the second side wall can be fixed. The second side wall can be similar or identical to bottom side wall 10874 (FIG. 108), bottom side wall 11774 (FIG. 117), bottom side support 12774 (FIG. 127), left bottom corner holder 13351 (FIG. 133), and/or bottom holder piece 13554 (FIG. 135). In some embodiments, the first side of the electronic device can run along a width of the electronic device. In other embodiments, the first side of the electronic device can run along a length of the electronic device. The first direction can be similar or identical to the y-direction.

In several embodiments, the adjustable cradle can be configured to adjust a position in the first direction (e.g., a position in the y-direction) of the alignment base with respect to the first adjustable holder such that a distance between the alignment base and a center of a first dimension of the electronic device is a fixed predetermined distance when the electronic device is held within the adjustable cradle. The distance can be similar or identical to distance 11261 (FIG. 112). In some embodiments, the first dimension can be the length of the electronic device. In other embodiments, the first dimension can be the width of the electronic device.

In a number of embodiments, when the first adjustable holder moves a first distance in the first direction, the alignment base can move a second distance in the first direction, such that the second distance is half of the first distance. In some embodiments, the adjustable cradle can include springs configured to adjust an inward position of the adjustable cradle for a thickness of the electronic device.

Proceeding to the next drawing, FIG. 141 illustrates a flow chart for an embodiment of a method 14100 of providing a machine. Method 14100 is merely exemplary and is not limited to the embodiments presented herein. Method 14100 can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method 14100 can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method 14100 can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or

136

the activities in method 14100 can be combined or skipped. The machine can be similar or identical to machine 10600 (FIG. 106), machine 11700 (FIG. 117), machine 12500 (FIG. 125), and/or machine 13300 (FIG. 133).

Referring to FIG. 141, method 14100 can include a block 14110 of providing an alignment base. The alignment base can be similar or identical to one or more of the alignment bases described above, such as alignment base 212 (FIG. 2), alignment base 312 (FIG. 3), alignment base 835 (FIGS. 8-9, 13-14), alignment base 1632 (FIGS. 16-19), alignment base 2035 (FIG. 20), alignment base 3112 (FIGS. 31-34), alignment base 3514 (FIGS. 35-36), alignment base 3814 (FIG. 38), alignment base 4734 (FIG. 47), alignment base 6414 (FIG. 64), alignment base 6424 (FIG. 64), alignment base 6434 (FIG. 64), alignment base 6953 (FIGS. 69, 73), alignment base 11051 (FIG. 110), alignment base 11751 (FIG. 117), alignment base 12651 (FIG. 126), and/or alignment base 13371 (FIG. 133). In many embodiments, the alignment base can engage an alignment mechanism of an overlay applicator. The alignment mechanism can be similar or identical to alignment mechanism 115 (FIG. 1), alignment mechanism 415 (FIG. 4), alignment mechanism 615 (FIG. 6), alignment mechanism 715 (FIG. 7), alignment mechanism 1515 (FIG. 15), alignment mechanism 2915 (FIGS. 29-30), alignment mechanism 3557 (FIGS. 35-36), alignment piece 8010 (FIG. 80), alignment piece 9110 (FIG. 91), alignment tab 11310 (FIG. 113), alignment tab 11781 (FIG. 117), and/or alignment tab 12681 (FIG. 126). The overlay applicator can be similar or identical to overlay applicators described above, such as overlay applicator 100 (FIG. 1), overlay applicator 400 (FIGS. 4-5), overlay applicator 600 (FIG. 6), overlay applicator 700 (FIG. 7), overlay applicator 1500 (FIG. 15), overlay applicator 3000 (FIG. 30), overlay applicator 3550 (FIGS. 35-36), overlay applicator 6050 (FIG. 60), overlay applicator 8001 (FIG. 80), overlay applicator 9101 (FIG. 91), overlay applicator 11300 (FIG. 113), overlay applicator 11780 (FIG. 117), and/or overlay applicator 12580 (FIG. 125).

In many embodiments, method 14100 next can include a block 14120 of providing an adjustable cradle including a first adjustable holder configured to (a) be pushed in a first direction toward a first side wall of the adjustable cradle by a first side of an electronic device upon insertion of the electronic device into the adjustable cradle and (b) hold the electronic device against a second side wall of the adjustable cradle opposite the first side wall when the electronic device is held within the adjustable cradle. The adjustable cradle can be similar or identical to adjustable cradle 10750 (FIG. 107), adjustable cradle 11750 (FIG. 117), adjustable cradle 12650 (FIG. 126), and/or adjustable cradle 13350 (FIG. 133). The electronic device can be similar or identical to device 220 (FIG. 2), device 320 (FIG. 3), device 1650 (FIG. 16), device 3401 (FIG. 34), device 3720 (FIG. 37), device 4800 (FIG. 48), device 5600 (FIG. 56), device 6550 (FIG. 65), device 7100, electronic device 8350 (FIG. 83), electronic device 9700 (FIGS. 97-99), electronic device 10000 (FIG. 100), electronic device 11000 (FIG. 110), electronic device 11790 (FIG. 117), and/or electronic device 12700 (FIG. 127). The first adjustable holder can be similar or identical to top holder 10853 (FIG. 108), top holder 11753 (FIG. 117), left top corner holder 12753 (FIG. 127), right top corner holder 12754 (FIG. 127), right top corner holder 13352 (FIG. 133), and/or top holder piece 13553 (FIG. 135). The first side wall can be similar or identical to top side wall 10873 (FIG. 108) and/or top side wall 11773 (FIG. 117). In many embodiments, the second side wall can be fixed. The second side wall can be similar or identical to bottom side

137

wall **10874** (FIG. **108**), bottom side wall **11774** (FIG. **117**), bottom side support **12774** (FIG. **127**), left bottom corner holder **13351** (FIG. **133**), and/or bottom holder piece **13554** (FIG. **135**). In some embodiments, the first side of the electronic device can run along a width of the electronic device. In other embodiments, the first side of the electronic device can run along a length of the electronic device. The first direction can be similar or identical to the y-direction. In some embodiments, the first adjustable holder can include a pair of adjustable corner holders. The pair of adjustable corner holders can be similar or identical to left top corner holder **12753** (FIG. **127**) and/or right top corner holder **12754** (FIG. **127**).

In several embodiments, the adjustable cradle can be configured to adjust a position (e.g., a position in the y-direction) of the alignment base with respect to the first adjustable holder such that a distance between the alignment base and a center of a first dimension of the electronic device is a fixed predetermined distance when the electronic device is held within the adjustable cradle. The distance can be similar or identical to distance **11261** (FIG. **112**). In some embodiments, the first dimension can be the length of the electronic device. In other embodiments, the first dimension can be the width of the electronic device. In a number of embodiments, when the first adjustable holder moves a first distance in the first direction, the alignment base can move a second distance in the first direction, such that the second distance is half of the first distance.

In a number of embodiments, the adjustable cradle can include a second adjustable holder and a third adjustable holder opposite the second adjustable holder. The second adjustable holder and the third adjustable holder can be configured to center a position of the electronic device in a second direction perpendicular the first direction (e.g., an position in the x-direction) within the adjustable cradle. The second adjustable holder can be similar or identical to left side holder **10851** (FIG. **108**) and/or left side holder **12751** (FIG. **127**). The third adjustable holder can be similar or identical to right side holder **10852** (FIG. **108**) and/or right side holder **12752** (FIG. **127**). In some embodiments, a position of the alignment base in the second direction (e.g., the x-direction) is fixed.

In various embodiments, the adjustable cradle can include an adjustable side holder configured to hold the electronic device against a fixed opposing side wall of the adjustable cradle that is opposite the adjustable side holder when the electronic device is held within the adjustable cradle. The adjustable side holder can be similar or identical to side holder **11752** (FIG. **117**), right top corner holder **13352** (FIG. **133**), and/or right holder piece **13552** (FIG. **135**). The fixed opposing side wall can be similar or identical to left side wall **11771** (FIG. **117**), left bottom corner holder **13351** (FIG. **133**), and/or left holder piece **13551** (FIG. **135**). In some embodiments, when the adjustable side holder moves a first distance in a direction between the adjustable side holder and the fixed opposing side wall (e.g., an x-direction), the alignment base moves a second distance in the direction between the adjustable side holder and the fixed opposing side wall (e.g., the x-direction), and the second distance is half of the first distance.

In some embodiments, the adjustable cradle can include springs configured to adjust an inward position (e.g., in the z-direction) of the adjustable cradle for a thickness of the electronic device.

Proceeding to the next drawing, FIG. **142** illustrates a flow chart for an embodiment of a method **14200** of providing a machine. Method **14200** is merely exemplary and

138

is not limited to the embodiments presented herein. Method **14200** can be employed in many different embodiments or examples not specifically depicted or described herein. In some embodiments, the procedures, the processes, and/or the activities of method **14200** can be performed in the order presented. In other embodiments, the procedures, the processes, and/or the activities of the method **14200** can be performed in any other suitable order. In still other embodiments, one or more of the procedures, the processes, and/or the activities in method **14200** can be combined or skipped. The machine can be similar or identical to machine **10600** (FIG. **106**), machine **11700** (FIG. **117**), machine **12500** (FIG. **125**), and/or machine **13300** (FIG. **133**).

Referring to FIG. **142**, method **14200** can include a block **14210** of providing an alignment base. The alignment base can be similar or identical to one or more of the alignment bases described above, such as alignment base **212** (FIG. **2**), alignment base **312** (FIG. **3**), alignment base **835** (FIGS. **8-9**, **13-14**), alignment base **1632** (FIGS. **16-19**), alignment base **2035** (FIG. **20**), alignment base **3112** (FIGS. **31-34**), alignment base **3514** (FIGS. **35-36**), alignment base **3814** (FIG. **38**), alignment base **4734** (FIG. **47**), alignment base **6414** (FIG. **64**), alignment base **6424** (FIG. **64**), alignment base **6434** (FIG. **64**), alignment base **6953** (FIGS. **69**, **73**), alignment base **11051** (FIG. **110**), alignment base **11751** (FIG. **117**), alignment base **12651** (FIG. **126**), and/or alignment base **13371** (FIG. **133**). In many embodiments, the alignment base can engage an alignment mechanism of an overlay applicator. The alignment mechanism can be similar or identical to alignment mechanism **115** (FIG. **1**), alignment mechanism **415** (FIG. **4**), alignment mechanism **615** (FIG. **6**), alignment mechanism **715** (FIG. **7**), alignment mechanism **1515** (FIG. **15**), alignment mechanism **2915** (FIGS. **29-30**), alignment mechanism **3557** (FIGS. **35-36**), alignment piece **8010** (FIG. **80**), alignment piece **9110** (FIG. **91**), alignment tab **11310** (FIG. **113**), alignment tab **11781** (FIG. **117**), and/or alignment tab **12681** (FIG. **126**). The overlay applicator can be similar or identical to overlay applicators described above, such as overlay applicator **100** (FIG. **1**), overlay applicator **400** (FIGS. **4-5**), overlay applicator **600** (FIG. **6**), overlay applicator **700** (FIG. **7**), overlay applicator **1500** (FIG. **15**), overlay applicator **3000** (FIG. **30**), overlay applicator **3550** (FIGS. **35-36**), overlay applicator **6050** (FIG. **60**), overlay applicator **8001** (FIG. **80**), overlay applicator **9101** (FIG. **91**), overlay applicator **11300** (FIG. **113**), overlay applicator **11780** (FIG. **117**), and/or overlay applicator **12580** (FIG. **125**).

In many embodiments, method **14200** next can include a block **14220** of providing an adjustable cradle including springs configured to adjust an inward position (e.g., in the z-direction) of the adjustable cradle for a thickness of an electronic device held in the adjustable cradle. The adjustable cradle can be similar or identical to adjustable cradle **10750** (FIG. **107**), adjustable cradle **11750** (FIG. **117**), adjustable cradle **12650** (FIG. **126**), and/or adjustable cradle **13350** (FIG. **133**). The electronic device can be similar or identical to device **220** (FIG. **2**), device **320** (FIG. **3**), device **1650** (FIG. **16**), device **3401** (FIG. **34**), device **3720** (FIG. **37**), device **4800** (FIG. **48**), device **5600** (FIG. **56**), device **6550** (FIG. **65**), device **7100**, electronic device **8350** (FIG. **83**), electronic device **9700** (FIGS. **97-99**), electronic device **10000** (FIG. **100**), electronic device **11000** (FIG. **110**), electronic device **11790** (FIG. **117**), and/or electronic device **12700** (FIG. **127**). The adjustment of the position of the adjustable cradle in the inward direction (e.g., z-direction) can move the adjustable cradle with respect to a support base or a lid of the machine.

In some embodiments, the adjustable cradle can include a first adjustable holder configured to (a) be pushed in a first direction toward a first side wall of the adjustable cradle by a first side of an electronic device upon insertion of the electronic device into the adjustable cradle and (b) hold the electronic device against a second side wall of the adjustable cradle opposite the first side wall when the electronic device is held within the adjustable cradle. The first adjustable holder can be similar or identical to top holder **10853** (FIG. **108**), top holder **11753** (FIG. **117**), left top corner holder **12753** (FIG. **127**), right top corner holder **12754** (FIG. **127**), right top corner holder **13352** (FIG. **133**), and/or top holder piece **13553** (FIG. **135**). The first side wall can be similar or identical to top side wall **10873** (FIG. **108**) and/or top side wall **11773** (FIG. **117**). In many embodiments, the second side wall can be fixed. The second side wall can be similar or identical to bottom side wall **10874** (FIG. **108**), bottom side wall **11774** (FIG. **117**), bottom side support **12774** (FIG. **127**), left bottom corner holder **13351** (FIG. **133**), and/or bottom holder piece **13554** (FIG. **135**). In some embodiments, the first side of the electronic device can run along a width of the electronic device. In other embodiments, the first side of the electronic device can run along a length of the electronic device. The first direction can be similar or identical to the y-direction. In some embodiments, the adjustable holder can include a pair of adjustable corner holders. The pair of adjustable corner holders can be similar or identical to left top corner holder **12753** (FIG. **127**) and/or right top corner holder **12754** (FIG. **127**). In several embodiments, the adjustable cradle can be configured to adjust a position the first direction (e.g., a position in the y-direction) of the alignment base with respect to the first adjustable holder such that a distance between the alignment base and a center of a first dimension of the electronic device is a fixed predetermined distance when the electronic device is held within the adjustable cradle. The distance can be similar or identical to distance **11261** (FIG. **112**). In some embodiments, the first dimension can be the length of the electronic device. In other embodiments, the first dimension can be the width of the electronic device. In a number of embodiments, when the first adjustable holder moves a first distance in the y-direction, the alignment base can move a second distance in the y-direction, such that the second distance is half of the first distance.

In a number of embodiments, the adjustable cradle can include a second adjustable holder and a third adjustable holder opposite the second adjustable holder. The second adjustable holder and the third adjustable holder can be configured to center a position (e.g., an x-position) of the electronic device within the adjustable cradle. The second adjustable holder can be similar or identical to left side holder **10851** (FIG. **108**) and/or left side holder **12751** (FIG. **127**). The third adjustable holder can be similar or identical to right side holder **10852** (FIG. **108**) and/or right side holder **12752** (FIG. **127**). In some embodiments, a position of the alignment base in a direction between the second adjustable holder and the third adjustable holder (e.g., a position in the x-direction) is fixed.

In various embodiments, the adjustable cradle can include an adjustable side holder configured to hold the electronic device against a fixed opposing side wall of the adjustable cradle that is opposite the adjustable side holder when the electronic device is held within the adjustable cradle. The adjustable side holder can be similar or identical to side holder **11752** (FIG. **117**), right top corner holder **13352** (FIG. **133**), and/or right holder piece **13552** (FIG. **135**). The fixed opposing side wall can be similar or identical to left side

wall **11771** (FIG. **117**), left bottom corner holder **13351** (FIG. **133**), and/or left holder piece **13551** (FIG. **135**). In some embodiments, when the adjustable side holder moves a first distance in a direction between the adjustable side holder and the fixed opposing side wall (e.g., the x-direction), the alignment base moves a second distance in the direction between the adjustable side holder and the fixed opposing side wall, and the second distance is half of the first distance.

In various embodiments, method **14200** additionally and optionally can include a block **14230** of providing a support base including the adjustable cradle and the alignment base. The support base can be similar or identical to base **10620** (FIG. **106**), **11720** (FIG. **117**), base **12520** (FIG. **125**), and/or base **13320** (FIG. **133**). In some embodiments, the alignment base can be adjustable with respect to the support base. In several embodiments, the support base can include a recess configured to hold different alignment plates. In various embodiments, the different alignment plates each can be configured to position the alignment base at a different respective y-position (e.g., position along the y-direction) with respect to the support base. The alignment plates can be similar or identical to alignment plate **13151** (FIG. **131**).

In many embodiments, method **14200** further and optionally can include a block **14240** of providing a lid hingedly attached to the support base and configured to rotate with respect to the support base between an opened configuration and a closed configuration. The lid can be similar or identical to lid **10630** (FIG. **106**), lid **11730** (FIG. **117**), lid **12530** (FIG. **125**), and/or lid **13330** (FIG. **133**). In other embodiments, the machine does not include a lid. In some embodiments, the lid can be configured to push inward (e.g., in the z-direction) on the electronic device to adjust the position (e.g., position in the z-direction) of the adjustable cradle when the lid is rotated to the closed configuration with the electronic device held in the adjustable cradle. The opened configuration can be similar or identical to the opened configuration shown in FIGS. **107**, **113**, **117**, **118**, and **133**. The closed configuration can be similar or identical to the closed configuration shown in FIGS. **106**, **114**, **116**, **125**, **133**, and **137**.

Although the invention has been described with reference to specific embodiments, it will be understood by those skilled in the art that various changes may be made without departing from the spirit or scope of the invention. Accordingly, the disclosure of embodiments of the invention is intended to be illustrative of the scope of the invention and is not intended to be limiting. It is intended that the scope of the invention shall be limited only to the extent required by the appended claims. For example, to one of ordinary skill in the art, it will be readily apparent that various elements of FIGS. **1-142** may be modified, combined, and/or interchanged, and that the foregoing discussion of certain of these embodiments does not necessarily represent a complete description of all possible embodiments. As another example, one or more of the procedures, processes, or activities of FIGS. **23-26**, **51-54**, **75-79**, **93-94**, **105**, and/or **139-142** may include different procedures, processes, and/or activities and be performed in many different orders, and/or one or more of the procedures, processes, or activities of FIGS. **23-26**, **51-54**, **75-79**, **93-94**, **105**, and/or **139-142** may include one or more of the procedures, processes, or activities of another different one of FIGS. **23-26**, **51-54**, **75-79**, **93-94**, **105**, and/or **139-142**. As another example, the elements of frame **210** (FIG. **2**), cradle **310** (FIG. **3**), machine **800** (FIGS. **8-14**), machine **1600** (FIGS. **16-19**), and/or machine **2000** (FIGS. **20-22**), cradle **3100** (FIG. **31**),

141

machine **3500** (FIG. **35**), system **3700** (FIG. **37**), machine **3740** (FIG. **37**), machine **4100** (FIG. **41**), machine **4600** (FIG. **46**), cradle **6410** (FIG. **64**), cradle **6420** (FIG. **64**), cradle **6430** (FIG. **64**), machine **6900** (FIG. **69**), cradle **8080** (FIG. **80**), and/or cradle **9180** (FIG. **91**), machine **10600** (FIG. **106**), machine **11700** (FIG. **117**), machine **12500** (FIG. **125**), and/or machine **13300** (FIG. **133**) can be interchanged or otherwise modified

Replacement of one or more claimed elements constitutes reconstruction and not repair. Additionally, benefits, other advantages, and solutions to problems have been described with regard to specific embodiments. The benefits, advantages, solutions to problems, and any element or elements that may cause any benefit, advantage, or solution to occur or become more pronounced, however, are not to be construed as critical, required, or essential features or elements of any or all of the claims, unless such benefits, advantages, solutions, or elements are expressly stated in such claim.

Moreover, embodiments and limitations disclosed herein are not dedicated to the public under the doctrine of dedication if the embodiments and/or limitations: (1) are not expressly claimed in the claims; and (2) are or are potentially equivalents of express elements and/or limitations in the claims under the doctrine of equivalents.

What is claimed is:

1. A machine comprising:

an adjustable cradle configured to hold, individually at different times, electronic devices having different dimensions; and

an alignment base configured to engage, individually at different times, with alignment tabs of overlay applicators, each respective one of the overlay applicators comprising (i) a respective overlay configured to be applied to a respective surface of each of the electronic devices and (ii) a respective alignment tab of the alignment tabs that is connected to the respective overlay and extends at least partly outside a perimeter of the respective overlay, wherein the alignment base is configured to removably engage with the respective alignment tab of each respective one of the overlay applicators to align the respective overlay with a screen of the electronic device,

wherein:

the machine is configured to facilitate applying, individually at different times, the respective overlays to the respective surfaces of the electronic devices; the adjustable cradle comprises a fixed corner holder and an adjustable corner holder; and the adjustable corner holder is configured to hold each of the electronic devices between the adjustable corner holder and the fixed corner holder when each of the electronic devices is held within the adjustable cradle.

2. The machine of claim **1**, wherein the adjustable corner holder is configured to move diagonally toward and away from the fixed corner holder.

3. The machine of claim **1**, wherein the adjustable cradle comprises an adjustment well.

4. The machine of claim **3**, wherein the adjustable corner holder is configured to be adjusted to different positions within the adjustment well.

5. The machine of claim **3**, wherein the adjustable corner holder is configured to move diagonally toward and away from the fixed corner holder within the adjustment well.

6. The machine of claim **1**, wherein:
the electronic devices comprise a first electronic device and a second electronic device;

142

the adjustable cradle is configured to hold, individually at different times, the first electronic device and the second electronic device;

the first electronic device of the electronic devices has a first length and a first width;

the second electronic device of the electronic devices has a second length different from the first length and a second width different from the first width; and the different dimensions comprise the first length, the first width, the second length, and the second width.

7. The machine of claim **6**, wherein:

the machine is configured in an opened configuration such that (a) either of the first electronic device or the second electronic device and (b) a respective one of the overlay applicators can be inserted and removed from the machine; and

the machine is configured in a closed configuration to prevent removal of (a) the either of the first electronic device or the second electronic device and (b) at least a portion of the respective one of the overlay applicators from the machine.

8. The machine of claim **7**, wherein the machine is configured in the closed configuration such that a portion of a respective pull tab that extends beyond the perimeter of the respective one of the overlay applicators can be pulled to remove a respective adhesive release liner of the respective one of the overlay applicators from the respective overlay of the respective one of the overlay applicators to expose an adhesive agent of the respective overlay to the respective surface of the either of the first electronic device or the second electronic device.

9. The machine of claim **7** further comprising:

a lid configured to adjust the machine between the open configuration and the closed configuration.

10. The machine of claim **1**, wherein the alignment base comprises at least two pins configured to fit within at least two respective holes of each of the alignment tabs of the overlay applicators.

11. A method of providing a machine, the method comprising:

providing an adjustable cradle configured to hold, individually at different times, electronic devices having different dimensions; and

providing an alignment base configured to engage, individually at different times, with alignment tabs of overlay applicators, each respective one of the overlay applicators comprising a respective overlay configured to be applied to a respective surface of each of the electronic devices and (ii) a respective alignment tab of the alignment tabs that is connected to the respective overlay and extends at least partly outside a perimeter of the respective overlay, wherein the alignment base is configured to removably engage with the respective alignment tab of each respective one of the overlay applicators to align the respective overlay with a screen of the electronic device,

wherein:

the machine is configured to facilitate applying, individually at different times, the respective overlays to the respective surfaces of the electronic devices;

the adjustable cradle comprises a fixed corner holder and an adjustable corner holder; and

the adjustable corner holder is configured to hold each of the electronic devices between the adjustable corner holder and the fixed corner holder when each of the electronic devices is held within the adjustable cradle.

143

12. The method of claim **11**, wherein the adjustable corner holder is configured to move diagonally toward and away from the fixed corner holder.

13. The method of claim **11**, wherein the adjustable cradle comprises an adjustment well.

14. The method of claim **13**, wherein the adjustable corner holder is configured to be adjusted to different positions within the adjustment well.

15. The method of claim **13**, wherein the adjustable corner holder is configured to move diagonally toward and away from the fixed corner holder within the adjustment well.

16. The method of claim **11**, wherein:

the electronic devices comprise a first electronic device and a second electronic device;

the adjustable cradle is configured to hold, individually at different times, the first electronic device and the second electronic device;

the first electronic device of the electronic devices has a first length and a first width;

the second electronic device of the electronic devices has a second length different from the first length and a second width different from the first width; and

the different dimensions comprise the first length, the first width, the second length, and the second width.

17. The method of claim **16**, wherein:

the machine is configured in an opened configuration such that (a) either of the first electronic device or the second

144

electronic device and (b) a respective one of the overlay applicators can be inserted and removed from the machine; and

the machine is configured in a closed configuration to prevent removal of (a) the either of the first electronic device or the second electronic device and (b) at least a portion of the respective one of the overlay applicators from the machine.

18. The method of claim **17**, wherein the machine is configured in the closed configuration such that a portion of a respective pull tab that extends beyond the perimeter of the respective one of the overlay applicators can be pulled to remove a respective adhesive release liner of the respective one of the overlay applicators from the respective overlay of the respective one of the overlay applicators to expose an adhesive agent of the respective overlay to the respective surface of the either of the first electronic device or the second electronic device.

19. The method of claim **17** further comprising:

providing a lid configured to adjust the machine between the open configuration and the closed configuration.

20. The method of claim **11**, wherein the alignment base comprises at least two pins configured to fit within at least two respective holes of each of the alignment tabs of the overlay applicators.

* * * * *