



US0D1091020S

(12) **United States Design Patent**
Smith

(10) **Patent No.:** **US D1,091,020 S**

(45) **Date of Patent:** **** Aug. 26, 2025**

(54) **PET TRACKING DEVICE ASSEMBLY**

Primary Examiner — Susan Moon Lee

(71) Applicant: **Ceres Tag Ltd**, Samford QLD (AU)

(72) Inventor: **David Ian Smith**, Samford QLD (AU)

(73) Assignee: **Ceres Tag Ltd**, Samford QLD (AU)

(**) Term: **15 Years**

(21) Appl. No.: **29/914,799**

(22) Filed: **Oct. 23, 2023**

(30) **Foreign Application Priority Data**

Apr. 24, 2023 (AU) 202312602

(51) **LOC (15) Cl.** **30-99**

(52) **U.S. Cl.** **D30/199; D10/104.1**

(58) **Field of Classification Search**
USPC D30/151–155, 144, 199, 160;
119/792–798, 850, 855–859, 863–865,
119/654, 905, 907, 815, 712, 802, 784,
119/769, 760, 776, 862, 908, 860,
119/719–721; 242/381.1–381.2, 385.4,
242/378.3, 376.1, 385.1, 916, 601, 570,
242/405, 404, 371, 223, 170, 388.1,
242/405.2, 377, 381.3, 381.6, 405.3, 388,
242/6, 384.7, 382, 396.1, 404.1, 380;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

D725,841 S * 3/2015 So D30/152

D734,176 S * 7/2015 Isaacs D14/344

(Continued)

OTHER PUBLICATIONS

Cube GPS collar strap attachment, Jan. 5, 2021, https://www.amazon.com/dp/B08S48DX7K?ref=emc_p_m_5_i_atc.*

(57) **CLAIM**


The ornamental design for a pet tracking device assembly, as shown and described.

DESCRIPTION

FIG. 1 is a top perspective view of the design for a pet tracking device assembly, in a coupled configuration; FIG. 2 is a right side elevation view of the design of FIG. 1, in an uncoupled configuration, the left side elevation view in the uncoupled configuration being a mirror image thereof; FIG. 3 is a right side elevation view of the design of FIG. 1, in the coupled configuration, the left side elevation view in the coupled configuration being a mirror image thereof; FIG. 4 is a front elevation view of the design of FIG. 1, in the coupled configuration, with the rear elevation view in the coupled configuration being a mirror image thereof; FIG. 5 is a front elevation view of the design of FIG. 1, in the uncoupled configuration, with the rear elevation view in the uncoupled configuration being a mirror image thereof; FIG. 6 is a top view of the design of FIG. 1, in the coupled configuration; FIG. 7 is a top perspective view of the design of FIG. 1, in the uncoupled configuration; and, FIG. 8 is a perspective view of the design of the pet tracking device assembly illustrating the environment thereof as attached to a collar.

The broken lines shown in the figures illustrate an environment or environmental structure for application of the pet tracking device assembly and form no part of the claimed design. References to “side”, “top”, “front”, “rear” and “bottom” in the figure descriptions are not meant to require certain in-use orientation; a pet tracking device assembly according to the claimed design may be used in any orientation.

1 Claim, 8 Drawing Sheets

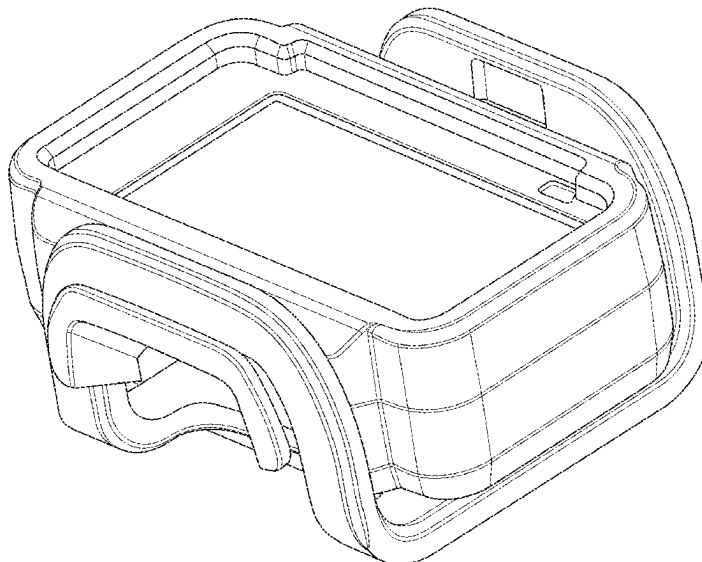

(58) **Field of Classification Search**

USPC 362/108; 33/767, 769, 414; D12/400;
 D3/229, 230, 207, 208, 215; 40/1.5, 455,
 40/640, 303; 206/63.3, 459.5, 702, 408;
 D6/515; D8/358, 360, 347, 360.1, 359,
 D8/356, DIG. 1; D24/145, 167, 186, 146,
 D24/169; D10/32, 57, 72, 106.1, 104.1,
 D10/104.2, 109.2, 70, 97, 98, 78, 65;
 D20/28; 224/666, 678; 16/445; 283/74,
 283/70; D11/232, 200, 216, 1, 2, 86, 87,
 D11/201, 206–210, 212–215, 218;
 24/163 K, 122.3, 323, 702, 600.4–600.7,
 24/163 R, 169–171, 173, 177–179, 191,
 24/194, 195, 197, 200, 303, 616, 635,
 24/313, 615, 3, 6, 3 K, 599.2, 96, 221,
 24/237, 311, 312, 314, 321, 338, 339,
 24/309; 428/3, 4; 54/76, 1, 71; 63/29.1,
 63/3; 191/12.2 R, 12.4; D13/154, 153,
 D13/137.4, 155, 103, 168; D19/69, 67;
 379/438; 446/26; 473/576; D22/140;
 174/135; 439/504, 13, 501; D34/33;
 188/83, 82.1, 65.1; 254/134.3 FT;
 D29/124; D2/627, 624, 633, 625;
 132/145, 146, 148; 2/314; 59/79.1;
 340/573.3, 573.1, 573, 573.4,
 340/539.13–539.19; 343/895;
 278/8 AES; 231/7; 361/232; D14/344,
 D14/341, 137, 155, 496, 203.5, 203.3,
 D14/144, 218, 188, 216, 192;
 342/357.51, 357.57, 357.52, 357.55;
 455/100, 352, 456.1, 550.1; 315/291

CPC A01K 15/021; A01K 15/02; A01K 15/022;
 A01K 15/023; A01K 15/029; A01K
 15/04; A01K 15/00; A01K 15/006; A01K
 12/022; A01K 27/009; A01K 27/00;
 A01K 27/001; A01K 27/006–008; A01K
 29/005; A01K 29/00; A61B 5/0002–0028;
 A61B 5/681; A61B 5/6822; A61B
 5/6824; A61B 5/6829; G01S 5/0294

See application file for complete search history.

(56)

References Cited

U.S. PATENT DOCUMENTS

D795,089	S *	8/2017	Wright		D10/32
D812,499	S *	3/2018	Kuh		D30/152
D817,558	S *	5/2018	Lee		D15/138
D823,557	S *	7/2018	Kuh		D30/152
10,376,020	B1 *	8/2019	Doyle		A44B 11/28
10,463,021	B2 *	11/2019	Lee		F16B 2/12
D899,273	S *	10/2020	Wright		A45C 13/008
					D10/38
D915,690	S *	4/2021	Younani		D30/155
D990,792	S *	6/2023	Smith		D30/155
D1,015,179	S *	2/2024	Chen		D10/70
D1,041,097	S *	9/2024	Blyth		D10/104.1
D1,046,657	S *	10/2024	Smith		D10/104.1
2018/0098525	A1 *	4/2018	Lee		A01K 27/001
2024/0065232	A1 *	2/2024	Neal		A01K 27/008

* cited by examiner

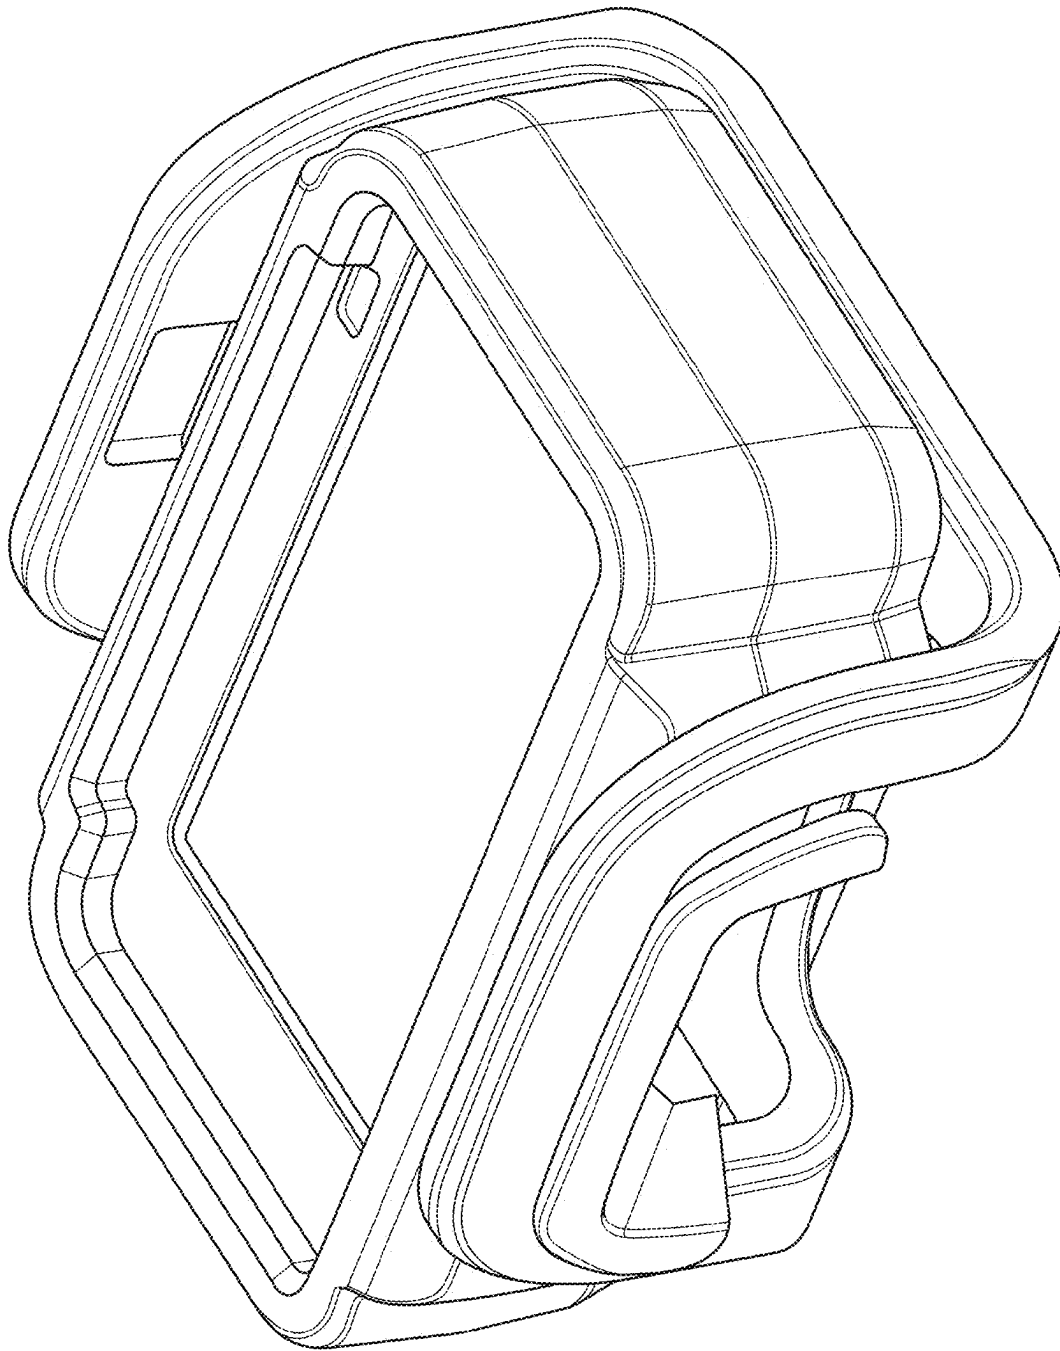


FIG. 1

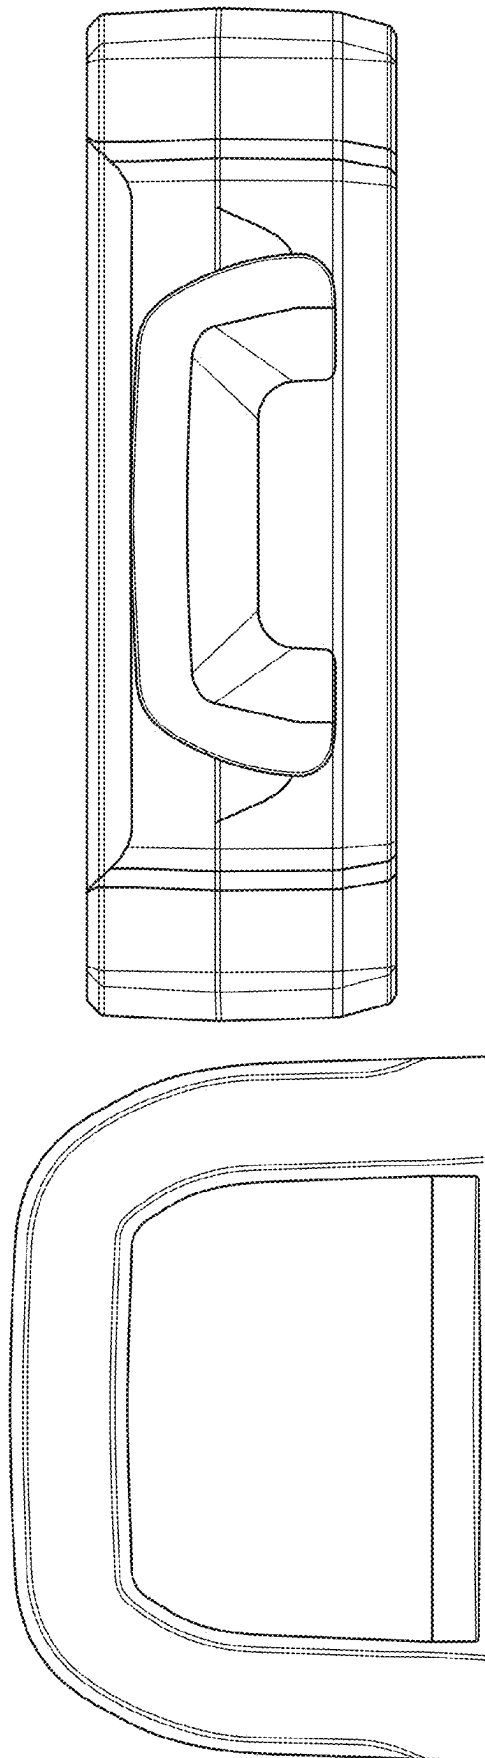


FIG. 2

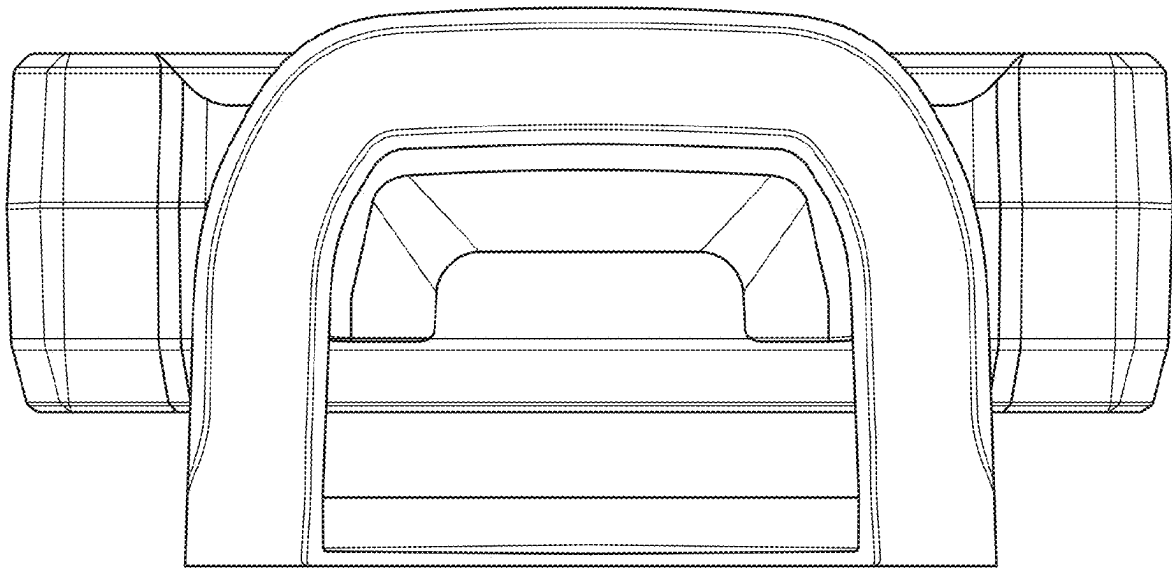


FIG. 3

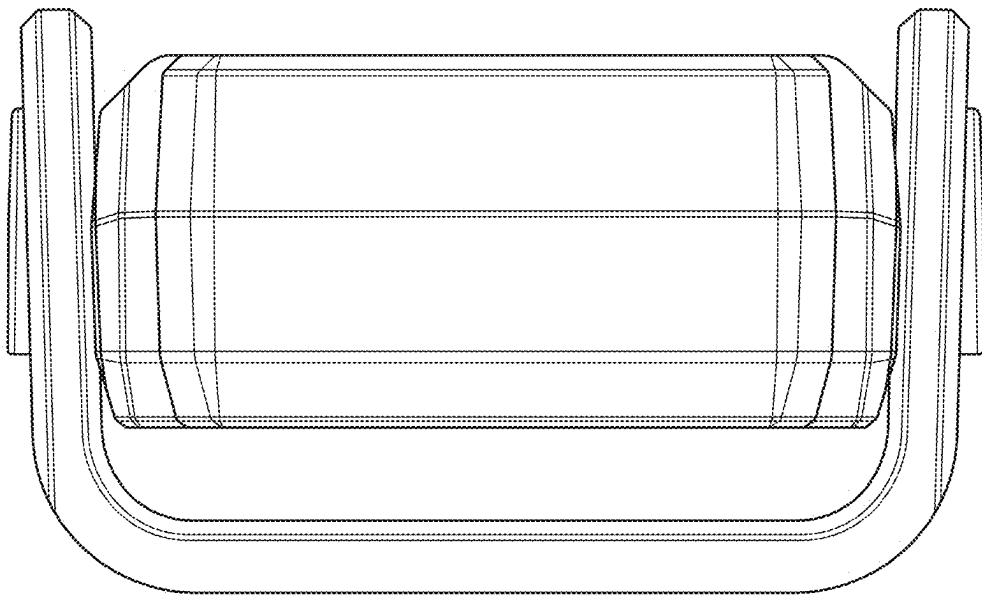


FIG. 4

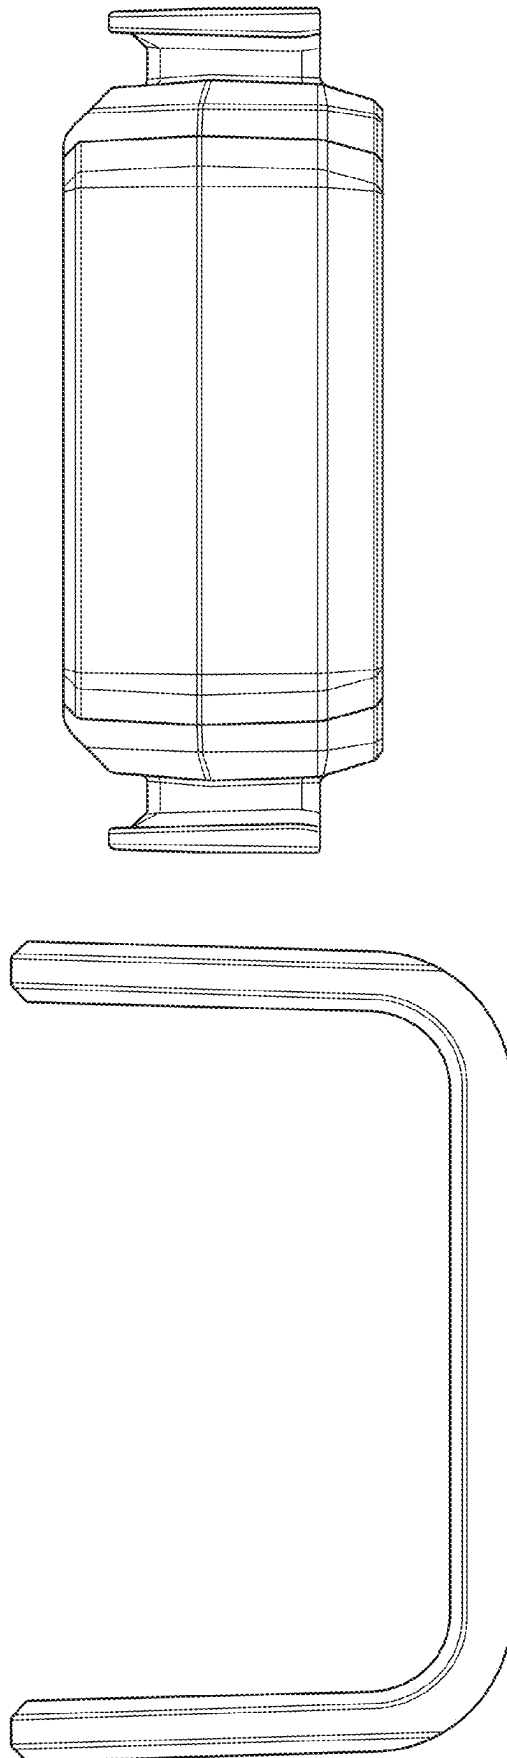


FIG. 5

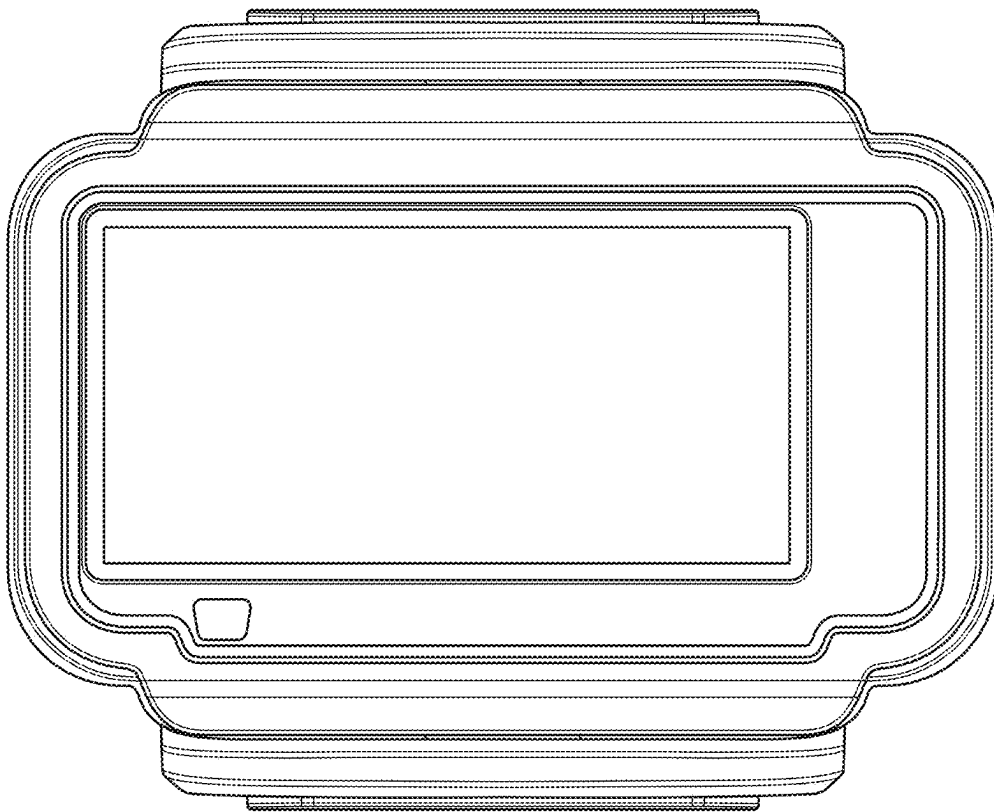


FIG. 6

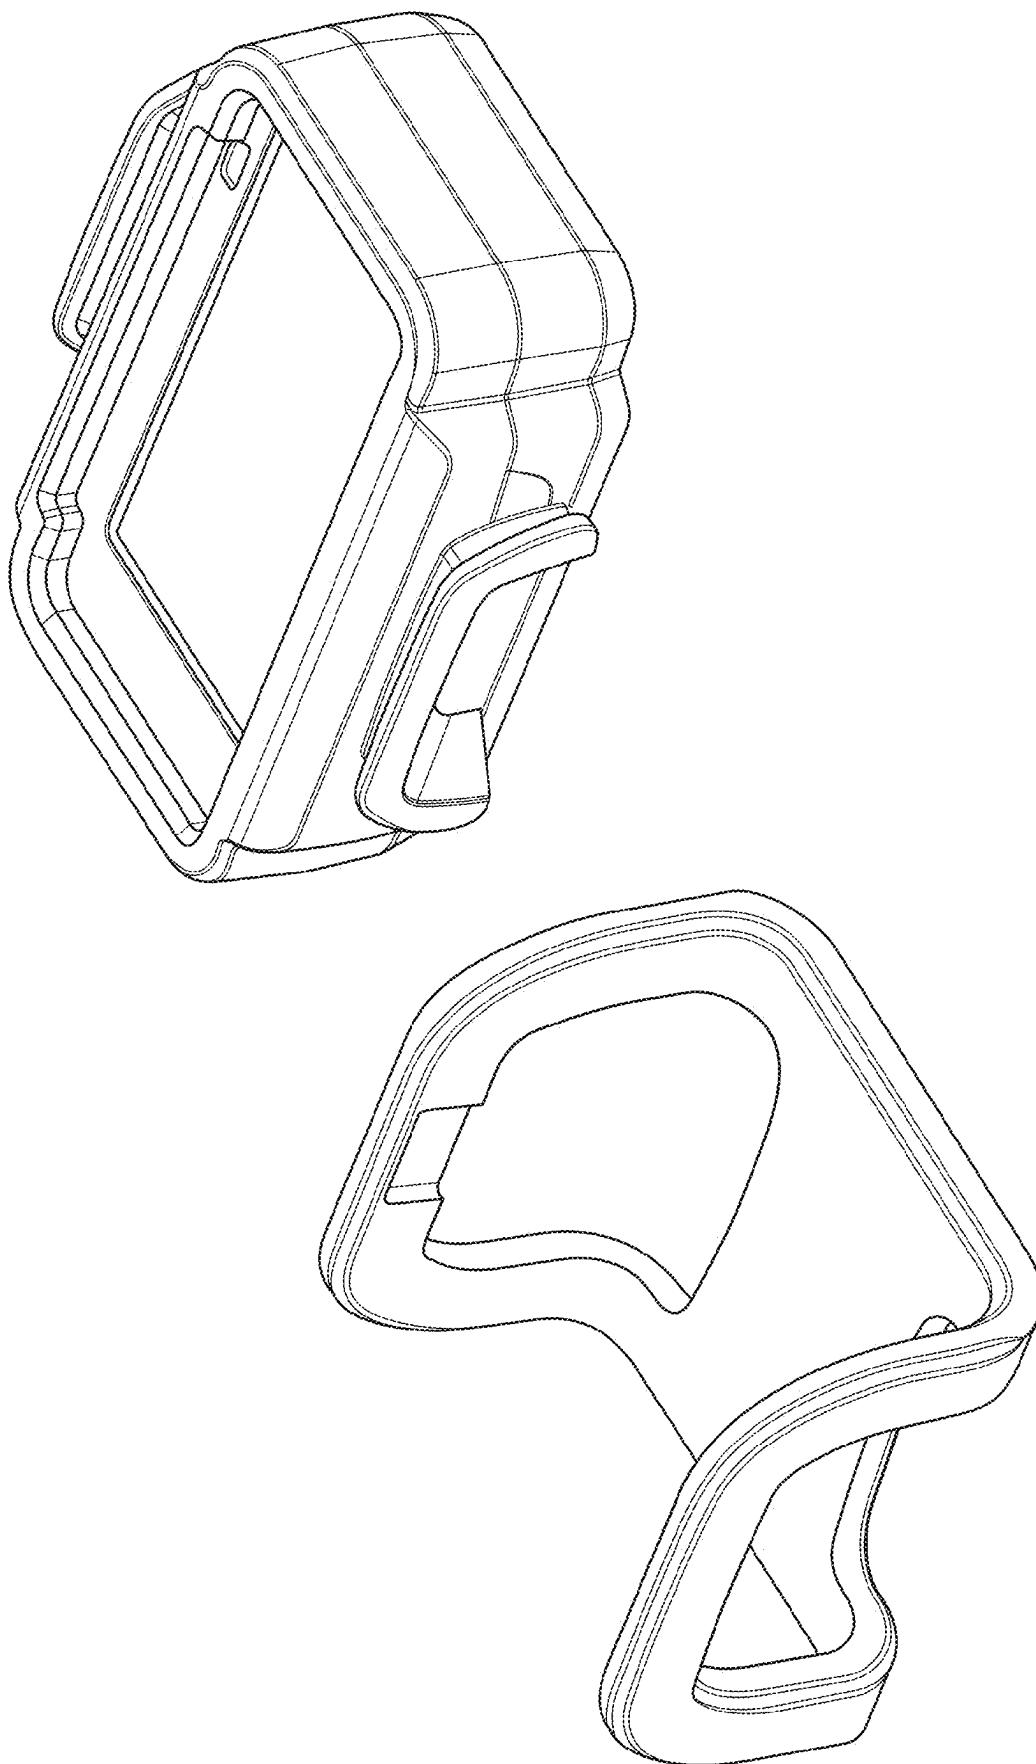


FIG. 7

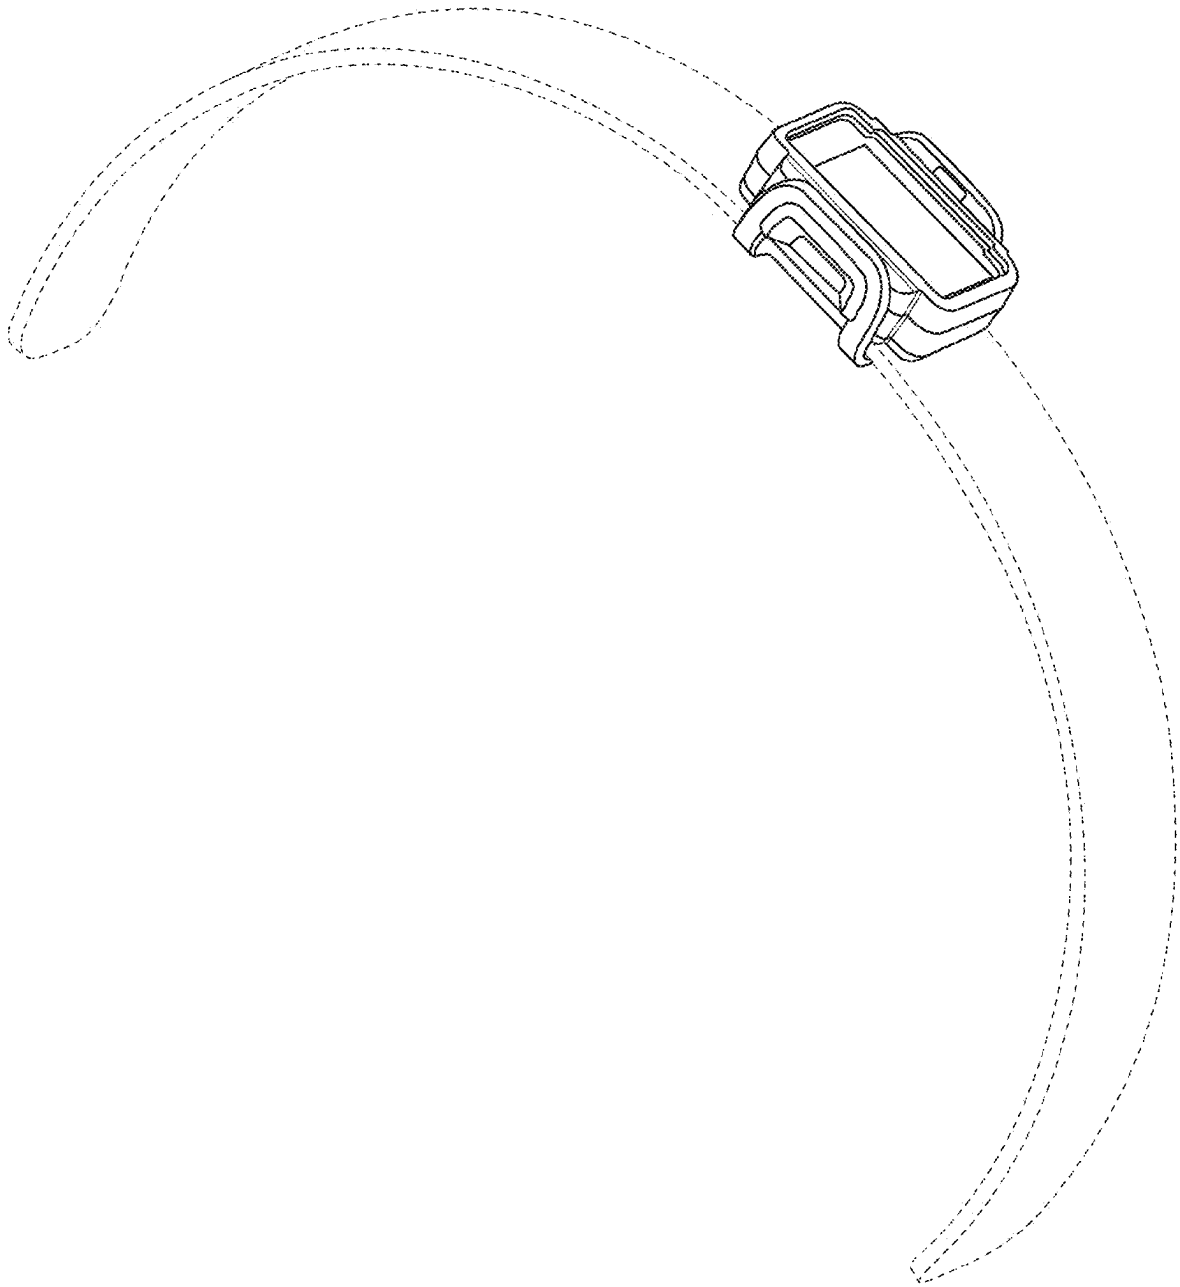


FIG. 8