



US 20250280903A1

(19) **United States**

(12) **Patent Application Publication**
French

(10) **Pub. No.: US 2025/0280903 A1**

(43) **Pub. Date: Sep. 11, 2025**

(54) **FEMALE OUTER SPORTS GARMENT**

Publication Classification

(71) Applicant: **Angela Marie French**, Norfolk, VA
(US)

(51) **Int. Cl.**
A41C 3/00 (2006.01)
A41C 3/02 (2006.01)

(72) Inventor: **Angela Marie French**, Norfolk, VA
(US)

(52) **U.S. Cl.**
CPC *A41C 3/0057* (2013.01); *A41C 3/0035*
(2013.01); *A41C 3/0085* (2013.01); *A41C 3/02*
(2013.01)

(21) Appl. No.: **19/071,508**


(57) **ABSTRACT**

(22) Filed: **Mar. 5, 2025**

A female outer sports garment includes a front panel, a rear panel, and a breast support member. The front panel has a left section and a right section. The breast support member comprises a pair of bra cups configured to support a user's breasts. The front panel and the rear panel are joined together to form a neck opening, a waist opening, and two arm openings. The pair of bra cups are separated from each other. The pair of bra cups are attached to the left section and the right section of the front panel, respectively.

Related U.S. Application Data

(60) Provisional application No. 63/561,624, filed on Mar. 5, 2024.

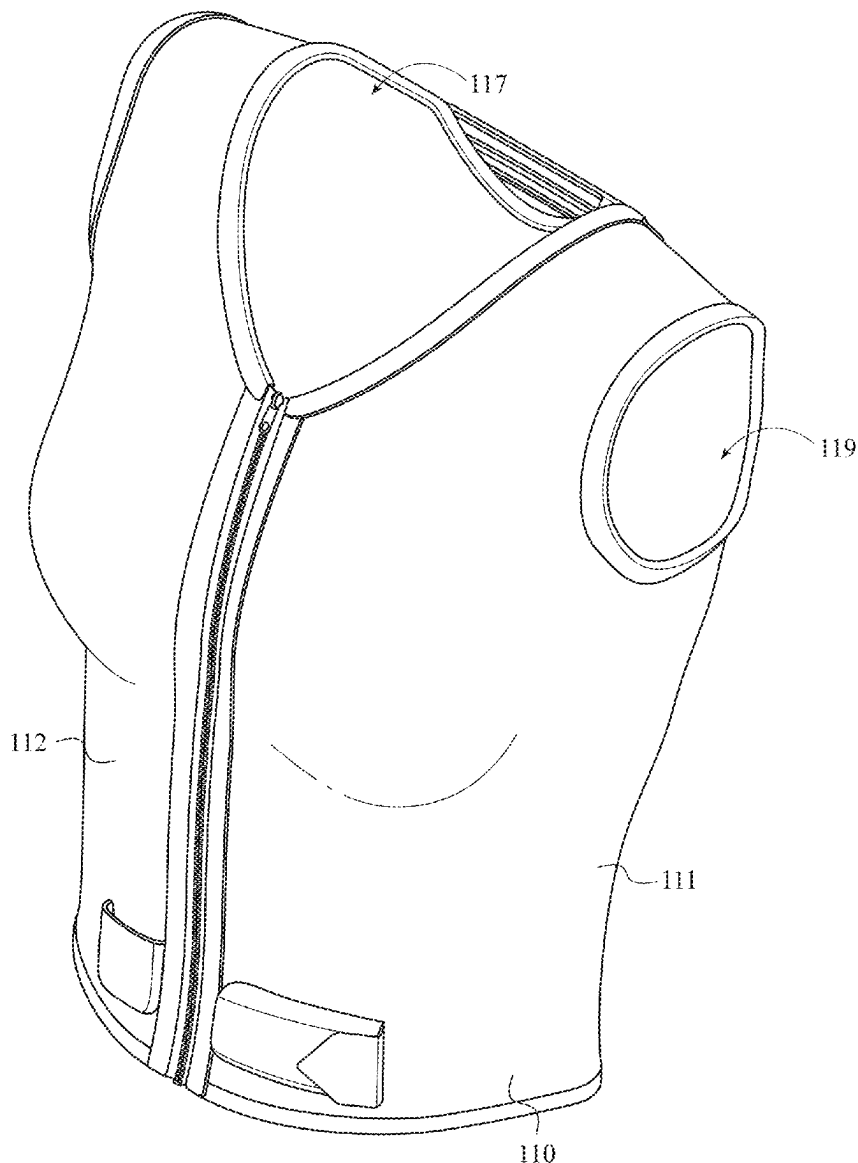

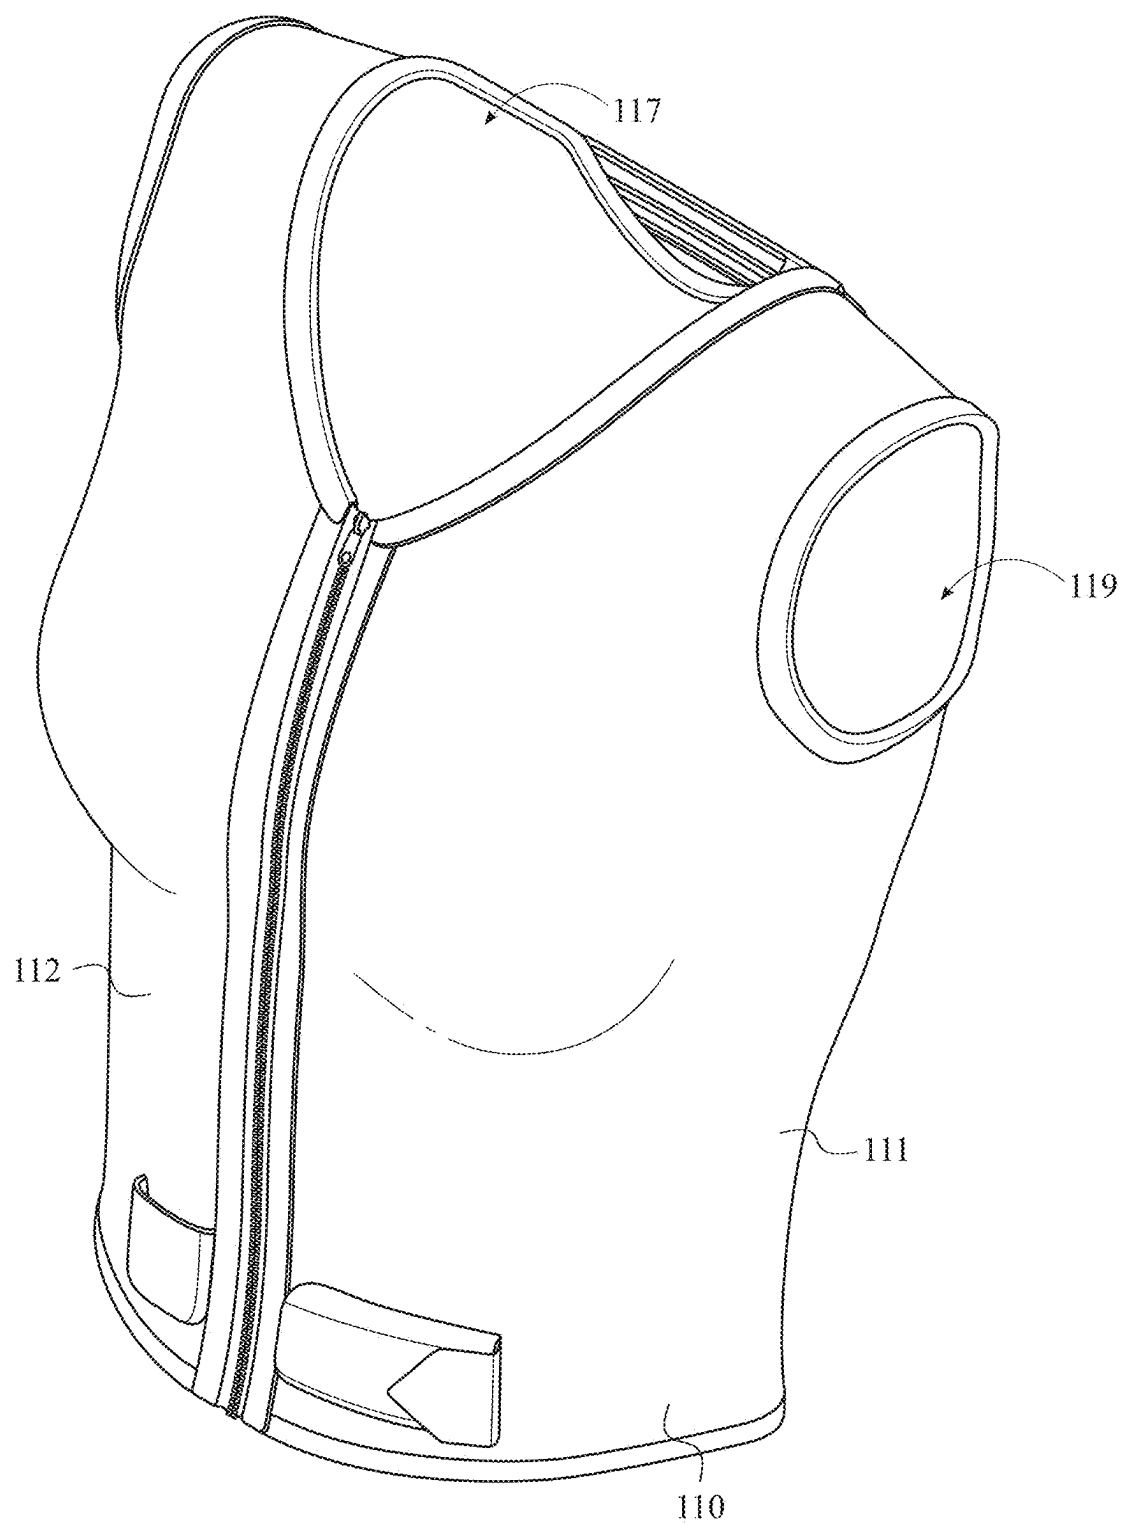


FIG. 1

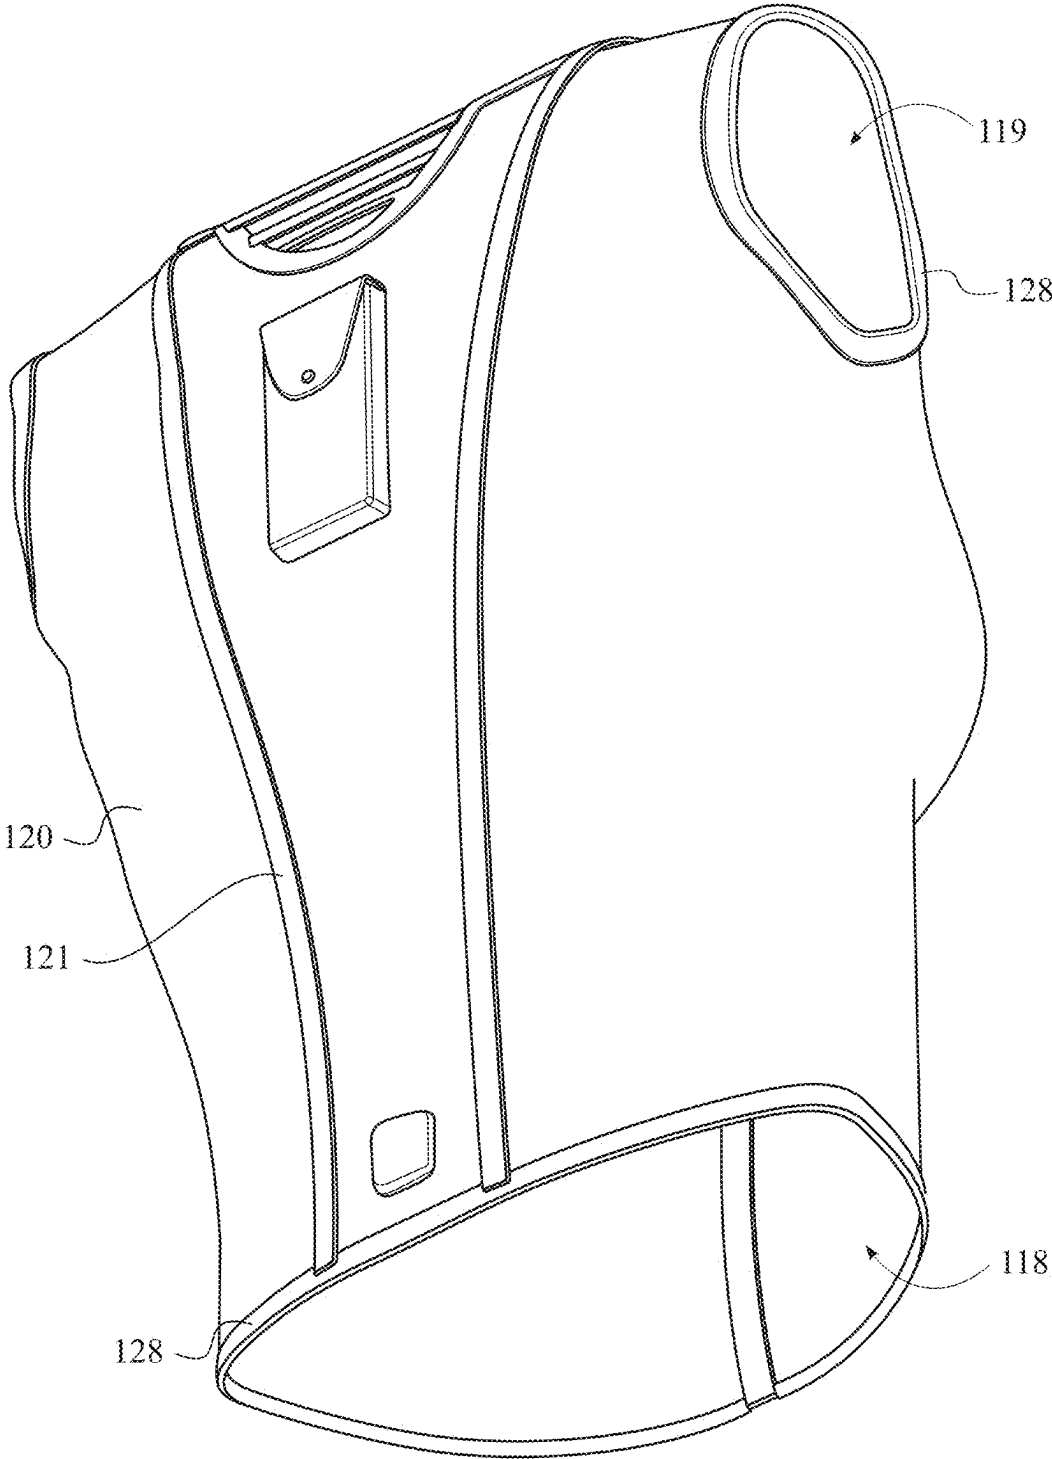


FIG. 2

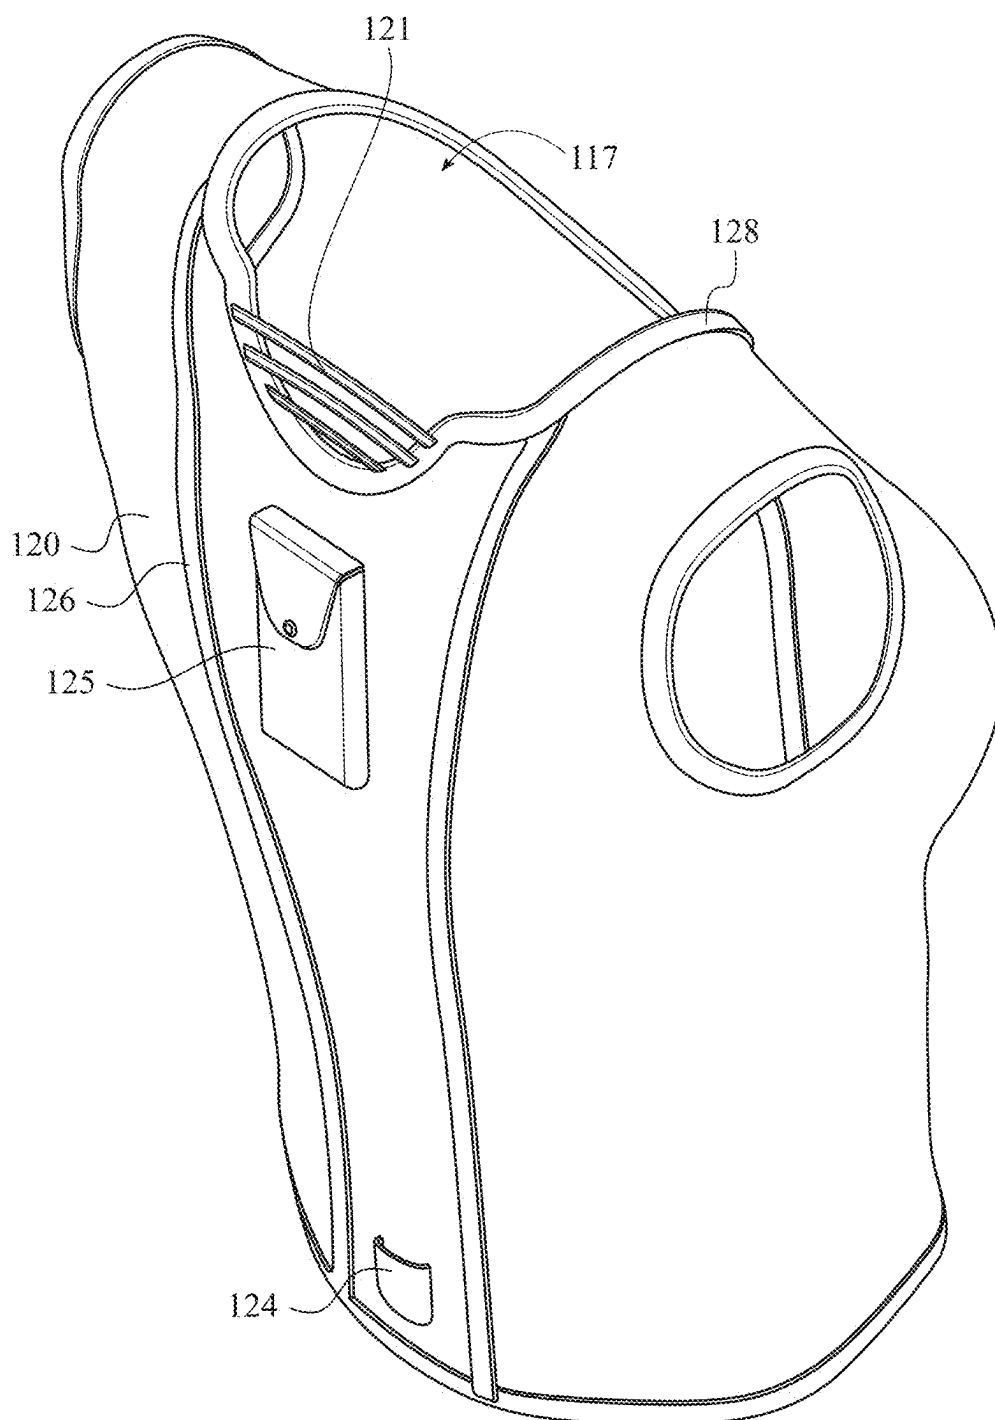


FIG. 3

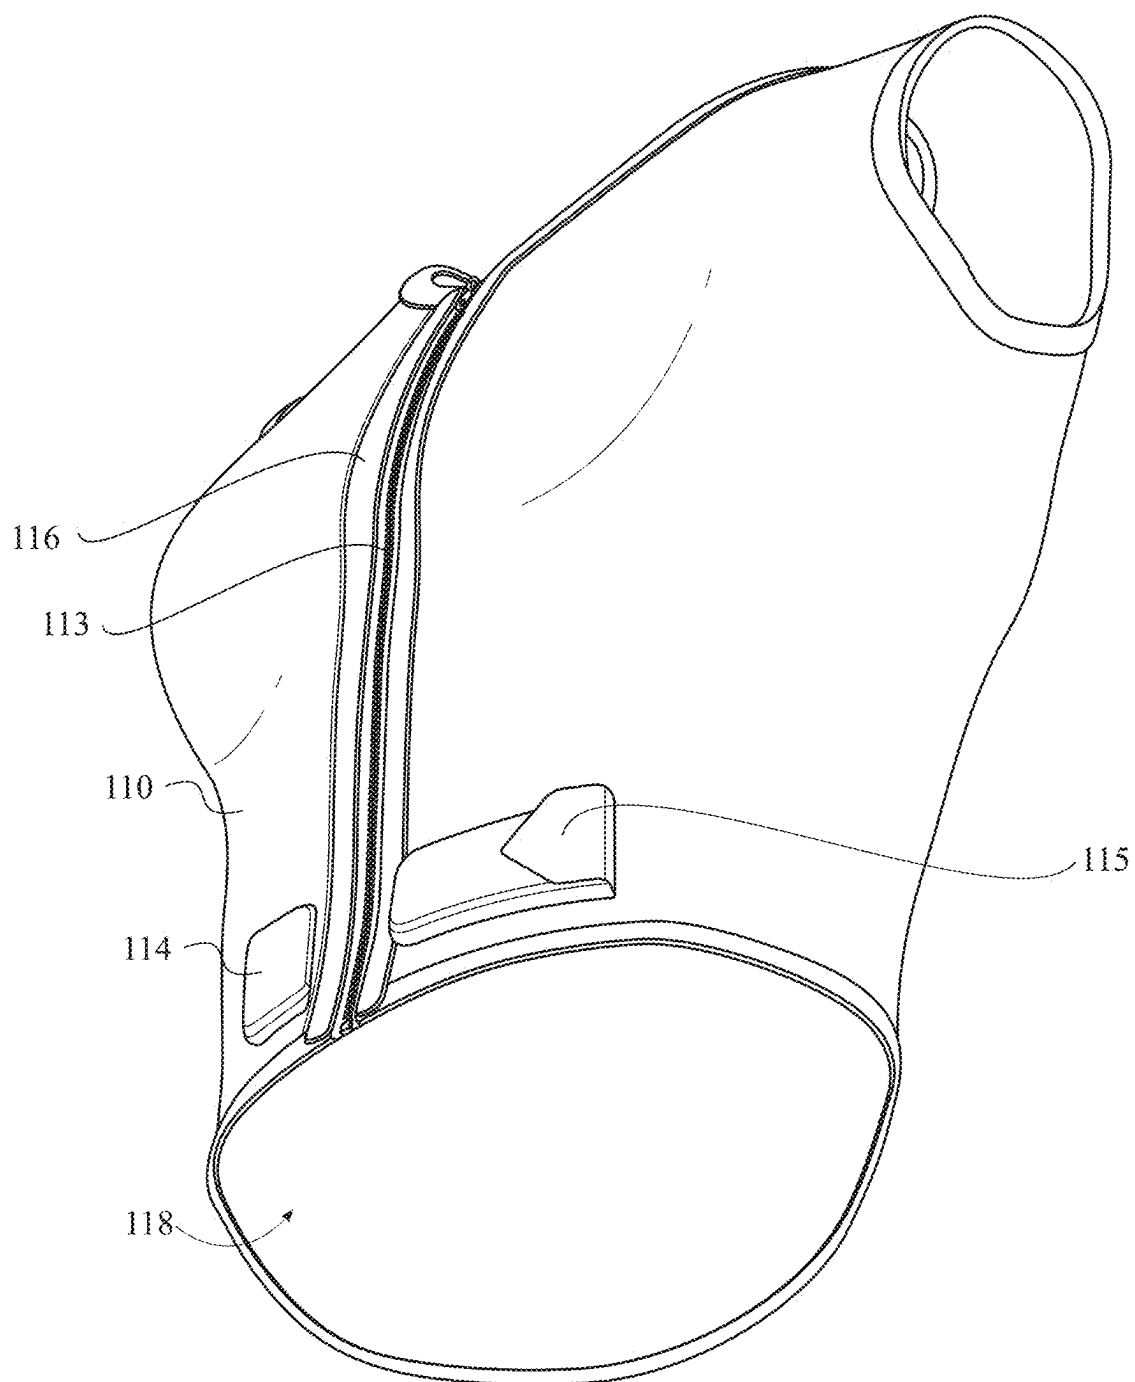


FIG. 4

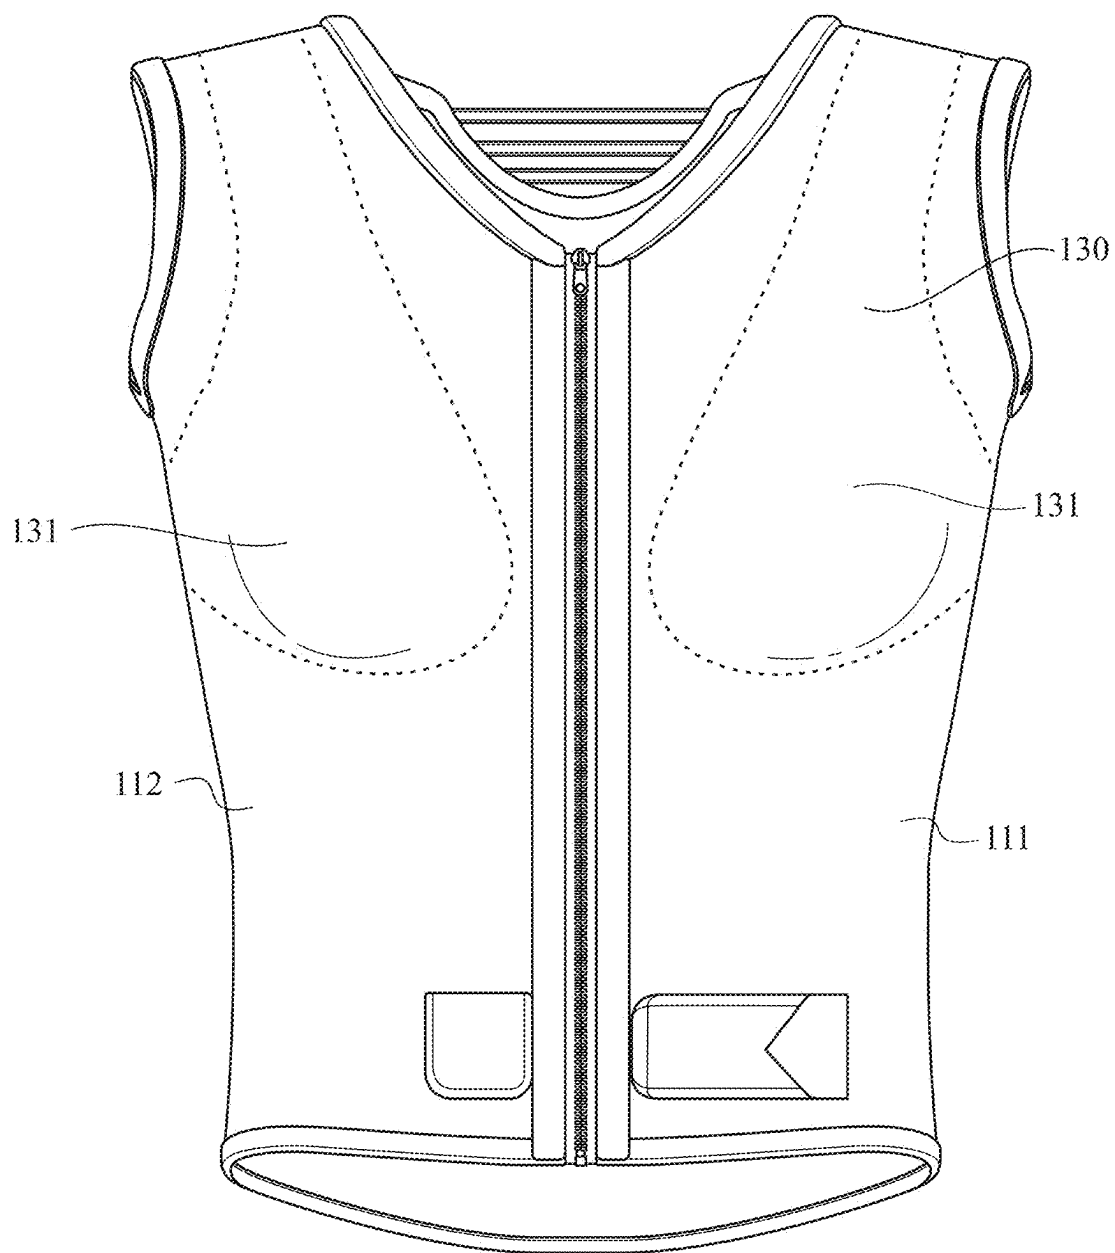


FIG. 5

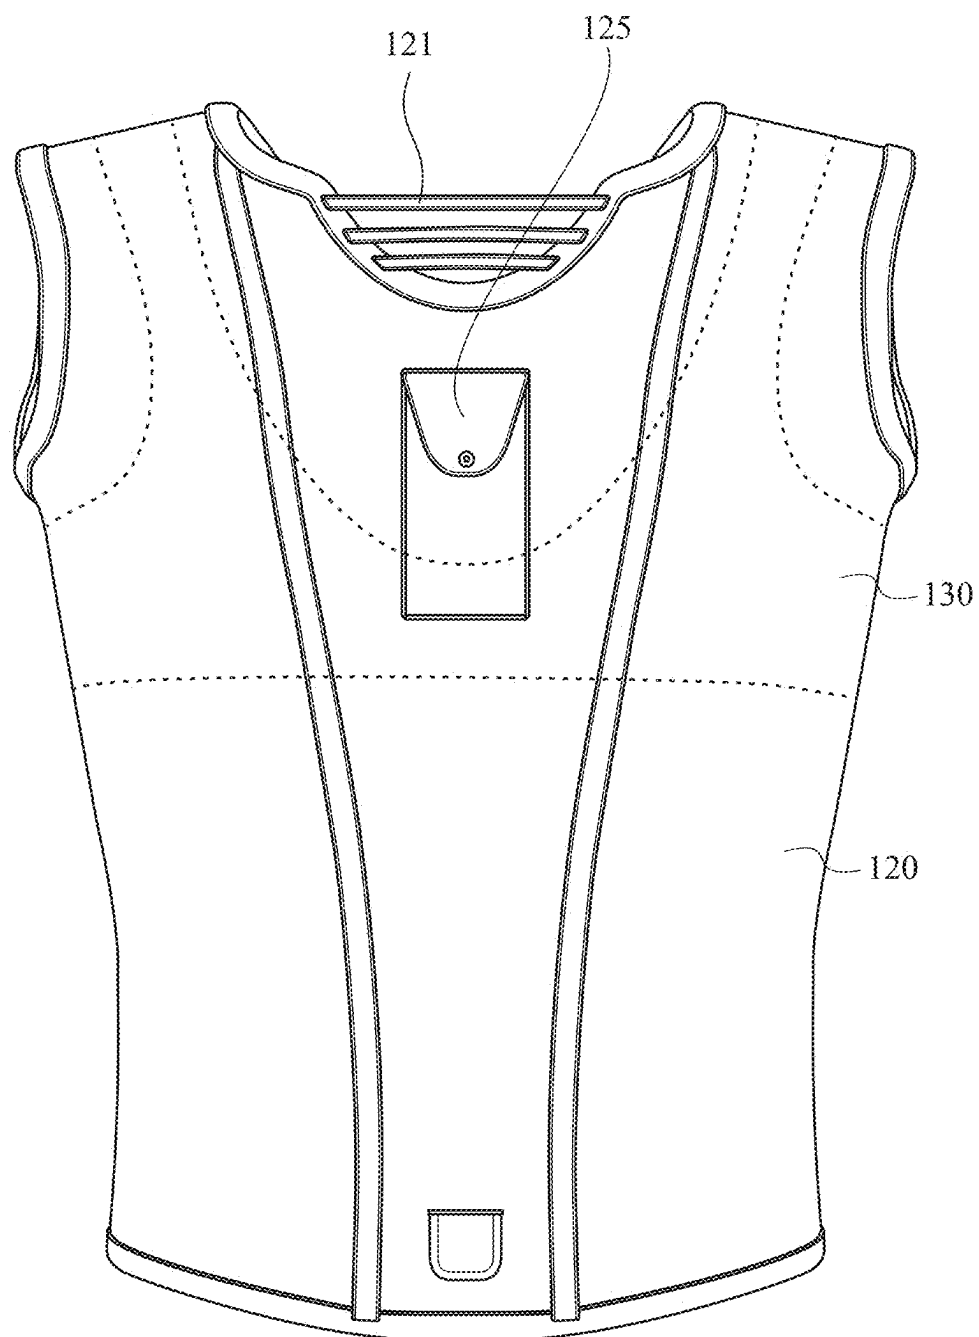


FIG. 6

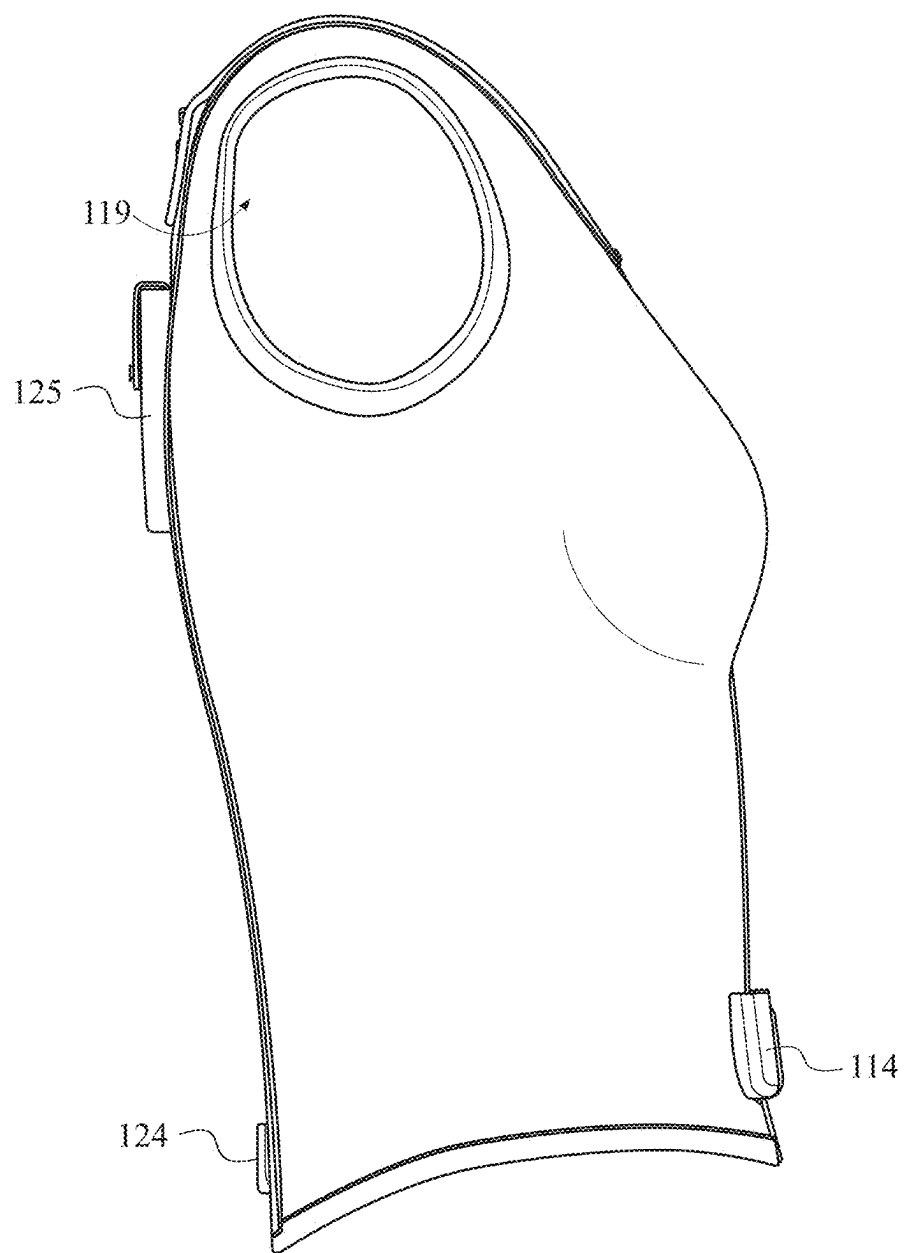


FIG. 7

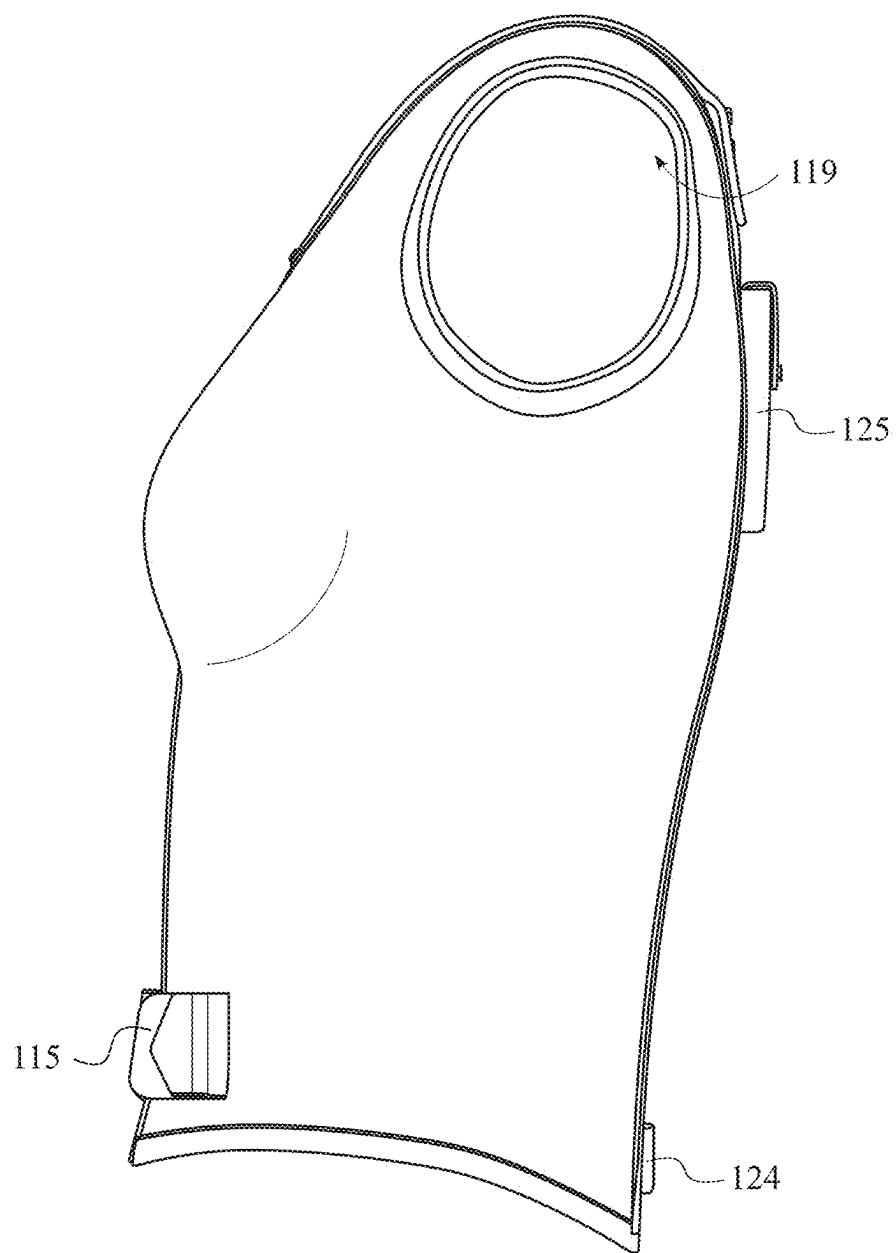


FIG. 8

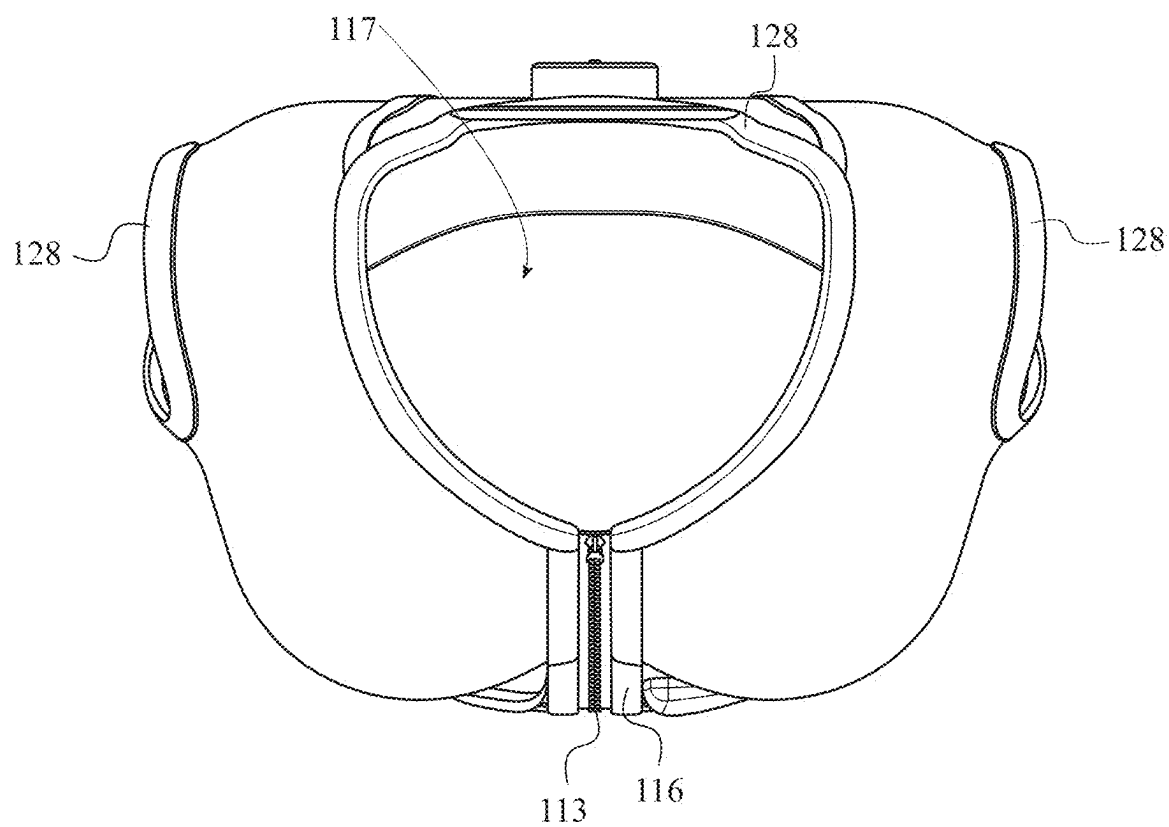


FIG. 9

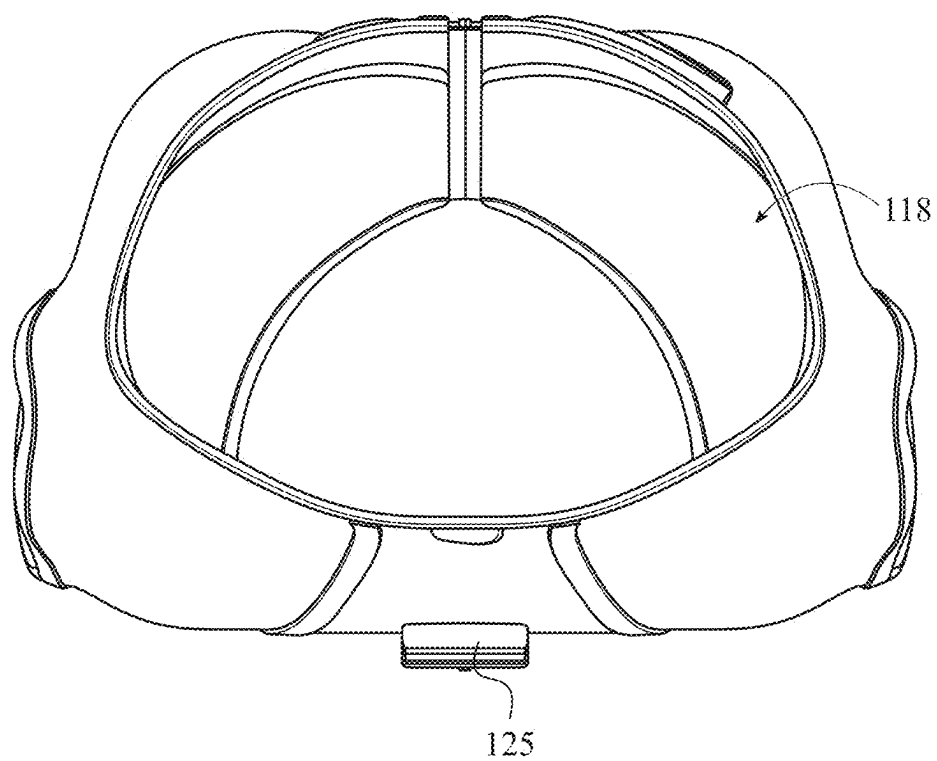


FIG. 10

FEMALE OUTER SPORTS GARMENT

FIELD OF THE INVENTION

[0001] The present invention relates generally to garments designed to cover the upper torso. More specifically, the present invention is a female outer sports garment with interior breast support.

BACKGROUND OF THE INVENTION

[0002] A workout bra or workout vest is a popular choice for women seeking comfortable and supportive activewear during exercise routines. The sports bra, serving as the foundation, offers support and stability during physical activities, with features like moisture-wicking fabric, compression or encapsulation support, and a racerback or cross-back design. It minimizes bounce and provides a secure fit, catering to different exercise intensities and breast sizes. The vest or tank top complements the sports bra, offering additional coverage and style to the workout ensemble. Made from lightweight, breathable fabric, it ensures freedom of movement and optimal airflow during exercise. The combination provides a balance of comfort and support, allowing women to feel confident and secure throughout their workouts. Both garments typically feature moisture-wicking fabric, drawing sweat away from the skin to keep the body dry and comfortable. This versatile activewear ensemble is suitable for various activities, including yoga, Pilates, weight training, cardio workouts, and outdoor sports, offering reliability, performance, and style. However, most products do not offer a combination of both a workout bra and a workout vest within one garment.

[0003] Therefore, it is an objective of the present invention to provide a female outer sports garment that overcomes the problems set forth above.

SUMMARY OF THE INVENTION

[0004] The present invention discloses a female outer sports garment. The present invention comprises a front panel, a rear panel, and a breast support member. The front panel has a left section and a right section. The breast support member comprises a pair of bra cups configured to support a user's breasts. The front panel and the rear panel are joined together to form a neck opening, a waist opening, and two arm openings. The pair of bra cups are separated from each other. The pair of bra cups are attached to the left section and the right section of the front panel, respectively.

[0005] In one embodiment, the front panel comprises a zipper configured to move between an open position and a closed position, wherein when the zipper is in its open position, the left section detaches from the right section, and wherein when the zipper is in its closed position, the left section joins to the right section.

[0006] In one embodiment, the front panel further comprises a plurality of front reflective strips.

[0007] In one embodiment, the plurality of front reflective strips is positioned on either side of the zipper.

[0008] In one embodiment, the front panel further comprises a front transparent pocket.

[0009] In one embodiment, the front transparent pocket is located on the right section of the front panel, adjacent to the zipper and the waist opening.

[0010] In one embodiment, the front panel further comprises a front storage pocket.

[0011] In one embodiment, the front storage pocket is located on the left section of the front panel, adjacent to the zipper and the waist opening.

[0012] In one embodiment, the rear panel comprises a plurality of upper back bands laterally spanning the neck opening.

[0013] In one embodiment, the rear panel further comprises a rear transparent pocket located at a center of the rear panel, adjacent to the waist opening.

[0014] In one embodiment, the rear panel further comprises a rear storage pocket located at the center of the rear panel, adjacent to the neck opening.

[0015] In one embodiment, the rear panel further comprises a plurality of rear reflective strips.

[0016] In one embodiment, the plurality of rear reflective strips traverses from an edge of the neck opening to an edge of the waist opening on either side of the rear storage pocket.

[0017] In one embodiment, the present invention further comprises a plurality of opening reflective strips positioned around the neck opening, the waist opening, and the arm openings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] The accompanying drawings, which are included to provide a further understanding of the invention are incorporated in and constitute a part of this specification, illustrate an embodiment of the invention and together with the description serve to explain the principles of the invention. They are meant to be exemplary illustrations provided to enable persons skilled in the art to practice the disclosure and are not intended to limit the scope of the present invention. That is, the dimensions of the components of the present invention, independently and in relation to each other can be different. It should be noted that the drawings are schematic and not necessarily drawn to scale. Some drawings are enlarged or reduced to improve drawing legibility.

[0019] FIG. 1 is a top front right perspective view of the present invention.

[0020] FIG. 2 is a bottom rear left perspective view of the present invention.

[0021] FIG. 3 is another perspective view of the present invention.

[0022] FIG. 4 is yet another perspective view of the present invention.

[0023] FIG. 5 is a front view of the present invention.

[0024] FIG. 6 is a rear view of the present invention.

[0025] FIG. 7 is a right-side view of the present invention.

[0026] FIG. 8 is a left-side view of the present invention.

[0027] FIG. 9 is a top view of the present invention.

[0028] FIG. 10 is a bottom view of the present invention.

DETAIL DESCRIPTIONS OF THE INVENTION

[0029] As a preliminary matter, it will readily be understood by one having ordinary skill in the relevant art that the present disclosure has broad utility and application. As should be understood, any embodiment may incorporate only one or a plurality of the above-disclosed aspects of the disclosure and may further incorporate only one or a plurality of the above-disclosed features. Furthermore, any embodiment discussed and identified as being "preferred" is considered to be part of a best mode contemplated for carrying out the embodiments of the present disclosure.

Other embodiments also may be discussed for additional illustrative purposes in providing a full and enabling disclosure. Moreover, many embodiments, such as adaptations, variations, modifications, and equivalent arrangements, will be implicitly disclosed by the embodiments described herein and fall within the scope of the present disclosure.

[0030] Accordingly, while embodiments are described herein in detail in relation to one or more embodiments, it is to be understood that this disclosure is illustrative and exemplary of the present disclosure and is made merely for the purposes of providing a full and enabling disclosure. The detailed disclosure herein of one or more embodiments is not intended, nor is to be construed, to limit the scope of patent protection afforded in any claim of a patent issuing here from, which scope is to be defined by the claims and the equivalents thereof. It is not intended that the scope of patent protection be defined by reading into any claim a limitation found herein that does not explicitly appear in the claim itself. Accordingly, it is intended that the scope of patent protection is to be defined by the issued claim(s) rather than the description set forth herein.

[0031] Additionally, it is important to note that each term used herein refers to that which an ordinary artisan would understand such term to mean based on the contextual use of such term herein. When not explicitly defined herein, to the extent that the meaning of a term used herein—as understood by the ordinary artisan based on the contextual use of such term—differs in any way from any particular dictionary definition of such term, it is intended that the meaning of the term as understood by the ordinary artisan should prevail.

[0032] Furthermore, it is important to note that, as used herein, “a” and “an” each generally denotes “at least one,” but does not exclude a plurality unless the contextual use dictates otherwise. When used herein to join a list of items, “or” denotes “at least one of the items,” but does not exclude a plurality of items of the list. Finally, when used herein to join a list of items, “and” denotes “all of the items of the list.”

[0033] The following detailed description refers to the accompanying drawings. Wherever possible, the same reference numbers are used in the drawings and the following description to refer to the same or similar elements. While many embodiments of the disclosure may be described, modifications, adaptations, and other implementations are possible. For example, substitutions, additions, or modifications may be made to the elements illustrated in the drawings, and the methods described herein may be modified by substituting, reordering, or adding stages to the disclosed methods. Accordingly, the following detailed description does not limit the disclosure. Instead, the proper scope of the disclosure is defined by the appended claims. The present disclosure contains headers. It should be understood that these headers are used as references and are not to be construed as limiting upon the subject matter disclosed under the header.

[0034] Other technical advantages may become readily apparent to one of ordinary skill in the art after review of the following figures and description. It should be understood at the outset that, although exemplary embodiments are illustrated in the figures and described below, the principles of the present disclosure may be implemented using any number of techniques, whether currently known or not. The present disclosure should in no way be limited to the

exemplary implementations and techniques illustrated in the drawings and described below.

[0035] Unless otherwise indicated, the drawings are intended to be read together with the specification and are to be considered a portion of the entire written description of this invention. As used in the following description, the terms “horizontal”, “vertical”, “left”, “right”, “up”, “down” and the like, as well as adjectival and adverbial derivatives thereof (e.g., “horizontally”, “rightwardly”, “upwardly”, “radially”, etc.), simply refer to the orientation of the illustrated structure as the particular drawing figure faces the reader. Similarly, the terms “inwardly”, “outwardly” and “radially” generally refer to the orientation of a surface relative to its axis of elongation, or axis of rotation, as appropriate. As used herein, the term “proximate” refers to positions that are situated close/near in relationship to a structure. As used in the following description, the term “distal” refers to positions that are situated away from positions.

[0036] The present disclosure includes many aspects and features. Moreover, while many aspects and features relate to, and are described in the context of female outer sports garments, embodiments of the present disclosure are not limited to use only in this context.

[0037] The present invention is a female outer sports garment. It is an aim of the present invention to provide users with a sewn-in bra to provide adequate breast support while still maintaining a fashionable tank/vest outer appearance. It is another aim of the present invention to provide optimal breast support during high and low intensity workouts without requiring the user to change garments during a workout.

[0038] Referring now to the figures of the present disclosure. The female outer sports garment of the present invention comprises a front panel **110**, a rear panel **120**, and a breast support member **130**.

[0039] The front panel **110** may have a left section **111** and a right section **112**. It should be noted that the front panel **110** can be of any shape, size, material, features, type or kind, orientation, location, quantity, components, and arrangements of components that would allow the present invention to fulfill the objectives and intents of the present invention. The front panel **110** and the rear panel **120** are joined together to form a neck opening **117**, a waist opening **118**, and two arm openings **119**. Preferably, the front panel **110** is permanently bonded to the rear panel **120** as a continuation of fabric weaving along the shoulders, left and right rib areas.

[0040] In one embodiment, the front panel **110** comprises a zipper **113** configured to move between an open position and a closed position. When the zipper **113** is in its open position, the left section **111** detaches from the right section **112**, and when the zipper **113** is in its closed position, the left section **111** joins to the right section **112**. Preferably, the zipper is a fastening strip that traverses along the center of the front panel **110** from the top to the bottom. The zipper **113** allows the user to open and close the front of the front panel, for example in order to put on or take off the garment of the present invention. In one embodiment, the front panel **110** further comprises a plurality of front reflective strips **116**. It should be noted that the plurality of front reflective strips **116** may be positioned at any suitable location. Preferably, the plurality of front reflective strips **116** is positioned on either side of the zipper **113**. In one embodiment,

the front panel 110 further comprises a front transparent pocket 114. Preferably, the front transparent pocket 114 is located on the right section 112 of the front panel 110, adjacent to the zipper 113 and the waist opening 118. Preferably, the front transparent pocket 114 is square-shaped and features an upper opening, allowing the user to conveniently insert or remove a lighting device to improve visibility of surroundings as well as visibility of the user while performing an exercise within low visibility conditions. In one embodiment, the front panel 110 further comprises a front storage pocket 115. Preferably, the front storage pocket 115 is located on the left section 111 of the front panel 110, adjacent to the zipper 113 and the waist opening 118. The front storage pocket 115 is preferably designed with a horizontal rectangular shape with a side opening. Further, the front storage pocket 115 may comprise a snap pocket fastening flap. The snap pocket fastening flap is a flexible piece of fabric that covers the opening of the snap pocket with a central fastening means to close the snap pocket and secure any internal contents. The fastening means could be any suitable fastening means, including but not limited to hook and loop fasteners, snap buttons, zippers, magnets, etc.

[0041] The rear panel 120 connects to the front panel 110 along the top shoulder areas and along the left and right sides of the body. It should be noted that the rear panel 120 can be of any shape, size, material, features, type or kind, orientation, location, quantity, components, and arrangements of components that would allow the present invention to fulfill the objectives and intents of the present invention. The rear panel 120 may be designed with a similar material as the front panel 110 and a similar shape without a central gap where the zipper is positioned on the front panel 110. In one embodiment, the rear panel 120 comprises a plurality of upper back bands 121 laterally spanning the neck opening 117. The plurality of upper back bands 121 secures the left and right sides of the rear panel 120, close to the shoulder area, to each other. The plurality of upper back bands 121 is designed with an elastic material to accommodate varying sized individuals while still providing proper support. In one embodiment, the rear panel 120 further comprises a rear transparent pocket 124 located at a center of the rear panel 120, adjacent to the waist opening 118. The rear transparent pocket 124 is designed with a similar transparent material as the front transparent pocket 114 and is designed with a square shape to receive a lighting device. In one embodiment, the rear panel 120 further comprises a rear storage pocket 125 located at the center of the rear panel 120, adjacent to the neck opening 117. Preferably, the rear storage pocket 125 is designed with a vertical rectangular shape with an upper opening. The rear storage pocket 125 may comprise two compartments, i.e., a smaller compartment and a larger compartment. For instance, the smaller compartment may be used to store a credit card, while the larger compartment may be used to store a cell phone. The rear storage pocket 125 may comprise a rear pocket fastening flap. The rear pocket fastening flap is positioned along the upper opening of the rear storage pocket 125 and utilizes a flexible fabric material to cover the upper opening of the rear storage pocket 125. The rear pocket fastening flap is further designed with a fastening means to secure the rear pocket fastening flap to the rear storage pocket 125 to secure an internal object such as an electronic device within the rear storage pocket 125. The fastening means could be any

suitable fastening means, including but not limited to hook and loop fasteners, snap buttons, zippers, magnets, etc.

[0042] In one embodiment, the rear panel 120 further comprises a plurality of rear reflective strips 126. In one embodiment, The plurality of rear reflective strips 126 traverses from an edge of the neck opening 117 to an edge of the waist opening 118 on either side of the rear storage pocket 125. In one embodiment, the present invention further comprises a plurality of opening reflective strips 128 positioned around the neck opening 117, the waist opening 118, and/or the arm openings 119.

[0043] The breast support member 130 is positioned internally within the present invention. It should be noted that the breast support member 130 can be of any shape, size, material, features, type or kind, orientation, location, quantity, components, and arrangements of components that would allow the present invention to fulfill the objectives and intents of the present invention. The breast support member 130 comprises a pair of bra cups 131 configured to support a user's breasts. In the present invention, the pair of bra cups are separated from each other. The pair of bra cups are attached to the left section 111 and the right section 112 of the front panel 110, respectively. The breast support member 130 may be a wireless bra without a connection along the front side in the middle where the zipper secures the left section 111 to the right section 112 of the front panel. The breast support member 130 is designed to provide adequate support for the breast area of the user to prevent pain, strain and bouncing during a high or low impact workout. In the preferred embodiment, the breast support member 130 is designed with vertical rear support straps. In an alternative embodiment, the breast support member 130 is designed with an X-shaped cross pattern design rear support straps. The breast support member 130 provides for maximal breast support while allowing for normal breathing during high impact exercises. The pair of bra cups 131 may be semi-firm, soft, and flexible support cups that snugly encompass under and over the breast areas of the user. The pair of bra cups 131 are then linked and secured to the rear support straps via a support strap positioned over each shoulder of the user. With all the components working in tandem with each other it can be seen that the present invention is a supportive female sports garment that provides optimal breast support during high and low intensity workouts without requiring the user to change garments during a workout.

[0044] The present invention may be designed with any suitable material. In a preferred embodiment, the front panel 110 and the rear panel 120 may be made from a two-layer fabric. The inner layer may be a breathable, semi-firm yet soft fabric, while the outer layer may be wind- and/or water-resistant material. The present invention is designed to be worn over standard workout attire, allowing for quick and convenient wearability and removal as needed.

[0045] It is envisioned that the sizes of the components forming the present invention such as the front panel 110, the rear panel 120, and/or the breast support member 130 can vary based on design requirements.

[0046] Although the disclosure has been explained in relation to its preferred embodiment, it is to be understood that many other possible modifications and variations can be made without departing from the spirit and scope of the disclosure.

What is claimed is:

1. A female outer sports garment comprising:
a front panel having a left section and a right section;
a rear panel;
a breast support member comprising a pair of bra cups
configured to support a user's breasts;
the front panel and the rear panel being joined together to
form a neck opening, a waist opening, and two arm
openings;
the pair of bra cups being separated from each other;
the pair of bra cups being attached to the left section and
the right section of the front panel, respectively.
2. The female outer sports garment as claimed in claim 1,
wherein the front panel comprises a zipper configured to
move between an open position and a closed position,
wherein when the zipper is in its open position, the left
section detaches from the right section, and wherein when
the zipper is in its closed position, the left section joins to the
right section.
3. The female outer sports garment as claimed in claim 1,
wherein the front panel further comprises a plurality of front
reflective strips.
4. The female outer sports garment as claimed in claim 3,
wherein the plurality of front reflective strips is positioned
on either side of the zipper.
5. The female outer sports garment as claimed in claim 2,
wherein the front panel further comprises a front transparent
pocket.
6. The female outer sports garment as claimed in claim 5,
wherein the front transparent pocket is located on the right
section of the front panel, adjacent to the zipper and the
waist opening.
7. The female outer sports garment as claimed in claim 2,
wherein the front panel further comprises a front storage
pocket.
8. The female outer sports garment as claimed in claim 7,
wherein the front storage pocket is located on the left section
of the front panel, adjacent to the zipper and the waist
opening.
9. The female outer sports garment as claimed in claim 1,
wherein the rear panel comprises a plurality of upper back
bands laterally spanning the neck opening.
10. The female outer sports garment as claimed in claim
9, wherein the rear panel further comprises a rear transparent
pocket located at a center of the rear panel, adjacent to the
waist opening.
11. The female outer sports garment as claimed in claim
1, wherein the rear panel further comprises a rear storage
pocket located at the center of the rear panel, adjacent to the
neck opening.
12. The female outer sports garment as claimed in claim
1, wherein the rear panel further comprises a plurality of rear
reflective strips.
13. The female outer sports garment as claimed in claim
12, wherein the plurality of rear reflective strips traverses
from an edge of the neck opening to an edge of the waist
opening on either side of the rear storage pocket.
14. The female outer sports garment as claimed in claim
13, further comprising a plurality of opening reflective strips
positioned around the neck opening, the waist opening, and
the arm openings.

* * * * *