



US 20250286193A1

(19) **United States**(12) **Patent Application Publication**  
**USUI et al.**(10) **Pub. No.: US 2025/0286193 A1**(43) **Pub. Date: Sep. 11, 2025**(54) **BATTERY MODULE****H01M 50/289** (2021.01)**H01M 50/682** (2021.01)(71) Applicant: **HONDA MOTOR CO., LTD.**, Tokyo  
(JP)(52) **U.S. Cl.**CPC ..... **H01M 50/242** (2021.01); **H01M 10/658**  
(2015.04); **H01M 50/204** (2021.01); **H01M**  
**50/289** (2021.01); **H01M 50/682** (2021.01)(72) Inventors: **Hidemasa USUI**, Saitama (JP);  
**Hirokazu WATANABE**, Saitama (JP);  
**Atsushi ASahi**, Saitama (JP); **Yosuke**  
**YOSHIZAWA**, Saitama (JP)

(57)

**ABSTRACT**

A battery module according to one embodiment of the present invention includes: a battery cell stack formed by stacking a plurality of battery cells; a pair of end plates provided at both ends of the battery cell stack in the stacking direction; and a cushioning material arranged either between the battery cells, or between the battery cell stack and the end plates, or both. The cushioning material includes: a double-pack structure including a first pack and a second pack with an inner diameter larger than that of the first pack, in which both ends of the first pack and the second pack are sealed, and the first pack and the second pack being at least partially bonded to each other; gas filled in an internal space of the first pack; and liquid filled in a space between the first pack and the second pack.

(21) Appl. No.: **19/061,935**(22) Filed: **Feb. 24, 2025**(30) **Foreign Application Priority Data**

Mar. 7, 2024 (JP) ..... 2024-035041

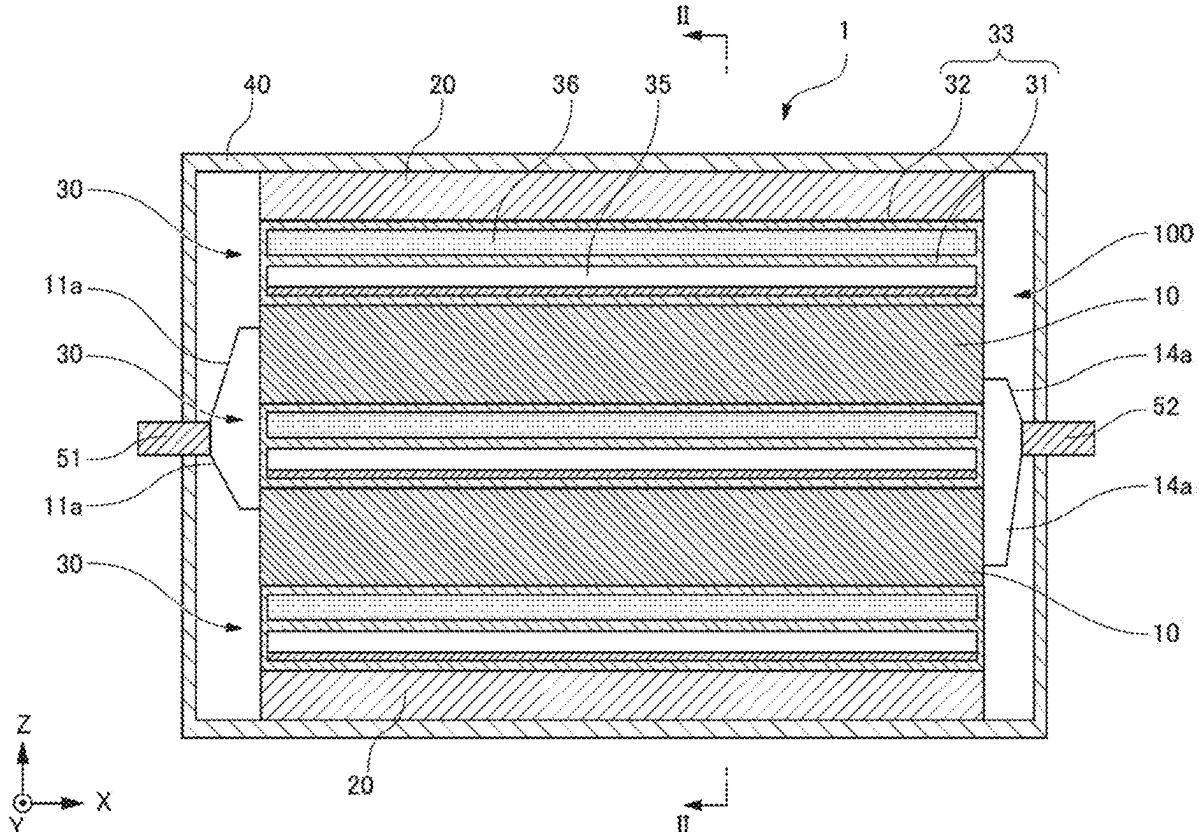
**Publication Classification**(51) **Int. Cl.****H01M 50/242** (2021.01)**H01M 10/658** (2014.01)**H01M 50/204** (2021.01)



FIG. 2

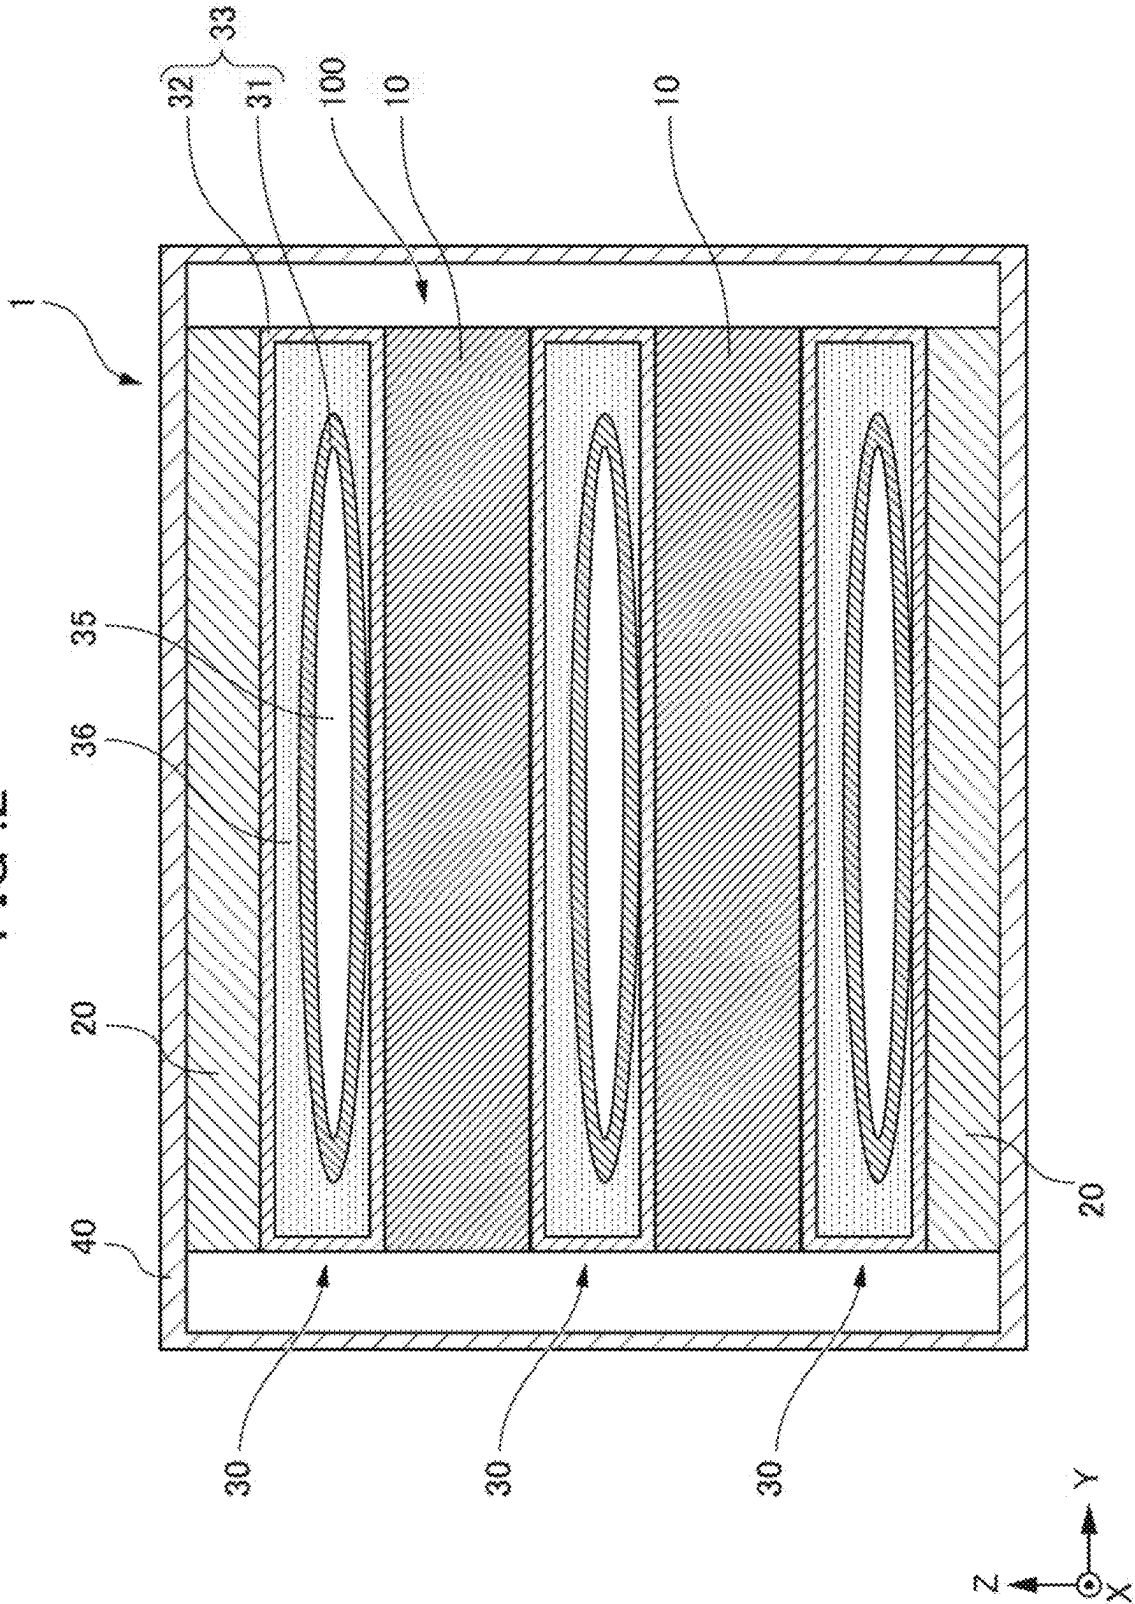


FIG. 3

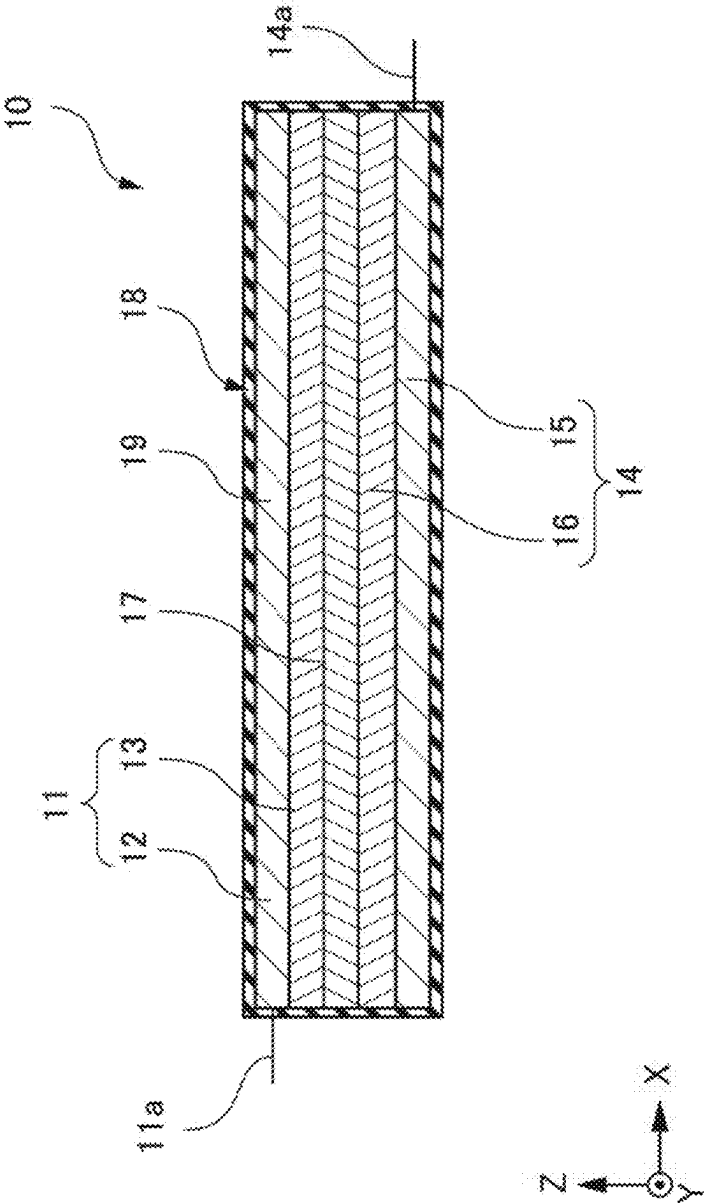


FIG. 4

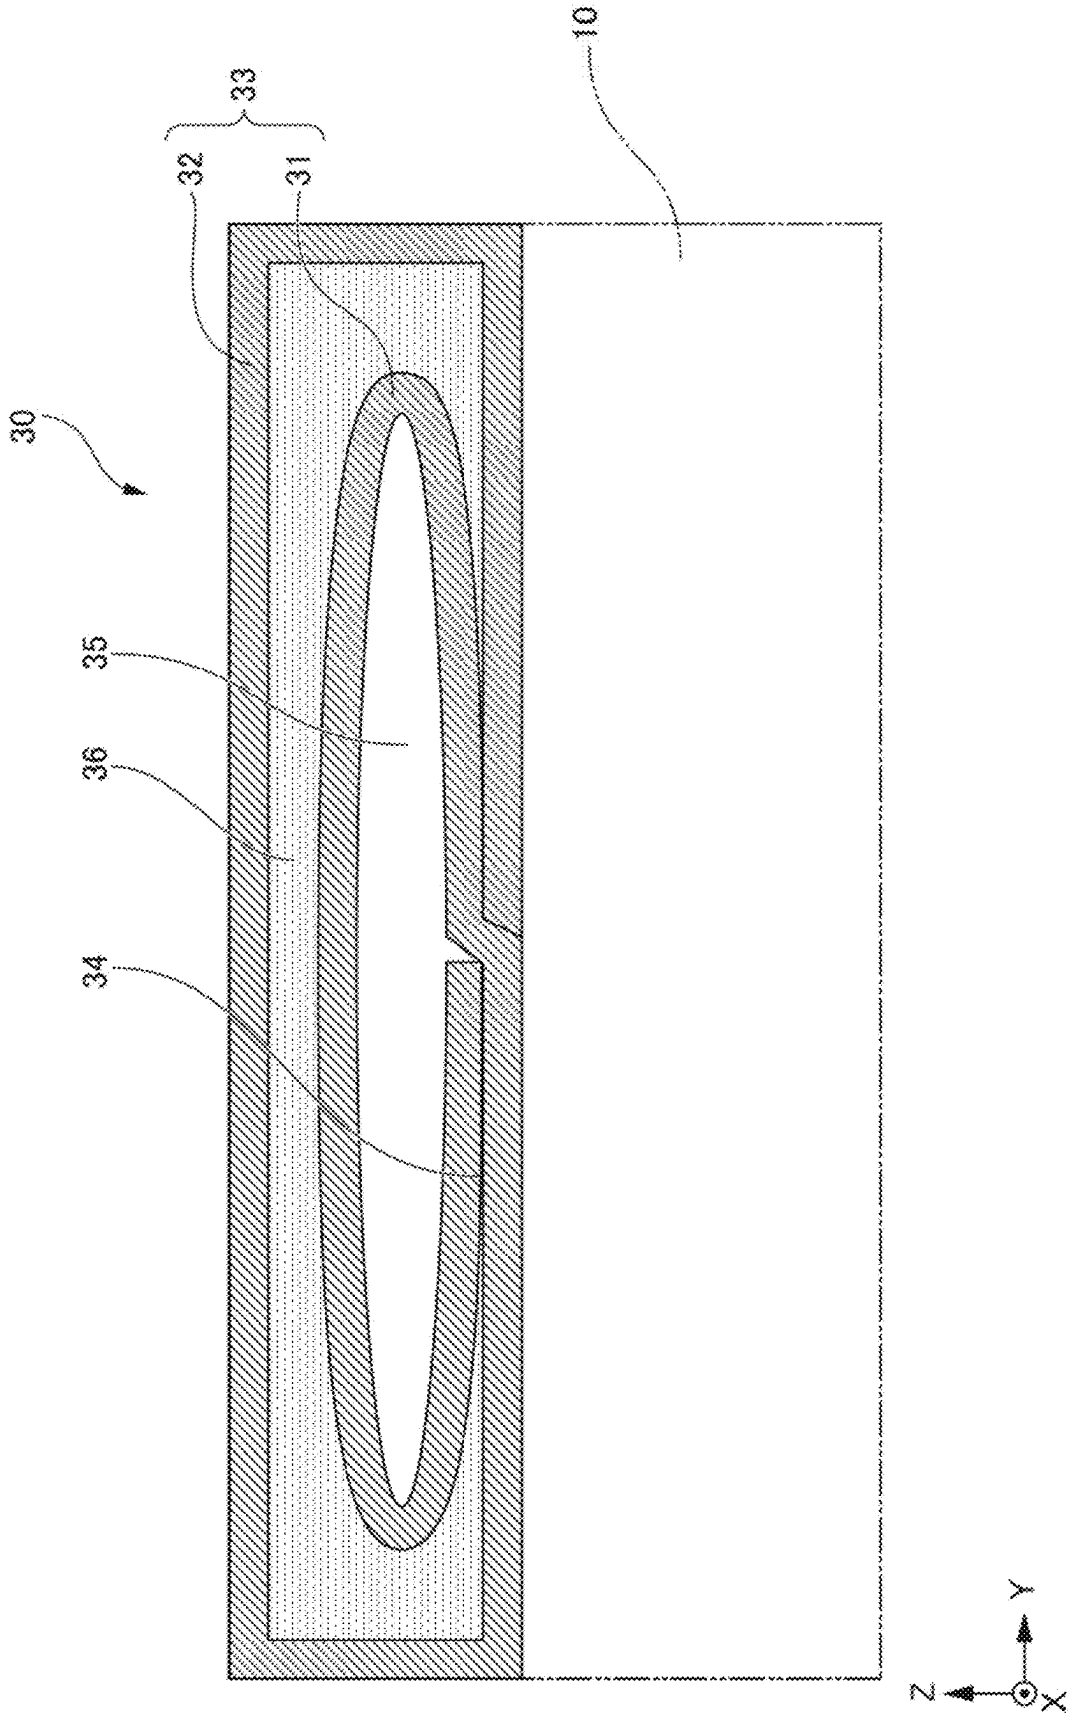




FIG. 6

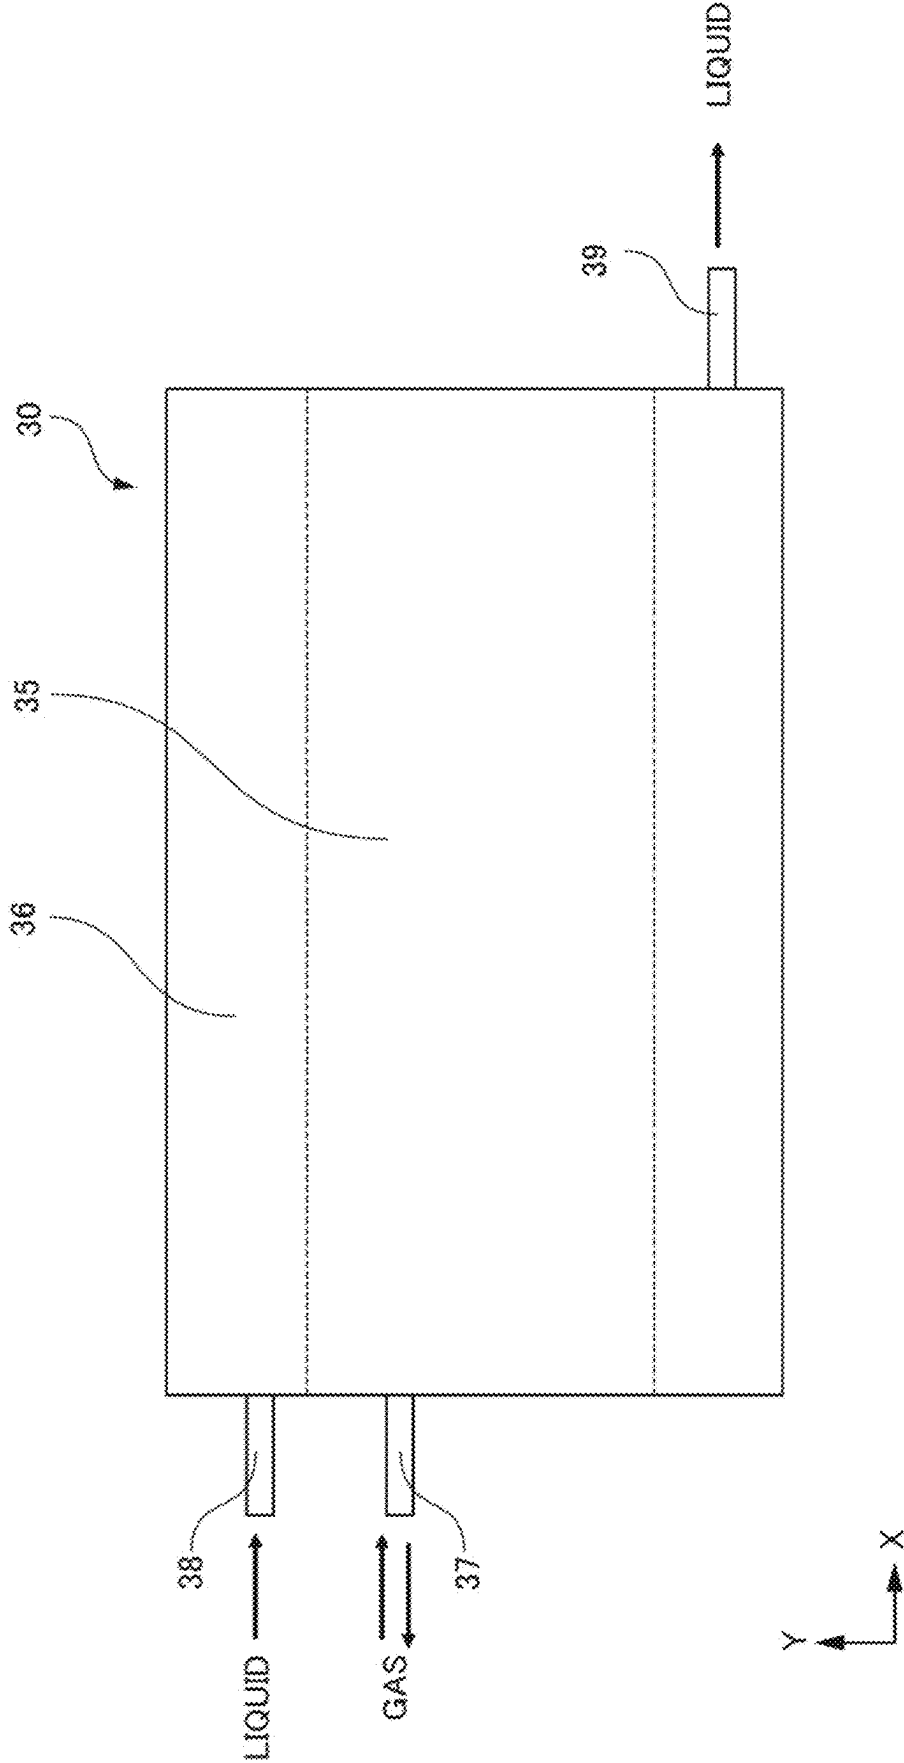


FIG. 7

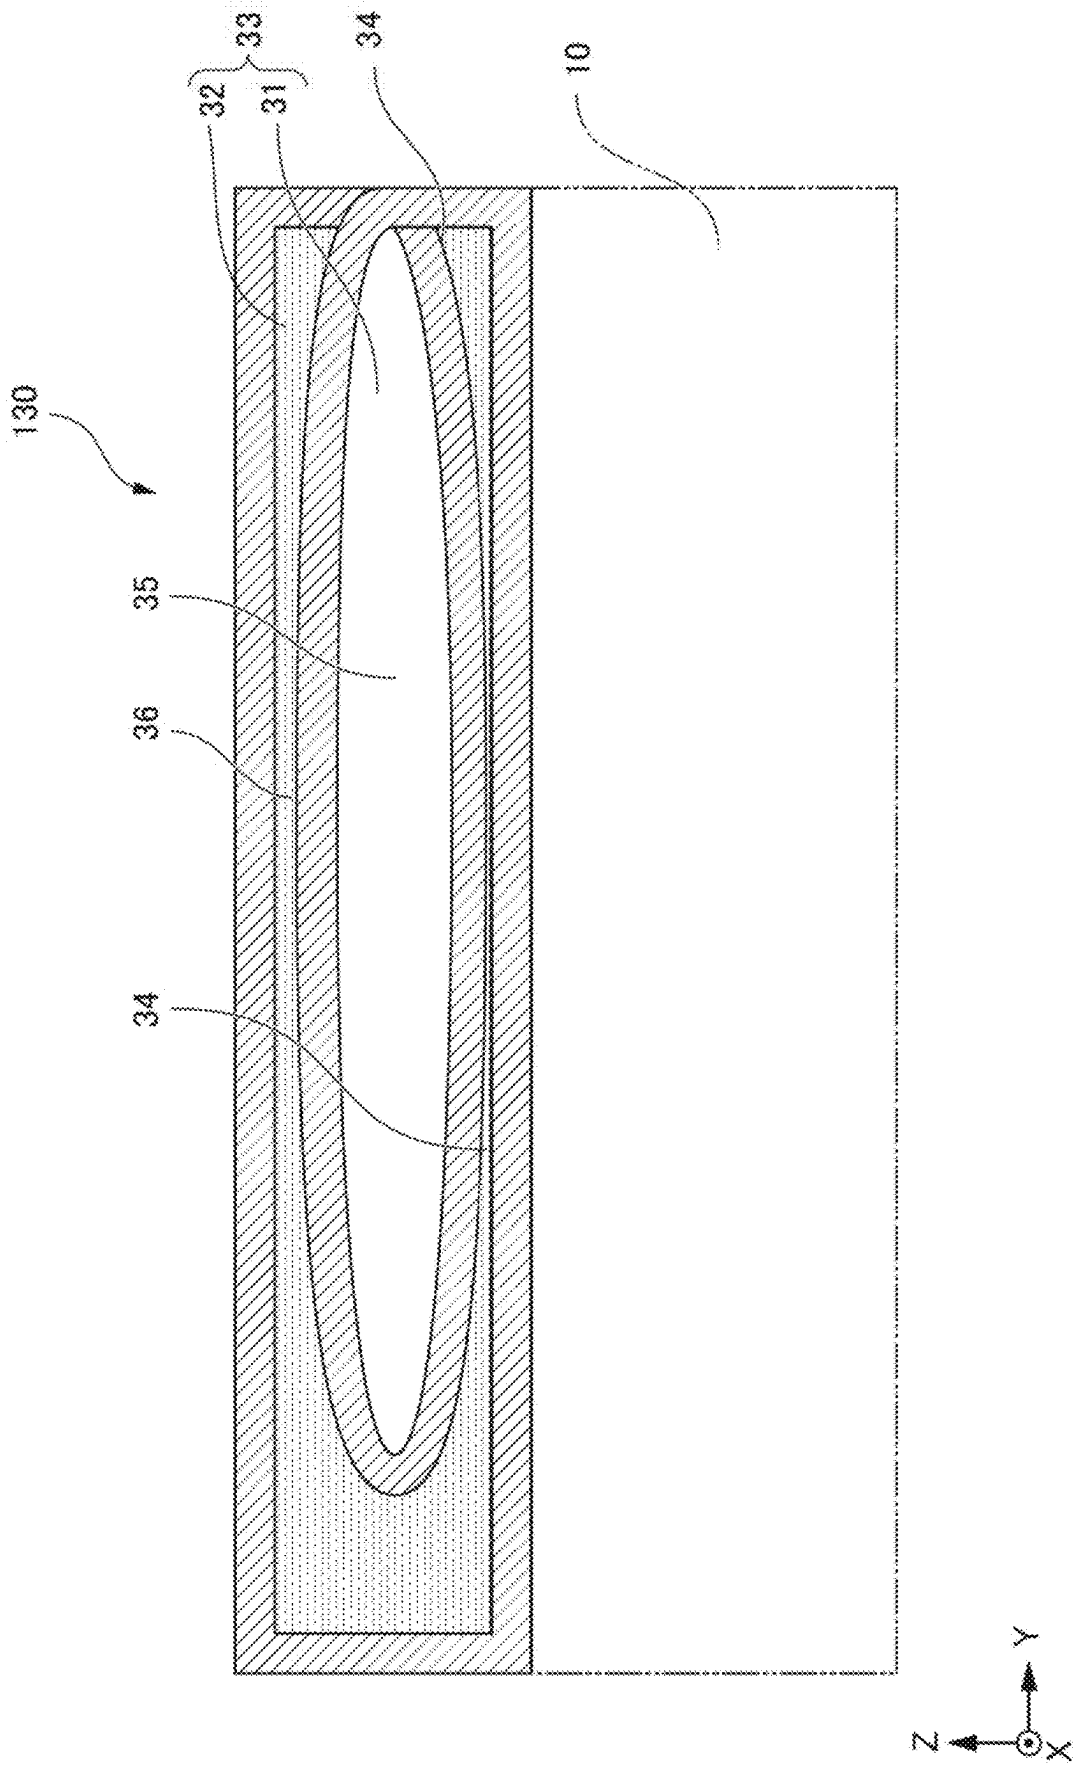
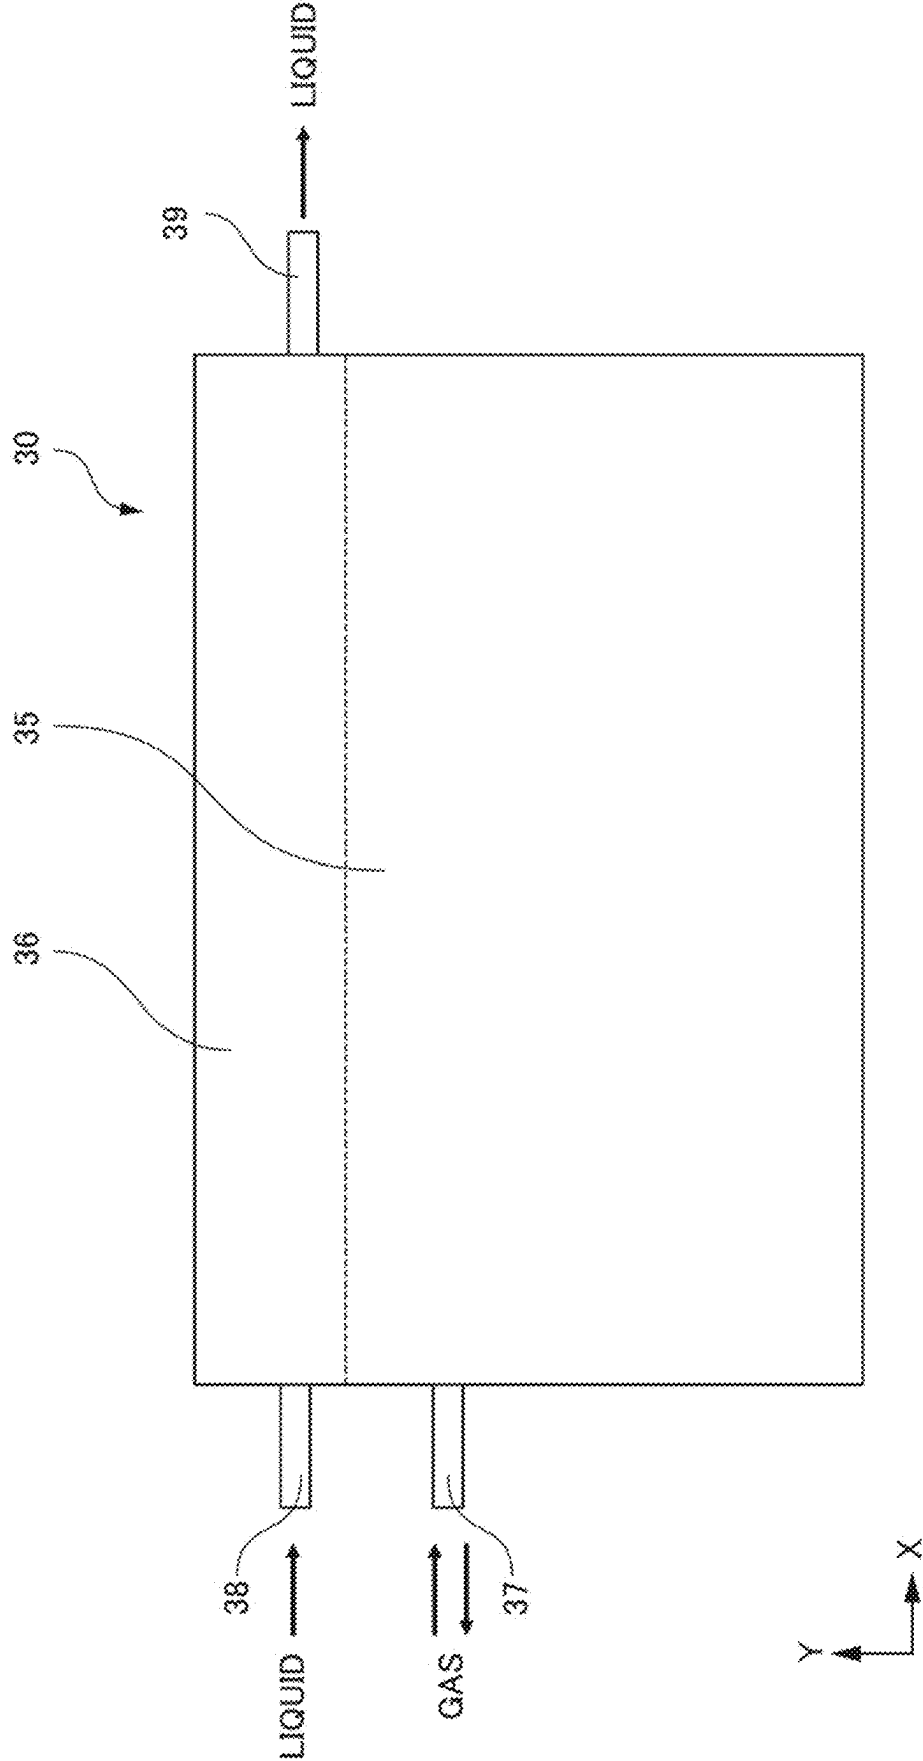




FIG. 8



## BATTERY MODULE

[0001] This application is based on and claims the benefit of priority from Japanese Patent Application No. 2024-035041, filed on 7 Mar. 2024, the content of which is incorporated herein by reference.

## BACKGROUND OF THE INVENTION

### Field of the Invention

[0002] The present invention relates to a battery module.

### Related Art

[0003] In recent years, research and development have been conducted on battery modules that contribute to energy efficiency, in order to enable more people to access affordable, reliable, sustainable, and advanced energy. A battery module is a modularized assembly combining a plurality of battery cells, generally including a battery cell stack formed by stacking a plurality of battery cells, and a pair of end plates arranged at both ends of the battery cell stack in the stacking direction. Battery modules are used in applications requiring high current and high voltage, such as for motor drives in electric vehicles and hybrid electric vehicles.

[0004] In battery modules, consideration has been given to arranging cushioning materials either between the battery cells or between the battery cell stack and the end plates to exert pressure on the battery cells in the stacking direction. Known cushioning materials include a cushioning material having a deformable chamber and a system that supplies fluid to deform the chamber (Patent Document 1), as well as elastic bodies such as plate springs and liquid springs (Patent Document 2 and Patent Document 3).

[0005] Patent Document 1: Japanese Unexamined Patent Application, Publication No. 2020-64848

[0006] Patent Document 2: Japanese Unexamined Patent Application, Publication No. 2021-96974

[0007] Patent Document 3: European Patent Application, Publication No. 3886202

## SUMMARY OF THE INVENTION

[0008] In the field of battery module technology, improving the electrical capacity is a recognized challenge. An effective approach to improving the electrical capacity of a battery module is to use a cushioning material to exert uniform pressure on each battery cell incorporated into the battery module. When using a cushioning material having a function of thermal dissipation to release heat from within the battery cell stack to outside, and a thermal insulation property to limit heat transfer between the battery cells, the thermal insulation is achieved in the cell stacking direction of the battery cell stack, and thermal conductivity is achieved in a direction perpendicular to the cell stacking direction, thereby facilitating the temperature control of the battery cells. However, in cases where the thickness of the battery cells partially fluctuates due to charging and discharging, resulting in a partial increase or decrease in the pressure exerted by the battery cells on the cushioning material, it may become challenging for the cushioning material to exert uniform pressure on the battery cells. Reducing the size of a cushioning material is desirable in order to improve the electrical capacity per unit volume of the battery module; however, reducing the size of the cushioning material could compromise the balance of ther-

mal dissipation and thermal insulation, potentially causing difficulty in achieving the intended effects.

[0009] The present invention has been made in view of the above circumstances, and aims to provide a battery module using a cushioning material that is capable of exerting uniform pressure on the battery cells, achieves high thermal insulation, and can be easily reduced in size. Consequently, the present invention contributes to increased energy efficiency.

[0010] The inventors of the present invention have found that the above problems can be solved by employing a structure of a cushioning material that includes: a double-pack structure including a first pack and a second pack with an inner diameter larger than that of the first pack, with at least a portion of the first pack and the second pack bonded to each other, and having both ends sealed; gas filled within the first pack; and liquid filled in the space between the first pack and the second pack, thereby arriving at completion of the present invention. Thus, the present invention provides the following.

[0011] (1) A battery module, including: a battery cell stack formed by stacking a plurality of battery cells; a pair of end plates provided at both ends of the battery cell stack in a stacking direction; and a cushioning material arranged either between the battery cells, or between the battery cell stack and the end plates, or both. The cushioning material includes: a double-pack structure including a first pack and a second pack with an inner diameter larger than that of the first pack, in which of the first pack and the second pack are at least partially bonded to each other; gas filled in an internal space of the first pack; and liquid filled in a space between the first pack and the second pack.

[0012] With the battery module as described in (1), for example, even in cases where the pressure exerted by the battery cell on the cushioning material partially increases or decreases, the liquid filled in the space between the first pack and the second pack maintains the internal pressure of the cushioning material uniform, and thus the pressure exerted by the cushioning material on the battery cell is maintained uniform. Since gas is filled inside the first pack, the thermal insulation property of the cushioning material is enhanced. Furthermore, the first pack and the second pack are bonded to each other, stabilizing the position of the first pack, thereby stabilizing the thermal insulation property of the cushioning material. The cushioning material consists of the double-pack structure including the first pack and the second pack, which can be relatively easily configured, and easily reduced in size.

[0013] (2) In the battery module as described in (1), the first pack and the second pack of the double-pack structure are formed from a single sheet wound twice.

[0014] With the battery module as described in (2), the first pack and the second pack of the cushioning material are formed from a single sheet, which can be further easily configured, and easily reduced in size.

[0015] (3) In the battery module as described in (1) or (2), the cushioning material includes an air ventilation tube connected to the internal space of the first pack.

[0016] With the battery module as described in (3), the internal pressure of the cushioning material can be regulated by introducing gas into the internal space of the first pack or exhausting the gas through the air ventilation tube. Therefore, the pressure exerted by the cushioning material on the battery cells can be maintained more constant.

[0017] (4) In the battery module as described in any one of (1) to (3), the cushioning material includes a liquid supply tube and a liquid discharge tube connected to the space between the first pack and the second pack.

[0018] The battery module as described in (4) is capable of regulating the internal pressure of the cushioning material by introducing liquid into the space between the first pack and the second pack through the liquid supply tube or discharging the liquid through the liquid discharge tube. Therefore, the pressure exerted by the cushioning material on the battery cells can be maintained more constant. By continuously flowing temperature-controlled liquid in the space between the first pack and the second pack via the liquid supply tube and the liquid discharge tube, the temperature of the cushioning material can be regulated. Therefore, the thermal insulation property of the cushioning material is further improved.

[0019] The present invention makes it possible to provide a battery module using a cushioning material that is capable of exerting uniform pressure on the battery cells, achieves high thermal insulation, and can be easily reduced in size.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0020] FIG. 1 is a cross-sectional view of a battery module according to one embodiment of the present invention;

[0021] FIG. 2 is a cross-sectional view taken along the line II-II of FIG. 1;

[0022] FIG. 3 is a cross-sectional view of a battery cell that can be used in the battery module according to one embodiment of the present invention;

[0023] FIG. 4 is an enlarged cross-sectional view of a cushioning material illustrated in FIG. 2;

[0024] FIG. 5 is a cross-sectional view illustrating a first modification of the battery module according to one embodiment of the present invention;

[0025] FIG. 6 is a plan view of the cushioning material used in the battery module illustrated in FIG. 5;

[0026] FIG. 7 is an enlarged cross-sectional view of the cushioning material used in a second modification of the battery module according to one embodiment of the present invention; and

[0027] FIG. 8 is a plan view of the cushioning material illustrated in FIG. 7.

#### DETAILED DESCRIPTION OF THE INVENTION

[0028] Hereinafter, embodiments of the present invention will be described with reference to the drawings. However, the embodiments described below are merely illustrative and do not limit the scope of the present invention.

[0029] FIG. 1 is a cross-sectional view of a battery module according to one embodiment of the present invention. FIG. 2 is a cross-sectional view taken along the line II-II of FIG. 1. FIG. 3 is a cross-sectional view of a battery cell that can be used in the battery module according to one embodiment of the present invention. FIG. 4 is an enlarged cross-sectional view of the cushioning material illustrated in FIG. 2.

[0030] As illustrated in FIGS. 1 and 2, a battery module 1 includes: a battery cell stack 100 formed by stacking a plurality of battery cells 10; a pair of end plates 20 provided at both ends of the battery cell stack in the stacking direction (Z direction in FIG. 1); and a cushioning material 30

arranged between the battery cells 10 and between the battery cell stack 100 and the end plates 20. The battery cell stack 100, the end plates 20, and the cushioning material 30 are housed within a module case 40. The module case 40 includes a positive electrode terminal 51 and a negative electrode terminal 52. The positive electrode terminal 51 and the negative electrode terminal 52 are arranged at opposing positions in one direction (X direction in FIG. 1). The positive electrode terminal 51 is connected to a positive electrode lead wire 11a of the battery cell 10. The negative electrode terminal 52 is connected to a negative electrode lead wire 14a of the battery cell 10.

[0031] The battery cell 10 is a battery utilizing lithium ions as the charge transfer medium. As illustrated in FIG. 3, the battery cell 10 includes an electrode stack 18, which is formed by stacking a positive electrode layer 11 and a negative electrode layer 14 with a solid electrolyte layer 17 interposed therebetween, and a housing 19 that houses the electrode stack 18. The positive electrode layer 11 includes a positive electrode current collector 12 and a positive electrode active material layer 13. The negative electrode layer 14 includes a negative electrode current collector 15 and a metal layer 16. When the battery cell 10 is charged, lithium ions released from the positive electrode active material layer 13 pass through the solid electrolyte layer 17 and deposit on the surface of the metal layer 16 of the negative electrode layer 14, forming a lithium deposition layer that increases the thickness of the negative electrode layer 14. This lithium deposition layer acts as the negative electrode active material layer, and dissolves upon discharge by releasing lithium ions. Therefore, the volume of the battery cell 10 changes with charging and discharging. Consequently, the pressure exerted by the battery cell 10 on the cushioning material 30 changes during charging and discharging. The stacking direction of the electrode stack 18 aligns with the stacking direction of the battery cell stack 100. In other words, the plurality of battery cells 10 in the battery module 1 are stacked along the stacking direction of the electrode stack 18. In the battery cell 10 illustrated in FIG. 4, only one electrode stack 18 is housed within the housing 19, although a plurality of electrode stacks 18 may be housed within the housing 19.

[0032] The positive electrode current collector 12 is not particularly limited in material or shape so long as having a function as a current collector for the positive electrode layer 11. Examples of materials for the positive electrode current collector 12 include aluminum, aluminum alloy, stainless steel, nickel, iron, and titanium, in which aluminum, aluminum alloy, and stainless steel are preferred. Examples of the shape of the positive electrode current collector 12 include foil and plate.

[0033] The positive electrode active material layer 13 contains at least one type of positive electrode active material. There is no particular limitation on the positive electrode active material, and may be any materials commonly used for positive electrode layers in solid-state secondary batteries. Examples of positive electrode active materials include layered active materials containing lithium, spinel-type active materials, and olivine-type active materials. Specific examples of positive electrode active materials include lithium cobalt oxide ( $\text{LiCoO}_2$ ), lithium nickel oxide ( $\text{LiNiO}_2$ ),  $\text{LiNi}_p\text{Mn}_q\text{Co}_r\text{O}_2$  (where  $p+q+r=1$ ),  $\text{LiNi}_p\text{Al}_q\text{Co}_r\text{O}_z$  (where  $p+q+r=1$ ), lithium manganese oxide ( $\text{LiMn}_2\text{O}_4$ ), heteroelement-substituted Li—Mn spinel such

as  $\text{Li}_{1+x}\text{Mn}_{2-x-y}\text{MO}_4$  (where  $x+y=2$ , and M is at least one element selected from Al, Mg, Co, Fe, Ni, and Zn), lithium titanate (an oxide containing Li and Ti), and lithium metal phosphate ( $\text{LiMPO}_4$ , where M is at least one element selected from Fe, Mn, Co, and Ni).

**[0034]** The positive electrode active material layer **13** may optionally contain a solid electrolyte to improve lithium-ionic conductivity. A conductive additive may be optionally contained to improve electrical conductivity. A binder may be optionally contained to impart flexibility or other properties. The solid electrolyte, the conductive additive, and the binder are not particularly limited, and may be any materials commonly used for positive electrode layers in solid-state secondary batteries.

**[0035]** The material for the positive electrode lead wire **11a** may be the same as the material for the positive electrode current collector **12**, or may be different from the material for the positive electrode current collector **12**. The positive electrode lead wire **11a** may be integrally connected to the positive electrode current collector **12**.

**[0036]** The negative electrode current collector **15** is not particularly limited in material or shape so long as having a function as a current collector for the negative electrode layer **14**. Examples of materials for the negative electrode current collector **15** include nickel, copper, and stainless steel. Examples of the shape of the negative electrode current collector **15** include foil and plate.

**[0037]** The metal layer **16** is not particularly limited in material or shape so long as having a function of densely depositing lithium ions. The metal layer **16** may be a metallic lithium layer or a layer of a metal that forms an alloy with lithium. Examples of metals that form alloys with lithium include Mg, Si, Au, Ag, In, Ge, Sn, Pb, Al, and Zn. The metal forming the metal layer **16** may be in the form of powder or a thin film. By employing the negative electrode layer **14** including the metal layer **16**, a uniform lithium deposition layer can be formed on the surface of the metal layer **16**.

**[0038]** The material for the negative electrode lead wire **14a** may be the same as the material for the negative electrode current collector **15**, or may be different from the material for the negative electrode current collector **15**. The negative electrode lead wire **14a** may be integrally connected to the negative electrode current collector **15**.

**[0039]** The solid electrolyte layer **17** contains at least one type of solid electrolyte. The solid electrolyte is not particularly limited so long as having lithium ion conductivity; however, examples include sulfide solid electrolytes, oxide solid electrolytes, nitride solid electrolytes, and halide solid electrolytes.

**[0040]** Examples of sulfide solid electrolytes include  $\text{Li}_2\text{S}-\text{P}_2\text{S}_5$  and  $\text{Li}_2\text{S}-\text{P}_2\text{S}_5-\text{LiI}$ . The sulfide solid electrolyte may have an argyrodite-type crystal structure.

**[0041]** Examples of oxide solid electrolytes include NASICON-type oxides, garnet-type oxides, and perovskite-type oxides. An example of a NASICON-type oxide is an oxide containing Li, Al, Ti, P, and O (e.g.,  $\text{Li}_{1.5}\text{Al}_{0.5}\text{Ti}_{1.5}(\text{PO}_4)_3$ ). An example of a garnet-type oxide is an oxide containing Li, La, Zr, and O (e.g.,  $\text{Li}_7\text{La}_3\text{Zr}_2\text{O}_{12}$ ). An example of a perovskite-type oxide is an oxide containing Li, La, Ti, and O (e.g.,  $\text{LiLaTiO}_3$ ).

**[0042]** The housing **19** is designed to be expandable and contractible to accommodate changes in volume of the battery cell **10** during charging and discharging. Examples

of materials that can be used for the housing **19** include a laminated film. A laminate film with a three-layer structure may be used as the laminated film, in which an inner resin layer, a metal layer, and an outer resin layer are laminated in this order from the inner side. For example, the outer resin layer may be a polyamide (nylon) layer or polyethylene terephthalate (PET) layer, the metal layer may be an aluminum layer, and the inner resin layer may be a polyethylene or polypropylene layer.

**[0043]** The end plates **20** function to restrain the battery cell stack **100** in the stacking direction. The restraining force of the end plates **20** allows for regulating the surface pressure exerted by the cushioning material **30** on the battery cell stack. The material for the end plate **20** is not particularly limited, and various materials commonly used for end plates for battery modules can be employed.

**[0044]** The cushioning material **30** functions to equalize the surface pressure exerted on the battery cells **10**. The surface pressure exerted on the battery cells **10** is, for example, 0.8 MPa or more.

**[0045]** As illustrated in FIG. 4, the cushioning material **30** includes a double-pack structure **33** that includes a first pack **31** and a second pack **32** with an inner diameter larger than that of the first pack **31**. The first pack **31** and the second pack **32** are bonded to each other at a seal portion **34**. The seal portion **34** may be formed, for example, by heat sealing or using an adhesive. Gas is filled in a first space **35** inside the first pack **31**. Liquid is filled in a second space **36** between the first pack **31** and the second pack **32**. The seal portion **34** is provided on the surface that contacts the battery cell **10**. Therefore, the first space **35** is located below the cushioning material **30**.

**[0046]** The double-pack structure **33** is formed from a single sheet wound twice. The double-pack structure **33** is formed by winding a portion of the single sheet once to form the first cylindrical portion, then winding the remaining part of the sheet with a gap around the outer circumference of the first cylindrical portion to form the second cylindrical portion, bonding the first cylindrical portion and the second cylindrical portion, and finally sealing the open ends of the first cylindrical portion and the second cylindrical portion to form the first pack **31** and the second pack **32**. An example of the sheet material that can be used for forming the double-pack structure **33** is a laminated film. By forming the double-pack structure **33** from a single laminated film, the first cylindrical portion and the second cylindrical portion can be bonded by one step of heat sealing. Therefore, the manufacturing is facilitated.

**[0047]** The area ratio between the first space **35** and the second space **36** in a cross-section perpendicular to the axial direction of the cushioning material **30** may be set from a standpoint of thermal insulation and thermal conductivity of the cushioning material **30**. The ratio of the cross-sectional area of the first space **35** to the total cross-sectional area of the cushioning material **30** is preferably within a range of 20 to 50% from a standpoint of thermal insulation property, and is preferably within a range of 50 to 80% or less from a standpoint of thermal conductivity. Nitrogen gas, for example, may be used as the gas filled in the first space. Examples of liquids that can be used for filling the second space **36** include mineral-based hydraulic oil, phosphate ester-based hydraulic oil, water, and glycol-based solvents.

**[0048]** The module case **40** houses the battery cell stack **100** and the end plates **20**. The material for the module case

40 is not particularly limited, and various materials commonly used for battery module cases can be employed. The material for the positive electrode terminal 51 may be the same as the material for the positive electrode lead wire 11a, or may be different from the material for the positive electrode lead wire 11a. The material for the negative electrode terminal 52 may be the same as the material for the negative electrode lead wire 14a, or may be different from the material for the negative electrode lead wire 14a.

[0049] In the battery module 1 of the present embodiment established in the configuration, even in cases where the volume of the battery cell 10 increases during charging, resulting in a partial increase in the pressure exerted by the battery cell 10 on the cushioning material 30, or in cases where the volume of the battery cell 10 decreases during discharging, resulting in a partial decrease in the pressure exerted by the battery cell 10 on the cushioning material 30, the internal pressure of the cushioning material 30 is maintained uniform by the liquid filled in the second space 36 between the first pack 31 and the second pack 32. Consequently, the pressure exerted by the cushioning material 30 on the battery cell can be maintained uniform. The presence of the gas filled in the first space 35 inside the first pack 31 enhances the thermal insulation of the cushioning material 30. Furthermore, since the first pack 31 and the second pack 32 are bonded at the seal portion 34, the position of the first pack 31 is stabilized, thereby stabilizing thermal insulation of the cushioning material 30. The cushioning material 30 consists of the double-pack structure 33 including the first pack 31 and the second pack 32, which is relatively simple in structure, enhancing the ease of size reduction. In particular, since the first pack 31 and the second pack 32 of the cushioning material 30 are formed from a single sheet wound twice, the configuration is further simplified, thereby enhancing the ease of size reduction.

[0050] FIG. 5 is a cross-sectional view illustrating a first modification of the battery module according to one embodiment of the present invention. FIG. 6 is a plan view of the cushioning material used in the battery module illustrated in FIG. 5.

[0051] As illustrated in FIGS. 5 and 6, a battery module 2 of the first modification is configured similarly to the battery module 1 described above, except that the battery module 2 includes an air ventilation tube 37 connected to the first space 35 of the cushioning material 30, and a liquid supply tube 38 and a liquid discharge tube 39 connected to the second space 36. Therefore, the same reference numbers are assigned to the components common to the aforementioned battery module 1, and descriptions thereof are omitted.

[0052] The air ventilation tube 37 functions as an inlet and outlet for the gas within the first space 35. For example, when the volume of the battery cell 10 increases during charging, resulting in a partial increase in the pressure exerted by the battery cell 10 on the cushioning material 30 and a corresponding increase in the internal pressure of the cushioning material 30, gas is exhausted from the first space 35 through the air ventilation tube 37, thereby allowing for lowering the internal pressure of the cushioning material 30. Conversely, when the volume of the battery cell 10 decreases during discharging, resulting in a partial decrease in the pressure exerted by the battery cell 10 on the cushioning material 30, gas is introduced from the outside into the first space 35 through the air ventilation tube 37, thereby allowing for raising the internal pressure of the cushioning

material 30. Furthermore, regardless of whether being during charging or discharging, the pressure exerted by the cushioning material 30 on the battery cell 10 can be regulated by introducing gas into the first space 35 or exhausting the gas from the first space 35 through the air ventilation tube 37.

[0053] The liquid supply tube 38 functions as an inlet for the liquid within the second space 36, while the liquid discharge tube 39 functions as an outlet for the liquid within the second space 36. For example, when the volume of the battery cell 10 decreases during discharging, resulting in a partial decrease in the pressure exerted by the battery cell 10 on the cushioning material 30, liquid is introduced from the outside into the second space 36 through the liquid supply tube 38, thereby allowing for raising the internal pressure of the cushioning material 30. When the volume of the battery cell 10 increases during charging, resulting in a partial increase in the pressure exerted by the battery cell 10 on the cushioning material 30 and a corresponding increase in the internal pressure of the cushioning material 30, liquid is discharged from the second space 36 to the outside through the liquid discharge tube 39, thereby allowing for lowering the internal pressure of the cushioning material 30. Furthermore, regardless of whether being during charging or discharging, the pressure exerted on the battery cell 10 can be regulated by way of the cushioning material 30 to regulate the internal pressure of the first space 35. Additionally, regardless of whether being during charging or discharging, the pressure exerted by the cushioning material 30 on the battery cell 10 can be regulated by introducing liquid into the second space 36 through the liquid supply tube 38 or discharging the liquid through the liquid discharge tube 39. The internal temperature of the cushioning material 30 can also be regulated by supplying temperature-controlled liquid into the second space 36 through the liquid supply tube 38 and discharging liquid through the liquid discharge tube 39.

[0054] The battery module 2 of the first modification achieves the same effects as the battery module 1 does, since the cushioning material 30 includes the double-pack structure 33 including the first pack 31 and the second pack 32, gas filled in the first space 35, and liquid filled in the second space 36, similarly to the battery module 1. Furthermore, the battery module 2 of the first modification is capable of regulating the internal pressure of the cushioning material 30 by introducing/exhausting gas into/from the first space 35 through the air ventilation tube 37, and thus is capable of maintaining the constant pressure exerted by the cushioning material 30 on the battery cell 10. Additionally, the battery module 2 of the first modification introduces liquid into the second space 36 through the liquid supply tube 38 or discharges the liquid through the liquid discharge tube 39, thereby allowing for regulating the internal pressure of the cushioning material 30, and thus is capable of maintaining the more constant pressure exerted by the cushioning material 30 on the battery cell 10. By continuously circulating temperature-controlled liquid in the second space 36 through the liquid supply tube 38 and the liquid discharge tube 39, the temperature of the cushioning material 30 can be regulated, thereby further enhancing the thermal insulation of the cushioning material 30.

[0055] FIG. 7 is an enlarged cross-sectional view of the cushioning material used in a second modification of the

battery module according to one embodiment of the present invention. FIG. 8 is a plan view of the cushioning material illustrated in FIG. 7.

[0056] As illustrated in FIGS. 7 and 8, the cushioning material 130 used in the second modification is configured similarly to the equivalent in the battery module 1, except that the cushioning material 130 includes the seal portion 34 at the center of the surface that does not contact the battery cell 10, the air ventilation tube 37 connected to the first space 35, and the liquid supply tube 38 and the liquid discharge tube 39 connected to the second space 36. Therefore, the same reference numbers are assigned to the components common to the battery module 1, and descriptions thereof are omitted.

[0057] In the cushioning material 130, the seal portion 34 is provided at the center of the surface that does not contact the battery cell 10, and thus the first space 35 is located at the center of the cushioning material 130, and the second space 36 is located so as to sandwich the first space 35 from above and below. Consequently, in the cushioning material 130, the second space 36 is located on both sides that contact the battery cell 10.

[0058] The battery module using the cushioning material 130 of the second modification achieves the same effects as the battery module 1 does, since the cushioning material 130 includes the double-pack structure 33 including the first pack 31 and the second pack 32, gas filled in the first space 35, and liquid filled in the second space 36, in common with the equivalent in the battery module 1. Additionally, since the cushioning material 130 includes the air ventilation tube 37, the liquid supply tube 38, and the liquid discharge tube 39, the cushioning material 130 achieves the same effects as the battery module 2 of the first modification does. Furthermore, since the second space 36 of the cushioning material 130 is located on both sides that contact the battery cell 10, the internal pressure of the cushioning material 130 can be easily maintained uniform, even in cases where the pressure exerted by the battery cell 10 on the cushioning material 130 partially increases or decreases. Consequently, the pressure exerted by the cushioning material 130 on the battery cell 10 is maintained uniform.

[0059] The preferred embodiments of the present invention have been described above. However, the present invention is not limited to these embodiments and may be modified as appropriate.

[0060] In the embodiments described above, the battery cell 10 has been described as a solid-state battery including the solid electrolyte layer 17; however, the battery cell 10 is not limited to this configuration. The battery cell 10 may be a non-aqueous battery using an organic electrolytic solution as the electrolyte or a polymer battery using a polymer gel (polymer).

[0061] In the embodiments described above, the cushioning material 30, 130 is arranged between the battery cells 10 and between the battery cell 10 and the end plate 20; however, the location of the cushioning material 30, 130 is not limited to this. The cushioning material 30, 130 only needs to be arranged either between the battery cells 10, or between the battery cell 10 and the end plate 20, or both.

#### EXPLANATION OF REFERENCE NUMERALS

|        |                                              |
|--------|----------------------------------------------|
| [0062] | 1, 2: battery module                         |
| [0063] | 10: battery cell                             |
| [0064] | 11: positive electrode layer                 |
| [0065] | 11a: positive electrode lead wire            |
| [0066] | 12: positive electrode current collector     |
| [0067] | 13: positive electrode active material layer |
| [0068] | 14: negative electrode layer                 |
| [0069] | 14a: negative electrode lead wire            |
| [0070] | 15: negative electrode current collector     |
| [0071] | 16: metal layer                              |
| [0072] | 17: solid electrolyte layer                  |
| [0073] | 18: electrode stack                          |
| [0074] | 19: housing                                  |
| [0075] | 20: end plate                                |
| [0076] | 30: cushioning material                      |
| [0077] | 31: first pack                               |
| [0078] | 32: second pack                              |
| [0079] | 33: double-pack structure                    |
| [0080] | 34: seal portion                             |
| [0081] | 35: first space                              |
| [0082] | 36: second space                             |
| [0083] | 37: air ventilation tube                     |
| [0084] | 38: liquid supply tube                       |
| [0085] | 39: liquid discharge tube                    |
| [0086] | 40: module case                              |
| [0087] | 51: positive electrode terminal              |
| [0088] | 52: negative electrode terminal              |

What is claimed is:

1. A battery module, comprising:

a battery cell stack formed by stacking a plurality of battery cells;

a pair of end plates provided at both ends of the battery cell stack in a stacking direction; and

a cushioning material arranged either between the battery cells, or between the battery cell stack and the end plates, or both, wherein

the cushioning material includes:

a double-pack structure including a first pack and a second pack with an inner diameter larger than that of the first pack, in which the first pack and the second pack are at least partially bonded to each other;

gas filled in an internal space of the first pack; and

liquid filled in a space between the first pack and the second pack.

2. The battery module according to claim 1, wherein the first pack and the second pack of the double-pack structure are formed from a single sheet wound twice.

3. The battery module according to claim 1, wherein the cushioning material includes an air ventilation tube connected to the internal space of the first pack.

4. The battery module according to claim 1, wherein the cushioning material includes a liquid supply tube and a liquid discharge tube connected to the space between the first pack and the second pack.

\* \* \* \* \*