

(12) **United States Patent**
McCall et al.

(10) **Patent No.:** **US 12,403,611 B2**
(45) **Date of Patent:** **Sep. 2, 2025**

(54) **HEAD AND NECK ASSEMBLY FOR A HUMANOID ROBOT**

(71) Applicant: **FIGURE AI INC.**, Sunnyvale, CA (US)

(72) Inventors: **David McCall**, Sunnyvale, CA (US);
Sydney Hardy, Sunnyvale, CA (US);
Katarina Rodak, Sunnyvale, CA (US)

(73) Assignee: **FIGURE AI INC.**, San Jose, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

(21) Appl. No.: **18/919,274**

(22) Filed: **Oct. 17, 2024**

(65) **Prior Publication Data**
US 2025/0100156 A1 Mar. 27, 2025

Related U.S. Application Data

(63) Continuation-in-part of application No. 18/914,800, filed on Oct. 14, 2024, which is a continuation-in-part of application No. 18/904,332, filed on Oct. 2, 2024, and a continuation-in-part of application No. 29/935,680, filed on Apr. 3, 2024, which is a (Continued)

(51) **Int. Cl.**
B25J 11/00 (2006.01)
H04N 23/90 (2023.01)

(52) **U.S. Cl.**
CPC **B25J 11/0015** (2013.01); **H04N 23/90** (2023.01)

(58) **Field of Classification Search**
None
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,394,766 A 3/1995 Johnson
6,732,015 B2 5/2004 Maeda
(Continued)

FOREIGN PATENT DOCUMENTS

CN 102357889 2/2012
CN 212287717 1/2021
(Continued)

OTHER PUBLICATIONS


Available online at <https://youtu.be/YsdnsNjvwKo?si=bu2dXk8mQaL86C2M>, at least as early as Aug. 23, 2023.
(Continued)

Primary Examiner — Christopher Braniff

(57) **ABSTRACT**

A humanoid robot includes an upper region includes a head and neck assembly having a neck portion and a head portion coupled to the neck portion. Said head portion includes: a rear shell, and a frontal shell coupled to the rear shell to define a head volume between the frontal shell and the rear shell, and an electronics assembly with a display located in the head volume between the frontal shell and the rear shell. The frontal shell of the head housing assembly includes: a first arc length at a first location below the display, a second arc length at a second location aligned with a portion of the display, and wherein said second arc length is greater than the first arc length, and a third arc length at a third location above the display, and wherein said third arc length is greater than both the first arc length and the second arc length.

23 Claims, 56 Drawing Sheets

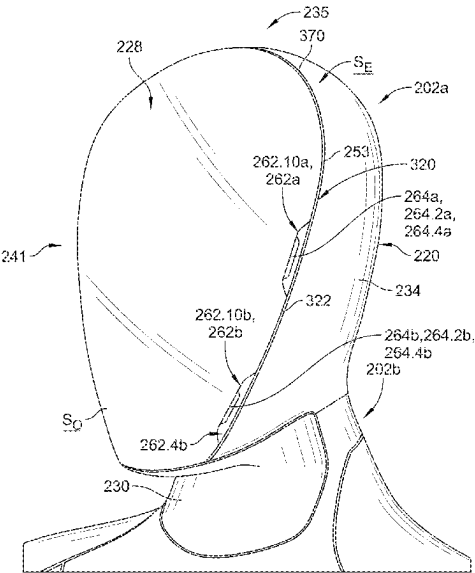

Related U.S. Application Data

continuation-in-part of application No. 29/928,748, filed on Feb. 15, 2024, which is a continuation-in-part of application No. 29/889,764, filed on Apr. 17, 2023.

- (60) Provisional application No. 63/707,897, filed on Oct. 16, 2024, provisional application No. 63/707,949, filed on Oct. 16, 2024, provisional application No. 63/708,003, filed on Oct. 16, 2024, provisional application No. 63/707,547, filed on Oct. 15, 2024, provisional application No. 63/626,037, filed on May 28, 2024, provisional application No. 63/634,697, filed on Apr. 16, 2024, provisional application No. 63/573,528, filed on Apr. 3, 2024, provisional application No. 63/573,226, filed on Apr. 2, 2024, provisional application No. 63/566,595, filed on Mar. 18, 2024, provisional application No. 63/626,034, filed on Mar. 13, 2024, provisional application No. 63/564,741, filed on Mar. 13, 2024, provisional application No. 63/561,316, filed on Mar. 5, 2024, provisional application No. 63/626,028, filed on Feb. 27, 2024, provisional application No. 63/626,035, filed on Feb. 27, 2024, provisional application No. 63/626,030, filed on Feb. 21, 2024.

(56)

References Cited**U.S. PATENT DOCUMENTS**

6,980,889 B2 12/2005 Ito
 7,024,276 B2 4/2006 Ito
 7,072,741 B2 7/2006 Nagashima
 7,099,747 B2 8/2006 Mikami
 7,308,336 B2 12/2007 Takenaka
 7,319,918 B2 1/2008 Takenaka
 7,379,789 B2 5/2008 Takenaka
 7,386,364 B2 6/2008 Mikami
 7,664,569 B2 2/2010 Shimizu
 7,864,159 B2 1/2011 Sweetser
 8,511,964 B2 8/2013 Linn
 8,660,695 B2 2/2014 De La Rosa Tames
 8,770,749 B2 7/2014 Mccabe
 9,134,547 B2 9/2015 Mccabe
 9,205,556 B1 12/2015 Magnusson
 9,205,560 B1 12/2015 Edsinger
 9,346,165 B1 5/2016 Metzger
 9,383,594 B2 7/2016 Mccabe
 9,494,415 B2 11/2016 Sweetser
 9,574,646 B1 2/2017 Edsinger
 9,575,335 B1 2/2017 Mccabe
 9,592,603 B2 3/2017 Hardouin
 9,789,607 B1 10/2017 Whitman
 9,789,612 B2 10/2017 Hoffman
 9,796,078 B2 10/2017 Angle
 9,821,466 B2 11/2017 Bingham
 9,868,210 B1 1/2018 Whitman
 9,910,297 B1 3/2018 Mccabe
 9,992,474 B2 6/2018 Grunnet-Jepsen
 10,007,994 B2 6/2018 Grunnet-Jepsen
 10,018,256 B1 7/2018 Magnusson
 10,189,158 B2 1/2019 Edsinger
 10,203,209 B2 2/2019 Roumeliotis
 10,310,362 B2 6/2019 Grunnet-Jepsen
 10,349,245 B2 7/2019 Tokuchi
 10,537,998 B2 1/2020 Salisbury
 10,656,511 B2 5/2020 Grunnet-Jepsen
 10,780,578 B2 9/2020 Blankespoor
 10,890,921 B2 1/2021 Gillett
 10,921,558 B2 2/2021 Yao
 10,924,638 B2 2/2021 Swaminathan
 10,946,528 B2 3/2021 Gupta
 10,960,539 B1 3/2021 Kalakrishnan
 11,180,205 B2 11/2021 Amino
 11,188,821 B1 11/2021 Kalakrishnan

11,333,954 B2 5/2022 Bull
 11,347,030 B2 5/2022 Yao
 11,402,726 B2 8/2022 Bull
 11,416,003 B2 8/2022 Whitman
 11,435,745 B2 9/2022 Lee
 11,498,223 B2 11/2022 Williams
 11,546,504 B2 1/2023 Kim
 11,554,484 B2 1/2023 Jung
 11,599,009 B2 3/2023 Bull
 11,600,010 B2 3/2023 Doutre
 11,602,853 B2 3/2023 Stoianovici
 11,686,884 B2 6/2023 Shinohara
 11,707,852 B1 7/2023 Hurst
 11,736,677 B2 8/2023 Grunnet-Jepsen
 11,807,067 B2 11/2023 Mancini
 11,833,680 B2 12/2023 Deits
 11,850,738 B2 12/2023 Chernyak
 11,851,120 B2 12/2023 Fay
 11,999,423 B2 6/2024 Whitman
 12,036,670 B2 7/2024 Geating
 12,054,208 B2 8/2024 Swilling
 12,070,863 B2 8/2024 Whitman
 12,077,229 B2 9/2024 Whitman
 12,097,626 B2 9/2024 Ikeda
 12,122,044 B2 10/2024 Webb
 12,134,181 B2 11/2024 Klingensmith
 12,172,537 B2 12/2024 Gonano
 12,214,497 B2 2/2025 Whitman
 12,235,652 B2 2/2025 Whitman
 12,240,117 B2 3/2025 Chebotar
 12,251,831 B2 3/2025 Murphy
 2004/0103740 A1 6/2004 Townsend
 2010/0280662 A1 11/2010 Abdallah
 2014/0265401 A1 9/2014 Allen Demers
 2016/0052574 A1 2/2016 Khripin
 2017/0075143 A1 3/2017 Saylor
 2017/0106738 A1 4/2017 Gillett
 2017/0299898 A1 10/2017 Gallina
 2018/0104823 A1* 4/2018 Kaku G06N 3/008
 2019/0025611 A1 1/2019 Saylor
 2019/0105783 A1 4/2019 Al Moubayed
 2019/0278079 A1 9/2019 Mccabe
 2019/0329413 A1* 10/2019 Johnson G06Q 20/204
 2019/0337166 A1* 11/2019 Keeney-Ritchie B25J 9/0009
 2020/0009739 A1 1/2020 Moon
 2020/0096792 A1 3/2020 Mccabe
 2020/0330246 A1 10/2020 Tognetti
 2020/0409183 A1 12/2020 Saylor
 2021/0387346 A1* 12/2021 Gillett B25J 19/0075
 2022/0388174 A1 12/2022 Stathis
 2022/0390952 A1 12/2022 Yu
 2022/0395974 A1 12/2022 Balasubramanian
 2022/0410380 A1 12/2022 Lu
 2023/0143315 A1 5/2023 Whitman
 2023/0173683 A1 6/2023 Gomez
 2023/0182296 A1 6/2023 Sermanet
 2023/0347514 A1 11/2023 Xiao
 2024/0003380 A1 1/2024 Vyas
 2024/0181637 A1 6/2024 Gillett
 2024/0217104 A1 7/2024 Neville
 2024/0228191 A1 7/2024 Kumar
 2024/0300109 A1 9/2024 Shaw
 2025/0147517 A1 5/2025 Swilling

FOREIGN PATENT DOCUMENTS

CN 112959343 6/2021
 CN 115503013 12/2022
 CN 117047810 11/2023
 GB 2472046 4/2013
 GB 2496335 5/2013
 KR 20180107353 10/2018
 WO 2009030922 3/2009
 WO 2019234706 12/2019
 WO 2023107501 6/2023
 WO 2024058844 3/2024
 WO 2024085904 4/2024
 WO 2024112350 5/2024
 WO 2024112351 5/2024

(56)

References Cited

FOREIGN PATENT DOCUMENTS

WO	2024123766	6/2024
WO	2024163992	8/2024
WO	2025019583	1/2025
WO	2025042802	2/2025
WO	2025072321	4/2025

OTHER PUBLICATIONS

Available online at <https://www.youtube.com/watch?v=q8ldbodRG14>, at least as early as May 22, 2019.

Available online at https://youtu.be/GtPs_ygfaEA?si=7lv6MEFvFoaacKfa, at least as early as Aug. 15, 2023.

Available online at <https://www.youtube.com/watch?v=G6JE7mNYz2A>, at least as early as Oct. 17, 2024.

Available online at <https://www.youtube.com/watch?v=FuNFr7V7KFQ>, at least as early as Aug. 19, 2024.

Available online at <https://www.youtube.com/watch?v=GzX1qOI01bE>, at least as early as May 13, 2024.

Available online at https://youtu.be/_MBd_XfXy9M?si=PbEHUJpRUFqaxS3J, at least as early as Jun. 26, 2023.

Available online at <https://youtu.be/SHPxcRBIXN0?si=VblqbK7jzUqtZGmn>, at least as early as Sep. 26, 2023.

Available online at <https://youtu.be/BvFxD-8AhJA?si=Vx1F4a76tbQDUX48>, at least as early as Nov. 16, 2023.

Available online at <https://www.youtube.com/watch?v=jWTWwuzB6Cg>, at least as early as Aug. 27, 2024.

Available online at <https://www.youtube.com/watch?v=B-ebMigAHZq>, at least as early as Sep. 30, 2024.

Available online at <https://youtu.be/XiQkeWOFwmk?si=lqOPC8gXgmmGvXRT>, at least as early as May 16, 2023.

Available online at <https://youtu.be/cpraXaw7dyc?si=JvPaT6eMA18psrmU>, at least as early as Dec. 13, 2023.

Available online at <https://www.youtube.com/watch?v=DrNcXgoFv20>, at least as early as Oct. 18, 2024.

Available online at <https://youtu.be/BNSZ8Fwcd20?si=YnVgjYblVuhASK1>, at least as early as Oct. 27, 2023.

Available online at <https://youtu.be/SS3Ga2HQQ0s?si=Dwr3sJuCsOeUoSLj>, at least as early as Nov. 20, 2023.

Available online at <https://www.youtube.com/watch?v=iWC8rSjDyWU>, at least as early as Oct. 18, 2024.

Available online at <https://youtu.be/sihlDeJ4Hmk?si=fJsKpvRFPzFejmS6>, at least as early as Dec. 27, 2023.

Available online at <https://www.youtube.com/watch?v=zkBnFPBV3f0>, at least as early as Jul. 11, 2013.

Available online at <https://www.youtube.com/watch?v=oXBYZxa25vc&t=1s>, at least as early as Apr. 3, 2013.

Available online at <https://www.youtube.com/watch?v=LBeml9AmTT4>, at least as early as Apr. 7, 2015.

Available online at <https://www.youtube.com/watch?v=IE-YBaYjbqY>, at least as early as Dec. 10, 2013.

Available online at <https://www.youtube.com/watch?v=y-j4dixQQml&t=222s>, at least as early as May 22, 2012.

Available online at https://www.youtube.com/watch?v=Bmg1bk_Op64&t=1s, at least as early as Nov. 10, 2011.

Available online at <https://www.youtube.com/watch?v=20GHG-R9eFI>, at least as early as Mar. 6, 2023.

Available online at <https://www.youtube.com/watch?v=bUrLuUxv9gE>, at least as early as Aug. 30, 2024.

Available online at https://www.youtube.com/watch?v=-9EM5_VFIt8, at least as early as Apr. 16, 2024.

Available online at https://www.youtube.com/watch?v=29ECwExc_M&t=2s, at least as early as Apr. 17, 2024.

Available online at <https://www.youtube.com/watch?v=67CUudkjEG4>, at least as early as Oct. 26, 2009.

Available online at <https://www.youtube.com/watch?v=yBmatGQ0giY&t=1s>, at least as early as Aug. 11, 2022.

Available online at <https://www.youtube.com/watch?v=bdVrWxjK2vo>, at least as early as Sep. 17, 2024.

Available online at <https://www.youtube.com/watch?v=qw2y0kceAv0>, at least as early as Oct. 15, 2024.

Available online at https://www.youtube.com/watch?v=B_12k7MZEKg, at least as early as Jun. 30, 2024.

Available online at <https://www.youtube.com/watch?v=CbA9wA9etGA>, at least as early as Sep. 19, 2024.

Available online at <https://www.youtube.com/watch?v=zLhA-RWBBYU>, at least as early as Jul. 5, 2024.

Available online at https://www.youtube.com/watch?v=_mQJw8VhZ7w&t=111s, at least as early as Oct. 5, 2022.

Available online at <https://www.youtube.com/watch?v=1fC7b2LjVW4>, at least as early as Jul. 12, 2016.

Available online at <https://www.youtube.com/watch?v=UPOLcElvwA0>, at least as early as Apr. 28, 2016.

Available online at <https://www.youtube.com/watch?v=UBbk180ZbTc>, at least as early as Oct. 14, 2024.

Available online at <https://www.youtube.com/watch?v=UHe1zSQwep0>, at least as early as Oct. 14, 2024.

Available online at <https://www.youtube.com/watch?v=MCbGeC-kuBM>, at least as early as Aug. 5, 2024.

Available online at <https://www.youtube.com/watch?v=ujdK3yd2gHY>, at least as early as Jul. 2, 2024.

Available online at <https://www.youtube.com/watch?v=-HizP4UQvug>, at least as early as Apr. 25, 2024.

Available online at <https://www.youtube.com/watch?v=ioOkUQqmZ0>, at least as early as Nov. 9, 2022.

Available online at <https://www.youtube.com/watch?v=zmqWU2dQKZ8>, at least as early as Oct. 24, 2024.

Available online at <https://www.youtube.com/watch?v=q8ldbodRG14>, at least as early as Feb. 26, 2024.

Available online at <https://www.youtube.com/watch?v=CUhuhleQNos>, at least as early as May 22, 2019.

Available online at https://www.youtube.com/watch?v=dY57qnD_07U, at least as early as Jul. 27, 2021.

International Search Report for PCT/US2025/016930 dated Jun. 10, 2025.

Park et al., Mechanical Design of Humanoid Robot Platform KHR-3 (Kaist Humanoid Robot 3: HUBO), 2005, IEEE, pgl., 321-3226 (2005).

Nakada et al., "Deep Learning of Neuromuscular and Visuomotor Control of a Biomimetic Simulated Humanoid," IEEE 3952-3959 (2020).

Lim et al., "Basic Emotional Walking Using a Biped Humanoid Robot," IEEE, 954-959 (1999).

Albers et al., "Upper Body of a new Humanoid Robot—the Design of ARMAR III," IEEE, 308-309 (2006).

Pateromichelelakis et al., Head-eyes system and gaze analysis of the humanoid robot Romeo, 2014, IEEE, p. 1374-1379 (Year: 2014).

Jeung et al., Realization of human neck motion with novel robotic mechanism, 2016, IEEE, p. 482-486 (Year: 2016).

Barker et al., Natural head movement for HRI with a muscular-skeletal head and neck robot, 2017, IEEE, p. 587-592 (Year: 2017).

Gao et al., Development of a low motion-noise humanoid neck: Statics analysis and experimental validation, 2010, IEEE, p. 1203-1208 (Year: 2010).

International Search Report for PCT/US2025/012544.

International Search Report for PCT/US2025/010425.

International Search Report for PCT/US2025/011450.

Keselman et al., "Intel RealSense stereoscopic depth cameras," in Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition Workshops, pp. 1-10, 2017.

* cited by examiner

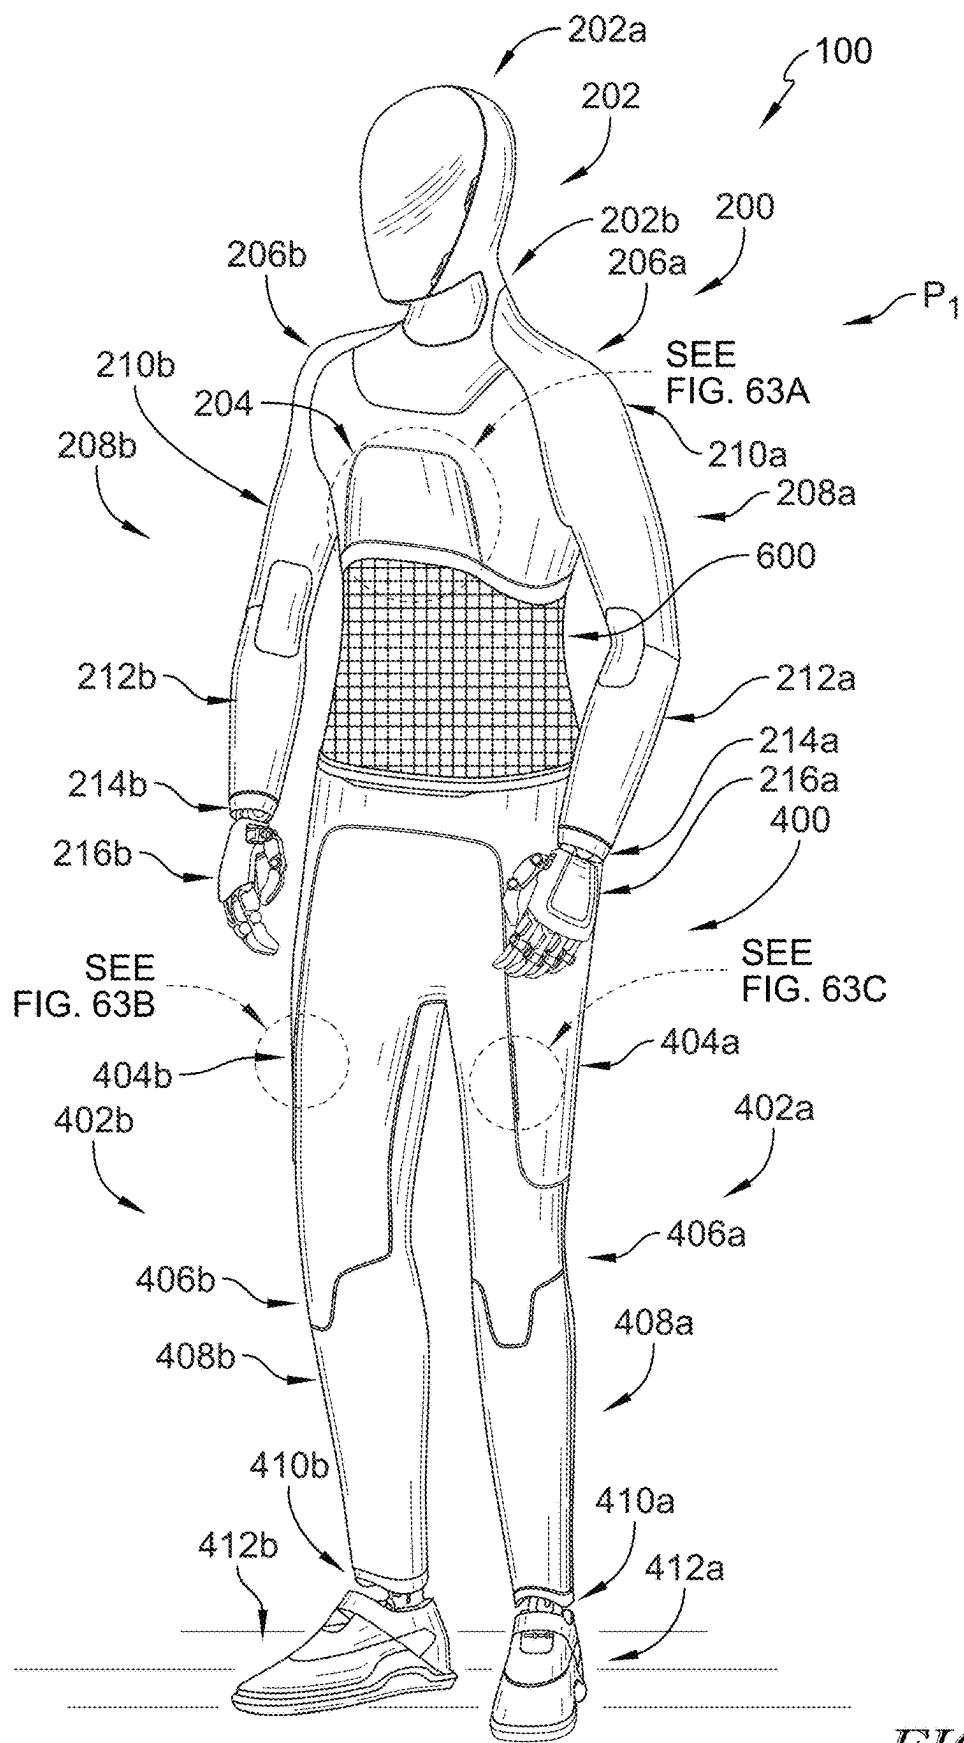


FIG. 1

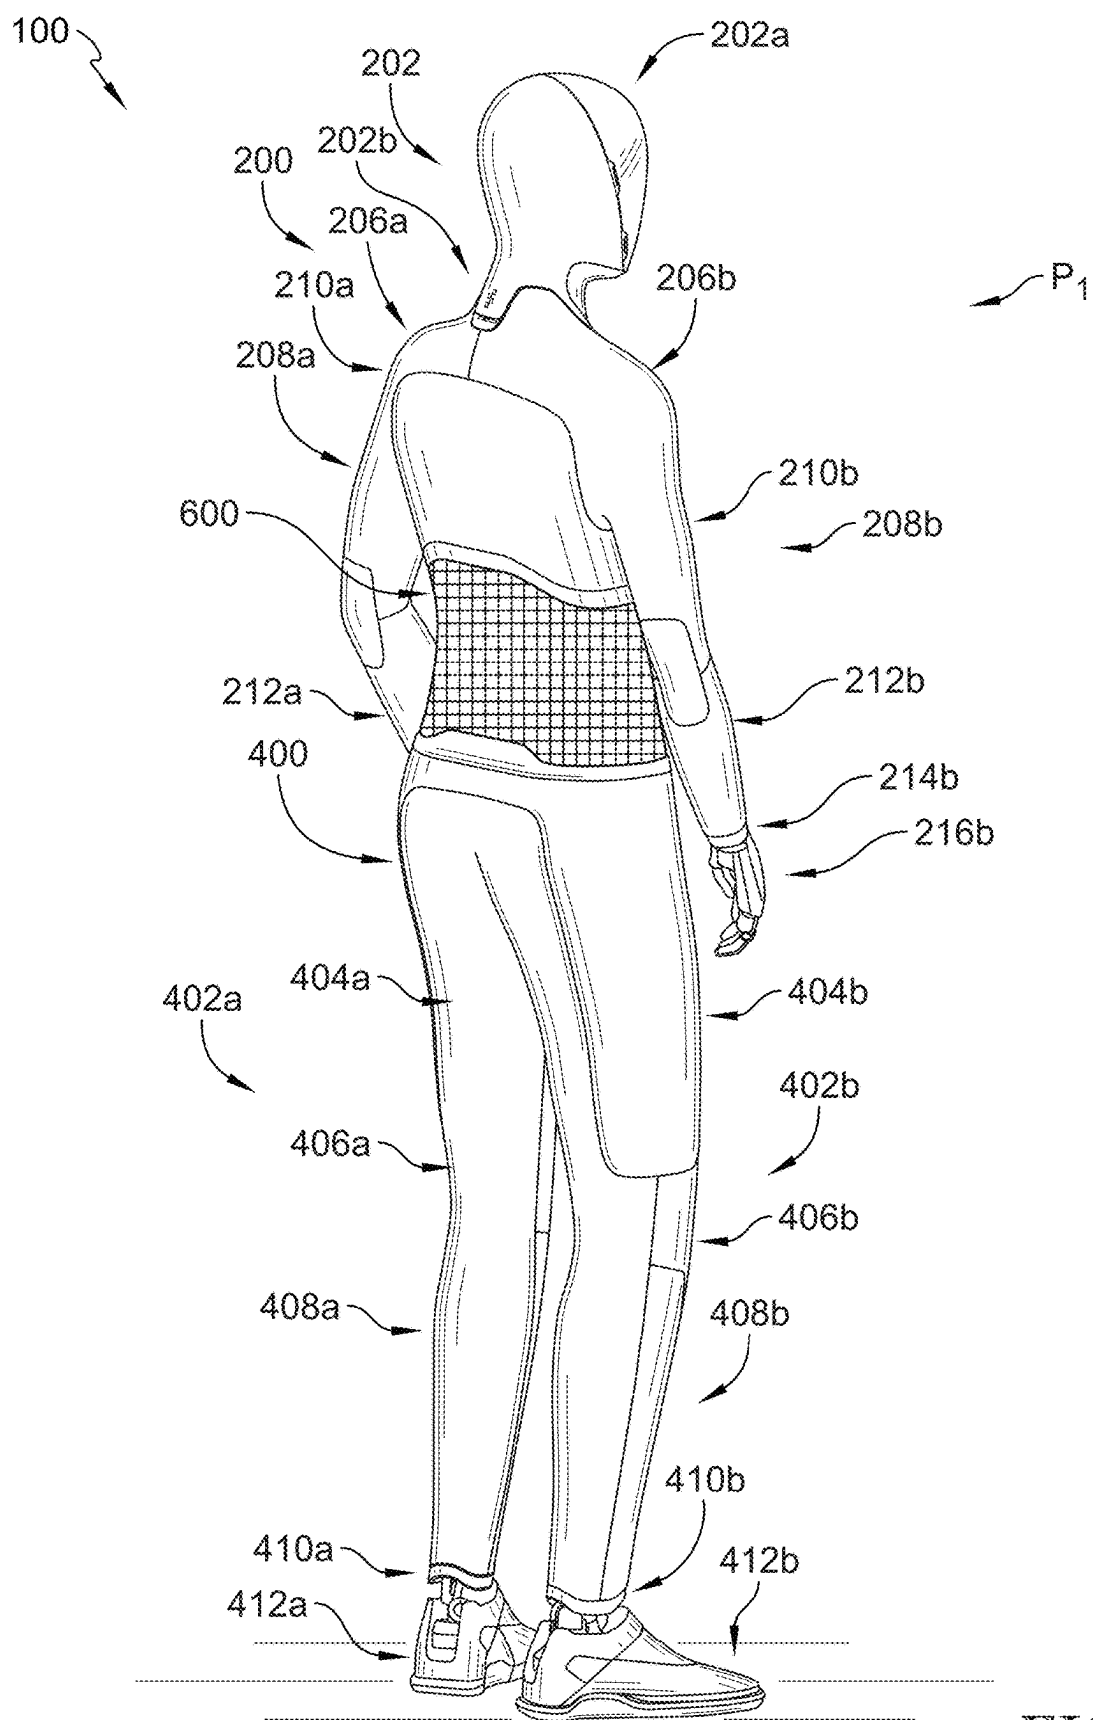


FIG. 2

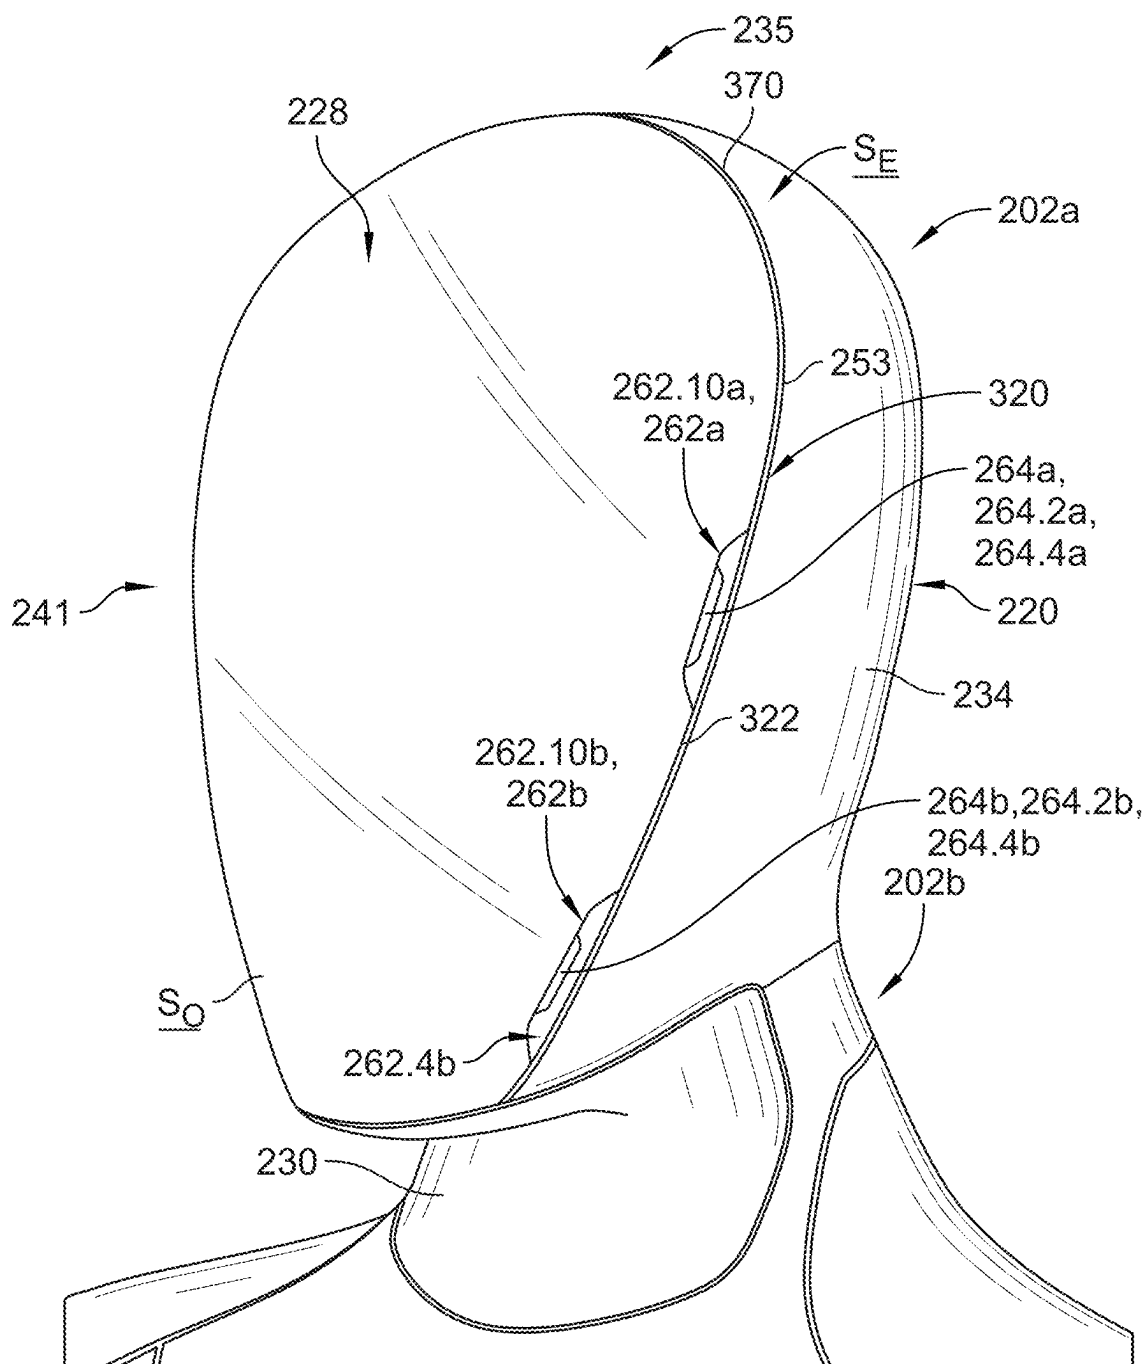
*FIG. 3*

FIG. 4

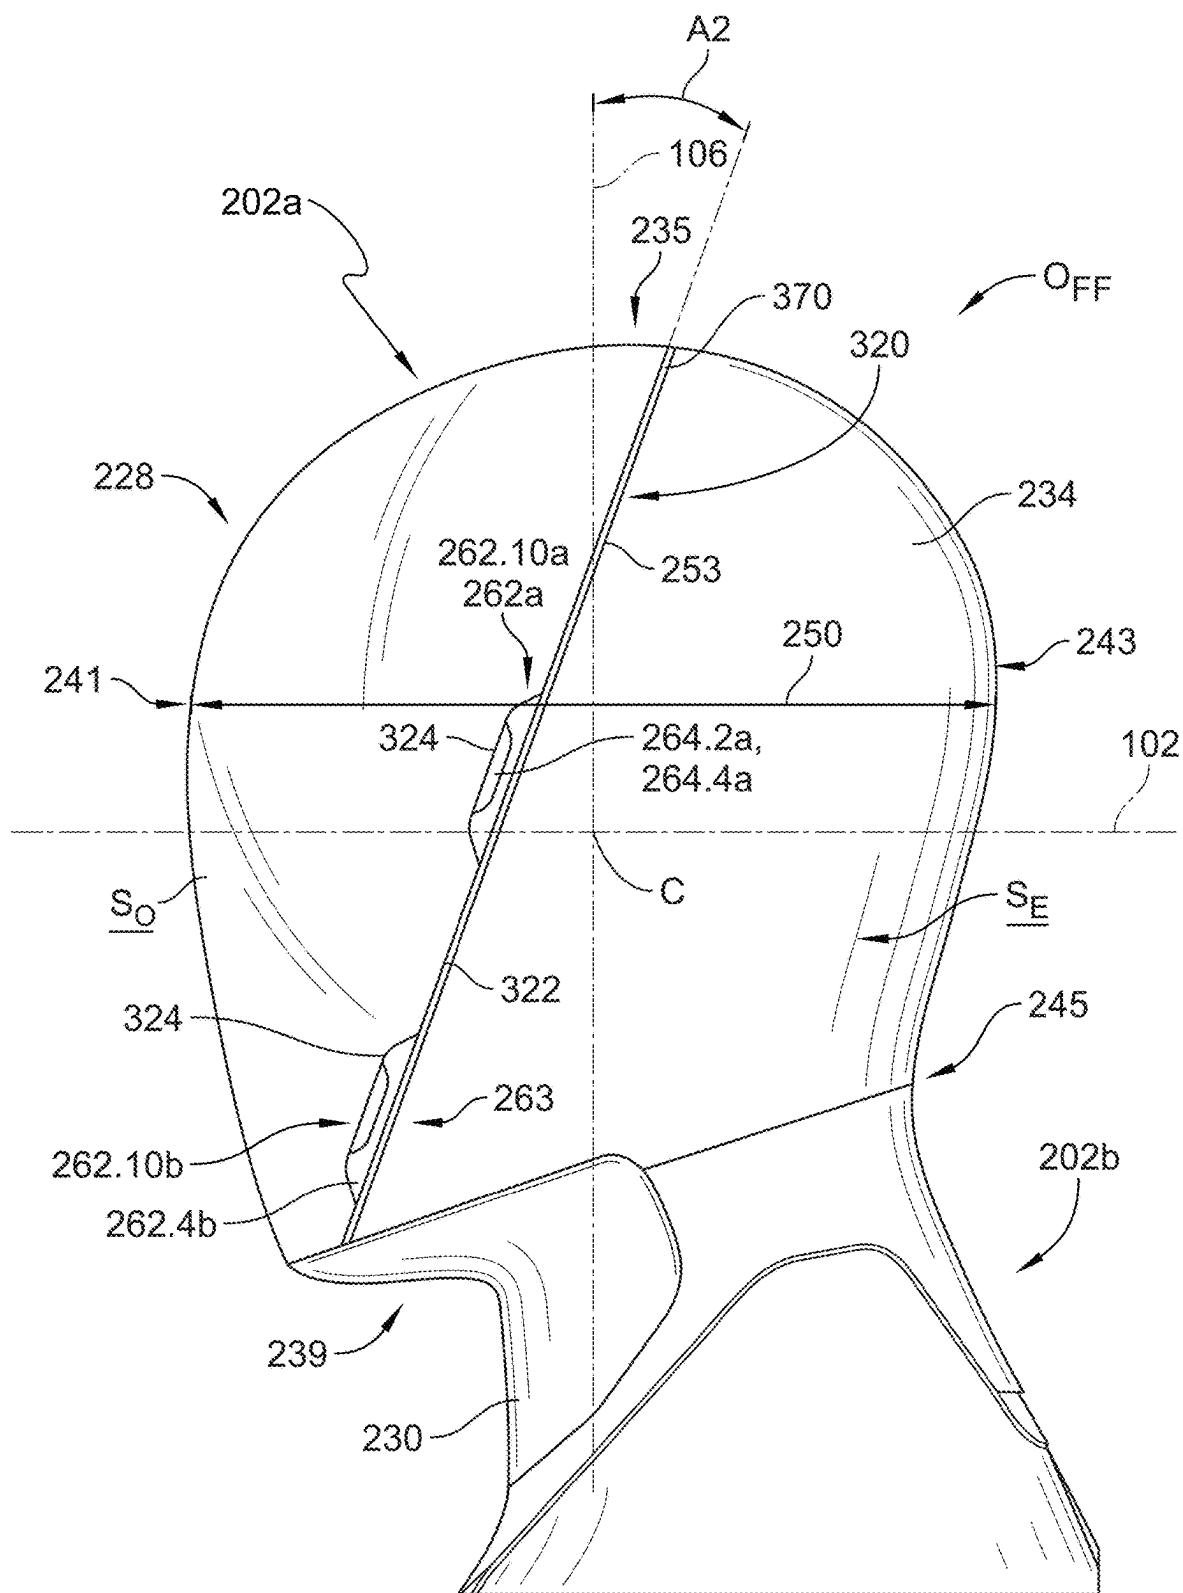


FIG. 5A

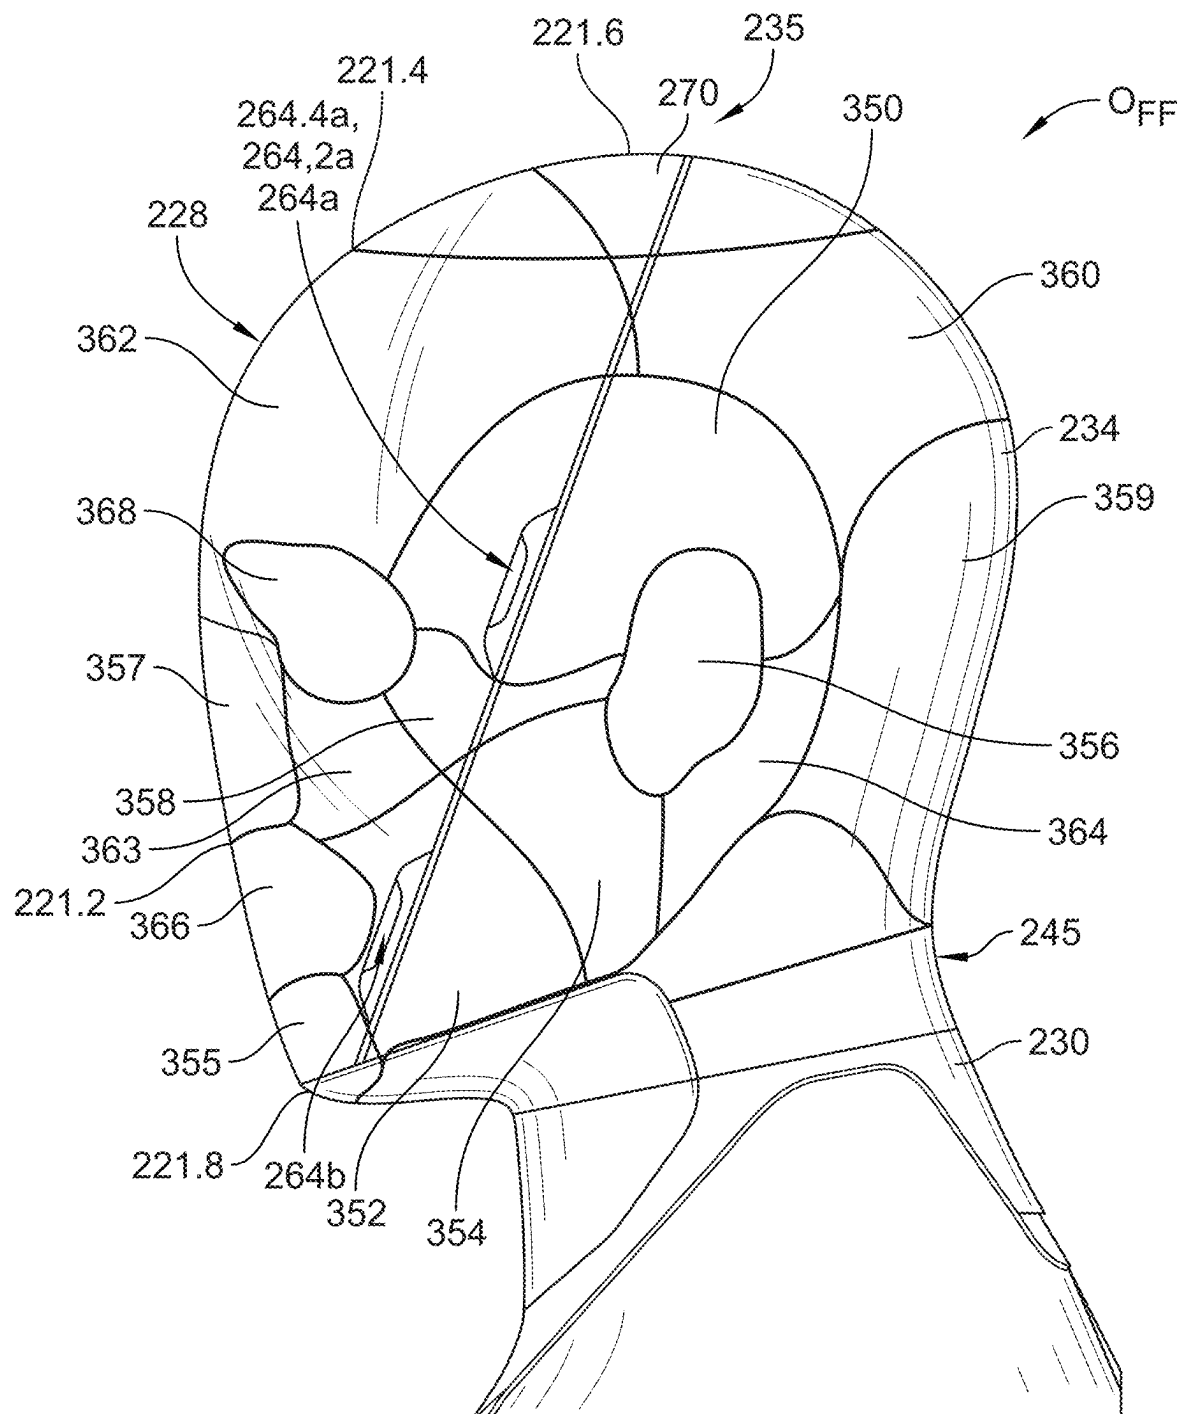
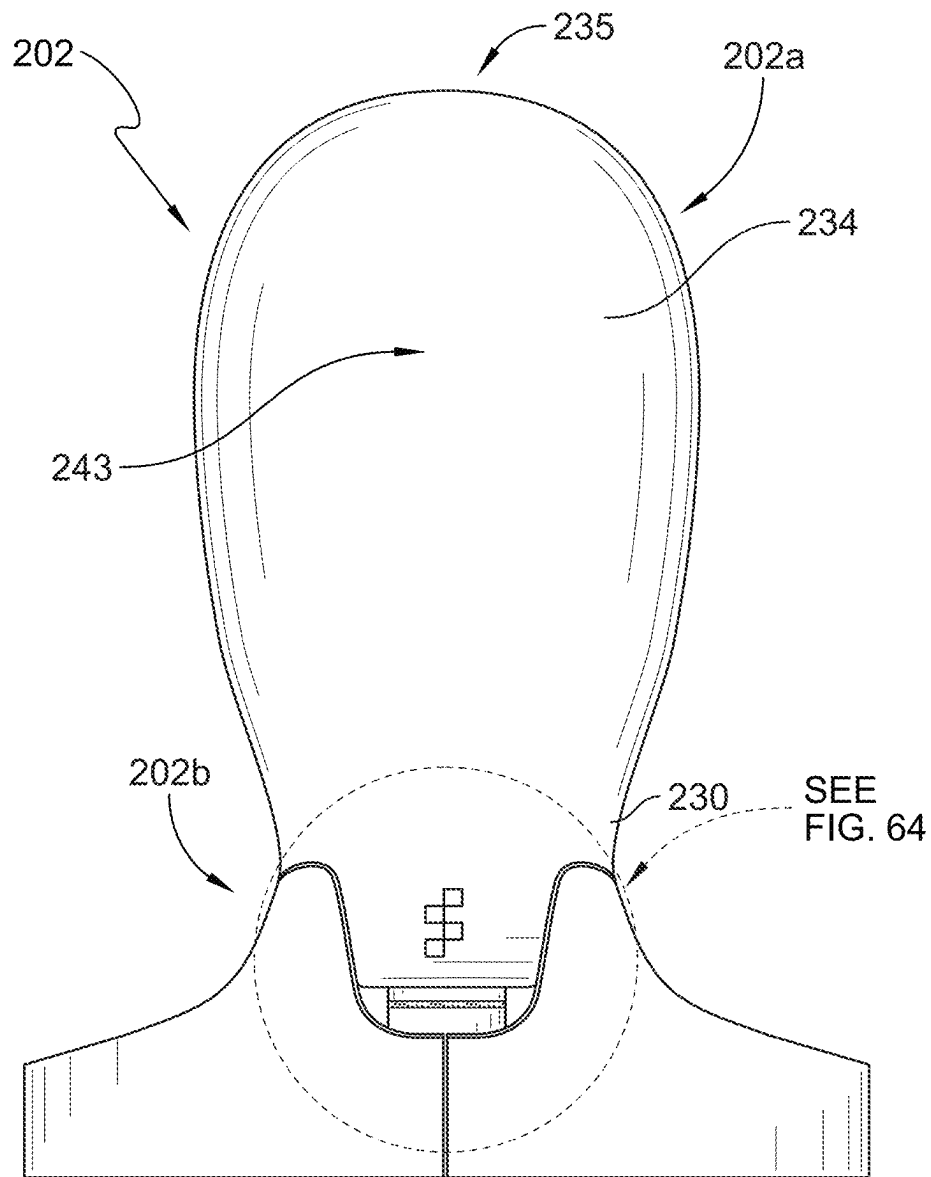
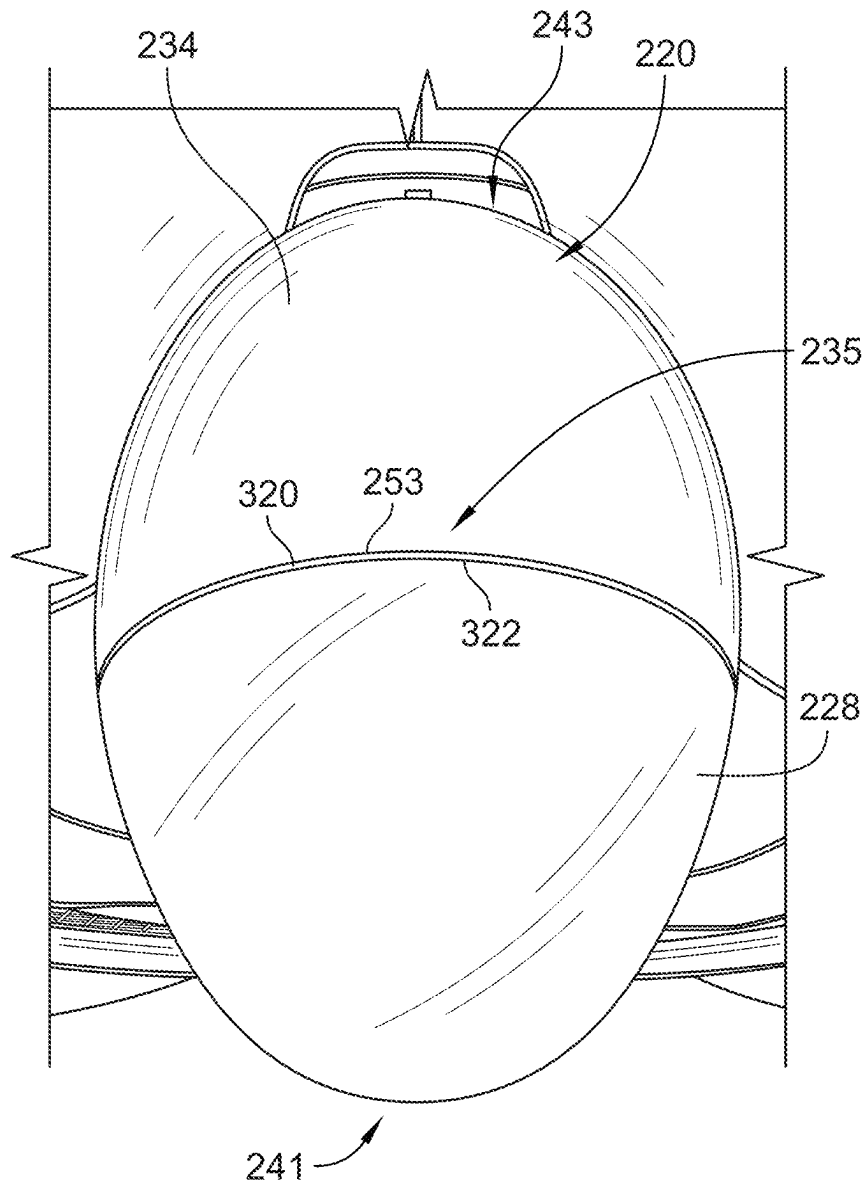
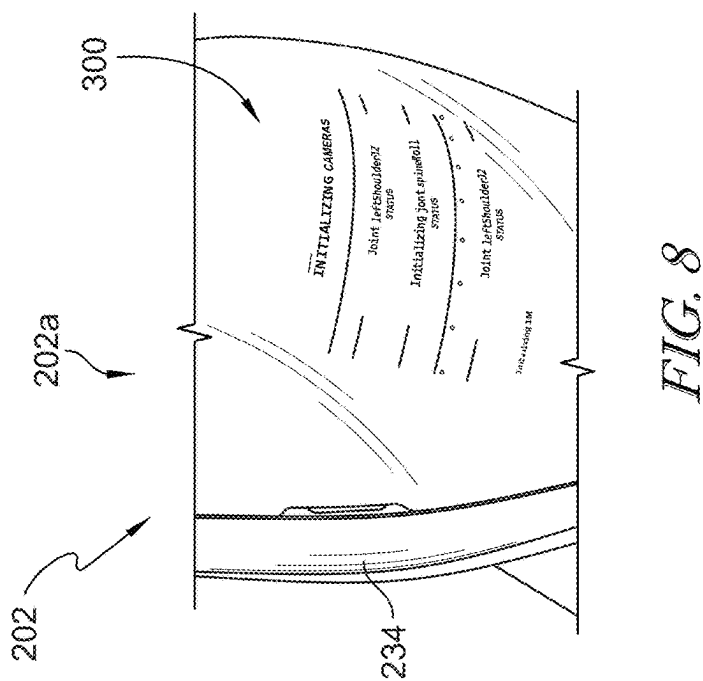
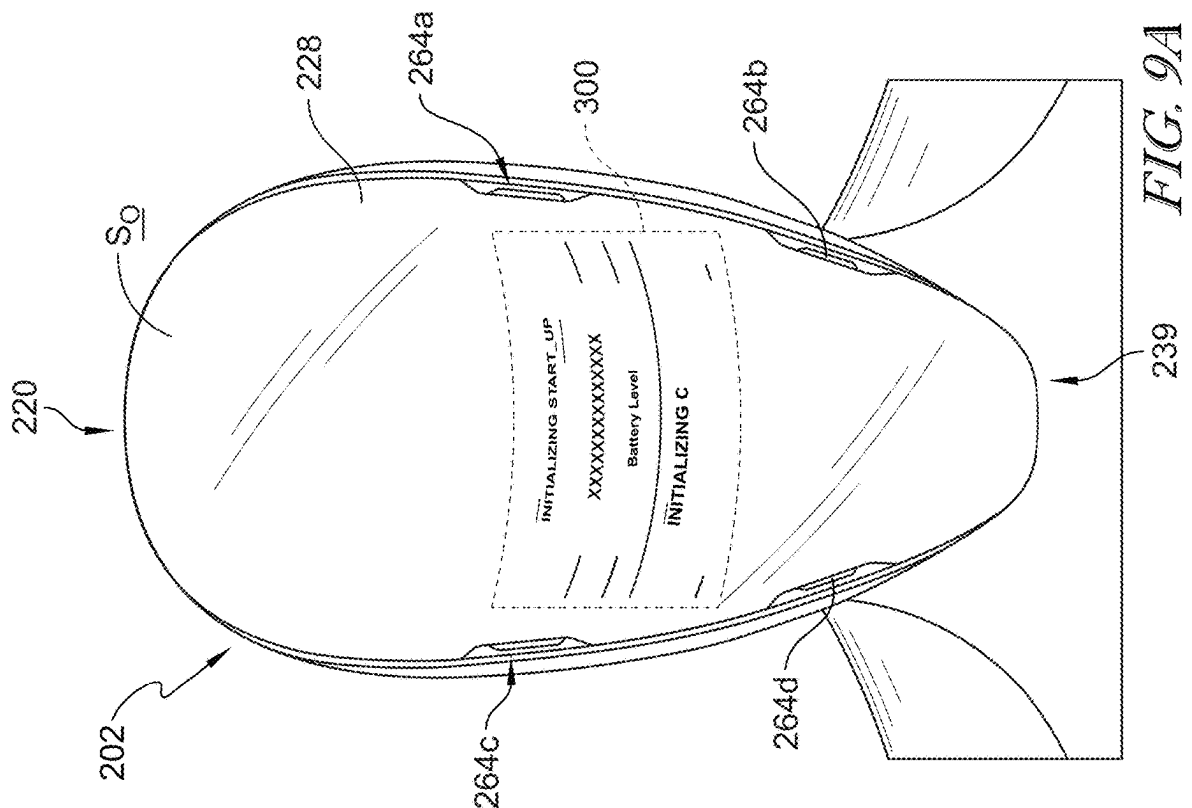


FIG. 5B

*FIG. 6*

*FIG. 7*



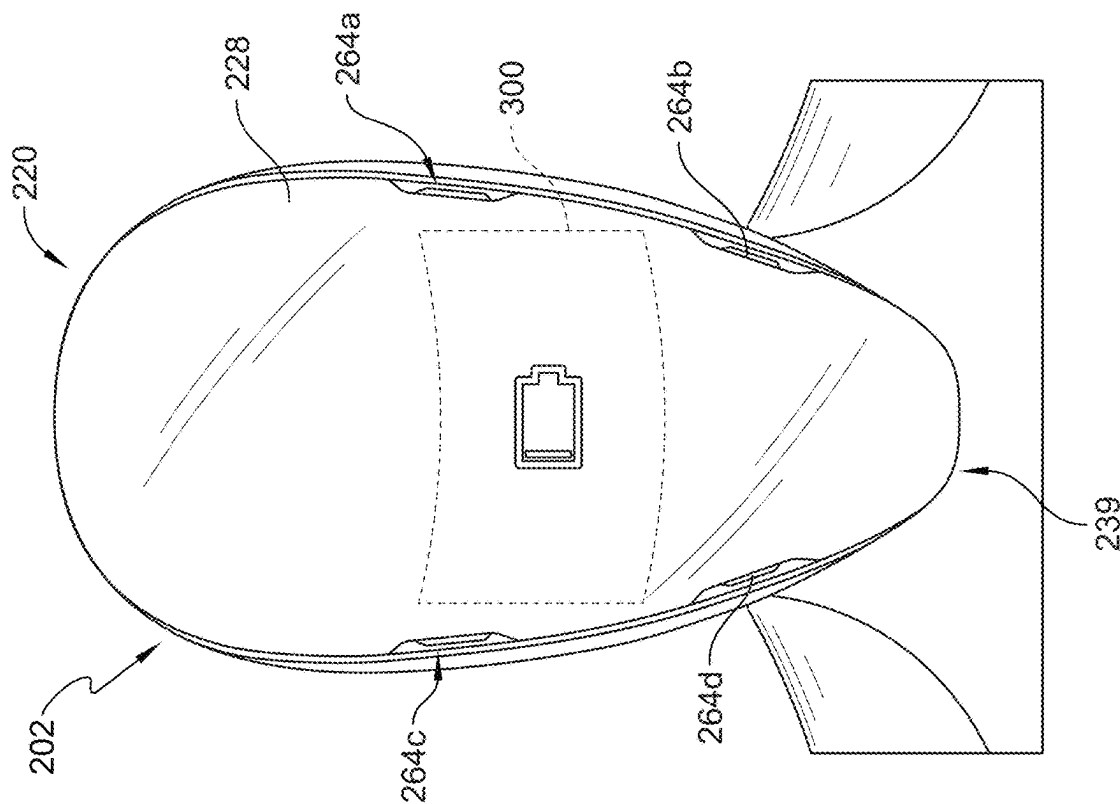


FIG. 9C

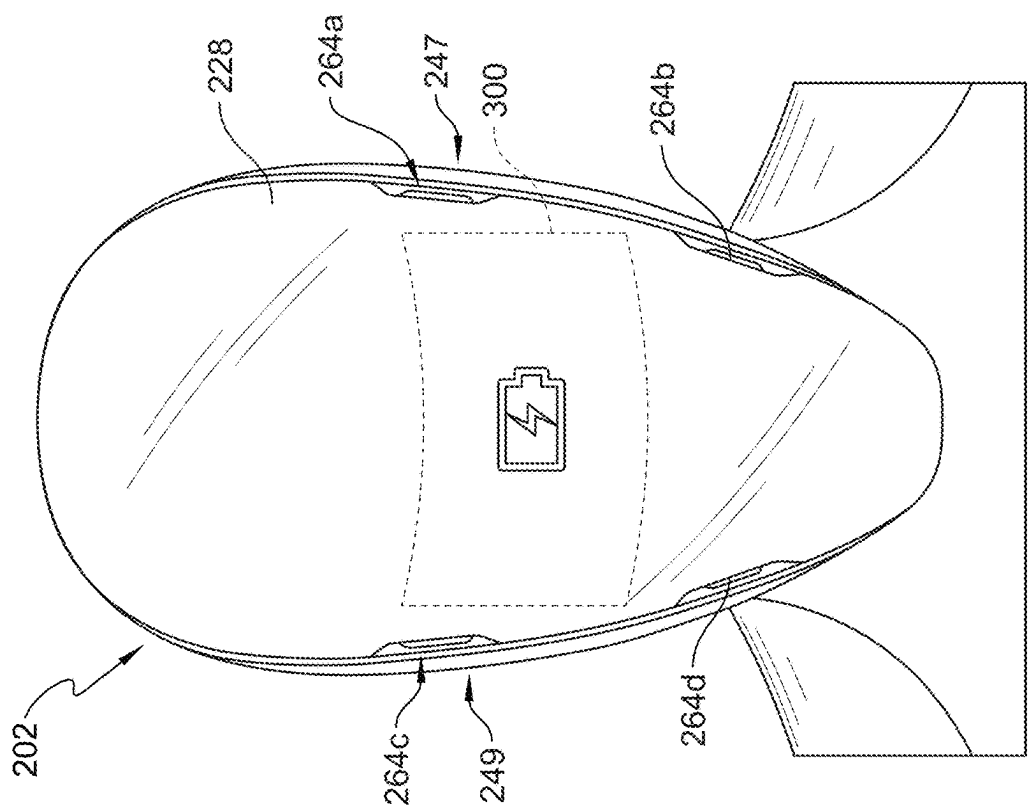


FIG. 9B

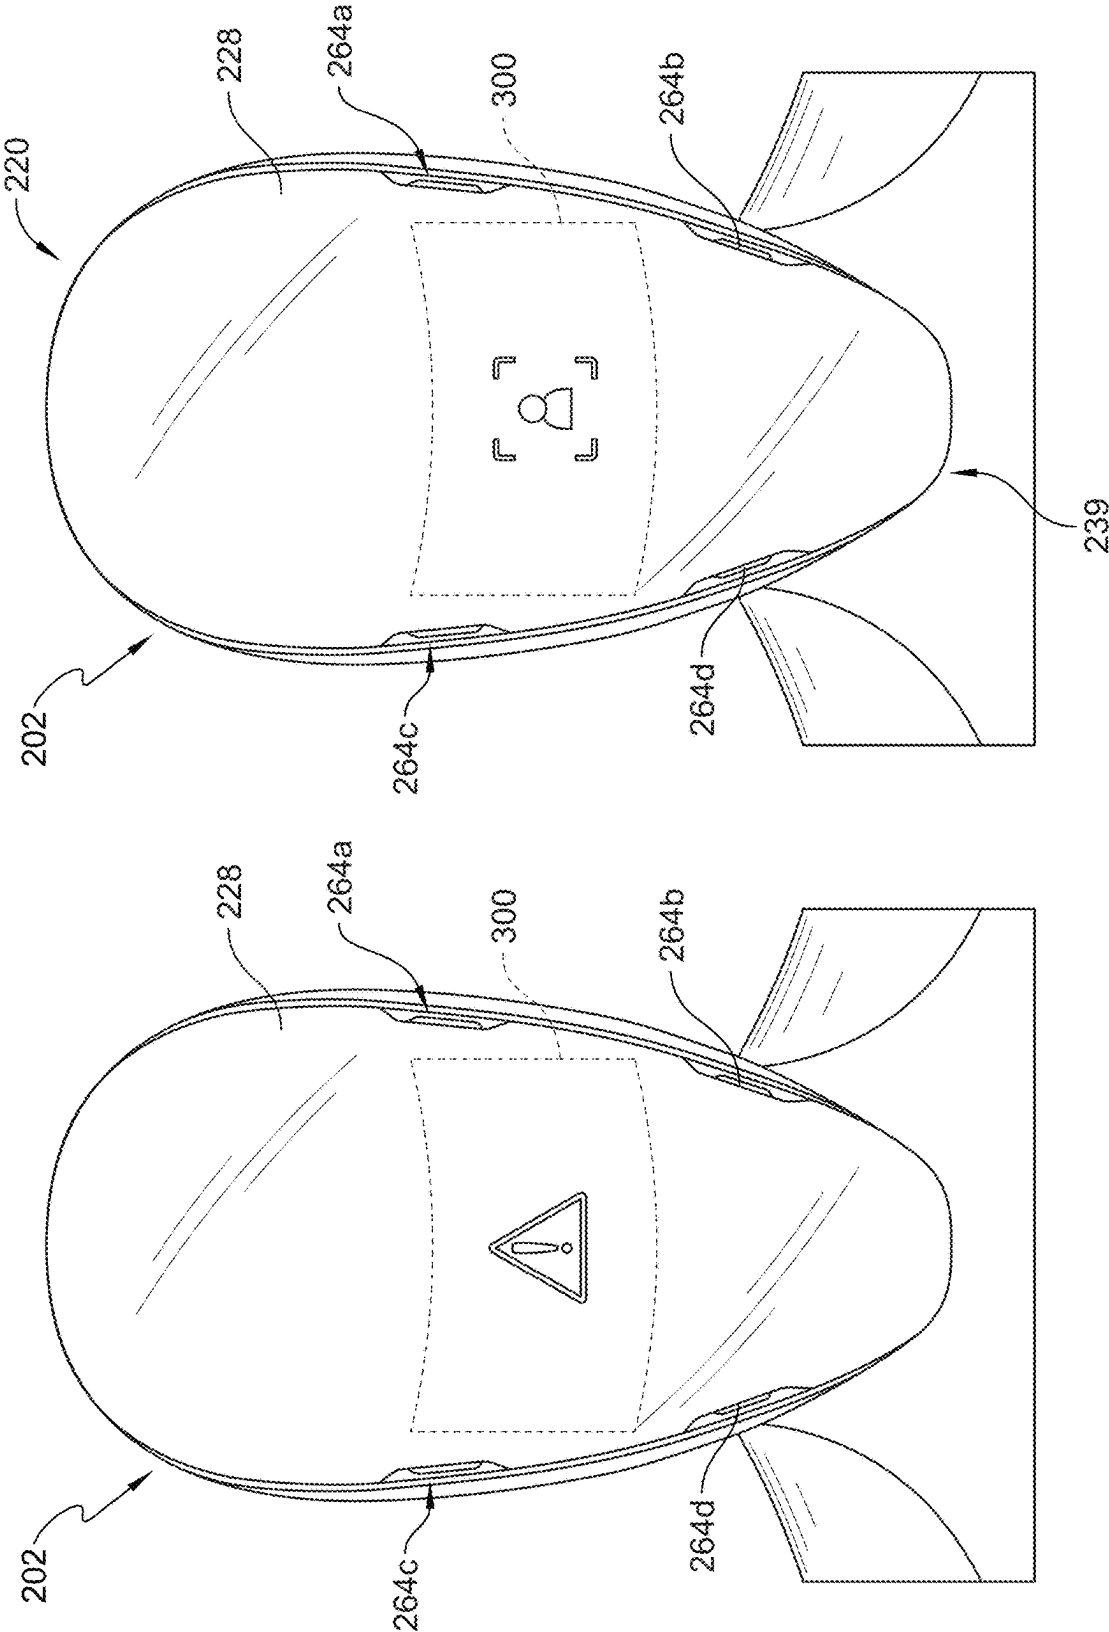


FIG. 9E

FIG. 9D

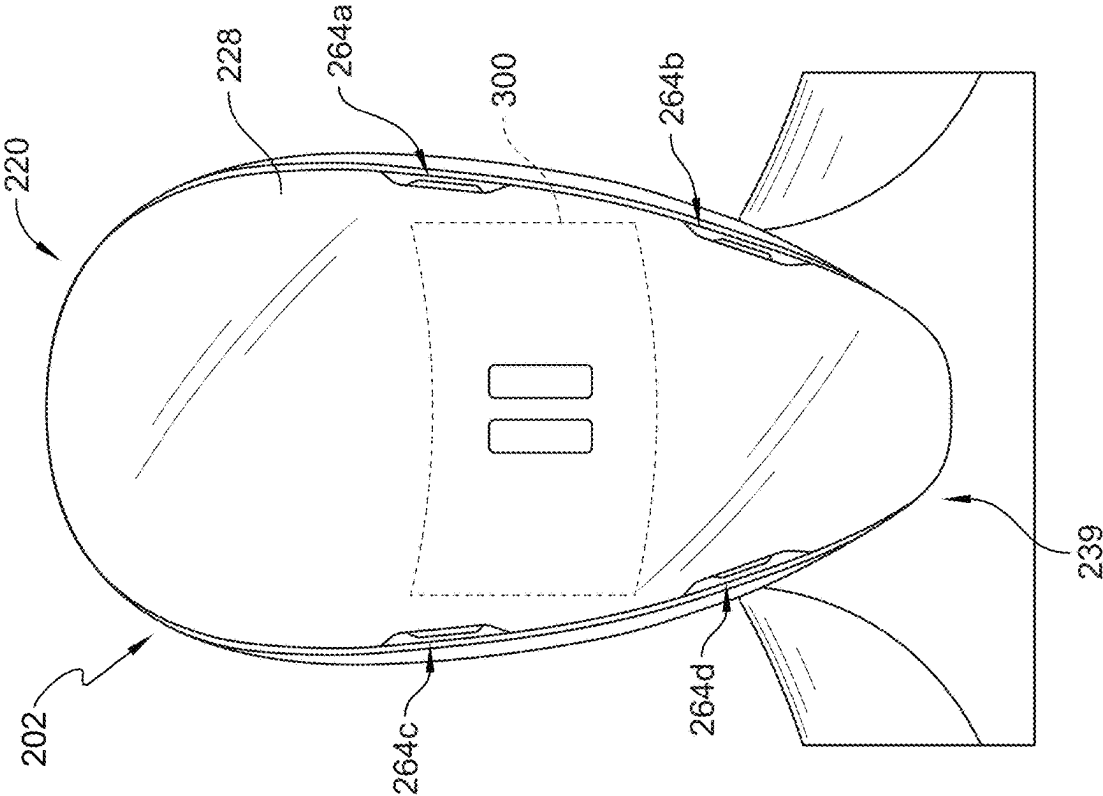


FIG. 9G

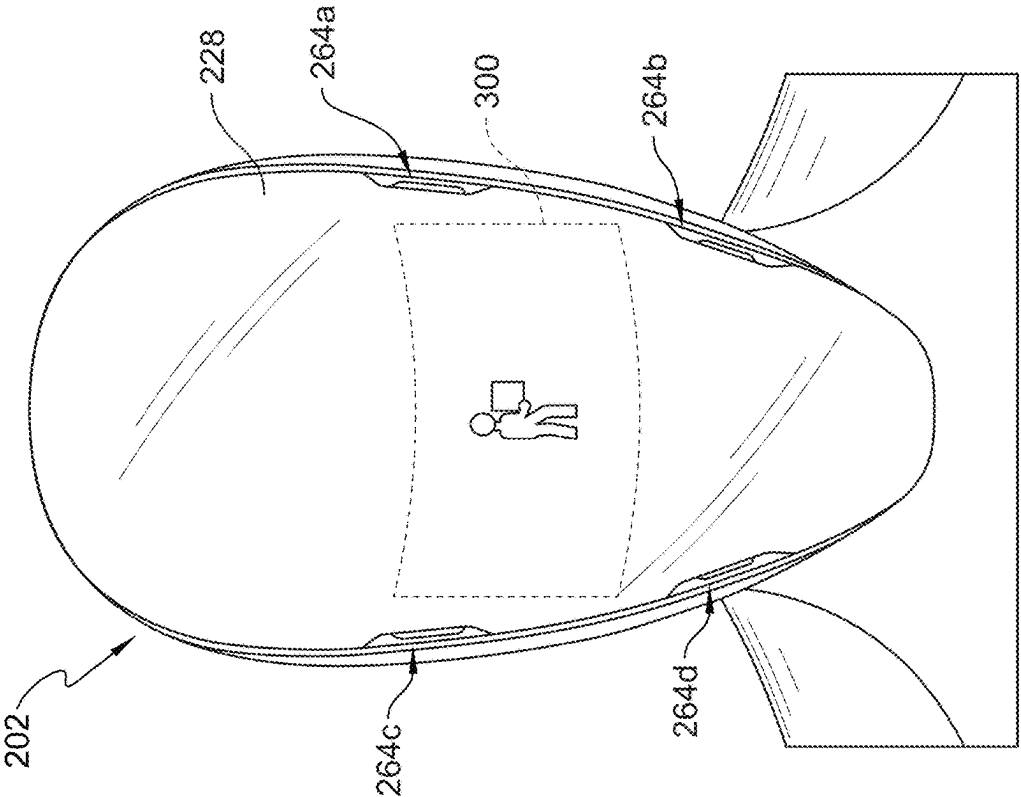


FIG. 9F

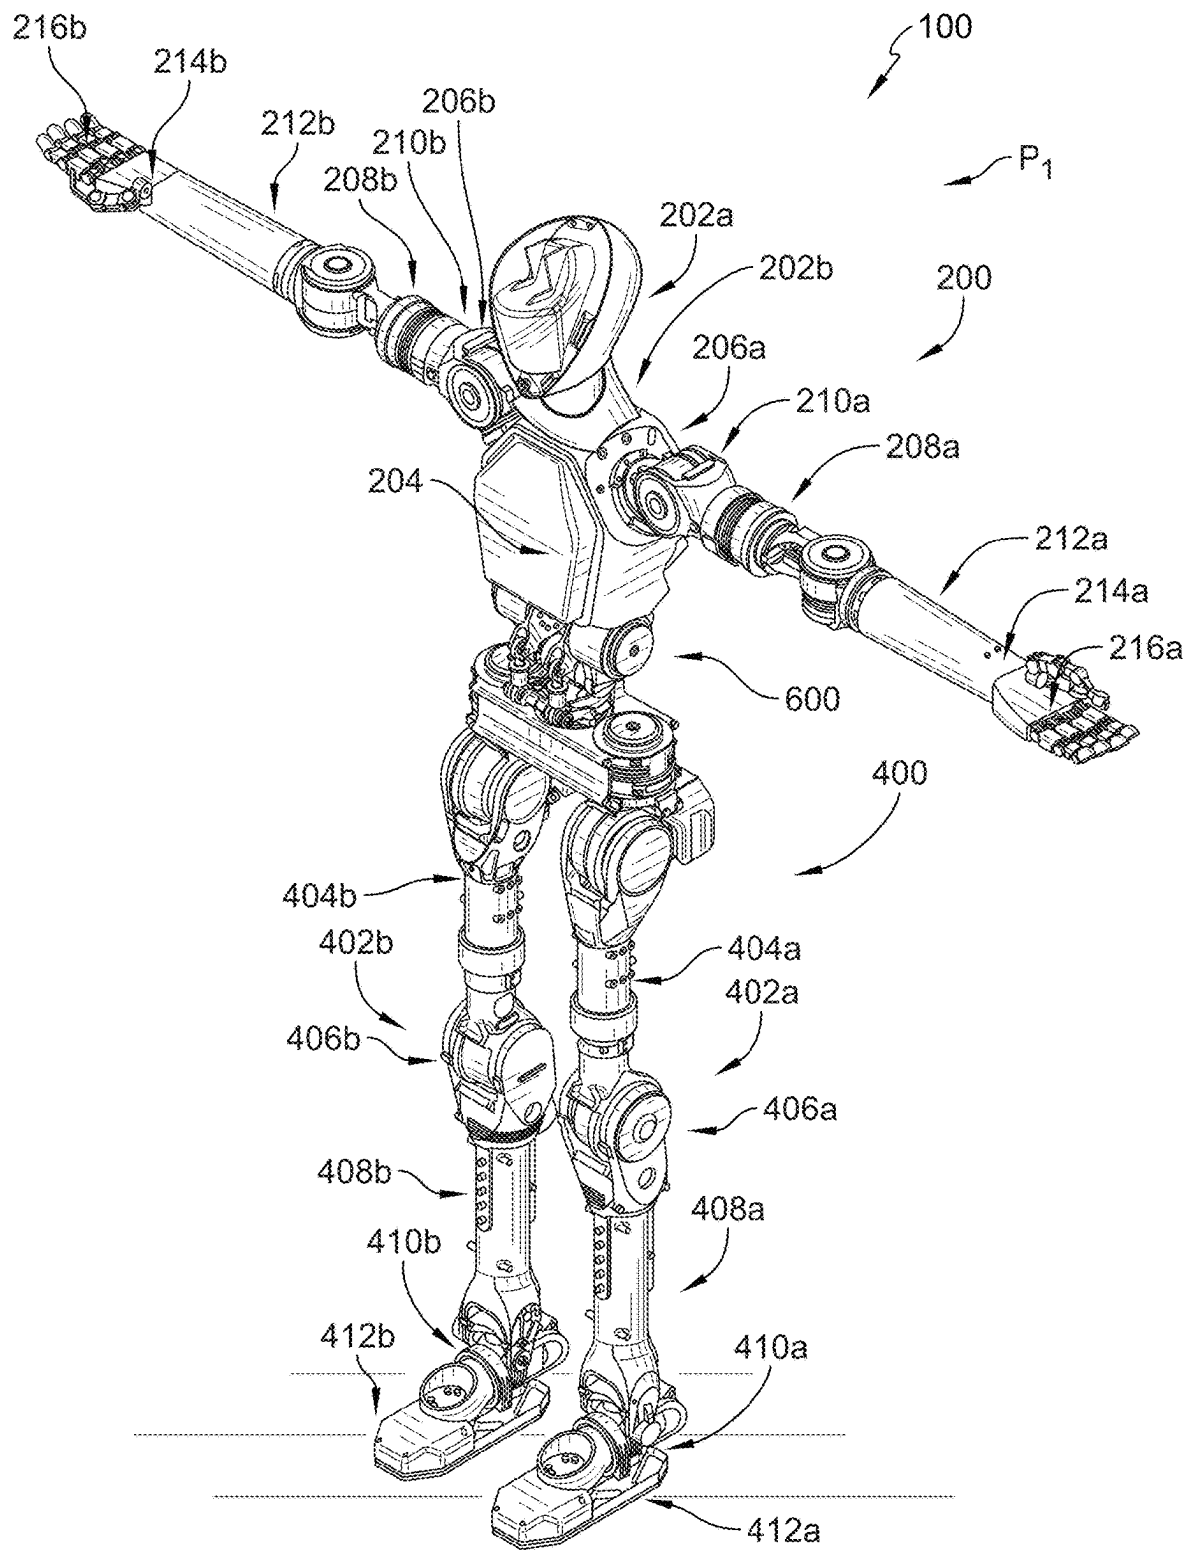


FIG. 10

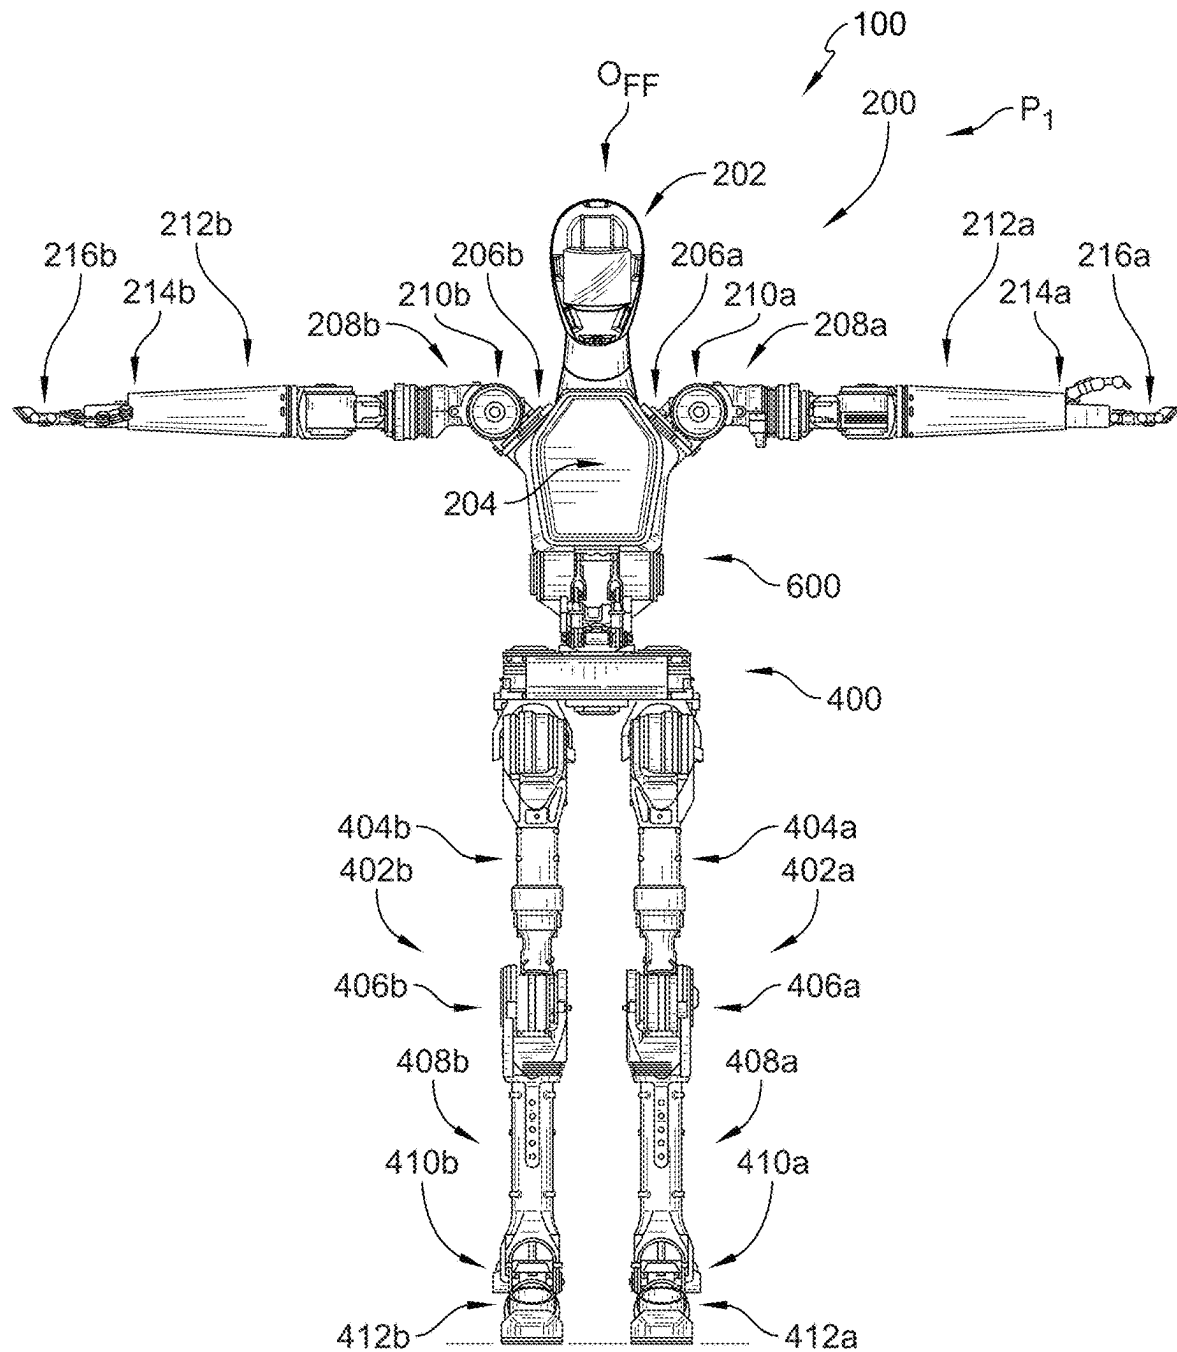


FIG. 11

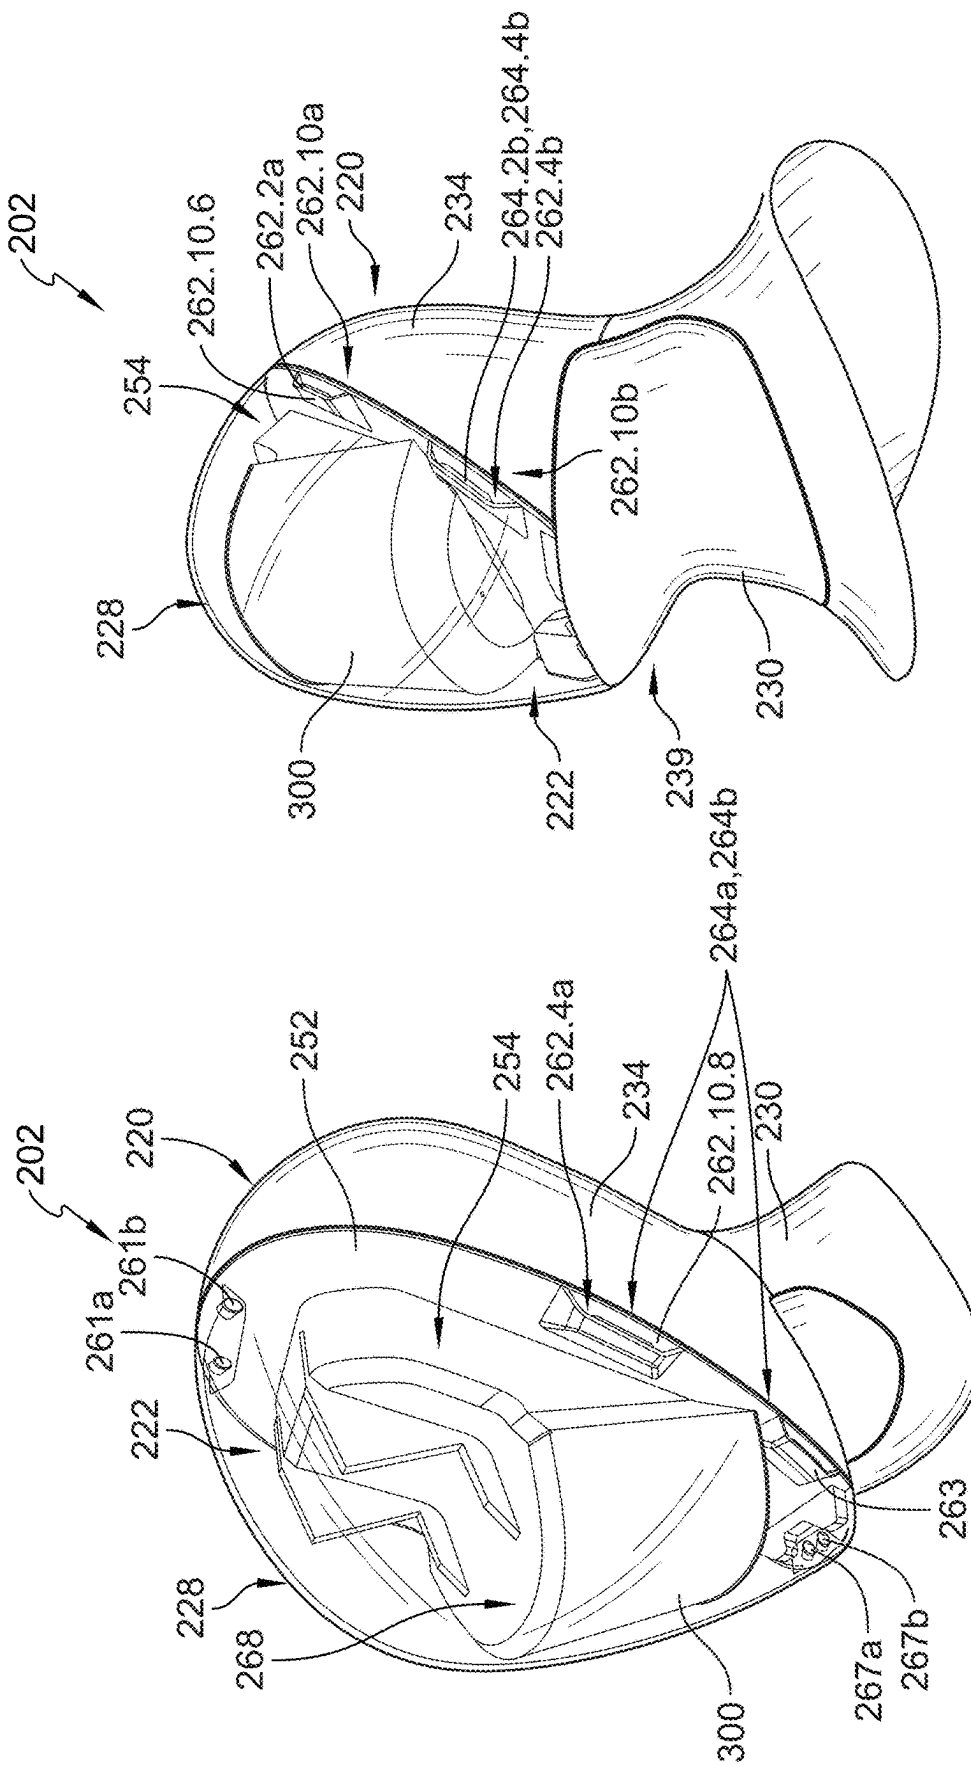


FIG. 12

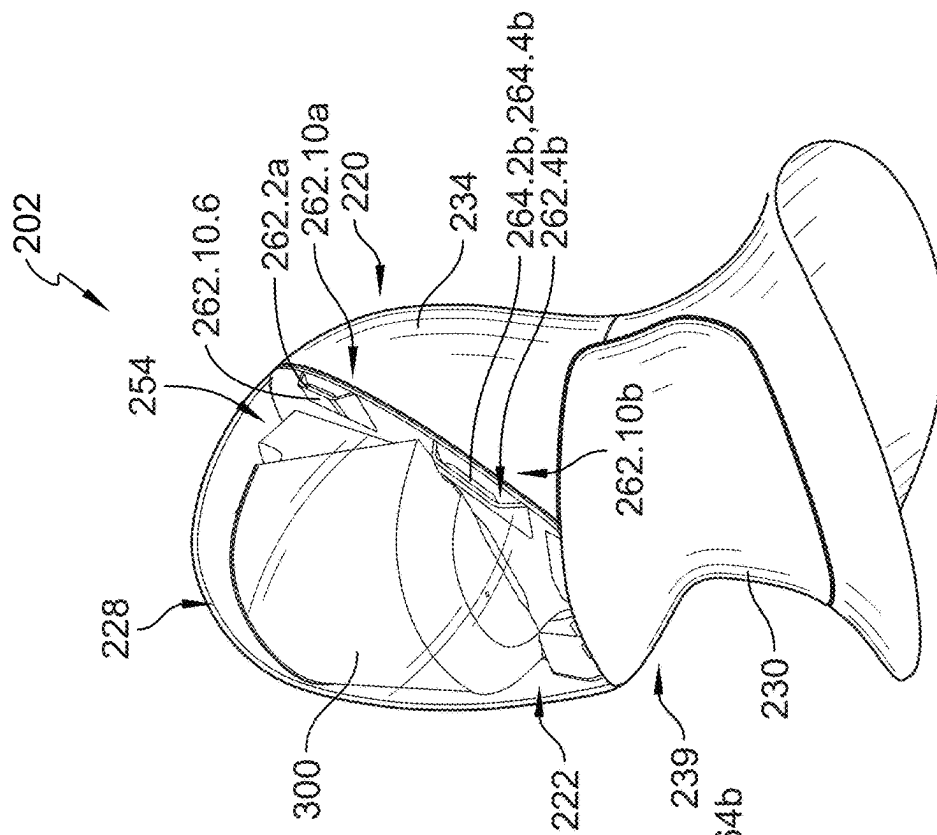
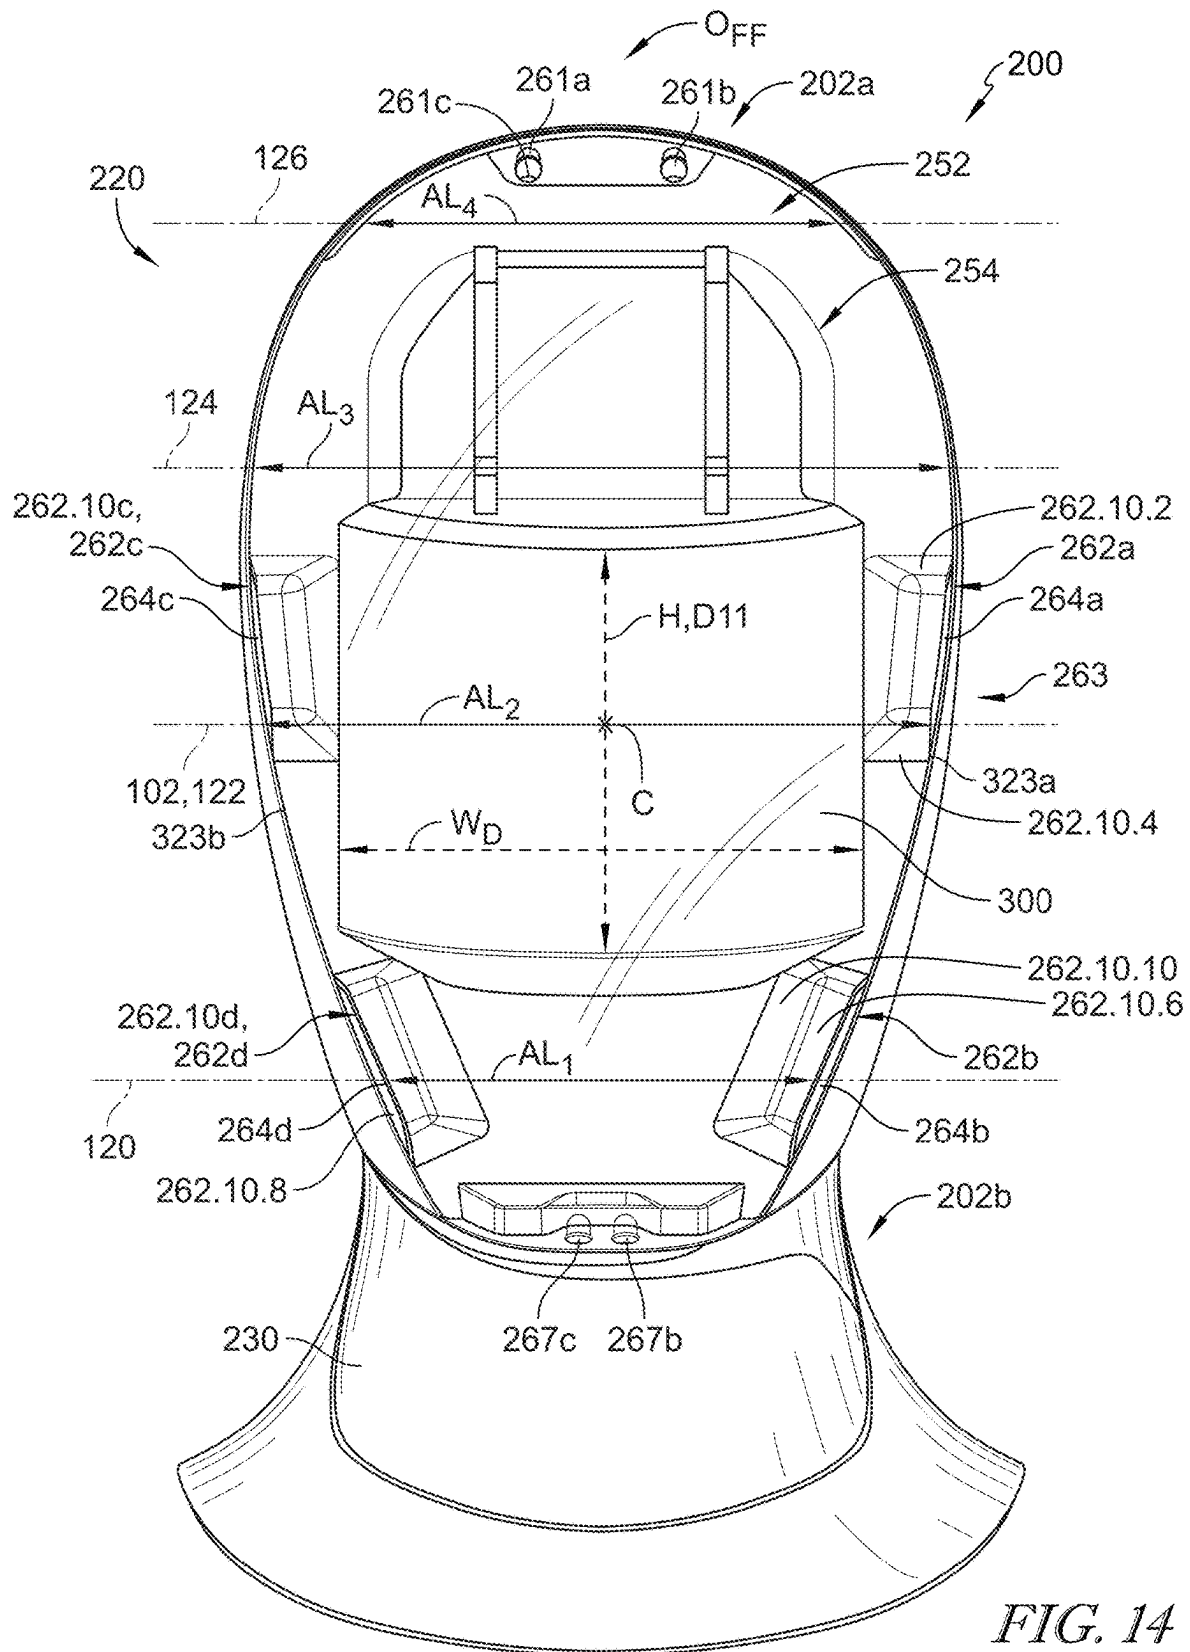


FIG. 13



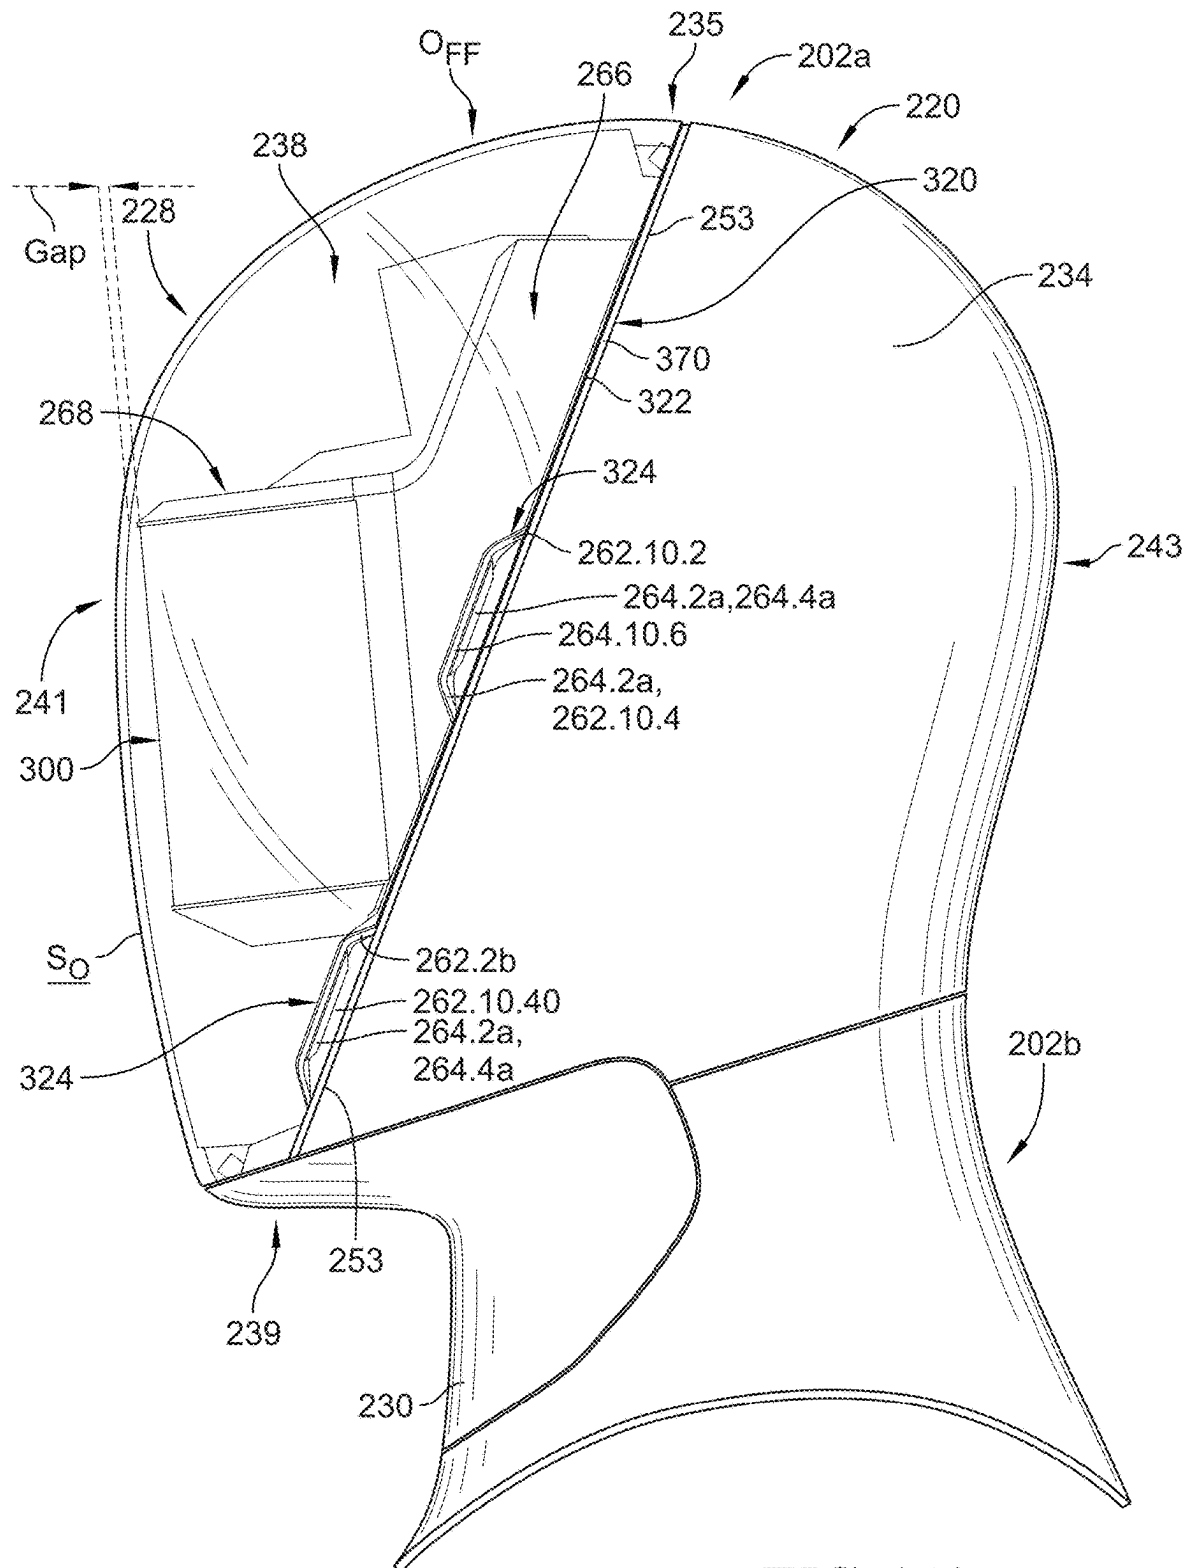


FIG. 15A

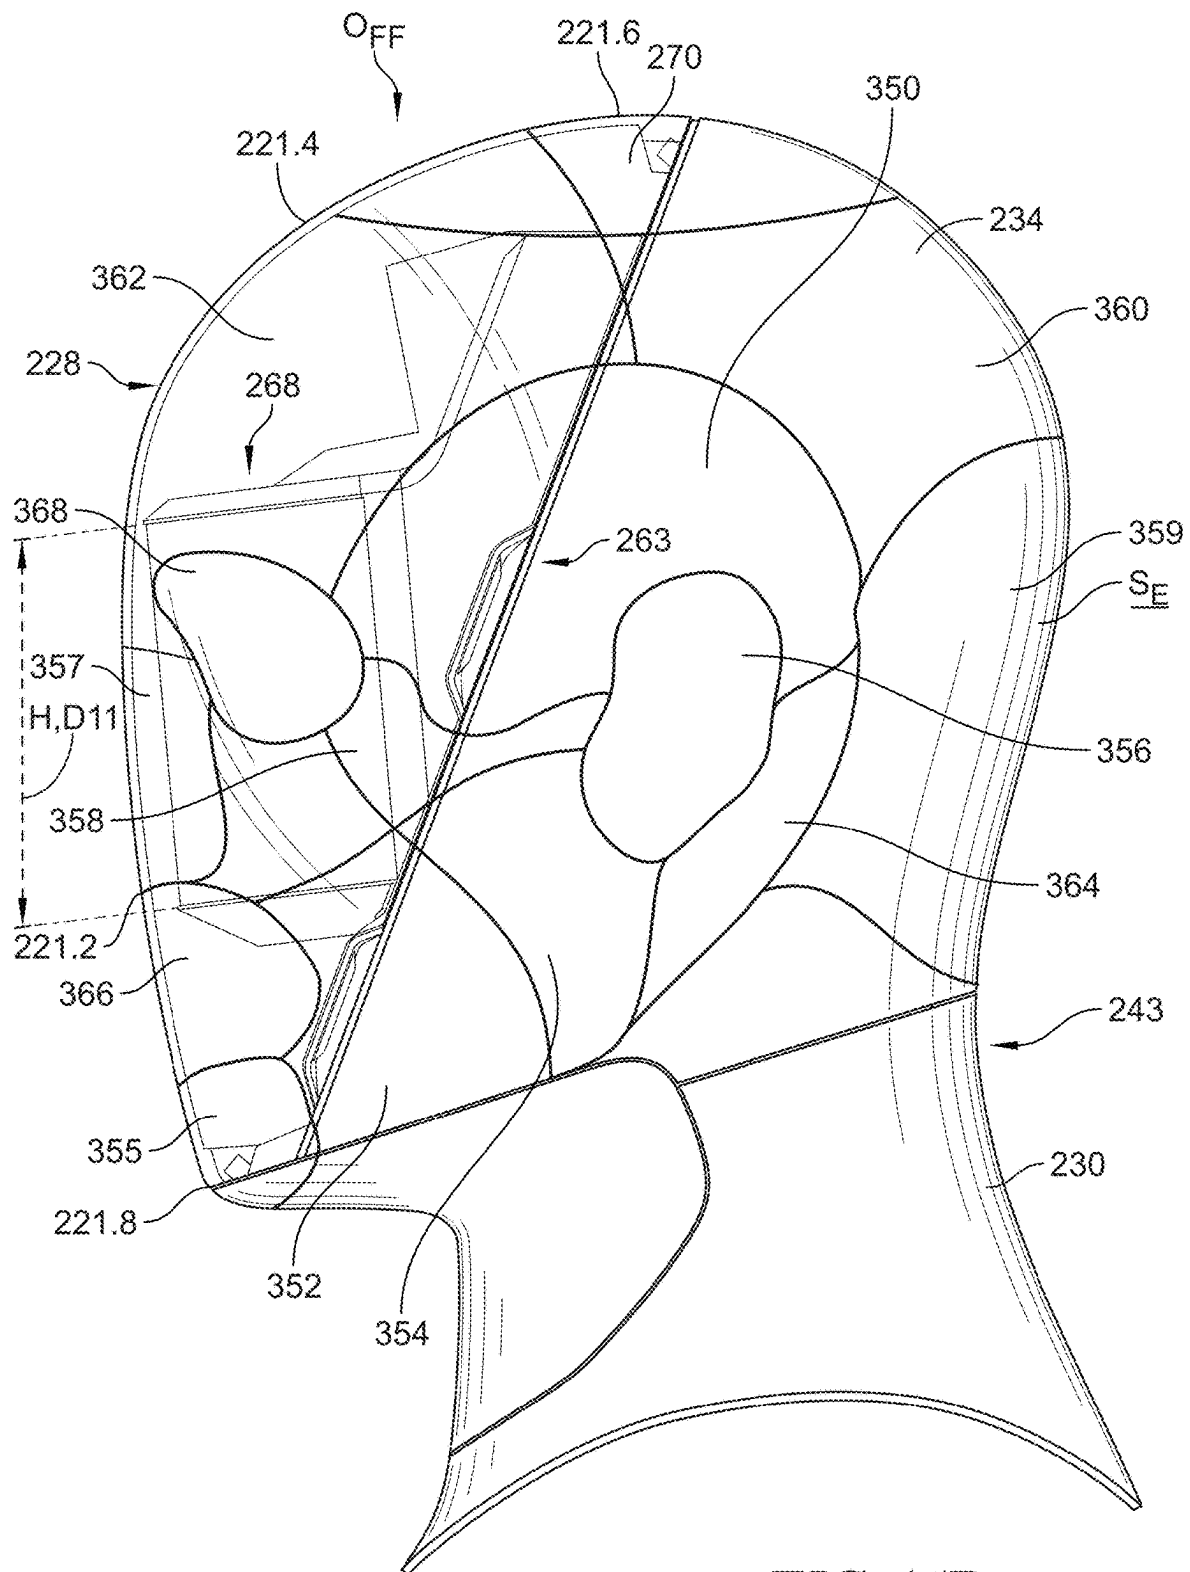
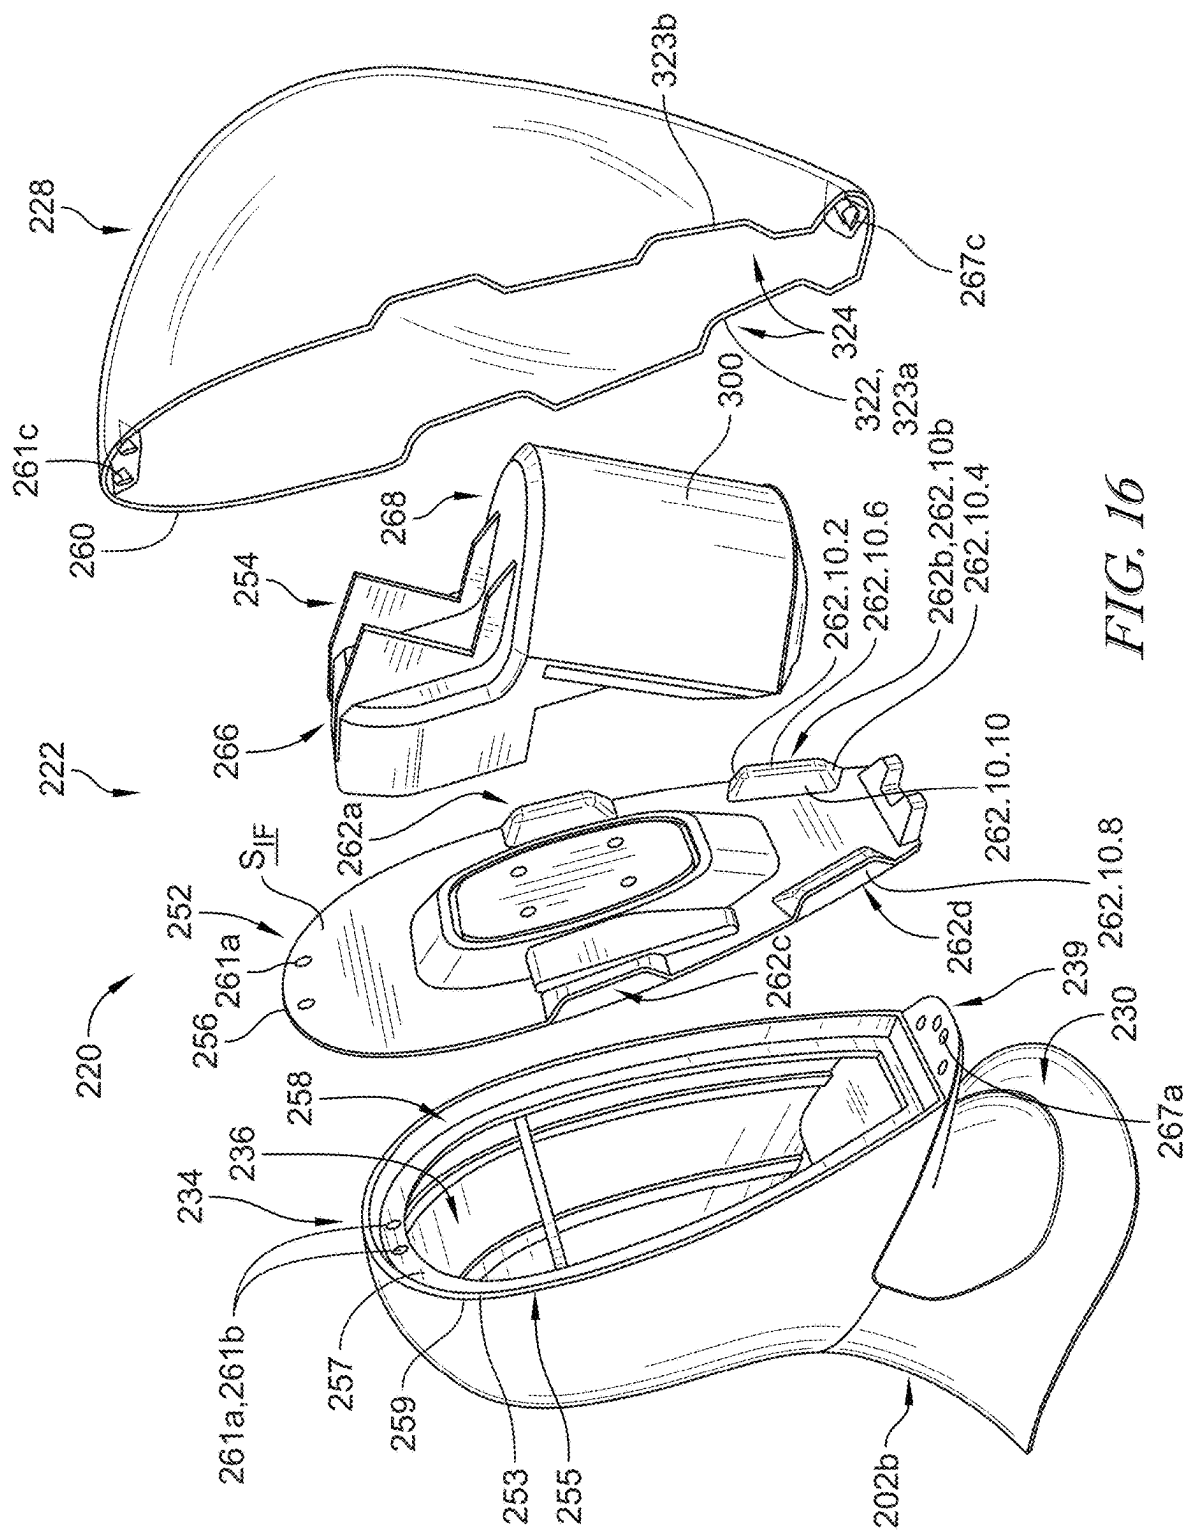


FIG. 15B



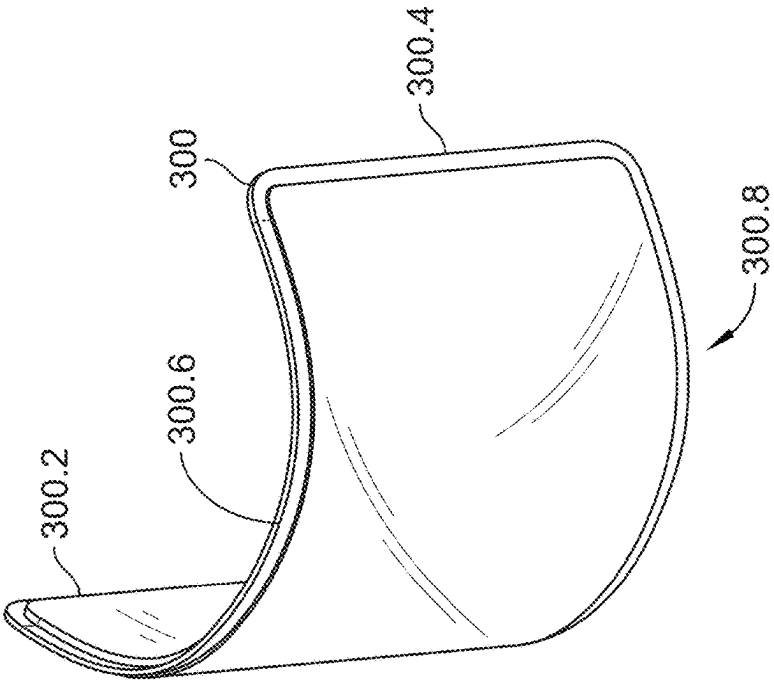


FIG. 17

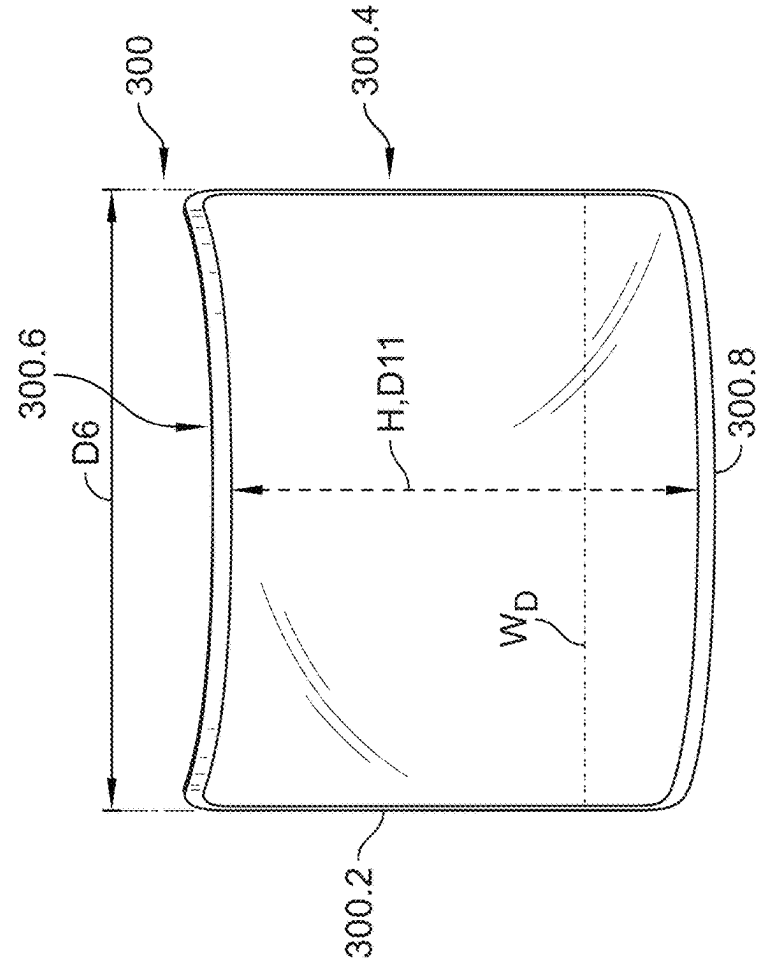
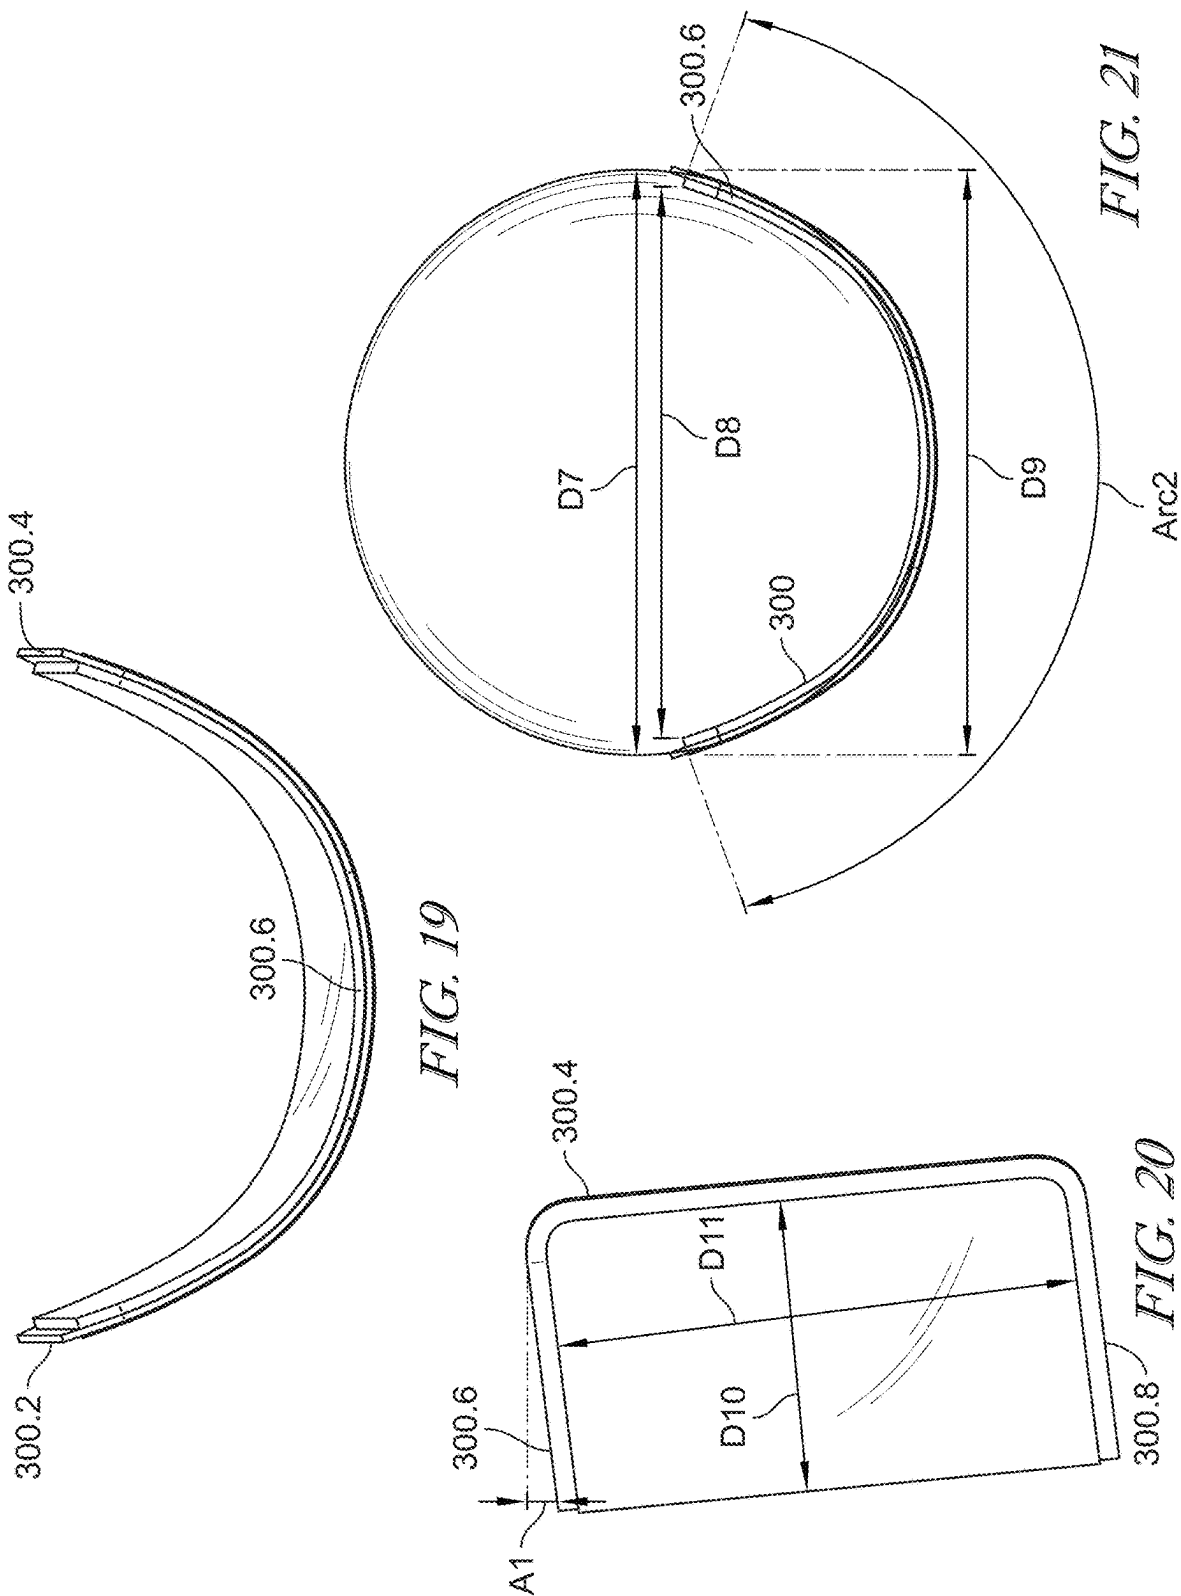
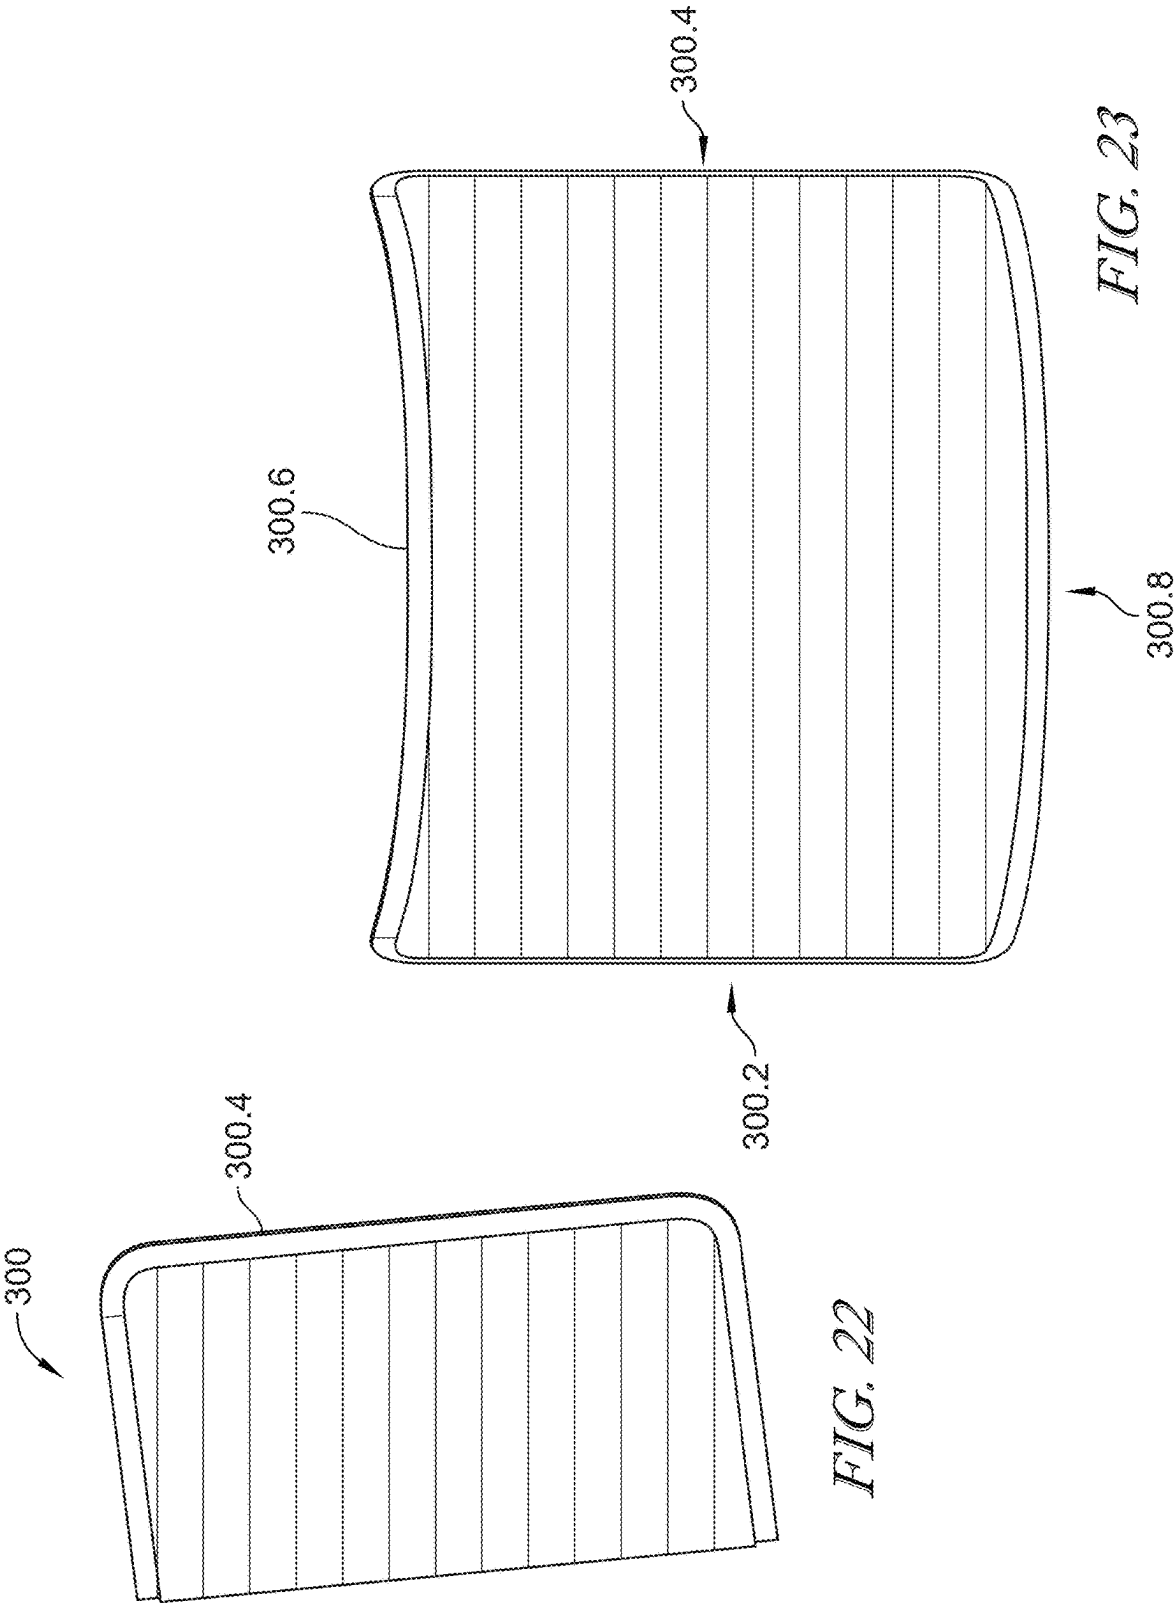
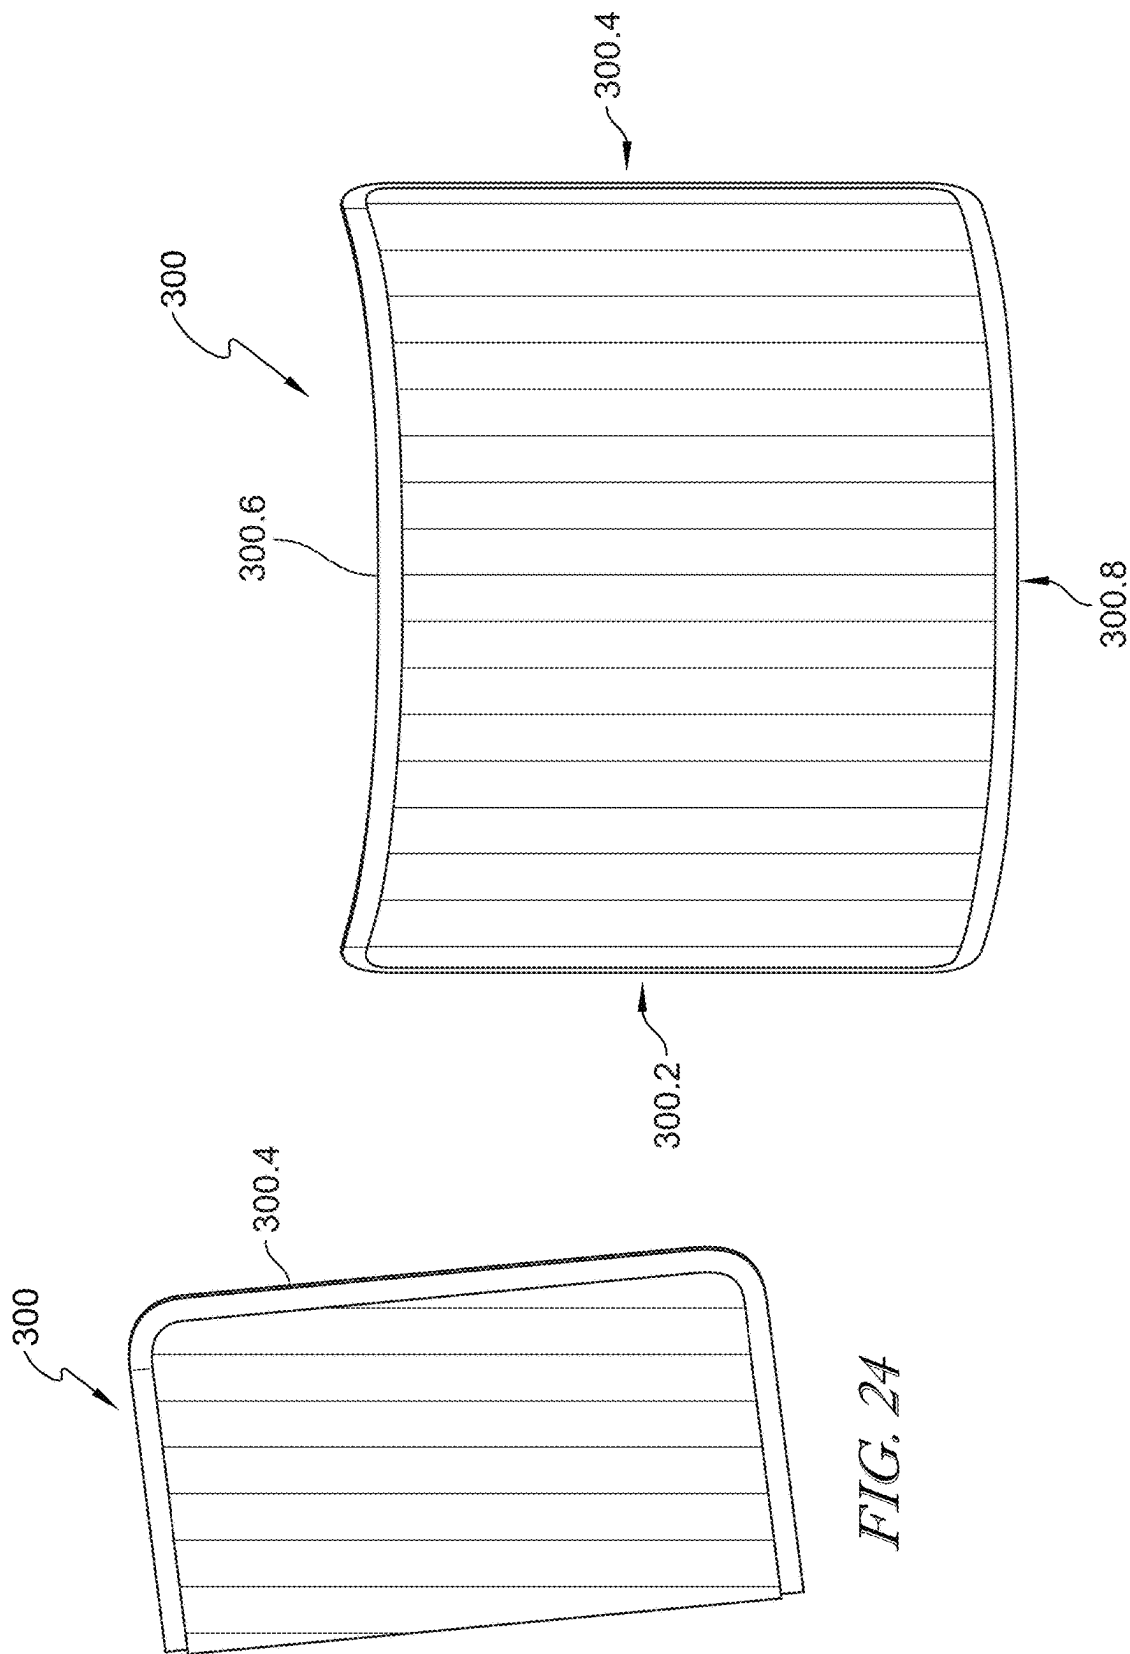


FIG. 18







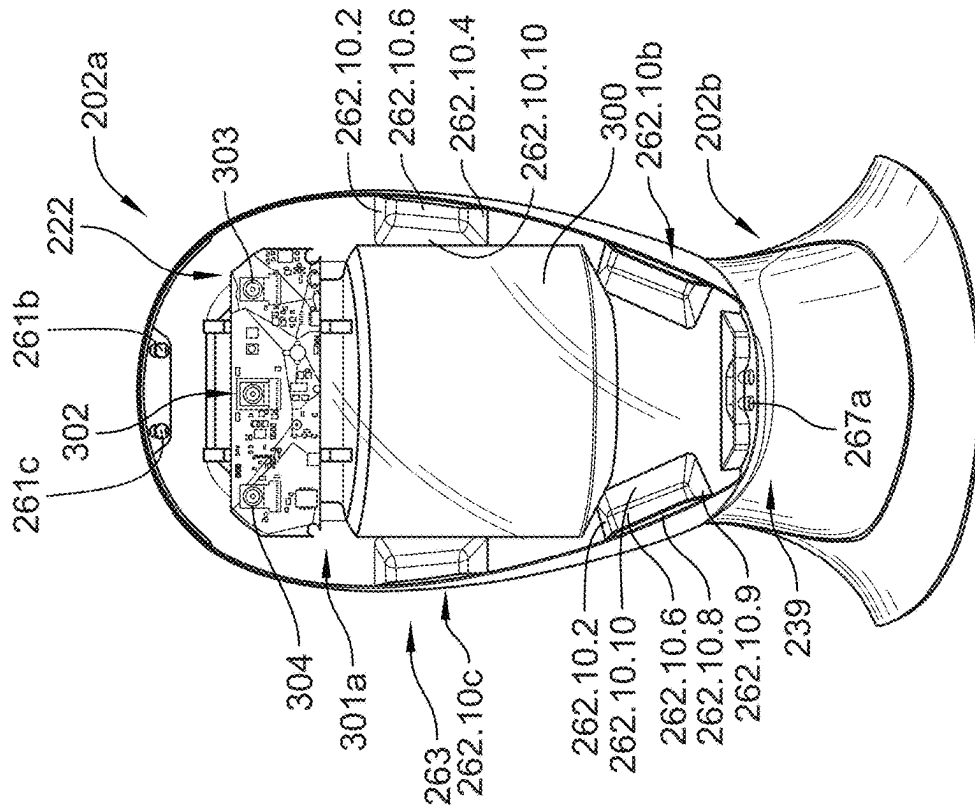


FIG. 26

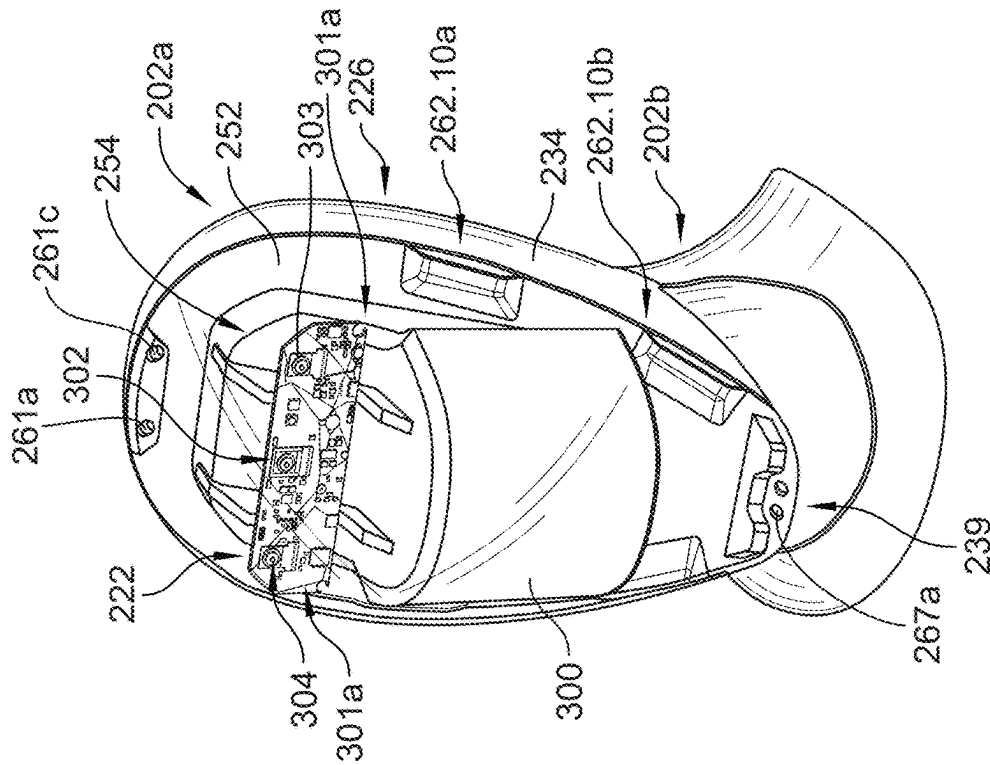


FIG. 27

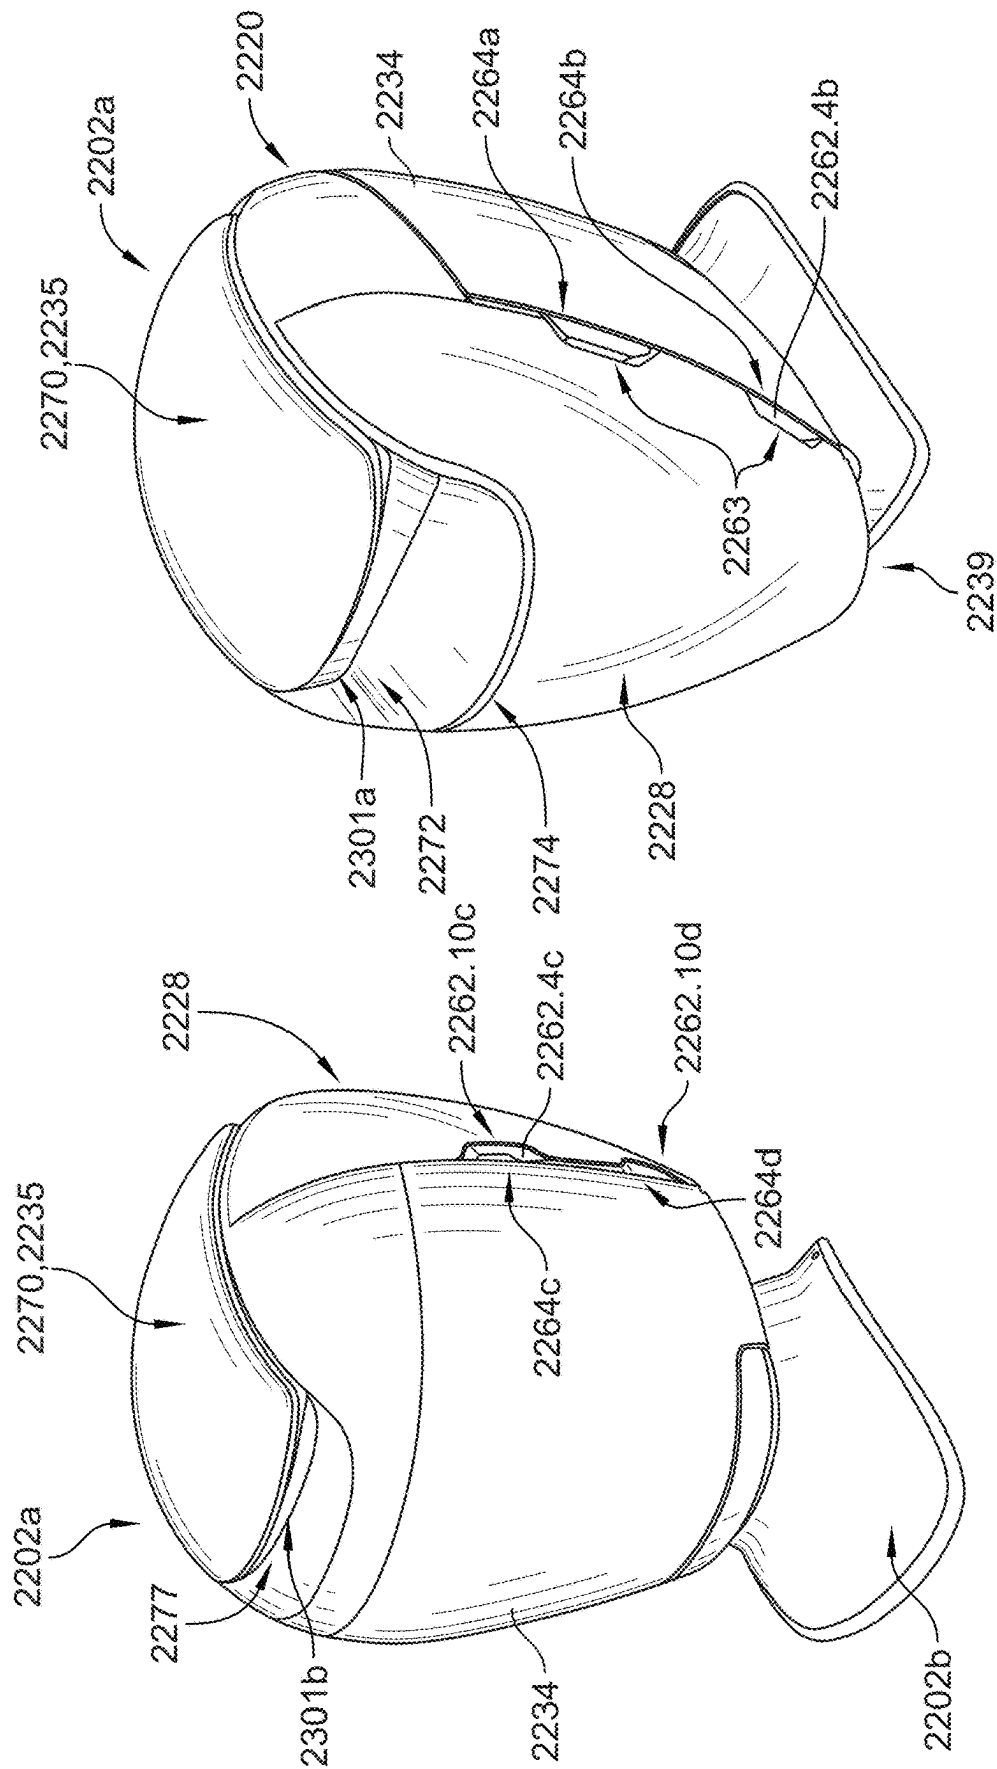


FIG. 29

FIG. 28

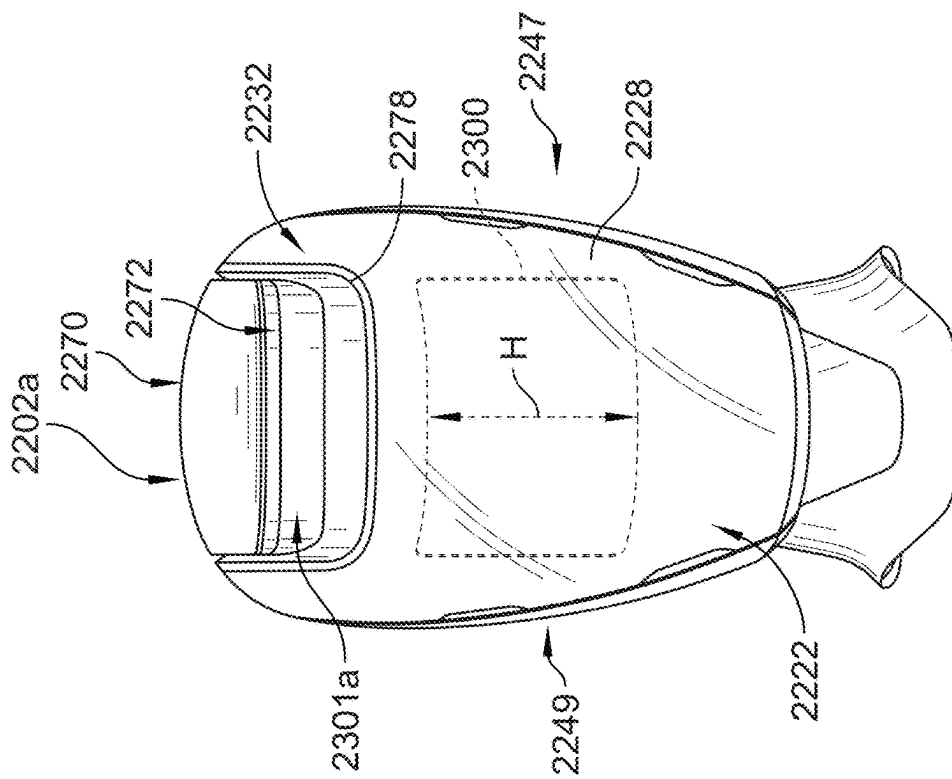


FIG. 30

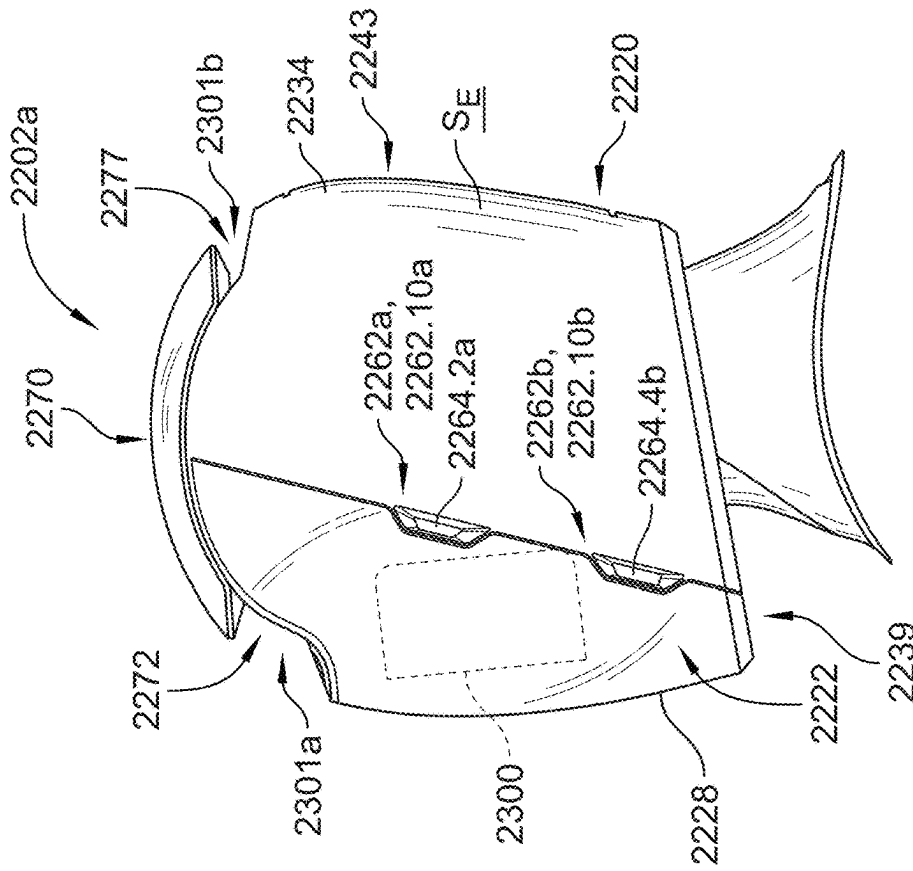
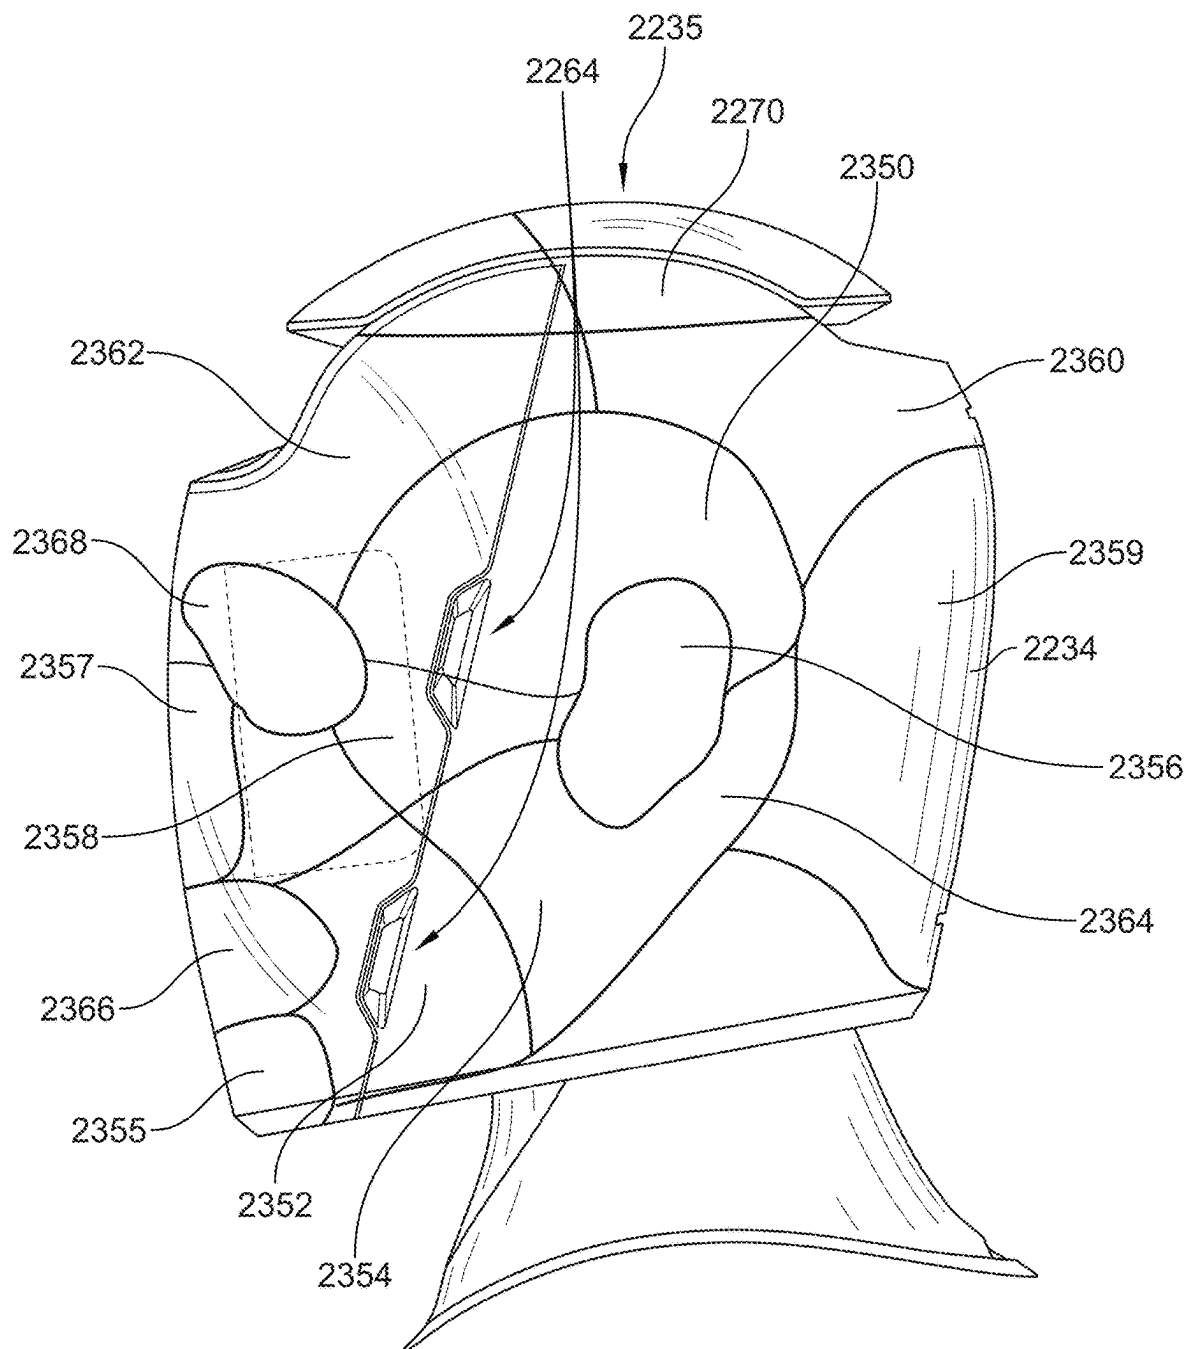


FIG. 31A

*FIG. 31B*

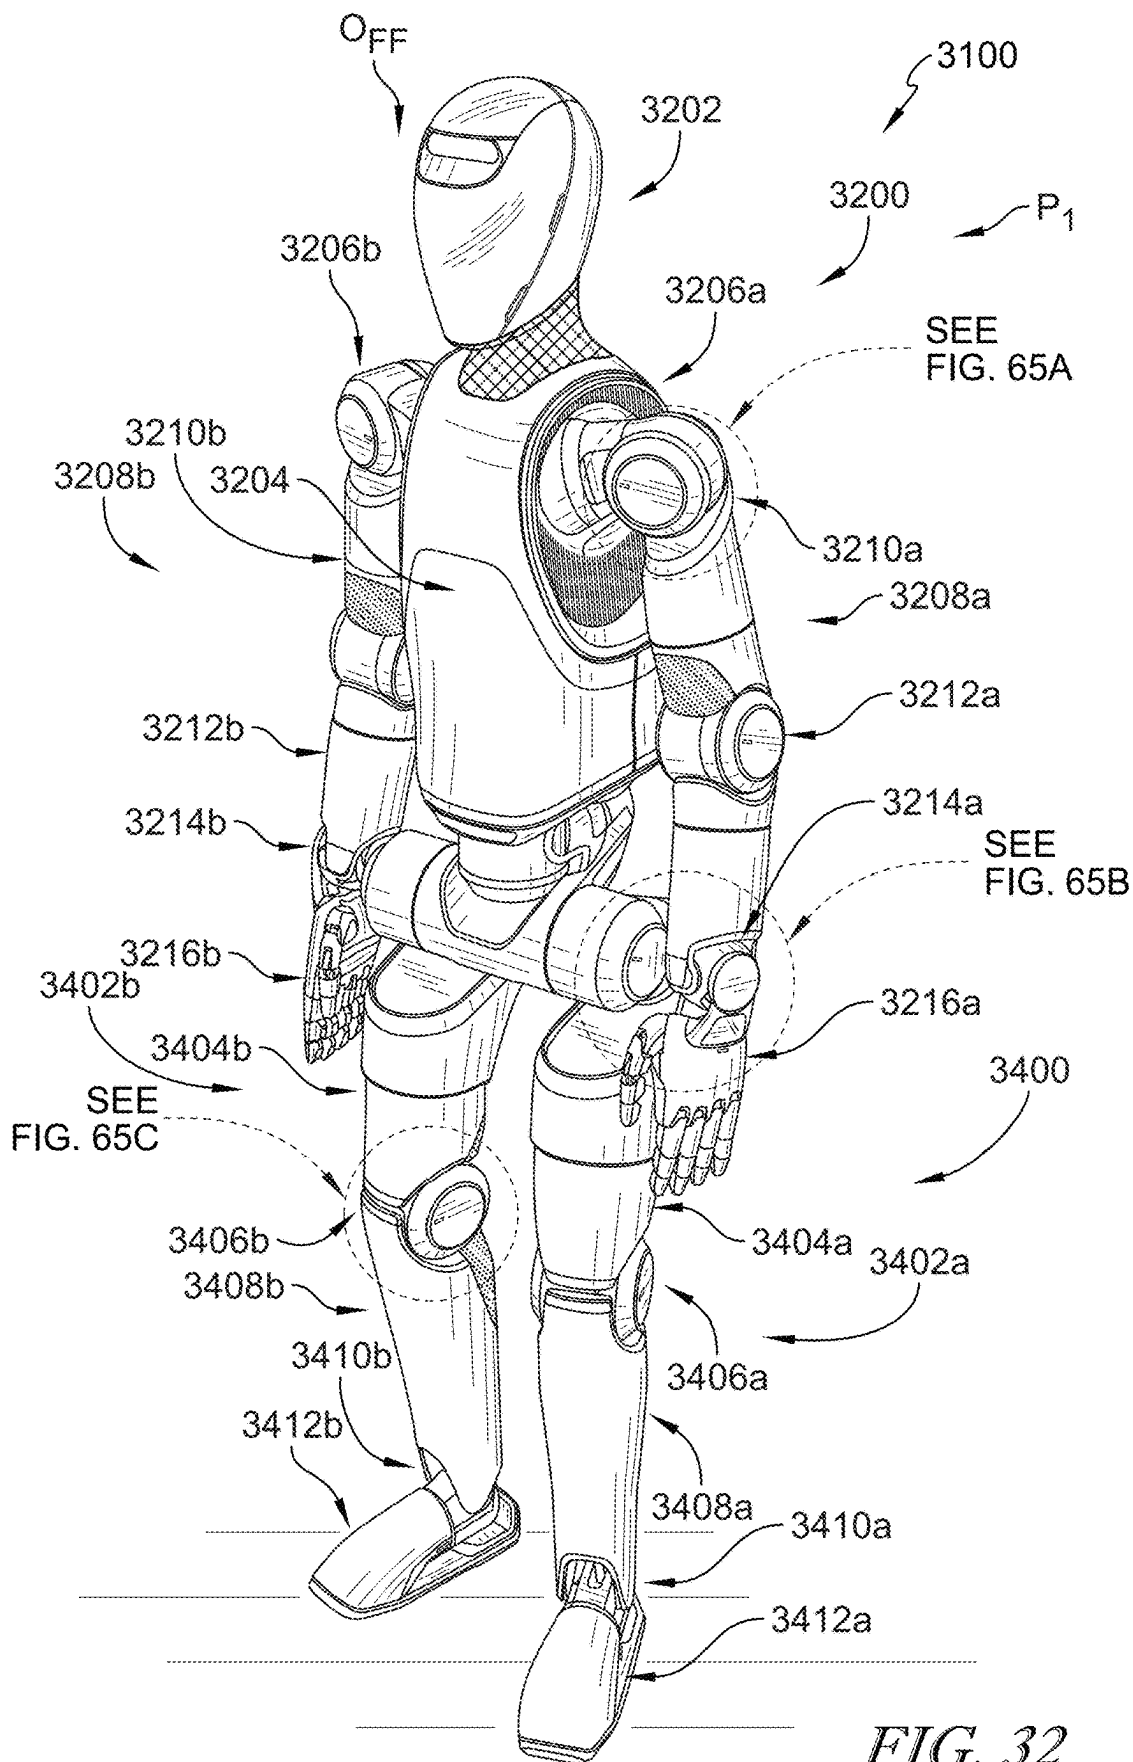


FIG. 32

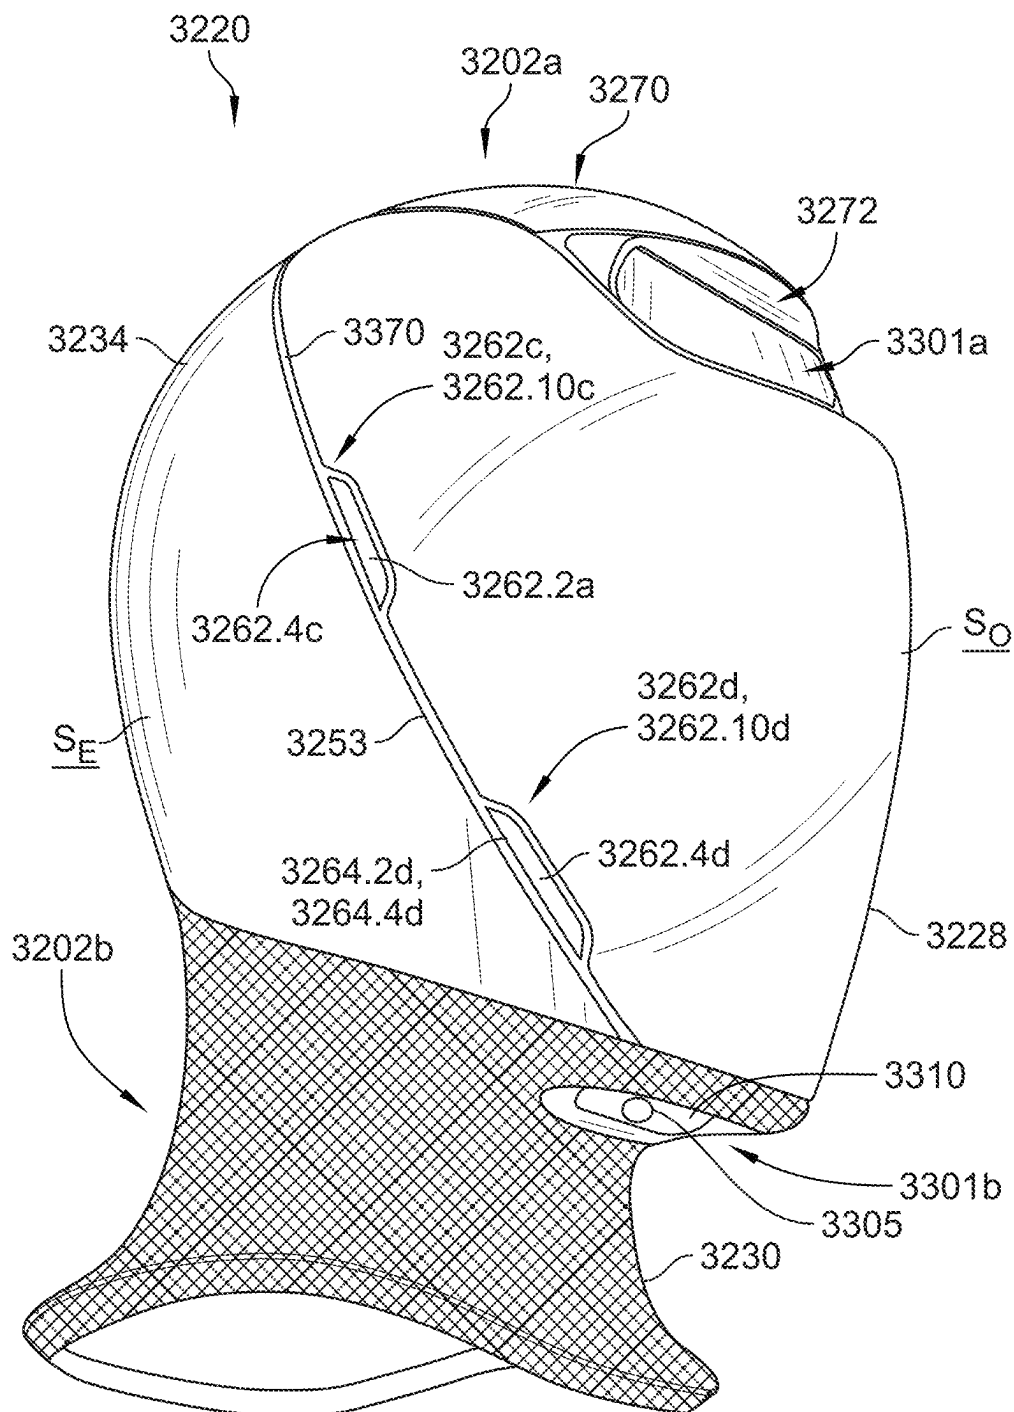


FIG. 33

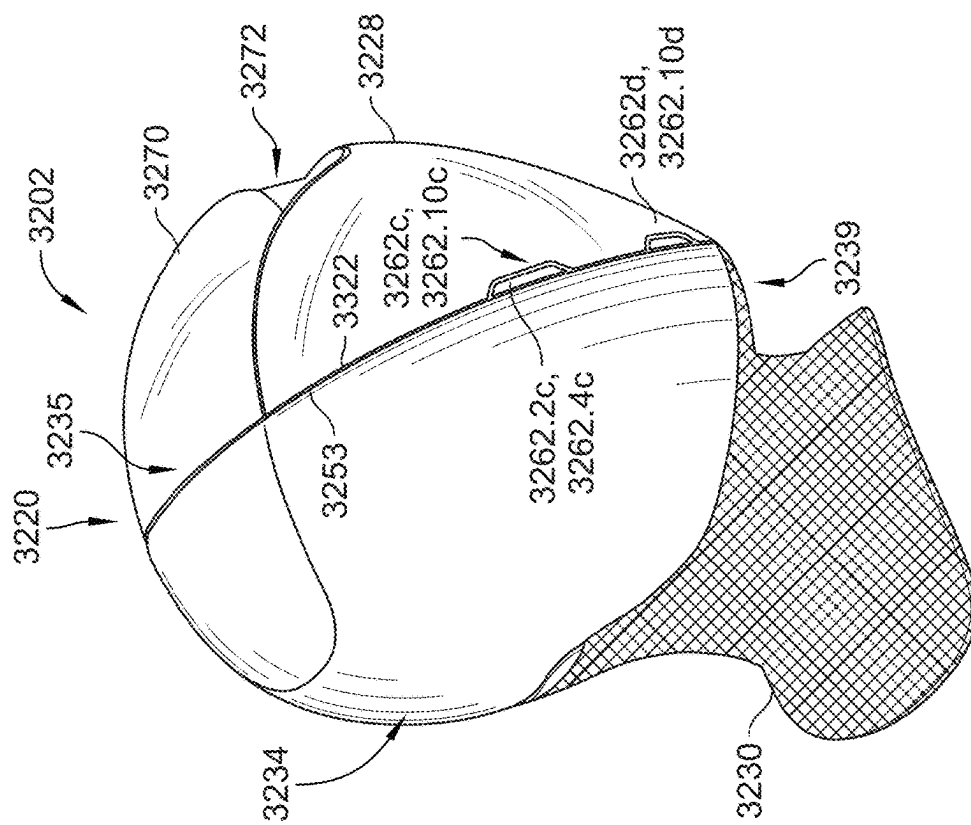


FIG. 35

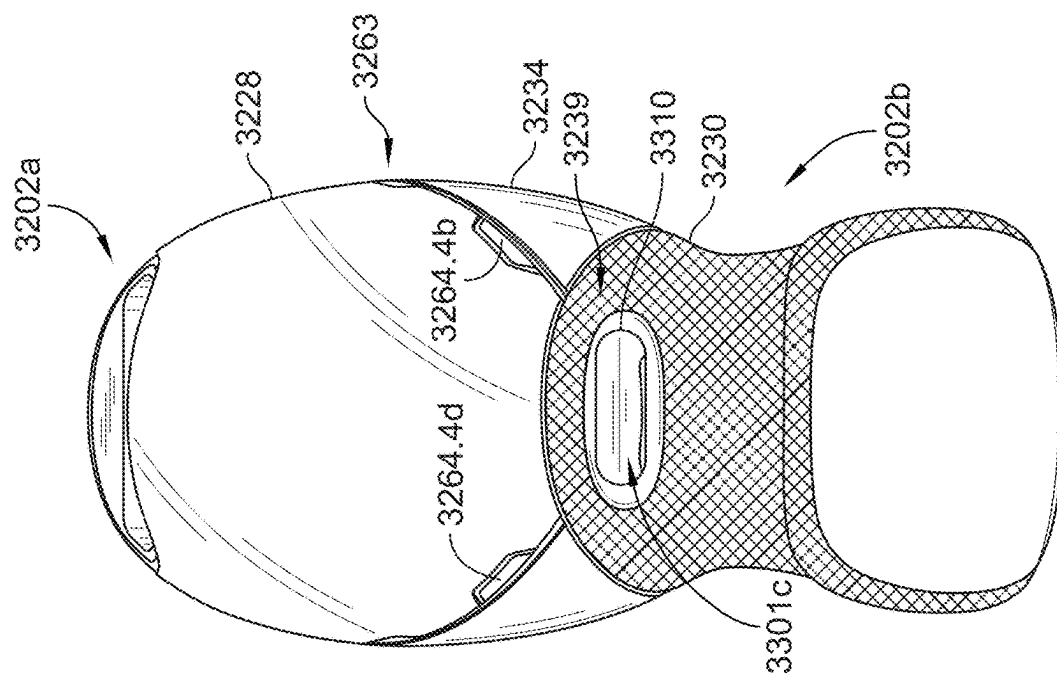


FIG. 34

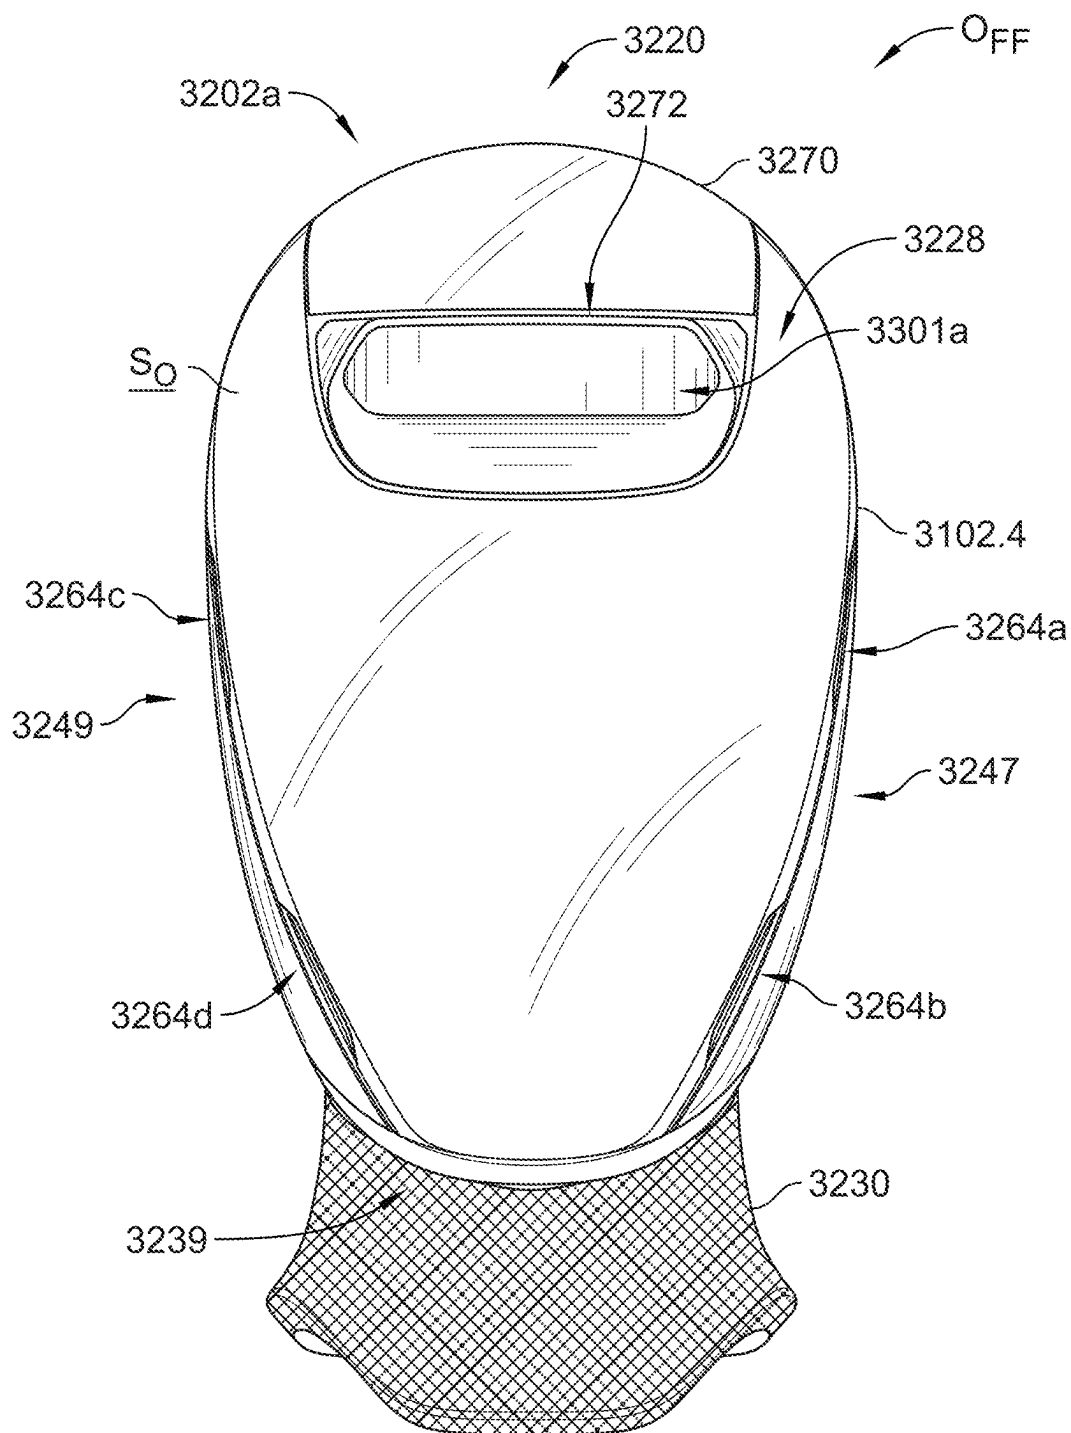
*FIG. 36*

FIG. 37

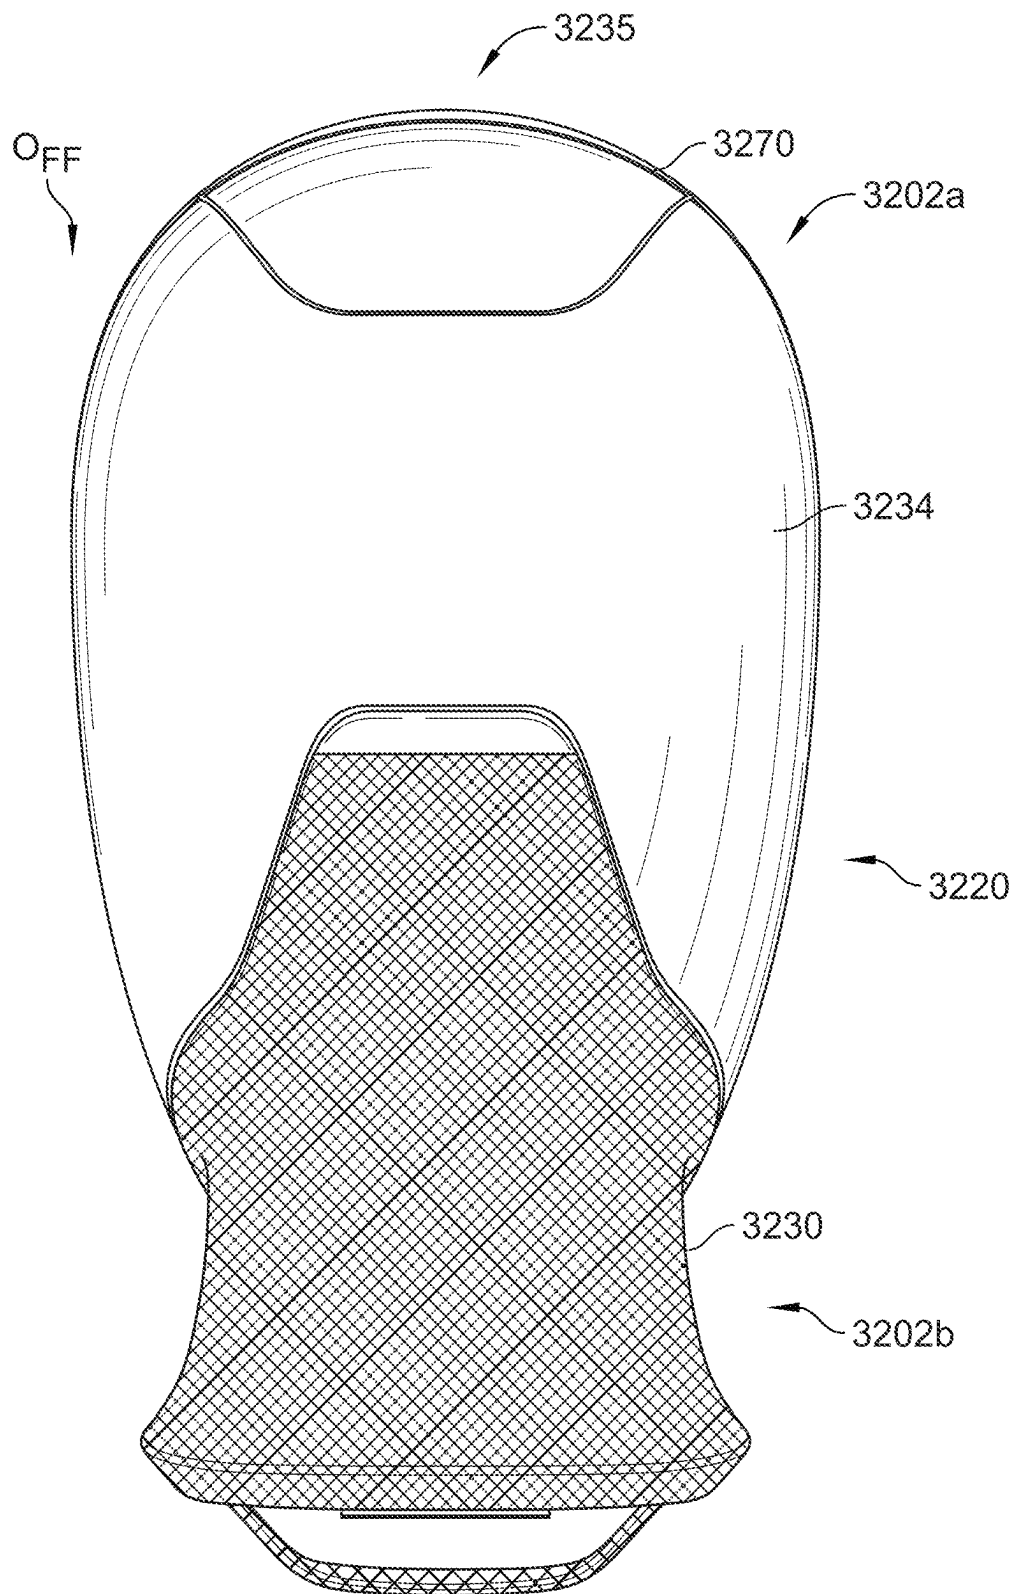


FIG. 38

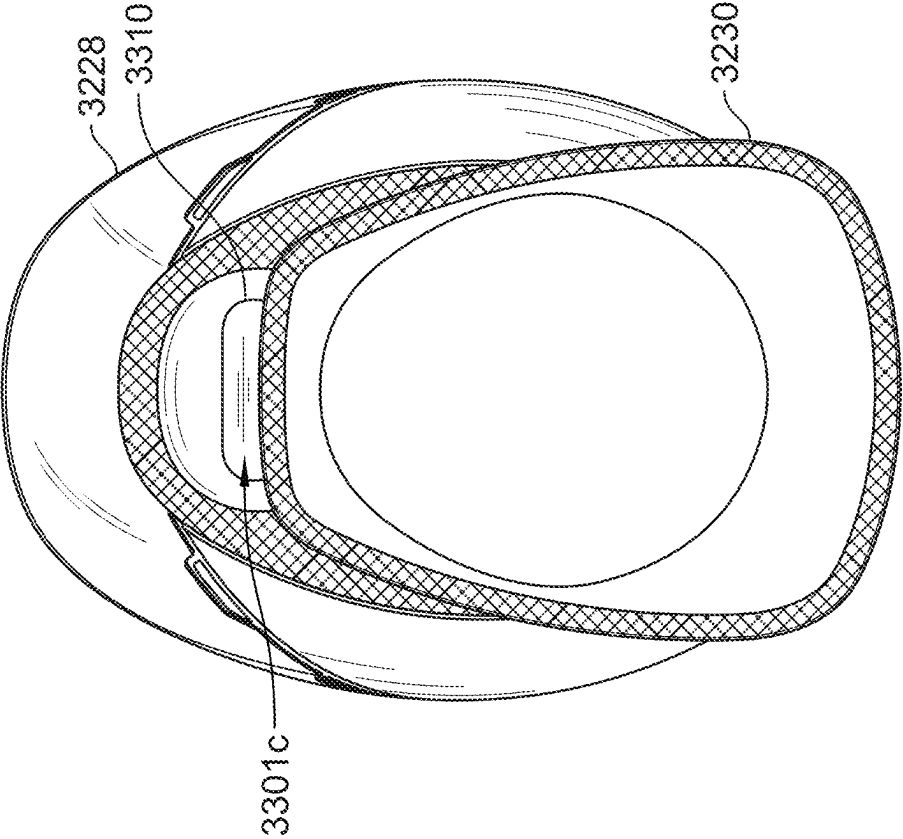


FIG. 39

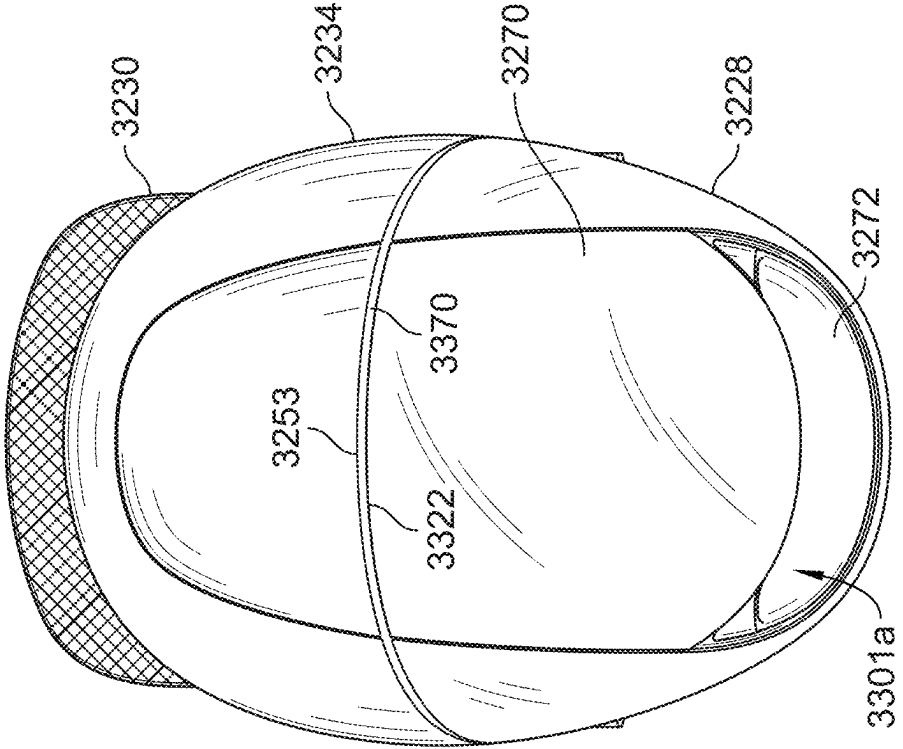


FIG. 40

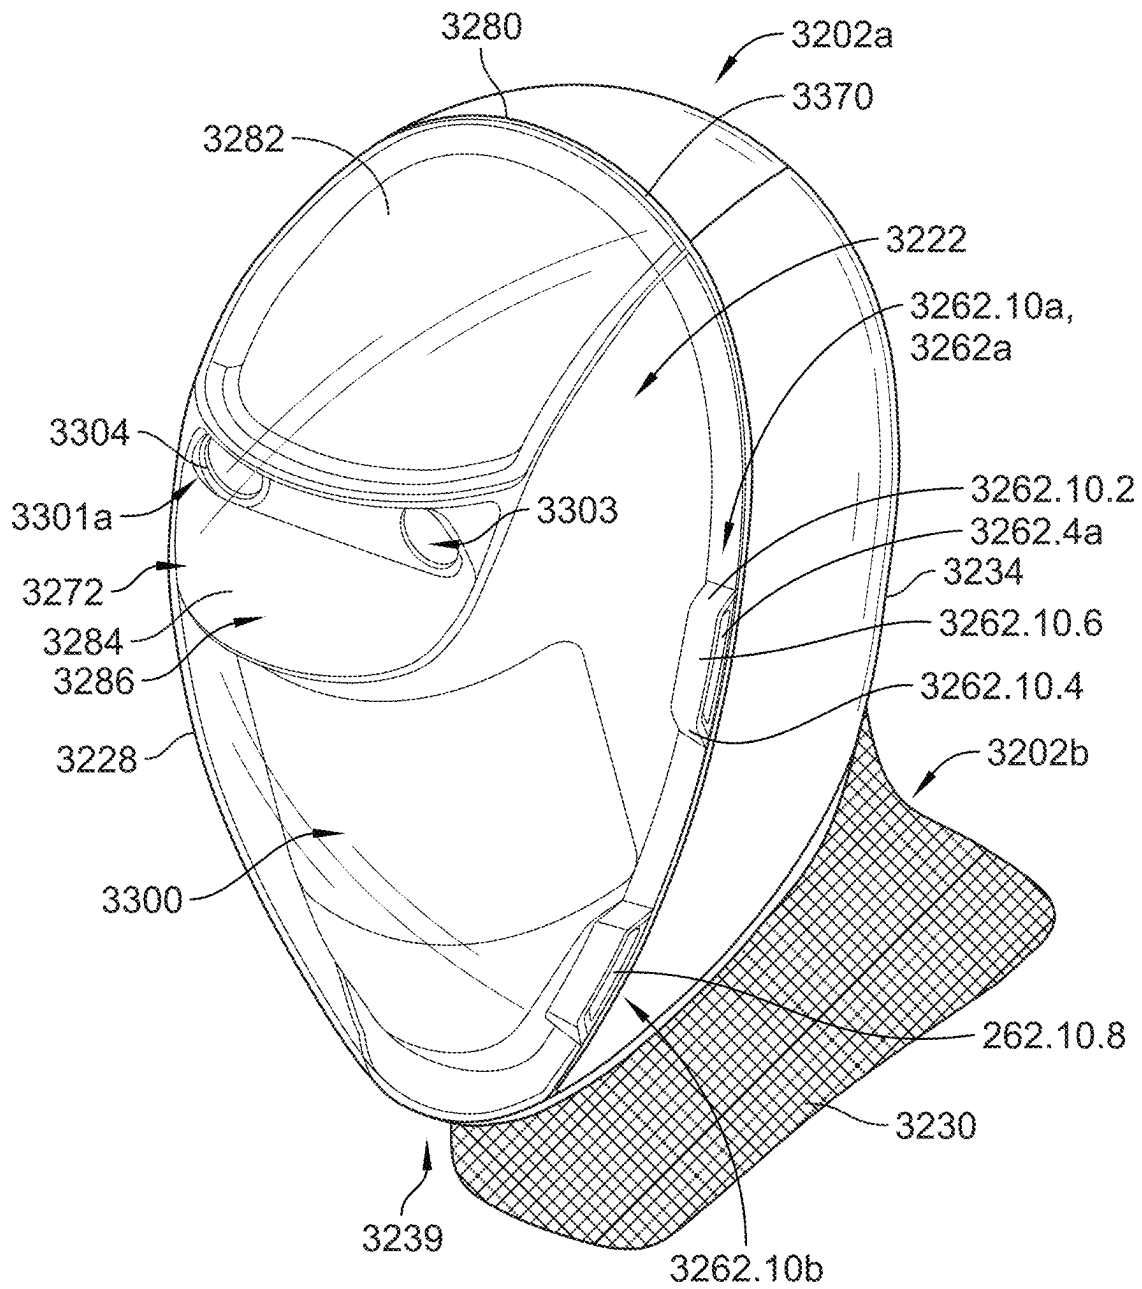


FIG. 41

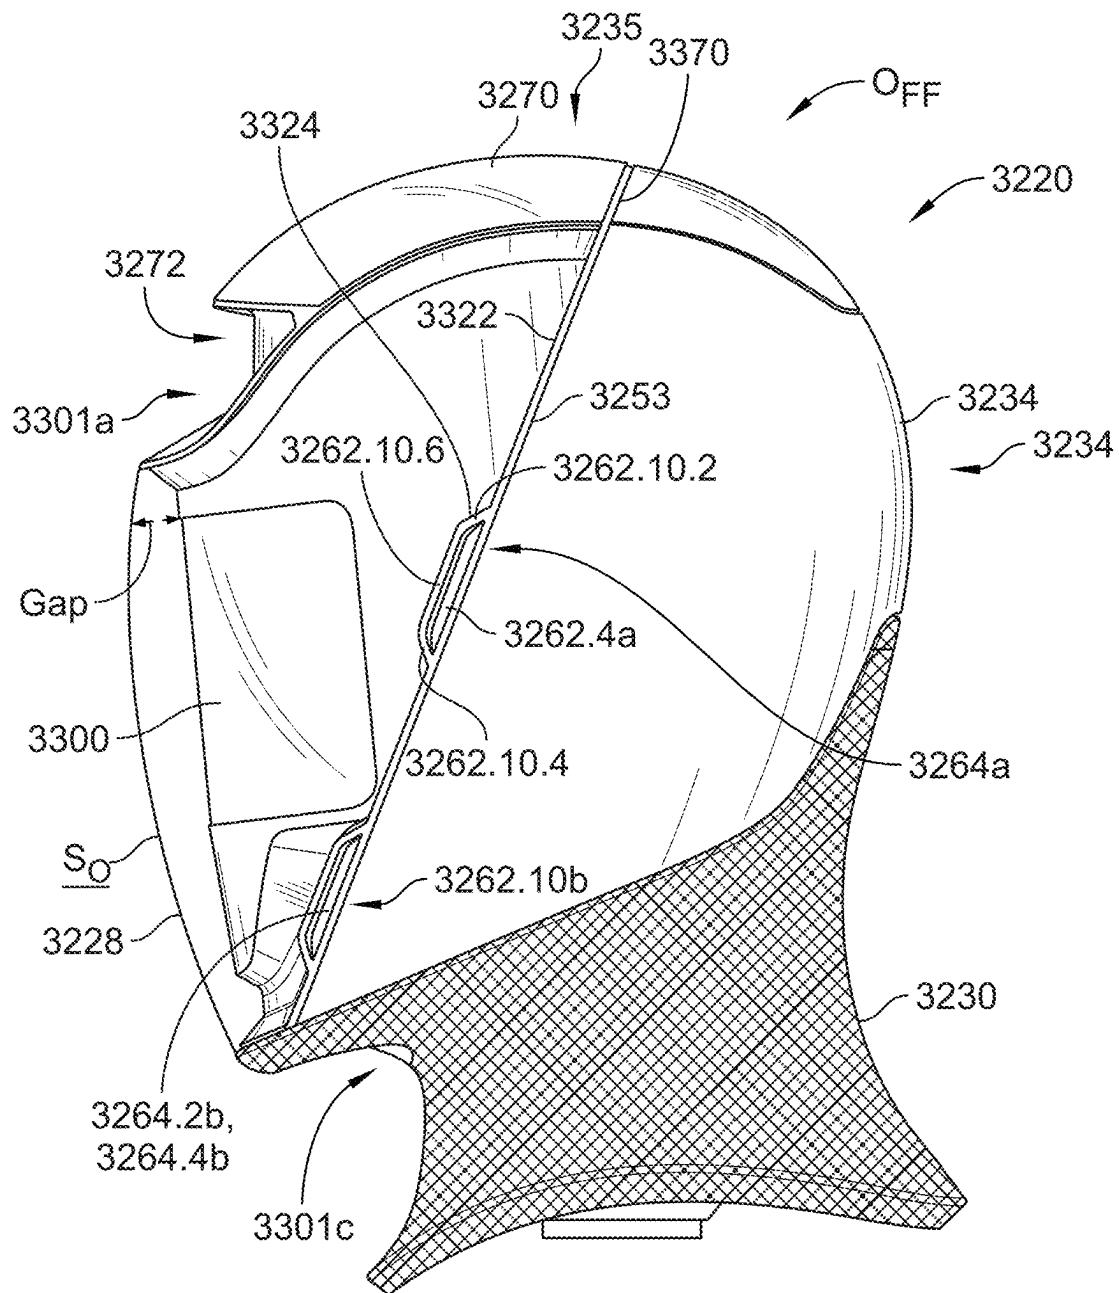


FIG. 42

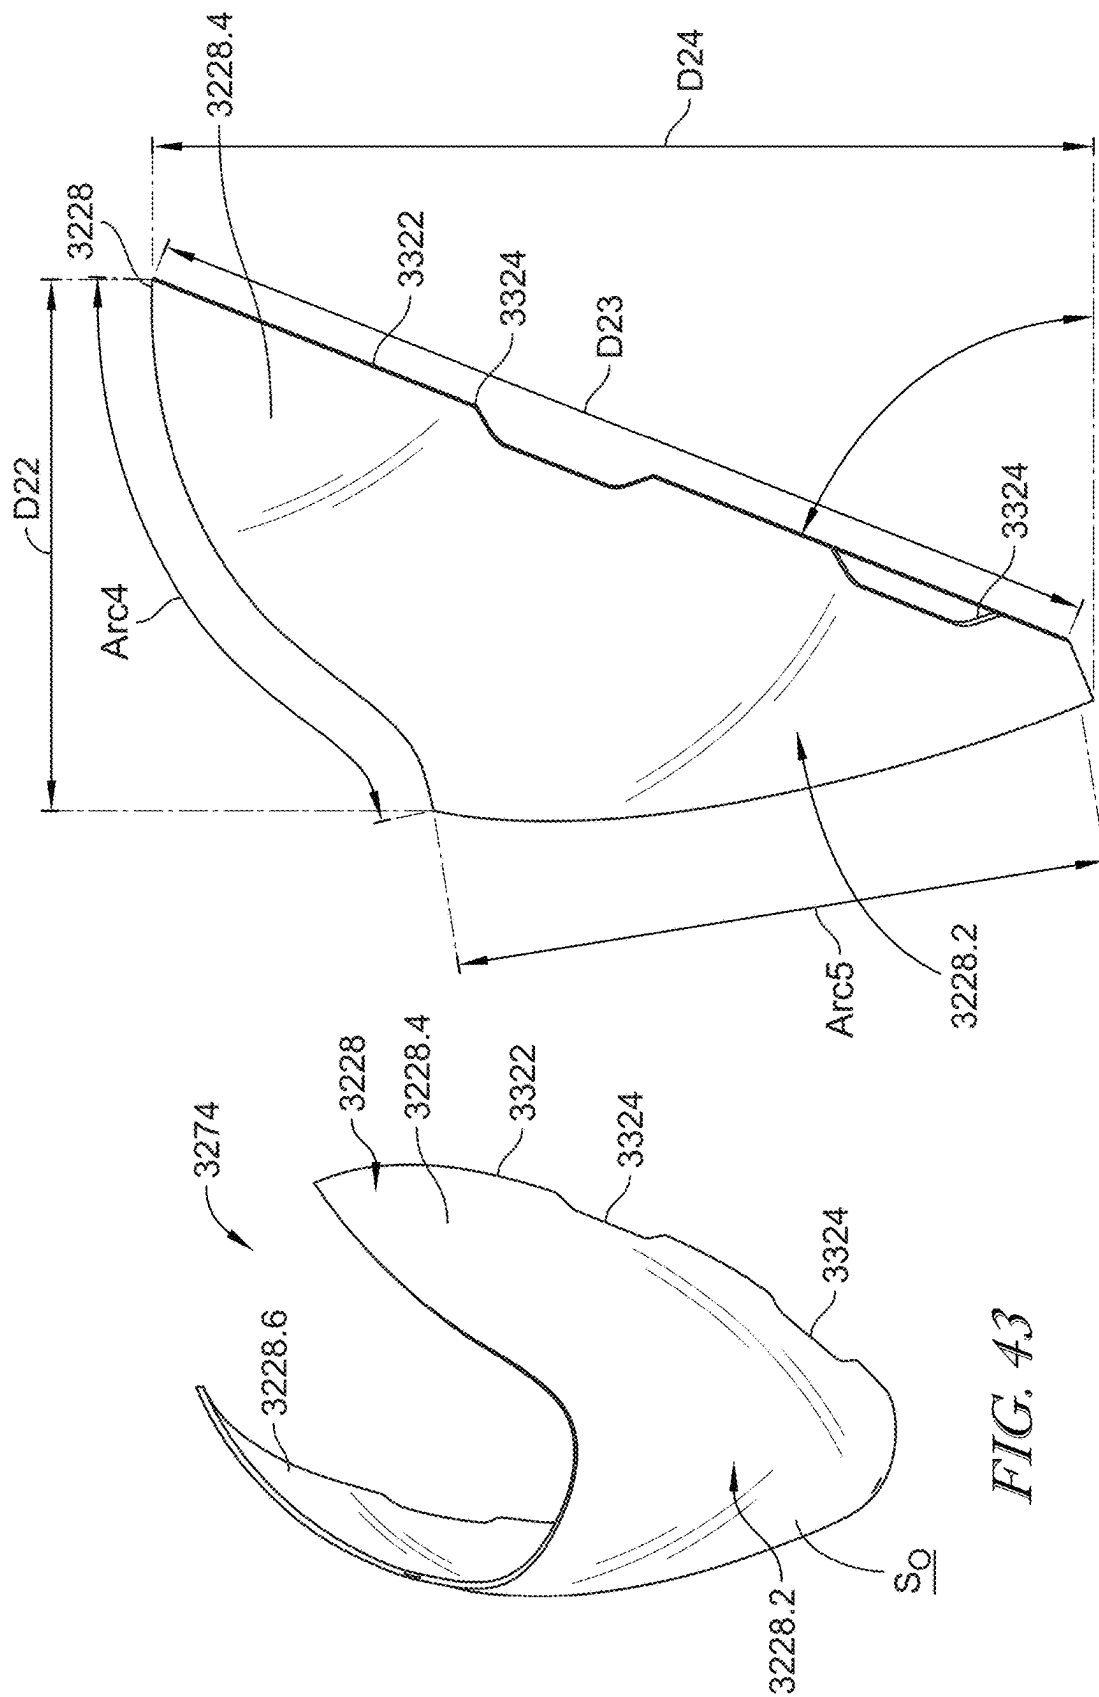


FIG. 44

FIG. 43

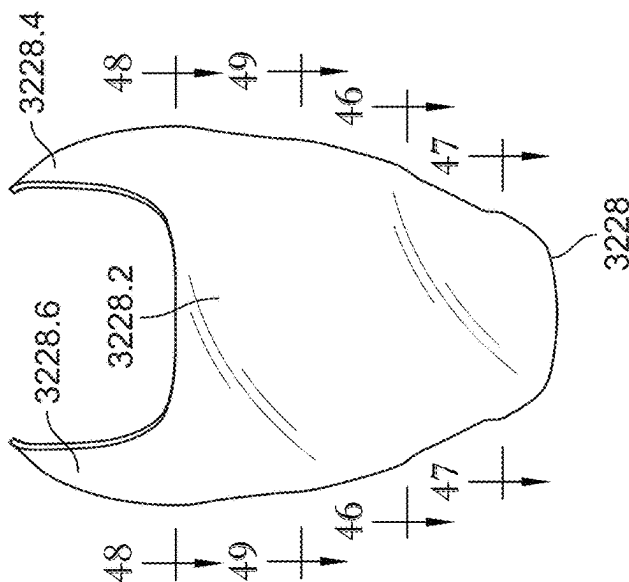


FIG. 45

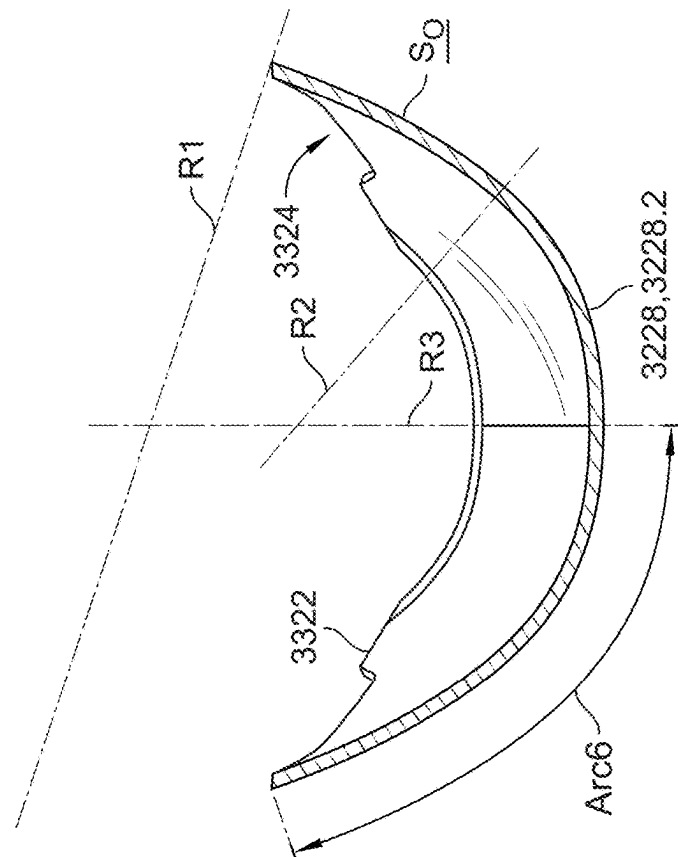


FIG. 46

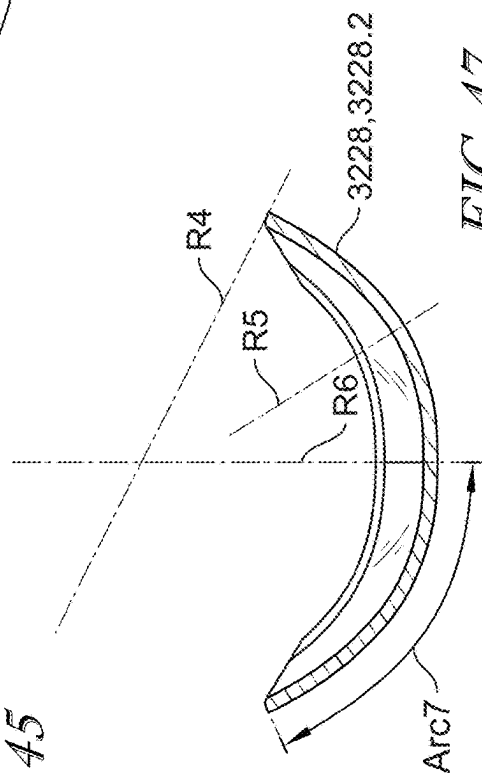
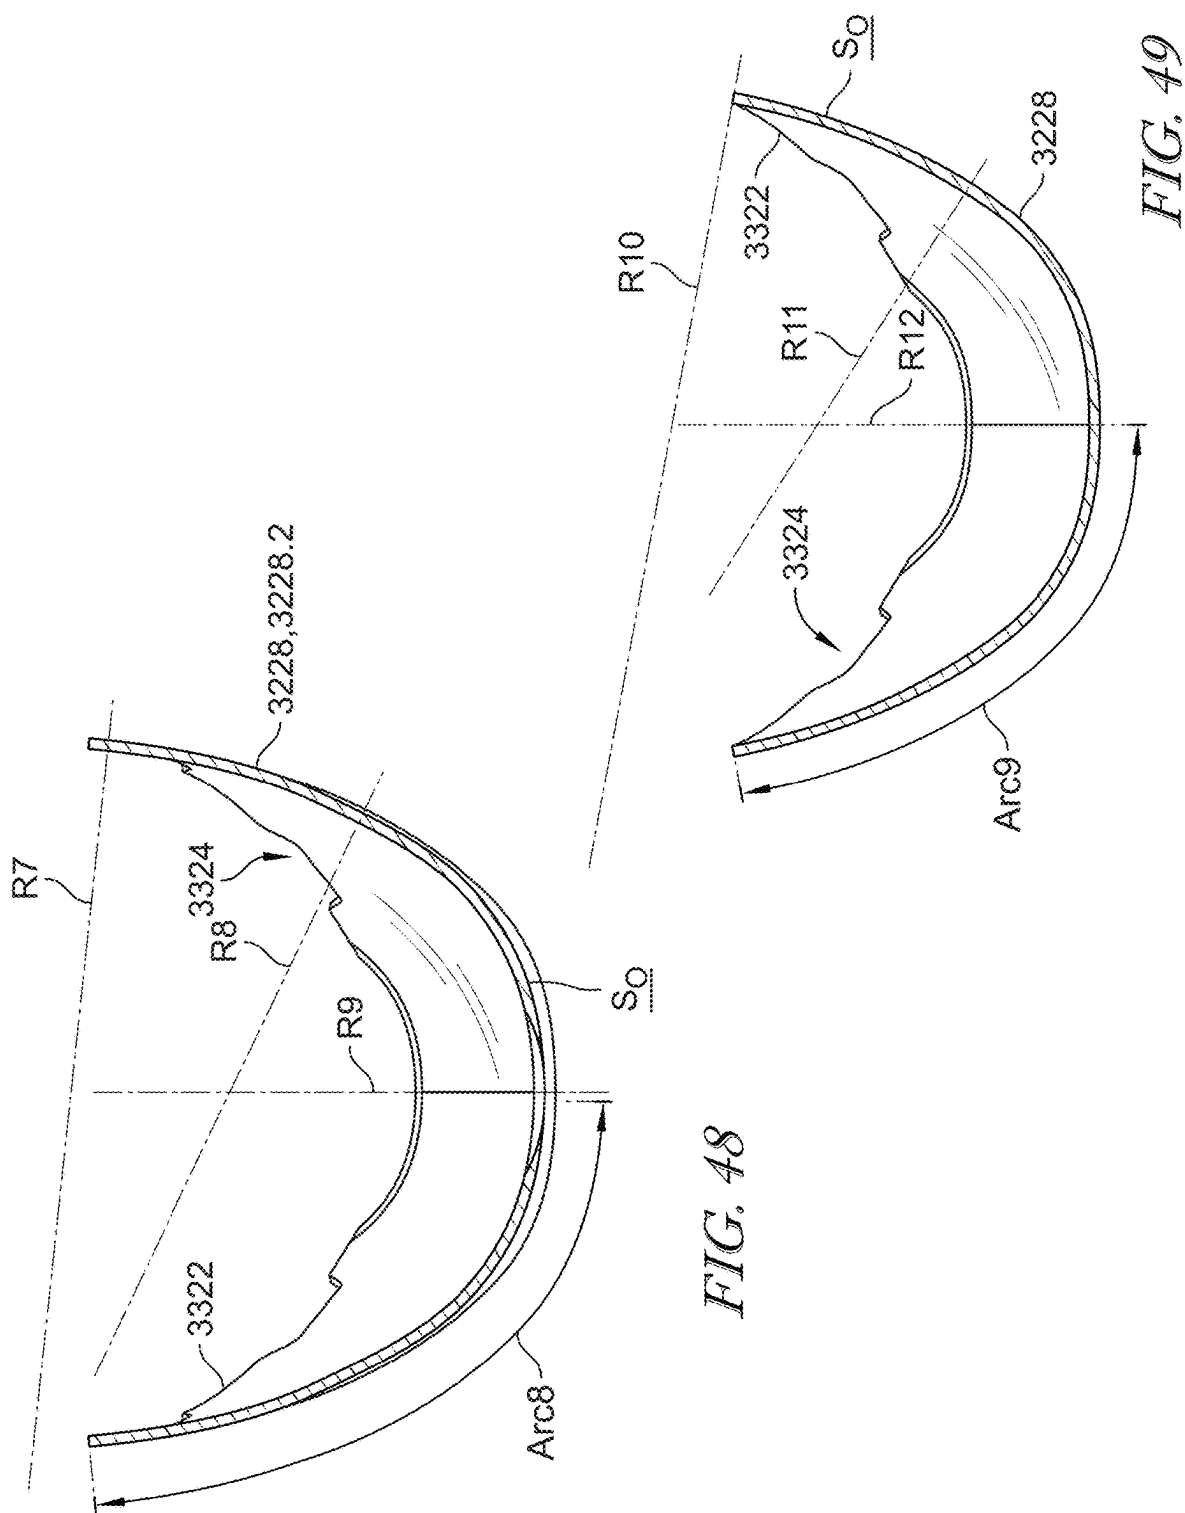


FIG. 47



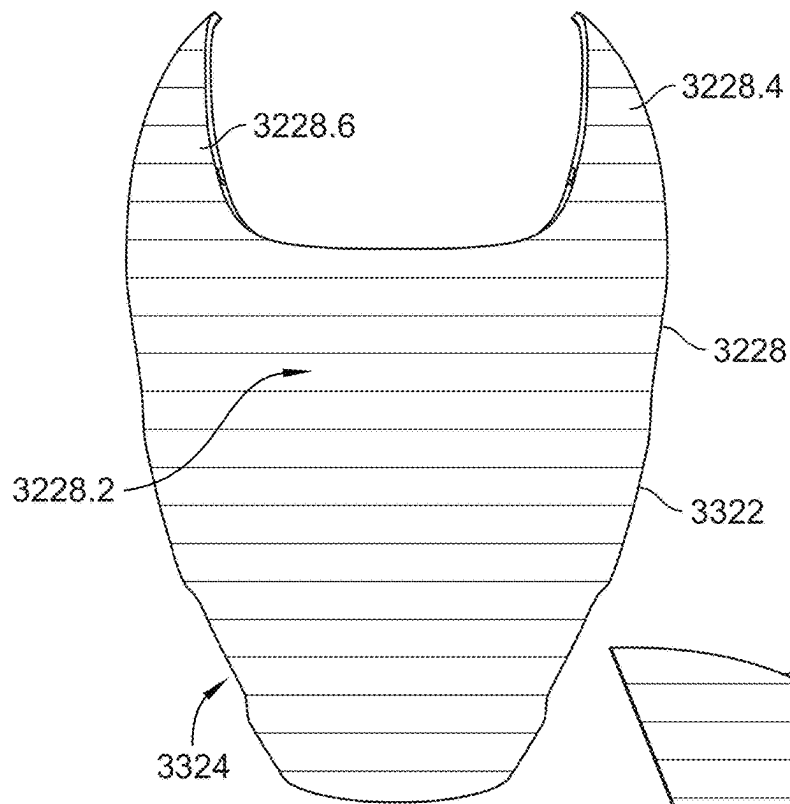


FIG. 50

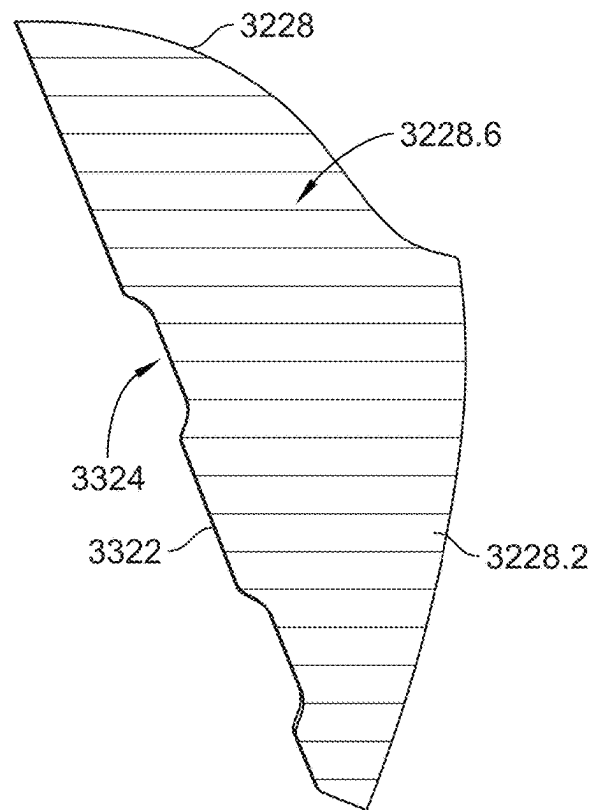


FIG. 51

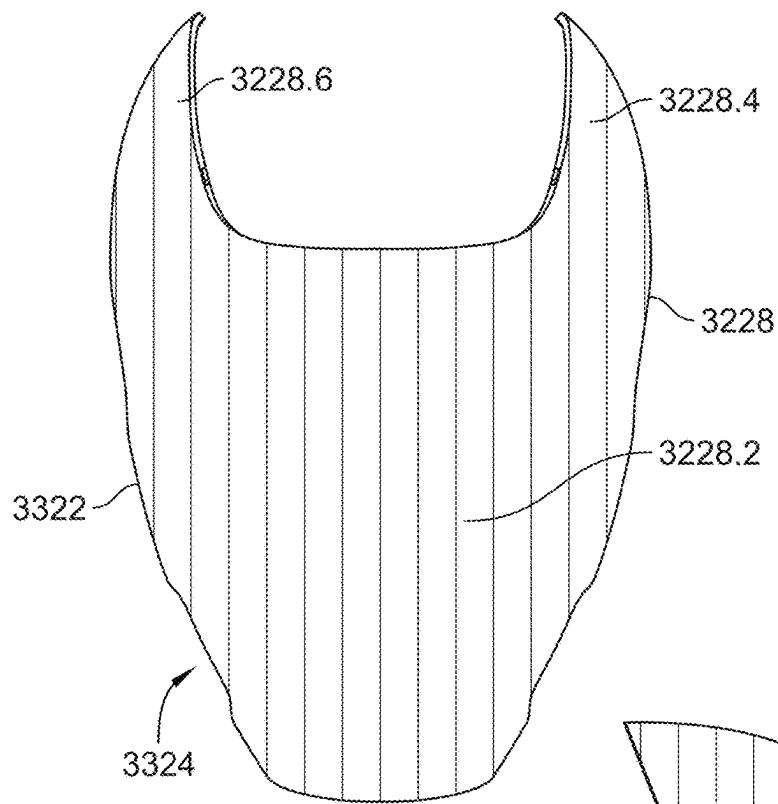


FIG. 52

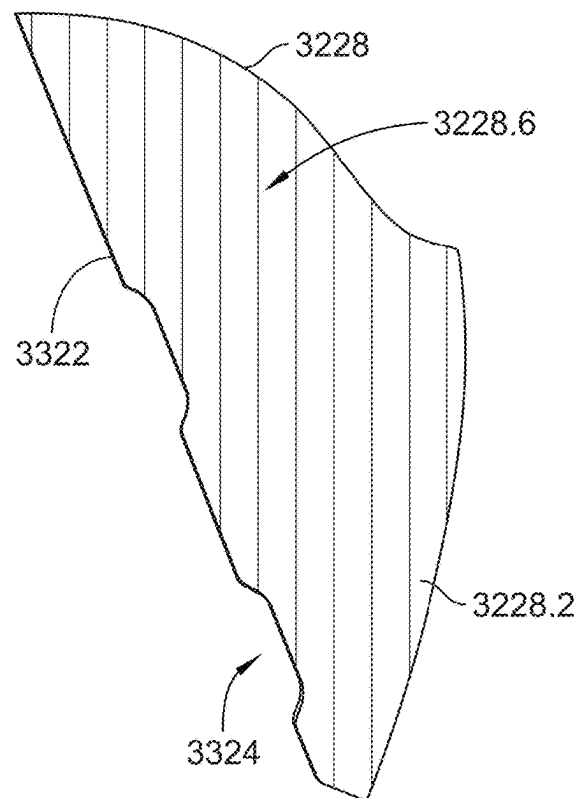


FIG. 53

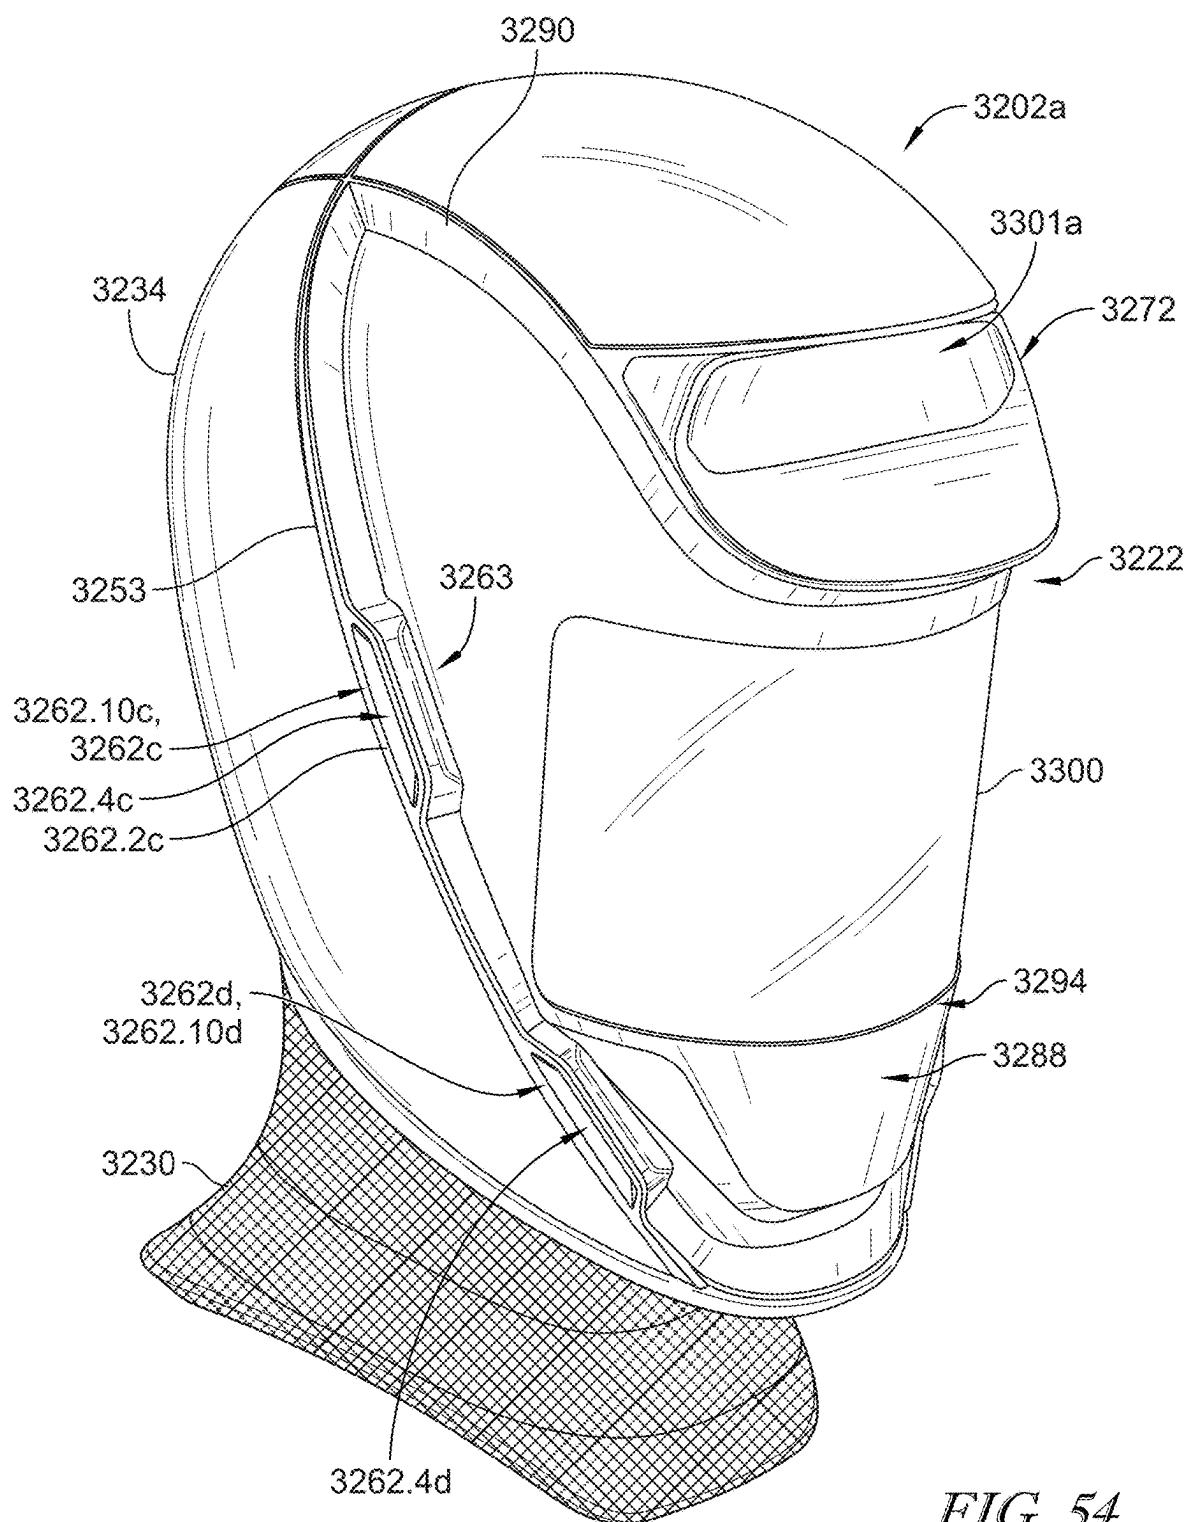


FIG. 54

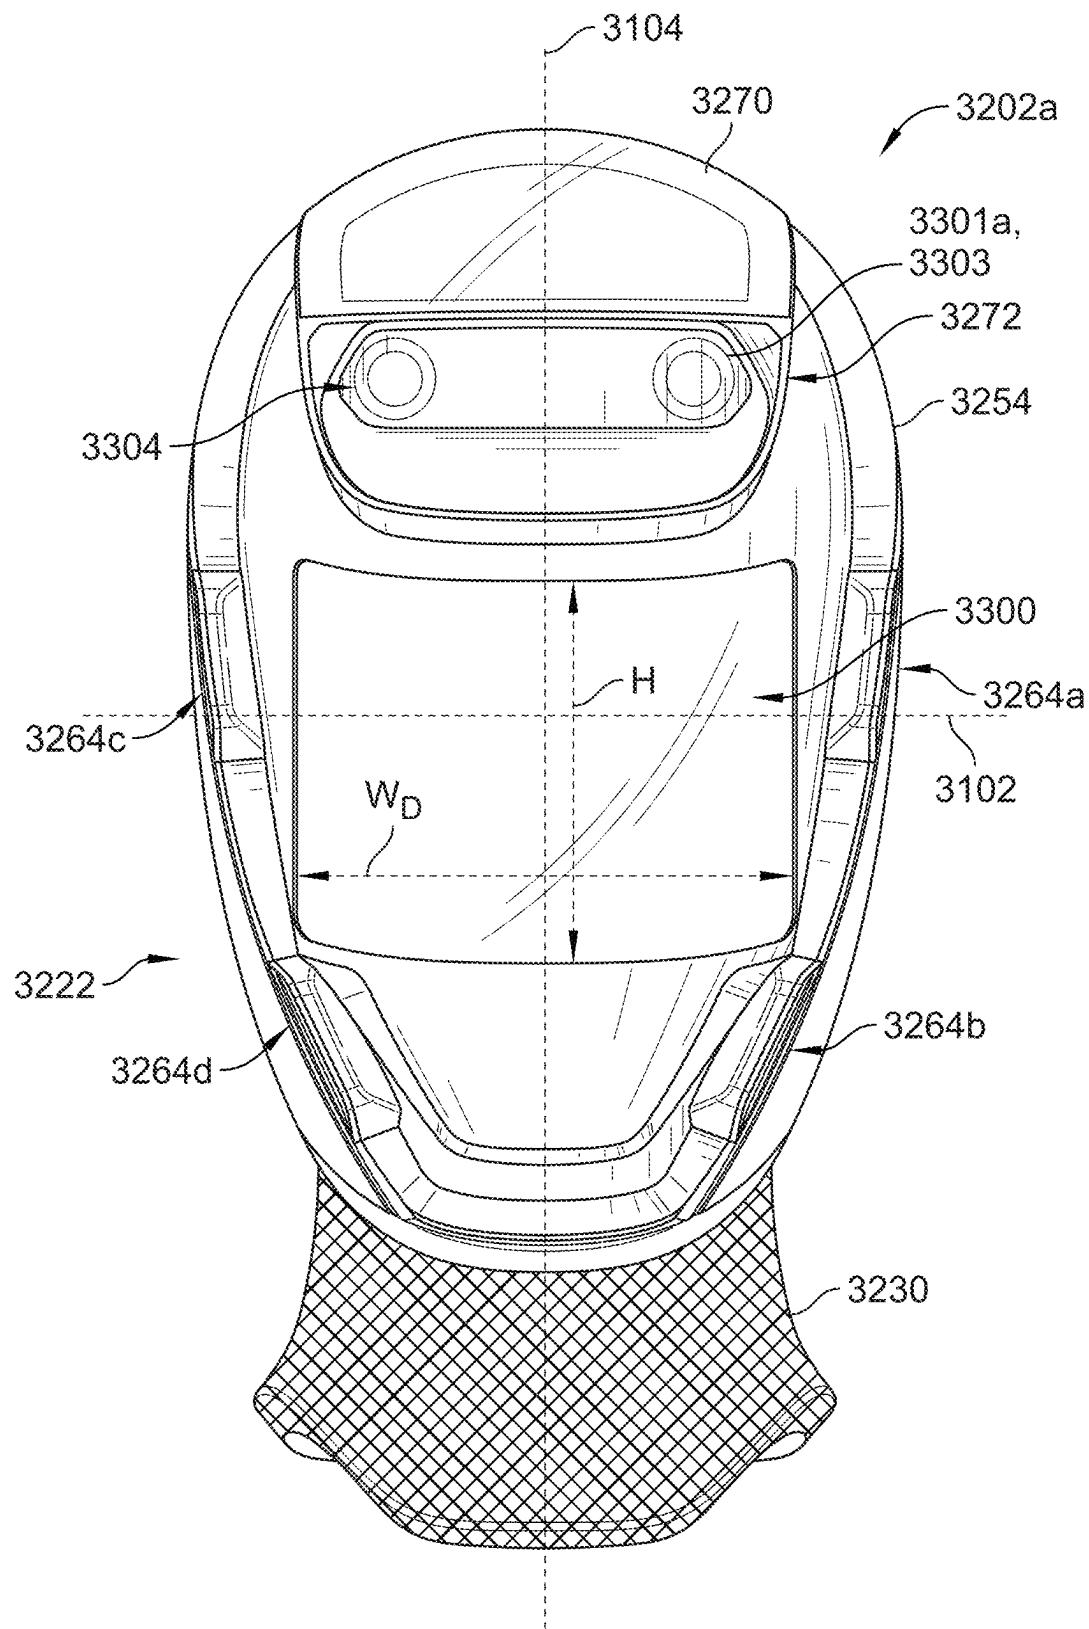


FIG. 55

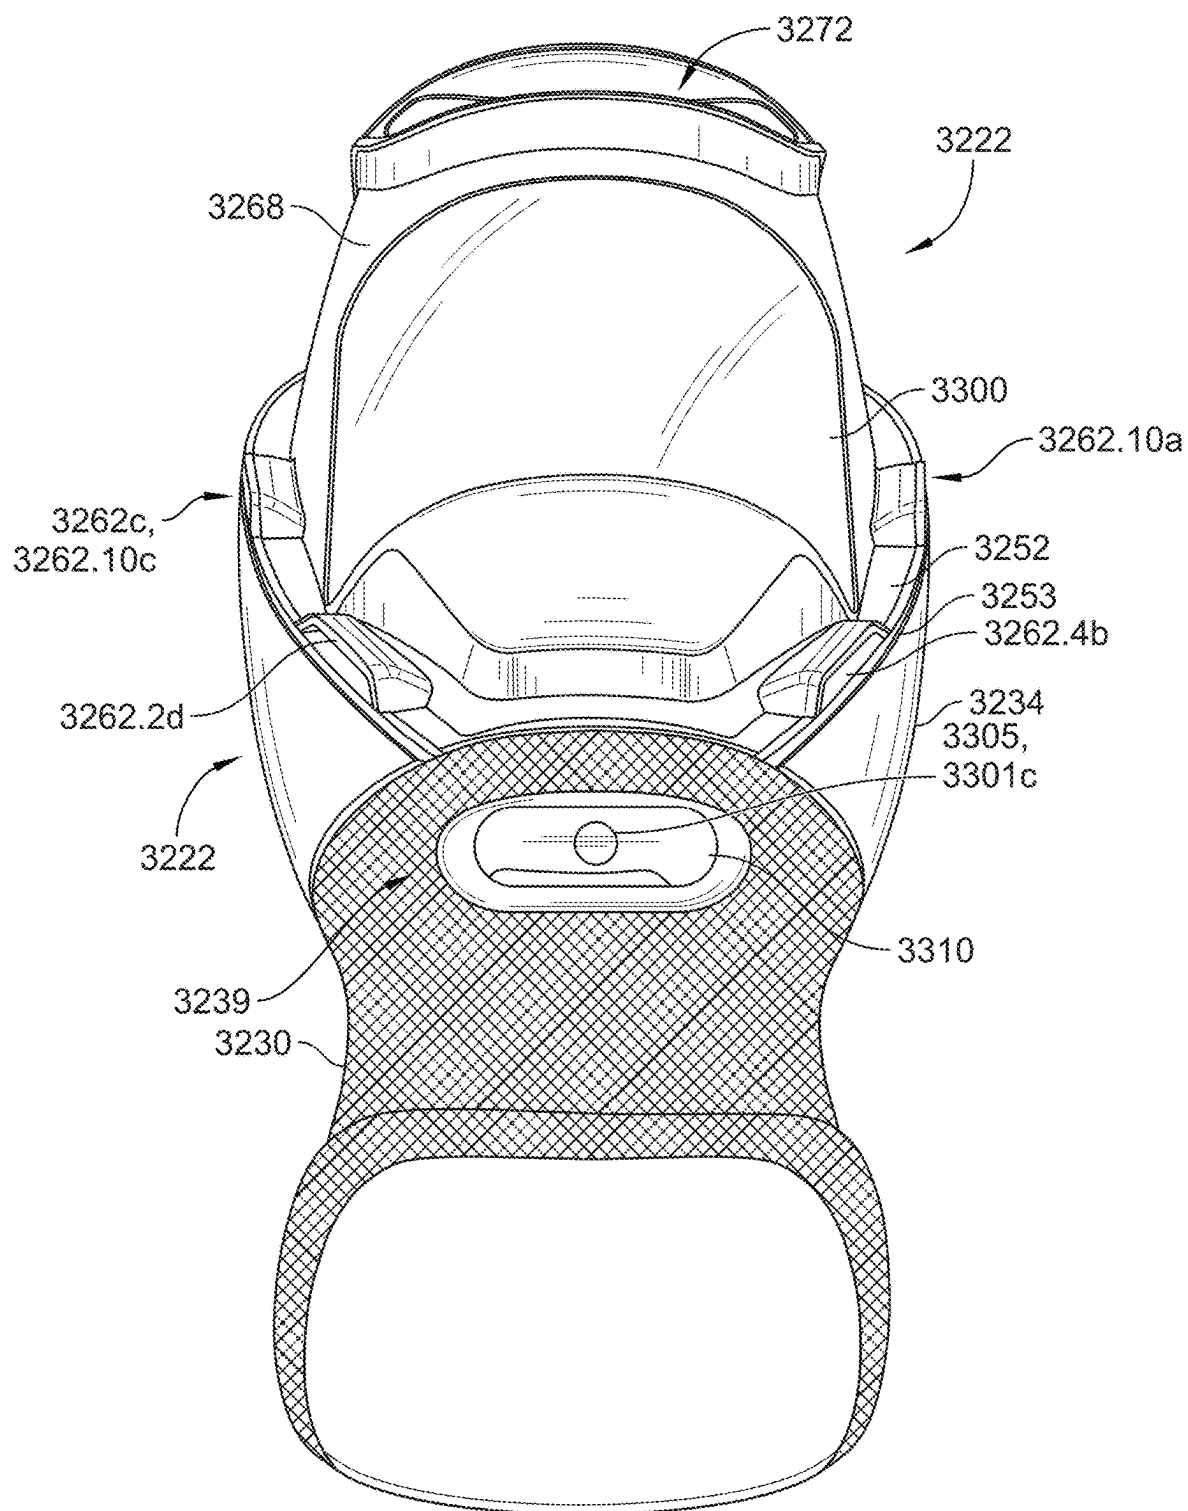


FIG. 56

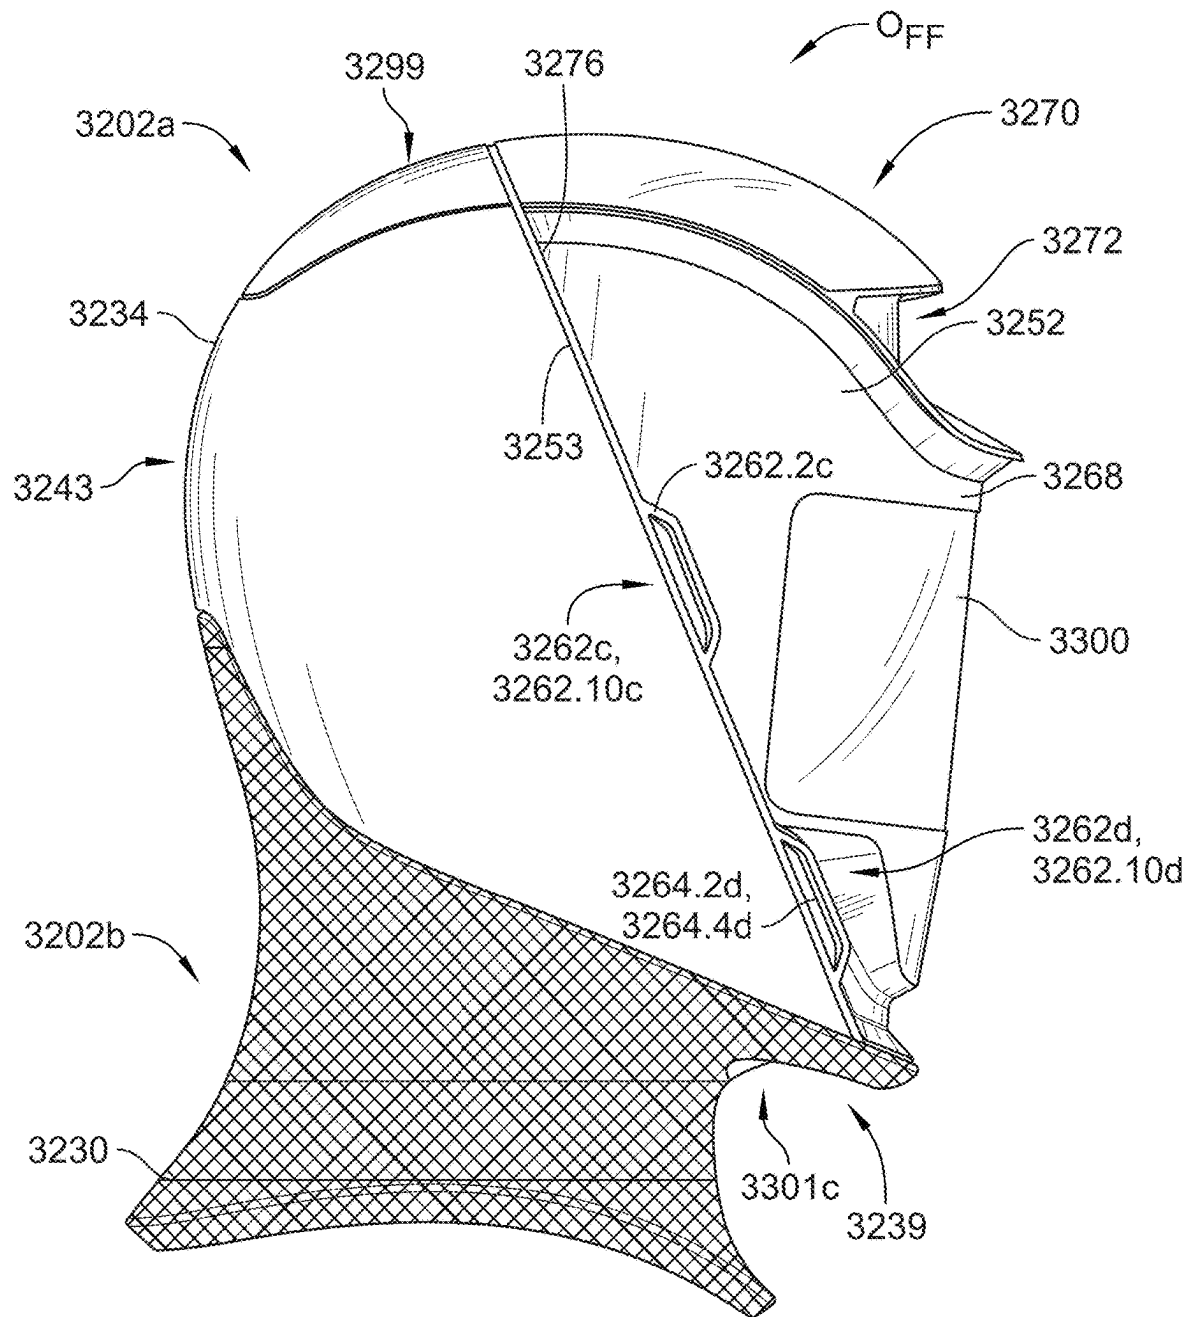


FIG. 57A

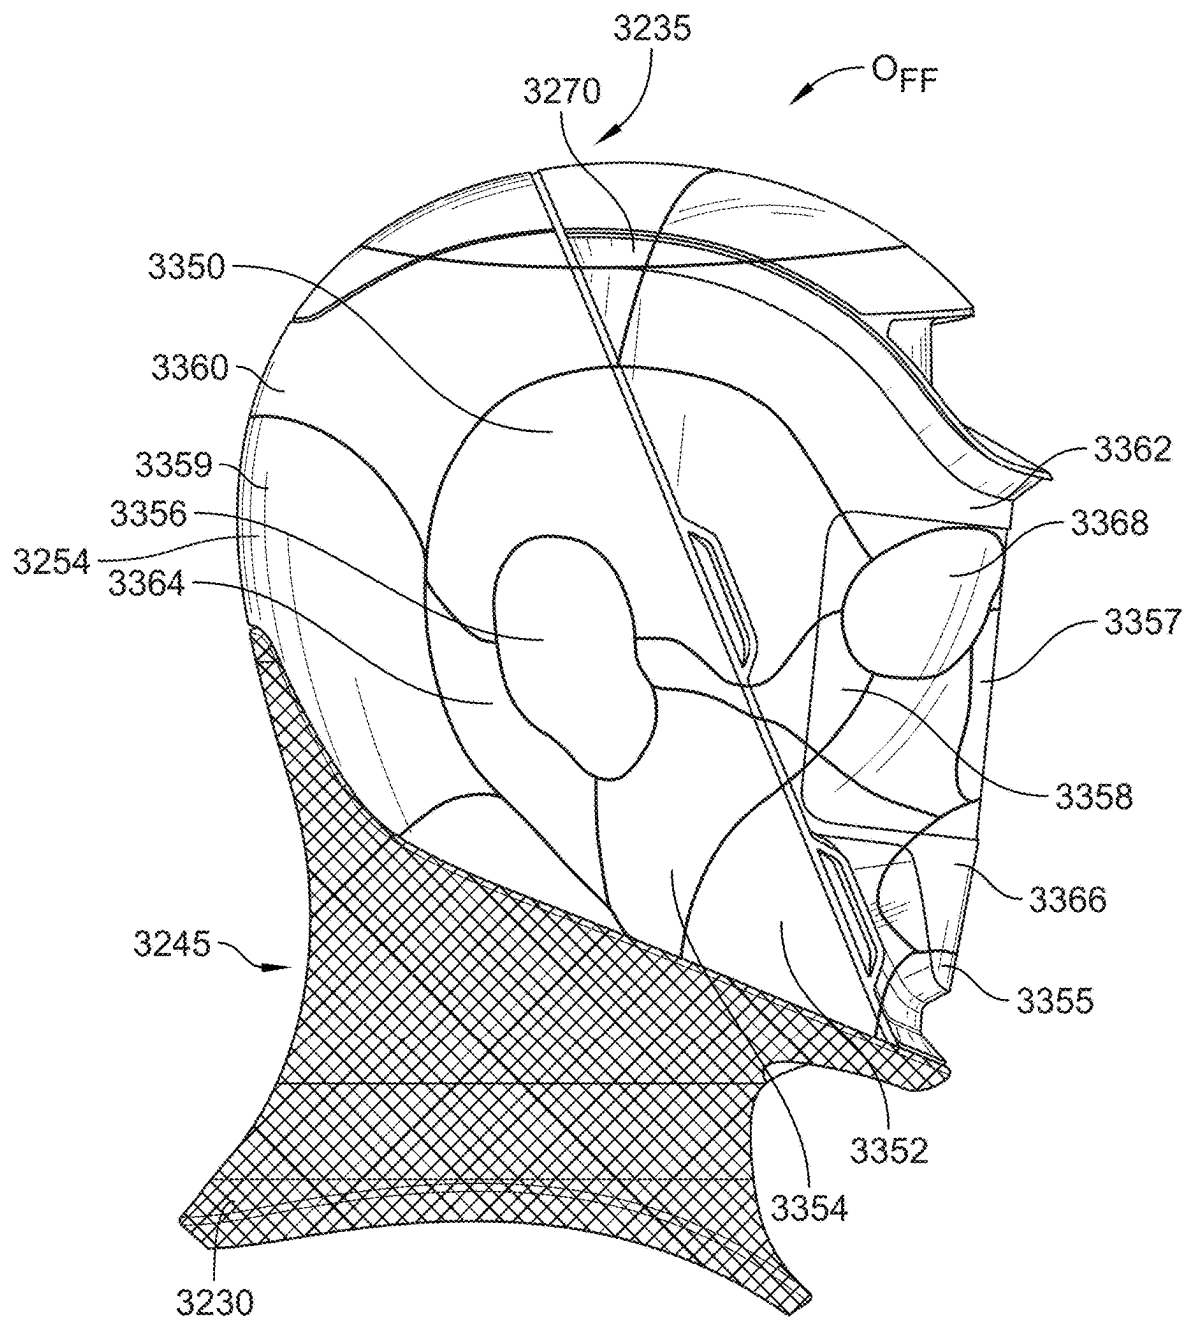
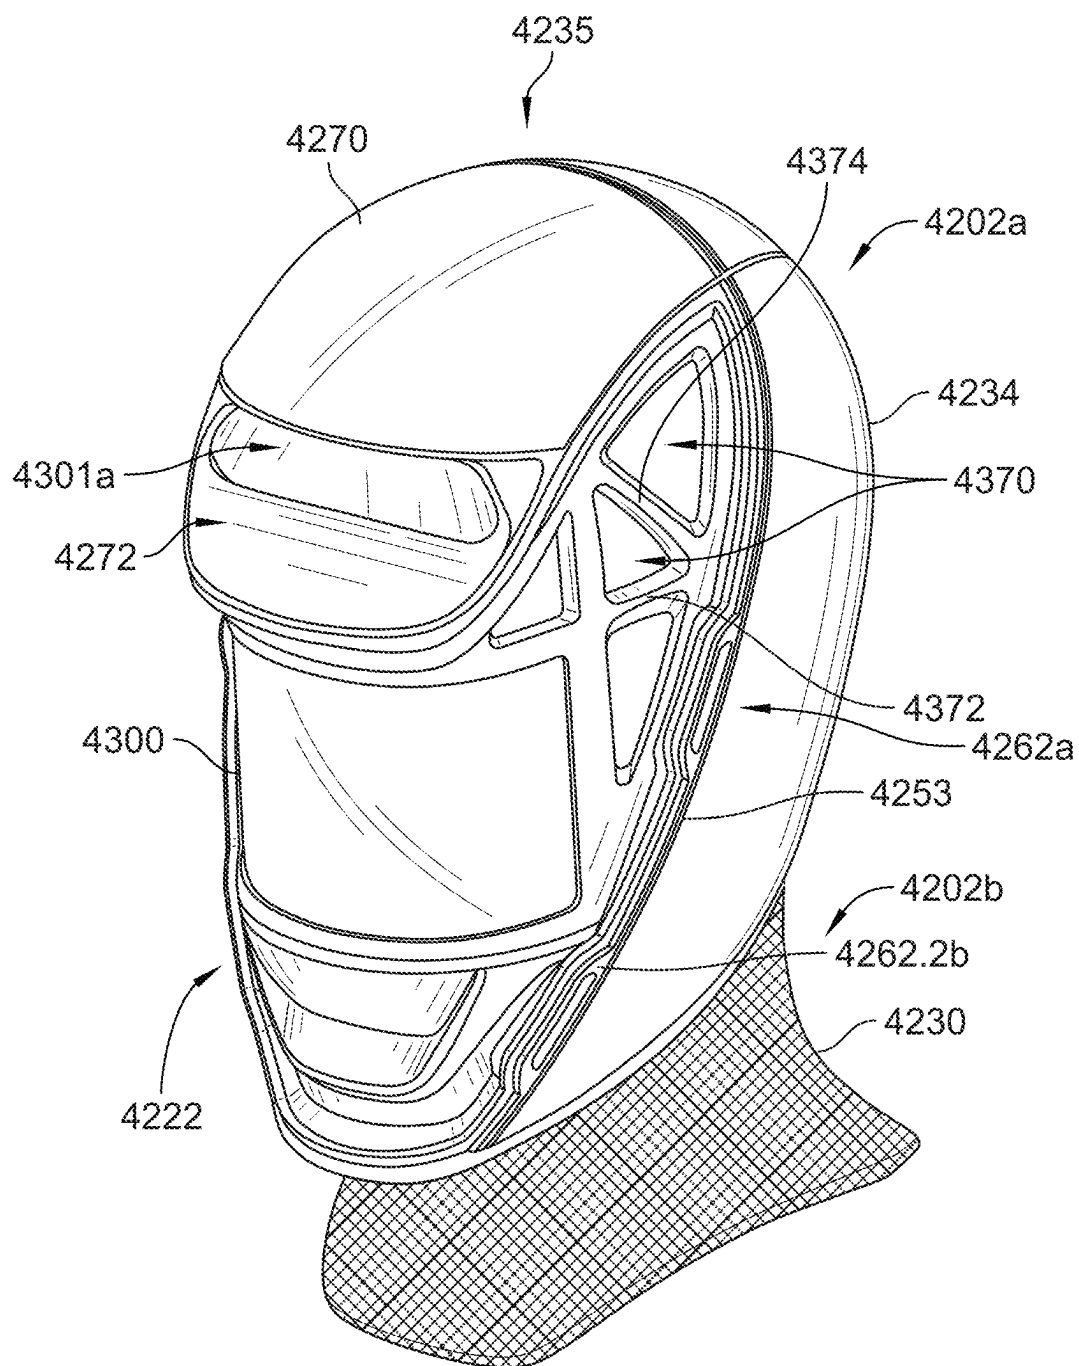
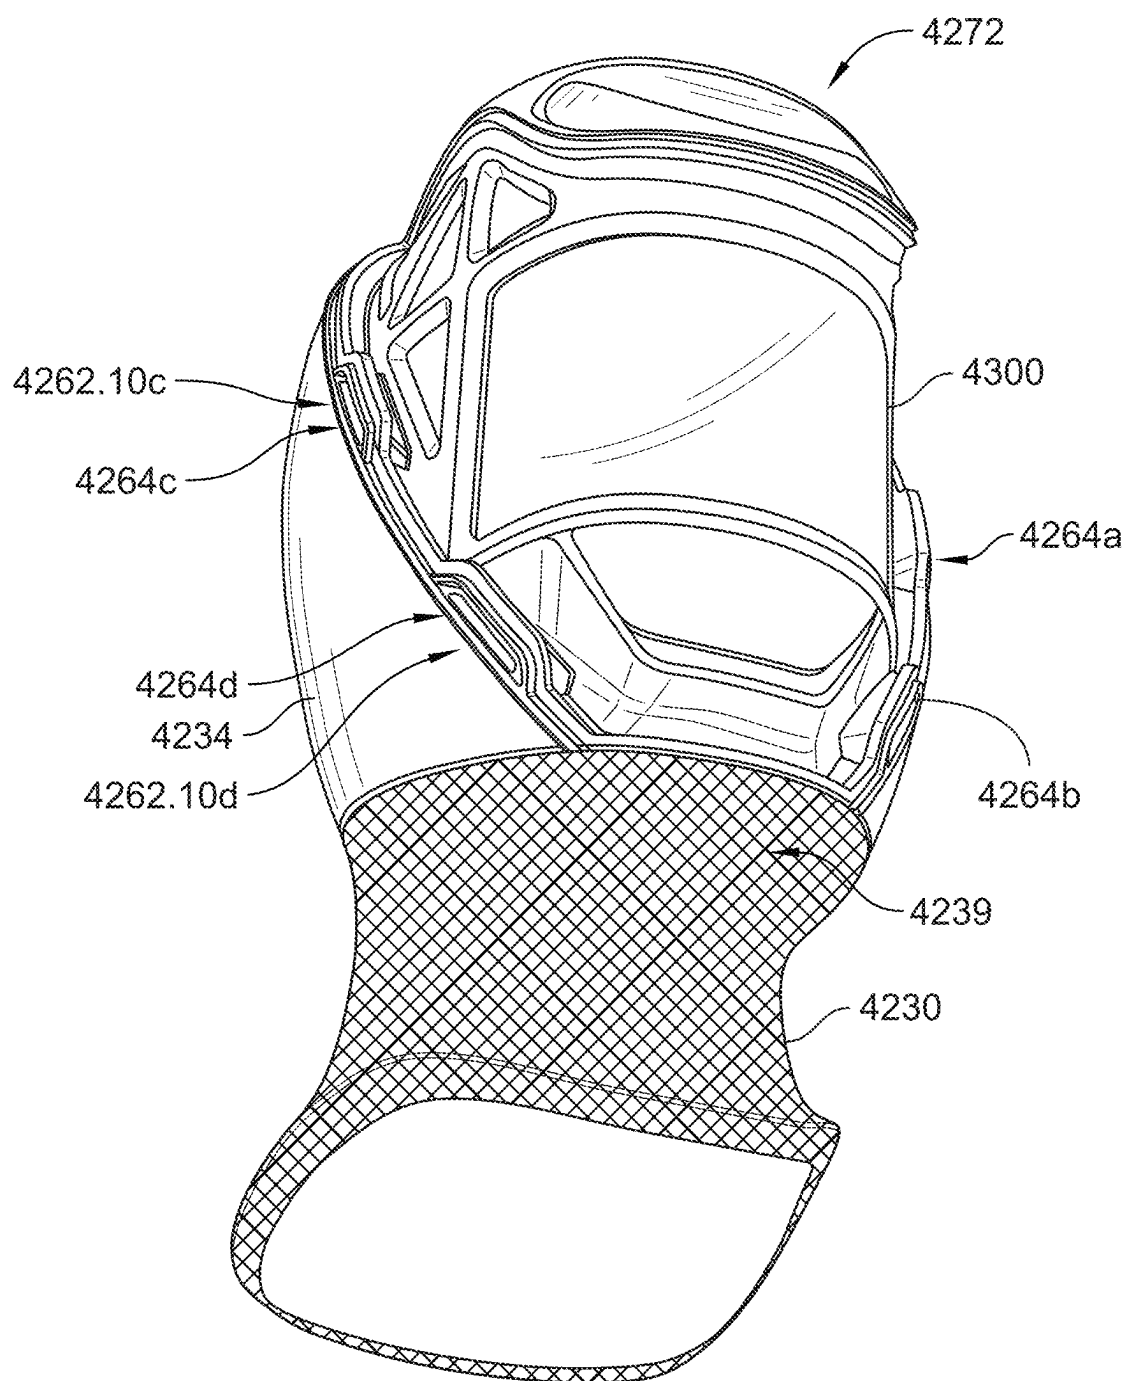
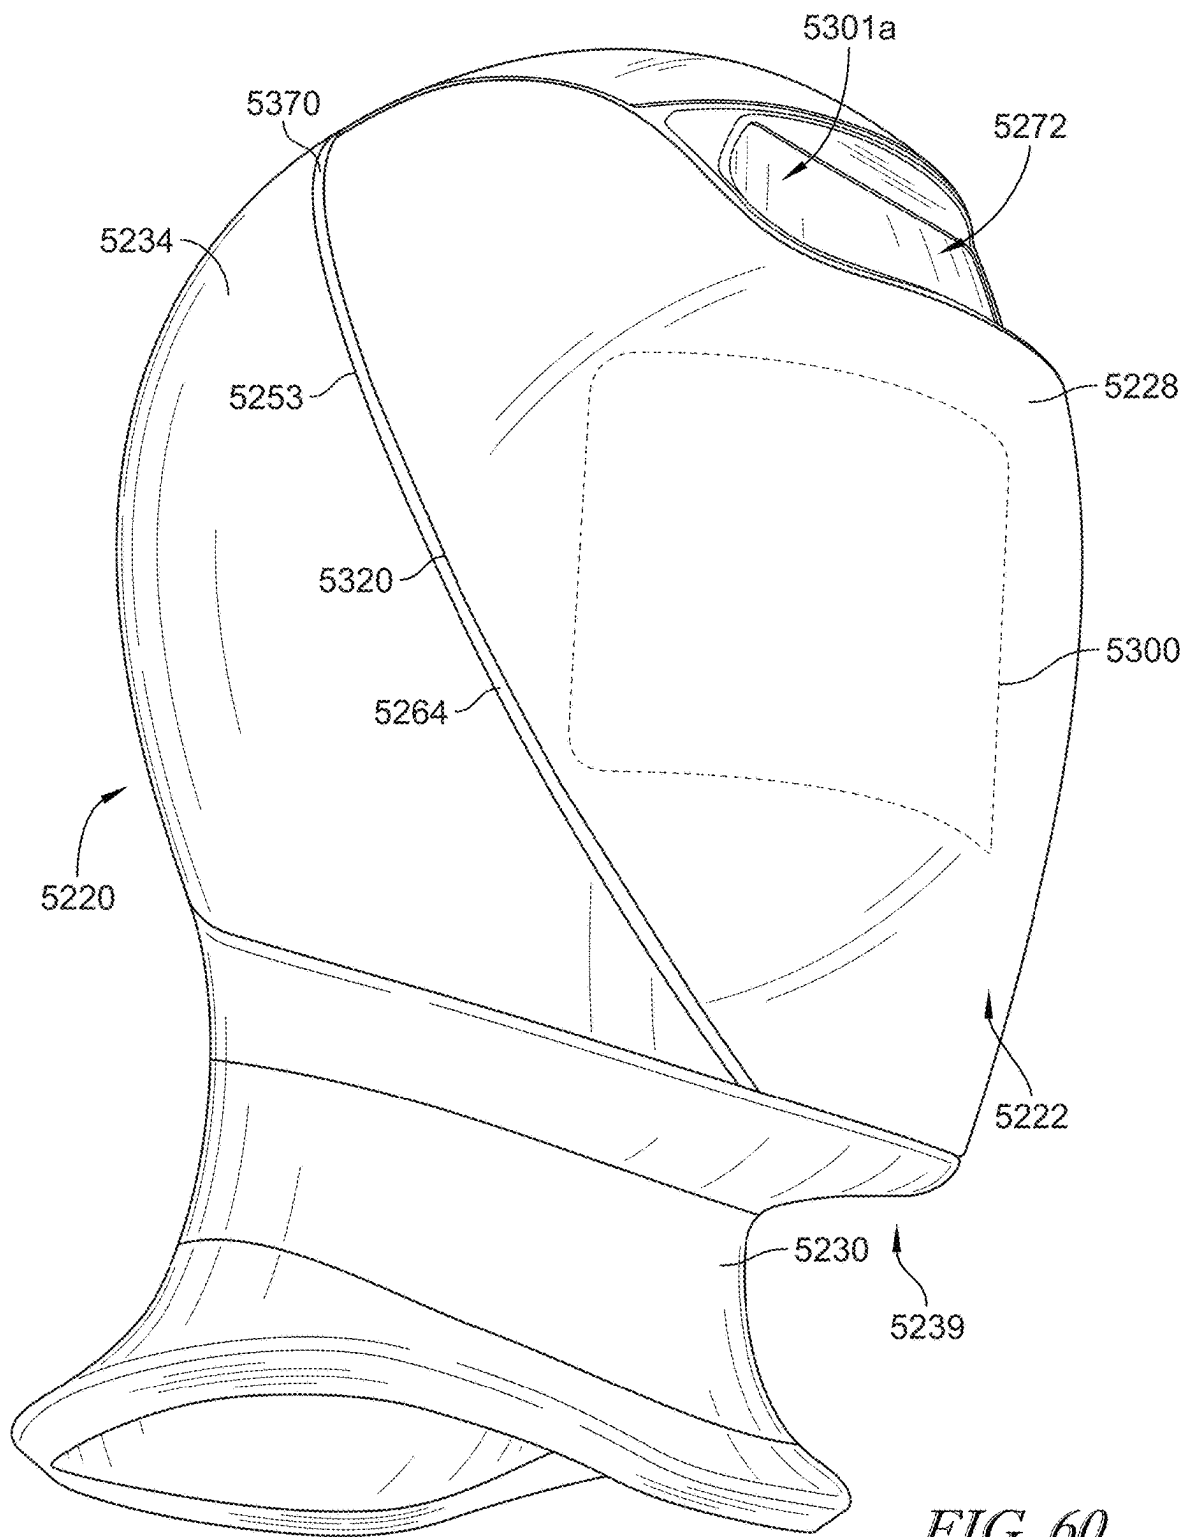
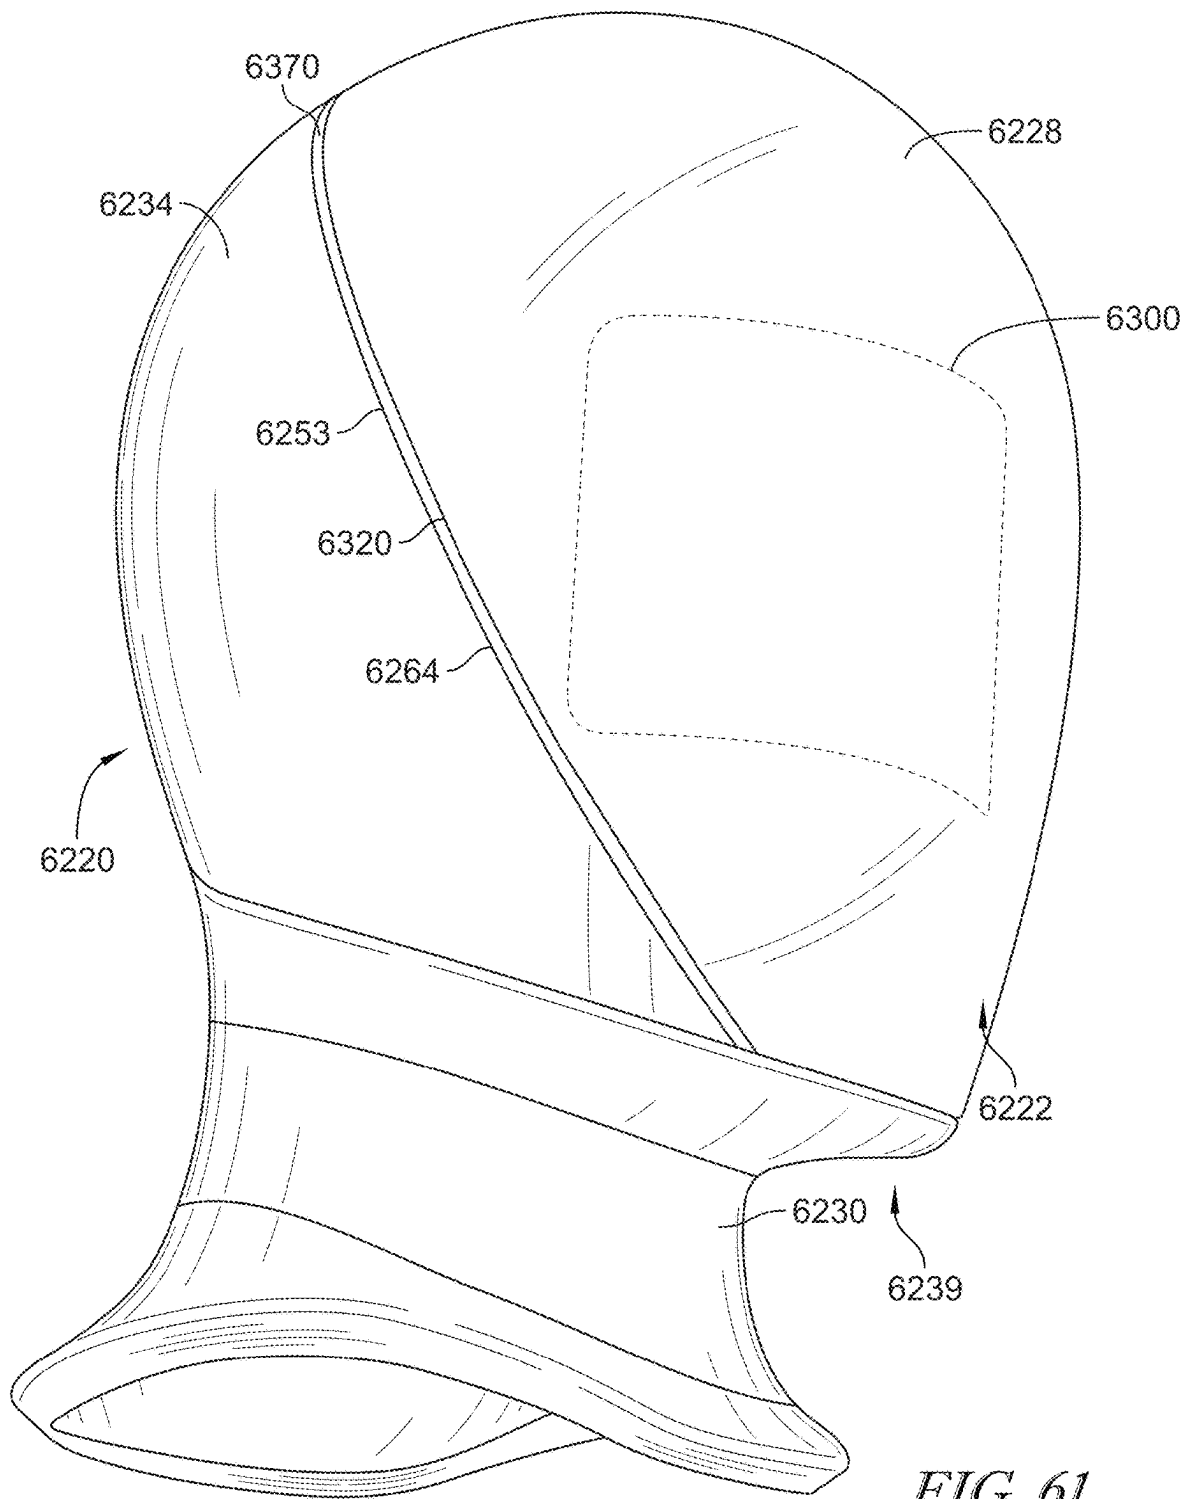



FIG. 57B

*FIG. 58*

*FIG. 59*

*FIG. 60*

*FIG. 61*

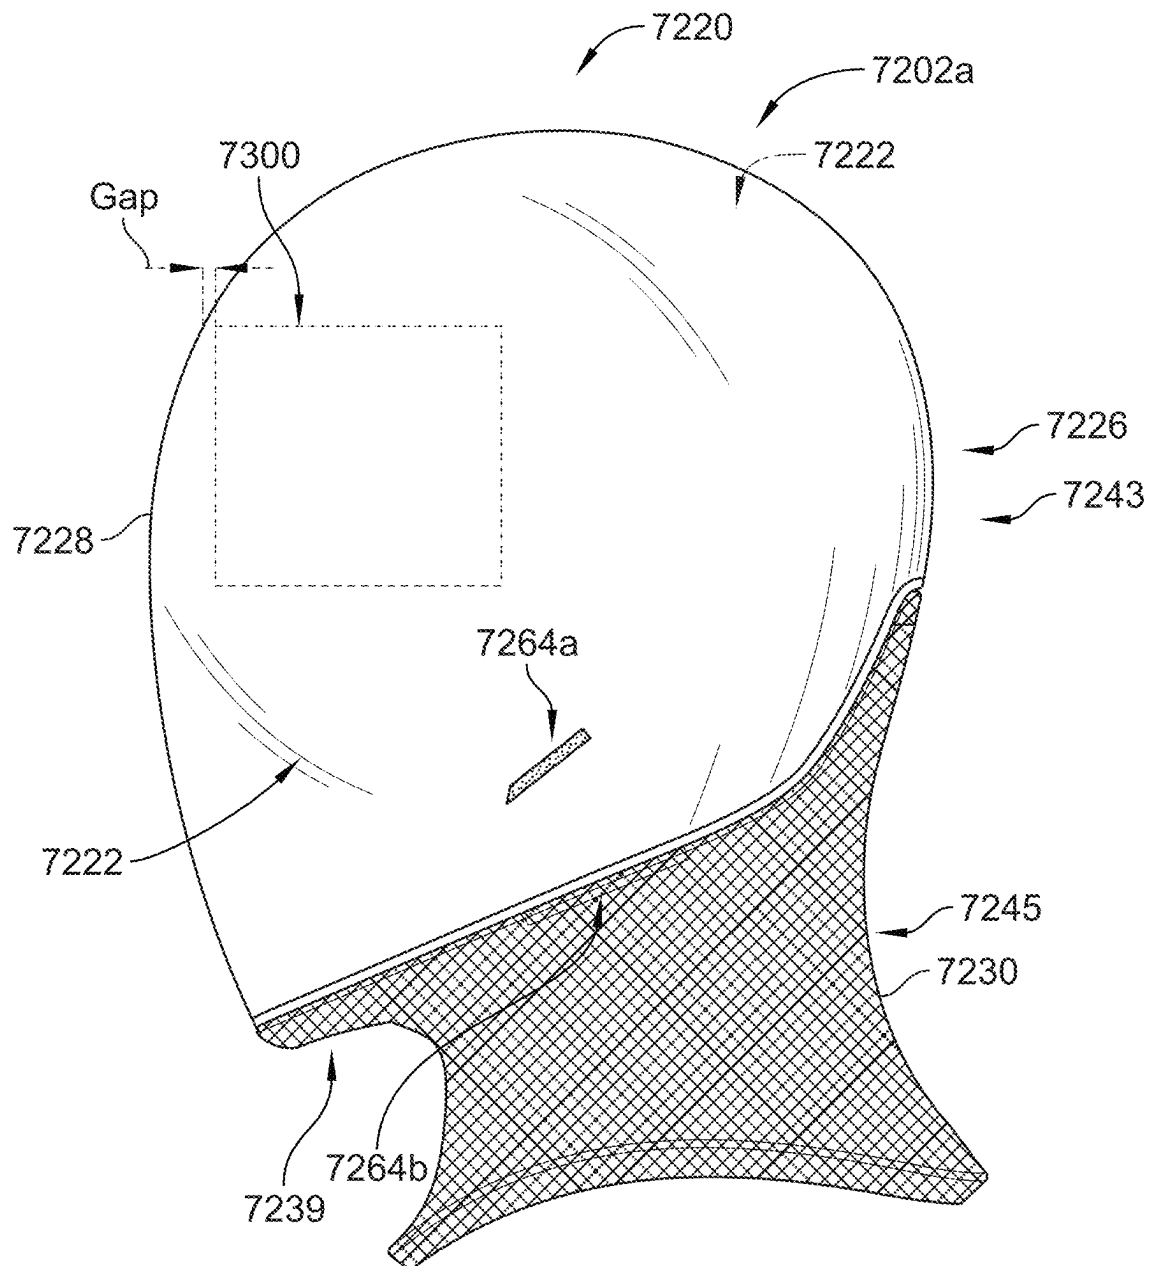*FIG. 62*

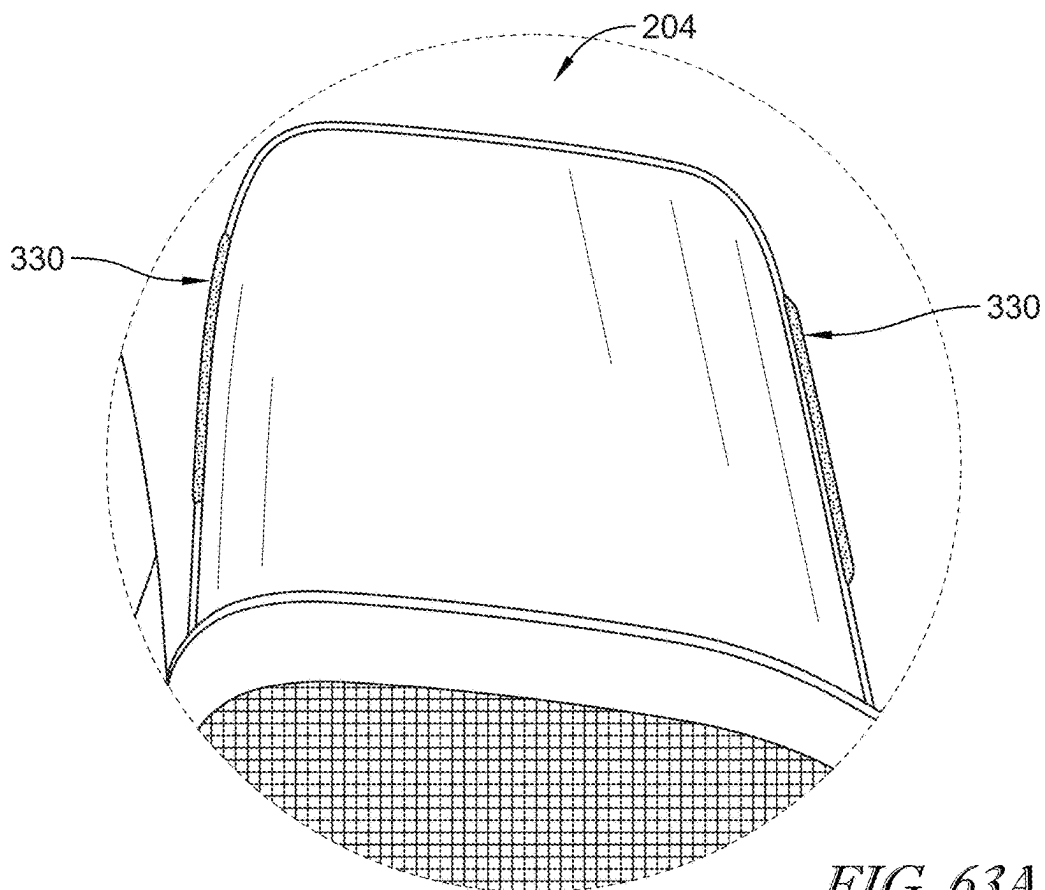


FIG. 63A

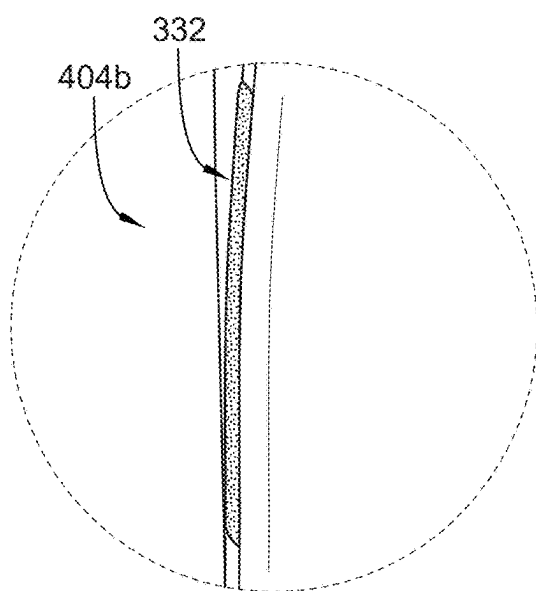


FIG. 63B

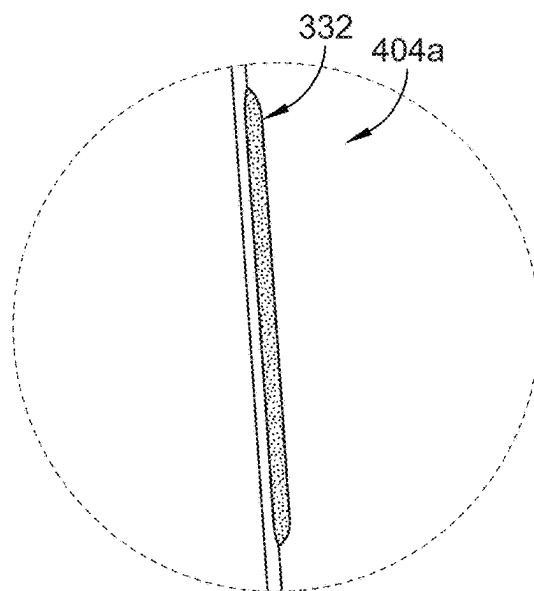


FIG. 63C

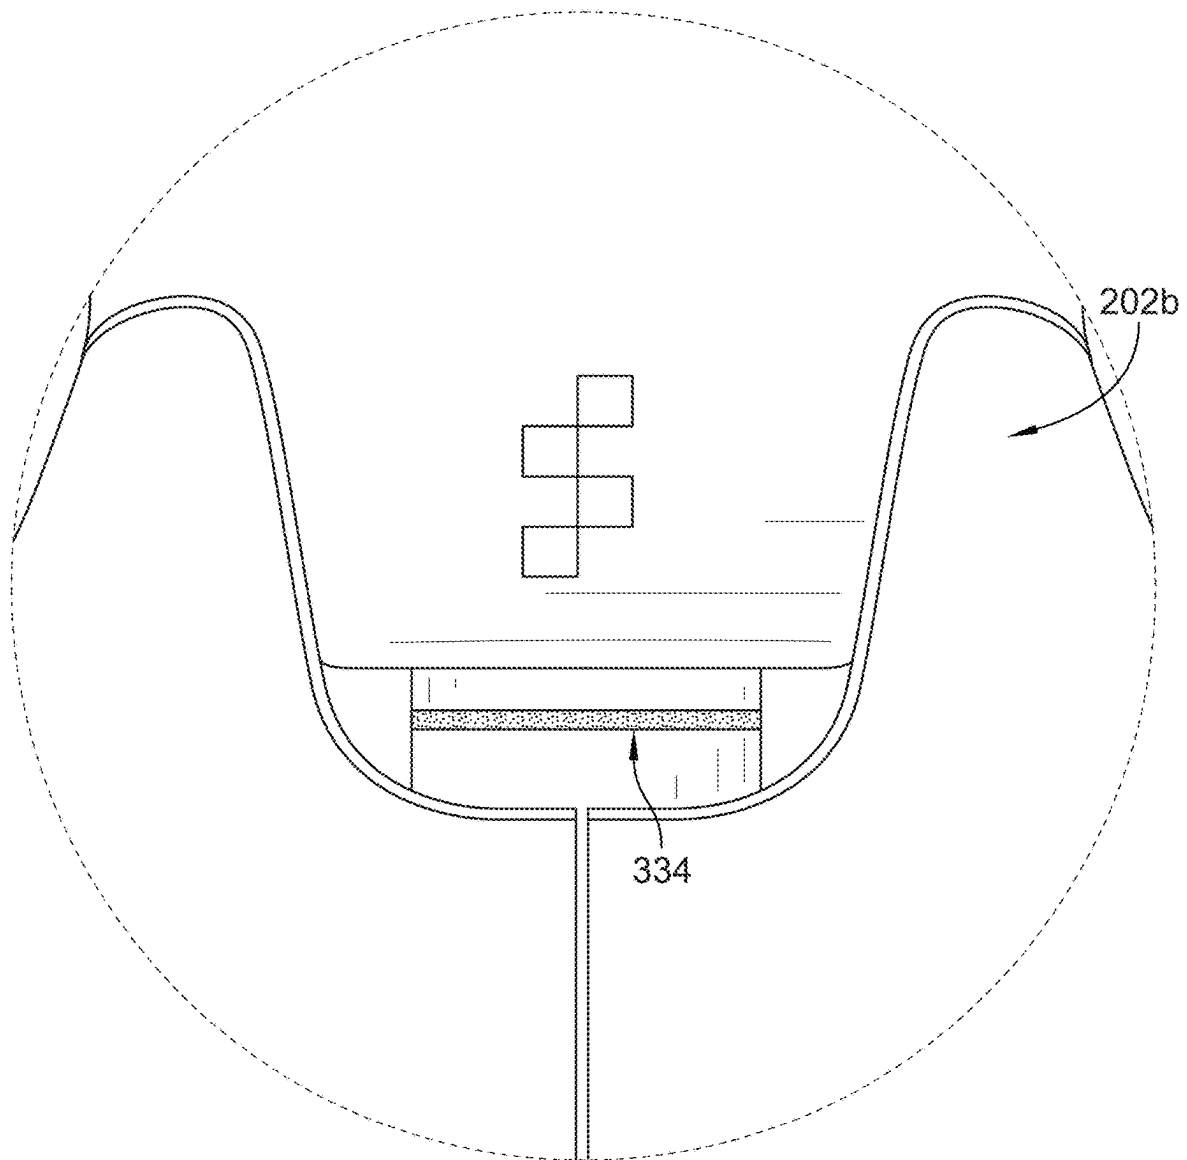
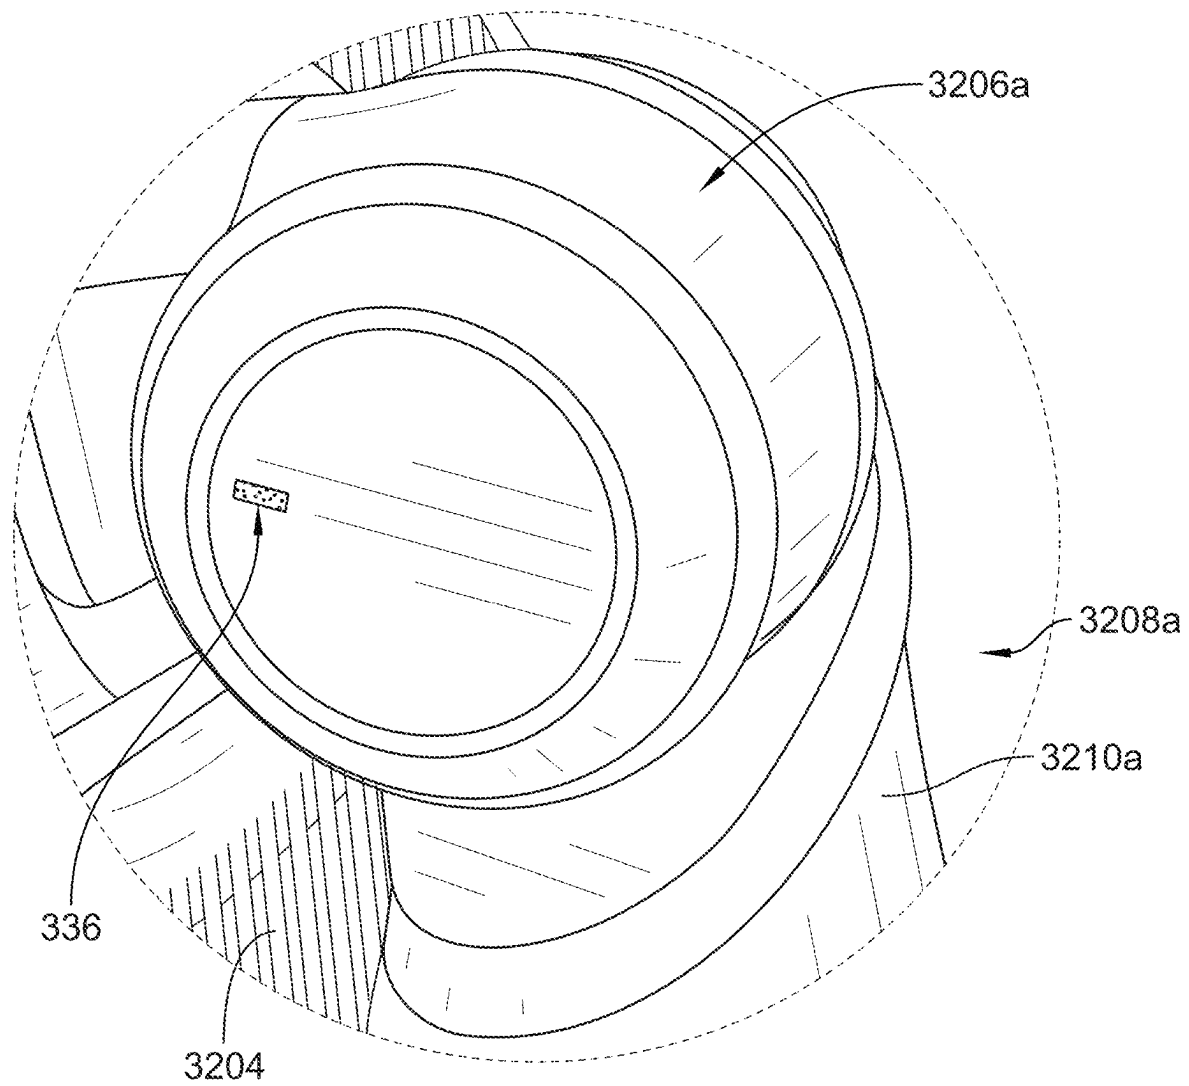


FIG. 64

*FIG. 65A*

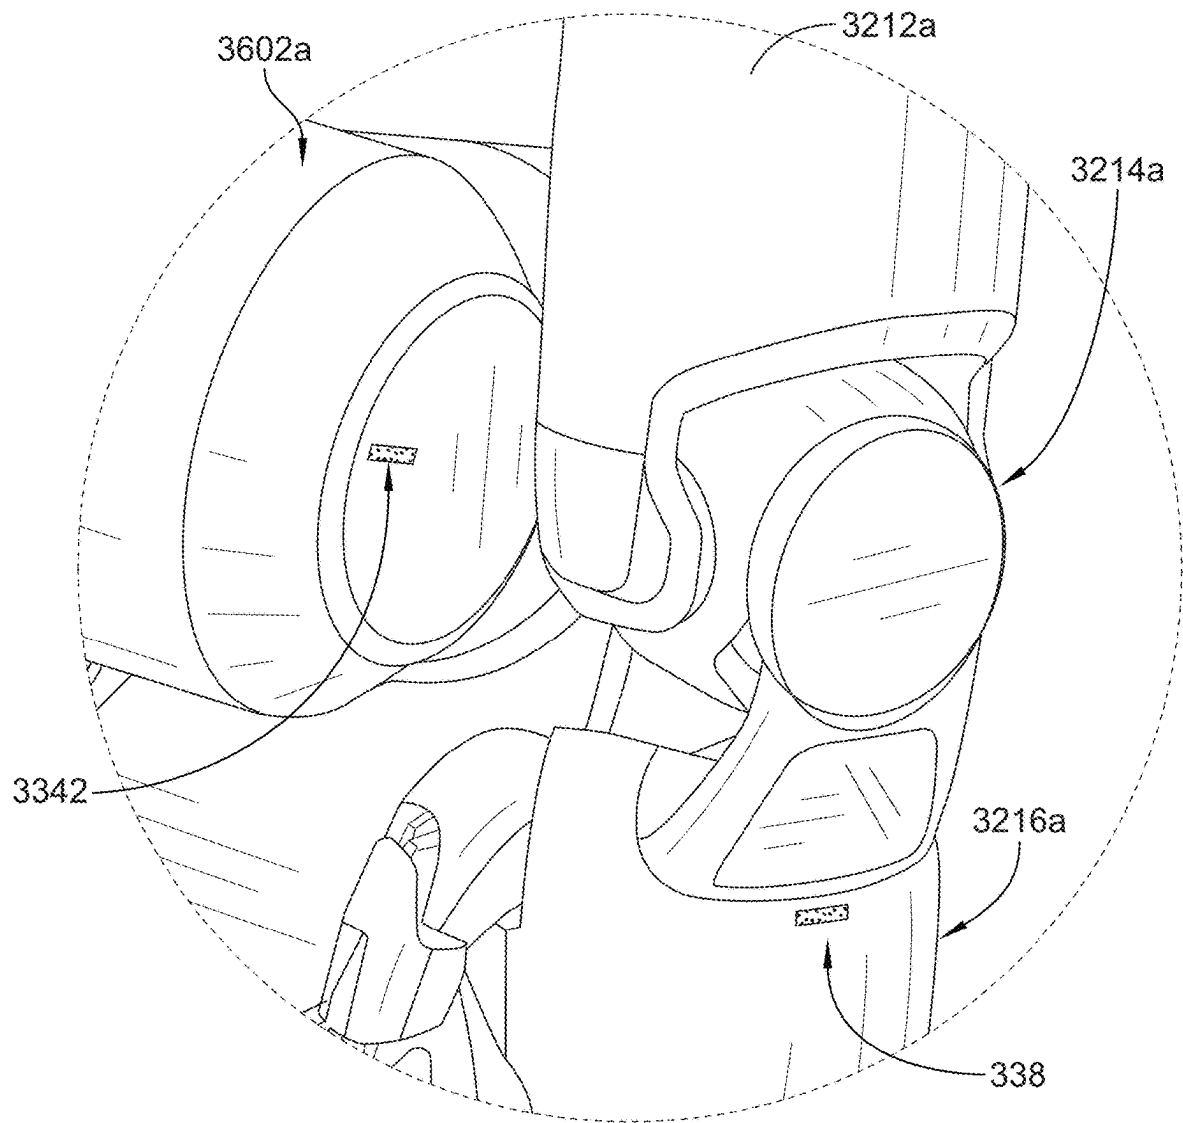
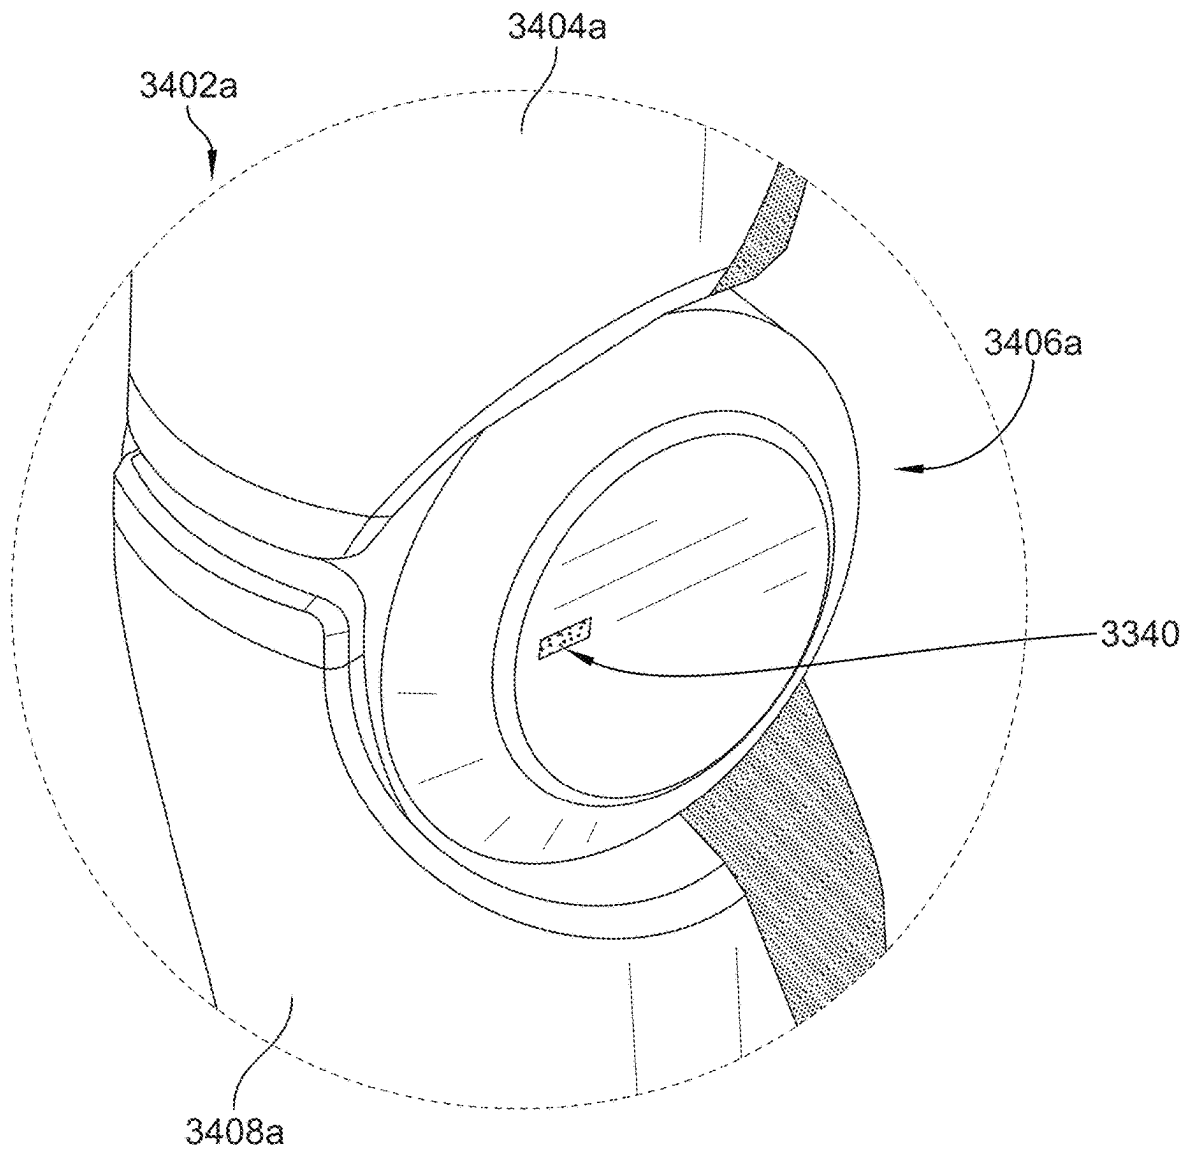


FIG. 65B

*FIG. 65C*

1

HEAD AND NECK ASSEMBLY FOR A HUMANOID ROBOT

PRIORITY CLAIM AND CROSS-REFERENCE TO RELATED APPLICATIONS

This application is: (i) a continuation in part of U.S. patent application Ser. No. 18/914,800, filed Oct. 14, 2024, which is a continuation in part of U.S. patent application Ser. No. 18/904,332, filed Oct. 2, 2024, (ii) a continuation in part of U.S. Design patent application Ser. No. 29/935,680, filed Apr. 3, 2024, which is a continuation in part of U.S. Design patent application Ser. No. 29/928,748, filed Feb. 15, 2024, which is a continuation in part of U.S. Design patent application Ser. No. 29/889,764, filed Apr. 17, 2023, and (iii) claims priority under 35 U.S.C. § 119 (e) to U.S. Provisional Patent Application No. 63/626,035, filed Feb. 27, 2024, U.S. Provisional Patent Application No. 63/564,741, filed Mar. 13, 2024, U.S. Provisional Patent Application No. 63/626,034, filed Mar. 13, 2024, and U.S. Provisional Patent Application No. 63/626,037, filed May 28, 2024, U.S. Provisional Patent Application No. 63/626,030, filed Feb. 21, 2024, U.S. Provisional Patent Application No. 63/566,595, filed Mar. 18, 2024, U.S. Provisional Patent Application No. 63/626,028, filed Feb. 27, 2024, U.S. Provisional Patent Application No. 63/573,528, filed Apr. 3, 2024, U.S. Provisional Patent Application No. 63/561,316, filed Mar. 5, 2024, U.S. Provisional Patent Application No. 63/634,697, filed Apr. 16, 2024, U.S. Provisional Patent Application No. 63/573,226, filed Apr. 2, 2024, U.S. Provisional Patent Application No. 63/707,949, filed Oct. 16, 2024, U.S. Provisional Patent Application No. 63/707,897, filed Oct. 16, 2024, U.S. Provisional Patent Application No. 63/707,547, filed Oct. 16, 2024, U.S. Provisional Patent Application No. 63/708,003, filed Oct. 16, 2024, each of which is expressly incorporated by reference herein in its entirety.

Reference is hereby made to U.S. Provisional Patent Application No. 63/557,874, filed Feb. 26, 2024, U.S. Provisional Patent Application No. 63/626,040, filed Jan. 28, 2024, U.S. Provisional Patent Application No. 63/626,105, filed Jan. 29, 2024, U.S. Provisional Patent Application No. 63/625,362, filed Jan. 26, 2024, U.S. Provisional Patent Application No. 63/625,370, filed Jan. 26, 2024, U.S. Provisional Patent Application No. 63/625,381, filed Jan. 26, 2024, U.S. Provisional Patent Application No. 63/625,384, filed Jan. 26, 2024, U.S. Provisional Patent Application No. 63/625,389, filed Jan. 26, 2024, U.S. Provisional Patent Application No. 63/625,405, filed Jan. 26, 2024, U.S. Provisional Patent Application No. 63/625,423, filed Jan. 26, 2024, U.S. Provisional Patent Application No. 63/625,431, filed Jan. 26, 2024, U.S. Provisional Patent Application No. 63/685,856, filed Aug. 22, 2024, U.S. Provisional Patent Application No. 63/696,507, filed Sep. 19, 2024, U.S. Provisional Patent Application No. 63/696,533, filed Sep. 19, 2024, and U.S. Provisional Patent Application No. 63/706,768, filed Oct. 14, 2024, each of which is expressly incorporated by reference herein in its entirety.

TECHNICAL FIELD

This disclosure relates to a head of a robot, specifically a head of a humanoid robot. The head of the humanoid robot includes a plurality of components configured to provide the robot with the ability to communicate with nearby humans using a display that is protected by a frontal shell.

BACKGROUND

The current labor market within the United States is confronting an unprecedented labor shortage, characterized

2

by over 10 million unfilled positions. A significant proportion of these vacancies pertain to occupations that are deemed unsafe, undesirable, or involve hazardous working conditions. This persistent and escalating shortage of available labor has created an urgent imperative for the development and deployment of advanced robotic systems capable of performing tasks that are unattractive or pose risks to human workers. To effectively address this widening gap in the workforce, it has become critical to design and engineer robots that can operate with high efficiency and reliability within human-centric environments. These environments often demand capabilities such as physical dexterity, sustained endurance, precise manipulation, and the ability to navigate complex spaces designed for humans.

Advanced general-purpose humanoid robots have emerged as a promising solution to meet these challenges. These robots are meticulously engineered to replicate the human form and emulate human functionality, typically featuring bipedal locomotion with two legs, bilateral manipulation abilities with two arms, and a display to facilitate interaction with human users. The anthropomorphic design enables these robots to seamlessly integrate into environments originally designed for humans, thereby minimizing the need for extensive modifications to existing infrastructures. As these robots endeavor to mimic the human body, it becomes essential to equip them with a head design that not only meets functional requirements but also enhances aesthetic appeal and durability. The head is a critical component for human-robot interaction, serving as the primary interface through which the robot communicates and engages with nearby humans. A well-designed head can significantly improve the robot's ability to convey information, express intentions, and respond to human cues, thereby fostering a more intuitive and natural interaction experience.

To meet these requirements, the present disclosure introduces an innovative head design that incorporates a versatile display system. This display is capable of adapting its visual output to suit a wide range of operational tasks by rendering icons, graphics, expressive animations, and informative text. The adaptability of the display allows the robot to present contextually relevant information and provide visual feedback, all of which enhance the robot's ability to interact effectively with human users. By making the robot's appearance more relatable and intuitive, the display fosters improved engagement and facilitates smoother human-robot collaboration.

Considering the sensitive and fragile nature of display technologies, and acknowledging the often challenging and harsh environments in which humanoid robots are deployed, it is advantageous to position the display behind a protective shield. This strategic placement serves multiple purposes. Firstly, the shield safeguards the display from potential contaminants such as dust, moisture, chemicals, and particulate matter that could adversely affect its performance and longevity. Secondly, the shield provides protection against physical impacts, vibrations, and mechanical stresses that may occur during operation, especially in industrial or outdoor settings. By mitigating the risks of damage to the display, the shield contributes to the overall robustness and reliability of the robot. Moreover, the integration of the display behind a shield contributes to a sleek and futuristic aesthetic, enhancing the robot's visual appeal.

In summary, the disclosed head design addresses the critical need for a durable, adaptable, and aesthetically pleasing interface for a general-purpose humanoid robot. By combining a versatile display with the frontal shell, the design ensures that the robot can effectively communicate

and interact with humans while withstanding the rigors of diverse operational environments. This innovation not only enhances the functionality and user experience but also extends the operational lifespan of the robot, thereby providing a more sustainable and cost-effective solution for addressing the current labor market challenges.

SUMMARY

A need exists for a humanoid robot with an upper region including: (i) a torso, (ii) a pair of arm assemblies coupled to the torso, and (iii) a head and neck assembly coupled to the torso and having a neck portion and a head portion coupled to the neck portion. Said head portion includes: a frontal shell having a rear edge, a rear shell having a frontal edge, and an illumination assembly. The illumination assembly is configured to illuminate a region that: (i) extends between a rear edge of the frontal shell and an extent of the frontal edge of the rear shell, (ii) is positioned adjacent to the extent of the rear edge of the frontal shell, and (iii) is positioned adjacent to the extent of the frontal edge of the rear shell. The humanoid robot also includes: (i) a central region coupled to the upper region, and (ii) a lower region coupled to the central region and spaced apart from the upper region, the lower region including a pair of legs.

There is also a need for a humanoid robot with an upper region including: (i) a torso, (ii) a pair of arm assemblies coupled to the torso, and (iii) a head and neck assembly coupled to the torso and having a neck portion and a head portion coupled to the neck portion. Said head portion includes a frontal shell having a curvilinear periphery, and an outer surface having a nasal region and an orbital region that is not recessed in comparison to said nasal region. The head portion also includes an illumination assembly configured to emit light in a location that is adjacent to the periphery of the frontal shell. Finally, the humanoid robot also includes: (i) a central region coupled to the upper region, and (ii) a lower region coupled to the central region and spaced apart from the upper region, the lower region including a pair of legs.

BRIEF DESCRIPTION OF THE DRAWINGS

The drawing figures depict one or more implementations in accord with the present teachings, by way of example only, not by way of limitation. In the figures, like reference numerals refer to the same or similar elements shown across various other figures.

FIG. 1 is a front perspective view of a humanoid robot in an upright, standing position P1 and including: (i) an upper region having the following parts: (a) a head and neck assembly, (b) a torso, (c) left and right shoulders, (d) and left and right arm assemblies each including: (e) a humerus, (f) a forearm, (g) a wrist, and (h) a hand; (ii) a lower region having left and right leg assemblies each including: (a) a thigh, (b) a knee, (c) a shin, (d) an ankle, and (e) a foot; and (iii) a central region connecting the upper portion and the lower portion to one another and configured to allow movement of the upper and lower regions relative to one another;

FIG. 2 is a rear perspective view of the humanoid robot of FIG. 1 in the upright, standing position P1;

FIG. 3 is a perspective view of the head and neck assembly of the humanoid robot of FIG. 1 showing the head and neck assembly including: (i) a head portion having: (a) a head housing assembly with a frontal shell and a rear shell, (b) a head electronics assembly with an illumination assembly having at least one light emitter configured to emit light

between an extent of the frontal shell and rear shell, and (ii) a neck portion having: (a) a neck housing assembly with a cover, and (b) a neck electronics assembly;

FIG. 4 is a front view of the head and neck assembly of FIG. 3 showing: (i) the frontal shell coupled to the rear shell, and (ii) a plurality of light emitters of the illumination assembly located at a junction between the frontal shell and the rear shell;

FIG. 5A is a side view of the head and neck assembly of FIG. 3;

FIG. 5B is a side view of the head and neck assembly of FIG. 3 showing various anatomical regions of the head;

FIG. 6 is a rear view of the head and neck assembly of FIG. 3;

FIG. 7 is a top view of the head and neck assembly of FIG. 3;

FIG. 8 is a partial perspective view of the head and neck assembly of FIG. 3 showing a first set of information displayed on and/or through the frontal shell;

FIG. 9A is a front view of the head and neck assembly of FIG. 3 showing a second set of information displayed on an/or through the frontal shell;

FIG. 9B is a front view of the head of the robot showing an icon indicating a battery status on an/or through the frontal shell;

FIG. 9C is a front view of the head of the robot showing another icon indicating a low battery status on an/or through the frontal shell;

FIG. 9D is a front view of the head of the robot showing another icon indicating an alert or system failure event on an/or through the frontal shell;

FIG. 9E is a front view of the head of the robot showing an icon indicating a particular mode of the robot on an/or through the frontal shell;

FIG. 9F is a front view of the head of the robot showing an icon indicating a particular task being performed by the robot on an/or through the frontal shell;

FIG. 9G is a front view of the head of the robot showing an additional robot status icon on an/or through the frontal shell;

FIG. 10 is a perspective view of a second embodiment of a humanoid robot in an upright standing position P1 with outer covers of the robot removed to expose various actuators and components included in the robot;

FIG. 11 is a front view of the humanoid robot of FIG. 10;

FIG. 12 is a perspective view of the head and neck assembly of FIG. 10, wherein the head electronics assembly further includes a display that is visible through the frontal shell;

FIG. 13 is a bottom perspective view of the head and neck assembly of FIG. 12;

FIG. 14 is a front view of the head and neck assembly of FIG. 12 showing the head and neck assembly including: (i) the display, and (ii) a plurality of light emitters of the illumination assembly that are positioned to emit light on the lateral sides of the head and adjacent to a rear edge of the frontal shell;

FIG. 15A is a side view of the head and neck assembly of FIG. 12;

FIG. 15B is a side view of the head and neck assembly of FIG. 12 showing various anatomical regions of the head;

FIG. 16 is an exploded assembly view of the head and neck assembly of FIG. 12 wherein: (i) the head housing assembly includes an electronics support and an intermediate cover, (ii) the display is coupled to the electronic support, and (iii) the light emitters of the illumination assembly are coupled to the intermediate cover;

5

FIG. 17 is a perspective view of the display of FIG. 12;
 FIG. 18 is a front view of the display of FIG. 12;
 FIG. 19 is a top view of the display of FIG. 12;
 FIG. 20 is a side view of the display of FIG. 12;

FIG. 21 is a top view of the display of FIG. 12, wherein a circle is disposed on the inside of the display in order to show its curvilinear configuration;

FIG. 22 is a side view of the display showing a plurality of zones in a horizontal arrangement relative to one another;
 FIG. 23 is a front view of the display of FIG. 22;

FIG. 24 is a side view of the display showing a plurality of zones in a vertical arrangement relative to one another;
 FIG. 25 is a front view of the display of FIG. 24;

FIG. 26 is a perspective view of the head and neck assembly of FIG. 12, wherein the head electronics assembly includes a sensor assembly: (i) coupled to the electronics support, (ii) positioned above the display, and (iii) within the interior space formed between the intermediate cover and the frontal shell;

FIG. 27 is a front view of the head and neck assembly of FIG. 26;

FIG. 28 is a rear perspective view of a second embodiment of a head and neck assembly of the humanoid robot of FIG. 1;

FIG. 29 is a front perspective view of the head and neck assembly of FIG. 28, wherein the head assembly further includes an upper shell with an upper recessed sensor zone;

FIG. 30 is a front view of the head and neck assembly of FIG. 28;

FIG. 31A is a side view of the head and neck assembly of FIG. 28;

FIG. 31B is a side view of the head and neck assembly of FIG. 28 showing various anatomical regions of the head;

FIG. 32 is a perspective view of a third embodiment of head and neck assembly of the humanoid robot, wherein the head and neck assembly includes a deformable mesh covering internal structures and components of the neck assembly;

FIG. 33 is a lower perspective view of the third embodiment of the head and neck assembly of FIG. 32, wherein the head and neck assembly includes: (i) a head portion having: (a) a head housing assembly with a frontal shell, a rear shell, and an upper shell with an upper recessed sensor zone, (b) a head electronics assembly with an illumination assembly having at least one light emitter configured to emit light between an extent of the frontal shell and rear shell, and (ii) a neck portion having: (a) a neck housing assembly with a deformable cover and a lower recessed sensor zone, and (b) a neck electronics assembly;

FIG. 34 is a bottom perspective view of the head and neck assembly of FIG. 32;

FIG. 35 is a side perspective view of the head and neck assembly of FIG. 32;

FIG. 36 is a front view of the head and neck assembly of FIG. 32;

FIG. 37 is a side view of the head and neck assembly of FIG. 32;

FIG. 38 is a rear view of the head and neck assembly of FIG. 32;

FIG. 39 is a top view of the head and neck assembly of FIG. 32;

FIG. 40 is a bottom view of the head and neck assembly of FIG. 32;

FIG. 41 is a top perspective view of the head and neck assembly of FIG. 32 wherein: (i) the frontal shell is shown as transparent to reveal the display located in an interior space defined between the frontal shell and rear shell, and

6

(ii) an extent of the upper sensor zone is shown as transparent to reveal a pair of cameras located in the interior space and positioned above the display;

FIG. 42 is a side view of the head and neck assembly of FIG. 41;

FIG. 43 is a perspective view of the frontal shell of the head and neck assembly of FIG. 41, wherein the frontal shell includes: (i) a main body, (ii) a plurality of wings that extend upward from the main body, (iii) an outer periphery with a rear edge having a plurality of recesses formed therein;

FIG. 44 is a side view of the frontal shell of the head and neck assembly of FIG. 41 showing various dimensions of the frontal shell;

FIG. 45 is a front view of the frontal shell of the head and neck assembly of FIG. 41;

FIG. 46 is a cross-sectional view of the frontal shell of FIG. 41 taken along line 46-46 in FIG. 45 and showing three different radii of curvatures;

FIG. 47 is a cross-sectional view of the frontal shell of FIG. 41 taken along line 47-47 in FIG. 45 and showing three different radii of curvatures;

FIG. 48 is a cross-sectional view of the frontal shell of FIG. 41 taken along line 48-48 in FIG. 45 and showing three different radii of curvatures;

FIG. 49 is a cross-sectional view of the frontal shell of FIG. 41 taken along line 49-49 in FIG. 45 and showing three different radii of curvatures;

FIG. 50 is a front view of the frontal shell with a plurality of zones in a horizontal arrangement relative to one another;

FIG. 51 is a side view of the frontal shell of FIG. 50;

FIG. 52 is a front view of the frontal shell with a plurality of zones in a vertical arrangement relative to one another;

FIG. 53 is a side view of the frontal shell of FIG. 52;

FIG. 54 is a perspective view of the third embodiment of the head and neck assembly wherein the frontal shell is omitted from the housing assembly to further show the display positioned within said head assembly;

FIG. 55 is a front view of the head and neck assembly of FIG. 54;

FIG. 56 is a bottom perspective view of the head and neck assembly of FIG. 54;

FIG. 57A is a side view of the head and neck assembly of FIG. 54;

FIG. 57B is a side view of the head and neck assembly of FIG. 57A showing various anatomical regions of the head;

FIG. 58 is a perspective view of a fourth embodiment of a head and neck assembly, wherein the frontal shell is omitted from the housing assembly, the electronics frame further includes a plurality of support ribs, and the electronics assembly further includes a plurality of side displays coupled to the electronics frame;

FIG. 59 is a bottom perspective view of the head and neck assembly of FIG. 58;

FIG. 60 is a perspective view of a fifth embodiment of a head and neck assembly, wherein the illumination assembly includes a plurality of light emitters that are positioned adjacent to a majority of the rear edge of said frontal shell;

FIG. 61 is a perspective view of a sixth embodiment of a head and neck assembly, wherein the upper recessed sensor zone of the fifth embodiment has been omitted;

FIG. 62 is a side view of a seventh embodiment of a head and neck assembly wherein the rear shell has been omitted and the frontal shell encases a majority of the head;

FIG. 63A is an enlarged view of a portion of a torso region of the humanoid robot of FIG. 1, wherein said torso includes a plurality of light emitters;

FIG. 63B is an enlarged view of a portion of a right thigh region of the humanoid robot of FIG. 1, wherein said thigh region includes at least one light emitter;

FIG. 63C is an enlarged view of a portion of a left thigh region of the humanoid robot of FIG. 1, wherein said thigh region includes at least one light emitter;

FIG. 64 is an enlarged view of a portion of the head and neck region of the humanoid robot of FIG. 6, wherein said neck includes at least one light emitter;

FIG. 65A is an enlarged view of a portion of a shoulder region of the humanoid robot of FIG. 32, wherein said shoulder region includes at least one light emitter;

FIG. 65B is an enlarged view of a portion of a wrist region of the humanoid robot of FIG. 32, wherein said wrist region includes at least one light emitter; and

FIG. 65C is an enlarged view of a portion of a knee region of the humanoid robot of FIG. 32, wherein said knee region includes at least one light emitter.

DETAILED DESCRIPTION

In the following detailed description, numerous specific details are set forth by way of examples in order to provide a thorough understanding of the relevant teachings. However, it should be apparent to those skilled in the art that the present teachings may be practiced without such details. In other instances, well-known methods, procedures, components, and/or circuitry have been described at a relatively high-level, without detail, in order to avoid unnecessarily obscuring aspects of the present disclosure.

While this disclosure includes several embodiments in many different forms, there is shown in the drawings and will herein be described in detail embodiments with the understanding that the present disclosure is to be considered as an exemplification of the principles of the disclosed methods and systems, and is not intended to limit the broad aspects of the disclosed concepts to the embodiments illustrated. As will be realized, the disclosed methods and systems are capable of other and different configurations and several details are capable of being modified all without departing from the scope of the disclosed methods and systems. For example, one or more of the following embodiments, in part or whole, may be combined consistent with the disclosed methods and systems. As such, one or more steps from the flow charts or components in the Figures may be selectively omitted and/or combined consistent with the disclosed methods and systems. Additionally, one or more steps from the flow charts or the method of assembling the shoulder and upper arm may be performed in a different order. Accordingly, the drawings, flow charts and detailed description are to be regarded as illustrative in nature, not restrictive or limiting.

A. Introduction

Unlike conventional robots and as described in greater detail below, the disclosed humanoid robot 100 includes an upper region 200 having a head and neck assembly 202. The head and neck assembly 202 is coupled to a torso 204 and has an overall shape that generally resembles a human head. As such, the head and neck assembly 202 includes a head portion 202a, 2202a, 3202a, 4202a, 5202a, 6202a, 7202a that does not include large flat surfaces (e.g., opposed sides of a head, or is not in the shape of: (a) a cube, (b) a hexagonal prism, or (c) a pentagonal prism). Instead, almost all the surfaces of the head portion 202a are curvilinear or have substantial curvilinear aspects or segments. However, as

shown in the Figures, some embodiments of the head portion 202a do include a recess with a small flat sensor cover or lens, which is recessed in a top portion of the head portion 202a and is designed to decrease sensor signal distortion that may be caused if the sensor signals are required to travel through a curvilinear shell, cover, shield, or lens. Additionally, while the overall head shape is designed to be human-like, the disclosed head portion 202a lacks pronounced human facial structures (cheeks, eye peripheral protrusions, a mouth, or other moving structures).

The frontal region of the head portion 202a is covered by a large freeform frontal shell, frontal head shell, or frontal shield 228, 2228, 3228, 4228, 5228, 6228, 7228 wherein the curvature of the frontal shell 228 varies both horizontally and laterally across the head portion 202a. The freeform nature of the frontal shell 228 causes it to be a separate and distinct component from the display(s) 300, 2300, 3300, 4300, 5300, 6300, 7300 that is positioned behind the frontal shell 228. This positional relationship allows the frontal shell 228 to protect the display 300 and other electronics contained within the head portion 202a from potential damage, a feature which provides a substantial benefit over conventional robot heads that lack this protective element. For example, certain tasks, that the humanoid robot 100 may perform on a factory floor such as moving and cutting sheet metal, may damage or break a display 300 that is not adequately protected behind such a frontal shell 228. As shown in the Figures, the frontal shell 228 does not extend over the entirety of an upper head shell, nor behind an ear region, nor does it extend into the rear region of the head portion 202a. However, the frontal shell 228 extends to the chin region of the head portion 202a and, in some embodiments, includes a substantial opening or recess formed along the upper extent of the shield 228. The opening or recess, which is formed along the upper edge of the frontal shell 228, allows for the inclusion of a small flat sensor cover or a secondary lens. Due to the formation of this opening or recess, the frontal shell 228 includes two wing-shaped structures that extend upwards from a main body of the shell and effectively surround lateral extents of the sensors that are positioned behind the aforementioned small flat sensor cover.

Unlike conventional robot heads, the disclosed head portion 202a includes a display 300, 2300, 3300, 4300, 5300, 6300, 7300 that is preferably curved in a single direction, or at least one direction, and is positioned on an angle relative to the coronal plane and a horizontal reference plane. The curved nature of the display 300 allows for the inclusion of a larger display with a larger surface area within the head portion 202a; this, in turn, increases the amount of information that can be displayed on the display 300. The larger display 300 provides a benefit over conventional robot heads that lack this feature because those conventional robots must either forgo displaying as much information (while not altering the size of the information) or undesirably increase the size of their head (which consequently causes a number of other issues, including increased material costs and assembly costs). Additionally, being able to display more information on the disclosed display 300 is beneficial because the disclosed humanoid robot 100 does not include any other internal displays. Further, including only a single display 300 within the humanoid robot 100 is beneficial because it: (i) reduces the space needed for displays, (ii) reduces the battery usage attributable to displays, and (iii) at least reduces, and typically eliminates, the inclusion of fragile components within the robot. The display may be configured to display robot status, sensor data, and/or other

relevant information to nearby human beings. However, the display is not configured to display human-like facial features (eyes, nose, mouth, etc.) or expressions, but instead is designed to use generic blocks or shapes.

Unlike conventional robot heads, in some embodiments, the disclosed head portion **202a** may include two separate sensor assemblies **301a**, **2301a**, **2301c**, **3301a**, **3301b**, **4301a**, **5301a**. The first camera(s) **302**, **303**, **304**, **2302**, **3303**, **3304**, **4302**, **5302** may be positioned within the upper shell or the robot's forehead region, while the second camera **3305** may be positioned within the neck portion **202b** or the robot's chin region. The strategic position of the first camera(s) **302**, **303**, **304**, **2302**, **3303**, **3304**, **4302**, **5302** offers two advantages: (i) it enables a larger display **300** to be utilized within the head portion **202a**, and (ii) it allows the humanoid robot **100** to see into a bin that is placed on a high shelf or rack. Including the second camera **3305** enables the humanoid robot **100** to look downward (e.g., to see what it is carrying or to look into a storage bin) without needing to use the first camera(s) **302**, **303**, **304**, **2302**, **3303**, **3304**, **4302**, **5302**. These features are significantly beneficial over conventional robots that lack a second camera **3305**, because such conventional robots must bend and articulate their neck to a greater degree to obtain the data that would otherwise be captured by the second camera **3305**. Also, neither camera(s) **302**, **303**, **304**, **2302**, **3303**, **3304**, **4302**, **5302** in the disclosed head portion **202a** is positioned where a human's eyes would typically be located, nor above the crown of the head, nor on either side of the robot's head **202a**. It should be understood that various configurations are possible: (i) both the first and second camera(s) **302**, **303**, **304**, **2302**, **3303**, **3304**, **4302**, **5302** may be omitted, (ii) the first or upper camera(s) **302**, **303**, **304**, **2302**, **3303**, **3304**, **4302**, **5302** may be omitted, while the second or lower camera **3305** is retained, or (iii) the second or lower camera **3305** may be omitted, while the first or upper camera(s) **302**, **303**, **304**, **2302**, **3303**, **3304**, **4302**, **5302** is retained.

The electronics assembly of the disclosed head portion **202a** may include an illumination assembly **263** having at least one light emitter, and preferably a plurality of light emitting assemblies **264a-264d**, **2264a-2264d**, **3264a-3264d**, **4264a-4264d**, **5264**, **6264**, **7264** are positioned adjacent to a rear edge of the frontal shell **228**. These light emitters **264.2a-264.2d** enable the humanoid robot **100** to communicate with humans without using the display **300** that is disposed behind the frontal shell **228**, wherein said light emitters act as, or are configured to act as, indicator lights. Typically, the light emitters (and in this configuration, these indicator lights) can communicate information about the humanoid robot **100** to nearby humans by: (i) emitting light having different wavelengths, wherein said emitted light may be perceived by a nearby human as having different colors of light, and/or (ii) utilizing various illumination sequences, durations, and/or brightness levels. For example, the indicator lights may be used to communicate the working state (e.g., yellow light—600 nm), idle state (e.g., green light 550 nm), charging state (e.g., blinking light or white light), error state (e.g., red light 665 nm), thinking or processing state (e.g., blue light 470 nm), or other general operational states. This capability is beneficial because it can limit the amount of information that needs to be displayed on the main display **300** and allows a human, another robot, or a machine to receive information from the humanoid robot **100**, even when the human, robot, or machine is positioned directly to one side of the humanoid robot **100** (a position from which the human, robot, or machine could not see the main display **300**). Also, the light emitters **264.2a-264.2d**

use less battery power than the display **300** and may be able to relay information more quickly to the human, robot, or machine. Alternatively, the indicator lights can signal an operator to immediately take note of a more complex condition or set of information that is comprehensively displayed on the display **300**, thereby ensuring that an operator properly assesses that complex condition or information pertaining to the humanoid robot **100**. It should be understood that in other embodiments, the illumination assembly may: (i) emit a light that surrounds the periphery of the frontal shell **228**, (ii) emit a light that surrounds the rear edge of the frontal shell **228**, or (iii) include one or more emitters positioned in other parts of the humanoid robot **100** (e.g., torso **204**, knee **406a/406b**, leg assembly **402a/402b**, arm assembly **208a/208b**, hand **216a/216b**, etc.).

B. Robot Architecture

The humanoid robot **100** is designed to possess substantial similarities in form factor and anatomy to human beings, including many of the same major appendages that human beings have. The humanoid robot **100** includes an upper region **200**, a lower region **400** spaced apart from the upper region **200**, and a central region **600** that interconnects the upper region **200** and the lower region **400**. The humanoid robot **100** is depicted in FIGS. **1** and **2** in an upright, standing position **P1**, where a pair of feet **412a**, **412b** of the lower region **400** are standing on a floor or ground surface **G**, such that the lower region **400** supports the upper region **200** and the central region **600** above the floor or ground surface **G**.

The upper region **200** includes the following principal parts: (a) the previously mentioned head and neck assembly **202**, (b) a torso **204**, (c) left and right shoulders **206a**, **206b**, and (d) left and right arm assemblies **208a**, **208b**, each of which includes: (e) a humerus **210a**, **210b**, (f) a forearm **212a**, **212b**, (g) a wrist **214a**, **214b**, and (h) a hand **216a**, **216b**. The lower region **400** includes left and right leg assemblies **402a**, **402b**, each of which includes: (a) a thigh **404a**, **404b**, (b) a knee **406a**, **406b**, (c) a shin **408a**, **408b**, (d) an ankle **410a**, **410b**, and (e) a foot **412a**, **412b**. The central region **600** is located generally in, or effectively provides, a pelvis region for the humanoid robot **100**. Each of the components of the upper region **200** and the lower region **400** noted above includes at least one actuator, which is configured to move these components relative to one another. The central region **600** is also configured to allow movement of the upper and lower regions **200**, **400** relative to one another in a three-dimensional manner.

C. Head and Neck Assembly

As shown in FIG. **1**, it can be observed that the head and neck assembly **202** of the humanoid robot **100** extends from the torso **204** and is designed to: (i) provide the humanoid robot **100** with a recognizably humanoid shape, (ii) house and protect one or more electronic components (e.g., the display **300**, light emitting assemblies **264a-264d**, sensors, and/or head actuators), and (iii) provide information to a nearby human using the display **300** and/or the light emitting assemblies **264a-264d**. As detailed in FIGS. **7-30**, the head and neck assembly **202** comprises: (i) a head portion **202a**, and (ii) a neck portion **202b** that is coupled to a lower end or extent of said head portion **202a**.

1. Exterior Head Shape

As shown in FIGS. **1-9**, the head portion **202a** of the humanoid robot **100** has an exterior surface **SE** that provides said head portion **202a** with an overall shape that is similar

to the shape of a human head. This overall shape of the head portion **202a** is primarily defined by a housing assembly **220**, which includes: (i) a rear shell, rear head covering, or rear cover **234**, and (ii) the frontal shell, frontal shield, frontal head covering, or frontal cover **228**. In some embodiments, the head portion **202a** is formed with no flat surfaces and is generally egg-shaped when viewed from the front, as shown in FIG. 4, and the top, as shown in FIG. 7. The head portion **202a** of the humanoid robot **100** changes constantly in width from its top to its bottom, wherein the width of the head portion **202a** increases from a top or scalp end **235** to a temple region **350**, where the head portion **202a** is at its widest. The temple region **350** generally corresponds to the eye level of a human, or is situated at a location that is approximately 30-50% of a height **240** of the head portion **202a** as measured from the top end **235**. The width of the head portion **202a** then decreases from the temple region **350** to a lower or chin end **239**. In this manner, the head portion **202a** of the humanoid robot **100** is asymmetrical about a first plane **102** that passes through a center or centroid **C** of the head portion **202a** and is parallel with the transverse plane, equidistant from the top end **235** and the lower end **239**. The head portion **202a** of the humanoid robot **100** is, however, symmetrical about a second plane **104** that is perpendicular to the first plane **102** passes through the center or centroid **C** of the head portion **202a**, and is parallel with the sagittal plane. In other embodiments, it is conceivable that the head portion **202a** may be symmetrical about the first plane **102** and asymmetrical about the second plane **104**.

As shown in FIG. 4, the rear shell **234** of the housing assembly **220** has a maximum height **240**, and the frontal shell **228** of the housing assembly **220** has a second height **242** that is less than the first height **240**. The rear shell **234** also has a first maximum width **244**, and the frontal shell **228** has a second width **246** that is less than the maximum width **244**. The head portion **202a** of the humanoid robot **100** has the overall maximum height **240** that is greater than the maximum width **244**. The maximum height **240** and maximum width **244** of the head portion **202a** are both provided by the rear shell **234**. The maximum width **246** of the frontal shell **228** is located at a position that is above the location of the maximum width **244** of the head portion **202a**.

As illustrated in FIG. 5, a depth of the head portion **202a** of the humanoid robot **100** is defined by a combination of both the rear shell **234** and the frontal shell **228**. This depth includes a maximum depth **250** at a location that is approximately equal to the temple region **350**, and this maximum depth **250** extends between a front or facial region **241** of the head portion **202a** to an occipital region **359** of the head portion **202a**. The front end **241** of the head portion **202a** is provided by the frontal shell **228**, and the rear end **243** is provided by the rear shell **234**. The depth of the head portion **202a** changes constantly from the top end **235** to the lower end **239**. Specifically, the depth increases from the top end **235** to the maximum depth **250** and then decreases from the maximum depth **250** to the lower end **239**. The head portion **202a** of the humanoid robot **100** is asymmetrical about a third plane **106** that extends through the center or centroid **C** of the head portion **202a**, is perpendicular to the first plane **102**, and is parallel with the coronal plane. The head portion **202a** of the humanoid robot **100** is also asymmetrical about first plane **102**. In other words, in this described embodiment, the head portion **202a** of the humanoid robot **100** is only symmetrical about the second plane **104**. The center **C** is defined as being spaced at equal distances from: (i) the top end **235** and the bottom end **239**, (ii) the front end **241** and

the rear end **243**, and (iii) lateral sides **247**, **249** of the head portion **202a**. In other embodiments, the head portion **202a** may be symmetrical about the first plane **102** and/or symmetrical about the third plane **106**. Stated another way, other embodiments of the head portion **202a** may be symmetrical about: (i) all planes **102**, **104**, and **106**, (ii) two of the four planes **102**, **104**, and **106**, (iii) one of the four planes **102**, **104**, and **106**, or (iv) none of the planes **102**, **104**, and **106**.

Exterior surfaces **SE** of the rear shell **234** and the frontal shell **228** are concave relative to: (i) the center **C** of the head portion **202a** and/or (ii) the rear shell **234**. The head portion **202a** of the humanoid robot **100** may include a nape region **245** formed in the rear extent of the head portion **202a**, positioned below the occipital region **359** and above the neck portion **202b**. The nape region **245** may include an exterior surface that is convex relative to the center **C** of the head portion **202a**. In some embodiments, the nape region **245** is the only region of the head portion **202a** that has a convex surface relative to the center or centroid **C** of the head portion **202a**.

When viewed from the front, as shown in FIGS. 4 and 14, (i) the lateral sides of the head portion **202a** exhibit a first vertical curvature or middle curvature generally extending about the center or centroid **C** and from a third point **221.2** to a second point **221.4**; (ii) the top extent **235** of the head portion **202a** has a second vertical curvature or an upper curvature generally extending about the center or centroid **C** and from a second point **221.4** to a first point **221.6**; and (iii) the bottom end **239** has a third curvature or lower curvature generally extending about the center or centroid **C** and from third point **221.2** to fourth point **221.8**. The second curvature is less than, or has a lesser degree than, the first curvature. The second curvature or upper curvature is greater than, or has a greater degree than, the third curvature or the lower curvature. The first curvature or middle curvature is defined between third point **221.2** located at an upper extent of the buccal region **352** and the second point **221.4** located at a lower extent of the crown region **270** of the head portion **202a**. The second curvature is primarily defined by the crown region **270**, wherein said curvature extends from the second point **221.4** located at a lower extent of the crown region **270** and the first or top point **221.6** located at the apex of the housing assembly **220**. The third curvature is defined between the third point **221.2** at the uppermost extent of the buccal region **352** and fourth point **221.8** at the lowermost extent of the buccal region **352**. The head portion **202a** has a substantially oval shape when viewed from above, as shown in FIG. 7, but may taper inwardly slightly in the frontal shell **228** towards the facial region **241** provided by this frontal shell **228**.

2. Head Housing Assembly

The head housing assembly **220** of the head and neck assembly **202** is configured to contain and protect other assemblies that are housed within the head portion **202a**. As discussed above, the housing assembly **220** is configured to have a form resembling the general shape of a human head and includes: (i) a frontal shell, frontal shield, frontal head covering, or frontal cover **228**, (ii) a rear shell, rear head covering, or rear cover **234**, (iii) an intermediate cover, intermediate support, or intermediate member **252**, and (iv) an electronics support or frame **254**. As discussed below, the intermediate cover **252** and the electronics support **254** may be combined into a single integrated structure. Additionally, in other embodiments, the intermediate cover **252** may be omitted, and the electronics support **254** may then be directly coupled to an extent of the rear shell **234**. In further alternative embodiments, the electronics support **254** may be

omitted, while the intermediate cover **252** is retained. Also, the rear shell **234** may be omitted or substantially omitted and effectively replaced by a substantially larger frontal shell **228**. Finally, conversely, the frontal shell **228** may be omitted or substantially omitted and replaced by a substantially larger rear shell **234**.

The intermediate cover **252** and the rear shell **234** are designed to mount to one another and together define a first head sub-volume **236** within the housing assembly **220**. This first head sub-volume **236** is configured to contain and protect one or more components utilized in the operation of the humanoid robot **100**, such as various electronics, batteries, computing components, and the like. The frontal shell **228** provides the front end of the housing assembly **220** and defines a second sub-volume **238**, located between the intermediate cover **252** and the frontal shell **228**, also within the housing assembly **220**. This second sub-volume **238** is separated from the first sub-volume **236** by the intermediate cover **252** and is configured to contain and protect one or more components included in an electronics assembly **222**, such as the display **300**, light emitters **264.2a-264.2d**, cameras, etc. Both The frontal shell **228** and/or the intermediate cover **252** can be removed from the rest of the housing assembly **220** to service components within the sub-volumes **236**, **238** or to upgrade components located in these sub-volumes **236**, **238**. This modular design allows for individual components to be replaced without necessitating the replacement of the entire housing assembly **220**.

i. Intermediate Cover

The intermediate cover **252** includes structures that are used to mount components of the electronics assembly **222** to the head portion **202a**. The intermediate cover **252** is configured to couple with the rear shell **234** and is located between the first and second sub-volumes **236**, **238** to separate these first and second sub-volumes **236**, **238**. In other words, the intermediate cover **252** is designed to split or divide the first sub-volume **236** from the second sub-volume **238**. In alternative embodiments, the intermediate cover **252** may be omitted entirely, in which case the first and second sub-volumes **236**, **238** may be converted into a single, larger sub-volume. Alternatively, the intermediate cover **252** may be combined or integrally formed with other structures disclosed herein (e.g., the electronics support **254**, the rear shell **234**, and/or the frontal shell **228**), whereby the first and second sub-volumes **236**, **238** may either remain distinct or may be combined into a single sub-volume depending on the specific integrated design. Further, it should be understood that other mounting structures, dividers, covers, and/or plates may be included within the head portion **202a** to further sub-divide the housing assembly **220** into additional sub-volumes (e.g., potentially ranging from 3-10 sub-volumes).

The intermediate cover **252** has an outer perimeter **256** that is sized to fit within an inset rim **258** of the rear shell **234**. In this manner, the outer perimeter **256** is slightly less than the inner perimeter of an extent of the rear shell **234** that is positioned between a ledge **257** and a forward edge **253** of an outer perimeter **259** of the rear shell **234**. As such, the outer perimeter **256** of the intermediate cover **252** has a length that is less than the length of the outer perimeter **259** of the rear shell **234**. In other embodiments, the outer perimeter **256** of the intermediate cover **252** may not be sized to fit within an inset rim **258** of the rear shell **234**. Instead, said outer perimeter **256** of the intermediate cover **252** may be substantially equal to the outer perimeter **259** of the rear shell **234**, wherein said intermediate cover **252** may be coupled to, positioned adjacent to, and/or abutting said

forward edge **253** of the rear shell **234**. In other words, a rear extent of the intermediate cover **252** may be configured to abut the forwardmost surface of said forward edge **253** of the rear shell **234**. In yet other embodiments, the outer perimeter **256** of the intermediate cover **252** may only extend along an extent that is less than substantially all, or even less than a majority (e.g., along only a minority), of the inner perimeter of an extent of the rear shell **234** that is positioned between a ledge **257** and a forward edge **253** of the outer perimeter **259**.

The outer perimeter **256** of the intermediate cover **252** is also slightly less than an outer perimeter **260** of the frontal shell **228**. As such, the outer perimeter **256** of the intermediate cover **252** has a length that is less than the length of the outer perimeter **260** of the frontal shell **228**. In other embodiments, the outer perimeter **256** of the intermediate cover **252** may be substantially equal to the outer perimeter **260** of the frontal shell **228**. In further alternative embodiments, the outer perimeter **256** of the intermediate cover **252** may only extend along an extent that is less than substantially all, or even less than a majority (e.g., along only a minority), of a rear edge **322** of the frontal shell **228**.

The intermediate cover **252** further includes a plurality of peripheral protrusions **262a**, **262b**, **262c**, **262d**, which are spaced around the outer perimeter **256** of the intermediate cover **252**. Said peripheral protrusions **262a**, **262b**, **262c**, **262d** form a plurality of light emitter housings **262.10a-262.10b**. Specifically, each of these peripheral protrusions **262a**, **262b**, **262c**, **262d** is configured to house a respective light emitting assembly **264a**, **264b**, **264c**, **264d** of the illumination assembly **263**. Said light emitter housings **262.10a-262.10b** have five primary walls that are comprised of: (i) two end walls **262.10.2**, **262.10.4**, wherein said end walls **262.10.2**, **262.10.4** are angled (e.g., at an obtuse angle) relative to a frontal surface SIF of the intermediate cover **252**; (ii) a top wall **262.10.6**; (iii) a bottom wall **262.10.8**, wherein said bottom wall **262.10.8** is also angled relative to the frontal surface SIF of the intermediate cover **252**; and (iv) an interior wall **262.10.10**, wherein said interior wall **262.10.10** is angled (e.g., at an obtuse angle) relative to the frontal surface SIF of the intermediate cover **252**. The angled configuration of these two end walls **262.10.2**, **262.10.4**, the bottom wall **262.10.8**, and the interior wall **262.10.10** is designed to achieve two objectives: (i) to effectively direct light out of the housings **262.10a-262.10b**, and (ii) to ensure that the light emitted radiates through a diffuser or lens **264.4a-264.4d** in a manner that does not let the light scatter too broadly, nor does it overly restrict the scattering of the light. In other embodiments, the walls **262.10.2**, **262.10.4**, **262.10.8**, **262.10.10** may not be angled relative to the frontal surface SIF of the intermediate cover **252**, the top wall **262.10.6** may be angled relative to the frontal surface SIF of the intermediate cover **252**, and/or the angles between the walls **262.10.2**, **262.10.4**, **262.10.8**, **262.10.10** and the frontal surface SIF of the intermediate cover **252** may be an acute angle instead of obtuse angle.

ii. Electronics Support

The electronics support **254** is mounted to a generally central area of the intermediate cover **252** and is configured to position the display **300**, which is included in the electronics assembly **222**, between the intermediate cover **252** and the frontal shell **228**, specifically within the second head sub-volume **238**. The electronics support **254** includes a base coupling **266** configured to mount to the intermediate cover **252**, and a display coupling **268** configured to mount the display **300** to the electronics support **254**. The base coupling **266** is located above and rearward of the display

15

coupling 268. The display coupling 268 positions the display 300 in a spaced apart relation to the frontal shell 228, as clearly shown in FIG. 15. As shown in FIGS. 26 and 27, the intermediate cover 252 is configured to lie behind the electronics assembly 222 to locate at least a portion of the electronics assembly 222 between the intermediate cover 252 and the frontal shell 228.

iii. Frontal Shell

The frontal shell 228 is configured to cover at least the intermediate cover 252 and the electronics assembly 222, as shown in FIGS. 1-27. The frontal shell 228 forms a forwardmost, exterior surface of the head portion 202a and cooperates with the intermediate cover 252 to define the second sub-volume 238 within the housing assembly 220. The frontal shell 228 may be made from a transparent material so that the display 300, which is mounted on the electronics support 254, may be viewed therethrough. In other embodiments, the frontal shell 228 may be tinted or entirely opaque. The intermediate cover 252 can be similarly colored (tinted or opaque) so that the frontal shell 228 has a similar appearance to the intermediate cover 252, and so that lights or images displayed on the display 300 are the only items that are visible or displayed/conspicuous through the frontal shell 228. The frontal shell 228 may be coated, etched, or formed in with a plurality of layers (e.g., examples of which are disclosed within U.S. Pat. Nos. 8,770,749, 9,134,547, 9,383,594, 9,575,335, 9,910,297, all of which are incorporated herein by reference) in a manner that improves durability, increases sensor accuracy, filters one or more specific wavelengths of light, reduces glare, enhances overall appearance, reduces fogging, makes the frontal shell 228 easier to clean or protects it from cleaning products. Examples of such optical coatings include anti-reflection coatings, mirror coatings, hard coatings, anti-static coatings, anti-fog coatings, some of which are described within U.S. patent application Ser. Nos. 16/896,016, 16/698,775, 16/417,311, 16/126,983, 15/359,317, 15/515,966, each of which are incorporated herein by reference. Further, the material composition, shape, number of layers, and composition of said layers of the frontal shell 228 may be different from the material composition, shape, number of layers, and composition of said layers utilized within other parts of the frontal shell 228 itself. In other words, the composition, shape, number of layers, and composition of said layers may vary across different regions of the frontal shell 228. It should be understood that this disclosure is not limited to just the information that is disclosed within those specifically cited applications; but instead should encompass any compositions, shapes, layer numbers, and compositions of layers that are known in the art or are rendered obvious in light of what is currently known in the art.

The frontal shell 228, or an extent thereof, may have a substantially uniform thickness, which may be equal to or greater than 1 mm, and is preferably greater than 2 mm. Additionally, the frontal shell 228 may be optically correct and is typically not designed to be a corrective lens. As such, the frontal shell 228 has a dioptric power of less than 0.25 diopters, preferably less than 0.12 diopters, and most preferably less than 0.06 diopters. The frontal shell 228 may exhibit a reverse/negative pantoscopic tilt, a forward/positive pantoscopic tilt, or no pantoscopic tilt at all. Accordingly, the frontal shell 228 may be made from or may include materials such as polycarbonate (PC), acrylic (PMMA), trivex, nylon, gorilla glass (aluminosilicate glass), thermoplastic polyurethane (TPU), high-grade glass, cr-39, polyethylene terephthalate (PET), polystyrene, fused silica (quartz glass), borosilicate glass, polyurethane, cellulose

16

acetate, polyvinyl chloride (PVC), cellulose acetate butyrate (CAB), polyvinyl butyral (PVB), optical-grade resin, sapphire glass, polyetherimide (PEI), Lexan, thermoset plastics, other anti-scratch coated plastics, or any other similar material that is known in the art.

In the illustrative embodiment shown in FIGS. 1-16, the frontal shell 228 is mounted to the intermediate cover 252 and/or the rear shell 234 along a shield interface 320, which is located at the outer perimeters 256, 260 of the rear shell 234 and the frontal shell 228. A rear facing edge 322 of the frontal shell 228 is configured to mount with: (i) the forward edge 253 of the rear shell 234, (ii) a frontal extent of the intermediate cover 252, and/or (iii) both, to form the shield interface 320. As shown in this embodiment, the shield interface 320 is not flat or planar. Instead, the shield interface 320 is irregular due to the fact that the rear edge 322 of the frontal shell 228 is formed to include a plurality of recesses 324. Each recess 324 is sized to receive a respective one of the peripheral protrusions 262a, 262b, 262c, 262d that are formed in the intermediate cover 252 and that house the respective light emitting assemblies 264a-264d. In some embodiments, the frontal shell 228 itself could include the peripheral protrusions 262a, 262b, 262c, 262d, although this configuration may not be desirable as the frontal shell 228 is the component that is most likely to be removed from the housing assembly 220 for servicing the head portion 202a and the electronics assembly 222.

Except for the aforementioned recesses 324, the rear facing edge 322 of the frontal shell 228 is substantially planar along the interface 320. The shield interface 320 between the intermediate cover 252 and the frontal shell 228, and thus the rear-facing edge 322, extends at an angle A2 relative to the third plane 106, as shown in FIGS. 5, 15, 31, and 57. In the illustrative embodiment, this angle A2 is within a range of about 15 degrees to about 50 degrees, preferably between 20 and 40 degrees, most preferably between 25 and 35 degrees, and may be approximately 30 degrees. This angular relationship provides the frontal shell 228 with a larger depth at a top end thereof, which serves to increase the volume of the second sub-volume 238 and thereby provide more room for components of the electronics assembly 222. An upper end of the frontal shell 228, near an upper extent of the head portion 202a, is located rearward of the third plane 106, while a lower end of the frontal shell 228, near a chin region 355, is located forward of the third plane 106, as depicted in FIG. 5A. There are no recesses formed in the frontal shell 228 in the orbital region 368, the nasal region 357, the oral region 366, or the frontal region 362. The frontal shell 228 extends upward from an extent of the rear shell 234 that is positioned in the chin region 355, continuing over a majority of the facial region 241, and into or beyond a frontal edge of the parietal region 360. The frontal shield 228 has an outer surface that occupies at least an orbital region 368 and a nasal region 357. Significantly, The orbital region 368 of the frontal shell 228 is not recessed in comparison to the nasal region 357 of the frontal shell 228.

The described depth change of the frontal shell 228 positions a first light emitting assembly 264a and a third light emitting assembly 264c above and rearward of a second light emitting assembly 264b and a fourth light emitting assembly 264d. Such an arrangement provides a greater viewing area for users to observe at least one light emitting assembly 264a-264d when they are positioned at different orientations relative to the humanoid robot 100. In other embodiments, the first and third light emitting assemblies 264a, 264c may not be positioned rearward of the

17

second and/or fourth light emitting assemblies **264b**, **264d**. Instead, the second and/or fourth light emitting assemblies **264b**, **264d** may be positioned in the same vertical plane as the first and third, and/or may even be positioned rearward of the first and third light emitting assemblies **264a**, **264c**.

The frontal shell **228** may: (i) wrap from the front of the head portion **202a** into the side regions of the head portion **202a**, (ii) extend into the chin area region **355** or cover the entire chin area, (iii) may have a non-uniform rear edge **322**, which is formed by the plurality of recesses **324**. The plurality of recesses **324** may be configured to receive an extent of the peripheral protrusions **262a**, **262b**, **262c**, **262d**.

The frontal shell **228** may not extend to the crown region **270** of the head portion **202a** and/or may not extend rearward past a location where a human's ears would typically be located. The disclosed frontal shell **228** may occupy between 25% and 50% of the surface area of the head portion **202a** and may be curved in at least two directions (e.g., vertically and horizontally). In some embodiments, the frontal shell **228** and the display **300** may be integrated into a single component or may be formed from a plurality of interconnected components. It is also possible that The frontal shell **228** may have a different curvature than the display **300**.

As shown in FIG. **14**, the frontal shell **228** has in a forward facing orientation OFF, at least: (i) a substantially horizontal first arc length AL_1 or chin arc length that extends from a first edge extent **323a** of the rear edge **322** to a second edge extent **323b** of the rear edge **322** at a first location or horizontal plane **120**; (ii) a substantially horizontal second arc length AL_2 or a display arc length that extends from a first edge extent **323a** of the rear edge **322** to a second edge extent **323b** of the rear edge **322** at a second location or horizontal plane **122**; (iii) a substantially horizontal third arc length AL_3 or forehead arc length, or above the display arc length that extends from a first edge extent **323a** of the rear edge **322** to a second edge extent **323b** of the rear edge **322** at a third location or horizontal plane **124**; and (iv) a substantially horizontal fourth arc length AL_4 or crown arc length that extends from a first edge extent **323a** of the rear edge **322** to a second edge extent **323b** of the rear edge **322** at a fourth location or horizontal plane **126**.

The frontal shell **228** is concave relative to the display **300** at each of these locations **120**, **122**, **124**, **126**, such that the frontal shell **228** extends at least partially about the display **300**. The first arc length occurs at a position below the display **300**. The second arc length occurs at approximately the center C of the head portion **202a**, is aligned with the display **300**, and is greater in magnitude than the first arc length. The third arc length occurs at a position above the display **300** and is greater in magnitude than the second arc length. The fourth arc length occurs at a position above the third arc length and also above the display **300**, and is less in magnitude than both the second and third arc lengths.

As shown in FIG. **4**, the frontal shell **228** also has, at least: (i) a first width W_1 or lower frontal shell width that extends from a first edge extent **323a** of the rear edge **322** to a second edge extent **323b** of the rear edge **322** at a first location below the first horizontal plane **120**; (ii) a second width W_2 or frontal shell centroid width that extends from a first edge extent **323a** of the rear edge **322** to a second edge extent **323b** of the rear edge **322** at a second location or at the horizontal plane **102** (which passes through the center C); and (iii) a third width W_3 or upper frontal shell width that extends from a first edge extent **323a** of the rear edge **322** to a second edge extent **323b** of the rear edge **322** at a third location above the first plane **102**. The first width W_1 is less

18

than both the second width W_2 and the third width W_3 ; the second width W_2 is greater than both the first width W_1 and the third width W_3 ; and the third width W_3 is greater than the first width W_1 but less than the second width W_2 . The first width W_1 or lower frontal shell width is positioned below a display width W_D , and wherein the display width W_D is greater than the frontal shell width W_1 . The frontal shell centroid width W_2 and the upper frontal shell width W_3 is greater than the display width W_D .

iv. Rear Shell

The rear shell **234** is shaped to resemble the curvature of a rear and sides of a human head, or at least portions of a parietal region **360**, an occipital region **359**, a temporal region **350**, an auricular region **356**, a zygomatic region **358**, a mastoid region **364**, a buccal region **352**, and a parotid region **354**. As shown in FIGS. **5B** and **15B**, the interface region **320** between the rear shell **234** and the frontal shell **228** passes through the buccal region **352**, the parotid region **354**, the zygomatic region **358**, the temporal region **350**, the parietal region **360**, and the crown region **270**. In other words, the rear shell **234** begins at the parotid region **354**, the zygomatic region **358**, the temporal region **350**, the parietal region **360**, and the crown region **270** and forms all portions of the head portion **202a** rearward thereof. Likewise, the frontal shell **228** begins at the parotid region **354**, the zygomatic region **358**, the temporal region **350**, the parietal region **360**, and the crown region **270** and forms all portions of the head portion **202a** forward thereof except for a chin region **355** which is included as part of the rear shell **234**. Also, it should be understood that in some variations, the frontal shell **228** may only be positioned forward of the auricular region **356**.

The rear shell **234** is configured to cover a rear portion of the electronics assembly **222** and to form the rear end of the head portion **202a**. The rear shell **234** extends downward from a top central position and also forward at an angle that is substantially similar to that of the rear facing edge **322** of the frontal shell **228**. The rear shell **234** includes a forward facing edge **298** that is configured to mate with the rear facing edge **322** of the frontal shell **228** and/or with the intermediate cover **252**.

As shown in FIG. **16**, the rear shell **234** has an outer rim **255** and a ledge **257** that projects inwardly from this outer rim **255** and is located within the first sub-volume **236**. The rim **255** may have a slightly larger outer perimeter **259** than the outer perimeter **256** of the intermediate cover **252**; this sizing allows the intermediate cover **252** to fit snugly within the rim **255** and engage the ledge **257**. Both The ledge **257** and the intermediate cover **252** have corresponding attachment holes **261a**, **261b** that are designed to receive a fastener to securely mount the intermediate cover **252** to the rear shell **234**. Apertures **261c**, which are formed in the frontal shell **228**, also receive a fastener to mount the frontal shell **228** to both the intermediate cover **252** and the rear shell **234**.

The rear shell **234** further includes a chin projection region **269** that extends forward from the rim **255** and defines a lower end of the rear shell **234**. The intermediate cover **252** further includes a lower mount **265** that engages and rests upon this chin projection region **269**. The chin projection region **269** and the lower mount **265** each include corresponding attachment holes **267a**, **267b** that receive a fastener to secure the intermediate cover **252** to the rear shell **234** at a lower end thereof. Apertures **267c**, formed in the frontal shell **228**, also receive a fastener to mount the frontal shell **228** to both the intermediate cover **252** and the rear shell **234** at this lower junction.

The rear shell **234** may be fabricated from a variety of materials, including but not limited to: silicone elastomers, thermoplastic polyurethane (TPU), shape-memory polymers (SMPS), polydimethylsiloxane (PDMS), polyurethane, liquid silicone rubber (LSR), urethane rubber, vinyl (PVC) skin, soft thermoplastic elastomers (TPE), elastomeric alloys, acrylonitrile butadiene styrene (ABS) blends, high-density polyethylene (HDPE) blends, conductive polymers, carbon nanotube-infused elastomers, magnetic shape-memory alloys, electroactive polymers (EAPS), styrene-butadiene rubber (SBR), thermoplastic vulcanizates (TPV), polyurea elastomers, medical-grade synthetic skin materials, thermoplastic olefins (TPO), fluoroelelastomers, chloroprene rubber, ethylene propylene diene monomer (EPDM) rubber, polyacrylamide hydrogels, polycaprolactone (PCL), photocurable resins, elastomeric composites, phosphorescent elastomers, thermochromic materials, electrostrictive polymers, piezoelectric polymers, superelastic alloys, microcellular foams, hyperelastic materials, viscoelastic gels, nanocomposite elastomers, fabrics, metal, other similar plastics or polymers, any combination of the above, and/or any other similar material known in the art. The rear shell **234** may be manufactured using any known method, including techniques such as: molding (e.g., injection molding or dip molding), casting, 3D printing (additive manufacturing), dip molding and subsequent coating, spray coating, lamination and layering, electrospinning, sculpting and machining, thermoforming, any combination of these methods, and/or any other known manufacturing method.

3. Electronics Assembly

The electronics assembly **222**, which is contained within the head portion **202a**, may include one or more of the following components: (i) a sensor assembly **301a**, (ii) the display **300**, (iii) a directional microphone, (iv) one or more speakers, (v) antennas, (vi) the illumination assembly that includes at least one, and preferably a plurality of, light emitting assemblies **264a-264d**, (vii) a data storage device, and (viii) other miscellaneous electronics (e.g., an Inertial Measurement Unit (IMU), an RFID reader, location sensors (such as Global Positioning System ("GPS"), GLONASS, Galileo, QZSS, and/or iBeacon technology), etc.), and/or Printed Circuit Boards (PCBs) for connecting these various electronic components. The data storage device may be a removable memory device or may be integrated within a computing device that comprises a processor and associated memory. In some examples, the data storage device may be housed in another portion of the humanoid robot **100**, such as within the torso **204**. In some examples, the data storage device may be configured to store data that is collected from other components of the humanoid robot **100**.

As shown in at least FIGS. **19-20**, the components of the electronics assembly **222** may be mounted to the electronics support **254** and located above the display **300**; alternatively, they may be mounted to an internal mounting frame that supports the head and neck assembly **202** on the torso **204**, or to any other suitable structure within the head and neck assembly **202**. Mounting the electronics assembly **222** to the electronics support **254** above the display **300** and within the second sub-volume **238** may allow for the individual items to be arranged in a space-saving manner and may leave other areas of the head and neck assembly open for the storage of other components that do not require direct access to areas outside of the humanoid robot **100**, such as sensors, cameras, displays, etc. As noted previously, the housing assembly **220** is configured to enclose the electronics assembly **222** with-

out interfering with the transmission or reception of signals. For example, the housing assembly **220** does not obscure the line of sight of the sensors.

i. Display

As best shown in FIGS. **17-25**, the display **300** of the electronics assembly **222** may be mounted to the electronics support **254** and positioned behind the frontal shell **228**. The display **300** is operatively connected to at least one processor to generate and display status messages and other types of information on the display **300**. For example, the display **300** may display information: (i) related to the robot's operational state (e.g., working, error, moving, etc.); (ii) obtained from sensors contained within the head portion **202a**, or (iii) received from other processors that are in communication with the display **300** (e.g., other internal processors housed within the humanoid robot **100** or external information transmitted to and received by the humanoid robot **100**). The information may be displayed in the format of blocks, well-known shapes, logos, or other moving items (e.g., animated thought bubbles). However, as stated before, the information may not be displayed in connection with human facial features (e.g., eyes, mouth, nose).

As shown in FIGS. **17-25**, the display **300** may have a substantially rectangular display surface that has a convex curvature that conforms with the curvature of the frontal shell **228** of the housing assembly **220**. The display **300** has a first or left substantially vertical edge **300.2** and a second or right substantially vertical edge **300.4** when the head is in the forward facing orientation **OFF**, and wherein said display **300** also includes a display width W_D that extends between the first or left substantially vertical edge **300.2** and the second or right substantially vertical edge **300.4**. The display width W_D is greater than the first width W_1 or lower frontal shell width, but is less than the frontal shell centroid width W_2 and the upper frontal shell width W_3 . The display **300** also includes an upper edge **300.6** and a lower edge **300.8**, wherein the display **300** has a constant: (i) height H between the upper edge **300.6** and the lower edge **300.8** across the display width W_D , and (ii) a constant arc length between the upper edge **300.6** and the lower edge **300.8**.

The display **300** may also be slightly tilted downward. For example, the display **300** may be tilted from a horizontal plane at an angle of about 5.7 degrees to about 8.6 degrees, or more specifically, about 6.4 degrees to about 7.9 degrees. This tilted orientation of the display **300** increases viewability for an observer and helps to eliminate unwanted reflections. The display **300** may use any known display technology or feature including, but not limited to: LCD, LED, OLED, LPD, IMOD, QDLED, mLED, AMOLED, SED, FED, plasma, electronic paper or EPD, MicroLED, quantum dot display, LED backlit LEC, WLCD, OLCD, transparent OLED, PMOLED, capacitive touchdisplay, resistive touchdisplay, monochrome, color, or any combination of the above, or any other known technology or display feature. The displays disclosed herein meet the standards described in FDA CFR Title 21 part **1040.10**, titled Performance standards for Light-Emitting Products, and ANSI LIA Z136.1, titled Safe Use of Lasers, at the time of filing this application, both of which are incorporated herein by reference.

It should be understood that this application contemplates the use of displays **300** that have different sizes. To this end, the display **300** may extend between any two of the horizontal lines shown in FIGS. **22** and **23**. For example, the display **300** may extend from the third line from the bottom to the third line from the top in these figures. In other examples, the display **300** may be sized to fit between any

21

two of the lines shown in FIGS. 24 and 25. Additionally, each of the lines indicated on the display 300 in FIGS. 22-24 can represent different zones or segments included in the display 300, which can be used to convey different images or other visual representations across the surface of the display 300. As an example, the sides of the display 300 can be used to display a different image or visual representation compared to a front portion of the display 300. Alternative display sizes may be used for various reasons, such as: (i) to reduce the surface area of fragile elements within the humanoid robot 100, (ii) because the humanoid robot 100 is not primarily designed to work in close proximity to humans, (iii) because additional area within the head portion 202a is needed for sensors or other electronics, or (iv) for any other reason that would be known or apparent to one of skill in the art.

The disclosed display 300 may be embedded in or occupy the entire frontal shell 228, between 100% and 75% of the frontal shell 228, between 75% and 50% of the frontal shell 228, between 50% and 25% of the frontal shell 228, or less than 25% of the frontal shell 228. In some examples, the display 300 may utilize the full area of the frontal shell 228. In some examples, the display 300 may be sized to fit between any two of the lines shown in FIGS. 50-51. In some further examples, the display 300 may be sized to fit between any two of the lines shown in FIGS. 52-53. In other words, the ratio of the display 300 size to the frontal shell 228 size may be any suitable ratio. The display 300 may be curved in a single direction, in two directions (e.g., vertically and horizontally), or it may embody a freeform design that could include multiple complex curves. In certain embodiments, the frontal shell 228 and the display 300 may be integrated into a single, cohesive unit. As best shown in FIGS. 15A, a gap is formed between the outer surface of the display 300 and the inner surface of the frontal shell 228.

As shown in FIG. 15B, the display 300 is curved so as to occupy and/or coincide with and display information through all or portions of the orbital region 368, the frontal region 362, the temporal region 350, the zygomatic region 358, the nasal region 357, the infraorbital region 363, the buccal region 352, and the oral region 366 of the head portion 202a. The display 300 may not coincide with any region located rearward of the shield interface 320, including a mental region 355, an auricular region 356, a crown region 270, a parietal region 360, an occipital region 359, or a mastoid region 364. In other embodiments, the display 300 may present information, indications, or visual representations across: (i) the entire frontal shell 228, (ii) a majority of the frontal shell 228, (iii) the entire facial region 241, and/or (iv) a majority of the facial region 241. In contrast, in other alternative embodiments, the display 300 may be omitted entirely or moved to a different region (e.g., the torso 204) of the humanoid robot 100.

FIGS. 9A-9G show various statuses and their corresponding indications or visual representations that are contemplated by this disclosure for display on the display 300. It should be noted that the present disclosure is not limited to these specific statuses and their corresponding indications or visual representations and that these are merely examples that can be displayed by the display 300.

FIGS. 8 and 9A show sets of information displayed by the display 300, including device status (e.g. camera status and robot start-up status), robot part status (e.g. a specified joint status), and a battery level status. The various statuses disclosed herein can update as the actual status changes. For example, during the start-up sequence of a camera(s) 302, 303, 304, the display 300 may display text, an icon, or

22

another visual representation indicating that the camera(s) 302, 303, 304 is currently initializing and is not yet ready for use. The status can then change to display an icon, or another visual representation, indicating that the camera(s) 302, 303, 304 are active once the start-up process is complete.

FIG. 9B shows an icon indicating a battery status, specifically that the battery is charging. The icon is generally in the shape of a battery. The icon further includes a lightning bolt symbol to indicate that the battery is currently in a charging state. This icon (or icons) can be displayed in a first color (e.g. green) while the battery is charging and/or after the battery has been fully charged. FIG. 9C shows another icon indicating an additional battery status, in this case, a low battery level. This icon is also generally in the shape of a battery and includes a level marker to indicate the current battery charge level. In the illustrative embodiment of FIG. 9C, the level marker is depicted as a thin line to one side of the battery icon, visually indicating that the battery charge is low and that the battery should be recharged soon. This level marker can move or increase in size to indicate the current battery charge level at any given time.

FIG. 9D shows another icon indicating an alert or a system failure event. The icon includes a triangle with an exclamation mark contained within it to signify the alert or system failure event. Such an icon may be displayed when a part of the humanoid robot 100 has failed, such as an actuator, a camera, or another device included in the humanoid robot 100. Identifying information, in the form of text or another accompanying icon, can also be displayed along with the alert or failure icon to specify which particular part of the humanoid robot 100 has failed or requires attention. FIG. 9E shows an icon indicating a particular operational mode of the robot. Illustratively, the mode depicted by this icon indicates a "follow mode," in which the humanoid robot 100 is engaged in following a user, another device, or another robot. The icon includes a generally human-shaped figure with a border around this generally human-shaped figure. Other icons corresponding to additional modes of operation of the robot can also be displayed as needed.

FIG. 9F shows an icon indicating a particular task currently being performed by the humanoid robot 100. Illustratively, the task icon depicted is a generally human shaped figure that is shown lifting and carrying a box or another item. Other icons corresponding to additional tasks that can be completed by the robot can also be displayed. FIG. 9G shows an additional robot status icon. Illustratively, the status icon depicted is a "pause" icon. The pause icon can be displayed when the humanoid robot 100 is currently not completing any tasks or modes and is essentially in a ready state, awaiting instructions. Other icons corresponding to additional robot statuses that can be conveyed by the robot can also be displayed.

ii. Head Illumination Assembly

The head illumination assembly 263 includes at least one, and preferably a plurality of, light emitting assemblies 264a-264d that are located on the lateral sides of the head portion 202a. In certain configurations, this illumination assembly 263 may be designed to visually indicate various robot statuses to users who are viewing the humanoid robot 100 from the side. As shown in FIGS. 5B, 15B, 31B, and 57B, a first light emitting assembly 264a is located in the temporal region 350 of the robot's head portion 202a, and a second light emitting assembly 264b is located in the buccal region 352 of the robot's head portion 202a. Third and fourth light emitting assemblies 264c, 264d are located symmetrically on the opposite side of the robot's head portion 202a, and so are also located in the temporal region

350 and the buccal region 352, respectively. In some embodiments, the light emitting assemblies 264a-264d can be located all or partially in a parotid region 354 of the robot's head portion 202a, an auricular region 356 of the robot's head portion 202a, a zygomatic region 358 of the robot's head portion 202a, a parietal region 360 of the robot's head portion 202a, a frontal region 362 of the robot's head portion 202a, or a mastoid region 364 of the robot's head portion 202a, so long as the light emitters 264.2a-264.2d of the assemblies 264a-264d are positioned on a lateral side of the robot's head portion 202a so as to be visible to a person standing next to the humanoid robot 100. These strategic positions of the light emitting assemblies 264a-264d allow users to view the light emitted from said light emitting assemblies 264a-264d from the side while the humanoid robot 100 is, for example, working on a task in an assembly line, and while the main display 300 is facing the assembly line and may not be entirely visible by the user. Further, the light emitting assemblies 264a-264d may face away from the display 300 so as not to obstruct the information being shown by the display 300, and they may also face away from other sensors so as not to interfere with the operation of those sensors. Other regions of the head portion 202a where the light emitting assemblies 264a-264d are not typically found include the chin or mental region 355, the orbital region 368, the nasal region 357, the crown region 270, and the occipital region 359.

The light emitting assemblies 264a-264d in the head portion 202a may be configured to display a status of the humanoid robot 100, or a part thereof, to users. For example, the light emitting assemblies 264a-264d can display: (i) a first color (i.e., green) when the robot is engaged in a task, such as assembling a part on an assembly line, (ii) a second color (i.e., yellow) when the humanoid robot 100 is not currently assigned to a task, thereby indicating to users that the humanoid robot 100 is available for a new task, and (iii) a third color (i.e. red) when the humanoid robot 100 is low on battery life and should be recharged. The light emitting assemblies 264a-264d and/or the display 300 can also be used to indicate when a component in the head portion 202a and/or the neck portion 202b, such as an actuator, is malfunctioning and should be serviced.

The light emitting assemblies 264a-264d can also incorporate one or more display sequences in which the light emitting assemblies 264a-264d are turned off and on, or the light emitted from said light emitting assemblies 264a-264d changes, in a specific pattern or sequence to indicate various statuses. For example, the light emitting assemblies 264a-264d can blink repeatedly to indicate that the humanoid robot 100 has lost communication with a host server or an external device, or that it is attempting to pair with or searching for a device or server to connect to. The light emitting assemblies 264a-264d may coordinate their display output with the information being displayed on the main display 300. For example, the light emitting assemblies 264a-264d can display a particular color that corresponds with the information currently displayed on the display 300. If the humanoid robot 100 is running low on battery life, the light emitting assemblies 264a-264d can display a red color while the display 300 concurrently displays a message and/or an icon that indicates that the battery is low.

The light emitting assemblies 264a-264d can also be synchronized with other devices included in the humanoid robot 100 as well. For example, the light emitting assemblies 264a-264d can be operated in conjunction with a speaker and may change colors or blink as the humanoid robot 100 outputs an audible message. Light emitting assemblies 264b

and 264d are positioned adjacent to an oral region 366 of the head portion 202a and can be operated independently of the light emitting assemblies 264a, 264c which are located above light emitting assemblies 264b, 264d and adjacent to an orbital region 368 of the head portion 202a.

Each of the light emitting assemblies 264a-264d in the head portion 202a typically includes: (i) a light source or light emitter 264.2a-264.2d, and (ii) a diffuser lens 264.4a-264.4d covering the light source 264.4a-264.4d. The light source 264.2a-264.2d and the diffuser lens 264.4a-264.4d form a unit 264.6a-264.6d that is inserted together into each respective peripheral protrusion 262a, 262b, 262c, 262d to couple the light emitting assemblies 264a-264d to the head portion 202a. The light source or emitter 264.2a-264.2d can include any known light emitter, including any one or more of the following: laser, LCD, LED (e.g., COB LED), OLED, LPD, IMOD, QDLED, mLED, AMOLED, SED, FED, plasma, electronic paper or EPD, MicroLED, quantum dot display, LED backlit LCD, WLCD, OLCD, transparent OLED, PMOLED, capacitive touchdisplay, resistive touchdisplay, monochrome emitter, color emitter, or any combination of the above, or any other known technology or light-emitting feature. It should be understood that in other embodiments, the above-disclosed light sources or emitters 264.2a-264.2d and/or additional light emitters 264.2a-264.2d may be formed in any desirable configuration or used with any other material, structure, or component to form the desirable light emitting assemblies 264a-264d. Examples of said light emitting assemblies 264a-264d that may be formed include configurations utilizing fiber optic cables, electroluminescent (EL) wire, laser diodes, neon tubes, cold cathode fluorescent lamps (CCFL), plasma tubes, phosphorescent strips, UV LED strips, infrared LED arrays, light guide panels (LGP), or edge-lit light panels. The light source or light emitter 264.2a-264.2d may be made from a single emitter or a plurality of emitters (e.g., a number ranging between 2 and 1000 individual emitters). Said light source or light emitter 264.2a-264.2d may be driven by an internal driver or an external driver located within another aspect of the electronics assembly 222. Each of the light emitters 264.2a-264.2d is positioned in an inner portion of each respective peripheral protrusion 262a-262d (i.e., positioned toward the display 300) and the diffuser lens 264.4a-264.4d is positioned in front of the light emitter 264.2a-264.2d so as to reside between a frontal extent of the light emitter 264.2a-264.2d and an outermost edge 262.2a-262.2d of each respective peripheral protrusion 262, and/or an outermost edge or surface of the head portion 202a or frontal shield 228. In some embodiments, the diffuser lens 264.4a-264.4d can be omitted from the light emitting assemblies 264a-264d. Each light emitter 264.2a-264.2d is located forward of and adjacent to the forward facing edge 298 of the rear shell 234, and also rearward of and adjacent to a portion of the rear facing edge 322 of the frontal shell 228 that defines each recess 324. A rearmost edge of each light emitter is located rearward of the entire rear facing edge 322 of the frontal shell 228. The light emitters 264.2a-264.2d are located in voids 262.4a-262.4d that are defined by each respective peripheral protrusion 262a-262d, where these voids 262.4a-262.4d are located between the frontal shell 228 and the rear shell 234. In other embodiments, the light emitters 264.2a-264.2d may not be formed directly in these voids 262.4a-262.4d; and instead, said voids 262.4a-262.4d may act as a reflector for light that is emitted from said light emitter or source. In other words, the light emitter may be positioned in the first head sub-volume 236.

25

A gap, region, or channel 370 is formed between the recesses 324 formed in the rear edge of the frontal shell 228 and the rear shell 234, and wherein light emitted from the illumination assembly 263 (comprising the light emitting assemblies 264a-264d) is visible in a region that contains a gap or channel 370. In other words, the region or the gap 370 may be: (i) positioned adjacent to both the rear edge 322 of the frontal shell 228 and the frontal edge 253 of the rear shell 234, and (ii) illuminated by an extent of the illumination assembly 263, namely by light that is emitted by at least one of the light emitters 264.2a-264.2d. An extent of the head portion 202a is provided by these peripheral protrusions 262a-262d, namely the voids 262.4a-262.4d. The voids 262.4a-262.4d are recessed relative to both: (i) a first location on the outer surface So of the frontal shell 228 that is positioned adjacent to the gap 370, and (ii) a second location on the outer surface of the rear shell 234 that is also positioned adjacent to said gap 370. The rear edge 322 of the frontal shell 228 does not directly abut the forward edge 298 of the rear shell 234 at a location corresponding to these gaps 370. As such, recess material may be positioned in these gaps 370, and wherein said recess material may be a portion of the peripheral protrusions 262a, 262b, 262c, 262d that form the light emitter housings 262.10a-262.10b. In other words, an extent of the portion of the peripheral protrusions 262a, 262b, 262c, 262d that form the light emitter housings 262.10a-262.10b may be recessed relative to the outer surfaces of both the frontal shell 228 and the rear shell 234. This specific positional relationship may cause an extent of the head portion 202a (namely, parts of the protrusions 262) to be positioned: (i) effectively within the envelope defined by the frontal shell 228 and/or the rear shell 234, and (ii) at said location to help connect the frontal shell 228 to the rear shell 234 (via the intermediate cover 252 to which they are attached). Light emitted from the illumination assembly 263 may obscure an extent of the head portion 202a (specifically, the recessed surfaces of the protrusions 262), and may specifically obscure an extent of the head portion 202a that has an outer surface that is recessed relative to the outer surfaces of the frontal and rear shells 228, 234.

When viewing the head portion 202a from the front, as shown in FIGS. 4 and 14, it can be seen that the light emitters 264.2a-264.2d of assemblies 264a-264d are spaced apart from the display 300 and the electronics support 254. In other words, the light emitters 264.2a-264.2d do not reside behind or overlap with the display 300 or the electronics support 254, although in some alternative embodiments, such an overlap may occur. The lower light emitting assemblies 264b, 264d are positioned below the display 300 and the electronics support 254. The upper light emitting assemblies 264a, 264c flank the display 300 and the electronics support 254 such that a horizontal plane (i.e., the plane 122) extending through these upper light emitting assemblies 264a, 264c also passes through the display 300. This plane 122 also passes through the center C of the head portion 202a, but the upper light emitting assemblies 264a, 264c are depicted as being slightly offset upward relative to this plane 122. The upper light emitting assemblies 264a, 264c are also located below a top end of the display 300 so as to be positioned below any cameras or sensors mounted to the electronics support 254 above the display 300.

iii. Sensor Assembly

The sensor assembly 301a associated with the head portion 202a may include one or more cameras (such as upper cameras 302, 303, 304), and/or other types of sensors including temperature sensors, pressure sensors, force sensors, inductive sensors, capacitive sensors, any combination

26

of these sensors, or other known types of sensors. In the illustrative example provided, the sensor assembly 301a includes a set of upper cameras 301a.2. For example, the set of upper camera 302.1 may include three upper cameras 302, 303, 304 that may be positioned in the head volume, in a forward facing orientation O_{FF} : (i) above: (a) the display/shield 300, (b) the orbital region 368, (c) the nasal region 357, (d) the oral region 366, and (e) an extent of the illumination assembly 263 and at least one light emitter 264a-264d, (ii) generally positioned in the frontal region 362, (iii) vertically above an extent of: (a) the temporal region 350, (b) the zygomatic region 358, and (c) the buccal region 352, and (iv) directed forward. As shown in FIGS. 26 and 27, the three upper cameras 302, 303, 304 are substantially horizontally aligned and spaced apart from one another along a plane that is parallel with plane 124. Although these upper cameras 302, 303, 304 are shown as illustrative examples, other types of sensors may be relied upon and coupled to the internal mounting frame (or electronics support 254) in a similar manner to ensure proper directional positioning for their respective detection, sensing, or signal reception capabilities.

The sensor assembly 301a and/or camera 302, 303, 304 may include: (i) scan camera(s), (ii) monochrome camera(s), (iii) color camera(s), (iv) CMOS camera(s), (v) CCD sensor(s) or camera(s) that include CCD sensor(s), (vi) camera(s) or sensor(s) that feature either a rolling shutter or a global shutter mechanism, (vii) other types of 2D digital camera(s), (viii) other types of 3D digital camera(s), (ix) camera(s) or sensor(s) that are capable of stereo vision, structured light projection, and/or laser triangulation techniques, (x) sonar camera(s) or ultrasonic camera(s), (xi) infrared sensor(s) and/or infrared camera(s), (xii) radar sensor(s), (xiii) LiDAR, (xiv) other structured light sensors, camera(s), or technologies, (xv) dot projecting camera(s) or sensor(s), or (xvi) any combination of the above-listed sensors or any other known camera or sensor type. For example, the camera 303, 302, 304 used in the sensor assembly 301a may have a megapixel resolution of between approximately 0.4 Megapixels (MP) to 20 MP, may be capable of recording video at frame rates from 5.6 Frames Per Second (FPS) to 286 FPS, may utilize a CMOS sensor, its pixel size may range from 2.4 micrometers (um) to 6.9 um, it may utilize a Starvis rolling shutter technology, it can operate in ambient air temperatures up to 55 degrees Celsius, and may possess any other properties, technologies, or features that are discussed within U.S. Pat. Nos. 11,402,726, 11,599,009, 11,333,954, or 11,600,010, all of which are incorporated herein by reference. It should be understood that the cameras are typically configured as video cameras but may, in alternative configurations, function primarily as still image cameras.

D. Neck Portion

As shown in at least FIG. 3, the neck portion 202b of the head and neck assembly 202 includes a deformable cover and member 230 that is designed to extend from an upper portion of the torso 204 to a lower portion of the head portion 202a. In particular, this deformable cover and member 230 is configured to wrap around at least an edge portion of the rear shell 234 of the head portion 202a. In doing so, the deformable cover and member 230 effectively obscures the actuators and other electronics that are contained within the neck portion 202b.

E. Distances, Angles, Radii, and Arcs

TABLE 1

Distance (mm)	Lower Bound	Upper Bound	Preferred Lower Bound	Preferred Upper Bound
D6	81.5	122.3	91.7	112.1
D7	80.5	120.8	90.6	110.7
D8	76.1	114.2	85.6	104.7
D9	80.6	120.9	90.7	110.9
D10	34.2	51.2	38.4	47.0
D11	61.7	92.6	69.4	84.8
D22	93.3	140.0	105.0	128.3
D23	173.6	260.4	195.3	238.7
D24	166.2	249.4	187.0	228.6

TABLE 2

Angle (Degrees)	Lower Bound	Upper Bound	Preferred Lower Bound	Preferred Upper Bound
A1	5.7	8.6	6.4	7.9

TABLE 3

Radius (mm)	Lower Bound	Upper Bound	Preferred Lower Bound	Preferred Upper Bound
R1	99.7	149.6	112.2	137.1
R2	46.0	69.0	51.7	63.2
R10	127.7	191.6	143.7	175.6
R11	79.3	118.9	89.2	109.0
R12	69.0	103.5	77.6	94.8

TABLE 4

Arc (Degrees)	Lower Bound	Upper Bound	Preferred Lower Bound	Preferred Upper Bound
Arc2	115.1	172.6	129.5	158.2
Arc4	110.8	166.2	124.6	152.3
Arc5	117.1	175.6	131.7	161.0
Arc6	65.8	98.7	74.1	90.5
Arc7	39.6	59.5	44.6	54.5

F. Alternative Embodiments of the Head and Neck Assembly

FIGS. 28-62 show seven alternative embodiments of the head and neck assembly 2202, 3202, 4202, 5202, 6202, 7202 that may be used interchangeably in connection with the two different general embodiments of the humanoid robot 100 shown in FIGS. 1-2, 10-11, and 32. Each of these alternative embodiments has slightly different structural features and configurations, but each embodiment maintains a similar and generally tapered overall shape. As discussed in more detail below, the features and/or components of each of these embodiments may be interchanged, added to, or removed from the features and/or components of other disclosed embodiments. For example, a lower recess 3310 that is formed in the chin or mental region 355 of the third embodiment of the head portion (e.g., as shown in FIGS. 32-57B, head 3202a) may be removed, similar to how such a lower recess was removed from the fifth, sixth, and seventh

embodiments (e.g., FIGS. 58-62). Additionally, the concept of utilizing a deformable material in the neck assembly (e.g., neck shell 3230) and including actuators within the neck assembly to allow the head portion to move may be added to the head and neck assembly 202 of the first embodiment. It should be understood that these are only illustrative examples, and any feature and/or component from one embodiment may potentially be interchanged with, added to, or removed from any other embodiment disclosed herein.

1. Second Embodiment

Similar to the head and neck assembly 202 described above in connection with FIGS. 1-27, FIGS. 28-31B illustrate a second embodiment of a head and neck assembly, designated as 2202. For the sake of brevity, the detailed disclosure provided above in connection with the head and neck assembly 202 will not be fully repeated below, but it should be understood that like numerals in the different embodiments generally represent similar or like structures. For example, the disclosure regarding the display 300 applies equally to the display 2300 of the second embodiment. Further, it should be understood that the functionality and operation of the head and neck assembly 2202 are similar or identical to the features and functionality disclosed with respect to the head and neck assembly 202. It should also be understood that any one or more features of the head and neck assembly 202 may be used in combination with those disclosed with respect to the head and neck assembly 2202, and, conversely, that any one or more features of the head and neck assembly 2202 may be used in combination with those disclosed with respect to the head and neck assembly 202. The primary difference between the head and neck assembly 202 and the head and neck assembly 2202 is the fact the housing assembly 2220 of the second embodiment further includes front and rear recessed areas 2272, 2277 respectively, and an upper shell 2270. These differences also contribute to a different overall shape for the frontal shell 2228 of this second embodiment.

As shown in FIGS. 28-31B, the frontal shell 2228 is configured to cover a front portion of an electronics assembly 2222, thereby locating at least a portion of the electronics assembly 2222 between an intermediate cover 2252 and the frontal shell 2228. In the illustrative second embodiment, the housing assembly 2220 further includes an upper shell 2270 and a sensor recess 2272. The frontal shell 2228 may be formed to include a central notch 2274 that conforms to the shape of this sensor recess 2272. The housing assembly 2220 is configured to hold the display 2300 and at least one sensor, such as upper cameras 2302, which are part of the electronics assembly 2222 mounted on an electronics support 2254. The sensor recess 2272 may be positioned above an extent of the frontal shell 2228 and is integrated within the upper shell 2270. The housing assembly 2220 is shaped with a curved surface in at least the upper shell 2270 to resemble a head portion and has a rear facing edge 2276 that extends downward from the upper shell 2270 at a rear end thereof. For example, when viewed from the side, the housing assembly 2220 may have a rearwardly sloping, substantially linear edge with a forward angle (e.g., extending rearward from a horizontal reference) of between 90 degrees and 140 degrees, and preferably around 110 degrees from horizontal, when the humanoid robot 100 is in a normal vertical standing position (meaning the sagittal and coronal planes of the head are aligned with the sagittal and coronal planes of the robot). The upper shell 2270 may include a curved portion of the housing assembly 2220 from the rear

edge to the sensor recess **2272** and may be defined by a curvilinear border **2278** that surrounds the upper shell **2270** and sensor recess **2272**. In some examples, the upper shell **2270** has a continuous surface from the rear edge to the sensor recess **2272**.

The upper sensor recess **2272** includes one or more sensor openings **2304** that are set back or recessed from the front of the housing assembly **2220**. These sensor openings **2304** are positioned to correspond with the upper camera(s) **2302** of the electronics assembly **2222**. The sensor openings **2304** are partially protected by an overhang feature of the upper shell **2270** that protrudes over these sensor openings **2304**. A shelf **2284** extends forward and downward from the sensor opening **2304** at an angle such that this shelf **2284** will not obscure the line of sight of the upper cameras **2302** (or other sensors) of the electronics assembly **2222**. The sensor recess **2272** may have a contoured surface to provide a smooth transition from the shelf **2284** to the overhang of the upper shell **2270**. The curvilinear border **2278** extends from the edge of the shelf **2284** up to the upper shell **2270**. The frontal shell **2228** of this embodiment may have a main body portion and two wing-like projections **2228.4**, **2228.6** that extend upward from this main body **2228.2**. Wherein said wing-like projections **2228.4**, **2228.6** are designed to flank the upper sensor recess **2272** and are configured to have extents that are positioned adjacent to the curvilinear border **2278** of the upper sensor recess **2272**.

The housing assembly **2220** may also include a sensor cover **2286** made of a material that does not obscure a signal intended to be detected by the sensor(s) housed therein. For example, the sensor cover **2286** may be a planar cover made of a transparent material that allows the upper cameras **2302** to receive images, preferably undistorted images. As such, housing assembly **2220** further comprises an upper substantially flat region **2220.2** that is provided by the sensor cover **2286**, and wherein said upper substantially flat region **2220.2** located above the display **2300** that displays one or more visual representations (as shown in FIGS. 9A-9G). Additionally and/or alternatively, the sensor cover **2286** may have openings formed directly therein for receiving an extent of a sensor (e.g., a camera lens protruding through). In further embodiments, the upper sensor recess **2272** may be omitted entirely, and in such a case, the frontal shell **2228** itself may include openings formed therein for receiving an extent of a sensor (e.g., a camera lens).

In the illustrative embodiment shown in FIGS. 28-31B, a rear sensor recess **2277** may be formed in the head portion **2202a**, positioned between a rear end of the upper shell **2270** and the rear shell **2234**. This rear sensor recess **2277** can form a viewport for a rear facing sensor **2301c** (e.g., camera) or can function as a vent to allow airflow into and/or out of the head portion **2202a** for the purpose of cooling the electronics assembly **2222**, potentially via an internal fan or a plurality of fans. As shown in FIGS. 28-31B, the frontal shell **2228** may include a curved upper surface defining the slot or notch **2274** and may be configured to fit between the curvilinear border **2278** and a rim. The frontal shell **2228** is shaped to generally resemble the form of the head portion **2202a**, thereby providing a substantially continuous surface from the upper shell **2270** and sensor recess **2272** to the rear shell **2234**. The curvature of the frontal shell **2228** may vary and may have different curvatures (i.e., different radii and arcs) at different positions along the frontal shell **2228**. The frontal shell **2228** may include light recesses **2296a**, **2296b**,

2296c, **2296d** to conform with the shape of the peripheral protrusions **2262a**, **2262b**, **2262c**, **2262d**.

2. Third Embodiment

Similar to the head and neck assemblies **202** and **2202** described above in connection with FIGS. 1-27 and FIGS. 28-31B respectively, FIGS. 32-57B illustrate a third embodiment of a head and neck assembly, designated as **3202**. For the sake of brevity, the detailed disclosure provided above in connection with the head and neck assemblies **202** and **2202** will not be fully repeated below, but it should be understood that like numerals in the various embodiments generally represent similar or like structures. For example, the disclosure regarding the display **300** applies equally to the display **3300** of this third embodiment. Further, it should be understood that the functionality and operation of the head and neck assembly **3202** are similar or identical to the features and functionality disclosed with respect to the head and neck assemblies **202** and **2202**. It should also be understood that any one or more features of the head and neck assemblies **202**, **2202** may be used in combination with those disclosed with respect to the head and neck assembly **3202**, and, conversely, that any one or more features of the head and neck assembly **3202** may be used in combination with those disclosed with respect to the head and neck assemblies **202**, **2202**. The primary differences between the head and neck assembly **2202** (second embodiment) and the head and neck assembly **3202** (third embodiment) are the fact that the head portion **3202a** of the third embodiment does not include the rear sensor recess **2277** (found in the second embodiment), but it does include a lower sensor cover **3310** in the chin region, and it incorporates a deformable neck shell **3230**.

i. Upper Shell

The head portion **3202a** of the third embodiment includes an upper shell **3270** which has a recessed sensor region **3272** at a front end of this upper shell **3270**, operating similarly to that of the housing assembly **2220** of the second embodiment. However, a rear end of the upper shell **3270** in this third embodiment is substantially flush with the rear shell **3234**, such that there is no recessed region in this particular area (unlike the rear sensor recess **2277** of the second embodiment). In some examples of this third embodiment, the upper shell **3270** may further include an additional recessed area **3280**. This recessed area **3280** may be configured to hold a top shell or cover plate **3282**, which is considered part of the upper shell **3270** and has a shape that conforms to the shape of the recessed area **3280**.

ii. Neck Shell

The neck shell **3230** of the third embodiment may be made from a material (e.g., fabric or a deformable plastic) that allows the head portion **3202a** to twist in both directions (yaw) and pitch forward and back without the material bunching excessively or pulling unduly. The neck shell **3230** may be elastic or resilient in nature and is designed to return to its original, undeformed state when the head portion **3202a** returns to its normal, neutral state or position. The disclosed head and neck assembly **3202** may include one or more actuators that allow the head portion **3202a** to: (i) twist or rotate, and (ii) tilt or change its pitch. Unlike many conventional robots, these actuators are hidden underneath the deformable neck shield **3230**. Movement of these actuators causes the deformable neck shell **3230** to deform and thereby accommodate such movements of the head portion **3202a**.

The deformable neck shield **3230** is designed to extend up to approximately the jaw line of the head enclosure (housing

31

assembly) and also into a rear extent of the head enclosure, but it generally does not extend into the side regions of the head portion **3202a**. This specific configuration ensures that the neck shield **3230** is sufficiently attached to the head portion **3202a**, yet it minimizes the surface area of the head portion **3202a** that is covered by this deformable neck shield **3230**. Minimizing the coverage of the deformable neck shield **3230** in the side regions of the head portion **3202a** allows for the inclusion of more durable materials in these side regions without necessitating the use of overlapping layers of materials. This design is beneficial over conventional robot heads because it can reduce overall material usage and/or increase the lateral protection afforded to the electronics contained within the head portion **3202a**.

iii. Lower Sensor Cover

As shown in FIGS. **33**, **34**, and **56**, the head portion **3202a** of the third embodiment further includes a lower recess formed in a chin region of this head portion **3202a**, which may include a lower sensor cover **3310**. The chin region itself projects outward away from the neck portion, thereby providing a lower surface **3311** that generally faces toward the ground when the robot is upright. The lower sensor cover **3310** is coupled to this lower surface **3311** and consequently also faces generally toward the ground. The lower sensor cover **3310** is shaped to couple with the head portion **3202a** in a position such that a sensor opening **3312**, which is included in the lower sensor cover **3310**, corresponds with a sensor **3301b**, such as one or more lower camera(s) **3305** that are part of the electronics assembly **3222**. The lower camera **3305** is configured to monitor the ground for obstacles and/or to monitor the movement of various parts of the humanoid robot **100**. The lower sensor cover **3310** may be made of a material that does not obscure a signal intended to be detected by the sensor housed behind it. For example, the lower sensor cover **3310** may be a planar cover made of a transparent material that allows the lower cameras **3305** to receive images, preferably undistorted images. The lower sensor cover **3310** may be enclosed by the frontal shell **3228** and the neck shell **3230**.

iv. Electronics Support Frame

The frontal shell **3228** is shown removed from the head portion **3202a** in FIGS. **54-58**. Both The frontal shell **3228** and the display **3300** are mounted to an electronics support frame, also referred to as a shielded portion **3288**; this electronics support frame **3288** is essentially a combination of the intermediate cover and the electronics support of the first embodiment, now integrated into a single component. The shielded portion **3288** may include a substantial surface that extends from a curvilinear border **3290** (which surrounds an extent of the upper shell **3270** and the sensor recess **3272**) down to a rim **3292**. This shielded portion **3288** may include a display opening **3294** that is positioned and sized to receive the display **3300** when mounted. The display **3300** may be rectangular in overall shape but possess a curvature. The shielded portion **3288** may be shaped with contours around this display opening **3294** to properly receive the curved shape of the display **3300** without obstructing the view of the active display area. The shielded portion **3288** may also have a taper and/or include additional contours in the region between the display opening **3294** and the rim **3292**. The rim **3292** may include lighting recesses or peripheral protrusions **3262a**, **3262b**, **3262c**, **3262d**, which are formed within this rim **3292** to receive the light emitting assemblies **3264a**, **3264b**, **3264c**, **3264d** of the electronics assembly **3222**. Although the illustrative embodiment shown in FIGS. **54-58** depicts the frontal shell **3228** as being sized to fit within the shielded portion **3288**, it should be under-

32

stood that the frontal shell **3228** may occupy any portion or ratio of the robot's head portion **3202a**, may have any suitable configuration, or in some cases, may even be omitted. In some embodiments, therefore, the frontal shell **3228** is an optional component.

3. Fourth Embodiment

Similar to the head and neck assemblies **202**, **2202**, and **3202** described above in connection with FIGS. **1-27**, FIGS. **28-31B**, and FIGS. **32-57B** respectively, FIGS. **58-59** illustrate a fourth embodiment of a head and neck assembly, designated as **4202**. For the sake of brevity, the detailed disclosure provided above in connection with the head and neck assemblies **202**, **2202**, and **3202** will not be fully repeated below, but it should be understood that like numerals generally represent generally similar or like structures in the various embodiments. For example, the disclosure regarding the display **300** applies equally to the display **4300** of this fourth embodiment. Further, it should be understood that the functionality and operation of the head and neck assembly **4202** are similar or identical to the features and functionality disclosed with respect to the head and neck assemblies **202**, **2202**, and **3202**. It should also be understood that any one or more features of the head and neck assemblies **202**, **2202**, **3202** may be used in combination with those disclosed with respect to the head and neck assembly **4202**, and, conversely, that any one or more features of the head and neck assembly **4202** may be used in combination with those disclosed with respect to the head and neck assemblies **202**, **2202**, **3202**.

The primary difference between the head and neck assembly **3202** (third embodiment) and the head and neck assembly **4202** (fourth embodiment) is the fact that the shielded portion **4288** of the fourth embodiment is ribbed, and the head portion **4202a** of this fourth embodiment lacks a lower recessed sensor region in the chin area (which was present as **3310** in the third embodiment). As shown in FIGS. **58** and **59**, the shielded portion **4288** can include a plurality of ribs **4372**, **4374** that define one or more recessed areas **4370** between them. These ribs **4372**, **4374** can provide additional structural reinforcement to areas adjacent to the electronics assembly **4222**. The recessed areas **4370** can simply be part of the structural shielded portion **4288** or, alternatively, can themselves house additional displays and/or lights that are used to convey information and indications to users. Although not explicitly shown in FIGS. **58** and **59**, the head portion **4202a** of this fourth embodiment can either include or omit a frontal shell.

4. Fifth Embodiment

Similar to the head and neck assemblies **202**, **2202**, **3202**, and **4202** described above in connection with FIGS. **1-27**, FIGS. **28-31B**, FIGS. **32-57B**, and FIGS. **58-59** respectively, FIG. **60** illustrates a fifth embodiment of a head and neck assembly, designated as **5202**. For the sake of brevity, the detailed disclosure provided above in connection with the head and neck assemblies **202**, **2202**, **3202**, and **4202** will not be fully repeated below, but it should be understood that like numerals generally represent generally similar or like structures in the various embodiments. For example, the disclosure regarding the display **300** applies equally to the display **5300** of this fifth embodiment. Further, it should be understood that the functionality and operation of the head and neck assembly **5202** are similar or identical to the features and functionality disclosed with respect to the head

33

and neck assemblies **202**, **2202**, **3202**, and **4202**. It should also be understood that any one or more features of the head and neck assemblies **202**, **2202**, **3202**, **4202** may be used in combination with those disclosed with respect to the head and neck assembly **5202**, and, conversely, that any one or more features of the head and neck assembly **5202** may be used in combination with those disclosed with respect to the head and neck assemblies **202**, **2202**, **3202**, **4202**.

The primary difference between the head and neck assembly **3202** and the head and neck assembly **5202** (fifth embodiment) is the fact that the head portion **5202a** of the fifth embodiment includes only one continuous light emitting assembly **5264**, and this head portion **5202a** also lacks a lower recessed sensor region in the chin area. As shown in FIG. **60**, the light emitting assembly **5264** in this fifth embodiment is in the form of a band and extends along the interface **5320** between the frontal shell **5228** and the rear shell **5234**. The light emitting assembly **5264** extends along the entire interface **5320** in the illustrative embodiment shown, but it may extend only partway along this interface **5320** in some alternative embodiments. In other words, the light emitting assembly **5264** may extend completely around the periphery of the frontal shell **5228**. The outer surface of this light emitting assembly **5264** may be flush with the outer surfaces of the frontal shell **5228** and rear shell **5234**, or it may be recessed relative to one or both of these front and/or rear shells **5228**, **5234**.

5. Sixth Embodiment

Similar to the head and neck assemblies **202**, **2202**, **3202**, **4202**, and **5202** described above in connection with FIGS. **1-27**, FIGS. **28-31B**, FIGS. **32-57B**, FIGS. **58-59**, and FIG. **60** respectively, FIG. **61** illustrates a sixth embodiment of a head and neck assembly, designated as **6202**. For the sake of brevity, the detailed disclosure provided above in connection with the head and neck assemblies **202**, **2202**, **3202**, **4202**, and **5202** will not be fully repeated below, but it should be understood that like numerals generally represent generally similar or like structures in the various embodiments. For example, the disclosure regarding the display **300** applies equally to the display **6300** of this sixth embodiment. Further, it should be understood that the functionality and operation of the head and neck assembly **6202** are similar or identical to the features and functionality disclosed with respect to the head and neck assemblies **202**, **2202**, **3202**, **4202**, and **5202**. It should also be understood that any one or more features of the head and neck assemblies **202**, **2202**, **3202**, **4202**, **5202** may be used in combination with those disclosed with respect to the head and neck assembly **6202**, and, conversely, that any one or more features of the head and neck assembly **6202** may be used in combination with those disclosed with respect to the head and neck assemblies **202**, **2202**, **3202**, **4202**, **5202**. The primary difference noted for this sixth embodiment (head and neck assembly **6202**) compared to some earlier embodiments is the fact that the head portion **6202a** of the sixth embodiment lacks a front recessed sensor region. Like the fifth embodiment, the head portion **6202a** of the sixth embodiment includes only one continuous light emitting assembly **6264** that extends along the interface **6320** between the frontal shell **6228** and the rear shell **6234**.

6. Seventh Embodiment

Similar to the head and neck assemblies **202**, **2202**, **3202**, **4202**, **5202**, and **6202** described above in connection with

34

FIGS. **1-27**, FIGS. **28-31B**, FIGS. **32-57B**, FIGS. **58-59**, FIG. **60**, and FIG. **61** respectively, FIG. **62** illustrates a seventh embodiment of a head and neck assembly, designated as **7202**. For the sake of brevity, the detailed disclosure provided above in connection with the head and neck assemblies **202**, **2202**, **3202**, **4202**, **5202**, and **6202** will not be fully repeated below, but it should be understood that like numerals generally represent generally similar or like structures in the various embodiments. For example, the disclosure regarding the display **300** applies equally to the display **7300** of this seventh embodiment. Further, it should be understood that the functionality and operation of the head and neck assembly **7202** are similar or identical to the features and functionality disclosed with respect to the head and neck assemblies **202**, **2202**, **3202**, **4202**, **5202**, and **6202**. It should also be understood that any one or more features of the head and neck assemblies **202**, **2202**, **3202**, **4202**, **5202**, **6202** may be used in combination with those disclosed with respect to the head and neck assembly **7202**, and, conversely, that any one or more features of the head and neck assembly **7202** may be used in combination with those disclosed with respect to the head and neck assemblies **202**, **2202**, **3202**, **4202**, **5202**, **6202**. The primary difference between the head and neck assembly **6202** (sixth embodiment) and the head and neck assembly **7202** (seventh embodiment) is the fact that the frontal shell **7228** of the seventh embodiment provides substantially all of the exterior surface of the head portion **7202a**. As shown in FIG. **62**, the head portion **7202a** of this seventh embodiment further includes a light emitting assembly **7264a** that is coupled to this prominent frontal shell **7228**. The neck shell **7230** (associated with neck portion **7202b**) can also include a second light emitting assembly **7264b** located adjacent to an edge of the frontal shell **7228**.

G. Body Illumination Assembly

As previously described in detail, the head portion **202a** (and its variants) includes a head illumination assembly, exemplified by light emitting assembly **264a-264d** (and its variants **2264**, **3264**, etc.) located at the shield interface **320** (and its variants). The humanoid robot **100** can further include additional illumination assemblies located in other areas of the robot **100**, such as a torso illumination assembly (with emitters **330**), a thigh illumination assembly (with emitters **332**), a neck illumination assembly (with emitters **334**), a shoulder illumination assembly (with emitters **336**), a hand/wrist illumination assembly (with emitters **338**), a knee illumination assembly (with emitters **340**), and a hip illumination assembly (with emitters **342**). The illumination assemblies disclosed herein are intended to meet the standards described in FDA CFR Title 21 part 1040.10, titled "Performance standards for Light-Emitting Products," and ANSI Z136.1, titled "Safe Use of Lasers," at the time of filing this application and are fully incorporated herein by reference.

1. Torso Illumination Assembly

The torso illumination assembly includes at least one, and preferably a plurality of, light emitters **330** that are located along a front surface of the torso **204**, generally corresponding to a chest region of the humanoid robot **100**, as shown in FIG. **63A**. These torso light emitters **330** are illustratively embodied as elongated light strips; however, the light emitters **330** can have any suitable shape or structure as dictated by design requirements. The torso light emitters **330** can be operated in the same way as the head light emitting assembly **264a-264d** described above. The torso light emitters **330** can

utilize one or more of the following light technologies: LCD, LED, OLED, LPD, IMOD, QDLED, mLED, AMOLED, SED, FED, plasma, electronic paper or EPD, MicroLED, quantum dot display, LED backlit LCD, WLCD, OLCD, transparent OLED, PMOLED, capacitive touchdisplay elements, resistive touchdisplay elements, monochrome emitters, color emitters, or any combination of the above, or any other known technology or light-emitting feature.

2. Thigh Illumination Assembly

The thigh illumination assembly includes at least one, and preferably a plurality of, light emitters **332** that are located along a front surface of each thigh **404a**, **404b**, generally corresponding to a quadricep region of the humanoid robot **100**, as shown in FIGS. **63B** and **63C**. These thigh light emitters **332** are illustratively embodied as elongated light strips; however, the light emitters **332** can have any suitable shape or structure. The thigh light emitters **332** can be operated in the same way as the head light emitting assembly **264a-264d** described above. The thigh light emitters **332** can utilize one or more of the following light technologies: LCD, LED, OLED, LPD, IMOD, QDLED, mLED, AMOLED, SED, FED, plasma, electronic paper or EPD, MicroLED, quantum dot display, LED backlit LCD, WLCD, OLCD, transparent OLED, PMOLED, capacitive touchdisplay elements, resistive touchdisplay elements, monochrome emitters, color emitters, or any combination of the above, or any other known technology or light-emitting feature.

3. Neck Illumination Assembly

The neck illumination assembly includes at least one, and preferably a plurality of, light emitters **334** that are located along a rear surface of the neck portion **202b**, specifically at the base of the head portion **202a**, as shown in FIG. **63A**. This neck light emitter (or emitters) **334** is illustratively embodied as an elongated light strip; however, the light emitters **334** can have any suitable shape or structure. The neck light emitters **334** can be operated in the same way as the head light emitting assembly **264a-264d** described above. The neck light emitters **334** can utilize one or more of the following light technologies: LCD, LED, OLED, LPD, IMOD, QDLED, mLED, AMOLED, SED, FED, plasma, electronic paper or EPD, MicroLED, quantum dot display, LED backlit LCD, WLCD, OLCD, transparent OLED, PMOLED, capacitive touchdisplay elements, resistive touchdisplay elements, monochrome emitters, color emitters, or any combination of the above, or any other known technology or light-emitting feature.

4. Shoulder Illumination Assembly

The shoulder illumination assembly includes at least one, and preferably a plurality of, light emitters **336** that are located along a front surface of each shoulder **206a**, **206b**, as shown in FIG. **65A**. These shoulder light emitters **336** are illustratively embodied as elongated light strips; however, the light emitters **336** can have any suitable shape or structure. The shoulder light emitters **336** can be operated in the same way as the head light emitting assembly **264a-264d** described above. The shoulder light emitters **336** can utilize one or more of the following light technologies: LCD, LED, OLED, LPD, IMOD, QDLED, mLED, AMOLED, SED, FED, plasma, electronic paper or EPD, MicroLED, quantum dot display, LED backlit LCD, WLCD, OLCD, transparent OLED, PMOLED, capacitive touchdisplay elements, resistive touchdisplay elements, monochrome emitters, color emitters, or any combination of the above, or any other known technology or light-emitting feature.

5. Hip Illumination Assembly

The hip illumination assembly includes at least one, and preferably a plurality of, light emitters **342** that are located

along a surface of each hip, as shown in FIG. **65B**. These hip light emitters **342** are illustratively embodied as elongated light strips; however, the light emitters **342** can have any suitable shape or structure. The hip light emitters **342** can be operated in the same way as the head light emitting assembly **264a-264d** described above. The hip light emitters **342** can utilize one or more of the following light technologies: LCD, LED, OLED, LPD, IMOD, QDLED, mLED, AMOLED, SED, FED, plasma, electronic paper or EPD, MicroLED, quantum dot display, LED backlit LCD, WLCD, OLCD, transparent OLED, PMOLED, capacitive touchdisplay elements, resistive touchdisplay elements, monochrome emitters, color emitters, or any combination of the above, or any other known technology or light-emitting feature.

6. Hand Illumination Assembly

The hand illumination assembly includes at least one, and preferably a plurality of, light emitters **338** that are located along a surface of each hand **216a**, **216b**, as shown in FIG. **65B**. These hand light emitters **338** are illustratively embodied as elongated light strips; however, the light emitters **338** can have any suitable shape or structure. The hand light emitters **338** can be operated in the same way as the head light emitting assembly **264a-264d** described above. The hand light emitters **338** can utilize one or more of the following light technologies: LCD, LED, OLED, LPD, IMOD, QDLED, mLED, AMOLED, SED, FED, plasma, electronic paper or EPD, MicroLED, quantum dot display, LED backlit LCD, WLCD, OLCD, transparent OLED, PMOLED, capacitive touchdisplay elements, resistive touchdisplay elements, monochrome emitters, color emitters, or any combination of the above, or any other known technology or light-emitting feature.

7. Knee Illumination Assembly

The knee illumination assembly includes at least one, and preferably a plurality of, light emitters **340** that are located along a surface of each knee **406a**, **406b**, as shown in FIG. **65C**. These knee light emitters **340** are illustratively embodied as elongated light strips; however, the light emitters **340** can have any suitable shape or structure. The knee light emitters **340** can be operated in the same way as the head light emitting assembly **264a-264d** described above. The knee light emitters **340** can utilize one or more of the following light technologies: LCD, LED, OLED, LPD, IMOD, QDLED, mLED, AMOLED, SED, FED, plasma, electronic paper or EPD, MicroLED, quantum dot display, LED backlit LCD, WLCD, OLCD, transparent OLED, PMOLED, capacitive touchdisplay elements, resistive touchdisplay elements, monochrome emitters, color emitters, or any combination of the above, or any other known technology or light-emitting feature.

H. Other Electronic Components

As described above, the electronic components of the head may also include a directional microphone, speaker, antennas, light emitting assembly **264a-264d**, as well as a data storage device and/or computing device comprising a processor and memory. Specifically, the directional microphone is designed to detect sounds and determine a position, which enables the robot to move its head toward the sound. In particular, one or more speakers may be configured to allow the robot to communicate with nearby humans with audible messages or responses. One or more antennas may be configured to transmit and receive data wirelessly for data transfer into and out of the robot. Specifically, the robot may include wireless communication modules (e.g., cellular, Wi-Fi, Bluetooth, WiMAX, HomeRF, Z-Wave, Zigbee,

THREAD, RFID, NFC, and/or etc.) that are connected to the antennas. For example, the robot head portion **202a** may include a 5G cellular radio coupled to one of the antennas and a Wi-Fi radio (e.g., 5 GHz or 2.4 GHz) coupled to the other antenna.

The data storage device may include a solid-state hard drive designed to capture all of the data generated by the sensors or a subset of the data generated by the sensors. The subset of the data may be time-based (e.g., the pre-defined time surrounding the start up/shut down of the robot), sensor-based (e.g., only encoder data), movement/configuration-based (e.g., when performing a specific task that requires the robot to put its body in a particular position/configuration), environment-based (e.g., when the robot recognizes a specific item or issue in its environment), or configuration based, error based, or a combination thereof. In addition, the data storage device may be used to store data to train other robots or store data for diagnostic purposes or any other purpose. Finally, the indicator lights may be designed to work with the display **300** to indicate a state of the robot **100** (e.g., working, error, moving, etc.) to a nearby human or may illuminate for other reasons.

It is to be understood that the disclosure is not limited to the exact details of construction, operation, exact materials or embodiments shown and described, as obvious modifications and equivalents will be apparent to one skilled in the art. While the specific embodiments have been illustrated and described, numerous modifications come to mind without significantly departing from the spirit of the disclosure, and the scope of protection is only limited by the scope of the accompanying Claims. It should also be understood that substantially utilized herein means a deviation that is less than 15% and preferably less than 5%. It should also be understood that other configuration or arrangements of the above described components is contemplated by this Application.

In this patent, to the extent any U.S. patents, U.S. patent applications, or other materials (e.g., articles) have been incorporated by reference, the text of such materials is only incorporated by reference to the extent that no conflict exists between such material and the statements and drawings set forth herein. In the event of such conflict, the text of the present document governs, and terms in this document should not be given a narrower reading in virtue of the way in which those terms are used in other materials incorporated by reference.

It is to be understood that the disclosure is not limited to the exact details of construction, operation, exact materials, or embodiments shown and described, as obvious modifications and equivalents will be apparent to one skilled in the art; for example, the photographs may be digital photographs or paper based photographs that may then be scanned into digital form. While the specific embodiments have been illustrated and described, numerous modifications come to mind without significantly departing from the spirit of the disclosure.

As used herein, the terms “component,” “system” and the like in relation to discussions about computer-related processes and systems are intended to refer to a computer-related entity, either hardware, a combination of hardware and software, software, or software in execution. For example, a component may be, but is not limited to being, a process running on a processor, a processor, an object, an instance, an executable, a thread of execution, a program, a computer, or both. By way of illustration, both an application running on a computer and the computer can be a component. One or more components may reside within a

process, a thread of execution, or both, and a component may be localized on one computer and/or distributed between two or more computers.

Furthermore, all or portions of the computer-related processes and systems can be implemented as a method, apparatus or article of manufacture using standard programming and/or engineering techniques to produce software, firmware, hardware, or any combination thereof to control a computer to implement the disclosed innovation. The term “article of manufacture” as used herein is intended to encompass a computer program accessible from any computer-readable device or media. For example, computer readable media can include but are not limited to magnetic storage devices (e.g., hard disk, floppy disk, magnetic strips . . .), optical disks (e.g., compact disk (CD), digital versatile disk (DVD) . . .), smart cards, and flash memory devices (e.g., card, stick, key drive . . .). Additionally, it should be appreciated that a carrier wave can be employed to carry computer-readable electronic data such as those used in transmitting and receiving electronic mail or in accessing a network such as the Internet or a local area network (LAN). Of course, those skilled in the art will recognize many modifications may be made to this configuration without departing from the scope or spirit of the claimed subject matter.

Where the above examples, embodiments and implementations reference examples, it should be understood by those of ordinary skill in the art that other helmet and manufacturing devices and examples could be intermixed or substituted with those provided. In places where the description above refers to particular embodiments of helmets and customization methods, it should be readily apparent that a number of modifications may be made without departing from the spirit thereof and that these embodiments and implementations may be applied to other to helmet customization technologies as well. Accordingly, the disclosed subject matter is intended to embrace all such alterations, modifications and variations that fall within the spirit and scope of the disclosure and the knowledge of one of ordinary skill in the art.

The invention claimed is:

1. A humanoid robot comprising:

an upper region including: (i) a torso, (ii) a pair of arm assemblies coupled to the torso, and (iii) a head and neck assembly coupled to the torso and having a neck portion and a head portion coupled to the neck portion, and wherein the head portion includes:

a head housing assembly with a rear shell, and a frontal shell coupled to the rear shell to define a head volume between the frontal shell and the rear shell, and wherein the frontal shell includes a first edge extent and an opposed second edge extent,

an electronics assembly with a display located in the head volume between the frontal shell and the rear shell, and

wherein when the head housing assembly is in a forward facing orientation, the frontal shell includes:

a substantially horizontal first arc length that extends from the first edge extent to the second edge extent at a first location below the display,

a substantially horizontal second arc length that extends from the first edge extent to the second edge extent at a second location aligned with a portion of the display, and wherein said second arc length is greater than the first arc length, and

a substantially horizontal third arc length that extends from the first edge extent to the second

39

edge extent at a third location above the display, and wherein said third arc length is greater than both the first arc length and the second arc length; and

a lower region coupled to the upper region and spaced apart from the upper region, the lower region including a pair of legs.

2. The humanoid robot of claim 1, wherein the frontal shell further includes a substantially horizontal fourth arc length that extends from the first edge extent to the second edge extent at a fourth location positioned above the third arc length, and wherein the fourth arc length is greater than the third arc length.

3. The humanoid robot of claim 1, further comprising a first camera positioned above the display and within the head volume.

4. The humanoid robot of claim 3, further comprising a second camera positioned below the display and within the head volume.

5. The humanoid robot of claim 1, wherein the frontal shell and the display both have a curvilinear configuration that is concave relative to the rear shell.

6. The humanoid robot of claim 1, further comprising an illumination assembly configured to illuminate an extent of a region positioned adjacent to a first edge extent of the frontal shell.

7. The humanoid robot of claim 6, wherein an illumination gap is positioned between the frontal shell and the rear shell, and wherein light emitted from the illumination assembly is visible in said gap.

8. The humanoid robot of claim 1, wherein a portion of the frontal shell includes a tinted coating.

9. A humanoid robot comprising:

an upper region including: (i) a torso, (ii) a pair of arm assemblies coupled to the torso, and (iii) a head and neck assembly coupled to the torso and having a neck portion and a head portion coupled to the neck portion, and wherein the head portion includes:

a housing assembly with a rear shell and a frontal shell coupled to the rear shell to define at least one head volume between the frontal shell and the rear shell, and wherein the frontal shell has a lower frontal shell width that extends between opposed shell edges,

an electronics assembly positioned within the head volume and including: (i) a display with a width that: (a) extends between opposed display edges, (b) is positioned above the lower frontal shell width, and (c) is greater than the frontal shell width, and (ii) at least one sensor, and

wherein said display is configured to show one or more visual representations that do not include human-like facial features to denote an operating status of the humanoid robot, and wherein the one or more visual representations are visible through the frontal shell; and

a lower region coupled to the upper region and including a pair of leg assemblies.

10. The humanoid robot of claim 9, further comprising an illumination assembly configured to emit light in a location that is adjacent to an extent of the periphery of the frontal shell.

11. The humanoid robot of claim 10, wherein the illumination assembly is configured to convey the operational status of the humanoid robot.

12. The humanoid robot of claim 9, wherein the housing assembly further comprises an upper substantially flat region located above said one or more visual representations.

40

13. The humanoid robot of claim 12, wherein the head portion further comprises a camera aligned with the upper substantially flat region, and wherein the upper substantially flat region includes a sensor opening configured to receive a lens of the camera.

14. The humanoid robot of claim 9, further comprises a lower camera positioned below the display.

15. The humanoid robot of claim 9, wherein the display is curved.

16. The humanoid robot of claim 9, wherein the neck portion includes a neck shell having a deformable material.

17. The humanoid robot of claim 9, further comprising a plurality of cameras, and wherein a first camera contained in the plurality of cameras is substantially horizontally aligned with a second camera contained in the plurality of cameras.

18. A humanoid robot comprising:

an upper region including: (i) a torso, (ii) a pair of arm assemblies coupled to the torso, and (iii) a head and neck assembly coupled to the torso and having a neck portion and a head portion coupled to the neck portion, and wherein the head portion includes:

a housing assembly having a frontal shell and defining a head volume, and

an electronics assembly including a curved display located in the head volume, and wherein a gap is formed between the curved display and the frontal shell and said curved display is configured to show one or more visual representations that do not include human-like facial features to denote an operating status of the humanoid robot; and

a lower region coupled to the upper region and included a pair of leg assemblies; and

further comprising an illumination assembly configured to emit light in a location that is adjacent to an extent of the periphery of the frontal shell;

wherein an extent of the illumination assembly is positioned in a temporal region of the housing assembly.

19. The humanoid robot of claim 18, wherein the frontal shell includes:

a first width defined by opposed edges of the frontal shell at a first location along a first substantially horizontal plane located below the display,

a second width defined by opposed edges of the frontal shell at a second location along a second substantially horizontal plane passing through the display, and wherein said second width is greater than the first width, and

a third width defined by opposed edges of the frontal shell at a third location along a third substantially horizontal plane located above the display, and wherein said third width is greater than both the first width and the second width.

20. The humanoid robot of claim 18, wherein the display has an upper end and an opposed lower end, and wherein the display has a constant height between the upper end and the lower end.

21. The humanoid robot of claim 20, wherein the display has a constant arc length between the upper end and the lower end.

22. The humanoid robot of claim 18, wherein the display occupies an ocular region, a nasal region, and an infraorbital region of the head portion.

23. The humanoid robot of claim 22, wherein the display further occupies at least a portion of: a frontal region, a temporal region, and a zygomatic region of the head portion.