



US 20250283685A1

(19) **United States**

(12) **Patent Application Publication**
Fazio et al.

(10) **Pub. No.: US 2025/0283685 A1**

(43) **Pub. Date: Sep. 11, 2025**

(54) **STRING SHOOTING DEVICE**

Publication Classification

(71) Applicant: **ZIPSTRING LLC**, Johns Creek, GA
(US)

(51) **Int. Cl.**
F41B 4/00 (2006.01)

(72) Inventors: **Stephen Giovanni Fazio**, Atlanta, GA
(US); **Austin Mark Hillam**, Atlanta,
GA (US)

(52) **U.S. Cl.**
CPC **F41B 4/00** (2013.01)

(21) Appl. No.: **19/075,598**


(57) **ABSTRACT**

(22) Filed: **Mar. 10, 2025**

Provided herein is a string shooting device, and more particularly, a string shooting device having that is wearable and operable by hand gestures or body movement. Embodiments include a wearable device for propelling a string including: a string shooting device; a band configured to attach to a body part of a user; and a holder, where the holder is secured by the band to the user; where, in response to the body part of the user being in a first position, the string shooting device is not actuated, and where in response to the body part of the user being in a second position, the string shooting device is actuated.

Related U.S. Application Data

(60) Provisional application No. 63/562,770, filed on Mar. 8, 2024, provisional application No. 63/692,214, filed on Sep. 9, 2024.

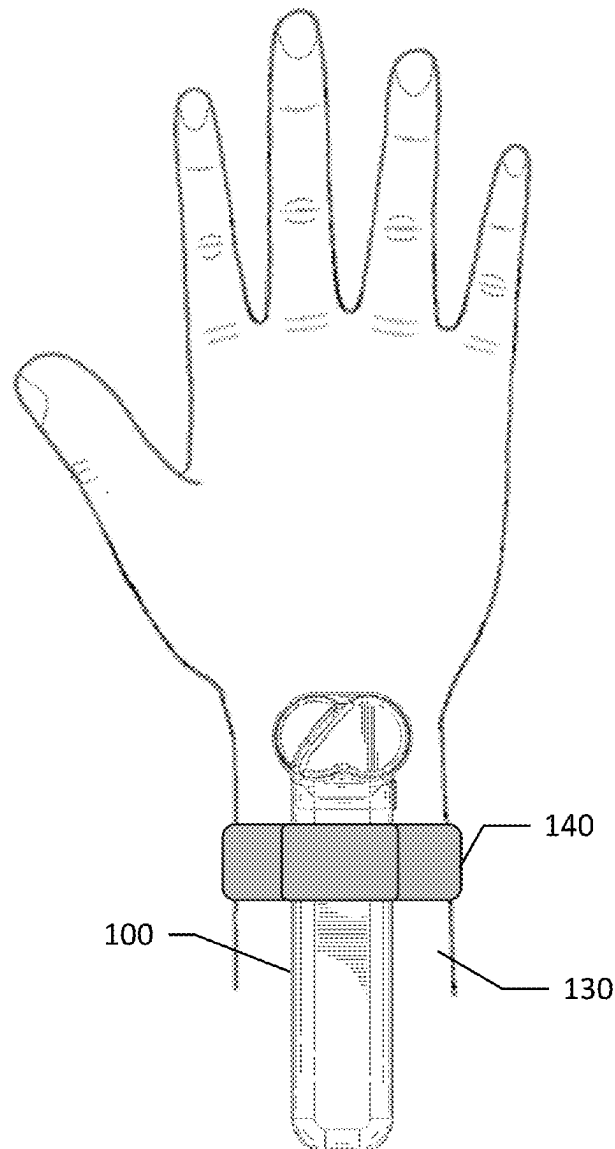

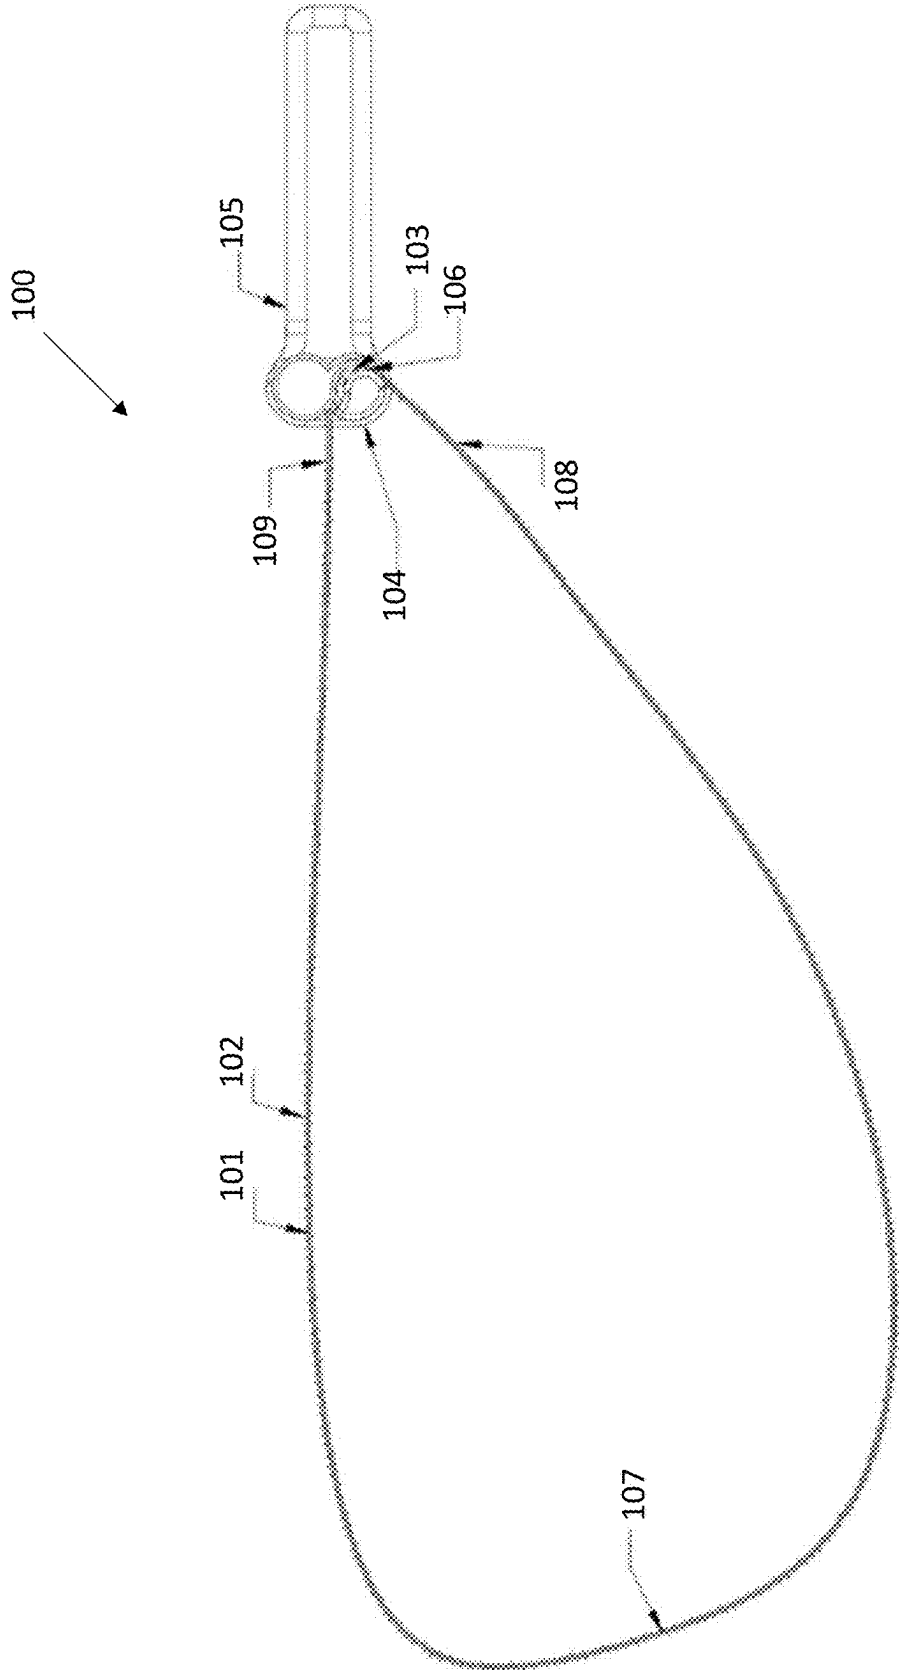


FIG. 1

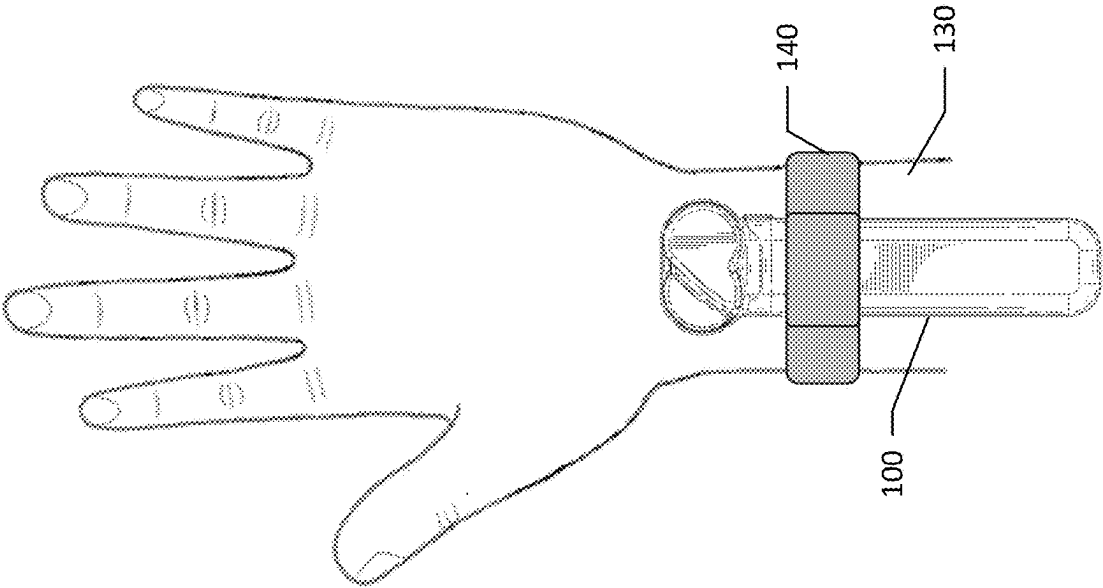


FIG. 2

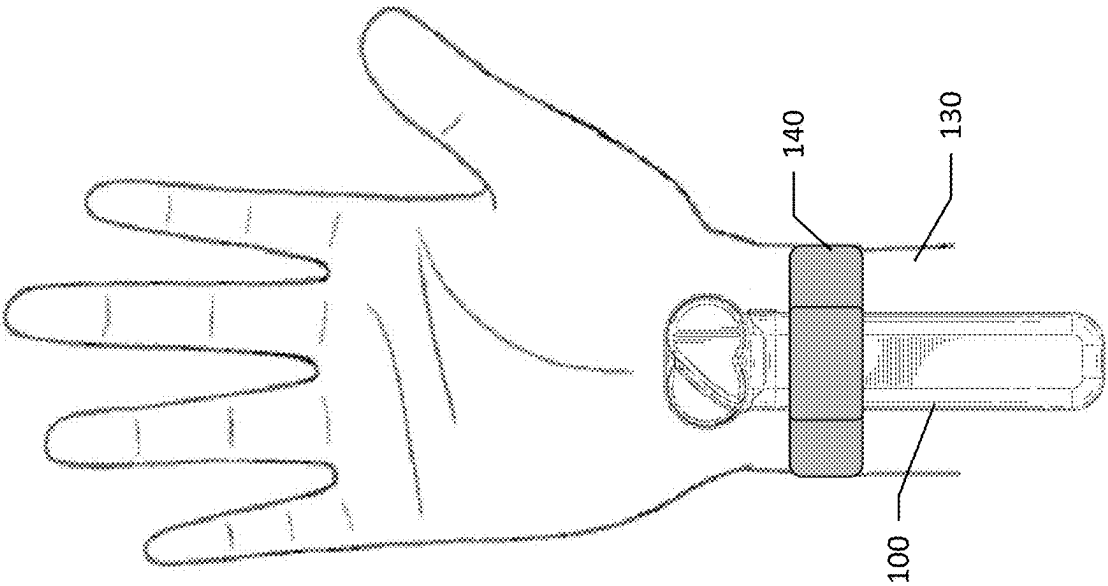


FIG. 3

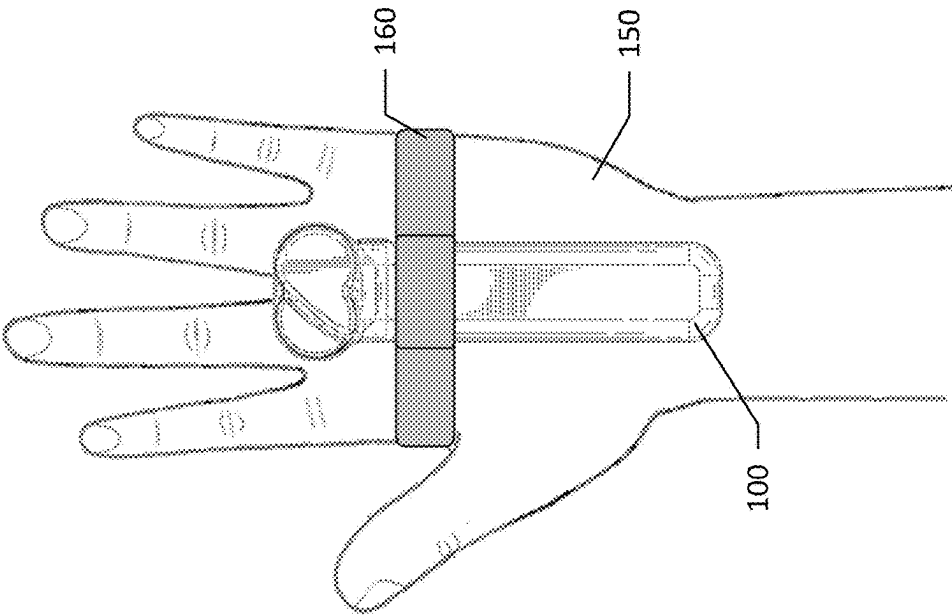


FIG. 4

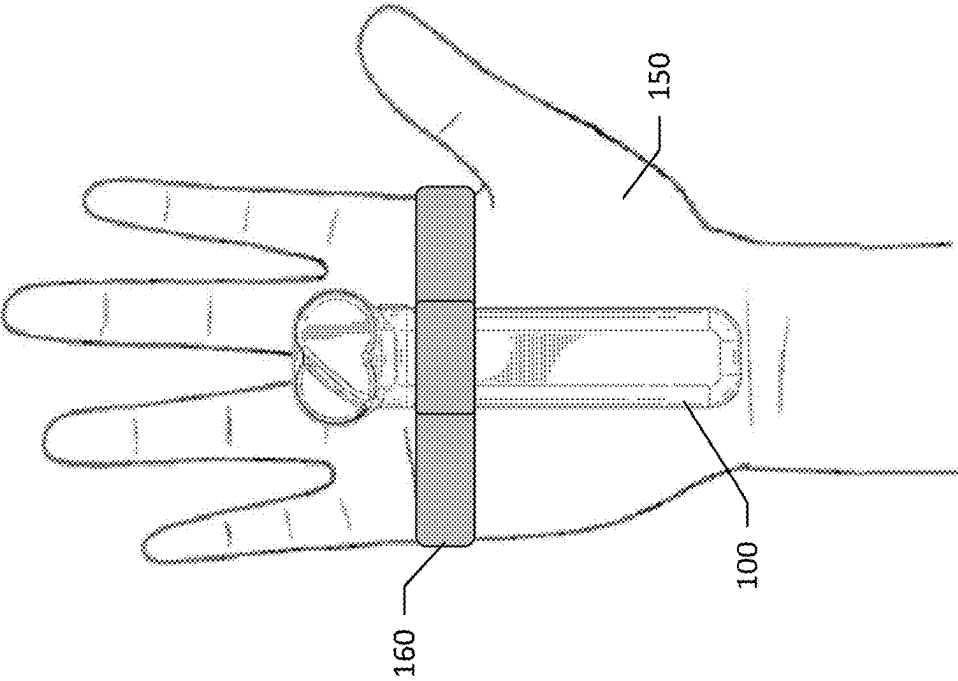


FIG. 5

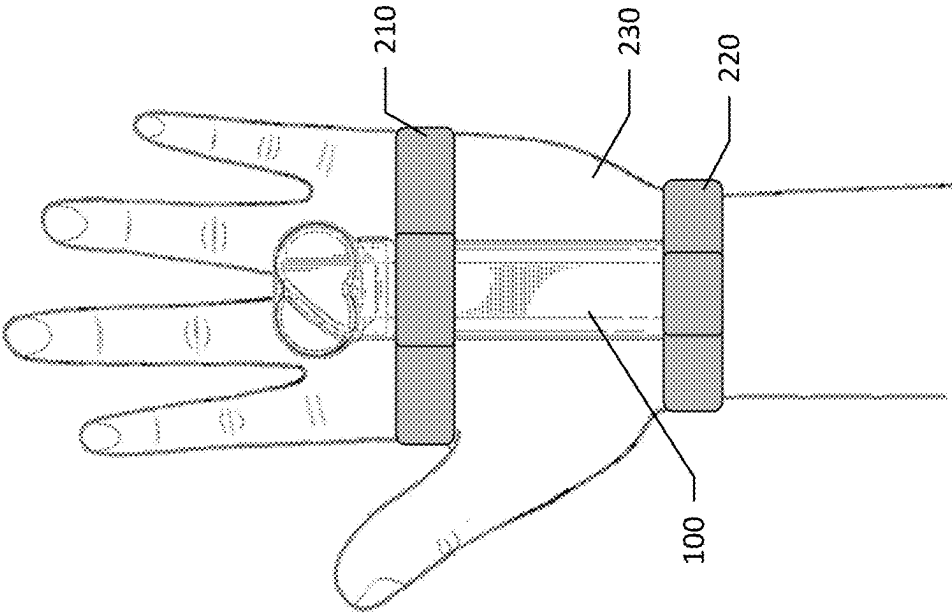


FIG. 6

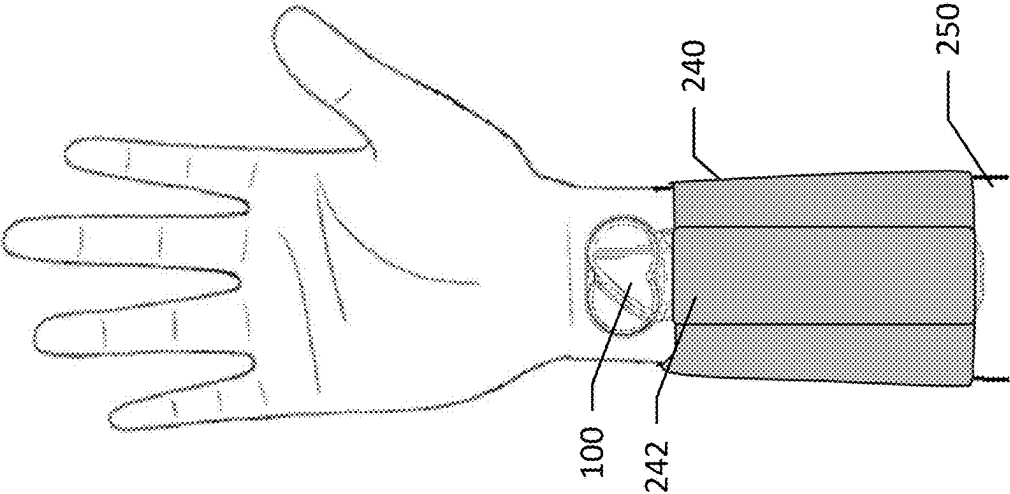


FIG. 7

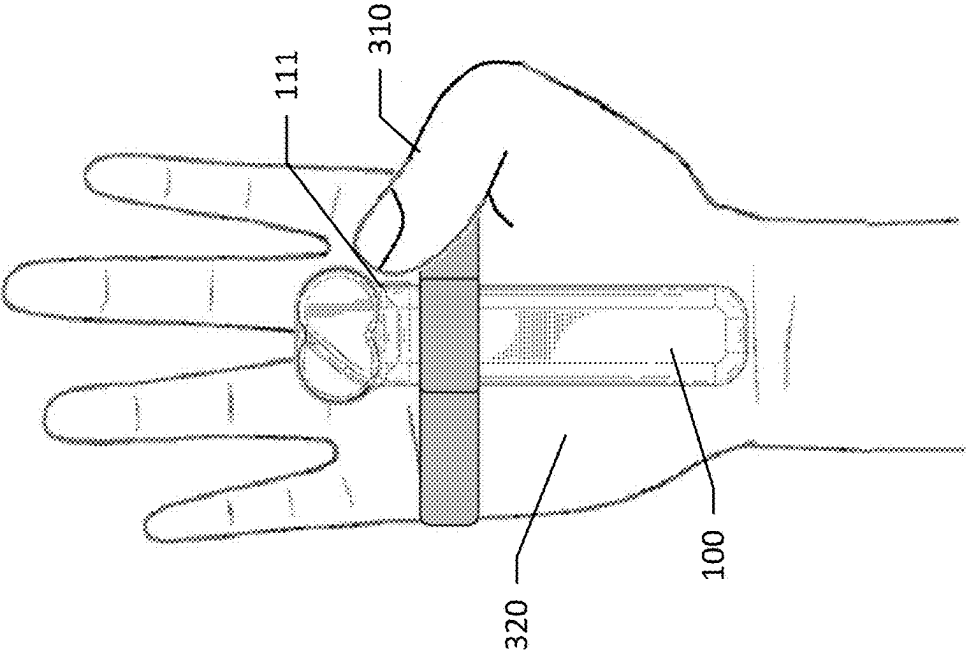


FIG. 8

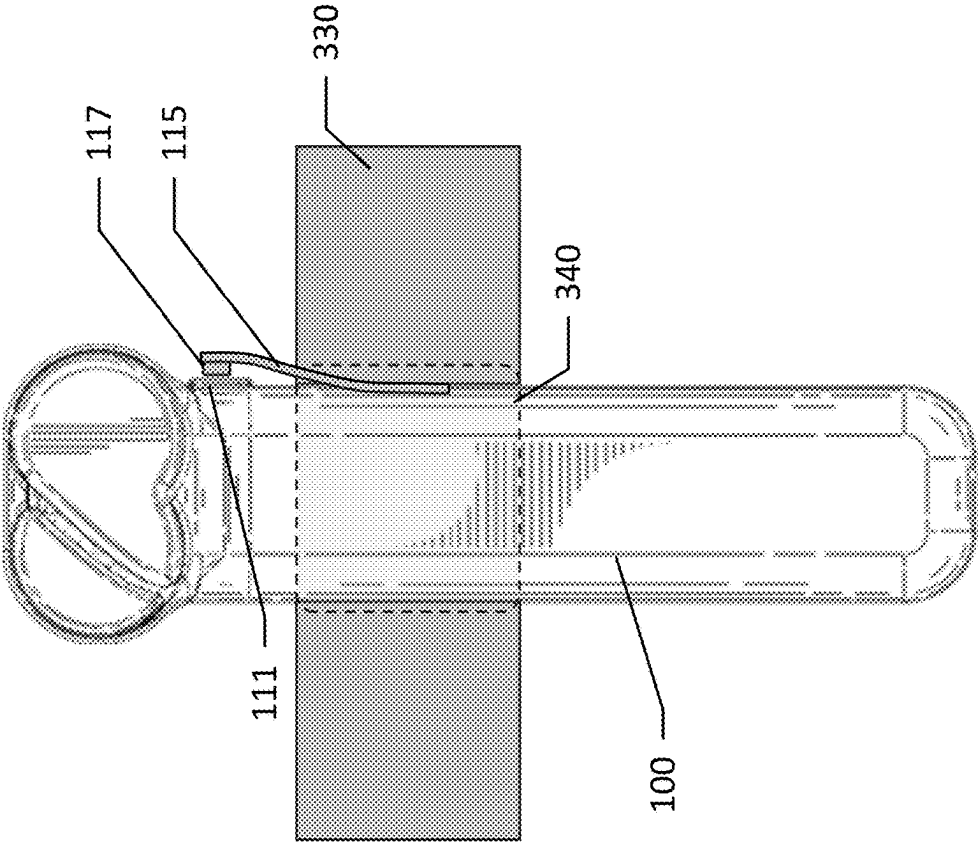


FIG. 9

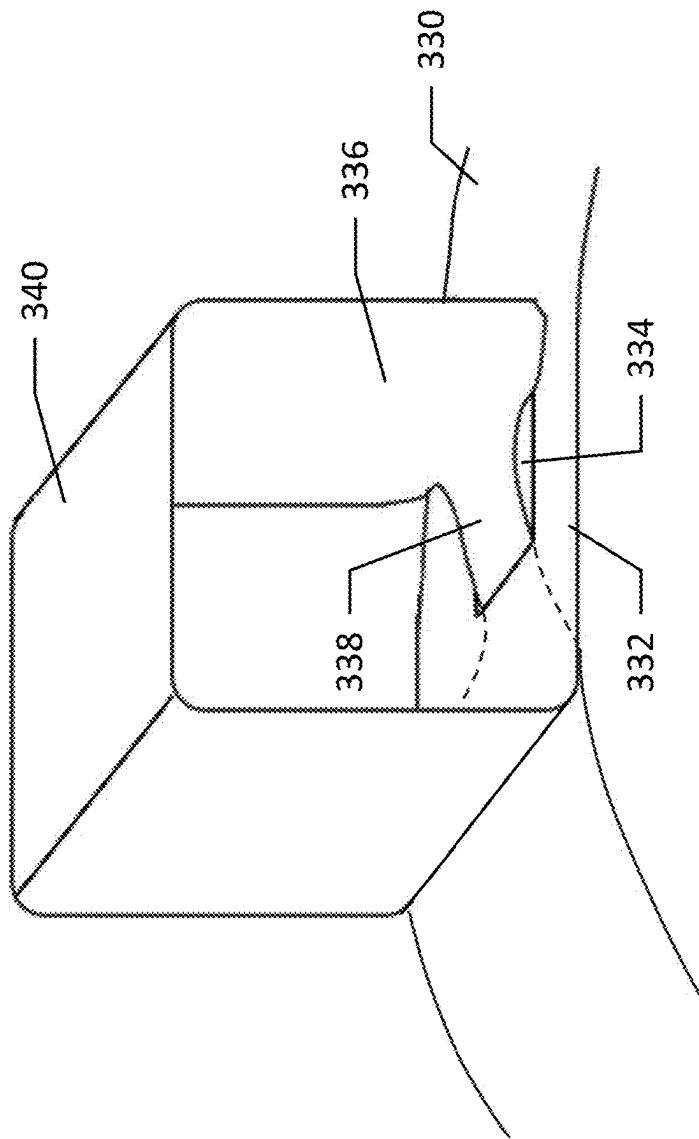


FIG. 10

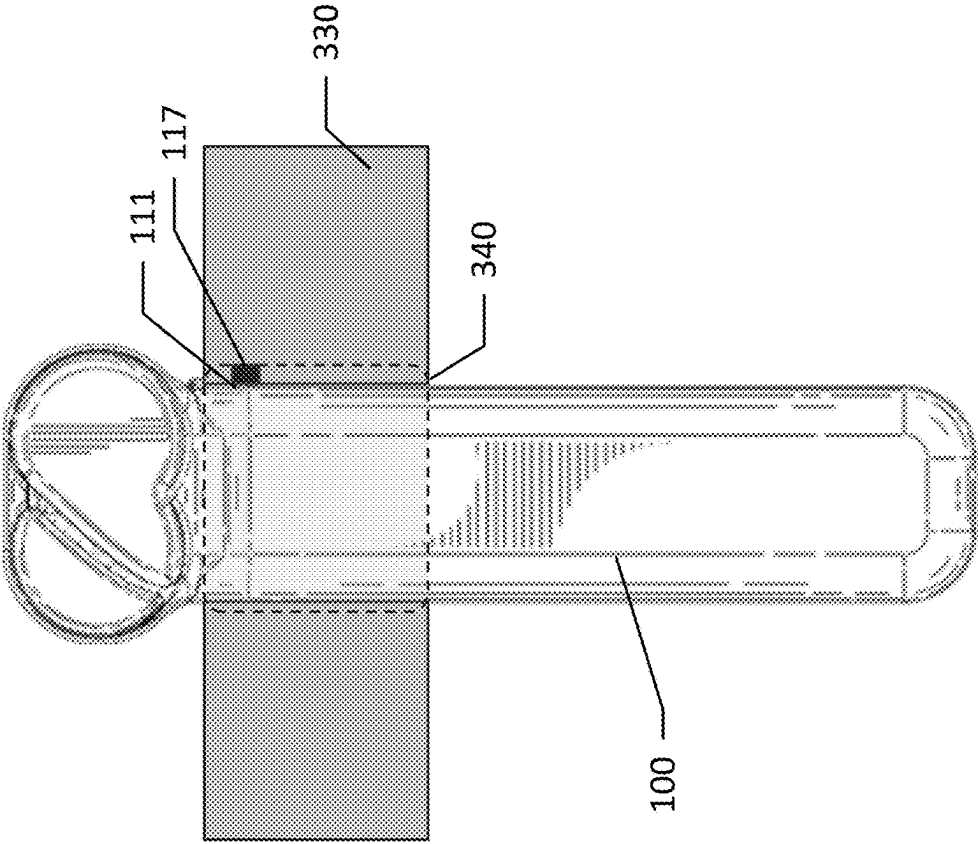


FIG. 11

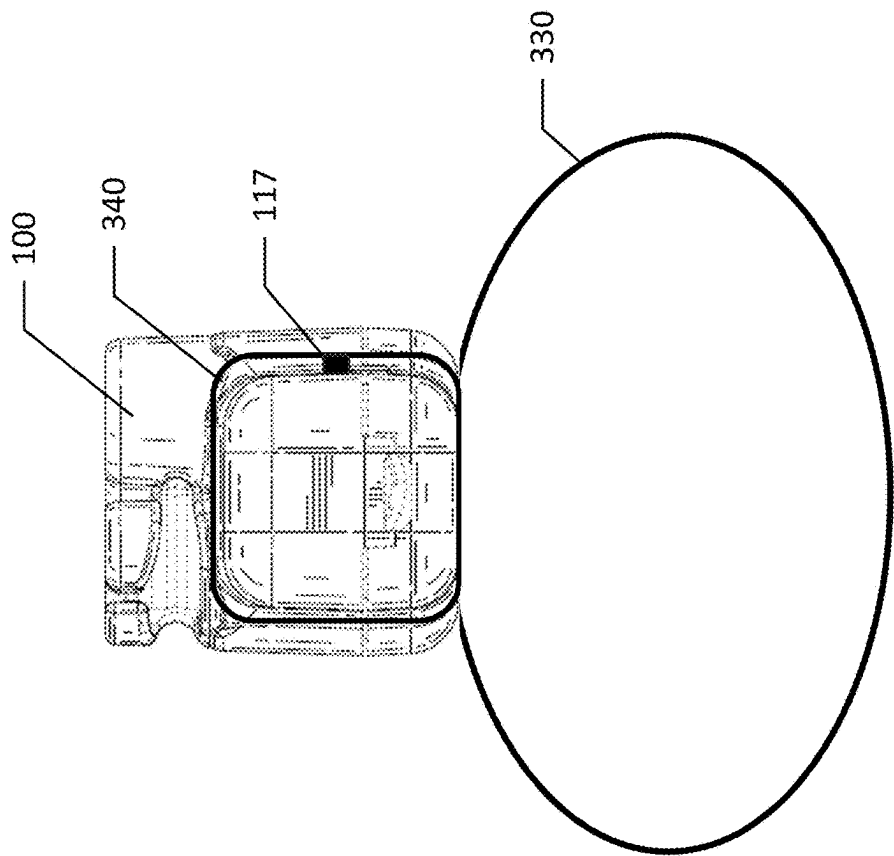


FIG. 12

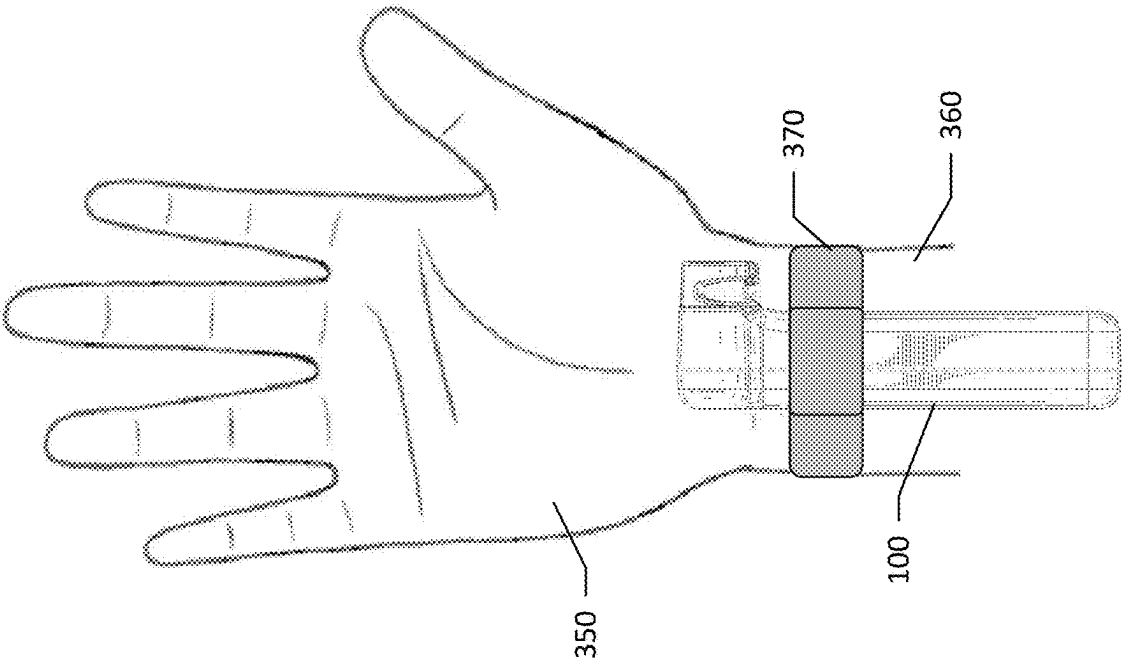


FIG. 13

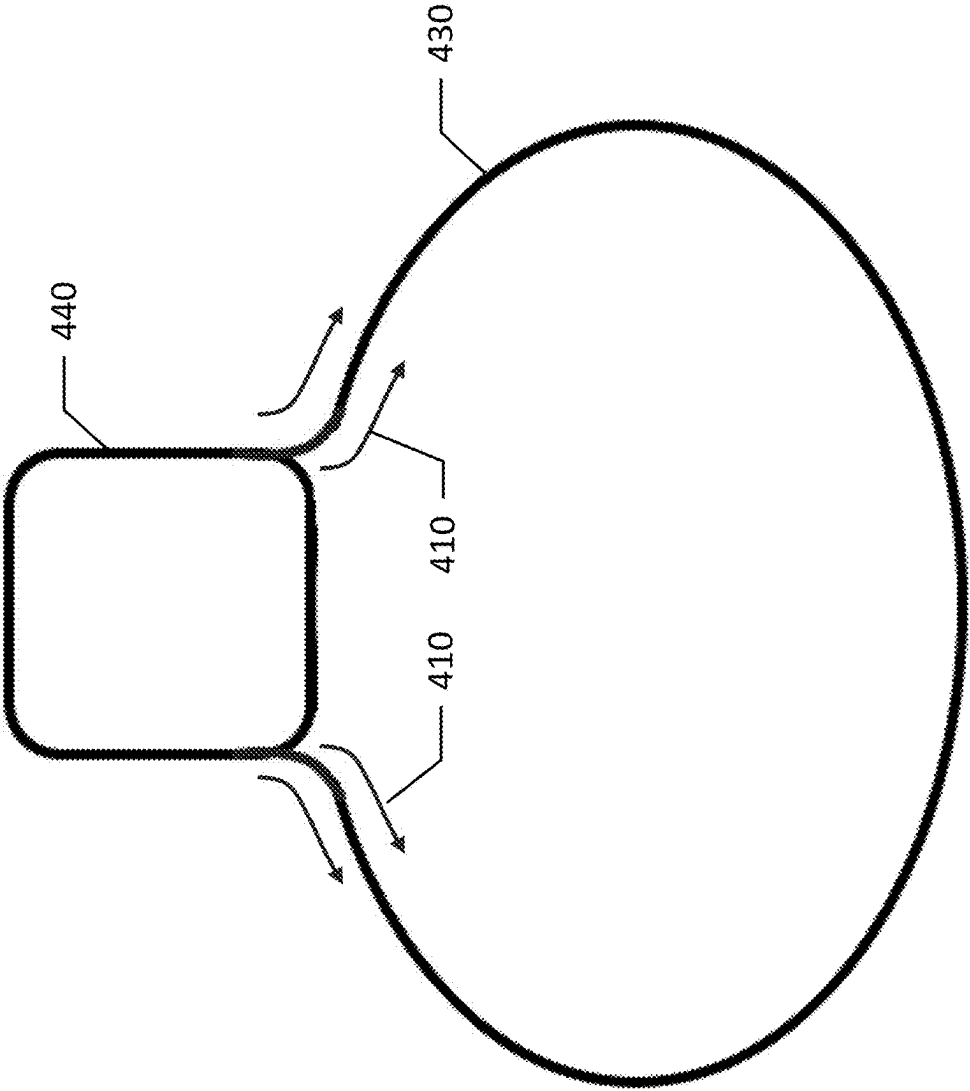


FIG. 14

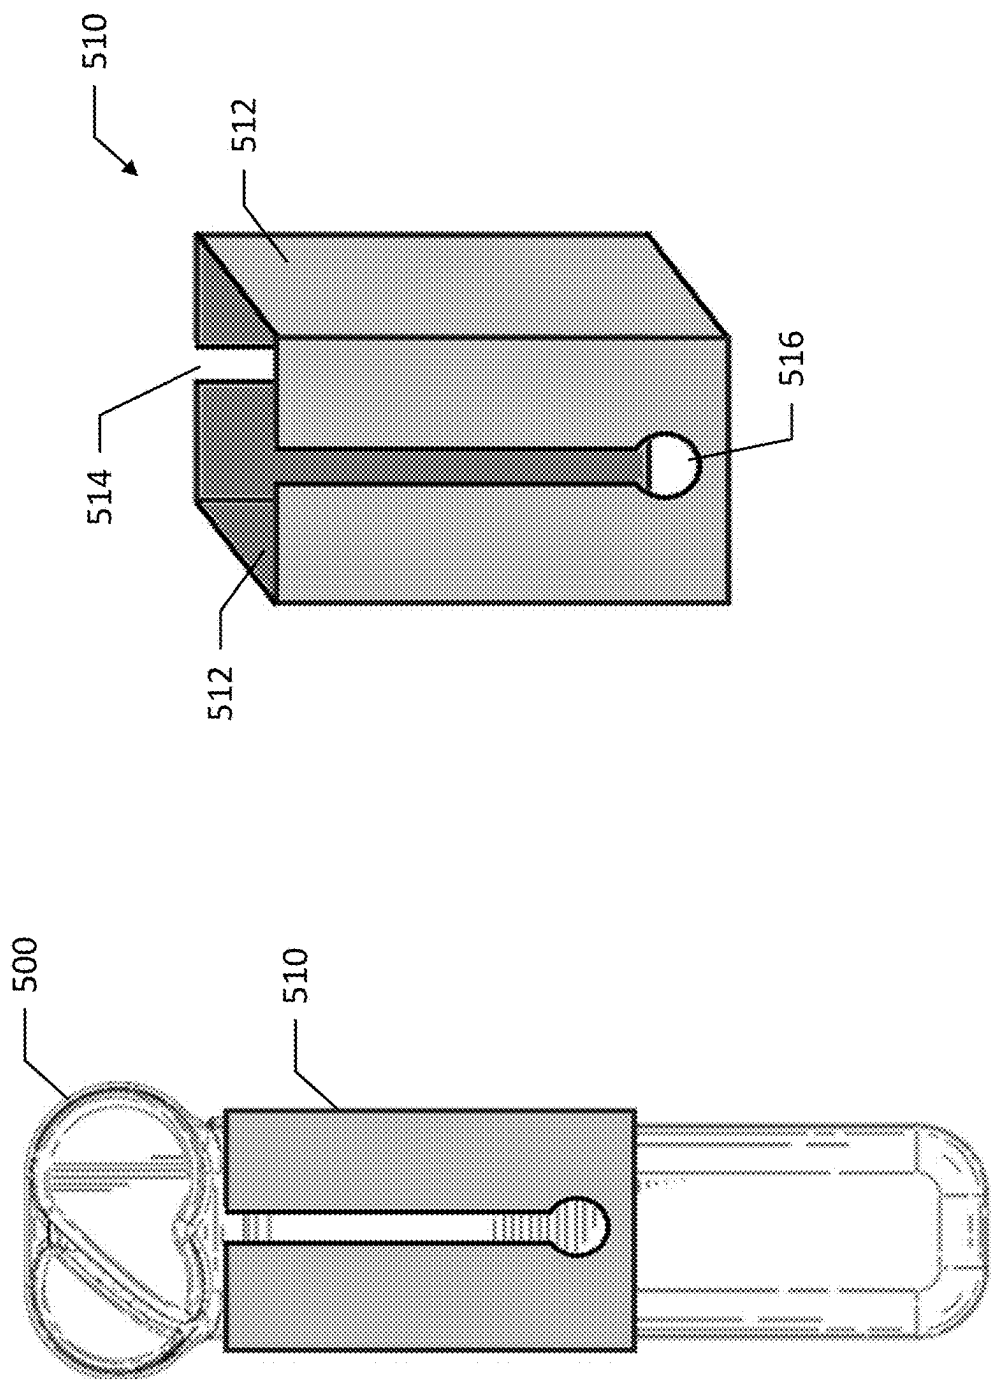


FIG. 15

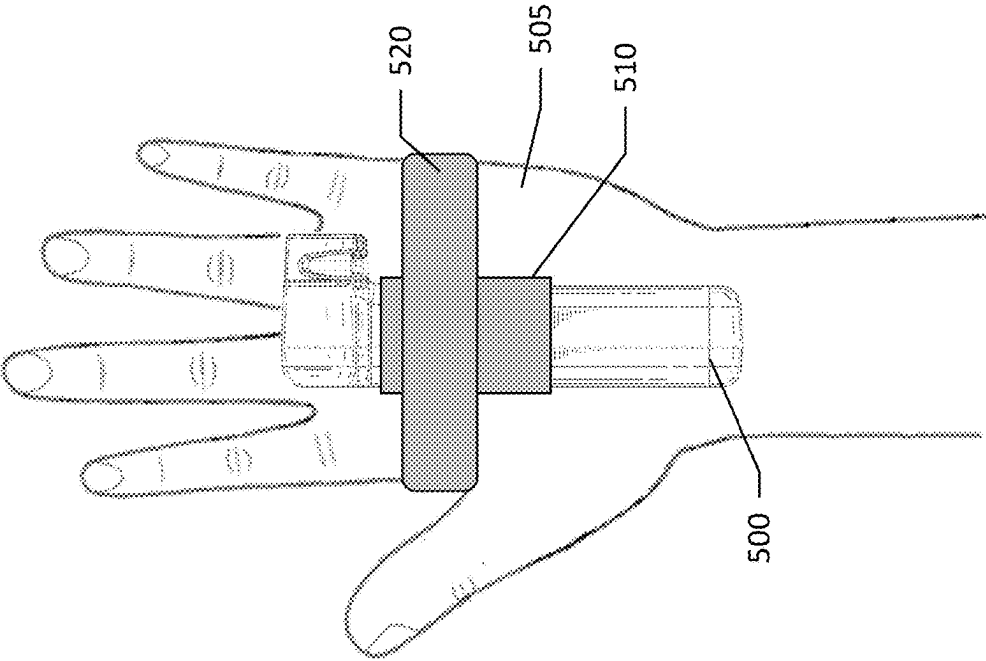


FIG. 16

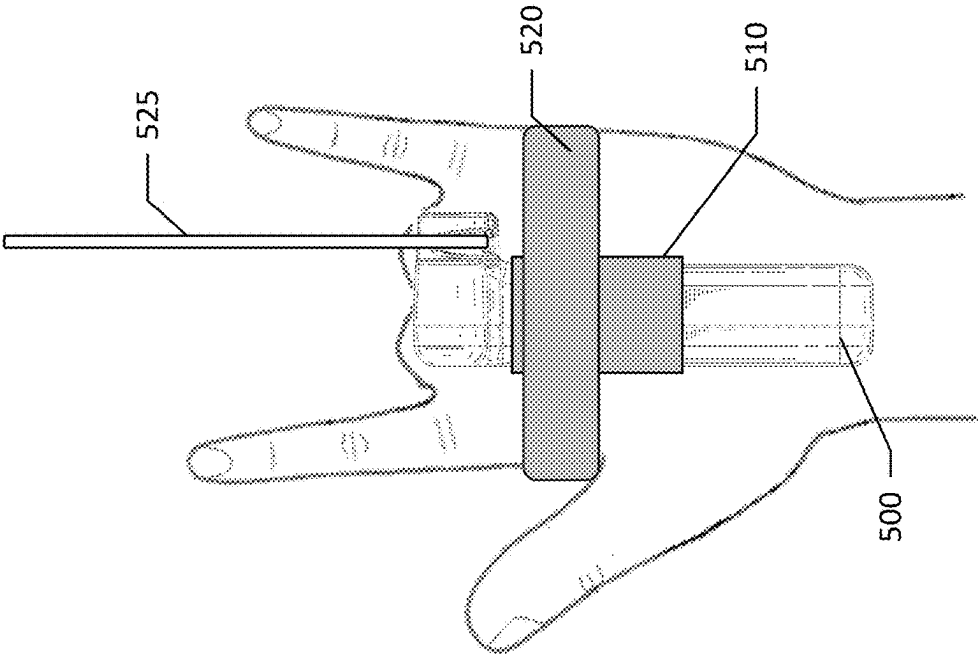


FIG. 17

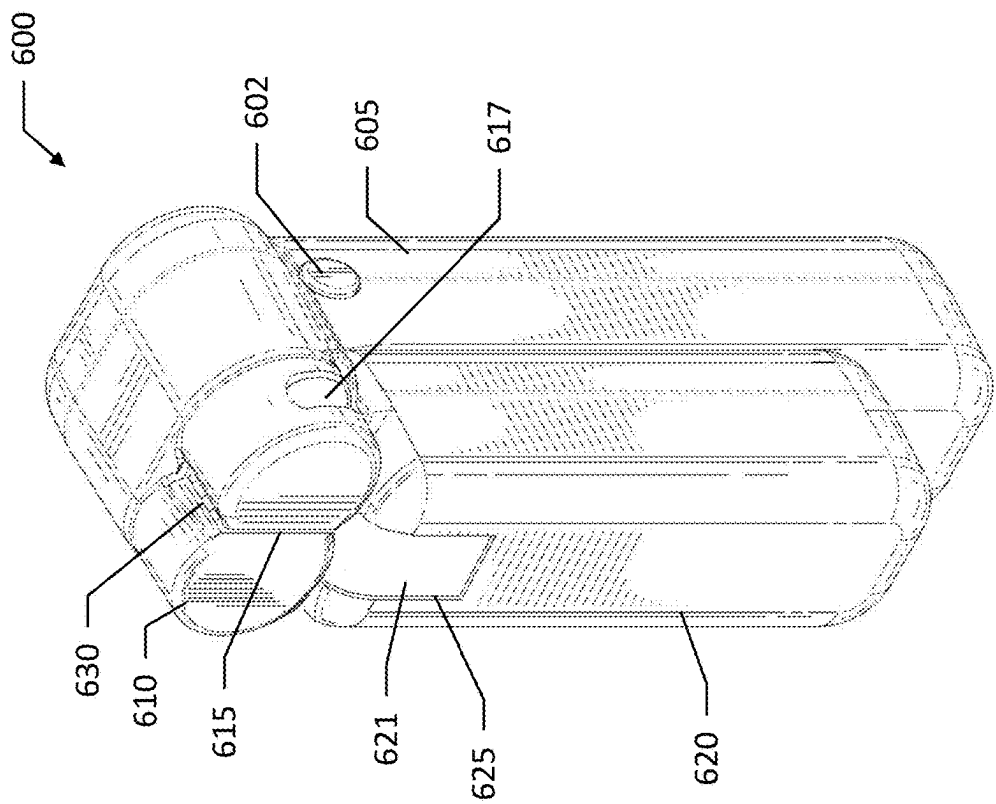


FIG. 18

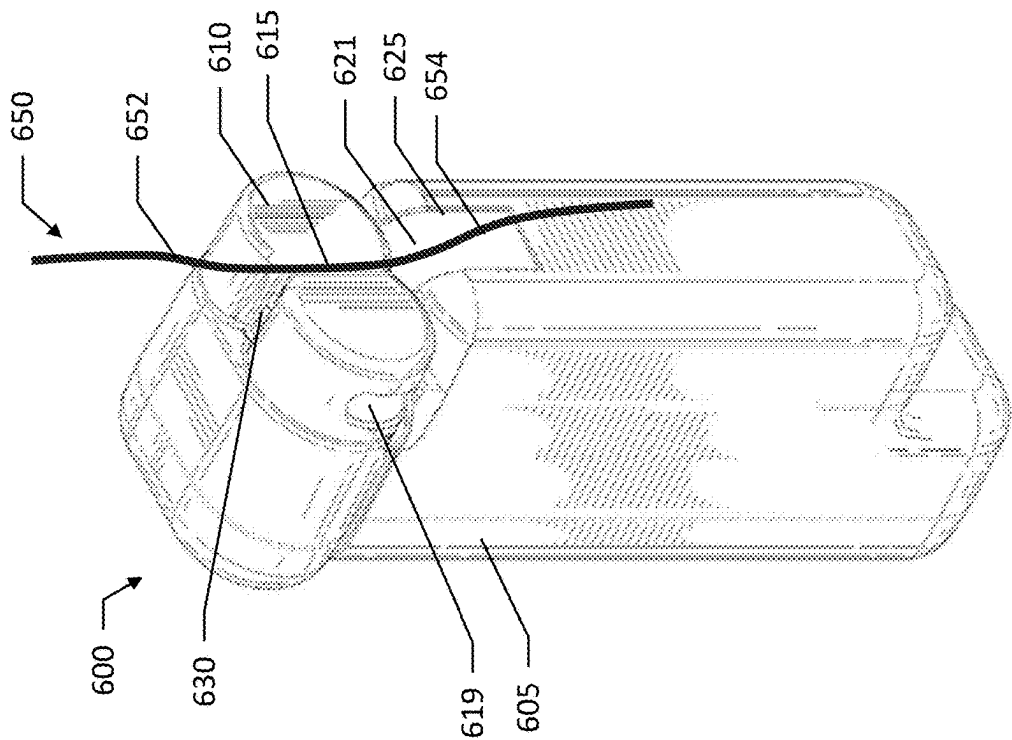


FIG. 19

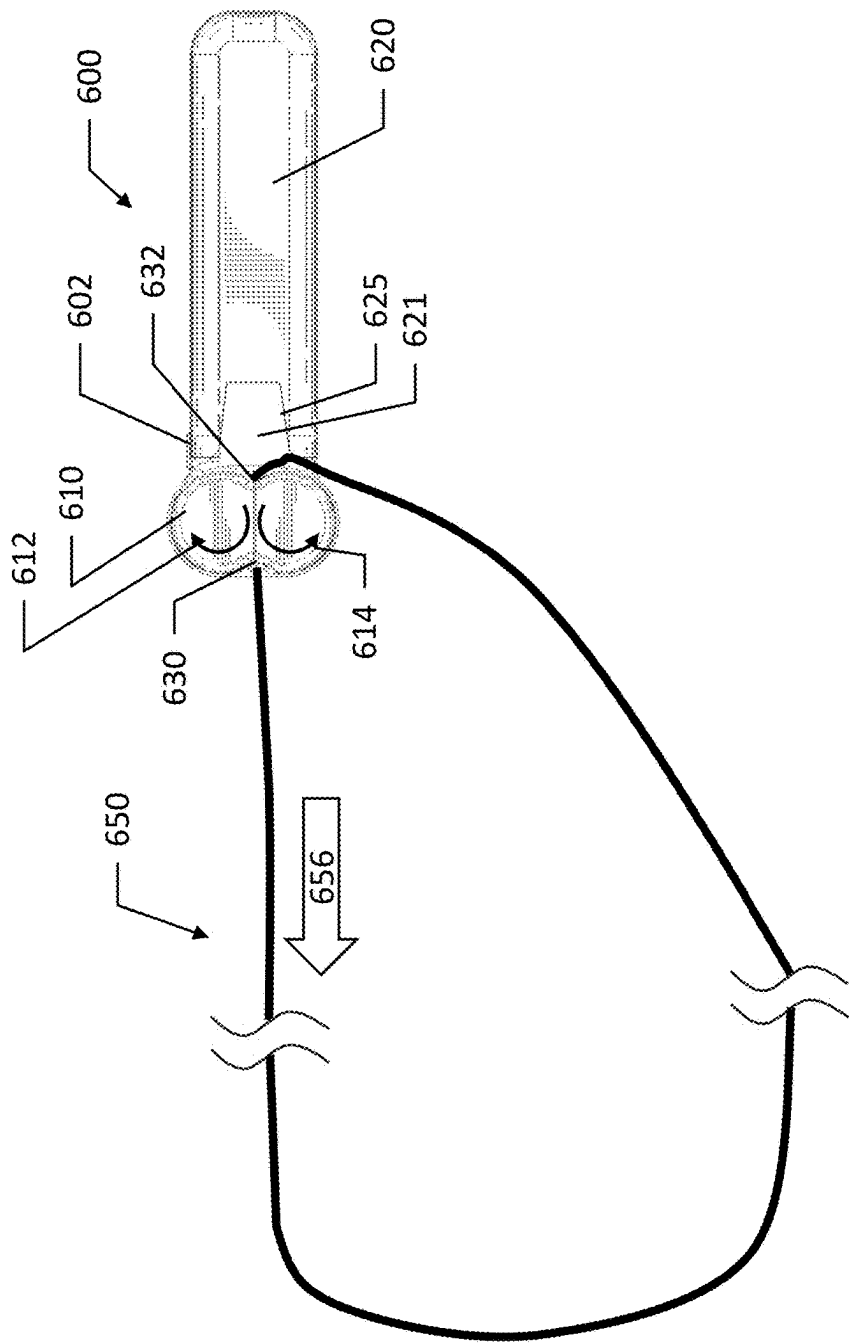


FIG. 20

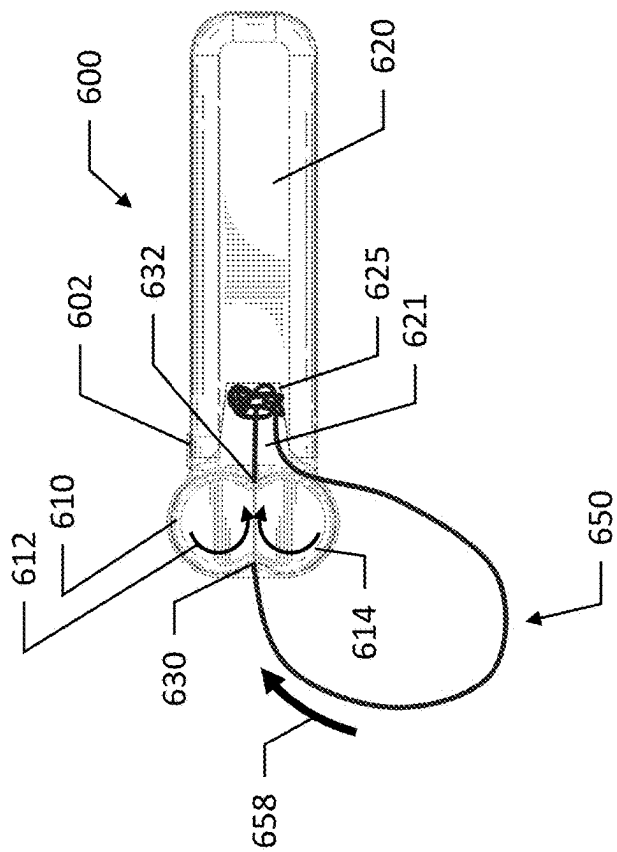


FIG. 21

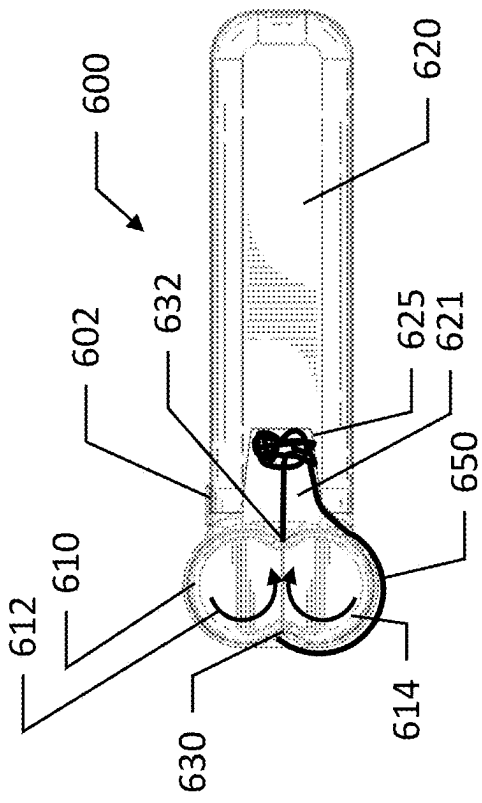


FIG. 22

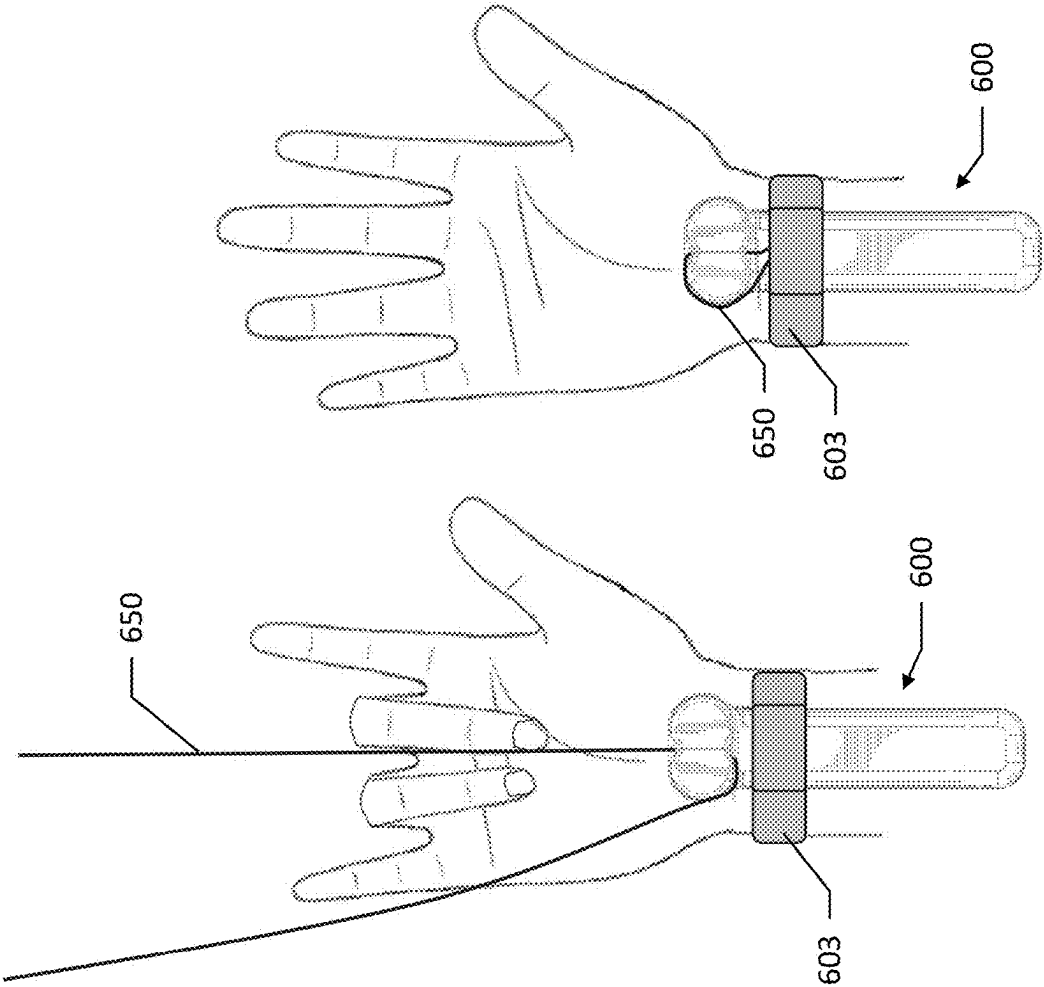


FIG. 23

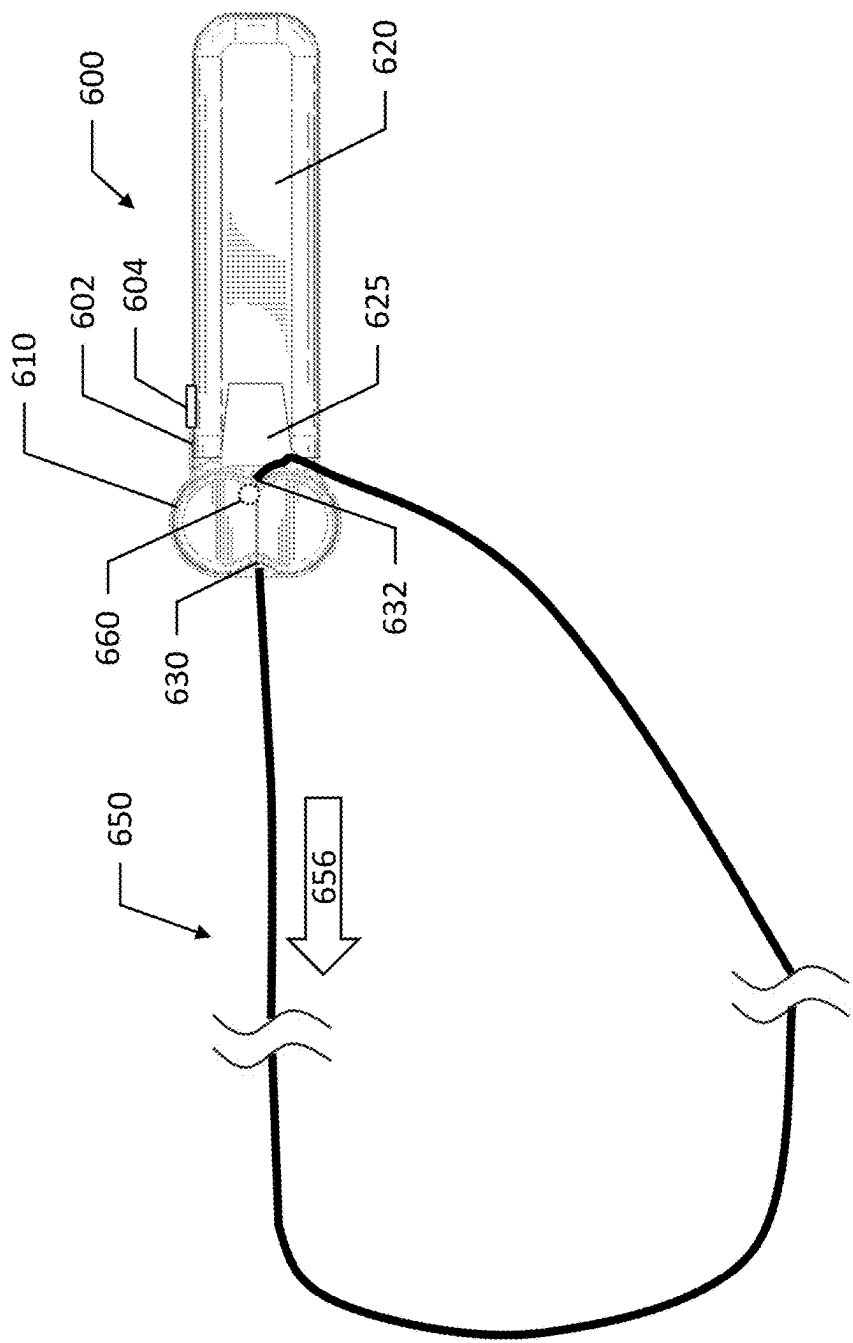


FIG. 24

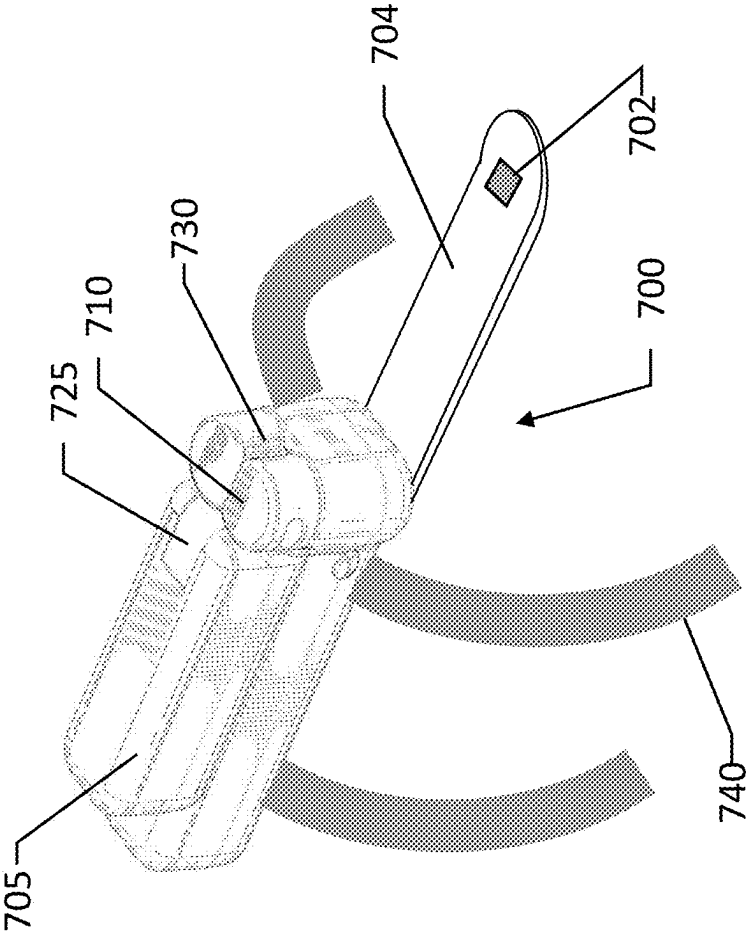


FIG. 25

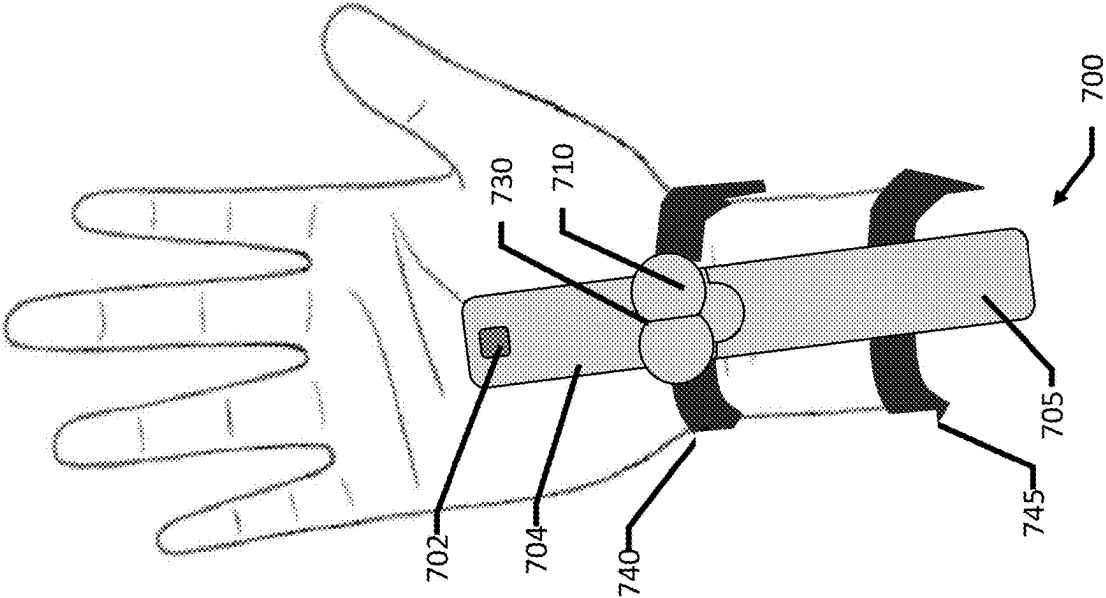


FIG. 26

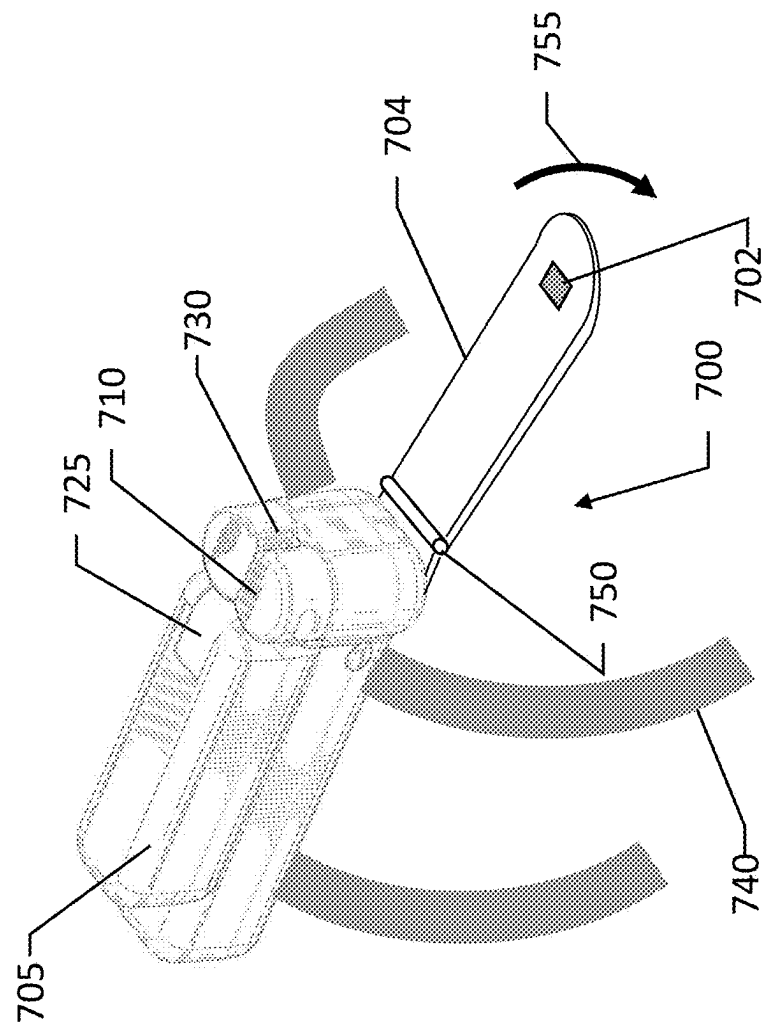


FIG. 27

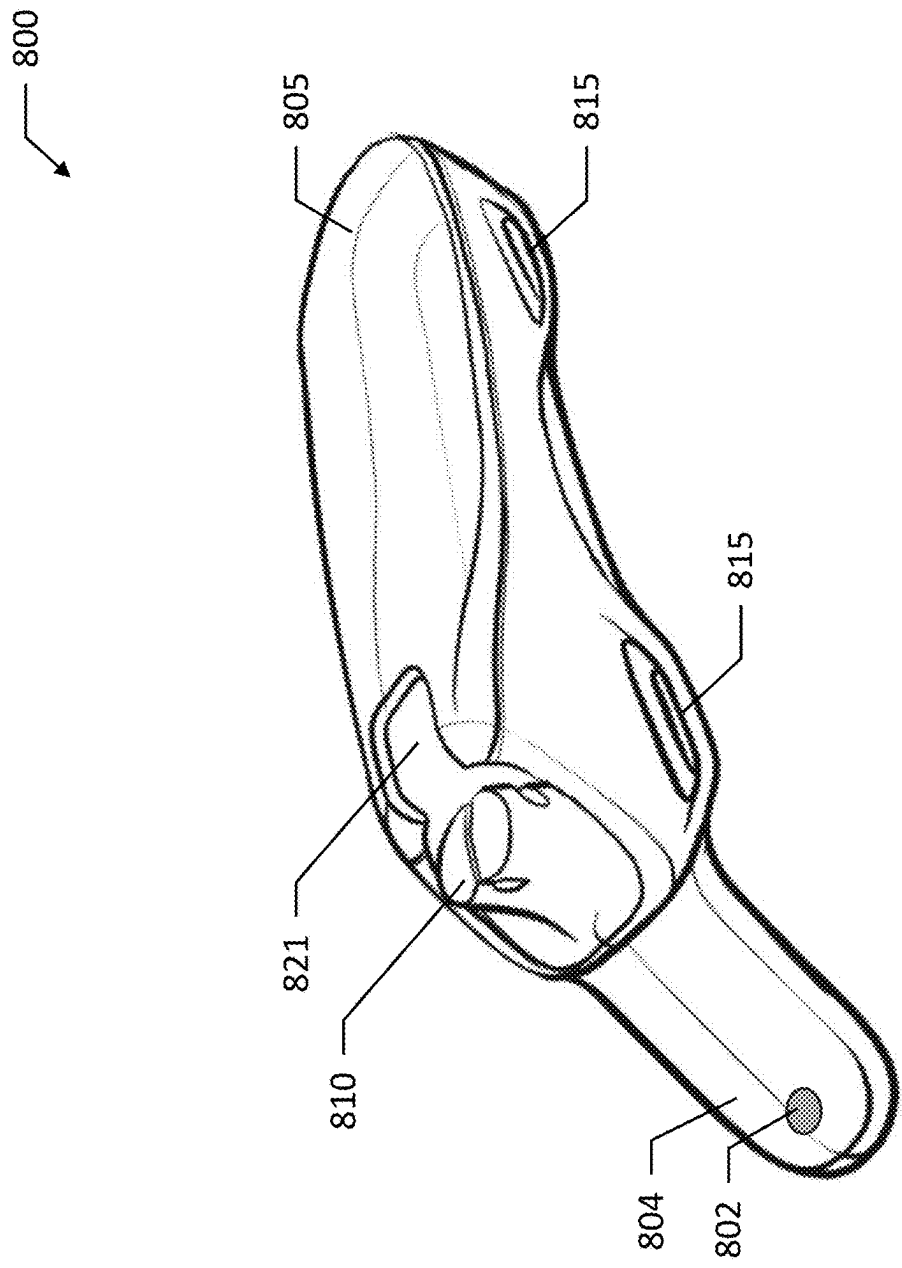


FIG. 28

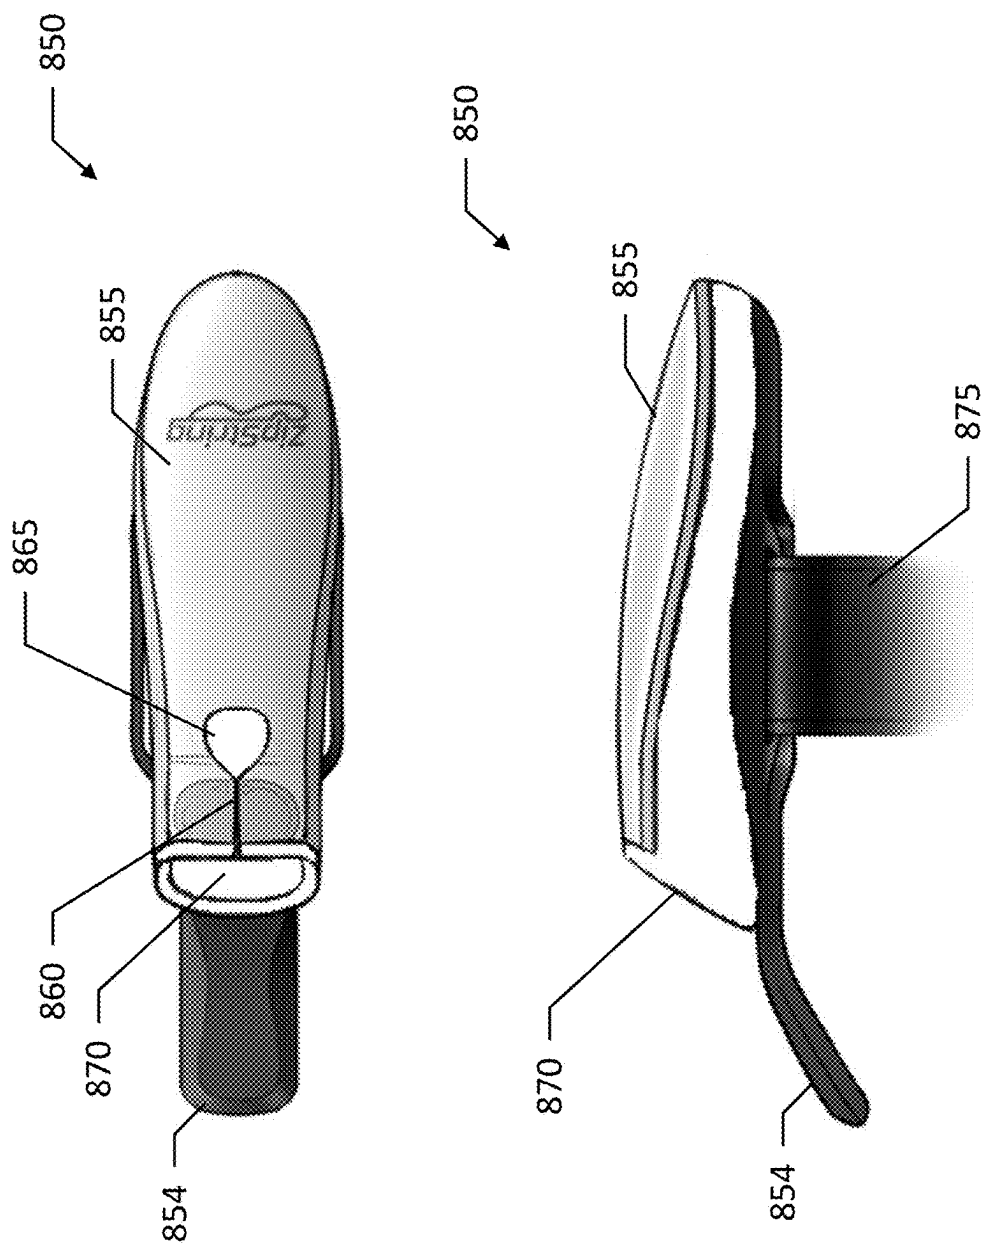


FIG. 29

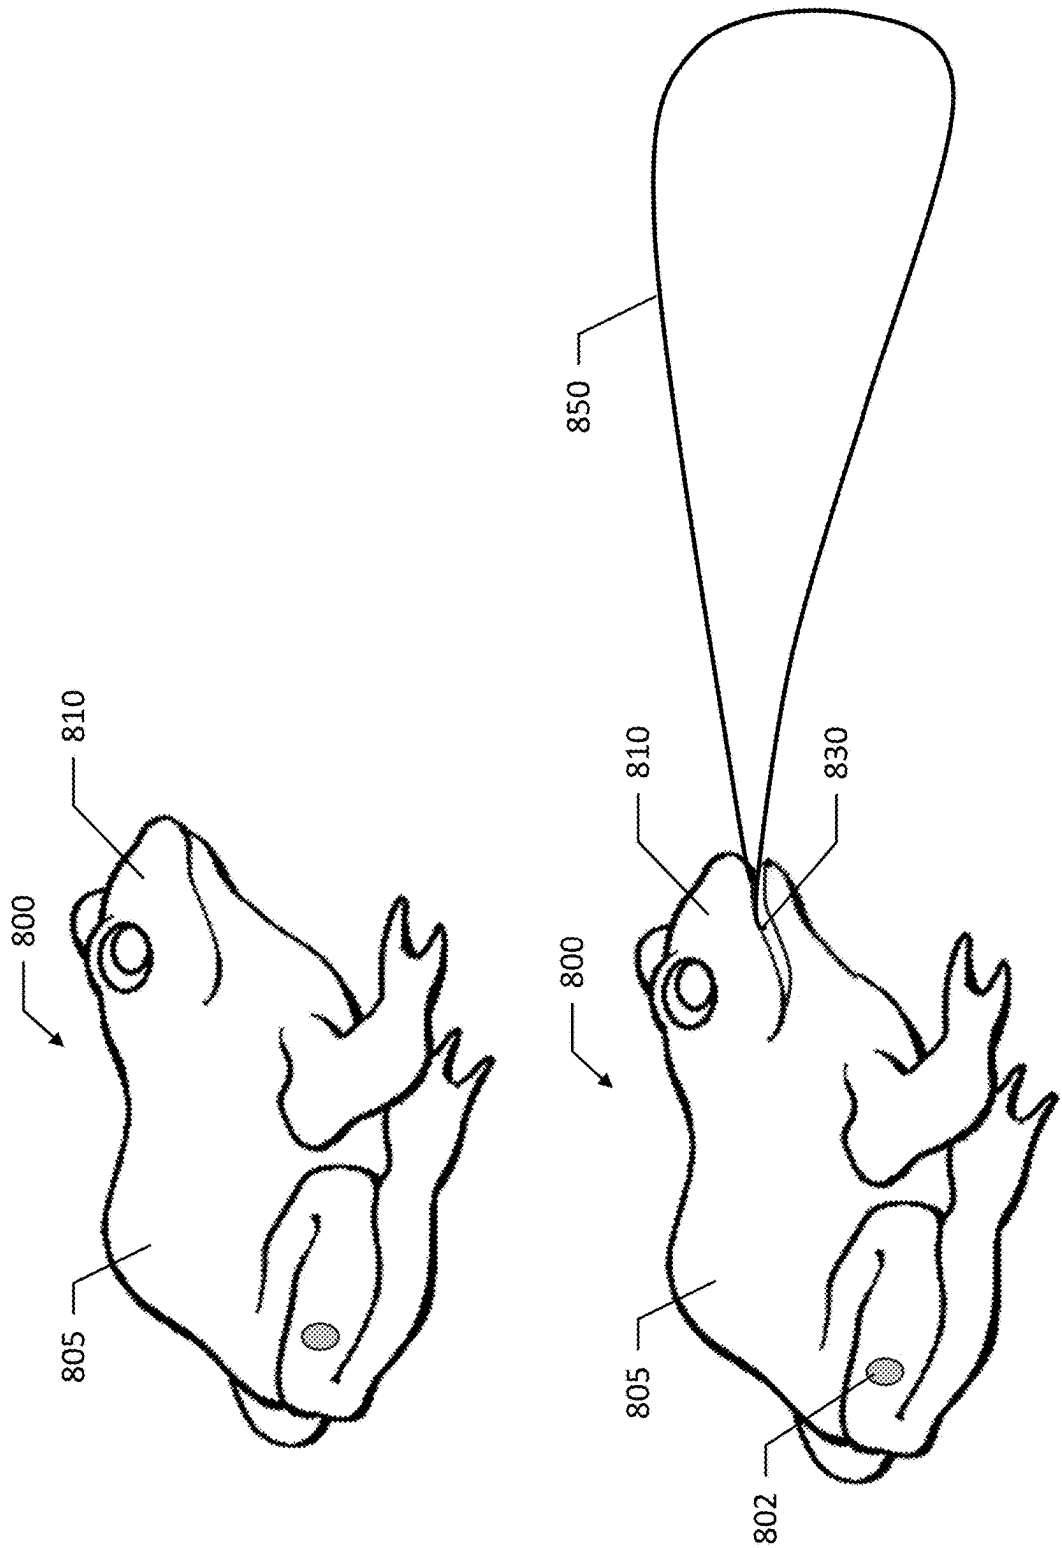


FIG. 30

STRING SHOOTING DEVICE

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application claims priority to U.S. Provisional Application No. 63/692,214, filed on Sep. 9, 2024, and U.S. Provisional Application No. 63/562,770, filed on Mar. 8, 2024, the contents of each of which are hereby incorporated by reference in their entirety.

TECHNOLOGICAL FIELD

[0002] Example embodiments relate generally to a string shooting device, and more particularly, to a string shooting device that is wearable and operable by hand gestures or body movement.

BACKGROUND

[0003] String shooters that propel a flexible member such as a rope or string are known in the art. One type of string shooter is one that shoots a length of string out of a free-standing housing including a motor over a distance before landing. This type of string shooter is disclosed in <https://www.youtube.com/watch?v=VRoyuOu5zhg> and in use, the housing is supported on a surface, such as a table, and shoots a single length of a weighted string from the housing a certain distance. The string is weighted to enhance the distance that the string travels before landing. Once the string lands, it must be physically retrieved and then reloaded by hand to repeat the process.

[0004] Another known string shooting device utilizes a looped string that is continuously propelled through a pair of wheels to create sufficient lift to defy gravity and generate a continuous floating loop that can be manipulated by the user to do various aerial tricks. This type of string shooting device is available in a hand-held version that is disclosed in the following US patents, U.S. Pat. Nos. 11,674,774, 11,879,703, and 12,025,399, all of which are owned by the Applicant of the present invention. A larger, table-top version that creates a continuous floating loop, which is not intended to be hand-held for performing tricks is also known in the art, as disclosed in, for example <https://www.youtube.com/watch?v=8ybXZqIDXak>.

BRIEF SUMMARY

[0005] The present disclosure relates generally to a string shooting device, and more particularly, to a string shooting device including a body that is wearable and operable by hand gestures to propel, direct, and retract the string.

[0006] Embodiments provided herein include a device for propelling a string including: a body, a cavity; a pair of wheels supported by the body, where at least one wheel of the pair of wheels is a driven wheel; an actuator to activate and/or change the direction of movement of the driven wheel, for example a switch, selector, relay, controller or other type of sensor that when in a first position or setting, the driven wheel of the pair of wheels rotates in a first direction, where when in a second position or setting, the driven wheel of the pair of wheels rotates in a second direction, opposite the first direction.

[0007] According to some embodiments the pair of wheels are configured to propel a looped string in a direction away from the body of the device in response to the driven wheel rotating in the first direction. According to certain embodi-

ments the pair of wheels are configured to propel the looped string toward the cavity in response to the driven wheel rotating in the second direction. The driven wheel of the pair of wheels of an example embodiment rotates in the second direction when the actuator is in the second position until at least a portion of the looped string is received within the cavity. In one exemplary embodiment, after being received within the cavity, at least a portion of the looped string remains between the pair of wheels.

[0008] According to some exemplary embodiments the driven wheel of the pair of wheels rotates in the second direction when the actuator is moved to the second setting or position for a predetermined amount of time. The driven wheel of the pair of wheels of an example embodiment rotates in the second direction when the actuator is in the second position until a torque force on the driven wheel exceeds a predetermined amount or threshold, at which time it stops rotating. According to some embodiments the pair of wheels are positioned on the body to rotate about parallel axes with a gap between the pair of wheels.

[0009] The device of some embodiments further includes a band attached to the body and configured to be removably attached to a body part of a user. According to some embodiments the actuator is a switch that is operable between the first position and the second position in response to a gesture made by a hand of the user. According to certain embodiments the gesture comprises a movement of at least one finger relative to other fingers of a hand of the user. The body of some embodiments includes an extension, where the band is worn about a wrist of the user in order to position the extension in a palm of the hand of the user, and wherein the switch is positioned on the extension.

[0010] Embodiments provided herein include a device for propelling a string including: a body including a cavity; a pair of wheels supported by the body, where at least one wheel of the pair of wheels is a driven wheel; an actuator configured to control the direction of the driven wheel between a first position wherein the driven wheel rotates in a first direction and a second position wherein the driven wheel rotates in a second direction, opposite the first direction; and a looped string, where the pair of wheels are configured to propel the looped string away from the body when the driven wheel rotates in the first direction, and where the pair of wheels are configured to drive the looped string into the cavity in response to the driven wheel rotating in the second direction.

[0011] The device of some embodiments further includes a band attached to the body to the device for propelling a looped string and configured to attach to a wrist of a user. The body of some embodiments includes an extension, where in response to the wrist band attached to the wrist of the user, the extension is received in a palm of the hand of the user, and wherein the actuator is positioned on the extension. According to some embodiments the pair of wheels are configured to drive the looped string into the cavity in response to the actuator moving the driven wheel into a direction toward the cavity until the looped string is received within the cavity. According to certain embodiments the pair of wheels are configured to drive the looped string into the cavity in response to the actuator being in a second position for a predetermined amount of time.

[0012] According to some embodiments the pair of wheels are configured to drive the looped string into the cavity in response the driven wheel rotating in the second direction

until a torque force on the driven wheel exceeds a predetermined amount or threshold. The pair of wheels of some embodiments are positioned on the body to rotate about parallel axes with a gap between the pair of wheels.

[0013] Embodiments provided herein include a method of propelling a string including: receiving an indication that an actuator is in a first position; propelling a looped string in a first direction by a pair of wheels supported by a body in response to the actuator being in the first position, wherein the first direction is away from the body; receiving an indication that the actuator is in a second position; propelling the looped string in a second direction, opposite the first direction by at least the driven wheel supported by the body in response to the actuator being in the second position, wherein the second direction is opposite the first and direct the string into a cavity associated with the body. According to some embodiments the body is configured to be attached to a user, and where activation of the actuator to move the driven wheel between the first direction and the second direction is performed by a gesture.

[0014] Embodiments provided herein include a wearable device for propelling a string including: a string shooting device; a band configured to attach to a body part of a user; and a holder, where the holder is secured by the band to the user; where, in response to the body part of the user being in a first position, the string shooting device is not actuated, and where in response to the body part of the user being in a second position, the string shooting device is actuated. According to some embodiments, the body part of the user includes a hand, where the first position comprises an open hand, and where the second position comprises an at least partially closed position.

[0015] According to certain embodiments, the holder includes a sleeve, where the string shooting device is received within the sleeve and the sleeve is attached to the body part of the user, and where in response to the body part of the user being in the second position, the sleeve is compressed and presses against an actuation switch of the string shooting device. According to some embodiments, the holder comprises a loop of the band, where the string shooting device is received within the loop and the band is attached to the body part of the user, and where in response to the body part of the user being in the second position, the loop is compressed and presses, at least indirectly, against an actuation switch of the string shooting device.

BRIEF DESCRIPTION OF THE DRAWINGS

[0016] Having thus described embodiments of the disclosure in general terms, reference will now be made to the accompanying drawings, which are not necessarily drawn to scale. The following drawings are illustrative of exemplary embodiments of the present disclosure and do not limit the scope of the present disclosure. Moreover, the drawings are intended for use in conjunction with the explanations provided herein. Example embodiments of the present disclosure will hereinafter be described in conjunction with the appended drawings.

[0017] FIG. 1 illustrates a profile view of a string shooter propelling a looped string according to an example embodiment of the present disclosure;

[0018] FIG. 2 illustrates a string shooting device as a wrist worn device secured to a back of a user's wrist according to an example embodiment of the present disclosure;

[0019] FIG. 3 illustrates a string shooting device as a wrist worn device secured to the front of a user's wrist according to an example embodiment of the present disclosure;

[0020] FIG. 4 illustrates another embodiment of a string shooting device as worn on a back of a hand according to an example embodiment of the present disclosure;

[0021] FIG. 5 illustrates yet another embodiment of a string shooting device as worn on the front of a hand and attached to the hand by a band according to an example embodiment of the present disclosure;

[0022] FIG. 6 illustrates a string shooting device worn by a hand using a palm band and a wrist band according to an example embodiment of the present disclosure;

[0023] FIG. 7 illustrates a string shooting device worn by a forearm using a sleeve band according to an example embodiment of the present disclosure;

[0024] FIG. 8 illustrates how a palm-worn string shooting device can be actuated, where a user folds their thumb into their palm and presses a switch of the device to actuate the propulsion of the string according to an example embodiment of the present disclosure;

[0025] FIG. 9 illustrates a mechanism for actuating the string shooting device that does not require the use of a finger to depress the switch according to an example embodiment of the present disclosure;

[0026] FIG. 10 illustrates a portion of the band and loop of the embodiment of FIG. 9, with the string shooting device removed for ease of understanding;

[0027] FIG. 11 illustrates another example embodiment in which the pad is not attached to an arm as in FIG. 9 but is instead attached inside the loop according to an example embodiment of the present disclosure;

[0028] FIG. 12 illustrates the embodiment of FIG. 11 viewed from a bottom of the string shooting device according to an example embodiment of the present disclosure;

[0029] FIG. 13 illustrates a different orientation of the string shooting device relative to a wrist of a wearer according to an example embodiment of the present disclosure;

[0030] FIG. 14 illustrates another embodiment of a configuration of a band for applying pressure to a loop according to an example embodiment of the present disclosure;

[0031] FIG. 15 illustrates a string shooting device and a sleeve into which the string shooting device is received according to an example embodiment of the present disclosure;

[0032] FIG. 16 illustrates the embodiment of FIG. 15 as worn by a user around a hand according to an example embodiment of the present disclosure;

[0033] FIG. 17 illustrates an example embodiment of a hand actuating the string shooting device and propelling the string by closing two fingers of the hand, which tensions the band and actuates the string shooting device according to an example embodiment of the present disclosure;

[0034] FIG. 18 illustrates a device including a cavity to hold retrieved looped string according to an example embodiment of the present disclosure;

[0035] FIG. 19 illustrates a loading technique for a device employing a cavity and an opening according to an example embodiment of the present disclosure;

[0036] FIG. 20 illustrates a device with a cavity for the looped string actively propelling the looped string according to an example embodiment of the present disclosure;

[0037] FIG. 21 illustrates a device with a cavity for the looped string as string is being retrieved into a cavity of the cavity according to an example embodiment of the present disclosure;

[0038] FIG. 22 illustrates the looped string fully retrieved into the cavity of the cavity according to an example embodiment of the present disclosure;

[0039] FIG. 23 depicts actuation of the device propelling the looped string and full retrieval of the looped string once actuation is ceased according to an example embodiment of the present disclosure;

[0040] FIG. 24 illustrates a device with a cavity for the looped string including a light source to illuminate at least a portion of a path of the string according to an example embodiment of the present disclosure;

[0041] FIG. 25 illustrates an embodiment of a wrist worn device for propelling looped string with a cavity for retrieved string according to an example embodiment of the present disclosure;

[0042] FIG. 26 illustrates another view of the embodiment of a wrist worn device for propelling looped string with a cavity for retrieved string according to an example embodiment of the present disclosure;

[0043] FIG. 27 illustrates another embodiment of a wrist worn device for propelling looped string according to an example embodiment of the present disclosure;

[0044] FIG. 28 illustrates an embodiment of a wrist worn device for propelling a looped string with a unitary housing according to an example embodiment of the present disclosure;

[0045] FIG. 29 illustrates another embodiment of a wrist worn device for propelling a looped string with a unitary housing according to an example embodiment of the present disclosure; and

[0046] FIG. 30 illustrates a device for propelling a looped string in the form factor of an animal according to an example embodiment of the present disclosure.

DETAILED DESCRIPTION

[0047] Some embodiments of the present invention will now be described more fully hereinafter with reference to the accompanying drawings, in which some, but not all, embodiments of the invention are shown. Like reference numerals refer to like elements throughout. For purposes of clarity, not every component may be labeled in every figure. Indeed, various embodiments of the invention may be embodied in many different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will satisfy applicable legal requirements.

[0048] As used herein, the term “or” is used in both the alternative and conjunctive sense, unless otherwise indicated. The term “along,” and similarly utilized terms, means near or on, but not necessarily requiring directly on an edge or other referenced location. The terms “approximately,” “generally,” and “substantially” refer to within manufacturing and/or engineering design tolerances for the corresponding materials and/or elements unless otherwise indicated. Any references to examples, embodiments, components, elements or acts of the device herein referred to in the singular may also embrace embodiments including a plurality, and any references in plural to any embodiment, component, element, or act herein may also embrace embodiments including only a singularity (and/or unitary

structure). References in the singular or plural form or unitary or separate components are not intended to limit the presently disclosed device, its components, acts, elements or how they are connected unless expressly stated. Thus, use of any such aforementioned terms, or similarly interchangeable terms, should not be taken to limit the spirit and scope of embodiments of the present invention.

[0049] The figures are not drawn to scale and are provided merely to illustrate some example embodiments of the inventions described herein. The figures do not limit the scope of the present disclosure or the appended claims. Several aspects of the example embodiments are described below with reference to example applications for illustration. It should be understood that numerous specific details, relationships, and methods are set forth to provide a full understanding of the example embodiments. One having ordinary skill in the relevant art, however, will readily recognize that the example embodiments can be practiced without one or more of the specific details or with other methods. In other instances, well-known structures and/or operations are not shown in detail to avoid obscuring the example embodiments.

[0050] Embodiments of the present disclosure are designed to be used in toys or gadgets that propel a continuous loop of string around a mechanically driven drive wheel at a fast enough rate in order that the string is propelled and climbs into the air in order to maintain a sufficient distance from the ground to perform tricks. The device is configured so that it may be handheld and/or to rest on or in the hand in order to allow for dexterity in order to perform tricks. These toys or gadgets are referred to herein as string shooters, or looped string shooters. Embodiments of the present disclosure employ the use of a string that has high surface area derived from threads, fibers or texture which radiate out from the surface of the string. When viewed closely the string could be described as “fuzzy”. While such string shooters can be hand-held, embodiments described herein provide a holder for the string shooter that renders the string shooter wearable and also discloses embodiments where the string shooter includes an integrated holder configured for wearing during operation. Further, embodiments of the string shooter of example embodiments described herein is operable by gestures, without requiring a direct actuation of the string shooter for operation. Embodiments described herein generally relate to string shooting devices, such as the string shooting device of U.S. Pat. No. 11,674,774, application Ser. No. 18/056,567, entitled String Shooting Device, the contents of which are hereby incorporated by reference in their entirety.

[0051] Embodiments of the present disclosure include a string with radiating fibers or texture that when accelerated through the air, increases the air friction by expanding the turbulent air boundary layer around the string. Embodiments increase the air friction and when the string runs as a continuous loop, the string creates lift along the length of the string that is propelled outward toward the distal end of the loop. The distal end of the loop, as described herein, is the end of the looped string furthest from the drive wheel of the string shooter. Embodiments of the present disclosure generate a lift force for a rapidly moving looped string by expanding a boundary layer of turbulent air around the string. This expansion of the boundary layer is achieved by

threads radiating out from an axis along which the string extends creating friction with the air or “drag” as the string moves through the air.

[0052] Embodiments of the present disclosure also have an additional feature of increasing the additive drag that accumulates along a length of the string loop from the point where the outgoing portion of the string leaves a drive wheel of the string shooter, along the length of the string loop to the incoming portion of the string returns to the drive wheel. This increased drag effect enhances the differences between the incoming and outgoing portions of the string loop as it relates to the drive wheel.

[0053] This friction accumulation and tension differentiation creates an outgoing portion of the string from the drive wheel that is under low tension. The combination of low tension along with the lift described above creates a distinctive effect such that the string appears to float in the air. The string under these conditions becomes highly susceptible to motions from the user. For instance, movement of the string shooter by a user can introduce waves into the floating string.

[0054] FIG. 1 illustrates an example embodiment of a string shooting device 100 in which a looped string 101 having radiating threads 102 is propelled by a drive wheel 103 driven by a motor 104. The outgoing portion of string 109, in relatively low tension, travels to a distal end 107 of the looped string 101 and back to the drive wheel along incoming string 108 portion which is in relatively high tension to the proximal end 106 of the looped string. The body 105 houses the power source, such as a battery, to power the motor 104 that turns the drive wheel 103. The drive wheel 103, driven by the motor 104, provides rotational acceleration to the looped string 101 via frictional engagement between the looped string and the drive wheel. The device features at least one drive wheel, and a second wheel that may be an idling guide wheel, or may be a second drive wheel, driven in an opposite rotational direction as the first drive wheel to grasp and propel the string. Preferably, the looped string interfaces only with the drive wheel 103, a second wheel, and the air around the string. According to some embodiments, the string shooter may include one or more string guides to help maintain the string in the proper orientation relative to the drive wheel as the string is propelled.

[0055] While embodiments of the string shooting device 100 may be hand-held and actuated through direct manual actuation, such as by the press of a button, rotation of a dial, or flip of a switch, embodiments described herein are wearable and can be actuated by hand gestures that do not require direct manual actuation, although such wearable devices may also be manually actuated. A wearable device, as described herein, is a device that can be worn by a person where the device does not require grasping of the body of the device during use by a user's fingers. In this regard, the attachment or holding may be described as passive and the wearer does not need to think about actively holding the device with their fingers.

[0056] A wearable string shooting device 100 of embodiments provided herein can be worn in a variety of positions by a person, though an example embodiment illustrated herein may be arm-, wrist-, or hand-worn. Embodiments that are wearable on an arm, wrist, or hand provides a user with some degree of articulation of the worn device relative to the person's body. An arm, wrist, or hand can generate a wide

variety of motions and has many degrees of freedom that promote motion of a worn device which is desirable as detailed below.

[0057] FIG. 2 illustrates an example embodiment of a string shooting device 100 as a wrist worn device secured to a back of a user's wrist 130. As shown, the string shooting device 100 is secured to the wrist 130 by a band 140. The band 140 of the illustrated embodiment can be considered a “wrist band”; however, the band 140 may be adjustable in size and therefore worn at different positions along a user's arm and is not limited to being worn at the wrist. FIG. 3 illustrates an example embodiment of a string shooting device 100 as a wrist-worn device secured to the front of a user's wrist 130. The device is again secured to the user's wrist 130 with an adjustable band 140 that is removably attached to the user.

[0058] FIG. 4 illustrates another embodiment of a string shooting device 100 as worn on a back of a hand 150. The string shooting device 100 is secured to the hand via band 160. FIG. 5 illustrates yet another embodiment of a string shooting device 100 as worn on the front of a hand 150 and attached to the hand by a band 160.

[0059] The aforementioned embodiments are merely examples of wearable string shooting devices and their respective configurations. Such wearable string shooting devices can be worn in any number of ways and on many locations of a wearer not limited to those illustrated above. The band shown in FIGS. 2-4 can be an elastic band, a band having little elasticity but having an adjustment mechanism (e.g., hook-and-loop fastener, buckle, strap adjusters, etc.), or a combination thereof. The degree of elasticity may be chosen based on the actuation mechanism as detailed further below. Actuation mechanisms that rely on tension applied to a band may benefit from a band having less elasticity, while mechanisms that do not rely on tension applied to a band may be compatible with fully-elastic bands, non-elastic bands, or any degree of elasticity therebetween.

[0060] The band described above is an example embodiment of how a string shooting device may be worn by a user. Beyond a single band, embodiments can include multiple bands, a sleeve, or any article that may be worn around a part of the body that accommodates a string shooting device, including for example a band or sleeve including a pocket sized to fit the body of the string shooter. FIG. 6 illustrates an example embodiment of a string shooting device 100 worn by a hand 230 using a palm band 210 and a wrist band 220. The use of two bands as shown in the embodiment of FIG. 6 can provide additional directional stability for the string shooting device, and can provide a more secure attachment that can be useful during movement of the hand and wrist while using the string shooter. Further, the illustrated embodiment can benefit from relative movement between the hand and the wrist as a motion for actuating the string shooter as described further below.

[0061] FIG. 7 illustrates an embodiment of a string shooting device 100 worn by a user around the forearm 250 using a sleeve 240. The embodiment of FIG. 7 provides a very stable attachment between the wearer of the sleeve 240 and the string shooting device 100 received within pocket 242. This can be beneficial for active users of the string shooting device, such as when a string shooting device is used in game play or through dance as an artistic display, for example.

[0062] While the above-described embodiments detail a variety of attachment configurations for a wearable string shooting device, it is important to be able to activate the string shooting device while it is worn in addition to when it may be carried by a hand. If a string shooting device is carried on one arm, wrist, or hand, the opposing hand could be used to actuate the string shooting device regardless of the worn position. However, it is desirable to be able to actuate the string shooting device without requiring a second hand, and in some embodiments, without requiring the physical touching of the string shooting device. Such embodiments can provide a visually appealing effect of a string being propelled without the use of hands, and possibly from a concealed location creating an illusion of the propelled string emanating from the wearer of the device.

[0063] FIG. 8 illustrates an example embodiment of how a palm-worn string shooting device 100 can be actuated, where a user folds their thumb 310 into their palm 320 and presses a switch 111 of the device to actuate the propulsion of the string (not shown). The embodiment of FIG. 8 provides a wearable string shooting device with actuation through manual (digital) touch.

[0064] FIG. 9 illustrates a mechanism for actuating the string shooting device 100 that does not require the use of a finger to depress a switch. As shown, a band 330 is attached to the string shooting device 100 by a loop 340 depicted as transparent and shown in broken lines for clarity. Partially disposed within the loop 340 and between the loop and the string shooting device 100 is arm 115. The arm extends out from the loop 340 and away from the string shooting device 100. At a functional end of the arm 115 is a trigger 117. Pressing on the arm 115, particularly closer to the functional end presses the trigger 117 into engagement with the switch 111, thereby activating the string shooting device 100.

[0065] FIG. 10 illustrates a portion of the band 330 and loop 340 of the embodiment of FIG. 9, with the string shooting device 100 removed for ease of understanding. As shown, the band 330 includes a single continuous band that forms the loop 340. To do so, a first part 332 of the loop portion of the band 330 includes a split 334 in the middle of a width of the band, while a second part 336 of the loop portion of the band includes a narrowed portion 338 that passes through the split 334. This enables the band 330 to form the loop 340 in a continuous piece of material. According to the illustrated embodiment, when tension is applied to the band 330, the portion of the band worn around a part of the body expands, while the loop 340 contracts. Referring back to FIG. 9, the contraction of the loop 340 presses the arm 115 against a body of the string shooting device 100 and drives the trigger 117 into contact with the switch 111, thereby actuating the string shooting device. Although illustrated as a continuous piece of material, it is expressly understood that the band may be made of more than a single, continuous piece of material and that the material may include other forms such as metal, plastic, and the like.

[0066] The band configuration illustrated with respect to FIG. 10 is an example embodiment of how tension can be transferred from the band to apply pressure to at least a portion of the string shooting device. Other embodiments can be employed that provide similar functionality as will be further described below.

[0067] According to the illustrated embodiment of FIGS. 9 and 10, a string shooting device 100 worn about a hand can be actuated through making a fist, which would put tension

on the band 330 thereby squeezing the loop 340 and actuating the string shooting device 100 as described above. Similarly, a band worn about a forearm will function similarly when a fist is made, and a forearm muscle is flexed to expand the band 330 and tension the loop 340.

[0068] According to the embodiment of FIG. 9, the arm 115 can be a part of the string shooting device 100 and attached to the body of the device, or part of the loop 340. Functionality is unchanged, while one embodiment may be more preferable than another by virtue of manufacturing, intended end user, and applicability.

[0069] FIG. 11 illustrates another example embodiment in which the trigger 117, in the form of a pad, is not attached to an arm as in FIG. 9 but is instead attached inside the loop 340. The tension on the loop 340 may not be sufficient to press the pad of the trigger 117 against the switch 111 to actuate the string shooting device when the device is not worn or is worn and tension is applied to the band 330 tensioning the loop 340. According to such an embodiment, the pad of the trigger 117 itself can be attached to the loop 340 or to the string shooting device switch 111. If attached to the switch, the band 330 may be sold separately as an accessory to accommodate the string shooting device 100 and inserting the string shooting device into the loop 340 and using the device as a worn string shooter with hands-free operation can be simplified.

[0070] FIG. 12 illustrates the embodiment of FIG. 11 viewed from a bottom of the string shooting device 100. As shown, the band 330 encircles a body part on which the string shooter is worn. The loop 340 retains the string shooting device to the wearer. When the band 330 is tensioned, the loop 340 tightens and presses the trigger 117 against the switch of the string shooting device 100, thereby activating it.

[0071] Embodiments provided herein can be configured for use with a string shooting device 100 in a variety of orientations. FIG. 13 illustrates a different orientation of the string shooting device 100 relative to a wrist of a wearer. As shown, the string shooting device 100 is oriented 90-degrees turned within the loop and band 370 relative to the wearer. Embodiments may enable the string shooting device to be rotated to any position within the loop 340 and retain functionality.

[0072] As noted above, the manner in which the loop 340 is tightened in FIG. 10 is an example embodiment as to how pressure can be applied to the body of the string shooting device 100 and applied to the switch 111. Other embodiments can be employed, such as one illustrated in FIG. 14, where the band 430 is attached to loop 440. When tension is applied to the band 430, such as by stretching the band, forces pull along arrows 410 and apply pressure to a device held within the loop 440. Such a configuration can be used to actuate a string shooting device as described above.

[0073] FIG. 15 illustrates a string shooting device 500 and a sleeve 510 into which the string shooting device is received as shown on the left side of the figure. The sleeve 510 is illustrated as separated from the string shooting device on the right side of the figure. The sleeve in the exemplary embodiment includes two parts 512 separated by gap 514. The sleeve 510 is formed of a material that has some degree of flexibility but retains its shape. For example, the sleeve 510 may be an injection molded plastic piece. The gap 514 separating the two parts 512 is positioned to allow the two parts to be pressed toward one another, while the

material provides resiliency and returns the two parts **512** to their original position (as depicted) when no pressing force is applied. Strain relief **516** at a bottom of the gap **514** enables this flexing of the two parts **512** toward one another and to return to their original positions without substantial wear or work hardening of the material of which the sleeve **510** is made.

[0074] In practice, when the string shooting device **500** is received within the sleeve **510**, the two parts are disposed on opposite sides of the string shooting device. The sleeve **510** is positioned such that the gap **514** is on opposing sides of the string shooting device **500** that do not include the actuating switch. Thus, when the two parts **512** are flexed toward one another, one of the two parts **512** presses the actuation switch and actuates the string shooting device.

[0075] FIG. 16 illustrates the embodiment of FIG. 15 as worn by a user around a hand **505**. The string shooting device **500**, received within the sleeve **510** (in a position with the gap sides facing to the left and right of the drawing sheet) is attached to the hand **505** with a band **520**. The band can be an adjustable strap, an elastic strap, etc. Tension applied to the band **520** squeezes the sleeve **510**, causing the two parts of the sleeve to bend, i.e. move toward one another, at least partially closing the gap. This motion causes the sleeve **510** to press the actuation switch and activate the string shooting device. FIG. 17 illustrates an example embodiment of a hand actuating the string shooting device and propelling the string **525** by closing two fingers of the hand **505**, which tensions the band **520** and actuates the string shooting device. This is just one example of a hand position that would actuate the string shooting device, as closing of all fingers would similarly actuate the device. Depending on how tight the band is, and how sensitive the actuation switch is, closing or partial closing of even a single finger could actuate the device in some embodiments.

[0076] The sleeve of the embodiments of FIGS. 15-17 operates in a similar manner as the loop of the embodiments of FIGS. 9-14 by transmitting a force from the band to the string shooting device by way of the sleeve or loop. Collectively, the sleeve and loop are referred to herein as a holder, such that the holder holds the string shooting device, and a mechanism of the holder applies pressure to the actuation switch of the string shooting device to actuate the device. Thus, the sleeve and loop both function as holders as described herein.

[0077] FIG. 18 illustrates an example embodiment of a string shooting device **600** similar to the above-described devices including a body **605** and housing **610**. The housing **610** of the illustrated embodiment includes an opening or slot **615** through which a string is loaded into the device **600** to be propelled in a loop as illustrated with respect to FIG. 1. Switch **602** can be used to turn on the wheels to propel the string from the device. While a switch **602** is depicted, embodiments can employ a switch, relay, selector, pressure sensor, or any other type of sensor to activate the device. The opening or slot **615** in the housing **610** of the device **600** of FIG. 18 is arranged vertically and is substantially straight, i.e., in line with the body **605**, as depicted. At least one of the looped string or the housing **610** is formed in order for the string to fit through the slot. The slot may be sized in order to aid in retaining the looped string within the housing **610** in a gap between the wheels of the device.

[0078] The device **600** of FIG. 18 also includes a receptacle **620** defining a cavity **621** supported on the body **605**

of the device. The cavity **621** is positioned below an intake aperture of the housing **610**, where a string enters a gap between the wheels within the housing. The receptacle **620** includes opening **625** that provides access to the cavity **621** within the receptacle **620**. The cavity **621**, described further below, is positioned to receive therein the looped string when the string is retrieved and store the string when it is not being actively propelled by the device.

[0079] Also shown in FIG. 18 is a right guide slot **617** around a substantial portion of a bottom of the housing portion, adjacent the receptacle **620** that covers a right wheel. A string being propelled from a string exit **630** from between the wheels within the housing **610** returns to the housing as it is drawn through the wheels. The right guide slot **617** enables the string to largely avoid contact with the housing **610** and instead return to the right wheel (not shown) within the housing. FIG. 19 illustrates a left front view of the device **600**, where the portion of the housing **610** covering the left wheel includes a left guide slot **619** similar to that of the right guide slot **617**. These guide slots allow the string to be returned to the intake aperture without contacting the housing **610**. As shown in FIG. 1, when the device is held by a right hand, the left guide slot **619** provides reduced friction operation as the string returns to the left wheel. However, when the device is held in a left hand, the right guide slot **617** provides reduced friction operation of the string as the string returns to the right wheel. The left guide slot **619** and the right guide slot **617** combine to make the device operate with reduced friction regardless of the hand holding the device.

[0080] When loading a looped string into the housing **610**, the string is pressed through the slot **615**. FIG. 19 illustrates an example embodiment of a device **600** similar to that of FIG. 18, though where the body **605** is unitary with and includes the cavity **621** defined therein without having a separate receptacle. FIG. 19 further illustrates the process by which a string **650** is loaded into the device whether configured as shown in FIG. 18 or as in FIG. 19. To do so, a user performs a motion similar to flossing teeth, whereby the string is pulled taught across the slot **615**, and while holding a top portion **652** of the string **650** above the string exit **630**, presses a bottom portion **654** of the string toward an intake aperture directly below the string exit. Opening **625** of the device **600** enables this motion to occur providing access to the cavity **621**, thereby making loading of the string more accessible for a user.

[0081] FIG. 20 illustrates the device **600** of FIGS. 18 and/or 19 actively propelling the string **650** in the direction of arrow **656**. The string **650** is a looped string such that it returns to the device taken up at the intake aperture **632** as it continues to be propelled by one or both wheels within the housing **610** and exits through string exit **630**. The broken lines are shown to emphasize that the string **650** can be of a wide range of lengths based on user preference or use case.

[0082] Embodiments of the devices of FIGS. 18-20 are actuated by switch **602** to propel the string **650** in a loop. String shooting devices generally operate in an on/off manner whereby the motor or motors driving one or more of the wheels are either on or off. However, embodiments described herein employ a retrieval mechanism. When a user is propelling a string as shown in FIG. 20 by pressing the switch **602**, the left wheel is turning counterclockwise shown by arrow **614**, while the right wheel is turning clockwise shown by arrow **612**. This propels or “shoots” the

string from the device. However, upon release of the switch **602**, the motor(s) reverse direction substantially immediately. The left wheel begins to turn clockwise, while the right wheel begins to turn counterclockwise.

[0083] When the wheels reverse direction upon release of the switch **602**, the string exit **630** becomes an intake, while the intake aperture **632** becomes an exit. This actively retrieves the string, effectively shooting or propelling the string into the cavity **621** of the receptacle **620**. FIG. **21** illustrates this action, with the wheels reversing to retrieve and pull the string **650** in the direction of arrow **658**. The string **650** is shown piling up in the cavity of the receptacle **620** visible through opening **625**. Because the string is a loop, the string does not tangle when entering the cavity, which is important to enjoyment of the device as when a string is tangled it is not properly propelled from the device. Retrieval of the string to be received within the cavity **621** packs the string into the cavity in a manner that ensures the string is ready to be propelled at any point. FIG. **22** illustrates the string **650** fully retrieved, with the string pulled taught around the housing **610**.

[0084] The cavity, whether as unitary with the body **605** or as a separate receptacle **620** is generally very smooth without features on which the string can be snagged or grabbed, such as burrs or sharp edges, for example. The smoothness of the receptacle improves the function of the retrieval of the string and the subsequent shooting of the string from the cavity **621**. A smooth interior surface of the cavity enables the string, as retrieval begins, to reach a bottom of the cavity such that the first portion of the string into the receptacle is at the bottom of the cavity. This is because the retrieval and subsequent propelling of the string functions best when the string is fed in a “first in last out” or FILO manner, where the first portion of the string retrieved into the cavity **621** during retrieval is the last portion of the string propelled out of the receptacle when the string is again propelled.

[0085] The opening **625** is sized to ensure the string does not spill out of the cavity **621** and the opening does not interfere with retrieval of the string. For example, the opening **625** may include a rounded edge or entrance that is flared outward from the receptacle to ensure the string does not get caught on the opening. The cavity **621** of the illustrated embodiment is positioned immediately adjacent the intake aperture **632**, which becomes the exit during retrieval of the string. This ensures alignment between the intake aperture and the receptacle which facilitates retrieval into the receptacle. The receptacle is sized to ensure a string can fit within the cavity **621** when fully retrieved. Too large of a cavity **621** renders the device unnecessarily bulky, while too small of a receptacle can lead to jamming of the string into the cavity, which can lead to tangles that can preclude the motors from spinning the wheels requiring manual intervention.

[0086] Upon retrieving the string **650** into the cavity **621** of the receptacle **620**, the wheels stop turning and the device is off. This can be performed, for example, until the length of the string **650** is substantially disposed within the cavity **621**. The automatic retrieval of the string requires the wheels to spin in the reverse direction until the string is fully retrieval. This can be performed in several ways. A first method involves spinning the wheels in the reverse direction upon release of the switch **602** for a predetermined amount of time. The amount of time can be set to be sufficient to

retrieve a largest length of looped string offered with the device. A margin of error may be added to that time, such as a percentage (e.g., 10% longer than should be necessary) or a set amount of time (e.g., 3 seconds longer than should be necessary). If shorter strings are used in such an embodiment, the wheels may spin longer than necessary to retrieve the string. The wheels may in some embodiments continue spinning once the string is fully retrieved until the predetermined time expires, with the wheels slipping against the string. This is referred to as “grip-then-slip” retrieval of the string, as the wheels grip the string and retrieve the string, but upon fully retrieving the string, the wheels then slip on the string until the predetermined amount of time ends. This grip-then-slip functionality requires the gap between the wheels to be appropriately sized for the string and the coefficient of friction between the string and the wheels to be less than an amount of friction that would stall the wheel motors, which could potentially damage the motors.

[0087] In some embodiments, the wheels may stall when the string stops moving. This may be achieved through a clutch mechanism built into the wheels and/or the motor(s). In some embodiments, the torque of the motor(s) may not be sufficient to spin the wheels against a stopped string such that the motor stalls temporarily until the time expires.

[0088] According to another method, upon release of the switch **602**, the wheels may spin in reverse until a torque or force is sensed at the wheels that indicates that the string **650** is stopped. The wheels may spin in the reverse direction until a torque force on the driven wheel(s) exceeds a predetermined amount or threshold that indicates that the string has been fully retrieved into the cavity **621**.

[0089] Upon pressing the switch **602** again, the string is pulled from the cavity **621** and propelled from the string exit **630** as shown in FIG. **20**. FIG. **23** illustrates how this retrieval mechanism can be employed with the wrist worn embodiment described above, where on the left a user has actuated the device **600** and propelled the string **650** from the device. This actuation is shown through curling of two fingers of the hand. The image on the right illustrates the user’s hand relaxed with all fingers extended such that the device **600** is not actuated and the string **650** is fully retrieved. The device **600** is illustrated attached to an inside of a user’s wrist by a wrist band **603**.

[0090] While the above-described embodiment retrieves the string using the pair of wheels rotating in a direction opposite that of when they are propelling the string, retrieval can be performed through alternative mechanisms. For example, the cavity **621** of an example embodiment can include an auger, spool, or bobbin around which the string is wound during retrieval. Such an embodiment an optionally employ a motor to turn the auger, spool, or bobbin to pull the string into the receptacle. Further the auger, spool, or bobbin could be implemented without requiring a cavity, where the string is wound and held in place during retrieval. Optionally a stationary hub can be employed with a winding element that guides the string about the hub. In such an embodiment, the winding element may be a driven element to wind the string about the hub during retrieval. Still further, the retrieval mechanism may include a second pair of wheels with a second gap, whereby the second pair of wheels rotate in such a direction as to retrieve the string that is propelled by the first pair of wheels. The second pair of wheels could employ their own motor or motors to perform this retrieval process.

[0091] Embodiments of the present disclosure are designed to be used in toys or gadgets that propel a continuous loop of string around a mechanically driven drive wheel at a fast rate. These toys or gadgets are referred to herein as string shooters. Embodiments of the present disclosure can additionally or alternatively employ the use of a looped string that has phosphorescent particles or fibers embedded in or on the string and has high surface area derived from threads, fibers or texture which radiate out from the surface of the looped string. The phosphorescent particles, when charged by light from a light source, emit light.

[0092] The string shooting device of some embodiments of the present disclosure include a light source that, as the string passes through the string shooting device, is focused onto at least a portion of the string thereby charging the phosphorescent particles or fibers of the string. The charged phosphorescent particles or fibers of the string emit the charged energy as visible light as the looped string is propelled through the air by the pair of wheels. Embodiments achieve a glow-in-the-dark effect when viewing the string as it emits light in a decaying fashion after it was charged by the light from the light source.

[0093] Embodiments of the present disclosure include a looped string having phosphorescent particles or fibers embedded in or on the looped string. In some embodiments, the phosphorescent particles or fibers are embedded in or on the full length of the looped string. In other embodiments, the phosphorescent particle or fibers are embedded in or on the looped string in specific patterns or sections of the string to cause different visual effects when viewing the string, particularly as the string is in motion. The phosphorescent particles or fibers of an example embodiment may be embedded in or on only a portion of the looped string, such as half of the length of the looped string, a striped pattern along the length of the looped string, a zig zag or spiral pattern, an alternating sequence of large sections and small sections of the string along its length, or any other pattern or set of sections that would cause desirable visual effects, particularly when the string is in motion.

[0094] The looped string of example embodiments can be dyed with a phosphorescent dye. The string can be dyed along the whole string, a portion of the string, or a pattern along a length of the looped string. In one embodiment, only a small portion of the looped string is dyed with a phosphorescent dye. In such an embodiment, as the string travels around its path in a dark environment, the small portion glows and can be seen traveling about the path of the string. Such an embodiment demonstrates a speed at which the string is traveling as a viewer can plainly see how that small portion of string advances.

[0095] FIG. 24 illustrates a device 600 such as the device of FIG. 20 that propels the looped string 650 in the direction of arrow 656, drawing the string into the intake aperture 632 and propelling the string out through the string exit 630. A light source 660 may be disposed within the housing 610 and configured to shine light upon the path of the string as it passes between the intake aperture 632 and the string exit 630. This light source 660 may include a light emitting diode (LED), incandescent, or fluorescent light source. However, in an example embodiment, an LED may be employed for size constraints. The LED may be chosen based upon a wavelength of light emitted that is best suited to charge phosphorescent particles of the looped string 650.

[0096] The light source 660 itself may be minimally visible from outside the housing 610 and possibly not visible outside the housing. Minimizing light escape from the housing can improve a perception that the looped string 650 is glowing without it being clear how it is glowing. The light source 660 may include an LED embedded within the housing 610 or within a body of the device, and may employ a light guide to conduct light to the location along the path of the string as it passes through the housing, such as in U.S. patent application Ser. No. 18/441,513, the disclosure of which is incorporated herein by reference.

[0097] FIG. 24 also illustrates a second switch 604 which may be used to operate the light source 660. The second switch 604, much like the switch 602 may be a switch of any kind, including a push button, slide switch, toggle switch, motion sensor, light sensor, etc. Further, the switch may require contact to be on (e.g., momentary contact) or may remain on without a user touch, and a momentary contact to turn off. In such an embodiment, the first position can be the movement through the first contact to turn on the switch, and the second position can be the movement through the second contact to turn off the switch. The switch 604 could optionally include a mechanical switch that starts or changes rotation direction of the wheels through a mechanical coupling, for example. The light source 660 may require both the switch 602 and second switch 604 to be in an "on" state or a first position for the light source to function. For example, if the second switch 604 is used for the light source 660, even when the second switch is in the first position or "on", the light source 660 may not illuminate unless the switch 602 is in the first position or "on" and the string is being propelled. This precludes the light source 660 from remaining on when the device is not in use and when the string is not moving through the housing 610. Moving the second switch 604 to the "off" or second position may ensure that the light source 660 does not illuminate when the switch 602 is in the first "on" position or in the second "off" position.

[0098] FIG. 25 illustrates an example embodiment of a wrist worn device 700 including a device body 705 that includes therein the receptacle visible through opening 725. The example embodiment is configured in dimension to be worn on the wrist/hand of children and/or adults. The housing 710 covers the pair of wheels with the string exit 730 disposed in the housing on the opposite side of the receptacle integrated into the body 705. The device 700 of FIG. 25 includes a wrist strap 740 and a palm extension 704. The wrist strap 740 is configured to attach proximate a wrist of a wearer, while the palm extension 704 extends into the palm of the wearer. In this manner, the palm extension 704 positions an actuator 702 in the palm of the wearer. The actuator, which may be in the form of a button, pressure sensor, pair of contacts, switch, or other mechanism can be reached by at least the middle and/or ring finger of a wearer to actuate the device 700, in a hand position similar to that shown on the left side of FIG. 23.

[0099] The device 700 may optionally include a forearm strap 745 to stabilize the attachment of the device to a wearer's wrist, and to maintain alignment of the device with the wrist and hand of the wearer. The wrist worn device 700 of FIG. 25 is also illustrated in FIG. 26 as attached to an inside of a user's wrist by the wrist strap 740 and forearm strap 745. The body 705 of the illustrated embodiment is shown with smoothed edges and a tapered shape. This may

be conducive to a wrist worn device **700** as the smooth and tapered body would more easily be received within a sleeve of a shirt or concealed within a shirt sleeve to conceal the device. Concealing the device within a shirt sleeve can provide a more impressive appearance when seen by someone other than the wearer and can give the wearer the impression that the string is being shot from their wrist.

[0100] FIG. 27 illustrates a device similar to that illustrated in FIGS. 25 and 26. However, the palm extension **704** is hinged at hinge **750**, and the palm extension is biased, such as by a string, in a direction shown by arrow **755** about the hinge. This biasing force ensures that when the wrist worn device **700** is worn by a user, the palm extension **704** remains in contact with a user's palm. Further, the biasing force of the palm extension **704** along arrow **755** moves the palm extension away from a path of the string and encourages a wearer to move their hand in the direction of the bias, which also urges the hand away from a path of the string as it is propelled by the wrist worn device **700**.

[0101] FIG. 28 illustrates a device **800** for propelling a looped string where the body **805** is a unitary body incorporating both the functional elements of the string shooting device and containing the cavity **821** within the unitary body **805**. This unitary body is afforded a sleek shape conducive to being worn within a shirt sleeve, such as at a cuff. Attachment points **815** provide slots through which straps can be received, where the straps are configured to attach to a wearer. The straps can be selected based on a size of a wearer and/or the straps can be adjustable to accommodate wearers of various sizes. Also shown is the extension **804**, positioned at a downward angle relative to the body **805** and may be positioned in a palm of a wearer when the device **800** is worn on the inside of a wrist. The extension **804** can include an actuator **802** as described above with respect to FIGS. 26 and 27. The extension **804** can be in a fixed position or flexibly biased in the angled position shown. The angle of the extension **804** encourages a wearer's palm to remain clear of the path of the projected string that emanates from the housing **810** that covers the wheels.

[0102] FIG. 29 illustrates another example embodiment of a string shooting device **850** having a unitary body **855** with a sleek profile adapted to be wrist-worn and conducive to being worn under a shirt sleeve. The device **850** can attach to a wrist with strap **875**, positioning extension **854** in the palm of a wearer. The embodiment of FIG. 29 illustrates an example in which the motor housing is enclosed within the body **855** providing a different overall form factor while retaining the same string shooting capabilities as devices described above. The string may be loaded by a user by threading the string through slot **860** and pushing the string down between the wheels by pressing the string through the opening **865** into the cavity within the body **855**. The string is propelled through aperture **870** of the body **855** in a similar manner as described in the aforementioned embodiments. The string can be retrieved into a cavity within the body **855**. The embodiment of FIG. 29 conceals the string when it is fully retrieved which provides an added visual effect of a string seemingly appearing from the aperture **870** and disappearing within the aperture. Although shown as a unitary member, the body may, if desired, may be made as a separate member.

[0103] According to a different embodiment of the device described herein, the device may be embodied by an animal, such as a frog or a lizard as depicted in FIG. 30. The

illustrated device **900** may include a body **905** where a head of the animal serves as the housing **910** within which the wheels are disposed. The cavity may be disposed inside the body **903**. Actuation of the device **900** may be achieved by pressing a switch **902**. Optionally, the device **900** may be actuated by a gesture, such as a hand flexing as described with regard to some embodiments above.

[0104] The device of some embodiments may be remotely controlled, such as through Bluetooth™, whereby a user may use their cell phone, such as through an app on the cell phone, to operate the device. The remote may alternatively be a dedicated remote that operates on a different near-field communication protocol or on a radio signal, for example. For use with a remote control, the remote control, whether wired, wireless, dedicated remote, or mobile device (e.g., a mobile phone), the remote control can provide the functionality described by the first switch **602** and second switch **604** described above. An example embodiment of a dedicated remote control can include a body-worn control, such as a palm-worn button, a fingertip-worn device, or any such potential remote control that is not part of the body of the device described herein.

[0105] The device **900** may be wrist worn or otherwise attachable to a person. In response to actuation of the device **900**, such as via switch **902**, a mouth of the animal may open to some degree and become the string exit **930**, whereby the looped string **950** emanates from the mouth in a way that appears as the animal's tongue.

[0106] The device **900** depicted in FIG. 30 can be hand-held, wrist worn or otherwise attached or worn by a person, and in some embodiments, may be displayed such as on a surface. According to example embodiments which are provided for display, the device **900** may be operable by a remote control or use a switch that does not require a user to hold down a switch to maintain the device in the operating state. Such a switch could include a toggle switch, a push-on/push-off switch, or other type of switch to turn the device on and keep it on.

[0107] Each of the embodiments described herein can be configured to be maintained in the on state with the driven wheels turning to propel the string from the string exit while the device is held, worn, or displayed without deviating from the hand-held and body-worn embodiments described herein.

[0108] The devices of embodiments described above can be used for entertainment through visual effect of the floating string but can also be employed in various gaming scenarios. For example, a game of "tag" whereby a user must touch another user with the string emanating from their device. As the string is lightweight and necessarily highly flexible, the string would not hurt a person through impact. Optionally, the devices described herein can be used for a form of "target" shooting, whereby small lightweight targets are targeted by a user, and may respond to the touch of the looped string. Further, the string of example embodiments can be used to "lasso" objects for retrieval, and embodiments can be used for games involving retrieval of objects, such as objects with hooks about which the looped string can be targeted. Embodiments described herein can be used in a variety of form factors and for a wide variety of entertainment purposes as will be appreciated in view of the foregoing disclosure.

[0109] Applicant notes that while the embodiment described above generally refers to both wheels as being

driven wheels, either by the same or different motors, embodiments can employ a mechanism by which only one wheel is driven and achieve similar benefits as described above. As such, embodiments described herein are not limited to two driven wheels but can include only a single driven wheel.

[0110] The present disclosure generally describes embodiments of a string shooting device that can be used as an entertainment device or toy. However, embodiments can be implemented in other use cases. For example, a device employing the same propelling and retrieving into a receptacle technique can be implemented for charging cables or cable management. Embodiments can be employed in devices that are used to propel strings, ropes, or cables, such as for arborists who rope trees and branches, for climbers who use ropes for repelling and climbing support, for contractors that use plumb lines, or the like. Examples can have utility in any such activity that involves use of an elongated body in the form of rope, string, wire, cable, etc. Thus, while embodiments have been described with regard to a string shooting device for entertainment, embodiments can have much greater utility in other such fields.

[0111] Many modifications and other embodiments of the present disclosure set forth herein will come to mind to one skilled in the art to which this disclosure pertains having the benefit of the teachings presented in the foregoing descriptions and the associated drawings. Therefore, it is to be understood that the present disclosure is not to be limited to the specific embodiments disclosed and that modifications and other embodiments are intended to be included within the scope of the appended claims. Moreover, although the foregoing descriptions and the associated drawings describe example embodiments in the context of certain example combinations of elements and/or functions, it should be appreciated, in light of the present disclosure, that different combinations of elements and/or functions can be provided by alternative embodiments without departing from the scope of the appended claims. In this regard, for example, different combinations of elements and/or functions than those explicitly described above are also contemplated as can be set forth in some of the appended claims. Although specific terms are employed herein, they are used in a generic and descriptive sense only and not for purposes of limitation.

1. A device for propelling a looped string comprising:
a body;
a pair of wheels supported by the body, wherein at least one wheel of the pair of wheels is a driven wheel;
a cavity sized to receive and store the looped string; and
an actuator including a first position that directs the driven wheel to rotate in a first direction to propel the looped string in a direction away from the body and into air, the actuator including a second position that directs the driven wheel to rotate in a second direction, opposite the first direction, to retrieve the looped string by propelling the looped string in the second direction toward the cavity and into the cavity,
wherein a length of the looped string remains within a gap disposed between the pair of wheels when propelled away from the body and into the air and a length of the looped string remains within the gap between the pair of wheels when a portion of the looped string is received within the cavity.

2. The device of claim 1, wherein the device further comprises a receptacle defining the cavity.

3. The device of claim 2, wherein the receptacle is disposed at least partially within the body.

4. The device of claim 1, wherein the driven wheel of the pair of wheels rotates in the second direction for a predetermined amount of time beginning when the actuator is moved to the second position.

5. The device of claim 4, wherein the driven wheel of the pair of wheels rotates in the second direction until the looped string is disposed within the cavity other than a portion extending outside the cavity between the pair of wheels.

6. The device of claim 4, wherein the driven wheel of the pair of wheels rotates in the second direction until a torque force on the driven wheel exceeds a predetermined threshold.

7. The device of claim 1, further comprising a strap configured to attach the body of the device to a body part of a user.

8. The device of claim 7, wherein the body part of the user is selected from the group consisting of a hand and a wrist of the user.

9. The device of claim 8, wherein the actuator is operable between the first position and the second position in response to a gesture made by the hand or wrist of the user.

10. The device of claim 9, wherein the gesture comprises a movement of at least one finger relative to other fingers of the hand of the user.

11. The device of claim 9, wherein the body comprises an extension, wherein the strap is configured to position the extension in at least a portion of a palm of the hand of the user.

12. The device of claim 11, wherein the actuator is positioned on the extension.

13. The device of claim 1, wherein the actuator is selected from the group consisting of a switch, selector, relay, control, and sensor.

14. A device for propelling a string comprising:

a body including a cavity having an opening;
a pair of wheels supported by the body, wherein at least one wheel of the pair of wheels is a driven wheel;
at least one actuator constructed and arranged to rotate the driven wheel between a first direction wherein the string is propelled in a direction away from the body and a second direction wherein the string is propelled in a direction toward the opening of the cavity; and
wherein the string includes a length and the driven wheel in the second direction propels the string through the opening and into the cavity until the length of the string is substantially disposed within the cavity.

15. The device of claim 14, wherein the device further comprises a receptacle defining the cavity.

16. The device of claim 15, wherein the receptacle is disposed at least partially within the body.

17. The device of claim 14, further comprising a strap supported by the body and configured to attach to a wrist of a user.

18. The device of claim 17, wherein the body comprises an extension, wherein the strap is configured to position the extension in at least a portion of a palm of a hand of the user and the at least one actuator is supported on the extension.

19. The device of claim 14, wherein the pair of wheels are configured to propel the string out of the cavity upon activation of the at least one actuator into a first position and

to propel the string into the cavity upon activation of the at least one actuator into a second position.

20. The device of claim **1**, wherein the actuator is selected from the group consisting of a switch, selector, relay, control, and sensor.

* * * * *