



US012396912B2

(12) **United States Patent**
Aquilante et al.

(10) **Patent No.:** **US 12,396,912 B2**

(45) **Date of Patent:** **Aug. 26, 2025**

(54) **LOAD COMPENSATION DEVICE, IN PARTICULAR OF GRAVITATIONAL LOADS, APPLICABLE TO EXOSKELETONS**

(71) Applicant: **AGADE, S.R.L.**, Milan (IT)

(72) Inventors: **Lorenzo Aquilante**, Treglio (IT);
Mattia Tabaglio, Inveruno (IT);
Daniele Ramirez, Genoa (IT);
Francesco Braghin, Varese (IT);
Alessandra Laura Giulia Pedrocchi,
Segrate (IT); **Marta Gandolla**, Gavirate
(IT); **Stefano Dalla Gasperina**,
Cesiomaggiore (IT)

(73) Assignee: **AGADE, S. R. L.**, Milan (IT)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 833 days.

(21) Appl. No.: **17/615,306**

(22) PCT Filed: **May 29, 2020**

(86) PCT No.: **PCT/EP2020/064944**

§ 371 (c)(1),

(2) Date: **Nov. 30, 2021**

(87) PCT Pub. No.: **WO2020/245038**

PCT Pub. Date: **Dec. 10, 2020**

(65) **Prior Publication Data**

US 2022/0218552 A1 Jul. 14, 2022

(30) **Foreign Application Priority Data**

Jun. 3, 2019 (IT) 102019000007848

(51) **Int. Cl.**

A61H 1/02 (2006.01)

A61H 3/00 (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC **A61H 1/0281** (2013.01); **A61H 1/024**
(2013.01); **A61H 1/0244** (2013.01); **A61H**
3/00 (2013.01);

(Continued)

(58) **Field of Classification Search**

CPC B25J 9/0006; A61H 3/00; A61H 2201/165;
A61H 1/024; A61H 2201/5064; A61H
2201/123; A61H 1/0281; A61H 1/0244
See application file for complete search history.

(56)

References Cited

U.S. PATENT DOCUMENTS

5,402,690 A 4/1995 Sekiguchi et al.
2006/0241539 A1 10/2006 Agrawal et al.

(Continued)

FOREIGN PATENT DOCUMENTS

CA 2544645 10/2006
CA 2952403 6/2017

(Continued)

OTHER PUBLICATIONS

Translation of WO 2019/057797 (Year: 2019).*

Translation of DE 10238256 (Year: 2004).*

Primary Examiner — Brian E Pellegrino


(74) *Attorney, Agent, or Firm* — ALLEN, DYER,
DOPPELT, + GILCHRIST, P.A. Attorneys at Law

(57)

ABSTRACT

A load compensation device may include an assisted joint configured to be constrained to a support structure; a main rod comprising a proximal end connected to the assisted joint, and further comprising a distal end configured to be stressed by an applied load; an auxiliary rod comprising a first end and a second end, the first end being hinged on the main rod for rotating the auxiliary rod with respect to the main rod, the second end being movable on a plane on which the applied load lies; an elastic element configured to provide an elastic force which acts between the second end

(Continued)

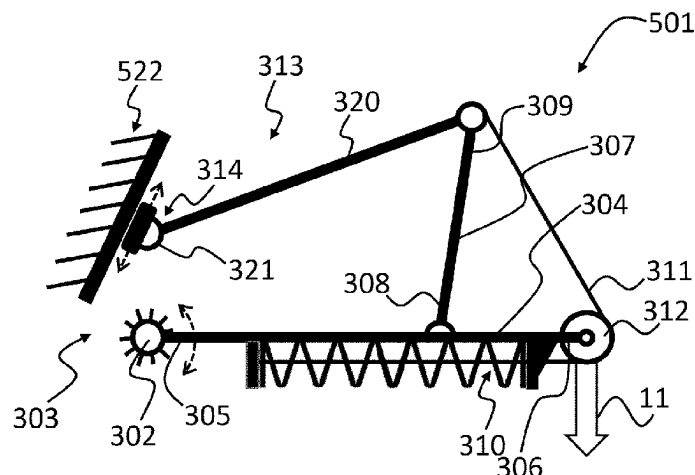

of the auxiliary rod and the distal end of the main rod; a regulation system configured to modify a distance between the second end of the auxiliary rod and the assisted joint, so as to vary a preloading of the elastic element.

14 Claims, 5 Drawing Sheets

(51) **Int. Cl.**

B25J 9/00 (2006.01)

B25J 19/00 (2006.01)

(52) **U.S. Cl.**

CPC **B25J 9/0006** (2013.01); **B25J 19/0016** (2013.01); **A61H 2201/1215** (2013.01); **A61H 2201/165** (2013.01); **A61H 2201/5058** (2013.01); **A61H 2201/5064** (2013.01)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2012/0184880 A1 7/2012 Doyle
2015/0231018 A1 8/2015 Shim et al.

FOREIGN PATENT DOCUMENTS

CN	102471043	5/2012	
CN	105234959	1/2016	
CN	105722490 A *	6/2016	 A61H 1/024
CN	205915355	2/2017	
CN	109070336	12/2018	
DE	10238256 A1 *	3/2004	 A61F 5/0102
EP	2861387	4/2015	
EP	3278938	2/2018	
EP	3342390	7/2018	
EP	3673884	7/2020	
JP	2018140475	9/2018	
KR	20120082221	7/2012	
KR	20160071661	6/2016	
TW	201226010	7/2012	
WO	2013186701	12/2013	
WO	2015106278	7/2015	
WO	2015147584	10/2015	
WO	2017161257	9/2017	
WO	2018165399	9/2018	
WO	2018213363	11/2018	
WO	WO-2019057797 A1 *	3/2019	 A61H 1/0262

* cited by examiner

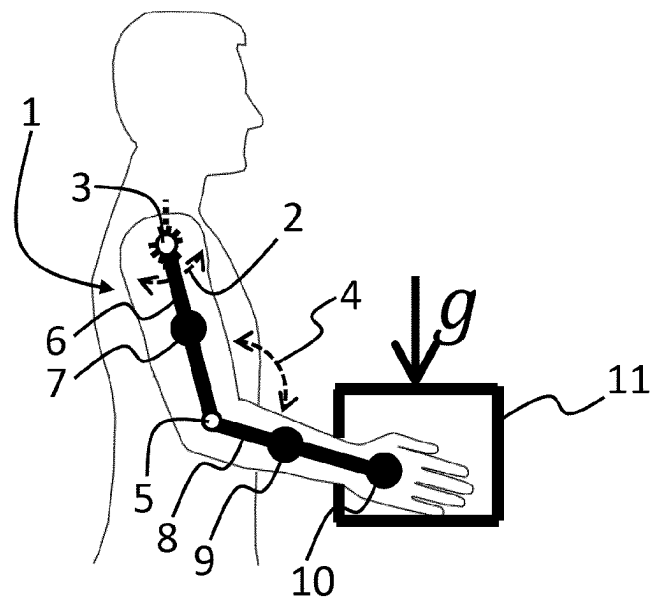


FIG. 1

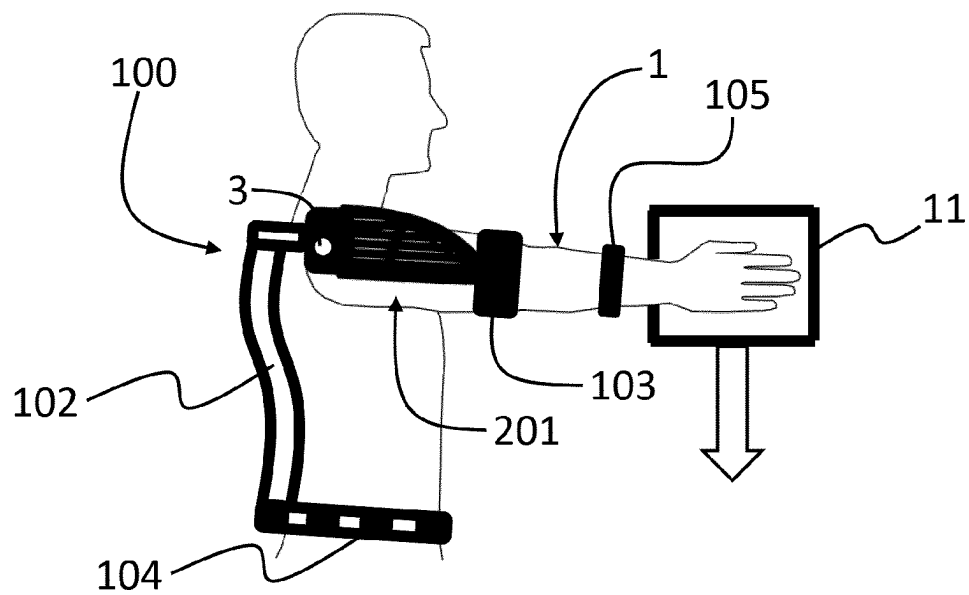


FIG. 2

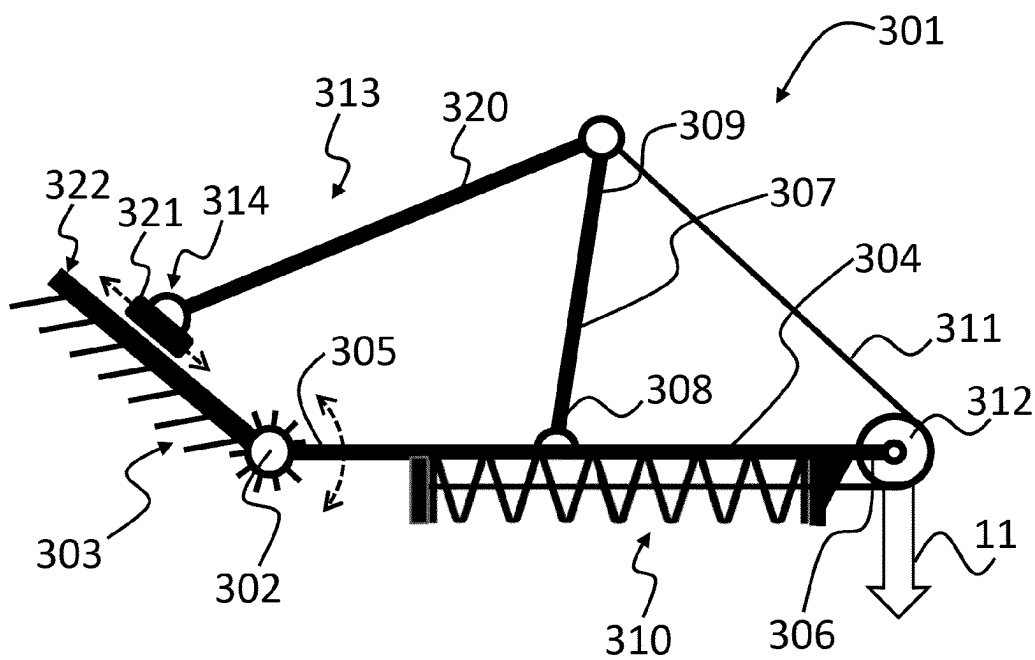


FIG. 3

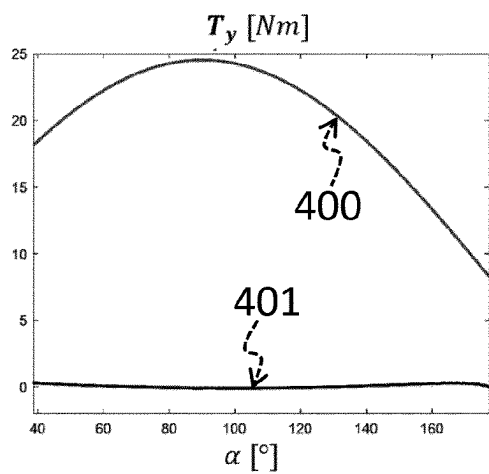


FIG. 4a

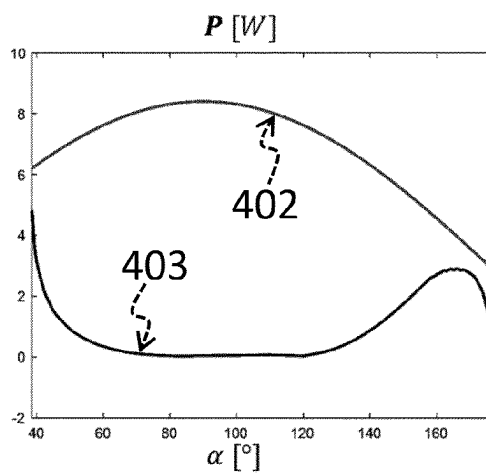


FIG. 4b

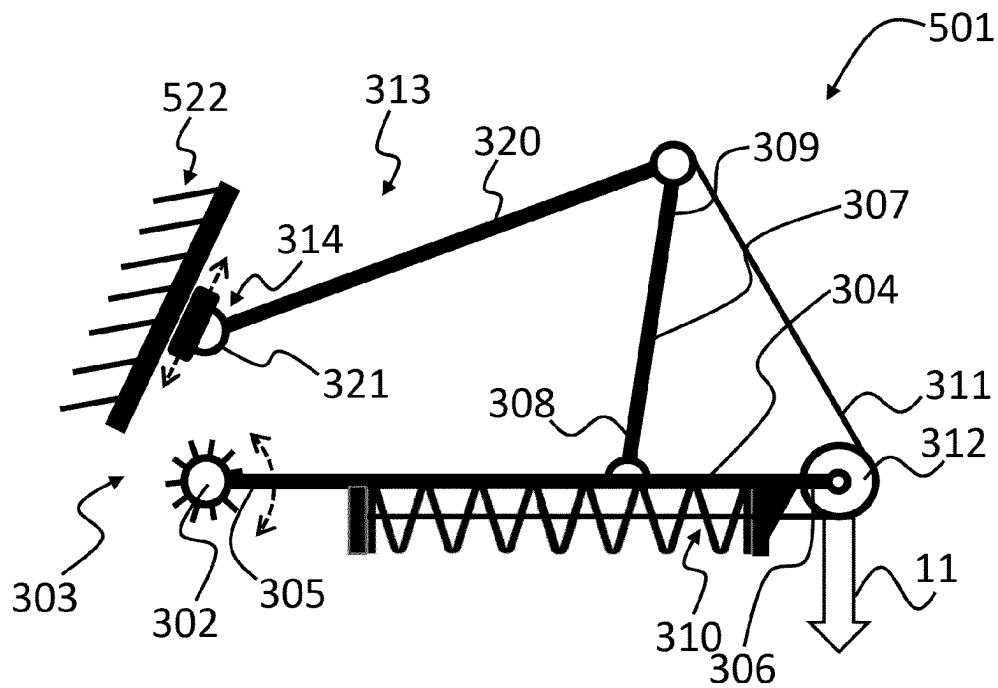


FIG. 5

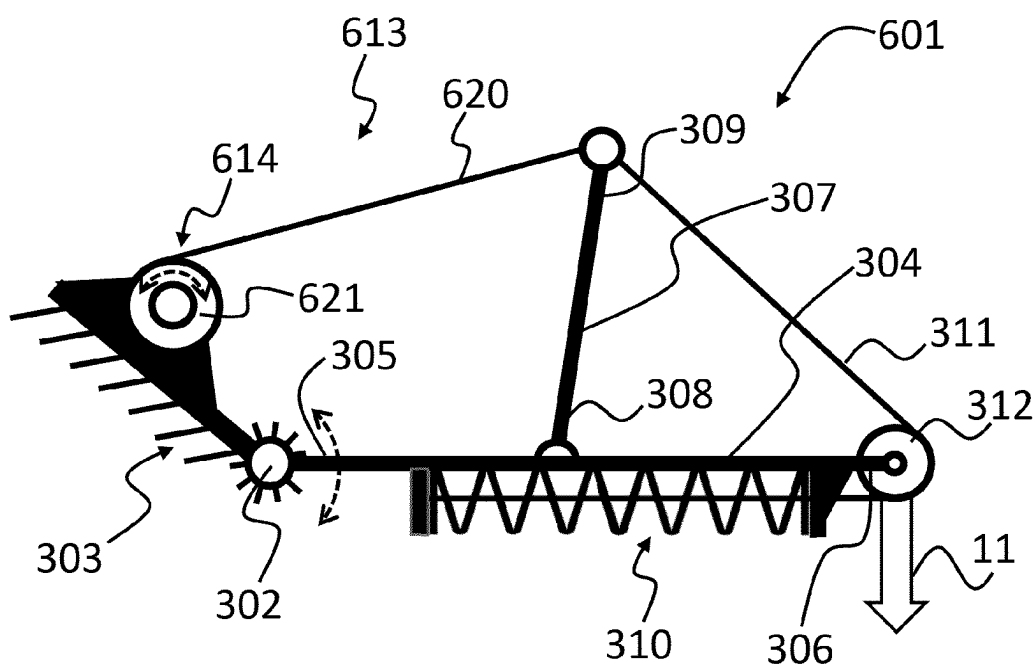


FIG. 6

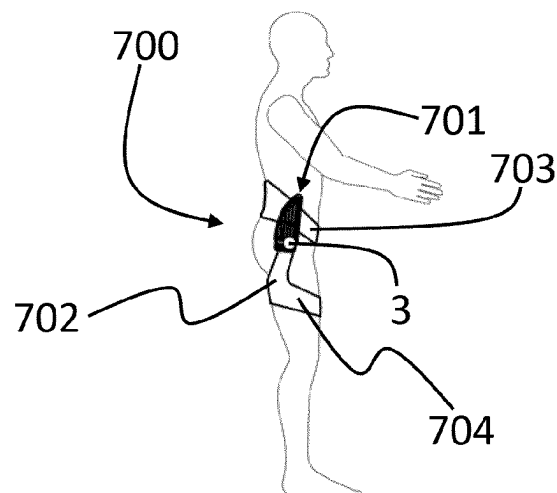


FIG. 7

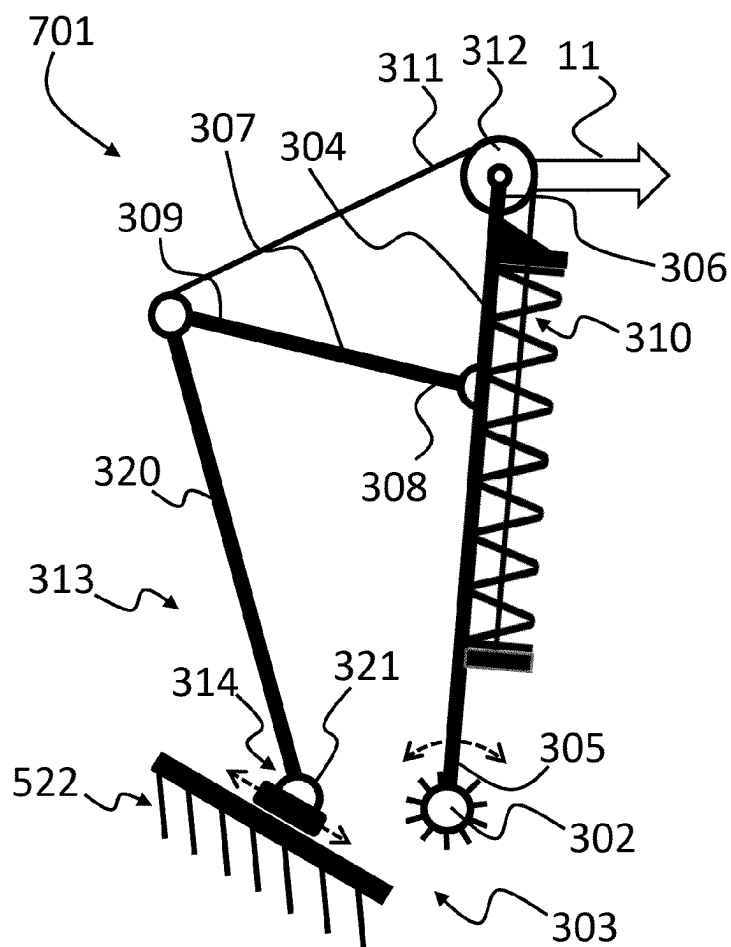


FIG. 8

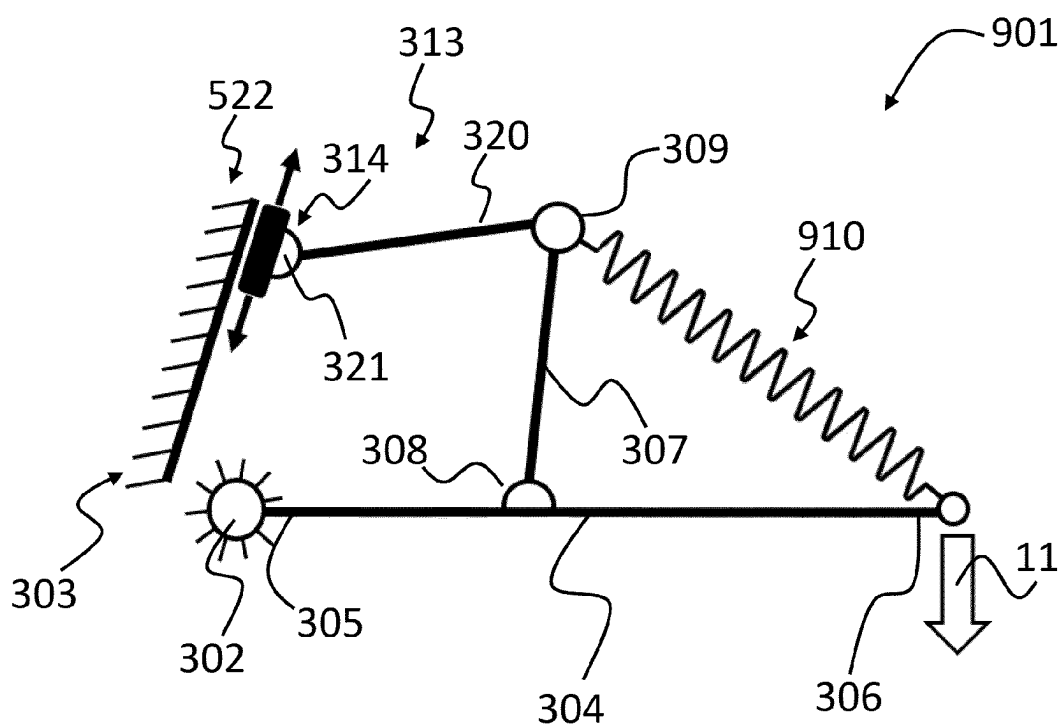


FIG. 9

1

LOAD COMPENSATION DEVICE, IN PARTICULAR OF GRAVITATIONAL LOADS, APPLICABLE TO EXOSKELETONS

TECHNICAL FIELD

The present invention relates to a load compensation device, in particular for compensating gravitational loads. In a preferred and non-limiting application, the present invention also relates to a related exoskeleton.

In general, the present invention finds non-limiting applications in the field of handling apparatuses and in the field of physical activity and rehabilitative exercise apparatuses.

PRIOR ART

In the last years, exoskeletons have found various applications which are mostly related to the biomedical and industrial fields.

In the biomedical field, the exoskeletons are designed to enhance the individual's physical and motor abilities, further compensating the effect of the force of gravity thus reducing the physical effort and the individual exertion. In particular, in the biomedical field, exoskeletons are used in the field of motor function recovery and assistance. The recovery relates to the rehabilitation of a patient, while the "assistance" relates to the simple case of aid, wherein the motor abilities of a user are irreversibly compromised.

In the industrial field, exoskeletons are mainly used in the manufacturing and building industries, in which the operators have to maintain uncomfortable postures or have to move or lift heavy loads; furthermore, exoskeletons are also used as aid for the healthcare workers. In general, in this industrial field, the exoskeleton is designed to relieve the effort of one or more body parts.

In exoskeletons, the load compensation is carried out via different technologies which can be categorized as "passive" or "active": the "passive" compensation technology uses a set of one or more elastic elements, which are loaded during the motion and release deformation energy during a motion in opposite direction; instead, the "active" compensation technology uses a motor-driven drive, typically of the electric type; other types of drives can provide piezoelectric actuators, SMA ("Shape-Memory Alloys"), pneumatic drives or electroactive polymers.

The passive compensation technology has the advantage of not requiring an external power supply, allowing lighter, more compact exoskeletons, which are also free from electronic power supply, to be obtained. Indeed, the passive compensation systems usually consist of kinematic chains of elastic elements, which support by deformation the user's weight.

However, exoskeletons with passive compensation cannot apply total compensation to the loads, for any position taken by the user, but have only one balance point. Furthermore, during the loading motion, the user has to produce force in order to load the elastic elements.

Instead, the active compensation technology requires an external power supply, electronics and control logics. Disadvantageously, the electric drive motors are bulky, causing the exoskeleton to be heavier and less ergonomic than the passive one. Furthermore, in case of high energy consumptions, the exoskeleton cannot be efficiently powered by a light and compact battery system.

For these reasons, the most widespread exoskeletons are of the passive compensation type both in the industrial field and in the biomedical field.

2

Examples of exoskeleton systems and gravitational load compensation devices of the active type are provided in documents KR20160071661, EP3278938A1, WO2017161257 and WO2015106278, which describe solutions including actuators.

Examples of exoskeleton systems and gravitational load compensation devices of the passive type are provided in documents KR20120082221, WO2015147584, CA2952403, US20120184880, CA2544645, WO2018165399A1, EP2861387, which include elastic elements, also of the adjustable type, proposed in exoskeletons and in devices which are wearable by a user.

A further example of gravitational load compensation device is provided in document EP3342390A1, which refers to an apparatus to support a limb comprising passive force elements connected to a wearable element and support active elements actuated by traction actuators with motor-driven cable. However, also the device known from EP3342390A1, although realizing a hybrid structure between active and passive systems, has disadvantages and limitations of application.

SUMMARY OF THE INVENTION

Object of the present invention is to solve drawbacks of the prior art.

Further particular object of the present invention is to present a device which has reduced energy consumptions and can thus efficiently be power supplied also with a portable battery system.

Further particular object of the present invention is to allow variable load compensation, in particular of gravitational loads, for any position taken by the user.

Further particular object of the present invention is to present a device which is less bulky than those entirely active, so as to obtain lighter and more ergonomic exoskeletons.

These and other objects are achieved by a load compensation device and a related exoskeleton according to features of the appended claims, which form an integral part of the present description.

An idea underlying the present invention is to provide a load compensation device comprising:

- an assisted joint configured to be constrained to a support structure;
- a main rod comprising a proximal end connected to the assisted joint, and further comprising a distal end configured to be stressed by an applied load;
- an auxiliary rod comprising a first end and a second end, the first end being hinged on the main rod for rotating the auxiliary rod with respect to the main rod, and the second end being movable on a plane on which the applied load lies;
- an elastic element configured to provide an elastic force which acts between the second end of the auxiliary rod and the distal end of the main rod;
- a regulation system configured to modify a distance between the second end of the auxiliary rod and the assisted joint, so as to vary a preloading of the elastic element;

wherein the elastic element is configured to provide the elastic force based on a kinematic configuration of the load compensation device, so as to compensate the applied load in a component thereof which is transverse to the main rod.

In short, the load compensation device according to the present invention is designed with the purpose to completely identify and compensate, with minimal energy consumption,

3

tions and bulkiness, the effect of a force, for example of a gravitational force, which acts on a main rod which represents the hooking point of the load compensation device to a structure of a system in which it is inserted, for example of an exoskeleton or of a robotic arm.

The load compensation device of the present invention then comprises a mechanical structure provided with suitable sensors and control logics, wherein a preloaded elastic element provides the necessary compensation force.

Advantageously, the present invention allows realizing a load compensation device which realizes a hybrid technology, designed to apply a compensation of the loads which adapts to the movements of the user, while guaranteeing a high compactness and low energy consumptions.

In particular, the load compensation device according to the present invention allows merging the positive aspects of the passive and active technologies inside a unique device which can be scalable to any type of apparatus or exoskeleton.

The load compensation device according to the present invention can also advantageously be used in different fields, such as for example the industrial robotics, the lifting or handling systems, to develop more compact and less energy-consuming apparatuses.

Preferably, the load compensation device comprises a movable regulation element, associated with the support structure. In particular, preferably, the movable regulation element provides a regulation rod and linear actuator system, or a cable and motor-driven pulley system.

Preferably, the elastic element is at least indirectly connected to the second end of the auxiliary rod. In particular, preferably, the load compensation device comprises a compensating cable which connects the second end of the auxiliary rod to the elastic element, with a pulley in proximity of the distal end of the main rod.

The load compensation device, which is the object of the present invention, could be applied to one or more joints of an exoskeleton or a robotic arm, making the solution applied to multiple degrees of freedom.

A further idea underlying the present invention is thus to provide an exoskeleton comprising one or more load compensation devices.

Further characteristics and advantages will be more evident from the detailed description made hereinafter, of preferred non-limiting embodiments of the present invention and from the dependent claims, which are outlining preferred and particularly advantageous embodiments of the invention.

BRIEF DESCRIPTION OF THE DRAWINGS

The invention is illustrated with reference to the following figures, provided by way of a non-limiting examples, wherein:

FIG. 1 illustrates an example of an upper limb which holds an object subjected to a load induced by gravitational force.

FIG. 2 illustrates an exoskeleton engaging an upper limb and comprising a load compensation device according to the present invention.

FIG. 3 illustrates a first embodiment of a load compensation device according to the present invention.

FIG. 4a and FIG. 4b illustrates exemplary performances of a load compensation device according to the present invention.

FIG. 5 illustrates a second embodiment of a load compensation device according to the present invention.

4

FIG. 6 illustrates a third embodiment of a load compensation device according to the present invention.

FIG. 7 illustrates an exoskeleton involving pelvis and lumbar spine and comprising a load compensation device according to the present invention.

FIG. 8 illustrates a fourth embodiment of a load compensation device according to the present invention.

FIG. 9 illustrates a fifth embodiment of a load compensation device according to the present invention.

In different figures, similar elements will be identified by similar reference numbers.

DETAILED DESCRIPTION

In preferred embodiments, the load compensation device according to the present invention is used for compensating the effect of gravitational loads in exoskeletons or robotic arms. In particular, the present invention is pertaining to exoskeletons applicable to multiple joints of the human body, such as shoulder, hip in favor of the lumbar spine, the knee, and to robotic arms. The present invention will refer to this non-limiting application of the load compensation device according to the present invention.

In this exemplary application, most of the effort required to carry out a movement with the upper limbs is used to overcome the gravitational effect which can be identified with a torque which acts on the arm itself. Accordingly, the shoulder is the joint which is mainly stressed. The exoskeletons are devices designed exactly to relieve the effort of the user who is wearing it, multiplying the force capabilities. In particular, the load compensation device according to the present invention is designed to be integrated inside exoskeletons, for upper limbs or also lower limbs, at a joint of a user. Similar applications can be carried out, by extension, to robotic arms.

FIG. 1 illustrates an example of an upper limb 1 which holds an object 11 subjected to a load induced by the gravitational acceleration "g".

The load "g" which acts on the object 11 becomes particularly relevant for the flexo-extension movement of the shoulder of the limb 1: this is the case of the "pick & place" movement which is carried out in many industrial fields, such as in the one of large retailer logistic and of manufacturing.

The limb 1 can be schematized as being composed of rigid bodies 6 and 8, of load 11 and of masses 7, 9, 10 and 11, respectively. The rods 6 and 8 are connected with each other by a hinge 5 and constrained to the ground via a hinge 3. This system represents the scheme of the user in the vertical plane. Therefore, the compensation torque applied to the body 6, which is necessary to compensate the gravitational effect which acts on the system and which is caused by the gravitational acceleration "g", will be in function of the position thereof taken in the plane, identified by the angles 2 and 4, by the geometric values of the rods 6 and 8 and by the corresponding masses 7, 9, 10 and 11. The gravitational effect can thus be understood as a resulting torque on the rod 6 caused by the weight forces acting on the barycentres of the bodies 7, 9, 10 and 11.

FIG. 2 illustrates an exoskeleton 100 engaging the upper limb 1 and comprising a load compensation device 201 according to the present invention.

As already described, a non-limiting example of application of the present invention is the compensation of gravitational loads acting on upper limbs during the flexo-extension motion of the shoulder, that is the rotation motion of the shoulder in the vertical plane, as already illustrated in

5

FIG. 1, where the arrow 2 represents the rotation of the shoulder and “g” the gravity vector. In this case, the exoskeleton 100 is configured to compensate the gravitational loads which the shoulder of the user is subjected to.

The application of the load compensation device 201 to the exoskeleton 100 is exemplified to provide a hybrid technology in the case of exoskeletons for upper limbs and for “pick & place” activities.

The load compensation device 201 is connected to a support structure 102 onto which the forces are released. The compensation force is transferred from the device 201 to the limb via an armrest 103 during the flexo-extension motion of the shoulder which is imposed by the user around the hinge 3. The belt 104 preferably contains the electronic components and the power-supply batteries of all active parts, while the strip 105 contains a sensor for detecting the relative rotation between arm and forearm.

In general, the load compensation device is associated, in the exoskeleton 100, with a battery to supply power to the regulation system, which will be further described, with a plurality of sensors and with at least a processor.

In other embodiments, the load compensation device could be applied to a robot or to a lifting apparatus or to a load handling apparatus, with an assisted joint configured to be constrained to a support structure, where there is a main rod, with the purpose of compensating a transverse component of a load applied to the main rod.

FIG. 3 illustrate a first embodiment of a load compensation device 301 according to the present invention.

The load compensation device 301, which is in particular configured to compensate gravitational loads, comprises an assisted joint 302, which is configured to be constrained to a support structure 303.

The load compensation device 301 further comprises a main rod 304 comprising a proximal end 305 connected to the assisted joint 302, and further comprising a distal end 306 configured to be stressed by the applied load, for example the already-described load 11.

The load compensation device 301 further comprises an auxiliary rod 307 comprising a first end 308 and a second end 309. The first end 308 is hinged on the main rod 304 for rotating of the auxiliary rod 307 with respect to the main rod 304. The second end 309 is instead movable on a plane on which the applied load 11 lies, which the load compensation device 301 is configured to compensate.

In particular, the auxiliary rod 307 is projecting outside of the main rod 304 in a direction opposite to a prevalent direction of the applied load 11. In particular, in the exemplary configuration of FIG. 3, the main rod 304 is horizontal and the auxiliary rod 307 is projecting outside of the main rod 304 in an essentially vertical and “upwards” direction, therefore on the opposite side of the prevalent direction of the applied load 11 which is “downwards”.

Preferably, the first end 308 of the auxiliary rod 307 is hinged on the main rod 304 in an intermediate position between the proximal end 305 and the distal end 306 of the main rod 304.

In particular, exactly the distal end 306 of the main rod 304 corresponds to a brace of a movable structural element subjected to variable loads, such as the already-described element 103.

In general, the length of the rods 304 and 307, the distances between the constraints and the general kinematic configuration of the load compensation device are determined in function of the desired compensation performances and of the energy and bulk constraints of the overall system.

6

The load compensation device 301 further comprises an elastic element 310, which is configured to provide an elastic force which acts between the second end 309 of the auxiliary rod 307 and the distal end 306 of the main rod 304.

In a preferred embodiment, the elastic element 310 comprises a traction or compression helical spring. In a variant, the elastic element could be a band made of rubber or of an elastic material which is suitable for the purpose.

Preferably, the elastic element 310 is at least indirectly connected to the second end 309 of the auxiliary rod 307.

In a preferred embodiment, such as the one represented in FIG. 3, the elastic element 310 is indirectly connected to the second end 309 of the auxiliary rod 307, in particular, providing a compensating cable 311 which directly connects the second end 309 of the auxiliary rod 307 to the elastic element 310.

Preferably, the elastic element 310 develops axially and is essentially parallel to the main rod 304; thereby, the load compensation device may be more compact and it is possible to insert an elastic element with higher stiffness. The load compensation device 301 further comprises a pulley 312 in proximity of the distal end 306 of the main rod 304, wherein the compensating cable 311 engages the pulley 312.

In a variant, the elastic element 310 could be directly connected to the second end 309 of the auxiliary rod 307, by directly connecting the distal end 306 to the second end 309 being interposed between them, without the need of a compensating cable, as it will be described with reference to FIG. 9.

The load compensation device 301 further comprises a regulation system 313 configured to modify a distance between the second end 309 of the auxiliary rod 307 and the assisted joint 302, so as to vary a preloading of the elastic element 310.

The elastic element 310 is configured to provide an elastic force based on a kinematic configuration taken by the load compensation device 301, so as to compensate the applied load 11 in a component thereof which is transverse to the main rod.

In this sense, the regulation system 313 is preferably configured to minimize a difference between the transverse component of the load 11 to be compensated, and an opposed transverse component provided by the elastic force of the elastic element 310.

The operating principle carried out by the load compensation device 301 is as follows: at any position taken by the user (exoskeleton or robotic arm), suitable control logics, via sensors and processors, process the gravitational torque/force which acts on the assisted joint 302. They thus process the control action to be sent to the regulation system 313 such that the latter will modify the preloading of the elastic element 310 through the articulated system of the arms 304 and 307, such that the compensation force is equal to the one of the gravitational effect.

In particular, the load compensation device 301 further comprises a plurality of sensors (not shown) configured to measure an absolute position of the main rod 304 and further to measure or obtain a torque which stresses the assisted joint 302 as a result of the applied load 11. Furthermore, the load compensation device 301 further comprises at least a processor (not shown) operatively connected to the plurality of sensors and to the regulation system 313, such processor being configured to calculate the preloading of the elastic element 310 so as to counterbalance the torque which stresses the assisted joint.

Preferably, the abovementioned processor is further configured to modulate the elastic force provided by the elastic

element **310** in function of a dynamic trajectory which is measured by the plurality of sensors, in order to second a movement which is desired by the user of the exoskeleton or required by the programming of the robot.

It is provided an example of a regulation process which can be carried out at any position taken by the user in the vertical plane, such as the one implemented by the control logics and by the sensors to manage the working cycles of the load compensation device **301**.

A single exemplary working cycle can be summarized by the following operation flow:

Sensors provide position measurements and send them to the control logics.

The control logics calculate the position taken by the user and the corresponding gravitational action which acts thereon, expressed as a torque with respect of the reference assisted joint **302**. In addition, preferably, the control system processes the movement dynamics and the type of carried-out trajectory.

A processor calculates a deformation which has to be applied to the elastic element **310** in order to obtain a torque which counterbalances the gravitational action.

A processor processes the control action to be sent to the regulation system **313** which allows the desired deformation of the elastic element **310** to be obtained by resolving the kinematics of the articulated system consisting of the rods **304** and **307**.

Preferably, such control is designed to modulate the actuation force in function of the trajectory and dynamics imposed by the user while carrying out an activity, so as to second the user intention in an application to an exoskeleton **100**.

As already described, the regulation system **313** is configured to modify a distance between the second end **309** of the auxiliary rod **307** and the assisted joint **302**, so as to vary a preloading of the elastic element **310**. In general, the regulation system **313** is further configured to vary a relative angle between the main rod **304** and the auxiliary rod **307**.

For this purpose, the regulation system **313** comprises a movable regulation element **314** associated with the support structure **303**.

Preferably, the regulation system **313** further comprises a regulation rod **320** which connects the movable regulation element **314** to the second end **309** of the auxiliary rod **307**. Preferably, the movable regulation element **314** comprises a linear actuator **321** onto which the regulation rod **320** is hinged.

Preferably, the linear actuator **321** is movable along a ramp element **322** which is constrained to the support structure **303**.

FIG. **4a** and FIG. **4b** illustrate exemplary performances of a load compensation device according to the present invention.

In particular, FIG. **4a** illustrates a comparison between torques at the joint which are required from the user in function of the rotation angle of the main rod **304** around the assisted joint, without the device of the present invention (line **400**) and with the load compensation device **301** (line **401**).

It can be noted that the effort required from the user is almost completely null in case of using the device (line **401**, for any value of the angle).

In particular, FIG. **4b** illustrates a different situation, wherein it is assumed that the exoskeleton **100** is equipped with a motor which controls the rotation of the assisted joint **302** instead of the user, by supplying a torque, without the

device of the present invention (line **402**) and with the load compensation device **301** (line **403**).

It can be noted how the total power (calculated by assuming that the angular velocity is constant) in case of exoskeleton **100**, which is provided with the load compensation device of the present invention (line **403**), is almost null along the entire working field, as compared to the power in case of active exoskeleton with motor but without the device of the present invention (line **402**).

The exemplified performances demonstrate that the load compensation device of the present invention is able to almost completely compensate the gravitational effect, in the entire working field, with minimum energy consumptions.

For this reason, the load compensation device of the present invention allows a lighter and less energy-consuming motor to be used, in favor of an overall lighter and more efficient system.

FIG. **5** illustrates a second embodiment of a load compensation device **501** according to the present invention.

The load compensation device **501** essentially comprises the elements already described in relation to the embodiment **301** presented with reference to the FIG. **3**.

Compared to the already-described embodiment **301**, the load compensation device **501** provides different overall geometries implying slightly different kinematic characteristics which allow load compensation suitable for a specific use.

Furthermore, compared to the already-described embodiment **301**, the load compensation device **501** provides a linear actuator **321** which is moving on a different ramp element **522**, which is differently sloped and is not directly connected to the assisted joint **302**, but it is anyway connected to the support structure **303**.

In other words, the load compensation device **501** provides a regulation system **313** which always comprises a movable regulation element **314** associated with the support structure **303**, and wherein the linear actuator **321** is movable along a different ramp element **522** constrained to the support structure, wherein the ramp element **522** has a determined slope based on different desired kinematic characteristics for the load compensation device **501**.

The FIG. **6** illustrates a third embodiment of a load compensation device **601** according to the present invention.

The load compensation device **601** essentially comprises the elements already described in relation to the embodiment **301** presented with reference to the FIG. **3**.

Therefore, the load compensation device **601** employs the same operating principle described in relation to the previous embodiments **301** and **501**, but it uses a different regulation system **613** inside the hybrid mechanical structure.

In particular, the regulation system **613** further comprises a cable **620** which connects the movable regulation element **614** to the second end **309** of the auxiliary rod **307**.

In this embodiment of the regulation system **613**, the movable regulation element **614** comprises a motor-driven pulley **621** on which the cable **620** is adapted to wind or unwind. Thereby, the regulation system **613** is configured to modify a distance between the second end **309** of the auxiliary rod **307** and the assisted joint **302**, so as to vary a preloading of the elastic element **310**. In general, the regulation system **613** is further configured to vary a relative angle between the main rod **304** and the auxiliary rod **307**.

Preferably, the motor-driven pulley **621** is in a fixed position with respect to the assisted joint **302**, and a second distance between the motor-driven pulley **621** and the

assisted joint **302** is determined based on desired kinematic characteristics of the load compensation device **601**.

In other words, in this embodiment of the regulation system **613**, the linear actuator **321** is replaced by a rotary actuator or motor **621**, while the regulation rod **320** is replaced by a cable **620** which winds the motor-controlled pulley **621** up.

FIG. 7 illustrates an exoskeleton **700** engaging pelvis and lumbar spine and comprising a load compensation device **701** according to the present invention.

In this embodiment of the load compensation device **701**, it is applied to exoskeletons for lumbar spine.

The load compensation device **701** is connected to a support structure **702** onto which the forces are released. The compensation force is transferred from the device **701** to the limb via an element **704**, during the motion of the leg imposed by the user around the hinge **3**. The element **704** itself preferably contains the electronic components and the power supply batteries of all the active parts, while there are sensors for detecting the relative rotation between **703** and **704**.

In general, the load compensation device is associated, in the exoskeleton, to a battery to supply power to the regulation system, a plurality of sensors and at least a processor.

FIG. 8 illustrates a fourth embodiment of a load compensation device according to the present invention.

The load compensation device **701** is applied to the exoskeleton **700** in order to relieve the effort in the area of the lumbar spine. In this case, the assisted joint **302** is the one of the pelvis. The support structure, on which the load compensation device **701** clasps, is composed of two parts, one which clasps on the upper part of the leg and one which clasps to the pelvis.

The load compensation device **701** follows the same implementation of the already-described load compensation device **501**.

FIG. 9 illustrates a fifth embodiment of a load compensation device **901** according to the present invention.

The load compensation device **901** comprises some of the elements already described in relation to the embodiments **301** and **501** presented with reference to the FIG. 3 and FIG. 5.

In particular, the load compensation device **901** comprises an assisted joint **302** configured to be constrained to a support structure **303**.

The load compensation device **901** further comprises a main rod **304**, comprising a proximal end **305**, connected to the assisted joint **302**, and a distal end **306** configured to be stressed by the applied load **11**.

The load compensation device **901** further comprises an auxiliary rod **307** comprising a first end **308** and a second end **309**. The first end **308** is hinged on the main rod **304** for rotating the auxiliary rod **307** with respect to the main rod **304**. The second end **309** is movable on a plane on which the applied load **11** lies.

The load compensation device **901** further comprises an elastic element **910** configured to provide an elastic force which acts between the second end **309** of the auxiliary rod **307** and the distal end **306** of the main rod **304**.

In particular, the elastic element **910** is a tension spring which directly connects the second end **309** with the distal end **306**. In a preferred embodiment, the elastic element **910** comprises a helical spring, but it could also be a band made of rubber or of an elastic material which is suitable for the purpose.

In a variant, the tension spring could connect outer portions of rods **304** and **309**, without directly connecting their ends.

The load compensation device **901** further comprises a regulation system **313** configured to modify a distance between the second end **309** of the auxiliary rod **307** and the assisted joint **302**, so as to vary a preloading of the elastic element **910**.

The regulation system **313** preferably corresponds to the embodiment already described with reference to FIG. 5, with a linear actuator **321** which is moving on a ramp element **522**.

In general, the elastic element **910** is configured to provide the elastic force based on a kinematic configuration of the load compensation device **901**, which is determined by the position of the main rod **304** and the auxiliary rod **307**, and by the preloading of the elastic element **910**.

In that, the load compensation device **901** is capable of compensating the applied load **11** in a component thereof which is transverse to the main rod **304**.

INDUSTRIAL APPLICABILITY

The present invention allows loads to be efficiently compensated, in particular gravitational loads.

The load compensation device according to the present invention can be integrated inside exoskeletons which are particularly designed for industrial applications in which a user has to carry out strenuous manual or generally body-wearing operations, and for both rehabilitation and assistive biomedical applications.

In this sense, the load compensation device according to the present invention, which is integrated in an exoskeleton, allows a load reduction in different joints, such as shoulder, lumbar spine, knee, hip, etc.

Furthermore, the load compensation device according to the present invention can also be integrated into robotic arms.

Considering the description herein reported, the skilled person will be able to conceive further modifications and variations, in order to meet contingent and specific needs.

The embodiments herein described are therefore to be considered as illustrative and non-limiting examples of the invention.

The invention claimed is:

1. A load compensation device comprising:

an assisted joint associated with a human joint and configured to be coupled to a support structure for engaging an adjacent portion of a human body that includes the human joint;

a main rod comprising a proximal end connected to said assisted joint, and further comprising a distal end configured to be stressed by an applied load;

an auxiliary rod comprising a first end and a second end, said first end being hinged on said main rod between the proximal and distal ends for rotating said auxiliary rod with respect to said main rod, said second end being movable on a plane on which said applied load lies;

an elastic element coupled to said main rod and extending along a length thereof from the distal end to beyond the first end of the auxiliary rod, the elastic element configured to provide an elastic force which acts between said second end of said auxiliary rod and said distal end of said main rod;

a regulation system comprising

a ramp coupled to said support structure,

11

a linear actuator movable along the ramp and configured to modify a distance between said second end of said auxiliary rod and said assisted joint, so as to vary a preloading of said elastic element, and a regulation rod hingeably coupled to said linear actuator and to said second end of said auxiliary rod; wherein said elastic element is configured to provide said elastic force based on a kinematic configuration of said load compensation device, so as to compensate said applied load in a component thereof which is transverse to said main rod.

2. The load compensation device according to claim 1, wherein said regulation system further comprises a cable, which connects said linear actuator to said second end of said auxiliary rod, and wherein said linear actuator comprises a motor-driven pulley for winding or unwinding said cable.

3. The load compensation device according to claim 2, wherein said motor-driven pulley is in a fixed position with respect to said assisted joint, and wherein a second distance between said motor-driven pulley and said assisted joint is determined based on desired kinematic characteristics of said load compensation device.

4. The load compensation device according to claim 1, wherein said regulation system is further configured to vary a relative angle between said main rod and said auxiliary rod.

5. The load compensation device according to claim 1, wherein said regulation system is further configured to minimize a difference between a transverse component of said applied load and an opposed transverse component provided by said elastic force.

6. The load compensation device according to claim 1, further comprising a plurality of sensors configured to measure an absolute position of said main rod and further to measure a torque which stresses said assisted joint as a result of said applied load, and further comprising at least one

12

processor operatively connected to said plurality of sensors and to said regulation system, configured to calculate said preloading in order to counterbalance said torque which stresses said assisted joint.

7. The load compensation device according to claim 6, wherein said processor is further configured to modulate said elastic force as a function of a dynamic trajectory, which is measured by said plurality of sensors, in order to add to a desired movement.

8. The load compensation device according to claim 1, wherein said elastic element is at least indirectly connected to said second end of said auxiliary rod.

9. The load compensation device according to claim 1, further comprising a compensating cable, said compensating cable connecting said second end of said auxiliary rod to said elastic element.

10. The load compensation device according to claim 9, wherein said elastic element develops axially and is essentially parallel to said main rod, said load compensation device further comprising a pulley in proximity of said distal end of said main rod, said compensating cable engaging said pulley.

11. The load compensation device according to claim 1, wherein said auxiliary rod is projecting out of said main rod in a direction opposite to a direction of said applied load.

12. The load compensation device according to claim 1, wherein said distal end of said main rod corresponds to a brace of a movable structural element subject to variable loads.

13. An exoskeleton comprising at least one load compensation device according to claim 1.

14. The exoskeleton according to claim 13, further comprising at least one battery to supply power to said regulation system, and further comprising a plurality of sensors and at least one processor.

* * * * *