

- (51) **Int. Cl.**
B29C 64/236 (2017.01)
B29C 64/336 (2017.01)
B33Y 10/00 (2015.01)
B33Y 30/00 (2015.01)
- (52) **U.S. Cl.**
CPC **B29C 64/336** (2017.08); **B33Y 10/00**
(2014.12); **B33Y 30/00** (2014.12)
- (56) **References Cited**
U.S. PATENT DOCUMENTS
- | | | | | | | | |
|-----------|---|---------|-------------------|-----------|----|---------|---------------------|
| 3,264,103 | A | 8/1966 | Cohen et al. | 5,939,008 | A | 8/1999 | Comb et al. |
| 3,395,014 | A | 7/1968 | Cohen et al. | 5,940,674 | A | 8/1999 | Sachs et al. |
| 3,486,482 | A | 12/1969 | Hunger | 5,945,058 | A | 8/1999 | Manners et al. |
| 3,710,846 | A | 1/1973 | Properzi | 5,968,561 | A | 10/1999 | Batchelder et al. |
| 3,875,067 | A | 4/1975 | DeSorgo et al. | 5,980,813 | A | 11/1999 | Narang et al. |
| 3,991,149 | A | 11/1976 | Hurwitt | 5,985,204 | A | 11/1999 | Otsuka et al. |
| 4,041,476 | A | 8/1977 | Swainson | 6,051,179 | A | 4/2000 | Hagenau |
| 4,292,827 | A | 10/1981 | Waugh | 6,067,480 | A | 5/2000 | Stuffle et al. |
| 4,575,330 | A | 3/1986 | Hull | 6,068,367 | A | 5/2000 | Fabbri |
| 4,752,498 | A | 6/1988 | Fudim | 6,110,411 | A | 8/2000 | Clausen et al. |
| 4,945,032 | A | 7/1990 | Murphy et al. | 6,146,567 | A | 11/2000 | Sachs et al. |
| 5,015,312 | A | 5/1991 | Kinzie | 6,193,923 | B1 | 2/2001 | Leyden et al. |
| 5,026,146 | A | 6/1991 | Hug et al. | 6,200,646 | B1 | 3/2001 | Neckers et al. |
| 5,031,120 | A | 7/1991 | Pomerantz et al. | 6,206,672 | B1 | 3/2001 | Grenda |
| 5,058,988 | A | 10/1991 | Spence et al. | 6,363,606 | B1 | 4/2002 | Johnson et al. |
| 5,059,021 | A | 10/1991 | Spence et al. | 6,375,451 | B1 | 4/2002 | Robinson et al. |
| 5,088,047 | A | 2/1992 | Bynum | 6,376,148 | B1 | 4/2002 | Liu et al. |
| 5,094,935 | A | 3/1992 | Vassiliou et al. | 6,391,245 | B1 | 5/2002 | Smith |
| 5,096,530 | A | 3/1992 | Cohen | 6,399,010 | B1 | 6/2002 | Guertin et al. |
| 5,104,592 | A | 4/1992 | Hull et al. | 6,401,002 | B1 | 6/2002 | Jang et al. |
| 5,123,734 | A | 6/1992 | Spence et al. | 6,403,002 | B1 | 6/2002 | van der Geest |
| 5,126,259 | A | 6/1992 | Weiss et al. | 6,436,520 | B1 | 8/2002 | Yamamoto |
| 5,126,529 | A | 6/1992 | Weiss et al. | 6,450,393 | B1 | 9/2002 | Doumanidis et al. |
| 5,133,987 | A | 7/1992 | Spence et al. | 6,463,349 | B2 | 10/2002 | White et al. |
| 5,162,167 | A | 11/1992 | Minh et al. | 6,471,800 | B2 | 10/2002 | Jang et al. |
| 5,174,931 | A | 12/1992 | Almquist et al. | 6,500,378 | B1 | 12/2002 | Smith |
| 5,175,077 | A | 12/1992 | Grossa | 6,512,869 | B1 | 1/2003 | Imayama et al. |
| 5,182,055 | A | 1/1993 | Allison et al. | 6,543,506 | B1 | 4/2003 | Phillips |
| 5,192,559 | A | 3/1993 | Hull et al. | 6,575,218 | B1 | 6/2003 | Burns et al. |
| 5,203,944 | A | 4/1993 | Prinz et al. | 6,596,224 | B1 | 7/2003 | Sachs et al. |
| 5,204,055 | A | 4/1993 | Sachs et al. | 6,641,897 | B2 | 11/2003 | Gervasi |
| 5,207,371 | A | 5/1993 | Prinz et al. | 6,649,113 | B1 | 11/2003 | Manners et al. |
| 5,236,326 | A | 8/1993 | Grossa | 6,660,209 | B2 | 12/2003 | Leyden et al. |
| 5,236,637 | A | 8/1993 | Hull | 6,668,892 | B2 | 12/2003 | Vasilakes et al. |
| 5,236,812 | A | 8/1993 | Vassiliou et al. | 6,682,598 | B1 | 1/2004 | Steinmueller et al. |
| 5,247,180 | A | 9/1993 | Mitcham et al. | 6,780,368 | B2 | 8/2004 | Liu et al. |
| 5,248,456 | A | 9/1993 | Evans, Jr. et al. | 6,786,711 | B2 | 9/2004 | Koch et al. |
| 5,258,146 | A | 11/1993 | Almquist et al. | 6,838,035 | B1 | 1/2005 | Ederer et al. |
| 5,314,711 | A | 5/1994 | Baccini | 6,850,334 | B1 | 2/2005 | Gothait |
| 5,340,656 | A | 8/1994 | Sachs et al. | 6,852,272 | B2 | 2/2005 | Artz et al. |
| 5,387,380 | A | 2/1995 | Cima et al. | 6,896,839 | B2 | 5/2005 | Kubo et al. |
| 5,432,045 | A | 7/1995 | Narukawa et al. | 6,914,406 | B1 | 7/2005 | Wilkes et al. |
| 5,447,822 | A | 9/1995 | Hull et al. | 6,930,144 | B2 | 8/2005 | Oriakhi |
| 5,454,069 | A | 9/1995 | Knapp et al. | 6,947,058 | B1 | 9/2005 | Elmquist |
| 5,460,758 | A | 10/1995 | Langer et al. | 6,966,960 | B2 | 11/2005 | Boyd et al. |
| 5,496,682 | A | 3/1996 | Quadir et al. | 6,974,521 | B2 | 12/2005 | Schermer |
| 5,610,824 | A | 3/1997 | Vinson et al. | 6,986,654 | B2 | 1/2006 | Imiolek et al. |
| 5,626,919 | A | 5/1997 | Chapman et al. | 7,008,209 | B2 | 3/2006 | Iskra et al. |
| 5,650,260 | A | 7/1997 | Onishi | 7,016,738 | B1 | 3/2006 | Karunasiri |
| 5,660,621 | A | 8/1997 | Bredt | 7,022,207 | B2 | 4/2006 | Hirsch |
| 5,665,401 | A | 9/1997 | Serbin et al. | 7,045,738 | B1 | 5/2006 | Kovacevic et al. |
| 5,688,464 | A | 11/1997 | Jacobs et al. | 7,052,263 | B2 | 5/2006 | John |
| 5,693,144 | A | 12/1997 | Jacobs et al. | 7,070,250 | B2 | 7/2006 | Lester et al. |
| 5,697,043 | A | 12/1997 | Baskaran et al. | 7,074,029 | B2 | 7/2006 | Stockwell et al. |
| 5,717,599 | A | 2/1998 | Menhennett et al. | 7,084,875 | B2 | 8/2006 | Plante |
| 5,718,279 | A | 2/1998 | Saoth et al. | 7,087,109 | B2 | 8/2006 | Bredt et al. |
| 5,746,833 | A | 5/1998 | Gerhardt | 7,158,849 | B2 | 1/2007 | Huang et al. |
| 5,764,521 | A | 6/1998 | Batchelder et al. | 7,164,420 | B2 | 1/2007 | Ard |
| 5,807,437 | A | 9/1998 | Sachs et al. | 7,195,472 | B2 | 3/2007 | John |
| 5,824,184 | A | 10/1998 | Kamijo et al. | 7,261,542 | B2 | 8/2007 | Hickerson et al. |
| 5,851,465 | A | 12/1998 | Bredt | 7,270,528 | B2 | 9/2007 | Sherwood |
| 5,866,058 | A | 2/1999 | Batchelder et al. | 7,300,613 | B2 | 11/2007 | Sano et al. |
| 5,895,547 | A | 4/1999 | Kathrein et al. | 7,351,304 | B2 | 4/2008 | Liang et al. |
| 5,900,207 | A | 5/1999 | Danforth et al. | 7,402,219 | B2 | 7/2008 | Graf |
| | | | | 7,438,846 | B2 | 10/2008 | John |
| | | | | 7,455,804 | B2 | 11/2008 | Patel et al. |
| | | | | 7,520,740 | B2 | 4/2009 | Wahlstrom et al. |
| | | | | 7,550,518 | B2 | 6/2009 | Bredt et al. |
| | | | | 7,555,726 | B2 | 6/2009 | Kurtenbach et al. |
| | | | | 7,569,174 | B2 | 8/2009 | Ruatta et al. |
| | | | | 7,572,403 | B2 | 8/2009 | Gu et al. |
| | | | | 7,575,682 | B2 | 8/2009 | Olsta et al. |
| | | | | 7,578,958 | B2 | 8/2009 | Patel et al. |
| | | | | 7,614,866 | B2 | 11/2009 | Sperry et al. |
| | | | | 7,614,886 | B2 | 11/2009 | Sperry et al. |
| | | | | 7,636,610 | B2 | 12/2009 | Schillen et al. |
| | | | | 7,698,947 | B2 | 4/2010 | Sarr |
| | | | | 7,706,910 | B2 | 4/2010 | Hull et al. |
| | | | | 7,742,060 | B2 | 6/2010 | Maillet |

(56)

References Cited

U.S. PATENT DOCUMENTS

7,758,799 B2	7/2010	Hull et al.	8,877,115 B2	11/2014	Elsey
7,767,132 B2	8/2010	Patel et al.	8,888,480 B2	11/2014	Yoo et al.
7,771,183 B2	8/2010	Hull et al.	8,915,728 B2	12/2014	Mironets et al.
7,780,429 B2	8/2010	Kikuchi	8,926,304 B1	1/2015	Chen
7,783,371 B2	8/2010	John et al.	8,932,511 B2	1/2015	Napendensky
7,785,093 B2	8/2010	Holmboe et al.	8,968,625 B2	3/2015	Tan
7,790,093 B2	9/2010	Shkolnik et al.	8,974,717 B2	3/2015	Maguire et al.
7,795,349 B2	9/2010	Bredt et al.	8,991,211 B1	3/2015	Arlotti et al.
7,815,826 B2	10/2010	Serdy et al.	8,992,816 B2	3/2015	Jonasson et al.
7,845,930 B2	12/2010	Shkolnik et al.	8,998,601 B2	4/2015	Busato
7,867,302 B2	1/2011	Nevoret et al.	9,011,982 B2	4/2015	Muller et al.
7,892,474 B2	2/2011	Shkolnik et al.	9,031,680 B2	5/2015	Napadensky
7,894,921 B2	2/2011	John et al.	9,063,376 B2	6/2015	Mizumura
7,931,460 B2	4/2011	Scott et al.	9,064,922 B2	6/2015	Nakajima et al.
7,962,238 B2	6/2011	Shkolnik et al.	9,067,359 B2	6/2015	Rohner et al.
7,964,047 B2	6/2011	Ishida	9,067,360 B2	6/2015	Wehning et al.
7,995,073 B1	8/2011	Shemanarev et al.	9,067,361 B2	6/2015	El-Siblani
8,003,040 B2	8/2011	El-Siblani	9,073,260 B2	7/2015	El-Siblani et al.
8,029,642 B2	10/2011	Hagman	9,079,357 B2	7/2015	Ebert et al.
8,048,261 B2	11/2011	McCowin	9,101,321 B1	8/2015	Kiesser
8,070,473 B2	12/2011	Kozlak	9,149,986 B2	10/2015	Huang et al.
8,071,055 B2	12/2011	Newcombe	9,150,032 B2	10/2015	Roof et al.
8,096,262 B2	1/2012	Ederer et al.	9,153,052 B2	10/2015	Ameline et al.
8,105,066 B2	1/2012	Sperry et al.	9,159,155 B2	10/2015	Andersen
8,110,135 B2	2/2012	El-Siblani	9,186,847 B2	11/2015	Fruth et al.
8,126,580 B2	2/2012	El-Siblani et al.	9,193,112 B2	11/2015	Ohkusa et al.
8,157,908 B2	4/2012	Williams	9,205,601 B2	12/2015	DeSimone et al.
8,185,229 B2	5/2012	Davidson	9,211,678 B2	12/2015	DeSimone et al.
8,191,500 B2	6/2012	Dohring et al.	9,216,546 B2	12/2015	DeSimone et al.
8,211,226 B2	7/2012	Bredt et al.	9,221,100 B2	12/2015	Schwarze et al.
8,232,444 B2	7/2012	Bar Nathan et al.	9,233,504 B2	1/2016	Douglas et al.
8,259,103 B2	9/2012	Glueck et al.	9,248,600 B2	2/2016	Goodman et al.
8,269,767 B2	9/2012	Glueck et al.	9,259,880 B2	2/2016	Chen
8,282,866 B2	10/2012	Hiraide	9,308,690 B2	4/2016	Boyer et al.
8,326,024 B2	12/2012	Shkolnik	9,327,385 B2	5/2016	Webb et al.
8,372,330 B2	2/2013	El-Siblani et al.	9,346,217 B2	5/2016	Huang et al.
8,394,313 B2	3/2013	El-Siblani et al.	9,346,218 B2	5/2016	Chen et al.
8,413,578 B2	4/2013	Doyle	9,360,757 B2	6/2016	DeSimone et al.
8,424,580 B2	4/2013	Anderson et al.	9,364,848 B2	6/2016	Silverbrook
8,444,903 B2	5/2013	Lyons et al.	9,403,322 B2	8/2016	Das et al.
8,454,879 B2	6/2013	Kuzusako et al.	9,403,324 B2	8/2016	Ederer et al.
8,475,946 B1	7/2013	Dion et al.	9,415,443 B2	8/2016	Ljungblad et al.
8,506,862 B2	8/2013	Giller et al.	9,415,544 B2	8/2016	Kerekes et al.
8,506,870 B2	8/2013	Hochsmann et al.	9,415,547 B2	8/2016	Chen et al.
8,513,562 B2	8/2013	Bichsel	9,429,104 B2	8/2016	Fuller
8,522,159 B2	8/2013	Kurtenbach et al.	9,434,107 B2	9/2016	Zenere
8,540,501 B2	9/2013	Yasukochi	9,446,557 B2	9/2016	Zenere et al.
8,568,646 B2	10/2013	Wang et al.	9,453,142 B2	9/2016	Rolland et al.
8,568,649 B1	10/2013	Balistreri et al.	9,456,884 B2	10/2016	Uckelmann et al.
8,593,083 B2	11/2013	Firhoj et al.	9,457,374 B2	10/2016	Hibbs et al.
8,616,872 B2	12/2013	Matsui et al.	9,463,488 B2	10/2016	Ederer et al.
8,623,264 B2	1/2014	Rohner et al.	9,469,074 B2	10/2016	Ederer et al.
8,636,494 B2	1/2014	Gothait et al.	9,486,944 B2	11/2016	El-Siblani et al.
8,636,496 B2	1/2014	Das et al.	9,486,964 B2	11/2016	Joyce
8,658,076 B2	2/2014	El-Siblani	9,487,443 B2	11/2016	Watanabe
8,663,568 B2	3/2014	Bar Nathan et al.	9,498,920 B2	11/2016	DeSimone et al.
8,666,142 B2	3/2014	Shkolnik et al.	9,498,921 B2	11/2016	Teulet
8,703,037 B2	4/2014	Hull et al.	9,511,546 B2	12/2016	Chen et al.
8,715,832 B2	5/2014	Ederer et al.	9,517,591 B2	12/2016	Yoo et al.
8,718,522 B2	5/2014	Chillszyzn et al.	9,517,592 B2	12/2016	Yoo et al.
8,737,862 B2	5/2014	Manico et al.	9,527,244 B2	12/2016	El-Siblani
8,741,194 B1	6/2014	Ederer et al.	9,527,272 B2	12/2016	Steele
8,741,203 B2	6/2014	Liska et al.	9,529,371 B2	12/2016	Nakamura
8,744,184 B2	6/2014	Ameline et al.	9,533,450 B2	1/2017	El-Siblani et al.
8,761,918 B2	6/2014	Silverbrook	9,539,762 B2	1/2017	Durand et al.
8,801,418 B2	8/2014	El-Siblani et al.	9,545,753 B2	1/2017	Costabeber
8,805,064 B2	8/2014	Ameline et al.	9,545,784 B2	1/2017	Nakamura
8,815,143 B2	8/2014	John et al.	9,550,326 B2	1/2017	Costabeber
8,844,133 B2	9/2014	Fuller	9,561,622 B2	2/2017	Das et al.
8,845,316 B2	9/2014	Schillen et al.	9,561,623 B2	2/2017	El-Siblani et al.
8,845,953 B1	9/2014	Balistreri et al.	9,578,695 B2	2/2017	Jerby et al.
8,862,260 B2	10/2014	Shkolnik et al.	9,579,852 B2	2/2017	Okamoto
8,872,024 B2	10/2014	Jamar et al.	9,581,530 B2	2/2017	Guthrie et al.
8,873,024 B2	10/2014	Jamar et al.	9,592,635 B2	3/2017	Ebert et al.
8,876,513 B2	11/2014	Lim et al.	9,604,411 B2	3/2017	Rogren
			9,610,616 B2	4/2017	Chen et al.
			9,616,620 B2	4/2017	Hoechsmann et al.
			9,632,037 B2	4/2017	Chen et al.
			9,632,420 B2	4/2017	Allanic

(56)

References Cited

U.S. PATENT DOCUMENTS

9,632,983 B2	4/2017	Ueda et al.	2012/0195994 A1	8/2012	El-Siblani et al.
9,636,873 B2	5/2017	Joyce	2012/0292800 A1	11/2012	Higuchi et al.
9,649,812 B2	5/2017	Hartmann et al.	2013/0008879 A1	1/2013	Bichsel
9,649,815 B2	5/2017	Atwood et al.	2013/0140741 A1	6/2013	El-Siblani et al.
9,656,344 B2	5/2017	Kironn et al.	2014/0099476 A1	4/2014	Subramanian et al.
9,670,371 B2	6/2017	Pervan et al.	2014/0103581 A1	4/2014	Das et al.
9,676,143 B2	6/2017	Kashani-Shirazi	2014/0200865 A1	7/2014	Lehmann et al.
9,676,963 B2	6/2017	Rolland et al.	2014/0239554 A1	8/2014	El-Siblani et al.
9,682,166 B2	6/2017	Watanabe	2014/0275317 A1	9/2014	Moussa
9,682,425 B2	6/2017	Xu et al.	2014/0319735 A1	10/2014	El-Siblani et al.
9,688,027 B2	6/2017	Batchelder et al.	2014/0322374 A1	10/2014	El-Siblani et al.
9,707,720 B2	7/2017	Chen et al.	2014/0332507 A1	11/2014	Fockele
9,720,363 B2	8/2017	Chillsczyn et al.	2014/0339741 A1	11/2014	Aghababae et al.
9,738,034 B2	8/2017	Gruber et al.	2014/0348691 A1	11/2014	Ljungblad et al.
9,738,564 B2	8/2017	Capobianco et al.	2014/0348692 A1	11/2014	Bessac et al.
9,751,292 B2	9/2017	Jamar et al.	2015/0004042 A1	1/2015	Nimal
9,764,513 B2	9/2017	Stampfl et al.	2015/0004046 A1	1/2015	Graham et al.
9,764,535 B2	9/2017	Xie et al.	2015/0056365 A1	2/2015	Miyoshi
9,821,546 B2	11/2017	Schaafsma et al.	2015/0086409 A1	3/2015	Hellestam
9,862,146 B2	1/2018	Driessen et al.	2015/0102531 A1	4/2015	El-Siblani et al.
9,862,150 B2	1/2018	Chen et al.	2015/0104563 A1	4/2015	Lowe et al.
9,868,255 B2	1/2018	Comb et al.	2015/0140152 A1	5/2015	Chen
9,885,987 B2	2/2018	Chillsczyn et al.	2015/0140155 A1	5/2015	Ohno et al.
9,895,843 B2	2/2018	Lobovsky et al.	2015/0145174 A1	5/2015	Comb
9,901,983 B2	2/2018	Hovel et al.	2015/0158111 A1	6/2015	Schwarze et al.
9,908,293 B2	3/2018	Yoo et al.	2015/0165695 A1	6/2015	Chen et al.
9,919,474 B2	3/2018	Napadensky	2015/0210013 A1	7/2015	Teulet
9,919,515 B2	3/2018	Daniell et al.	2015/0224710 A1	8/2015	El-Siblani
9,950,368 B2	4/2018	Lampenscherf et al.	2015/0231828 A1	8/2015	El-Siblani et al.
9,956,727 B2	5/2018	Steele	2015/0231831 A1	8/2015	El-Siblani
9,962,767 B2	5/2018	Buller et al.	2015/0246487 A1	9/2015	El-Siblani
9,981,411 B2	5/2018	Green et al.	2015/0251351 A1	9/2015	Feygin
10,000,023 B2	6/2018	El-Siblani et al.	2015/0268099 A1	9/2015	Craig et al.
10,011,076 B2	7/2018	El-Siblani et al.	2015/0298396 A1	10/2015	Chen et al.
10,061,302 B2	8/2018	Jacobs et al.	2015/0301517 A1	10/2015	Chen et al.
10,071,422 B2	9/2018	Buller et al.	2015/0306819 A1	10/2015	Ljungblad
10,124,532 B2	11/2018	El-Siblani et al.	2015/0306825 A1	10/2015	Chen et al.
10,150,254 B2	12/2018	Bauman et al.	2015/0321421 A1	11/2015	Ding
10,155,345 B2	12/2018	Ermoshkin et al.	2015/0352668 A1	12/2015	Scott et al.
10,155,882 B2	12/2018	Rolland et al.	2015/0352791 A1	12/2015	Chen et al.
10,183,330 B2	1/2019	Buller et al.	2015/0355553 A1	12/2015	Allanic
10,183,444 B2	1/2019	Campbell	2015/0375452 A1	12/2015	Huang et al.
10,240,066 B2	3/2019	Rolland et al.	2016/0016361 A1	1/2016	Lobovsky et al.
10,245,784 B2	4/2019	Teken et al.	2016/0031010 A1	2/2016	O'Neill et al.
10,317,882 B2	6/2019	de Pena et al.	2016/0046075 A1	2/2016	DeSimone et al.
10,336,055 B2	7/2019	Das et al.	2016/0046080 A1	2/2016	Thomas et al.
10,336,057 B2	7/2019	Moore et al.	2016/0052205 A1	2/2016	FrantzDale
10,350,823 B2	7/2019	Rolland et al.	2016/0059484 A1	3/2016	DeSimone et al.
10,357,956 B2	7/2019	Usami et al.	2016/0059485 A1	3/2016	Ding et al.
10,406,748 B2	9/2019	Honda	2016/0067921 A1	3/2016	Willis et al.
10,612,112 B2	4/2020	Yang et al.	2016/0082662 A1	3/2016	Majer
10,639,843 B2	5/2020	Yuan et al.	2016/0082671 A1	3/2016	Joyce
10,682,808 B2	6/2020	Fujita et al.	2016/0096332 A1	4/2016	Chen et al.
10,695,988 B2	6/2020	Hanyu et al.	2016/0107340 A1	4/2016	Joyce
10,717,212 B2	7/2020	Parkinson et al.	2016/0107383 A1	4/2016	Dikovskiy et al.
10,737,479 B2	8/2020	El-Siblani et al.	2016/0107387 A1	4/2016	Ooba et al.
2002/0164069 A1	11/2002	Nagano et al.	2016/0129631 A1	5/2016	Chen et al.
2003/0180171 A1	9/2003	Artz et al.	2016/0137839 A1	5/2016	Rolland et al.
2003/0209836 A1	11/2003	Sherwood	2016/0167160 A1	6/2016	Hellestam
2005/0012239 A1	1/2005	Nakashima	2016/0176114 A1	6/2016	Tsai et al.
2005/0019016 A1	1/2005	Nakashika et al.	2016/0184931 A1	6/2016	Green
2006/0230984 A1	10/2006	Bredt et al.	2016/0193785 A1	7/2016	Bell et al.
2006/0248062 A1	11/2006	Libes et al.	2016/0214327 A1	7/2016	Ucklemann et al.
2007/0063366 A1	3/2007	Cunningham et al.	2016/0221262 A1	8/2016	Das et al.
2007/0116937 A1	5/2007	Lazzerini	2016/0243649 A1	8/2016	Zheng et al.
2008/0170112 A1	7/2008	Hull et al.	2016/0303798 A1	10/2016	Mironets et al.
2008/0224352 A1	9/2008	Narukawa et al.	2016/0332386 A1	11/2016	Kuijpers
2008/0241404 A1	10/2008	Allaman et al.	2016/0361871 A1	12/2016	Jeng et al.
2010/0003619 A1	1/2010	Das et al.	2016/0361872 A1	12/2016	El-Siblani
2010/0196694 A1	8/2010	Yamazaki et al.	2017/0008234 A1	1/2017	Cullen et al.
2010/0290016 A1	11/2010	Kaehr et al.	2017/0008236 A1	1/2017	Easter et al.
2011/0089610 A1	4/2011	El-Siblani et al.	2017/0021562 A1	1/2017	El-Siblani et al.
2011/0101570 A1	5/2011	John et al.	2017/0066185 A1	3/2017	Ermoshkin et al.
2011/0162989 A1	7/2011	Ducker et al.	2017/0066196 A1	3/2017	Beard et al.
2011/0207057 A1	8/2011	Hull et al.	2017/0072635 A1	3/2017	El-Siblani et al.
			2017/0080641 A1	3/2017	El-Siblani
			2017/0087670 A1	3/2017	Kalenties et al.
			2017/0100895 A1	4/2017	Chou et al.
			2017/0100897 A1	4/2017	Chou et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2017/0100899	A1	4/2017	El-Siblani et al.
2017/0102679	A1	4/2017	Greene et al.
2017/0113409	A1	4/2017	Patrov
2017/0120332	A1	5/2017	DeMuth et al.
2017/0120333	A1	5/2017	DeMuth et al.
2017/0120334	A1	5/2017	DeMuth et al.
2017/0120335	A1	5/2017	DeMuth et al.
2017/0120336	A1	5/2017	DeMuth et al.
2017/0120387	A1	5/2017	DeMuth et al.
2017/0120518	A1	5/2017	DeMuth et al.
2017/0120529	A1	5/2017	DeMuth et al.
2017/0120530	A1	5/2017	DeMuth et al.
2017/0120537	A1	5/2017	DeMuth et al.
2017/0120538	A1	5/2017	DeMuth et al.
2017/0123222	A1	5/2017	DeMuth et al.
2017/0123237	A1	5/2017	DeMuth et al.
2017/0136688	A1	5/2017	Knecht et al.
2017/0136708	A1	5/2017	Das et al.
2017/0157841	A1	6/2017	Green
2017/0157862	A1	6/2017	Bauer
2017/0165916	A1	6/2017	El-Siblani
2017/0173865	A1	6/2017	Dikovsky et al.
2017/0182708	A1	6/2017	Lin et al.
2017/0190120	A1	7/2017	Bloome et al.
2017/0276651	A1	9/2017	Hall
2017/0284971	A1	10/2017	Hall
2017/0291804	A1	10/2017	Craft et al.
2017/0297108	A1	10/2017	Gibson et al.
2017/0297109	A1	10/2017	Gibson et al.
2017/0305136	A1	10/2017	Elsey
2017/0326786	A1	11/2017	Yuan et al.
2017/0326807	A1	11/2017	Greene et al.
2017/0368816	A1	12/2017	Batchelder et al.
2018/0001567	A1	1/2018	Juan et al.
2018/0015672	A1	1/2018	Shusteff et al.
2018/0043619	A1	2/2018	Kim et al.
2018/0056585	A1	3/2018	Du Toit
2018/0056604	A1	3/2018	Sands et al.
2018/0079137	A1	3/2018	Herzog et al.
2018/0085998	A1	3/2018	von Burg
2018/0117790	A1	5/2018	Yun
2018/0169969	A1	6/2018	Deleon et al.
2018/0200948	A1	7/2018	Kuijpers et al.
2018/0201021	A1	7/2018	Beaver et al.
2018/0229332	A1	8/2018	Tsai et al.
2018/0229436	A1	8/2018	Gu et al.
2018/0272603	A1	9/2018	MacCormack et al.
2018/0272608	A1	9/2018	Yun
2018/0345600	A1	12/2018	Holford et al.
2018/0370214	A1	12/2018	Comb et al.
2019/0022937	A1	1/2019	Stelter et al.
2019/0039299	A1	2/2019	Busbee et al.
2019/0047211	A1	2/2019	Herring et al.
2019/0061230	A1	2/2019	Ermoshkin et al.
2019/0112499	A1	4/2019	Rolland et al.
2019/0126548	A1	5/2019	Barnhart et al.
2019/0232550	A1	8/2019	Mark et al.
2019/0240932	A1	8/2019	Graf
2019/0263054	A1	8/2019	Kotler et al.
2019/0283316	A1	9/2019	Rolland et al.
2019/0344381	A1	11/2019	Pomerantz et al.
2019/0389137	A1	12/2019	Frohnmaier et al.
2020/0001398	A1	1/2020	Mellor et al.
2020/0079008	A1	3/2020	Chowdry et al.
2020/0079017	A1	3/2020	MacNeish, III et al.
2020/0108553	A1	4/2020	Rogren
2020/0164437	A1	5/2020	Goth et al.
2020/0198224	A1*	6/2020	Dubelman
2020/0230938	A1	7/2020	Menchik et al.
2020/0247040	A1	8/2020	Green
2020/0290275	A1	9/2020	Dubelman et al.
2020/0307075	A1	10/2020	Mattes et al.
2020/0376775	A1	12/2020	Das et al.
2021/0046695	A1	2/2021	Thompson et al.
2021/0276248	A1	9/2021	Boehm et al.

FOREIGN PATENT DOCUMENTS

CN	103522546	A	1/2014
CN	104175559	A	12/2014
CN	104647752	A	5/2015
CN	105711101	A	6/2016
CN	105773962	A	7/2016
CN	107322930	A	11/2017
CN	208946717	U	6/2019
CN	109968661	A	7/2019
CN	111497231	A	8/2020
DE	102007010624	A1	9/2008
EP	448459	A1	9/1991
EP	557051	A1	8/1993
EP	1454831	B1	9/2004
EP	1852244	A2	11/2007
EP	1864785	A1	12/2007
EP	1946908	A2	7/2008
EP	2521524	A1	11/2012
EP	3053729	A1	8/2016
EP	3453521	A1	3/2019
EP	3356121	B1	10/2020
GB	2311960	A	10/1997
JP	H06246839	A	9/1994
JP	H09277384	A	10/1997
JP	2002370286	A	12/2002
JP	2003039564	A	2/2003
JP	2004/257929	A	9/2004
JP	2016196098	A	11/2016
KR	20170108729	A	9/2017
KR	102109664	B1	5/2020
WO	WO9600422	A1	1/1996
WO	WO9806560		2/1998
WO	WO0100390	A1	1/2001
WO	WO2006/077665	A1	7/2006
WO	WO2006109355	A1	10/2006
WO	WO2017009368	A1	1/2017
WO	WO2017098968	A1	6/2017
WO	WO2017100538	A1	6/2017
WO	WO2019/159936	A1	8/2019
WO	WO2020033607	A1	2/2020
WO	WO2020185553	A1	9/2020

OTHER PUBLICATIONS

Carbon, Carbon SpeedCell: Additive Manufacturing Reinvented, Redwood City California, Mar. 16, 2017, 4 Pages. Retrieved from Webpage: <https://www.carbon3d.com/news/carbon-speedcell-additive-manufacturing-reinvented/>.

Carbon, The 3D Printer for Products that Outperform, 8 Pages. Retrieved from Webpage: <https://www.carbon3d.com>.

DDM Systems, Disruptive Technologies for Additive Manufacturing, 2014. Retrieved on Jul. 7, 2020 from Web Link: <http://www.ddmsys.com/>.

Designing Buildings Wiki, Types of Brick Bonding, 6 Pages. Retrieved Mar. 25, 2021 from Webpage: https://www.designingbuildings.co.uk/wiki/Types_of_brick_bonding.

Doctor Blade with Micrometer Screw Gauge, The Tape Casting Warehouse, Inc., Morrisville PA, 6 Pages. Retrieved Mar. 23, 2021 from Webpage: <https://www.drblade.com/>.

Envisiontec, Advanced DLP for Superior 3D Printing, Mar. 9, 2017, 8 Pages. <https://envisiontec.com/wp-content/uploads/2016/12/Why-EnvisionTEC-DLP-3D-Printing-is-Better-rebranded.pdf>.

Feng et al., Exposure Reciprocity Law in Photopolymerization of Multi-Functional Acrylates and Methacrylates, Macromolecular Chemistry and Physics, vol. 208, 2007, pp. 295-306.

Formlabs, An Introduction to Post-Curing SLA 3D Prints, 8 Pages. Retrieved from Webpage: <https://formlabs.com/blog/introduction-post-curing-sla-3d-prints>.

Formlabs, Form Wash & Form Cure, 8 Pages. Retrieved from Webpage: <https://formlabs.com/tools/wash-cure/>.

Hafkamp et al., A Feasibility Study on Process Monitoring and Control in Vat Photopolymerization of Ceramics, Mechatronics, vol. 56, The Netherlands, Dec. 2018, pp. 220-241. Retrieved from <https://doi.org/10.1016/j.mechatronics.2018.02.006>.

(56)

References Cited**OTHER PUBLICATIONS**

KUDO3D, Post-Process Your SLA Prints in 4 Easy Steps, 8 Pages. Retrieved from Webpage: <https://www.kudo3d.com/post-process-your-sla-prints-in-4-easy-steps/>.

Leap, Low-Frequency Sonic Mixing Technology, Energy Efficiency & Renewable Energy, EnergyGov, 5 Pages. Retrieved Mar. 17, 2021 from Webpage: <https://www.energy.gov/eere/amo/low-frequency-sonic-mixing-technology>.

Lee et al., Development of a 3D Printer Using Scanning Projection Stereolithography, Scientific Reports, vol. 5, Article No. 9875, 2015, 5 pages. <https://www.nature.com/articles/srep09875#s1>.

Lee et al., Large-Area Compatible Laser Sintering Schemes with a Spatially Extended Focused Beam, Journal, Micromachines, vol. 8, No. 153, Seoul University, Seoul Korea, May 11, 2017, 8 Pages. <http://dx.doi.org/10.3390/mi8050153>.

Limaye, Multi-Objective Process Planning Method for Mask Projection Stereolithography, Dissertation Georgia Institute of Technology, Dec. 2007, 324 Pages.

Lithoz, 2 Pages. Retrieved from Webpage: <http://www.lithoz.com/en/our-products/cleaning-station>.

Matthews et al., Diode-Based Additive Manufacturing of Metals Using an Optically-Addressable Light Valve, Optic Express Research Article, vol. 25, No. 10, Lawrence Livermore National Laboratory, Livermore CA, May 10, 2017.

Micron3d, Cleaning of Printed Models, YouTube, Dec. 5, 2016, 1 Page. Retrieved from Webpage: <https://www.youtube.com/watch?v=soAlrSsliBY>.

Nussbaum et al., Evaluation of Processing Variables in Large Area Polymer Sintering of Single Layer Components, Solid Freeform Fabrication 2016: Proceedings of the 27th Annual International Solid Freeform Fabrication Symposium—An Additive Manufacturing Conference Reviewed Paper, University of South Florida, Tampa Florida.

Omegasonics, Ultrasonic Cleaning of 3D Printer Parts, YouTube, Feb. 26, 2014, 1 Page. Retrieved from Webpage: <https://www.youtube.com/watch?v=Gxj47OS5ohk>.

Park et al., Development of Multi-Material DLP 3D Printer, Journal of the Korean Society of Manufacturing Technology Engineers, vol. 26, Issue 1, Seoul Korea, Feb. 15, 2017, pp. 100-107. <https://doi.org/10.7735/ksmte.2017.26.1.100>.

Prodways Tech, Prodways Movinglight Technology Retrieved on Jul. 2, 2020 from Web Link: <https://www.prodways.com/en/the-prodways-movinglight-technology/>.

RAMCO Equipment Corporation, RAMCO RamTough-Fully Automated Wash/Rinse/Dry System, YouTube, Jul. 9, 2013, 1 Page. Retrieved from Webpage: <https://www.youtube.com/watch?v=i8S5Oc3FVFU>.

Ricoh Imaging Company Ltd., The Advanced Pixel Shift Resolution System II for Super-High-Resolution Images, Pentax K-1 Mark II, Pixel Shift Resolution System, 4 Pages. Retrieved on Mar. 30, 2021 from Webpage: <http://www.ricoh-imaging.co.jp/english/products/k-1-2/feature/02.html>.

Sonics & Materials, Inc., Ultrasonic Food Cutting Equipment, Sonics & Materials, Inc., Retrieved on Jun. 26, 2020, 4 Pages. <https://www.sonics.com/food-cutting>.

Stemmer Imaging, Ultra-High Resolution for Industrial Imaging, Germany, 9 Pages. Retrieved on Mar. 30, 2021 from Webpage: <https://www.stemmer-imaging.com/en/knowledge-base/pixel-shift-technology/>.

Stevenson, Admatec's Ceramic 3D Printers, Ceramic, Metal, Fabbaloo 3D Printing News, Jan. 21, 2019, 8 Pages. Retrieved Nov. 24, 2020 from Weblink: <https://www.fabbaloo.com/blog/2019/1/21/admatecs-ceramic-3d-printers>.

Techmetals, Electroless Nickel (TM 117C), Engineered Metal Finishing & Performance Coatings, 1 Page. Retrieved from Webpage: https://techmetals.com/pdfs/TM_117C.pdf <https://techmetals.com/tm117c-2/>.

Telsonic Ultrasonics, Cutting Awning Fabrics and Sealing the Edge, The Powerhouse of Ultrasonics, 2017, 1 Page. https://www.telsonic.com/fileadmin/applications/AS_206_Cut_Seal_Markisengewebe_EN.pdf.

Telsonic Ultrasonics, Integrated Power Actuator—IPA 3505, Telsonic Ultrasonics, Retrieved Jun. 26, 2020, 2 Pages. <https://www.telsonic.com/en/products/integrated-power-actuator-ipa-3505/>.

Tok et al., Tape Casting of High Dielectric Ceramic Substrates for Microelectronics Packaging, Journal of Materials Engineering and Performance, vol. 8, 1999, pp. 469-472. (Abstract Only) <https://link.springer.com/article/10.1361/105994999770346783>.

Wikipedia, Pixel Shifting, 2 Pages. Retrieved Mar. 30, 2021 from Webpage: https://en.wikipedia.org/wiki/Pixel_shifting.

Wikipedia, Standing Wave, 11 Pages. Retrieved Mar. 17, 2021 from Webpage: https://en.wikipedia.org/wiki/Standing_wave.

* cited by examiner



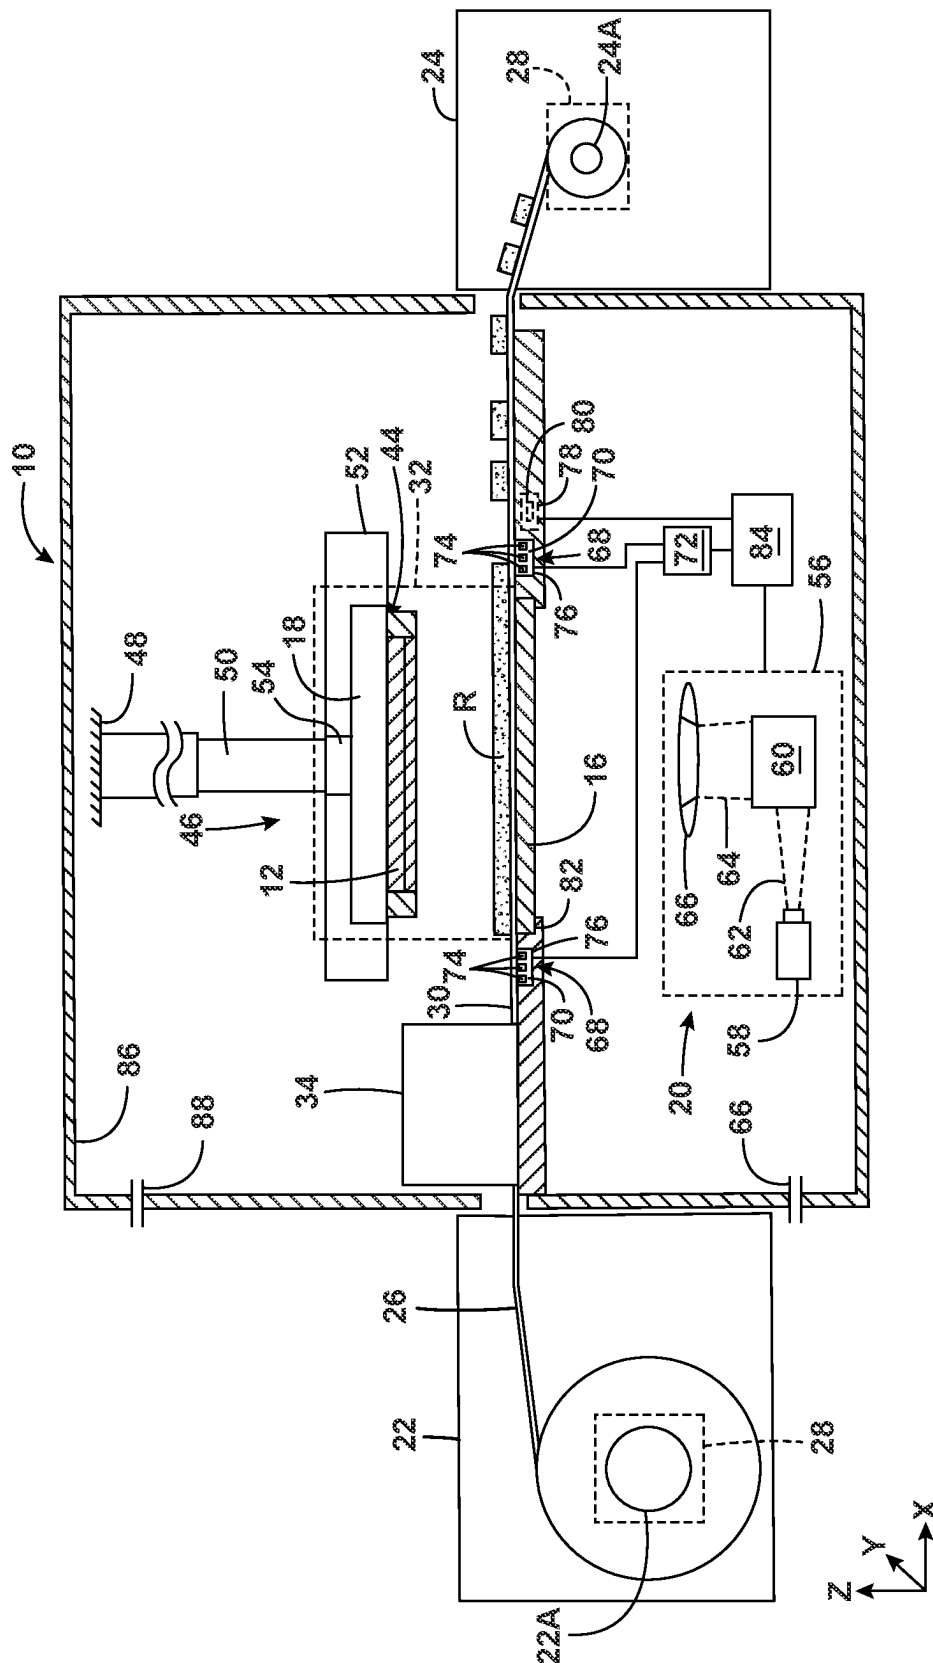


FIG. 1A

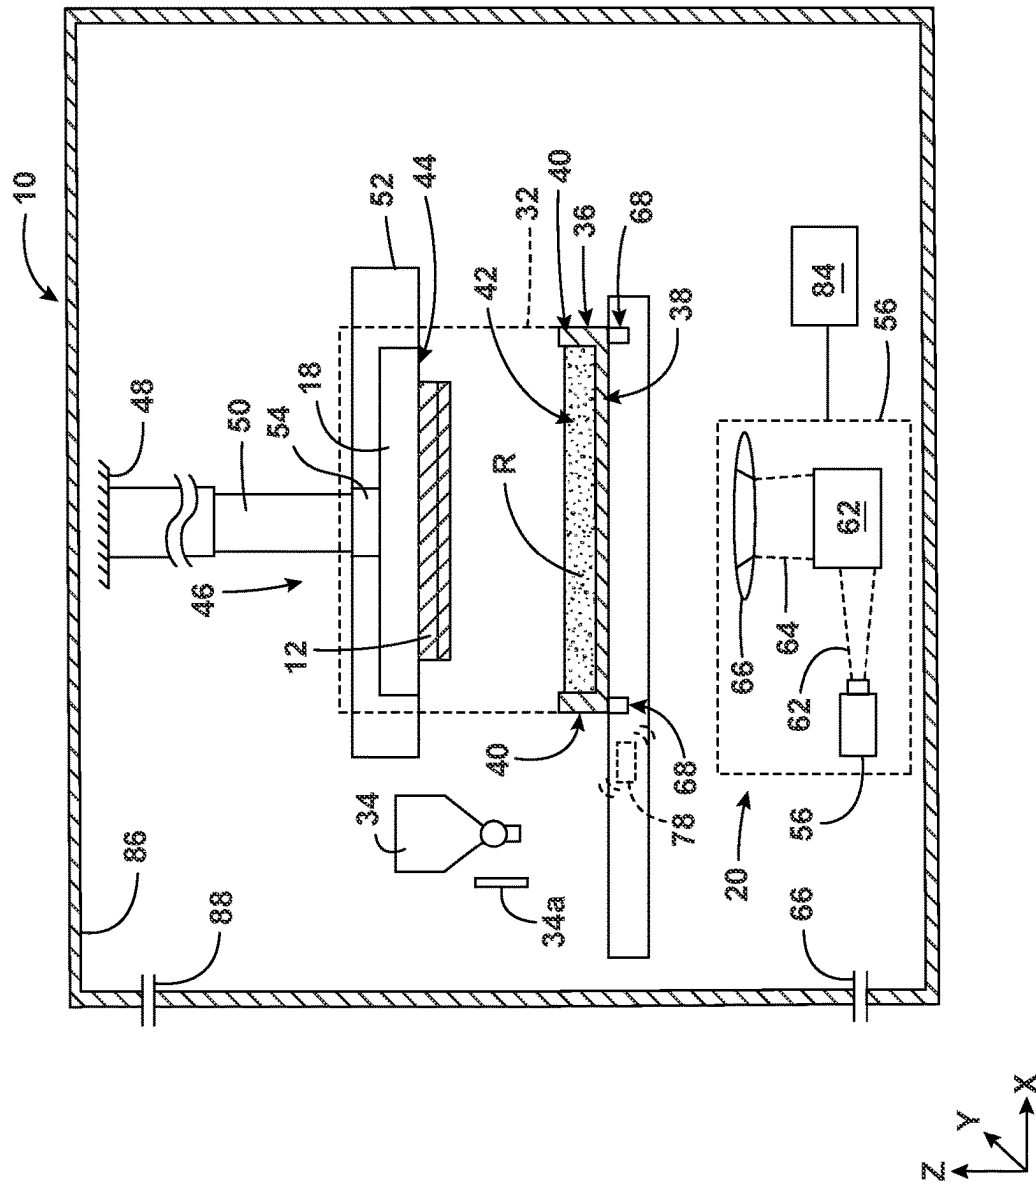

உரு

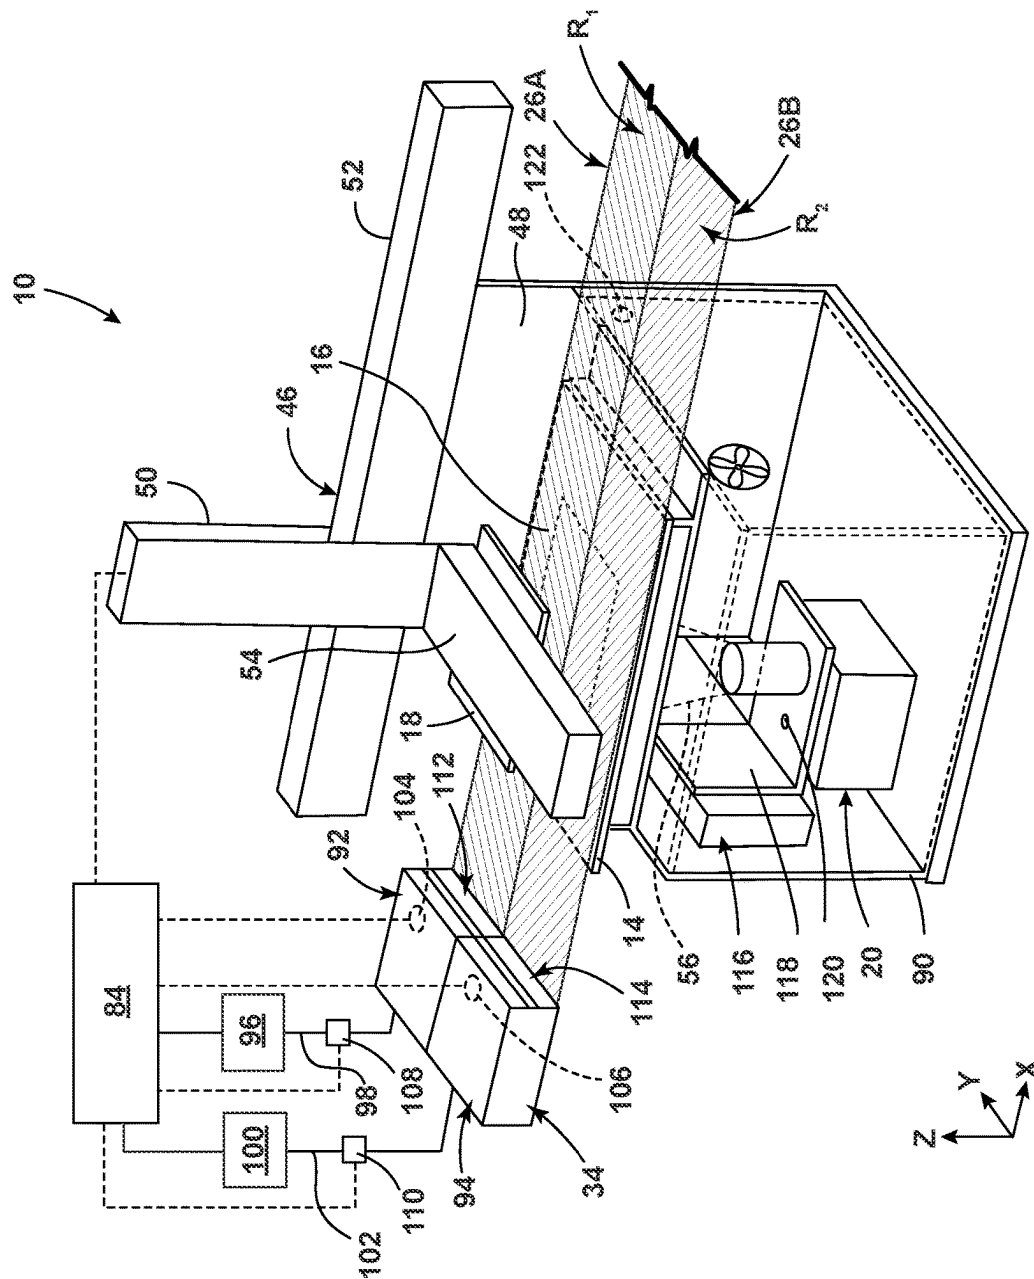

261

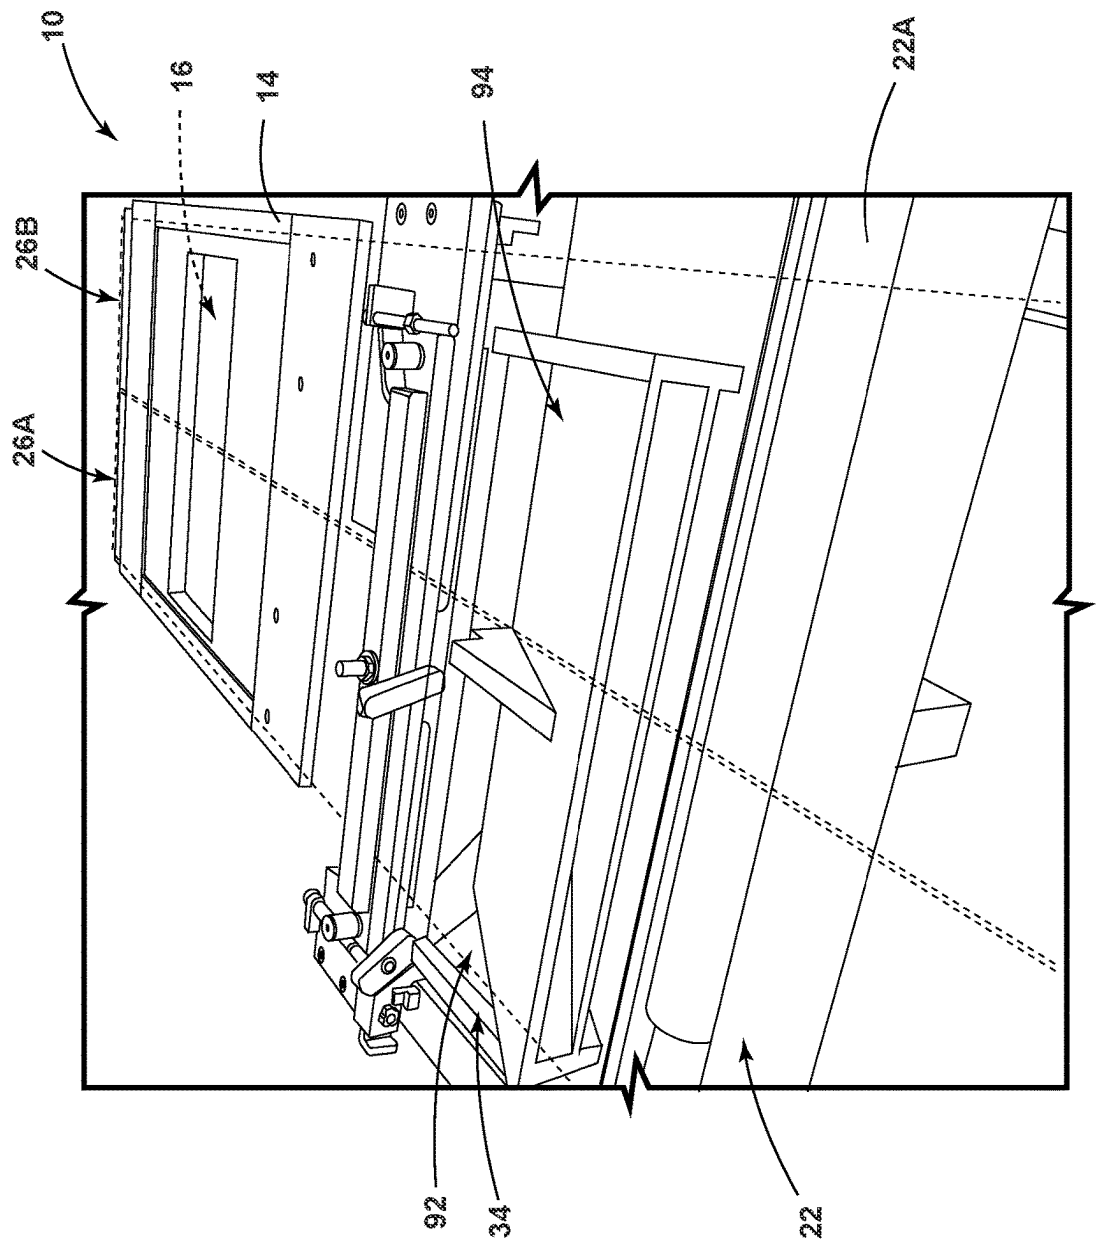


FIG. 3

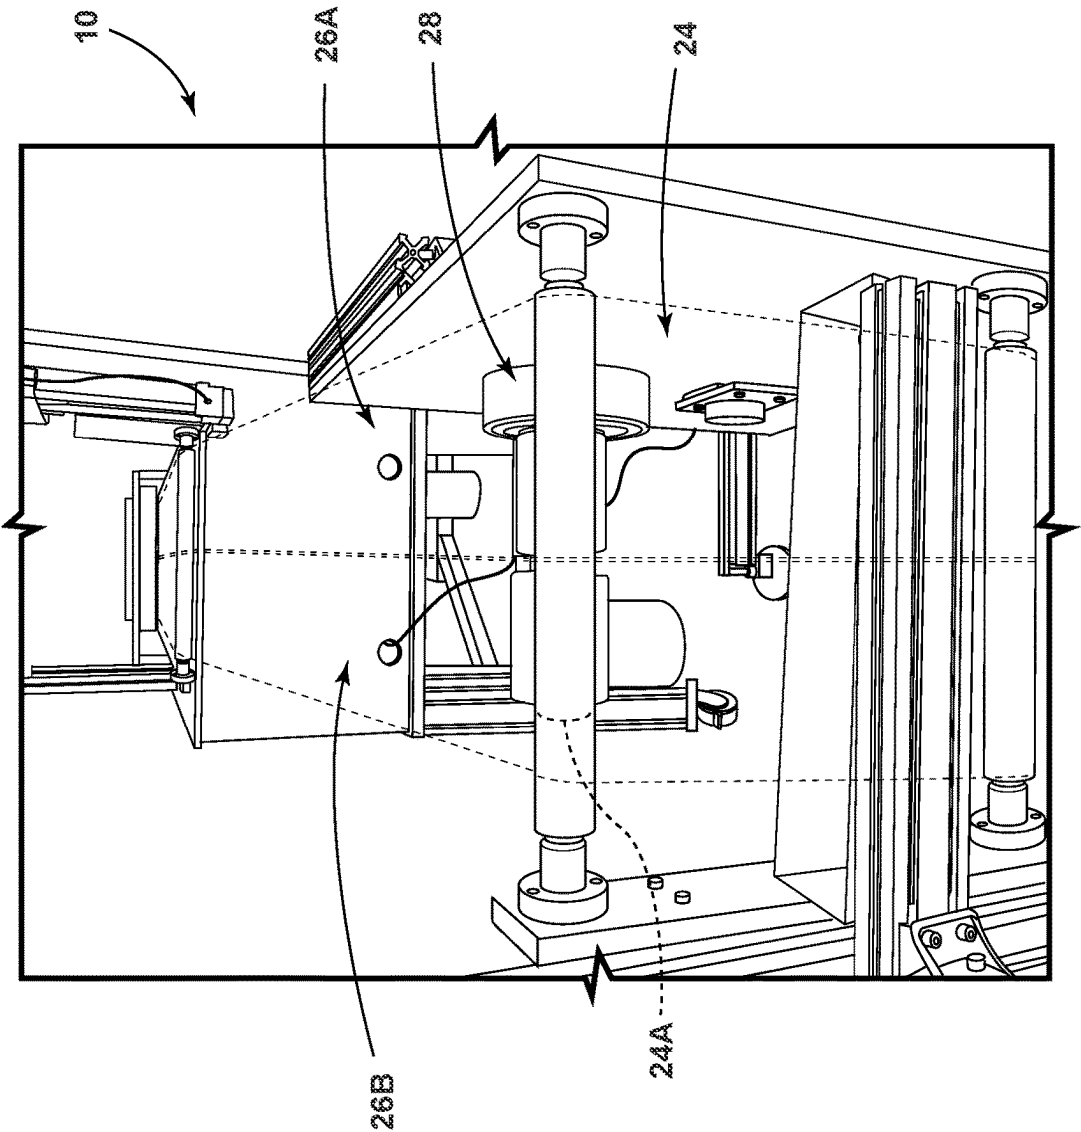


FIG. 4

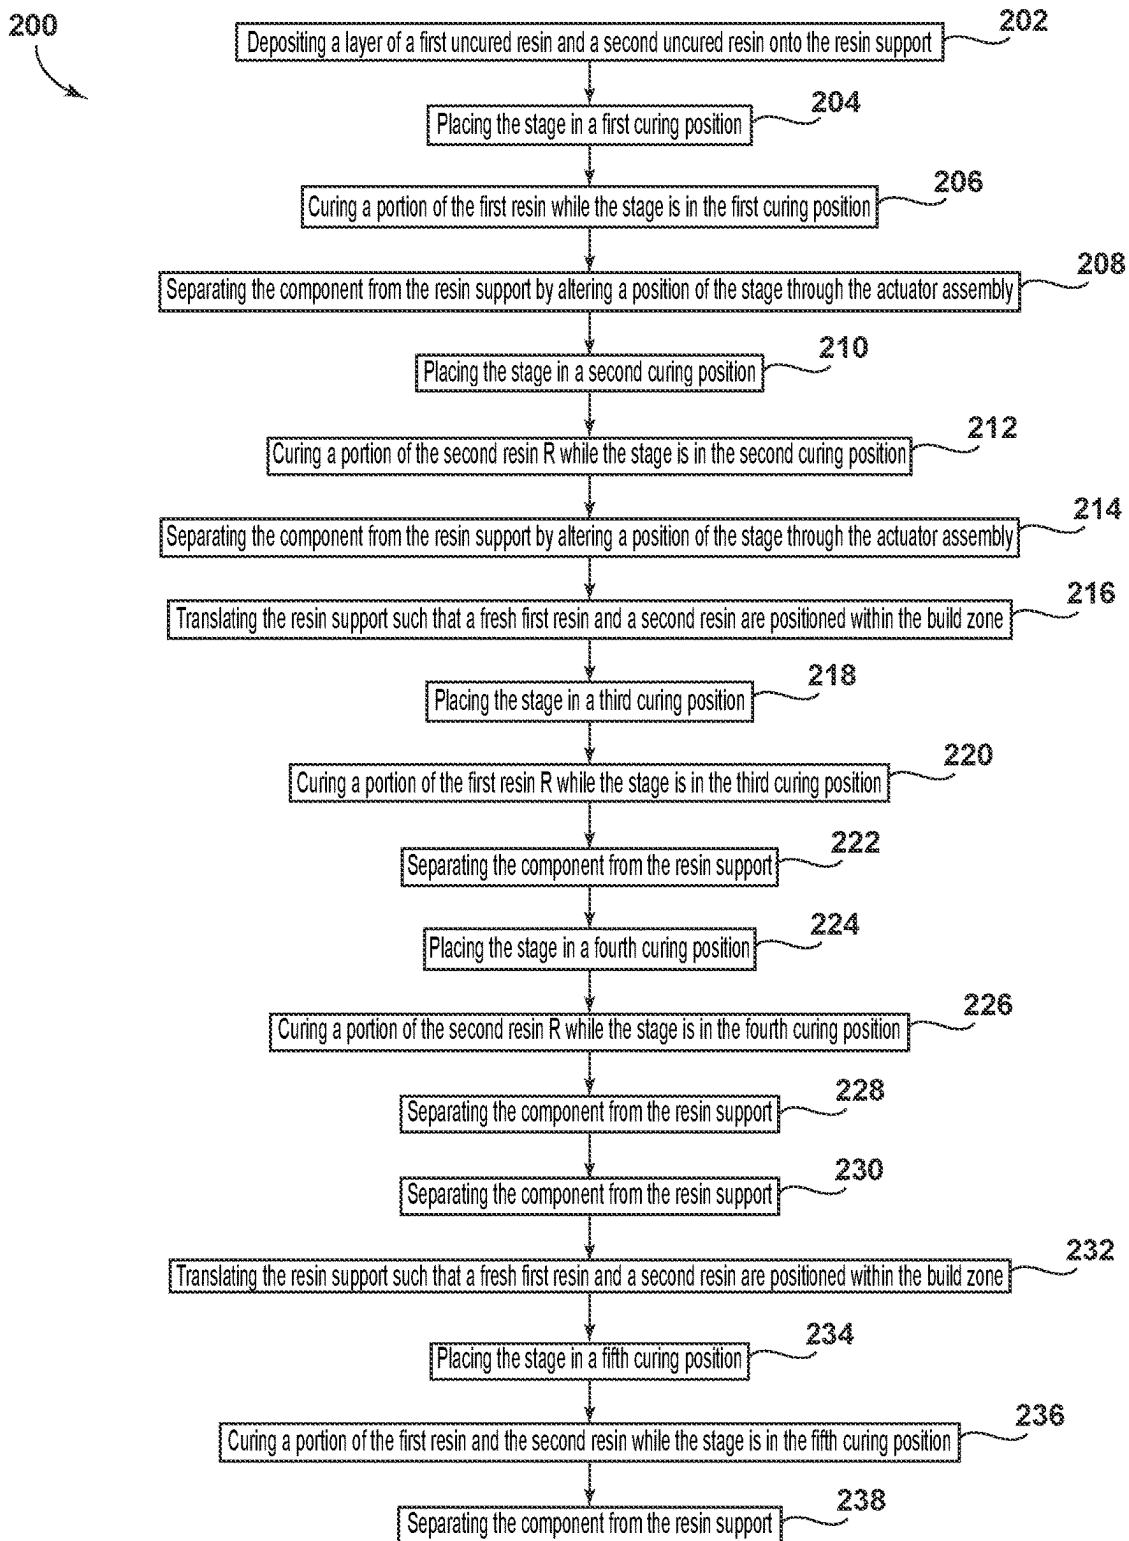


FIG. 5

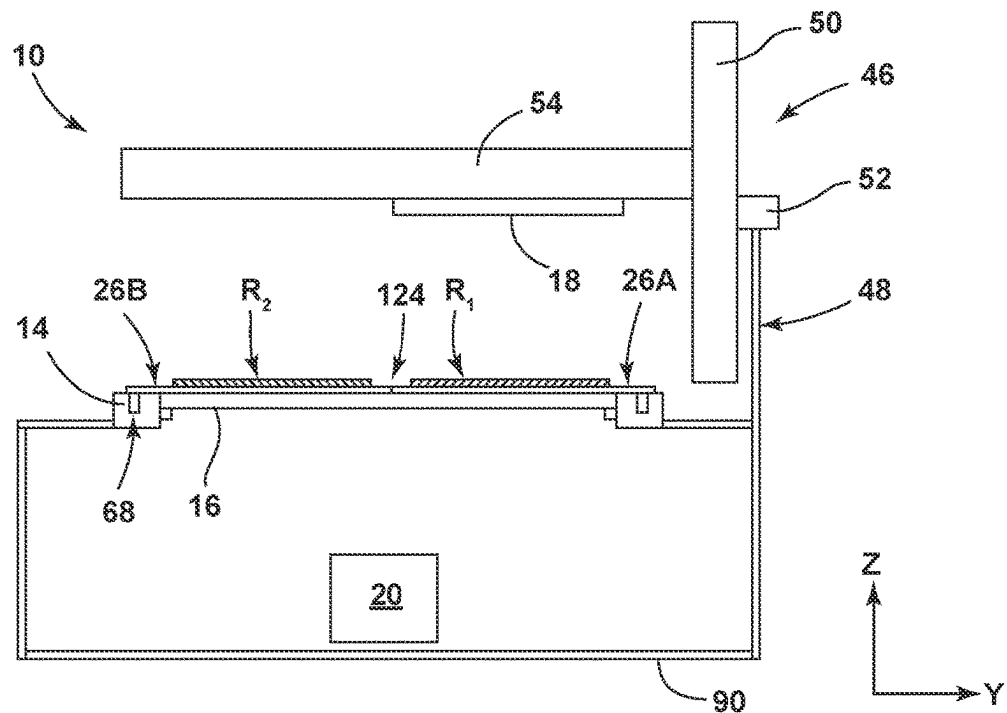


FIG. 6

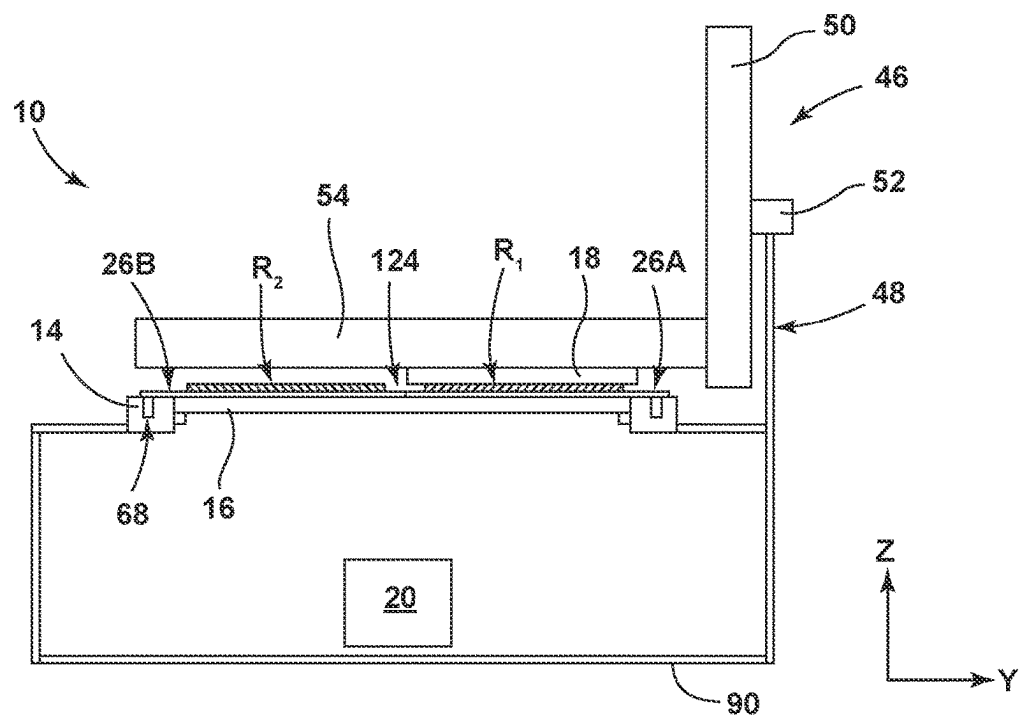


FIG. 7

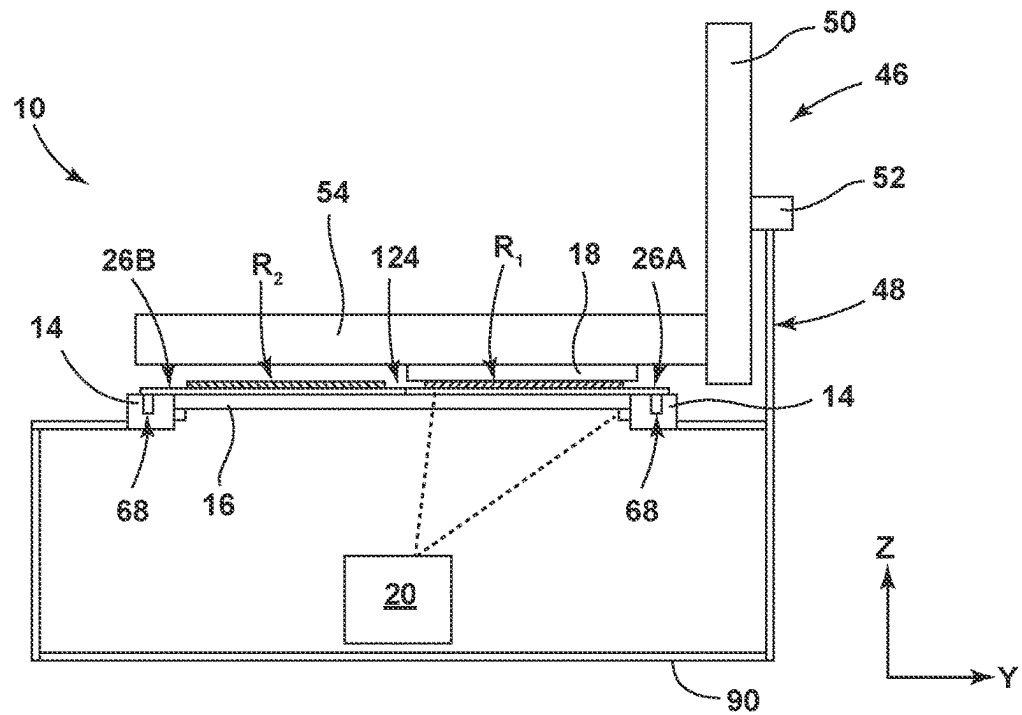


FIG. 8

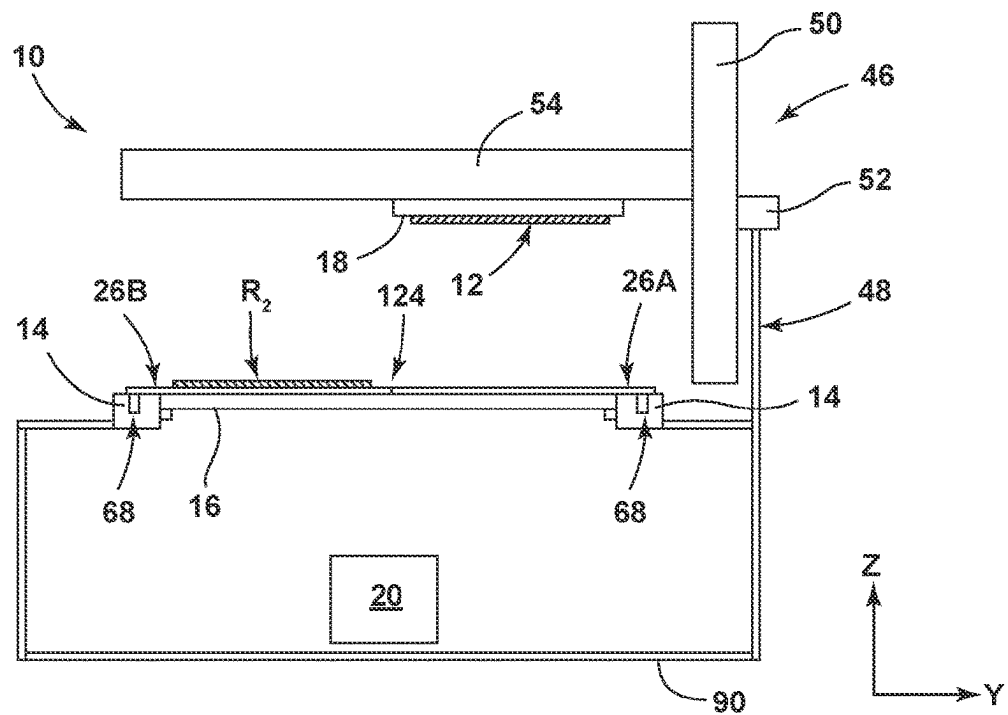


FIG. 9

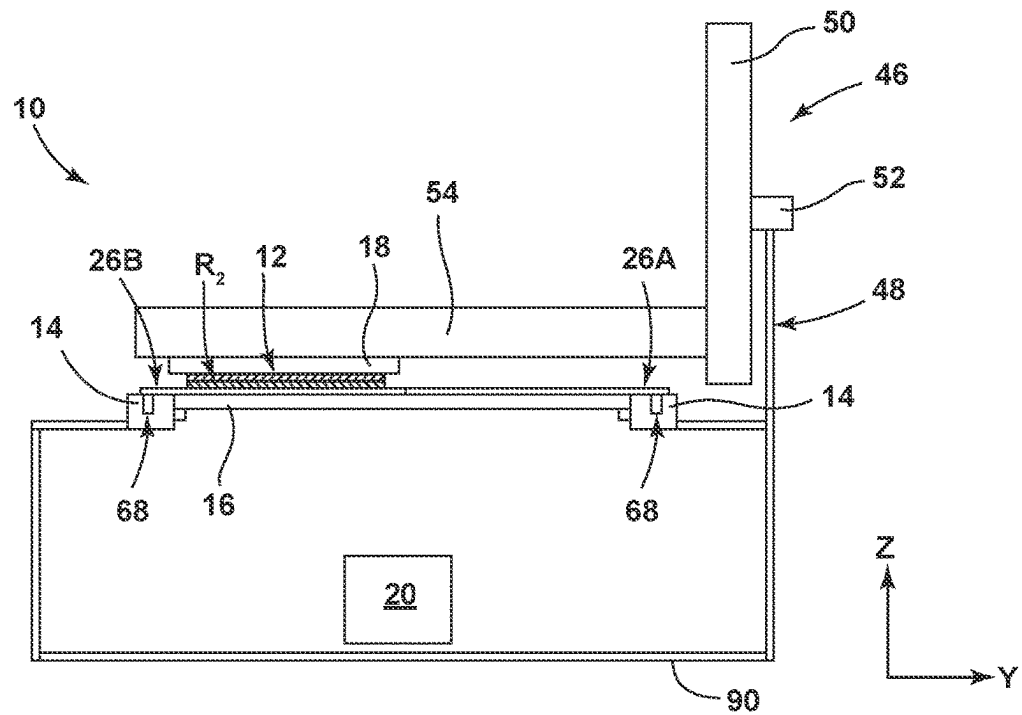


FIG. 10

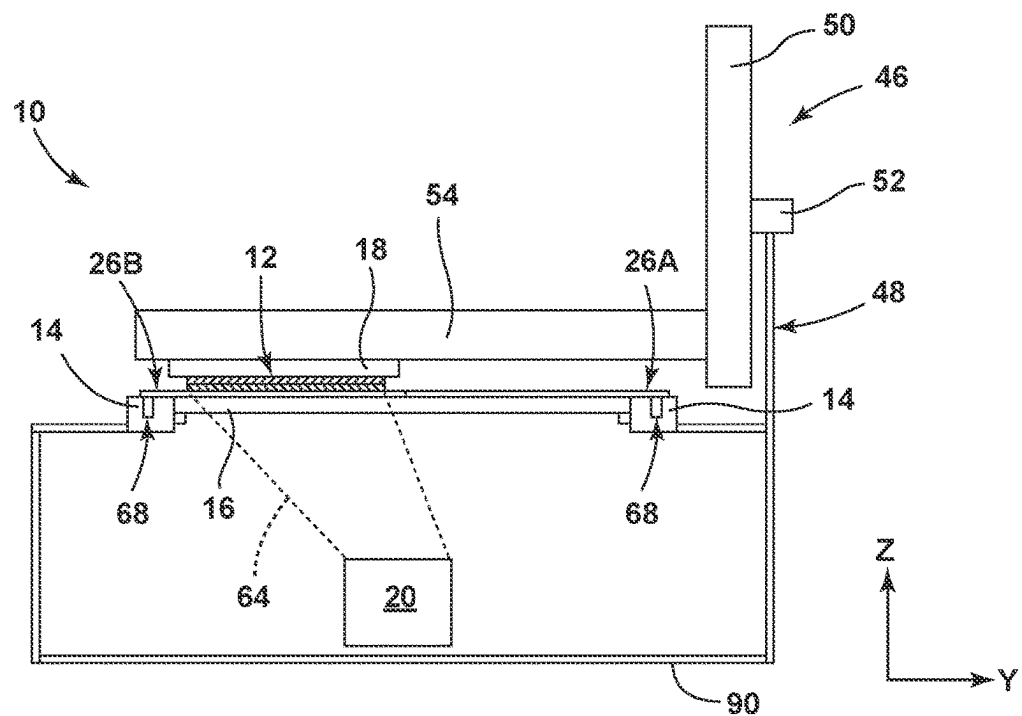


FIG. 11

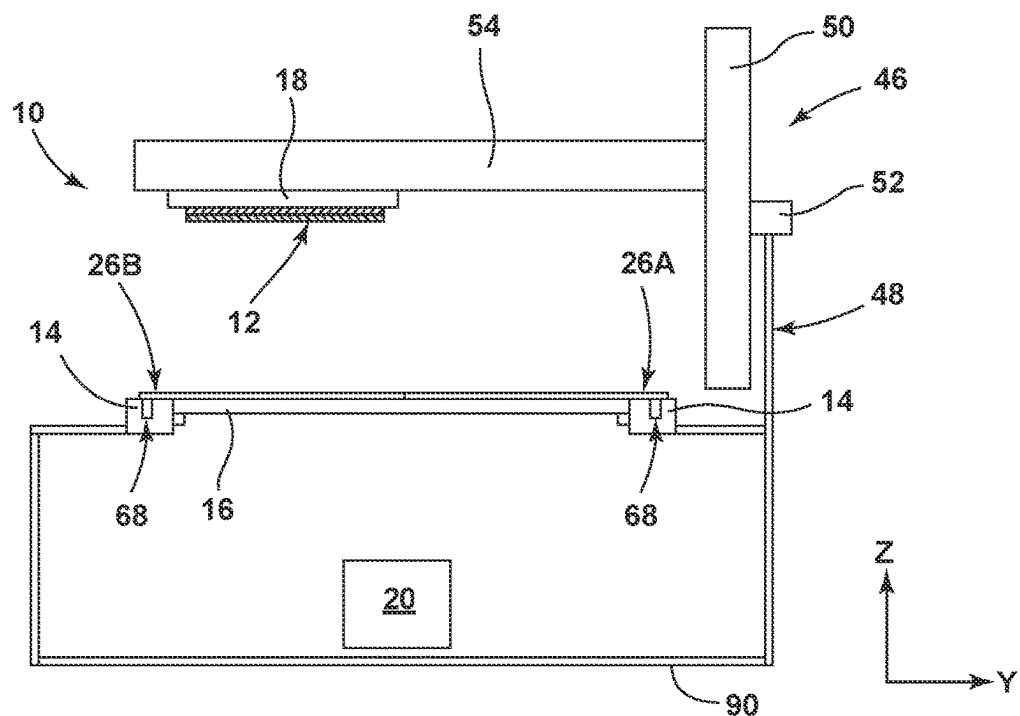


FIG. 12

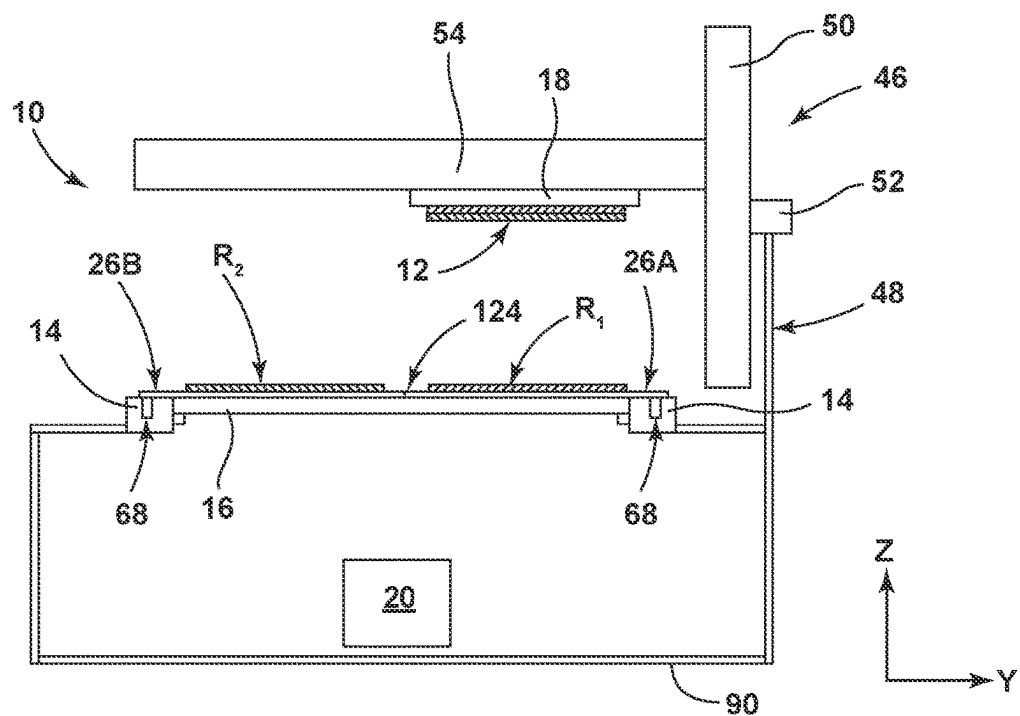


FIG. 13

FIG. 15

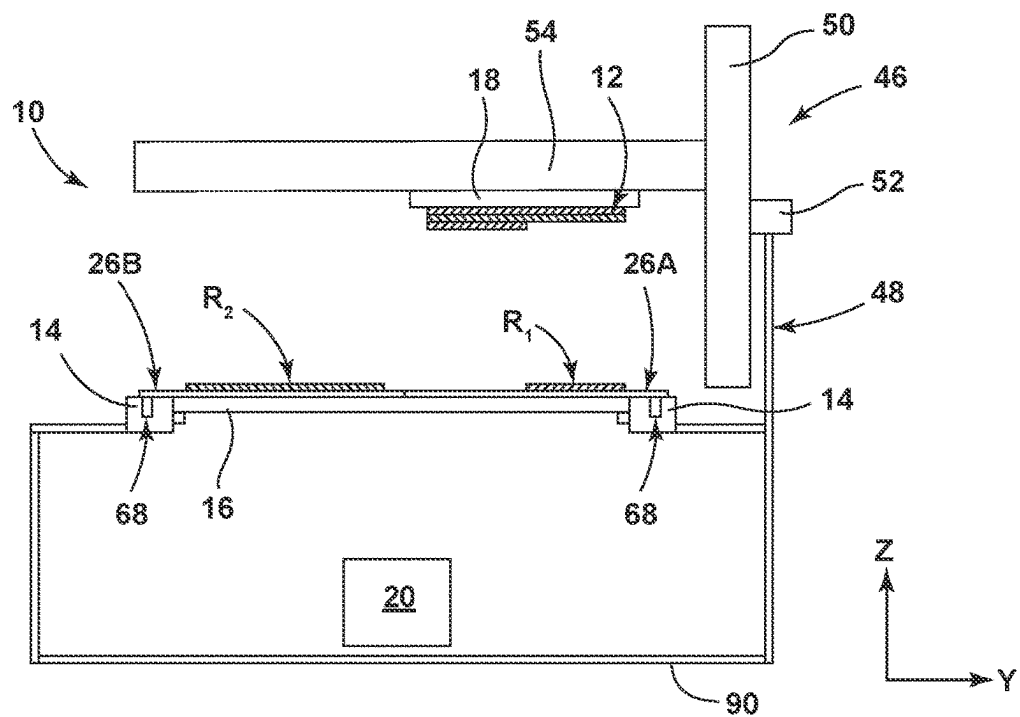


FIG. 16

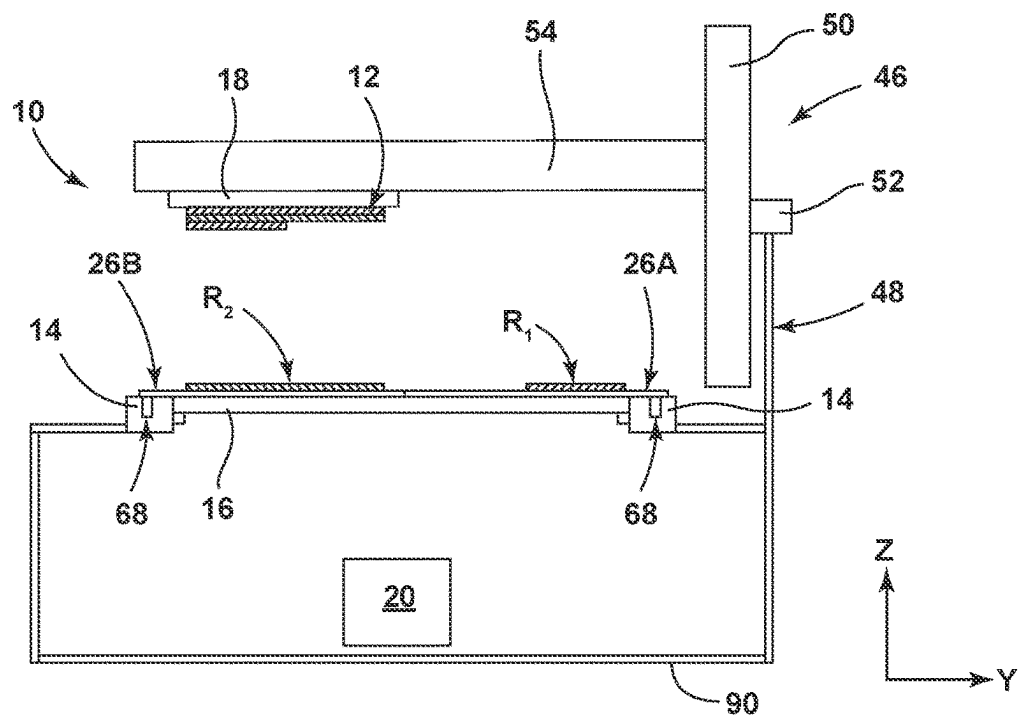


FIG. 17

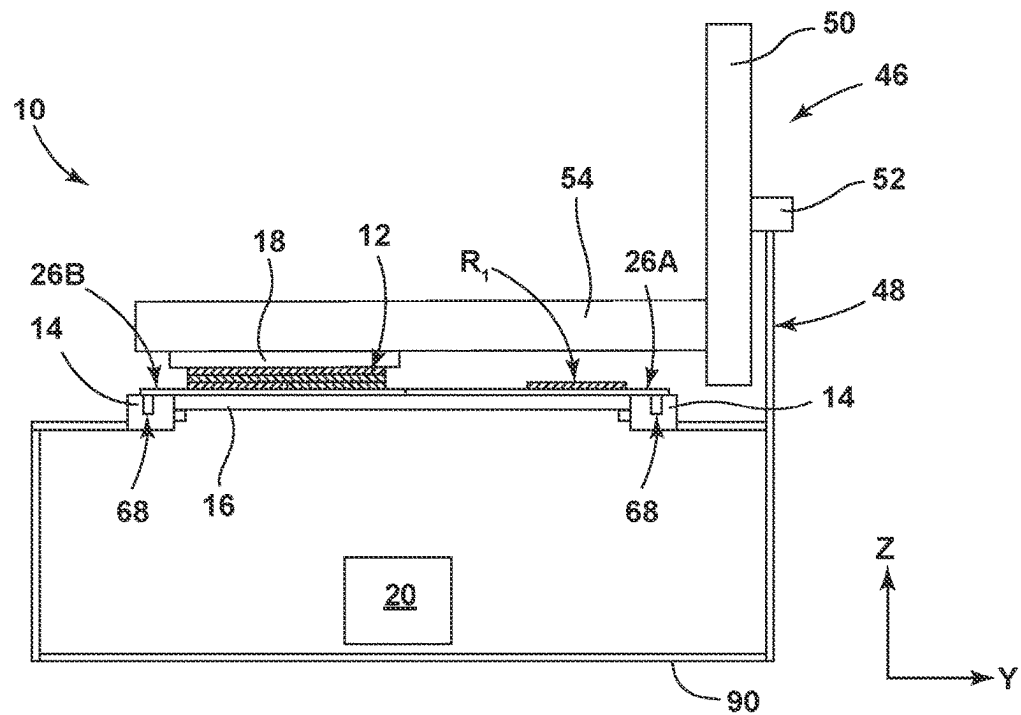


FIG. 18

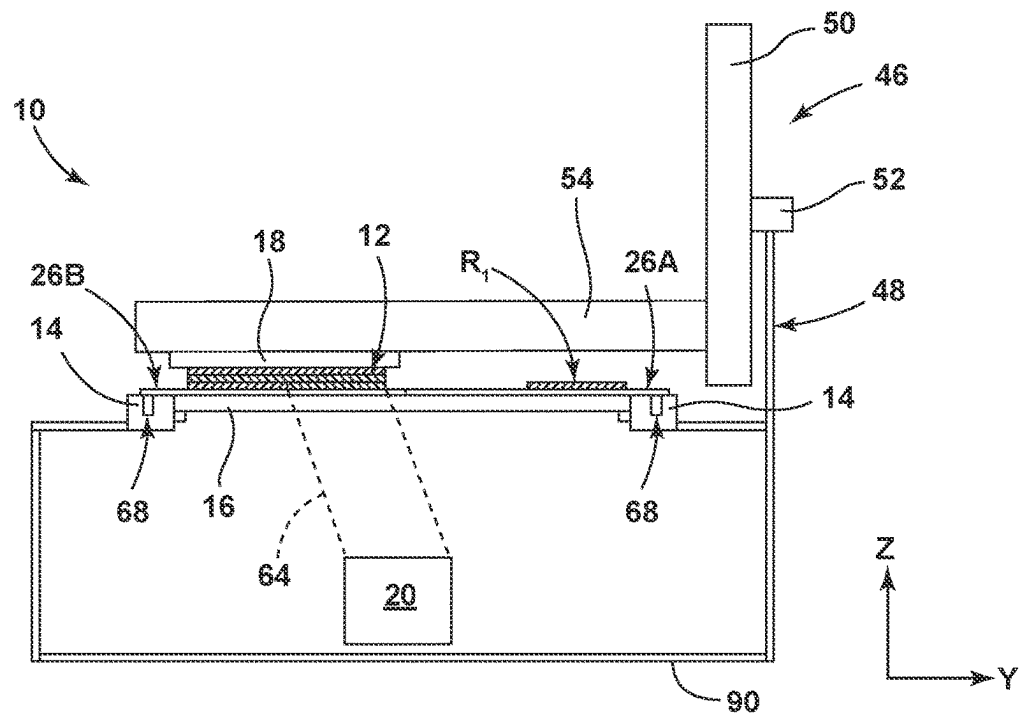


FIG. 19

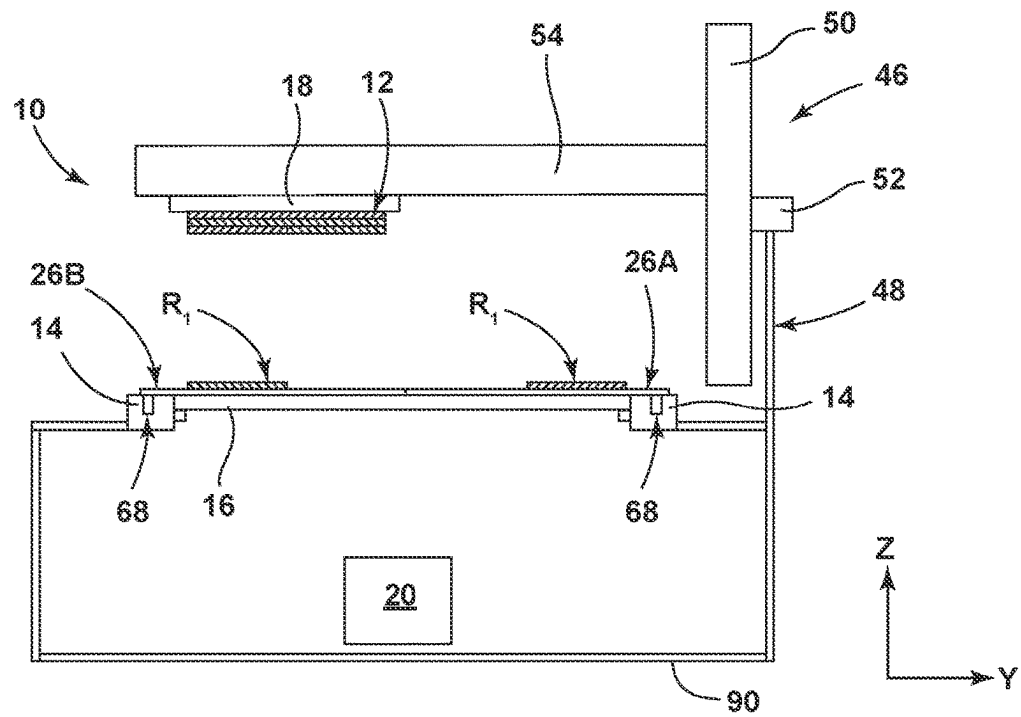


FIG. 20

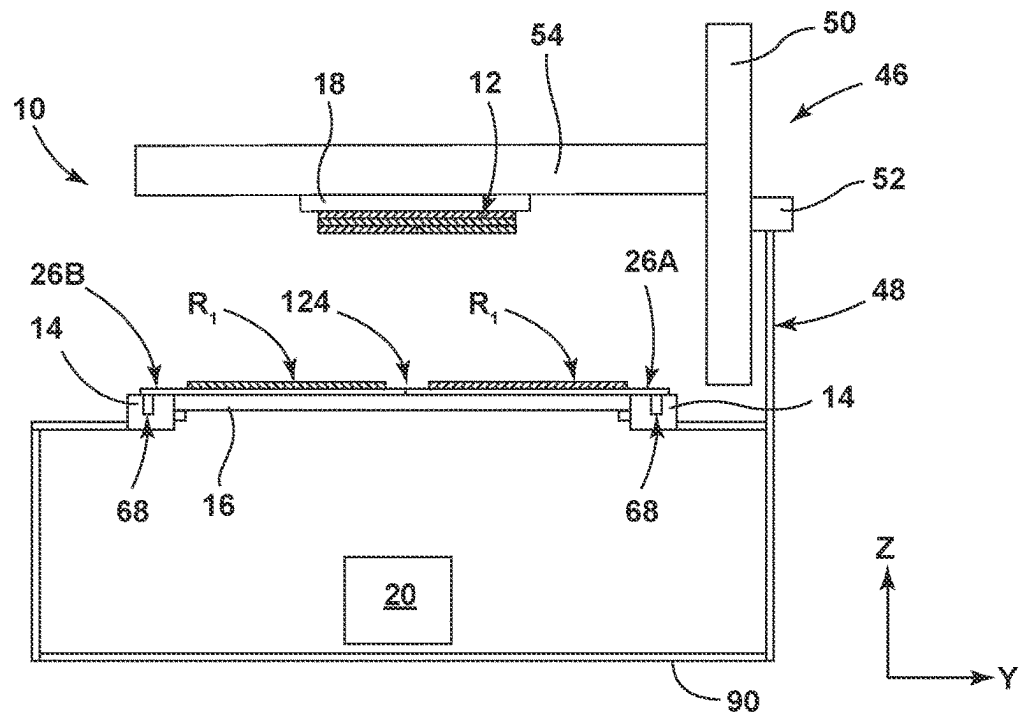


FIG. 21

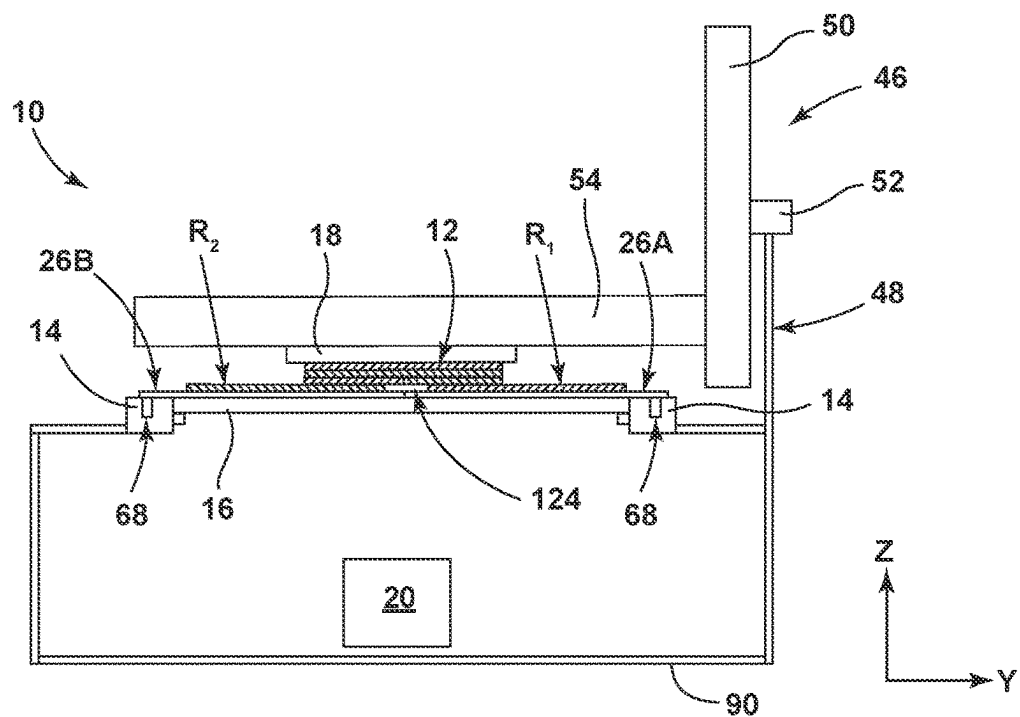


FIG. 22

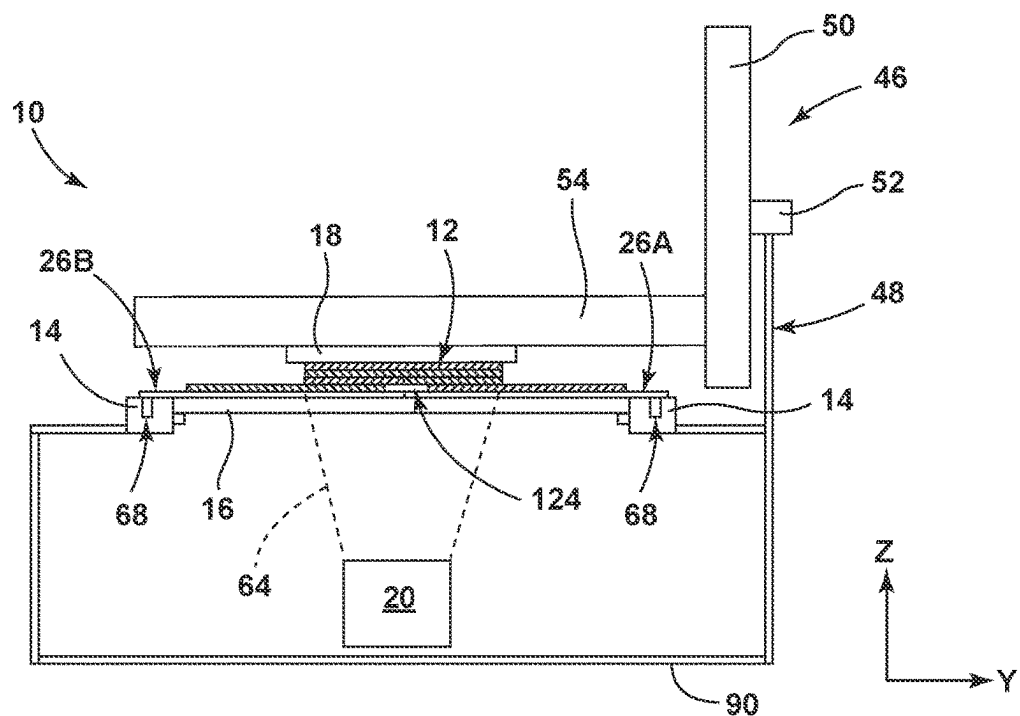


FIG. 23

FIG. 25

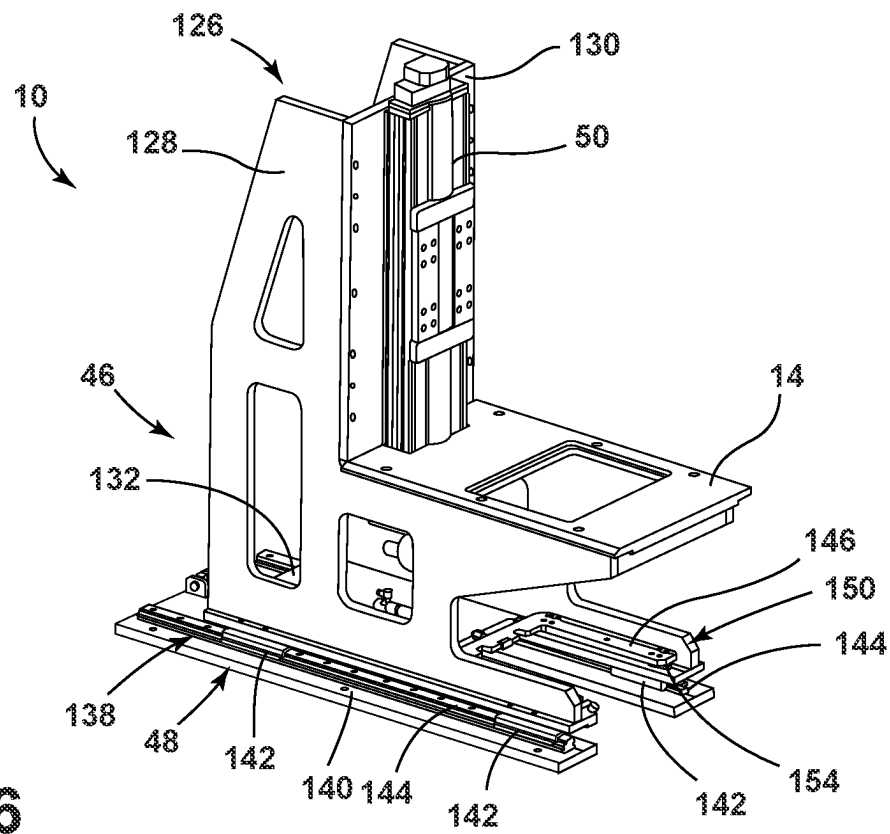


FIG. 26

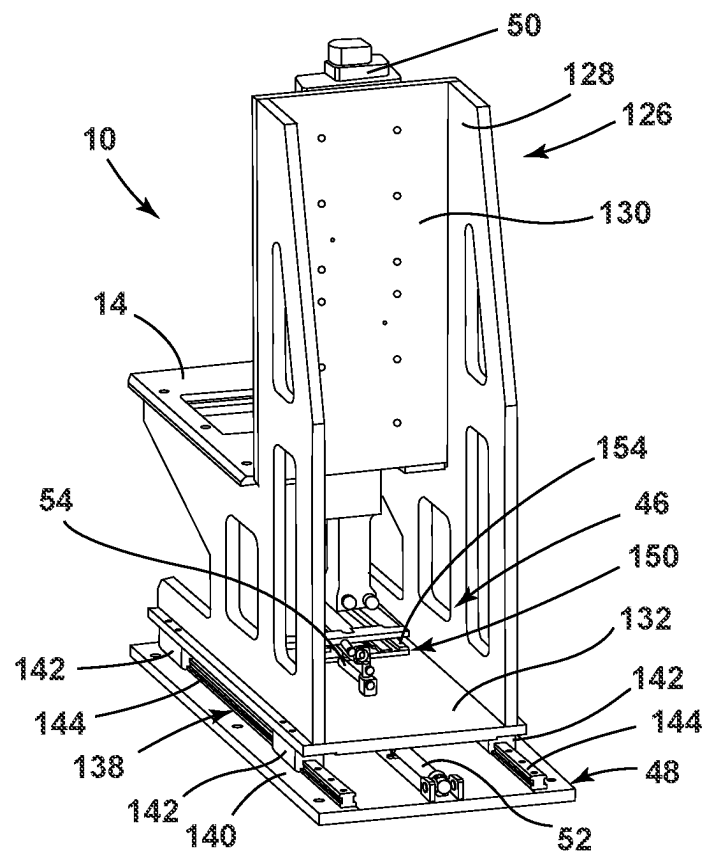


FIG. 27

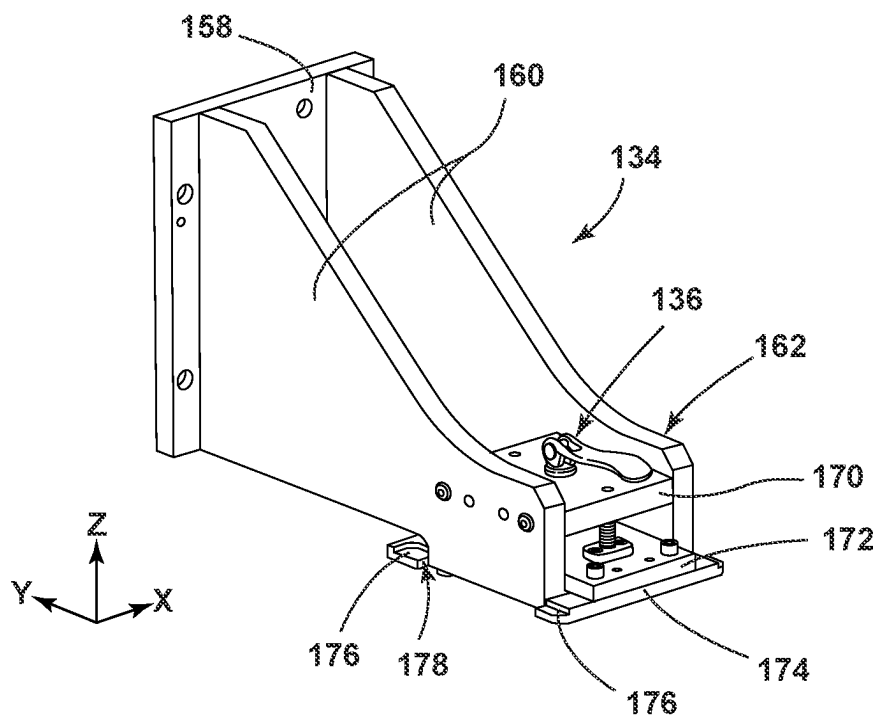


FIG. 28

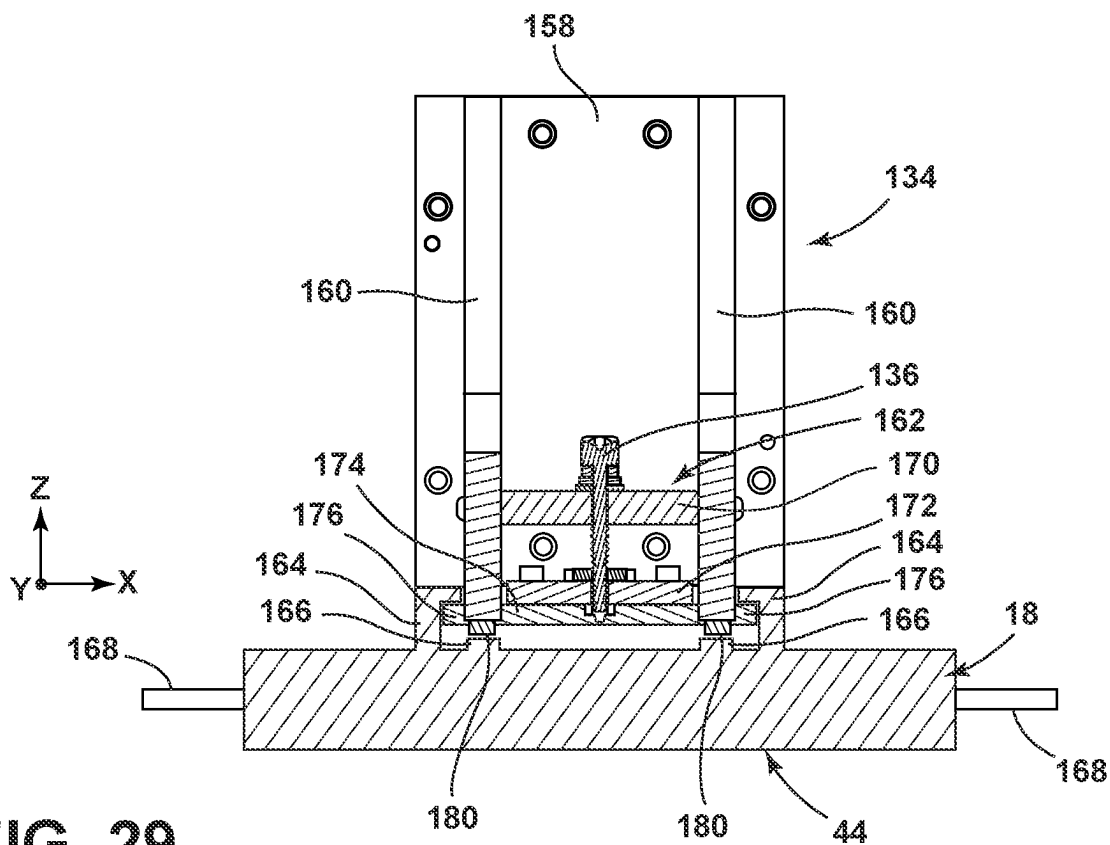


FIG. 29

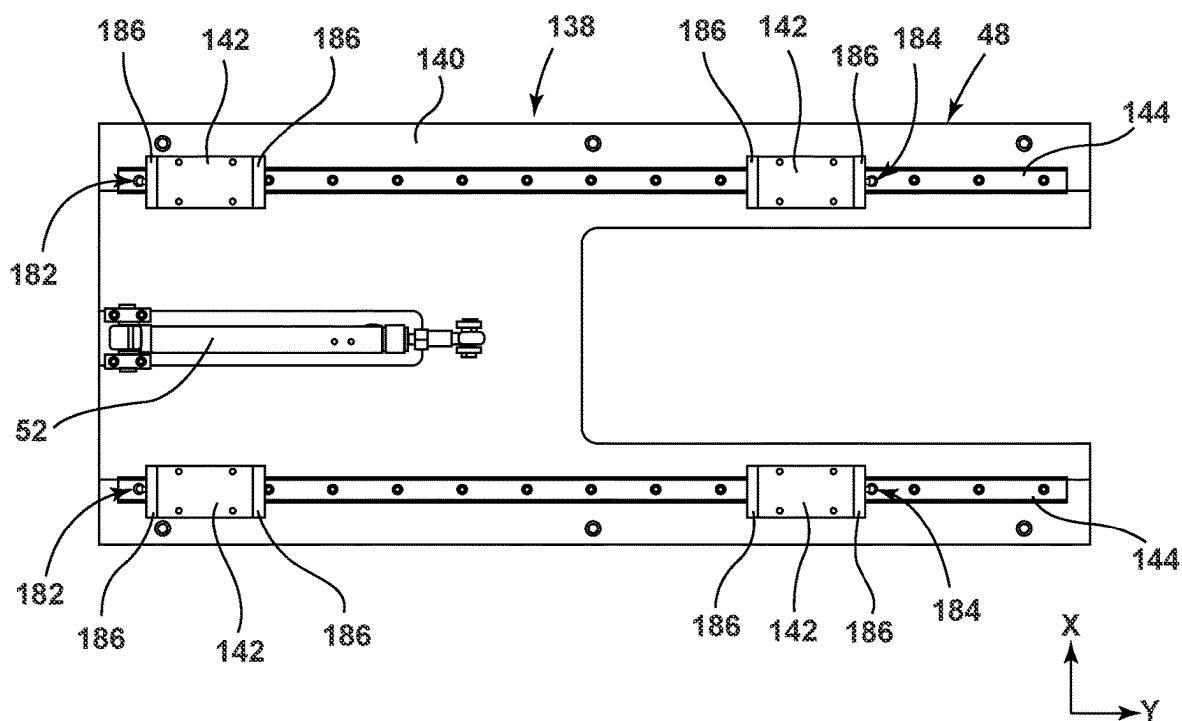


FIG. 30

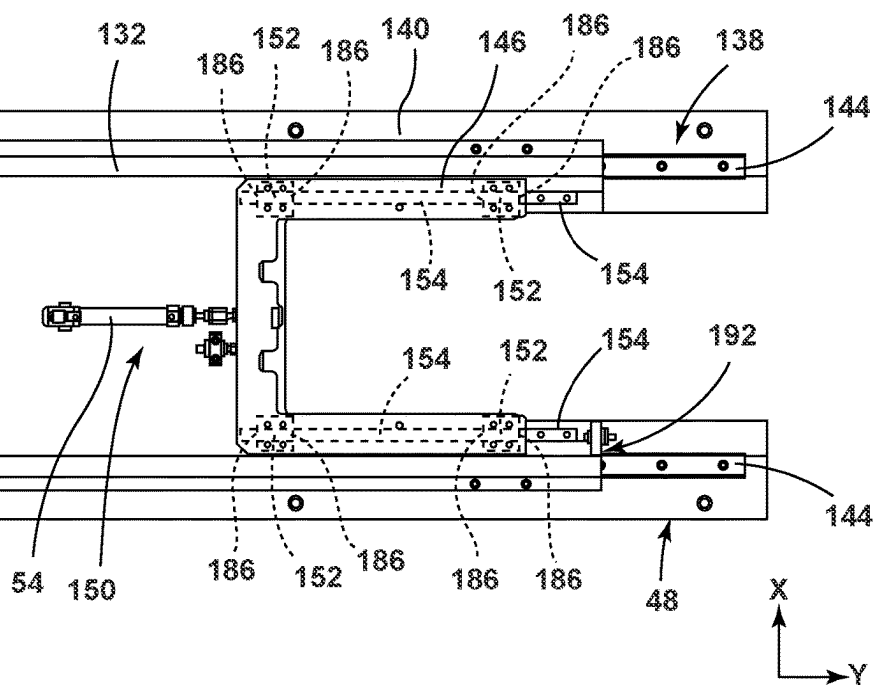


FIG. 31

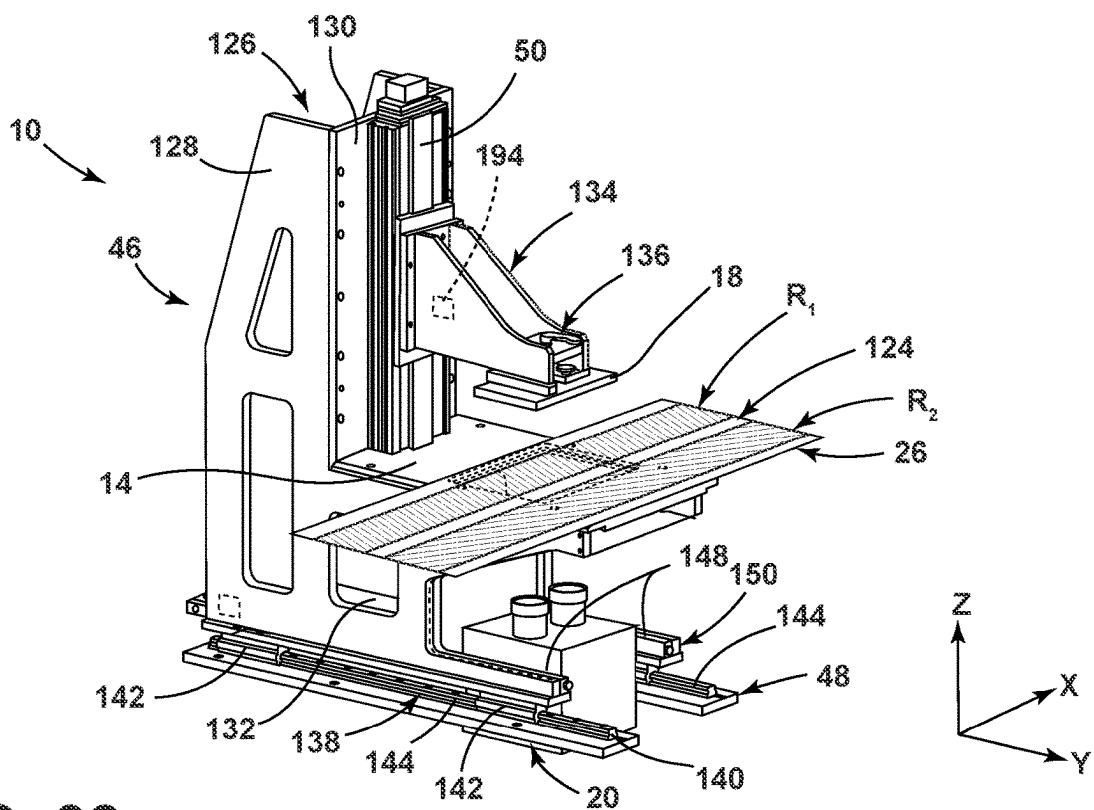


FIG. 32

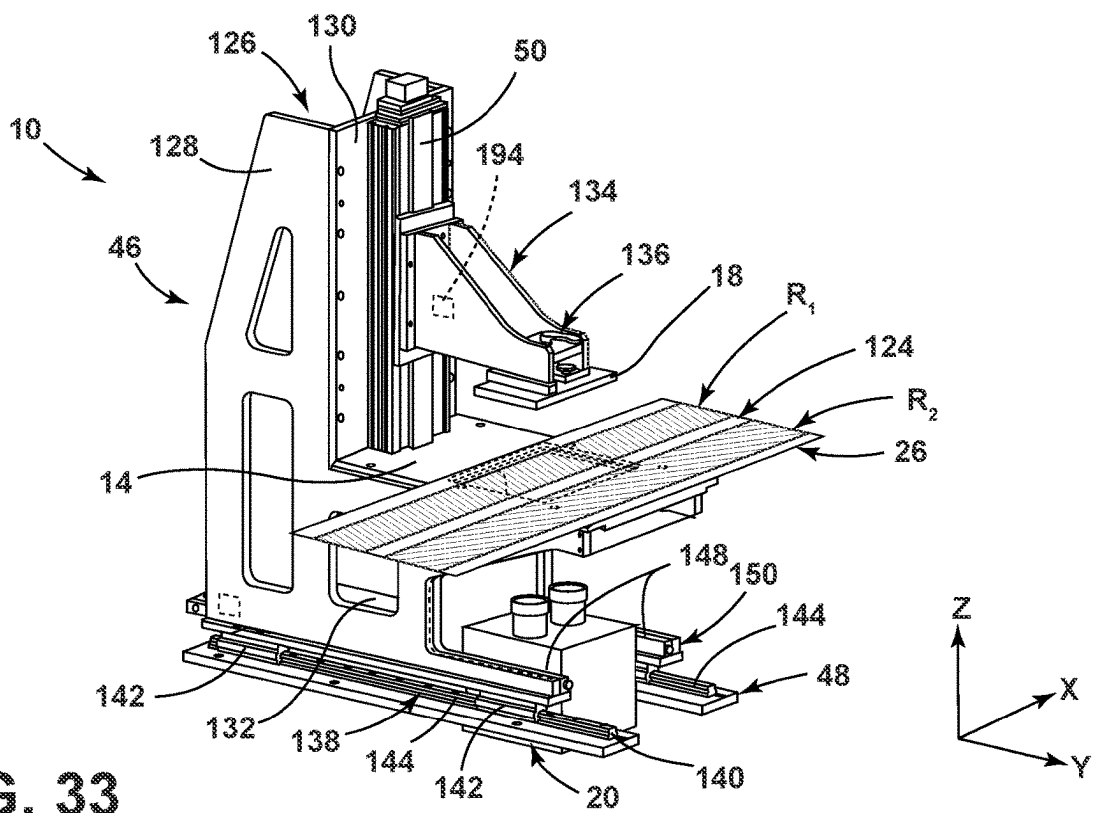


FIG. 33

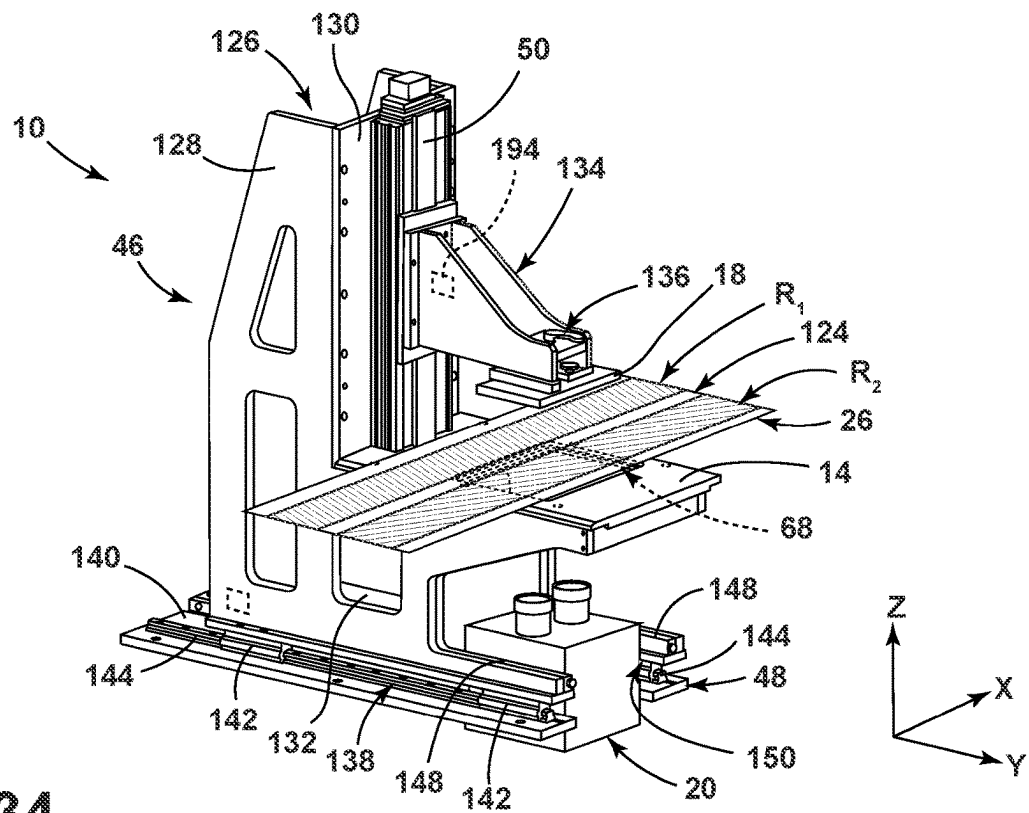


FIG. 34

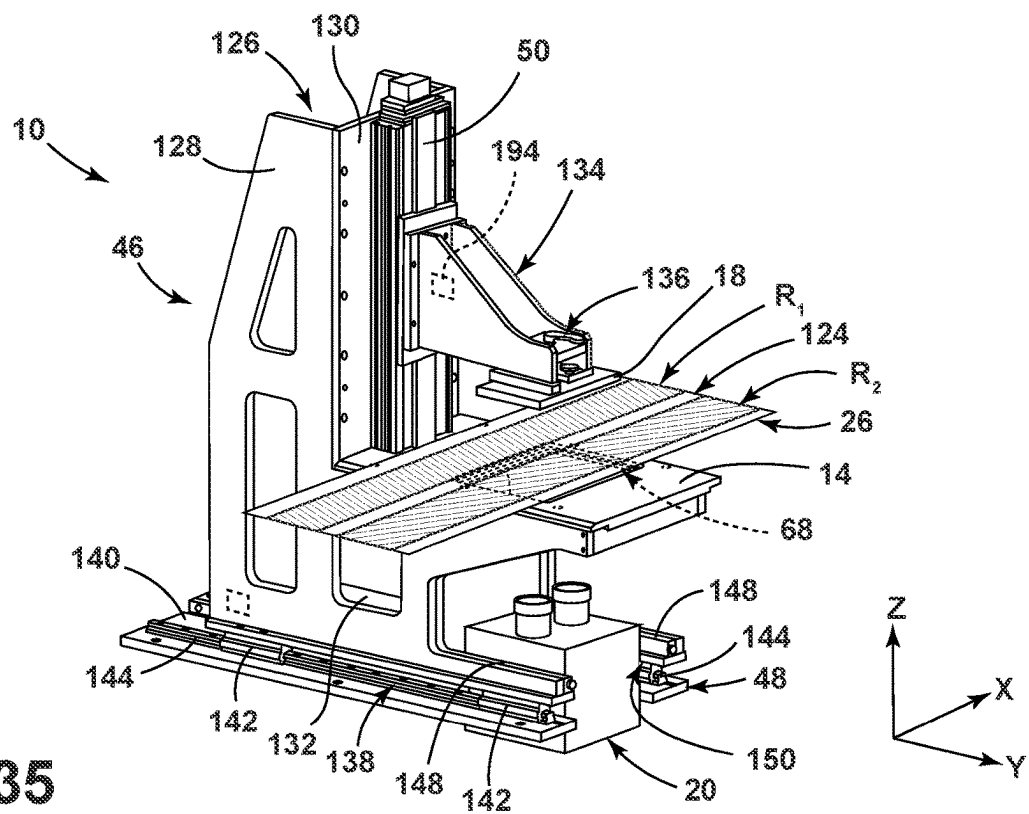


FIG. 35

FIG. 36

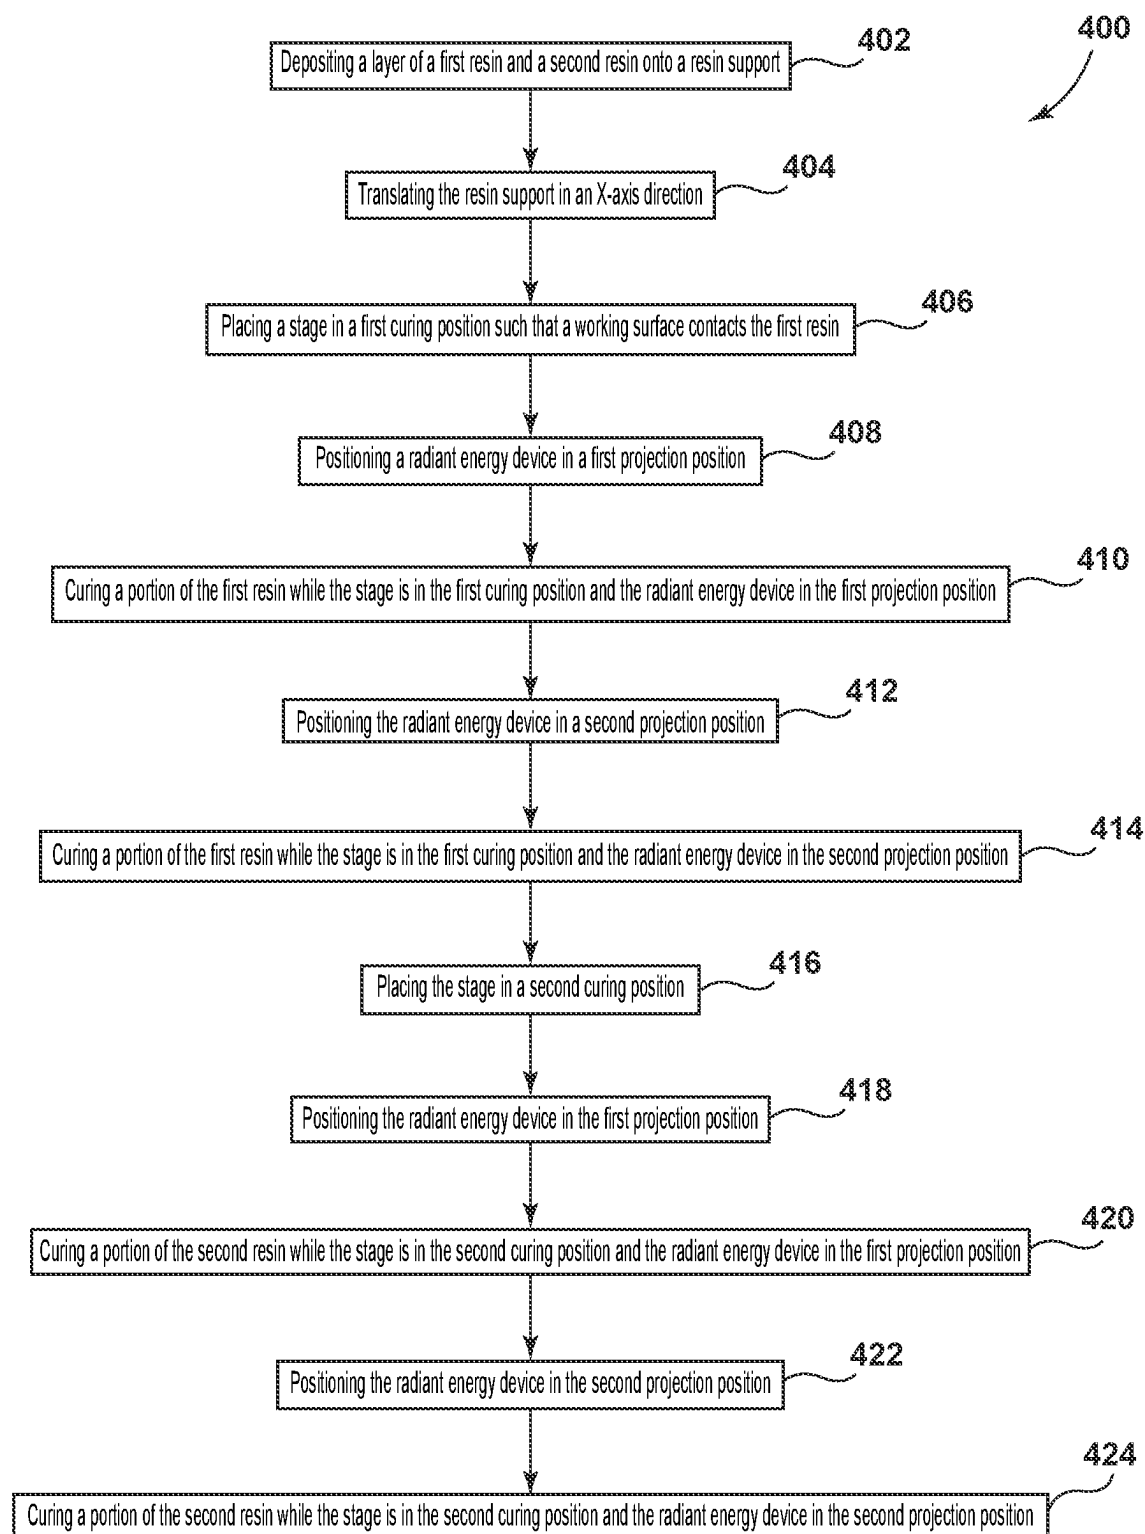
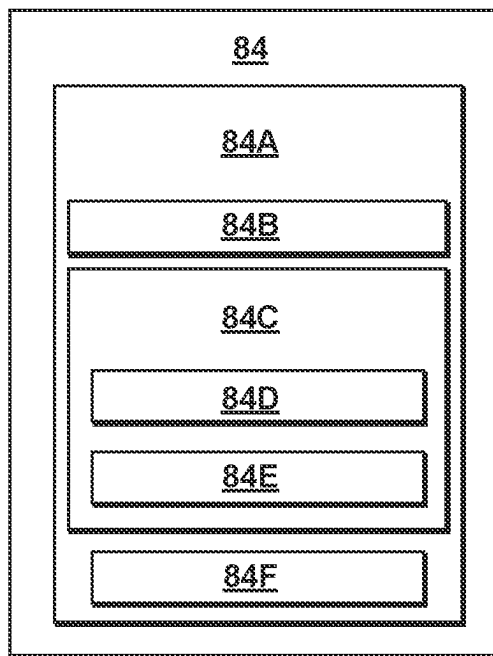


FIG. 37

**FIG. 38**

1

SYSTEMS AND METHODS FOR ADDITIVE MANUFACTURING

CROSS-REFERENCE TO RELATED APPLICATION

The present application claims priority to U.S. Provisional Patent Application Ser. No. 63/322,864, filed on Mar. 23, 2022, the contents of which are hereby incorporated by reference in their entirety.

FIELD

The present subject matter relates generally to an additive manufacturing apparatus, and more particularly to assemblies for altering positions of various components of the additive manufacturing apparatus.

BACKGROUND

Additive manufacturing is a process in which material is built up layer-by-layer to form a component. Stereolithography (SLA) is a type of additive manufacturing process, which employs a tank of radiant-energy curable photopolymer “resin” and a curing energy source such as a laser. Similarly, Digital Light Processing (DLP) three-dimensional (3D) printing employs a two-dimensional image projector to build components one layer at a time. For each layer, the energy source draws or flashes a radiation image of the cross section of the component onto the surface of the resin. Exposure to the radiation cures and solidifies the pattern in the resin and joins it to a previously cured layer.

In some instances, additive manufacturing may be accomplished through a “tape casting” process. In this process, a resin is deposited onto a flexible radiotransparent resin support, such as a tape or foil, that is fed out from a supply reel to a build zone. Radiant energy is produced from a radiant energy device and directed through a window to cure the resin to a component that is supported by a stage in the build zone. Once the curing of the first layer is complete, the stage and the resin support are separated from one another. The resin support is then advanced and fresh resin is provided to the build zone. In turn, the first layer of the cured resin is placed onto the fresh resin and cured through the energy device to form an additional layer of the component. Subsequent layers are added to each previous layer until the component is completed. The tape casting process may be used to form various components.

BRIEF DESCRIPTION OF THE DRAWINGS

A full and enabling disclosure of the present disclosure, including the best mode thereof, directed to one of ordinary skill in the art, is set forth in the specification, which makes reference to the appended figures.

FIG. 1A is a schematic side view of an additive manufacturing apparatus in accordance with various aspects of the present disclosure;

FIG. 1B is a schematic side view of an additive manufacturing apparatus in accordance with various aspects of the present disclosure;

FIG. 2 is a front perspective view of the additive manufacturing apparatus in accordance with various aspects of the present disclosure;

FIG. 3 is a side perspective view of the additive manufacturing apparatus in accordance with various aspects of the present disclosure;

2

FIG. 4 is a side perspective view of the additive manufacturing apparatus in accordance with various aspects of the present disclosure;

FIG. 5 is a method of operating the additive manufacturing apparatus in accordance with various aspects of the present disclosure;

FIGS. 6-24 illustrate schematic views of the additive manufacturing apparatus during operation of the apparatus in accordance with various aspects of the present disclosure;

FIG. 25 is a side perspective view of the additive manufacturing apparatus in accordance with various aspects of the present disclosure;

FIG. 26 is a side perspective view of a frame of the additive manufacturing apparatus in accordance with various aspects of the present disclosure;

FIG. 27 is a rear perspective view of a frame of the additive manufacturing apparatus in accordance with various aspects of the present disclosure;

FIG. 28 is a side perspective view of a print head of the additive manufacturing apparatus in accordance with various aspects of the present disclosure;

FIG. 29 is a cross-sectional view of the print head of the additive manufacturing apparatus taken along the line XXIX-XXIX of FIG. 25 in accordance with various aspects of the present disclosure;

FIG. 30 is a top plan view of a first slide assembly of the additive manufacturing apparatus in accordance with various aspects of the present disclosure;

FIG. 31 is a top plan view of a second slide assembly of the additive manufacturing apparatus in accordance with various aspects of the present disclosure;

FIG. 32 is a side perspective view of the additive manufacturing apparatus with the stage in a first position and the radiant energy device in a first projection position in accordance with various aspects of the present disclosure;

FIG. 33 is a side perspective view of the additive manufacturing apparatus with the stage in the first position and the radiant energy device in a second projection position in accordance with various aspects of the present disclosure;

FIG. 34 is a side perspective view of the additive manufacturing apparatus with the stage in a second position and the radiant energy device in a third projection position in accordance with various aspects of the present disclosure;

FIG. 35 is a side perspective view of the additive manufacturing apparatus with the stage in the second position and the radiant energy device in a fourth projection position in accordance with various aspects of the present disclosure;

FIG. 36 is a side perspective view of the additive manufacturing apparatus in accordance with various aspects of the present disclosure;

FIG. 37 is a method of operating the additive manufacturing apparatus in accordance with various aspects of the present disclosure; and

FIG. 38 depicts an exemplary computing system for an additive manufacturing apparatus in accordance with various aspects of the present disclosure.

Repeat use of reference characters in the present specification and drawings is intended to represent the same or analogous features or elements of the present disclosure.

DETAILED DESCRIPTION

Reference will now be made in detail to present embodiments of the invention, one or more examples of which are illustrated in the accompanying drawings. The detailed description uses numerical and letter designations to refer to features in the drawings. Like or similar designations in the

drawings and description have been used to refer to like or similar parts of the invention.

As used herein, the terms “first,” “second,” and “third” may be used interchangeably to distinguish one component from another and are not intended to signify a location or importance of the individual components. The terms “coupled,” “fixed,” “attached to,” and the like refer to both direct coupling, fixing, or attaching, as well as indirect coupling, fixing, or attaching through one or more intermediate components or features, unless otherwise specified herein. The terms “upstream” and “downstream” refer to the relative direction with respect to a resin support movement along the manufacturing apparatus. For example, “upstream” refers to the direction from which the resin support moves, and “downstream” refers to the direction to which the resin support moves. The term “selectively” refers to a component’s ability to operate in various states (e.g., an ON state and an OFF state) based on manual and/or automatic control of the component.

The singular forms “a,” “an,” and “the” include plural references unless the context clearly dictates otherwise.

Approximating language, as used herein throughout the specification and claims, is applied to modify any quantitative representation that could permissibly vary without resulting in a change in the basic function to which it is related. Accordingly, a value modified by a term or terms, such as “about,” “approximately,” “generally,” and “substantially,” is not to be limited to the precise value specified. In at least some instances, the approximating language may correspond to the precision of an instrument for measuring the value, or the precision of the methods or apparatus for constructing or manufacturing the components and/or systems. For example, the approximating language may refer to being within a ten percent margin.

Moreover, the technology of the present application will be described in relation to exemplary embodiments. The word “exemplary” is used herein to mean “serving as an example, instance, or illustration.” Any embodiment described herein as “exemplary” is not necessarily to be construed as preferred or advantageous over other embodiments. Additionally, unless specifically identified otherwise, all embodiments described herein should be considered exemplary.

Here and throughout the specification and claims, range limitations are combined and interchanged, such ranges are identified and include all the sub-ranges contained therein unless context or language indicates otherwise. For example, all ranges disclosed herein are inclusive of the endpoints, and the endpoints are independently combinable with each other.

As used herein, the term “and/or,” when used in a list of two or more items, means that any one of the listed items can be employed by itself, or any combination of two or more of the listed items can be employed. For example, if a composition or assembly is described as containing components A, B, and/or C, the composition or assembly can contain A alone; B alone; C alone; A and B in combination; A and C in combination; B and C in combination; or A, B, and C in combination.

The present disclosure is generally directed to an additive manufacturing apparatus that implements various manufacturing processes such that successive layers of material(s) are provided on each other to “build-up,” layer-by-layer, a three-dimensional component. The successive layers generally cure together to form a monolithic component which may have a variety of integral sub-components. Although additive manufacturing technology is described herein as

enabling the fabrication of complex objects by building objects point-by-point, layer-by-layer, variations of the described additive manufacturing apparatus and technology are possible and within the scope of the present subject matter.

The additive manufacturing apparatus can include a support plate, a window supported by the support plate, and a stage moveable relative to the window. The additive manufacturing apparatus can further include a first resin and a second resin that are each deposited as layers having a desired thickness onto a resin support (such as a foil, tape, vat, plate, etc.) that is fed out from a supply reel or a pair of supply reels in an X-axis direction. In various instances, the first resin may be laterally offset from the second resin in a Y-axis direction.

A stage lowers onto the resin such that a working surface defined by one of a surface of the stage or a surface of the work in process component is positioned such that the working surface either is just touching the resin or compressing it between the resin support and the stage and defining a layer thickness. Radiant energy is used to cure the resin through the resin support. Once the curing of the first layer is complete, the stage is retracted, taking the cured material with the stage. The resin support is then advanced to expose a fresh clean section, ready for additional resin to be deposited in a subsequent, new cycle.

In some instances, the additive manufacturing apparatus further includes an actuator assembly including a first actuator configured to move the stage in a Z-axis direction and a second actuator configured to move the stage in a Y-axis direction. The movement of the stage in the Y-axis direction may allow for layers of the component to selectively be formed from the first resin and/or the second resin. As such, a component may be formed from one or more resins.

Referring to the drawings wherein identical reference numerals denote the similar elements throughout the various views, FIGS. 1A and 1B schematically illustrate an example of one type of suitable apparatus **10** for forming a component **12** created through one or more layers of at least one cured resin R. The apparatus **10** can include one or more of a support plate **14**, a window **16**, a stage **18** that is movable relative to the window **16**, and a radiant energy device **20**, which, in combination, may be used to form any number (e.g., one or more) of additively manufactured components **12**.

In the illustrated example of FIG. 1A, the apparatus **10** includes a feed module **22**, which may include a first roller **22A**, and a take-up module **24**, which may include a second roller **24A**, that are spaced-apart with a resin support **26** extending therebetween. A portion of the resin support **26** can be supported from underneath by the support plate **14**. Suitable mechanical supports (frames, brackets, etc.) and/or alignment devices may be provided for the rollers **22A**, **24A** and the support plate **14**. The first roller **22A** and/or the second roller **24A** can be configured to control the speed and direction of the resin support **26** such that the desired tension and speed is maintained in the resin support **26** through a drive system **28**. By way of example and not limitation, the drive system **28** can be configured as individual motors associated with the first roller **22A** and/or the second roller **24A**. Moreover, various components, such as motors, actuators, feedback sensors, and/or controls can be provided for driving the rollers **22A**, **24A** in such a manner to maintain the resin support **26** tensioned between the aligned rollers **22A**, **24A** and to wind the resin support **26** from the first roller **22A** to the second roller **24A**.

5

In various embodiments, the window 16 is transparent and can be operably supported by the support plate 14. Further, the window 16 and the support plate 14 can be integrally formed such that one or more windows 16 are integrated within the support plate 14. Likewise, the resin support 26 is also transparent or includes portions that are transparent. As used herein, the terms “transparent” and “radiotransparent” refer to a material that allows at least a portion of radiant energy of a selected wavelength to pass through. For example, the radiant energy that passes through the window 16 and the resin support 26 can be in the ultraviolet spectrum, the infrared spectrum, the visible spectrum, or any other practicable radiant energy. Non-limiting examples of transparent materials include polymers, glass, and crystalline minerals, such as sapphire or quartz.

The resin support 26 extends between the feed module 22 and the take-up module 24 and defines a “build surface” 30, which is shown as being planar, but could alternatively be arcuate (depending on the shape of the support plate 14). In some instances, the build surface 30 may be defined by the resin support 26 and be positioned to face the stage 18 with the window 16 on an opposing side of the resin support 26 from the stage 18. For purposes of convenient description, the build surface 30 may be considered to be oriented parallel to an X-Y plane of the apparatus 10, and a direction perpendicular to the X-Y plane is denoted as a Z-axis direction (X, Y, and Z being three mutually perpendicular directions). As used herein, the X-axis refers to the machine direction along the length of the resin support 26. As used herein, the Y-axis refers to the transverse direction across the width of the resin support 26 and generally perpendicular to the machine direction. As used herein, the Z-axis refers to the stage direction that can be defined as the direction of movement of the stage 18 relative to the window 16.

The build surface 30 may be configured to be “non-stick,” that is, resistant to adhesion of a cured resin R. The non-stick properties may be embodied by a combination of variables such as the chemistry of the resin support 26, its surface finish, and/or applied coatings. For instance, a permanent or semi-permanent non-stick coating may be applied. One non-limiting example of a suitable coating is polytetrafluoroethylene (“PTFE”). In some examples, all or a portion of the build surface 30 may incorporate a controlled roughness or surface texture (e.g. protrusions, dimples, grooves, ridges, etc.) with nonstick properties. Additionally or alternatively, the resin support 26 may be made in whole or in part from an oxygen-permeable material.

For reference purposes, an area or volume immediately surrounding the location of the resin support 26 and the window 16 or transparent portion defined by the support plate 14 may be defined as a “build zone,” labeled 32.

In some instances, a material depositor 34 may be positioned along the resin support 26. The material depositor 34 may be any device or combination of devices that is operable to apply a layer of resin R on the resin support 26. The material depositor 34 may optionally include a device or combination of devices to define a height of the resin R on the resin support 26 and/or to level the resin R on the resin support 26. Nonlimiting examples of suitable material deposition devices include chutes, rollers, hoppers, pumps, spray nozzles, spray bars, or printheads (e.g. inkjets). In some examples, a doctor blade may be used to control the thickness of resin R applied to the resin support 26 as the resin support 26 passes the material depositor 34.

In the illustrated example of FIG. 1B, the resin support 26 may be in the form of a vat 36 that is configured to isolate debris that could contaminate the build from usable resin R.

6

The vat 36 may include a floor 38 and a perimeter wall 40. The perimeter wall 40 extends from the floor 38. Inner surfaces of the floor 38 and the perimeter wall 40 define a receptacle 42 for receiving the resin R.

A drive system 28 (FIG. 1A) may be provided for moving the vat 36 relative to the stage 18 parallel to the X-direction between a build zone 32 and a position at least partially external to the build zone 32. However, it will be appreciated that, in other embodiments, the resin support 26 may be stationary without departing from the scope of the present disclosure.

In some instances, the resin support 26 may be positioned to accept a resin R from a material depositor 34 is operable to introduce a layer of resin R into the resin support 26. The material depositor 34 may optionally include a device or combination of devices to define a height in the resin and/or to level the resin R. Nonlimiting examples of suitable material deposition devices include chutes, hoppers, pumps, spray nozzles, spray bars, or printheads (e.g. inkjets).

Referring back to FIGS. 1A and 1B, the resin R includes any radiant-energy curable material, which is capable of adhering or binding together the filler (if used) in the cured state. As used herein, the term “radiant-energy curable” refers to any material which solidifies or partially solidifies in response to the application of radiant energy of a particular frequency and energy level. For example, the resin R may include a photopolymer resin containing photo-initiator compounds functioning to trigger a polymerization reaction, causing the resin R to change from a liquid (or powdered) state to a solid state. Alternatively, the resin R may include a material that contains a solvent that may be evaporated out by the application of radiant energy. The uncured resin R may be provided in solid (e.g. granular) or liquid form, including a paste or slurry.

Furthermore, the resin R can have a relatively high viscosity resin that will not “slump” or run off during the build process. The composition of the resin R may be selected as desired to suit a particular application. Mixtures of different compositions may be used. The resin R may be selected to have the ability to out-gas or burn off during further processing, such as a sintering process.

Additionally or alternatively, the resin R may be selected to be a viscosity reducible composition. These compositions reduce in viscosity when a shear stress is applied or when they are heated. For example, the resin R may be selected to be shear-thinning such that the resin R exhibits reduced viscosity as an amount of stress applied to the resin R increases. Additionally or alternatively, the resin R may be selected to reduce in the viscosity as the resin R is heated.

The resin R may incorporate a filler. The filler may be pre-mixed with resin R, then loaded into the material depositor 34. Alternatively, the filler may be mixed with the resin R on the apparatus 10. The filler includes particles, which are conventionally defined as “a very small bit of matter.” The filler may include any material that is chemically and physically compatible with the selected resin R. The particles may be regular or irregular in shape, may be uniform or non-uniform in size and may have variable aspect ratios. For example, the particles may take the form of powder, of small spheres or granules, or may be shaped like small rods or fibers.

The composition of the filler, including its chemistry and microstructure, may be selected as desired to suit a particular application. For example, the filler may be metallic, ceramic, polymeric, and/or organic. Other examples of potential fillers include diamond, silicon, and graphite. Mixtures of different compositions may be used. In some examples, the

filler composition may be selected for its electrical or electromagnetic properties, e.g. it may specifically be an electrical insulator, a dielectric material, an electrical conductor, and/or magnetic.

The filler may be “fusible,” meaning it is capable of consolidation into a mass upon application of sufficient energy. For example, fusibility is a characteristic of many available powders including but not limited to polymeric, ceramic, glass, and metallic. The proportion of filler to resin R may be selected to suit a particular application. Generally, any amount of filler may be used so long as the combined material is capable of flowing and being leveled, and there is sufficient resin R to hold together the particles of the filler in the cured state.

The stage 18 is a structure defining a planar surface 44, which is capable of being oriented parallel to the build surface 30 or the X-Y plane. Various devices may be provided for moving the stage 18 relative to the window 16. For example, as illustrated in FIGS. 1A and 1B, the movement may be provided through an actuator assembly 46 that may be coupled with a static support 48. In some embodiments, the actuator assembly 46 may include a first actuator 50 between the stage 18 and the static support 48 that allows for movement of the stage 18 in a first, vertical direction (e.g., along the Z-axis direction). The actuator assembly 46 may additionally or alternatively include a second actuator 52 between the stage 18 and the first actuator 50 and/or the static support 48 that allows for movement in the X-axis direction and/or the Y-axis direction. The actuator assembly 46 may additionally or alternatively include a third actuator 54 between the stage 18 and the second actuator 52 and/or the stage 18 that allows for movement in the X-axis direction and/or the Y-axis direction. The actuator assembly 46 may include any device practicable of moving the stage 18 in any direction, such as ballscrew electric actuators, linear electric actuators, pneumatic cylinders, hydraulic cylinders, delta drives, belt systems, or any other practicable device. It will be appreciated that, in other examples, the resin support may additionally or alternatively translate in the Y-axis direction (or any other direction).

The radiant energy device 20 may be configured as any device or combination of devices operable to generate and project radiant energy at the resin R in a suitable pattern and with a suitable energy level and other operating characteristics to cure the resin R during the build process. For example, as shown in FIGS. 1A and 1B, the radiant energy device 20 may include a projector 56, which may generally refer to any device operable to generate a radiant energy predetermined patterned image of suitable energy level and other operating characteristics to cure the resin R. As used herein, the term “patterned image” refers to a projection of radiant energy comprising an array of one or more individual pixels. Non-limiting examples of patterned image devices include a DLP projector or another digital micro-mirror device, a two-dimensional array of LEDs, a two-dimensional array of lasers, and/or optically addressed light valves. In the illustrated example, the projector 56 includes a radiant energy source 58 such as a UV lamp, an image forming apparatus 60 operable to receive a source beam 62 from the radiant energy source 58 and generate a patterned image 64 to be projected onto the surface of the resin R, and optionally focusing optics 66, such as one or more lenses.

The image forming apparatus 60 may include one or more mirrors, prisms, and/or lenses and is provided with suitable actuators, and arranged so that the source beam 62 from the radiant energy source 58 can be transformed into a pixelated image 64 in an X-Y plane coincident with the surface of the

resin R. In the illustrated example, the image forming apparatus 60 may be a digital micro-mirror device.

The projector 56 may incorporate additional components, such as actuators, mirrors, etc. configured to selectively move the image forming apparatus 60 or other part of the projector 56 with the effect of rastering or shifting the location of the patterned image 64 on the build surface 30. Stated another way, the patterned image 64 may be moved away from a nominal or starting location.

In addition to other types of radiant energy devices 20, the radiant energy device 20 may include a “scanned beam apparatus” used herein to refer generally to any device operable to generate a radiant energy beam of suitable energy level and other operating characteristics to cure the resin R and to scan the beam over the surface of the resin R in a desired pattern. For example, the scanned beam apparatus can include a radiant energy source 58 and a beam steering apparatus. The radiant energy source 58 may include any device operable to generate a beam of suitable power and other operating characteristics to cure the resin R. Non-limiting examples of suitable radiant energy sources 58 include lasers or electron beam guns.

In some instances, the apparatus 10 may include a material retention assembly 68 that may be configured to retain the resin support 26 in a predefined position along the support plate 14. In some instances, the material retention assembly 68 can include one or more pneumatic actuation zones 70 with each pneumatic actuation zone 70 configured to selectively interact with the resin support 26 by producing a force on a surface of the resin support 26 opposite the resin R.

The one or more pneumatic actuation zones 70 may apply a negative pressure on a first surface of the resin support 26 that is opposite to the resin R, or a second side of the resin support 26, to produce a suction or vacuum on the resin support 26. The negative pressure may retain the resin support 26 in a desired position along the support plate 14. The one or more pneumatic actuation zones 70 may also apply a positive pressure on the first surface of the resin support 26 that is opposite to the resin R, or a second side of the resin support 26, to produce a pushing force on the resin support 26. The positive pressure may release the resin support 26 from a component of the apparatus 10, such as the window 16, the material retention assembly 68, etc. As used herein, a “negative” pressure is any pressure that is less than an ambient pressure proximate to one or more pneumatic actuation zones 70 such that fluid may be drawn into the one or more pneumatic actuation zones 70. Conversely, a “positive” pressure is any pressure that is greater than an ambient pressure proximate to one or more pneumatic actuation zones 70 such that fluid may be exhausted from the one or more pneumatic actuation zones 70. Further, a “neutral” pressure is any pressure that is generally equal to an ambient pressure proximate to one or more pneumatic actuation zones 70.

In some examples, the pneumatic actuation zones 70 may be fluidly coupled with a pneumatic assembly 72 through various hoses and one or more ports. The pneumatic assembly 72 may include any device capable of providing a vacuum/suction and/or pushing a fluid, such as air or a process gas (e.g., nitrogen or argon), through the one or more pneumatic actuation zones 70. For instance, the pneumatic assembly 72 may include a pressurized fluid source that includes a compressor and/or a blower. The pneumatic assembly 72 may additionally or alternatively include any assembly capable of altering a pressure, such as a venturi vacuum pump. In some embodiments, one or more valves

and/or switches may be coupled with the pneumatic assembly **72** and the one or more pneumatic actuation zones **70**. The one or more valves and/or switches are configured to regulate a pressure to each of the one or more pneumatic actuation zones **70**.

In some embodiments, the pneumatic actuation zone **70** includes one or more apertures **74** of any size and shape for interacting with the resin support **26**. For instance, the apertures **74** may be any number and combination of holes, slits, or other geometric shapes defined by any component of the additive manufacturing apparatus **10**, such as a portion of the support plate **14**. Additionally, or alternatively, the apertures **74** may be defined by a portion of the support plate **14** being formed from a porous material, or through any other assembly in which a fluid may be moved from a first side of the support plate **14** to a second side of the support plate **14** to interact with the resin support **26**.

In some examples, the pneumatic actuation zone **70** may be defined by a plenum **76**. The plenum **76** may be of any size and may be similar or varied from the shape of any remaining plenum **76**. In some instances, a gasket may be positioned about a rim of the plenum **76**. Additionally or alternatively, the material retention assembly **68** may include one or more clamps that compressively maintain the resin support **26** along the support plate **14**.

With further reference to FIGS. 1A and 1B, a viscosity modification assembly **78** may be integrated within the support plate **14** and/or otherwise operably coupled with the resin support **26**. The viscosity modification assembly **78** may be configured to apply a shearing stress to the resin R to alter (e.g., reduce) a viscosity of the resin R. Additionally or alternatively, the viscosity modification assembly **78** may be configured to heat the resin R to alter the viscosity of the resin R. It will be appreciated that in embodiments that heat the resin R to alter the viscosity of the resin R, the heat provided may be within a predefined range that is sufficient to alter the viscosity of the resin R without causing any cross-linking in the polymer.

In some embodiments, the viscosity modification assembly **78** may be configured to mechanically vibrate a portion of the support plate **14** to create a shearing stress on the resin R. For example, the viscosity modification assembly **78** may include a movement device **80** (e.g., a transducer) that is operably coupled with the support plate **14**. The movement device **80** may be configured to vibrate at least a portion of the support plate **14** or any other module of the apparatus **10** that is then transferred to the resin R. Additionally and/or alternatively, the movement device **80** may be configured to convert electrical energy to ultrasonic mechanical pressure waves that are transferred to the resin R. For instance, the movement device **80** may be in the form of an ultrasonic vibrating device, such as one utilizing a piezoelectric transducer. In other embodiments, the viscosity modification assembly **78**, in addition to or in lieu of the transducer, may include, alone or in conjunction with one or the other, a fluid, an acoustic, a motor (e.g., offset cam), a reciprocating piston, or any other movement device **80**.

The movement device **80** may be operably coupled with the computing system **84**. The computing system **84** may include a signal generator that supplies an electric impulse to the movement device **80**, the voltage of which can be varied at different frequencies and with different wave-shapes. The signal may, for example, be a pure sinusoidal wave or may be modulated with one or more other frequencies. Alternatively, the signal may be a stepped or spiked pulse. In some embodiments, the signal generator transmits a signal of between 20-80 kHz. For example, the signal is at

about 60 kHz. The signal generator may, for example, transmit a constant amplitude signal at a constant frequency, or alternate one or both of these parameters. A power level can be selected as a percentage of maximum power.

In other embodiments, the viscosity modification assembly **78** may be configured to create a shearing stress on the resin R through other configurations without departing from the scope of the present disclosure. For example, the viscosity modification assembly **78** may be configured as a probe that may be adjacent and in physical contact with the resin support **26** and/or any other module that may relay the shearing stress to the resin R on the resin support **26**. Additionally or alternatively, the viscosity modification assembly **78** may be configured as an ultrasonic or vibration plate that may be operably coupled with the resin support **26** and/or any other module of the apparatus **10** that may provide the shearing stress to the resin R on the resin support **26**.

With further reference to FIGS. 1A and 1B, in various embodiments, a gasket **82** may be positioned between the window **16** and the support plate **14** to isolate movement of each of the window **16** and the support plate **14** from one another. By isolating movement of the window **16** from the support plate **14**, degradation issues of the apparatus **10** caused through the operation of viscosity modification assembly **78** may be mitigated. In various examples, the gasket **82** may be formed from a motion attenuating material, such as any of a wide variety of resilient elastomers including, but not limited to, materials containing natural rubber and silicone.

As provided herein, in some instances, the viscosity modification assembly **78** may additionally or alternatively be capable of producing heat to alter the viscosity of the resin R. For example, fast heating processes, such as dielectric or microwave heating, can be used to avoid exposing the resin R to a long heating cycle before the temperature of use is reached.

The computing system **84** in FIGS. 1A and 1B is a generalized representation of the hardware and software that may be implemented to control the operation of the apparatus **10**, including some or all of the stage **18**, the drive system **28**, the radiant energy device **20**, the actuator assembly **46**, the material retention assembly **68**, the viscosity modification assembly **78**, a movement device **80**, actuators, and the various parts of the apparatus **10** described herein. The computing system **84** may be embodied, for example, by software running on one or more processors embodied in one or more devices such as a programmable logic controller ("PLC") or a microcomputer. Such processors may be coupled to process sensors and operating components, for example, through wired or wireless connections. The same processor or processors may be used to retrieve and analyze sensor data, for statistical analysis, and for feedback control. Numerous aspects of the apparatus **10** may be subject to closed-loop control.

Optionally, the components of the apparatus **10** may be surrounded by a housing **86**, which may be used to provide a shielding or inert gas (e.g., a "process gas") atmosphere using gas ports **88**. Optionally, the pressure within the housing **86** could be maintained at a desired level greater than or less than atmospheric. Optionally, the housing **86** could be temperature and/or humidity controlled. Optionally, ventilation of the housing **86** could be controlled based on factors such as a time interval, temperature, humidity, and/or chemical species concentration. In some embodiments, the housing **86** can be maintained at a pressure that is different than an atmospheric pressure.

11

Referring to FIGS. 2-4, various perspective views are provided of the additive manufacturing apparatus 10 including an actuator assembly 46 in accordance with exemplary embodiments of the present disclosure. The exemplary apparatus 10 may include a base structure 90 and a static support 48 extending from the base structure 90. In the illustrated embodiment, the actuator assembly 46 is operably coupled with the static support 48 and is configured to change a position of the stage 18. However, it will be appreciated that the actuator assembly 46 may be operably coupled with any other component without departing from the scope of the present disclosure.

As illustrated, the actuator assembly 46 includes the first actuator 50 operably coupled with the static support 48. A second actuator 52 may be operably coupled with and moveable along the first actuator 50. Additionally, a third actuator 54 may be operably coupled with and moveable with the second actuator 52. The stage 18 may be operably coupled with and moveable along the third actuator 54. In various embodiments, when the stage 18 is moved along the Z-axis direction through the use of the first actuator 50, the second actuator 52, the third actuator 54, and the stage 18 move along the first actuator 50. When the stage 18 is moved in the X-axis direction through the use of the second actuator 52, the third actuator 54, and the stage 18 move along the second actuator 52. When the stage 18 is moved in the Y-axis direction, the stage 18 moves along the third actuator 54. While the first actuator 50 is illustrated translating in the Z-direction, the second actuator 52 is illustrated translating in the X-axis direction, and the third actuator 54 is illustrated translating in the Y-direction in FIG. 2, it will be appreciated that each actuator may be coupled to and moveable with any other actuator and/or the stage 18 without departing from the scope of the present disclosure. It will be appreciated that the terms "first actuator," "second actuator," and "third actuator" are used herein for clarity purposes. It will be understood that the additive manufacturing apparatus may include any one or more of the actuators without departing from the scope of the present disclosure.

With further reference to FIGS. 2-4, the resin support 26 may be configured to retain first and second materials thereon. For example, the first material may be a first resin R_1 and the second material may be a second resin R_2 . As illustrated, the first resin R_1 may be positioned adjacent to a second resin R_2 in the Y-axis direction. As such, in some instances, the first resin R_1 may be positioned over a first segment of the window 16 as the resin support 26 is translated across the window 16. Likewise, the second resin R_2 may be positioned over a second segment of the window 16 that is offset from the first segment as the resin support 26 is translated across the window 16.

In various embodiments, such as the ones illustrated in FIGS. 2-4, the resin support 26 may be in the form of a first resin support 26A that is configured to have the first resin R_1 deposited thereon and a second resin support 26B that is configured to have the second resin R_2 deposited thereon. Each of the first resin support 26A and the second resin support 26B may be operably coupled with the feed module 22 (FIG. 1A) and the take-up module 24 (FIG. 1A). In some instances, each of the first resin support 26A and the second resin support 26B may be operably coupled with a common first roller 22A within the feed module 22 and/or a common second roller 24A within the take-up module 24. In such instances, a translational movement length of the first resin support 26A may be generally equal to a translational length of the second resin support 26B. However, it will be appreciated that the first resin support 26A may be operably

12

coupled with a different roller within the feed module 22 and the take-up module 24 from the second resin support 26B such that each resin support 26A, 26B may be translated in the X-direction independently of one another.

With further reference to FIGS. 2-4, the material depositor 34 may include a first reservoir 92 configured to retain the first resin R_1 and a second reservoir 94 configured to retain the second resin R_2 . As illustrated, the first reservoir 92 may be configured to retain the first resin R_1 and the second reservoir 94 may be configured to retain the second resin R_2 .

In some examples, the material depositor 34 can further include a first vessel 96 fluidly coupled with the first reservoir 92. A first conduit 98 extends from the first vessel 96 to direct the first resin R_1 from the first vessel 96 to the first reservoir 92. Likewise, the material depositor 34 can also include a second vessel 100 fluidly coupled with the second reservoir 94. A second conduit 102 extends from the second vessel 100 to direct the second resin R_2 from the second vessel 100 to the second reservoir 94.

In various embodiments, the material depositor 34 can further include a first volume sensor 104 and/or a second volume sensor 106. The first volume sensor 104 can be configured to provide signals to the computing system 84 related to a volume of the first resin R_1 within the first reservoir 92. The computing system 84 is configured to receive the monitoring signals and process such signals using predetermined algorithms to generate control signals for controlling a first regulator 108, which may allow or restrict flow of the first resin R_1 from the first vessel 96 to the first reservoir 92. Likewise, the second volume sensor 106 can be configured to provide signals to the computing system 84 related to a volume of the second resin R_2 within the second reservoir 94. The computing system 84 is configured to receive the monitoring signals and process such signals using predetermined algorithms to generate control signals for controlling a second regulator 110, which may allow or restrict flow of the second resin R_2 from the second vessel 100 to the first reservoir 92. In this manner, closed-loop control of the volume of the first resin R_1 and the volume of the second resin R_2 can be achieved. The first volume sensor 104 and the second volume sensor 106 may each be embodied as one or more imaging sensors or any other vision-based device. The first volume sensor 104 and the second volume sensor 106 may additionally and/or alternatively be configured as any other practicable proximity sensor, such as, but not limited to, an ultrasonic sensor, a radar sensor, a LIDAR sensor, or the like.

With further reference to FIGS. 2-4, a first thickness assembly 112 can be used to control the thickness of the resin R applied to the resin support 26 as the first resin R_1 is deposited on the resin support 26. A second thickness assembly 114 can be used to control the thickness of the second resin R_2 applied to the resin support 26 as the second resin R_2 is deposited on the resin support 26. In the illustrated embodiment, the thickness of the first resin R_1 may be defined through the usage of a doctor blade and the thickness of the second resin R_2 may be defined through the usage of a doctor blade. In various embodiments, other material depositing apparatuses can be used separately or in combination with the first and second doctor blades, such as but not limited to, gravure rolls, metering rolls, weir-based cascades, direct die casting, and a combination thereof.

In some embodiments, a common thickness assembly may additionally or alternatively be used with the first thickness assembly 112 and the second thickness assembly 114. For instance, a common material depositing apparatus can be used for each of the first resin R_1 and the second resin

13

R₂. In some instances, the common material depositing apparatus may be configured to act as a gross control for the thickness of an initially deposited layer of the first resin R₁ and the second resin R₂. In turn, the first thickness assembly 112 may further define the thickness of the first resin R₁ and the second thickness assembly 114 may further define the thickness of the second resin R₂.

Still referring to FIGS. 2-4, a radiant energy device 20 may be positioned within the base structure 90. As an option, the radiant energy device 20 may be coupled with an image movement device 116 through a bracket 118. The movement device 80 may include actuators, mirrors, etc. that are configured to selectively move the radiant energy device 20, or another part of the radiant energy device 20, with the effect of rastering or shifting the location of a patterned image 64 relative to the window 16. Stated another way, the patterned image 64 may be moved away from a nominal or starting location. This permits a single radiant energy device 20 to cover a larger build area, for example. This type of image projection may be referred to herein as a “tiled image”.

Additionally or alternatively, the apparatus 10 may include a plurality of radiant energy devices 20 that are operably coupled with the build zone 32. Each of the plurality of radiant energy devices 20 may or may not be configured to translate below the window 16 and/or the support plate 14. Moreover, each of the plurality of radiant energy devices 20 may generate an image 64 that at least partially overlaps with an image 64 of an additional radiant energy device to form a stitched image on the resin R. In various embodiments, the images 64 from each of the plurality of radiant energy devices 20 may have some degree of overlap where that overlap is a single pixel, less than one pixel (for example, half a pixel), or more than one pixel. Further, in some embodiments, optics 66 may be optically coupled with the one or more radiant energy devices 20. In such instances, at least one of the one or more radiant energy devices 20 and/or the optics 66 may translate along the Y-axis and/or otherwise move through the movement device 80 to produce patterned images 64 on various portions of the resin support 26.

Further, in some embodiments, the apparatus 10 may include one or more sensors 120 that are configured to detect information related to a position of the stage 18, the resin support 26, and/or the radiant energy device 20. For example, the one or more sensors 120 may verify the position of the stage 18 and/or the resin support 26 each time the stage 18 and/or the resin support 26 are moved by the actuator assembly 46. Likewise, the one or more sensors 120 may verify the location of the radiant energy device 20 each time the radiant energy device 20 is translated by the movement device 80. In various embodiments, the one or more sensors 120 may be any combination of devices that is configured to provide information indicative of a position of the stage 18 and/or the resin support 26 or a location of the radiant energy device 20. For example, the one or more sensors 120 may include a gyroscope, an accelerometer, a proximity sensor, an image sensor, and/or any other practicable sensor.

In operation, the radiant energy device 20 and/or the movement assembly may produce heat. Accordingly, one or more vents and/or fans 122 may be positioned within the base structure 90 to remove heat from the base structure 90. The one or more fans 122 may be configured as any fluid movement device 80 that is capable of drawing the heated air from the base structure 90 to an area proximate to the base structure 90.

14

Referring now to FIG. 5, a method 200 for operating an additive manufacturing apparatus 10 is provided in accordance with various aspects of the present disclosure. The various steps of method 200 are schematically illustrated in FIGS. 5-24. The method 200 can be used to operate the additive manufacturing apparatus 10 or any other suitable additive manufacturing apparatus 10. It should be appreciated that the example method 200 is discussed herein only to describe example aspects of the present subject matter and is not intended to be limiting. Any of the steps within FIG. 5 may be omitted without departing from the scope of the present disclosure.

Referring now to FIGS. 5 and 6, the method 200 can include, at step 202, depositing a layer of a first uncured resin and a second uncured resin onto the resin support 26. In various embodiments, the first resin R₁ may be laterally offset from the second resin R₂ on the resin support 26 in the Y-direction. Further, a gap 124 may be defined between the laterally offset first and second resins R₁, R₂.

In addition, the resin support 26 may be in the form of a first resin support 26A that is configured to have the first resin R₁ deposited thereon and a second resin support 26B that is configured to have the second resin R₂ deposited thereon. Each of the first resin support 26A and the second resin support 26B may be operably coupled with the feed module 22 and the take-up module 24. Conversely, the first resin R₁ and the second resin R₂ may be deposited on a common resin support 26.

While the first resin R₁ and/or the second resin R₂ is deposited onto the resin support 26 and/or after the deposition of the first resin R₁ and/or the second resin R₂ onto the resin support 26, the resin support 26 may be translated in an X-axis direction into a build zone 32.

As shown in FIGS. 5 and 7, at step 204, the method 200 can include placing the stage 18 in a first curing position by moving the stage 18 such that a working surface of the stage 18 and/or the component 12 retained by the stage 18 contacts the first resin R₁. As the stage 18 is moved to the first curing position, a working surface of the stage 18 and/or the component 12 retained by the stage 18 contacts the first resin R₁.

As shown in FIGS. 5 and 8, at step 206, the method 200 can include curing a portion of the first resin R₁ while the stage 18 is in the first curing position relative to a window 16 by applying radiant energy from a radiant energy device 20 through the window 16 and the resin support 26. As provided herein, the radiant energy may be in the form of a first patterned image 64 that is transmitted through at least a portion of the window 16. The portion of the first resin R₁ that is cured forms a layer of the component 12 that is retained by the stage 18. In the exemplary embodiment of FIG. 8, the patterned image 64 is generally equal to the width of the first resin R₁ in the Y-axis direction. However, the first portion may be of any width (varied or constant) in the Y-axis direction.

As shown in FIGS. 5 and 9, at step 208, the method 200 can include separating the component 12 from the resin support 26 by altering a position of the stage 18 through the actuator assembly 46. It will be appreciated that the stage 18 may move in the X-axis direction, the Y-axis direction, and/or the Z-axis direction.

As shown in FIGS. 5 and 10, at step 210, the method 200 can include placing the stage 18 in a second curing position by moving the stage 18 such that the working surface of the component 12 retained by the stage 18 contacts the second resin R₂. As the stage 18 is moved to the second curing

15

position, the working surface of the component 12 retained by the stage 18 contacts the second resin R_2 .

As shown in FIGS. 5 and 11, at step 212, the method 200 can include curing a portion of the second resin R_2 while the stage 18 is in the second curing position relative to a window 16 by applying radiant energy from a radiant energy device 20 through the window 16 and the resin support 26. As provided herein, the radiant energy may be in the form of a patterned image 64 that is transmitted through at least a portion of the window 16. The portion of the second resin R_2 that is cured forms a layer of the component 12 that is retained by the stage 18. In the exemplary embodiment of FIG. 11, the patterned image 64 is generally equal to the width of the second resin R_2 in the Y-axis direction. However, the second portion may be of any width (varied or constant) in the Y-axis direction.

As shown in FIGS. 5 and 12, at step 214, the method 200 can include separating the component 12 from the resin support 26 by altering a position of the stage 18 through the actuator assembly 46. It will be appreciated that the stage 18 may move in the X-axis direction, the Y-axis direction, and/or the Z-axis direction.

As shown in FIGS. 5 and 13, at step 216, after the component 12 is separated from the resin support 26, the method 200 can include translating the resin support 26 such that a fresh first resin R_1 and a second resin R_2 are positioned between the window 16 and the stage 18. It will be appreciated, however, that in various embodiments, after a portion of either resin is cured, the resin support 26 supporting that respective resin may be translated. Additionally or alternatively, the resin support 26 may be translated whenever the next layer to be formed requires fresh resin. For example, if the first resin R_1 forms a first layer and a second resin R_2 forms a second layer, the resin support 26 may be translated after the second layer. If the first resin R_1 forms a first layer and a second layer, the resin support 26 may be translated between the first and second layers even though the second resin R_2 remains unused between the first and second layers.

While the resin support 26 is translated, the stage 18 and the component 12 attached to the stage 18 may move based on the next layer to be formed. For example, in the illustrated embodiment, the third layer will include the first resin R_1 therein. As such, the stage 18 may be moved in the Y-axis direction to a position above the first resin R_1 .

As shown in FIGS. 5 and 14, at step 218, the method 200 can include placing the stage 18 in a third curing position by moving the stage 18 such that the working surface of the component 12 retained by the stage 18 contacts the first resin R_1 . As the stage 18 is moved to the third curing position, the working surface of the component 12 retained by the stage 18 contacts the first resin R_1 .

As shown in FIGS. 5 and 15, at step 220, the method 200 can include curing a portion of the first resin R_1 while the stage 18 is in the third curing position relative to a window 16 by applying radiant energy from a radiant energy device 20 through the window 16 and the resin support 26. As provided herein, the radiant energy may be in the form of a patterned image 64 that is transmitted through at least a portion of the window 16. The portion of the first resin R_1 that is cured forms a layer of the component 12 that is retained by the stage 18. In the exemplary embodiment of FIG. 15, the patterned image 64 is less than the width of the first resin R_1 in the Y-axis direction. However, the cured portion may be of any width (varied or constant) in the Y-axis direction.

As shown in FIGS. 5, 16, and 17, at step 222, the method 200 can include separating the component 12 from the resin

16

support 26 by altering a position of the stage 18 through the actuator assembly 46. It will be appreciated that the stage 18 may move in the X-axis direction, the Y-axis direction, and/or the Z-axis direction.

As shown in FIGS. 5 and 18, at step 224, the method 200 can include placing the stage 18 in a fourth curing position by moving the stage 18 such that the working surface of the component 12 retained by the stage 18 contacts the second resin R_2 . As the stage 18 is moved to the fourth curing position, the working surface of the component 12 retained by the stage 18 contacts the second resin R_2 .

As shown in FIGS. 5 and 19, at step 226, the method 200 can include curing a portion of the second resin R_2 while the stage 18 is in the fourth curing position relative to a window 16 by applying radiant energy from a radiant energy device 20 through the window 16 and the resin support 26. As provided herein, the radiant energy may be in the form of a patterned image 64 that is transmitted through at least a portion of the window 16. The portion of the second resin R_2 that is cured forms a layer of the component 12 that is retained by the stage 18. In the exemplary embodiment of FIG. 19, the patterned image 64 is less than the width of the second resin R_2 in the Y-axis direction. However, the cured portion may be of any width (varied or constant) in the Y-axis direction.

As shown in FIGS. 5 and 20, at step 230, the method 200 can include separating the component 12 from the resin support 26 by altering a position of the stage 18 through the actuator assembly 46. It will be appreciated that the stage 18 may move in the X-axis direction, the Y-axis direction, and/or the Z-axis direction.

As shown in FIGS. 5 and 21, at step 232, after the component 12 is separated from the resin support 26, the method 200 can include translating the resin support 26 such that a fresh first resin R_1 and a second resin R_2 are positioned within the build zone 32.

As shown in FIGS. 5 and 22, at step 234, the method 200 can include placing the stage 18 in a fifth curing position by moving the stage 18 in the X-axis direction, Y-axis direction, and/or a Z-axis direction such that the working surface of the component 12 is retained by the stage 18 contacts both the first resin R_1 and the second resin R_2 . As the stage 18 is moved to the fifth curing position, the working surface of the component 12 retained by the stage 18 contacts the first resin R_1 and the second resin R_2 .

As shown in FIGS. 5 and 23, at step 236, the method 200 can include curing a portion of the first resin R_1 and the second resin R_2 while the stage 18 is in the fifth curing position relative to a window 16 by applying radiant energy from a radiant energy device 20 through the window 16 and the resin support 26. As provided herein, the radiant energy may be in the form of a patterned image 64 that is transmitted through at least a portion of the window 16.

As shown in FIGS. 5 and 24, at step 238, the method 200 can include separating the component 12 from the resin support 26 by altering a position of the stage 18 through the actuator assembly 46. It will be appreciated that the stage 18 and the resin support 26 may move to any number (one or more) curing positions to form each layer of the component 12 based on the component design.

Referring now to FIGS. 25-34, various views of the additive manufacturing apparatus 10 are illustrated according to various aspects of the present disclosure. While only some components of the additive manufacturing apparatus are illustrated in FIGS. 25-34 for clarity purposes, it will be appreciated that the additive manufacturing apparatus may include any feature described in the present disclosure. In

17

addition, it will be appreciated that the additive manufacturing apparatus may perform the method 200 described in FIGS. 5-24 and/or any other method, such as method 400 set forth in FIG. 36.

In the embodiments illustrated in FIGS. 25-34, the additive manufacturing apparatus may include a frame 126 and an actuator assembly 46 configured to allow for movement of various components of the additive manufacturing apparatus relative to one another. In some instances, the frame 126 may include a frame structure 128 and may be operably coupled with and/or operably support various components of the additive manufacturing apparatus. As illustrated, the frame 126 may support a build plate 130, a support plate 14, and/or a base plate 132.

The build plate 130 may support a first actuator 50. In some embodiments, the first actuator 50 can allow for movement of the stage 18 in a first, vertical direction (e.g., along the Z-axis direction). The first actuator 50 may include any device practicable of moving the stage 18 in the Z-axis direction, such as ballscrew electric actuators, linear electric actuators, pneumatic cylinders, hydraulic cylinders, delta drives, belt systems, or any other practicable device.

A print head 134 may be operably coupled with the first actuator 50. In such instances, the print head 134 may be configured to translate or otherwise through actuation of the first actuator 50. The print head 134 may further be operably coupled with the stage 18. In some instances, the print head 134 may include a clamp 136 and/or any other feature for retaining the stage 18 on the print head 134.

The frame 126 may further be operably coupled with the support plate 14. In various embodiments, a window 16 can be operably supported by the support plate 14. Further, the window 16 and the support plate 14 can be integrally formed such that one or more windows 16 are integrated within the support plate 14.

With further reference to FIGS. 25-34, the base plate 132 may be fixed to a bottom portion of the frame structure 128. A first slide assembly 138 may be operably coupled with the base plate 132. The first slide assembly 138 may be configured to guide movement of the base plate 132 relative to a mounting plate 140, which may be retained within a generally static position within the additive manufacturing apparatus. It will be appreciated, however, that the mounting plate 140 may be moveable.

In the embodiments illustrated in FIGS. 25-34, one or more guides 142 may be operably coupled with the base plate 132. The guides 142 may move along a track 144 operably coupled with the mounting plate 140. As will be described in greater detail below, the first slide assembly 138 may allow for the frame 126, and, consequently, the stage 18 to translate along the track 144 in the Y-axis direction such that the stage 18 may be lowered onto a first resin R_1 and/or a second resin R_2 . As provided herein, the first resin R_1 may be separated from the second resin R_2 by a gap 124. As such, the stage 18 may be moved to the various resins to form various portions of the component 12. It will be appreciated that in other embodiments, the track 144 may be operably coupled with the base plate 132 and the guides 142 may be operably coupled with the mounting plate 140 without departing from the scope of the present disclosure. In addition, it will be appreciated that the first slide assembly 138 may include any components that allow for movement of the base plate 132 relative to the mounting plate 140 without departing from the teachings provided herein.

In various embodiments, a second actuator 52 may be operably coupled with the base plate 132 and the mounting plate 140. The second actuator 52 may be configured to

18

move the base plate 132 relative to the mounting plate 140 in the Y-axis direction. The second actuator 52 may include any practicable device, such as ballscrew electric actuators, linear electric actuators, pneumatic cylinders, hydraulic cylinders, delta drives, belt systems, or any other practicable device.

Referring still to FIGS. 25-34, in various embodiments, the radiant energy device 20 may be operably coupled with the frame 126 and positioned on an opposing side of the window from the stage 18 in the Z-direction. In the illustrated embodiments, the radiant energy device 20 may include a pair of projectors 56. However, it will be appreciated that the radiant energy device 20 may be configured as any device or combination of devices operable to generate and project radiant energy at the resin R in a suitable pattern and with a suitable energy level and other operating characteristics to cure the resin R during a build process.

In some embodiments, the radiant energy device 20 may be operably coupled with a carrier plate 146. In some instances, the radiant energy device 20 may include one or more carrier rails 148 that are coupled with the carrier plate 146 for retaining the radiant energy device 20 relative to the carrier plate 146.

In several embodiments, the radiant energy device 20 may be movably coupled with the frame 126. For example, a second slide assembly 150 may be positioned between the carrier plate 146 and the base plate 132. The second slide assembly 150 may be configured to guide movement of the carrier plate 146 relative to the base plate 132. As such, in some examples, the stage 18 and the radiant energy device 20 may move in conjunction relative to the mounting panel with one another through the use of the first slide assembly 138 and the radiant energy device 20 may move relative to the stage 18 through use of the second slide assembly 150.

In the embodiments illustrated in FIGS. 25-34, one or more guides 152 may be operably coupled with the carrier plate 146. The guides 152 may move along a rail 154 operably coupled with the base plate 132. As will be described in greater detail below, the second slide assembly 150 may allow for the radiant energy device 20 to translate along the second slide assembly 150 in the Y-axis direction such that the radiant energy device 20 may be aligned with various portions of the resin support 26. It will be appreciated that in other embodiments, the rail 154 may be operably coupled with the carrier plate 146 and the guides 152 may be operably coupled with the base plate 132 without departing from the scope of the present disclosure. In addition, it will be appreciated that the second slide assembly 150 may be operably coupled with any other component, such as the frame 126 or the mounting plate 140 without departing from the scope of the present disclosure.

In various embodiments, a third actuator 54 may be operably coupled with the carrier plate 146 and the base plate 132. The third actuator 54 may be configured to move the carrier plate 146 relative to the base plate 132 in the Y-axis direction. The third actuator 54 may include any practicable device, such as ballscrew electric actuators, linear electric actuators, pneumatic cylinders, hydraulic cylinders, delta drives, belt systems, or any other practicable device.

As illustrated in FIG. 25, a cover 156 may be operably coupled with the frame 126 and configured to shield an area between the lenses of the radiant energy device 20 and the support plate 14. In various embodiments, the shield may be configured to prevent light within various spectrums and/or all light from passing therethrough.

19

Referring further to FIGS. 28 and 29, the print head 134 may include a print head mounting plate 158, one or more print head arms 160 extending from the print head mounting plate 158, and an attachment assembly 162. The print head 134 may be configured to selectively retain the stage 18.

In some embodiments, such as the one illustrated in FIG. 29, the stage 18 is a structure defining a planar surface 44, which is capable of being oriented parallel to a build surface 30 or the X-Y plane. The stage 18 may further include one or more stage rails 164 that are configured to interact with the print head 134. One or more datums 166 may also be positioned on and/or integrally formed with the stage 18. In some instances, the stage 18 may further include one or more handles 168.

Referring back to FIGS. 28 and 29, the clamp 136 of the attachment assembly 162 may selectively retain the stage 18 relative to the print head 134. In addition, the attachment assembly 162 may further include an anchor plate 170 and a clamping plate 172. In operation, the anchor plate 170 may maintain a common position when the clamp 136 is in both the unlocked and locked positions. The clamping plate 172 may be operably coupled with a clamping arm 174. The clamping plate 172 and the clamping arm 174 may move in conjunction with one another when the clamp 136 is moved from the unlocked position to the locked position and vice versa.

The clamping arm 174 may include one or more protrusions 176 that are configured to be positioned within the one or more rails 154 of the stage 18. In some instances, the one or more protrusions 176 may define notches 178 for assisting in locating the stage 18 relative to the protrusions 176. With the one or more protrusions 176 within the one or more rails 154 of the stage 18, the one or more datums 166 of the stage 18 can align with locators 180 within the attachment assembly 162. In various embodiments, as the clamp 136 is moved to the locked position, a distance between a bottom portion of the locators 180 and a top portion of the clamping arm 174 is increased in the Z-axis direction. The increased distance creates an expansion force on the rails 154 of the stage 18 and the one or more datums 166 thereby retaining the stage 18 in position relative to the print head 134.

Referring further to FIGS. 30 and 31, as provided herein, the mounting plate 140 may have a pair of tracks 144 operably coupled thereto. A plurality of guides 142 are coupled with the base plate 132 and may be configured to move along the first slide assembly 138. As illustrated, the second actuator 52 may be operably coupled with the base plate 132 and the mounting plate 140 to move the base plate 132 relative to the mounting plate 140. In some instances, the second actuator 52 may be configured to move the base plate 132 between a first position and a second position.

In the first position, the stage 18 may be lowered by the first actuator 50 (FIG. 25) to a position over at least a portion of the first resin R_1 . When in the first position, the guides 142 may contact a first pair of stops 182. In the second position, the stage 18 may be lowered by the first actuator 50 (FIG. 25) to a position over at least a portion of the second resin R_2 . When in the second position, the guides 142 may contact a second pair of stops 184. It will be appreciated that the first slide assembly 138 may include a single first stop and/or a single second stop without departing from the scope of the present disclosure.

In various embodiments, each of the first pair of stops 182 and the second pair of stops 184 may be adjustable. For example, the first pair of stops 182, and the second pair of stops 184 can be in the form of fine threaded (e.g., 100 threads per inch (TPI)) adjustable end stops that allow

20

precise positioning of each respective pair of end stops 182, 184. In some embodiments, the one or more guides 142 may include hardened standoffs 186 that are configured to engage with end stops 182, 184. The standoffs 186 can be removable and replaceable thereby allowing for easy replacement once the standoffs 186 in use are worn from use and/or for any other reason.

With further reference to FIG. 31, as provided herein, a second slide assembly 150 may include a pair of rails 154 operably coupled to the base plate 132. The second slide assembly 150 may also include one or more guides 152 coupled with the carrier plate 146. The guides 152 may be configured to move along the pair of rails 154. As illustrated, the third actuator 54 may be operably coupled with the base plate 132 and the carrier plate 146 to move the carrier plate 146 relative to the base plate 132. In some instances, the third actuator 54 may be configured to move the carrier plate 146 between a first position and a second position.

In the first position, the radiant energy device 20 may be positioned in a first location relative to the window 16 and/or the base plate 132. When in the first position, the guides 152 may contact a first stop 188. In the second position, the radiant energy device 20 may be positioned in a second location relative to the window 16 and/or the base plate 132 that is offset from the first location in the Y-axis direction. When in the second position, the guides 152 may contact a second stop 190.

In the illustrated embodiment of FIG. 31, the first stop 188 may be operably coupled to the base plate 132. The second stop 190 may be operably coupled with a flange 192 of the base plate 132. In various embodiments, each of the first end stop and the second end stop may be adjustable. For example, the first end stop, and the second end stop can be in the form of a fine threaded (e.g., 100 TPI) adjustable end stops that allow for precise positioning of each of the first end stop and the second end stop. In some embodiments, a first standoff 186 may be supported by the carrier plate 146 and configured to align with the first end stop. A second standoff 186 may be operably coupled with an opposing end of the carrier plate 146 and/or the guides 152 of the second slide assembly 150. Each of the first standoff 186 and the second standoff 186 can be removable and replaceable thereby allowing for easy replacement once the standoffs 186 in use are worn from use and/or for any other reason.

Referring now to FIGS. 32-34, various perspective views of the additive manufacturing apparatus having the actuator assembly 46 are provided in accordance with various aspects of the present disclosure. As provided herein, the additive manufacturing apparatus may be configured to deposit a first resin R_1 and a second resin R_2 onto a resin support 26. The first resin R_1 may be laterally offset from the second resin R_2 on the resin support 26 in the Y-direction. In addition, a gap 124 may be defined between the laterally offset first and second resins R_1 , R_2 .

The actuator assembly 46 may include a first actuator 50 configured to move the stage 18 in a plurality of locations along the Z-axis direction. The actuator assembly 46 may also include a second actuator 52 that may be associated with the first slide assembly 138. The first slide assembly 138 may be configured to move the stage 18 relative to the mounting plate 140. In addition, the actuator assembly 46 may include a third actuator 54 that is may be associated with the second slide assembly 150. The second slide assembly 150 may be configured to move the radiant energy device 20 relative to the frame 126 and/or the window 16.

During operation, the resin support 26 may be maintained in a generally consistent position. Conversely, the stage 18

21

and/or the radiant energy device **20** may be movable relative to the resin support **26** such that the first resin R_1 (or various portions of the first resin R_1) and/or the second resin R_2 (or various portions of the second resin R_2) may be selectively cured.

For example, as illustrated in FIG. **32**, the first slide assembly **138** may be placed in a first position relative to the mounting plate **140**. In the first position, the guides **142** of the first slide assembly **138** may contact and/or be proximate to the first pair of stops **182**. In the first position, the stage **18** may be generally aligned with the first resin R_1 in the Y-axis direction.

As also shown in FIG. **32**, the second slide assembly **150** may be in the first position. In the first position, the guides **152** of the second slide assembly **150** may contact and/or be proximate to the first stop **188** of the second slide assembly **150**. In the first position, the radiant energy device **20** may be in a first location relative to the window **16**. As such, the radiant energy device **20** may be directed towards a first portion of the first resin R_1 .

As shown in FIG. **33**, while the first slide assembly **138** is in the first position, the second slide assembly **150** may alternatively be in the second position. In the second position, the guides **152** of the second slide assembly **150** may contact and/or be proximate to the second stop **190** of the second slide assembly **150**. In the second position, the radiant energy device **20** may be in a second location relative to the window **16**. As such, the radiant energy device **20** may be directed towards a second portion of the first resin R_1 .

As illustrated in FIG. **34**, the first slide assembly **138** may also be placed in a second position relative to the mounting plate **140**. In the second position, the guides **142** of the first slide assembly **138** may contact and/or be proximate to the second pair of stops **184**. In the second position, the stage **18** may be generally aligned with the second resin R_2 in the Y-axis direction.

As also shown in FIG. **34**, the second slide assembly **150** may be in the first position. In the first position, the guides **152** of the second slide assembly **150** may contact and/or be proximate to the first stop **188** of the second slide assembly **150**. In the first position, the radiant energy device **20** may be in a third location relative to the window **16**. As such, the radiant energy device **20** may be directed towards a first portion of the second resin R_2 .

As shown in FIG. **35**, while the first slide assembly **138** is in the second position, the second slide assembly **150** may alternatively be in the second position. In the second position, the guides **152** of the second slide assembly **150** may contact and/or be proximate to the second stop **190** of the second slide assembly **150**. In the second position, the radiant energy device **20** may be in a fourth location relative to the window **16**. As such, the radiant energy device **20** may be directed towards a second portion of the second resin R_2 .

During operation, each of the slide assemblies may be manipulated in any order to form a component **12** formed from one or both of the first and second resins R_1 , R_2 . In some instances, the radiant energy device **20** may be configured as any device or combination of devices operable to generate and project radiant energy at the resin R in a suitable pattern and with a suitable energy level and other operating characteristics to cure the first resin R_1 and/or the second resin R_2 during the build process. In addition, the radiant energy device **20** may or may not be configured to translate below the window **16** and/or the support plate **14**. For example, as shown in FIGS. **31-34**, the radiant energy device **20** may include a first projector **56** and a second projector **56**. Each of the first projector **56** and the second

22

projector **56** may generate an image **64** that at least partially overlaps with an image **64** of an additional radiant energy device to form a stitched image **64** on the first resin R_1 and/or the second resin R_2 . In various embodiments, the images **64** from each of the plurality of radiant energy devices **20** may have some degree of overlap where that overlap is a single pixel, less than one pixel (for example, half a pixel), or more than one pixel. Additionally or alternatively, the radiant energy device **20** may be capable of performing a scanning process in which the consecutive patterned images **64** are emitted from the radiant energy device **20** as the radiant energy device **20** is translated along the movement device **80**. As such, in some embodiments, the image **64** from the first projector **56** and the image **64** from the second projector **56** may be statically, or mechanically, stitched together. Additionally or alternatively, multiple images **64** from the first projector **56** may be stitched with one another as the third actuator **54** alters a position of the first projector **56**. Likewise, multiple images **64** from the second projector **56** may be stitched with one another as the third actuator **54** alters a position of the second projector **56**.

Further, in some embodiments, the apparatus **10** may include one or more sensors **194** that are configured to detect information related to a position of the printhead, the frame **126**, and/or the radiant energy device **20**. For example, the one or more sensors **194** may verify the position of the stage **18** each time the stage **18** is moved. Additionally or alternatively, the one or more sensors **194** may verify the location of the frame **126** each time the frame **126** is translated. Additionally or alternatively, the one or more sensors **194** may verify the location of the radiant energy device **20** each time the radiant energy device **20** is translated by the movement device **80**. In various embodiments, the one or more sensors **194** may be any combination of devices that is configured to provide information indicative of a position of the printhead, the frame **126**, and/or the radiant energy device **20**. For example, the one or more sensors **194** may include a gyroscope, an accelerometer, a proximity sensor, an image sensor, and/or any other practicable sensor.

Referring now to FIG. **36**, a perspective view of the additive manufacturing apparatus is provided in accordance with various aspects of the present disclosure. As provided herein, the additive manufacturing apparatus may be configured to deposit a first resin R_1 and a second resin R_2 onto a resin support **26**. The first resin R_1 may be laterally offset from the second resin R_2 on the resin support **26** in the Y-direction. In addition, a gap may be defined between the laterally offset first and second resins R_1 , R_2 .

As illustrated, in various embodiments, the frame **126** may be movable relative to the support plate **14** and the window **16**. As such, in some instances, there may be little to no relative motion between the resin support **26** and the support plate **14** and the window **16** in the Y-axis direction.

In some embodiments, an opening **196** may be defined between the support plate **14** and the frame **126** to accommodate for movement of the frame **126** relative to the support plate **14**. The opening **196** may have a length in the Y-axis direction that is at least equal to the length of travel of the build plate **130** when the frame **126** is moved from the first position to the second position.

Referring now to FIG. **37**, a method **400** for operating an additive manufacturing apparatus **10** is provided. The method **400** can be used to operate the additive manufacturing apparatus **10** or any other suitable additive manufacturing apparatus **10**. It should be appreciated that the example method **400** is discussed herein only to describe example aspects of the present subject matter and is not

23

intended to be limiting. Any of the steps within FIG. 36 may be omitted without departing from the scope of the present disclosure.

At 402, the method 400 can include depositing a layer of a first uncured resin and a second uncured resin onto the resin support. In various embodiments, the first resin may be laterally offset from the second resin R_2 on the resin support in the Y-direction. Further, a gap may be defined between the laterally offset first and second resins R_1 , R_2 .

In addition, the resin support may be in the form of a first resin support that is configured to have the first resin deposited thereon and a second resin support that is configured to have the second resin deposited thereon. Each of the first resin support and the second resin support may be operably coupled with the feed module and the take-up module. Conversely, the first resin and the second resin may be deposited on a common resin support.

At 404, the method 400 can include translating the resin support in an X-axis direction into a build zone while the first resin and/or the second resin is deposited onto the resin support and/or after the deposition of first resin and/or second resin onto the resin support. As provided herein, the resin support may be translated by a drive assembly.

At 406, the method 400 can include placing the stage in a first curing position by moving the stage such that a working surface of the stage and/or the component retained by the stage contacts the first resin. As provided herein, the additive manufacturing apparatus includes a frame. The frame may include a frame structure, a build plate, a support plate, and/or a base plate.

The build plate may support a first actuator. In some embodiments, the first actuator can allow for movement of the stage in a first, vertical direction (e.g., along the Z-axis direction). A print head may be operably coupled with the first actuator. In such instances, the print head may be configured to translate or otherwise be moved by the actuator in the Z-axis direction. The print head may further be operably coupled with the stage.

The base plate may be fixed to a bottom portion of the frame structure. A first slide assembly may be operably coupled with the base plate. The first slide assembly may guide the movement of the base plate relative to a mounting plate in a Y-axis direction. The mounting plate may be retained within a generally static position within the additive manufacturing apparatus. In various embodiments, a second actuator may be operably coupled with the base plate and the mounting plate. The second actuator may be configured to move the base plate relative to the mounting plate in the Y-axis direction.

At 408, the method 400 can include positioning a radiant energy device in a first projection position. In various embodiments, the radiant energy device may be operably coupled with the frame and positioned on an opposing side of the window from the stage in the Z-direction. In several embodiments, the radiant energy device may be movably coupled with the frame. For example, a second slide assembly may be positioned between the carrier plate and the base plate. The second slide assembly may guide the movement of the carrier plate relative to the base plate. As such, in some examples, the stage and the radiant energy device may move in conjunction relative to the mounting panel with one another through the use of the first slide assembly and the radiant energy device may move relative to the stage through the use of the second slide assembly.

At 410, the method 400 can include curing a portion of the first resin while the stage is in the first curing position and the radiant energy device in the first projection position by

24

applying radiant energy from a radiant energy device through a window of the support plate and the resin support. As provided herein, the radiant energy may be in the form of a patterned image that is transmitted through at least a portion of the window.

At 412, the method 400 can include positioning the radiant energy device in a second projection position. The second projection position is offset from the first curing position in the Y-axis direction. In various embodiments, the radiant energy device is moved from the first projection position to the second projection position by translating along a second slide assembly. A third actuator may be operably coupled with the base plate of the frame and a carrier plate operably coupled with the radiant energy device to move the radiant energy device relative to the stage and/or the resin support.

At 414, the method 400 can include curing a portion of the first resin while the stage is in the first curing position and the radiant energy device in the second projection position by applying radiant energy from a radiant energy device through a window of the support plate and the resin support. As provided herein, the radiant energy may be in the form of a patterned image that is transmitted through at least a portion of the window.

At 416, the method 400 can include placing the stage in a second curing position by moving the stage such that a working surface of the stage and/or the component retained by the stage contacts the first resin and/or the second resin. The second curing position is offset from the first curing position in the Y-axis direction.

At 418, the method 400 can include positioning a radiant energy device in a first projection position. In turn, at 420, the method 400 can include curing a portion of the second resin while the stage is in the second curing position and the radiant energy device in the first projection position by applying radiant energy from a radiant energy device through a window of the support plate and the resin support. As provided herein, the radiant energy may be in the form of a patterned image that is transmitted through at least a portion of the window.

At 422, the method 400 can include positioning the radiant energy device in a second projection position. The second projection position is offset from the first curing position in the Y-axis direction. In various embodiments, the radiant energy device is moved from the first projection position to the second projection position by translating along the second slide assembly.

At 424, the method 400 can include curing a portion of the second resin while the stage is in the second curing position and the radiant energy device in the second projection position by applying radiant energy from a radiant energy device through a window of the support plate and the resin support.

FIG. 38 depicts certain components of a computing system 84 according to example embodiments of the present disclosure. The computing system 84 can include one or more computing device(s) 84A which may be used to implement the methods 200, 400 described herein. The computing device(s) 84A can include one or more processor(s) 84B and one or more memory device(s) 84C. The one or more processor(s) 84B can include any suitable processing device, such as a microprocessor, microcontroller, integrated circuit, an application specific integrated circuit (ASIC), a digital signal processor (DSP), a field-programmable gate array (FPGA), logic device, one or more central processing units (CPUs), graphics processing units (GPUs) (e.g., dedicated to efficiently rendering images),

25

processing units performing other specialized calculations, etc. The memory device(s) **84C** can include one or more non-transitory computer-readable storage medium(s), such as RAM, ROM, EEPROM, EPROM, flash memory devices, magnetic disks, etc., and/or combinations thereof.

The memory device(s) **84C** can include one or more computer-readable media and can store information accessible by the one or more processor(s) **84B**, including instructions **84D** that can be executed by the one or more processor(s) **84B**. The instructions **84D** may include one or more steps of the methods **200**, **400** described above, such as to execute operations at the additive manufacturing apparatus **10** described herein. The memory device(s) **84C** can store instructions **84D** for running one or more software applications, displaying a user interface, receiving user input, processing user input, etc. In some implementations, the instructions **84D** can be executed by the one or more processor(s) **84B** to cause the one or more processor(s) **84B** to perform operations, e.g., such as one or more portions of the methods **200**, **400** described herein. The instructions **84D** can be software written in any suitable programming language or can be implemented in hardware. Additionally, and/or alternatively, the instructions **84D** can be executed in logically and/or virtually separate threads on the processor(s) **84B**.

The one or more memory device(s) **84C** can also store data **84E** that can be retrieved, manipulated, created, or stored by the one or more processor(s) **84B**. The data **84E** can include, for instance, data to facilitate the performance of the methods **200**, **400** described herein. The data **84E** can be stored in one or more database(s). The one or more database(s) can be connected to computing system **84** by a high bandwidth LAN or WAN, or can also be connected to the computing system **84** through the network(s). The one or more database(s) can be split up so that they are located in multiple locales. In some implementations, the data **84E** can be received from another device.

The computing device(s) **84A** can also include a communication module or interface **84F** used to communicate with one or more another component (s) of the computing system **84** or the additive manufacturing apparatus **10** over the network(s). The communication interface **84F** can include any suitable components for interfacing with one or more network(s), including, for example, transmitters, receivers, ports, controllers, antennas, or other suitable components.

It should be appreciated that the additive manufacturing apparatus is described herein only for the purpose of explaining aspects of the present subject matter. In other example embodiments, the additive manufacturing apparatus may have any other suitable configuration and may use any other suitable additive manufacturing technology. Further, the additive manufacturing apparatus and processes or methods **200**, **400** described herein may be used for forming components using any suitable material. For example, the material may be plastic, metal, concrete, ceramic, polymer, epoxy, photopolymer resin, or any other suitable material that may be embodied in a layer of slurry, resin, or any other suitable form of sheet material having any suitable consistency, viscosity, or material properties. For example, according to various embodiments of the present subject matter, the additively manufactured components described herein may be formed in part, in whole, or in some combination of materials including but not limited to pure metals, nickel alloys, chrome alloys, titanium, titanium alloys, magnesium, magnesium alloys, aluminum, aluminum alloys, iron, iron alloys, stainless steel, and nickel or cobalt based superalloys (e.g., those available under the name Inconel® available

26

from Special Metals Corporation). These materials are examples of materials suitable for use in the additive manufacturing processes described herein and may be generally referred to as “additive materials.”

Aspects of the invention(s) are provided by the subject matter of the following clauses, which are intended to cover all suitable combinations unless dictated otherwise based on logic or the context of the clauses and/or associated figures and description:

10 An additive manufacturing apparatus comprising: a resin support configured to support a first resin and a second resin; a support plate including a window; a stage configured to hold one or more cured layers of the first resin or the second resin to form a component positioned opposite the support plate; a radiant energy device positioned on an opposite side of the resin support from the stage and operable to generate and project radiant energy in a patterned image through the window; and an actuator assembly configured to move the stage in a Z-axis direction and in a Y-axis direction.

20 The additive manufacturing apparatus of one or more of these clauses, wherein the first resin is laterally offset from the second resin in the Y-axis direction.

The additive manufacturing apparatus of one or more of these clauses, wherein a gap is defined between the first resin and the second resin.

25 The additive manufacturing apparatus of one or more of these clauses, wherein the resin support comprises a first resin support configured to have the first resin deposited thereon and a second resin support configured to have the second resin deposited thereon.

30 The additive manufacturing apparatus of one or more of these clauses, wherein the actuator assembly is further configured to move the radiant energy device along the Y-axis direction relative to the resin support.

35 The additive manufacturing apparatus of one or more of these clauses, further comprising: a material depositor configured to deposit the first resin and the second resin on the resin support, the material depositor including a first reservoir for retaining the first resin and a second reservoir for retaining the second resin.

40 The additive manufacturing apparatus of one or more of these clauses, further comprising: a frame operably coupled with the stage, the radiant energy device, and the support plate, the frame further coupled with a mounting plate; and a first slide assembly, wherein the frame, the stage, the radiant energy device, and the support plate are moveable relative to the mounting plate along the first slide assembly.

45 The additive manufacturing apparatus of one or more of these clauses, wherein an actuator of the actuator assembly is operably coupled with the frame and the mounting plate, and wherein the actuator is configured to move the frame between a first position and a second position along the first slide assembly.

50 The additive manufacturing apparatus of one or more of these clauses, further comprising: a second slide assembly operably coupled with the radiant energy device and the frame, wherein the radiant energy device is moveable relative to the frame along the second slide assembly.

55 The additive manufacturing apparatus of one or more of these clauses, further comprising: a third actuator operably coupled with the frame and the radiant energy device, wherein the third actuator is configured to move the radiant energy device between a first position and a second position along the second slide assembly.

60 The additive manufacturing apparatus of one or more of these clauses, further comprising: a frame operably coupled with the stage, the radiant energy device, and the actuator

27

assembly, wherein the frame, the stage, and the radiant energy device are moveable relative to the support plate along a first slide assembly.

A method of operating an additive manufacturing apparatus, the method comprising: depositing a layer of a first resin and a second resin onto a resin support; translating the resin support in an X-axis direction; placing a stage in a first curing position such that a working surface contacts the first resin; curing a portion of the first resin while the stage is in the first curing position; placing the stage in a second curing position, wherein the second curing position is offset from the first curing position in a Y-axis direction; and curing a portion of the second resin while the stage is in the second curing position.

The method of one or more of these clauses, wherein curing the portion of the first resin while the stage is in the first curing position forms a first layer of a component, and curing the portion of the second resin while the stage is in the second curing position forms a second layer of the component.

The method of one or more of these clauses, wherein curing the portion of the first resin while the stage is in the first curing position forms a first portion of a layer of a component and curing the portion of the second resin while the stage is in the second curing position forms a second portion of the layer of the component.

The method of one or more of these clauses, further comprising: positioning a radiant energy device in a first projection position, wherein the portion of the first resin is cured while the radiant energy device is in the first projection position.

The method of one or more of these clauses, further comprising: positioning the radiant energy device in a second projection position, wherein the second projection curing position is offset from the first projection position in the Y-axis direction, and wherein the portion of the first resin is cured while the radiant energy device is in the second projection position.

An additive manufacturing apparatus comprising: a frame including a frame structure, the frame structure having a build plate, a support plate, and a base plate each coupled thereto, wherein the support plate includes a window therein; a first actuator operably coupled with the build plate; a print head operably with the first actuator, wherein the actuator is configured to move the print head relative to a Z-axis direction; a stage operably coupled with the print head; a radiant energy device operably coupled with the frame and positioned on an opposing side of the window from the stage in the Z-axis direction; and a first slide assembly operably coupled with the base plate of the frame and a mounting plate, the first slide assembly configured to guide movement of the frame relative to the mounting plate in a Y-axis direction.

The additive manufacturing apparatus of one or more of these clauses, wherein the first slide assembly includes a track operably coupled with the mounting plate and one or more guides operably coupled with the base plate, the one or more guides slidable along the track.

The additive manufacturing apparatus of one or more of these clauses, further comprising: a second slide assembly positioned between the radiant energy device and the frame structure, the second slide assembly configured to guide movement of the radiant energy device relative to the window.

The additive manufacturing apparatus of one or more of these clauses, wherein the second slide assembly includes a

28

rail operably coupled with the frame structure and one or more guides, the one or more guides slidable along the rail.

This written description uses examples to disclose the invention, including the best mode, and also to enable any person skilled in the art to practice the invention, including making and using any devices or systems and performing any incorporated methods. The patentable scope of the invention is defined by the claims, and may include other examples that occur to those skilled in the art. Such other examples are intended to be within the scope of the claims if they include structural elements that do not differ from the literal language of the claims, or if they include equivalent structural elements with insubstantial differences from the literal languages of the claims.

What is claimed is:

1. An additive manufacturing apparatus comprising:

a common resin support configured to support a first resin and a second resin, the first resin laterally offset from the second resin by a gap defined between the first resin and the second resin in a Y-axis direction;

a support plate including a window;

a stage configured to hold one or more cured layers of the first resin or the second resin to form a component positioned opposite the support plate;

a radiant energy device positioned on an opposite side of the common resin support from the stage and operable to generate and project radiant energy in a patterned image through the window;

an actuator assembly configured to move the stage in a Z-axis direction and in the Y-axis direction;

a frame operably coupled with the stage, the radiant energy device, and the support plate, the frame further coupled with a mounting plate; and

a first slide assembly, wherein the frame, the stage, the radiant energy device, and the support plate are moveable relative to the mounting plate along the first slide assembly.

2. The additive manufacturing apparatus of claim 1, wherein an actuator of the actuator assembly is operably coupled with the frame and the mounting plate, and wherein the actuator is configured to move the frame between a first position and a second position along the first slide assembly.

3. The additive manufacturing apparatus of claim 1, further comprising:

a second slide assembly operably coupled with the radiant energy device and the frame, wherein the radiant energy device is movable relative to the frame along the second slide assembly.

4. The additive manufacturing apparatus of claim 3, further comprising:

a third actuator operably coupled with the frame and the radiant energy device, wherein the third actuator is configured to move the radiant energy device between a first position and a second position along the second slide assembly.

5. An additive manufacturing apparatus comprising:

a resin support configured to support a first resin and a second resin;

a support plate including a window;

a stage configured to hold one or more cured layers of the first resin or the second resin to form a component positioned opposite the support plate, wherein a working surface is defined by one of a surface of the stage or a surface of the component, and wherein the working surface is configured to contact the first resin and the second resin simultaneously;

29

a radiant energy device positioned on an opposite side of the resin support from the stage and operable to generate and project radiant energy in a patterned image through the window;

an actuator assembly configured to move the stage in a Z-axis direction and in a Y-axis direction; and

a frame operably coupled with the stage, the radiant energy device, and the actuator assembly, wherein the frame, the stage, and the radiant energy device are moveable relative to the support plate along a first slide assembly.

6. An additive manufacturing apparatus comprising:

a frame including a frame structure, the frame structure having a build plate, a support plate, and a base plate each coupled thereto, wherein the support plate includes a window therein;

a first actuator operably coupled with the build plate;

a print head operably coupled with the first actuator, wherein the first actuator is configured to move the print head relative to a Z-axis direction;

a stage operably coupled with the print head;

a radiant energy device operably coupled with the frame and positioned on an opposing side of the window from the stage in the Z-axis direction; and

a first slide assembly operably coupled with the base plate of the frame and a mounting plate, the first slide assembly configured to guide movement of the frame relative to the mounting plate in a Y-axis direction between a first curing position and a second curing position, wherein the window is configured to be aligned with a first portion of a resin support in the first curing position and a second portion of the resin support in the second curing position, the first portion offset from the second portion in the Y-axis direction.

7. The additive manufacturing apparatus of claim 6, wherein the first slide assembly includes a track operably coupled with the mounting plate and one or more guides operably coupled with the base plate, the one or more guides slidable along the track.

8. The additive manufacturing apparatus of claim 6, further comprising:

a second slide assembly positioned between the radiant energy device and the frame structure, the second slide

30

assembly configured to guide movement of the radiant energy device relative to the window.

9. The additive manufacturing apparatus of claim 8, wherein the second slide assembly includes a rail operably coupled with the frame structure and one or more guides, the one or more guides slidable along the rail.

10. The additive manufacturing apparatus of claim 5, wherein an actuator of the actuator assembly is operably coupled with the frame and a mounting plate, and wherein the actuator is configured to move the frame between a first position and a second position along the first slide assembly.

11. The additive manufacturing apparatus of claim 5, further comprising:

a second slide assembly operably coupled with the radiant energy device and the frame, wherein the radiant energy device is movable relative to the frame along the second slide assembly.

12. The additive manufacturing apparatus of claim 11, further comprising:

a third actuator operably coupled with the frame and the radiant energy device, wherein the third actuator is configured to move the radiant energy device between a first position and a second position along the second slide assembly.

13. The additive manufacturing apparatus of claim 5, further comprising:

one or more sensors configured to detect information related to a position of the frame.

14. The additive manufacturing apparatus of claim 5, further comprising:

one or more sensors configured to detect information related to a position of the radiant energy device.

15. The additive manufacturing apparatus of claim 1, further comprising:

one or more sensors configured to detect information related to a position of the frame.

16. The additive manufacturing apparatus of claim 1, further comprising:

one or more sensors configured to detect information related to a position of the radiant energy device.

* * * * *