

(12) **United States Patent**
Inoue et al.

(10) **Patent No.:** US 12,400,825 B2
(45) **Date of Patent:** Aug. 26, 2025

(54) **MULTI-ELECTRON BEAM IMAGE ACQUISITION APPARATUS, MULTI-ELECTRON BEAM INSPECTION APPARATUS, AND MULTI-ELECTRON BEAM IMAGE ACQUISITION METHOD**

(71) Applicant: **NuFlare Technology, Inc.**, Yokohama (JP)

(72) Inventors: **Kazuhiko Inoue**, Yokohama (JP);
Munehiro Ogasawara, Hiratsuka (JP)

(73) Assignee: **NuFlare Technology, Inc.**, Yokohama (JP)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 463 days.

(21) Appl. No.: **17/897,267**

(22) Filed: **Aug. 29, 2022**

(65) **Prior Publication Data**
US 2023/0102715 A1 Mar. 30, 2023

(30) **Foreign Application Priority Data**
Sep. 24, 2021 (JP) 2021-155770

(51) **Int. Cl.**
H01J 37/141 (2006.01)
G01N 23/2251 (2018.01)
H01J 37/244 (2006.01)
(52) **U.S. Cl.**
CPC **H01J 37/1413** (2013.01); **G01N 23/2251** (2013.01); **H01J 37/244** (2013.01); **H01J 2237/2448** (2013.01)

(58) **Field of Classification Search**
CPC H01J 37/1413; H01J 37/244; H01J 2237/2448; H01J 37/141; H01J 37/265; H01J 37/28; G01N 23/2251
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

7,135,675 B1 * 11/2006 Adler H01J 37/26 250/306
12,211,669 B2 * 1/2025 Ren H01J 37/3177
(Continued)

FOREIGN PATENT DOCUMENTS

CN 109585244 A 4/2019
JP 2-21552 A 1/1990
(Continued)

OTHER PUBLICATIONS

Japanese Office Action issued Apr. 15, 2025 in Japanese Patent Application No. 2021-155770 (with unedited computer-generated English Translation), 4 pages.


Primary Examiner — David A Vanore

(74) *Attorney, Agent, or Firm* — Oblon, McClelland, Maier & Neustadt, L.L.P.

(57) **ABSTRACT**

A multi-electron beam image acquisition apparatus includes a first electromagnetic lens configured to focus multiple primary electron beams to form an image on a substrate, and a second electromagnetic lens configured to be able to variably adjust a peak position of a magnetic field distribution in a direction of a trajectory central axis of multiple secondary electron beams, and to focus the multiple secondary electron beams to form an image on either one of a detection surface of a detector and a position conjugate to the detection surface. The first electromagnetic lens focuses, to form an image, the multiple secondary electron beams before they are separated from the multiple primary electron beams, and the second electromagnetic lens is arranged between a separator which separates the multiple secondary electron beams and an image forming point on which the multiple secondary electron beams are focused by the first electromagnetic lens.

10 Claims, 12 Drawing Sheets

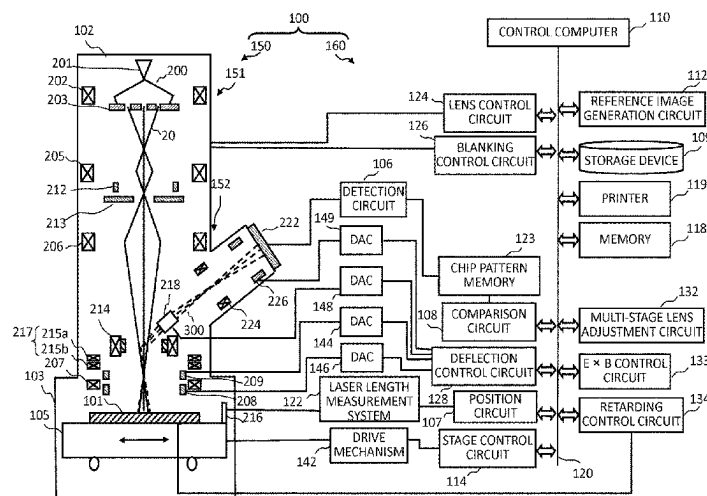

(56)

References Cited


U.S. PATENT DOCUMENTS

2002/0088940	A1 *	7/2002	Watanabe		H01J 37/224	250/310
2002/0142496	A1 *	10/2002	Nakasuji		G01N 23/2251	250/492.3
2003/0030007	A1 *	2/2003	Karimata		H01J 37/12	250/396 R
2003/0168606	A1 *	9/2003	Adamec		H01J 37/09	250/396 R
2004/0159787	A1 *	8/2004	Nakasuji		H01J 37/28	250/311
2006/0102838	A1 *	5/2006	Nakasuji		G01N 23/2251	250/307
2007/0045534	A1 *	3/2007	Zani		H01J 37/3174	257/E21.336
2008/0099697	A1 *	5/2008	Watanabe		H01J 37/026	250/492.22
2009/0014649	A1 *	1/2009	Nakasuji		H01J 37/153	250/310
2009/0212213	A1 *	8/2009	Nakasuji		H01J 37/28	250/442.11
2010/0213370	A1 *	8/2010	Nakasuji		H01J 37/226	250/310
2011/0220795	A1 *	9/2011	Frosien		H01J 37/147	250/307
2011/0272576	A1 *	11/2011	Otaki		B82Y 40/00	250/306
2012/0061565	A1 *	3/2012	Enyama		H01J 37/28	250/307
2012/0091332	A1 *	4/2012	Makarov		H01J 49/40	250/281
2017/0032952	A1 *	2/2017	Verenchikov		H01J 49/0031	
2017/0084423	A1 *	3/2017	Masnaghetti		H01J 37/09	
2017/0084424	A1 *	3/2017	Masnaghetti		H01J 37/28	
2017/0243717	A1 *	8/2017	Kruit			
2017/0263413	A1 *	9/2017	Frosien		H01J 37/21	
2018/0261424	A1 *	9/2018	Tsuchiya		H01J 37/28	
2019/0035595	A1 *	1/2019	Ren		H01J 37/1472	
2019/0051487	A1 *	2/2019	Ogasawara		H01J 37/3177	
2019/0088440	A1 *	3/2019	Zeidler		H01J 37/09	
2019/0096631	A1 *	3/2019	Takekoshi		H01J 37/22	
2019/0164721	A1 *	5/2019	Shaked		H01J 37/244	
2019/0195815	A1 *	6/2019	Kikuri		H01J 37/244	
2019/0214221	A1 *	7/2019	Ishii		H01J 37/244	
2019/0259564	A1 *	8/2019	Kruit		H01J 37/1475	
2019/0277782	A1 *	9/2019	Tsuchiya		H01J 37/265	
2019/0333732	A1 *	10/2019	Ren		H01J 37/145	
2019/0355546	A1 *	11/2019	Ando		H01J 37/141	
2019/0355547	A1 *	11/2019	Ando		H01J 37/28	
2019/0360951	A1 *	11/2019	Ogawa		G01N 23/04	
2019/0362928	A1 *	11/2019	Inoue		H01J 37/141	
2019/0378676	A1 *	12/2019	Hartley		H01J 37/1471	
2020/0006031	A1 *	1/2020	Izumi		H01J 37/16	
2020/0013585	A1 *	1/2020	Inoue		H01J 37/28	
2020/0035452	A1 *	1/2020	Bennahmias		H01J 37/04	
2020/0051779	A1 *	2/2020	Ren		H01J 37/10	
2020/0104980	A1 *	4/2020	Inoue		H01J 37/21	
2020/0124546	A1 *	4/2020	Hu		H01J 37/32321	
2020/0126752	A1 *	4/2020	Brodie		H01J 37/12	
2020/0161082	A1 *	5/2020	Inoue		H01J 37/222	
2020/0168430	A1 *	5/2020	Inoue		H01J 37/12	
2020/0176216	A1 *	6/2020	Inoue		H01J 37/20	
2020/0211811	A1 *	7/2020	Ren		H01J 37/28	
2020/0211812	A1 *	7/2020	Inoue		H01J 37/3177	
2020/0234919	A1 *	7/2020	Sugihara		H01J 37/3177	
2020/0258714	A1 *	8/2020	Cook		H01J 37/265	
2020/0286705	A1 *	9/2020	Liu		H01J 37/04	
2020/0286709	A1 *	9/2020	Shiratsuchi		H01J 37/22	
2020/0317504	A1 *	10/2020	Wang		H01J 37/12	
2020/0321191	A1 *	10/2020	Ren		H01J 37/3177	
2020/0381207	A1 *	12/2020	Ren		H01J 37/28	
2020/0381211	A1 *	12/2020	Ren		H01J 37/145	
2020/0381212	A1 *	12/2020	Ren		H01J 37/12	
2020/0388462	A1 *	12/2020	Nguyen		H01J 37/222	
2020/0394778	A1 *	12/2020	Yoshitake		G21K 7/00	
2020/0395189	A1 *	12/2020	Inoue		H01J 37/09	
2021/0005422	A1 *	1/2021	Nakashima		H01J 37/3177	
2021/0193437	A1 *	6/2021	Ren		H01J 37/292	
2021/0202206	A1 *	7/2021	Takekoshi		H01J 37/265	
2021/0217582	A1 *	7/2021	Maassen		H01J 37/28	
2021/0319977	A1 *	10/2021	Liu		H01J 37/1474	
2022/0230837	A1 *	7/2022	Inoue		H01J 37/05	
2022/0299456	A1 *	9/2022	Ogawa		G01N 23/2251	
2022/0301811	A1 *	9/2022	Fang		H01J 37/222	
2022/0336183	A1 *	10/2022	Ishii		H01J 37/1477	
2022/0359149	A1 *	11/2022	Sakakibara		H01J 37/141	
2022/0365010	A1 *	11/2022	Ishii		G01N 23/225	
2022/0415611	A1 *	12/2022	Steenbrink		H01J 37/3177	
2023/0037583	A1 *	2/2023	Wieland		H01J 37/153	
2023/0048580	A1 *	2/2023	Mangnus		H01J 37/153	
2023/0077403	A1 *	3/2023	Inoue		H01J 37/244	250/306
2023/0080062	A1 *	3/2023	Ishii		H01J 37/28	250/307
2023/0102715	A1 *	3/2023	Inoue		H01J 37/244	250/307
2023/0113062	A1 *	4/2023	Ando		H01J 37/20	250/310
2023/0136198	A1 *	5/2023	Akiba		H01J 37/145	250/310
2023/0207253	A1 *	6/2023	Wieland		H01J 37/26	250/307
2023/0207259	A1 *	6/2023	Slot		H01J 37/3045	250/491.1
2023/0238211	A1 *	7/2023	Wieland		H01L 27/1443	250/396 R
2023/0298850	A1 *	9/2023	Scotuzzi		H01J 37/28	250/307
2023/0304949	A1 *	9/2023	Veenstra		H01J 37/244	
2023/0335368	A1 *	10/2023	Ogasawara		H01J 37/06	
2024/0071716	A1 *	2/2024	Wieland		H01J 37/226	
2024/0079200	A1 *	3/2024	Inoue		H01J 37/244	
2024/0087842	A1 *	3/2024	Wieland		H01J 37/222	
2024/0128045	A1 *	4/2024	Slot		H01J 37/28	
2024/0136147	A1 *	4/2024	Slot		H01J 37/141	
2024/0170248	A1 *	5/2024	Podhola		H01J 29/563	
2024/0186106	A1 *	6/2024	Wang		H01J 37/244	
2024/0210336	A1 *	6/2024	Van Lare		G03F 7/70655	
2024/0242921	A1 *	7/2024	Osterberg		H01J 37/04	
2024/0282547	A1 *	8/2024	Ishii		H01J 37/1471	
2024/0339290	A1 *	10/2024	Van Soest		H01J 37/28	
2025/0014855	A1 *	1/2025	Wieland		H01J 37/12	

FOREIGN PATENT DOCUMENTS

JP	2-284340	A	11/1990
JP	2004-363003	A	12/2004
JP	2005-158642	A	6/2005
JP	2007-317467	A	12/2007
JP	2020-9755	A	1/2020
JP	2020-528197	A	9/2020
JP	2021-197263	A	12/2021
JP	2022-096502	A	6/2022
JP	2022-112409	A	8/2022
KR	10-2020-0015425	A	2/2020
KR	10-2020-0047479	A	5/2020

* cited by examiner

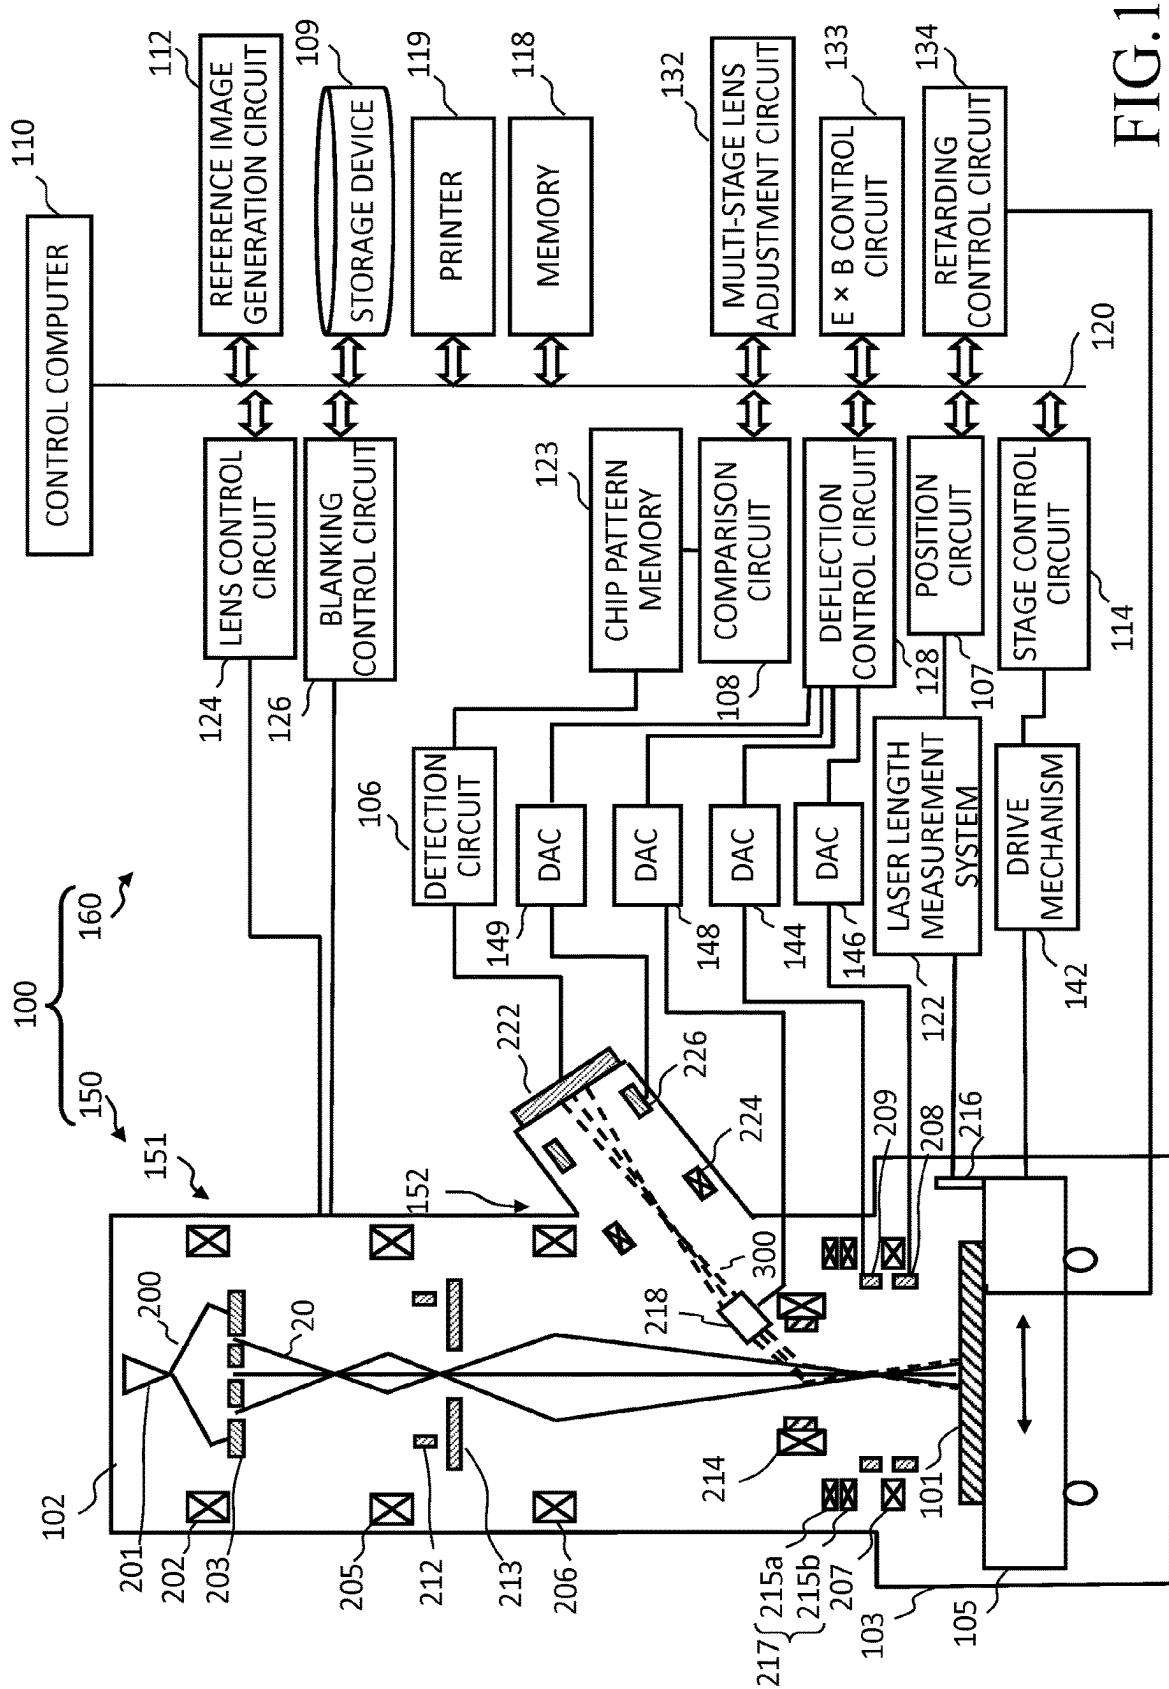

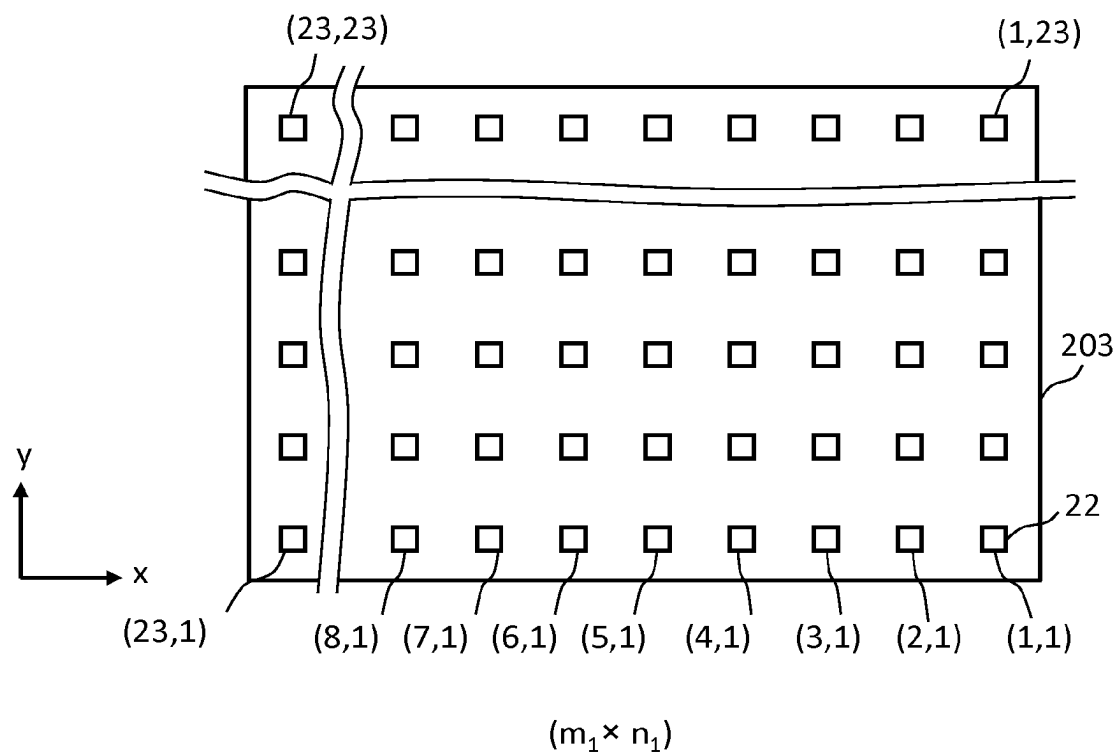


FIG.2

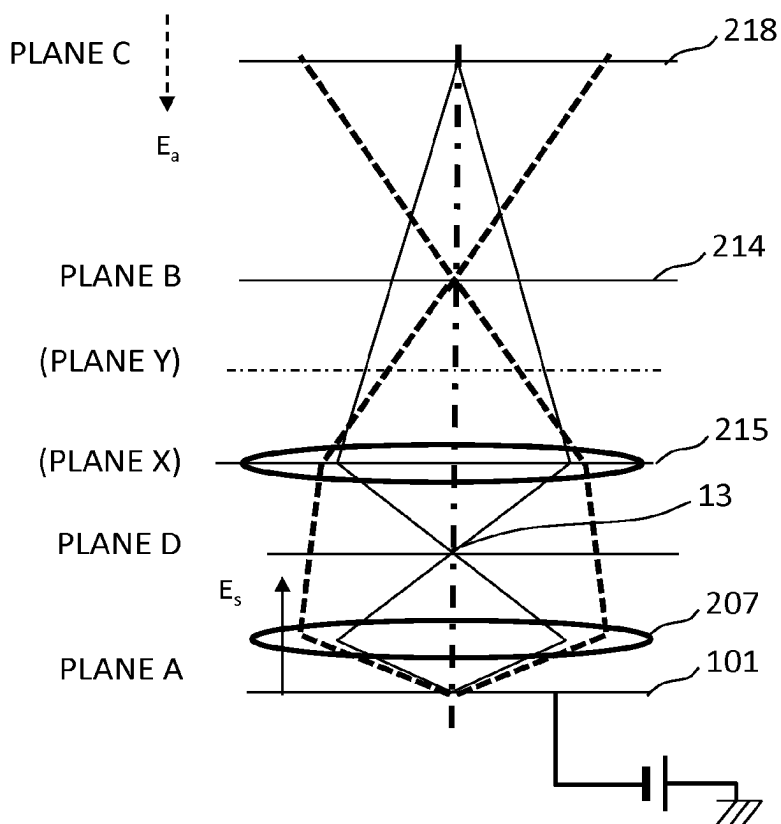
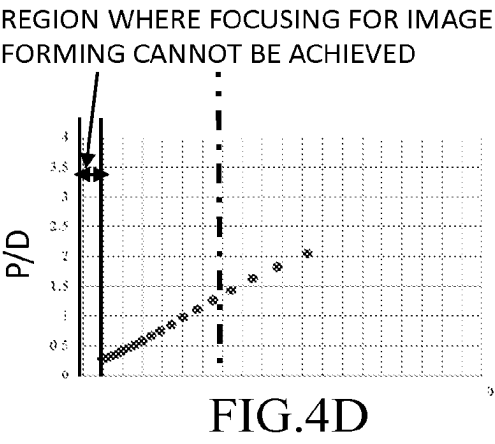
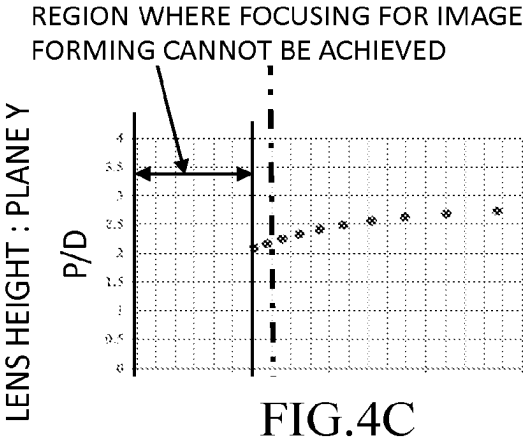
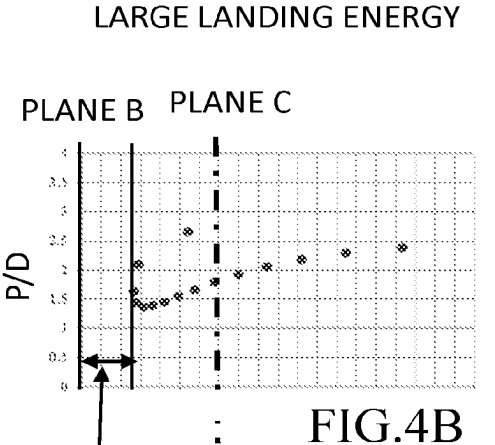
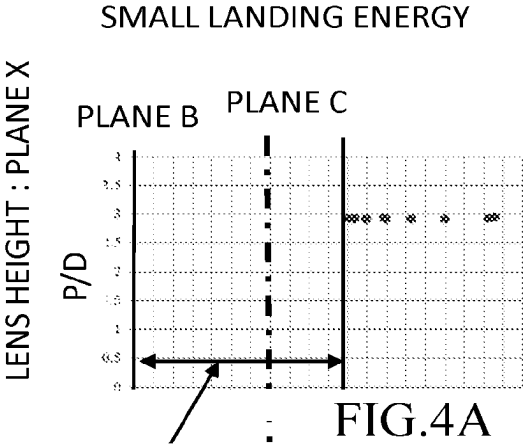


FIG.3



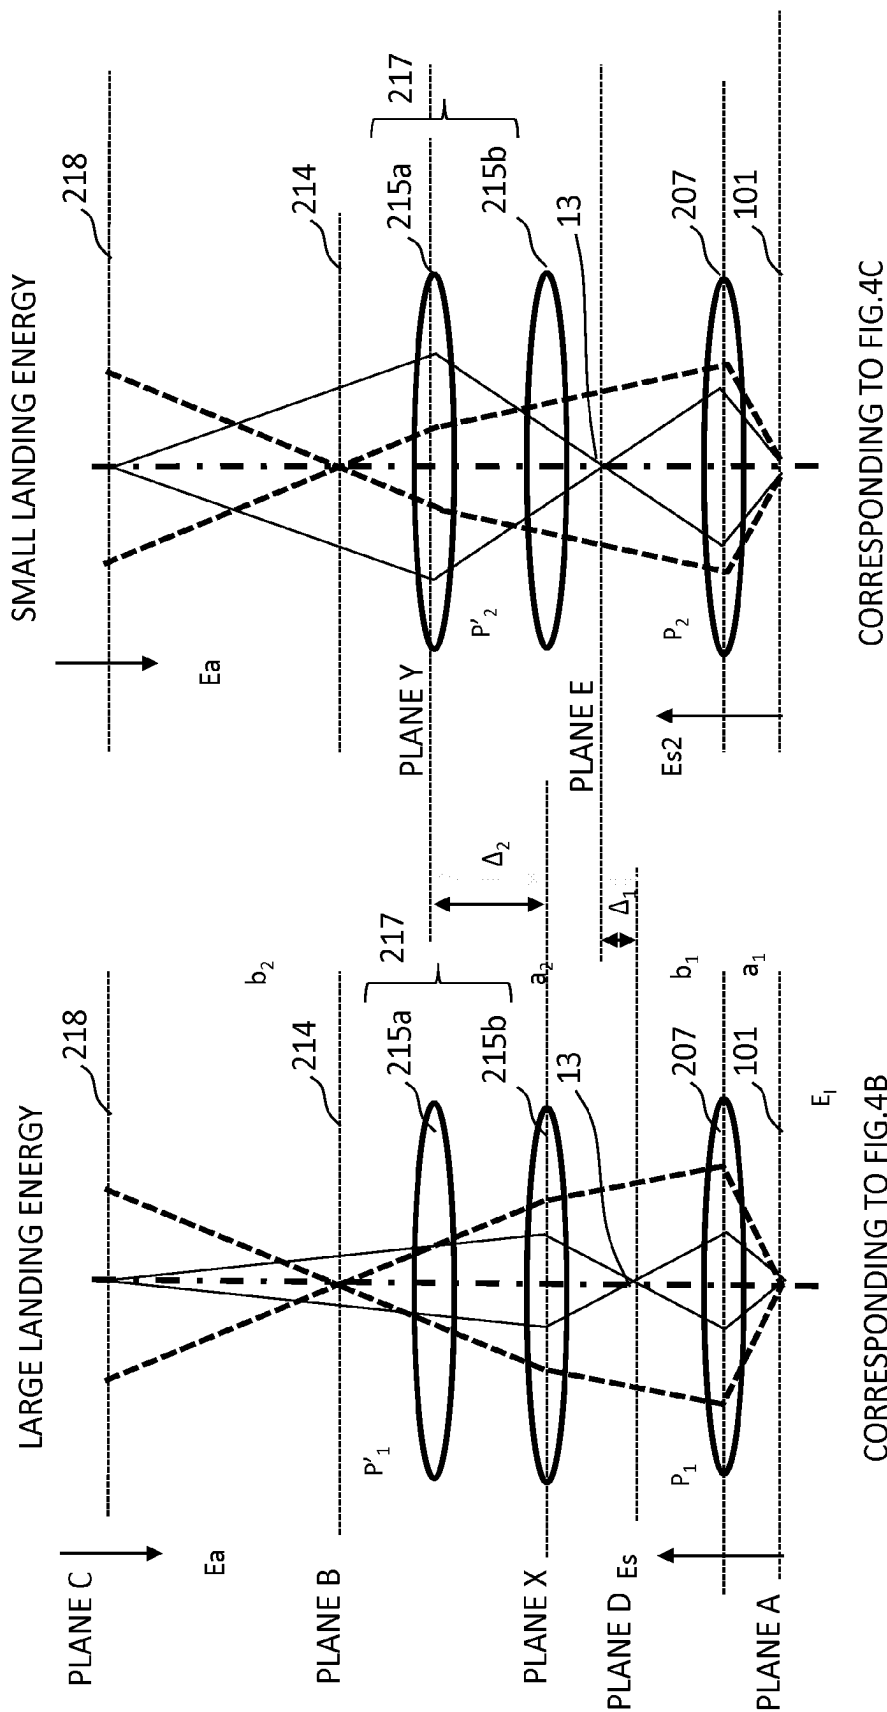
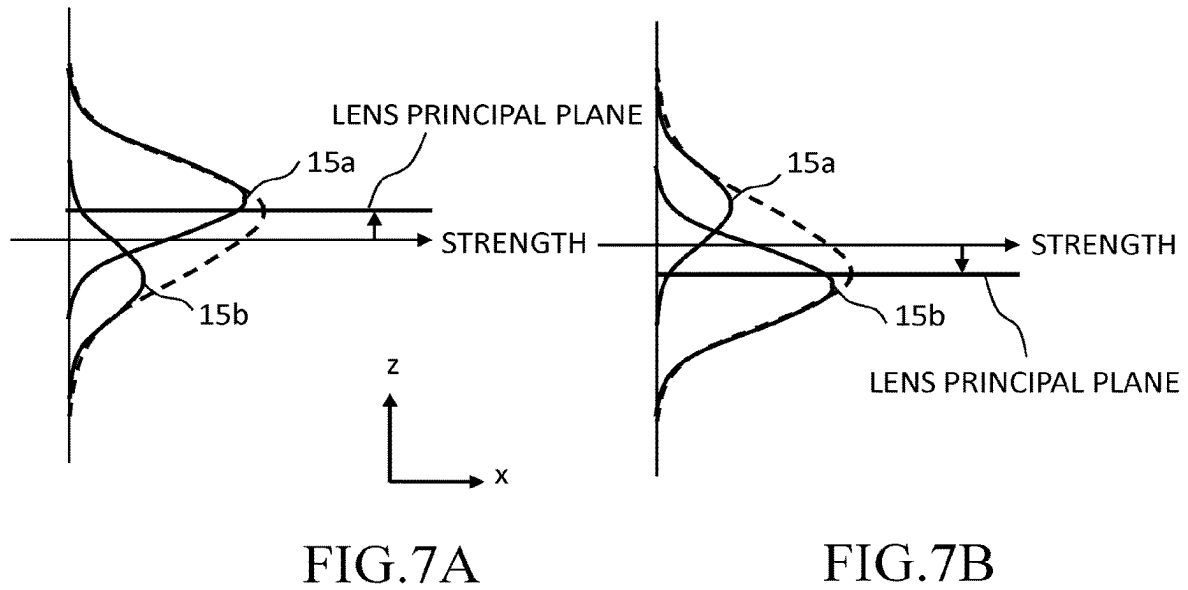
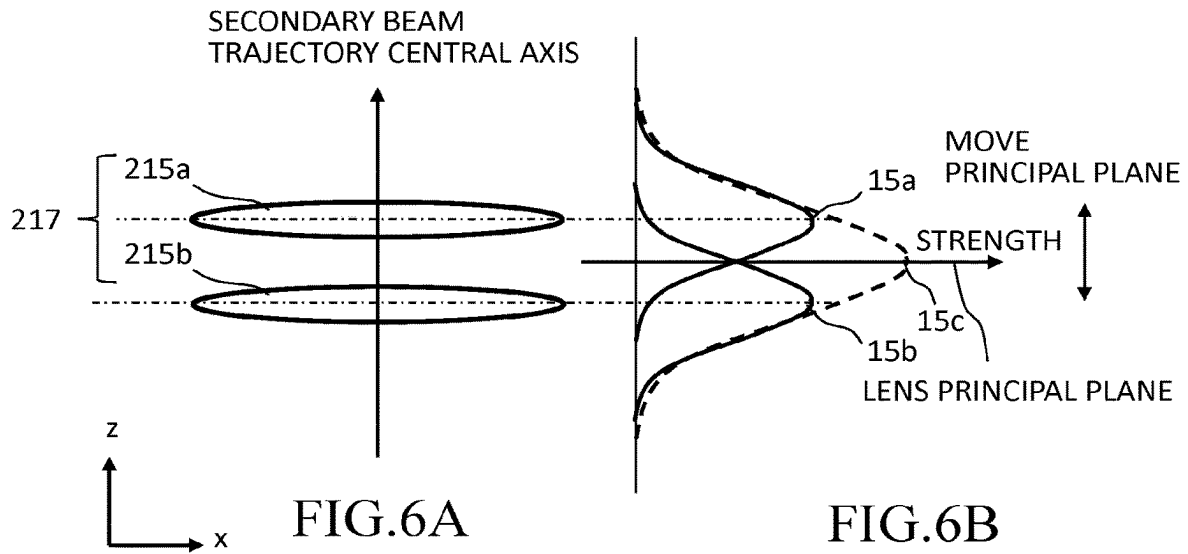


FIG. 5A

FIG. 5B



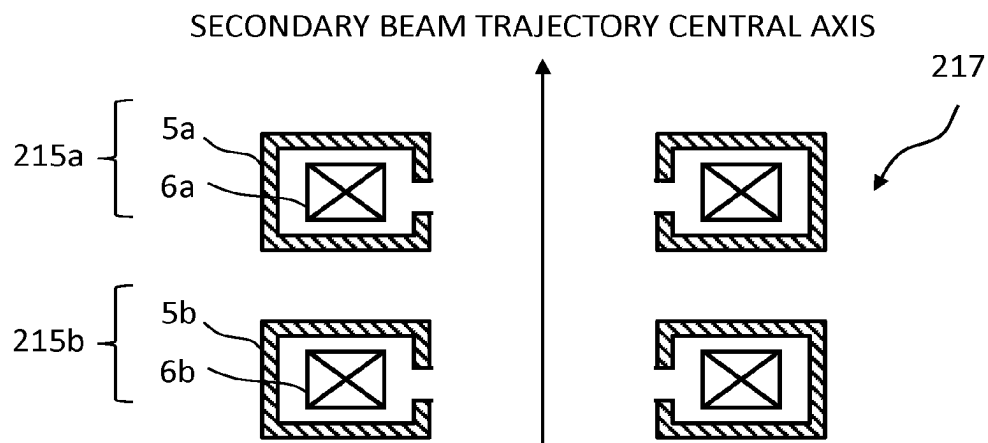


FIG. 8

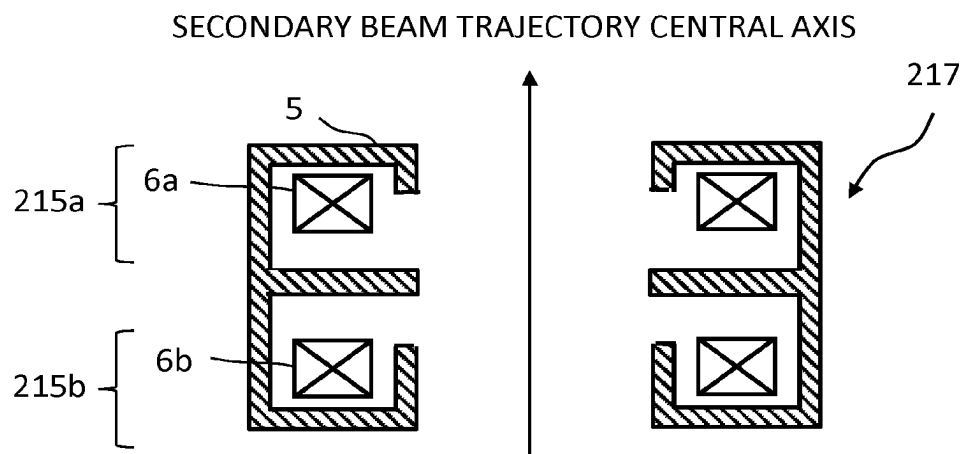


FIG. 9

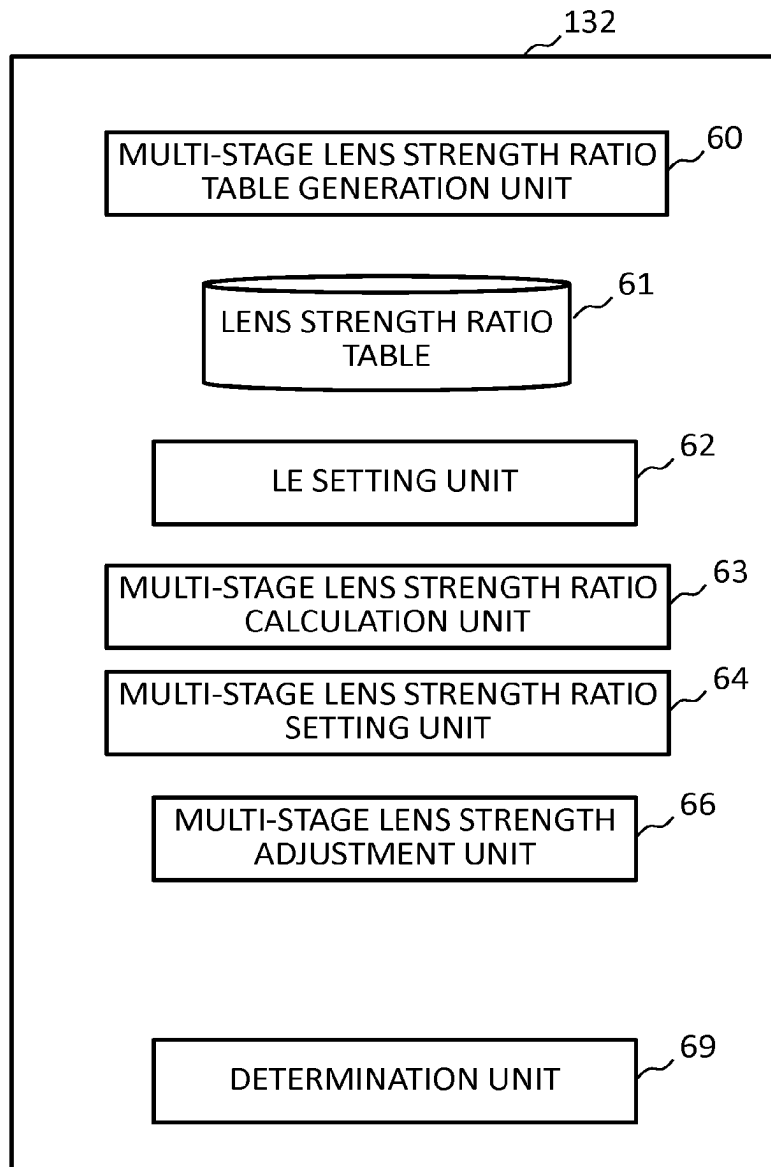


FIG. 10

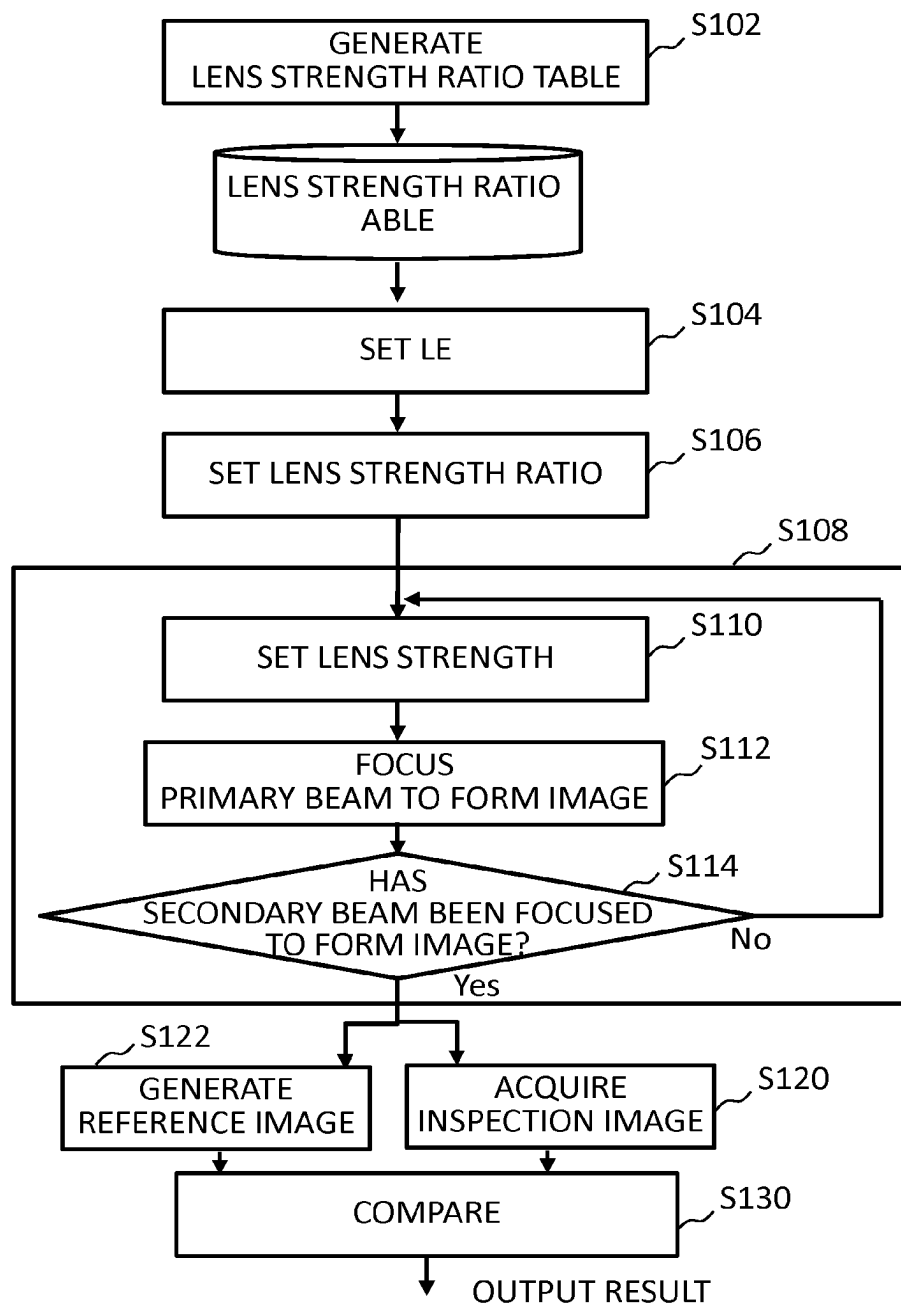


FIG.11

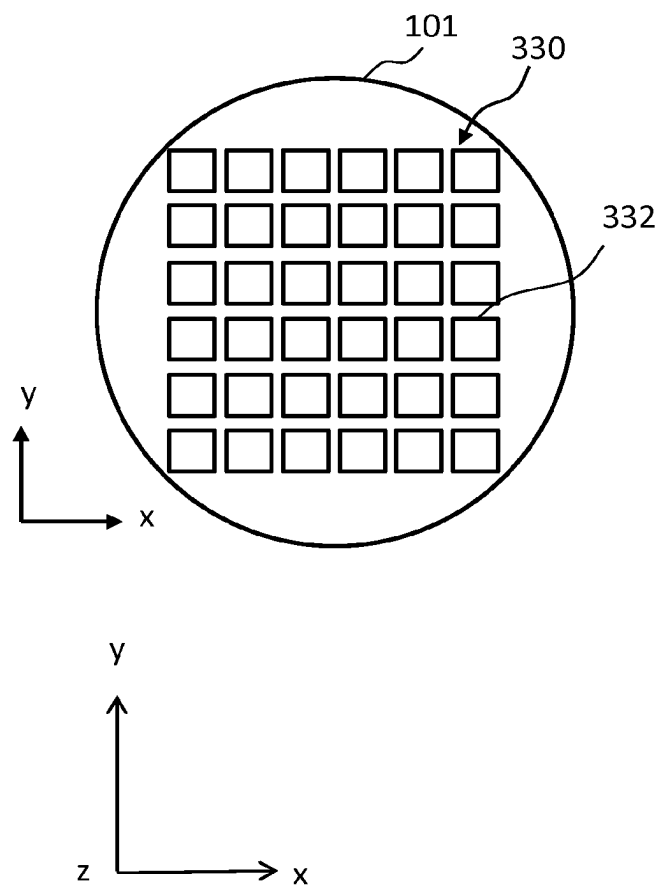
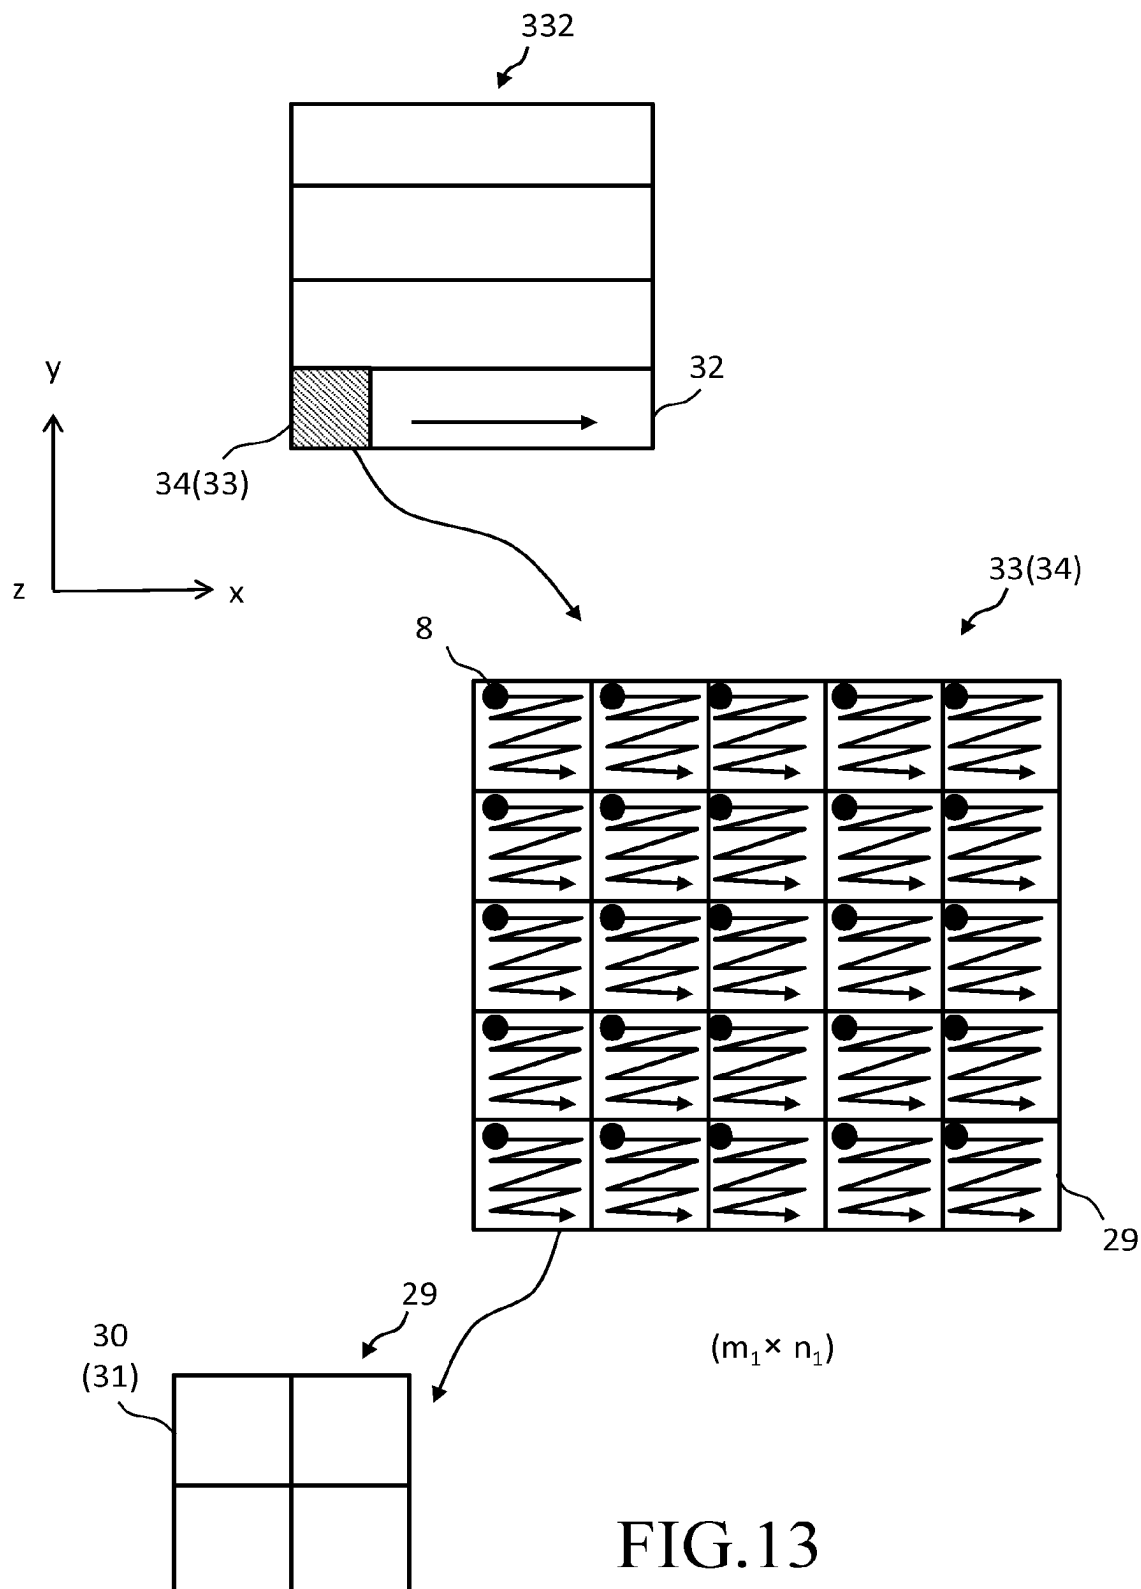


FIG.12



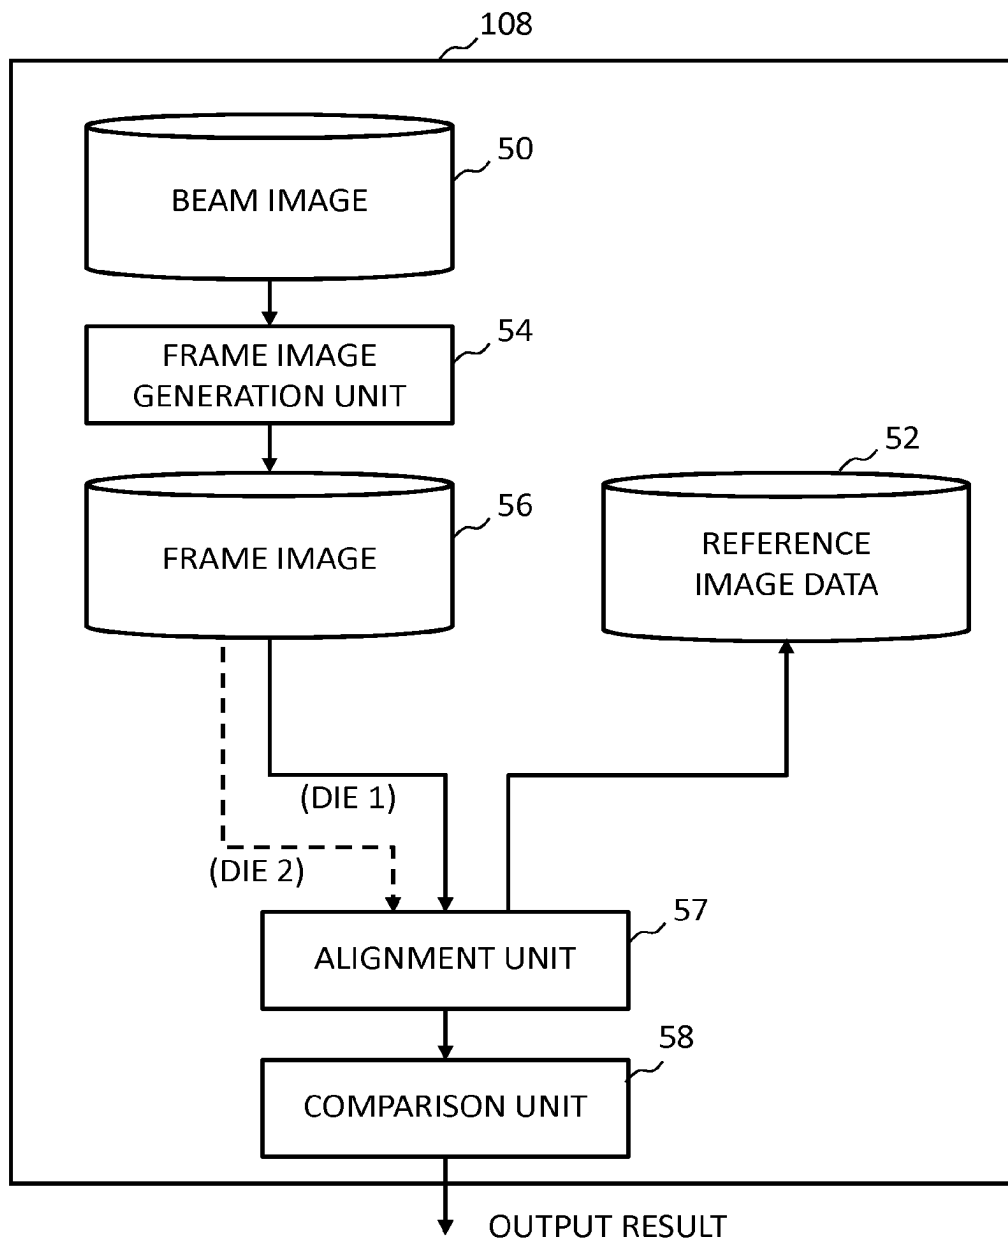


FIG.14

1

**MULTI-ELECTRON BEAM IMAGE
ACQUISITION APPARATUS,
MULTI-ELECTRON BEAM INSPECTION
APPARATUS, AND MULTI-ELECTRON
BEAM IMAGE ACQUISITION METHOD**

**CROSS-REFERENCE TO RELATED
APPLICATION**

This application is based upon and claims the benefit of priority from prior Japanese Patent Application No. 2021-155770 filed on Sep. 24, 2021 in Japan, the entire contents of which are incorporated herein by reference.

BACKGROUND OF THE INVENTION

Field of the Invention

Embodiments of the present invention relate to a multi-electron beam image acquisition apparatus, a multi-electron beam inspection apparatus, and a multi-electron beam image acquisition method, and for example, relates to a method for acquiring an image by applying multiple primary electron beams to a substrate and detecting multiple secondary electron beams emitted from the substrate.

Description of Related Art

With recent progress in high integration and large capacity of the LSI (Large Scale Integrated circuits), the line width (critical dimension) required for circuits of semiconductor elements is becoming increasingly narrower. Since LSI manufacturing requires an enormous production cost, it is essential to improve the yield. Meanwhile, as typified by 1 gigabit DRAMs (Dynamic Random Access Memories), the size of patterns that make up the LSI is reduced from the order of submicrons to nanometers. Also, in recent years, with miniaturization of dimensions of LSI patterns formed on a semiconductor wafer, dimensions to be detected as a pattern defect have become extremely small. Therefore, the pattern inspection apparatus for inspecting defects of ultra-fine patterns exposed/transferred onto a semiconductor wafer needs to be highly accurate. Further, one of major factors that decrease the yield of the LSI manufacturing is due to pattern defects on a mask for exposing/transferring an ultrafine pattern onto the semiconductor wafer by the photolithography technology. Therefore, the pattern inspection apparatus for inspecting defects on an exposure transfer mask used in manufacturing LSI also needs to be highly accurate.

The inspection apparatus acquires a pattern image by, for example, irradiating an inspection target substrate with multiple electron beams, and individually detecting, by a multi-detector, a secondary electron corresponding to each beam emitted from the inspection target substrate. As an inspection method, there is known a method of comparing a measured image acquired by imaging a pattern formed on a substrate with design data or with another measured image acquired by imaging an identical pattern on the same substrate. For example, as a pattern inspection method, there is “die-to-die inspection” or “die-to-database inspection”. Specifically, the “die-to-die inspection” method compares data of measured images acquired by imaging identical patterns at different positions on the same substrate. The “die-to-database inspection” method generates, based on pattern design data, design image data (reference image), and compares it with a measured image being measured data

2

acquired by imaging a pattern. Acquired images are transmitted as measured data to a comparison circuit. After performing alignment between the images, the comparison circuit compares the measured data with reference data according to an appropriate algorithm, and determines that there is a pattern defect if the compared data do not match each other.

In image acquisition using electron beams, there is an optimal landing energy (incident energy) depending on the yield of a target object to be inspected. Therefore, when acquiring images, the landing energy needs to be changed in accordance with the target object. Regarding this, an optical system is disclosed in which two lenses are arranged between an ExB separator and a target object (e.g., refer to Japanese Patent Application Laid-open (JP-A) No. 2004-363003). In the configuration according to what is disclosed, when the landing energy is changed, the two lenses between the ExB separator and the target object need to focus a primary electron beam to form an image on the surface of the target object, and focus a secondary electron beam to form an image at a desired position. However, there occurs a problem that, when focusing a primary electron beam to form an image on the target object surface and focusing a secondary electron beam to form an image at a desired position by the optical system fixed to a predetermined position, it may not be possible, depending on the amount of landing energy, for that system to achieve focusing and imaging. Further, even if focusing and forming an image has been achieved, there is a problem that, depending on the amount of landing energy, a crosstalk may occur between beams of multiple secondary electron beams.

BRIEF SUMMARY OF THE INVENTION

According to one aspect of the present invention, a multi-electron beam image acquisition apparatus includes a stage on which a substrate is to be mounted, an emission source configured to emit multiple primary electron beams, a first electromagnetic lens configured to focus the multiple primary electron beams to form an image on the substrate, a separator configured to separate multiple secondary electron beams, which are emitted from the substrate due to irradiation with the multiple primary electron beams, from the multiple primary electron beams, a detector configured to detect the multiple secondary electron beams having been separated, and a second electromagnetic lens configured to be able to variably adjust a peak position of a magnetic field distribution in a direction of a trajectory central axis of the multiple secondary electron beams, and to focus the multiple secondary electron beams to form an image on either one of a detection surface of the detector and a position conjugate to the detection surface, wherein the first electromagnetic lens focuses, to form an image, the multiple secondary electron beams in a state before being separated from the multiple primary electron beams, and the second electromagnetic lens is arranged between the separator and an image forming point on which the multiple secondary electron beams are focused by the first electromagnetic lens.

According to another aspect of the present invention, a multi-electron beam inspection apparatus includes a stage on which a substrate is to be mounted, an emission source configured to emit multiple primary electron beams, a first electromagnetic lens configured to focus the multiple primary electron beams to form an image on the substrate, a separator configured to separate multiple secondary electron beams, which are emitted from the substrate due to irradiation with the multiple primary electron beams, from the

3

multiple primary electron beams, a detector configured to detect the multiple secondary electron beams having been separated, a second electromagnetic lens configured to be able to variably adjust a peak position of a magnetic field distribution in a direction of a trajectory central axis of the multiple secondary electron beams, and to focus the multiple secondary electron beams to form an image on either one of a detection surface of the detector and a position conjugate to the detection surface, and a comparison circuit configured to compare an image acquired by detecting the multiple secondary electron beams by the detector with a reference image, wherein the first electromagnetic lens focuses, to form an image, the multiple secondary electron beams in a state before being separated from the multiple primary electron beams, and the second electromagnetic lens is arranged between the separator and an image forming point on which the multiple secondary electron beams are focused by the first electromagnetic lens.

According to yet another aspect of the present invention, a multi-electron beam image acquisition method includes emitting multiple primary electron beams, focusing, by a first electromagnetic lens, the multiple primary electron beams to form an image on a substrate mounted on a stage, separating, by a separator, multiple secondary electron beams, which are emitted from the substrate due to irradiation with the multiple primary electron beams, from the multiple primary electron beams, detecting, by a detector, the multiple secondary electron beams having been separated, and focusing the multiple secondary electron beams to form an image on either one of a detection surface of the detector and a position conjugate to the detection surface, by using a second electromagnetic lens which can variably adjust a peak position of a magnetic field distribution in a direction of a trajectory central axis of the multiple secondary electron beams, wherein

the first electromagnetic lens focuses, to form an image, the multiple secondary electron beams in a state before being separated from the multiple primary electron beams, and the second electromagnetic lens is arranged between the separator and an image forming point on which the multiple secondary electron beams are focused by the first electromagnetic lens.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a diagram showing a configuration of an inspection apparatus according to a first embodiment;

FIG. 2 is a conceptual diagram showing a configuration of a shaping aperture array substrate according to the first embodiment;

FIG. 3 is an illustration showing an example of a primary electron beam trajectory and a secondary electron beam trajectory according to a comparative example of the first embodiment;

FIGS. 4A to 4D are graphs each showing an example of change of a ratio of a beam pitch to a beam diameter according to a comparative example of the first embodiment;

FIGS. 5A and 5B are illustrations showing an example of a trajectory of a primary electron beam and that of a secondary electron beam according to the first embodiment;

FIGS. 6A and 6B are illustrations showing an example of a magnetic field center position of each lens and a composite magnetic field center position according to the first embodiment;

4

FIGS. 7A and 7B are illustrations showing another example of a magnetic field center position of each lens and a composite magnetic field center position according to the first embodiment;

FIG. 8 is an illustration showing an example of a configuration of a multi-stage electromagnetic lens according to the first embodiment;

FIG. 9 is an illustration showing another example of a configuration of a multi-stage electromagnetic lens according to the first embodiment;

FIG. 10 is a block diagram showing an example of an internal configuration of a multi-stage lens adjustment circuit according to the first embodiment;

FIG. 11 is a flowchart showing an example of main steps of an inspection method according to the first embodiment;

FIG. 12 is an illustration showing an example of a plurality of chip regions formed on a semiconductor substrate, according to the first embodiment;

FIG. 13 is an illustration describing inspection processing according to the first embodiment; and

FIG. 14 is a diagram showing an example of an internal configuration of a comparison circuit according to the first embodiment.

DETAILED DESCRIPTION OF THE INVENTION

In the following, embodiments of the present invention provide an apparatus and method that can, even when the landing energy is variably adjusted, focus a primary electron beam to form an image on the surface of a target object, and focus a secondary electron beam to form an image at a desired position without generating a crosstalk between beams.

The embodiments below describe, as an example of a multi-electron beam image acquisition apparatus, an inspection apparatus using multiple electron beams. However, it is not limited thereto. Any apparatus can be used that acquires an image by irradiating a substrate with multiple primary electron beams to use multiple secondary electron beams emitted from the substrate due to the irradiation.

First Embodiment

FIG. 1 is a diagram showing an example of a configuration of an inspection apparatus according to a first embodiment. In FIG. 1, an inspection apparatus 100 for inspecting a pattern formed on the substrate is an example of a multi-electron beam inspection apparatus. The inspection apparatus 100 includes an image acquisition mechanism 150 and a control system circuit 160. The image acquisition mechanism 150 includes an electron beam column 102 (electron optical column) and an inspection chamber 103. In the electron beam column 102, there are disposed an electron gun 201, an electromagnetic lens 202, a shaping aperture array substrate 203, an electromagnetic lens 205, a bundle blanking deflector 212, a limiting aperture substrate 213, an electromagnetic lens 206, a multi-stage electromagnetic lens 217 (pre multi-stage objective lens), an electromagnetic lens 207 (objective lens), a main deflector 208, a sub deflector 209, an ExB separator 214 (beam separator), a deflector 218, an electromagnetic lens 224, a deflector 226, and a multi-detector 222. A primary electron optical system 151 (illumination optical system) is composed of the electron gun 201, the electromagnetic lens 202, the shaping aperture array substrate 203, the electromagnetic lens 205, the bundle blanking deflector 212, the limiting aperture

substrate **213**, the electromagnetic lens **206**, the multi-stage electromagnetic lens **217**, the electromagnetic lens **207** (objective lens), the main deflector **208**, and the sub deflector **209**. A secondary electron optical system **152** (detection optical system) is composed of the electromagnetic lens **207**, electromagnetic lenses **215a** and **215b** of a two-stage array, the E×B separator **214**, the deflector **218**, the electromagnetic lens **224**, and the deflector **226**.

Although the two-stage electromagnetic lens of the electromagnetic lens **215a** and the electromagnetic lens **215b** is shown as the multi-stage electromagnetic lens **217** in FIG. 1, three or more stage electromagnetic lens may be used.

In the inspection chamber **103**, there is disposed a stage **105** movable at least in the x and y directions. On the stage **105**, a substrate **101** (target object) to be inspected is placed. The substrate **101** may be an exposure mask substrate, or a semiconductor substrate such as a silicon wafer. In the case of the substrate **101** being a semiconductor substrate, a plurality of chip patterns (wafer dies) are formed on the semiconductor substrate. In the case of the substrate **101** being an exposure mask substrate, a chip pattern is formed on the exposure mask substrate. The chip pattern is composed of a plurality of figure patterns. When the chip pattern formed on the exposure mask substrate is exposed and transferred onto the semiconductor substrate a plurality of times, a plurality of chip patterns (wafer dies) are formed on the semiconductor substrate. The case of the substrate **101** being a semiconductor substrate is mainly described below. The substrate **101** is placed, with its pattern-forming surface facing upward, on the stage **105**, for example. Further, on the stage **105**, there is disposed a mirror **216** which reflects a laser beam for measuring a laser length emitted from a laser length measuring system **122** arranged outside the inspection chamber **103**.

The multi-detector **222** is connected, at the outside of the electron beam column **102**, to a detection circuit **106**. The detection circuit **106** is connected to a chip pattern memory **123**.

The multi-detector **222** includes a plurality of detection elements arranged in an array.

In the control system circuit **160**, a control computer **110** which controls the whole of the inspection apparatus **100** is connected, through a bus **120**, to a position circuit **107**, a comparison circuit **108**, a reference image generation circuit **112**, a stage control circuit **114**, a lens control circuit **124**, a blanking control circuit **126**, a deflection control circuit **128**, a multi-stage lens adjustment circuit **132**, an E×B control circuit **133**, a retarding control circuit **134**, a storage device **109** such as a magnetic disk drive, a memory **118**, and a printer **119**. The deflection control circuit **128** is connected to DAC (digital-to-analog conversion) amplifiers **144**, **146**, **148** and **149**. The DAC amplifier **146** is connected to the main deflector **208**, the DAC amplifier **144** is connected to the sub deflector **209**, the DAC amplifier **148** is connected to the deflector **218**, and the DAC amplifier **149** is connected to the deflector **226**.

The chip pattern memory **123** is connected to the comparison circuit **108** and the retarding control circuit **134**. The stage **105** is driven by a drive mechanism **142** under the control of the stage control circuit **114**. In the drive mechanism **142**, a drive system such as a three (x-, y-, and θ -) axis motor which provides drive in the directions of x, y, and θ in the stage coordinate system is configured, and therefore, the stage **105** can be moved in the x, y, and θ directions. A step motor, for example, can be used as each of these x, y, and θ motors (not shown). The stage **105** is movable in the horizontal direction and the rotation direction by the x-, y-,

and θ -axis motors. The movement position of the stage **105** is measured by the laser length measuring system **122**, and supplied (transmitted) to the position circuit **107**. Based on the principle of laser interferometry, the laser length measuring system **122** measures the position of the stage **105** by receiving a reflected light from the mirror **216**. With respect to the stage coordinate system, the x, y, and θ directions of the primary coordinate system are set, for example, to a plane perpendicular to the optical axis of the multiple primary electron beams **20**.

The retarding control circuit **134** applies a retarding potential to the substrate **101**. Here, a negative retarding potential is applied.

The electromagnetic lenses **202**, **205**, **206**, **207**, and **224**, and the multi-stage electromagnetic lens **217** are controlled by the lens control circuit **124**. With respect to adjusting the electromagnetic lens **207** and the multi-stage electromagnetic lens **217**, the lens control circuit **124** is controlled by the multi-stage lens adjustment circuit **132**.

The E×B separator **214** is controlled by the E×B control circuit **133**. The bundle blanking deflector **212** is an electrostatic deflector composed of two or more electrodes (or poles), and each electrode is controlled by the blanking control circuit **126** through a DAC amplifier (not shown). The sub deflector **209** is an electrostatic deflector composed of four or more electrodes (or poles), and each electrode is controlled by the deflection control circuit **128** through the DAC amplifier **144**. The main deflector **208** is an electrostatic deflector composed of four or more electrodes (or poles), and each electrode is controlled by the deflection control circuit **128** through the DAC amplifier **148**. The deflector **218** is an electrostatic deflector composed of four or more electrodes (or poles), and each electrode is controlled by the deflection control circuit **128** through the DAC amplifier **146**. The deflector **226** is an electrostatic deflector composed of four or more electrodes (or poles), and each electrode is controlled by the deflection control circuit **128** through the DAC amplifier **149**.

To the electron gun **201**, there is connected a high voltage power supply circuit (not shown). The high voltage power supply circuit applies an acceleration voltage between a filament (cathode) (not shown) and an extraction electrode (anode) (not shown) in the electron gun **201**. In addition to the applying the acceleration voltage, a voltage is applied to another extraction electrode (Wehnelt), and the cathode is heated to a predetermined temperature, and thereby, electrons from the cathode are accelerated to be emitted as an electron beam **200**.

FIG. 1 shows configuration elements necessary for describing the first embodiment. Other configuration elements generally necessary for the inspection apparatus **100** may also be included therein.

FIG. 2 is a conceptual diagram showing a configuration of a shaping aperture array substrate according to the first embodiment. As shown in FIG. 2, holes (openings) **22** of m_1 columns wide (width in the x direction) and n_1 rows long (length in the y direction), where each of m_1 and n_1 is an integer of 2 or more, are two-dimensionally formed in the x and y directions at a predetermined arrangement pitch in the shaping aperture array substrate **203**. In the case of FIG. 2, 23×23 holes (openings) **22** are formed. Each of the holes **22** is a rectangle (including a square) having the same dimension, shape, and size. Alternatively, each of the holes **22** may be a circle with the same outer diameter. The shaping aperture array substrate **203** is an example of an emission source which emits multiple primary electron beams. The shaping aperture array substrate **203** forms and emits the

multiple primary electron beams **20**. Concretely, the multiple primary electron beams **20** are formed by letting portions of the electron beam **200** individually pass through a corresponding one of the plurality of holes **22**. Next, operations of the image acquisition mechanism **150** when acquiring a secondary electron image will be described below. In the primary electron optical system **151**, the substrate **101** is irradiated with the multiple primary electron beams **20**. Specifically, it operates as follows:

The electron beam **200** emitted from the electron gun **201** (emission source) is refracted by the electromagnetic lens **202**, and illuminates the whole of the shaping aperture array substrate **203**. As shown in FIG. 2, a plurality of holes **22** (openings) are formed in the shaping aperture array substrate **203**. The region including all the plurality of holes **22** is irradiated with the electron beam **200**. The multiple primary electron beams **20** are formed by letting portions of the electron beam **200** applied to the positions of the plurality of holes **22** individually pass through a corresponding one of the plurality of holes **22** in the shaping aperture array substrate **203**.

The formed multiple primary electron beams **20** are individually refracted by the electromagnetic lenses **205** and **206**, and travel to the multi-stage electromagnetic lens **217** and the electromagnetic lens **207** (objective lens), while repeating forming an intermediate image and a crossover, passing through the ExB separator **214** arranged in the intermediate image plane of each beam of the multiple primary electron beams **20**.

When the multiple primary electron beams **20** are incident on the electromagnetic lens **207** (objective lens), the electromagnetic lens **207** focuses the multiple primary electron beams **20** to form an image on the substrate **101**. The multiple primary electron beams **20** having been focused on the substrate **101** (target object) by the electromagnetic lens **207** are collectively deflected by the main deflector **208** and the sub deflector **209** to irradiate respective beam irradiation positions on the substrate **101**. In the case where all of the multiple primary electron beams **20** are collectively deflected by the bundle blanking deflector **212**, they deviate from the hole in the center of the limiting aperture substrate **213** and are blocked by the limiting aperture substrate **213**. On the other hand, the multiple primary electron beams **20** which were not deflected by the bundle blanking deflector **212** pass through the hole in the center of the limiting aperture substrate **213** as shown in FIG. 1. Blanking control is provided by On/Off of the bundle blanking deflector **212**, and thus On/Off of the multiple beams is collectively controlled. In this way, the limiting aperture substrate **213** blocks the multiple primary electron beams **20** which were deflected to be in an "Off state" by the bundle blanking deflector **212**. Then, the multiple primary electron beams **20** for image acquisition are formed by the beams having been made during a period from becoming "beam On" to becoming "beam Off" and having passed through the limiting aperture substrate **213**.

When desired positions on the substrate **101** are irradiated with the multiple primary electron beams **20**, a flux of secondary electrons (multiple secondary electron beams **300**) including reflected electrons, each corresponding to each of the multiple primary electron beams **20**, is emitted from the substrate **101** due to the irradiation with the multiple primary electron beams **20**.

The multiple secondary electron beams **300** emitted from the substrate **101** pass through the electromagnetic lens **207**, and form an intermediate image plane. The multiple secondary electron beams **300**, passing through the intermedi-

ate image plane position and the multi-stage electromagnetic lens **217**, travel to the ExB separator **214**. Then, the multiple secondary electron beams **300** form, by the multi-stage electromagnetic lens **217**, another intermediate image plane at the downstream side from the ExB separator **214** in the secondary trajectory of the secondary electron optical system.

The ExB separator **214** includes a plurality of, at least two, magnetic poles each having a coil, and a plurality of, at least two, electrodes (poles). For example, the ExB separator **214** includes four magnetic poles (electromagnetic deflection coils) whose phases are mutually shifted by 90°, and four electrodes (electrostatic deflection electrodes) whose phases are also mutually shifted by 90°. For example, by setting two opposing magnetic poles to be an N pole and an S pole, a directive magnetic field is generated by these plurality of magnetic poles. Also, for example, by applying electrical potentials V whose signs are opposite to each other to the two opposing electrodes, a directive electric field is generated by these plurality of electrodes. Specifically, the ExB separator **214** generates an electric field and a magnetic field to be orthogonal to each other in a plane perpendicular to the traveling direction of the center beam (i.e., trajectory center axis) of the multiple primary electron beams **20**. The electric field exerts a force in a fixed direction regardless of the traveling direction of electrons. In contrast, the magnetic field exerts a force according to Fleming's left-hand rule. Therefore, the direction of the force acting on (applied to) electrons can be changed depending on the entering (or "traveling") direction of electrons. With respect to the multiple primary electron beams **20** entering the ExB separator **214** from above, since the forces due to the electric field and the magnetic field cancel each other out, the beams **20** travel straight downward. In contrast, with respect to the multiple secondary electron beams **300** entering the ExB separator **214** from below, since both the forces due to the electric field and the magnetic field are exerted in the same direction, the beams **300** are bent obliquely upward, and separated from the trajectory of the multiple primary electron beams **20**.

The multiple secondary electron beams **300** having been bent obliquely upward travel to the deflector **218**, and forms an intermediate image plane at the intermediate (center) height position of the deflector **218**. In other words, the multiple secondary electron beams **300** are focused on the intermediate position of the deflector **218** by the multi-stage electromagnetic lens **217**.

The multiple secondary electron beams **300** having been bent obliquely upward are further bent by the deflector **218**, travel to the electromagnetic lens **224**, and form a crossover at the intermediate position of the electromagnetic lens **224**. The multiple secondary electron beams **300** are projected onto the multi-detector **222** while being refracted by the electromagnetic lens **224**.

The multi-detector **222** detects the projected multiple secondary electron beams **300**. At the detection surface of the multi-detector **222**, since each beam of the multiple primary electron beams **20** collides with a detection element corresponding to each of the multiple secondary electron beams **300**, electron amplification occurs, and secondary electron image data is generated for each pixel. An intensity signal detected by the multi-detector **222** is output to the detection circuit **106**. A sub-irradiation region on the substrate **101**, which is surrounded by the beam pitch in the x direction and the beam pitch in the y direction and in which the beam concerned itself is located, is irradiated with each primary electron beam, and the inside of the sub-irradiation region is scanned with each primary electron beam.

In image acquisition using electron beams, there is an optimal landing energy depending on the yield of a target object to be inspected, where the yield indicates a ratio of the secondary electron emission amount to the primary electron incident amount. As shown in the equation (1) below, a landing energy E_l can be defined by a value obtained by subtracting an energy E_s which decelerates a primary electron by a retarding potential to be applied to the target object surface from an energy E_a of a primary electron by an acceleration voltage. In other words, E_s is an acceleration energy of a secondary electron generated on the target object surface.

$$E_l = E_a - E_s \quad (1)$$

When performing an image acquisition, the landing energy needs to be changed depending on the material of the target object, for example. One of objects to change the landing energy is to inhibit charging of the target object. If defining the yield = (the number of primary electrons applied to the target object surface) / (the number of secondary electrons emitted from the target object surface), when the yield is 1, the number of applied electrons is the same as the number of emitted electrons. Thereby, it becomes electrically 0 (zero), and thus, charging can be inhibited. The conditions of the yield being 1 are dependent on the material (work function) of the target object. Therefore, the landing energy to be applied to the target object needs to be changed.

In the case of image acquisition using a single beam, when adjusting the landing energy, it does not matter which ever of an acceleration voltage and a retarding potential is used for the adjustment. Further, since the number of beams is one, the problem of crosstalk does not occur in the first place.

In contrast, in the image acquisition apparatus using multiple beams, secondary electrons of the multiple beams individually need to be incident on predetermined detection elements of the multi-detector. For transferring secondary electrons to respective detection elements, it is effective to accelerate them. Since the emission energy of each of the secondary electrons is about 1 eV to 50 eV, it is difficult, in the case of using a small energy side, to transfer the secondary electron to the detection element. Therefore, acceleration is performed by applying a retarding voltage. Specifically, by applying a negative voltage to the target object surface to accelerate a secondary electron, a generated secondary electron is given an energy E_s for retarding from the target object due to a potential difference between the target object surface and the optical column. Thereby, the secondary electron proceeds to the upstream of the target object surface. Thus, in the multi-beam image acquisition apparatus, preferably, the retarding potential is adjusted in order to adjust the landing energy of a primary electron. Consequently, since the acceleration energy E_s for secondary electrons changes, the trajectory of the secondary electrons changes. Thereby, as described below, it may be impossible to focus to form an image at a desired position depending on the amount of landing energy. Further, even if it is possible to focus to form an image at a desired position, the problem of crosstalk may occur.

FIG. 3 is an illustration showing an example of a primary electron beam trajectory and a secondary electron beam trajectory according to a comparative example of the first embodiment. In the case of FIG. 3, the dotted line shows a trajectory of a central primary electron beam in the multiple primary electron beams, and the solid line shows a trajectory of a central secondary electron beam in the multiple secondary electron beams. In this comparative example, an

optical system is configured such that two lenses of the electromagnetic lens **215** (pre objective lens) and the electromagnetic lens **207** (objective lens) are arranged between the ExB separator **214** and the substrate **101**. Further, a retarding voltage is applied to the substrate **101**.

The central primary electron beam, passing through the ExB separator **214** arranged at the intermediate image plane position (plane B), is refracted, while spreading, by the electromagnetic lens **215** (pre objective lens) arranged in the plane X and the electromagnetic lens **207** (objective lens), and focused to form an image on the substrate **101** arranged in the plane A. Further, each primary electron beam other than the central primary electron beam is also focused to form an image on the substrate **101**. Then, multiple secondary electron beams are emitted from the substrate to which a negative retarding potential has been applied. The secondary electron beam is accelerated up to the energy E_s by the retarding potential. During or after the acceleration, the secondary electron beam proceeds to the electromagnetic lens **207** (objective lens) and forms an intermediate image plane **13** in the plane D by the electromagnetic lens **207** (objective lens). After forming the intermediate image plane **13**, the secondary electron beam proceeds, while spreading, to the electromagnetic lens **215** (pre objective lens) arranged in the plane X. Then, the secondary electron beam forms an intermediate image plane at the position of the plane C, which is the intermediate position of the deflector **218**, by the electromagnetic lens **215** (pre objective lens).

This optical system also performs adjustment such that the landing energy E_l is reduced to similarly form an intermediate image plane of each secondary electron beam at the position of the plane C.

FIGS. 4A to 4D are graphs each showing an example of change of a ratio of a beam pitch to a beam diameter according to a comparative example of the first embodiment. FIG. 4B shows a focusing (image forming) position and a ratio (P/D) of a beam pitch to a beam diameter in the case of, in a large landing energy state, focusing the multiple primary electron beams **20** to form an image on the substrate (plane A), and focusing the multiple secondary electron beams **300** to form an image at the position in the plane C (namely, in the case of forming an intermediate image plane). At the position of the plane C, since P/D is around 1.8, a sufficient beam pitch can be acquired. In contrast, in a small landing energy state, as shown in FIG. 4A, the position of the plane C may be included in a region where focusing for image formation cannot be achieved. If using two electromagnetic lenses whose positions are fixed, a region where no focusing for image formation can be achieved exists depending on the amount of landing energy. Therefore, in the case of FIG. 4A, the position of the plane C needs to be further away from the plane B in order to achieve focusing (image forming). However, it is difficult to move the position of the deflector **218** in the plane C whenever the landing energy changes. Further, if the deflector **218** is arranged away from the plane C, a large space for the separating optical system needs to be obtained, which restricts the design. Therefore, it is preferable that the plane C is closer to the plane B as much as possible.

Now, with respect to the case of FIG. 3, the electromagnetic lens **215** (pre objective lens) is arranged in the plane Y which is close to the ExB separator **214**. Then, similarly to what is described above, the multiple primary electron beams **20** are focused to form an image on the substrate (plane A), and the multiple secondary electron beams **300** are focused to form an image in the plane C. Consequently, as shown in FIG. 4C, in a small landing energy state, the

position of the plane C can be located out of the region where focusing for image formation cannot be achieved. Therefore, in a small landing energy state, it becomes possible to focus the multiple primary electron beams 20 to form an image on the substrate (plane A), and focus the multiple secondary electron beams to form an image in the plane C. Further, the ratio (P/D) of the beam pitch to the beam diameter at the position of the plane C can be increased to around 2.3.

However, by locating the electromagnetic lens 215 (pre objective lens) in the plane Y, the ratio (P/D) of the beam pitch to the beam diameter at the position of the plane C is about 1.3, namely close to 1, in a large landing energy state as shown in FIG. 4D. This is because the beam pitch largely changes to the change of the beam diameter. Consequently, it becomes difficult to individually detect a secondary electron beam in each detection element of the multi-detector 222. Therefore, there is a problem that a crosstalk may occur between the beams of the multiple secondary electron beams.

Thus, the position of the electromagnetic lens 215 (pre objective lens) is desirably located low in a large landing energy state, and located high in a small landing energy state. Then, according to the first embodiment, as a pre objective lens, the multi-stage electromagnetic lens 217 of two or more stages having different heights is arranged.

FIGS. 5A and 5B are illustrations showing an example of a trajectory of a primary electron beam and that of a secondary electron beam according to the first embodiment. In FIG. 5A, for example, the electromagnetic lens 215a of the multi-stage electromagnetic lens 217 is arranged at the position of the plane Y, and the electromagnetic lens 215b of the multi-stage electromagnetic lens 217 is arranged at the position of the plane X. Then, as shown in FIG. 5A, in a large landing energy state, it is excited such that the lens principal plane of the multi-stage electromagnetic lens 217 is located at the center height position (plane X) of the electromagnetic lens 215b. In contrast, as shown in FIG. 5B, in a small landing energy state, it is excited such that the lens principal plane of the multi-stage electromagnetic lens 217 is located at the center height position (plane Y) of the electromagnetic lens 215a.

FIGS. 6A and 6B are illustrations showing an example of a magnetic field center position of each lens and a composite magnetic field center position according to the first embodiment. As shown in FIG. 6A, for example, the two-stage lens composed of the electromagnetic lens 215a and the electromagnetic lens 215b is arranged as the multi-stage electromagnetic lens 217. FIG. 6B shows a composite magnetic field distribution by a magnetic field distribution of the electromagnetic lens 215a and that of the electromagnetic lens 215b. If the lens strength of the electromagnetic lens 215a and that of the electromagnetic lens 215b are set to be the same (1:1), the z-direction position of a composite magnetic field center 15c of the composite magnetic field distribution is an intermediate position between a magnetic field center 15a of the magnetic field distribution of the electromagnetic lens 215a and a magnetic field center 15b of the magnetic field distribution of the electromagnetic lens 215b. In the first embodiment, the z-direction position of the composite magnetic field center 15c of the composite magnetic field distribution is assumed to be the position of the lens principal plane of the multi-stage electromagnetic lens 217.

FIGS. 7A and 7B are illustrations showing another example of a magnetic field center position of each lens and a composite magnetic field center position according to the

first embodiment. FIG. 7A shows the case where the lens strength of the electromagnetic lens 215b is smaller than that of the electromagnetic lens 215a. The z-direction position of the composite magnetic field center 15c of the composite magnetic field distribution can be moved to the magnetic field center 15a side of the magnetic field distribution of the electromagnetic lens 215a. In contrast, FIG. 7B shows the case where the lens strength of the electromagnetic lens 215a is smaller than that of the electromagnetic lens 215b. The z-direction position of the composite magnetic field center 15c of the composite magnetic field distribution can be moved to the magnetic field center 15b side of the magnetic field distribution of the electromagnetic lens 215b. In the cases of FIGS. 6A, 6B, 7A, and 7B, the z-direction position of the composite magnetic field center 15c of the composite magnetic field distribution can be adjusted between the magnetic field center 15a of the magnetic field distribution of the electromagnetic lens 215a, and the magnetic field center 15b of the magnetic field distribution of the electromagnetic lens 215b. Thus, the z-direction position of the composite magnetic field center 15c of the composite magnetic field distribution is variably adjustable according to a ratio between the lens strength of the electromagnetic lens 215a and that of the electromagnetic lens 215b. In other words, the position of the lens principal plane of the multi-stage electromagnetic lens 217 can be variably adjusted. Thus, according to the first embodiment, the position of the lens principal plane of the multi-stage electromagnetic lens 217 is variably adjusted according to the amount of landing energy.

FIG. 8 is an illustration showing an example of a configuration of a multi-stage electromagnetic lens according to the first embodiment. In FIG. 8, a multi-stage electromagnetic lens (two or more lens group) includes a plurality of pole pieces 5a and 5b disposed at different height positions, and a plurality of coils 6a and 6b each individually arranged in a corresponding one of the pole pieces 5a and 5b. Specifically, in the case of FIG. 8, electromagnetic lenses are arranged in a two-stage array, where a coil 6 for configuring a lens for one stage is arranged in one pole piece 5. In FIG. 8, the first stage electromagnetic lens 215a includes a pole piece 5a and a coil 6a. The second stage electromagnetic lens 215b includes a pole piece 5b and a coil 6b. Thus, an individual pole piece 5 is arranged for each coil 6.

FIG. 9 is an illustration showing another example of a configuration of a multi-stage electromagnetic lens according to the first embodiment. In FIG. 9, the multi-stage electromagnetic lens (two or more lens group) includes a common pole piece 5, and a plurality of coils 6a and 6b arranged at different height positions in the common pole piece 5. In other words, in the case of FIG. 9, the coils 6a and 6b of a two-stage array having different height positions are arranged in the common pole piece 5. The first stage electromagnetic lens 215a is composed of the common pole piece 5 and the coil 6a. The second stage electromagnetic lens 215b is composed of the common pole piece 5 and the coil 6b. Thus, the common pole piece 5 which can separate the coils 6 may be arranged for each coil 6.

FIG. 10 is a block diagram showing an example of an internal configuration of a multi-stage lens adjustment circuit according to the first embodiment. In FIG. 10, in the multi-stage lens adjustment circuit 132, there are arranged a storage device 61 such as a magnetic disk drive, a multi-stage lens strength ratio table generation unit 60, a landing energy LE setting unit 62, a multi-stage lens strength ratio calculation unit 63, a multi-stage lens strength ratio setting unit 64, a multi-stage lens strength adjustment unit 66, and

a determination unit **69**. Each unit "...", such as the multi-stage lens strength ratio table generation unit **60**, the landing energy LE setting unit **62**, the multi-stage lens strength ratio calculation unit **63**, the multi-stage lens strength ratio setting unit **64**, the multi-stage lens strength adjustment unit **66**, and the determination unit **69** includes processing circuitry. The processing circuitry includes an electric circuit, a computer, a processor, a circuit board, a quantum circuit, a semiconductor device, or the like. Further, common processing circuitry (the same processing circuitry), or different processing circuitry (separate processing circuitry) may be used for each unit "...". Input data necessary for the multi-stage lens strength ratio table generation unit **60**, the landing energy LE setting unit **62**, the multi-stage lens strength ratio calculation unit **63**, the multi-stage lens strength ratio setting unit **64**, the multi-stage lens strength adjustment unit **66**, and the determination unit **69**, and operated (calculated) results are stored in a memory (not shown) or in the memory **118** each time.

FIG. **11** is a flowchart showing an example of main steps of an inspection method according to the first embodiment. In FIG. **11**, the inspection method of the first embodiment executes a series of steps: a lens strength ratio table generation step (S**102**), a landing energy LE setting step (S**104**), a multi-stage lens strength ratio setting step (S**106**), a multi-stage lens strength adjustment step (S**108**), an inspection image acquisition step (S**120**), a reference image generation step (S**122**), and a comparison step (S**130**). The multi-stage lens strength adjustment step (S**108**) executes, as internal steps, a multi-stage lens strength setting step (S**110**), a primary beam focusing (image forming) step (S**112**), and a determination step (S**114**).

In the lens strength ratio table generation step (S**102**), first, an evaluation substrate is placed on the stage **105**. A desired evaluation pattern is arranged on the evaluation substrate. For example, a dot pattern and/or a line and space pattern is arranged. Then, using the inspection apparatus **100**, for each landing energy LE, measured are the lens strength of the electromagnetic lens **207** (objective lens) which can focus the multiple primary electron beams **20** to form an image on the evaluation substrate (plane A), and focus the multiple secondary electron beams **300** to form an image at a desired position (plane C), and the lens strength of each of the electromagnetic lenses **215a** and **215b** being stages of the multi-stage electromagnetic lens **217** (pre objective lens). As shown in FIGS. **6A**, **6B**, **7A**, and **7B**, with respect to the multi-stage electromagnetic lens **217**, the peak position **15c** of the composite magnetic field distribution can be variably adjusted in the direction of the trajectory central axis, that is the z direction, of the multiple secondary electron beams **300**. Then, the lens strength of each of the electromagnetic lenses **215a** and **215b** is adjusted such that the peak position **15c** of the composite magnetic field distribution of the multi-stage electromagnetic lens **217** is located at a height position where the multi-stage electromagnetic lens **217** can perform focusing to form an image, according to the landing energy LE. For example, when the landing energy is large, the height position is adjusted in the z direction such that the height of the peak position **15c** of the composite magnetic field distribution of the multi-stage electromagnetic lens **217** becomes higher. For example, when the landing energy is small, the height position is adjusted in the z direction such that the height of the peak position **15c** of the composite magnetic field distribution of the multi-stage electromagnetic lens **217** becomes lower.

In this process, a combination, between the beam pitch and the beam diameter, which leads the ratio (P/D) of the

beam pitch to the beam diameter at the position in the plane C to be equal to or greater than a threshold is acquired. As the threshold, 1.5 is used, for example. In the case of FIG. **1**, an intermediate position of the deflector **218** is used as the plane C. Further, since the multi-detector **222** is located at a conjugate position to the plane C, it can be used to measure whether focusing to form an image has been achieved. Alternatively, a detector (not shown) may be arranged at the intermediate position of the deflector **218**. The lens strength of the electromagnetic lens **207** (objective lens) and the lens strength of each of the electromagnetic lenses **215a** and **215b** being stages of the multi-stage electromagnetic lens **217** (pre objective lens) are obtained for each landing energy LE by experiment or simulation. The landing energy LE is adjusted by changing a retarding potential. Each data, obtained for each landing energy, on the lens strength of the electromagnetic lens **207** (objective lens) and the lens strength of each of the electromagnetic lenses **215a** and **215b** being stages of the multi-stage electromagnetic lens **217** (pre objective lens) is output to the multi-stage lens adjustment circuit **132**. Each data is stored in the storage device **61**, for example, in the multi-stage lens adjustment circuit **132**.

The multi-stage lens strength ratio table generation unit **60** calculates, for each landing energy LE, a ratio of the lens strength of each of the electromagnetic lenses **215a** and **215b** being stages of the multi-stage electromagnetic lens **217** (pre objective lens). Then, a lens strength ratio table is generated in which a calculated lens strength ratio, for each landing energy LE, of each of the electromagnetic lenses **215a** and **215b** being stages of the multi-stage electromagnetic lens **217** (pre objective lens) is defined. The generated lens strength ratio table is stored in the storage device **61**. An excitation current value may be used as a parameter indicating a lens strength. Alternatively, it is also preferable to use a coefficient for an excitation current value serving as a reference. Alternatively, other calculated values may be used.

Before acquiring an image of the substrate **101** to be inspected, the lens strength ratio table is generated in advance.

Then, the substrate **101** to be inspected is located on the stage **105**.

In the landing energy LE setting step (S**104**), the landing energy LE setting unit **62** sets a landing energy LE depending on the substrate **101**. For example, it is preferable to determine a desirable or optimal landing energy LE in advance for each material of the substrate **101**. As the optimal landing energy LE, for example, when the substrate **101** is irradiated with the multiple primary electron beams **20** at a desired acceleration voltage, a landing energy LE at which a detected intensity of emitted multiple secondary electron beams is equal to or greater than a threshold can be the optimal one.

In the lens strength ratio setting step (S**106**), first, referring to the lens strength ratio table, the multi-stage lens strength ratio calculation unit **63** calculates a lens strength ratio, corresponding to a landing energy LE having been set, of each of the electromagnetic lenses **215a** and **215b** being stages of the multi-stage electromagnetic lens **217**. Then, the multi-stage lens strength ratio setting unit **64** sets the calculated lens strength ratio of each of the electromagnetic lenses **215a** and **215b** of the calculated multi-stage electromagnetic lens **217**.

In the multi-stage lens strength adjustment step (S**108**), in a state where the set lens strength ratio is maintained, the multi-stage lens strength adjustment unit **66** adjusts the

15

strength of each of the electromagnetic lenses **215a** and **215b** (two or more lens group) being stages of the multi-stage electromagnetic lens **217**. Specifically, it operates as follows:

In the multi-stage lens strength setting step (S110), in a state where the set lens strength ratio is maintained, the multi-stage lens strength adjustment unit **66** sets, in the lens control circuit **124**, a temporary lens strength of each of the electromagnetic lenses **215a** and **215b** being stages of the multi-stage electromagnetic lens **217**.

In the primary beam focusing (image forming) step (S112), under the control of the lens control circuit **124**, the electromagnetic lens **207** (first electromagnetic lens) focuses the multiple primary electron beams **20** to form an image on the substrate **101**.

In the determination step (S114), in a state where the multiple primary electron beams **20** have been focused to form an image on the substrate **101**, the determination unit **69** determines whether the multiple secondary electron beams **300** have been focused to form an image at a desired position (plane C: intermediate position of the deflector **218**).

If the multiple secondary electron beams **300** have not been focused to form an image at the desired position (plane C: intermediate position of the deflector **218**), it returns to the multi-stage lens strength setting step (S110). Then, in the multi-stage lens strength setting step (S110), the multi-stage lens strength adjustment unit **66** changes, in a state where the set lens strength ratio is maintained, the lens strength of each of the electromagnetic lenses **215a** and **215b**, and sets the changed lens strength in the lens control circuit **124**. Then, the primary beam focusing (image forming) step (S112) and the determination step (S114) are executed. Each step from the multi-stage lens strength setting step (S110) to the determination step (S114) is repeated until the multiple secondary electron beams **300** have been focused to form an image at the desired position (plane C: intermediate position of the deflector **218**).

When the multiple secondary electron beams **300** have been focused to form an image at the desired position (plane C: intermediate position of the deflector **218**), the lens adjustment is completed, and it proceeds to inspection processing.

In the inspection image acquisition step (S120), the image acquisition mechanism **150** applies the multiple primary electron beams **20** to the substrate **101**, and acquires a secondary electron image of the substrate **101** formed by the multiple secondary electron beams **300** emitted from the substrate **101**. As described above, the electromagnetic lens **207** (objective lens) focuses the multiple primary electron beams **20** to form an image on the substrate **101**.

The multiple secondary electron beams **300** are emitted from the substrate **101** due to the irradiation with the multiple primary electron beams **20**.

Then, the electromagnetic lens **207** (first electromagnetic lens) focuses the multiple secondary electron beams **300** in the state before being separated from the multiple primary electron beams **20**. In other words, before being separated from the multiple primary electron beams **20**, the multiple secondary electron beams **300** form an intermediate image plane by the lens action of the electromagnetic lens **207**. The multi-stage electromagnetic lens **217** (second electromagnetic lens) is arranged between the image forming point on which the multiple secondary electron beams are focused by the electromagnetic lens **207**, and the ExB separator **214**. The multi-stage electromagnetic lens **217** focuses the multiple secondary electron beams **300** to form an image at the

16

position (plane C) conjugate to the detection surface of the multi-detector **222**. In the case of FIG. **1**, after forming an intermediate image plane in the plane C, the multiple secondary electron beams **300** are focused to form an image on the detection surface of the multi-detector **222**, but it is not limited thereto. The multi-stage electromagnetic lens **217** may focus the multiple secondary electron beams **300** to form an image on the detection surface of the multi-detector **222**.

As described above, after being separated from the multiple primary electron beams **20** by the ExB separator **214**, the multiple secondary electron beams **300** are focused to form an image at the intermediate position (plane C) of the deflector **218**.

The multiple secondary electron beams **300** are further bent by the deflector **218**, and proceed to the electromagnetic lens **224**. Then, the multiple secondary electron beams **300** are projected onto the multi-detector **222** while being refracted by the electromagnetic lens **224**. The multi-detector **222** detects the projected multiple secondary electron beams **300**.

FIG. **12** is an illustration showing an example of a plurality of chip regions formed on a semiconductor substrate, according to the first embodiment. In FIG. **12**, in the case of the substrate **101** being a semiconductor substrate (wafer), a plurality of chips (wafer dies) **332** are formed in a two-dimensional array in an inspection region **330** of the semiconductor substrate (wafer). A mask pattern for one chip formed on an exposure mask substrate is reduced to, for example, $1/4$, and exposed/transferred onto each chip **332** by an exposure device such as a stepper (not shown). The mask pattern for one chip is generally composed of a plurality of figure patterns.

FIG. **13** is an illustration describing inspection processing according to the first embodiment. As shown in FIG. **13**, the region of each chip **332** is divided, for example, in the y direction into a plurality of stripe regions **32** by a predetermined width. The scanning operation by the image acquisition mechanism **150** is carried out for each stripe region **32**, for example. The operation of scanning the stripe region **32** advances relatively in the x direction while the stage **105** is moved in the $-x$ direction, for example. Each stripe region **32** is divided in the longitudinal direction into a plurality of rectangular (including square) regions **33**. Beam application to a target rectangular region **33** is achieved by collectively deflecting all the multiple primary electron beams **20** by the main deflector **208**.

The case of FIG. **13** shows the multiple primary electron beams **20** of 5 rows $\times$ 5 columns, for example. The size of an irradiation region **34** which can be irradiated by one irradiation with the multiple primary electron beams **20** is defined by (x direction size obtained by multiplying an x-direction beam pitch of the multiple primary electron beams **20** on the substrate **101** by the number of beams in the x direction) $\times$ (y direction size obtained by multiplying a y-direction beam pitch of the multiple primary electron beams **20** on the substrate **101** by the number of beams in the y direction). The irradiation region **34** serves as a field of view of the multiple primary electron beams **20**. The inside of a sub-irradiation region **29** is irradiated and scanned with each primary electron beam **8** of the multiple primary electron beams **20**, where the sub-irradiation region **29** is surrounded by the beam pitch in the x direction and the beam pitch in the y direction and the beam concerned itself is located therein. Each primary electron beam **8** is associated with any one of the sub-irradiation regions **29** which are different from each other. At the time of each shot, each

17

primary electron beam 8 is applied to the same position in the associated sub-irradiation region 29. The primary electron beam 8 is moved in the sub-irradiation region 29 by collective deflection of all the multiple primary electron beams 20 by the sub deflector 209. By repeating this operation, the inside of one sub-irradiation region 29 is irradiated, in order, with one primary electron beam 8.

Preferably, the width of each stripe region 32 is set to be the same as the size in the y direction of the irradiation region 34, or to be the size reduced by the width of the scanning margin. In the cases of FIGS. 4A to 4D, the irradiation region 34 and the rectangular region 33 are of the same size. However, it is not limited thereto. The irradiation region 34 may be smaller than the rectangular region 33, or larger than it. Using each primary electron beam 8 of the multiple primary electron beams 20, the sub-irradiation region 29, in which the primary electron beam 8 concerned itself is located, is irradiated with the primary electron beam 8 concerned, and scanned by collectively deflecting all the multiple primary electron beams 20 by the sub deflector 209. Then, when scanning of one sub-irradiation region 29 is completed, the irradiation position is moved to an adjacent rectangular region 33 in the same stripe region 32 by collectively deflecting all of the multiple primary electron beams 20 by the main deflector 208. By repeating this operation, the inside of the stripe region 32 is irradiated in order. After completing scanning of one stripe region 32, the irradiation region 34 is moved to the next stripe region 32 by moving the stage 105 and/or by collectively deflecting all of the multiple primary electron beams 20 by the main deflector 208. As described above, by irradiation with each primary electron beam 8, the scanning operation per sub-irradiation region 29 and acquisition of a secondary electron image are performed. By combining secondary electron images of respective sub-irradiation regions 29, a secondary electron image of the rectangular region 33, a secondary electron image of the stripe region 32, or a secondary electron image of the chip 332 is configured. When an image comparison is actually performed, the sub-irradiation region 29 in each rectangular region 33 is further divided into a plurality of frame regions 30, and a frame image 31 of each frame region 30 is compared. FIG. 13 shows the case of dividing the sub-irradiation region 29 which is scanned with one primary electron beam 8 into four frame regions 30 by halving it in the x and y directions.

As described above, the image acquisition mechanism 150 proceeds with a scanning operation per stripe region 32. The multiple secondary electron beams 300 emitted from the substrate 101 due to the irradiation with the multiple primary electron beams 20 is detected by the multi-detector 222. A reflected electron may be included in the detected multiple secondary electron beams 300. Alternatively, a reflected electron may be separated during moving in the secondary electron optical system 152 and therefore may not reach the multi-detector 222. Detected data (measured image data: secondary electron image data: inspection image data) on the secondary electron of each pixel in each sub-irradiation region 29, detected by the multi-detector 222, is output to the detection circuit 106 in order of measurement. In the detection circuit 106, the detected data in analog form is converted into digital data by an A-D converter (not shown), and stored in the chip pattern memory 123. Then, acquired measured image data is transmitted to the comparison circuit 108, together with information on each position from the position circuit 107.

Since the inside of the sub irradiation region 29 is scanned with the multiple primary electron beams 20, the emission

18

position of each secondary electron beam changes every second in the sub-irradiation region 29. Therefore, if left as is, each secondary electron beam is projected onto a position deviated from a corresponding detection element of the multi-detector 222. Then, it is necessary that the deflector 226 collectively deflects the multiple secondary electron beams 300 so that each secondary electron beam whose emission position has changed as described above may irradiate a corresponding detection region of the multi-detector 222. In order to make each secondary electron beam irradiate a corresponding detection region of the multi-detector 222, deflection for swinging back (cancelling) a movement of the position of the multiple secondary electron beams caused by the change of the emission position needs to be performed.

FIG. 14 is a diagram showing an example of an internal configuration of a comparison circuit according to the first embodiment. In FIG. 14, storage devices 50, 52 and 56 such as magnetic disk drives, a frame image generation unit 54, an alignment unit 57, and a comparison unit 58 are arranged in the comparison circuit 108. Each of the "units" such as the frame image generation unit 54, the alignment unit 57 and the comparison unit 58 includes processing circuitry. The processing circuitry includes an electric circuit, a computer, a processor, a circuit board, a quantum circuit, a semiconductor device, or the like. Further, common processing circuitry (same processing circuitry), or different processing circuitry (separate processing circuitry) may be used for each of the "units". Input data required in the frame image generation unit 54, the alignment unit 57 and the comparison unit 58, or a calculated result is stored in a memory (not shown) or in the memory 118 each time.

Measured image data (beam image) transmitted into the comparison circuit 108 is stored in the storage device 50.

The frame image generation unit 54 generates the frame image 31 of each of a plurality of frame regions 30 obtained by further dividing image data of the sub-irradiation region 29 acquired by scanning with each primary electron beam 8. The frame region 30 is used as a unit region of an inspection image. In order to prevent missing an image, it is preferable that margin regions overlap each other with respect to respective frame regions 30. The generated frame image 31 is stored in the storage device 56.

In the reference image generation step (S122), the reference image generation circuit 112 generates, for each frame region 30, a reference image corresponding to the frame image 31, based on design data serving as a basis of a plurality of figure patterns formed on the substrate 101. Specifically, it operates as follows: First, design pattern data is read from the storage device 109 through the control computer 110, and each figure pattern defined by the read design pattern data is converted into image data of binary or multiple values.

As described above, basic figures defined by the design pattern data are, for example, rectangles (including squares) and triangles. For example, there is stored figure data defining the shape, size, position, and the like of each pattern figure by using information, such as coordinates (x, y) of the reference position of the figure, lengths of sides of the figure, and a figure code serving as an identifier for identifying the figure type such as a rectangle, a triangle and the like.

When design pattern data used as the figure data is input to the reference image generation circuit 112, the data is developed/expanded into data for each figure. Then, with respect to each figure data, the figure code, the figure dimensions, and the like indicating the figure shape of each figure data are interpreted. The reference image generation

19

circuit 112 develops each figure data to design pattern image data in binary or multiple values as a pattern to be arranged in squares in units of grids of predetermined quantization dimensions, and outputs the developed data. In other words, the reference image generation circuit 112 reads design data, calculates the occupancy of a figure in the design pattern, for each square region obtained by virtually dividing the inspection region into squares in units of predetermined dimensions, and outputs n-bit occupancy data. For example, it is preferable to set one square as one pixel. Assuming that one pixel has a resolution of $\frac{1}{2}^0 (= \frac{1}{256})$, the occupancy rate in each pixel is calculated by allocating sub regions which correspond to the region of figures arranged in the pixel concerned and each of which corresponds to a $\frac{1}{256}$ resolution. Then, the 8-bit occupancy rate data is output to the reference image generation circuit 112. Such square regions (inspection pixels) can be commensurate with pixels of measured data.

Next, the reference image generation circuit 112 performs filtering processing on design image data of a design pattern which is image data of a figure, using a predetermined filter function. Thereby, it becomes possible to match/fit the design image data being design side image data, whose image intensity (gray scale level) is represented by digital values, with image generation characteristics obtained by irradiation with the multiple primary electron beams 20. Image data for each pixel of a generated reference image is output to the comparison circuit 108. The reference image data transmitted into the comparison circuit 108 is stored in the storage device 52.

In the comparison step (S130), first, the alignment unit 57 reads the frame image 31 serving as an inspection image, and a reference image corresponding to the frame image 31, and provides alignment between both the images, based on units of sub-pixels smaller than units of pixels. For example, the alignment can be performed by a least-square method.

Then, the comparison unit 58 compares a secondary electron image, which is an image acquired by detecting multiple secondary electron beams by the multi-detector 222, with a reference image. At least a portion of the acquired secondary electron image is compared with a reference image. Here, a frame image obtained by further dividing the image of the sub-irradiation region 29 acquired for each beam is used. The comparison unit 58 compares, for each pixel, the frame image 31 and the reference image. The comparison unit 58 compares them, for each pixel, based on predetermined determination conditions in order to determine whether there is a defect or a candidate defect such as a shape defect. For example, if a difference in gray scale level for each pixel is larger than a determination threshold Th, it is determined that there is a defect. Then, the comparison result is output. It may be output to the storage device 109 or the memory 118, or alternatively, output from the printer 119.

In the examples described above, the die-to-database inspection is performed. However, it is not limited thereto. A die-to-die inspection may be performed. In the case of the die-to-die inspection, alignment and comparison having been described above are carried out between the frame image 31 (die 1) to be inspected and another frame image 31 (die 2) (another example of a reference image) in which there is formed the same pattern as that of the frame image 31 to be inspected.

As described above, according to the first embodiment, it is possible, even when the landing energy is variably adjusted, to focus the multiple secondary electron beams

20

300 to form an image at a desired position without generating a crosstalk between beams.

In the above description, each “ . . . circuit” includes processing circuitry. The processing circuitry includes an electric circuit, a computer, a processor, a circuit board, a quantum circuit, a semiconductor device, or the like. Each “ . . . circuit” may use common processing circuitry (the same processing circuitry), or different processing circuitry (separate processing circuitry). Programs for causing a processor, etc. to execute processing may be stored in a recording medium, such as a magnetic disk drive, magnetic tape drive, FD, ROM (Read Only Memory) or the like. For example, the position circuit 107, the comparison circuit 108, the reference image generation circuit 112, the stage control circuit 114, the lens control circuit 124, the blanking control circuit 126, the deflection control circuit 128, the multi-stage lens adjustment circuit 132, the ExB control circuit 133, and the retarding control circuit 134 may be configured by at least one processing circuit described above. For example, the processing in these circuits may be executed by the control computer 110.

Embodiments have been explained referring to specific examples as described above. However, the present invention is not limited to these specific examples. Although FIG. 1 shows the case where the multiple primary electron beams 20 are formed by the shaping aperture array substrate 203 irradiated with one beam from the electron gun 201 serving as an irradiation source, it is not limited thereto. The multiple primary electron beams 20 may be formed by applying a primary electron beam from each of a plurality of irradiation sources.

While the apparatus configuration, control method, and the like not directly necessary for explaining the present invention are not described, some or all of them can be appropriately selected and used on a case-by-case basis when needed.

Further, any multi-electron beam image acquisition apparatus, multi-electron beam inspection apparatus, and multi-electron beam image acquisition method that include elements of the present invention and that can be appropriately modified by those skilled in the art are included within the scope of the present invention.

Additional advantages and modification will readily occur to those skilled in the art. Therefore, the invention in its broader aspects is not limited to the specific details and representative embodiments shown and described herein. Accordingly, various modifications may be made without departing from the spirit or scope of the general inventive concept as defined by the appended claims and their equivalents.

What is claimed is:

1. A multi-electron beam image acquisition apparatus comprising:

- a stage on which a substrate is to be mounted;
- an emission source configured to emit multiple primary electron beams;
- a first electromagnetic lens configured to focus the multiple primary electron beams to form an image on the substrate;
- a separator configured to separate multiple secondary electron beams, which are emitted from the substrate due to irradiation with the multiple primary electron beams, from the multiple primary electron beams;
- a detector configured to detect the multiple secondary electron beams having been separated; and
- a second electromagnetic lens configured to be controlled to variably adjust a peak position of a magnetic field

21

distribution in a direction of a trajectory central axis of the multiple secondary electron beams, and to focus the multiple secondary electron beams to form an image on either one of a detection surface of the detector and a position conjugate to the detection surface, wherein the first electromagnetic lens focuses, to form an image, the multiple secondary electron beams in a state before being separated from the multiple primary electron beams, and

the second electromagnetic lens is arranged between the separator and an image forming point on which the multiple secondary electron beams are focused by the first electromagnetic lens.

2. The apparatus according to claim 1, wherein the second electromagnetic lens is composed of a group of at least two lenses.

3. The apparatus according to claim 2, wherein the group of at least two lenses includes

- a plurality of pole pieces disposed at different height positions, and
- a plurality of coils each individually arranged in a corresponding one of the plurality of pole pieces.

4. The apparatus according to claim 2, wherein the group of at least two lenses includes

- a common pole piece, and
- a plurality of coils arranged at different height positions in the common pole piece.

5. The apparatus according to claim 2, wherein the peak position of the magnetic field distribution is a peak position of a composite magnetic field of at least two magnetic fields generated by the group of at least two lenses.

6. A multi-electron beam inspection apparatus comprising:

- a stage on which a substrate is to be mounted;
- an emission source configured to emit multiple primary electron beams;
- a first electromagnetic lens configured to focus the multiple primary electron beams to form an image on the substrate;
- a separator configured to separate multiple secondary electron beams, which are emitted from the substrate due to irradiation with the multiple primary electron beams, from the multiple primary electron beams;
- a detector configured to detect the multiple secondary electron beams having been separated;
- a second electromagnetic lens configured to be controlled to variably adjust a peak position of a magnetic field distribution in a direction of a trajectory central axis of the multiple secondary electron beams, and to focus the multiple secondary electron beams to form an image on either one of a detection surface of the detector and a position conjugate to the detection surface; and
- a comparison circuit configured to compare an image acquired by detecting the multiple secondary electron beams by the detector with a reference image, wherein

22

the first electromagnetic lens focuses, to form an image, the multiple secondary electron beams in a state before being separated from the multiple primary electron beams, and

the second electromagnetic lens is arranged between the separator and an image forming point on which the multiple secondary electron beams are focused by the first electromagnetic lens.

7. The apparatus according to claim 6, wherein the second electromagnetic lens is composed of a group of at least two lenses.

8. The apparatus according to claim 7, wherein the peak position of the magnetic field distribution is a peak position of a composite magnetic field of at least two magnetic fields generated by the group of at least two lenses.

9. A multi-electron beam image acquisition method comprising:

- emitting multiple primary electron beams;
- focusing, by a first electromagnetic lens, the multiple primary electron beams to form an image on a substrate mounted on a stage;
- separating, by a separator, multiple secondary electron beams, which are emitted from the substrate due to irradiation with the multiple primary electron beams, from the multiple primary electron beams;
- detecting, by a detector, the multiple secondary electron beams having been separated; and
- focusing the multiple secondary electron beams to form an image on either one of a detection surface of the detector and a position conjugate to the detection surface, by using a second electromagnetic lens which can be controlled to variably adjust a peak position of a magnetic field distribution in a direction of a trajectory central axis of the multiple secondary electron beams, wherein

the first electromagnetic lens focuses, to form an image, the multiple secondary electron beams in a state before being separated from the multiple primary electron beams, and

the second electromagnetic lens is arranged between the separator and an image forming point on which the multiple secondary electron beams are focused by the first electromagnetic lens.

10. The method according to claim 9, wherein the second electromagnetic lens is composed of a group of at least two lenses, further comprising:

- setting a lens strength ratio of the group of at least two lenses, and
- adjusting, in a state where the lens strength ratio having been set is maintained, a strength of the group of at least two lenses.

* * * * *