



US012408536B2

(12) **United States Patent**
Kim et al.

(10) **Patent No.:** **US 12,408,536 B2**
(45) **Date of Patent:** **Sep. 2, 2025**

(54) **DISPLAY APPARATUS HAVING A
SUBSTRATE HOLE AND METHOD FOR
FORMING THE SAME**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **LG Display Co., Ltd.**, Seoul (KR)
(72) Inventors: **Jeong-Oh Kim**, Goyang-si (KR);
Jei-Hyun Lee, Goyang-si (KR)
(73) Assignee: **LG Display Co., Ltd.**, Seoul (KR)

9,905,629 B2 2/2018 Kim et al.
10,135,025 B2 11/2018 Kim et al.
10,529,952 B2 1/2020 Kim et al.
10,615,369 B2 4/2020 Choi et al.
10,714,707 B2 7/2020 Kim et al.
(Continued)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 319 days.

FOREIGN PATENT DOCUMENTS

CN 109802052 A 5/2019
CN 110265583 A 9/2019
(Continued)

(21) Appl. No.: **17/135,450**

(22) Filed: **Dec. 28, 2020**

(65) **Prior Publication Data**

US 2021/0202569 A1 Jul. 1, 2021

(30) **Foreign Application Priority Data**

Dec. 31, 2019 (KR) 10-2019-0180185

(51) **Int. Cl.**

H10K 59/65 (2023.01)
H10K 59/122 (2023.01)
H10K 59/123 (2023.01)
H10K 59/131 (2023.01)
H10K 59/80 (2023.01)

(52) **U.S. Cl.**

CPC **H10K 59/65** (2023.02); **H10K 59/122**
(2023.02); **H10K 59/123** (2023.02); **H10K**
59/131 (2023.02); **H10K 59/8723** (2023.02);
H10K 59/873 (2023.02)

(58) **Field of Classification Search**

CPC . H01L 51/5253; H10K 59/873; H10K 50/844
See application file for complete search history.

OTHER PUBLICATIONS

Korean Intellectual Property Office, Office Action, Korean Patent
Application No. 10-2019-0180185, Feb. 20, 2024, eight pages,
(with concise explanation of relevance).

(Continued)


Primary Examiner — Lauren R Bell

(74) *Attorney, Agent, or Firm* — Fenwick & West LLP

(57) **ABSTRACT**

A display apparatus is provided. The display apparatus may include a substrate hole penetrating a device substrate. A light-emitting device may be disposed on the device substrate. The light-emitting device may be spaced away from the substrate hole. A separating device may be disposed between the substrate hole and the light-emitting device. The device substrate may be in contact with the device substrate. Thus, in the display apparatus, the permeation of the moisture through the crack of the insulating layer which occurs in a process of forming the substrate hole may be prevented.

16 Claims, 13 Drawing Sheets

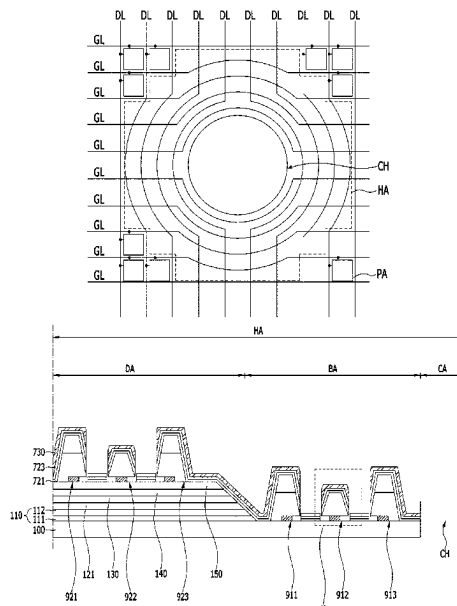

(56)

References Cited

U.S. PATENT DOCUMENTS

RE48,773	E	10/2021	Kim et al.	
11,251,401	B2	2/2022	Kim et al.	
11,476,309	B2	10/2022	Ding et al.	
11,737,311	B2	8/2023	Kim et al.	
2017/0148856	A1 *	5/2017	Choi	H10K 50/844
2017/0237038	A1	8/2017	Kim et al.	
2017/0288004	A1	10/2017	Kim et al.	
2019/0051859	A1	2/2019	Choi et al.	
2019/0074481	A1	3/2019	Kim et al.	
2020/0144542	A1	5/2020	Kim et al.	
2020/0152663	A1 *	5/2020	Li	H01L 27/124
2020/0258960	A1 *	8/2020	Choi	H10K 50/8445
2020/0343485	A1	10/2020	Kim et al.	
2021/0028249	A1 *	1/2021	Ding	H01L 27/1288
2021/0134848	A1 *	5/2021	Hanada	H01L 29/7869
2021/0226163	A1 *	7/2021	Ji	H10K 71/00
2022/0028960	A1	1/2022	Kim et al.	

2022/0173356	A1	6/2022	Kim et al.	
2022/0328593	A1 *	10/2022	Song	H10K 59/87
2023/0397453	A1	12/2023	Kim et al.	
2024/0023365	A1	1/2024	Choi et al.	

FOREIGN PATENT DOCUMENTS

CN	110518141	A	11/2019
KR	10-2017-0059864	A	5/2017
KR	10-2017-0096646	A	8/2017
KR	10-2017-0115177	A	10/2017
KR	10-2019-0018120	A	2/2019

OTHER PUBLICATIONS

China National Intellectual Property Administration, Office Action, Chinese Patent Application No. 202011537002.6, Dec. 27, 2023, 14 pages.

* cited by examiner

FIG. 1

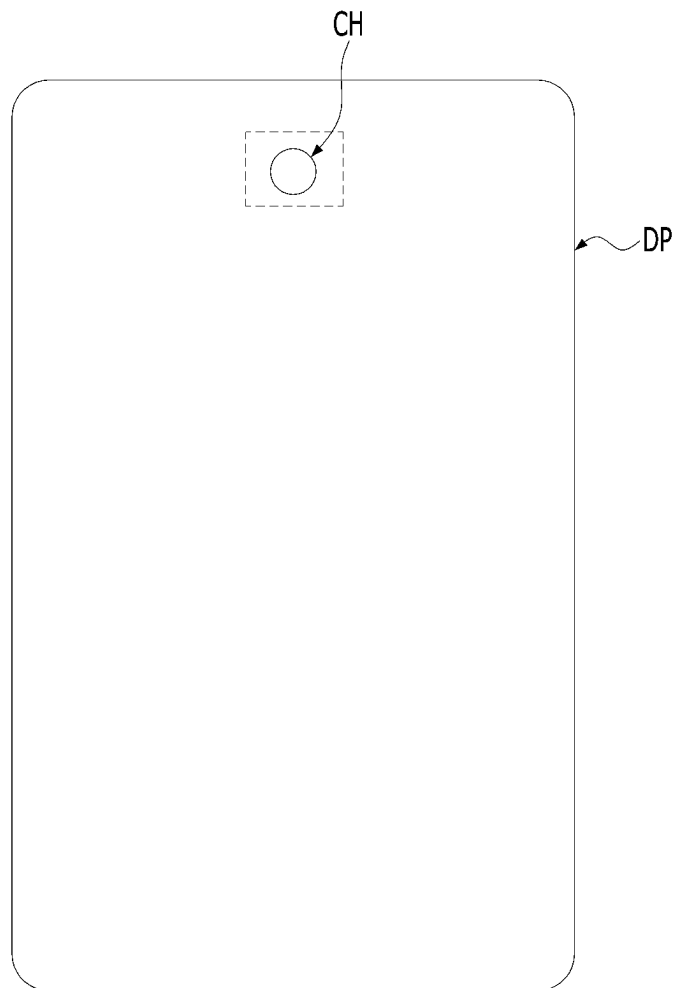


FIG. 2

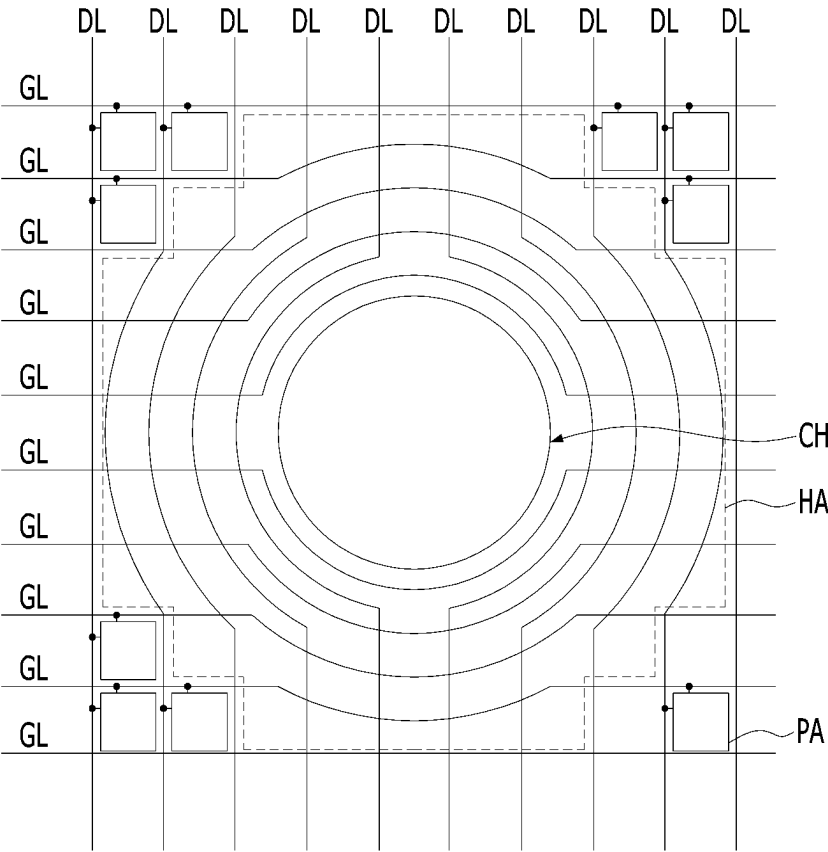


FIG. 3A

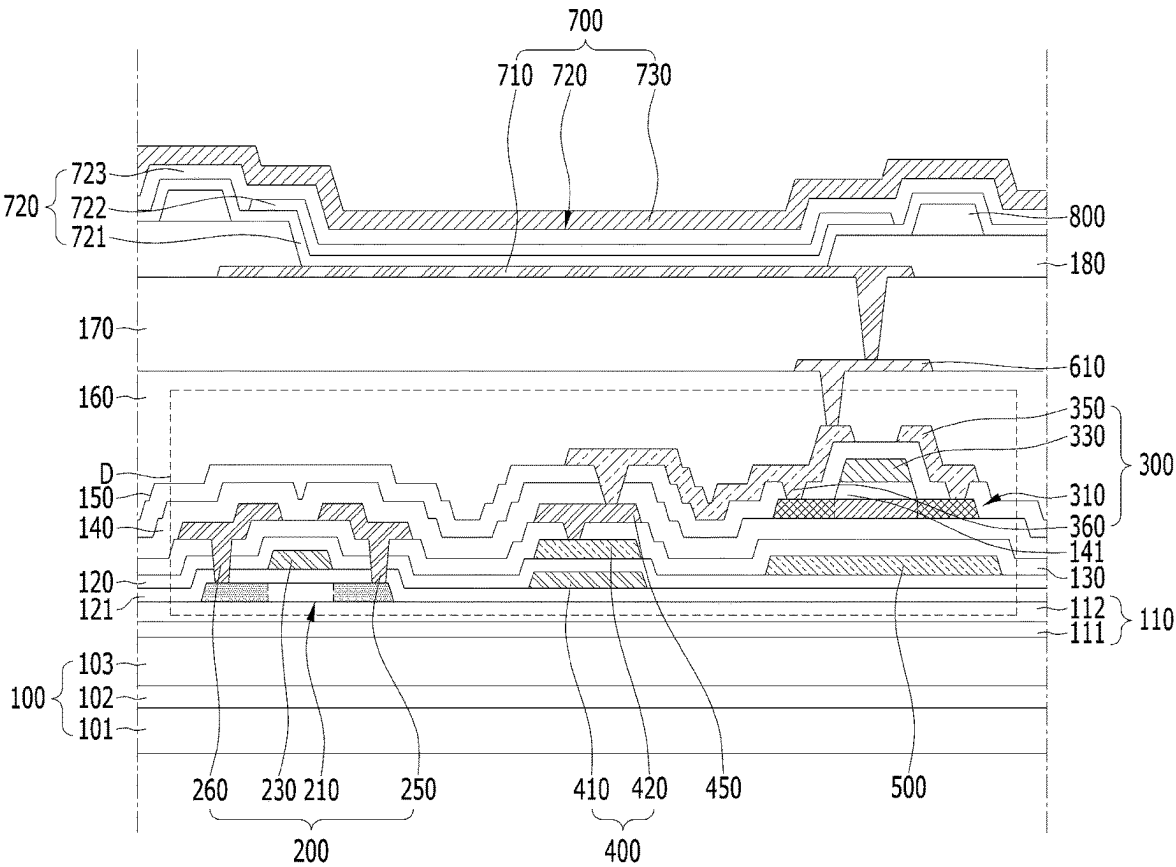


FIG. 3B

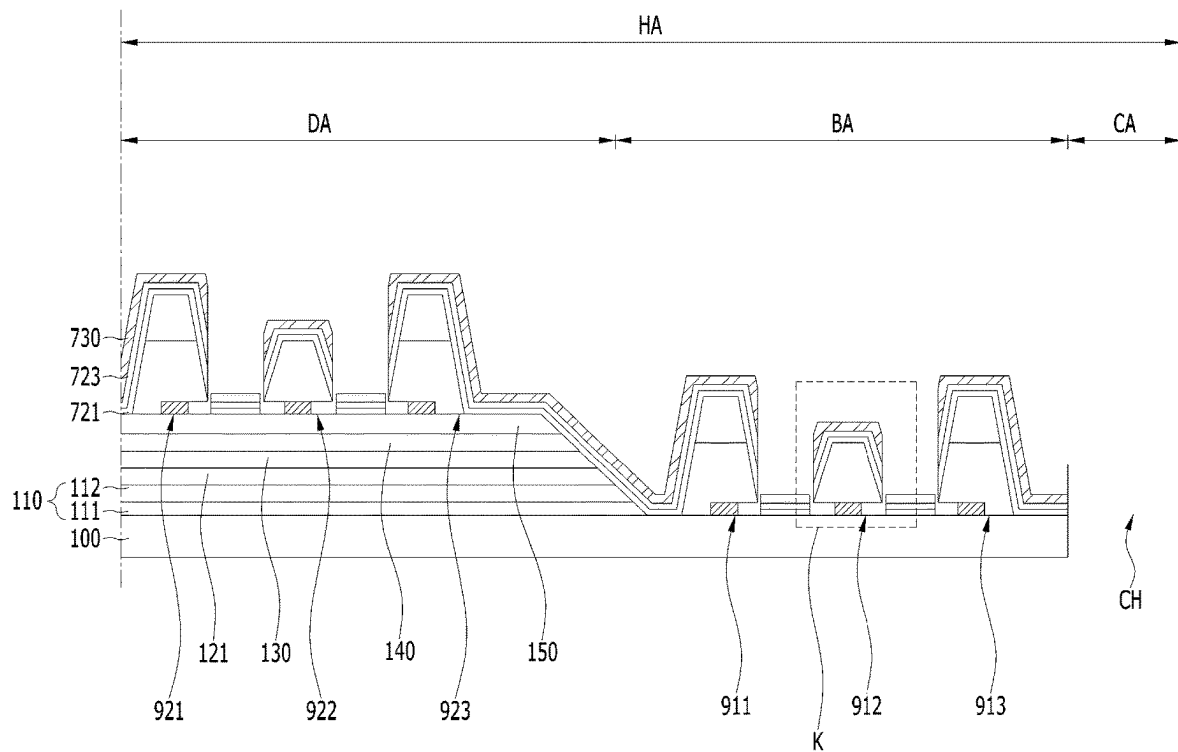


FIG. 4

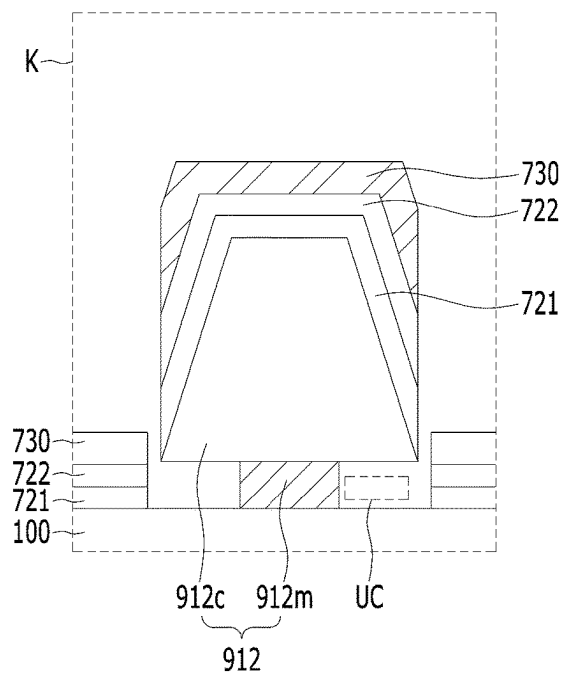


FIG. 5A

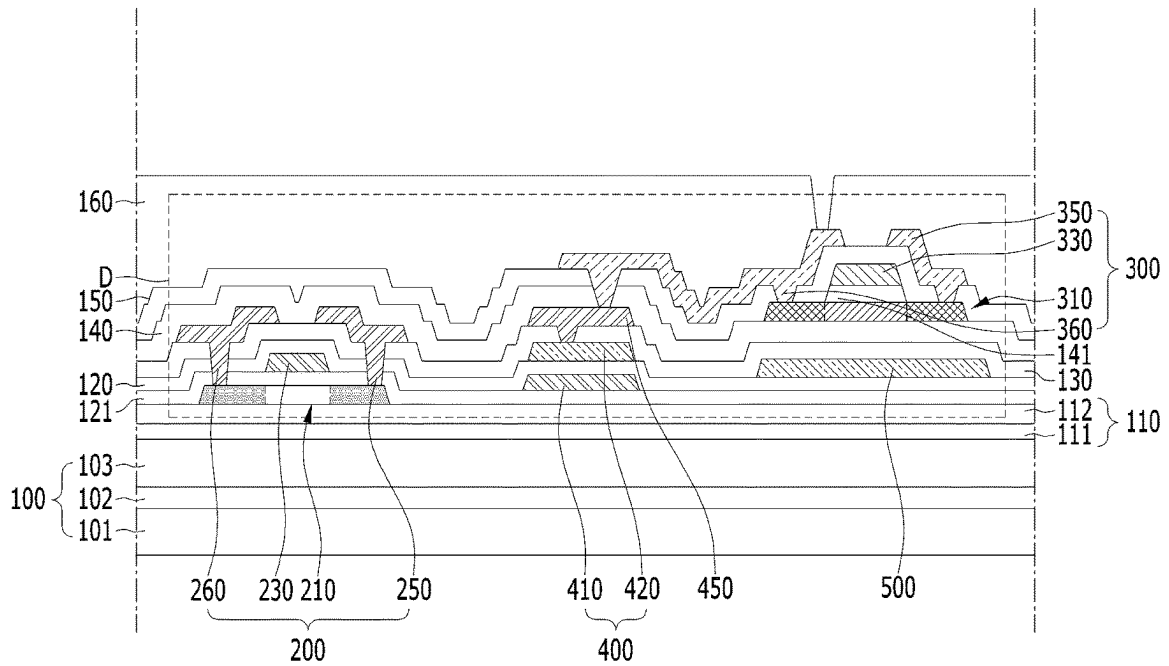


FIG. 5B

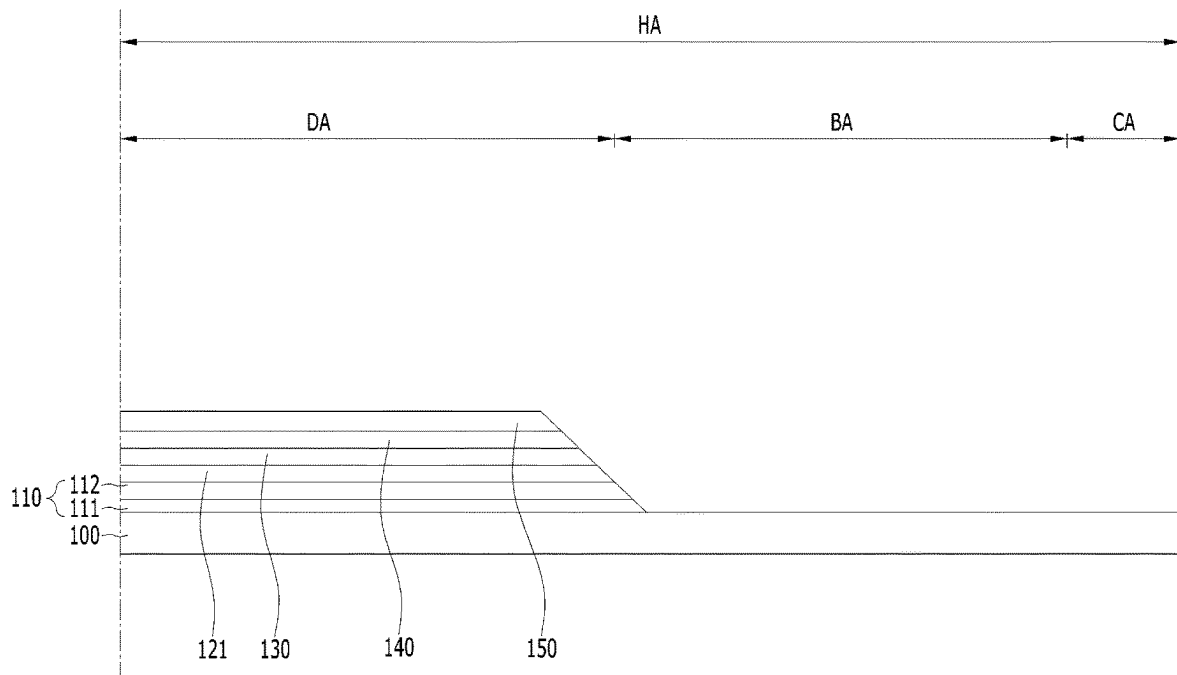


FIG. 6A

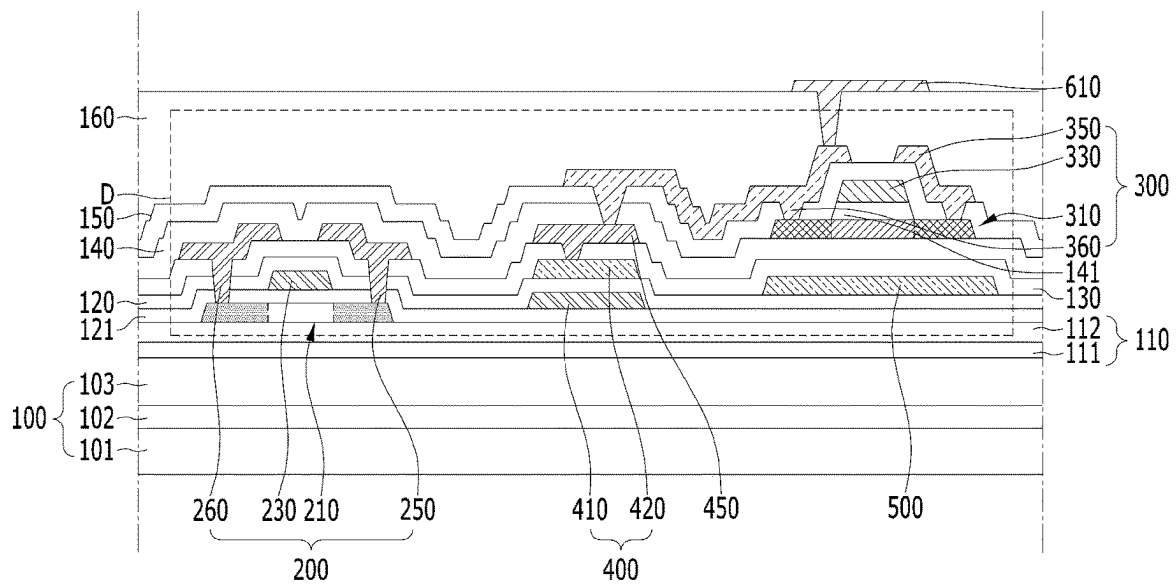


FIG. 6B

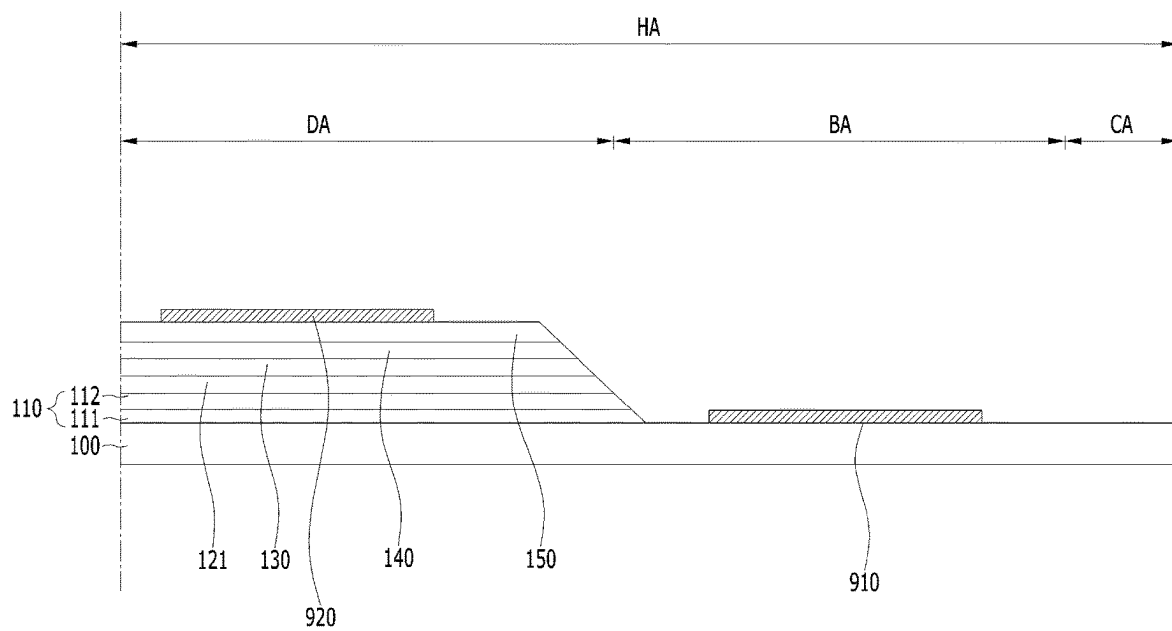


FIG. 7A

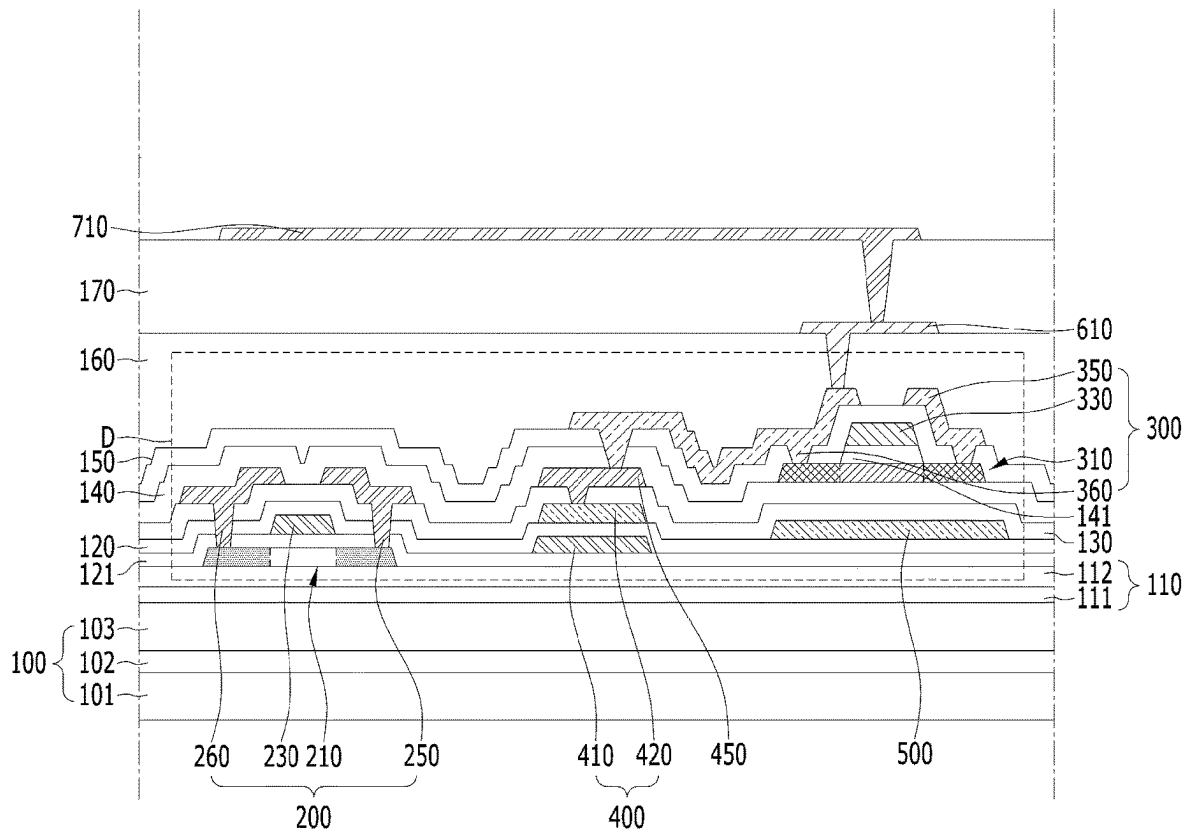


FIG. 7B

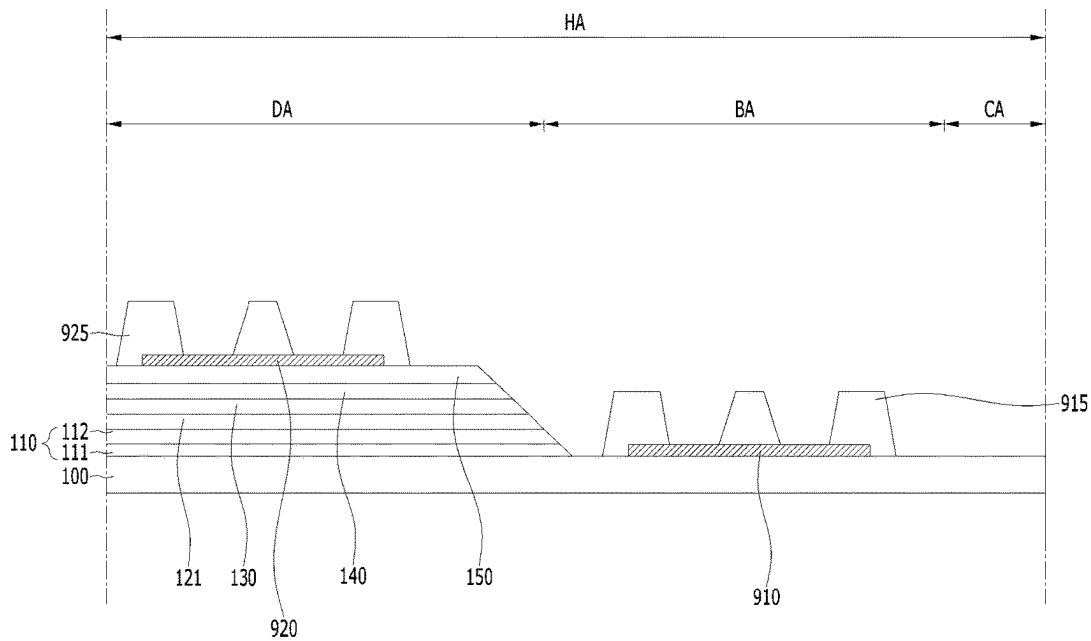


FIG. 8A

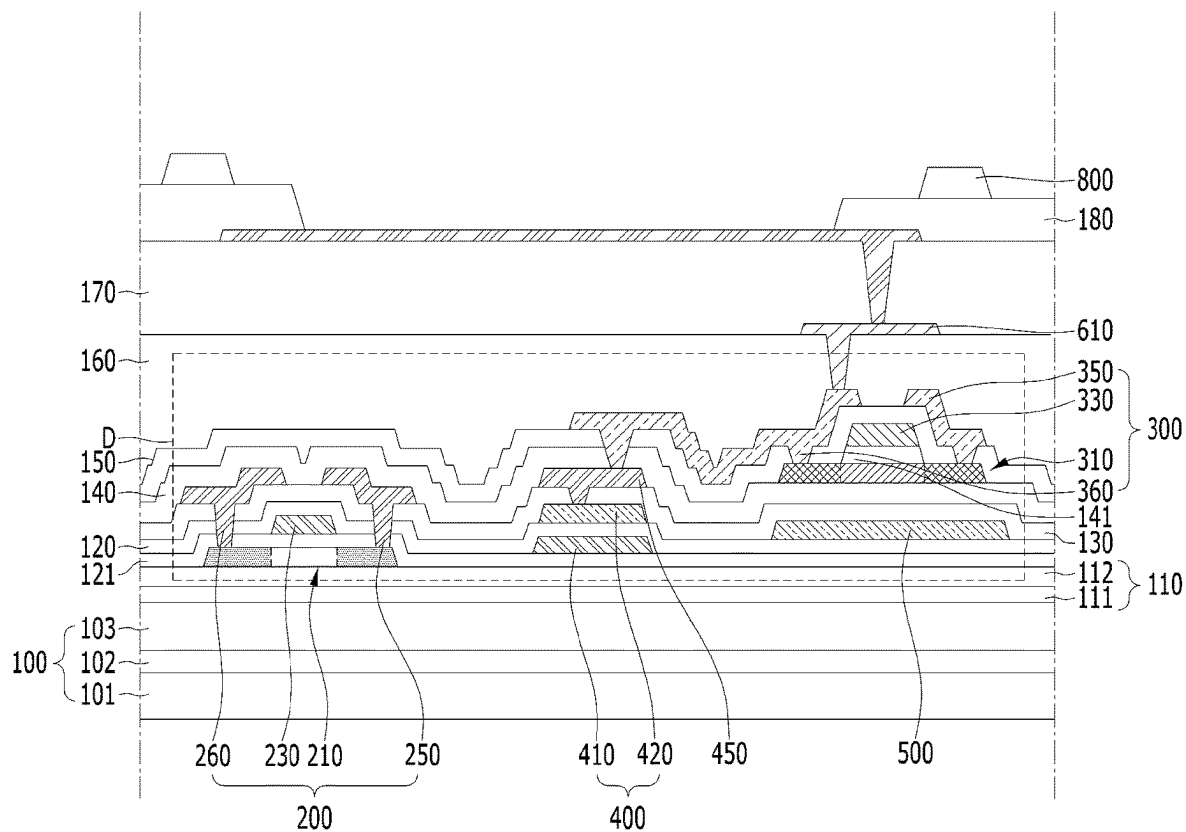


FIG. 8B

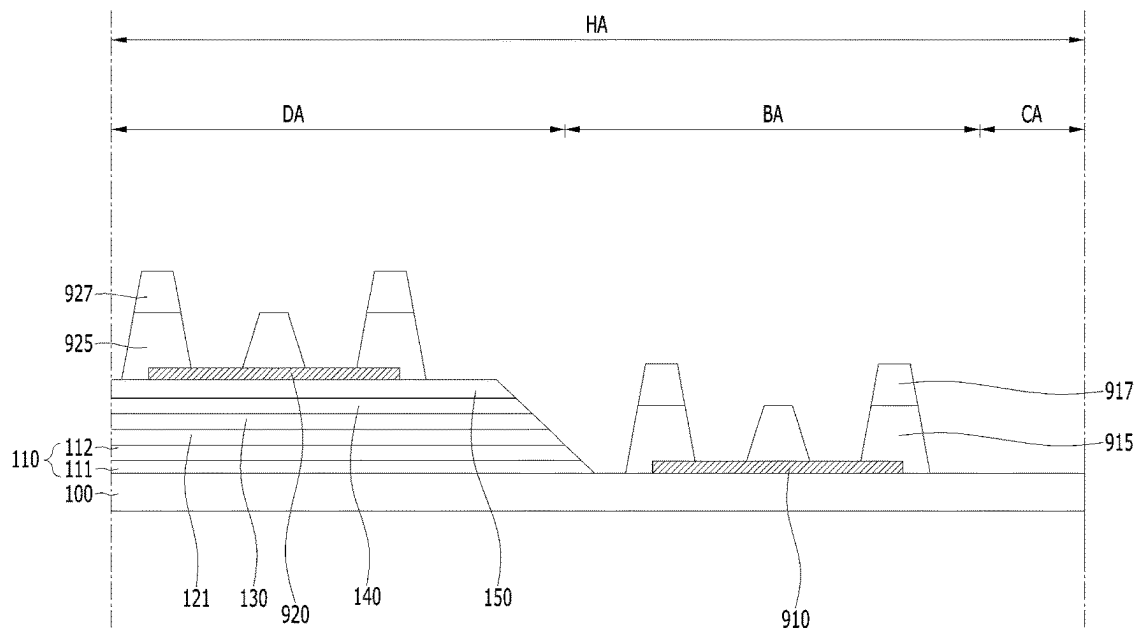


FIG. 9A

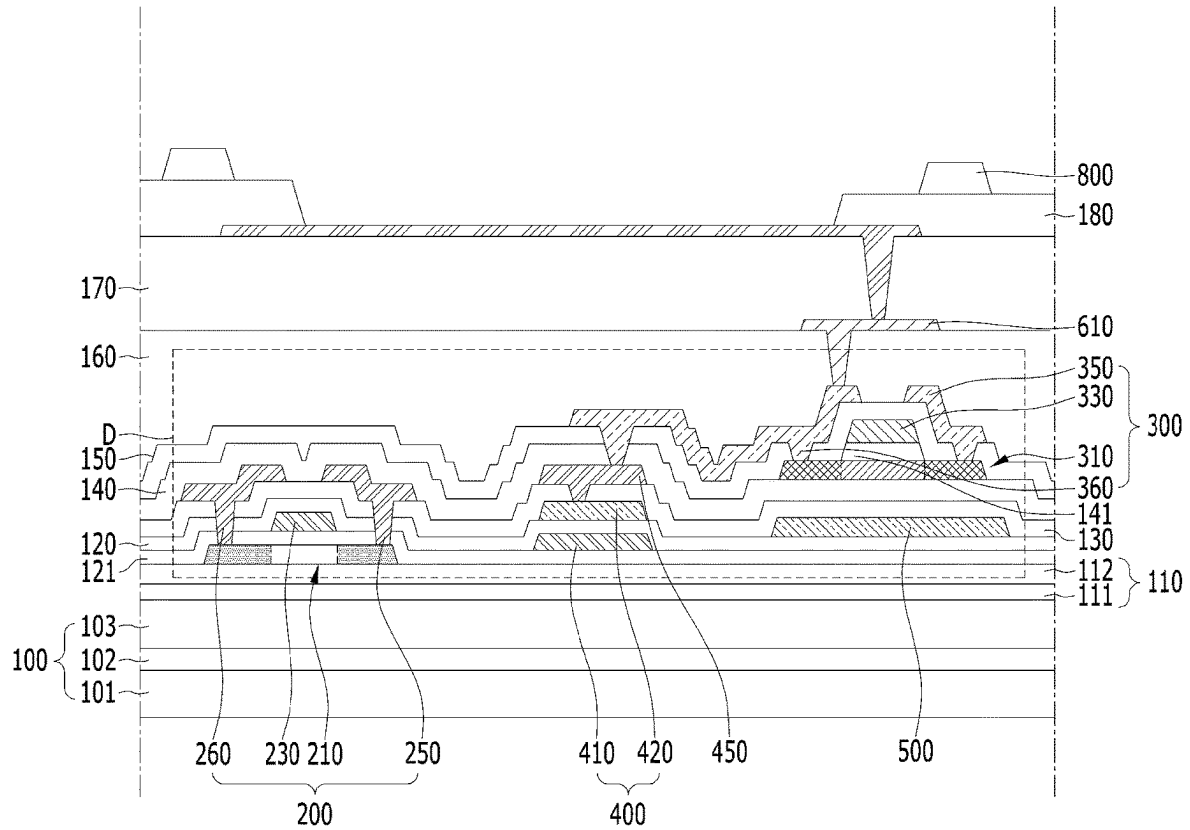


FIG. 9B

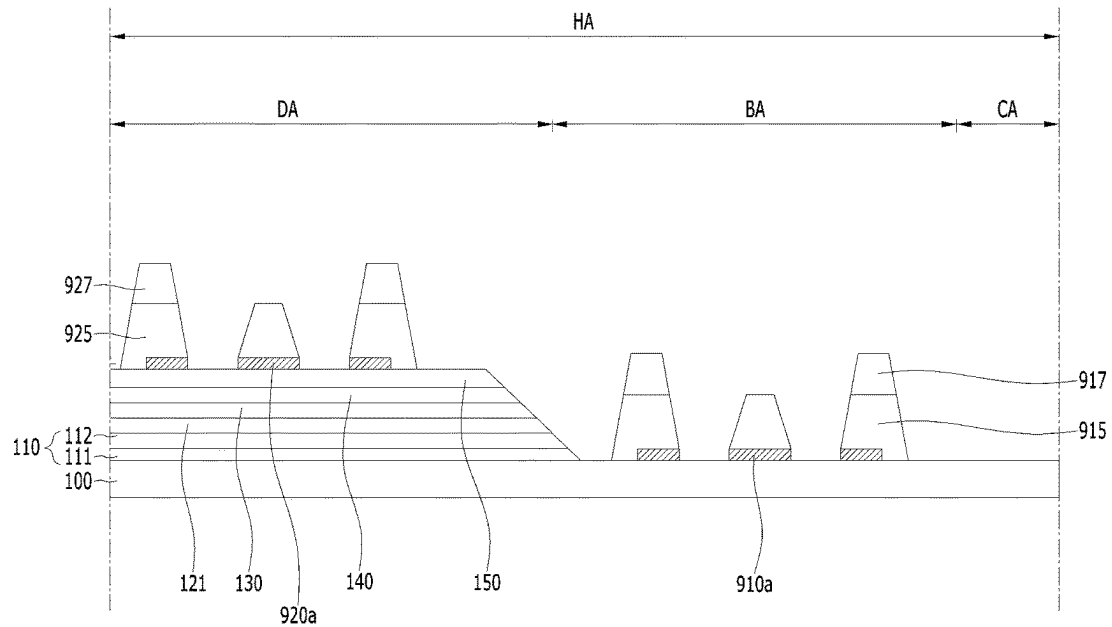


FIG. 10A

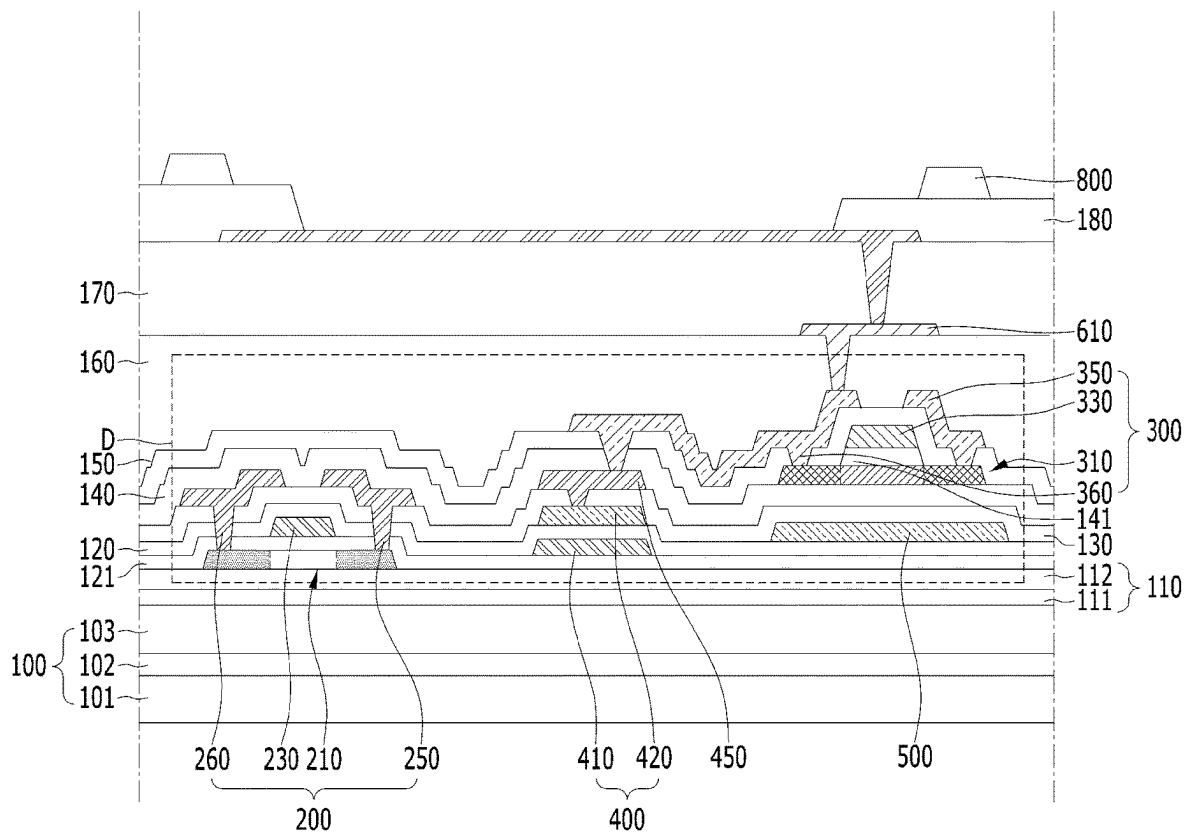


FIG. 10B

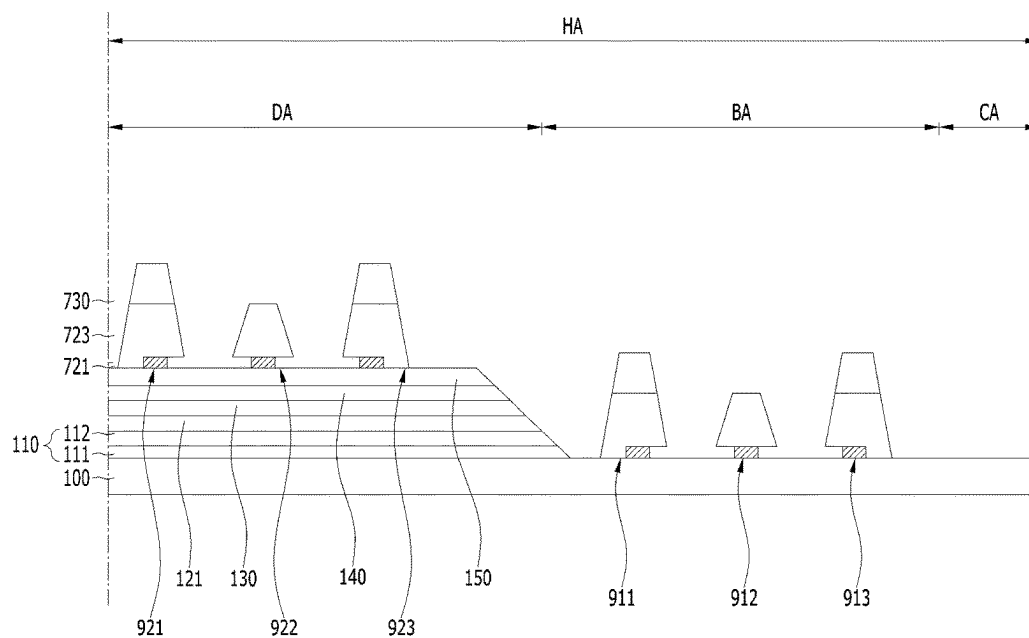


FIG. 11A

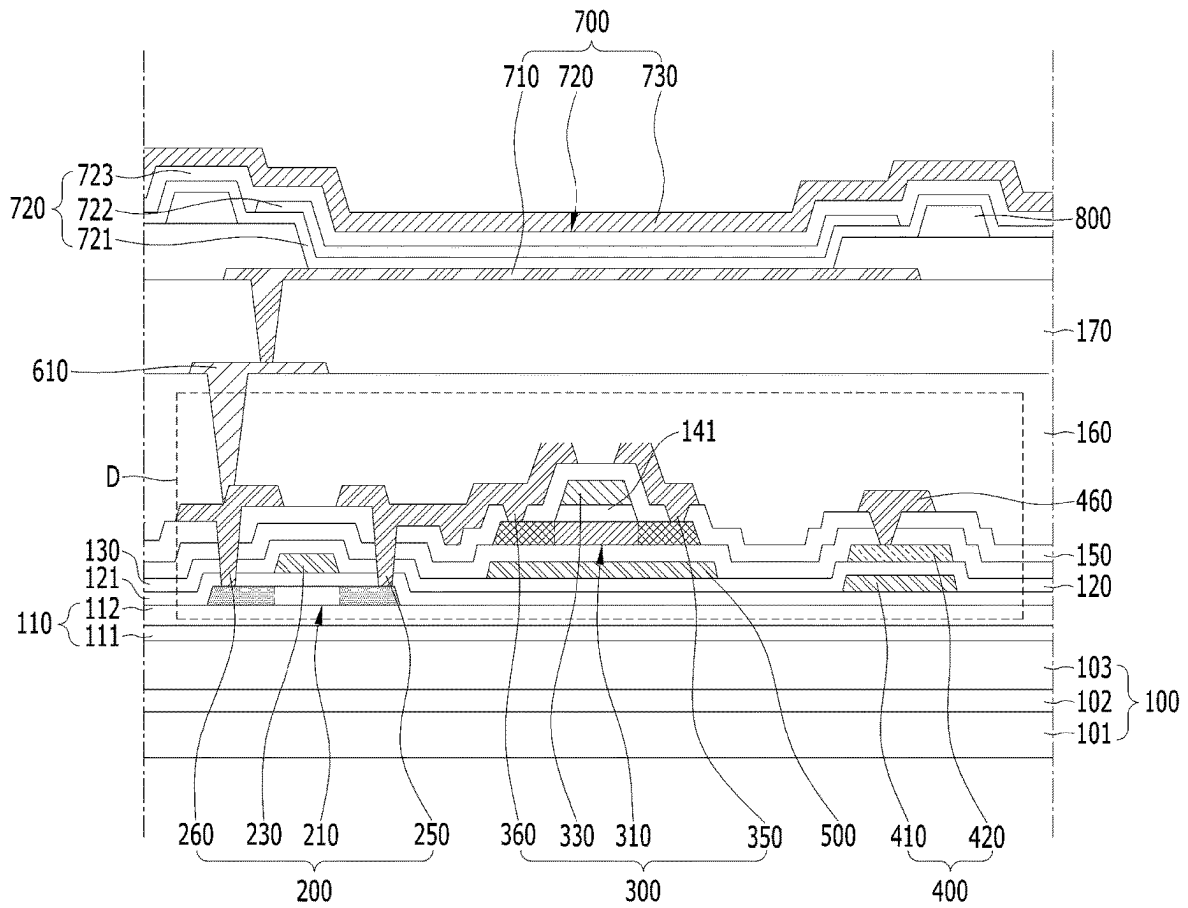


FIG. 11B

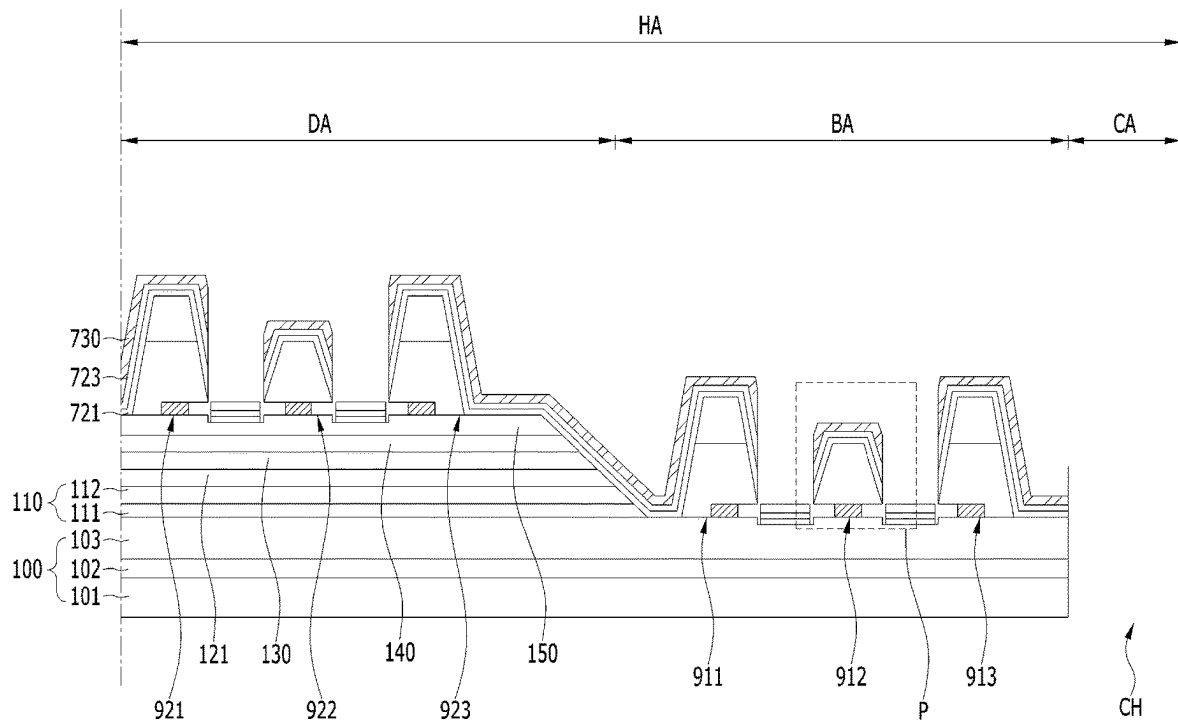


FIG. 12

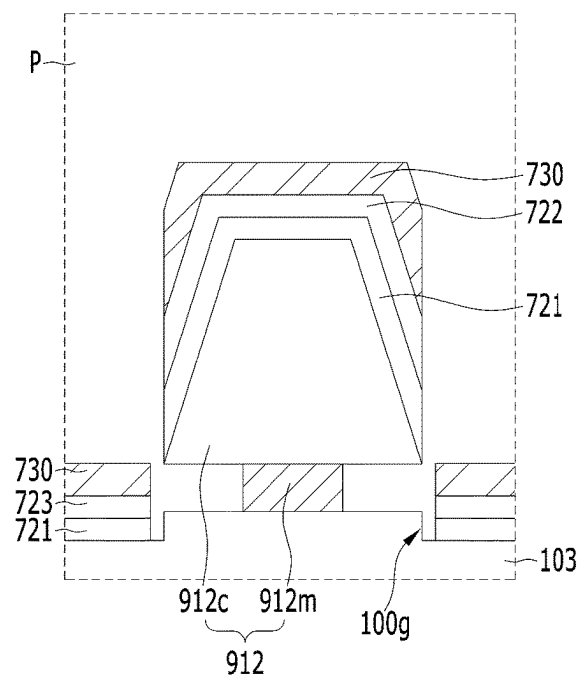


FIG. 13A


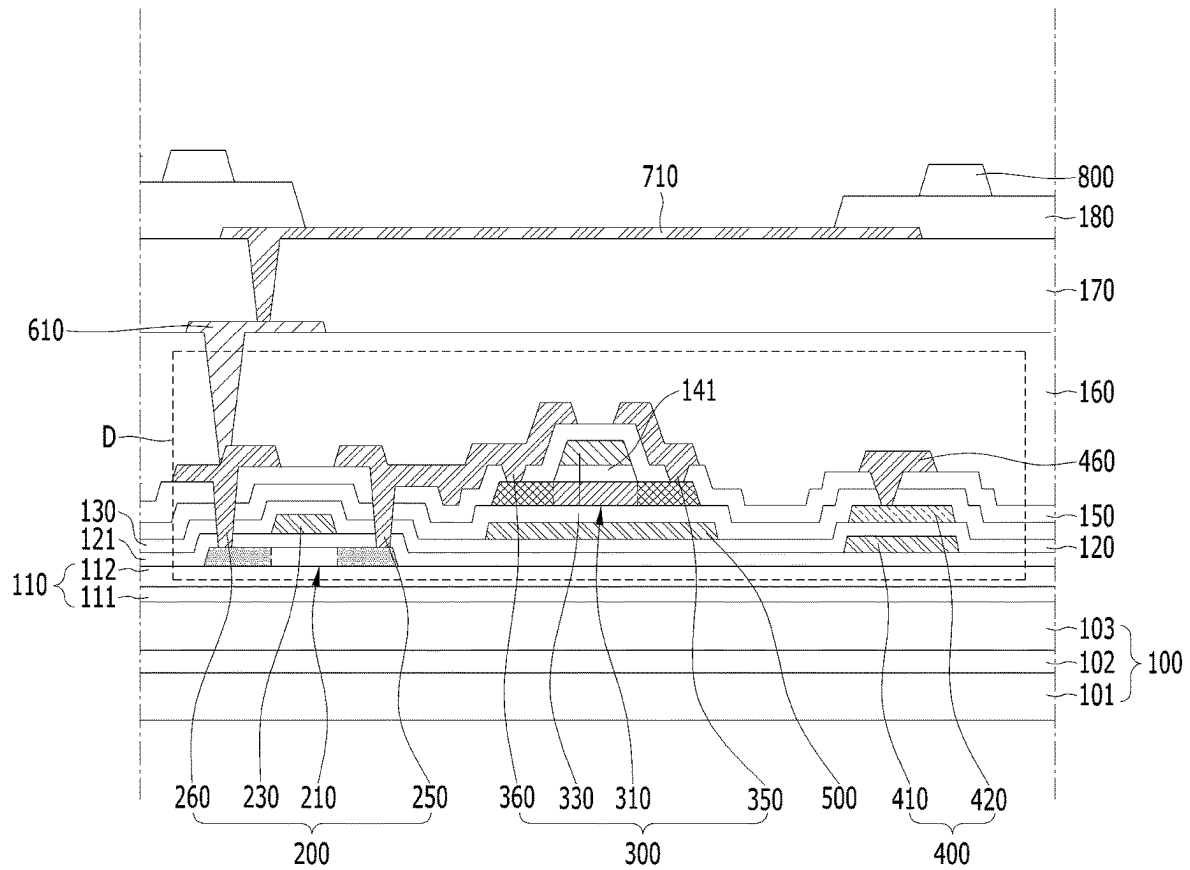


FIG. 13B

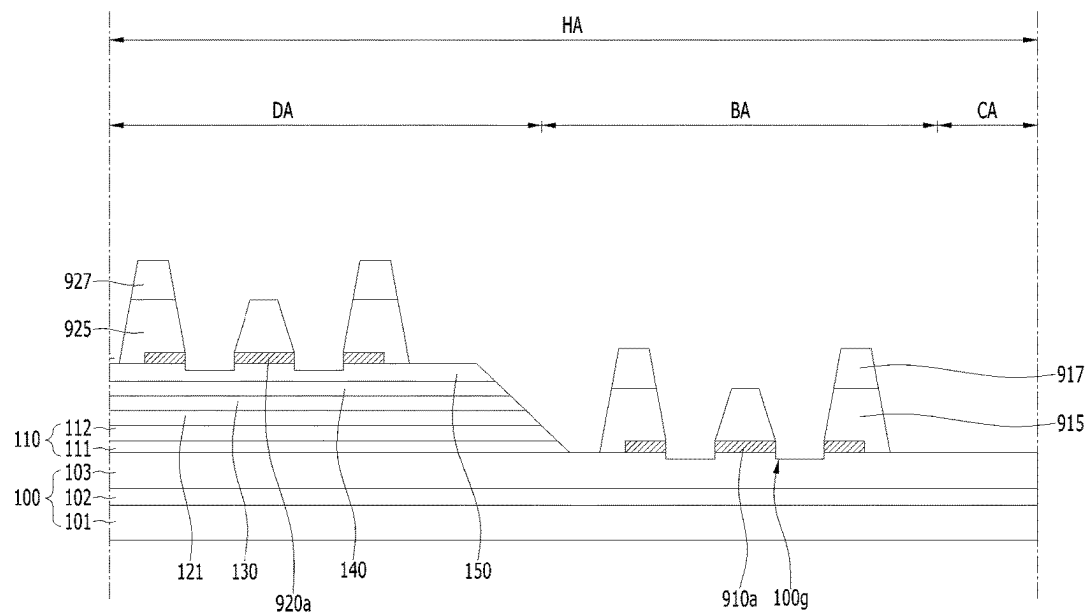

1

DISPLAY APPARATUS HAVING A SUBSTRATE HOLE AND METHOD FOR FORMING THE SAME

CROSS-REFERENCE TO RELATED APPLICATIONS

This application claims the priority benefit of Republic of Korea Patent Application No. 10-2019-0180185, filed on Dec. 31, 2019, which is hereby incorporated by reference as if fully set forth herein.

BACKGROUND

Field

The present disclosure relates to a display apparatus including a substrate hole which penetrates a device substrate.

Discussion of the Related Art

Generally, an electronic appliance, such as a monitor, a TV, a laptop computer and a digital camera, includes a display apparatus to realize an image. For example, the display apparatus may include a light-emitting device. The light-emitting device may emit light displaying a specific color. For example, the light-emitting device may include a light-emitting layer between a first electrode and a second electrode.

The display apparatus may include a substrate hole in which a peripheral appliance such as a camera, a speaker and a sensor is mounted. The substrate hole may penetrate a device substrate supporting the light-emitting device. The light-emitting device may be spaced away from the substrate hole. A separating device may be disposed between the substrate hole and the light-emitting device. The separating device may cut off an organic layer between the substrate hole and the light-emitting device, partially. For example, the separating device may include an under-cut. The under-cut of the separating device may be formed by the difference of etching ratio between silicon oxide and silicon nitride.

However, in the display apparatus, a crack may be formed in an inorganic insulating layer by a process of forming the substrate hole. Thus, in the display apparatus, external moisture may be permeated through the crack of the inorganic insulating layer.

SUMMARY

Accordingly, the present disclosure is directed to a display apparatus that substantially obviates one or more problems due to limitations and disadvantages of the related art.

An object of the present disclosure is to provide a display apparatus capable of preventing the permeation of the external moisture through the crack which occurs in a process of forming the substrate hole.

Additional advantages, objects, and features of the invention will be set forth in part in the description which follows and in part will become apparent to those having ordinary skill in the art upon examination of the following or may be learned from practice of the invention. The objectives and other advantages of the disclosure may be realized and attained by the structure particularly pointed out in the written description and claims hereof as well as the appended drawings.

2

To achieve these objects and other advantages and in accordance with the purpose of the disclosure, as embodied and broadly described herein, there is provided a display apparatus comprising a device substrate. A substrate hole penetrates the device substrate. A light-emitting device is disposed on the device substrate. The light-emitting device is spaced away from the substrate hole. A separating device is disposed between the substrate hole and the light-emitting device. The separating device is in contact with the device substrate.

The device substrate may include a recess groove. The separating device may be disposed adjacent the recess groove.

The separating device may include a metal pattern and an insulating cap. The insulating cap may be disposed on the metal pattern.

The metal pattern may have a smaller width than the insulating cap.

A dam may be disposed between the light-emitting device and the separating device. At least one insulating layer may be disposed between the device substrate and the dam.

The dam may have the same stacked structure as the separating device.

An inclined surface of the insulating layer may have a gentler slope than a side surface of the dam and a side surface of the separating device between the dam and the separating device.

A driving circuit may be disposed between the device substrate and the light-emitting device. A connecting electrode connecting may be disposed between the driving circuit and the light-emitting device. The light-emitting device may be connected to the driving circuit by the connecting electrode. The metal pattern may include the same material as the connecting electrode.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are included to provide a further understanding of the disclosure and are incorporated in and constitute a part of this application, illustrate embodiment(s) of the invention and together with the description serve to explain the principle of the disclosure.

FIG. 1 is a view schematically showing a display apparatus according to an embodiment of the present disclosure.

FIG. 2 is an enlarged view showing a peripheral of a substrate hole in the display apparatus according to an embodiment of the present disclosure.

FIG. 3A is a view showing a cross-section of a pixel in the display apparatus according to an embodiment of the present disclosure.

FIG. 3B is a view showing a cross-section of a peripheral region of the substrate hole in the display apparatus according to an embodiment of the present disclosure.

FIG. 4 is an enlarged view of K in FIG. 3B according to an embodiment of the present disclosure.

FIGS. 5A, 6A, 7A, 8A, 9A, and 10A and FIGS. 5B, 6B, 7B, 8B, 9B, and 10B are views sequentially showing a method of forming the display apparatus according to an embodiment of the present disclosure.

FIGS. 11A and 11B are views showing the display apparatus according to another embodiment of the present disclosure.

FIG. 12 is an enlarged view of P in FIG. 11B according to an embodiment of the present disclosure.

FIGS. 13A and 13B are views sequentially showing a process of forming the display apparatus according to another embodiment of the present disclosure.

DETAILED DESCRIPTION OF THE EMBODIMENTS

Hereinafter, details related to the above objects, technical configurations, and operational effects of the embodiments of the present disclosure will be clearly understood by the following detailed description with reference to the drawings, which illustrate some embodiments of the present disclosure. Here, the embodiments of the present disclosure are provided in order to allow the technical spirit of the present disclosure to be satisfactorily transferred to those skilled in the art, and thus the present disclosure may be embodied in other forms and is not limited to the embodiments described below.

In addition, the same or extremely similar elements may be designated by the same reference numerals throughout the specification, and in the drawings, the lengths and thickness of layers and regions may be exaggerated for convenience. It will be understood that, when a first element is referred to as being “on” a second element, although the first element may be disposed on the second element so as to come into contact with the second element, a third element may be interposed between the first element and the second element.

Here, terms such as, for example, “first” and “second” may be used to distinguish any one element with another element. However, the first element and the second element may be arbitrary named according to the convenience of those skilled in the art without departing the technical spirit of the present invention.

The terms used in the specification of the present invention are merely used in order to describe particular embodiments, and are not intended to limit the scope of the present invention. For example, an element described in the singular form is intended to include a plurality of elements unless the context clearly indicates otherwise. In addition, in the specification of the present invention, it will be further understood that the terms “comprises” and “includes” specify the presence of stated features, integers, steps, operations, elements, components, and/or combinations thereof, but do not preclude the presence or addition of one or more other features, integers, steps, operations, elements, components, and/or combinations.

Unless otherwise defined, all terms (including technical and scientific terms) used herein have the same meaning as commonly understood by one of ordinary skill in the art to which example embodiments belong. It will be further understood that terms, such as those defined in commonly used dictionaries, should be interpreted as having a meaning that is consistent with their meaning in the context of the relevant art and should not be interpreted in an idealized or overly formal sense unless expressly so defined herein.

Embodiment

FIG. 1 is a view schematically showing a display apparatus according to an embodiment of the present disclosure. FIG. 2 is an enlarged view showing a peripheral of a substrate hole in the display apparatus according to the embodiment of the present disclosure. FIG. 3A is a view showing a cross-section of a pixel in the display apparatus according to the embodiment of the present disclosure. FIG. 3B is a view showing a cross-section of a peripheral region

of the substrate hole in the display apparatus according to the embodiment of the present disclosure. FIG. 4 is an enlarged view of K in FIG. 3B according to an embodiment of the present disclosure.

Referring to FIGS. 1 to 4, the display apparatus according to the embodiment of the present disclosure may include a device substrate 100. The device substrate 100 may include an insulating material. For example, the device substrate 100 may include glass or plastic.

Gate lines GL and data lines DL may be disposed on the device substrate 100. The data lines DL may intersect the gate lines GL. For example, the gate lines GL and the data lines DL may define a plurality of pixel regions PA.

Each of the pixel regions PA may realize a specific color. For example, a light-emitting device 700 may be disposed in each pixel region PA. The light-emitting device 700 may emit light displaying a specific color. For example, the light-emitting device 700 may include a first electrode 710, a light-emitting layer 720 and a second electrode 730, which are sequentially stacked.

The first electrode 710 may include a conductive material. The first electrode 710 may include a metal having a relatively high reflectance. For example, the first electrode 710 may include a metal, such as aluminum (Al) and silver (Ag). The first electrode 710 may have a multi-layer structure. For example, the first electrode 710 may have a structure in which a reflective electrode formed of a metal is disposed between transparent electrodes formed of a transparent conductive material such as ITO and IZO.

The light-emitting layer 720 may generate light having luminance corresponding to a voltage difference between the first electrode 710 and the second electrode 730. For example, the light-emitting layer 720 may include an emission material. The emission material may include an organic material, an inorganic material or a hybrid material. For example, the display apparatus according to the embodiment of the present disclosure may be an organic light-emitting display apparatus including the light-emitting layer 720 of an organic material.

The light-emitting layer 720 may have a multi-layer structure. For example, the light-emitting layer 720 may include an emission material layer (EML) 722 disposed between a first organic layer 721 and a second organic layer 723. The first organic layer 721 and the second organic layer 723 may include at least one of a hole injection layer (HIL) and a hole transporting layer (HTL), an electron transporting layer (ETL) and an electron injection layer (EIL). Thus, in the display apparatus according to the embodiment of the present disclosure, the emission efficiency of the light-emitting device 700 may be improved.

The second electrode 730 may include a conductive material. The second electrode 730 may include a material different from the first electrode 710. For example, the second electrode 730 may be a transparent electrode formed of a transparent conductive material, such as ITO and IZO. Thus, in the display apparatus according to the embodiment of the present invention, the light generated from the light-emitting layer 720 of each pixel PA may emit outside through the second electrode 730.

A driving circuit D connected to the light-emitting device 700 may be disposed in each pixel region PA. The driving circuit D may supply a driving current corresponding to a gate signal applied by the gate lines GL and a data signal applied by the data line DL to the light-emitting device 700. For example, the driving circuit D may include a first thin film transistor 200, a second thin film transistor 300 and a storage capacitor 400.

The first thin film transistor **200** may turn on/off the second thin film transistor **300** according to the gate signal. The first thin film transistor **200** may include a first semiconductor pattern **210**, a first gate electrode **230**, a first source electrode **250** and a first drain electrode **260**. The first gate electrode **230** may overlap a portion of the first semiconductor pattern **210**. A first gate insulating layer **121** may be disposed between the first semiconductor pattern **210** and the first gate electrode **230**. The first source electrode **250** and the first drain electrode **260** may be connected to the first semiconductor pattern **210**.

The first semiconductor pattern **210** may be disposed close to the device substrate **100**. The first semiconductor pattern **210** may include a semiconductor material. The first semiconductor pattern **210** may include a poly-silicon. For example, the first semiconductor pattern **210** may include a low-temperature poly silicon (LIPS). The first semiconductor pattern **210** may include a first channel region disposed between a first source region and a first drain region. The first source region and the first drain region may have a higher conductivity than the first channel region. For example, the first source region and the first drain region may have a higher content of conductive impurities than the first channel region.

The first gate insulating layer **121** may be disposed on the first semiconductor pattern **210**. The first gate insulating layer **121** may extend beyond the first semiconductor pattern **210**. For example, a side surface of the first semiconductor pattern **210** may be covered by the first gate insulating layer **121**. The first gate insulating layer **121** may include an insulating material. For example, the first gate insulating layer **121** may include a silicon oxide (SiOx) or silicon nitride (SiNx). The first gate insulating layer **121** may include a material having a high dielectric constant (High-K material). For example, the first gate insulating layer **121** may include hafnium oxide (HfO). The first gate insulating layer **121** may have a multi-layer structure.

The first gate electrode **230** may be disposed on the first gate insulating layer **121**. For example, the first gate electrode **230** may overlap the channel region of the first semiconductor pattern **210**. The first gate electrode **230** may be insulated from the first semiconductor pattern **210** by the first gate insulating layer **121**. The first gate electrode **230** may include a conductive material. For example, the first gate electrode **230** may include a metal, such as aluminum (Al), chromium (Cr), copper (Cu), titanium (Ti), molybdenum (Mo) and tungsten (W). The first gate electrode **230** may be formed of a single layer or a multiple layer.

The first source electrode **250** may be electrically connected to the first source region of the first semiconductor pattern **210**. For example, the first source electrode **250** may be in direct contact with a portion of the first source region. The first source electrode **250** may include a portion overlapping with the first source region. The first source electrode may be insulated from the first gate electrode **230**. For example, a lower interlayer insulating layer **120** may be disposed on the first gate insulating layer **121** and the first gate electrode **230**, and the first source electrode **250** may be disposed on the lower interlayer insulating layer **120**. For example, the lower interlayer insulating layer **120** may include silicon oxide (SiOx). The lower interlayer insulating layer **120** may extend beyond the first semiconductor pattern **210**. For example, a side surface of the first gate electrode **230** may be in direct contact with the lower interlayer insulating layer **120**. The lower interlayer insulating layer **120** may include a first source contact hole partially exposing the first source region of the first semiconductor pattern

210. The first source electrode **250** may be connected to the first source region of the first semiconductor pattern **210** in the first source contact hole.

The first source electrode **250** may include a conductive material. For example, the first source electrode **250** may include a metal, such as aluminum (Al), titanium (Ti), chromium (Cr), molybdenum (Mo), tungsten (W) and copper (Cu) or alloy thereof. The first source electrode **250** may include a material different from the first gate electrode **230**.

The first drain electrode **260** may be electrically connected to the first drain region of the first semiconductor pattern **210**. For example, the first drain electrode **260** may be in direct contact with a portion of the first drain region. The first drain electrode **260** may include a portion overlapping with the first drain region. The first drain electrode **260** may be insulated from the first gate electrode **230**. For example, the first drain electrode **260** may be disposed on the lower interlayer insulating layer **120**. The first drain electrode **260** may be spaced away from the first source electrode **250**. For example, the lower interlayer insulating layer **120** may include a first drain contact hole partially exposing the first drain region. The first drain electrode **260** may be connected to the first drain region in the first drain contact hole.

The first drain electrode **260** may include a conductive material. For example, the first drain electrode **260** may include a metal, such as aluminum (Al), chromium (Cr), titanium (Ti), molybdenum (Mo), tungsten (W) and copper (Cu), or alloy thereof. The first drain electrode **260** may be formed of a single layer or a multiple layer. The first drain electrode **260** may include the same material as the first source electrode **250**. The first drain electrode **260** may include a material different from the first gate electrode **230**.

The second thin film transistor **300** may generate a driving current corresponding to the data signal. The second thin film transistor **300** may include a second semiconductor pattern **310**, a second gate electrode **330**, a second source electrode **350** and a second drain electrode **360**. The second gate electrode **330** may overlap a portion of the second semiconductor pattern **310**. A second gate insulating layer **141** may be disposed between the second semiconductor pattern **310** and the second gate electrode **330**. The second source electrode **350** and the second drain electrode **360** may be connected to the second semiconductor pattern **310**.

The second semiconductor pattern **310** may include a material different from the first semiconductor pattern **210**. The second semiconductor pattern **310** may be an oxide semiconductor. For example, the second semiconductor pattern **310** may include a metal oxide, such as IGZO.

The second semiconductor pattern **310** may be disposed on a layer different from the first semiconductor pattern **210**. For example, an intermediate buffer layer **140** may be disposed between the first semiconductor pattern **210** and the second semiconductor pattern **310**. The first semiconductor pattern **210** may be disposed between the device substrate **100** and the intermediate buffer layer **140**. The second semiconductor pattern **310** may be disposed on the intermediate buffer layer **140**.

The intermediate buffer layer **140** may include silicon nitride (SiNx) or silicon oxide (SiOx). Referring to FIG. 3A, the intermediate buffer layer **140** is illustrated as a single layer, but is not limited thereto. For example, the intermediate buffer layer **140** may be formed of a multiple layer in which a layer including silicon nitride (SiNx) and a layer including silicon oxide (SiOx) are stacked.

The second semiconductor pattern **310** may have the same configuration as the first semiconductor pattern **210**. For

example, the second semiconductor pattern **310** may include a second channel region disposed between a second source region and a second drain region. An electrical conductivity of the second source region and an electrical conductivity of the second drain region may be higher than an electrical conductivity of the second channel region. For example, the second source region and the second drain region may be a conductorized region.

The second gate insulating layer **141** may be disposed on the second semiconductor pattern **310**. For example, the second gate insulating layer **141** may overlap the second channel region of the second semiconductor pattern **310**. The second source region and the second drain region of the second semiconductor pattern **310** may be disposed outside the second gate insulating layer **141**. The second gate insulating layer **141** may include an insulating material. For example, the second gate insulating layer **320** may include silicon oxide (SiOx) or silicon nitride (SiNx). The second gate insulating layer **141** may include a material having a high dielectric constant (High-K material). For example, the second gate insulating layer **141** may include hafnium oxide (HfO). The second gate insulating layer **141** may have a multi-layer structure. The second gate insulating layer **141** may have the same stacked structure as the first gate insulating layer **121**.

The second gate electrode **330** may be disposed on the second gate insulating layer **141**. The second gate electrode **330** may overlap the second channel region of the second semiconductor pattern **310**. The second gate electrode **330** may be insulated from the second semiconductor pattern **310** by the second gate insulating layer **141**. The second channel region of the second semiconductor pattern **310** may have an electrical conductivity corresponding to a voltage applied to the second gate electrode **330**. For example, the second channel region of the second semiconductor pattern **310** may be a semiconductor region.

The second gate electrode **330** may include a conductive material. For example, the second gate electrode **330** may include a metal, such as aluminum (Al), chromium (Cr), titanium (Ti), molybdenum (Mo), tungsten (W) and copper (Cu). The second gate electrode **330** may have a single layer or a multiple layer. The second gate electrode **330** may include the same material as the first gate electrode **230**.

The second source electrode **350** may be electrically connected to the second source region of the second semiconductor pattern **310**. For example, the second source electrode **350** may be in direct contact with a portion of the second source region. The second source electrode **350** may be insulated from the second gate electrode **330**. For example an upper interlayer insulating layer **150** may be disposed on the second semiconductor pattern **310** and the second gate electrode **330**, and the second source electrode **350** may be disposed on the upper interlayer insulating layer **150**. The upper interlayer insulating layer **150** may include an insulating material. For example, the upper interlayer insulating layer **150** may include silicon oxide (SiOx). The upper interlayer insulating layer **150** may extend beyond the second semiconductor pattern **310**. For example, a side surface of the second gate electrode **330** may be in direct contact with the upper interlayer insulating layer **150**. The upper interlayer insulating layer **150** may include a second source contact hole partially exposing the second source region of the second semiconductor pattern **310**. The second source electrode **350** may be connected to the second source region of the second semiconductor pattern **310** in the second source contact hole.

The upper interlayer insulating layer **150** may include silicon nitride (SiNx) or silicon oxide (SiOx). Referring to FIG. 3A, the upper interlayer insulating layer **150** is illustrated as a single layer, but is not limited thereto. For example, the upper interlayer insulating layer **150** may have a multi-layer structure in which a layer formed of silicon nitride (SiNx) and a layer formed of silicon oxide (SiOx) are stacked.

The second source electrode **350** may include a conductive material. For example, the second source electrode **350** may include a metal, such as aluminum (Al), chromium (Cr), titanium (Ti), molybdenum (Mo), tungsten (W) and copper (Cu). The second source electrode **350** may have a single layer or a multiple layer. The second source electrode **350** may include the same material as the first source electrode **250**.

The second drain electrode **360** may be electrically connected to the second drain region of the second semiconductor pattern **310**. For example, the second drain electrode **360** may be in direct contact with a portion of the second drain region. The second drain electrode **360** may be insulated from the second gate electrode **330**. For example, the second drain electrode **360** may be disposed on the upper interlayer insulating layer **150**. The upper interlayer insulating layer **150** may include a second drain contact hole partially exposing the second drain region of the second semiconductor pattern **310**. The second drain electrode **360** may be connected to the second drain region of the second semiconductor pattern **310** in the second drain contact hole.

The second drain electrode **360** may include a conductive material. For example, the second drain electrode **360** may include a metal, such as aluminum (Al), chromium (Cr), titanium (Ti), molybdenum (Mo), tungsten (W) and copper (Cu). The second drain electrode **360** may have a single layer or a multiple layer. The second drain electrode **360** may include the same material as the second source electrode **350**. The second drain electrode **360** may include a material different from the second gate electrode **330**.

The storage capacitor **400** may be formed by a process of forming the first thin film transistor **200** and the second thin film transistor **300**. For example, the storage capacitor **400** may include a first storage electrode **410** disposed on the same layer as the first gate electrode **230**, and a second storage electrode **420** above the first storage electrode **410**.

The first storage electrode **410** may include a conductive material. The first storage electrode **410** may include a metal, such as aluminum (Al), chromium (Cr), titanium (Ti), molybdenum (Mo), tungsten (W) and copper (Cu). The first storage electrode **410** may have a single layer or a multiple layer. The first storage electrode **410** may include the same material as the first gate electrode **230**.

The second storage electrode **420** may include a conductive material. The second storage electrode **420** may include a metal, such as aluminum (Al), chromium (Cr), titanium (Ti), molybdenum (Mo), tungsten (W) and copper (Cu). The second storage electrode **420** may have a single layer or a multiple layer. The lower interlayer insulating layer **120** may extend between the first storage electrode **410** and the second storage electrode **420**. The second storage electrode **420** may be disposed on the lower interlayer insulating layer **120**. The first source electrode **250** and the first drain electrode **260** may be disposed a layer different from the second storage electrode **420**. For example, an intermediate interlayer insulating layer **130** may be disposed on the second storage electrode **420**, and the lower interlayer insulating layer **120** and the intermediate interlayer insulating layer **130** may be stacked between the first gate electrode

230 and the first source electrodes 250, and between the first gate electrode 230 and the first drain electrode 260. The second storage electrode 420 may include a material different from the first source electrode 250 and the first drain electrode 260.

The intermediate interlayer insulating layer 130 may include an insulating material. For example, the intermediate interlayer insulating layer 130 may include silicon oxide (SiOx) and/or silicon nitride (SiNx). The intermediate interlayer insulating layer 130 may have a single layer or a multiple layer. For example, the intermediate interlayer insulating layer 130 may have a multi-layer structure in which an insulating layer formed of silicon oxide (SiOx) and an insulating layer formed of silicon nitride (SiNx) are stacked.

The second storage electrode 420 may be electrically connected to the second drain electrode 360 of the second thin film transistor 300. For example, a storage connecting electrode 450 penetrating the intermediate interlayer insulating layer 130 may be disposed on the intermediate interlayer insulating layer 130. The storage connecting electrode 450 may be disposed on the same layer as the first source electrode 250 and the first drain electrode 260. For example, the storage connecting electrode 450 may include the same material as the first source electrode 250 and the first drain electrode 260. The second drain electrode 360 may be connected to the storage connecting electrode 450 by penetrating the intermediate buffer layer 140 and the upper interlayer insulating layer 150.

A light-blocking electrode 500 may be disposed between the lower interlayer insulating layer 120 and the intermediate interlayer insulating layer 130. The light-blocking electrode 500 may prevent the characteristics change of the second semiconductor pattern 310 due to the external light. For example, the light-blocking electrode 500 may include a metal. The light-blocking electrode 500 may include the same material as the second storage electrode 420. For example, the light-blocking electrode 500 may be disposed on the same layer as the second storage electrode 420.

A device buffer layer 110 may be disposed between the device substrate 100 and the driving circuit D of each pixel region PA. The device buffer layer 110 may prevent pollution from the device substrate 100 during a process of forming the driving circuits D. For example, the device buffer layer 110 may extend between the device substrate 100 and the first semiconductor pattern 210 of each pixel region PA. The device buffer layer 110 may include an insulating material. For example, the device buffer layer 110 may include silicon oxide (SiOx) and/or silicon nitride (SiNx). The device buffer layer 110 may have a multi-layer structure. For example, the device buffer layer 110 may have a stacked structure of a first buffer layer 111 and a second buffer layer 112 including a material different from the first buffer layer 111.

A first over-coat layer 160 and a second over-coat layer 170 may be sequentially stacked between the driving circuit D and the light-emitting device 700 of each pixel region PA. The first over-coat layer 160 may remove a thickness difference due to the driving circuit D of each pixel region PA. The second over-coat layer 170 may be disposed on the first over-coat layer 160. A surface of the second over-coat layer 170 toward the light-emitting device 700 of each pixel region PA may be a flat surface. The first over-coat layer 160 and the second over-coat layer 170 may include an insulating material. The first over-coat layer 160 and the second over-coat layer 170 may include a material different from the upper interlayer insulating layer 150. For example, the first

over-coat layer 160 and the second over-coat layer 170 may include an organic insulating material. The second over-coat layer 170 may include a material different from the first over-coat layer 160, but is not limited thereto.

The light-emitting device 700 of each pixel region PA may be electrically connected to the second thin film transistor 300 of the corresponding pixel region PA. For example, the first electrode 710 of each pixel region PA may be electrically connected to the corresponding second drain electrode 360 by penetrating the first over-coat layer 160 and the second over-coat layer 170. The first electrode 710 of each pixel region PA may be electrically connected to the corresponding second drain electrode 360 by an intermediate electrode 610. For example, the intermediate electrode 610 may be disposed between the first over-coat layer 160 and the second over-coat layer 170. The intermediate electrode 610 may be connected to the second drain electrode 360 by penetrating the first over-coat layer 160, and the first electrode 710 may be connected to the intermediate electrode 610 by penetrating the second over-coat layer 170.

The intermediate electrode 610 may include a conductive material. For example, the intermediate electrode 610 may include a metal, such as aluminum (Al), chromium (Cr), titanium (Ti), molybdenum (Mo), tungsten (W) and copper (Cu), or alloy thereof. The intermediate electrode 620 may have a single layer or a multiple layer.

The light-emitting device 700 of each pixel region PA may be independently operated. For example, the first electrode 710 of each pixel region PA may be insulated from the first electrode 710 of adjacent pixel region PA. An edge of each first electrode 710 may be covered by a bank insulating layer 180. The bank insulating layer 180 may be disposed on the second over-coat layer 170. The light-emitting layer 720 and the second electrode 730 of each pixel region PA may be stacked on a portion of the corresponding first electrode 710 exposed by the bank insulating layer 180. The bank insulating layer 180 may include an insulating material. For example, the bank insulating layer 180 may include an organic insulating material. The bank insulating layer 180 may include a material different from the second over-coat layer 170.

At least a portion of the light-emitting layer 720 of each pixel region PA may extend onto the bank insulating layer 180. For example, the first organic layer 721 and the second organic layer 723 of each pixel region PA may be connected to the first organic layer 721 and the second organic layer 723 of adjacent pixel region PA. The emission material layer 722 of each pixel region PA may be spaced away from the emission material layer 722 of adjacent pixel region PA. For example, the emission material layer 722 of each pixel region PA may be formed by a deposition process using a fine metal mask (FMM). A spacer 800 may be disposed on the bank insulating layer 180. The spacer 800 may prevent damage of adjacent emission material layer 722 and/or the bank insulating layer 180 due to the fine metal mask. For example, the end of each emission material layer 722 may be disposed on a surface of the bank insulating layer 180 which is disposed outside the spacer 800. The spacer 800 may include an insulating material.

The second electrode 730 of each pixel region PA may extend onto the bank insulating layer 180. For example, the second electrode 730 of each pixel region PA may be connected to the second electrode 730 of adjacent pixel region PA.

A substrate hole CH may be formed in the device substrate 100. The substrate hole CH may penetrate the device substrate 100. The substrate hole CH may be disposed

11

among the pixel regions PA. For example, the substrate hole CH may be formed among the light-emitting devices 700. The device substrate 100 may include a hole peripheral region HA including a region in which the substrate hole CH is formed. The light-emitting devices 700 may be disposed outside the hole peripheral region HA. The gate lines GL and the data lines DL may be bypassed along an edge of the substrate hole CH in the hole peripheral region HA.

The hole peripheral region HA may include a penetrating region CA in which the substrate hole CH is formed, a separating region BA surrounding the penetrating region CA, and a dam region DA disposed outside the separating region BA. The separating region BA may be disposed between the penetrating region CA and the dam region DA. For example, the separating region BA may be disposed between the substrate hole CH and the light-emitting devices 700.

A separating device 911, 912 and 913 may be disposed in the separating region BA. The separating device 911, 912 and 913 may be in direct contact with the device substrate 100. For example, an insulating layer formed in the separating region BA may be removed. Thus, in the display apparatus according to the embodiment of the present disclosure, a crack which occurs in a process of forming the substrate hole CH may be blocked in the separating region BA. Therefore, in the display apparatus according to the embodiment of the present disclosure, the permeation of moisture due to the process of forming the substrate hole CH may be prevented.

The separating device 911, 912 and 913 may have a structure in which a metal pattern 912m and an insulating cap 912c are stacked. The metal pattern 912m may have a smaller width than the insulating cap 912c. For example, an under-cut UC may be formed between the device substrate 100 and the insulating cap 912c. Thus, in the display apparatus according to the embodiment of the present disclosure, the organic and/or inorganic layer deposited after the formation of the separating device 911, 912 and 913 may be separated by the separating device 911, 912 and 913. For example, the first organic layer 721, the second organic layer 723 and the second electrode 730 may be partially cut off by the separating device 911, 912 and 913.

The separating device 911, 912 and 913 may have various shapes. For example, at least one separating device 912 may have a shape in which the under-cut is formed at a left lower end and a right lower end of the insulating cap 912c. And, at least one separating device 911 and 913 may have a shape in which the insulating cap extends beyond one side of the metal pattern. Thus, the display apparatus according to the embodiment of the present disclosure may effectively block the permeation of the external moisture using the separating device 911, 912 and 913 having various shapes.

The metal pattern 912m may include the same material as the intermediate electrode 610. For example, the metal pattern 912m may have the same stacked structure as the intermediate electrode 610.

A dam 921, 922 and 923 may be disposed in the dam region DA. At least one insulating layer 121, 130, 140 and 150 may be stacked between the device substrate 100 and the dam 921, 922 and 923. The dam 921, 922 and 923 may have the same structure as the separating device 911, 912 and 913. For example, at least one dam 922 may have a shape in which a metal pattern and an insulating cap are sequentially stacked, and an under-cut is formed at a left lower end and a right lower end of the insulating cap. And, at least one dam 921 and 923 may have a shape in which a metal pattern and an insulating cap are sequentially stacked,

12

and the insulating cap extends beyond one side of the metal pattern. Thus, the display apparatus according to the embodiment of the present disclosure may effectively block the permeation of the external moisture using the separating device 911, 912 and 913, and the dam 921, 922 and 923 which have various shapes.

FIGS. 5A to 10A and 5B to 10B are views sequentially showing a method of forming the display apparatus according to the embodiment of the present disclosure.

A method of forming the display device according to the embodiment of the present disclosure will be described with reference to FIGS. 3A, 3B, 5A to 10A and 5B to 10B. First, as shown in FIGS. 5A and 5B, the method of forming the display apparatus according to the embodiment of the present disclosure may include a step of forming a driving circuit D on each pixel region PA of the device substrate 100, a step of forming the first over-coat layer 160 covering the driving circuits D, and a step of removing an insulating layer which is disposed on the separating region BA and the penetrating region CA.

The step of removing the insulating layer in the separating region BA and the penetrating region CA may be performed relatively gently between the dam region DA and the separating region BA due to a difference in density. For example, insulating layers 121, 130, 140 and 150 stacked on the dam region DA may include a side surface toward the penetrating region CA, and the side surface of the insulating layers 121, 130, 140 and 150 toward the penetrating region CA may have a gentle inclination.

As shown in FIGS. 6A and 6B, the method of forming the display apparatus according to the embodiment of the present disclosure may include a step of forming the intermediate electrode 610 on the first over-coat layer 160, a step of forming a first preliminary pattern 910 on the separating region BA, and a step of forming a second preliminary pattern 920 on the dam region DA.

The first preliminary pattern 910 and the second preliminary pattern 920 may be formed simultaneously with the intermediate electrode 610. For example, a step of forming the intermediate electrode 610, the first preliminary pattern 910 and the second preliminary pattern 920 may include a step of forming a conductive material layer on the first over-coat layer 160, and a step of patterning the conductive material layer. Thus, in the method of forming the display apparatus according to the embodiment of the present invention, the intermediate electrode 610, the first preliminary pattern 910 and the second preliminary pattern 920 may be formed of the same material.

As shown in FIGS. 7A and 7B, the method of forming the display apparatus according to the embodiment of the present disclosure may include a step of forming the second over-coat layer 170 on the intermediate electrode 610, the first preliminary pattern 910 and the second preliminary pattern 920, a step of forming a first preliminary cap 915 on the first preliminary pattern 910, a step of forming a second preliminary cap 925 on the second preliminary pattern 920, and a step of forming the first electrode 710 connected to the intermediate electrode 610 on the second over-coat layer 170.

The first preliminary cap 915 and the second preliminary cap 925 may be formed by using the second over-coat layer 170. For example, the step of forming the first preliminary cap 915 and the second preliminary cap 925 may include a step of partially etching the second over-coat layer 170 on the separating region BA and the dam region DA. The second preliminary cap 925 may be formed of the same material as the first preliminary cap 915.

13

The first preliminary cap **915** may partially expose the first preliminary pattern **910**. The second preliminary cap **925** may partially expose the second preliminary pattern **920**. For example, the location of the first preliminary cap **915** based on the first preliminary pattern **910** may correspond to the location of the second preliminary cap **925** based on the second preliminary pattern **920**.

As shown in FIGS. **8A** and **8B**, the method of forming the display apparatus according to the embodiment of the present disclosure may include a step of forming the bank insulating layer **180**, the spacer **800**, a first upper cap **917** and a second upper cap **927** on the device substrate **100** in which the first electrode **710** of each pixel region PA is formed.

The bank insulating layer **180** may cover the edge of the first electrode **710** of each pixel region PA. The spacer **800** may be formed on the bank insulating layer **180**. The first upper cap **917** may be formed on the first preliminary cap **915**. The second upper cap **927** may be formed on the second preliminary cap **925**.

The first upper cap **917** and the second upper cap **927** may be formed by using a process of forming the bank insulating layer **180** and the spacer **800**. For example, the step of forming first upper cap **917** and the second upper cap **927** may include a step of stacking insulating layers for forming the bank insulating layer **180** and the spacer **800**, and a step of patterning the insulating layers. The second upper cap **927** may be formed of the same material as the first upper cap **917**. For example, the first upper cap **917** and the second upper cap **927** may be formed simultaneously with the bank insulating layer **180** and/or the spacer **800**.

As shown in FIGS. **9A** and **9B**, the method of forming the display apparatus according to the embodiment of the present disclosure may include a step of removing a portion of the first preliminary pattern **910** exposed by the first preliminary cap **915** and the first upper cap **917**, and a step of removing a portion of the second preliminary pattern **920** exposed by the second preliminary cap **925** and the second upper cap **927**.

The step of removing a portion of the second preliminary pattern **920** may be performed simultaneously with the step of removing a portion of the first preliminary pattern **910**. For example, the step of removing a portion of the second preliminary pattern **920** and a portion of the first preliminary pattern **910** may include a step of etching the first preliminary pattern **910** and the second preliminary pattern **920** using the first upper cap **917** and the second upper cap **927** as an etching mask. A first preliminary metal pattern **910a** overlapping with the first preliminary cap **915** and a second preliminary metal pattern **920a** overlapping with the second preliminary cap **925** may be formed by the process of etching the first preliminary pattern **910** and the second preliminary pattern **920**.

As shown in FIGS. **10A** and **10B**, the method of forming the display apparatus according to the display apparatus according to the embodiment of the present disclosure may include a step of forming the separating device **911**, **912** and **913** on the separating region BA and the dam **921**, **922** and **923** on the dam region DA.

The step of forming the separating device **911**, **912** and **913**, and the dam **921**, **922** and **923** may include a step of reducing a width of the first preliminary metal pattern **910a** and the second preliminary metal pattern **920a**. Thus, in the display apparatus according to the embodiment of the present disclosure, the separating device **911**, **912** and **913** and the dam **921**, **922** and **923** may include the metal pattern and the insulating cap having a larger width than the metal

14

pattern, which are stacked. That is, in the display apparatus according to the embodiment of the present disclosure, each of the separating device **911**, **912** and **913** and the dam **921**, **922** and **923** may include the under-cut due to a difference in width.

As shown in FIGS. **11A** and **11B**, the method of forming the display apparatus according to the embodiment of the present disclosure may include a step of forming the light-emitting layer **720** and the second electrode **730** of each light-emitting device **700** on the device substrate **100** in which the separating device **911**, **912** and **913** and the dam **921**, **922** and **923** are formed, and a step of forming the substrate hole CH in the penetrating region CA.

Accordingly, in the display apparatus according to the embodiment of the present disclosure and the method of forming the same, the insulating layers stacked on the separating region BA between the penetrating region CA in which the substrate hole CH is formed, and the pixel regions PA may be completely removed, so that the separating device **911**, **912** and **913** formed on the separating region BA by a subsequent process may be in contact with the device substrate **100**. Thus, in the display apparatus according to the embodiment of the present disclosure and the method of forming the same, the crack which occurs in the inorganic insulating layer by a process of forming the substrate hole may not propagate to the pixel regions PA. Thereby, in the display apparatus according to the embodiment of the present disclosure and the method of forming the same, the permeation of the external moisture due to a process of forming the substrate hole may be blocked, and the damage of the light-emitting devices due to the external moisture may be prevented.

And, in the display apparatus according to the embodiment of the present disclosure and the method of forming the same, the separating device **911**, **912** and **913** may be formed simultaneously with the dam **921**, **922** and **923**. Therefore, in the display apparatus according to the embodiment of the present disclosure and the method of forming the same, process efficiency may be improved.

The display apparatus according to the embodiment of the present disclosure is described that the device substrate **100** is a single layer. However, in the display apparatus according to another embodiment of the present disclosure, the device substrate **100** may have a multi-layer structure. For example, in the display apparatus according to another embodiment of the present disclosure, the device substrate **100** may have a structure in which an insulating layer **102** may be disposed between the first substrate layer **101** and the second substrate layer **103**, as shown in FIGS. **11A** and **11B**. The second substrate layer **103** may include the same material as the first substrate layer **101**. For example, the first substrate layer **101** and the second substrate layer **103** may include plastic. The insulating layer **102** may include an insulating material. Thus, in the display apparatus according to another embodiment of the present disclosure, the device substrate **100** may include a recess groove **100g** disposed adjacent the separating device **911**, **912** and **913**.

FIGS. **13A** and **13B** are views sequentially showing a method of forming the display apparatus according to another embodiment of the present disclosure.

As shown in FIGS. **13A** and **13B**, in the method of forming the display apparatus according to another embodiment of the present disclosure, an over-etching may occur in a process of forming the first preliminary metal pattern **910a**. Thus, in the method of forming the display apparatus according to another embodiment of the present disclosure,

15

a portion of the device substrate **100** exposed by the first preliminary cap **915** may be etched, so that the recess groove **100g** may be formed.

The step of forming the first preliminary metal pattern **910a** may be performed simultaneously with the step of forming the second preliminary metal pattern **920a**. For example, a portion of the upper interlayer insulating layer **150** exposed by the second preliminary cap **925** may be over-etched in the step of forming the second preliminary metal pattern **920a**.

That is, the display apparatus according to another embodiment of the present disclosure may include the recess groove **100g** in a portion of the device substrate **100** which is formed by the step of forming the separating device **911**, **912** and **913**. Thus, in the display apparatus according to another embodiment of the present disclosure, the moving path of the external moisture permeated through the substrate hole CH formed in the penetrating hole CA may be increased. Thereby, in the display apparatus according to another embodiment of the present disclosure, the deterioration of the light-emitting devices due to the permeation of the external moisture may be effectively prevented.

In the result, the display apparatus according to the embodiments of the present invention may include the separating device between the substrate hole and the light-emitting devices, wherein the separating device may be in contact with the device substrate. Thus, in the display apparatus according to the embodiments of the present disclosure, the crack which occurs in the inorganic insulating layer in a process of forming the substrate hole may be blocked by the separating device. Thereby, in the display apparatus according to the embodiments of the present disclosure, the reliability of the light-emitting devices may be improved.

What is claimed is:

1. A display apparatus comprising:

a substrate hole penetrating a device substrate;
a light-emitting device on the device substrate, the light-emitting device spaced away from the substrate hole;
a plurality of inorganic insulating layers between the device substrate and the light-emitting device;
a separating device disposed laterally between the plurality of inorganic insulating layers and the substrate hole;
a dam on the plurality of inorganic insulating layers, the dam disposed laterally between the light-emitting device and the separating device, the dam including a first metal pattern and a first insulating cap disposed on the first metal pattern; and

a first over-coat layer between the plurality of inorganic insulating layers and the light-emitting device, wherein the dam, the separating device and the substrate hole are laterally spaced apart from the first over-coat layer, and

a driving circuit a transistor including at least one thin film transistor and an intermediate electrode which electrically connects the light-emitting device to the driving circuit through a first contact hole penetrating the first over-coat layer,

wherein the plurality of inorganic insulating layers includes at least one gate insulating layer of the at least one transistor,

wherein the separating device includes a second metal pattern being in direct contact with the device substrate, and a second insulating cap disposed on the second metal pattern,

wherein a side surface of each of the plurality of inorganic insulating layers toward the separating device has a

16

gentler slope than a side surface of the separating device and a side surface of the dam, such that an angle between a side surface of the plurality of inorganic insulating layers toward the separating device and an upper surface of the device substrate is smaller than an angle between a side surface of the first insulating cap of the dam toward the separating device and the upper surface of the device substrate and an angle between a side surface of the second insulating cap of the separating device toward the dam and the upper surface of the device substrate, and

wherein the first metal pattern and the second metal pattern are patterned from a same layer as the intermediate electrode.

2. The display apparatus according to claim 1, wherein the device substrate includes a recess groove disposed adjacent the separating device, and wherein the separating device is spaced apart from the recess groove of the device substrate.

3. The display apparatus according to claim 2, wherein the recess groove of the device substrate has a thickness thinner than a portion of the device substrate overlapping with the separating device.

4. The display apparatus according to claim 1, wherein the first metal pattern overlaps with the first insulating cap and has a smaller width than the first insulating cap, and

wherein the second metal pattern overlaps with the second insulating cap and has a smaller width than the second insulating cap.

5. The display apparatus according to claim 4, wherein at least one organic layer of the light-emitting device are cut off by the separating device and the dam.

6. The display apparatus according to claim 4, wherein the second metal pattern includes a same material as the first metal pattern, and

wherein the second insulating cap includes a same material as the first insulating cap.

7. The display apparatus according to claim 6, wherein the dam has a same stacked structure as the separating device.

8. The display apparatus according to claim 1, wherein the side surface of the plurality of inorganic insulating layers toward the separating device is disposed between the dam and the separating device.

9. The display apparatus according to claim 1, wherein the first metal pattern is in contact with the plurality of inorganic insulating layers.

10. The display apparatus according to claim 1, further comprising:

second over-coat layer disposed between the first over-coat layer and the light-emitting device; and

a connecting electrode disposed between the first over-coat layer and the second over-coat layer, the connecting electrode connected to the light-emitting device through a contact hole penetrating the second over-coat layer,

wherein the first metal pattern and the second metal pattern include a same material as the connecting electrode.

11. The display apparatus according to claim 10, wherein the first insulating cap and the second insulating cap include a same material as the second over-coat layer covering the connecting electrode.

12. The display apparatus according to claim 1, further comprising a first thin film transistor and a second thin film transistor disposed between the device substrate and the first over-coat layer,

17

wherein a second semiconductor pattern of the second thin film transistor is disposed on a different layer from a first semiconductor pattern of the first thin film transistor, and

wherein the second semiconductor pattern includes a 5 different material from the first semiconductor pattern.

13. The display apparatus according to claim **12**, wherein the first semiconductor pattern includes a low-temperature poly silicon (LTPS), and

wherein the second semiconductor pattern includes an 10 oxide semiconductor.

14. The display apparatus according to claim **12**, wherein the plurality of inorganic insulating layers includes a first gate insulating layer, a second gate insulating layer on the first gate insulating layer, and an intermediate interlayer 15 insulating layer,

wherein the first gate insulating layer is disposed between the first semiconductor pattern and a first gate electrode of the first thin film transistor,

18

wherein the second gate insulating layer is disposed between the second semiconductor pattern and a second gate electrode of the second thin film transistor, and wherein both ends of the first gate insulating layer or the second gate insulating layer are disposed on the second semiconductor pattern.

15. The display apparatus according to claim **12**, further comprising a storage capacitor disposed between the device substrate and the first over-coat layer,

wherein the storage capacitor includes a storage electrodes disposed on a same layer as a first gate electrode of the first thin film transistor.

16. The display apparatus according to claim **15**, further comprising a light-blocking electrode disposed between the device substrate and the second semiconductor pattern of the second thin film transistor,

wherein the storage capacitor includes a storage electrodes disposed on a same layer as the light-blocking electrode.

* * * * *