



US 20250281318A1

(19) **United States**

(12) **Patent Application Publication**
Najjar

(10) **Pub. No.: US 2025/0281318 A1**

(43) **Pub. Date: Sep. 11, 2025**

(54) **PENIS ENLARGEMENT DEVICE**

(52) **U.S. Cl.**

CPC *A61F 5/41* (2013.01); *A61F 2005/412* (2013.01)

(71) Applicant: **Baseem Najjar**, Lewes, DE (US)

(72) Inventor: **Baseem Najjar**, Lewes, DE (US)

(21) Appl. No.: **18/671,082**

(22) Filed: **May 22, 2024**

Related U.S. Application Data

(63) Continuation-in-part of application No. 18/595,798, filed on Mar. 5, 2024, now abandoned.

Publication Classification

(51) **Int. Cl.**


A61F 5/41

(2006.01)

(57)

ABSTRACT

According to an aspect of the present invention, there is provided device for enlargement of the penis of a user, comprising: a hook for holding a vacuum cup that attaches to the head of the penis; a bottom semi-circular member; a first hinge arranged on one side of the bottom semi-circular member; a second hinge arranged on the other side of the bottom semi-circular member; a first rod connecting to the first hinge; a second rod connecting to the second hinge; a first swivel on the first rod allowing for the first rod to be interchanged; a second swivel on the second rod allowing for the second rod to be interchanged; a middle bracket; and a top bracket, wherein the middle bracket connects the first rod to the second rod.

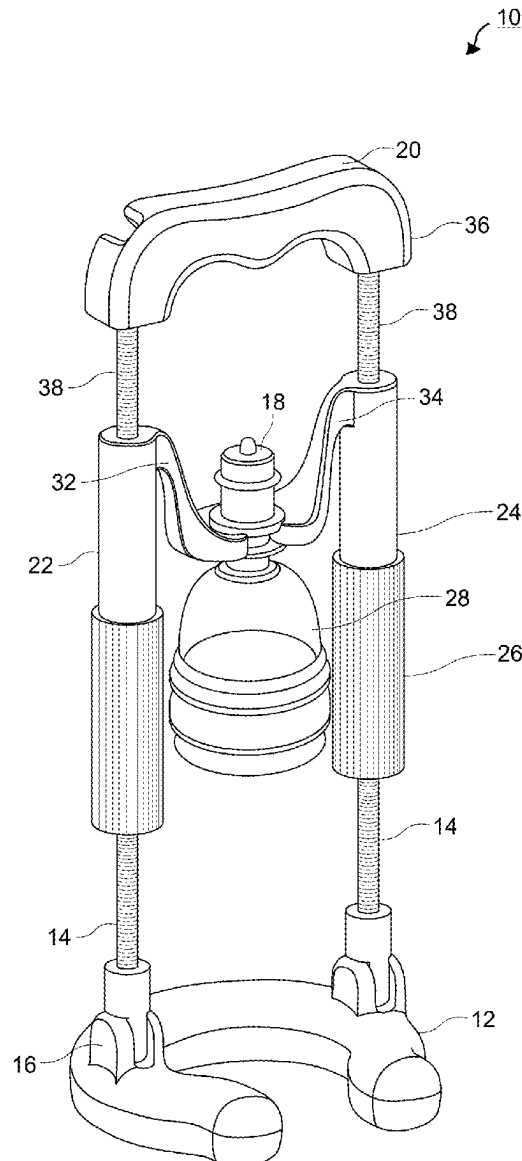

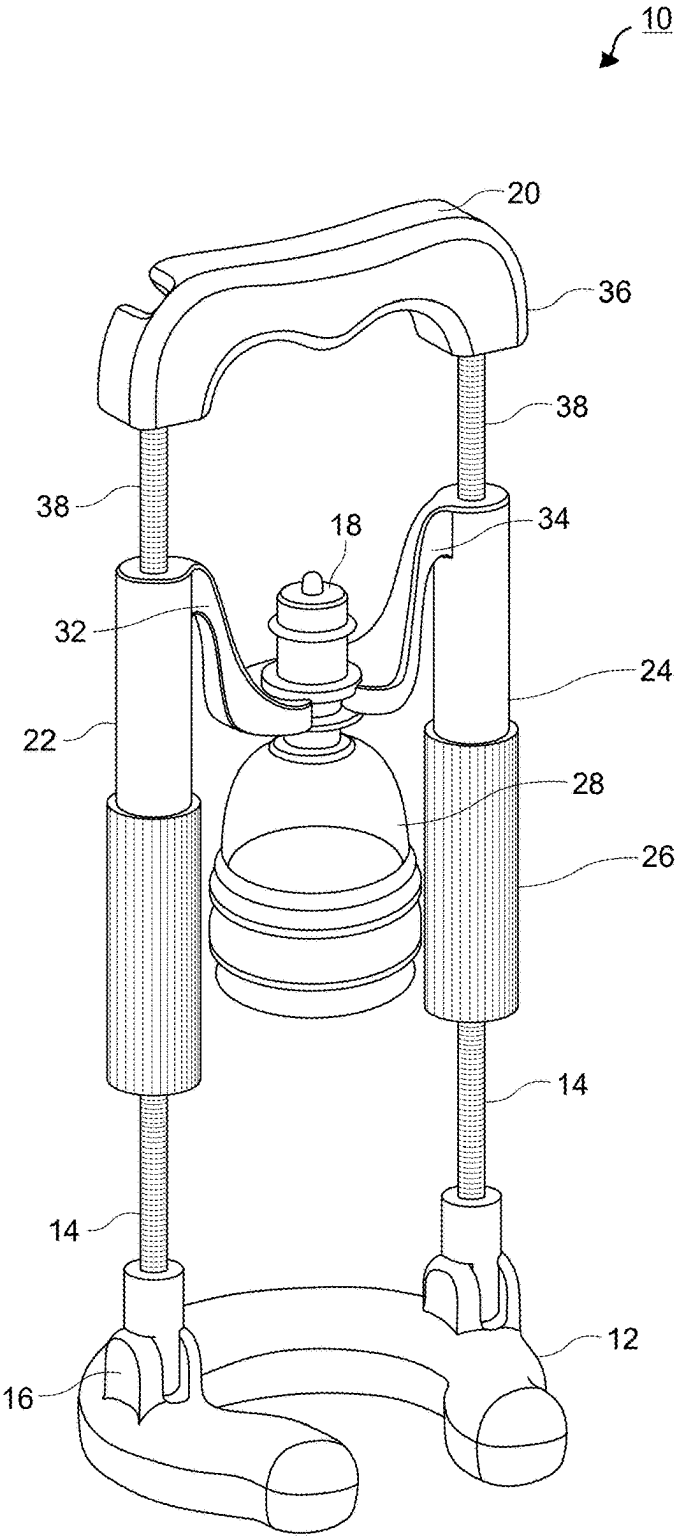


FIG. 1

PENIS ENLARGEMENT DEVICE

BACKGROUND

[0001] Methods and devices for enhancing the penis of a male individual are well-known in the patent literature.

[0002] For example, US20150202109 discloses a penis enlargement device comprising a substantially flat member with a hole and neck adapted to fit over a human penis to be positioned flat against a user's lower abdomen; a ring member also adapted to fit around the base of the penis; a waist strap attached to said flat member adapted to hold the flat member in place; a substantially cylindrical cover attached to said neck adapted to connect to either stretch cords or to a weight container; whereby, weight or force is applied to the base of the penis causing the penis to enlarge over time.

[0003] U.S. Pat. No. 7,802,577 discloses a harness for stretching the penis, includes a belt for encircling the waist of the user, with a fastening mechanism secured to a rear part of the belt. A first tractive means applies tractive forces at the base of the penis of a user of the harness, and is secured to the belt via the fastening mechanism. A second tractive means applies tractive forces at the edge of the head of the penis of a user of the harness, and is also secured to the belt via the fastening mechanism. The first tractive means and the second tractive means apply a stretching force to the penis of the user of the harness.

[0004] U.S. Pat. No. 8,075,473 discloses an extension device for permanent penis enlargement and straightening via long-term elongation, the extension device comprising: a fastening means for application to a penis, the fastening means having an accommodation body, the accommodation body: being dimensionally stable, accommodating a glans penis of the penis over the entire surface of the glans penis when the glans penis is inserted into the extension device, having an inner contour essentially corresponding to a shape of the glans penis, having an opening for allowing insertion of the glans penis, and having an inner surface; a pulling apparatus connected to the fastening means; an elastic tube seal connected to the opening of the accommodation body; and a lubricant located on the inner surface of the accommodation body; wherein the pulling apparatus is formed by: a support, strap, belt or other clothing accessory or piece of clothing, the support, strap, belt or other clothing accessory or piece of clothing being connected to the accommodation body, being held on a body of the user, and being used as a stop, a stationary object, a frame supported on a body of the user, the frame being adjustable in length, or a weight attached to the accommodation body.

[0005] Nonetheless, prior art methods and devices suffer from significant drawbacks, including physical danger and inefficiency in bringing about the desired penile enlargement.

SUMMARY OF INVENTION

[0006] Therefore, the present invention provides an improved device for enlarging the penis of a user.

[0007] According to an aspect of the present invention, there is provided device for enlargement of the penis of a user, comprising: a hook for holding a vacuum cup that attaches to the head of the penis; a bottom semi-circular member; a first hinge arranged on one side of the bottom semi-circular member; a second hinge arranged on the other

side of the bottom semi-circular member; a first rod connecting to the first hinge; a second rod connecting to the second hinge; a first swivel on the first rod allowing for the first rod to be interchanged; a second swivel on the second rod allowing for the second rod to be interchanged; a middle bracket; and a top bracket, wherein the middle bracket connects the first rod to the second rod; and wherein the top bracket also connects the first rod to the second rod to stabilize the device; and wherein the first and second rods are configured to allow changing the length of the device and amount of stretching force on the penis of the user.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008] FIG. 1 illustrates a penis enlargement device according to an embodiment of the present invention.

DETAILED DESCRIPTION

[0009] Embodiments illustrative of the present invention will be described with reference to the attached drawing.

[0010] FIG. 1 illustrates a penis enlargement device according to an embodiment of the present invention.

[0011] Device 10 refers to the penis enlargement device according to an embodiment of the present invention as a whole.

[0012] Bottom semi-circular member 12 is a silicone padded base that sits on the base of the penis.

[0013] Rod 14 is one of the two rods on either side that allow for changing the length of the device and the stretching force applied to the penis of a user of the device.

[0014] Hinge 16 is one of two hinges on either side that allow, by bending rod 14 and its counterpart rod on the other side, for the device to bend 180 degrees to stretch the penis of a user of the device at any angle.

[0015] Top bracket 20 helps stabilize rod 14 and its counterpart rod on the other side to prevent unwanted twisting of the device.

[0016] Extension 38 connects rod 14 and its counterpart. A user can gauge the tension on the penis by a meter on middle bracket 22. The number that is visible is the current tension of the device.

[0017] Cup holder and adapter ring 18 allows for the device to be used with a penis extender cup.

[0018] A penis extender cup can be used with the device of embodiments to maximize the penis enlargement experience by a user of the device.

[0019] A cup has teeth and it sits on a bracket that also has teeth. That allows it to twist and lock clockwise. Basically the cup can be pressed up and rotates and it will lock in place with springs

[0020] The bracket allows for easy swap of metal rods, so length is adjusted to each user.

[0021] And cups can have a rubber sleeve on it 2 mm thick, which rolls down to seal the vacuum. The cup can be vacuumed with a small pump.

[0022] Cups 28 attach to the head of the penis when operation of the device is active.

[0023] Swivel 26 allows for rods to be interchanged.

[0024] Attachment piece 32 and its counterpart 34 on the other side can hold the adapter ring 18.

[0025] Insulator 22 and insulator 24 cover the respective rods and connect them to the swivel 26.

[0026] Elbow 36 connects to top bracket 20.

[0027] The embodiments described above are given merely for example and for the purpose of facilitating the understanding of the present invention and are not intended to limit the interpretation of the present invention. The respective elements and their arrangements, materials, conditions, shapes, sizes, or the like of the embodiment are not limited to the illustrated examples but may be appropriately changed. Further, the constituents described in the embodiment may be partially replaced or combined together.

What is claimed is:

1. A device for enlargement of the penis of a user, comprising:

- a hook for holding a vacuum cup that attaches to the head of the penis;
- a bottom semi-circular member;
- a first hinge arranged on one side of the bottom semi-circular member;

- a second hinge arranged on the other side of the bottom semi-circular member;
- a first rod connecting to the first hinge;
- a second rod connecting to the second hinge;
- a first swivel on the first rod allowing for the first rod to be interchanged;
- a second swivel on the second rod allowing for the second rod to be interchanged;
- a middle bracket; and
- a top bracket,

wherein the middle bracket connects the first rod to the second rod; and

wherein the top bracket also connects the first rod to the second rod to stabilize the device; and

wherein the first and second rods are configured to allow changing the length of the device and amount of stretching force on the penis of the user.

* * * * *