



US012404068B2

(12) **United States Patent**
Mitten et al.

(10) **Patent No.: US 12,404,068 B2**

(45) **Date of Patent: Sep. 2, 2025**

(54) **HINGED LID PACKAGING**

(56) **References Cited**

(71) Applicant: **Altria Client Services LLC**,
Richmond, VA (US)

U.S. PATENT DOCUMENTS

(72) Inventors: **Robert T. Mitten**, Mechanicsville, VA
(US); **Christopher J. Hession**,
Mechanicsville, VA (US)

1,790,370 A 1/1931 Earman
1,864,871 A 6/1932 Straus
(Continued)

FOREIGN PATENT DOCUMENTS

(73) Assignee: **Altria Client Services LLC**,
Richmond, VA (US)

DE 8901535 U1 3/1989
DE 4134567 A1 1/1993
(Continued)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 60 days.

OTHER PUBLICATIONS

(21) Appl. No.: **17/901,091**

International Search Report and the Written Opinion of the Inter-
national Searching Authority issued Apr. 19, 2012 by the Interna-
tional Searching Authority in International Application No. PCT/
US2011/064925.

(22) Filed: **Sep. 1, 2022**

(Continued)

(65) **Prior Publication Data**

US 2023/0009504 A1 Jan. 12, 2023

Primary Examiner — Anthony D Stashick
Assistant Examiner — Symren K Sanghera

(57)

ABSTRACT

Related U.S. Application Data

(60) Continuation of application No. 16/218,918, filed on
Dec. 13, 2018, now Pat. No. 11,434,043, which is a
(Continued)


(51) **Int. Cl.**
B65D 5/66 (2006.01)
B65D 5/42 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **B65D 5/662** (2013.01); **B65D 5/4266**
(2013.01); **B65D 5/5045** (2013.01); **B65D**
5/543 (2013.01); **B65D 85/1045** (2013.01)

(58) **Field of Classification Search**
CPC B65D 5/662
(Continued)

A pack for consumer goods includes an outer packaging
container and an inner packaging container. The outer pack-
aging container includes a lower box portion with an upper
lid portion hingedly connected thereto. The inner packaging
container includes a dispensing opening with a resealable
closure, a front panel, a back panel, a top panel, a bottom
panel, and opposing side panels; each side panel having an
inner panel and an outer panel, the inner panel having a first
width defining a width of the inner packaging container, and
the outer panel including at least a portion having a second
width defining flanges having a width greater than the first
width. The inner packaging container is insertable within the
outer packaging container such that the flanges extending
from the back panel of the inner packaging container exert
a biasing force on the hinged lid of the outer packaging
container to assure lid closure is maintained.

25 Claims, 6 Drawing Sheets

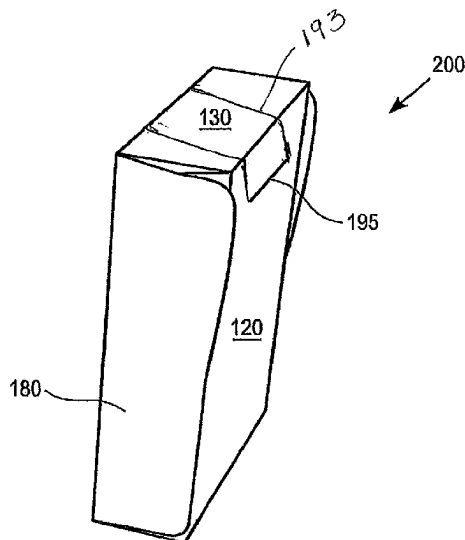

Related U.S. Application Data

division of application No. 15/235,492, filed on Aug. 12, 2016, now Pat. No. 10,173,831, which is a continuation of application No. 15/172,898, filed on Jun. 3, 2016, now Pat. No. 10,059,506, which is a division of application No. 13/325,803, filed on Dec. 14, 2011, now Pat. No. 9,382,062.

- (60) Provisional application No. 61/422,975, filed on Dec. 14, 2010.

- (51) **Int. Cl.**
B65D 5/50 (2006.01)
B65D 5/54 (2006.01)
B65D 85/10 (2006.01)

- (58) **Field of Classification Search**

USPC 220/268
 See application file for complete search history.

- (56) **References Cited**

U.S. PATENT DOCUMENTS

2,031,029 A 2/1936 Breneman
 2,109,100 A 2/1938 Brophy
 2,163,828 A 6/1939 Chalmers
 2,346,407 A 4/1944 Wright
 2,354,239 A 7/1944 Williamson
 2,396,150 A 3/1946 Bonville
 2,445,001 A 7/1948 Pence
 2,922,565 A 1/1960 Roderick et al.
 2,944,555 A 7/1960 Peel et al.
 2,950,043 A 8/1960 Ringler
 2,992,766 A 7/1961 Guyer
 3,093,292 A 6/1963 Ahlbor
 3,099,382 A 7/1963 Talbert
 3,167,238 A 1/1965 Smith
 3,231,170 A 1/1966 Robinson
 3,327,888 A 6/1967 Chalmers et al.
 3,608,812 A 9/1971 Hamilton
 3,708,108 A 1/1973 Rosenberg, Jr.
 3,818,676 A 6/1974 Russell et al.
 3,874,581 A 4/1975 Fox et al.
 3,948,389 A * 4/1976 Molins B65D 77/32
 229/87.13
 3,977,520 A 8/1976 Grimm
 RE29,887 E 1/1979 Fox et al.
 4,196,842 A 4/1980 Focke et al.
 4,216,898 A 8/1980 Davies
 4,251,022 A 2/1981 Focke
 4,267,926 A 5/1981 Toimil
 4,267,958 A 5/1981 Focke et al.
 4,300,676 A * 11/1981 Focke B65D 85/1045
 206/264
 4,303,155 A * 12/1981 Focke B65D 85/1045
 229/87.05
 4,303,191 A 12/1981 Foster et al.
 4,375,260 A 3/1983 Focke et al.
 4,534,463 A 8/1985 Bouchard
 4,586,605 A 5/1986 Newsome
 4,632,299 A 12/1986 Holmberg
 4,646,960 A 3/1987 Challand
 4,732,276 A 3/1988 Knecht
 4,753,384 A 6/1988 Focke et al.
 4,763,779 A * 8/1988 Focke B65D 85/1036
 206/268
 4,771,882 A 9/1988 Lowe et al.
 4,850,482 A 7/1989 Campbell
 4,912,910 A 4/1990 Lowe et al.
 4,948,038 A * 8/1990 Moeller B65D 5/6611
 229/149
 5,080,227 A 1/1992 Focke
 5,121,879 A 6/1992 Focke et al.
 5,158,664 A 10/1992 Colgan et al.
 5,205,432 A 4/1993 Gullan

5,207,322 A 5/1993 Focke et al.
 5,301,804 A 4/1994 Focke et al.
 5,314,062 A 5/1994 Wu et al.
 5,341,925 A 8/1994 Fleenor et al.
 5,358,105 A 10/1994 Boriani et al.
 5,435,440 A 7/1995 Focke et al.
 5,511,658 A 4/1996 Focke et al.
 5,513,752 A 5/1996 Gottlieb
 5,588,281 A 12/1996 Boriani et al.
 5,806,671 A 9/1998 Focke et al.
 5,904,244 A 5/1999 Focke et al.
 6,164,444 A * 12/2000 Bray B65D 75/5838
 206/268
 6,199,687 B1 3/2001 Tambo et al.
 6,244,436 B1 6/2001 Boriani et al.
 6,334,532 B1 1/2002 Tambo et al.
 6,412,630 B2 7/2002 Focke et al.
 6,478,149 B1 11/2002 Parker
 6,505,735 B1 * 1/2003 Parker B65D 85/1045
 206/268
 6,612,429 B2 9/2003 Dennen
 6,742,652 B1 6/2004 Focke et al.
 6,826,889 B2 12/2004 Parker
 6,874,623 B2 4/2005 Bray
 6,889,827 B2 5/2005 Stringfield
 7,048,115 B2 5/2006 Stringfield
 7,370,756 B2 5/2008 Bray et al.
 7,395,924 B2 7/2008 Tambo
 7,438,183 B2 10/2008 Focke et al.
 7,467,711 B2 12/2008 Tambo
 7,500,558 B2 3/2009 Tanbo
 7,506,755 B2 3/2009 Buse et al.
 7,537,113 B2 5/2009 Tambo
 7,617,930 B2 11/2009 Jones et al.
 7,717,260 B2 5/2010 Buse
 7,717,261 B2 5/2010 Pham et al.
 7,770,724 B2 8/2010 Ghini et al.
 7,827,769 B2 11/2010 Bertuzzi et al.
 7,828,143 B2 11/2010 Tosaka et al.
 7,832,556 B2 11/2010 Ghini et al.
 7,857,122 B2 12/2010 Williams et al.
 7,857,128 B2 * 12/2010 Deevi B32B 15/20
 206/274
 7,870,953 B2 1/2011 Tanbo et al.
 8,464,867 B2 6/2013 Holloway et al.
 9,714,134 B2 * 7/2017 Tacchi B65D 5/548
 2003/0047470 A1 * 3/2003 Parker B65D 75/5855
 206/268
 2007/0193896 A1 8/2007 Tanbo et al.
 2008/0093233 A1 * 4/2008 Jones B65D 85/1072
 206/268
 2008/0121538 A1 5/2008 Buse
 2008/0128301 A1 * 6/2008 Bourgoin B65D 85/1054
 206/268
 2008/0230410 A1 * 9/2008 Steven Jones B65D 5/6691
 206/268
 2009/0038965 A1 2/2009 Tanbo et al.
 2009/0152138 A1 6/2009 Ghini et al.
 2009/0321437 A1 12/2009 Polloni et al.
 2010/0084424 A1 4/2010 Gelardi
 2010/0230303 A1 * 9/2010 Buse B65D 75/5838
 206/268
 2010/0252462 A1 10/2010 Marchetti et al.
 2010/0270184 A1 * 10/2010 McKenzie A24F 23/04
 493/51
 2011/0147443 A1 * 6/2011 Igo G09F 23/00
 229/117.34
 2011/0233080 A1 * 9/2011 Bertuzzi B65D 85/10564
 206/268
 2013/0284623 A1 * 10/2013 Groulx B65D 5/6691
 206/268
 2016/0159557 A1 * 6/2016 Kahawaiolaa B65D 75/5838
 206/268

(56)

References Cited

U.S. PATENT DOCUMENTS

2018/0022538 A1* 1/2018 Li Vigni B65D 81/2061
 206/259
 2020/0156843 A1* 5/2020 Bellamah B65D 65/14

FOREIGN PATENT DOCUMENTS

DE 19851201 A1 1/2000
 EP 0007423 A1 2/1980
 EP 0395249 A1 10/1990
 EP 0608909 A1 8/1994
 GB 30067 10/1911
 GB 259165 A 10/1926
 GB 311957 A 5/1929
 GB 449353 A 6/1936
 GB 505544 A 5/1939
 GB 578319 A 6/1946
 GB 613944 A 12/1948
 GB 904632 A 8/1962
 GB 1102398 A 2/1968
 GB 1149296 A 4/1969
 GB 1336081 A 11/1973
 GB 1341587 A 12/1973
 GB 1496352 A 12/1977
 GB 1555748 A 11/1979
 GB 2038765 A 7/1980
 GB 2236737 A 4/1991
 GB 2264287 A 8/1993
 GB 2451180 A 1/2009
 WO WO-98/22367 A1 5/1998
 WO WO-98/49072 A1 11/1998

WO WO-01/94238 A2 12/2001
 WO WO-02/079052 A1 10/2002
 WO WO-2004/063032 A2 7/2004
 WO WO-2004/074123 A1 9/2004
 WO WO-2007/071745 A1 6/2007
 WO WO-2009/004421 A2 1/2009
 WO WO-2010/012370 A1 2/2010

OTHER PUBLICATIONS

International Search Report and the Written Opinion of the International Searching Authority dated Apr. 19, 2012 by the International Searching Authority in International Application No. PCT/US2011/064925.

International Preliminary Report on Patentability dated Jun. 18, 2013 for corresponding International Application No. PCT/US2011/064925.

Japanese Notice of Reasons for Refusal dated Nov. 10, 2015 for corresponding Japanese Application No. 2013-544745, and English-language translation thereof.

Written Opinion dated Mar. 9, 2016 for corresponding Japanese Application No. 2013- 544745, and English-language translation thereof.

Decision of Refusal dated Sep. 6, 2016 for corresponding Japanese Application No. 2013-544745, and English-language translation thereof.

Decision to Grant a Patent dated Feb. 7, 2017 for corresponding Japanese Application No. 2013-544745, and English-language translation thereof.

* cited by examiner

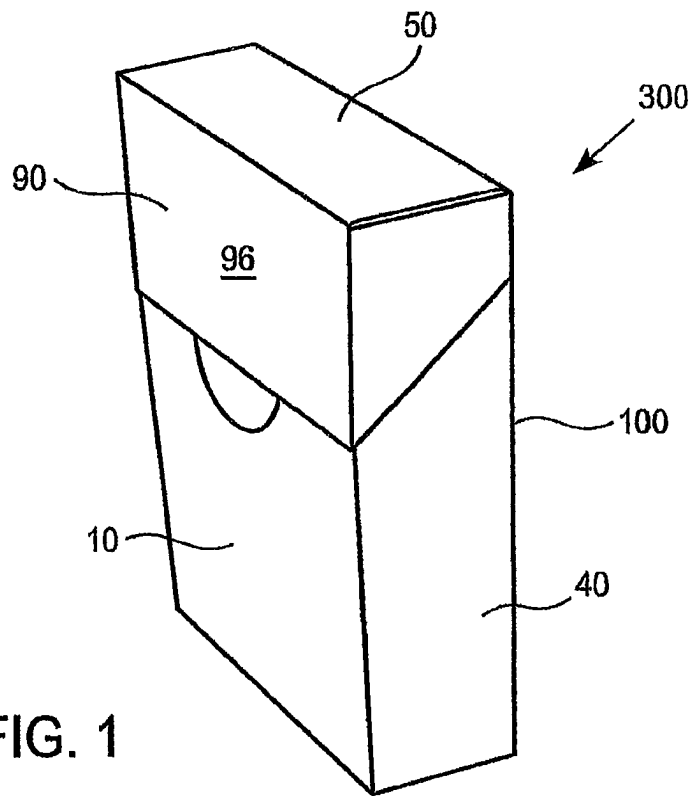


FIG. 1


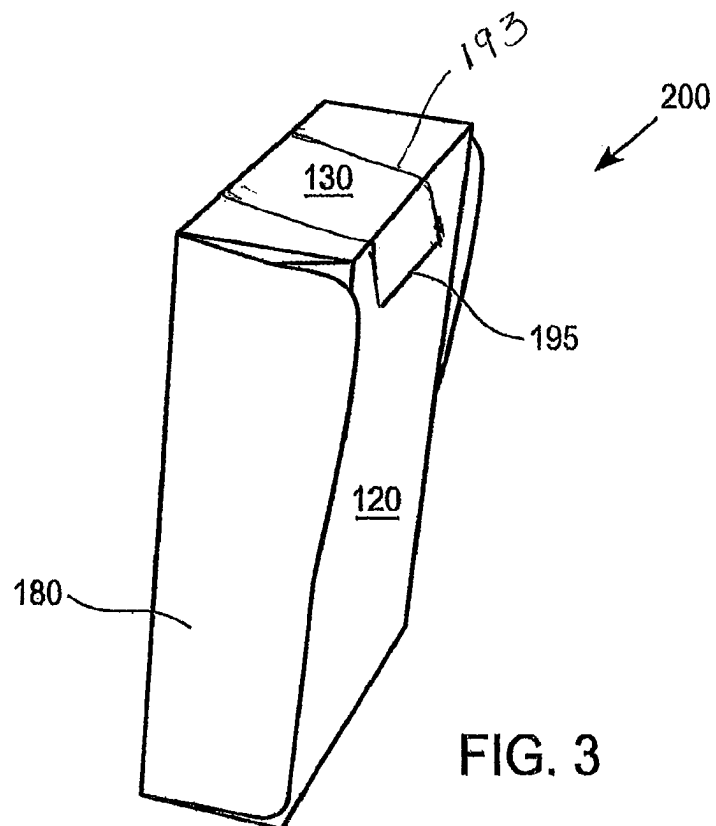


FIG. 3

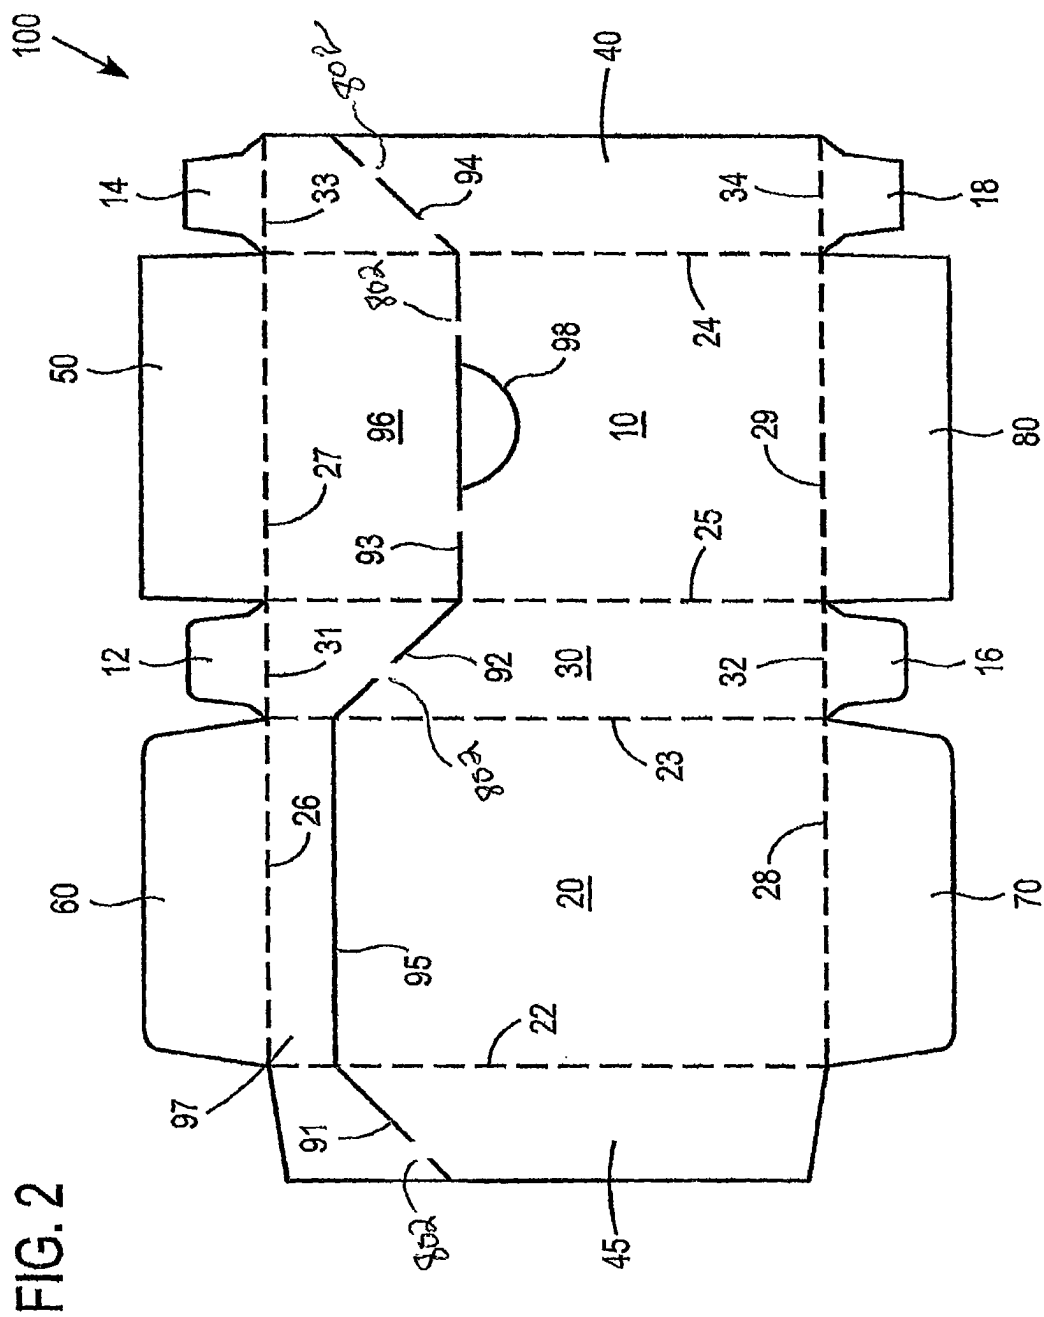

200

FIG. 4

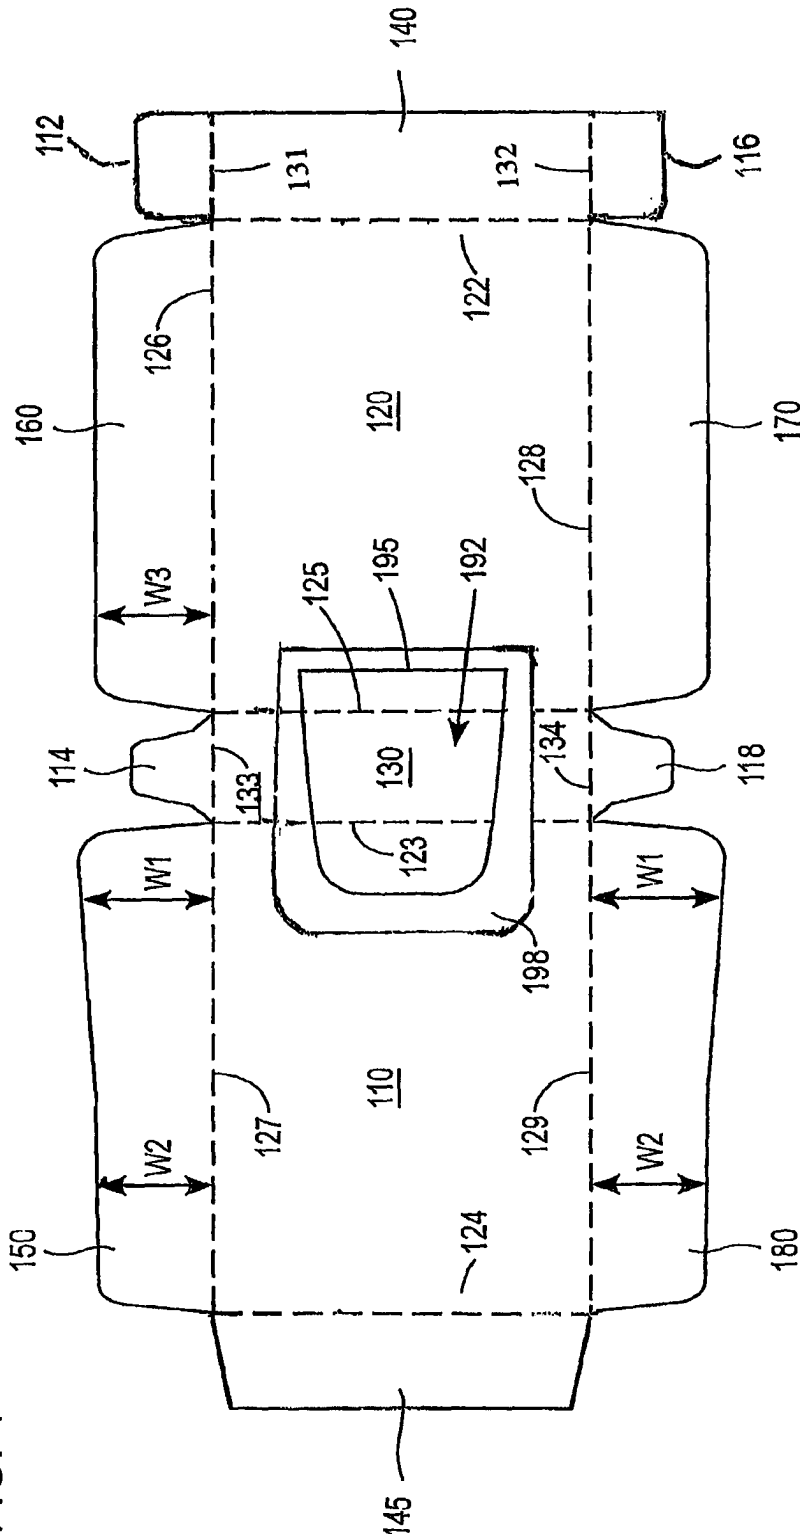
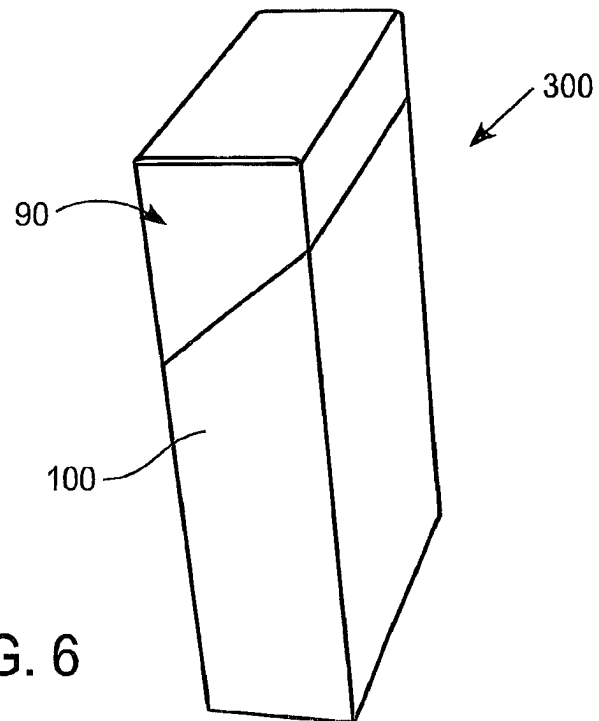
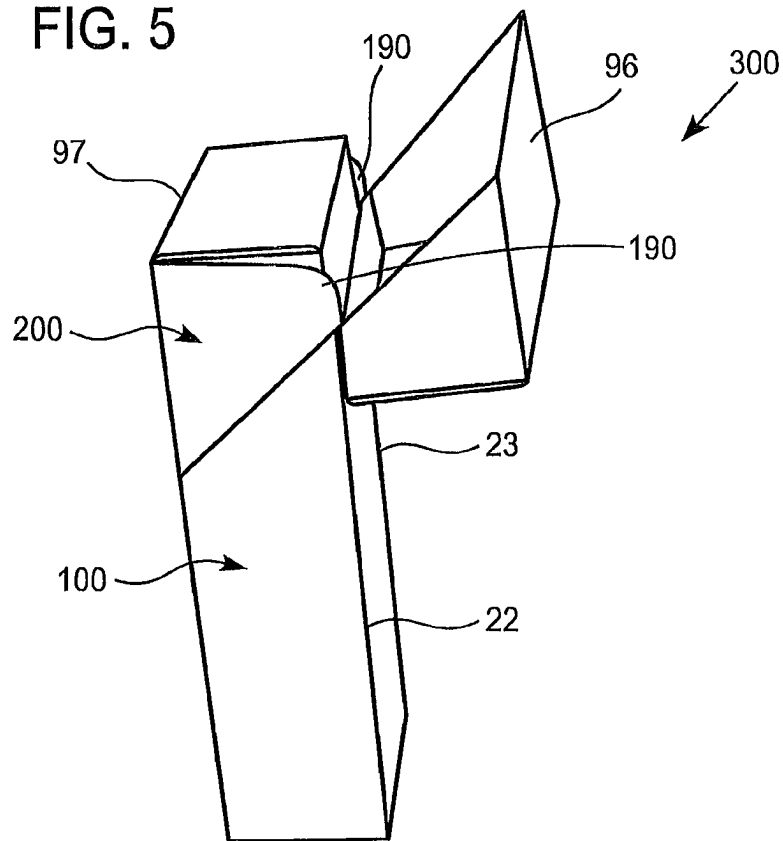


FIG. 5




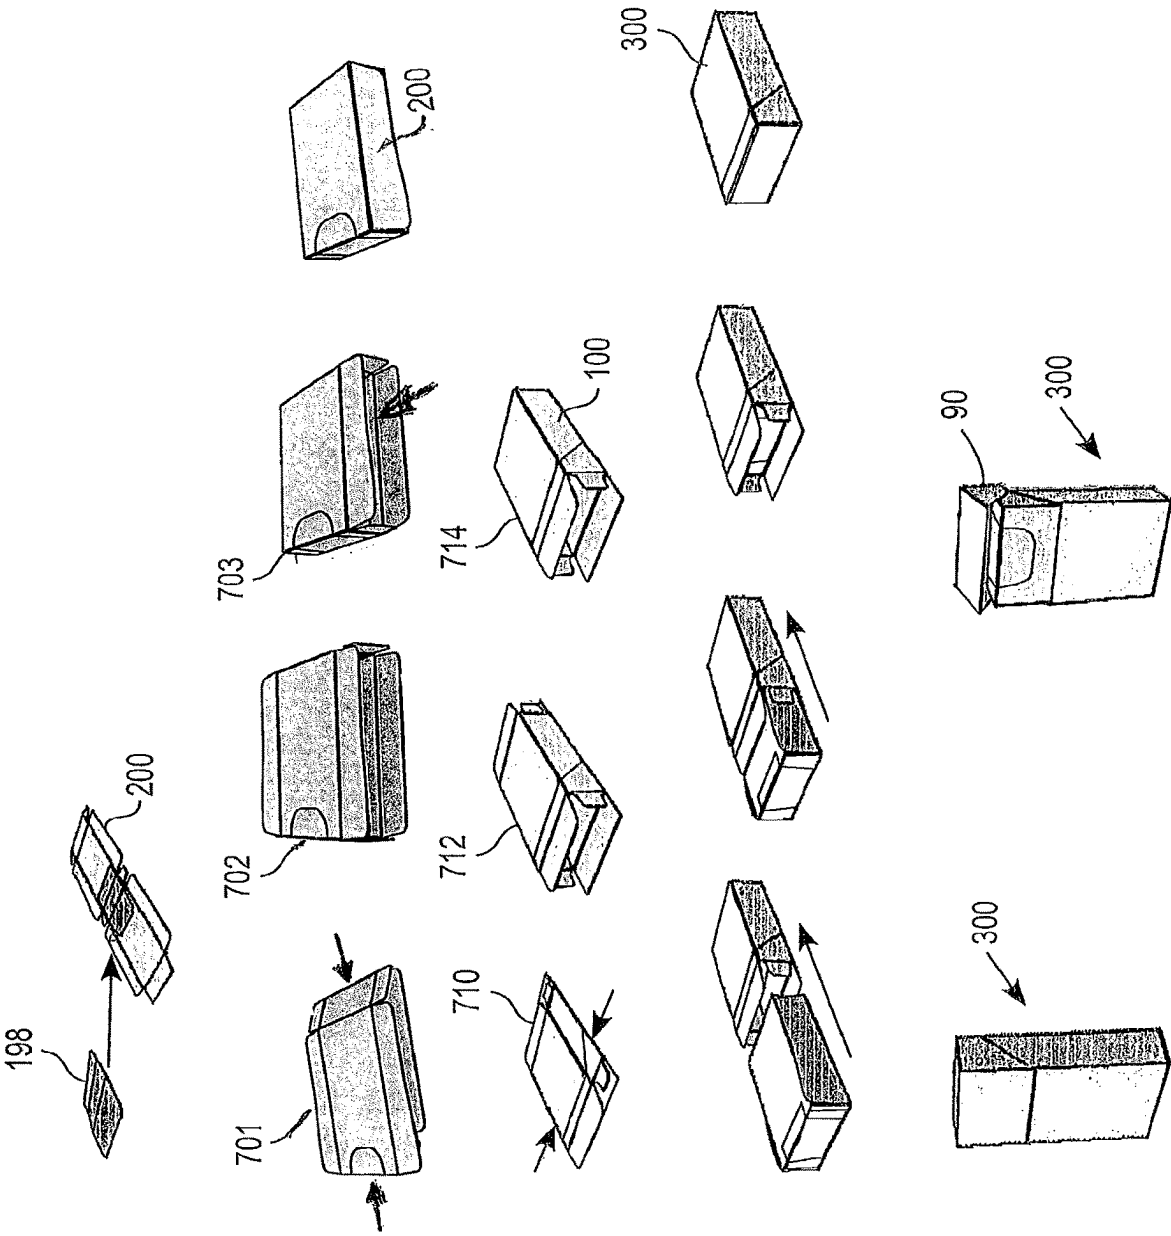


FIG. 8

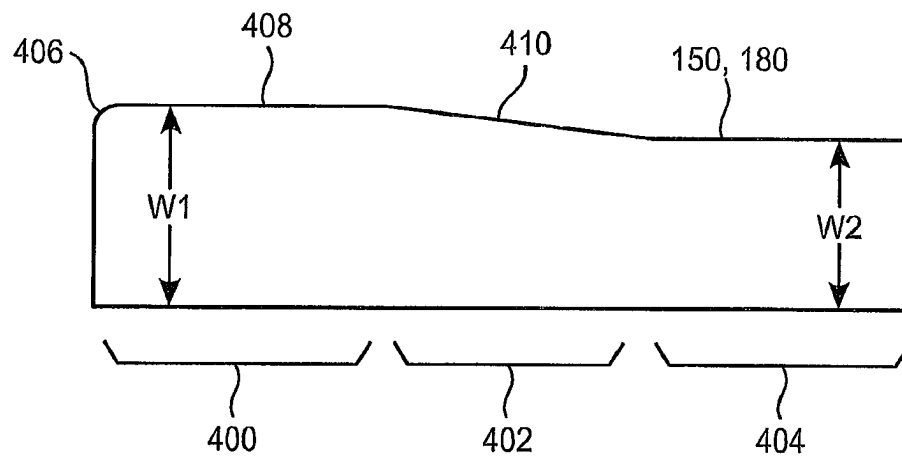

1

HINGED LID PACKAGING**CROSS-REFERENCE TO RELATED APPLICATION**

This application is a continuation patent application of U.S. patent application Ser. No. 16/218,918, filed Dec. 13, 2018, which is a divisional patent application of U.S. patent application Ser. No. 15/235,492, filed Aug. 12, 2016, which is a continuation patent application of U.S. patent application Ser. No. 15/172,898, filed Jun. 3, 2016, which issued as U.S. Pat. No. 10,059,506 on Aug. 28, 2018, which is a divisional patent application of U.S. patent application Ser. No. 13/325,803, filed Dec. 14, 2011, which issued as U.S. Pat. No. 9,382,062 on Jul. 5, 2016, which claims priority under 35 U.S.C. § 119(e) to U.S. Provisional Application Ser. No. 61/422,975 filed Dec. 14, 2010, the entire contents of each of which is incorporated by reference herein.

FIELD OF THE DISCLOSURE

The disclosure relates to a packaging container having an inner packaging container adapted to hold a number of consumer items, and in particular to a hinged lid packaging container having an inner resealable packaging container, preferably for accommodating smokeless tobacco pouches or pre-portioned smokeless tobacco (all referenced as “portions of smokeless tobacco”).

WORKING ENVIRONMENT

Smokeless tobacco products are sold in round metal, plastic or paperboard cans which have removable metal or plastic lids. However, different forms of packaging may appeal and provide conveniences to consumers such as smokers more familiar with hinged-lid packaging.

SUMMARY

Disclosed herein is a combination of a resealable inner box and outer box packaging arrangement, particularly suited for smokeless tobacco products.

According to one embodiment, a pack for consumer goods comprises an outer packaging container and an inner packaging container. The outer packaging container includes a generally rectangular lower box portion with an upper lid portion hingedly connected thereto for movement between opened and closed positions, said box defining an inner box width; wherein said upper lid portion includes a lid back panel, a lid front panel, and a lid top panel. The inner packaging container includes a generally rectangular box having a dispensing opening with a resealable closure; wherein the rectangular box includes a front panel, a back panel, a top panel, a bottom panel, and opposing side panels; wherein each said side panel includes an inner panel and an outer panel, said inner panel having a first width defining a width of the inner packaging container, and said outer panel including at least a portion having a second width defining a width greater than the first width. The second width is greater than the inner box width in one embodiment. The inner packaging container is insertable within said outer packaging container.

According to another embodiment, a blank for forming an inner packaging container for insertion into a hinged lid box comprises a front panel defined by a first pair of parallel first and second score lines and a second pair of parallel third and fourth score lines; a bottom panel connected to the front panel

2

along the first score line and further including first top and first bottom flaps connected at top and bottom score lines; an outer left side panel connected to the front panel along the third score line; an outer right side panel connected to the front panel along the fourth score line; a top panel connected to the front panel along the second score line and further including second top and second bottom flaps connected at top and bottom score lines and a fifth score line parallel to the second score line; a back panel connected to the top panel along the fifth score line and further including a sixth score line parallel to the fifth score line thereby forming a third pair of parallel score lines, and a fourth pair of parallel seventh and eighth score lines; an inner left side panel connected to the back panel along the seventh score line; an inner right side panel connected to the back panel along the eighth score line; and a glue flap connected to the back panel along the sixth score line. The inner left and right side panels have a first width defining a width of the inner packaging container and at least a portion of said outer left and right side panels have a second width greater than the first width.

BRIEF DESCRIPTION OF THE DRAWING FIGURES

FIG. 1 shows a perspective view of the pack in a fully folded closed state.

FIG. 2 shows a planar view of the outer packaging container blank in an unfolded state.

FIG. 3 shows a perspective view of the inner packaging container in a fully closed state.

FIG. 4 shows a planar view of the inner packaging container blank in an unfolded state.

FIG. 5 shows a perspective view of the pack in an open state during loading of the inner packaging container within the outer packaging container.

FIG. 6 shows a perspective view of the pack in a closed state with the inner packaging container fully loaded within the outer packaging container.

FIGS. 7A-7E show the pack during erecting, folding, gluing and loading of the inner packaging container within the outer container packing.

FIG. 8 is a detail view of one of the side panels of the inner box of a preferred embodiment.

DETAILED DESCRIPTION

Referring to FIGS. 1 and 3, a pack **300** is described herein, the pack **300** comprising an outer packaging container (outer box) **100** having an inner packaging container (inner box) **200** therewithin. When the pack **300** is adapted for containing discrete portions of smokeless tobacco, the outer box is configured preferably smaller than a traditional cigarette hinged lid box and can have a height of about 3 inches, a width of about 2 inches and a depth of about $\frac{3}{4}$ inch. The inner box is sized to fit snugly in the outer box as described below. As used herein in connection with dimensions, “about” means $\pm 10\%$.

The pack **300** is adaptable for containing other articles, such as smoking articles, in which case the overall dimensions may mimic customary dimensions of existing hinge lid boxes.

Outer packaging container **100** is preferably a hinged lid type of container formed from a paper or paperboard blank. As best shown in FIG. 2, the blank for outer packaging container **100** comprises a front panel **10**; a back panel **20**; a left side panel **30** connected between a side edge of the back panel **20** along a longitudinal fold line **23** and a side

3

edge of the front panel **10** along a longitudinal fold line **25**; a right side panel **40** connected to an opposite side edge of the front panel **10** along another longitudinal fold line **24**; and a glue flap **45** connected to an opposite side edge of the back panel **20** along longitudinal fold line **22**. When folded, as described in greater detail below, glue flap **45** is glued to an inner surface of side panel **40** to form a rectangular shape. As used herein, the term “glued” should be understood to include any type of gluing, securing, thermal sealing or otherwise adhering one surface to an opposing surface.

The outer packaging container **100** further includes an inner top closure panel **60** connected to the back panel **20** along a transverse fold line **26**; an outer top closure panel **50** connected to the front panel **10** along a transverse fold line **27**; an inner bottom closure panel **70** connected to the back panel **20** along a transverse fold line **28**; and an outer bottom closure panel **80** connected to the front panel **10** along a transverse fold line **29**. When folded, inner top closure panel **60** is adhered to an inner surface of outer top panel closure panel **50** and inner bottom closure panel **70** is adhered to an inner surface of outer bottom closure panel **80**.

Outer packaging container **100** also comprises upper and lower dust flaps **12**, **16** connected to left side panel **30** along upper and lower transverse fold lines **31**, **32**, respectively, and upper and lower dust flaps **14**, **18** connected to right side panel **40** along upper and lower transverse fold lines **33**, **34**, respectively.

As mentioned above, outer packaging container **100** is preferably a hinged lid type of container in that a pivotable hinged lid portion **90** is provided in order to gain access to the contents therein. In order to obtain this functionality from a one-piece blank, the blank is pre-cut to define the perimeter of hinged lid portion **90**. As best illustrated in FIG. 2, hinged lid portion **90** is preferably formed by cut line **91** along glue flap **45**, cut line **92** along side panel **30**, cut line **93** across the front panel **10** which defines the hinged lid front panel **96** thereabove, and cut line **94** along side panel **40**. Cut lines **91**, **92**, **93** and **94** that define the hinge lid include “nicks” or “breaks” **802** at spaced locations such that correlated adjoining panels remain connected through folding, gluing, erecting and loading, until the consumer chooses to break open the lid of a completed pack **300**. In addition, a score line **95** is provided along back panel **20** to define the hinge between the upper lid back panel **97** and the lower portion of the back panel **20** such that the hinged lid portion **90** is pivotal about score line **95**. The outer box is not limited to the exact shape and angles illustrated for hinged lid portion **90**, as one skilled in the art will appreciate that other configurations of the same are possible. For example, the cut extending across front panel **10** and defining the front panel of hinged lid portion may optionally include a semi-circular cut-away portion **98** below cut line **93** so as to form a thumb notch (cutaway) region allowing easy opening of hinged lid portion **90**; the cut line **93** preferably extends straight across the front panel. Any other configuration may be used.

The outer blank **100** is a blank configuration which is laterally folded and “glued” to form the intended box structure.

As best shown in FIG. 4, a paper or paperboard blank for inner packaging container **200** comprises a front panel **110**; a back panel **120**; a top panel **130** connected between a top edge of the back panel **120** along a longitudinal fold line **125** and a top edge of the front panel **110** along a longitudinal fold line **123**; a bottom panel **140** connected to a bottom edge of the back panel **120** along another longitudinal fold line **122**; and a glue flap **145** connected to a bottom edge of the front panel **110** along longitudinal fold line **124**. When

4

folded, as described in greater detail below, glue flap **145** is adhered to an inner surface of the bottom panel **140** to form a rectangular shape.

The inner packaging container blank **200** further includes an inner side closure left panel **160** connected to the back panel **120** along a longitudinal fold line **126**; an outer side closure left panel **150** connected to the front panel **110** along a longitudinal fold line **127**; an inner side closure right panel **170** connected to the back panel **120** along a longitudinal fold line **128**; and an outer side closure right panel **180** connected to the front panel **110** along a longitudinal fold line **129**. When folded, inner side closure left panel **160** is adhered to an inner surface of outer side closure left panel closure panel **150** and inner side closure right panel **170** is adhered to an inner surface of outer side closure right panel **180**.

Inner packaging container blank **200** also comprises left and right side dust flaps **112**, **116** connected to bottom panel **140** along left and right longitudinal fold lines **131**, **132**, respectively, and left and right dust flaps **114**, **118** connected to top panel **130** along left and right longitudinal fold lines **133**, **134**, respectively.

Inner packaging container blank **200** further comprises a dispensing door **192** which is provided to allow access and removal of the contents within inner packaging container **200**. Door **192** is formed by establishing the perimeter thereof preferably with a score line **195** located partially across a central portion of the upper back panel **120** and with a perforated cut line **193** into central portions of the front and top panels **110** and **130** of the inner packaging container blank **200**, as shown best in FIGS. 3 and 4. As illustrated therein, fold lines **123**, **125** extend across door **192** and the score line **195** is provided along a rear edge of door **192**, thus allowing door **192** to be opened and reclosed in a foldable manner. In one embodiment, the dispensing door **192** is also covered by a resealable label **198**, thereby permitting inner packaging container **200** to be resealed after the initial opening by the consumer. Resealable label **198** may comprise a single layer of polymer material and include a permanently tacky material on one side thereof, permanent bonding adhesive, or the like, permitting repeated opening and closing of dispensing door **192**, or any other suitable reclosing mechanism. Preferably, a permanent bonding adhesive may cover the undersurface of label **198** which superposes the door **192**, and, preferably, edge portions of the label **198** beyond the edges of dispensing door **192** are provided with a peel-and-reseal adhesive sufficient to maintain a sealed closure.

Alternatively, the door **192** may be an opening of the same or comparable perimeter of lines **195** and **193**, covered only by a label **198**.

The left and right outer side closure panels **150**, **180** of the inner packaging container **200** have an upper side width “W1” that is slightly greater than the lower side width “W2” thereof. The upper side width W1 of the left and right side closure panels **150**, **180** is also slightly greater than the side width “W3” of the left and right inner side closure panels **160**, **170**, the width W3 thereof preferably being substantially equal to width W2. Moreover, the upper side width W1 of the left and right side closure panels **150**, **180** is also slightly greater than the inner width defined within outer packaging container **100**. As a result of the slightly greater width W1 of the upper portion of the left and right outer side closure panels **150**, **180**, when inner packaging container **200** is folded, glued and sealed, the inner packaging container **200** comprises rearwardly projecting flanges **190**, as best shown in FIGS. 3 and 5. The projecting flanges **190**

5

cooperate with other features of the box **100** to assure and retain a complete closure of the lid **90** of the outer packaging container **100**.

More particularly, in one preferred embodiment, flanges **190** have a gradually increasing width from **W2** to **W1** which feature facilitates insertion of an erected inner box into an erected outer box. Referring now to FIG. **8**, preferably, each outer side panel **150**, **180** includes from top to bottom: an operative flange portion **400** of a width **W1**; a transition portion **402** and a lower portion **404** of a width **W2**. Preferably, the operative flange portion includes straight, rear flange edge **408** which extends from a rounded, upper rear corner portion **406** of the side panels **150**, **180** to the inclined edge **410** of the transition portion **402**. The length of the straight flange edge **408** (or the flange portion **400**) may be adjusted both as to relative position and/or length so as to achieve a desired biasing effect regardless of variations in relative dimensions and materials of a particular pack **300**. Generally, a longer flange edge **408** will increase biasing force against the inner surfaces of the lid during and upon reclosure of the lid. In the preferred embodiment, the operative flange portion **400**, the transition portion **402** and the lower portion **404** are of essentially equal length (from a direction of top to bottom of the pack **300**).

The flange portion **400** and its biasing action also serve in essence to “lock” the inner box **200** within the outer box **100** with a friction fit such that the inner box **200** remains steadfast during handling by the consumer, even when the lid has been opened and product is removed. In addition, a small amount of adhesive (not shown) can be applied between the exterior surface of the bottom of the inner box **200** and the interior surface of the bottom of the outer box **100** to further assure the desired positioning of the inner box **200** within the outer box **100**.

Preferably, both the outer box **100** and the inner box **200** are constructed of 12 or 14 point paper board, preferably 12 point board is used for the inner box **200** and 14 point board is used for the outer box **100**. Most preferably, a laminated or metalized board is used in the construction of the inner box **200**, which promotes product stability and shelf life and serves as a barrier against transfer of adhesives, inks or other agents from either of the boxes to the product to be contained therein.

In a preferred embodiment, the outer box has a height of about 3 inches, a width of about 2 inches and a thickness of about $\frac{3}{4}$ inch, more preferably $2\frac{15}{16}$ inches $\times$ 2 inches $\times$ $\frac{11}{16}$ inch. The hinge lid **90** can have a height of about 1 inch at the front of the outer box and the hinge line at the rear of the box can be located about $1\frac{3}{4}$ inches from the bottom of the outer box. To snugly fit within the outer box, the inner box preferably has a height of about $2\frac{13}{16}$ inches, a width of about $1\frac{7}{8}$ inches and a thickness of about $\frac{5}{8}$ inch. The inner box **200** preferably holds about fifteen portions of smokeless tobacco. The door **192** can have a width of about $1\frac{1}{4}$ inches at hinge line **195** and length of about $1\frac{1}{2}$ inches from the hinge line **195** to a free end of the door. The door is more narrow at the free end with side edges tapering inward 4 to 5° and joining the free end at rounded corners having a radius of about $\frac{3}{8}$ inch. The flanges **190** preferably have a length of about $1\frac{1}{4}$ inches and extend outwardly from the rear of the inner box by about $\frac{1}{16}$ to $\frac{1}{8}$ inch and ends of the flanges are rounded with a radius of about $\frac{1}{8}$ inch.

In a preferred embodiment, the inner box **200** is approximately of a same height as that of the outer box **100** (with accommodation for the layers of board at the upper and lower panels of the outer box **100**). It is envisioned that with

6

the inclusion of flanges **190** (or comparable arrangement to bias an upper edge portion of the inner box **200**), the inner box **200** may be of a height less than that comparable to the outer box **100**.

Referring to FIG. **5**, when inner packaging container **200** is loaded into outer packaging container **100** during manufacture or after a consumer removes the inner packaging to remove product therein and then places the inner packaging back in the outer packaging, the rearwardly projecting flanges **190** engage the back panel **20** near the side panels of the outer packaging container **100** close to fold lines **22** and **23**. The engagement of the rear flanges **190** with the back panel of the outer packaging container **100** causes the upper portion of inner packaging container **200** to be biased forward toward the front panel **10** of the outer packaging container **100**. As a result, when the hinged-top portion **90** of the outer packaging container **100** is reclosed, the inside face of the front lid panel **96** slidably engages upper front face portion **97** of the inner box **200** such that position of the inner packaging container **200** assists in securing and maintaining the hinged-top portion **90** in a closed position, as shown in FIG. **6**. The width **W1** can be selected as desired to define a width greater than width **W2** and the inner width within outer packaging container **100**, so long as inner packaging container **200** can still be inserted within outer container **100** and the hinged lid top portion **90** maintains the desired closed position.

A method of making the pack **300** according to one embodiment is described below.

Referring to FIG. **7A**, a flat blank for the inner packaging container blank **200** is provided and the resealable label **198** is disposed over the dispensing door **192**. As shown in FIG. **7B**, inner packaging container blank **200** is folded by first pre-breaking fold lines **124**, **125** and then folding the blank 180° along fold lines **123** and **122** so as to form a collapsed, erectable structure **701**. In so doing, the outer surface of glue flap **145** is glued to the inner surface of bottom panel **140**. Inner packaging container blank **200** is then erected from the collapsed, erectable structure **701** by, for example, squeezing the top and bottom surfaces to erect the box **701** into an open, rectangular structure **702**. Alternatively, the open, rectangular structure **702** can be obtained by applying suction to the front and back surfaces of the collapsed, erectable structure **701** alone or in combination with the squeezing. One side of the open, rectangular structure **702** is then also folded and glued to form a partially closed structure **703**. In the illustrated embodiment, dust flaps **116** and **118** are folded along fold lines **132** and **134**, respectively, and then an outer surface of right side inner closure panel **170** is glued to an inner surface of right side outer closure panel **180** so as to seal the right side of the inner packaging container blank **200**.

Product is then loaded into the partially closed structure **703** through the remaining open side of the structure **703**, for example, the left side as in the illustrated embodiment. The open side of the container is then sealed in a similar manner by folding the dust flaps and side closure panels. In the illustrated embodiment, for example, dust flaps **112**, **114** are folded along fold lines **131**, **133**, respectively, and then an outer surface of left side inner closure panel **160** is glued to an inner surface of left side outer closure panel **150** so as to completely seal inner packaging container **200** and the contents therein. Although a preferred practice in an embodiment includes closing one side of the inner box before insertion of product, it is envisioned that product could be inserted before closure of either side.

7

It is to be noted that the erection of the inner blank **200** is in a “longitudinal” sense, i.e. the end panels are rotated during erection.

Referring to FIG. 7C, the outer packaging container blank **100** is folded and glued. More particularly, in one embodiment, glue flap **45** is glued to an inner surface of side panel **40** to form a collapsed erectable structure **710**. The outer container is then formed into an open rectangular structure **712** by, for example, squeezing the opposing sides of the erectable structure **710**. Alternatively, the open rectangular structure **712** can be obtained by applying suction to the front and back surfaces of the collapsed erectable structure **710** alone or in combination with the squeezing. Dust flaps **16** and **18** are then folded inwardly along fold lines **32** and **34**, respectively. Inner bottom closure panel **70** is folded inwardly along fold line **28** and an outer surface thereof is glued to an inner surface of outer bottom panel closure **80** which is folded inwardly along fold line **29**, thereby closing one end of the open structure **712** to form a partially closed structure **714**. It is to be noted that the erection of the outer blank **100** is “lateral” or “transverse” in that the side panels are rotated during erection. Thereafter, as schematically shown in FIG. 7D, sealed inner packaging container **200** is loaded into the one open end of outer packaging container **100**, such as the top end of outer packaging container **100**. The top end of outer packaging container **100** is then closed and glued. More particularly, in one embodiment, dust flaps **12** and **14** are folded inwardly along fold lines **31**, **33**, respectively. Inner top closure panel **60** is folded inwardly along fold line **26**, outer top closure panel **50** is folded inwardly along fold line **27**, and an outer surface of inner top closure panel **60** is glued to outer top closure panel **50**, thereby forming finished pack **300**. As shown in FIG. 7E, cut lines **91-94** (with nicks) formed in the blank for outer packaging container **100** form hinged lid portion **90** which is openable by the consumer by breaking the nicks to gain access to the inner packaging container **200**. Inner packing container **200** includes, in turn, dispensing door **192** which, in one embodiment, is repeatedly openable and closable by way of resealable label **198**.

The box structure of the pack **300** and its manner of erection and loading provides:

- a resealable feature which prolongs freshness;
- the resealable flap **198** that may be pressed against opposing portions of the top panel of **130** to assure adhesion and may be reinforced by the board structure of the door **192**;
- the inclined edge **410** of the flanges **190** of the inner box **200** facilitates insertion of the inner box **200** into the outer box **100** during packing;
- having one of the boxes **100**, **200** erectable in a lateral sense (e.g. box **100**) and the other being erectable in a longitudinal sense (e.g. box **200**), assures rectangularity in the pack **300** once the pack **300** has been fully assembled; and
- the flanges **190** bias an upper front edge portion of the inner box **200** against an inner front surface of the lid during and after reclosure so as to assure a complete reclosure and to maintain it fully closed (the avoidance of a “smile” along the lid line).

While the above pack and the method of packaging have been described in detail with reference to specific embodiments thereof, it will be apparent to those skilled in the art that various changes and modifications can be made, and equivalents employed, without departing from the scope of the appended claims.

8

What is claimed is:

1. A pack for consumer goods comprising:

- an outer box including,
 - a box portion, and
 - a lid portion flexibly connected to the box portion and configured to move between an open position and a closed position, the lid portion including,
 - a lid back panel,
 - a lid front panel that is parallel with the lid back panel, and
 - a lid top panel; and
- an inner box within the outer box, the inner box defining a dispensing opening, the inner box including,
 - a front panel,
 - a back panel that is parallel with the front panel and the lid back panel,
 - a top panel that is parallel with the lid top panel,
 - a bottom panel that is parallel with the top panel, and
 - opposing side panels, the opposing side panels including,
 - a first set of the opposing side panels, the first set of opposing side panels including,
 - a first inner panel connected to a first edge of the back panel, and
 - a first outer panel connected to a first edge of the front panel, the first outer panel including,
 - a first operative flange portion having a first width and a first length,
 - a first lower portion having a second width and a second length, the second width being less than the first width, the second length being the same as the first length, and
 - a first transition portion joining the first operative flange portion and the first lower portion, the first transition portion having a third length, the third length being the same as the second length, and
 - a second set of the opposing side panels, the second set of opposing side panels including,
 - a second inner panel connected to a second edge of the back panel, and
 - a second outer panel connected to a second edge of the front panel, the second outer panel including,
 - a second operative flange portion having a third width and a fourth length,
 - a second lower portion having a fourth width and a fifth length, the fourth width being less than the third width, the fifth length being the same as the fourth length, and
 - a second transition portion joining the first operative flange portion and the first lower portion, the second transition portion having a sixth length, the sixth length being the same as the fifth length.
- 2. The pack of claim 1, wherein the dispensing opening extends along the top panel and the front panel of the inner box.
- 3. The pack of claim 2, wherein the dispensing opening is accessible when the lid portion of the outer box is in the open position.
- 4. The pack of claim 1, wherein the dispensing opening includes a resealable closure.
- 5. The pack of claim 4, wherein the resealable closure includes a label having a tacky surface.
- 6. The pack of claim 4, wherein the resealable closure includes a label including polymer material.

9

7. The pack of claim 4, wherein the resealable closure includes a label including bonding material on a surface thereof, the label adhered to the back panel of the inner box.

8. The pack of claim 4, wherein the resealable closure includes a label, at least part of the label between the top panel of the inner box and the lid top panel when the lid portion is in the closed position.

9. The pack of claim 4, wherein the resealable closure includes a label, and the label covers the dispensing opening when the lid portion is in the closed position.

10. The pack of claim 1, wherein the inner box is comprised of laminated board.

11. The pack of claim 1, wherein the inner box is comprised of metalized board.

12. The pack of claim 1, wherein the inner box further includes dust flaps connected to the top panel.

13. The pack of claim 1, wherein the inner box is comprised of 12 or 14 point board.

14. The pack of claim 1, wherein the dispensing opening includes round corners.

15. The pack of claim 1, wherein the dispensing opening has a width at least one half of a width of the inner box.

10

16. The pack of claim 1, wherein the inner box is adhered to the outer box.

17. The pack of claim 1, wherein the inner box contains smoking articles.

18. The pack of claim 1, wherein the inner box contains smokeless tobacco products.

19. The pack of claim 1, wherein the inner box is friction fit inside the outer box.

20. The pack of claim 1, wherein the first inner panel has a single width.

21. The pack of claim 20, wherein the single width of the first inner panel is a fifth width, the fifth width being less than the first width.

22. The pack of claim 21, wherein the fifth width is the same as the second width.

23. The pack of claim 21, wherein the second inner panel has a single width.

24. The pack of claim 23, wherein the single width of the second inner panel is a sixth width, the sixth width being less than the third width.

25. The pack of claim 24, wherein the sixth width is the same as the fourth width.

* * * * *