



US012404756B2

(12) **United States Patent**
Broussard et al.

(10) **Patent No.:** **US 12,404,756 B2**
(45) **Date of Patent:** **Sep. 2, 2025**

(54) **TORSIONAL COUPLING FOR ELECTRIC
HYDRAULIC FRACTURING FLUID PUMPS**

(56) **References Cited**

U.S. PATENT DOCUMENTS

(71) Applicant: **U.S. Well Services, LLC**, Houston, TX
(US)

1,656,861 A 1/1928 Leonard
1,671,436 A 5/1928 Melott
(Continued)

(72) Inventors: **Joel N. Broussard**, Lafayette, LA (US);
Jeff McPherson, Spring, TX (US);
Robert Kurtz, Fairmont, WV (US);
Jared Oehring, Houston, TX (US)

FOREIGN PATENT DOCUMENTS

(73) Assignee: **U.S. Well Services, LLC**, Houston, TX
(US)

AU 734988 9/1997
CA 2406801 11/2001
(Continued)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

OTHER PUBLICATIONS

Notice of Allowance and Notice of Allowability issued in U.S. Appl.
No. 15/829,419 mailed Jul. 26, 2021.

(Continued)

(21) Appl. No.: **18/095,197**

(22) Filed: **Jan. 10, 2023**

Primary Examiner — Kenneth L Thompson

(74) *Attorney, Agent, or Firm* — Abel Schillinger, LLP

(65) **Prior Publication Data**

US 2023/0417131 A1 Dec. 28, 2023

Related U.S. Application Data

(63) Continuation of application No. 17/379,651, filed on
Jul. 19, 2021, now Pat. No. 11,549,346, which is a
(Continued)

(51) **Int. Cl.**
E21B 43/26 (2006.01)
F04B 9/02 (2006.01)
(Continued)

(52) **U.S. Cl.**
CPC **E21B 43/2607** (2020.05); **E21B 43/26**
(2013.01); **F04B 9/02** (2013.01);
(Continued)

(58) **Field of Classification Search**


None

See application file for complete search history.

(57) **ABSTRACT**

A system for hydraulically fracturing an underground formation in an oil or gas well, including a pump for pumping hydraulic fracturing fluid into the wellbore, the pump having a pump shaft, and an electric motor with a motor shaft mechanically attached to the pump to drive the pump. The system further includes a torsional coupling connecting the motor shaft to the pump shaft. The torsional coupling includes a motor component fixedly attached to the motor shaft and having motor coupling claws extending outwardly away from the motor shaft, and a pump component fixedly attached to the pump shaft of the pump and having pump coupling claws extending outwardly away from the pump shaft. The motor coupling claws engage with the pump coupling claws so that when the motor shaft and motor component rotate, such rotation causes the pump component and the pump shaft to rotate, thereby driving the pump.

16 Claims, 11 Drawing Sheets

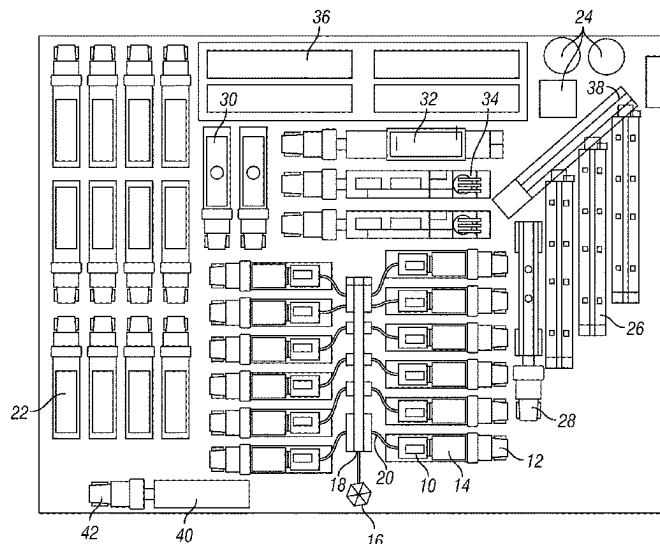

Related U.S. Application Data

continuation of application No. 15/581,625, filed on Apr. 28, 2017, now Pat. No. 11,066,912, which is a continuation of application No. 14/622,532, filed on Feb. 13, 2015, now Pat. No. 9,650,879, which is a continuation-in-part of application No. 13/679,689, filed on Nov. 16, 2012, now Pat. No. 9,410,410.

(51) **Int. Cl.**

F04B 17/03 (2006.01)

F04B 47/00 (2006.01)

F04D 29/044 (2006.01)

F04D 29/66 (2006.01)

(52) **U.S. Cl.**

CPC **F04B 17/03** (2013.01); **F04B 47/00** (2013.01); **F04D 29/044** (2013.01); **F04D 29/66** (2013.01)

(56)

References Cited

U.S. PATENT DOCUMENTS

2,004,077	A *	6/1935	McCartney		F16D 3/68	464/76	5,189,388	A	2/1993	Mosley	
2,183,364	A	12/1939	Bailey				5,230,366	A	7/1993	Marandi	
2,220,622	A	11/1940	Aitken				5,334,899	A	8/1994	Skybyk	
2,248,051	A	7/1941	Armstrong				5,366,324	A	11/1994	Arlt	
2,407,796	A	9/1946	Page				5,422,550	A	6/1995	McClanahan	
2,416,848	A	3/1947	Rothery				5,433,243	A	7/1995	Griswold	
2,610,741	A	9/1952	Schmid				5,439,066	A	8/1995	Gipson	
2,753,940	A	7/1956	Bonner				5,486,047	A	1/1996	Zimmerman	
2,976,025	A	3/1961	Pro				5,491,098	A	2/1996	Noppe	
3,055,682	A	9/1962	Bacher				5,517,822	A	5/1996	Haws et al.	
3,061,039	A	10/1962	Peters				5,548,093	A	8/1996	Sato	
3,066,503	A	12/1962	Fleming				5,590,976	A	1/1997	Kilheffer et al.	
3,302,069	A	1/1967	Webster				5,655,361	A	8/1997	Kishi	
3,334,495	A	8/1967	Jensen				5,736,838	A	4/1998	Dove et al.	
3,722,595	A	3/1973	Kiel				5,755,096	A	5/1998	Holleyman	
3,764,233	A	10/1973	Strickland				5,790,972	A	8/1998	Kohlenberger	
3,773,140	A	11/1973	Mahajan				5,798,596	A	8/1998	Lordo	
3,837,179	A	9/1974	Barth				5,813,455	A	9/1998	Pratt et al.	
3,849,662	A	11/1974	Blaskowski				5,865,247	A	2/1999	Paterson	
3,878,884	A	4/1975	Raleigh				5,879,137	A	3/1999	Yie	
3,881,551	A	5/1975	Terry				5,894,888	A	4/1999	Wiemers	
4,037,431	A *	7/1977	Sugimoto		F16D 3/68	464/73	5,907,970	A *	6/1999	Havlovick	 F02B 63/00
4,100,822	A	7/1978	Rosman								403/3
4,151,575	A	4/1979	Hogue				6,035,265	A	3/2000	Dister et al.	
4,172,369	A *	10/1979	Hayes		F16D 3/68	464/73	6,097,310	A	8/2000	Harrell et al.	
4,226,299	A	10/1980	Hansen				6,121,705	A	9/2000	Hoong	
4,265,266	A	5/1981	Kierbow et al.				6,138,764	A	10/2000	Scarsdale et al.	
4,411,313	A	10/1983	Johnson et al.				6,142,878	A	11/2000	Barin	
4,432,064	A	2/1984	Barker				6,164,910	A	12/2000	Mayleben	
4,442,665	A	4/1984	Fick et al.				6,202,702	B1	3/2001	Ohira	
4,456,092	A	6/1984	Kubozuka				6,208,098	B1	3/2001	Kume	
4,506,982	A	3/1985	Smithers et al.				6,254,462	B1	7/2001	Kelton	
4,512,387	A	4/1985	Rodriguez				6,271,637	B1	8/2001	Kushion	
4,529,887	A	7/1985	Johnson				6,273,193	B1	8/2001	Hermann et al.	
4,538,916	A	9/1985	Zimmerman				6,315,523	B1	11/2001	Mills	
4,601,629	A	7/1986	Zimmerman				6,442,942	B1	9/2002	Kopko	
4,676,063	A	6/1987	Goebel et al.				6,477,852	B2	11/2002	Dodo	
4,759,674	A	7/1988	Schroder				6,484,490	B1	11/2002	Olsen	
4,768,884	A	9/1988	Elkin				6,529,135	B1	3/2003	Bowers et al.	
4,793,386	A	12/1988	Sloan				6,560,131	B1	5/2003	VonBrethorst	
4,845,981	A	7/1989	Pearson				6,585,455	B1	7/2003	Petersen et al.	
4,922,463	A	5/1990	Del Zotto et al.				6,626,646	B2	9/2003	Rajewski	
5,004,400	A	4/1991	Handke				6,719,900	B2	4/2004	Hawkins	
5,006,044	A	4/1991	Walker, Sr.				6,765,304	B2	7/2004	Baten et al.	
5,025,861	A	6/1991	Huber et al.				6,776,227	B2	8/2004	Beida	
5,050,673	A	9/1991	Baldrige				6,788,022	B2	9/2004	Sopko	
5,130,628	A	7/1992	Owen				6,802,690	B2	10/2004	Han	
5,131,472	A	7/1992	Dees et al.				6,808,303	B2	10/2004	Fisher	
5,172,009	A	12/1992	Mohan				6,931,310	B2	8/2005	Shimizu et al.	
							6,936,947	B1	8/2005	Leijon	
							6,985,750	B1	1/2006	Vicknair et al.	
							7,082,993	B2	8/2006	Ayoub	
							7,104,233	B2	9/2006	Ryzek et al.	
							7,170,262	B2	1/2007	Pettigrew	
							7,173,399	B2	2/2007	Sihler	
							7,308,933	B1	12/2007	Mayfield	
							7,312,593	B1	12/2007	Streicher et al.	
							7,336,514	B2	2/2008	Amarillas	
							7,445,041	B2	11/2008	O'Brien	
							7,494,263	B2	2/2009	Dykstra et al.	
							7,500,642	B2	3/2009	Cunningham	
							7,525,264	B2	4/2009	Dodge	
							7,563,076	B2	7/2009	Brunet	
							7,581,379	B2	9/2009	Yoshida	
							7,675,189	B2	3/2010	Grenier	
							7,683,499	B2	3/2010	Saucier	
							7,717,193	B2	5/2010	Egilsson et al.	
							7,755,310	B2	7/2010	West et al.	
							7,795,830	B2	9/2010	Johnson	
							7,807,048	B2	10/2010	Collette	
							7,835,140	B2	11/2010	Mori	
							7,845,413	B2	12/2010	Shampine et al.	
							7,926,562	B2	4/2011	Poitzsch	
							7,977,824	B2	7/2011	Halen et al.	
							7,984,757	B1	7/2011	Keast	
							8,037,936	B2	10/2011	Neuroth	
							8,054,084	B2	11/2011	Schulz et al.	
							8,083,504	B2	12/2011	Williams	
							8,091,928	B2	1/2012	Carrier	

(56)

References Cited

U.S. PATENT DOCUMENTS

8,096,354 B2	1/2012	Poitzsch	9,745,840 B2	8/2017	Oehring et al.
8,096,891 B2	1/2012	Lochtefeld	9,790,858 B2	10/2017	Kanebako
8,139,383 B2	3/2012	Efrainsson	9,863,228 B2	1/2018	Shampine et al.
8,146,665 B2	4/2012	Neal	9,909,398 B2	3/2018	Pham
8,154,419 B2	4/2012	Daussin et al.	9,915,128 B2	3/2018	Hunter
8,232,892 B2	7/2012	Overholt et al.	9,932,799 B2	4/2018	Symchuk
8,261,528 B2	9/2012	Chillar	9,945,365 B2 *	4/2018	Hernandez F04B 47/02
8,272,439 B2	9/2012	Strickland	9,963,961 B2	5/2018	Hardin
8,310,272 B2	11/2012	Quarto	9,976,351 B2	5/2018	Randall
8,354,817 B2	1/2013	Yeh et al.	10,008,880 B2	6/2018	Vicknair
8,474,521 B2	7/2013	Kajaria	10,184,465 B2	1/2019	Enis et al.
8,506,267 B2	8/2013	Gambier et al.	10,196,878 B2	2/2019	Hunter
8,534,235 B2	9/2013	Chandler	10,221,639 B2	3/2019	Romer et al.
8,573,303 B2	11/2013	Kerfoot	10,227,854 B2	3/2019	Glass
8,596,056 B2	12/2013	Woodmansee	10,232,332 B2	3/2019	Oehring
8,616,005 B1	12/2013	Cousino	10,246,984 B2	4/2019	Payne
8,616,274 B2	12/2013	Belcher et al.	10,254,732 B2	4/2019	Oehring
8,646,521 B2	2/2014	Bowen	10,260,327 B2	4/2019	Kajaria
8,650,879 B2	2/2014	Freund et al.	10,280,724 B2	5/2019	Hinderliter
8,692,408 B2	4/2014	Zhang et al.	10,287,873 B2	5/2019	Filas
8,727,068 B2	5/2014	Bruin	10,302,079 B2	5/2019	Kendrick
8,760,657 B2	6/2014	Pope	10,309,205 B2	6/2019	Randall
8,763,387 B2	7/2014	Schmidt	10,337,308 B2	7/2019	Broussard
8,774,972 B2	7/2014	Rusnak et al.	10,371,012 B2	8/2019	Davis
8,789,601 B2	7/2014	Broussard	10,378,326 B2	8/2019	Morris
8,795,525 B2	8/2014	McGinnis et al.	10,393,108 B2	8/2019	Chong
8,800,652 B2	8/2014	Bartko	10,407,990 B2	9/2019	Oehring
8,807,960 B2	8/2014	Stephenson	10,408,030 B2	9/2019	Oehring et al.
8,838,341 B2	9/2014	Kumano	10,408,031 B2	9/2019	Oehring et al.
8,851,860 B1	10/2014	Mail	10,415,332 B2	9/2019	Morris et al.
8,857,506 B2	10/2014	Stone, Jr	10,436,026 B2	10/2019	Ounadjela
8,899,940 B2	12/2014	Laugemors	10,627,003 B2	4/2020	Dale et al.
8,905,056 B2	12/2014	Kendrick	10,648,270 B2	5/2020	Brunty et al.
8,905,138 B2	12/2014	Lundstedt et al.	10,648,311 B2	5/2020	Oehring et al.
8,997,904 B2	4/2015	Cryer	10,669,471 B2	6/2020	Schmidt et al.
9,018,881 B2	4/2015	Mao et al.	10,669,804 B2	6/2020	Kotrla
9,051,822 B2	6/2015	Ayan	10,686,301 B2	6/2020	Oehring et al.
9,051,923 B2	6/2015	Kuo	10,695,950 B2	6/2020	Igo et al.
9,061,223 B2	6/2015	Winborn	10,711,576 B2	7/2020	Bishop
9,062,545 B2	6/2015	Roberts et al.	10,731,561 B2	8/2020	Oehring et al.
9,067,182 B2	6/2015	Nichols	10,740,730 B2	8/2020	Altamirano et al.
9,103,193 B2	8/2015	Coli	10,767,561 B2	9/2020	Brady
9,119,326 B2	8/2015	McDonnell	10,781,752 B2	9/2020	Kikkawa et al.
9,121,257 B2	9/2015	Coli et al.	10,794,165 B2	10/2020	Fischer et al.
9,140,105 B2	9/2015	Pattillo	10,988,998 B2	4/2021	Fischer et al.
9,140,110 B2	9/2015	Coli et al.	11,066,912 B2 *	7/2021	Broussard E21B 43/26
9,160,168 B2	10/2015	Chapel	11,549,346 B2 *	1/2023	Broussard F04D 29/66
9,175,554 B1	11/2015	Watson	2002/0169523 A1	11/2002	Ross
9,206,684 B2	12/2015	Parra	2003/0000759 A1	1/2003	Schmitz
9,260,253 B2	2/2016	Naizer	2003/0056514 A1	3/2003	Lohn
9,322,239 B2	4/2016	Angeles Boza et al.	2003/0079875 A1	5/2003	Weng
9,324,049 B2	4/2016	Thomeer	2003/0138327 A1	7/2003	Jones et al.
9,340,353 B2	5/2016	Oren	2004/0040746 A1	3/2004	Niedemayr
9,353,593 B1	5/2016	Lu et al.	2004/0045703 A1	3/2004	Hooper et al.
9,366,114 B2	6/2016	Coli et al.	2004/0102109 A1	5/2004	Cratty
9,395,049 B2 *	7/2016	Vicknair F17D 1/08	2004/0167738 A1	8/2004	Miller
9,410,410 B2	8/2016	Broussard et al.	2005/0061548 A1	3/2005	Hooper
9,450,385 B2	9/2016	Kristensen	2005/0116542 A1	6/2005	Seiver
9,456,540 B2 *	10/2016	Rees F16D 11/08	2005/0274508 A1	12/2005	Folk
9,458,687 B2	10/2016	Hallundbaek	2006/0052903 A1	3/2006	Bassett
9,475,020 B2	10/2016	Coli et al.	2006/0065319 A1	3/2006	Csitari
9,475,021 B2	10/2016	Coli et al.	2006/0260331 A1	11/2006	Andreychuk
9,482,086 B2	11/2016	Richardson et al.	2007/0131410 A1	6/2007	Hill
9,499,335 B2	11/2016	McIver	2007/0187163 A1	8/2007	Cone
9,506,333 B2	11/2016	Castillo et al.	2007/0201305 A1	8/2007	Heilman et al.
9,513,055 B1	12/2016	Seal	2007/0226089 A1	9/2007	DeGaray et al.
9,534,473 B2	1/2017	Morris et al.	2007/0277982 A1	12/2007	Shampine
9,562,420 B2	2/2017	Morris et al.	2007/0278140 A1	12/2007	Mallet et al.
9,587,649 B2	3/2017	Oehring	2008/0017369 A1	1/2008	Sarada
9,611,728 B2	4/2017	Oehring	2008/0041596 A1	2/2008	Blount
9,650,879 B2 *	5/2017	Broussard E21B 43/2607	2008/0095644 A1	4/2008	Mantei et al.
9,706,185 B2	7/2017	Ellis	2008/0112802 A1	5/2008	Orlando
9,728,354 B2	8/2017	Skolozdra	2008/0137266 A1	6/2008	Jensen
9,738,461 B2	8/2017	DeGaray	2008/0208478 A1	8/2008	Ella et al.
9,739,546 B2	8/2017	Bertilsson et al.	2008/0217024 A1	9/2008	Moore
			2008/0236818 A1	10/2008	Dykstra
			2008/0264625 A1	10/2008	Ochoa
			2008/0264640 A1	10/2008	Eslinger
			2008/0264649 A1	10/2008	Crawford

(56)

References Cited

U.S. PATENT DOCUMENTS

2008/0277120	A1	11/2008	Hickie	2014/0138079	A1	5/2014	Broussard
2009/0045782	A1	2/2009	Datta	2014/0174691	A1	6/2014	Kamps
2009/0065299	A1	3/2009	Vito	2014/0174717	A1	6/2014	Broussard et al.
2009/0072645	A1	3/2009	Quere	2014/0219824	A1	8/2014	Burnette
2009/0078410	A1	3/2009	Krenek et al.	2014/0238683	A1	8/2014	Korach
2009/0090504	A1	4/2009	Weightman	2014/0246211	A1	9/2014	Guidry
2009/0093317	A1	4/2009	Kajiware et al.	2014/0251623	A1	9/2014	Lestz et al.
2009/0095482	A1	4/2009	Surjaatmadja	2014/0255214	A1	9/2014	Burnette
2009/0145611	A1	6/2009	Pallini, Jr.	2014/0277772	A1	9/2014	Lopez
2009/0153354	A1	6/2009	Daussin et al.	2014/0290768	A1	10/2014	Randle
2009/0188181	A1	7/2009	Forbis	2014/0379300	A1	12/2014	Devine et al.
2009/0200035	A1	8/2009	Bjerkreim et al.	2015/0027712	A1	1/2015	Vicknair
2009/0260826	A1	10/2009	Sherwood	2015/0053426	A1	2/2015	Smith
2009/0308602	A1	12/2009	Bruins et al.	2015/0068724	A1	3/2015	Coli et al.
2010/0000508	A1	1/2010	Chandler	2015/0068754	A1	3/2015	Coli et al.
2010/0019574	A1	1/2010	Baldassarre	2015/0075778	A1	3/2015	Walters
2010/0038907	A1	2/2010	Hunt	2015/0083426	A1	3/2015	Lesko
2010/0045109	A1	2/2010	Arnold	2015/0097504	A1	4/2015	Lamascus
2010/0051272	A1	3/2010	Loree et al.	2015/0114652	A1	4/2015	Lestz
2010/0101785	A1	4/2010	Khvoshchev	2015/0136043	A1	5/2015	Shaaban
2010/0132949	A1	6/2010	DeFosse et al.	2015/0144336	A1	5/2015	Hardin et al.
2010/0146981	A1	6/2010	Motakef	2015/0159911	A1	6/2015	Holt
2010/0172202	A1	7/2010	Borgstadt	2015/0175013	A1	6/2015	Cryer et al.
2010/0200224	A1	8/2010	Nguete	2015/0176386	A1	6/2015	Castillo et al.
2010/0250139	A1	9/2010	Hobbs et al.	2015/0211512	A1	7/2015	Wiegman
2010/0293973	A1	11/2010	Erickson	2015/0211524	A1	7/2015	Broussard
2010/0303655	A1	12/2010	Seekic	2015/0217672	A1	8/2015	Shampine
2010/0322802	A1	12/2010	Kugelev	2015/0225113	A1	8/2015	Lungu
2011/0005757	A1	1/2011	Hebert	2015/0252661	A1	9/2015	Glass
2011/0017468	A1	1/2011	Birch et al.	2015/0300145	A1	10/2015	Coli et al.
2011/0052423	A1	3/2011	Gambier et al.	2015/0300336	A1	10/2015	Hernandez et al.
2011/0061855	A1	3/2011	Case et al.	2015/0314225	A1	11/2015	Coli et al.
2011/0085924	A1*	4/2011	Shampine	2015/0330172	A1	11/2015	Allmaras
			F16F 15/1407	2015/0354322	A1	12/2015	Vicknair
			188/379	2016/0006311	A1	1/2016	Li
2011/0110793	A1	5/2011	Leugemors et al.	2016/0032703	A1	2/2016	Broussard et al.
2011/0166046	A1	7/2011	Weaver	2016/0102537	A1	4/2016	Lopez
2011/0247878	A1	10/2011	Rasheed	2016/0105022	A1	4/2016	Oehring
2011/0272158	A1	11/2011	Neal	2016/0160889	A1	6/2016	Hoffman et al.
2012/0018016	A1	1/2012	Gibson	2016/0177675	A1	6/2016	Morris et al.
2012/0049625	A1	3/2012	Hopwood	2016/0177678	A1	6/2016	Morris
2012/0085541	A1	4/2012	Love et al.	2016/0186531	A1	6/2016	Harkless et al.
2012/0112757	A1	5/2012	Vrankovic et al.	2016/0208592	A1	7/2016	Oehring
2012/0127635	A1	5/2012	Grindeland	2016/0208593	A1	7/2016	Coli et al.
2012/0152716	A1	6/2012	Kikukawa et al.	2016/0208594	A1	7/2016	Coli et al.
2012/0205301	A1	8/2012	McGuire et al.	2016/0208595	A1	7/2016	Tang
2012/0205400	A1	8/2012	DeGaray et al.	2016/0221220	A1	8/2016	Paige
2012/0222865	A1	9/2012	Larson	2016/0230524	A1	8/2016	Dumoit
2012/0232728	A1	9/2012	Karimi	2016/0230525	A1	8/2016	Lestz et al.
2012/0247783	A1	10/2012	Berner, Jr	2016/0230660	A1	8/2016	Zeitoun et al.
2012/0255734	A1	10/2012	Coli et al.	2016/0258267	A1	9/2016	Payne et al.
2013/0009469	A1	1/2013	Gillett	2016/0265457	A1	9/2016	Stephenson
2013/0025706	A1	1/2013	DeGaray et al.	2016/0273328	A1	9/2016	Oehring
2013/0051971	A1	2/2013	Wyse et al.	2016/0273456	A1	9/2016	Zhang et al.
2013/0175038	A1	7/2013	Conrad	2016/0281484	A1	9/2016	Lestz
2013/0175039	A1	7/2013	Guidry	2016/0290114	A1	10/2016	Oehring
2013/0180722	A1	7/2013	Olarte Caro et al.	2016/0290563	A1	10/2016	Diggins
2013/0189629	A1	7/2013	Chandler	2016/0312108	A1	10/2016	Lestz et al.
2013/0199617	A1	8/2013	DeGaray et al.	2016/0319650	A1	11/2016	Oehring
2013/0233542	A1	9/2013	Shampine	2016/0326853	A1	11/2016	Fred et al.
2013/0255271	A1	10/2013	Yu et al.	2016/0326854	A1	11/2016	Broussard
2013/0284278	A1	10/2013	Winborn	2016/0326855	A1	11/2016	Coli et al.
2013/0284455	A1	10/2013	Kajaria et al.	2016/0341281	A1	11/2016	Brunvold et al.
2013/0299167	A1	11/2013	Fordyce et al.	2016/0348479	A1	12/2016	Oehring
2013/0306322	A1	11/2013	Sanborn et al.	2016/0349728	A1	12/2016	Oehring
2013/0317750	A1	11/2013	Hunter	2016/0369609	A1	12/2016	Morris et al.
2013/0341029	A1	12/2013	Roberts et al.	2017/0016433	A1	1/2017	Chong
2013/0343858	A1	12/2013	Flusche	2017/0021318	A1	1/2017	McIver et al.
2014/0000899	A1	1/2014	Nevison	2017/0022788	A1	1/2017	Oehring et al.
2014/0010671	A1*	1/2014	Cryer	2017/0022807	A1	1/2017	Dursun
			B60K 6/485	2017/0028368	A1	2/2017	Oehring et al.
			290/45	2017/0030177	A1	2/2017	Oehring et al.
2014/0054965	A1	2/2014	Jain	2017/0030178	A1	2/2017	Oehring et al.
2014/0060658	A1	3/2014	Hains	2017/0036178	A1	2/2017	Coli et al.
2014/0095114	A1	4/2014	Thomeer	2017/0036872	A1	2/2017	Wallace
2014/0096974	A1	4/2014	Coli	2017/0037717	A1	2/2017	Oehring
2014/0124162	A1	5/2014	Leavitt	2017/0037718	A1	2/2017	Coli et al.
				2017/0043280	A1	2/2017	Vankouwenberg
				2017/0051732	A1	2/2017	Hernandez et al.

(56)

References Cited

U.S. PATENT DOCUMENTS

2017/0074076 A1 3/2017 Joseph et al.
 2017/0082033 A1 3/2017 Wu et al.
 2017/0089189 A1 3/2017 Norris et al.
 2017/0096885 A1 4/2017 Oehring
 2017/0104389 A1 4/2017 Morris et al.
 2017/0114625 A1 4/2017 Norris
 2017/0130743 A1 5/2017 Anderson
 2017/0138171 A1 5/2017 Richards et al.
 2017/0146189 A1 5/2017 Herman
 2017/0159570 A1 6/2017 Bickert
 2017/0159654 A1 6/2017 Kendrick
 2017/0175516 A1 6/2017 Eslinger
 2017/0212535 A1 7/2017 Shelman et al.
 2017/0218727 A1 8/2017 Oehring
 2017/0218843 A1 8/2017 Oehring et al.
 2017/0222409 A1 8/2017 Oehring et al.
 2017/0226838 A1 8/2017 Ceizobka et al.
 2017/0226842 A1 8/2017 Omont et al.
 2017/0234250 A1 8/2017 Janik
 2017/0241221 A1 8/2017 Seshadri
 2017/0259227 A1 9/2017 Morris et al.
 2017/0292513 A1 10/2017 Haddad
 2017/0302218 A1 10/2017 Janik
 2017/0313499 A1 11/2017 Hughes et al.
 2017/0314380 A1 11/2017 Oehring
 2017/0314979 A1 11/2017 Ye et al.
 2017/0328179 A1 11/2017 Dykstra
 2017/0369258 A1 12/2017 DeGaray
 2017/0370639 A1 12/2017 Barden et al.
 2018/0028992 A1 2/2018 Stegemoeller
 2018/0038216 A1 2/2018 Zhang
 2018/0045331 A1 2/2018 Lopez
 2018/0090914 A1 3/2018 Johnson et al.
 2018/0181830 A1 6/2018 Laharuka et al.
 2018/0216455 A1 8/2018 Andreychuk
 2018/0238147 A1 8/2018 Shahri
 2018/0245428 A1 8/2018 Richards
 2018/0259080 A1 9/2018 Dale et al.
 2018/0266217 A1 9/2018 Funkhauser et al.
 2018/0266412 A1 9/2018 Stokkevag
 2018/0284817 A1 10/2018 Cook et al.
 2018/0291713 A1 10/2018 Jeanson
 2018/0298731 A1 10/2018 Bishop
 2018/0312738 A1 11/2018 Rutsch et al.
 2018/0320483 A1 11/2018 Zhang
 2018/0343125 A1 11/2018 Clish
 2018/0363437 A1 12/2018 Coli et al.
 2018/0363640 A1 12/2018 Kajita et al.
 2018/0366950 A1 12/2018 Pedersen et al.
 2019/0003329 A1 1/2019 Morris
 2019/0010793 A1 1/2019 Hinderliter
 2019/0063309 A1 2/2019 Davis
 2019/0100989 A1 4/2019 Stewart
 2019/0112910 A1 4/2019 Oehring
 2019/0119096 A1 4/2019 Haile
 2019/0120024 A1 4/2019 Oehring
 2019/0128080 A1 5/2019 Ross
 2019/0154020 A1 5/2019 Glass
 2019/0162061 A1 5/2019 Stephenson
 2019/0169971 A1 6/2019 Oehring
 2019/0178057 A1 6/2019 Hunter
 2019/0178235 A1 6/2019 Coskrey
 2019/0203567 A1 7/2019 Ross
 2019/0203572 A1 7/2019 Morris
 2019/0211661 A1 7/2019 Reckels
 2019/0226317 A1 7/2019 Payne
 2019/0245348 A1 8/2019 Hinderliter
 2019/0249527 A1 8/2019 Kraynek
 2019/0292866 A1 9/2019 Ross
 2019/0292891 A1 9/2019 Kalaria
 2019/0316447 A1 10/2019 Oehring
 2020/0040878 A1 2/2020 Morris
 2020/0047141 A1 2/2020 Oehring et al.
 2020/0088152 A1 3/2020 Allion et al.

2020/0232454 A1 7/2020 Chretien
 2020/0325760 A1 10/2020 Markham
 2020/0350790 A1 11/2020 Luft et al.

FOREIGN PATENT DOCUMENTS

CA 2707269 12/2010
 CA 2482943 5/2011
 CA 3050131 11/2011
 CA 2955706 10/2012
 CA 2966672 10/2012
 CA 3000322 4/2013
 CA 2787814 2/2014
 CA 2833711 5/2014
 CA 2978706 9/2016
 CA 2944980 2/2017
 CA 3006422 6/2017
 CA 3018485 8/2017
 CA 2964593 10/2017
 CA 2849825 7/2018
 CA 3067854 A1 1/2019
 CA 2919649 2/2019
 CA 2919666 7/2019
 CA 2797081 9/2019
 CA 2945579 10/2019
 CN 201687513 12/2010
 CN 101977016 2/2011
 CN 202023547 11/2011
 CN 102602322 7/2012
 CN 104196613 A1 12/2014
 CN 205986303 U 2/2017
 CN 108049999 A1 5/2018
 JP 2004264589 9/2004
 WO 2008081368 A1 7/2008
 WO 2009046280 4/2009
 WO 2014177346 11/2014
 WO 2016/144939 9/2016
 WO 2016/160458 10/2016
 WO 2018044307 A1 3/2018
 WO 2018213925 A1 11/2018
 WO 2019210417 11/2019

OTHER PUBLICATIONS

Notice of Allowance issued in corresponding U.S. Appl. No. 14/622,532 dated Mar. 27, 2017.
 Notice of Allowance issued in corresponding U.S. Appl. No. 15/217,040 dated Mar. 28, 2017.
 Notice of Allowance mailed Apr. 23, 2019 in corresponding U.S. Appl. No. 15/635,028.
 Notice of Allowance mailed Jan. 9, 2020 in related U.S. Appl. No. 16/570,331.
 Office Action dated Apr. 10, 2018 in related U.S. Appl. No. 15/294,349.
 Office Action dated Apr. 2, 2018 in related U.S. Appl. No. 15/183,387.
 Office Action dated May 29, 2018 in related U.S. Appl. No. 15/235,716.
 Office Action mailed Aug. 19, 2019 in related U.S. Appl. No. 15/356,436.
 Office Action mailed Aug. 4, 2020 in related U.S. Appl. No. 16/385,070.
 Office Action mailed Dec. 12, 2018 in related U.S. Appl. No. 16/160,708.
 Office Action mailed Jan. 30, 2019 in related Canadian Patent Application No. 2,936,997.
 Office Action mailed Jul. 25, 2018 in related U.S. Appl. No. 15/644,487.
 Office Action mailed Jun. 11, 2019 in corresponding U.S. Appl. No. 16/210,749.
 Office Action mailed Jun. 29, 2020 in related U.S. Appl. No. 16/404,283.
 Office Action mailed Jun. 29, 2020 in related U.S. Appl. No. 16/728,359.
 Office Action mailed Jun. 7, 2019 in corresponding U.S. Appl. No. 16/170,695.

(56)

References Cited**OTHER PUBLICATIONS**

Office Action mailed Mar. 1, 2019 in related Canadian Patent Application No. 2,943,275.

Office Action mailed May 10, 2019 in corresponding U.S. Appl. No. 16/268,030.

Office Action mailed Oct. 11, 2019 in related U.S. Appl. No. 16/385,070.

Office Action mailed Oct. 2, 2019 in related U.S. Appl. No. 16/152,732.

Office Action mailed Sep. 11, 2019 in related U.S. Appl. No. 16/268,030.

Office Action mailed Sep. 20, 2019 in related U.S. Appl. No. 16/443,273.

Office Action mailed Sep. 3, 2019 in related U.S. Appl. No. 15/994,772.

Schlumberger, "Jet Manual 23, Fracturing Pump Units, SPF/SPS-343, Version 1.0," Jan. 31, 2007, 68 pages.

Stewart & Stevenson, "Stimulation Systems," 2007, 20 pages.

UK Power Networks—Transformers to Supply Heat to Tate Modern—from Press Releases May 16, 2013.

Woodbury et al., "Electrical Design Considerations for Drilling Rigs," IEEE Transactions on Industry Applications, vol. 1A-12, No. 4, Jul./Aug. 1976, pp. 421-431.

International Search Report and Written Opinion mailed Nov. 26, 2019 in related PCT Application No. PCT/US19/51018.

International Search Report and Written Opinion mailed Sep. 11, 2019 in related PCT Application No. PCT/US2019/037493.

International Search Report and Written Opinion Mailed Sep. 3, 2020 in PCT/US2020/36932.

Karim, "Duel Fuel Diesel Engines," (2015), Taylor & Francis, pp. 62-63, Retrieved from <https://app.knovel.com/hotlink/oc/id:kpDFDE0001/dual-fueal-diesel-engines/duel-fuel-diesel-engines> (Year 2015).

Luis Gamboa, "Variable Frequency Drives in Oil and Gas Pumping Systems," Dec. 17, 2011, 5 pages.

Morris et al., U.S. Appl. No. 62/526,869; Hydration-Blender Transport and Electric Power Distribution for Fracturing Operation; Jun. 28, 2018; USPTO; see entire document.

Non-Final Office Action mailed Mar. 3, 2020 in U.S. Appl. No. 16/152,695.

Non-Final Office Action dated Oct. 4, 2018 in related U.S. Appl. No. 15/217,081.

Non-Final Office Action issued in corresponding U.S. Appl. No. 14/622,532 dated Aug. 5, 2015.

Non-Final Office Action issued in corresponding U.S. Appl. No. 14/622,532 dated May 17, 2016.

Non-Final Office Action issued in corresponding U.S. Appl. No. 14/884,363 dated Sep. 5, 2017.

Office Action issued in corresponding U.S. Appl. No. 15/145,443 dated Feb. 7, 2017.

Office Action issued in Corresponding U.S. Appl. No. 15/145,491 on May 15, 2017.

Office Action issued in corresponding U.S. Appl. No. 15/145,491 on Sep. 12, 2016.

Office Action issued in corresponding U.S. Appl. No. 15/217,040 dated Nov. 29, 2016.

Office Action issued in corresponding U.S. Appl. No. 15/235,788 dated Dec. 14, 2016.

Office Action issued in corresponding U.S. Appl. No. 15/291,842 dated Jan. 6, 2017.

Office Action issued in corresponding U.S. Appl. No. 15/293,681 dated Feb. 16, 2017.

In corresponding U.S. Appl. No. 15/294,349 dated Mar. 14, 2017.

In corresponding U.S. Appl. No. 15/486,970 dated Jun. 22, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/487,656 dated Jun. 23, 2017.

Non-Final Office Action issued in corresponding U.S. Appl. No. 15/487,694 dated Jun. 26, 2017.

Non-Final Office Action issued in U.S. Appl. No. 14/881,535 mailed Jul. 21, 2021.

Non-Final Office Action issued in U.S. Appl. No. 16/404,283 mailed Jul. 21, 2021.

Non-Final Office Action issued in U.S. Appl. No. 16/871,928 mailed Aug. 25, 2021.

Non-Final Office Action issued in U.S. Appl. No. 16/901,774 mailed Sep. 14, 2021.

Non-Final Office Action issued in U.S. Appl. No. 16/943,727 mailed Aug. 3, 2021.

Non-Final Office Action issued in U.S. Appl. No. 17/060,647 mailed Sep. 20, 2021.

Non-Final Office Action issued in U.S. Appl. No. 14/881,535 mailed May 20, 2020.

Non-Final Office Action issued in U.S. Appl. No. 15/145,443 mailed May 8, 2020.

Non-Final Office Action issued in U.S. Appl. No. 16/458,696 mailed May 22, 2020.

Non-Final Office Action issued in U.S. Appl. No. 16/564,186 mailed Oct. 15, 2021.

Non-Final Office Action issued in U.S. Appl. No. 16/871,328 mailed Dec. 9, 2021.

Non-Final Office Action issued in U.S. Appl. No. 16/943,935 mailed Oct. 21, 2021.

Non-Final Office Action issued Nov. 13, 2017 in related U.S. Appl. No. 15/644,487.

Non-Final Office Action issued Nov. 29, 2017 in related U.S. Appl. No. 15/145,414.

Non-Final Office Action issued Oct. 6, 2017 in related U.S. Appl. No. 14/881,535.

Non-Final Office Action Mailed Aug. 31, 2020 in U.S. Appl. No. 16/167,083.

Non-Final Office Action mailed Dec. 23, 2019 in related U.S. Appl. No. 16/597,008.

Non-Final Office Action mailed Dec. 6, 2019 in related U.S. Appl. No. 16/564,186.

Non-Final Office Action mailed Feb. 12, 2019 in related U.S. Appl. No. 16/170,695.

Non-Final Office Action mailed Feb. 25, 2019 in related U.S. Appl. No. 16/210,749.

Non-Final Office Action mailed Jan. 10, 2020 in related U.S. Appl. No. 16/597,014.

Non-Final Office Action mailed Jan. 29, 2021 in U.S. Appl. No. 16/564,185.

Non-Final Office Action mailed Jan. 4, 2021 in U.S. Appl. No. 16/522,043.

Non-Final Office Action mailed Mar. 6, 2019 in related U.S. Appl. No. 15/183,387.

Non-Final Office Action Mailed Sep. 2, 2020 in U.S. Appl. No. 16/356,263.

Non-Final Office Action Mailed Sep. 29, 2020 in U.S. Appl. No. 16/943,727.

Non-Final Office Mailed Oct. 26, 2020 in U.S. Appl. No. 15/356,436.

Non-Final Office Mailed Oct. 5, 2020 in U.S. Appl. No. 16/443,273.

"Griswold Model 811 Pumps: Installation, Operation and Maintenance Manual, ANSI Process Pump," 2010, 60 pages.

"Heat Exchanger" (https://en.wikipedia.org/w/index.php?title=Heat_exchanger&oldid=89300146) Dec. 18, 2019 Apr. 2019 (Apr. 18, 2019), entire document, especially para (0001).

"Process Burner" (<https://www.cebasrt.com/products/loii-gas/process-burner>) Sep. 6, 2006, 2018 (Sep. 6, 2018), entire document, especially para (Burners for refinery Heaters).

"Water and Glycol Heating Systems" (<https://www.heat-inc.com/wg-series-water-glycol-systems/>) Jun. 18, 2018 Jun. 18, 2018), entire document, especially WG Series Water Glycol Systems.

Albone, "Mobile Compressor Stations for Natural Gas Transmission Service," ASME 67-GT-33, Turbo Expo, Power for Land, Sea and Air, vol. 79887, p. 1-10, 1967.

Canadian Patent Application No. 2,944,980, filed Aug. 12, 2016, 25 pages.

Canadian Office Action dated Apr. 18, 2018 in related Canadian Patent Application No. 2,928,711.

Canadian Office Action dated Mar. 2, 2018 in related Canadian Patent Application No. 2,833,711.

(56)

References Cited**OTHER PUBLICATIONS**

Canadian Office Action dated Sep. 28, 2018 in related Canadian Patent Application No. 2,945,281.
 Canadian Office Action issued Aug. 31, 2020 in Canadian Patent Application No. 2,944,980.
 Canadian Office Action issued in Canadian Application No. 3,094,768 mailed Oct. 28, 2021.
 Canadian Office Action issued Sep. 22, 2020 in Canadian Application No. 2,982,974.
 Canadian Office Action issued Sep. 8, 2020 in Canadian Patent Application No. 2,928,707.
 Canadian Office Action mailed Aug. 17, 2020 in related CA Patent Application No. 2,944,968.
 Canadian Office Action mailed Aug. 18, 2020 in related CA Patent Application No. 2,933,444.
 Canadian Office Action mailed Jun. 20, 2019 in corresponding CA Application No. 2,964,597.
 Canadian Office Action mailed Jun. 22, 2018 in related Canadian Patent Application No. 2,886,697.
 Canadian Office Action mailed May 30, 2019 in corresponding CA Application No. 2,833,711.
 Canadian Office Action mailed Oct. 1, 2019 in related Canadian Patent Application No. 2,936,997.
 Final Office Action issued in corresponding U.S. Appl. No. 14/622,532 dated Dec. 21, 2015.
 Final Office Action issued in corresponding U.S. Appl. No. 14/622,532 dated Dec. 7, 2016.
 Final Office Action issued in corresponding U.S. Appl. No. 15/145,491 dated Jan. 20, 2017.
 Final Office Action issued in corresponding U.S. Appl. No. 15/145,491 dated Sep. 6, 2017.
 Final Office Action issued in corresponding U.S. Appl. No. 15/294,349 dated Jul. 6, 2017.
 Final Office Action issued in U.S. Appl. No. 16/356,263 mailed Oct. 7, 2021.
 Final Office Action mailed Feb. 4, 2021 in U.S. Appl. No. 16/597,014.
 Final Office Action mailed Jan. 11, 2021 in U.S. Appl. No. 16/404,283.
 Final Office Action mailed Jan. 21, 2021 in U.S. Appl. No. 16/458,696.
 Final Office Action mailed Mar. 31, 2020 in U.S. Appl. No. 15/356,436.

Goodwin, "High-voltage auxilliary switchgear for power stations," Power Engineering Journal, 1989, 10 pg. (Year 1989).
 International Search Report and Written Opinion mailed Dec. 14, 2020 in PCT/US2020/53980.
 International Search Report and Written Opinion mailed Feb. 2, 2021 in PCT/US20/58906.
 International Search Report and Written Opinion mailed Feb. 3, 2021 in PCT/US20/58899.
 International Search Report and Written Opinion mailed Feb. 4, 2021 in PCT/US20/59834.
 International Search Report and Written Opinion mailed Jun. 2, 2020 in related PCT Application No. PCT/US20/23809.
 International Search Report and Written Opinion dated Sep. 19, 2018 in related PCT Patent Application No. PCT/US2018/040683.
 International Search Report and Written Opinion mailed Apr. 10, 2019 in corresponding PCT Application No. PCT/US2019/016635.
 International Search Report and Written Opinion Mailed Aug. 28, 2020 in PCT/US20/23821.
 International Search Report and Written Opinion mailed Dec. 31, 2018 in related PCT Patent Application No. PCT/US18/55913.
 International Search Report and Written Opinion mailed Feb. 11, 2020 in related PCT Application No. PCT/US2019/055323.
 International Search Report and Written Opinion mailed Feb. 15, 2019 in related PCT Application No. PCT/US18/63977.
 International Search Report and Written Opinion mailed Jan. 2, 2019 in related PCT Patent Application No. PCT/US18/54542.
 International Search Report and Written Opinion mailed Jan. 2, 2019 in related PCT Patent Application No. PCT/US18/54548.
 International Search Report and Written Opinion mailed Jan. 2, 2020 in related PCT Application No. PCT/US19/55325.
 International Search Report and Written Opinion mailed Jan. 4, 2019 in related PCT Patent Application No. PCT/US18/57539.
 International Search Report and Written Opinion mailed Jul. 22, 2020 in corresponding PCT Application No. PCT/US20/00017.
 International Search Report and Written Opinion mailed Jul. 9, 2019 in corresponding PCT Application No. PCT/US2019/027584.
 International Search Report and Written Opinion mailed Jun. 23, 2020 in corresponding PCT Application No. PCT/US20/23912.
 International Search Report and Written Opinion mailed Mar. 5, 2019 in related PCT Application No. PCT/US18/63970.
 International Search Report and Written Opinion mailed Nov. 24, 2020 in corresponding PCT Application No. PCT/US20/44274.

* cited by examiner

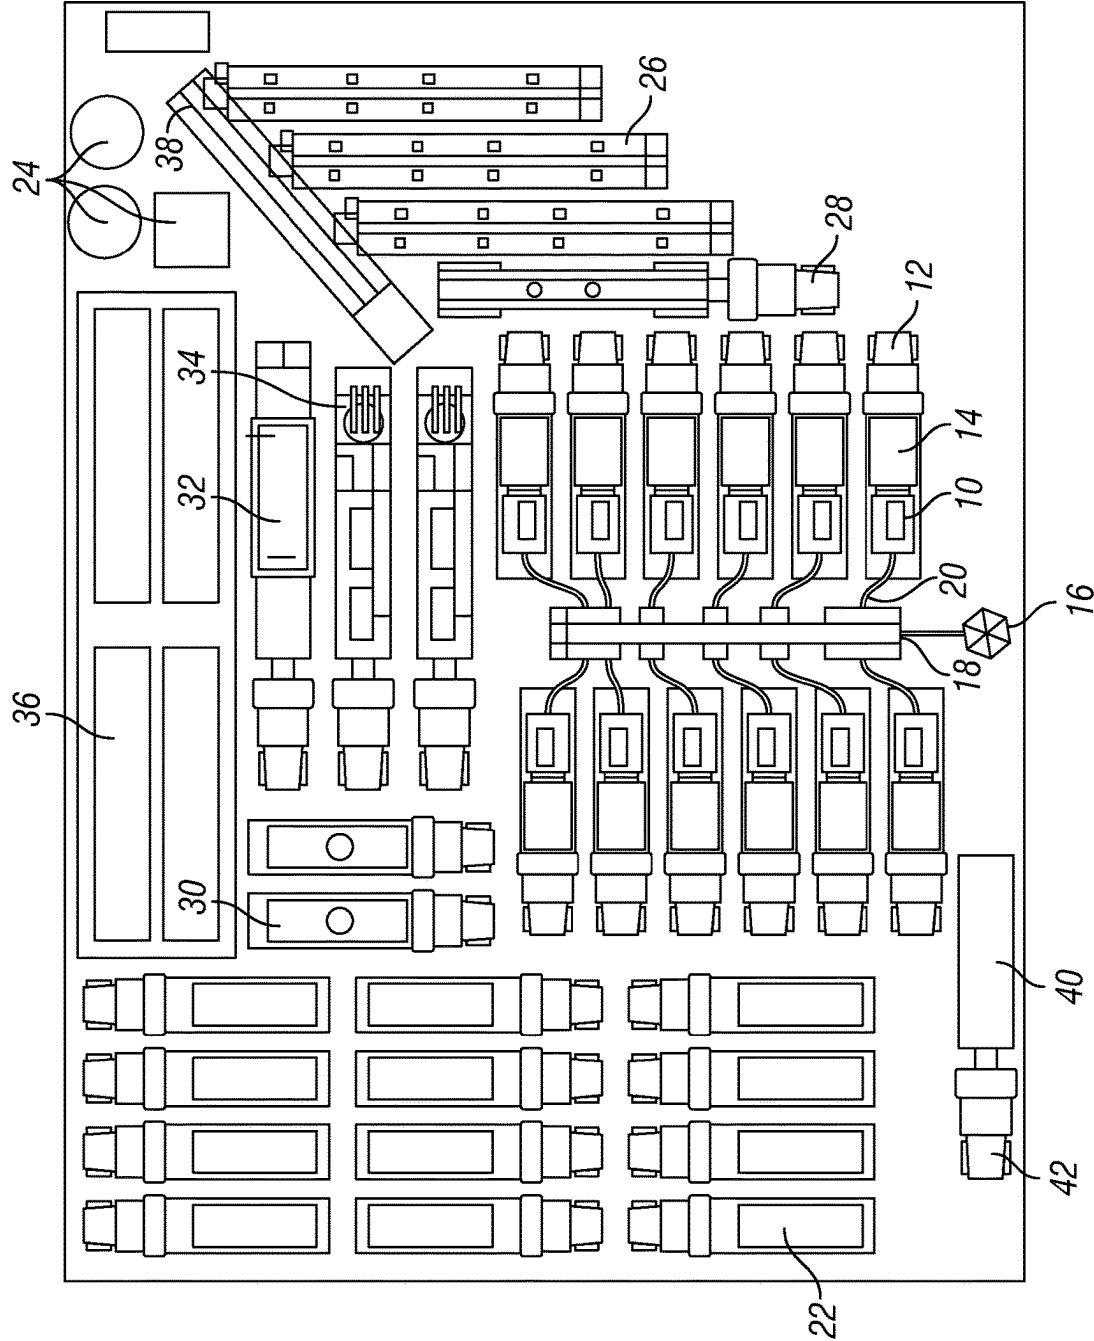


FIG. 1

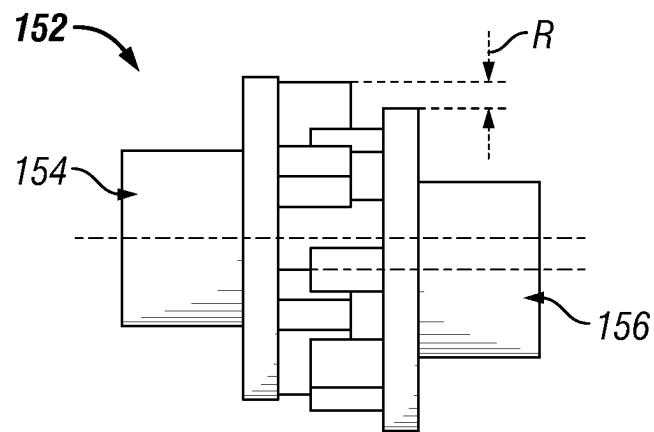


FIG. 2A

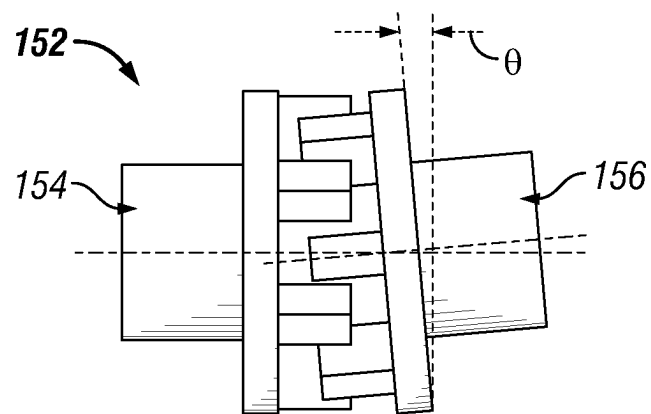


FIG. 2B

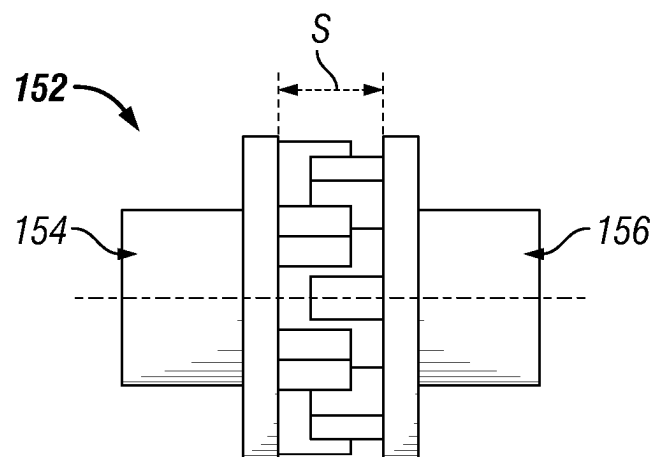


FIG. 2C

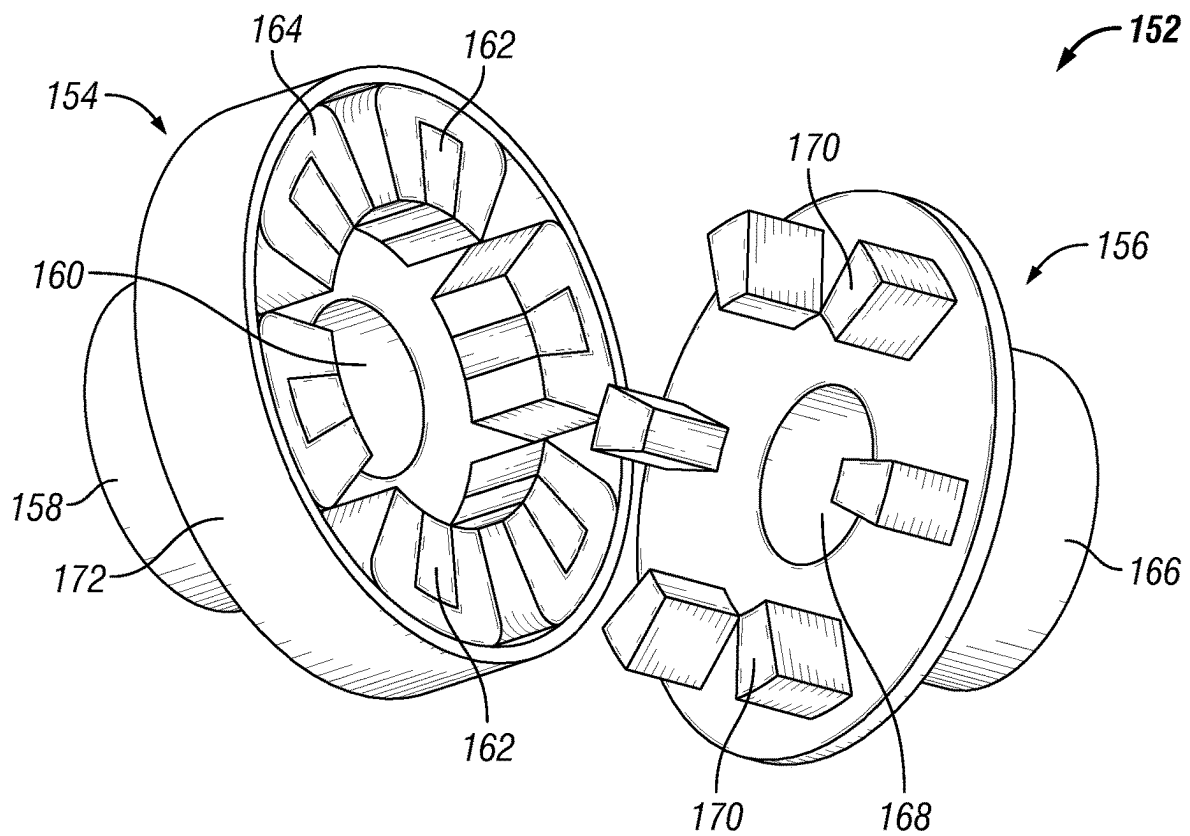


FIG. 3

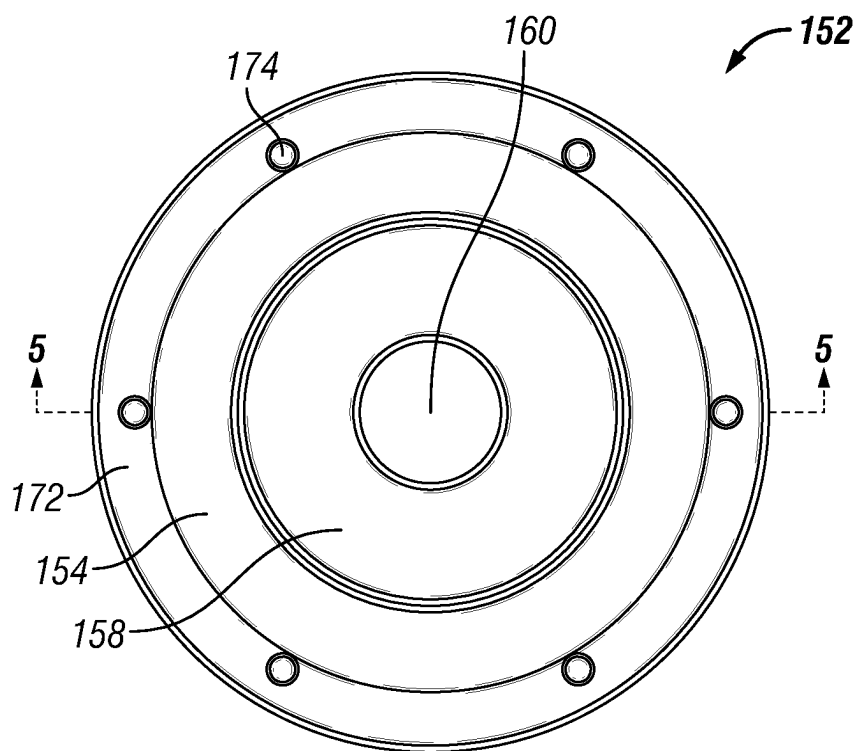


FIG. 4

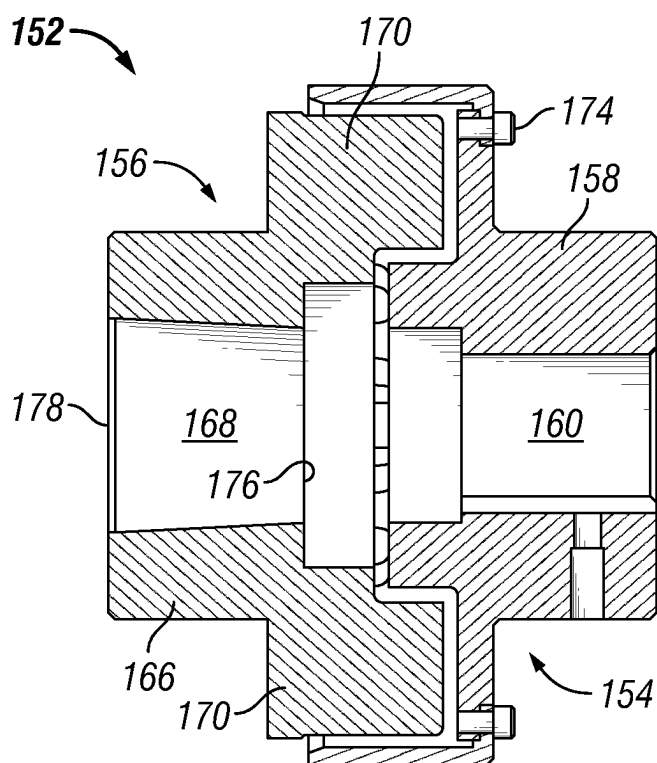


FIG. 5

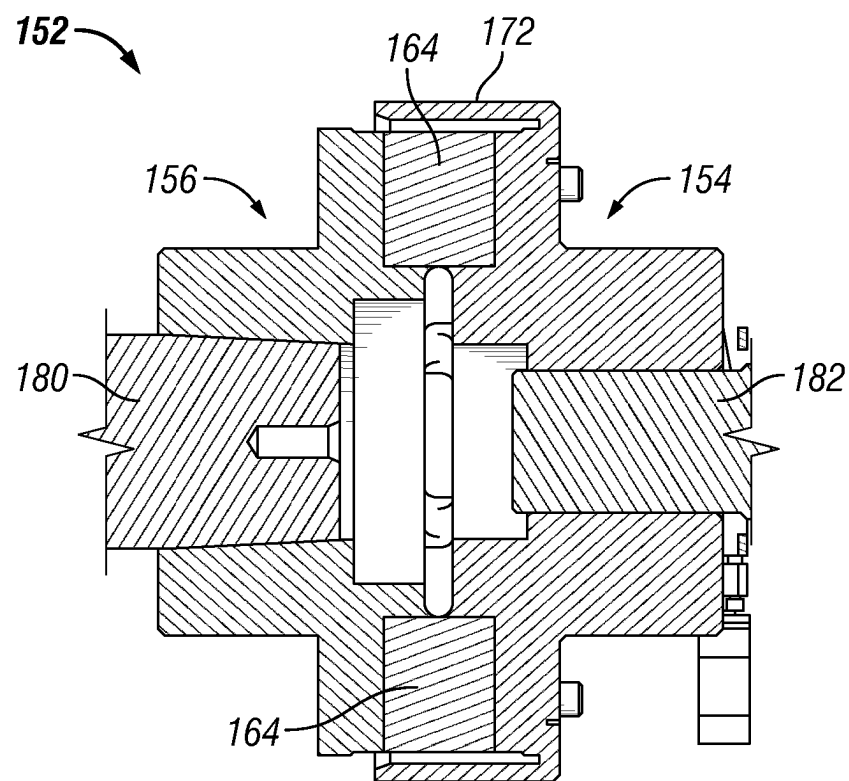


FIG. 6

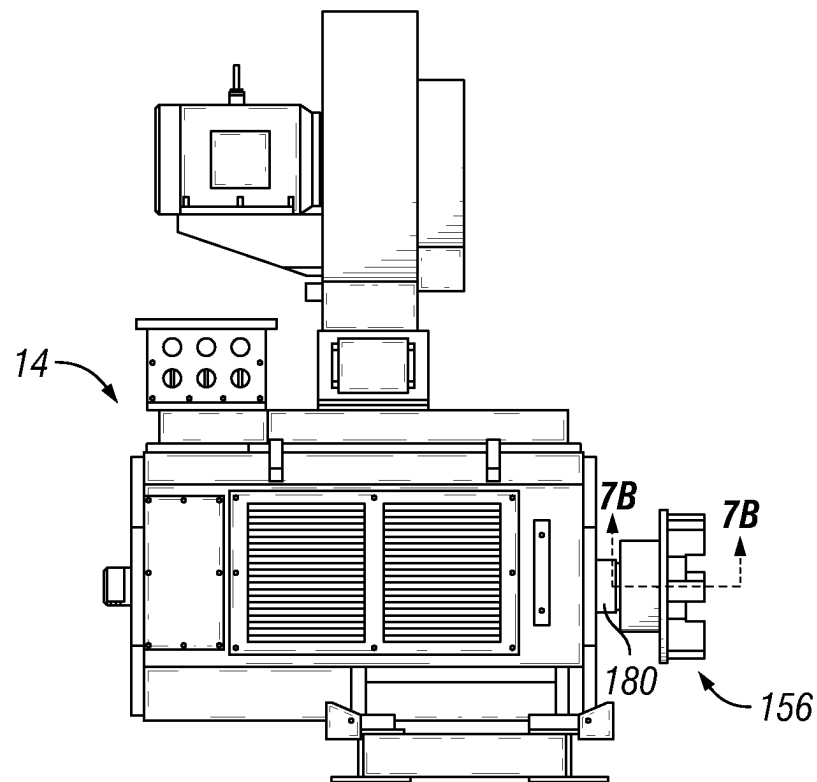


FIG. 7A

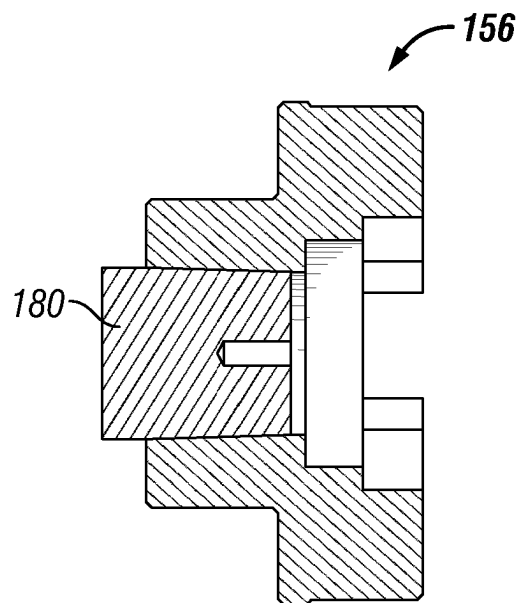


FIG. 7B

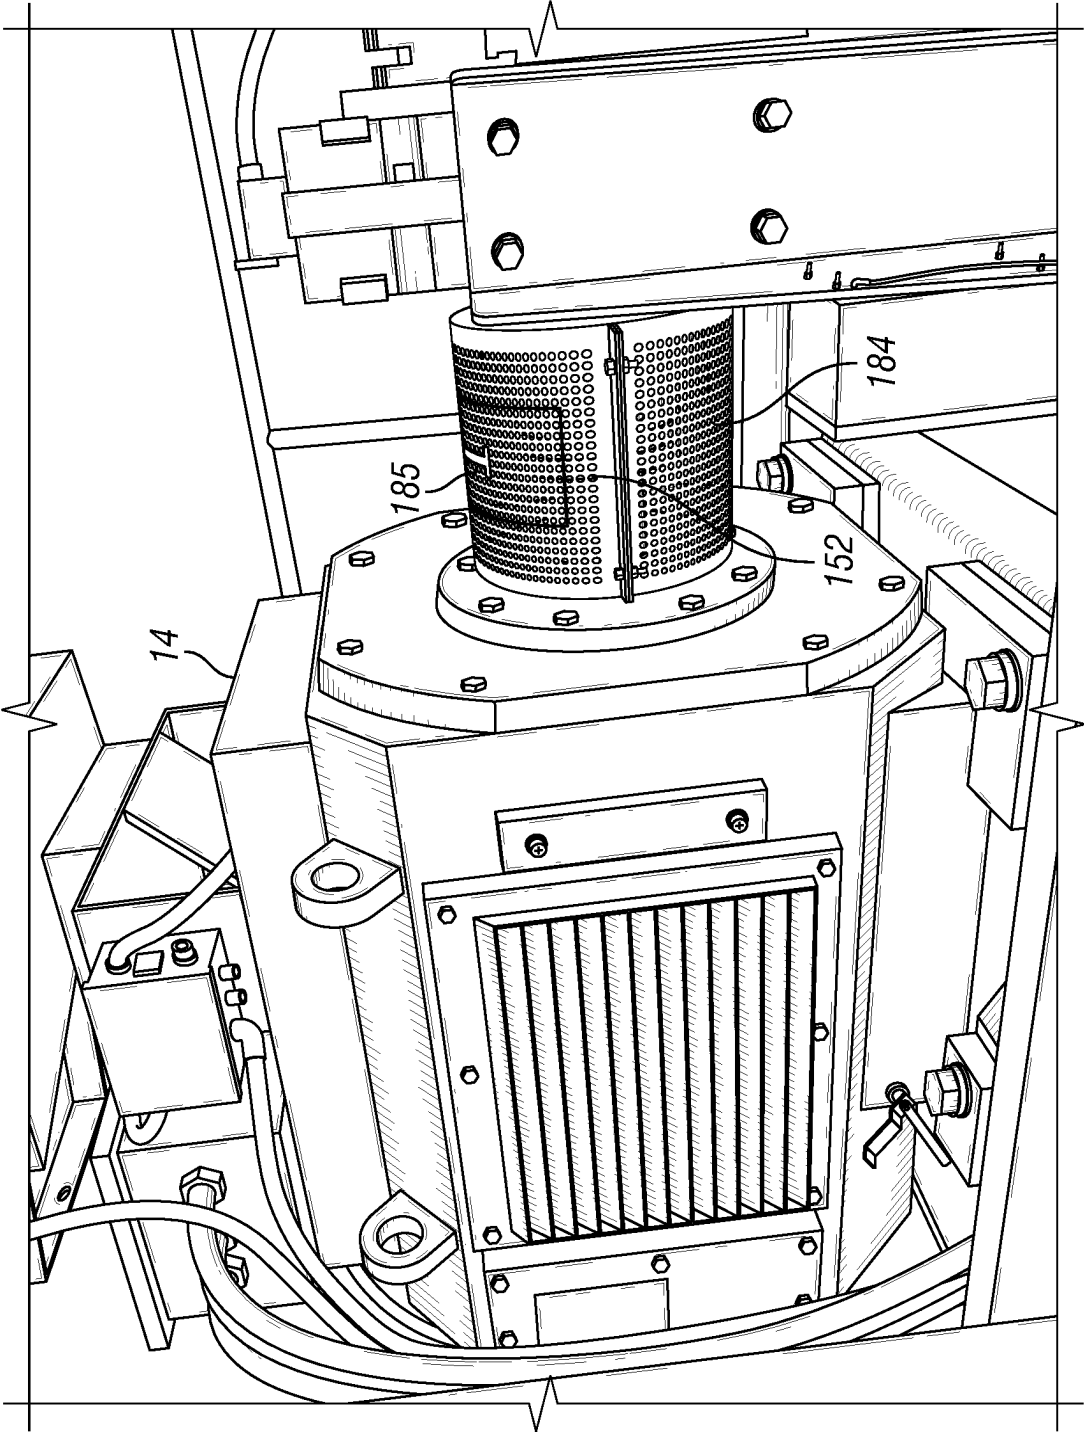


FIG. 8

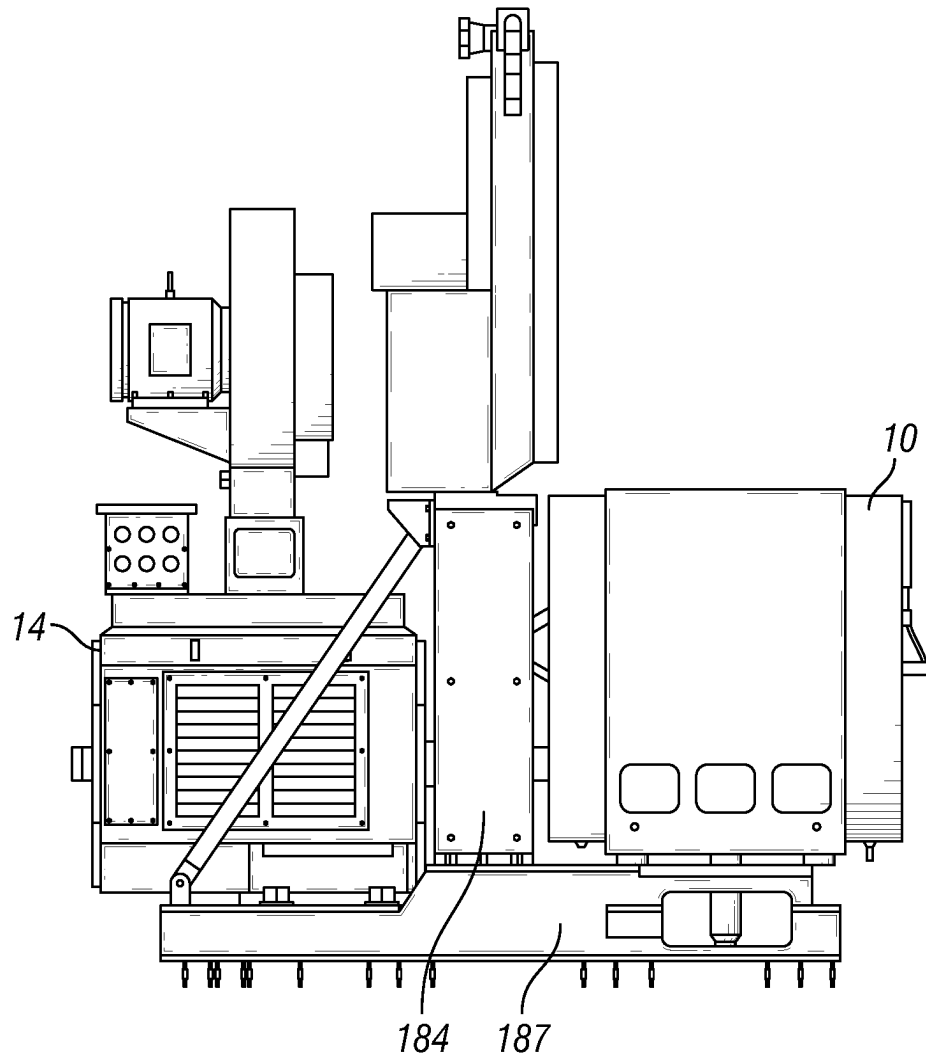


FIG. 9

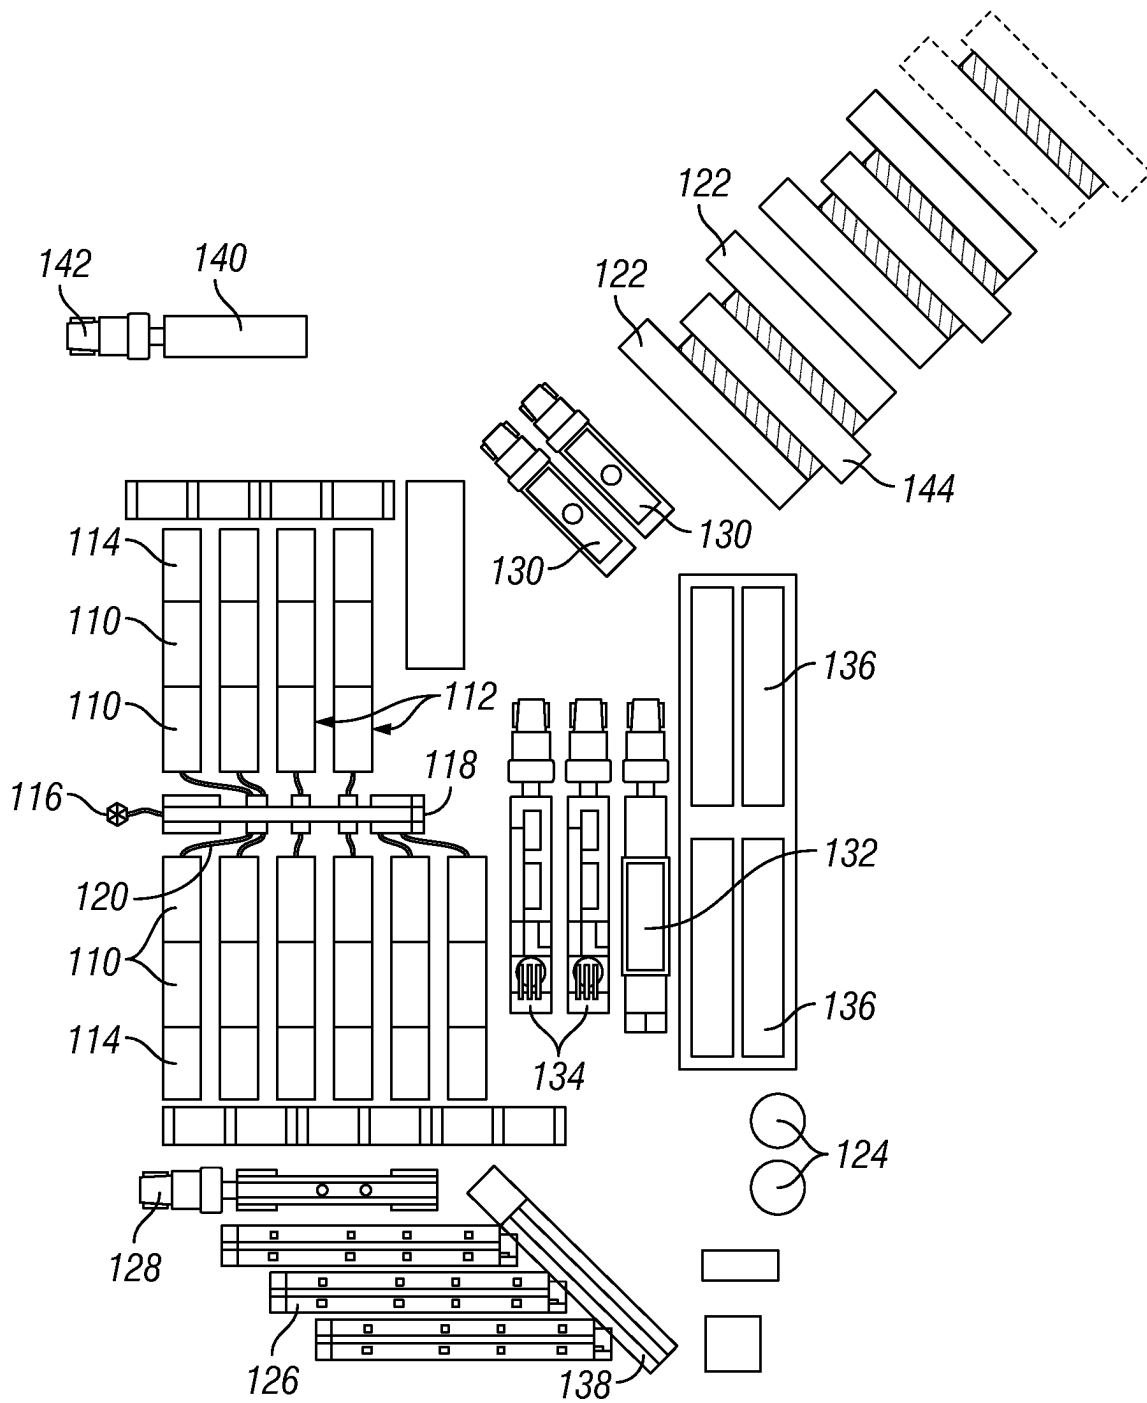


FIG. 10

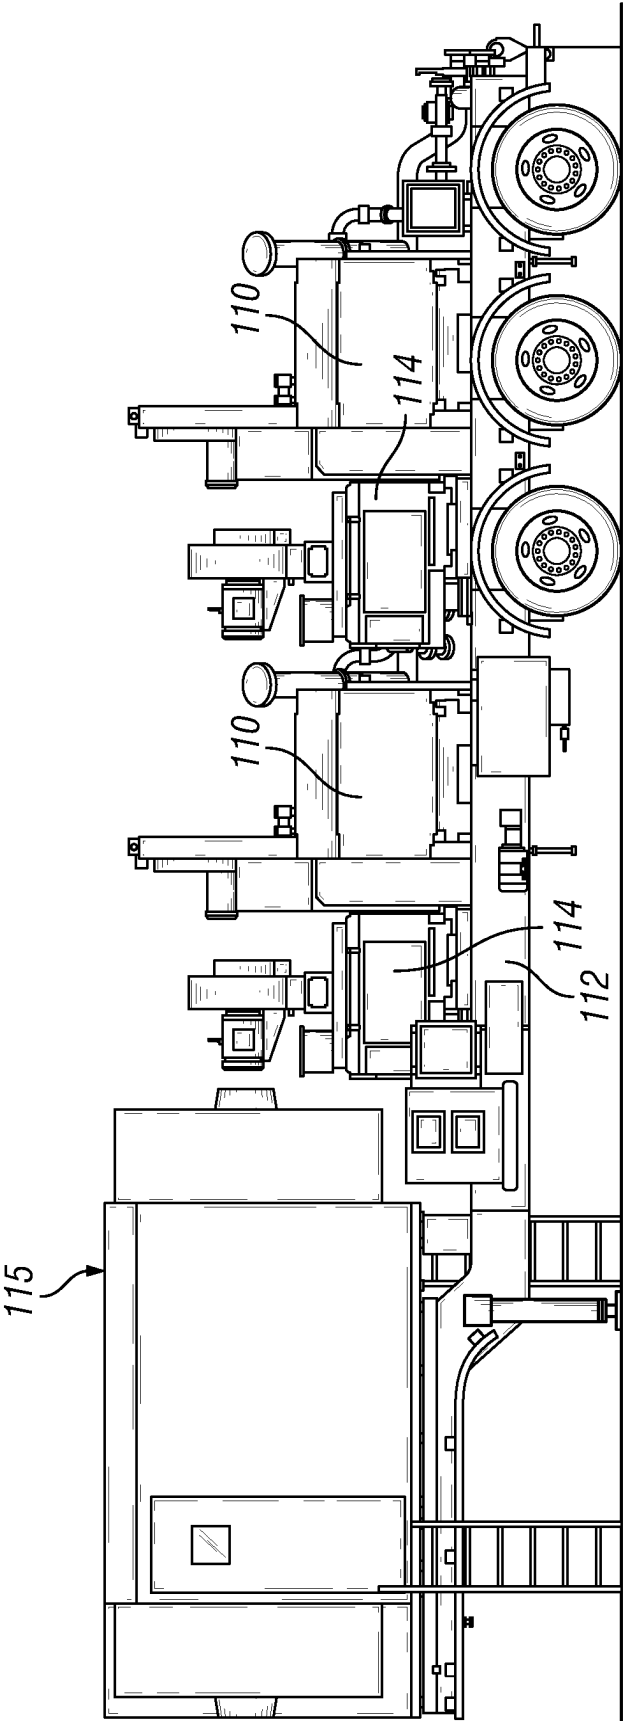


FIG. 11

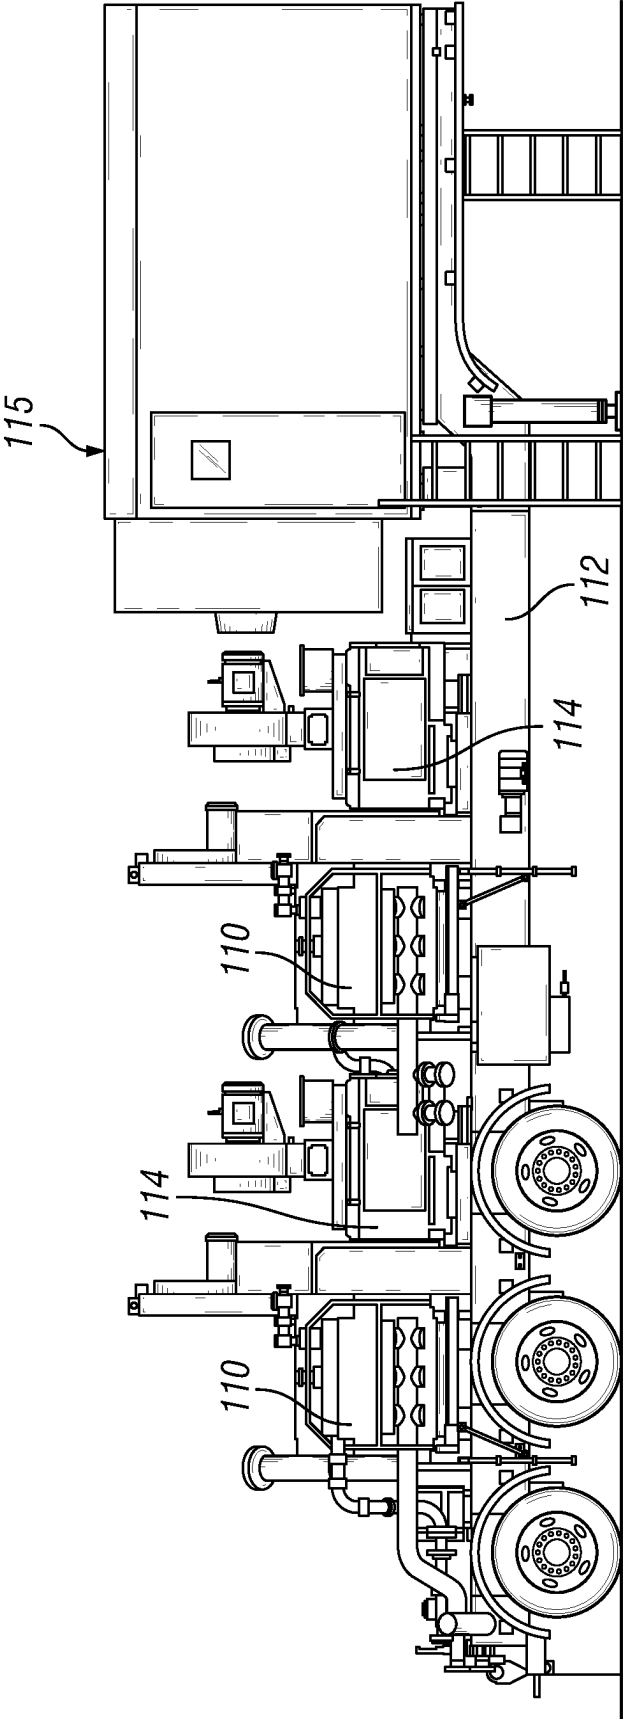


FIG. 12

1

TORSIONAL COUPLING FOR ELECTRIC HYDRAULIC FRACTURING FLUID PUMPS

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 17/379,651 filed Jul. 19, 2021 titled “TORSIONAL COUPLING FOR ELECTRIC HYDRAULIC FRACTURING FLUID PUMPS,” which is now U.S. Pat. No. 11,549,346 issued Jan. 10, 2023, which is a continuation of U.S. patent application Ser. No. 15/581,625 filed Apr. 28, 2017 titled “TORSIONAL COUPLING FOR ELECTRIC HYDRAULIC FRACTURING FLUID PUMPS,” which is now U.S. Pat. No. 11,066,912 issued Jul. 20, 2021, which is a continuation of U.S. patent application Ser. No. 14/622,532 filed Feb. 13, 2015 titled “TORSIONAL COUPLING FOR ELECTRIC HYDRAULIC FRACTURING FLUID PUMPS,” which is now U.S. Pat. No. 9,650,879 issued May 16, 2017, which is a continuation-in-part of, and claims priority to and the benefit of, U.S. patent application Ser. No. 13/679,689 filed Nov. 16, 2012 titled “SYSTEM FOR PUMPING HYDRAULIC FRACTURING FLUID USING ELECTRIC PUMPS,” which is now U.S. Pat. No. 9,410,410 issued Aug. 9, 2016, the full disclosures of which are incorporated herein by reference for all intents and purposes.

BACKGROUND OF THE INVENTION

1. Field of the Invention

This technology relates to hydraulic fracturing in oil and gas wells. In particular, this technology relates to pumping fracturing fluid into an oil or gas well using pumps powered by electric motors.

2. Brief Description of Related Art

Typically, motors are used at a well site to drive equipment. For example, diesel, gas, or electric motors might be used to drive pumps, blenders, or hydration units for carrying out hydraulic fracturing operations. Such motors are attached to the well site equipment by connecting the shaft of the motor to a shaft on the equipment, such a pump shaft for a pump, or a hydraulic motor shaft for a blender or a hydration unit. In order to compensate for misalignment between the motor and the equipment driven by the motor, a U-joint shaft is typically used. The U-joint shaft allows limited radial, angular, or even axial misalignment between the motor and the equipment, while still allowing mechanical communication between the shafts of the motor and the equipment to drive the equipment.

Use of U-joint shafts, however, can be problematic in practice. For example, U-joint shafts introduce inefficiencies into the system, losing up to 10% or more of the energy that would otherwise be transmitted from the motor shaft to the equipment. Furthermore, a minimum of 3 degrees of offset can be required between the motor and the equipment in order for the U-joint shaft to function properly. This offset leads to the need for a longer shaft, which in turn leads to greater separation between the motor and the equipment. Such separation can be problematic in setup where space is limited, for example, where both the motor and a pump are mounted to a trailer or truck body.

SUMMARY OF THE INVENTION

The present technology provides a system for hydraulically fracturing an underground formation in an oil or gas

2

well. The system includes a pump for pumping hydraulic fracturing fluid into the wellbore at high pressure so that the fluid passes from the wellbore into the formation and fractures the formation, the pump having a pump shaft that turns to activate the pump. The system further includes an electric motor with a motor shaft mechanically attached to the pump to drive the pump, and a torsional coupling connecting the motor shaft to the pump shaft. The torsional coupling has a motor component fixedly attached to the motor shaft of the electric motor and having motor coupling claws extending outwardly away from the motor shaft, and a pump component fixedly attached to the pump shaft of the pump and having pump coupling claws extending outwardly away from the pump shaft. The motor coupling claws engage with the pump coupling claws so that when the motor shaft and motor component rotate, such rotation causes the pump component and the pump shaft to rotate, thereby driving the pump.

In some embodiments, the pump component or the motor component can further include elastomeric inserts positioned between the pump coupling claws or the motor coupling claws, respectively, to provide a buffer therebetween and to absorb movement and vibration in the torsional coupling. In addition, the motor coupling claws and the pump coupling claws can be spaced to allow radial misalignment, axial misalignment, or angular misalignment of the motor component and the pump component while still allowing engagement of the motor component and the pump component to transmit torque. Furthermore, the torsional coupling can further comprise a retainer cap attached to the motor component or the pump component to cover the interface therebetween and to prevent the ingress of debris or contaminants between the motor component and the pump component. The retainer cap can be removable from the torsional coupling to allow access to the inside of the coupling.

In some embodiments, the motor component can have a tapered central bore for receiving the motor shaft. In addition, the pump and the motor can be mounted on separate but aligned weldments. Alternatively, the pump and the motor can be mounted on a single common weldment. Pump and motor mounted on single weldment for ease of alignment and stability.

Another embodiment of the present technology provides a system for pumping hydraulic fracturing fluid into a wellbore. The system includes a pump having a pump shaft, an electric motor having a motor shaft mechanically attached to the pump to drive the pump, and a torsional coupling connecting the motor shaft to the pump shaft. The torsional coupling includes a motor component fixedly attached to the motor shaft and having motor coupling claws extending outwardly away from the motor shaft, and a pump component fixedly attached to the pump shaft and having pump coupling claws extending outwardly away from the pump shaft. The motor coupling claws engage with the pump coupling claws so that when the motor shaft and motor component rotate, such rotation causes the pump component and the pump shaft to rotate. In addition, the motor coupling claws and the pump coupling claws are spaced to allow radial misalignment, axial misalignment, or angular misalignment of the motor component and the pump component, while still allowing engagement of the motor component and the pump component to transmit torque.

In some embodiments, the pump component or the motor component further include elastomeric inserts positioned between the pump coupling claws or the motor coupling claws, respectively, to provide a buffer therebetween and to

3

absorb movement and vibration in the torsional coupling. In addition, the torsional coupling can further include a retainer cap attached to the motor component or the pump component to cover the interface therebetween and to prevent the ingress of debris or contaminants between the motor component and the pump component. The retainer cap can be removable from the torsional coupling to allow access to the inside of the coupling.

In some embodiments, the motor component can have a tapered central bore for receiving the motor shaft. In addition, the pump and the motor can be mounted on separate but aligned weldments. Alternatively, the pump and the motor can be mounted on a single common weldment.

Yet another embodiment of the present technology provides a system for conducting hydraulic fracturing operations in a well. The system includes hydraulic fracturing equipment, the hydraulic fracturing equipment selected from the group consisting of a hydraulic fracturing pump, a hydraulic motor of a blender, and a hydraulic motor of a hydration unit, the hydraulic fracturing equipment having a hydraulic fracturing equipment shaft. The system further includes an electric motor with a motor shaft mechanically attached to the hydraulic fracturing equipment to drive the hydraulic fracturing equipment, and a torsional coupling connecting the motor shaft to the hydraulic fracturing equipment shaft. The torsional coupling includes a motor component fixedly attached to the motor shaft of the electric motor and having motor coupling claws extending outwardly away from the motor shaft, and a hydraulic fracturing equipment component fixedly attached to the hydraulic fracturing equipment shaft of the hydraulic fracturing equipment and having hydraulic fracturing equipment coupling claws extending outwardly away from the hydraulic fracturing equipment shaft. The motor coupling claws engage with the hydraulic fracturing equipment coupling claws so that when the motor shaft and motor component rotate, such rotation causes the hydraulic fracturing equipment component and the hydraulic fracturing equipment shaft to rotate, thereby driving the hydraulic fracturing equipment.

In some embodiments, the hydraulic fracturing equipment component or the motor component can further include elastomeric inserts positioned between the hydraulic fracturing equipment coupling claws or the motor coupling claws, respectively, to provide a buffer therebetween and to absorb movement and vibration in the torsional coupling. In addition, the motor coupling claws and the hydraulic fracturing equipment coupling claws can be spaced to allow radial misalignment, axial misalignment, or angular misalignment of the motor component and the hydraulic fracturing equipment component while still allowing engagement of the motor component and the hydraulic fracturing equipment component to transmit torque.

In some embodiments, the torsional coupling can further include a retainer cap attached to the motor component or the hydraulic fracturing equipment component to cover the interface therebetween and to prevent the ingress of debris or contaminants between the motor component and the hydraulic fracturing equipment component. In addition, the motor component can have a tapered central bore for receiving the motor shaft.

BRIEF DESCRIPTION OF THE DRAWINGS

The present technology will be better understood on reading the following detailed description of nonlimiting embodiments thereof, and on examining the accompanying drawing, in which:

4

FIG. 1 is a schematic plan view of equipment used in a hydraulic fracturing operation, according to an embodiment of the present technology;

FIG. 2A is a side view of a torsional coupling according to the present technology with the components of the coupling radially misaligned;

FIG. 2B is a side view of a torsional coupling according to the present technology with the components of the coupling angularly misaligned;

FIG. 2C is a side view of a torsional coupling according to the present technology with the components of the coupling axially misaligned;

FIG. 3 is a perspective view of the torsional coupling with the components separated;

FIG. 4 is an end view of the torsional coupling according to an embodiment of the present technology;

FIG. 5 is a side cross-sectional view of the torsional coupling of FIG. 4 taken along the line 5-5 in FIG. 4;

FIG. 6 is a side cross-sectional view of the torsional coupling according to an alternate embodiment of the present technology;

FIG. 7A is a side view of a motor according to an embodiment of the present technology with a part of the torsional coupling mounted to the motor shaft;

FIG. 7B is a side cross-sectional view of the part of the torsional coupling shown in FIG. 7A, taken along line 7B-7B;

FIG. 8 is a perspective view of a motor and torsional coupling according to an embodiment of the present technology;

FIG. 9 is a side view of a motor and pump mounted to a single weldment;

FIG. 10 is a schematic plan view of equipment used in a hydraulic fracturing operation, according to an alternate embodiment of the present technology;

FIG. 11 is a left side view of equipment used to pump fracturing fluid into a well and mounted on a trailer, according to an embodiment of the present technology; and

FIG. 12 is a right side view of the equipment and trailer shown in FIG. 3.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

The foregoing aspects, features, and advantages of the present technology will be further appreciated when considered with reference to the following description of preferred embodiments and accompanying drawing, wherein like reference numerals represent like elements. In describing the preferred embodiments of the technology illustrated in the appended drawing, specific terminology will be used for the sake of clarity. However, the technology is not intended to be limited to the specific terms used, and it is to be understood that each specific term includes equivalents that operate in a similar manner to accomplish a similar purpose.

FIG. 1 shows a plan view of equipment used in a hydraulic fracturing operation. Specifically, there is shown a plurality of pumps 10 mounted to vehicles 12, such as trailers (as shown, for example, in FIGS. 3 and 4). In the embodiment shown, the pumps 10 are powered by electric motors 14, which can also be mounted to the vehicles 12. The pumps 10 are fluidly connected to the wellhead 16 via the missile 18. As shown, the vehicles 12 can be positioned near enough to the missile 18 to connect fracturing fluid lines 20 between the pumps 10 and the missile 18. The missile 18 is then connected to the wellhead 16 and config-

5

ured to deliver fracturing fluid provided by the pumps **10** to the wellhead **16**. Although the vehicles **12** are shown in FIGS. **3** and **4** to be trailers, the vehicles could alternately be trucks, wherein the pumps motors **14**, and other equipment are mounted directly to the truck.

In some embodiments, each electric motor **14** can be an induction motor, and can be capable of delivering about 1500 horsepower (HP), 1750 HP, or more. Use of induction motors, and in particular three-phase induction motors, allows for increased power output compared to other types of electric motors, such as permanent magnet (PM) motors. This is because three-phase induction motors have nine poles (3 poles per phase) to boost the power factor of the motors. Conversely, PM motors are synchronous machines that are accordingly limited in speed and torque. This means that for a PM motor to match the power output of a three-phase induction motor, the PM motor must rotate very fast, which can lead to overheating and other problems.

Each pump **10** can optionally be rated for about 2250 horsepower (HP) or more. In addition, the components of the system, including the pumps **10** and the electric motors **14**, can be capable of operating during prolonged pumping operations, and in temperature in a range of about 0 degrees C. or less to about 55 degrees C. or more. In addition, each electric motor **14** can be equipped with a variable frequency drive (VFD) **15**, and an A/C console, that controls the speed of the electric motor **14**, and hence the speed of the pump **10**.

The VFDs **15** of the present technology can be discrete to each vehicle **12** and/or pump. Such a feature is advantageous because it allows for independent control of the pumps **10** and motors **14**. Thus, if one pump **10** and/or motor **14** becomes incapacitated, the remaining pumps **10** and motors **14** on the vehicle **12** or in the fleet can continue to function, thereby adding redundancy and flexibility to the system. In addition, separate control of each pump **10** and/or motor **14** makes the system more scalable, because individual pumps **10** and/or motors **14** can be added to or removed from a site without modification to the VFDs **15**.

The electric motors **14** of the present technology can be designed to withstand an oilfield environment. Specifically, some pumps **10** can have a maximum continuous power output of about 1500 HP, 1750 HP, or more, and a maximum continuous torque of about 8750 ft-lb, 11,485 ft-lb, or more. Furthermore, electric motors **14** of the present technology can include class H insulation and high temperature ratings, such as about 1100 degrees C. or more. In some embodiments, the electric motor **14** can include a single shaft extension and hub for high tension radial loads, and a high strength **4340** alloy steel drive shaft, although other suitable materials can also be used.

The VFD **15** can be designed to maximize the flexibility, robustness, serviceability, and reliability required by oilfield applications, such as hydraulic fracturing. For example, as far as hardware is concerned, the VFD **15** can include packaging receiving a high rating by the National Electrical Manufacturers Association (such as nema 1 packaging), and power semiconductor heat sinks having one or more thermal sensors monitored by a microprocessor to prevent semiconductor damage caused by excessive heat. Furthermore, with respect to control capabilities, the VFD **15** can provide complete monitoring and protection of drive internal operations while communicating with an operator via one or more user interfaces. For example, motor diagnostics can be performed frequently (e.g., on the application of power, or with each start), to prevent damage to a grounded or shorted electric motor **14**. The electric motor diagnostics can be

6

disabled, if desired, when using, for example, a low impedance or high-speed electric motor.

In some embodiments, the pump **10** can optionally be a 2250 HP triplex or quintuplex pump. The pump **10** can optionally be equipped with 4.5 inch diameter plungers that have an eight (8) inch stroke, although other size plungers can be used, depending on the preference of the operator. The pump **10** can further include additional features to increase its capacity, durability, and robustness, including, for example, a 6.353 to 1 gear reduction, autofrettaged steel or steel alloy fluid end, wing guided slush type valves, and rubber spring loaded packing. Alternately, pumps having slightly different specifications could be used. For example, the pump **10** could be equipped with 4 inch diameter plungers, and/or plungers having a ten (10) inch stroke.

In certain embodiments of the invention, the electric motor **14** can be connected to the pump **10** via a torsional coupling **152**, of the type illustrated in FIGS. **2A-2C**. Use of such a torsional coupling **152** is advantageous compared to use of, for example, a U-joint drive shaft to connect the motor **14** to the pump **10**, because the torsional coupling **152** is more efficient. For example, in a typically system, in which a pump is connected to and powered by a diesel motor, the pump may be connected to the diesel motor using a U-joint drive shaft. Such drive shafts typically require at least a 3 degree offset, and they may lose up to 10% or more energy due to inefficiencies. By replacing the U-joint drive shaft with a torsional coupling **152** in the system of the present technology, this inefficiency can be reduced to 1% or less. In addition, the torsional coupling **152** allows for a shorter driveshaft than the U-joint drive shaft, thereby requiring a smaller space. Such space savings is valuable in particular for trailer or truck mounted systems.

The torsional coupling **152** of the present technology compensates for offset between a motor shaft and a pump shaft by allowing for some misalignment of the coupling components, while still maintaining an operative relationship between the components. For example, as shown in FIG. **2A**, the pump component **154** of the coupling **152** can be radially offset from the motor component **156** of the coupling **152** by a radial distance **R**, and the two components **154**, **156** may still be engaged so that when the motor component **156** rotates it causes rotation of the pump component **154**. In fact, in some embodiments, the radial distance **R** can be up to 1.8 mm or more.

Similarly, as shown in FIG. **2B**, the pump component **154** can be angled relative to the motor component **156** of the coupling **152** at an angle θ , and the two components **154**, **156** may still be engaged. In some instances, the angle θ may be up to about 0.33 degrees. In addition, as shown in FIG. **2C**, the pump component **154** can be axially separated from the motor component **156** by a distance **S**, and the two components **154**, **156** may still be engaged. In some embodiments, the components **154**, **156** can be axially separated by an axial distance **S** of up to 110 mm or more.

Referring now to FIG. **3**, there is shown an isometric view of the pump component **154** and the motor component **156** of the coupling **152**. The pump component **154** includes a protrusion **158** extending perpendicularly outward toward the pump (not shown), and which has a bore **160** configured to receive the shaft with an interference fit so that the pump component **154** transmits torque to the shaft of the pump when the pump component **154** turns. The pump component **154** also includes pump coupling claws **162** that extend inwardly toward the motor component **156** of the coupling **152** when the coupling **152** is made up. The pump coupling claws **162** are spaced circumferentially around the pump

component 154. In some embodiments, such as that shown in FIG. 3, there can be six pump coupling claws 162, but any appropriate number can be used.

In addition to the above, the pump component 154 of the coupling 152 can include elastomeric inserts 164 surrounding at least a portion of the pump coupling claws 162 to provide a buffer between the pump coupling claws 162 of the pump component 154 and corresponding claws on the motor component 156. Such a buffer is advantageous to increase the ability of the coupling 152 to withstand shocks and vibrations associated with the use of heavy duty equipment such as hydraulic fracturing pumps. It is advantageous, when making up the coupling 152, to ensure that the components 154, 156 of the coupling are not mounted too far away from each other in an axial direction, so that the elastomeric inserts can transmit torque over the entire width of the inserts.

Also shown in FIG. 3 is an isometric view of the motor component 156 according to an embodiment of the present technology. The motor component 156 includes a protrusion 166 extending perpendicularly outward toward the motor (not shown), and which has a bore 168. The bore 168 engages the shaft of the motor with an interference fit, so that the motor component 156 receives torque from the shaft of the motor. In some embodiments, the shaft may be tapered, as described in greater detail below. This taper helps, among other things, to properly set the depth of the motor shaft relative to the motor component 156 when making up the coupling 152. The interference fit of the pump shaft and the motor shaft into the pump and motor components 154, 156 of the coupling 152 can be achieved by heating the pump and motor components 154, 156 to, for example, about 250 degrees Fahrenheit, and installing the components on their respective shafts while hot. Thereafter, as the pump and motor components 154, 156 cool, the inner diameters of the bores 160, 168 in the pump and motor components 154, 156 decrease, thereby creating an interference fit between the pump and motor components 154, 156 and the pump and motor shafts, respectively.

The motor component 156 also includes motor coupling claws 170 that extend inwardly toward the pump component 154 of the coupling 152 when the coupling 152 is made up. The motor coupling claws 170 are spaced circumferentially around the motor component 156 so as to correspond to voids between the pump coupling claws 162 and elastomeric inserts 164 when the coupling 152 is made up. In some embodiments, a retainer cap 172 can be included to cover the interface between the pump component 154 and the motor component 156, to protect, for example, the coupling 152 from the ingress of foreign objects or debris. The retainer cap 172 can be integral to the pump component 154 or it can be a separate piece that is fastened to the pump component 154.

Thus, when the coupling 152 is made up, the motor shaft, which is inserted into the bore 168 of the motor component 156, can turn and transmit torque to the motor component 156 of the coupling 152. As the motor component 156 of the coupling 152 turns, the motor coupling teeth 170 transmit torque to the pump coupling teeth 162 through the elastomeric inserts 164. Such torque transmission in turn causes the pump component 154 of the coupling 152 to turn, which transmits torque to the pump shaft engaged with the bore 160 of the pump component 154. The transmission of torque through the coupling 152 occurs even if the motor component 156 and the pump component 154 are radially offset, positioned at an angle to one another, or separated by an axial distance, as shown in FIGS. 2A-2C.

Referring now to FIG. 4, there is shown an end view of the coupling 152 looking from the pump side of the coupling 152 toward the motor. In particular, there is shown the pump component 154 of the coupling 152, including the protrusion 158 and the bore 160 for receiving the pump shaft. In the embodiment of FIG. 4, the retainer cap 172 is a separate piece from the pump component 154, and is attached to the pump component 154 with fasteners 174. In this embodiment shown, the fasteners 174 are shown to be bolts, but any appropriate fasteners could be used. Provision of a removable retainer cap 172 can be advantageous because it allows easier access to the interior components of the coupling 152 for servicing or repair. For example, if an operator desires to replace the elastomeric inserts 164 within the coupling 152, it need only remove the retainer cap 172, after which it can easily replace the elastomeric inserts 164.

FIG. 5 shows a cross-sectional view of the coupling 152 of FIG. 3, taken along line 5-5. As shown in FIG. 5, the bore 168 in the protrusion 166 of the motor component 156 of the coupling 152 can be tapered from a smaller diameter at an inward side 176 of the motor component 156 (toward the pump component 154) to a larger diameter at an outward side 178 of the motor component (toward the motor). The tapered diameter of the bore 168 corresponds to a similarly tapered end of the motor shaft, and helps with torque transmission and depth setting of the motor shaft relative to the coupling 152 when the coupling 152 is made up.

FIG. 6 shows a cross-sectional view of the coupling 152 according to an alternate embodiment of the present technology, and including the motor shaft 180 and pump shaft 182. In addition, in the view shown in FIG. 6, there is shown the elastomeric inserts 164 in the coupling. Furthermore, the embodiment shown in FIG. 6 differs from that shown in FIG. 5 in that the retainer cap 172 is integral to the pump component 154 (as opposed to being a separate piece, as depicted in FIGS. 4 and 5).

FIG. 7A shows the motor component 156 of the coupling 152 attached to a motor 14. As can be seen, the motor shaft 180 extends outwardly from the motor 14 and into engagement with the motor component 156. FIG. 7B shows how the end of the motor shaft 180 is tapered so that it fits within the tapered bore 168 of the motor component 156. With the motor shaft 180 thus engaged with the motor component 156, the motor shaft 180 transmits torque to the motor component 156 as the shaft 180 turns, thereby turning the motor component 156 as well.

Referring now to FIG. 8, there is shown a motor 14 according to an embodiment of the present invention, and a coupling 152. There is also shown a protective cage 184 surrounding the coupling 152. The protective cage provides the advantage of protecting the coupling 152 from damage. In addition, the protective cage 184 can have a removable panel 185, or can otherwise be removable, to allow access to the coupling for repair and maintenance.

The coupling 152 of the present technology can be built out of any suitable materials, including composite materials, and is designed to allow for high torsional forces. For example, the torque capacity of the coupling could be up to about 450,000 lb-in. In addition, when the motor, pump, and associated coupling 152 are mounted to a trailer, truck, skid, or other equipment, various sized shim plates can be used to allow for more precise positioning of the equipment, thereby leading to appropriate alignment of the shafts and coupling components. Support brackets may also be provided to fix the motor and the pump in place relative to the trailer, truck, skid, or other equipment, thereby helping to maintain such alignment.

Furthermore, the pump and motor mounting may be separate weldments, or, as shown in FIG. 9, they may alternatively be a combined single weldment 187. If they are a single weldment 187, the mounting faces can be machined, leveled, and planar to each other to increase the accuracy of alignment. Attaching the motor 14 and pump 10 to a single weldment 187 can be advantageous because it can improve alignment of the components, which can lead to reduced torsional stresses in the coupling. Mounting the motor 14 and pump 10 to a single weldment 187 also helps to ensure that during transport or operation, the motor 14 and pump are moved together, so that alignment of the coupling halves can be better maintained. In embodiments using separate weldments, the motor 14 can move independently of the pump 10, thereby causing a misalignment of the components, and possible damage to the coupling. In addition, the separate weldments can have a greater tendency to warp, requiring additional effort to get the alignment in the acceptable range.

Use of the coupling 152 complements the combination of a triplex, plunger pump, and an electric motor 14, because such a pump 10 and motor 14 are torsionally compatible. In other words, embodiments using this pump 10 and motor 14 are substantially free of serious torsional vibration, and vibration levels in the pump input shaft and in the coupling 152 are, as a result, kept within acceptable levels.

For example, experiments testing the vibration of the system of the present technology have indicated that, in certain embodiments, the motor shaft vibratory stress can be about 14% of the allowable limit in the industry. In addition, the coupling maximum combined order torque can be about 24% of the allowable industry limit, vibratory torque can be about 21% of the allowable industry limit, and power loss can be about 25% of the allowable industry limit. Furthermore, the gearbox maximum combined order torque can be about 89% of the standard industry recommendations, and vibratory torque can be about 47% of standard industry recommendations, while the fracturing pump input shaft combined order vibratory stress can be about 68% of the recommended limit.

The coupling 152 can further be used to connect the motor shaft 180 with other equipment besides a pump. For example, the coupling 152 can be used to connect the motor to a hydraulic drive powering multiple hydraulic motors in a hydration unit, or associated with blender equipment. In any of these applications, it is advantageous to provide a protective cage around the coupling 152, and also to provide an easy access panel in the protective cage to provide access to the coupling 152.

In addition to the above, certain embodiments of the present technology can optionally include a skid (not shown) for supporting some or all of the above-described equipment. For example, the skid can support the electric motor 14 and the pump 10. In addition, the skid can support the VFD 15. Structurally, the skid can be constructed of heavy-duty longitudinal beams and cross-members made of an appropriate material, such as, for example, steel. The skid can further include heavy-duty lifting lugs, or eyes, that can optionally be of sufficient strength to allow the skid to be lifted at a single lift point. It is to be understood, however, that a skid is not necessary for use and operation of the technology, and the mounting of the equipment directly to a vehicle 12 without a skid can be advantageous because it enables quick transport of the equipment from place to place, and increased mobility of the pumping system.

Referring back to FIG. 1, also included in the equipment is a plurality of electric generators 22 that are connected to,

and provide power to, the electric motors 14 on the vehicles 12. To accomplish this, the electric generators 22 can be connected to the electric motors 14 by power lines (not shown). The electric generators 22 can be connected to the electric motors 14 via power distribution panels (not shown). In certain embodiments, the electric generators 22 can be powered by natural gas. For example, the generators can be powered by liquefied natural gas. The liquefied natural gas can be converted into a gaseous form in a vaporizer prior to use in the generators. The use of natural gas to power the electric generators 22 can be advantageous because above ground natural gas vessels 24 can already be placed on site in a field that produces gas in sufficient quantities. Thus, a portion of this natural gas can be used to power the electric generators 22, thereby reducing or eliminating the need to import fuel from offsite. If desired by an operator, the electric generators 22 can optionally be natural gas turbine generators, such as those shown in FIG. 10. The generators can run on any appropriate type of fuel, including liquefied natural gas (LNG).

FIG. 1 also shows equipment for transporting and combining the components of the hydraulic fracturing fluid used in the system of the present technology. In many wells, the fracturing fluid contains a mixture of water, sand or other proppant, acid, and other chemicals. Examples of fracturing fluid components include acid, anti-bacterial agents, clay stabilizers, corrosion inhibitors, friction reducers, gelling agents, iron control agents, pH adjusting agents, scale inhibitors, and surfactants. Historically, diesel has at times been used as a substitute for water in cold environments, or where a formation to be fractured is water sensitive, such as, for example, clay. The use of diesel, however, has been phased out over time because of price, and the development of newer, better technologies.

In FIG. 1, there are specifically shown sand transporting vehicles 26, an acid transporting vehicle 28, vehicles for transporting other chemicals 30, and a vehicle carrying a hydration unit 32. Also shown are fracturing fluid blenders 34, which can be configured to mix and blend the components of the hydraulic fracturing fluid, and to supply the hydraulic fracturing fluid to the pumps 10. In the case of liquid components, such as water, acids, and at least some chemicals, the components can be supplied to the blenders 34 via fluid lines (not shown) from the respective component vehicles, or from the hydration unit 32. In the case of solid components, such as sand, the component can be delivered to the blender 34 by a conveyor belt 38. The water can be supplied to the hydration unit 32 from, for example, water tanks 36 onsite. Alternately, the water can be provided by water trucks. Furthermore, water can be provided directly from the water tanks 36 or water trucks to the blender 34, without first passing through the hydration unit 32.

In certain embodiments of the technology, the hydration units 32 and blenders 34 can be powered by electric motors. For example, the blenders 34 can be powered by more than one motor, including motors having 600 horsepower or more, and motors having 1150 horsepower or more. The hydration units 32 can be powered by electric motors of 600 horsepower or more. In addition, in some embodiments, the hydration units 32 can each have up to five (5) chemical additive pumps, and a 200 bbl steel hydration tank.

Pump control and data monitoring equipment 40 can be mounted on a control vehicle 42, and connected to the pumps 10, electric motors 14, blenders 34, and other down-hole sensors and tools (not shown) to provide information to an operator, and to allow the operator to control different parameters of the fracturing operation. For example, the

11

pump control and data monitoring equipment **40** can include an A/C console that controls the VFD **15**, and thus the speed of the electric motor **14** and the pump **10**. Other pump control and data monitoring equipment can include pump throttles, a pump VFD fault indicator with a reset, a general fault indicator with a reset, a main estop, a programmable logic controller for local control, and a graphics panel. The graphics panel can include, for example, a touchscreen interface.

Referring now to FIG. **10**, there is shown an alternate embodiment of the present technology. Specifically, there is shown a plurality of pumps **110** which, in this embodiment, are mounted to pump trailers **112**. As shown, the pumps **110** can optionally be loaded two to a trailer **112**, thereby minimizing the number of trailers needed to place the requisite number of pumps at a site. The ability to load two pumps **110** on one trailer **112** is possible because of the relatively light weight of the electric powered pumps **110** compared to other known pumps, such as diesel pumps. In the embodiment shown, the pumps **110** are powered by electric motors **114**, which can also be mounted to the pump trailers **112**. Furthermore, each electric motor **114** can be equipped with a VFD **115**, and an A/C console, that controls the speed of the motor **114**, and hence the speed of the pumps **110**.

The VFDs **115** shown in FIG. **10** can be discrete to each pump trailer **112** and/or pump **110**. Such a feature is advantageous because it allows for independent control of the pumps **110** and motors **114**. Thus, if one pump **110** and/or motor **114** becomes incapacitated, the remaining pumps **110** and motors **114** on the pump trailers **112** or in the fleet can continue to function, thereby adding redundancy and flexibility to the system. In addition, separate control of each pump **110** and/or motor **114** makes the system more scalable, because individual pumps **110** and/or motors **114** can be added to or removed from a site without modification to the VFDs **115**.

In addition to the above, and still referring to FIG. **10**, the system can optionally include a skid (not shown) for supporting some or all of the above-described equipment. For example, the skid can support the electric motors **114** and the pumps **110**. In addition, the skid can support the VFD **115**. Structurally, the skid can be constructed of heavy-duty longitudinal beams and cross-members made of an appropriate material, such as, for example, steel. The skid can further include heavy-duty lifting lugs, or eyes, that can optionally be of sufficient strength to allow the skid to be lifted at a single lift point. It is to be understood that a skid is not necessary for use and operation of the technology and the mounting of the equipment directly to a trailer **112** may be advantageous because it enables quick transport of the equipment from place to place, and increased mobility of the pumping system, as discussed above.

The pumps **110** are fluidly connected to a wellhead **116** via a missile **118**. As shown, the pump trailers **112** can be positioned near enough to the missile **118** to connect fracturing fluid lines **120** between the pumps **110** and the missile **118**. The missile **118** is then connected to the wellhead **116** and configured to deliver fracturing fluid provided by the pumps **110** to the wellhead **116**.

This embodiment also includes a plurality of turbine generators **122** that are connected to, and provide power to, the electric motors **114** on the pump trailers **112**. To accomplish this, the turbine generators **122** can be connected to the electric motors **114** by power lines (not shown). The turbine generators **122** can be connected to the electric motors **114** via power distribution panels (not shown). In certain

12

embodiments, the turbine generators **122** can be powered by natural gas, similar to the electric generators **22** discussed above in reference to the embodiment of FIG. **1**. Also included are control units **144** for the turbine generators **122**. The control units **144** can be connected to the turbine generators **122** in such a way that each turbine generator **122** is separately controlled. This provides redundancy and flexibility to the system, so that if one turbine generator **122** is taken off line (e.g., for repair or maintenance), the other turbine generators **122** can continue to function.

The embodiment of FIG. **10** can include other equipment similar to that discussed above. For example, FIG. **10** shows sand transporting vehicles **126**, acid transporting vehicles **128**, other chemical transporting vehicles **130**, hydration unit **132**, blenders **134**, water tanks **136**, conveyor belts **138**, and pump control and data monitoring equipment **140** mounted on a control vehicle **142**. The function and specifications of each of these is similar to corresponding elements shown in FIG. **1**.

Use of pumps **10**, **110** powered by electric motors **14**, **114** and natural gas powered electric generators **22** (or turbine generators **122**) to pump fracturing fluid into a well is advantageous over known systems for many different reasons. For example, the equipment (e.g. pumps, electric motors, and generators) is lighter than the diesel pumps commonly used in the industry. The lighter weight of the equipment allows loading of the equipment directly onto a truck body or trailer. Where the equipment is attached to a skid, as described above, the skid itself can be lifted on the truck body, along with all the equipment attached to the skid. Furthermore, and as shown in FIGS. **11** and **12**, trailers **112** can be used to transport the pumps **110** and electric motors **114**, with two or more pumps **110** carried on a single trailer **112**. Thus, the same number of pumps **110** can be transported on fewer trailers **112**. Known diesel pumps, in contrast, cannot be transported directly on a truck body or two on a trailer, but must be transported individually on trailers because of the great weight of the pumps.

The ability to transfer the equipment of the present technology directly on a truck body or two to a trailer increases efficiency and lowers cost. In addition, by eliminating or reducing the number of trailers to carry the equipment, the equipment can be delivered to sites having a restricted amount of space, and can be carried to and away from worksites with less damage to the surrounding environment. Another reason that the electric powered pump system of the present technology is advantageous is that it runs on natural gas. Thus, the fuel is lower cost, the components of the system require less maintenance, and emissions are lower, so that potentially negative impacts on the environment are reduced.

More detailed side views of the trailers **112**, having various system components mounted thereon, are shown in FIGS. **11** and **12**, which show left and right side views of a trailer **112**, respectively. As can be seen, the trailer **112** can be configured to carry pumps **110**, electric motors **114** and a VFD **115**. Thus configured, the motors **114** and pumps **110** can be operated and controlled while mounted to the trailers **112**. This provides advantages such as increased mobility of the system. For example, if the equipment needs to be moved to a different site, or to a repair facility, the trailer can simply be towed to the new site or facility without the need to first load the equipment onto a trailer or truck, which can be a difficult and hazardous endeavor. This is a clear benefit over other systems, wherein motors and pumps are attached to skids that are delivered to a site and placed on the ground.

13

In order to provide a system wherein the pumps 110, motors 114, and VFDs 115 remain trailer mounted, certain improvements can be made to the trailers 112. For example, a third axle 146 can be added to increase the load capacity of the trailer and add stability. Additional supports and cross members 148 can be added to support the motors' torque. In addition, the neck 149 of the trailer can be modified by adding an outer rib 150 to further strengthen the neck 149. The trailer can also include specially designed mounts 152 for the VFD 115 that allow the trailer to move independently of the VFD 115, as well as specially designed cable trays for running cables on the trailer 112. Although the VFD 115 is shown attached to the trailer in the embodiment of FIGS. 11 and 12, it could alternately be located elsewhere on the site, and not mounted to the trailer 112.

In practice, a hydraulic fracturing operation can be carried out according to the following process. First, the water, sand, and other components are blended to form a fracturing fluid, which is pumped down the well by the electric-powered pumps. Typically, the well is designed so that the fracturing fluid can exit the wellbore at a desired location and pass into the surrounding formation. For example, in some embodiments the wellbore can have perforations that allow the fluid to pass from the wellbore into the formation. In other embodiments, the wellbore can include an openable sleeve, or the well can be open hole. The fracturing fluid can be pumped into the wellbore at a high enough pressure that the fracturing fluid cracks the formation, and enters into the cracks. Once inside the cracks, the sand, or other proppants in the mixture, wedges in the cracks, and holds the cracks open.

Using the pump control and data monitoring equipment 40, 140 the operator can monitor, gauge, and manipulate parameters of the operation, such as pressures, and volumes of fluids and proppants entering and exiting the well. For example, the operator can increase or decrease the ratio of sand to water as the fracturing process progresses and circumstances change.

This process of injecting fracturing fluid into the wellbore can be carried out continuously, or repeated multiple times in stages, until the fracturing of the formation is optimized. Optionally, the wellbore can be temporarily plugged between each stage to maintain pressure, and increase fracturing in the formation. Generally, the proppant is inserted into the cracks formed in the formation by the fracturing, and left in place in the formation to prop open the cracks and allow oil or gas to flow into the wellbore.

While the technology has been shown or described in only some of its forms, it should be apparent to those skilled in the art that it is not so limited, but is susceptible to various changes without departing from the scope of the technology. Furthermore, it is to be understood that the above disclosed embodiments are merely illustrative of the principles and applications of the present technology. Accordingly, numerous modifications can be made to the illustrative embodiments and other arrangements can be devised without departing from the spirit and scope of the present technology as defined by the appended claims.

What is claimed is:

1. A system for hydraulically fracturing an underground formation in an oil or gas well, the system comprising:
 - a pump for pumping hydraulic fracturing fluid into a wellbore, the pump having a pump shaft that turns to activate the pump;
 - an electric motor with a motor shaft to drive the pump via the pump shaft;

14

- a variable frequency drive and an alternating current console to control the speed of the electric motor to protect against overheating; and
- a torsional coupling connecting the electric motor to the pump shaft, the torsional coupling comprising:
 - a motor component coupled to the motor shaft of the electric motor; and
 - a pump component coupled to the pump shaft of the pump;
- the motor component engaged with the pump component to transmit power from the electric motor to the pump when the motor shaft and the motor component rotate, the motor component contacting the pump component so that the pump component and the pump shaft rotate, thereby driving the pump; and
- the system further comprising buffers between the motor component and the pump component.

2. The system of claim 1, wherein the motor component further comprises motor coupling claws and the pump component further comprises pump coupling claws, and wherein the motor coupling claws and the pump coupling claws are spaced to allow at least one of radial, axial, or angular misalignment of the motor component and the pump component while still allowing engagement of the motor component and the pump component to transmit torque.

3. The system of claim 1, wherein the torsional coupling further comprises a retainer cap attached to at least one of the motor component or the pump component to cover the interface therebetween and to prevent ingress of debris or contaminants between the motor component and the pump component.

4. The system of claim 1, wherein the motor component has a tapered central bore for receiving the motor shaft.

5. The system of claim 1, wherein the pump and the motor are mounted on separate but aligned weldments.

6. The system of claim 1, wherein the pump and the motor are mounted on a single common weldment.

7. The system of claim 1, further comprising a variable frequency drive monitoring operation of the electric motor.

8. A system for pumping hydraulic fracturing fluid into a wellbore, the system comprising:

- a pump having a pump shaft;
- an electric motor having a motor shaft, the motor shaft coupling to the pump to drive the pump;
- a variable frequency drive and an alternating current console to control the speed of the electric motor to protect against overheating; and
- a torsional coupling for transmitting energy from the electric motor to the pump, the torsional coupling comprising:
 - a motor component coupled to the motor shaft;
 - a pump component coupled to the pump shaft;
 - the motor component being coupled to the pump component to transmit rotation of the electric motor to the pump, wherein the motor component and the pump component are positioned to enable radial, axial, or angular misalignment when the motor component and the pump component are engaged; and
 - the system further comprising buffers between the motor component and the pump component.

9. The system of claim 8, wherein the torsional coupling further comprises a retainer cap attached to at least one of the motor component or the pump component to cover the interface therebetween and to prevent ingress of debris or contaminants between the motor component and the pump component.

15

10. The system of claim 8, wherein the motor component has a tapered central bore for receiving the motor shaft.

11. The system of claim 8, wherein the pump and the motor are mounted on separate but aligned weldments.

12. The system of claim 8, further comprising a variable frequency drive monitoring operation of the electric motor.

13. A system for conducting hydraulic fracturing operations in a well, comprising:

hydraulic fracturing equipment having a hydraulic fracturing equipment shaft;

an electric motor with a motor shaft coupled to and driving the hydraulic fracturing equipment;

a variable frequency drive and an alternating current console to control the speed of the electric motor to protect against overheating; and

a torsional coupling connecting the motor shaft to the hydraulic fracturing equipment shaft, the torsional coupling comprising:

a motor component coupled to the motor shaft of the electric motor; and

a hydraulic fracturing equipment component coupled to the hydraulic fracturing equipment shaft of the hydraulic fracturing equipment, the motor component engaging the hydraulic fracturing equipment

16

component to drive operation of the hydraulic fracturing equipment when the electric motor shaft rotates; and

the system further comprising buffers between the hydraulic fracturing equipment component and the motor component.

14. The system of claim 13, wherein the motor component further comprises motor coupling claws and the hydraulic fracturing equipment component further comprises hydraulic fracturing equipment claws, and wherein the motor coupling claws and the hydraulic fracturing equipment claws are spaced to allow at least one of radial, axial, or angular misalignment of the motor component and the hydraulic fracturing equipment component while still allowing engagement of the motor component and the hydraulic fracturing equipment component to transmit torque.

15. The system of claim 13, wherein the torsional coupling further comprises a retainer cap attached to at least one of the motor component or the hydraulic fracturing equipment component to cover the interface therebetween and to prevent ingress of debris or contaminants between the motor component and the hydraulic fracturing equipment component.

16. The system of claim 13, further comprising a variable frequency drive monitoring operation of the electric motor.

* * * * *