



(19) **United States**

(12) **Patent Application Publication**
PURKAYASTHA et al.

(10) **Pub. No.: US 2025/0287267 A1**

(43) **Pub. Date: Sep. 11, 2025**

(54) **CHANNEL STATE INFORMATION
RESOURCE CONFIGURATION FOR
CANDIDATE CELLS ASSOCIATED WITH
LOWER LAYER TRIGGERED MOBILITY**

(52) **U.S. Cl.**
CPC ... **H04W 36/0016** (2013.01); **H04W 36/0072**
(2013.01); **H04W 48/10** (2013.01)

(71) Applicant: **QUALCOMM Incorporated**, San
Diego, CA (US)

(57) **ABSTRACT**

(72) Inventors: **Punyaslok PURKAYASTHA**, San
Diego, CA (US); **Naeem AKL**,
Bridgewater, NJ (US); **Jelena**
DAMNJANOVIC, Del Mar, CA (US);
Shankar KRISHNAN, San Diego, CA
(US); **Ozcan OZTURK**, San Diego,
CA (US); **Prasad Reddy KADIRI**, San
Diego, CA (US)

Various aspects of the present disclosure generally relate to wireless communication. In some aspects, a source central unit (CU) may receive, from a user equipment (UE), a measurement report. The source CU may generate a lower layer triggered mobility (LTM) channel state information (CSI) resource configuration for one or more candidate cells based at least in part on the measurement report. The source CU may transmit, to a candidate CU, an LTM preparation request that indicates the one or more candidate cells and the LTM CSI resource configuration. The source CU may receive, from the candidate CU, an LTM preparation response that indicates one or more LTM radio resource control (RRC) configurations associated with the one or more candidate cells, respectively. Numerous other aspects are described.


(21) Appl. No.: **18/600,296**

(22) Filed: **Mar. 8, 2024**

Publication Classification

(51) **Int. Cl.**
H04W 36/00 (2009.01)
H04W 48/10 (2009.01)

500

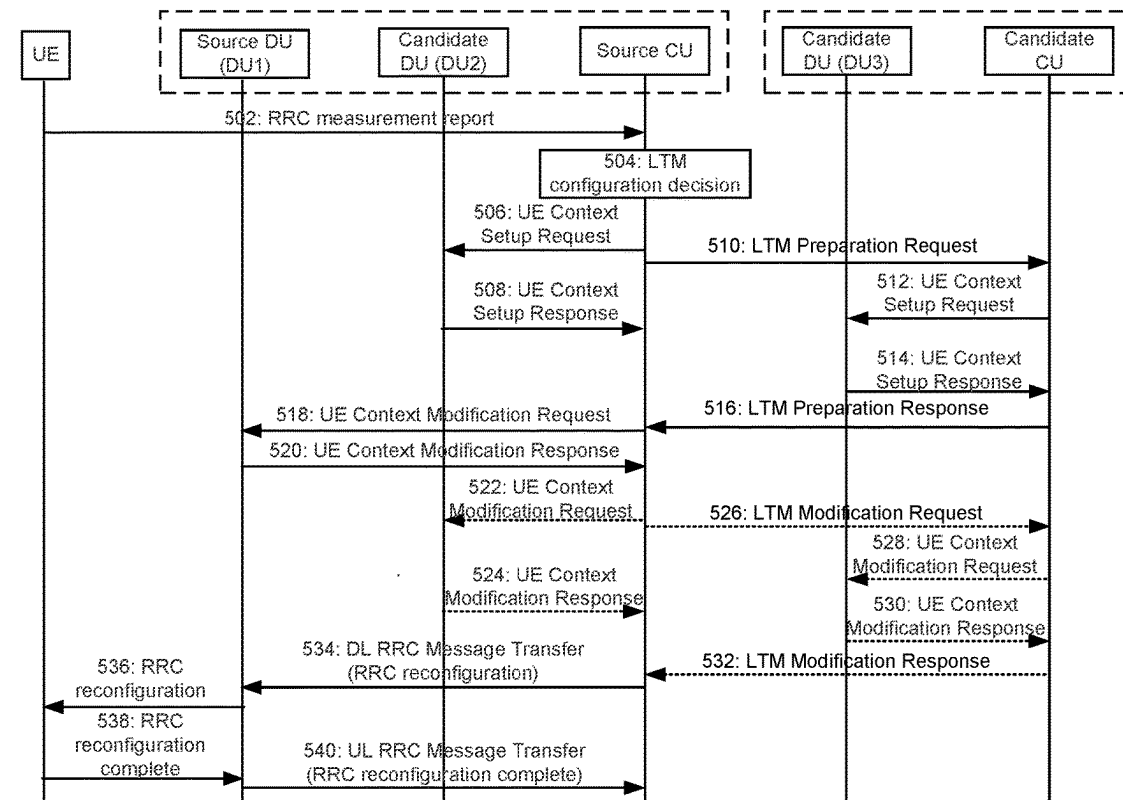

100 →

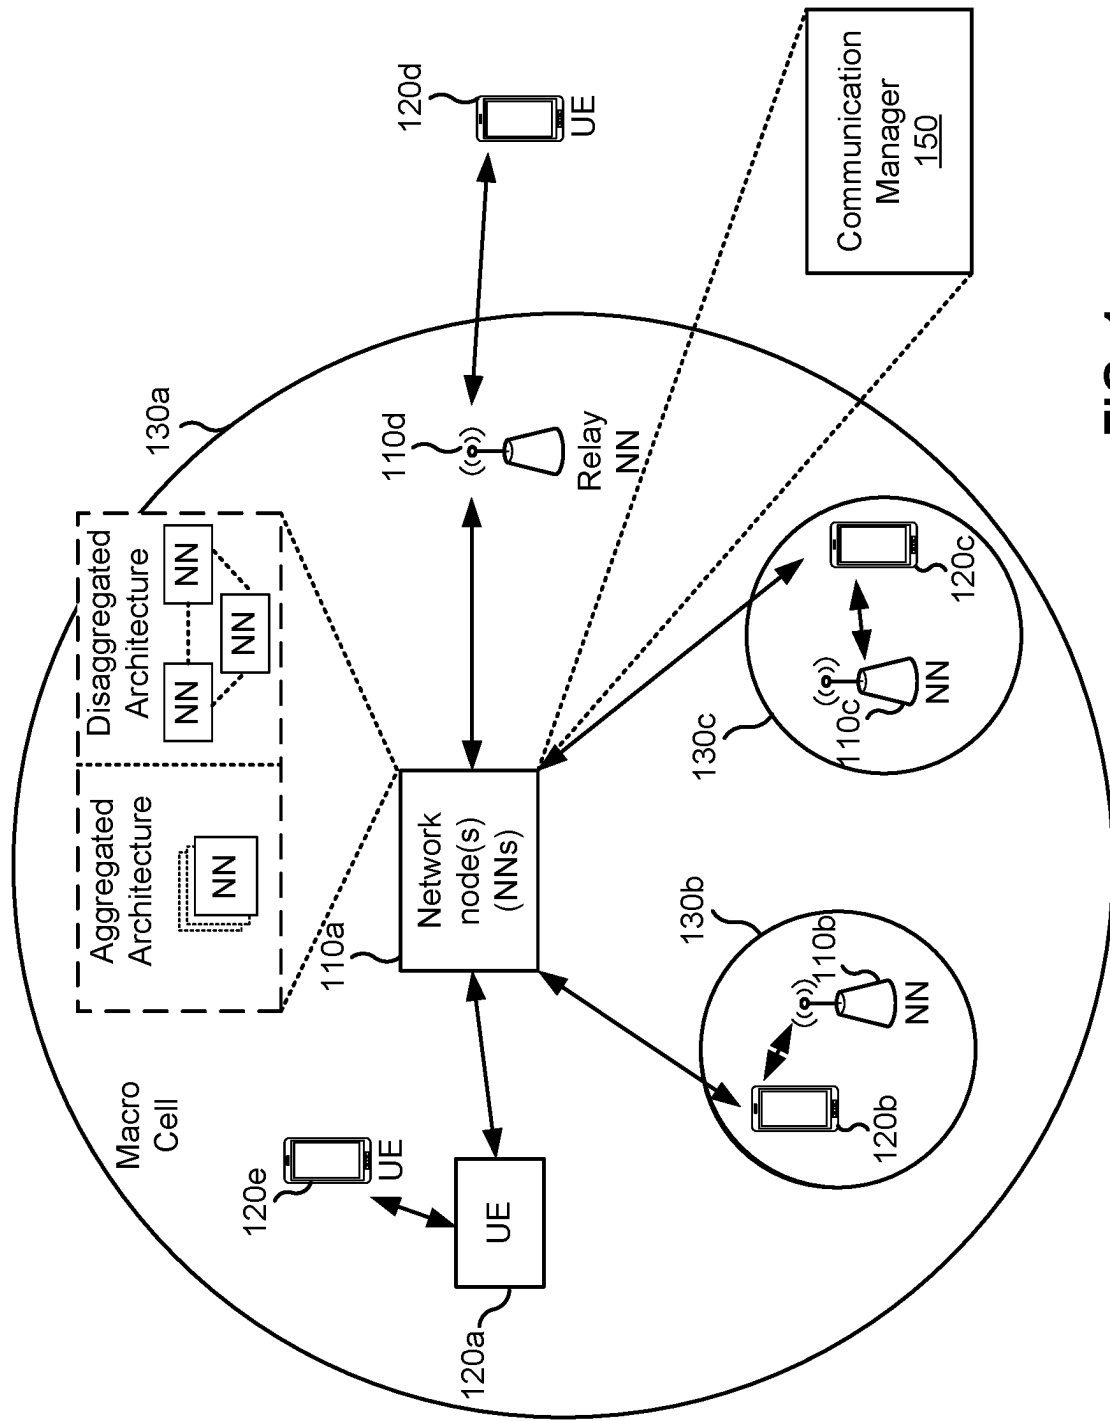


FIG. 1

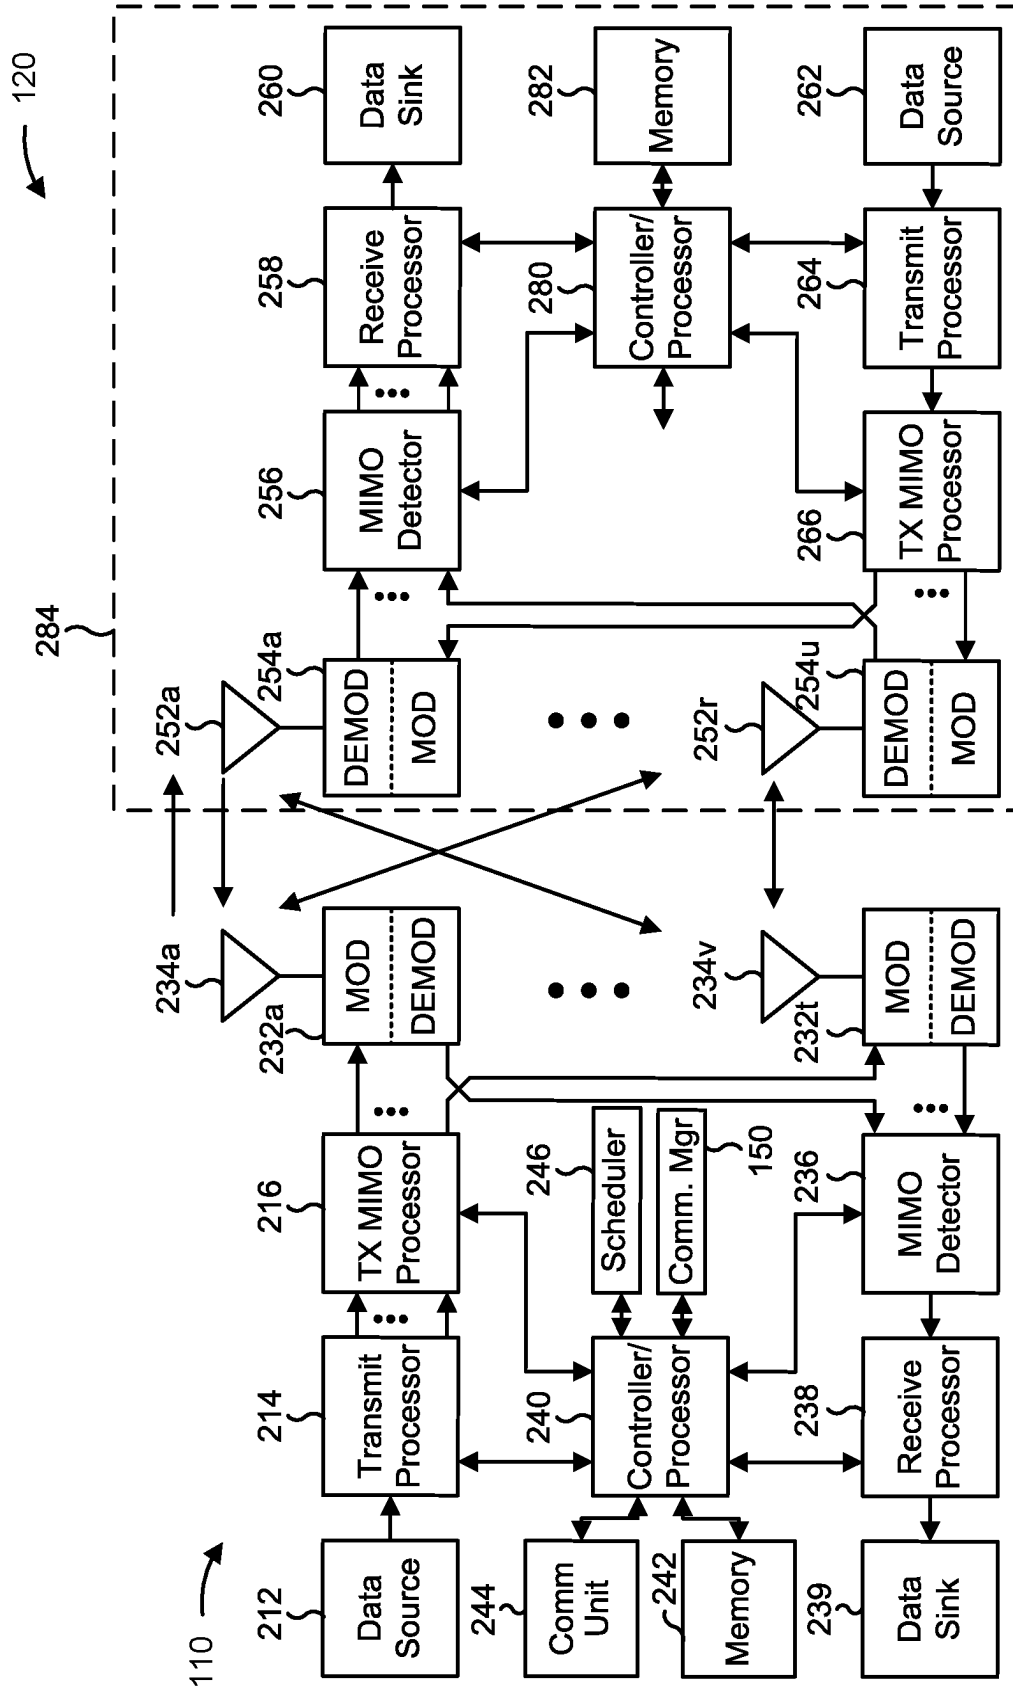


FIG. 2

300 →

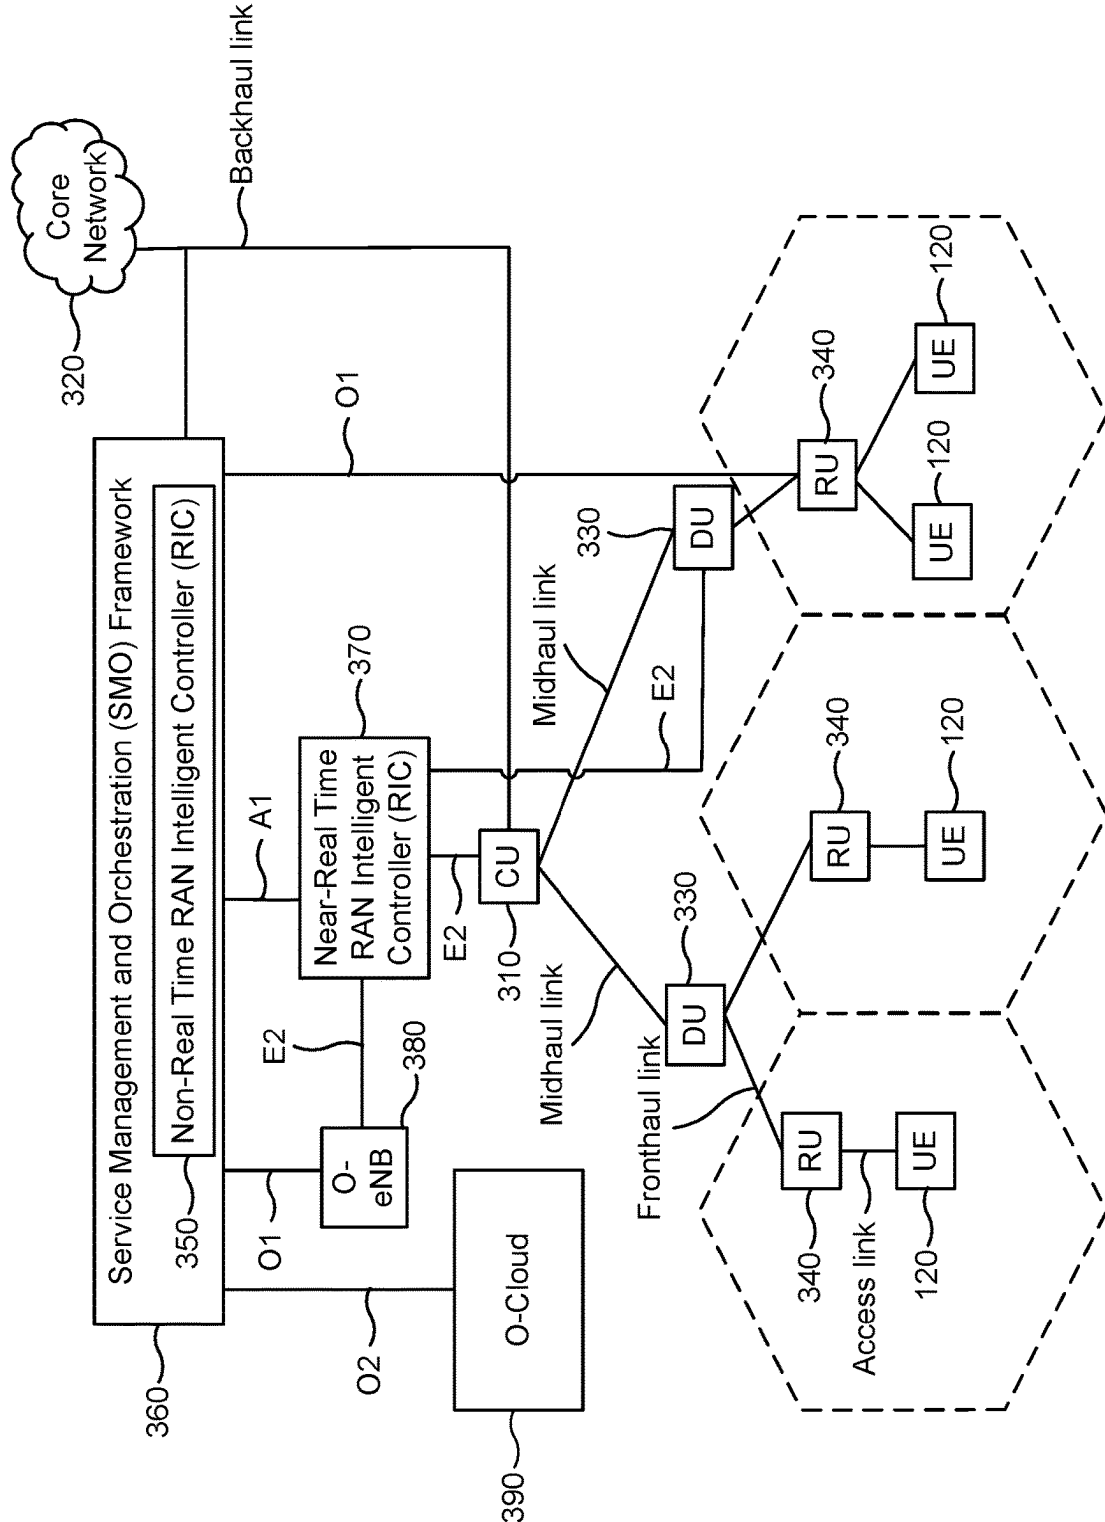


FIG. 3

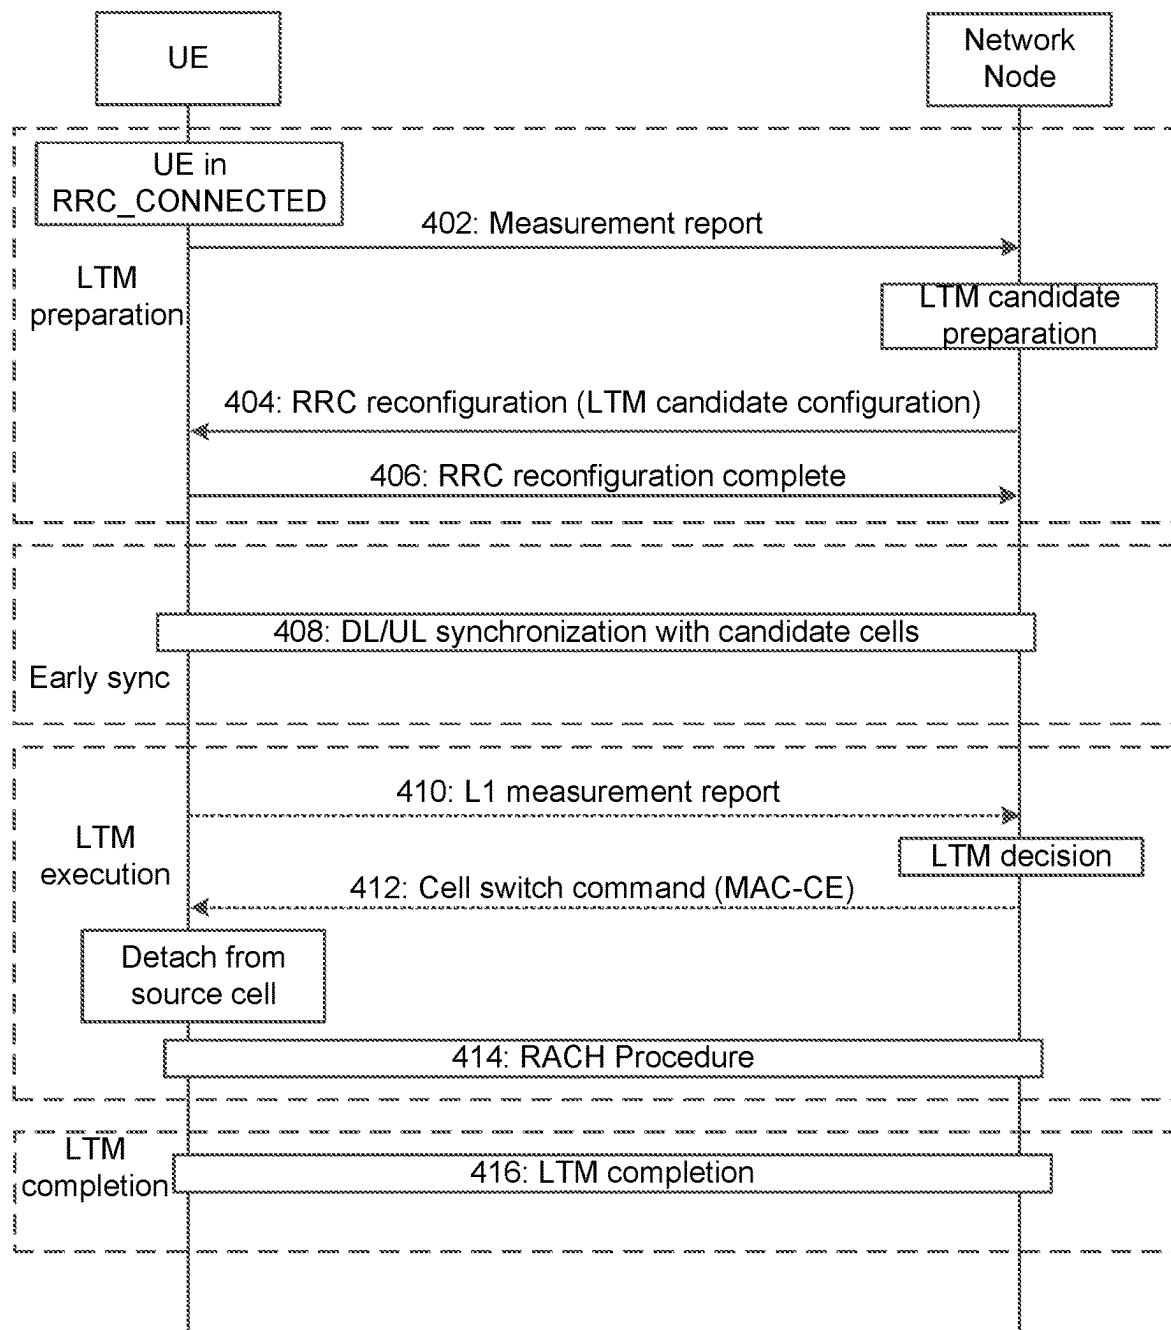


FIG. 4

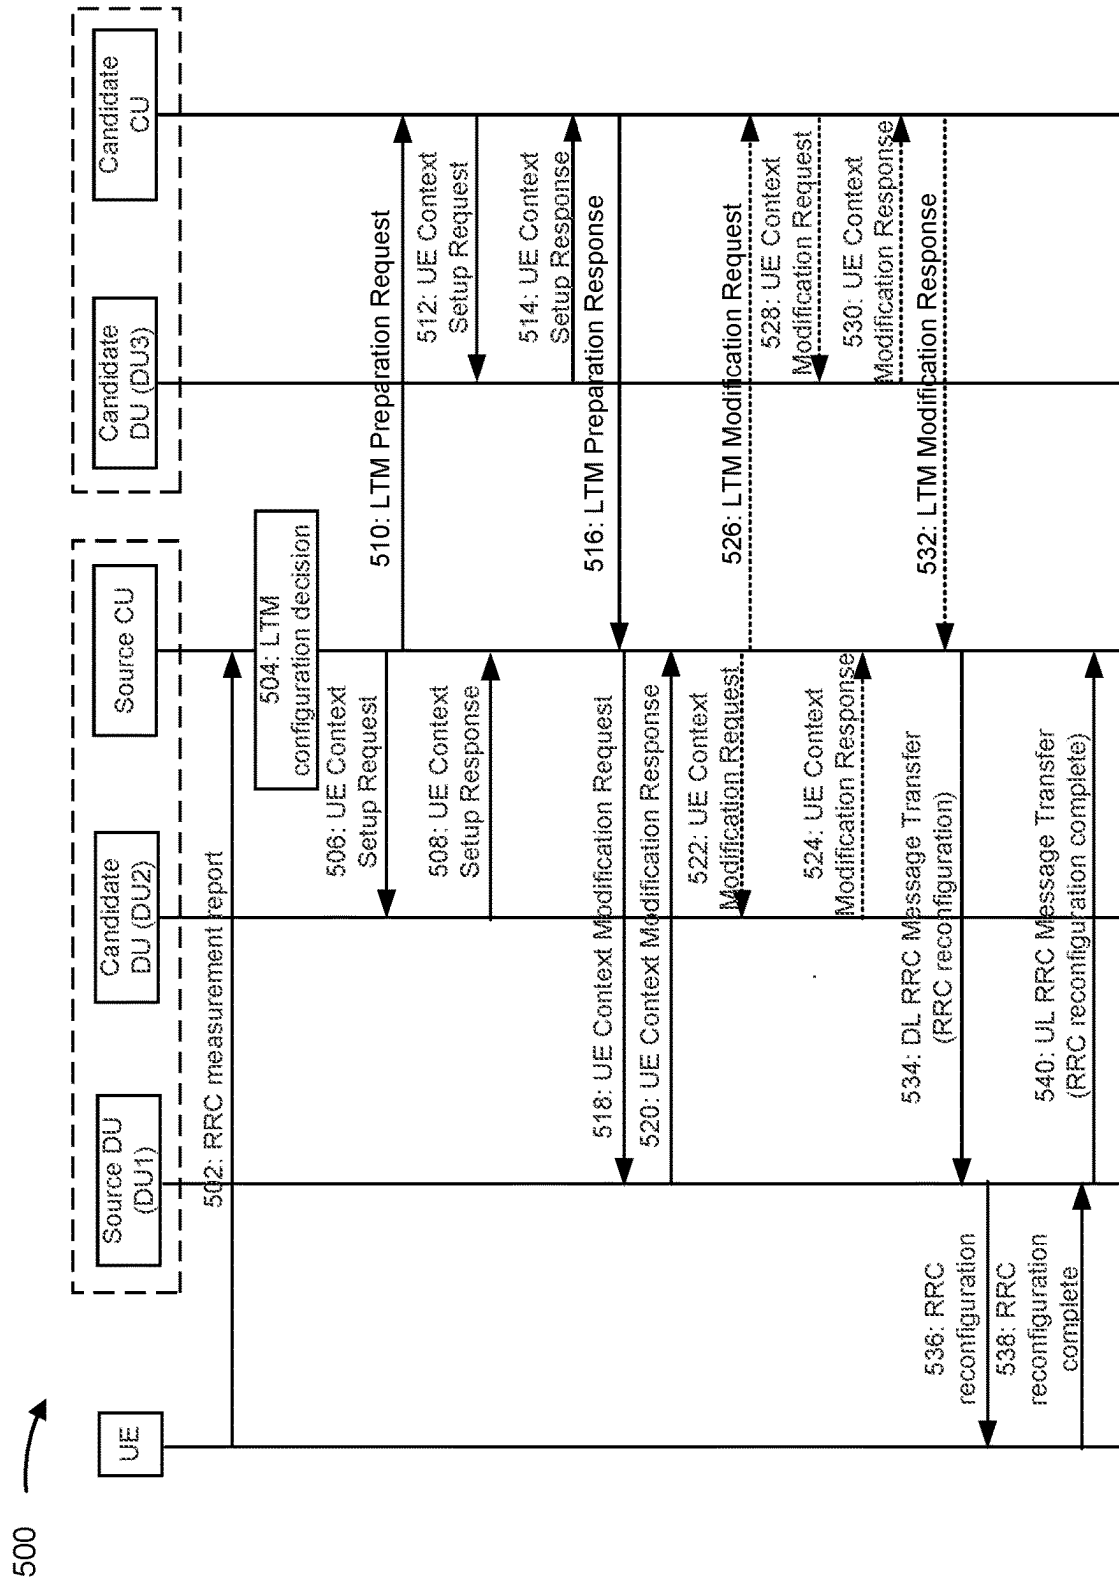


FIG. 5

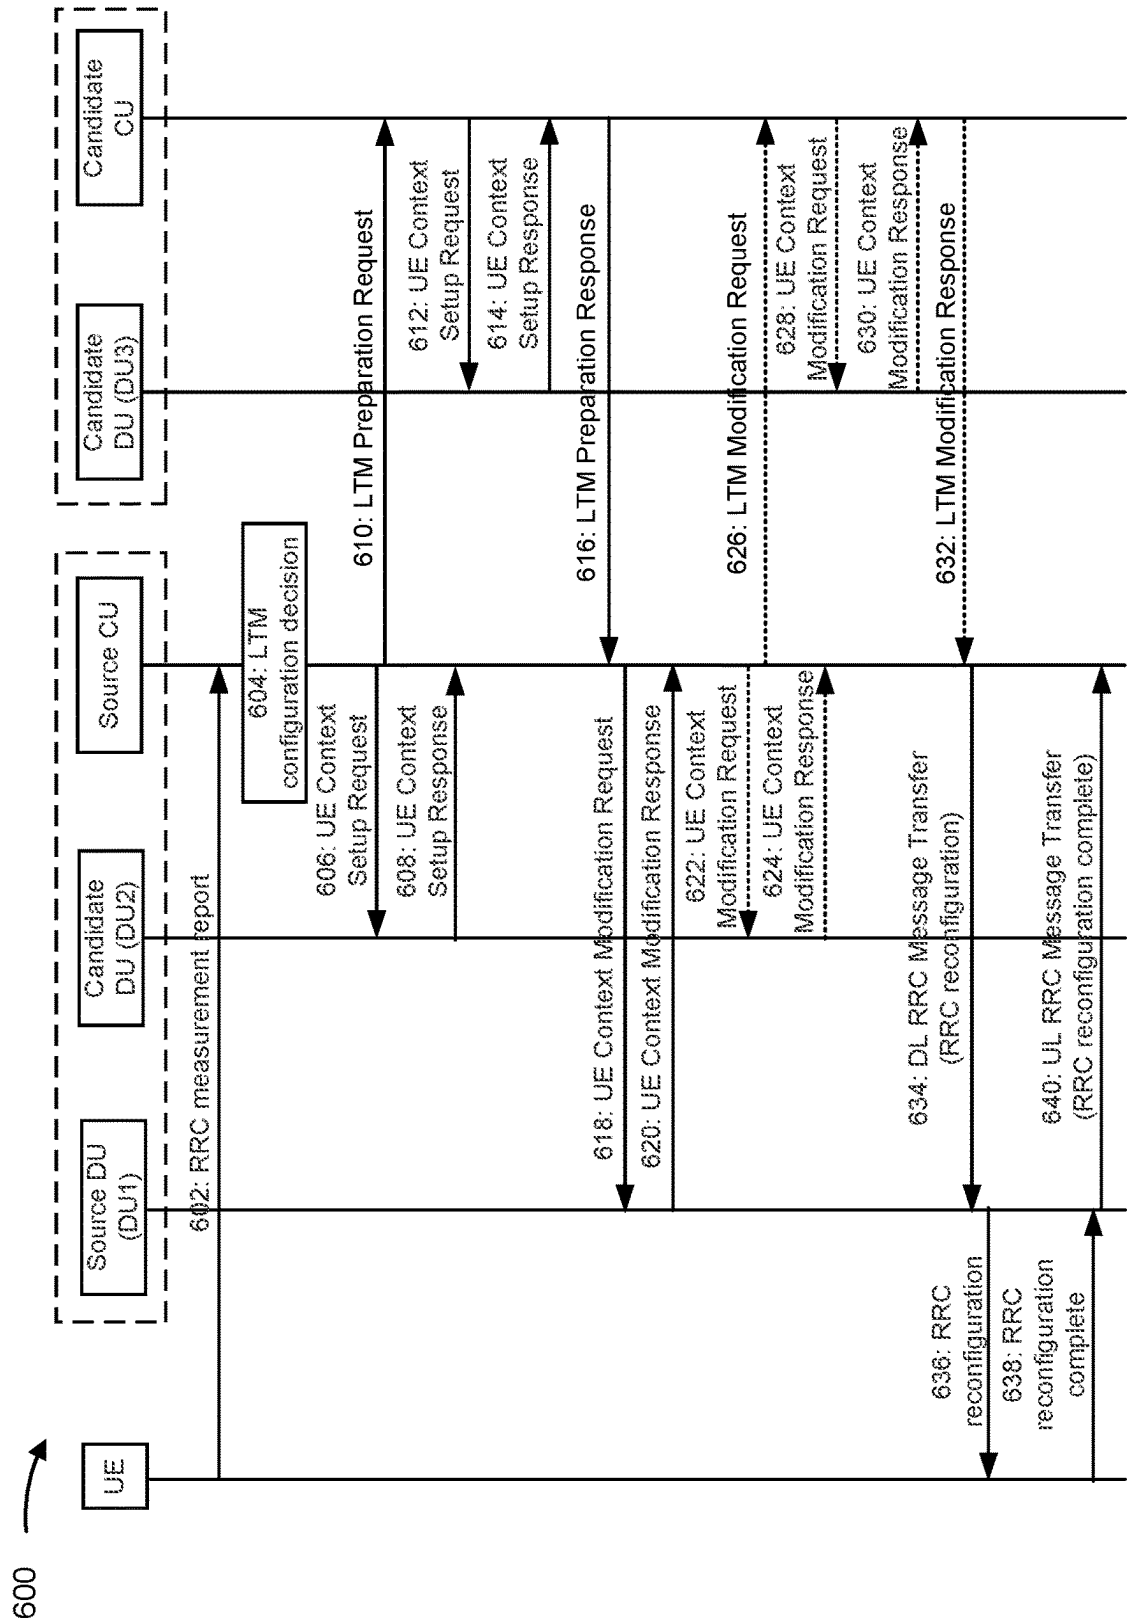


FIG. 6

700

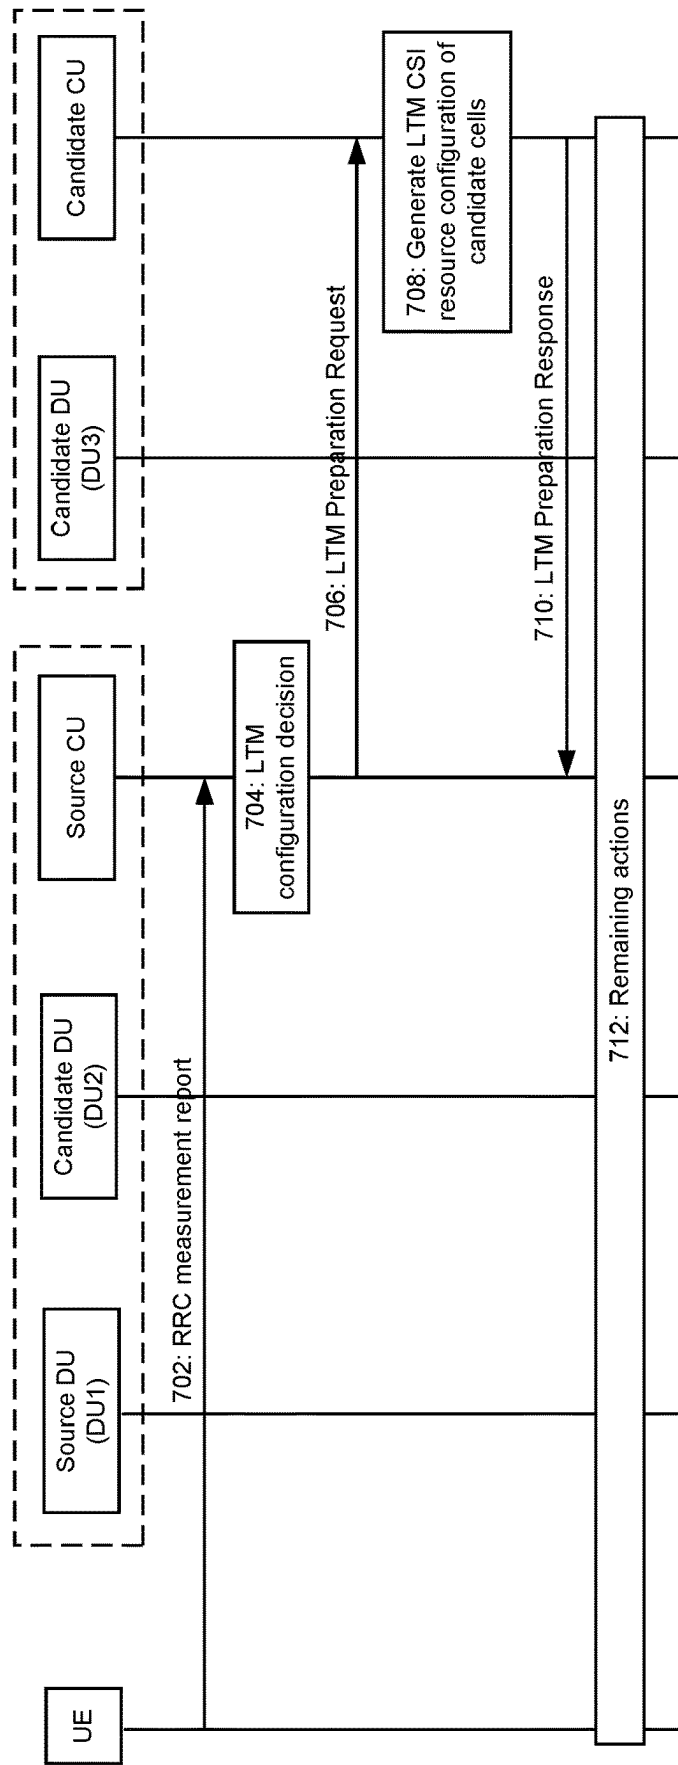


FIG. 7

800 →

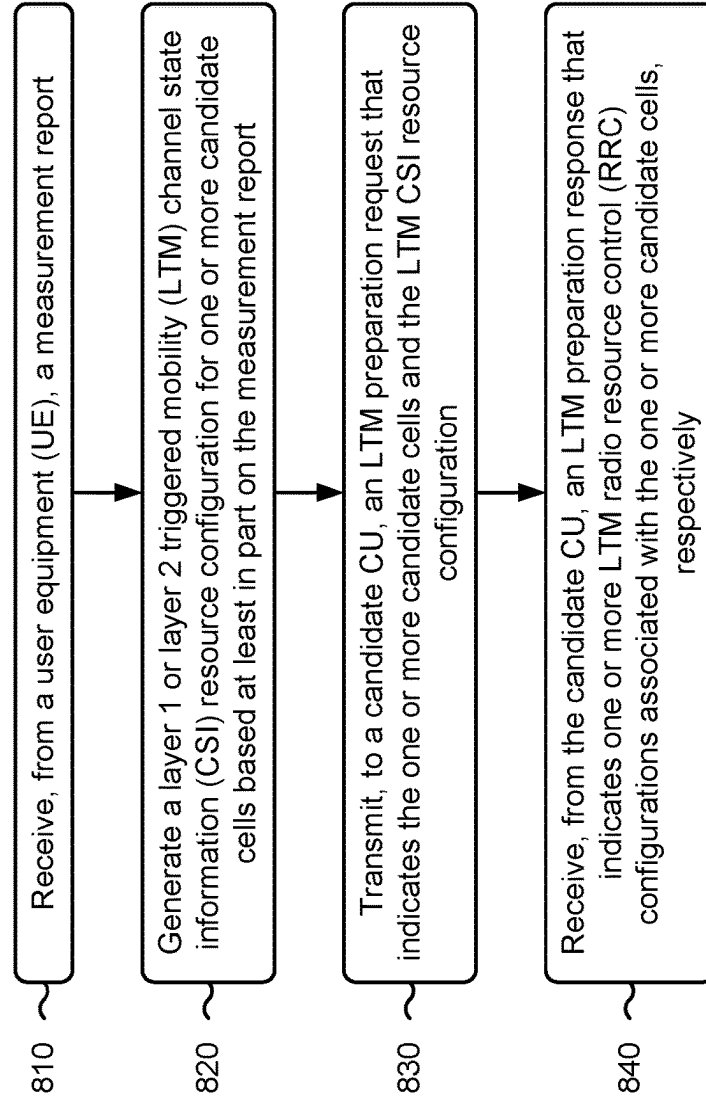


FIG. 8

900 →

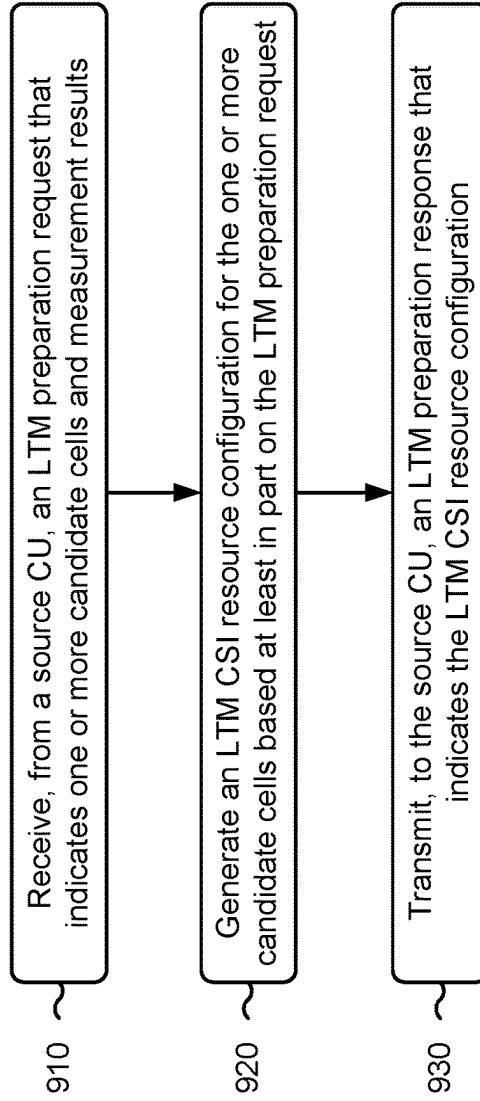


FIG. 9

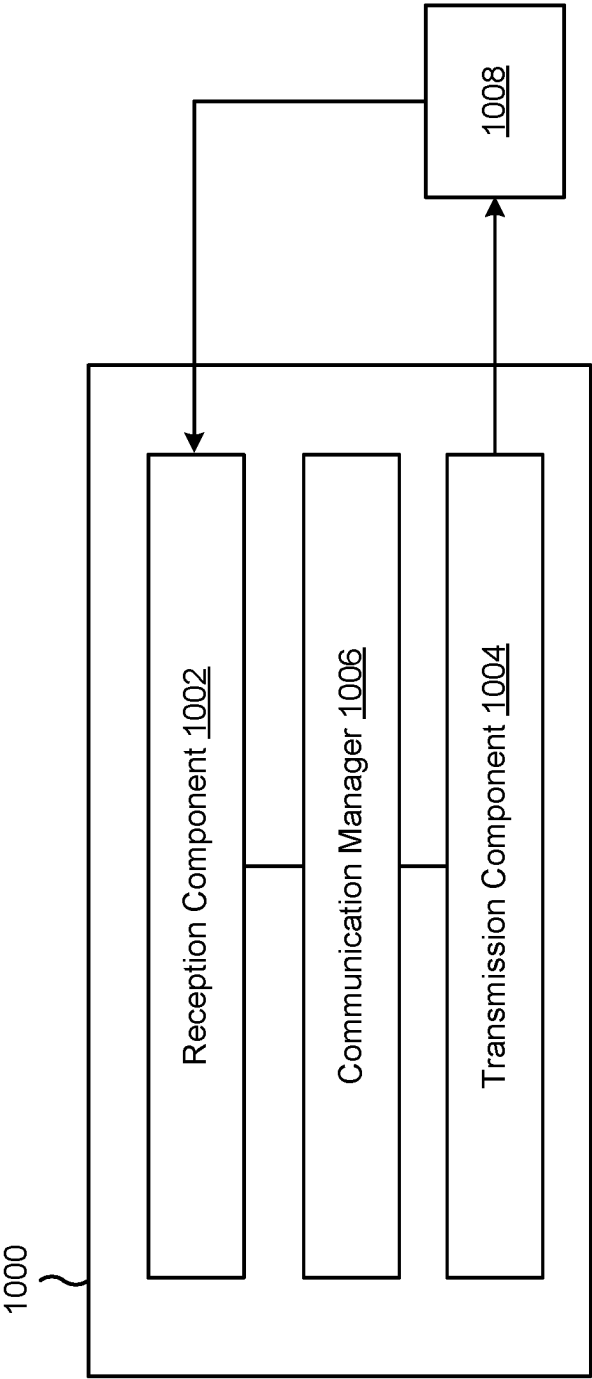


FIG. 10

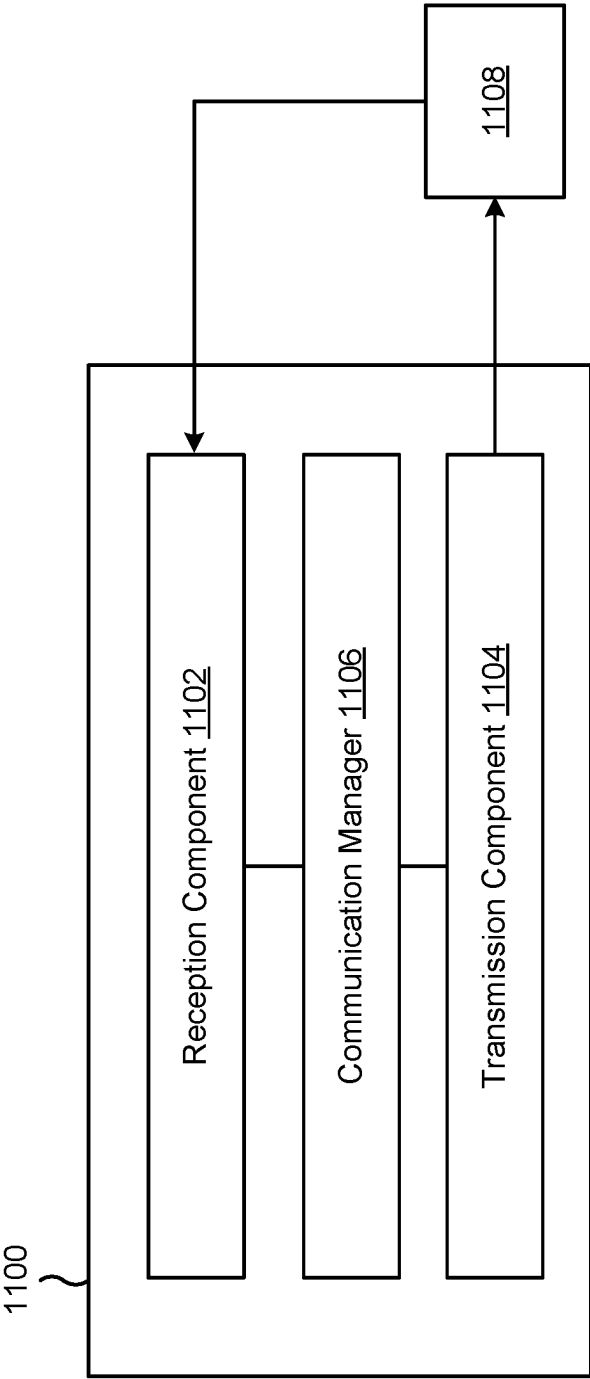


FIG. 11

**CHANNEL STATE INFORMATION
RESOURCE CONFIGURATION FOR
CANDIDATE CELLS ASSOCIATED WITH
LOWER LAYER TRIGGERED MOBILITY**

FIELD OF THE DISCLOSURE

[0001] Aspects of the present disclosure generally relate to wireless communication and specifically relate to techniques, apparatuses, and methods for channel state information (CSI) resource configuration for candidate cells associated with lower layer triggered mobility.

BACKGROUND

[0002] Wireless communication systems are widely deployed to provide various services that may include carrying voice, text, messaging, video, data, and/or other traffic. The services may include unicast, multicast, and/or broadcast services, among other examples. Typical wireless communication systems may employ multiple-access radio access technologies (RATs) capable of supporting communication with multiple users by sharing available system resources (for example, time domain resources, frequency domain resources, spatial domain resources, and/or device transmit power, among other examples). Examples of such multiple-access RATs include code division multiple access (CDMA) systems, time division multiple access (TDMA) systems, frequency division multiple access (FDMA) systems, orthogonal frequency division multiple access (OFDMA) systems, single-carrier frequency division multiple access (SC-FDMA) systems, and time division synchronous code division multiple access (TD-SCDMA) systems.

[0003] The above multiple-access RATs have been adopted in various telecommunication standards to provide common protocols that enable different wireless communication devices to communicate on a municipal, national, regional, or global level. An example telecommunication standard is New Radio (NR). NR, which may also be referred to as 5G, is part of a continuous mobile broadband evolution promulgated by the Third Generation Partnership Project (3GPP). NR (and other mobile broadband evolutions beyond NR) may be designed to better support Internet of things (IoT) and reduced capability device deployments, industrial connectivity, millimeter wave (mmWave) expansion, licensed and unlicensed spectrum access, non-terrestrial network (NTN) deployment, sidelink and other device-to-device direct communication technologies (for example, cellular vehicle-to-everything (CV2X) communication), massive multiple-input multiple-output (MIMO), disaggregated network architectures and network topology expansions, multiple-subscriber implementations, high-precision positioning, and/or radio frequency (RF) sensing, among other examples. As the demand for mobile broadband access continues to increase, further improvements in NR may be implemented, and other radio access technologies such as 6G may be introduced, to further advance mobile broadband evolution.

SUMMARY

[0004] In some implementations, an apparatus for wireless communication includes one or more memories; and one or more processors coupled to the one or more memories, the one or more processors individually or collectively configured to:

receive, from a user equipment (UE), a measurement report; generate a lower layer triggered mobility (LTM) channel state information (CSI) resource configuration for one or more candidate cells based at least in part on the measurement report; transmit, to a candidate central unit (CU), an LTM preparation request that indicates the one or more candidate cells and the LTM CSI resource configuration; and receive, from the candidate CU, an LTM preparation response that indicates one or more LTM radio resource control (RRC) configurations associated with the one or more candidate cells, respectively.

[0005] In some implementations, an apparatus for wireless communication includes one or more memories; and one or more processors coupled to the one or more memories, the one or more processors individually or collectively configured to: receive, from a source CU, an LTM preparation request that indicates one or more candidate cells and measurement results; generate an LTM CSI resource configuration for the one or more candidate cells based at least in part on the LTM preparation request; and transmit, to the source CU, an LTM preparation response that indicates the LTM CSI resource configuration.

[0006] In some implementations, a method of wireless communication performed by a source CU includes receiving, from a UE, a measurement report; generating an LTM CSI resource configuration for one or more candidate cells based at least in part on the measurement report; transmitting, to a candidate CU, an LTM preparation request that indicates the one or more candidate cells and the LTM CSI resource configuration; and receiving, from the candidate CU, an LTM preparation response that indicates one or more LTM RRC configurations associated with the one or more candidate cells, respectively.

[0007] In some implementations, a method of wireless communication performed by a candidate CU includes receiving, from a source CU, an LTM preparation request that indicates one or more candidate cells and measurement results; generating an LTM CSI resource configuration for the one or more candidate cells based at least in part on the LTM preparation request; and transmitting, to the source CU, an LTM preparation response that indicates the LTM CSI resource configuration.

[0008] In some implementations, a non-transitory computer-readable medium storing a set of instructions for wireless communication includes one or more instructions that, when executed by one or more processors of a source CU, cause the source CU to: receive, from a UE, a measurement report; generate an LTM CSI resource configuration for one or more candidate cells based at least in part on the measurement report; transmit, to a candidate CU, an LTM preparation request that indicates the one or more candidate cells and the LTM CSI resource configuration; and receive, from the candidate CU, an LTM preparation response that indicates one or more LTM RRC configurations associated with the one or more candidate cells, respectively.

[0009] In some implementations, a non-transitory computer-readable medium storing a set of instructions for wireless communication includes one or more instructions that, when executed by one or more processors of a candidate CU, cause the candidate CU to: receive, from a source CU, an LTM preparation request that indicates one or more candidate cells and measurement results; generate an LTM CSI resource configuration for the one or more candidate

cells based at least in part on the LTM preparation request; and transmit, to the source CU, an LTM preparation response that indicates the LTM CSI resource configuration.

[0010] In some implementations, a source apparatus for wireless communication includes means for receiving, from a UE, a measurement report; means for generating an LTM CSI resource configuration for one or more candidate cells based at least in part on the measurement report; means for transmitting, to a candidate apparatus, an LTM preparation request that indicates the one or more candidate cells and the LTM CSI resource configuration; and means for receiving, from the candidate apparatus, an LTM preparation response that indicates one or more LTM RRC configurations associated with the one or more candidate cells, respectively.

[0011] In some implementations, a candidate apparatus for wireless communication includes means for receiving, from a source apparatus, an LTM preparation request that indicates one or more candidate cells and measurement results; means for generating an LTM CSI resource configuration for the one or more candidate cells based at least in part on the LTM preparation request; and means for transmitting, to the source apparatus, an LTM preparation response that indicates the LTM CSI resource configuration.

[0012] Aspects of the present disclosure may generally be implemented by or as a method, apparatus, system, computer program product, non-transitory computer-readable medium, user equipment, base station, network node, network entity, wireless communication device, and/or processing system as substantially described with reference to, and as illustrated by, the specification and accompanying drawings.

[0013] The foregoing paragraphs of this section have broadly summarized some aspects of the present disclosure. These and additional aspects and associated advantages will be described hereinafter. The disclosed aspects may be used as a basis for modifying or designing other aspects for carrying out the same or similar purposes of the present disclosure. Such equivalent aspects do not depart from the scope of the appended claims. Characteristics of the aspects disclosed herein, both their organization and method of operation, together with associated advantages, will be better understood from the following description when considered in connection with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

[0014] The appended drawings illustrate some aspects of the present disclosure, but are not limiting of the scope of the present disclosure because the description may enable other aspects. Each of the drawings is provided for purposes of illustration and description, and not as a definition of the limits of the claims. The same or similar reference numbers in different drawings may identify the same or similar elements.

[0015] FIG. 1 is a diagram illustrating an example of a wireless network, in accordance with the present disclosure.

[0016] FIG. 2 is a diagram illustrating an example of a network node in communication with a user equipment (UE) in a wireless network, in accordance with the present disclosure.

[0017] FIG. 3 is a diagram illustrating an example disaggregated base station architecture, in accordance with the present disclosure.

[0018] FIG. 4 is a diagram illustrating an example of a lower layer triggered mobility (LTM), in accordance with the present disclosure.

[0019] FIGS. 5-7 are diagrams illustrating examples associated with channel state information (CSI) resource configuration for candidate cells associated with LTM, in accordance with the present disclosure.

[0020] FIGS. 8-9 are diagrams illustrating example processes associated with CSI resource configuration for candidate cells associated with LTM, in accordance with the present disclosure.

[0021] FIGS. 10-11 are diagrams of example apparatuses for wireless communication, in accordance with the present disclosure.

DETAILED DESCRIPTION

[0022] Various aspects of the present disclosure are described hereinafter with reference to the accompanying drawings. However, aspects of the present disclosure may be embodied in many different forms and is not to be construed as limited to any specific aspect illustrated by or described with reference to an accompanying drawing or otherwise presented in this disclosure. Rather, these aspects are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the disclosure to those skilled in the art. One skilled in the art may appreciate that the scope of the disclosure is intended to cover any aspect of the disclosure disclosed herein, whether implemented independently of or in combination with any other aspect of the disclosure. For example, an apparatus may be implemented or a method may be practiced using various combinations or quantities of the aspects set forth herein. In addition, the scope of the disclosure is intended to cover an apparatus having, or a method that is practiced using, other structures and/or functionalities in addition to or other than the structures and/or functionalities with which various aspects of the disclosure set forth herein may be practiced. Any aspect of the disclosure disclosed herein may be embodied by one or more elements of a claim.

[0023] Several aspects of telecommunication systems will now be presented with reference to various methods, operations, apparatuses, and techniques. These methods, operations, apparatuses, and techniques will be described in the following detailed description and illustrated in the accompanying drawings by various blocks, modules, components, circuits, steps, processes, or algorithms (collectively referred to as “elements”). These elements may be implemented using hardware, software, or a combination of hardware and software. Whether such elements are implemented as hardware or software depends upon the particular application and design constraints imposed on the overall system.

[0024] A wireless network may include a source central unit (CU) with underlying distributed units (DUs), such as a first DU (DU1) (source DU) and a second DU, and a candidate CU with an underlying DU, such as a third DU (DU3). The source CU, the candidate CU, and/or underlying DUs, respectively, may be used to generate a lower layer triggered mobility (LTM) channel state information (CSI) resource and CSI report configuration. The LTM may be associated with a layer 1 (L1) or a layer 2 (L2).

[0025] The source CU and the candidate CU may receive, from the underlying DUs, respectively, information during an F1 setup (e.g., the source CU may receive information from DU1 and DU2, and the candidate CU may receive

information from DU3). The information may include a list of cells managed by the DU. The information may include, for each such cell, a cell reference signal (RS) configuration, which may include a list of transmitting synchronization signal blocks (SSBs) of the cell. The source CU may receive, from the candidate CU, similar information during an Xn setup. The information may include a list of cells managed by the candidate CU. The information may include, for each such cell, a cell RS configuration, which may include a list of transmitting SSBs of the cell.

[0026] In an intra-CU LTM that utilizes an SSB-based LTM CSI configuration, the source CU may generate a CSI resource configuration for measuring LTM candidate cells, where the CSI resource configuration may be common for all of the LTM candidate cells. The source DU and the candidate DU may generate a CSI reporting configuration.

[0027] However, CSI resource and CSI report configurations may not be defined for inter-CU LTM. In other words, when a UE moves between CUs, which may trigger the inter-CU LTM, the CUs and/or DUs associated with a source network and a candidate network, respectively, may not be configured to generate LTM CSI resource configurations for candidate cells. As a result, the UE may be unable to be handed over between CUs, which may degrade an overall performance of the UE.

[0028] Various aspects relate generally to a CSI resource configuration for candidate cells associated with LTM. Some aspects more specifically relate to CSI resource configurations for candidate cells associated with LTM. In some examples, a source CU may receive, from a UE, a measurement report. The source CU may generate an LTM CSI resource configuration for one or more candidate cells based at least in part on the measurement report, and based at least in part on information received from a candidate CU and one or more DUs associated with the source CU during a setup procedure. The LTM CSI resource configuration may include a list of SSBs to be measured for each candidate cell of the one or more candidate cells. An LTM RRC configuration of a candidate cell may include an LTM CSI resource configuration. The LTM CSI resource configuration may be associated with an inter-CU LTM. The source CU may transmit, to the candidate CU, an LTM preparation request that indicates the one or more candidate cells and the LTM CSI resource configuration. The source CU may receive, from the candidate CU, an LTM preparation response that indicates one or more LTM RRC configurations associated with the one or more candidate cells, respectively.

[0029] In some aspects, the source CU may determine an updated LTM CSI resource configuration for the one or more candidate cells or an updated list of candidate cells, where the updated LTM CSI resource configuration may indicate an updated list of SSBs to be measured for each candidate cell of the one or more candidate cells. In some aspects, the source CU may receive, from a DU associated with the source CU or the candidate CU, an updated LTM CSI report configuration. The source CU may transmit, to a UE, an RRC reconfiguration message that indicates one or more LTM RRC reconfigurations associated with the one or more candidate cells, respectively, based at least in part on the updated LTM CSI report configuration. In some aspects, the LTM preparation response received from the candidate CU may indicate the updated LTM CSI resource configuration, where the updated LTM CSI resource configuration may be

received from the candidate CU via a DU associated with the candidate CU, or from an underlying DU associated with the source CU.

[0030] Particular aspects of the subject matter described in this disclosure can be implemented to realize one or more of the following potential advantages. In some examples, by enabling CSI resource and CSI report configurations for inter-CU LTM, the described techniques can be used by the source CU or the candidate CU to generate and/or update the LTM CSI resource configuration. An RRC reconfiguration message, which may be based at least in part on the LTM CSI resource configuration, may be provided to the UE. The UE may use the LTM CSI resource configuration to measure SSBs for different candidate cells, which may allow the UE to be handed over between CUs, thereby improving an overall system performance.

[0031] Multiple-access radio access technologies (RATs) have been adopted in various telecommunication standards to provide common protocols that enable wireless communication devices to communicate on a municipal, enterprise, national, regional, or global level. For example, 5G New Radio (NR) is part of a continuous mobile broadband evolution promulgated by the Third Generation Partnership Project (3GPP). 5G NR supports various technologies and use cases including enhanced mobile broadband (eMBB), ultra-reliable low-latency communication (URLLC), massive machine-type communication (mMTC), millimeter wave (mmWave) technology, beamforming, network slicing, edge computing, Internet of Things (IoT) connectivity and management, and network function virtualization (NFV).

[0032] As the demand for broadband access increases and as technologies supported by wireless communication networks evolve, further technological improvements may be adopted in or implemented for 5G NR or future RATs, such as 6G, to further advance the evolution of wireless communication for a wide variety of existing and new use cases and applications. Such technological improvements may be associated with new frequency band expansion, licensed and unlicensed spectrum access, overlapping spectrum use, small cell deployments, non-terrestrial network (NTN) deployments, disaggregated network architectures and network topology expansion, device aggregation, advanced duplex communication, sidelink and other device-to-device direct communication, IoT (including passive or ambient IoT) networks, reduced capability (RedCap) UE functionality, industrial connectivity, multiple-subscriber implementations, high-precision positioning, radio frequency (RF) sensing, and/or artificial intelligence or machine learning (AI/ML), among other examples. These technological improvements may support use cases such as wireless backhauls, wireless data centers, extended reality (XR) and metaverse applications, meta services for supporting vehicle connectivity, holographic and mixed reality communication, autonomous and collaborative robots, vehicle platooning and cooperative maneuvering, sensing networks, gesture monitoring, human-brain interfacing, digital twin applications, asset management, and universal coverage applications using non-terrestrial and/or aerial platforms, among other examples. The methods, operations, apparatuses, and techniques described herein may enable one or more of the foregoing technologies and/or support one or more of the foregoing use cases.

[0033] FIG. 1 is a diagram illustrating an example of a wireless communication network **100** in accordance with the present disclosure. The wireless communication network **100** may be or may include elements of a 5G (or NR) network or a 6G network, among other examples. The wireless communication network **100** may include multiple network nodes **110**, shown as a network node (NN) **110a**, a network node **110b**, a network node **110c**, and a network node **110d**. The network nodes **110** may support communications with multiple UEs **120**, shown as a UE **120a**, a UE **120b**, a UE **120c**, a UE **120d**, and a UE **120e**.

[0034] The network nodes **110** and the UEs **120** of the wireless communication network **100** may communicate using the electromagnetic spectrum, which may be subdivided by frequency or wavelength into various classes, bands, carriers, and/or channels. For example, devices of the wireless communication network **100** may communicate using one or more operating bands. In some aspects, multiple wireless networks **100** may be deployed in a given geographic area. Each wireless communication network **100** may support a particular RAT (which may also be referred to as an air interface) and may operate on one or more carrier frequencies in one or more frequency ranges. Examples of RATs include a 4G RAT, a 5G/NR RAT, and/or a 6G RAT, among other examples. In some examples, when multiple RATs are deployed in a given geographic area, each RAT in the geographic area may operate on different frequencies to avoid interference with one another.

[0035] Various operating bands have been defined as frequency range designations FR1 (410 MHz through 7.125 GHz), FR2 (24.25 GHz through 52.6 GHz), FR3 (7.125 GHz through 24.25 GHz), FR4a or FR4-1 (52.6 GHz through 71 GHz), FR4 (52.6 GHz through 114.25 GHz), and FR5 (114.25 GHz through 300 GHz). Although a portion of FR1 is greater than 6 GHz, FR1 is often referred to (interchangeably) as a “Sub-6 GHz” band in some documents and articles. Similarly, FR2 is often referred to (interchangeably) as a “millimeter wave” band in some documents and articles, despite being different than the extremely high frequency (EHF) band (30 GHz through 300 GHz), which is identified by the International Telecommunications Union (ITU) as a “millimeter wave” band. The frequencies between FR1 and FR2 are often referred to as mid-band frequencies, which include FR3. Frequency bands falling within FR3 may inherit FR1 characteristics or FR2 characteristics, and thus may effectively extend features of FR1 or FR2 into mid-band frequencies. Thus, “sub-6 GHz,” if used herein, may broadly refer to frequencies that are less than 6 GHz, that are within FR1, and/or that are included in mid-band frequencies. Similarly, the term “millimeter wave,” if used herein, may broadly refer to frequencies that are included in mid-band frequencies, that are within FR2, FR4, FR4-a or FR4-1, or FR5, and/or that are within the EHF band. Higher frequency bands may extend 5G NR operation, 6G operation, and/or other RATs beyond 52.6 GHz. For example, each of FR4a, FR4-1, FR4, and FR5 falls within the EHF band. In some examples, the wireless communication network **100** may implement dynamic spectrum sharing (DSS), in which multiple RATs (for example, 4G/LTE and 5G/NR) are implemented with dynamic bandwidth allocation (for example, based on user demand) in a single frequency band. It is contemplated that the frequencies included in these operating bands (for example, FR1, FR2, FR3, FR4, FR4-a,

FR4-1, and/or FR5) may be modified, and techniques described herein may be applicable to those modified frequency ranges.

[0036] A network node **110** may include one or more devices, components, or systems that enable communication between a UE **120** and one or more devices, components, or systems of the wireless communication network **100**. A network node **110** may be, may include, or may also be referred to as an NR network node, a 5G network node, a 6G network node, a Node B, an eNB, a gNB, an access point (AP), a transmission reception point (TRP), a mobility element, a core, a network entity, a network element, a network equipment, and/or another type of device, component, or system included in a radio access network (RAN).

[0037] A network node **110** may be implemented as a single physical node (for example, a single physical structure) or may be implemented as two or more physical nodes (for example, two or more distinct physical structures). For example, a network node **110** may be a device or system that implements part of a radio protocol stack, a device or system that implements a full radio protocol stack (such as a full gNB protocol stack), or a collection of devices or systems that collectively implement the full radio protocol stack. For example, and as shown, a network node **110** may be an aggregated network node (having an aggregated architecture), meaning that the network node **110** may implement a full radio protocol stack that is physically and logically integrated within a single node (for example, a single physical structure) in the wireless communication network **100**. For example, an aggregated network node **110** may consist of a single standalone base station or a single TRP that uses a full radio protocol stack to enable or facilitate communication between a UE **120** and a core network of the wireless communication network **100**.

[0038] Alternatively, and as also shown, a network node **110** may be a disaggregated network node (sometimes referred to as a disaggregated base station), meaning that the network node **110** may implement a radio protocol stack that is physically distributed and/or logically distributed among two or more nodes in the same geographic location or in different geographic locations. For example, a disaggregated network node may have a disaggregated architecture. In some deployments, disaggregated network nodes **110** may be used in an integrated access and backhaul (IAB) network, in an open radio access network (O-RAN) (such as a network configuration in compliance with the O-RAN Alliance), or in a virtualized radio access network (vRAN), also known as a cloud radio access network (C-RAN), to facilitate scaling by separating base station functionality into multiple units that can be individually deployed.

[0039] The network nodes **110** of the wireless communication network **100** may include one or more CUs, one or more DUs, and/or one or more radio units (RUs). A CU may host one or more higher layer control functions, such as radio resource control (RRC) functions, packet data convergence protocol (PDCP) functions, and/or service data adaptation protocol (SDAP) functions, among other examples. A DU may host one or more of a radio link control (RLC) layer, a medium access control (MAC) layer, and/or one or more higher physical (PHY) layers depending, at least in part, on a functional split, such as a functional split defined by the 3GPP. In some examples, a DU also may host one or more lower PHY layer functions, such as a fast Fourier transform (FFT), an inverse FFT (iFFT), beamforming,

physical random access channel (PRACH) extraction and filtering, and/or scheduling of resources for one or more UEs 120, among other examples. An RU may host RF processing functions or lower PHY layer functions, such as an FFT, an iFFT, beamforming, or PRACH extraction and filtering, among other examples, according to a functional split, such as a lower layer functional split. In such an architecture, each RU can be operated to handle over the air (OTA) communication with one or more UEs 120.

[0040] In some aspects, a single network node 110 may include a combination of one or more CUs, one or more DUs, and/or one or more RUs. Additionally or alternatively, a network node 110 may include one or more Near-Real Time (Near-RT) RAN Intelligent Controllers (RICs) and/or one or more Non-Real Time (Non-RT) RICs. In some examples, a CU, a DU, and/or an RU may be implemented as a virtual unit, such as a virtual central unit (VCU), a virtual distributed unit (VDU), or a virtual radio unit (VRU), among other examples. A virtual unit may be implemented as a virtual network function, such as associated with a cloud deployment.

[0041] Some network nodes 110 (for example, a base station, an RU, or a TRP) may provide communication coverage for a particular geographic area. In the 3GPP, the term “cell” can refer to a coverage area of a network node 110 or to a network node 110 itself, depending on the context in which the term is used. A network node 110 may support one or multiple (for example, three) cells. In some examples, a network node 110 may provide communication coverage for a macro cell, a pico cell, a femto cell, or another type of cell. A macro cell may cover a relatively large geographic area (for example, several kilometers in radius) and may allow unrestricted access by UEs 120 with service subscriptions. A pico cell may cover a relatively small geographic area and may allow unrestricted access by UEs 120 with service subscriptions. A femto cell may cover a relatively small geographic area (for example, a home) and may allow restricted access by UEs 120 having association with the femto cell (for example, UEs 120 in a closed subscriber group (CSG)). A network node 110 for a macro cell may be referred to as a macro network node. A network node 110 for a pico cell may be referred to as a pico network node. A network node 110 for a femto cell may be referred to as a femto network node or an in-home network node. In some examples, a cell may not necessarily be stationary. For example, the geographic area of the cell may move according to the location of an associated mobile network node 110 (for example, a train, a satellite base station, an unmanned aerial vehicle, or an NTN network node).

[0042] The wireless communication network 100 may be a heterogeneous network that includes network nodes 110 of different types, such as macro network nodes, pico network nodes, femto network nodes, relay network nodes, aggregated network nodes, and/or disaggregated network nodes, among other examples. In the example shown in FIG. 1, the network node 110a may be a macro network node for a macro cell 130a, the network node 110b may be a pico network node for a pico cell 130b, and the network node 110c may be a femto network node for a femto cell 130c. Various different types of network nodes 110 may generally transmit at different power levels, serve different coverage areas, and/or have different impacts on interference in the wireless communication network 100 than other types of network nodes 110. For example, macro network nodes may

have a high transmit power level (for example, 5 to 40 watts), whereas pico network nodes, femto network nodes, and relay network nodes may have lower transmit power levels (for example, 0.1 to 2 watts).

[0043] In some examples, a network node 110 may be, may include, or may operate as an RU, a TRP, or a base station that communicates with one or more UEs 120 via a radio access link (which may be referred to as a “Uu” link). The radio access link may include a downlink and an uplink. “Downlink” (or “DL”) refers to a communication direction from a network node 110 to a UE 120, and “uplink” (or “UL”) refers to a communication direction from a UE 120 to a network node 110. Downlink channels may include one or more control channels and one or more data channels. A downlink control channel may be used to transmit downlink control information (DCI) (for example, scheduling information, reference signals, and/or configuration information) from a network node 110 to a UE 120. A downlink data channel may be used to transmit downlink data (for example, user data associated with a UE 120) from a network node 110 to a UE 120. Downlink control channels may include one or more physical downlink control channels (PDCCHs), and downlink data channels may include one or more physical downlink shared channels (PDSCHs). Uplink channels may similarly include one or more control channels and one or more data channels. An uplink control channel may be used to transmit uplink control information (UCI) (for example, reference signals and/or feedback corresponding to one or more downlink transmissions) from a UE 120 to a network node 110. An uplink data channel may be used to transmit uplink data (for example, user data associated with a UE 120) from a UE 120 to a network node 110. Uplink control channels may include one or more physical uplink control channels (PUCCHs), and uplink data channels may include one or more physical uplink shared channels (PUSCHs). The downlink and the uplink may each include a set of resources on which the network node 110 and the UE 120 may communicate.

[0044] Downlink and uplink resources may include time domain resources (frames, subframes, slots, and/or symbols), frequency domain resources (frequency bands, component carriers, subcarriers, resource blocks, and/or resource elements), and/or spatial domain resources (particular transmit directions and/or beam parameters). Frequency domain resources of some bands may be subdivided into bandwidth parts (BWPs). A BWP may be a continuous block of frequency domain resources (for example, a continuous block of resource blocks) that are allocated for one or more UEs 120. A UE 120 may be configured with both an uplink BWP and a downlink BWP (where the uplink BWP and the downlink BWP may be the same BWP or different BWPs). A BWP may be dynamically configured (for example, by a network node 110 transmitting a DCI configuration to the one or more UEs 120) and/or reconfigured, which means that a BWP can be adjusted in real-time (or near-real-time) based on changing network conditions in the wireless communication network 100 and/or based on the specific requirements of the one or more UEs 120. This enables more efficient use of the available frequency domain resources in the wireless communication network 100 because fewer frequency domain resources may be allocated to a BWP for a UE 120 (which may reduce the quantity of frequency domain resources that a UE 120 is required to monitor), leaving more frequency domain resources to be spread

across multiple UEs 120. Thus, BWPs may also assist in the implementation of lower-capability UEs 120 by facilitating the configuration of smaller bandwidths for communication by such UEs 120.

[0045] As described above, in some aspects, the wireless communication network 100 may be, may include, or may be included in, an IAB network. In an IAB network, at least one network node 110 is an anchor network node that communicates with a core network. An anchor network node 110 may also be referred to as an IAB donor (or “IAB-donor”). The anchor network node 110 may connect to the core network via a wired backhaul link. For example, an Ng interface of the anchor network node 110 may terminate at the core network. Additionally or alternatively, an anchor network node 110 may connect to one or more devices of the core network that provide a core access and mobility management function (AMF). An IAB network also generally includes multiple non-anchor network nodes 110, which may also be referred to as relay network nodes or simply as IAB nodes (or “IAB-nodes”). Each non-anchor network node 110 may communicate directly with the anchor network node 110 via a wireless backhaul link to access the core network, or may communicate indirectly with the anchor network node 110 via one or more other non-anchor network nodes 110 and associated wireless backhaul links that form a backhaul path to the core network. Some anchor network node 110 or other non-anchor network node 110 may also communicate directly with one or more UEs 120 via wireless access links that carry access traffic. In some examples, network resources for wireless communication (such as time resources, frequency resources, and/or spatial resources) may be shared between access links and backhaul links.

[0046] In some examples, any network node 110 that relays communications may be referred to as a relay network node, a relay station, or simply as a relay. A relay may receive a transmission of a communication from an upstream station (for example, another network node 110 or a UE 120) and transmit the communication to a downstream station (for example, a UE 120 or another network node 110). In this case, the wireless communication network 100 may include or be referred to as a “multi-hop network.” In the example shown in FIG. 1, the network node 110d (for example, a relay network node) may communicate with the network node 110a (for example, a macro network node) and the UE 120d in order to facilitate communication between the network node 110a and the UE 120d. Additionally or alternatively, a UE 120 may be or may operate as a relay station that can relay transmissions to or from other UEs 120. A UE 120 that relays communications may be referred to as a UE relay or a relay UE, among other examples.

[0047] The UEs 120 may be physically dispersed throughout the wireless communication network 100, and each UE 120 may be stationary or mobile. A UE 120 may be, may include, or may be included in an access terminal, another terminal, a mobile station, or a subscriber unit. A UE 120 may be, include, or be coupled with a cellular phone (for example, a smart phone), a personal digital assistant (PDA), a wireless modem, a wireless communication device, a handheld device, a laptop computer, a cordless phone, a wireless local loop (WLL) station, a tablet, a camera, a gaming device, a netbook, a smartbook, an ultrabook, a medical device, a biometric device, a wearable device (for

example, a smart watch, smart clothing, smart glasses, a smart wristband, and/or smart jewelry, such as a smart ring or a smart bracelet), an entertainment device (for example, a music device, a video device, and/or a satellite radio), an XR device, a vehicular component or sensor, a smart meter or sensor, industrial manufacturing equipment, a Global Navigation Satellite System (GNSS) device (such as a Global Positioning System device or another type of positioning device), a UE function of a network node, and/or any other suitable device or function that may communicate via a wireless medium.

[0048] A UE 120 and/or a network node 110 may include one or more chips, system-on-chips (SoCs), chipsets, packages, or devices that individually or collectively constitute or comprise a processing system. The processing system includes processor (or “processing”) circuitry in the form of one or multiple processors, microprocessors, processing units (such as central processing units (CPUs), graphics processing units (GPUs), neural processing units (NPUs) and/or digital signal processors (DSPs)), processing blocks, application-specific integrated circuits (ASIC), programmable logic devices (PLDs) (such as field programmable gate arrays (FPGAs)), or other discrete gate or transistor logic or circuitry (all of which may be generally referred to herein individually as “processors” or collectively as “the processor” or “the processor circuitry”). One or more of the processors may be individually or collectively configurable or configured to perform various functions or operations described herein. A group of processors collectively configurable or configured to perform a set of functions may include a first processor configurable or configured to perform a first function of the set and a second processor configurable or configured to perform a second function of the set, or may include the group of processors all being configured or configurable to perform the set of functions.

[0049] The processing system may further include memory circuitry in the form of one or more memory devices, memory blocks, memory elements or other discrete gate or transistor logic or circuitry, each of which may include tangible storage media such as random-access memory (RAM) or read-only memory (ROM), or combinations thereof (all of which may be generally referred to herein individually as “memories” or collectively as “the memory” or “the memory circuitry”). One or more of the memories may be coupled (for example, operatively coupled, communicatively coupled, electronically coupled, or electrically coupled) with one or more of the processors and may individually or collectively store processor-executable code (such as software) that, when executed by one or more of the processors, may configure one or more of the processors to perform various functions or operations described herein. Additionally or alternatively, in some examples, one or more of the processors may be preconfigured to perform various functions or operations described herein without requiring configuration by software. The processing system may further include or be coupled with one or more modems (such as a Wi-Fi (for example, IEEE compliant) modem or a cellular (for example, 3GPP 4G LTE, 5G, or 6G compliant) modem). In some implementations, one or more processors of the processing system include or implement one or more of the modems. The processing system may further include or be coupled with multiple radios (collectively “the radio”), multiple RF chains, or multiple transceivers, each of which may in turn

be coupled with one or more of multiple antennas. In some implementations, one or more processors of the processing system include or implement one or more of the radios, RF chains or transceivers. The UE 120 may include or may be included in a housing that houses components associated with the UE 120 including the processing system.

[0050] Some UEs 120 may be considered machine-type communication (MTC) UEs, evolved or enhanced machine-type communication (eMTC) UEs, further enhanced eMTC (feMTC) UEs, or enhanced feMTC (efeMTC) UEs, or further evolutions thereof, all of which may be simply referred to as “MTC UEs”). An MTC UE may be, may include, or may be included in or coupled with a robot, an uncrewed aerial vehicle, a remote device, a sensor, a meter, a monitor, and/or a location tag. Some UEs 120 may be considered IoT devices and/or may be implemented as NB-IoT (narrowband IoT) devices. An IoT UE or NB-IoT device may be, may include, or may be included in or coupled with an industrial machine, an appliance, a refrigerator, a doorbell camera device, a home automation device, and/or a light fixture, among other examples. Some UEs 120 may be considered Customer Premises Equipment, which may include telecommunications devices that are installed at a customer location (such as a home or office) to enable access to a service provider’s network (such as included in or in communication with the wireless communication network 100).

[0051] Some UEs 120 may be classified according to different categories in association with different complexities and/or different capabilities. UEs 120 in a first category may facilitate massive IoT in the wireless communication network 100, and may offer low complexity and/or cost relative to UEs 120 in a second category. UEs 120 in a second category may include mission-critical IoT devices, legacy UEs, baseline UEs, high-tier UEs, advanced UEs, full-capability UEs, and/or premium UEs that are capable of URLLC, enhanced mobile broadband (eMBB), and/or precise positioning in the wireless communication network 100, among other examples. A third category of UEs 120 may have mid-tier complexity and/or capability (for example, a capability between UEs 120 of the first category and UEs 120 of the second category). A UE 120 of the third category may be referred to as a reduced capacity UE (“RedCap UE”), a mid-tier UE, an NR-Light UE, and/or an NR-Lite UE, among other examples. RedCap UEs may bridge a gap between the capability and complexity of NB-IoT devices and/or eMTC UEs, and mission-critical IoT devices and/or premium UEs. RedCap UEs may include, for example, wearable devices, IoT devices, industrial sensors, and/or cameras that are associated with a limited bandwidth, power capacity, and/or transmission range, among other examples. RedCap UEs may support healthcare environments, building automation, electrical distribution, process automation, transport and logistics, and/or smart city deployments, among other examples.

[0052] In some examples, two or more UEs 120 (for example, shown as UE 120a and UE 120e) may communicate directly with one another using sidelink communications (for example, without communicating by way of a network node 110 as an intermediary). As an example, the UE 120a may directly transmit data, control information, or other signaling as a sidelink communication to the UE 120e. This is in contrast to, for example, the UE 120a first transmitting data in an UL communication to a network node

110, which then transmits the data to the UE 120e in a DL communication. In various examples, the UEs 120 may transmit and receive sidelink communications using peer-to-peer (P2P) communication protocols, device-to-device (D2D) communication protocols, vehicle-to-everything (V2X) communication protocols (which may include vehicle-to-vehicle (V2V) protocols, vehicle-to-infrastructure (V2I) protocols, and/or vehicle-to-pedestrian (V2P) protocols), and/or mesh network communication protocols. In some deployments and configurations, a network node 110 may schedule and/or allocate resources for sidelink communications between UEs 120 in the wireless communication network 100. In some other deployments and configurations, a UE 120 (instead of a network node 110) may perform, or collaborate or negotiate with one or more other UEs to perform, scheduling operations, resource selection operations, and/or other operations for sidelink communications.

[0053] In various examples, some of the network nodes 110 and the UEs 120 of the wireless communication network 100 may be configured for full-duplex operation in addition to half-duplex operation. A network node 110 or a UE 120 operating in a half-duplex mode may perform only one of transmission or reception during particular time resources, such as during particular slots, symbols, or other time periods. Half-duplex operation may involve time-division duplexing (TDD), in which DL transmissions of the network node 110 and UL transmissions of the UE 120 do not occur in the same time resources (that is, the transmissions do not overlap in time). In contrast, a network node 110 or a UE 120 operating in a full-duplex mode can transmit and receive communications concurrently (for example, in the same time resources). By operating in a full-duplex mode, network nodes 110 and/or UEs 120 may generally increase the capacity of the network and the radio access link. In some examples, full-duplex operation may involve frequency-division duplexing (FDD), in which DL transmissions of the network node 110 are performed in a first frequency band or on a first component carrier and transmissions of the UE 120 are performed in a second frequency band or on a second component carrier different than the first frequency band or the first component carrier, respectively. In some examples, full-duplex operation may be enabled for a UE 120 but not for a network node 110. For example, a UE 120 may simultaneously transmit an UL transmission to a first network node 110 and receive a DL transmission from a second network node 110 in the same time resources. In some other examples, full-duplex operation may be enabled for a network node 110 but not for a UE 120. For example, a network node 110 may simultaneously transmit a DL transmission to a first UE 120 and receive an UL transmission from a second UE 120 in the same time resources. In some other examples, full-duplex operation may be enabled for both a network node 110 and a UE 120.

[0054] In some examples, the UEs 120 and the network nodes 110 may perform MIMO communication. “MIMO” generally refers to transmitting or receiving multiple signals (such as multiple layers or multiple data streams) simultaneously over the same time and frequency resources. MIMO techniques generally exploit multipath propagation. MIMO may be implemented using various spatial processing or spatial multiplexing operations. In some examples, MIMO may support simultaneous transmission to multiple receivers, referred to as multi-user MIMO (MU-MIMO). Some

RATs may employ advanced MIMO techniques, such as mTRP operation (including redundant transmission or reception on multiple TRPs), reciprocity in the time domain or the frequency domain, single-frequency-network (SFN) transmission, or non-coherent joint transmission (NC-JT).

[0055] In some aspects, a source CU (e.g., network node **110**) may include a communication manager **150**. As described in more detail elsewhere herein, the communication manager **150** may receive, from a UE, a measurement report; generate an LTM CSI resource configuration for one or more candidate cells based at least in part on the measurement report; transmit, to a candidate CU, an LTM preparation request that indicates the one or more candidate cells and the LTM CSI resource configuration; and receive, from the candidate CU, an LTM preparation response that indicates one or more LTM RRC configurations associated with the one or more candidate cells, respectively. Additionally, or alternatively, the communication manager **150** may perform one or more other operations described herein.

[0056] In some aspects, a candidate CU (e.g., network node **110**) may include a communication manager **150**. As described in more detail elsewhere herein, the communication manager **150** may receive, from a source CU, an LTM preparation request that indicates one or more candidate cells and measurement results; generate an LTM CSI resource configuration for the one or more candidate cells based at least in part on the LTM preparation request; and transmit, to the source CU, an LTM preparation response that indicates the LTM CSI resource configuration. Additionally, or alternatively, the communication manager **150** may perform one or more other operations described herein.

[0057] As indicated above, FIG. 1 is provided as an example. Other examples may differ from what is described with regard to FIG. 1.

[0058] FIG. 2 is a diagram illustrating an example network node **110** in communication with an example UE **120** in a wireless network in accordance with the present disclosure.

[0059] As shown in FIG. 2, the network node **110** may include a data source **212**, a transmit processor **214**, a transmit (TX) MIMO processor **216**, a set of modems **232** (shown as **232a** through **232t**, where $t \geq 1$), a set of antennas **234** (shown as **234a** through **234v**, where $v \geq 1$), a MIMO detector **236**, a receive processor **238**, a data sink **239**, a controller/processor **240**, a memory **242**, a communication unit **244**, a scheduler **246**, and/or a communication manager **150**, among other examples. In some configurations, one or a combination of the antenna(s) **234**, the modem(s) **232**, the MIMO detector **236**, the receive processor **238**, the transmit processor **214**, and/or the TX MIMO processor **216** may be included in a transceiver of the network node **110**. The transceiver may be under control of and used by one or more processors, such as the controller/processor **240**, and in some aspects in conjunction with processor-readable code stored in the memory **242**, to perform aspects of the methods, processes, and/or operations described herein. In some aspects, the network node **110** may include one or more interfaces, communication components, and/or other components that facilitate communication with the UE **120** or another network node.

[0060] The terms “processor,” “controller,” or “controller/processor” may refer to one or more controllers and/or one or more processors. For example, reference to “a/the processor,” “a/the controller/processor,” or the like (in the singular) should be understood to refer to any one or more

of the processors described in connection with FIG. 2, such as a single processor or a combination of multiple different processors. Reference to “one or more processors” should be understood to refer to any one or more of the processors described in connection with FIG. 2. For example, one or more processors of the network node **110** may include transmit processor **214**, TX MIMO processor **216**, MIMO detector **236**, receive processor **238**, and/or controller/processor **240**. Similarly, one or more processors of the UE **120** may include MIMO detector **256**, receive processor **258**, transmit processor **264**, TX MIMO processor **266**, and/or controller/processor **280**.

[0061] In some aspects, a single processor may perform all of the operations described as being performed by the one or more processors. In some aspects, a first set of (one or more) processors of the one or more processors may perform a first operation described as being performed by the one or more processors, and a second set of (one or more) processors of the one or more processors may perform a second operation described as being performed by the one or more processors. The first set of processors and the second set of processors may be the same set of processors or may be different sets of processors. Reference to “one or more memories” should be understood to refer to any one or more memories of a corresponding device, such as the memory described in connection with FIG. 2. For example, operation described as being performed by one or more memories can be performed by the same subset of the one or more memories or different subsets of the one or more memories.

[0062] For downlink communication from the network node **110** to the UE **120**, the transmit processor **214** may receive data (“downlink data”) intended for the UE **120** (or a set of UEs that includes the UE **120**) from the data source **212** (such as a data pipeline or a data queue). In some examples, the transmit processor **214** may select one or more MCSs for the UE **120** in accordance with one or more channel quality indicators (CQIs) received from the UE **120**. The network node **110** may process the data (for example, including encoding the data) for transmission to the UE **120** on a downlink in accordance with the MCS(s) selected for the UE **120** to generate data symbols. The transmit processor **214** may process system information (for example, semi-static resource partitioning information (SRPI)) and/or control information (for example, CQI requests, grants, and/or upper layer signaling) and provide overhead symbols and/or control symbols. The transmit processor **214** may generate reference symbols for reference signals (for example, a cell-specific reference signal (CRS), a demodulation reference signal (DMRS), or a channel state information (CSI) reference signal (CSI-RS)) and/or synchronization signals (for example, a primary synchronization signal (PSS) or a secondary synchronization signals (SSS)).

[0063] The TX MIMO processor **216** may perform spatial processing (for example, precoding) on the data symbols, the control symbols, the overhead symbols, and/or the reference symbols, if applicable, and may provide a set of output symbol streams (for example, T output symbol streams) to the set of modems **232**. For example, each output symbol stream may be provided to a respective modulator component (shown as MOD) of a modem **232**. Each modem **232** may use the respective modulator component to process (for example, to modulate) a respective output symbol stream (for example, for orthogonal frequency division multiplexing (OFDM)) to obtain an output sample stream.

Each modem **232** may further use the respective modulator component to process (for example, convert to analog, amplify, filter, and/or upconvert) the output sample stream to obtain a time domain downlink signal. The modems **232a** through **232t** may together transmit a set of downlink signals (for example, T downlink signals) via the corresponding set of antennas **234**.

[0064] A downlink signal may include a DCI communication, a MAC control element (MAC-CE) communication, an RRC communication, a downlink reference signal, or another type of downlink communication. Downlink signals may be transmitted on a PDCCH, a PDSCH, and/or on another downlink channel. A downlink signal may carry one or more transport blocks (TBs) of data. A TB may be a unit of data that is transmitted over an air interface in the wireless communication network **100**. A data stream (for example, from the data source **212**) may be encoded into multiple TBs for transmission over the air interface. The quantity of TBs used to carry the data associated with a particular data stream may be associated with a TB size common to the multiple TBs. The TB size may be based on or otherwise associated with radio channel conditions of the air interface, the MCS used for encoding the data, the downlink resources allocated for transmitting the data, and/or another parameter. In general, the larger the TB size, the greater the amount of data that can be transmitted in a single transmission, which reduces signaling overhead. However, larger TB sizes may be more prone to transmission and/or reception errors than smaller TB sizes, but such errors may be mitigated by more robust error correction techniques.

[0065] For uplink communication from the UE **120** to the network node **110**, uplink signals from the UE **120** may be received by an antenna **234**, may be processed by a modem **232** (for example, a demodulator component, shown as DEMOD, of a modem **232**), may be detected by the MIMO detector **236** (for example, a receive (Rx) MIMO processor) if applicable, and/or may be further processed by the receive processor **238** to obtain decoded data and/or control information. The receive processor **238** may provide the decoded data to a data sink **239** (which may be a data pipeline, a data queue, and/or another type of data sink) and provide the decoded control information to a processor, such as the controller/processor **240**.

[0066] The network node **110** may use the scheduler **246** to schedule one or more UEs **120** for downlink or uplink communications. In some aspects, the scheduler **246** may use DCI to dynamically schedule DL transmissions to the UE **120** and/or UL transmissions from the UE **120**. In some examples, the scheduler **246** may allocate recurring time domain resources and/or frequency domain resources that the UE **120** may use to transmit and/or receive communications using an RRC configuration (for example, a semi-static configuration), for example, to perform semi-persistent scheduling (SPS) or to configure a configured grant (CG) for the UE **120**.

[0067] One or more of the transmit processor **214**, the TX MIMO processor **216**, the modem **232**, the antenna **234**, the MIMO detector **236**, the receive processor **238**, and/or the controller/processor **240** may be included in an RF chain of the network node **110**. An RF chain may include one or more filters, mixers, oscillators, amplifiers, analog-to-digital converters (ADCs), and/or other devices that convert between an analog signal (such as for transmission or reception via an air interface) and a digital signal (such as for processing by

one or more processors of the network node **110**). In some aspects, the RF chain may be or may be included in a transceiver of the network node **110**.

[0068] In some examples, the network node **110** may use the communication unit **244** to communicate with a core network and/or with other network nodes. The communication unit **244** may support wired and/or wireless communication protocols and/or connections, such as Ethernet, optical fiber, common public radio interface (CPRI), and/or a wired or wireless backhaul, among other examples. The network node **110** may use the communication unit **244** to transmit and/or receive data associated with the UE **120** or to perform network control signaling, among other examples. The communication unit **244** may include a transceiver and/or an interface, such as a network interface.

[0069] The UE **120** may include a set of antennas **252** (shown as antennas **252a** through **252r**, where $r \geq 1$), a set of modems **254** (shown as modems **254a** through **254u**, where $u \geq 1$), a MIMO detector **256**, a receive processor **258**, a data sink **260**, a data source **262**, a transmit processor **264**, a TX MIMO processor **266**, a controller/processor **280**, a memory **282**, and/or a communication manager **140**, among other examples. One or more of the components of the UE **120** may be included in a housing **284**. In some aspects, one or a combination of the antenna(s) **252**, the modem(s) **254**, the MIMO detector **256**, the receive processor **258**, the transmit processor **264**, or the TX MIMO processor **266** may be included in a transceiver that is included in the UE **120**. The transceiver may be under control of and used by one or more processors, such as the controller/processor **280**, and in some aspects in conjunction with processor-readable code stored in the memory **282**, to perform aspects of the methods, processes, or operations described herein. In some aspects, the UE **120** may include another interface, another communication component, and/or another component that facilitates communication with the network node **110** and/or another UE **120**.

[0070] For downlink communication from the network node **110** to the UE **120**, the set of antennas **252** may receive the downlink communications or signals from the network node **110** and may provide a set of received downlink signals (for example, R received signals) to the set of modems **254**. For example, each received signal may be provided to a respective demodulator component (shown as DEMOD) of a modem **254**. Each modem **254** may use the respective demodulator component to condition (for example, filter, amplify, downconvert, and/or digitize) a received signal to obtain input samples. Each modem **254** may use the respective demodulator component to further demodulate or process the input samples (for example, for OFDM) to obtain received symbols. The MIMO detector **256** may obtain received symbols from the set of modems **254**, may perform MIMO detection on the received symbols if applicable, and may provide detected symbols. The receive processor **258** may process (for example, decode) the detected symbols, may provide decoded data for the UE **120** to the data sink **260** (which may include a data pipeline, a data queue, and/or an application executed on the UE **120**), and may provide decoded control information and system information to the controller/processor **280**.

[0071] For uplink communication from the UE **120** to the network node **110**, the transmit processor **264** may receive and process data ("uplink data") from a data source **262** (such as a data pipeline, a data queue, and/or an application

executed on the UE 120) and control information from the controller/processor 280. The control information may include one or more parameters, feedback, one or more signal measurements, and/or other types of control information. In some aspects, the receive processor 258 and/or the controller/processor 280 may determine, for a received signal (such as received from the network node 110 or another UE), one or more parameters relating to transmission of the uplink communication. The one or more parameters may include a reference signal received power (RSRP) parameter, a received signal strength indicator (RSSI) parameter, a reference signal received quality (RSRQ) parameter, a CQI parameter, or a transmit power control (TPC) parameter, among other examples. The control information may include an indication of the RSRP parameter, the RSSI parameter, the RSRQ parameter, the CQI parameter, the TPC parameter, and/or another parameter. The control information may facilitate parameter selection and/or scheduling for the UE 120 by the network node 110.

[0072] The transmit processor 264 may generate reference symbols for one or more reference signals, such as an uplink DMRS, an uplink sounding reference signal (SRS), and/or another type of reference signal. The symbols from the transmit processor 264 may be precoded by the TX MIMO processor 266, if applicable, and further processed by the set of modems 254 (for example, for DFT-s-OFDM or CP-OFDM). The TX MIMO processor 266 may perform spatial processing (for example, precoding) on the data symbols, the control symbols, the overhead symbols, and/or the reference symbols, if applicable, and may provide a set of output symbol streams (for example, U output symbol streams) to the set of modems 254. For example, each output symbol stream may be provided to a respective modulator component (shown as MOD) of a modem 254. Each modem 254 may use the respective modulator component to process (for example, to modulate) a respective output symbol stream (for example, for OFDM) to obtain an output sample stream. Each modem 254 may further use the respective modulator component to process (for example, convert to analog, amplify, filter, and/or upconvert) the output sample stream to obtain an uplink signal.

[0073] The modems 254a through 254u may transmit a set of uplink signals (for example, R uplink signals or U uplink signals) via the corresponding set of antennas 252. An uplink signal may include a UCI communication, a MAC-CE communication, an RRC communication, or another type of uplink communication. Uplink signals may be transmitted on a PUSCH, a PUCCH, and/or another type of uplink channel. An uplink signal may carry one or more TBs of data. Sidelink data and control transmissions (that is, transmissions directly between two or more UEs 120) may generally use similar techniques as were described for uplink data and control transmission, and may use sidelink-specific channels such as a physical sidelink shared channel (PSSCH), a physical sidelink control channel (PSCCH), and/or a physical sidelink feedback channel (PSFCH).

[0074] One or more antennas of the set of antennas 252 or the set of antennas 234 may include, or may be included within, one or more antenna panels, one or more antenna groups, one or more sets of antenna elements, or one or more antenna arrays, among other examples. An antenna panel, an antenna group, a set of antenna elements, or an antenna array may include one or more antenna elements (within a single housing or multiple housings), a set of coplanar antenna

elements, a set of non-coplanar antenna elements, or one or more antenna elements coupled with one or more transmission or reception components, such as one or more components of FIG. 2. As used herein, “antenna” can refer to one or more antennas, one or more antenna panels, one or more antenna groups, one or more sets of antenna elements, or one or more antenna arrays. “Antenna panel” can refer to a group of antennas (such as antenna elements) arranged in an array or panel, which may facilitate beamforming by manipulating parameters of the group of antennas. “Antenna module” may refer to circuitry including one or more antennas, which may also include one or more other components (such as filters, amplifiers, or processors) associated with integrating the antenna module into a wireless communication device.

[0075] In some examples, each of the antenna elements of an antenna 234 or an antenna 252 may include one or more sub-elements for radiating or receiving radio frequency signals. For example, a single antenna element may include a first sub-element cross-polarized with a second sub-element that can be used to independently transmit cross-polarized signals. The antenna elements may include patch antennas, dipole antennas, and/or other types of antennas arranged in a linear pattern, a two-dimensional pattern, or another pattern. A spacing between antenna elements may be such that signals with a desired wavelength transmitted separately by the antenna elements may interact or interfere constructively and destructively along various directions (such as to form a desired beam). For example, given an expected range of wavelengths or frequencies, the spacing may provide a quarter wavelength, a half wavelength, or another fraction of a wavelength of spacing between neighboring antenna elements to allow for the desired constructive and destructive interference patterns of signals transmitted by the separate antenna elements within that expected range.

[0076] The amplitudes and/or phases of signals transmitted via antenna elements and/or sub-elements may be modulated and shifted relative to each other (such as by manipulating phase shift, phase offset, and/or amplitude) to generate one or more beams, which is referred to as beamforming. The term “beam” may refer to a directional transmission of a wireless signal toward a receiving device or otherwise in a desired direction. “Beam” may also generally refer to a direction associated with such a directional signal transmission, a set of directional resources associated with the signal transmission (for example, an angle of arrival, a horizontal direction, and/or a vertical direction), and/or a set of parameters that indicate one or more aspects of a directional signal, a direction associated with the signal, and/or a set of directional resources associated with the signal. In some implementations, antenna elements may be individually selected or deselected for directional transmission of a signal (or signals) by controlling amplitudes of one or more corresponding amplifiers and/or phases of the signal(s) to form one or more beams. The shape of a beam (such as the amplitude, width, and/or presence of side lobes) and/or the direction of a beam (such as an angle of the beam relative to a surface of an antenna array) can be dynamically controlled by modifying the phase shifts, phase offsets, and/or amplitudes of the multiple signals relative to each other.

[0077] Different UEs 120 or network nodes 110 may include different numbers of antenna elements. For example, a UE 120 may include a single antenna element, two antenna elements, four antenna elements, eight antenna elements, or

a different number of antenna elements. As another example, a network node **110** may include eight antenna elements, 24 antenna elements, 64 antenna elements, 128 antenna elements, or a different number of antenna elements. Generally, a larger number of antenna elements may provide increased control over parameters for beam generation relative to a smaller number of antenna elements, whereas a smaller number of antenna elements may be less complex to implement and may use less power than a larger number of antenna elements. Multiple antenna elements may support multiple-layer transmission, in which a first layer of a communication (which may include a first data stream) and a second layer of a communication (which may include a second data stream) are transmitted using the same time and frequency resources with spatial multiplexing.

[0078] While blocks in FIG. 2 are illustrated as distinct components, the functions described above with respect to the blocks may be implemented in a single hardware, software, or combination component or in various combinations of components. For example, the functions described with respect to the transmit processor **264**, the receive processor **258**, and/or the TX MIMO processor **266** may be performed by or under the control of the controller/processor **280**.

[0079] As indicated above, FIG. 2 is provided as an example. Other examples may differ from what is described with regard to FIG. 2.

[0080] FIG. 3 is a diagram illustrating an example disaggregated base station architecture **300** in accordance with the present disclosure. One or more components of the example disaggregated base station architecture **300** may be, may include, or may be included in one or more network nodes (such one or more network nodes **110**). The disaggregated base station architecture **300** may include a CU **310** that can communicate directly with a core network **320** via a backhaul link, or that can communicate indirectly with the core network **320** via one or more disaggregated control units, such as a Non-RT RIC **350** associated with a Service Management and Orchestration (SMO) Framework **360** and/or a Near-RT RIC **370** (for example, via an E2 link). The CU **310** may communicate with one or more DUs **330** via respective midhaul links, such as via F1 interfaces. Each of the DUs **330** may communicate with one or more RUs **340** via respective fronthaul links. Each of the RUs **340** may communicate with one or more UEs **120** via respective RF access links. In some deployments, a UE **120** may be simultaneously served by multiple RUs **340**.

[0081] Each of the components of the disaggregated base station architecture **300**, including the CUS **310**, the DUs **330**, the RUs **340**, the Near-RT RICs **370**, the Non-RT RICs **350**, and the SMO Framework **360**, may include one or more interfaces or may be coupled with one or more interfaces for receiving or transmitting signals, such as data or information, via a wired or wireless transmission medium.

[0082] In some aspects, the CU **310** may be logically split into one or more CU user plane (CU-UP) units and one or more CU control plane (CU-CP) units. A CU-UP unit may communicate bidirectionally with a CU-CP unit via an interface, such as the E1 interface when implemented in an O-RAN configuration. The CU **310** may be deployed to communicate with one or more DUs **330**, as necessary, for network control and signaling. Each DU **330** may correspond to a logical unit that includes one or more base station functions to control the operation of one or more RUs **340**.

For example, a DU **330** may host various layers, such as an RLC layer, a MAC layer, or one or more PHY layers, such as one or more high PHY layers or one or more low PHY layers. Each layer (which also may be referred to as a module) may be implemented with an interface for communicating signals with other layers (and modules) hosted by the DU **330**, or for communicating signals with the control functions hosted by the CU **310**. Each RU **340** may implement lower layer functionality. In some aspects, real-time and non-real-time aspects of control and user plane communication with the RU(s) **340** may be controlled by the corresponding DU **330**.

[0083] The SMO Framework **360** may support RAN deployment and provisioning of non-virtualized and virtualized network elements. For non-virtualized network elements, the SMO Framework **360** may support the deployment of dedicated physical resources for RAN coverage requirements, which may be managed via an operations and maintenance interface, such as an O1 interface. For virtualized network elements, the SMO Framework **360** may interact with a cloud computing platform (such as an open cloud (O-Cloud) platform **390**) to perform network element life cycle management (such as to instantiate virtualized network elements) via a cloud computing platform interface, such as an O2 interface. A virtualized network element may include, but is not limited to, a CU **310**, a DU **330**, an RU **340**, a non-RT RIC **350**, and/or a Near-RT RIC **370**. In some aspects, the SMO Framework **360** may communicate with a hardware aspect of a 4G RAN, a 5G NR RAN, and/or a 6G RAN, such as an open eNB (O-eNB) **380**, via an O1 interface. Additionally or alternatively, the SMO Framework **360** may communicate directly with each of one or more RUs **340** via a respective O1 interface. In some deployments, this configuration can enable each DU **330** and the CU **310** to be implemented in a cloud-based RAN architecture, such as a vRAN architecture.

[0084] The Non-RT RIC **350** may include or may implement a logical function that enables non-real-time control and optimization of RAN elements and resources, AI/ML workflows including model training and updates, and/or policy-based guidance of applications and/or features in the Near-RT RIC **370**. The Non-RT RIC **350** may be coupled to or may communicate with (such as via an A1 interface) the Near-RT RIC **370**. The Near-RT RIC **370** may include or may implement a logical function that enables near-real-time control and optimization of RAN elements and resources via data collection and actions via an interface (such as via an E2 interface) connecting one or more CUs **310**, one or more DUs **330**, and/or an O-eNB with the Near-RT RIC **370**.

[0085] In some aspects, to generate AI/ML models to be deployed in the Near-RT RIC **370**, the Non-RT RIC **350** may receive parameters or external enrichment information from external servers. Such information may be utilized by the Near-RT RIC **370** and may be received at the SMO Framework **360** or the Non-RT RIC **350** from non-network data sources or from network functions. In some examples, the Non-RT RIC **350** or the Near-RT RIC **370** may tune RAN behavior or performance. For example, the Non-RT RIC **350** may monitor long-term trends and patterns for performance and may employ AI/ML models to perform corrective actions via the SMO Framework **360** (such as reconfiguration via an O1 interface) or via creation of RAN management policies (such as A1 interface policies).

[0086] The network node 110, the controller/processor 240 of the network node 110, the UE 120, the controller/processor 280 of the UE 120, the CU 310, the DU 330, the RU 340, or any other component(s) of FIG. 1, 2, or 3 may implement one or more techniques or perform one or more operations associated with CSI resource configuration for candidate cells associated with LTM, as described in more detail elsewhere herein. For example, the controller/processor 240 of the network node 110, the controller/processor 280 of the UE 120, any other component(s) of FIG. 2, the CU 310, the DU 330, or the RU 340 may perform or direct operations of, for example, process 800 of FIG. 8, process 900 of FIG. 9, or other processes as described herein (alone or in conjunction with one or more other processors). The memory 242 may store data and program codes for the network node 110, the network node 110, the CU 310, the DU 330, or the RU 340. The memory 282 may store data and program codes for the UE 120. In some examples, the memory 242 or the memory 282 may include a non-transitory computer-readable medium storing a set of instructions (for example, code or program code) for wireless communication. The memory 242 may include one or more memories, such as a single memory or multiple different memories (of the same type or of different types). The memory 282 may include one or more memories, such as a single memory or multiple different memories (of the same type or of different types). For example, the set of instructions, when executed (for example, directly, or after compiling, converting, or interpreting) by one or more processors of the network node 110, the UE 120, the CU 310, the DU 330, or the RU 340, may cause the one or more processors to perform process 800 of FIG. 8, process 900 of FIG. 9, or other processes as described herein. In some examples, executing instructions may include running the instructions, converting the instructions, compiling the instructions, and/or interpreting the instructions, among other examples.

[0087] In some aspects, a source CU (e.g., network node 110) includes means for receiving, from a UE, a measurement report; means for generating an LTM CSI resource configuration for one or more candidate cells based at least in part on the measurement report; means for transmitting, to a candidate CU, an LTM preparation request that indicates the one or more candidate cells and the LTM CSI resource configuration; and/or means for receiving, from the candidate CU, an LTM preparation response that indicates one or more LTM RRC configurations associated with the one or more candidate cells, respectively. In some aspects, the means for the source CU to perform operations described herein may include, for example, one or more of communication manager 150, transmit processor 214, TX MIMO processor 216, modem 232, antenna 234, MIMO detector 236, receive processor 238, controller/processor 240, memory 242, or scheduler 246.

[0088] In some aspects, a candidate CU (e.g., network node 110) includes means for receiving, from a source CU, an LTM preparation request that indicates one or more candidate cells and measurement results; means for generating an LTM CSI resource configuration for the one or more candidate cells based at least in part on the LTM preparation request; and/or means for transmitting, to the source CU, an LTM preparation response that indicates the LTM CSI resource configuration. In some aspects, the means for the candidate CU to perform operations described herein may

include, for example, one or more of communication manager 150, transmit processor 214, TX MIMO processor 216, modem 232, antenna 234, MIMO detector 236, receive processor 238, controller/processor 240, memory 242, or scheduler 246.

[0089] As indicated above, FIG. 3 is provided as an example. Other examples may differ from what is described with regard to FIG. 3.

[0090] FIG. 4 is a diagram illustrating an example 400 of an LTM, in accordance with the present disclosure.

[0091] In an LTM, a UE may be in an RRC connected state. As shown by reference number 402, the UE may transmit, to a network node, a measurement report. The UE may transmit the measurement report via RRC signaling. The network node may determine, based at least in part on the measurement report, to use LTM and may initiate a candidate LTM cell preparation. As shown by reference number 404, the network node may transmit, to the UE, an RRC reconfiguration message. The RRC reconfiguration message may indicate a candidate LTM cell configuration, which may indicate a configuration of one or multiple candidate LTM target cells. The UE may store the candidate LTM cell configuration. As shown by reference number 406, the UE may transmit, to the network node, an RRC reconfiguration complete message. The measurement report, the RRC reconfiguration message, and the RRC reconfiguration complete message may be part of an LTM preparation phase.

[0092] As shown by reference 408, the UE may perform a downlink/uplink synchronization and a timing advance (TA) acquisition with candidate target cells, which may occur before receiving an LTM cell switch command. The downlink/uplink synchronization and the TA acquisition may be associated with an early synchronization phase. The UE may perform L1 measurements on one or more configured candidate LTM target cells. As shown by reference number 410, the UE may transmit, to the network node, an L1 measurement report, which may indicate the L1 measurements on the one or more configured candidate LTM target cells. The network node may determine to execute an LTM cell switch to a target cell, which may be based at least in part on the L1 measurement report. As shown by reference number 412, the network node may transmit, to the UE, a MAC control element (MAC-CE) triggering the LTM cell switch, where the MAC-CE may indicate a candidate configuration index of the target cell. The UE may detach from a source cell. The UE may apply the candidate configuration index of the target cell. In other words, the UE may switch to a configuration of a candidate LTM target cell. The UE may detach from the source cell and attach to the target cell as part of an LTM execution phase.

[0093] As shown by reference number 414, the UE may perform a random access channel (RACH) procedure with the target cell (e.g., when a TA is not available). As shown by reference number 416, the UE may transmit, to the target cell, an indication of a successful completion of the LTM cell switch to the target cell. The indication of the successful completion of the LTM cell switch may be part of an LTM completion phase.

[0094] As indicated above, FIG. 4 is provided as an example. Other examples may differ from what is described with regard to FIG. 4.

[0095] A wireless network may include a source CU with underlying DUs, such as a first DU (DU1) (source DU) and a second DU, and a candidate CU with an underlying DU,

such as a third DU (DU3). The source CU, the candidate CU, and/or underlying DUs, respectively, may be used to generate an LTM CSI resource and CSI report configuration.

[0096] The source CU and the candidate CU may receive, from the underlying DUs, respectively, information during an F1 setup (e.g., the source CU may receive information from DU1 and DU2, and the candidate CU may receive information from DU3). The information may include a list of cells managed by the DU. The information may include, for each such cell, a cell RS configuration, which may include a list of transmitting SSBs of the cell. For example, in an F1 setup request message, the cell RS configuration may indicate a gNB-DU served cells list, a gNB-DU served cell item, served cell information, and/or SSB positions in burst. An SSB positions in burst IE may be a bitmap with a length corresponding to a total number of beams in an SSB burst set, where the SSB positions in burst IE may indicate transmitting beams and switched off beams. For example, in the SSB positions in burst IE, a first/left-most bit may correspond to a synchronization signal or physical broadcast channel (SS/PBCH) block index 0, a second bit may correspond to an SS/PBCH block index 1, and so on. A value of 0 in the bitmap may indicate that the corresponding SS/PBCH block is not transmitted, while a value of 1 in the bitmap may indicate that the corresponding SS/PBCH block is transmitted.

[0097] The source CU may receive, from the candidate CU, similar information during an Xn setup. The information may include a list of cells managed by the candidate CU. The information may include, for each such cell, a cell RS configuration, which may include a list of transmitting SSBs of the cell. For example, in an Xn setup request message, the cell RS configuration may indicate a list of served cells in NR, served cell information in NR, and/or SSB positions in burst.

[0098] In an intra-CU LTM that utilizes an SSB-based LTM CSI configuration, the source CU may generate a CSI resource configuration for measuring LTM candidate cells, where the CSI resource configuration may be common for all of the LTM candidate cells. The CSI resource configuration may be included in an LTM configuration (LTM-Config) IE, and may be located outside of the LTM candidate cell configurations and serving cell configurations (ServingCellConfigs) of serving cells. An LTM CSI resource configuration (LTM-CSI-ResourceConfig-r18) may be contained within an RRC reconfiguration (RRCReconfiguration) of the LTM configuration IE. The source DU and the candidate DU may generate a CSI reporting configuration. The CSI reporting configuration may be placed within the serving cell configurations of the serving cells and candidate cells for the UE to use when operating on a source cell and on a candidate cell, respectively. The CSI reporting configurations may be within the RRC reconfiguration, which may be associated with a cell group configuration (CellGroup-Config). The cell group configuration may be the serving cell configuration that contains a CSI measurement configuration (CSI-MeasConfig). The CSI measurement configuration may be associated with the LTM CSI report configuration.

[0099] However, CSI resource and CSI report configurations may not be defined for inter-CU LTM. In other words, when a UE moves between CUs, which may trigger the inter-CU LTM, the CUs and/or DUs associated with a source network and a candidate network, respectively, may not be

configured to generate LTM CSI resource configurations for candidate cells. As a result, the UE may be unable to be handed over between CUs, which may degrade an overall performance of the UE.

[0100] In various aspects of techniques and apparatuses described herein, a source CU may receive, from a UE, a measurement report. The source CU may generate an LTM CSI resource configuration for one or more candidate cells based at least in part on the measurement report, and based at least in part on information received from a candidate CU and one or more DUs associated with the source CU during a setup procedure. The LTM CSI resource configuration may include a list of SSBs to be measured for each candidate cell of the one or more candidate cells. An LTM RRC configuration of a candidate cell may include a CSI report configuration. The LTM CSI resource configuration may be associated with an inter-CU LTM. The source CU may transmit, to the candidate CU, an LTM preparation request that indicates the one or more candidate cells and the LTM CSI resource configuration. The source CU may receive, from the candidate CU, an LTM preparation response that indicates one or more LTM RRC configurations associated with the one or more candidate cells, respectively.

[0101] In some aspects, the source CU may determine an updated LTM CSI resource configuration for the one or more candidate cells or an updated list of candidate cells, where the updated LTM CSI resource configuration may indicate an updated list of SSBs to be measured for each candidate cell of the one or more candidate cells. In some aspects, the source CU may receive, from a DU associated with the source CU or the candidate CU, an updated LTM CSI report configuration. The source CU may transmit, to a UE, an RRC reconfiguration message that indicates one or more LTM RRC reconfigurations associated with the one or more candidate cells, respectively, based at least in part on an updated LTM CSI resource configuration and the updated LTM CSI report configuration. In other words, a candidate DU may provide the updated LTM CSI report configuration, and RRC reconfigurations associated with the one or more candidate cells contain the updated LTM CSI report configurations, whereas the LTM RRC reconfiguration message that is transmitted to the UE by the source CU contains an updated LTM CSI resource configuration that is placed outside the containers consisting of the LTM RRC reconfigurations associated with the one or more candidate cells. In some aspects, the LTM preparation response received from the candidate CU may indicate the updated LTM CSI resource configuration, where the updated LTM CSI resource configuration may be received from the candidate CU via a DU associated with the candidate CU or from an underlying DU associated with the source CU.

[0102] In some aspects, the source CU and the candidate CU may exchange Xn information regarding resource configurations for the one or more candidate cells, which may include the list of SSBs to be measured in each candidate cell. The candidate CU may forward, to the source CU, a list of prepared cells and associated LTM RRC configurations. The source CU may form a final RRC reconfiguration message, which may be provided to the UE. The final RRC reconfiguration message may include RRC reconfigurations of the candidate cells provided by the candidate CU and its underlying DUs.

[0103] In some aspects, by enabling CSI resource and CSI report configurations for inter-CU LTM, the source CU or

the candidate CU may generate and/or update the LTM CSI resource configuration. An RRC reconfiguration message, which may be based at least in part on the LTM CSI resource configuration, may be provided to the UE. The UE may use the LTM CSI resource configuration to measure SSBs for different candidate cells, which may allow the UE to be handed over between CUs, thereby improving an overall system performance.

[0104] FIG. 5 is a diagram illustrating an example 500 associated with CSI resource configuration for candidate cells associated with LTM, in accordance with the present disclosure. As shown in FIG. 5, example 500 includes communication between a UE (e.g., UE 120), a source DU (DU1), a first candidate DU (DU2), a source CU, a second candidate DU (DU3), and a candidate CU. The source DU, the first candidate DU, the source CU, the second candidate DU, and the candidate CU may be associated with one or more network nodes. In some aspects, the UE and the one or more network nodes may be included in a wireless network, such as wireless network 100.

[0105] In some aspects, the source CU may generate and perform updates of an LTM CSI resource configuration. The source CU may initiate an LTM preparation for a set of candidate cells, belonging to its underlying DUs and the candidate CU, based at least in part on an RRC measurement report. The source CU may generate the LTM CSI resource configuration for the set of candidate cells, e.g., a list of SSBs to be measured for each candidate cell, based at least in part on information received from the candidate CU and its own underlying DUs (e.g., the source DU and the first candidate DU), in Xn setup and F1 setup procedures, and based at least in part on the RRC measurement report. The RRC measurement report may include beam measurements when an include beam measurements (includeBeamMeasurements) flag is included in a measurement configuration (measConfig).

[0106] As shown by reference number 502, the UE may transmit the RRC measurement report to the source CU. As shown by reference number 504, the source CU may perform an LTM configuration decision. As shown by reference number 506, the source CU may transmit a UE context setup request to the first candidate DU (intra-CU). The UE context setup request may indicate a candidate cells list and the LTM CSI resource configuration. In other words, the source CU may provide, to the first candidate DU (intra-CU), a list of candidate cells to be prepared and the LTM CSI resource configuration. As shown by reference number 508, the first candidate DU may transmit a UE context setup response to the source CU. The UE context setup response may indicate lower layer configurations of prepared candidate cells and the LTM CSI resource configuration. In other words, the first candidate DU may respond with a list of prepared cells and associated lower layer and LTM CSI report configurations.

[0107] As shown by reference number 510, the source CU may transmit an LTM preparation request to the candidate CU. The LTM preparation request may indicate the candidate cells list and the LTM CSI resource configuration. In other words, the source CU may provide to the candidate CU the list of candidate cells to be prepared and the LTM CSI resource configuration. As shown by reference number 512, the candidate CU may transmit a UE context setup request to the second candidate DU. The UE context setup request may indicate the candidate cells list and the LTM CSI resource configuration. As shown by reference number 514,

the second candidate DU may transmit a UE context setup response to the candidate CU. The UE context setup response may indicate the lower layer configurations of the prepared candidate cells and the LTM CSI resource configuration. In other words, the second candidate DU may provide to the candidate CU the list of prepared cells of the DU and their associated lower layer and LTM CSI report configurations. After receiving the UE context setup response, the candidate CU may determine an upper layer configuration (e.g., PDCP configuration and/or RRC configuration), and the candidate CU may form RRC configurations of the prepared cells.

[0108] As shown by reference number 516, the candidate CU may transmit an LTM preparation response to the source CU. The LTM preparation response may indicate LTM RRC configurations of the prepared candidate cells. In other words, the candidate CU may forward, to the source CU, the list of prepared cells and their associated LTM RRC configurations. The LTM RRC configurations of a prepared cell may include CSI report configurations. The source CU may update the LTM CSI resource configuration based at least in part on the prepared cells indicated by its underlying candidate DUs (e.g., the first candidate DU) and the candidate CU.

[0109] As shown by reference number 518, the source CU may transmit a UE context modification request to the source DU. As shown by reference number 520, the source DU may transmit a UE context modification response to the source CU. In other words, the UE context modification request/response may be transmitted to obtain, from the source DU, a list of the source cell and other prepared cells, and their associated lower layer and LTM CSI report configurations. The source CU may further update the LTM CSI resource configuration based at least in part on the prepared cells indicated by the source DU. As shown by reference number 522, the source CU may transmit a UE context modification request to the first candidate DU. As shown by reference number 524, the first candidate DU may transmit a UE context modification response to the source CU.

[0110] As shown by reference number 526, the source CU may transmit an LTM modification request to the candidate CU. As shown by reference number 528, the candidate CU may transmit a UE context modification request to the second candidate DU. As shown by reference number 530, the second candidate DU may transmit a UE context modification response to the candidate CU. As shown by reference number 532, the candidate CU may transmit an LTM modification response to the source CU. In other words, the source CU may initiate a configuration modification to provide an updated LTM CSI resource configuration. The candidate DUs may provide updated LTM CSI report configurations to the source CU and the candidate CU.

[0111] As shown by reference number 534, the source CU may transmit, to the source DU, an RRC reconfiguration associated with a downlink RRC message transfer. As shown by reference number 536, the source DU may transmit the RRC reconfiguration to the UE. In other words, the source CU may form a final RRC reconfiguration message to be provided to the UE, which may include the RRC reconfigurations of the candidate cells provided by the candidate CU and its underlying DUs. As shown by reference number 538, the UE may transmit an RRC reconfiguration complete message to the source DU. As shown by reference number 540, the source DU may transmit, to the

source CU, the RRC reconfiguration complete, which may be associated with an uplink RRC message transfer.

[0112] As indicated above, FIG. 5 is provided as an example. Other examples may differ from what is described with regard to FIG. 5.

[0113] FIG. 6 is a diagram illustrating an example 600 associated with CSI resource configuration for candidate cells associated with LTM, in accordance with the present disclosure. As shown in FIG. 6, example 600 includes communication between a UE (e.g., UE 120), a source DU (DU1), a first candidate DU (DU2), a source CU, a second candidate DU (DU3), and a candidate CU. The source DU, the first candidate DU, the source CU, the second candidate DU, and the candidate CU may be associated with one or more network nodes. In some aspects, the UE and the one or more network nodes may be included in a wireless network, such as wireless network 100.

[0114] In some aspects, the source CU may generate an LTM CSI resource configuration and the candidate DU may perform updates of the LTM CSI resource configuration. The candidate DU may use measurement results forwarded by its CU to update the LTM CSI resource configuration (e.g., to update a list of beams to be measured). Each candidate CU may forward the updated LTM CSI resource configuration to the source CU.

[0115] As shown by reference number 602, the UE may transmit an RRC measurement report to the source CU. As shown by reference number 604, the source CU may perform an LTM configuration decision. As shown by reference number 606, the source CU may transmit a UE context setup request to the first candidate DU. The UE context setup request may indicate a candidate cells list and the LTM CSI resource configuration. As shown by reference number 608, the first candidate DU may transmit a UE context setup response to the source CU. The UE context setup response may indicate lower layer configurations of prepared candidate cells, an LTM CSI report configuration, and an updated LTM CSI resource configuration.

[0116] As shown by reference number 610, the source CU may transmit an LTM preparation request to the candidate CU. The LTM preparation request may indicate the candidate cells list and the LTM CSI resource configuration. As shown by reference number 612, the candidate CU may transmit a UE context setup request to the second candidate DU. The UE context setup request may indicate the candidate cells list, the measurement results, and the LTM CSI resource configuration. As shown by reference number 614, the second candidate DU may transmit a UE context setup response to the candidate CU. The UE context setup response may indicate the lower layer configurations of the prepared candidate cells, the LTM CSI report configuration, and the updated LTM CSI resource configuration. As shown by reference number 616, the candidate CU may transmit an LTM preparation response to the source CU. The LTM preparation response may indicate LTM RRC configurations of the prepared candidate cells and the updated LTM CSI resource configuration.

[0117] As shown by reference number 618, the source CU may transmit a UE context modification request to the source DU. As shown by reference number 620, the source DU may transmit a UE context modification response to the source CU. As shown by reference number 622, the source CU may transmit a UE context modification request to the

first candidate DU. As shown by reference number 624, the first candidate DU may transmit a UE context modification response to the source CU.

[0118] As shown by reference number 626, the source CU may transmit an LTM modification request to the candidate CU. As shown by reference number 628, the candidate CU may transmit a UE context modification request to the second candidate DU. As shown by reference number 630, the second candidate DU may transmit a UE context modification response to the candidate CU. As shown by reference number 632, the candidate CU may transmit an LTM modification response to the source CU.

[0119] As shown by reference number 634, the source CU may transmit, to the source DU, an RRC reconfiguration associated with a downlink RRC message transfer. As shown by reference number 636, the source DU may transmit the RRC reconfiguration to the UE. As shown by reference number 638, the UE may transmit an RRC reconfiguration complete to the source DU. As shown by reference number 640, the source DU may transmit, to the source CU, the RRC reconfiguration complete, which may be associated with an uplink RRC message transfer.

[0120] As indicated above, FIG. 6 is provided as an example. Other examples may differ from what is described with regard to FIG. 6.

[0121] FIG. 7 is a diagram illustrating an example 700 associated with CSI resource configuration for candidate cells associated with LTM, in accordance with the present disclosure. As shown in FIG. 7, example 700 includes communication between a UE (e.g., UE 120), a source DU (DU1), a first candidate DU (DU2), a source CU, a second candidate DU (DU3), and a candidate CU. The source DU, the first candidate DU, the source CU, the second candidate DU, and the candidate CU may be associated with one or more network nodes. In some aspects, the UE and the one or more network nodes may be included in a wireless network, such as wireless network 100.

[0122] In some aspects, the candidate CU may generate an LTM CSI resource configuration of its candidate cells. The candidate CU may use measurement results forwarded by the source CU to generate the LTM CSI resource configuration of its own candidate cells, and the candidate CU may provide the LTM CSI resource configuration to the source CU.

[0123] As shown by reference number 702, the UE may transmit an RRC measurement report to the source CU. As shown by reference number 704, the source CU may perform an LTM configuration decision. As shown by reference number 706, the source CU may transmit an LTM preparation request to the candidate CU. The LTM preparation request may indicate a candidate cells list and the measurement results. As shown by reference number 708, the candidate CU may generate the LTM CSI resource configuration of its own candidate cells based at least in part on the LTM preparation request. As shown by reference number 710, the candidate CU may transmit an LTM preparation response to the source CU. The LTM preparation response may indicate LTM RRC configuration. As shown by reference number 712, subsequent actions may correspond to reference numbers 618 to 640, as shown in FIG. 6.

[0124] As indicated above, FIG. 7 is provided as an example. Other examples may differ from what is described with regard to FIG. 7.

[0125] FIG. 8 is a diagram illustrating an example process 800 performed, for example, at a source CU or an apparatus of a source CU, in accordance with the present disclosure. Example process 800 is an example where the apparatus or the source CU (e.g., network node 110) performs operations associated with CSI resource configuration for candidate cells associated with lower layer triggered mobility.

[0126] As shown in FIG. 8, in some aspects, process 800 may include receiving, from a UE, a measurement report (block 810). For example, the source CU (e.g., using reception component 1002 and/or communication manager 1006, depicted in FIG. 10) may receive, from a UE, a measurement report, as described above.

[0127] As further shown in FIG. 8, in some aspects, process 800 may include generating an LTM CSI resource configuration for one or more candidate cells based at least in part on the measurement report (block 820). For example, the source CU (e.g., using communication manager 1006, depicted in FIG. 10) may generate an LTM CSI resource configuration for one or more candidate cells based at least in part on the measurement report, as described above.

[0128] As further shown in FIG. 8, in some aspects, process 800 may include transmitting, to a candidate CU, an LTM preparation request that indicates the one or more candidate cells and the LTM CSI resource configuration (block 830). For example, the source CU (e.g., using transmission component 1004 and/or communication manager 1006, depicted in FIG. 10) may transmit, to a candidate CU, an LTM preparation request that indicates the one or more candidate cells and the LTM CSI resource configuration, as described above.

[0129] As further shown in FIG. 8, in some aspects, process 800 may include receiving, from the candidate CU, an LTM preparation response that indicates one or more LTM RRC configurations associated with the one or more candidate cells, respectively (block 840). For example, the source CU (e.g., using reception component 1002 and/or communication manager 1006, depicted in FIG. 10) may receive, from the candidate CU, an LTM preparation response that indicates one or more LTM RRC configurations associated with the one or more candidate cells, respectively, as described above.

[0130] Process 800 may include additional aspects, such as any single aspect or any combination of aspects described below and/or in connection with one or more other processes described elsewhere herein.

[0131] In a first aspect, the LTM CSI resource configuration includes a list of SSBs to be measured for each candidate cell of the one or more candidate cells.

[0132] In a second aspect, alone or in combination with the first aspect, generating the LTM CSI resource configuration is based at least in part on information received from the candidate CU and one or more DUs associated with the source CU during a setup procedure.

[0133] In a third aspect, alone or in combination with one or more of the first and second aspects, an LTM RRC configuration, of the one or more LTM RRC configurations, of a candidate cell, of the one or more candidate cells, includes a CSI report configuration.

[0134] In a fourth aspect, alone or in combination with one or more of the first through third aspects, process 800 includes determining an updated LTM CSI resource configuration for the one or more candidate cells or an updated list of candidate cells, wherein the updated LTM CSI

resource configuration indicates an updated list of SSBs to be measured for each candidate cell of the one or more candidate cells.

[0135] In a fifth aspect, alone or in combination with one or more of the first through fourth aspects, process 800 includes receiving, from a DU associated with a source CU or the candidate CU, an updated LTM CSI report configuration, and transmitting, to the UE, an RRC reconfiguration message that indicates one or more LTM RRC reconfigurations associated with the one or more candidate cells, respectively, based at least in part on the updated LTM CSI report configuration.

[0136] In a sixth aspect, alone or in combination with one or more of the first through fifth aspects, the LTM preparation response indicates an updated LTM CSI resource configuration, and the updated LTM CSI resource configuration is received from the candidate CU via a DU associated with the candidate CU or from an underlying DU associated with a source CU.

[0137] In a seventh aspect, alone or in combination with one or more of the first through sixth aspects, the LTM CSI resource configuration is associated with an inter-CU LTM.

[0138] Although FIG. 8 shows example blocks of process 800, in some aspects, process 800 may include additional blocks, fewer blocks, different blocks, or differently arranged blocks than those depicted in FIG. 8. Additionally, or alternatively, two or more of the blocks of process 800 may be performed in parallel.

[0139] FIG. 9 is a diagram illustrating an example process 900 performed, for example, at a candidate CU or an apparatus of a candidate CU, in accordance with the present disclosure. Example process 900 is an example where the apparatus or the candidate CU (e.g., network node 110) performs operations associated with CSI resource configuration for candidate cells associated with lower layer triggered mobility.

[0140] As shown in FIG. 9, in some aspects, process 900 may include receiving, from a source CU, an LTM preparation request that indicates one or more candidate cells and measurement results (block 910). For example, the candidate CU (e.g., using reception component 1102 and/or communication manager 1106, depicted in FIG. 11) may receive, from a source CU, an LTM preparation request that indicates one or more candidate cells and measurement results, as described above.

[0141] As further shown in FIG. 9, in some aspects, process 900 may include generating an LTM CSI resource configuration for the one or more candidate cells based at least in part on the LTM preparation request (block 920). For example, the candidate CU (e.g., using communication manager 1106, depicted in FIG. 11) may generate an LTM CSI resource configuration for the one or more candidate cells based at least in part on the LTM preparation request, as described above.

[0142] As further shown in FIG. 9, in some aspects, process 900 may include transmitting, to the source CU, an LTM preparation response that indicates the LTM CSI resource configuration (block 930). For example, the candidate CU (e.g., using transmission component 1104 and/or communication manager 1106, depicted in FIG. 11) may transmit, to the source CU, an LTM preparation response that indicates the LTM CSI resource configuration, as described above.

[0143] Process 900 may include additional aspects, such as any single aspect or any combination of aspects described below and/or in connection with one or more other processes described elsewhere herein.

[0144] In a first aspect, the LTM CSI resource configuration includes a list of SSBs to be measured for each candidate cell of the one or more candidate cells.

[0145] In a second aspect, alone or in combination with the first aspect, the measurement results are associated with a measurement report from a UE.

[0146] In a third aspect, alone or in combination with one or more of the first and second aspects, the LTM CSI resource configuration is associated with an inter-CU LTM.

[0147] Although FIG. 9 shows example blocks of process 900, in some aspects, process 900 may include additional blocks, fewer blocks, different blocks, or differently arranged blocks than those depicted in FIG. 9. Additionally, or alternatively, two or more of the blocks of process 900 may be performed in parallel.

[0148] FIG. 10 is a diagram of an example apparatus 1000 for wireless communication, in accordance with the present disclosure. The apparatus 1000 may be a source CU, or a source CU may include the apparatus 1000. In some aspects, the apparatus 1000 includes a reception component 1002, a transmission component 1004, and/or a communication manager 1006, which may be in communication with one another (for example, via one or more buses and/or one or more other components). In some aspects, the communication manager 1006 is the communication manager 150 described in connection with FIG. 1. As shown, the apparatus 1000 may communicate with another apparatus 1008, such as a UE or a network node (such as a CU, a DU, an RU, or a base station), using the reception component 1002 and the transmission component 1004.

[0149] In some aspects, the apparatus 1000 may be configured to perform one or more operations described herein in connection with FIGS. 5-7. Additionally, or alternatively, the apparatus 1000 may be configured to perform one or more processes described herein, such as process 800 of FIG. 8, or a combination thereof. In some aspects, the apparatus 1000 and/or one or more components shown in FIG. 10 may include one or more components of the source CU described in connection with FIG. 2. Additionally, or alternatively, one or more components shown in FIG. 10 may be implemented within one or more components described in connection with FIG. 2. Additionally, or alternatively, one or more components of the set of components may be implemented at least in part as software stored in one or more memories. For example, a component (or a portion of a component) may be implemented as instructions or code stored in a non-transitory computer-readable medium and executable by one or more controllers or one or more processors to perform the functions or operations of the component.

[0150] The reception component 1002 may receive communications, such as reference signals, control information, data communications, or a combination thereof, from the apparatus 1008. The reception component 1002 may provide received communications to one or more other components of the apparatus 1000. In some aspects, the reception component 1002 may perform signal processing on the received communications (such as filtering, amplification, demodulation, analog-to-digital conversion, demultiplexing, deinterleaving, de-mapping, equalization, interference can-

cellation, or decoding, among other examples), and may provide the processed signals to the one or more other components of the apparatus 1000. In some aspects, the reception component 1002 may include one or more antennas, one or more modems, one or more demodulators, one or more MIMO detectors, one or more receive processors, one or more controllers/processors, one or more memories, or a combination thereof, of the source CU described in connection with FIG. 2.

[0151] The transmission component 1004 may transmit communications, such as reference signals, control information, data communications, or a combination thereof, to the apparatus 1008. In some aspects, one or more other components of the apparatus 1000 may generate communications and may provide the generated communications to the transmission component 1004 for transmission to the apparatus 1008. In some aspects, the transmission component 1004 may perform signal processing on the generated communications (such as filtering, amplification, modulation, digital-to-analog conversion, multiplexing, interleaving, mapping, or encoding, among other examples), and may transmit the processed signals to the apparatus 1008. In some aspects, the transmission component 1004 may include one or more antennas, one or more modems, one or more modulators, one or more transmit MIMO processors, one or more transmit processors, one or more controllers/processors, one or more memories, or a combination thereof, of the source CU described in connection with FIG. 2. In some aspects, the transmission component 1004 may be co-located with the reception component 1002 in one or more transceivers.

[0152] The communication manager 1006 may support operations of the reception component 1002 and/or the transmission component 1004. For example, the communication manager 1006 may receive information associated with configuring reception of communications by the reception component 1002 and/or transmission of communications by the transmission component 1004. Additionally, or alternatively, the communication manager 1006 may generate and/or provide control information to the reception component 1002 and/or the transmission component 1004 to control reception and/or transmission of communications.

[0153] The reception component 1002 may receive, from a UE, a measurement report. The communication manager 1006 may generate an LTM CSI resource configuration for one or more candidate cells based at least in part on the measurement report. The transmission component 1004 may transmit, to a candidate CU, an LTM preparation request that indicates the one or more candidate cells and the LTM CSI resource configuration. The reception component 1002 may receive, from the candidate CU, an LTM preparation response that indicates one or more LTM RRC configurations associated with the one or more candidate cells, respectively.

[0154] The number and arrangement of components shown in FIG. 10 are provided as an example. In practice, there may be additional components, fewer components, different components, or differently arranged components than those shown in FIG. 10. Furthermore, two or more components shown in FIG. 10 may be implemented within a single component, or a single component shown in FIG. 10 may be implemented as multiple, distributed components. Additionally, or alternatively, a set of (one or more) components shown in FIG. 10 may perform one or more

functions described as being performed by another set of components shown in FIG. 10.

[0155] FIG. 11 is a diagram of an example apparatus 1100 for wireless communication, in accordance with the present disclosure. The apparatus 1100 may be a candidate CU, or a candidate CU may include the apparatus 1100. In some aspects, the apparatus 1100 includes a reception component 1102, a transmission component 1104, and/or a communication manager 1106, which may be in communication with one another (for example, via one or more buses and/or one or more other components). In some aspects, the communication manager 1106 is the communication manager 150 described in connection with FIG. 1. As shown, the apparatus 1100 may communicate with another apparatus 1108, such as a UE or a network node (such as a CU, a DU, an RU, or a base station), using the reception component 1102 and the transmission component 1104.

[0156] In some aspects, the apparatus 1100 may be configured to perform one or more operations described herein in connection with FIGS. 5-7. Additionally, or alternatively, the apparatus 1100 may be configured to perform one or more processes described herein, such as process 900 of FIG. 9, or a combination thereof. In some aspects, the apparatus 1100 and/or one or more components shown in FIG. 11 may include one or more components of the candidate CU described in connection with FIG. 2. Additionally, or alternatively, one or more components shown in FIG. 11 may be implemented within one or more components described in connection with FIG. 2. Additionally, or alternatively, one or more components of the set of components may be implemented at least in part as software stored in one or more memories. For example, a component (or a portion of a component) may be implemented as instructions or code stored in a non-transitory computer-readable medium and executable by one or more controllers or one or more processors to perform the functions or operations of the component.

[0157] The reception component 1102 may receive communications, such as reference signals, control information, data communications, or a combination thereof, from the apparatus 1108. The reception component 1102 may provide received communications to one or more other components of the apparatus 1100. In some aspects, the reception component 1102 may perform signal processing on the received communications (such as filtering, amplification, demodulation, analog-to-digital conversion, demultiplexing, deinterleaving, de-mapping, equalization, interference cancellation, or decoding, among other examples), and may provide the processed signals to the one or more other components of the apparatus 1100. In some aspects, the reception component 1102 may include one or more antennas, one or more modems, one or more demodulators, one or more MIMO detectors, one or more receive processors, one or more controllers/processors, one or more memories, or a combination thereof, of the candidate CU described in connection with FIG. 2.

[0158] The transmission component 1104 may transmit communications, such as reference signals, control information, data communications, or a combination thereof, to the apparatus 1108. In some aspects, one or more other components of the apparatus 1100 may generate communications and may provide the generated communications to the transmission component 1104 for transmission to the apparatus 1108. In some aspects, the transmission component

1104 may perform signal processing on the generated communications (such as filtering, amplification, modulation, digital-to-analog conversion, multiplexing, interleaving, mapping, or encoding, among other examples), and may transmit the processed signals to the apparatus 1108. In some aspects, the transmission component 1104 may include one or more antennas, one or more modems, one or more modulators, one or more transmit MIMO processors, one or more transmit processors, one or more controllers/processors, one or more memories, or a combination thereof, of the candidate CU described in connection with FIG. 2. In some aspects, the transmission component 1104 may be co-located with the reception component 1102 in one or more transceivers.

[0159] The communication manager 1106 may support operations of the reception component 1102 and/or the transmission component 1104. For example, the communication manager 1106 may receive information associated with configuring reception of communications by the reception component 1102 and/or transmission of communications by the transmission component 1104. Additionally, or alternatively, the communication manager 1106 may generate and/or provide control information to the reception component 1102 and/or the transmission component 1104 to control reception and/or transmission of communications.

[0160] The reception component 1102 may receive, from a source CU, an LTM preparation request that indicates one or more candidate cells and measurement results. The communication manager 1106 may generate an LTM CSI resource configuration for the one or more candidate cells based at least in part on the LTM preparation request. The transmission component 1104 may transmit, to the source CU, an LTM preparation response that indicates the LTM CSI resource configuration.

[0161] The number and arrangement of components shown in FIG. 11 are provided as an example. In practice, there may be additional components, fewer components, different components, or differently arranged components than those shown in FIG. 11. Furthermore, two or more components shown in FIG. 11 may be implemented within a single component, or a single component shown in FIG. 11 may be implemented as multiple, distributed components. Additionally, or alternatively, a set of (one or more) components shown in FIG. 11 may perform one or more functions described as being performed by another set of components shown in FIG. 11.

[0162] The following provides an overview of some Aspects of the present disclosure:

[0163] Aspect 1: A method of wireless communication performed by a source central unit (CU), comprising: receiving, from a user equipment (UE), a measurement report; generating a lower layer triggered mobility (LTM) channel state information (CSI) resource configuration for one or more candidate cells based at least in part on the measurement report; transmitting, to a candidate CU, an LTM preparation request that indicates the one or more candidate cells and the LTM CSI resource configuration; and receiving, from the candidate CU, an LTM preparation response that indicates one or more LTM radio resource control (RRC) configurations associated with the one or more candidate cells, respectively.

[0164] Aspect 2: The method of Aspect 1, wherein the LTM CSI resource configuration includes a list of synchro-

nization signal blocks (SSBs) to be measured for each candidate cell of the one or more candidate cells.

[0165] Aspect 3: The method of any of Aspects 1-2, wherein generating the LTM CSI resource configuration is based at least in part on information received from the candidate CU and one or more distributed units (DUs) associated with the source CU during a setup procedure.

[0166] Aspect 4: The method of any of Aspects 1-3, wherein an LTM RRC configuration, of the one or more LTM RRC configurations, of a candidate cell, of the one or more candidate cells, includes a CSI report configuration.

[0167] Aspect 5: The method of any of Aspects 1-4, further comprising: determining an updated LTM CSI resource configuration for the one or more candidate cells or an updated list of candidate cells, wherein the updated LTM CSI resource configuration indicates an updated list of synchronization signal blocks (SSBs) to be measured for each candidate cell of the one or more candidate cells.

[0168] Aspect 6: The method of any of Aspects 1-5, further comprising: receiving, from a distributed unit (DU) associated with a source CU or the candidate CU, an updated LTM CSI report configuration; and transmitting, to the UE, an RRC reconfiguration message that indicates one or more LTM RRC reconfigurations associated with the one or more candidate cells, respectively, based at least in part on the updated LTM CSI report configuration.

[0169] Aspect 7: The method of any of Aspects 1-6, wherein the LTM preparation response indicates an updated LTM CSI resource configuration, and wherein the updated LTM CSI resource configuration is received from the candidate CU via a distributed unit (DU) associated with the candidate CU or from an underlying DU associated with a source CU.

[0170] Aspect 8: The method of any of Aspects 1-7, wherein the LTM CSI resource configuration is associated with an inter-CU LTM.

[0171] Aspect 9: A method of wireless communication performed by a candidate central unit (CU), comprising: receiving, from a source CU, a lower layer triggered mobility (LTM) preparation request that indicates one or more candidate cells and measurement results; generating an LTM channel state information (CSI) resource configuration for the one or more candidate cells based at least in part on the LTM preparation request; and transmitting, to the source CU, an LTM preparation response that indicates the LTM CSI resource configuration.

[0172] Aspect 10: The method of Aspect 9, wherein the LTM CSI resource configuration includes a list of synchronization signal blocks (SSBs) to be measured for each candidate cell of the one or more candidate cells.

[0173] Aspect 11: The method of any of Aspects 9-10, wherein the measurement results are associated with a measurement report from a user equipment (UE).

[0174] Aspect 12: The method of any of Aspects 9-11, wherein the LTM CSI resource configuration is associated with an inter-CU LTM.

[0175] Aspect 13: An apparatus for wireless communication at a device, the apparatus comprising one or more processors; one or more memories coupled with the one or more processors; and instructions stored in the one or more memories and executable by the one or more processors to cause the apparatus to perform the method of one or more of Aspects 1-12.

[0176] Aspect 14: An apparatus for wireless communication at a device, the apparatus comprising one or more memories and one or more processors coupled to the one or more memories, the one or more processors configured to cause the device to perform the method of one or more of Aspects 1-12.

[0177] Aspect 15: An apparatus for wireless communication, the apparatus comprising at least one means for performing the method of one or more of Aspects 1-12.

[0178] Aspect 16: A non-transitory computer-readable medium storing code for wireless communication, the code comprising instructions executable by one or more processors to perform the method of one or more of Aspects 1-12.

[0179] Aspect 17: A non-transitory computer-readable medium storing a set of instructions for wireless communication, the set of instructions comprising one or more instructions that, when executed by one or more processors of a device, cause the device to perform the method of one or more of Aspects 1-12.

[0180] Aspect 18: A device for wireless communication, the device comprising a processing system that includes one or more processors and one or more memories coupled with the one or more processors, the processing system configured to cause the device to perform the method of one or more of Aspects 1-12.

[0181] Aspect 19: An apparatus for wireless communication at a device, the apparatus comprising one or more memories and one or more processors coupled to the one or more memories, the one or more processors individually or collectively configured to cause the device to perform the method of one or more of Aspects 1-12.

[0182] The foregoing disclosure provides illustration and description but is not intended to be exhaustive or to limit the aspects to the precise forms disclosed. Modifications and variations may be made in light of the above disclosure or may be acquired from practice of the aspects.

[0183] As used herein, the term “component” is intended to be broadly construed as hardware or a combination of hardware and at least one of software or firmware. “Software” shall be construed broadly to mean instructions, instruction sets, code, code segments, program code, programs, subprograms, software modules, applications, software applications, software packages, routines, subroutines, objects, executables, threads of execution, procedures, or functions, among other examples, whether referred to as software, firmware, middleware, microcode, hardware description language, or otherwise. As used herein, a “processor” is implemented in hardware or a combination of hardware and software. It will be apparent that systems or methods described herein may be implemented in different forms of hardware or a combination of hardware and software. The actual specialized control hardware or software code used to implement these systems or methods is not limiting of the aspects. Thus, the operation and behavior of the systems or methods are described herein without reference to specific software code, because those skilled in the art will understand that software and hardware can be designed to implement the systems or methods based, at least in part, on the description herein. A component being configured to perform a function means that the component has a capability to perform the function, and does not require the function to be actually performed by the component, unless noted otherwise.

[0184] As used herein, “satisfying a threshold” may, depending on the context, refer to a value being greater than the threshold, greater than or equal to the threshold, less than the threshold, less than or equal to the threshold, equal to the threshold, or not equal to the threshold, among other examples.

[0185] As used herein, a phrase referring to “at least one of” a list of items refers to any combination of those items, including single members. As an example, “at least one of: a, b, or c” is intended to cover a, b, c, a+b, a+c, b+c, and a+b+c, as well as any combination with multiples of the same element (for example, a+a, a+a+a, a+a+b, a+a+c, a+b+b, a+c+c, b+b, b+b+b, b+b+c, c+c, and c+c+c, or any other ordering of a, b, and c).

[0186] No element, act, or instruction used herein should be construed as critical or essential unless explicitly described as such. Also, as used herein, the articles “a” and “an” are intended to include one or more items and may be used interchangeably with “one or more.” Further, as used herein, the article “the” is intended to include one or more items referenced in connection with the article “the” and may be used interchangeably with “the one or more.” Furthermore, as used herein, the terms “set” and “group” are intended to include one or more items and may be used interchangeably with “one or more.” Where only one item is intended, the phrase “only one” or similar language is used. Also, as used herein, the terms “has,” “have,” “having,” and similar terms are intended to be open-ended terms that do not limit an element that they modify (for example, an element “having” A may also have B). Further, the phrase “based on” is intended to mean “based on or otherwise in association with” unless explicitly stated otherwise. Also, as used herein, the term “or” is intended to be inclusive when used in a series and may be used interchangeably with “and/or,” unless explicitly stated otherwise (for example, if used in combination with “either” or “only one of”). It should be understood that “one or more” is equivalent to “at least one.”

[0187] Even though particular combinations of features are recited in the claims or disclosed in the specification, these combinations are not intended to limit the disclosure of various aspects. Many of these features may be combined in ways not specifically recited in the claims or disclosed in the specification. The disclosure of various aspects includes each dependent claim in combination with every other claim in the claim set.

What is claimed is:

1. An apparatus for wireless communication, comprising: one or more memories; and one or more processors coupled to the one or more memories, the one or more processors individually or collectively configured to: receive, from a user equipment (UE), a measurement report; generate a lower layer triggered mobility (LTM) channel state information (CSI) resource configuration for one or more candidate cells based at least in part on the measurement report; transmit, to a candidate central unit (CU), an LTM preparation request that indicates the one or more candidate cells and the LTM CSI resource configuration; and receive, from the candidate CU, an LTM preparation response that indicates one or more LTM radio

resource control (RRC) configurations associated with the one or more candidate cells, respectively.

2. The apparatus of claim 1, wherein the LTM CSI resource configuration includes a list of synchronization signal blocks (SSBs) to be measured for each candidate cell of the one or more candidate cells.

3. The apparatus of claim 1, wherein the one or more processors are individually or collectively configured to:

- generate the LTM CSI resource configuration based at least in part on information received from the candidate CU and one or more distributed units (DUs) associated with a source CU during a setup procedure.

4. The apparatus of claim 1, wherein an LTM RRC configuration, of the one or more LTM RRC configurations, of a candidate cell, of the one or more candidate cells, includes a CSI report configuration.

5. The apparatus of claim 1, wherein the one or more processors are individually or collectively configured to:

- determine one or more of an updated LTM CSI resource configuration for the one or more candidate cells or an updated list of candidate cells, wherein the updated LTM CSI resource configuration indicates an updated list of synchronization signal blocks (SSBs) to be measured for each candidate cell of the one or more candidate cells.

6. The apparatus of claim 1, wherein the one or more processors are individually or collectively configured to:

- receive, from a distributed unit (DU) associated with a source CU or the candidate CU, an updated LTM CSI report configuration; and

- transmit, to the UE, an RRC reconfiguration message that indicates one or more LTM RRC reconfigurations associated with the one or more candidate cells, respectively, based at least in part on an updated LTM CSI resource configuration and the updated LTM CSI report configuration.

7. The apparatus of claim 1, wherein the LTM preparation response indicates an updated LTM CSI resource configuration, and wherein the updated LTM CSI resource configuration is received from the candidate CU via a distributed unit (DU) associated with the candidate CU or from an underlying DU associated with a source CU.

8. The apparatus of claim 1, wherein the LTM CSI resource configuration is associated with an inter-CU LTM.

9. An apparatus for wireless communication, comprising: one or more memories; and

- one or more processors coupled to the one or more memories, the one or more processors individually or collectively configured to:

- receive, from a source central unit (CU), a lower layer triggered mobility (LTM) preparation request that indicates one or more candidate cells and measurement results;

- generate an LTM channel state information (CSI) resource configuration for the one or more candidate cells based at least in part on the LTM preparation request; and

- transmit, to the source CU, an LTM preparation response that indicates the LTM CSI resource configuration.

10. The apparatus of claim 9, wherein the LTM CSI resource configuration includes a list of synchronization signal blocks (SSBs) to be measured for each candidate cell of the one or more candidate cells.

11. The apparatus of claim **9**, wherein the measurement results are associated with a measurement report from a user equipment (UE).

12. The apparatus of claim **9**, wherein the LTM CSI resource configuration is associated with an inter-CU LTM.

13. A method of wireless communication performed by a source central unit (CU), comprising:

receiving, from a user equipment (UE), a measurement report;

generating a lower layer triggered mobility (LTM) channel state information (CSI) resource configuration for one or more candidate cells based at least in part on the measurement report;

transmitting, to a candidate CU, an LTM preparation request that indicates the one or more candidate cells and the LTM CSI resource configuration; and

receiving, from the candidate CU, an LTM preparation response that indicates one or more LTM radio resource control (RRC) configurations associated with the one or more candidate cells, respectively.

14. The method of claim **13**, wherein the LTM CSI resource configuration includes a list of synchronization signal blocks (SSBs) to be measured for each candidate cell of the one or more candidate cells.

15. The method of claim **13**, wherein generating the LTM CSI resource configuration is based at least in part on information received from the candidate CU and one or more distributed units (DUs) associated with the source CU during a setup procedure.

16. The method of claim **13**, wherein an LTM RRC configuration, of the one or more LTM RRC configurations, of a candidate cell, of the one or more candidate cells, includes a CSI report configuration.

17. The method of claim **13**, further comprising:

determining an updated LTM CSI resource configuration for the one or more candidate cells or an updated list of candidate cells, wherein the updated LTM CSI resource configuration indicates an updated list of synchronization signal blocks (SSBs) to be measured for each candidate cell of the one or more candidate cells.

18. The method of claim **13**, further comprising:

receiving, from a distributed unit (DU) associated with a source CU or the candidate CU, an updated LTM CSI report configuration; and

transmitting, to the UE, an RRC reconfiguration message that indicates one or more LTM RRC reconfigurations associated with the one or more candidate cells, respectively, based at least in part on an updated LTM CSI resource configuration and the updated LTM CSI report configuration.

19. The method of claim **13**, wherein the LTM preparation response indicates an updated LTM CSI resource configuration, and wherein the updated LTM CSI resource configuration is received from the candidate CU via a distributed unit (DU) associated with the candidate CU or from an underlying DU associated with a source CU.

20. The method of claim **13**, wherein the LTM CSI resource configuration is associated with an inter-CU LTM.

* * * * *