US0D1091565S

(12) United States Design Patent

Payne et al.

(10) Patent No.: US D1,091,565 S
(45) Date of Patent: ** Sep. 2, 2025

(54) **DISPLAY SCREEN OR PORTION THEREOF WITH ANIMATED GRAPHICAL USER INTERFACE**

(71) Applicant: **McMaster-Carr Supply Company**, Elmhurst, IL (US)

(72) Inventors: **Patrice Payne**, Chicago, IL (US); **Mira Staykova**, Chicago, IL (US); **Catherine Aviles**, Chicago, IL (US); **Varun Gadh**, Los Angeles, CA (US)

(73) Assignee: **McMaster-Carr Supply Company**, Elmhurst, IL (US)

(**) Term: **15 Years**

(21) Appl. No.: **29/820,572**

(22) Filed: **Dec. 22, 2021**

(51) **LOC (15) Cl.** **14-04**

(52) **U.S. Cl.**
USPC **D14/486**

(58) **Field of Classification Search**
USPC D14/485–495
CPC G06F 16/168; G06F 3/048; G06F 3/0481; G06F 3/04812; G06F 3/04815; G06F 3/04817; G06F 3/0482; G06F 3/0483; G06F
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

D667,833 S * 9/2012 DuPont D14/486
D673,172 S * 12/2012 Peters D14/487
(Continued)

OTHER PUBLICATIONS

Mcmaster-Carr, Mar. 5, 2025, mcmaster.com, retrieved Mar. 5, 2025, https://www.mcmaster.com/products/reamers/reamers-5~/reamers-1~~/reamers-5~mount-type~arbor/ (Year: 2025).*
(Continued)

Primary Examiner — Shannon W Morgan
Assistant Examiner — Kelly A Custer
(74) *Attorney, Agent, or Firm* — Sterne, Kessler, Goldstein & Fox P.L.L.C.

(57) **CLAIM**

The ornamental design for a display screen or portion thereof with animated graphical user interface as shown and described.

DESCRIPTION

The file of this patent contains at least one drawing/photograph executed in color. Copies of this patent with color drawing(s)/photograph(s) will be provided by the Office upon request and payment of the necessary fee.

FIG. **1** is a front view of a display screen or portion thereof with animated graphical user interface showing a first image of the claimed design;

FIG. **2** is a second image thereof;

FIG. **3** is a third image thereof;

FIG. **4** is a front view of another embodiment of a display screen or portion thereof with animated graphical user interface showing a first image of the claimed design;

FIG. **5** is a second image thereof; and,

FIG. **6** is a third image thereof.

The outermost broken lines in the figures show a display screen or portion thereof, and form no part of the claimed design. The other broken lines in the figures show portions of the animated graphical user interface that form no part of the claimed design.

The appearance of the animated image sequentially transitions between the images shown in FIGS. **1-3** and FIGS. **4-6**, respectively. The process or period in which one image transitions to another forms no part of the claimed design.

1 Claim, 6 Drawing Sheets
(2 of 6 Drawing Sheet(s) Filed in Color)

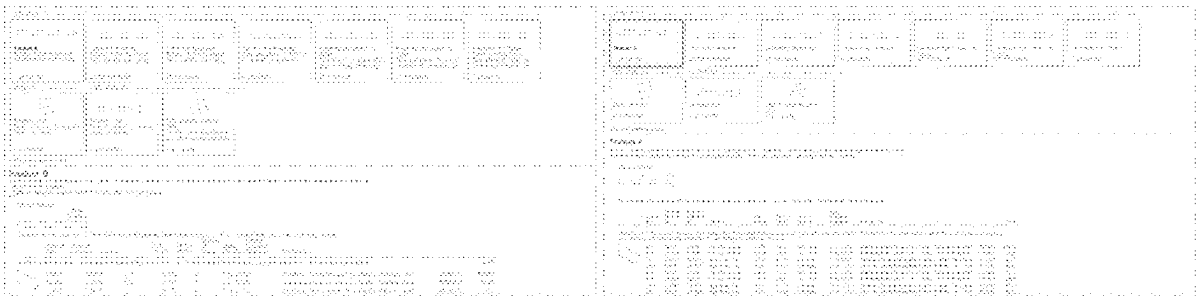

(58) **Field of Classification Search**
CPC 3/0484; G06F 3/04842; G06F 3/04845; G06F 3/04847; G06F 3/0485; G06F 3/04855; G06F 3/0486; G06F 3/0487; G06F 3/0488; G06F 3/04883; G06F 3/04886; G06F 40/103; G06F 40/106; G06Q 30/0641
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

D697,927	S	*	1/2014	Seo	D14/485
D719,969	S	*	12/2014	Ebtekar	D14/486
D759,690	S	*	6/2016	Olson	D14/486
D791,145	S	*	7/2017	Nakaguchi	D14/485
D796,533	S	*	9/2017	Lee	D14/486
D798,331	S	*	9/2017	Fong	D14/488
D808,403	S	*	1/2018	Capela	D14/486
D812,091	S	*	3/2018	Van Every	D14/488
D858,535	S	*	9/2019	Evans	D14/485
D868,101	S	*	11/2019	Choi	D14/487
D890,201	S	*	7/2020	Li	D14/487
D896,258	S	*	9/2020	Felkins	D14/486
D920,369	S	*	5/2021	Gouliard	D14/488
D929,434	S	*	8/2021	Gouliard	D14/491
D931,890	S	*	9/2021	Caldwell	D14/486
D937,847	S	*	12/2021	Kumar	D14/485
D963,695	S	*	9/2022	Devine	D14/486
D986,914	S	*	5/2023	Xu	D14/485
D989,807	S	*	6/2023	Cordova	D14/488
D1,013,712	S	*	2/2024	Dunlap	D14/485
D1,013,713	S	*	2/2024	Dunlap	D14/485
D1,013,726	S	*	2/2024	Jewitt	D14/489
D1,032,655	S	*	6/2024	Norman	D14/487
D1,034,631	S	*	7/2024	Sabour	D14/488
D1,056,924	S	*	1/2025	Aviles	D14/485
12,250,432	B2	*	3/2025	Ventura	G06N 20/00
D1,069,833	S	*	4/2025	Borochoff	D14/486
D1,070,885	S	*	4/2025	Inui	D14/485
D1,071,951	S	*	4/2025	Modi	D14/486
12,288,301	B2	*	4/2025	Rockel	G06T 19/20
D1,073,697	S	*	5/2025	Choi	D14/486
D1,073,725	S	*	5/2025	Sheen	D14/486
2014/0279245	A1	*	9/2014	Callanta	G06Q 30/0623 705/26.61
2016/0350836	A1	*	12/2016	Burns	G06Q 30/0625
2025/0111380	A1	*	4/2025	Wilson	G06Q 30/016

OTHER PUBLICATIONS

Card, Mar. 5, 2025, patternfly.org, retrieved Mar. 5, 2025, https://www.patternfly.org/components/card/design-guidelines/ (Year: 2025).*

* cited by examiner

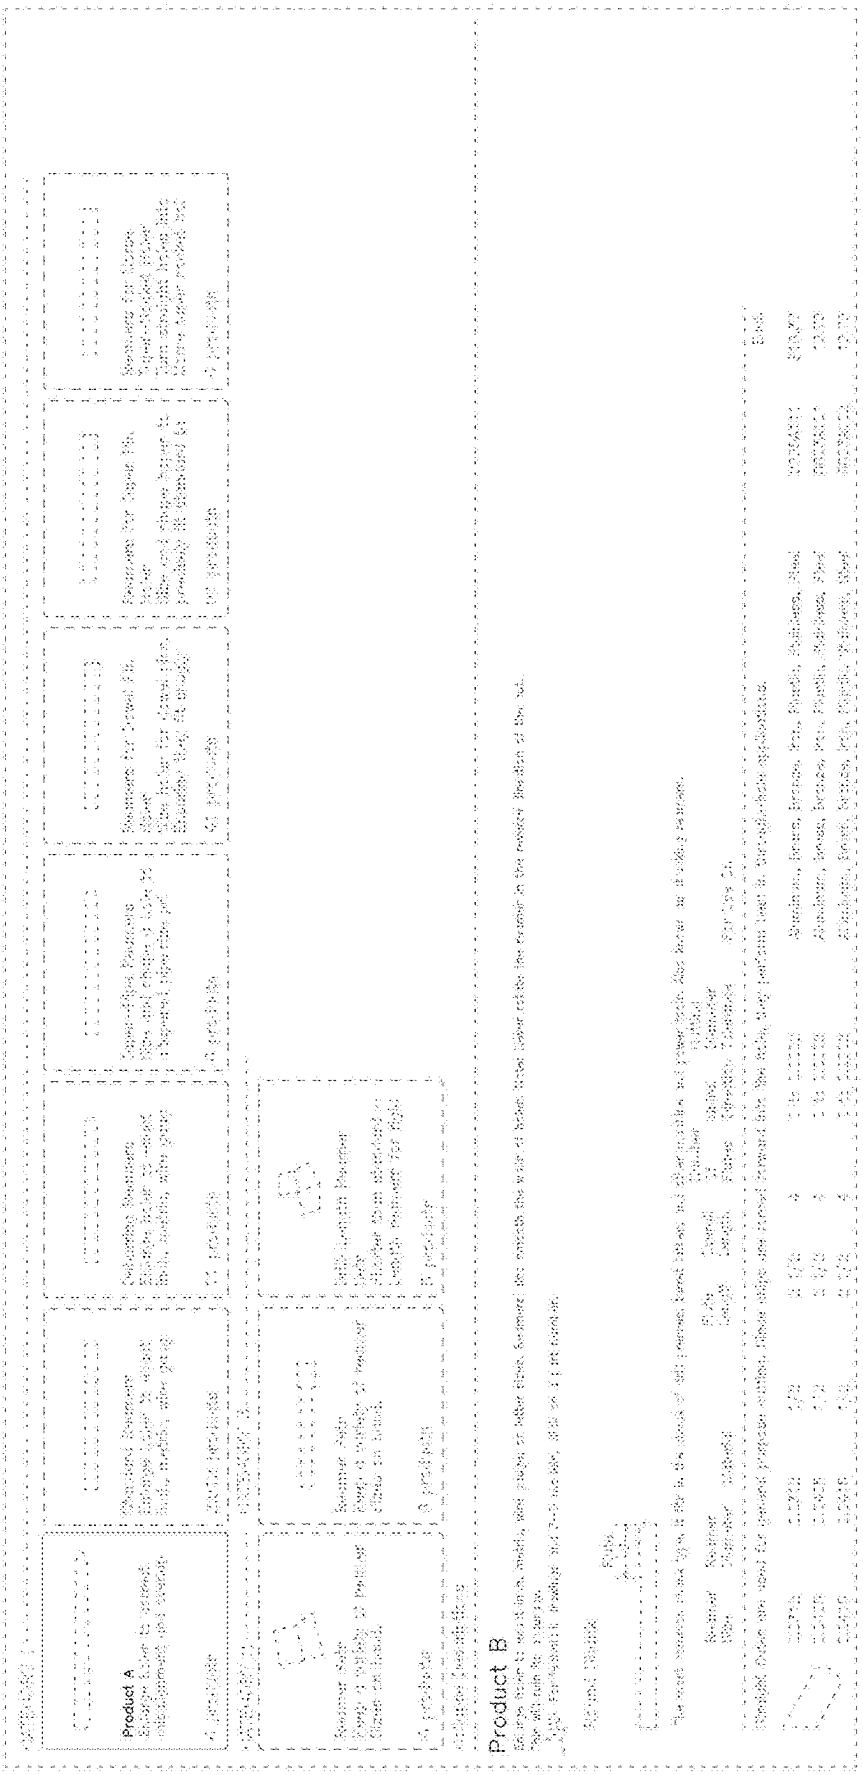

FIG. 1

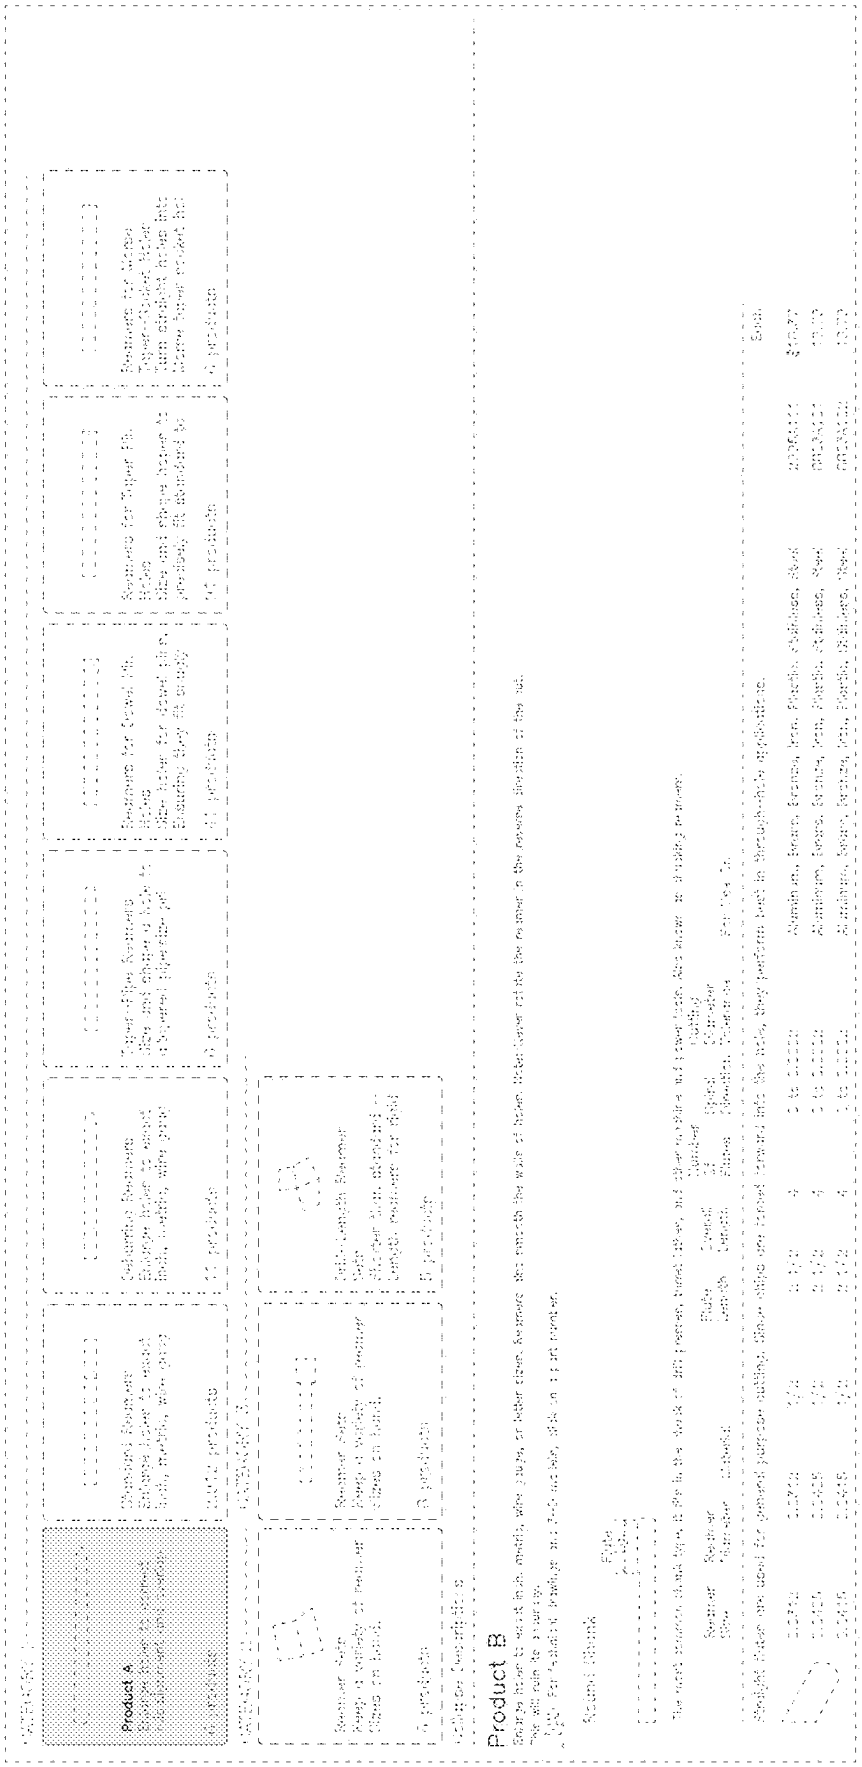

FIG. 2

CATEGORY

Product A
4 products

Standard Reamers
20012 products

Deburring Reamers
11 products

Taper-Flute Reamers
4 products

Reamers for Dowel Pin Holes
21 products

Reamers for Taper Pin Holes
21 products

Reamers for Screw
4 products

CATEGORY 1

Reamer Sets
3 products

CATEGORY 2

Reamer Sets
3 products

Drill-Length Reamer Sets
3 products

Expand Descriptions

Product A

Enlarge holes to correct misalignment and overlap. Misaligned holes often have narrow ends, so the tapered shape is easier to insert and makes more contact to remove the overlapping material. These are also known as bridge and tor reamers.

Round Shank

These reamers fit in the chuck of drill presses, turret lathes, and other machine and power tools, making them the most common shank type.

Reamer Size	Reamer Diameter (A)	Reamer Diameter (B)	Material	Flute Length	Overall Length	Spiral Direction	Cutting Diameter Tolerance	For Use In	Price
Optical Fiber-Modified Waste reamers cut in chips better than straight flutes. They leave holes with a smoother finish. They're better for holes with tension in the surface such as keyway. Because they not continuously cross the tracks instead of moving in and out.									
1/16"	0.1875"	0.1563"	High-Speed Steel	1 1/4"	4 1/2"	Left Hand	0" to 0.100"	Aluminum, Brass, Bronze, Iron, Plastic, Stainless Steel, Steel	3102A11	$44.41
3/32"	0.2312"	0.1875"	High-Speed Steel	1 1/2"	4 1/2"	Left Hand	0" to 0.100"	Aluminum, Brass, Bronze, Iron, Plastic, Stainless Steel, Steel	3102A12	40.01
1/8"	0.2750"	0.2188"	High-Speed Steel	1 3/4"	4 1/2"	Left Hand	0" to 0.100"	Aluminum, Brass, Bronze, Iron, Plastic, Stainless Steel, Steel	3102A13	41.13
3/16"	0.4375"	0.3750"	High-Speed Steel	2 1/4"	5 3/4"	Left Hand	0" to 0.100"	Aluminum, Brass, Bronze, Iron, Plastic, Stainless Steel, Steel	3102A14	42.41
1/4"	0.5000"	0.4250"	High-Speed Steel	2 3/4"	6 3/4"	Left Hand	0" to 0.100"	Aluminum, Brass, Bronze, Iron, Plastic, Stainless Steel, Steel	3102A15	43.13
5/16"	0.6125"	0.5250"	High-Speed Steel	3 1/2"	8 1/2"	Left Hand	0" to 0.100"	Aluminum, Brass, Bronze, Iron, Plastic, Stainless Steel, Steel	3102A16	43.47
3/8"	0.6875"	0.5875"	High-Speed Steel	4 1/4"	9 3/4"	Left Hand	0" to 0.100"	Aluminum, Brass, Bronze, Iron, Plastic, Stainless Steel, Steel	3102A17	43.53
1/2"	0.8125"	0.7437"	High-Speed Steel	5 1/4"	11 1/2"	Left Hand	0" to 0.100"	Aluminum, Brass, Bronze, Iron, Plastic, Stainless Steel, Steel	3102A18	44.13

FIG. 3

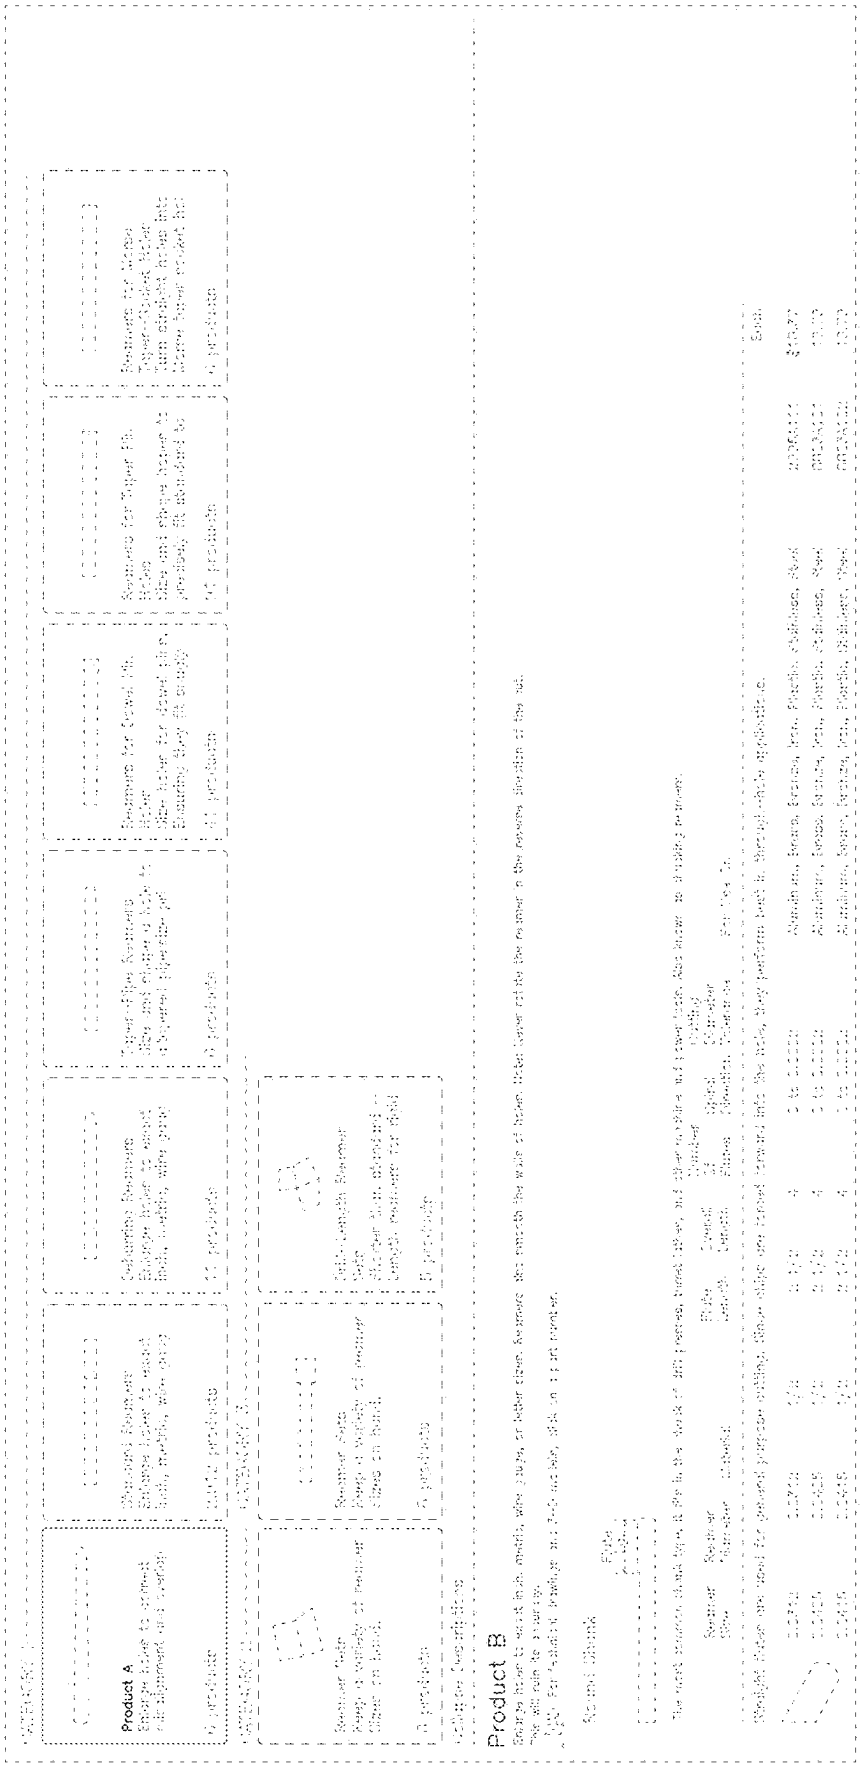

FIG. 4

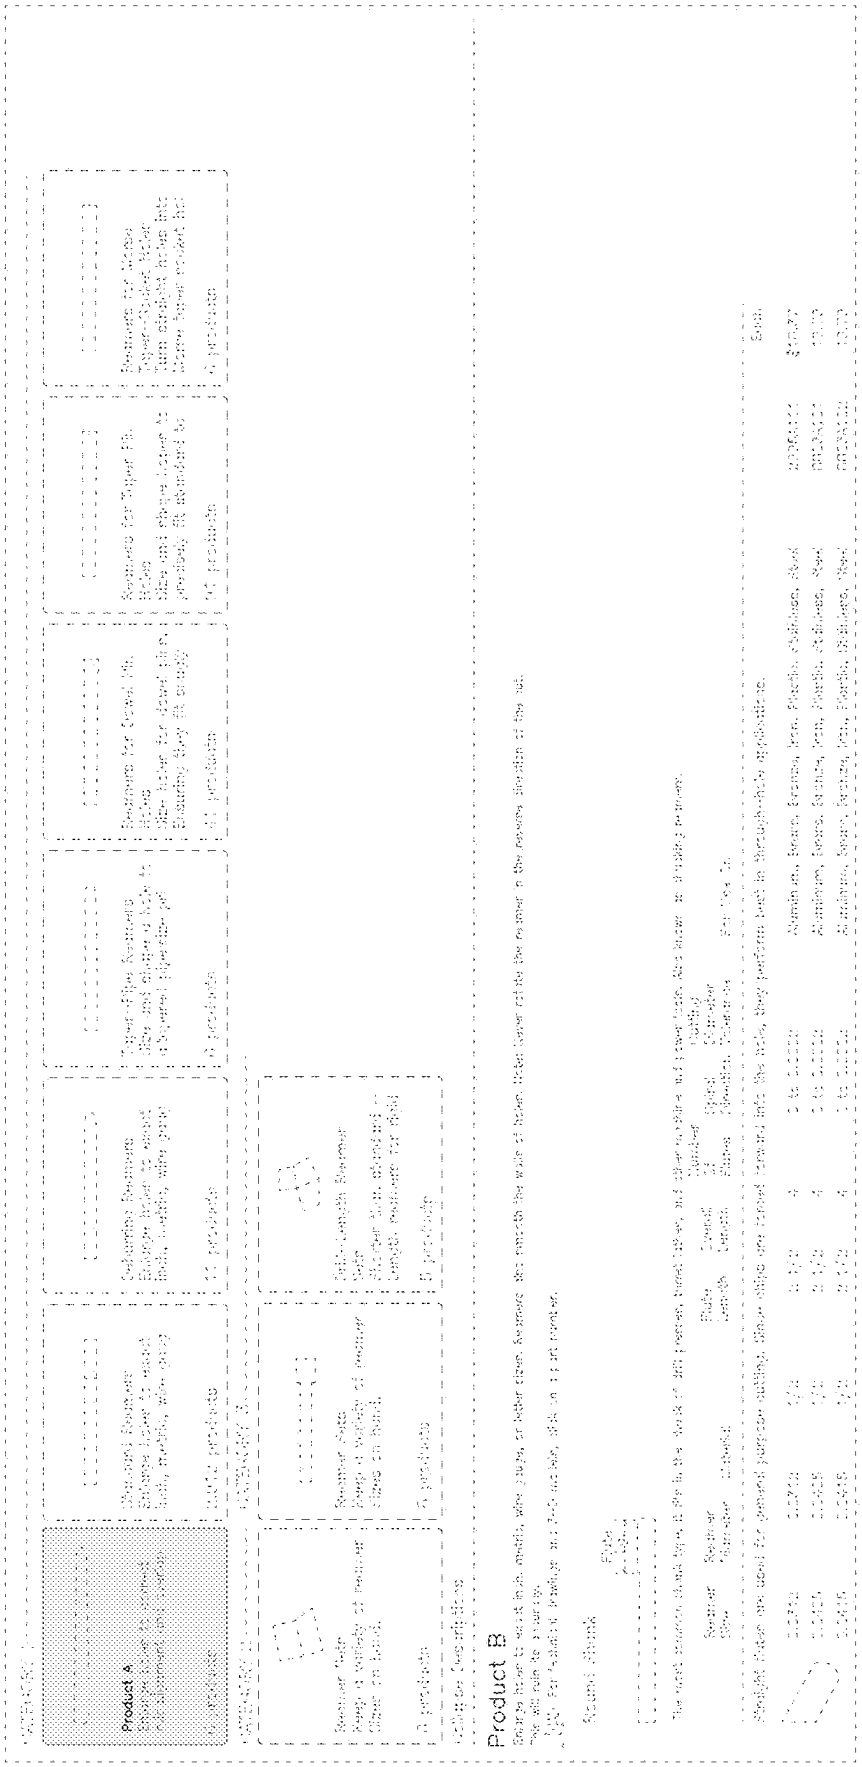

FIG. 5

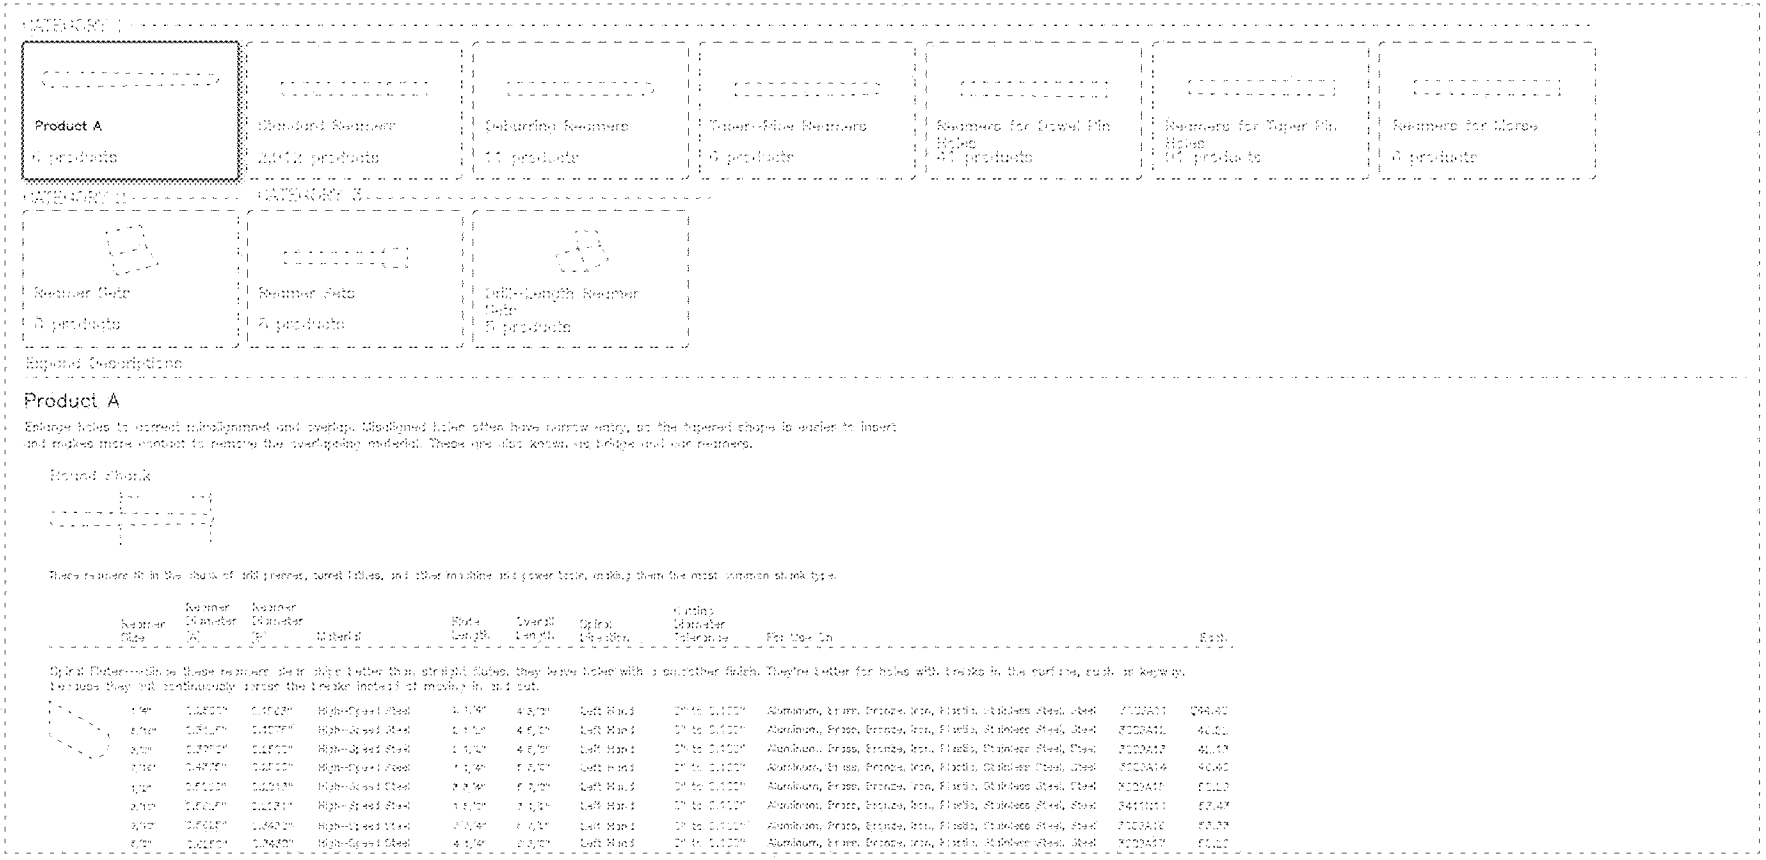
CATEGORY 1
Product A
6 products
Standard Reamers
2,412 products
Deburring Reamers
11 products
Taper-Flute Reamers
6 products
Reamers for Dowel Pin Holes
31 products
Reamers for Taper Pin Holes
17 products
Reamers for Morse
6 products
CATEGORY 2
CATEGORY 3
Reamer Sets
3 products
Reamer Sets
4 products
Drill-Length Reamer Sets
5 products
Expand Descriptions
Product A
Enlarge holes to correct misalignment and overlap. Misaligned holes often have narrow entry, so the tapered shape is easier to insert and makes more contact to remove the overlapping material. These are also known as bridge and nail reamers.
Round shank
These reamers fit in the chuck of drill presses, turret lathes, and other machine and power tools, making them the most common shank type.
Reamer Size
Reamer Diameter (A)
Reamer Diameter (B)
Material
Shank Length
Overall Length
Spiral Direction
Cutting Diameter Tolerance
For Use In
Each
Optical Enhancement: These reamers have slight edges better than straight flutes, they leave holes with a smoother finish. They're better for holes with breaks in the surface, such as keyway. Flutes they not continuously cross the breaks instead of moving in and out.
1/4"
0.2500"
0.3125"
High-Speed Steel
3 1/4"
4 5/8"
Left Hand
0" to 0.1250"
Aluminum, Brass, Bronze, Iron, Plastic, Stainless Steel, Steel
3/8"
0.3750"
0.4375"
High-Speed Steel
3 1/2"
4 5/8"
Left Hand
0" to 0.1250"
Aluminum, Brass, Bronze, Iron, Plastic, Stainless Steel, Steel
1/2"
0.5000"
0.5625"
High-Speed Steel
3 1/2"
4 5/8"
Left Hand
0" to 0.1250"
Aluminum, Brass, Bronze, Iron, Plastic, Stainless Steel, Steel
5/8"
0.6250"
0.6875"
High-Speed Steel
3 1/2"
4 5/8"
Left Hand
0" to 0.1250"
Aluminum, Brass, Bronze, Iron, Plastic, Stainless Steel, Steel
3/4"
0.7500"
0.8125"
High-Speed Steel
3 3/4"
5 3/8"
Left Hand
0" to 0.1250"
Aluminum, Brass, Bronze, Iron, Plastic, Stainless Steel, Steel
7/8"
0.8750"
0.9375"
High-Speed Steel
4 1/2"
5 3/8"
Left Hand
0" to 0.1250"
Aluminum, Brass, Bronze, Iron, Plastic, Stainless Steel, Steel
1"
0.9375"
1.0000"
High-Speed Steel
4 1/2"
5 3/8"
Left Hand
0" to 0.1250"
Aluminum, Brass, Bronze, Iron, Plastic, Stainless Steel, Steel
1 1/8"
1.0625"
1.1250"
High-Speed Steel
4 1/2"
5 3/8"
Left Hand
0" to 0.1250"
Aluminum, Brass, Bronze, Iron, Plastic, Stainless Steel, Steel

FIG. 6