


(45) **Date of Patent:** *Sep. 2, 2025

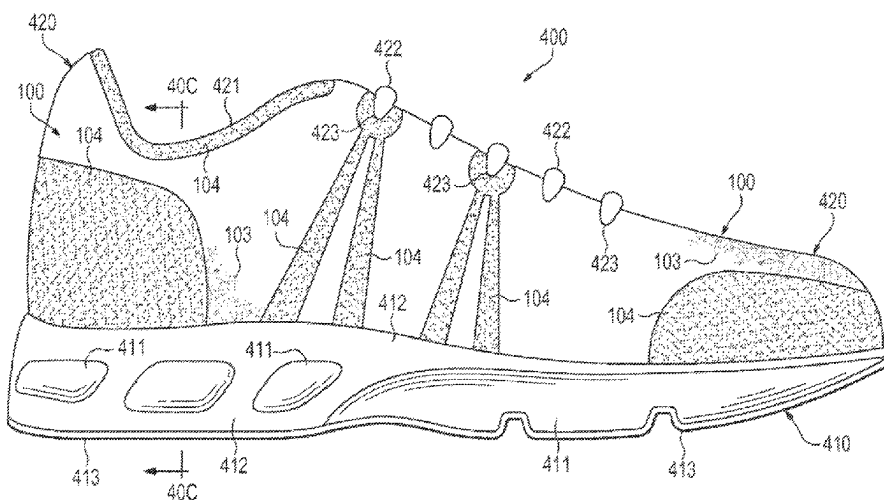

Related U.S. Application Data

No. 16/160,259, filed on Oct. 15, 2018, now abandoned, which is a continuation of application No. 13/426,361, filed on Mar. 21, 2012, now abandoned, which is a division of application No. 12/367,274, filed on Feb. 6, 2009, now abandoned.

(51) Int. Cl.

A41D 1/06 (2006.01)
A43B 1/02 (2022.01)
A43B 1/028 (2022.01)
A43B 3/00 (2022.01)
A43B 9/16 (2006.01)
A43B 23/02 (2006.01)
A43B 23/24 (2006.01)
B29C 65/00 (2006.01)
B29C 65/02 (2006.01)
B29C 65/18 (2006.01)
B29D 35/00 (2010.01)
B32B 3/26 (2006.01)
B32B 3/30 (2006.01)
B32B 5/02 (2006.01)
B32B 5/04 (2006.01)
B32B 5/06 (2006.01)
B32B 5/08 (2006.01)
B32B 5/14 (2006.01)
B32B 5/22 (2006.01)
B32B 5/24 (2006.01)
B32B 5/26 (2006.01)
B32B 7/12 (2006.01)
B32B 27/12 (2006.01)
D04H 1/52 (2006.01)
D04H 1/558 (2012.01)
D04H 3/14 (2012.01)
D04H 3/153 (2012.01)
D04H 5/08 (2012.01)
D04H 13/00 (2006.01)
D06H 5/00 (2006.01)
B29L 31/48 (2006.01)
B29L 31/50 (2006.01)

(52) U.S. Cl.

CPC *A43B 1/0063* (2013.01); *A43B 1/028* (2022.01); *A43B 3/0078* (2013.01); *A43B 9/16* (2013.01); *A43B 23/0255* (2013.01); *A43B 23/026* (2013.01); *A43B 23/027* (2013.01); *A43B 23/0275* (2013.01); *A43B 23/24* (2013.01); *B29C 65/022* (2013.01); *B29C 65/18* (2013.01); *B29C 66/1122* (2013.01); *B29C 66/1282* (2013.01); *B29C 66/12841* (2013.01); *B29C 66/133* (2013.01); *B29C 66/14* (2013.01); *B29C 66/244* (2013.01); *B29C 66/303* (2013.01); *B29C 66/30326* (2013.01); *B29C 66/43* (2013.01); *B29C 66/431* (2013.01); *B29C 66/433* (2013.01); *B29C 66/45* (2013.01); *B29C 66/472* (2013.01); *B29C 66/4722* (2013.01); *B29C 66/4724* (2013.01); *B29C 66/71* (2013.01); *B29C 66/723* (2013.01); *B29C 66/7294* (2013.01); *B29C 66/7392* (2013.01); *B29C 66/73921* (2013.01); *B29C 66/8226* (2013.01); *B29C 66/83221* (2013.01); *B29C 66/8362* (2013.01); *B29D 35/00* (2013.01); *B32B 3/263* (2013.01); *B32B 3/30* (2013.01); *B32B 5/02* (2013.01); *B32B 5/022* (2013.01); *B32B 5/024* (2013.01); *B32B 5/04* (2013.01); *B32B 5/06*

(2013.01); *B32B 5/08* (2013.01); *B32B 5/142* (2013.01); *B32B 5/22* (2013.01); *B32B 5/24* (2013.01); *B32B 5/245* (2013.01); *B32B 5/26* (2013.01); *B32B 7/12* (2013.01); *B32B 27/12* (2013.01); *D04H 1/52* (2013.01); *D04H 1/558* (2013.01); *D04H 3/153* (2013.01); *D04H 5/08* (2013.01); *D04H 13/00* (2013.01); *D06H 5/00* (2013.01); *A41D 2500/30* (2013.01); *B29C 66/727* (2013.01); *B29C 66/729* (2013.01); *B29C 66/7394* (2013.01); *B29C 66/81422* (2013.01); *B29C 66/81423* (2013.01); *B29C 66/81435* (2013.01); *B29L 2031/4842* (2013.01); *B29L 2031/4857* (2013.01); *B29L 2031/50* (2013.01); *B32B 2262/02* (2013.01); *B32B 2262/0253* (2013.01); *B32B 2262/0261* (2013.01); *B32B 2262/0269* (2013.01); *B32B 2262/0276* (2013.01); *B32B 2262/0292* (2013.01); *B32B 2262/106* (2013.01); *B32B 2262/12* (2013.01); *B32B 2262/14* (2013.01); *B32B 2266/02* (2013.01); *B32B 2266/0214* (2013.01); *B32B 2307/50* (2013.01); *B32B 2307/51* (2013.01); *B32B 2437/00* (2013.01); *B32B 2437/02* (2013.01); *D10B 2331/10* (2013.01); *D10B 2403/033* (2013.01); *Y10T 428/19* (2015.01); *Y10T 428/2481* (2015.01); *Y10T 428/24826* (2015.01); *Y10T 442/608* (2015.04); *Y10T 442/652* (2015.04); *Y10T 442/69* (2015.04)

(56)**References Cited****U.S. PATENT DOCUMENTS**

1,077,556	A	11/1913	Richards
2,440,393	A	4/1948	Clark
2,536,163	A	1/1951	Feild, Jr. et al.
2,763,759	A	9/1956	Sanai et al.
3,249,129	A	5/1966	Renfroe
3,375,156	A	3/1968	Edgar, Jr.
3,415,919	A	12/1968	Kippan
3,439,434	A	4/1969	Tangorra
3,616,170	A	10/1971	Closson, Jr.
3,617,417	A	11/1971	Olson
3,635,625	A	1/1972	Voss
3,681,826	A	8/1972	Bergwerk
3,689,882	A	9/1972	Dessailly
3,694,873	A	10/1972	Crowley
3,734,813	A	5/1973	Pohl
3,785,915	A	1/1974	Closson
3,790,439	A	2/1974	Zosel et al.
3,870,592	A	3/1975	Brock et al.
3,912,567	A	10/1975	Schwartz
4,016,329	A	4/1977	Matsuyama et al.
4,041,203	A	8/1977	Brock et al.
4,059,114	A	11/1977	Richards
4,070,217	A	1/1978	Smith, II et al.
4,100,319	A	7/1978	Schwartz
4,107,364	A	8/1978	Sisson
4,144,371	A	3/1979	Okie et al.
4,168,606	A	9/1979	Callander
4,197,345	A	4/1980	Worrall
4,205,397	A	6/1980	Bechis
4,228,641	A	10/1980	O'Neil
4,265,954	A	5/1981	Romanek
4,310,373	A	1/1982	Schuhmacher et al.
4,355,489	A	10/1982	Heyer et al.
4,410,385	A	10/1983	Murphy et al.
4,410,575	A	10/1983	Obayashi et al.
4,435,457	A	3/1984	Servo et al.
4,445,951	A	5/1984	Lind et al.
4,486,200	A	12/1984	Heyer et al.
4,497,099	A	2/1985	Scott
4,511,615	A	4/1985	Ohta

(56)

References Cited

U.S. PATENT DOCUMENTS

4,576,852 A	3/1986	Burgess et al.	6,013,587 A	1/2000	Truong et al.
4,588,630 A	5/1986	Shimalla	6,017,831 A	1/2000	Beardsley et al.
4,615,188 A	10/1986	Hursh et al.	6,069,097 A	5/2000	Suzuki et al.
4,621,013 A	11/1986	Holtrop et al.	6,086,911 A	7/2000	Godbey
4,647,492 A	3/1987	Grant et al.	6,090,234 A	7/2000	Barone et al.
4,654,099 A	3/1987	Sandman	6,110,572 A	8/2000	Groh et al.
4,695,501 A	9/1987	Robinson	6,119,691 A	9/2000	Angadjivand et al.
4,741,941 A	5/1988	Englebert et al.	6,123,752 A	9/2000	Wu et al.
4,747,901 A	5/1988	Becker et al.	6,174,964 B1	1/2001	Jariwala et al.
4,755,242 A	7/1988	Miller et al.	6,251,154 B1	6/2001	Van Rossen
4,781,296 A	11/1988	Morris et al.	6,284,843 B1	9/2001	Jariwala et al.
4,938,817 A	7/1990	Langley	6,288,157 B1	9/2001	Jariwala et al.
4,980,927 A	1/1991	Wawiluk et al.	6,315,130 B1	11/2001	Olsen
5,003,902 A	4/1991	Benstock et al.	6,332,465 B1	12/2001	Xue et al.
5,102,724 A	4/1992	Okawahara et al.	6,391,200 B2	5/2002	Pulek et al.
5,106,678 A	4/1992	Abu-Isa	6,391,807 B1	5/2002	Jariwala et al.
5,111,558 A *	5/1992	Ridley A43C 9/00 24/300	6,395,211 B1	5/2002	Dettmer et al.
5,118,550 A	6/1992	Baravian et al.	6,406,576 B1	6/2002	Benedict et al.
5,130,178 A	7/1992	Zerfass et al.	6,406,577 B1	6/2002	Benedict et al.
5,132,160 A	7/1992	Bird	6,429,159 B1	8/2002	Watanabe et al.
5,150,787 A	9/1992	Bird et al.	6,492,183 B1	12/2002	Perman et al.
5,203,939 A	4/1993	Sperling et al.	6,503,855 B1	1/2003	Menzies et al.
5,230,701 A	7/1993	Meyer et al.	6,537,930 B1	3/2003	Middlesworth et al.
5,238,733 A	8/1993	Joseph et al.	6,537,935 B1	3/2003	Seth et al.
5,255,833 A	10/1993	McAllister	6,558,784 B1	5/2003	Norton et al.
5,282,900 A	2/1994	McDonnell et al.	6,610,390 B1	8/2003	Kauschke et al.
5,306,275 A	4/1994	Bryan	6,645,611 B2	11/2003	Seth
5,316,838 A	5/1994	Crandall et al.	6,715,188 B1	4/2004	Jackson et al.
5,324,277 A	6/1994	Daugan et al.	6,719,744 B2	4/2004	Kinnear et al.
5,328,758 A	7/1994	Markell et al.	6,769,202 B1	8/2004	Luthi et al.
5,380,580 A	1/1995	Rogers et al.	6,773,718 B2	8/2004	Seth et al.
5,415,779 A	5/1995	Markell et al.	6,783,574 B1	8/2004	Angadjivand et al.
5,420,794 A	5/1995	James	6,784,125 B1	8/2004	Yamakawa et al.
5,423,783 A	6/1995	Battles et al.	6,784,127 B1	8/2004	Yamakawa et al.
5,458,962 A	10/1995	Birch	6,835,256 B2	12/2004	Menzies et al.
5,470,605 A	11/1995	Lundeen	6,875,710 B2	4/2005	Eaton et al.
5,478,628 A	12/1995	Billingsley et al.	6,880,211 B2	4/2005	Jackson et al.
5,482,756 A	1/1996	Berger et al.	6,910,288 B2	6/2005	Dua
5,496,507 A	3/1996	Angadjivand et al.	6,942,683 B2	9/2005	Dunshee
5,501,794 A	3/1996	Van De Graaf et al.	6,942,894 B2	9/2005	Alberg et al.
5,507,968 A	4/1996	Palaikis	6,967,178 B2	11/2005	Zhou et al.
5,539,042 A	7/1996	Birch	6,986,825 B1	1/2006	Squires et al.
5,573,619 A	11/1996	Benedict et al.	7,066,182 B1	6/2006	Dunshee
5,586,563 A	12/1996	Newman	7,147,734 B2	12/2006	Ogle et al.
5,595,649 A	1/1997	Markell et al.	7,147,904 B1	12/2006	Crawford
5,603,747 A	2/1997	Matuda et al.	7,150,774 B2	12/2006	Kubokawa et al.
5,604,271 A	2/1997	Lundeen	7,169,202 B2	1/2007	Kubokawa
5,609,706 A	3/1997	Benedict et al.	7,195,729 B2	3/2007	Jackson et al.
5,624,726 A	4/1997	Sanocki et al.	7,230,043 B2	6/2007	Klun et al.
5,629,079 A	5/1997	Battles et al.	7,238,314 B2	7/2007	Jackson et al.
5,639,287 A	6/1997	Van De Graaf et al.	7,267,681 B2	9/2007	Dunshee
5,641,563 A	6/1997	Truong et al.	7,291,236 B2	11/2007	Guilhem et al.
5,651,853 A	7/1997	Wrigley et al.	7,293,371 B2	11/2007	Aveni
5,655,833 A	8/1997	Raczynski	7,303,805 B2	12/2007	Seth et al.
5,682,618 A	11/1997	Johnson et al.	7,311,880 B2	12/2007	Perman et al.
5,695,853 A	12/1997	Billingsley et al.	7,320,719 B2	1/2008	Van De Graaf et al.
5,698,358 A	12/1997	Yu	7,390,451 B2	6/2008	Jackson et al.
5,714,229 A	2/1998	Ogden	7,393,371 B2	7/2008	O'Gary et al.
5,743,273 A	4/1998	Newman	7,547,650 B2	6/2009	Keep
5,744,207 A	4/1998	Bartusiak et al.	7,709,075 B2	5/2010	Suzuki
5,759,659 A	6/1998	Sanocki et al.	7,785,509 B2	8/2010	Perera et al.
5,783,290 A	7/1998	Isaac et al.	7,955,549 B2	6/2011	Noda et al.
5,803,086 A	9/1998	Scholz et al.	8,172,970 B2 *	5/2012	Sussmann A43D 8/24 156/272.8
5,858,140 A	1/1999	Berger et al.	8,850,719 B2	10/2014	Hawkinson et al.
5,858,515 A	1/1999	Stokes et al.	8,906,275 B2	12/2014	Davis et al.
5,879,493 A	3/1999	Johnson et al.	12,127,631 B2 *	10/2024	Reichard A43B 3/122
5,883,019 A	3/1999	Troung et al.	2001/0008683 A1	7/2001	Takai et al.
5,888,157 A	3/1999	Guenther et al.	2001/0035598 A1	11/2001	Ampulski et al.
5,928,070 A	7/1999	Lux	2001/0051474 A1	12/2001	Matsuda et al.
5,939,339 A	8/1999	Delmore et al.	2001/0051484 A1	12/2001	Ishida et al.
RE36,323 E	10/1999	Thompson et al.	2002/0070471 A1	6/2002	Lee et al.
5,981,033 A	11/1999	Haunschild et al.	2002/0090875 A1	7/2002	Lasko et al.
6,004,642 A	12/1999	Langford	2002/0132121 A1	9/2002	Palacio et al.
6,004,891 A	12/1999	Tuppin et al.	2002/0137418 A1	9/2002	Seth
			2002/0150610 A1	10/2002	Kono et al.
			2002/0172792 A1	11/2002	Jarvis et al.
			2003/0060858 A1	3/2003	Kieval et al.
			2003/0091617 A1	5/2003	Mrozinski et al.

US 12,404,615 B2

Page 4

(56)	References Cited			2010/0035963	A1	2/2010	Chajut et al.	
	U.S. PATENT DOCUMENTS			2010/0037483	A1*	2/2010	Meschter	A43B 3/26 36/47
				2010/0077634	A1	4/2010	Bell	
2003/0119411	A1	6/2003	Yamakawa et al.	2010/0095554	A1	4/2010	Gillespie	
2003/0124310	A1	7/2003	Ellis et al.	2010/0147444	A1	6/2010	Hsu et al.	
2003/0137221	A1	7/2003	Radziemski et al.	2010/0154256	A1*	6/2010	Dua	A43B 7/20 12/146 B
2003/0162458	A1	8/2003	Tsujiyama et al.					
2003/0171051	A1	9/2003	Bergsten et al.	2010/0175276	A1	7/2010	Dojan et al.	
2004/0050506	A1	3/2004	Haiber et al.	2010/0186874	A1	7/2010	Sussmann	
2004/0060858	A1	4/2004	Lucas et al.	2010/0199406	A1	8/2010	Dua et al.	
2004/0087230	A1	5/2004	Wildeman	2010/0199520	A1	8/2010	Dua et al.	
2004/0118018	A1*	6/2004	Dua	2010/0251491	A1	10/2010	Dojan et al.	
			A43B 1/028 36/3 A	2010/0287790	A1	11/2010	Sokolowski et al.	
2004/0186482	A1	9/2004	Kolb et al.	2010/0293814	A1*	11/2010	Skaja	B29D 35/122 428/206
2004/0216329	A1	11/2004	Evans					
2004/0224596	A1	11/2004	Mathis et al.	2010/0325916	A1	12/2010	Dua et al.	
2004/0241399	A1	12/2004	Marmon et al.	2011/0098147	A1	4/2011	Crane	
2005/0003139	A1	1/2005	Keller	2011/0250378	A1	10/2011	Eaton et al.	
2005/0084647	A1	4/2005	Menzies et al.	2012/0157904	A1	6/2012	Stein	
2005/0106326	A1	5/2005	Audenaert et al.	2012/0227282	A1	9/2012	Hawkinson et al.	
2005/0160629	A1	7/2005	Jungkind	2012/0291314	A1	11/2012	Sokolowski et al.	
2005/0188907	A1	9/2005	D'Henin	2013/0067639	A1	3/2013	Dua et al.	
2005/0193592	A1	9/2005	Dua et al.	2013/0067768	A1	3/2013	Dua et al.	
2005/0217226	A1	10/2005	Sundet et al.	2013/0068378	A1	3/2013	Dua et al.	
2006/0009106	A1	1/2006	Nishimura et al.	2013/0069266	A1	3/2013	Dua et al.	
2006/0036230	A1	2/2006	Mills et al.	2013/0232815	A1	9/2013	Meythaler et al.	
2006/0081329	A1	4/2006	Kikuchi	2013/0255103	A1	10/2013	Dua et al.	
2006/0121812	A1	6/2006	Suzuki et al.	2013/0260104	A1	10/2013	Dua et al.	
2006/0135015	A1	6/2006	Seo	2013/0260629	A1	10/2013	Dua et al.	
2006/0141881	A1	6/2006	Bergsten et al.	2013/0285294	A1	10/2013	Huang et al.	
2006/0143947	A1	7/2006	Ellis et al.	2015/0123305	A1	5/2015	Davis et al.	
2006/0165939	A1	7/2006	Hottner	2016/0302508	A1*	10/2016	Kormann	G06Q 99/00
2006/0169387	A1	8/2006	Nayar et al.	2018/0352899	A1*	12/2018	Ng	B29D 35/068
2006/0180067	A1	8/2006	Yamazaki et al.	2019/0037967	A1	2/2019	McFarland, II et al.	
2006/0204558	A1	9/2006	Kantner et al.					
2006/0223403	A1	10/2006	Mahboob	FOREIGN PATENT DOCUMENTS				
2006/0246260	A1	11/2006	Sundet et al.	CN	1190931	A	8/1998	
2006/0276095	A1	12/2006	Dua et al.	CN	1201846	A	12/1998	
2007/0049148	A1	3/2007	Chien et al.	CN	2354400	Y	12/1999	
2007/0049153	A1	3/2007	Dunbar et al.	CN	1278424	A	1/2001	
2007/0049646	A1	3/2007	Moore et al.	CN	1322869	A	11/2001	
2007/0129524	A1	6/2007	Sunkara	CN	1451330	A	10/2003	
2007/0135008	A1	6/2007	Hall et al.	CN	1497086	A	5/2004	
2007/0169379	A1	7/2007	Hazenberget al.	CN	1571871	A	1/2005	
2007/0176325	A1	8/2007	Jackson et al.	CN	1802104	A	7/2006	
2007/0186482	A1	8/2007	Sudo	CN	101001546	A	7/2007	
2007/0199210	A1	8/2007	Vattes et al.	CN	101125044	A	2/2008	
2007/0212963	A1	9/2007	Keep	CN	101326212	A	12/2008	
2007/0271821	A1	11/2007	Meschter	CN	101500794	A	8/2009	
2007/0298671	A1	12/2007	Noda et al.	CN	101542032	A	9/2009	
2007/0298697	A1	12/2007	Charmoille et al.	CN	102137600	A	7/2011	
2008/0001431	A1	1/2008	Thompson et al.	CN	102292487	A	12/2011	
2008/0022642	A1	1/2008	Fox et al.	DE	2109143	A1	10/1972	
2008/0022643	A1	1/2008	Fox et al.	DE	2753897	A1	6/1978	
2008/0026659	A1	1/2008	Brandner et al.	DE	19642253	A1	8/1997	
2008/0044622	A1	2/2008	Noda et al.	DE	29911710	U1	12/1999	
2008/0064279	A1	3/2008	Browning et al.	DE	102004030914	A1	1/2006	
2008/0070464	A1	3/2008	Alberg et al.	DE	102006009974	A1	9/2007	
2008/0085399	A1	4/2008	Noda et al.	DE	102007004146	A1	7/2008	
2008/0134543	A1	6/2008	Klein	DE	102007035729	A1	2/2009	
2008/0139067	A1	6/2008	Mukai et al.	EP	0264132	A2	4/1988	
2008/0148946	A1	6/2008	Lotgerink-Bruinenberg	EP	0304301	A2	2/1989	
2008/0168684	A1*	7/2008	Khalifa	EP	0327402	A2	8/1989	A43B 3/102 36/102
				EP	0370835	A2	5/1990	
2008/0169055	A1	7/2008	Seliskar et al.	EP	0559969	A1	9/1993	
2008/0196136	A1	8/2008	Fellouhe et al.	EP	1068889	A1	1/2001	
2008/0241476	A1	10/2008	Olguin	EP	1167606	A1	1/2002	
2008/0245720	A1	10/2008	Hutchinson et al.	EP	1264561	A1	12/2002	
2008/0245725	A1	10/2008	Patel et al.	EP	1340848	A1	9/2003	
2008/0246182	A1	10/2008	Patel et al.	EP	1342825	A1	9/2003	
2008/0276805	A1	11/2008	Lotgerink-Bruinenberg	EP	1418092	A1	5/2004	
2009/0068908	A1	3/2009	Hinchcliff	EP	1491105	A1	12/2004	
2009/0100705	A1	4/2009	Cook et al.	EP	1589140	A1	10/2005	
2009/0140470	A1	6/2009	Dua et al.	EP	1884582	A1	2/2008	
2009/0151397	A1	6/2009	Sturman et al.	EP	2084981	A1	8/2009	
2009/0277041	A1	11/2009	Hubner	EP	2393972	A2	12/2011	
2009/0300942	A1*	12/2009	Peikert	EP	2397593	A2	12/2011	D04H 13/00 12/146 B

(56)

References Cited

FOREIGN PATENT DOCUMENTS

EP	2397594	A2	12/2011	JP	2000248454	A	9/2000
EP	2407302	A2	1/2012	JP	2001058002	A	3/2001
EP	2453048	A1	5/2012	JP	2001179889	A	7/2001
EP	2488685	A1	8/2012	JP	2001181905	A	7/2001
EP	2530195	A1	12/2012	JP	2001523772	A	11/2001
EP	2397593	B1	7/2013	JP	2002011789	A	1/2002
EP	2397594	B1	11/2013	JP	2002234547	A	8/2002
EP	2453048	B1	11/2013	JP	2002317367	A	10/2002
EP	2683866	A1	1/2014	JP	2003117325	A	4/2003
EP	2488685	B1	11/2014	JP	3093555	U	5/2003
FR	1176314	A	4/1959	JP	2003517950	A	6/2003
GB	1296202	A	11/1972	JP	2003227060	A	8/2003
GB	1353183	A	5/1974	JP	2003524534	A	8/2003
GB	1384326	A	2/1975	JP	2003310331	A	11/2003
GB	1411401	A	10/1975	JP	2004076445	A	3/2004
GB	1491602	A	11/1977	JP	2004150008	A	5/2004
GB	2115741	A	9/1983	JP	2004192182	A	7/2004
GB	2346624	A	8/2000	JP	2004211258	A	7/2004
JP	S473280	Y1	2/1972	JP	2004244791	A	9/2004
JP	S4732180	U	12/1972	JP	2004306149	A	11/2004
JP	S6052237	B2	11/1985	JP	2005029907	A	2/2005
JP	S61655	A	1/1986	JP	2005187954	A	7/2005
JP	S6124634	A	2/1986	JP	2005212055	A	8/2005
JP	S61111993	U	7/1986	JP	2005245542	A	9/2005
JP	S62194030	U	12/1987	JP	2006511306	A	4/2006
JP	S62203211	U	12/1987	JP	2006192723	A	7/2006
JP	S62203212	U	12/1987	JP	2006193881	A	7/2006
JP	S63282352	A	11/1988	JP	2006223403	A	8/2006
JP	H0257993	U	4/1990	JP	2006274453	A	10/2006
JP	H0266623	U	5/1990	JP	2006299425	A	11/2006
JP	H02165942	A	6/1990	JP	2006328221	A	12/2006
JP	H02130206	U	10/1990	JP	2007516046	A	6/2007
JP	H02286225	A	11/1990	JP	2007522908	A	8/2007
JP	H0386536	A	4/1991	JP	2007537372	A	12/2007
JP	H03200885	A	9/1991	JP	2008007930	A	1/2008
JP	H03224421	A	10/1991	JP	2008101285	A	5/2008
JP	H04108152	A	4/1992	JP	2008513626	A	5/2008
JP	H054291	A	1/1993	JP	2008517183	A	5/2008
JP	H0522792	A	1/1993	JP	2008138908	A	6/2008
JP	H05200890	A	8/1993	JP	2008169506	A	7/2008
JP	H05321119	A	12/1993	JP	2009538197	A	11/2009
JP	H0616426	U	3/1994	JP	2010534535	A	11/2010
JP	H06126754	A	5/1994	JP	2011081082	A	4/2011
JP	H06158501	A	6/1994	JP	4785700	B2	10/2011
JP	H06277252	A	10/1994	JP	2012517535	A	8/2012
JP	H0776052	A	3/1995	JP	5226844	B2	7/2013
JP	H07157957	A	6/1995	JP	5411906	B2	2/2014
JP	H07197355	A	8/1995	JP	5615786	B2	10/2014
JP	3016014	U	9/1995	JP	2015522722	A	8/2015
JP	H07252762	A	10/1995	KR	20050088367	A	9/2005
JP	H07292504	A	11/1995	KR	20090023339	A	3/2009
JP	H08301	A	1/1996	WO	WO-0051458	A1	9/2000
JP	H08104164	A	4/1996	WO	WO-0145927	A1	6/2001
JP	H08503745	A	4/1996	WO	WO-02054894	A1	7/2002
JP	H08296161	A	11/1996	WO	WO-03007864	A1	1/2003
JP	H08323903	A	12/1996	WO	WO-03021024	A1	3/2003
JP	H0913252	A	1/1997	WO	WO-2004060093	A1	7/2004
JP	H0958200	A	3/1997	WO	WO-2005000055	A1	1/2005
JP	H0965907	A	3/1997	WO	WO-2005052235	A1	6/2005
JP	H09188951	A	7/1997	WO	WO-2005063071	A2	7/2005
JP	H09267456	A	10/1997	WO	WO-2005066250	A1 *	7/2005
JP	H09275293	A	10/1997	WO	WO-2005082188	A1	9/2005
JP	H1077556	A	3/1998	WO	WO-2005112677	A2	12/2005
JP	H1077566	A	3/1998	WO	WO-2007103244	A2	9/2007
JP	H10245760	A	9/1998	WO	WO-2007139567	A1	12/2007
JP	H10273868	A	10/1998	WO	WO-2007140054	A1	12/2007
JP	H10292271	A	11/1998	WO	WO-2008069280	A1	6/2008
JP	H10323661	A	12/1998	WO	WO-2008077785	A1	7/2008
JP	H1112912	A	1/1999	WO	WO-2008111294	A1	9/2008
JP	H1161616	A	3/1999	WO	WO-2009027701	A1	3/2009
JP	H1190836	A	4/1999	WO	WO-2010036557	A1	4/2010
JP	H11217799	A	8/1999	WO	WO-2011046762	A1	4/2011
JP	H11320736	A	11/1999				
JP	H11320800	A	11/1999				
JP	2000503610	A	3/2000				

..... A43B 13/04

(56)

References Cited

FOREIGN PATENT DOCUMENTS

WO WO-2013181082 A1 12/2013
 WO WO-2015190920 A1 12/2015

OTHER PUBLICATIONS

Advisory Action dated Aug. 1, 2012 in U.S. Appl. No. 12/367,274, filed Feb. 6, 2009.

Advisory Action in U.S. Appl. No. 12/579,838, dated Mar. 23, 2018, 4 pages.

Chawla, Krishan Kumar, "Fibrous Materials," Cambridge University Press, p. 42 (1998).

Chinese Office Action dated Apr. 28, 2015 in Chinese Patent Application No. 201410041109.X.

Chinese Office Action dated Jan. 10, 2014 and corresponding Search Report dated Nov. 26, 2013 in Chinese Application No. 201080046286.7.

Chinese Office Action dated Jan. 27, 2016 in Chinese Patent Application No. 201380028031.1 (51-4114).

Chinese Office Action dated May 25, 2015, in Chinese Application No. 201080046286.7.

Chinese Office Action dated May 6, 2015 in Chinese Patent Application No. 201280012038.X.

Chinese Office Action dated Nov. 15, 2014, in Chinese Application No. 201080046286.7.

Co-pending U.S. Appl. No. 14/528,491, filed Oct. 30, 2014.

Decision of Refusal, and English language translation thereof, in Japanese Application No. 2016-110241, dated Nov. 28, 2017, 5 pages.

Decision of Refusal dated Jan. 24, 2014 in Japanese Patent Application No. 2011-225838.

Decision of Refusal dated Jan. 29, 2015, in Japanese Patent Application No. 2011-225846.

Decision of Refusal dated Mar. 26, 2015, in Japanese Patent Application No. 2011-225849.

Decision to Grant a Patent dated Aug. 14, 2014 in Japanese Patent Application No. 2011-225838.

Districo—Bonding Yarns—Grilon® Fusible bonding yarns (Jul. 16, 2016); http://districo.com/page_gb/bondingyarn.htm.

European Office Action dated Aug. 31, 2015 in European Patent Application No. 11174751.5.

European Office Action dated Jan. 22, 2014 in European Patent Application No. 11174751.5.

European Office Action dated Mar. 31, 2015, in European Patent Application No. 12718759.9 (51-3460).

European Office Action dated Nov. 28, 2014, in European Patent Application No. 11174751.5.

European Search Report and Written Opinion dated Jun. 11, 2012 in European Patent Application No. 11174747.3.

European Search Report and Written Opinion dated Mar. 6, 2012 in European Patent Application No. 11174751.5.

European Search Report dated Apr. 17, 2012 in European Patent Application No. 11174753.1.

European Search Report dated Jan. 30, 2012 in European Patent Application No. 11174750.7.

European Search Report dated Jan. 30, 2012 in European Patent Application No. 11175063.4.

European Search Report dated Nov. 25, 2011 in European Patent Application No. 11174747.3.

European Search Report mailed Nov. 25, 2011, for European Application No. 12001388.3 filed Jan. 27, 2010.

Examination Report dated Oct. 31, 2014 in European Patent Application No. 11174747.3.

Extended European Search Report dated Jul. 17, 2014 in European Patent Application No. 14166582.8.

Extended European Search Report in connection with European Application No. 16000062.6, dated Jun. 30, 2016, 7 pages.

Extended European Search Report in connection with European Application No. 17151883.0, dated Mar. 24, 2017, 9 pages.

Final Office Action dated Dec. 24, 2014 in U.S. Appl. No. 13/426,349.
 Final Office Action dated Dec. 4, 2014 in U.S. Appl. No. 12/367,274.
 Final Office Action dated Feb. 23, 2015 in U.S. Appl. No. 12/579,838.
 Final Office Action dated Feb. 23, 2015 in U.S. Appl. No. 13/426,290.
 Final Office Action dated May 19, 2015, in U.S. Appl. No. 13/426,323.
 Final Office Action dated May 21, 2015, in Japanese Patent Application No. 2013-164367.

Final Office Action dated May 9, 2012 in connection with U.S. Appl. No. 12/367,274, filed Feb. 6, 2009.

Final Office Action dated Nov. 28, 2012 in U.S. Appl. No. 12/579,838, filed Oct. 15, 2009.

Final Office Action dated Oct. 27, 2015, in U.S. Appl. No. 13/426,361.

Final Office Action for U.S. Appl. No. 13/426,290 dated Jan. 23, 2019, 7 pages.

Humphries, Mary. Fabric Reference. Prentice Hall, Upper Saddle River, NJ. 1996. pp. 84-85.

International Preliminary Report and Written Opinion dated Apr. 26, 2012 in PCT Application No. PCT/US2010/051149.

International Preliminary Report dated Aug. 18, 2011 in PCT Application No. PCT/US2010/022216.

International Preliminary Report dated Sep. 19, 2013 in connection with PCT Application No. PCT/US2012/027974.

International Preliminary Report on Patentability dated Dec. 11, 2014, for PCT Application No. PCT/US2013/042581.

International Preliminary Report on Patentability for Application No. PCT/US2013/034901, dated Oct. 16, 2014.

International Preliminary Report on Patentability for Application No. PCT/US2013/034916, dated Oct. 16, 2014.

International Preliminary Report on Patentability for PCT Application No. PCT/US2013/034931 dated Oct. 16, 2014.

International Preliminary Report on Patentability in connection with International Application No. PCT/US2016/021442, dated Sep. 12, 2017, 7 pages.

International Search Report and Written Opinion dated Jan. 14, 2011 in connection with PCT Application No. PCT/US2010/034779.

International Search Report and Written Opinion dated Jul. 4, 2012 in PCT Application No. PCT/US2012/027974.

International Search Report and Written Opinion dated Sep. 30, 2013 in connection with PCT Application No. PCT/US2013/042581.

International Search Report and Written Opinion for Application No. PCT/US2013/034901, dated Dec. 2, 2013.

International Search Report and Written Opinion for Application No. PCT/US2013/034916, dated Sep. 19, 2013.

International Search Report and Written Opinion for PCT/US2020/060236, dated Mar. 5, 2021.

International Search Report and Written Opinion for PCT/US2020/060247, dated Mar. 23, 2021.

International Search Report and Written Opinion for PCT/US2020/061032, mailed Dec. 4, 2021 (141406-2470).

International Search Report and Written Opinion in connection with International Application No. PCT/US2013/034931, dated Sep. 24, 2014, 12 pages.

International Search Report and Written Opinion in PCT Application No. PCT/US2010/022216, dated Dec. 6, 2010.

International Search Report and Written Opinion in PCT Application No. PCT/US2010/051149, dated Mar. 18, 2011.

International Search Report in connection with International Application No. PCT/US2016/021442, dated May 23, 2016, 3 pages.

Invitation to Pay Additional Fees and, Where Applicable, Protest Fee (with Search Report) for Application No. PCT/US2013/034901, mailed Aug. 28, 2013, 11 pages.

Jangala P.K., "Effect of Bonding Variables in Thermal Bonding of Polypropylene Nonwovens," Doctoral Dissertations, Aug. 2001, pp. 1-109.

Japanese Office Action dated Jul. 9, 2015 in Japanese Patent Application No. 2011-549186 (51-2318).

Lord, Peter R., "Handbook of Yarn Technology," in Science, Technology and Economics, Boca Raton, Florida, Woodhead Publishing, pp. 56-61 (2003).

Non-Final Office Action dated Aug. 27, 2014 in U.S. Appl. No. 13/426,323.

(56)

References Cited**OTHER PUBLICATIONS**

Non-Final Office Action dated Aug. 4, 2014 in U.S. Appl. No. 13/426,349.

Non-Final Office Action dated Jul. 21, 2014 in U.S. Appl. No. 12/367,274.

Non-Final Office Action dated May 12, 2015 in U.S. Appl. No. 13/426,349.

Non-Final Office Action dated Oct. 30, 2015, in U.S. Appl. No. 12/579,838.

Non-Final Office Action dated Sep. 2, 2015 in U.S. Appl. No. 12/367,274.

Non-Final Office Action dated Sep. 4, 2015 in U.S. Appl. No. 13/426,290.

Non-Final Office Action for U.S. Appl. No. 15/439,339 dated Dec. 11, 2018, 13 pages.

Non-Final Office Action in U.S. Appl. No. 12/367,274, dated Nov. 29, 2016 (18 pages).

Notice of Allowance date Apr. 11, 2014 in U.S. Appl. No. 13/045,168.

Notice of Allowance dated Aug. 1, 2014 in U.S. Appl. No. 13/482,182.

Notice of Allowance dated Aug. 25, 2015 in Japanese Patent Application No. 2011-225849.

Notice of Allowance dated Feb. 1, 2013 in European Patent Application No. 11174750.7 filed Jul. 20, 2011.

Notice of Allowance dated Feb. 1, 2013 in European Patent Application No. 11174753.1 filed Jul. 20, 2011.

Notice of Allowance dated Feb. 1, 2013 in European Patent Application No. 11175063.4 filed Jul. 22, 2011.

Notice of Allowance dated Feb. 21, 2013 in connection with Japanese Patent Application No. 2011-225851, filed Oct. 13, 2011.

Notice of Allowance dated Feb. 21, 2013 in European Patent Application No. 2011225851 filed Oct. 13, 2011.

Notice of Allowance dated Jul. 24, 2012 in European Patent Application No. 10734588.6 filed Jun. 27, 2011.

Notice of Allowance dated May 22, 2013 in connection with European Patent Application No. 11174753.1, filed Jul. 20, 2011.

Notice of Allowance dated Nov. 13, 2013 in connection with Chinese Patent Application No. 201080005095.6 and the English translation thereof.

Notice of Allowance dated Oct. 10, 2013 in connection with Japanese Patent Application No. 2011-225827, filed Oct. 13, 2011 and the English translation thereof.

Notice of Allowance dated Sep. 15, 2015, for European Patent Application No. 13723278.1.

Notice of Allowance dated Sep. 23, 2015, in U.S. Appl. No. 13/426,349.

Notice of Allowance dated Sep. 3, 2015 in European Patent Application No. 12718759.9.

Notice of Allowance mailed Apr. 12, 2017, in U.S. Appl. No. 13/438,535, 13 pages.

Notice of Opposition in European Application No. 11174751.5, dated Feb. 5, 2018, 74 pages.

Notice to Terminate Reconsideration before Appeal & Result of Reconsideration dated Oct. 16, 2014 for Japanese Patent Application No. 2011-549186.

Notification of Reason(s) for Refusal dated Aug. 21, 2014 in Japanese Patent Application No. 2013-164367.

Notification of Reason(s) for Refusal dated May 1, 2014 in Japanese Patent Application No. 2011-225846.

Notification of Reason(s) for Refusal dated May 22, 2014 in Japanese Patent Application No. 2011-225849.

Notification of Reason(s) for Refusal dated May 29, 2014 in Japanese Patent Application No. 2012-534219.

Office Action, and English language translation thereof, in Chinese Application No. 201380028031.1, dated Jul. 24, 2015, 14 pages.

Office Action and English language translation thereof, in connection with Chinese Application No. 201380029223.4, dated Apr. 12, 2016, 28 pages.

Office Action and English language translation thereof, in connection with Chinese Application No. 201380029223.4, dated Oct. 27, 2016, 4 pages.

Office Action and English language translation thereof, in connection with Chinese Application No. 201410041109.X, dated Dec. 31, 2015, 7 pages.

Office Action and English language translation thereof, in connection with Chinese Application No. 201410041109.X, dated Jan. 23, 2017, 37 pages.

Office Action and English language translation thereof, in connection with Chinese Application No. 201610085379.X, dated Aug. 28, 2017, 16 pages.

Office Action and English language translation thereof, in connection with Japanese Application No. 2011-549186, dated Jan. 21, 2016, 8 pages.

Office Action and English language translation thereof, in connection with Japanese Application No. 2015-086916, dated Jun. 30, 2016, 11 pages.

Office Action and English language translation thereof, in connection with Japanese Application No. 2015-515080, dated May 10, 2016, 9 pages.

Office Action and English language translation thereof, in connection with Japanese Application No. 2016-110241, dated Apr. 20, 2017, 8 pages.

Office Action dated Aug. 17, 2015, in U.S. Appl. No. 13/438,520.

Office Action dated Aug. 27, 2015 for Chinese Patent Application No. 201380029215.X) and the English translation thereof.

Office Action dated Dec. 1, 2011 in connection with U.S. Appl. No. 12/367,274, filed Feb. 6, 2009.

Office Action dated Feb. 14, 2013 in Japanese Patent Application No. 2011-225838, filed Oct. 13, 2011.

Office Action dated Feb. 21, 2013 in Japanese Patent Application No. 2011-225846, filed Oct. 13, 2011.

Office Action dated Feb. 7, 2013 in Japanese Patent Application No. 2011-225849, filed Oct. 13, 2011.

Office Action dated Feb. 7, 2013 in Japanese Patent Application No. 2011-549186, filed Aug. 1, 2011.

Office Action dated Jan. 22, 2013 in Chinese Application No. 20108005095.6, filed Dec. 12, 2012.

Office Action dated Jan. 24, 2013 in European Patent Application No. 11174751.5 filed Jul. 20, 2011.

Office Action dated Jan. 6, 2014 for U.S. Appl. No. 13/045,168.

Office Action dated Jul. 24, 2015, for Chinese Patent Application No. 201380029223.4 and the English translation thereof.

Office Action dated Jul. 31, 2015, for Chinese Patent Application No. 201380029220.0 and the English translation thereof.

Office Action dated Jun. 13, 2013 in connection with Japanese Patent Application No. 2011-534219, and the English translation thereof.

Office Action dated Jun. 14, 2012 in U.S. Appl. No. 12/579,838, filed Oct. 15, 2009.

Office Action, dated Mar. 16, 2016, with English translation, for Korean Application No. 10-2014-7031180, (11 pages).

Office Action dated Mar. 26, 2015 in U.S. Appl. No. 13/426,361.

Office Action dated May 9, 2013 in connection with Japanese Patent Application No. 2011-225827, filed Oct. 13, 2011 and the English translation thereof.

Office Action dated Nov. 11, 2013 for European Patent Application No. 10779359.8.

Office Action dated Oct. 1, 2014 in U.S. Appl. No. 13/426,290.

Office Action dated Sep. 24, 2015, in U.S. Appl. No. 13/426,323.

Office Action dated Sep. 30, 2014 in U.S. Appl. No. 12/579,838.

Office Action, end English language translation thereof, in connection with Chinese Application No. 201280012038.X, dated Jul. 13, 2016, 6 pages.

Office Action, end English language translation thereof, in connection with Chinese Application No. 201380029215.X, dated May 9, 2016, 7 pages.

Office Action, end English language translation thereof, in connection with Chinese Application No. 201380029215.X, dated Nov. 3, 2016, 6 pages.

Office Action, end English language translation thereof, in connection with Chinese Application No. 201410041109.X, dated Jul. 11, 2016, 19 pages.

(56)

References Cited**OTHER PUBLICATIONS**

Office Action, end English languagetranslation thereof, in connection with Chinese Application No. 201280012038.X, dated Dec. 8, 2015, 14 pages.

Office Action for U.S. Appl. No. 14/528,491, dated Dec. 5, 2016 (6 pages).

Office Action in connection with European Application No. 13739302.1 dated Mar. 15, 2017, 5 pages.

Office Action in connection with European Application No. 13739302.1 dated Oct. 4, 2017, 5 pages.

Office Action in connection with European Application No. 14166582.8 dated Dec. 8, 2015, 4 pages.

Office Action in connection with European Application No. 14166582.8. dated Jun. 28, 2016, 6 pages.

Office Action in connection with European Application No. 14166582.8. dated May 29, 2017, 8 pages.

Office Action in connection with European Application No. 14166582.8 dated Nov. 10, 2016, 9 pages.

Office Action in U.S. Appl. No. 12/367,274, dated Sep. 27, 2017 9 pages.

Office Action in U.S. Appl. No. 12/579,838, dated Nov. 28, 2017; 8 pages.

Office Action in U.S. Appl. No. 13/426,290, dated Feb. 26, 2018, 11 pages.

Office Action in U.S. Appl. No. 13/426,323, dated Sep. 19, 2017 22 pages.

Office Action in U.S. Appl. No. 13/438,535, dated Feb. 23, 2017, 17 pages.

Office Action in U.S. Appl. No. 14/956,783 dated Nov. 15, 2017, 12 pages.

Office Action in U.S. Appl. No. 15/206,495, dated Feb. 16, 2018 12 pages.

Office Action mailed Mar. 27, 2017 for U.S. Appl. No. 13/426,290, 12 pages.

Office Action mailed Mar. 30, 2016 in U.S. Appl. No. 13/426,290.

Office Action mailed Mar. 30, 2017 for U.S. Appl. No. 13/426,323, 24 pages.

Partial European Search Report dated Nov. 28, 2011 in European Patent Application No. 11177097.0.

Partial European Search Report dated Nov. 4, 2011 in connection with European Patent Application No. 11175063.4.

Partial European Search Report dated Nov. 4, 2011 in European Patent Application No. 11174750.7.

Partial European Search Report dated Nov. 7, 2011 in European Patent Application No. 11174751.5.

Response to European Office Action filed May 16, 2014 in European Patent Application No. 11174751.5.

Response to European Search Report and Written Opinion filed Sep. 21, 2012 in European Patent Application No. 11174751.5.

Response to European Search Report dated Jan. 11, 2013 in European Patent Application No. 11174747.3.

Response to European Search Report filed Aug. 15, 2012 in European Patent Application No. 11175063.4.

Response to European Search Report filed Aug. 16, 2012 in European Patent Application No. 11174750.7.

Response to European Search Report filed Dec. 21, 2011 in European Patent Application No. 11174747.3.

Response to Final Office Action dated Jul. 25, 2012 for U.S. Appl. No. 12/368,274, filed Feb. 6, 2009.

Response to Final Office Action filed Jul. 25, 2012 in connection with U.S. Appl. No. 12/367,274, filed Feb. 6, 2009.

Response to Final Office Action filed Mar. 13, 2013 in U.S. Appl. No. 12/579,838, filed Oct. 15, 2009.

Response to Office Action dated Mar. 1, 2012 for U.S. Appl. No. 12/368,274, filed Feb. 6, 2009.

Response to Office Action filed Aug. 2, 2013 in connection with European Patent Application No. 11174751.5.

Response to Office Action filed Aug. 29, 2013 in connection with Japanese Patent Application No. 2011-225827, filed Oct. 13, 2011 and the English translation thereof.

Response to Office Action filed Aug. 6, 2013 in connection with Chinese Patent Application No. 201080005095.6 filed Jul. 21, 2011 and the English translation thereof.

Response to Office Action filed Aug. 6, 2013 in connection with Japanese Patent Application No. 2011-225849, filed Oct. 13, 2011 and the English translation thereof.

Response to Office Action filed Aug. 7, 2013 in connection with Japanese Patent Application No. 2011-549186, filed Aug. 1, 2011 and the English translation thereof.

Response to Office Action filed Jul. 10, 2013 in connection with Japanese Patent Application No. 2011-225846, filed Oct. 13, 2011 and the English translation thereof.

Response to Office Action filed Jun. 10, 2013 in connection with Japanese Patent Application No. 2011-225838, filed Oct. 13, 2011 and the English translation thereof.

Response to Office Action filed Mar. 1, 2012 in connection with U.S. Appl. No. 12/367,274, filed Feb. 6, 2009.

Response to Office Action filed Sep. 10, 2013 in connection with Japanese Patent Application No. 2011-534219, filed Apr. 11, 2012 and the English translation thereof.

Response to Office Action filed Sep. 14, 2012 in U.S. Appl. No. 12/579,838, filed Oct. 15, 2009.

Response to Result of Reconsideration filed Dec. 19, 2014, in Japanese Patent Application No. 2011-549186 (51/2318).

Third Chinese Office Action (English translation of relevant portions only) for Chinese Patent Application No. 2013800292200, dated approximately Jan. 3, 2017 (10 pages).

Voluntary Amendment filed Apr. 12, 2012 in connection with Chinese Patent Application No. 20108005095.6, filed Jul. 21, 2011.

Voluntary Amendment filed Jan. 10, 2013 filed connection with Chinese Patent Application No. 201080046286.7, filed Apr. 13, 2012.

Voluntary Amendment filed May 15, 2012 in Japanese Patent Application No. 2012-534219 filed Apr. 11, 2012.

Voluntary Amendment filed Oct. 25, 2011 in Japanese Patent Application No. 2011-549186 filed Aug. 1, 2011.

Wise, R.J. Excerpt: "Thermal Welding of Polymers", Abington Publishing, 1999, 15 pages.

Written Opinion for PCT/US2020/060236, mailed Nov. 23, 2021 (141406-2410).

Written Opinion for PCT/US2020/060247 mailed Oct. 28, 2021 (141406-2420).

Written Opinion for PCT/US2020/061032 mailed Nov. 22, 2021 (141406-2470).

* cited by examiner

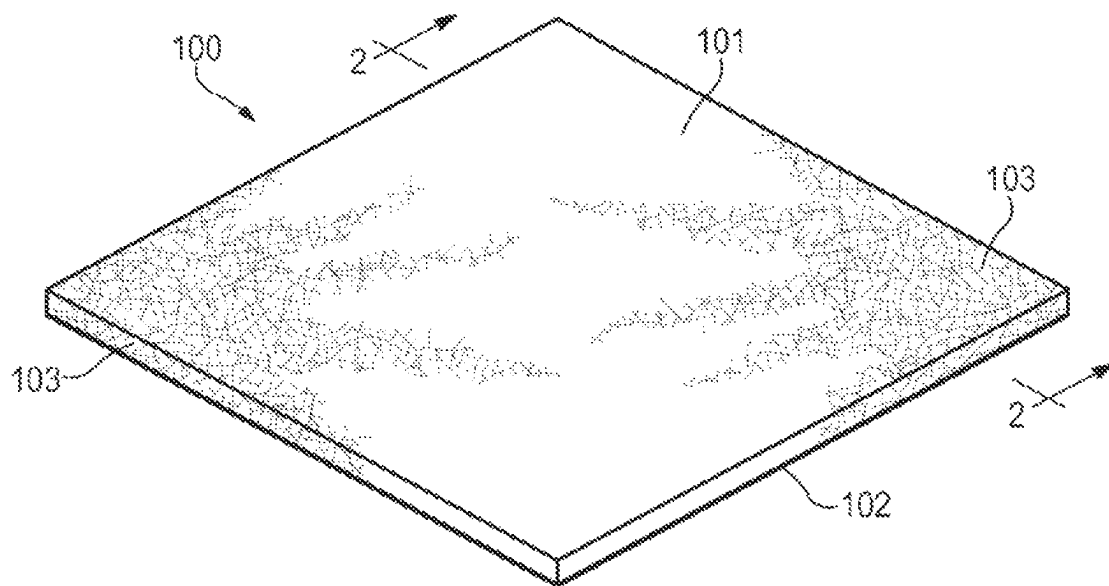


Figure 1

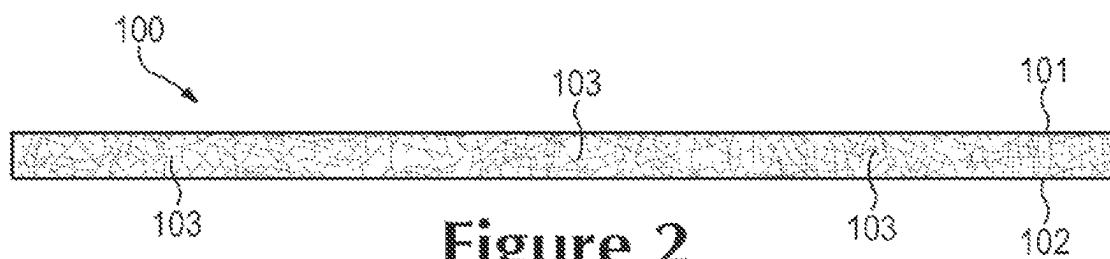


Figure 2

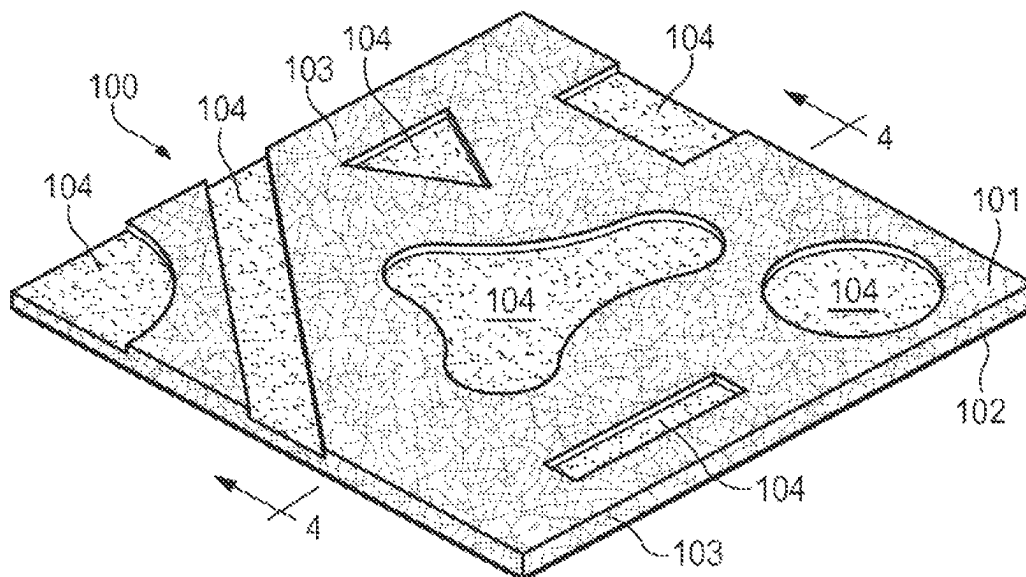


Figure 3

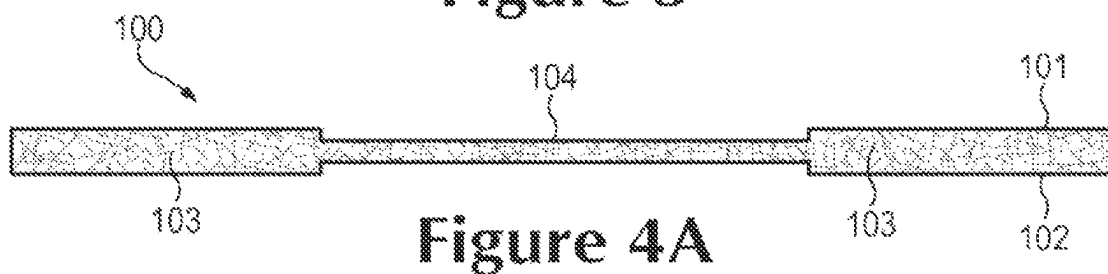


Figure 4A

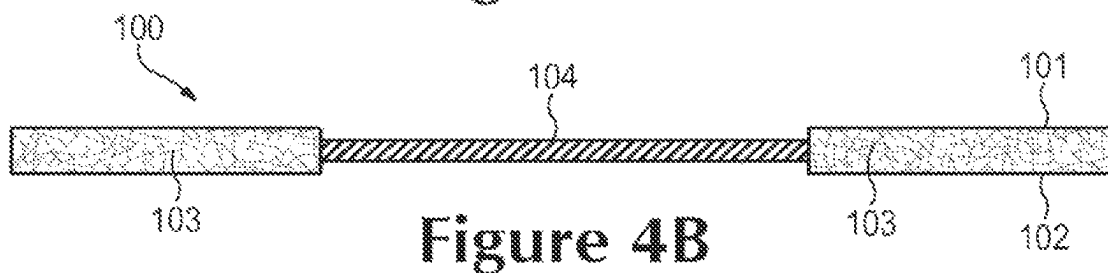


Figure 4B

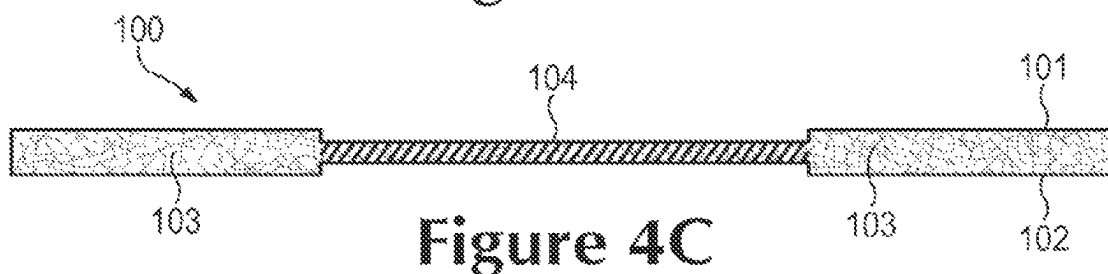
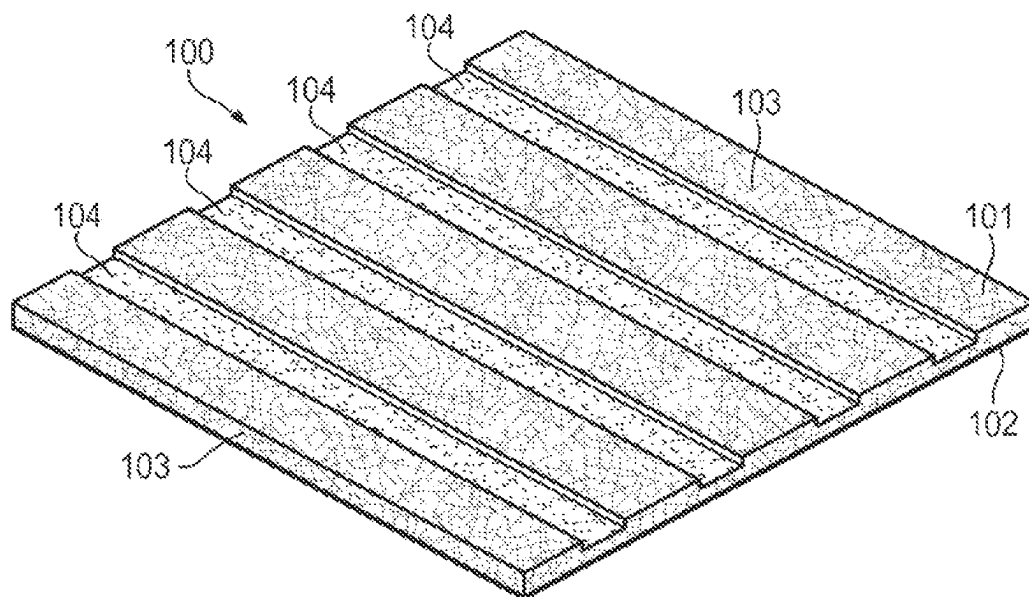
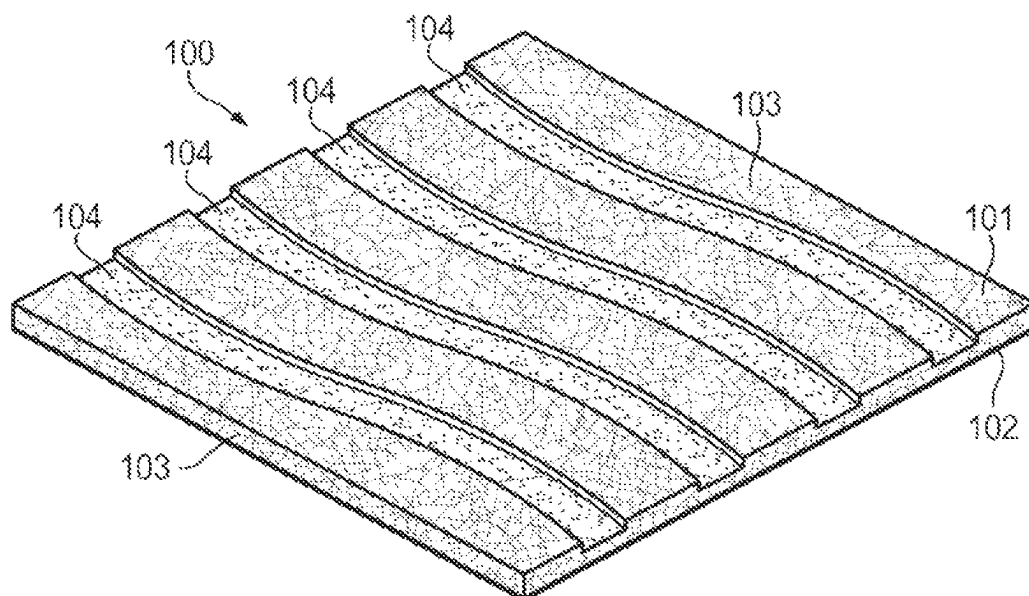
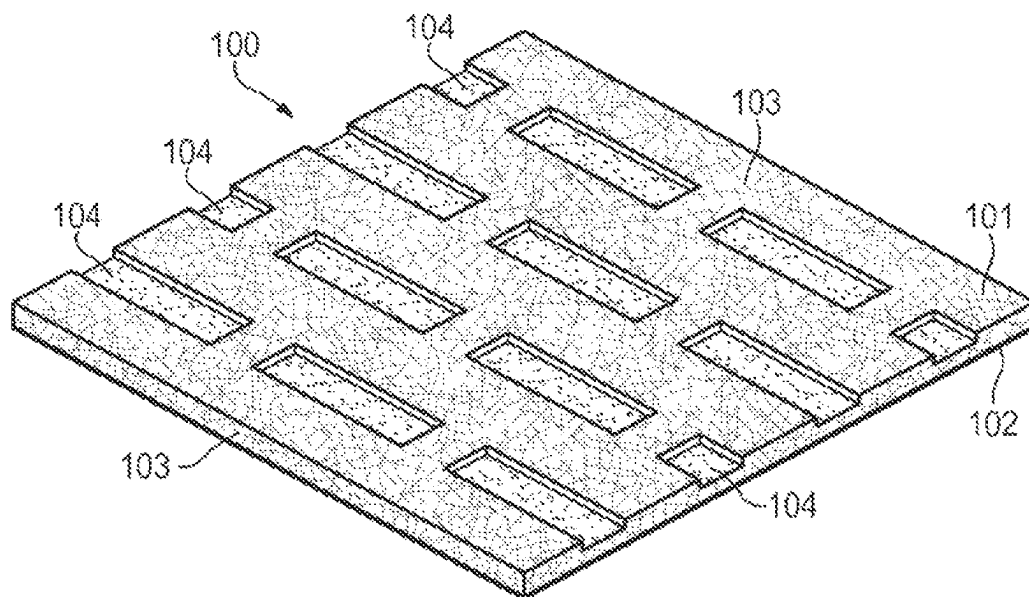
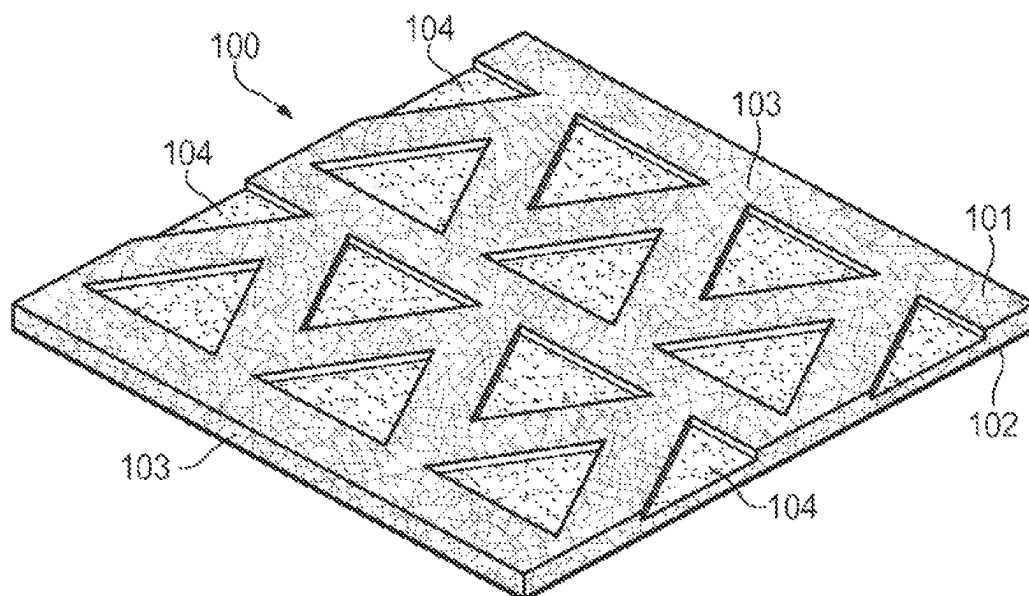


Figure 4C

**Figure 5A****Figure 5B**

**Figure 5C****Figure 5D**

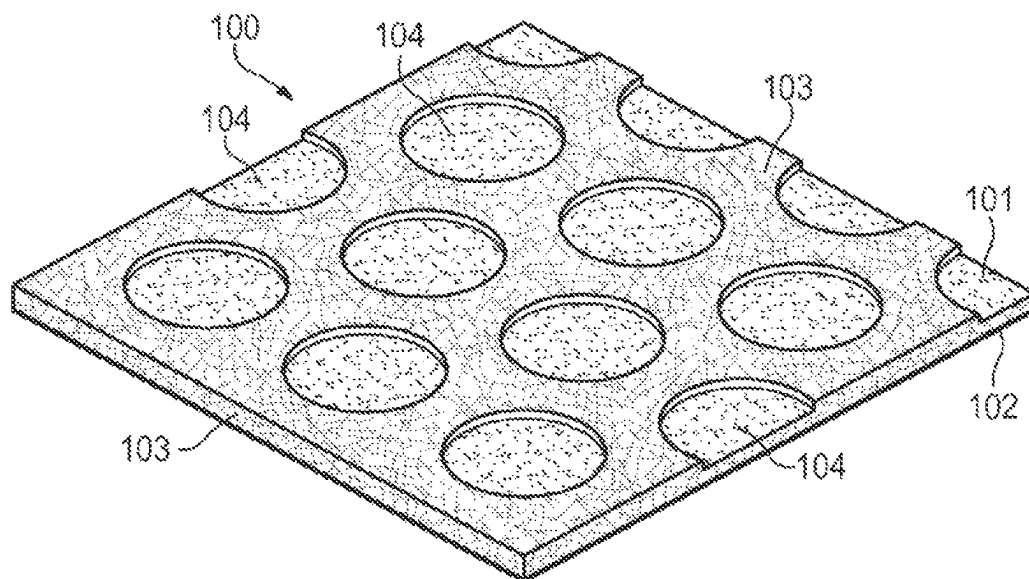


Figure 5E

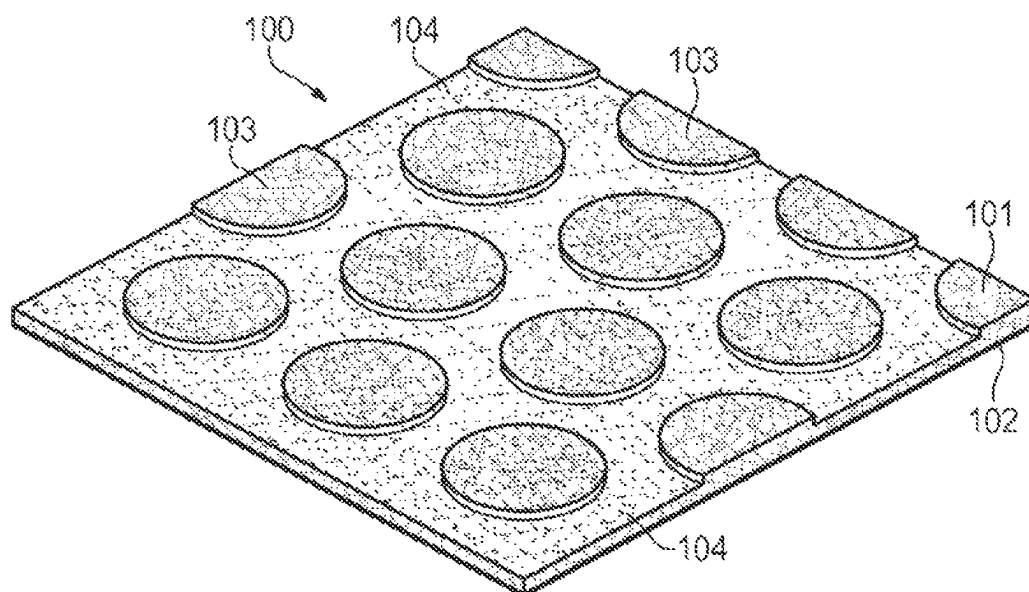


Figure 5F

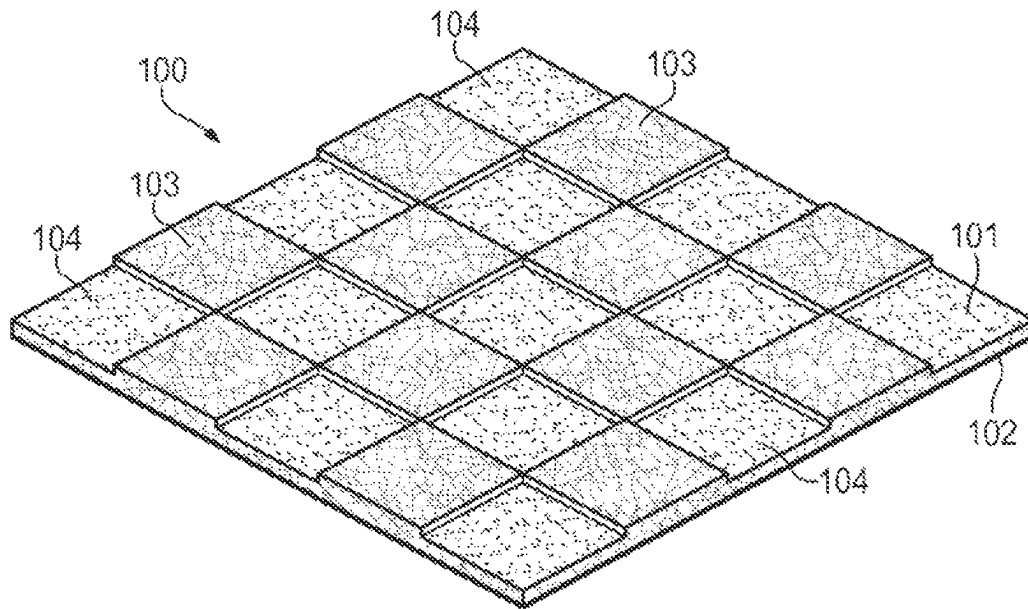


Figure 5G

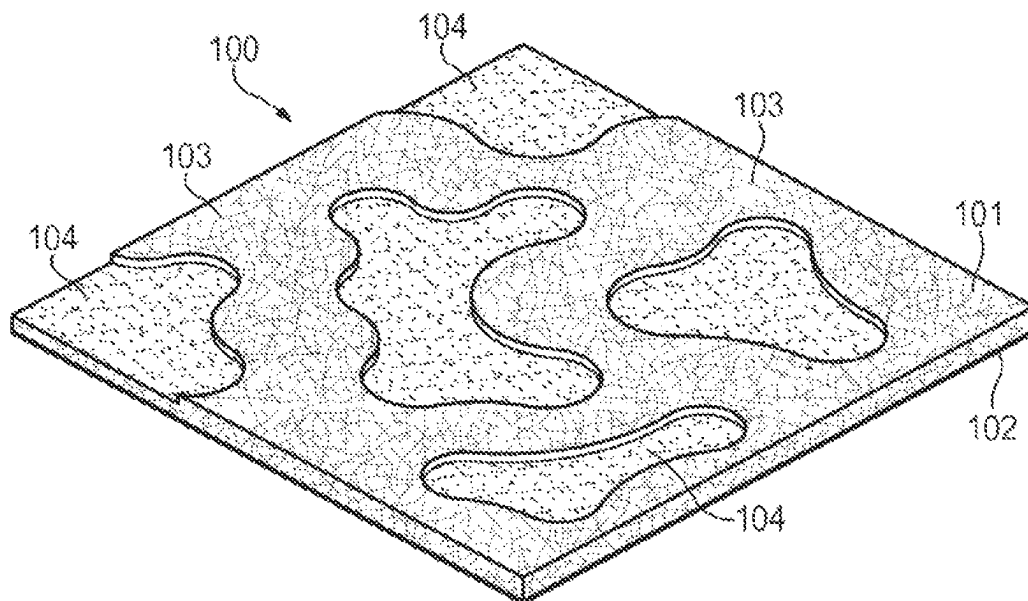


Figure 5H

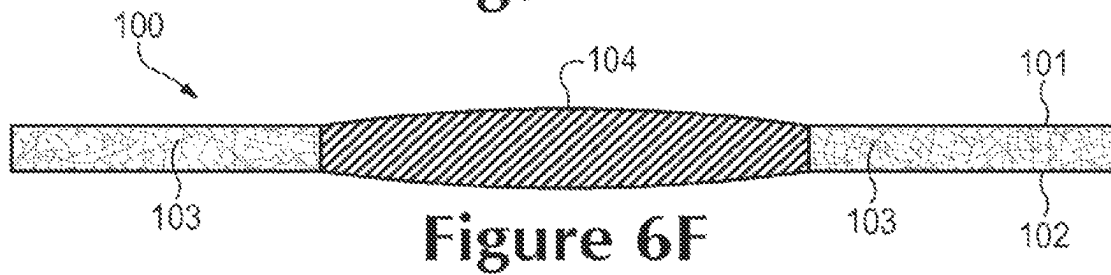
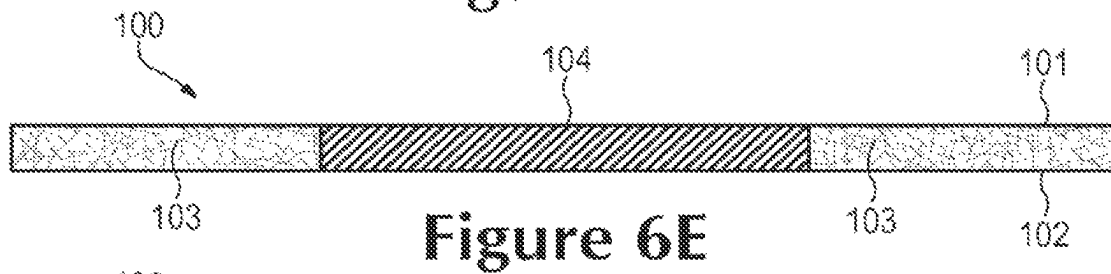
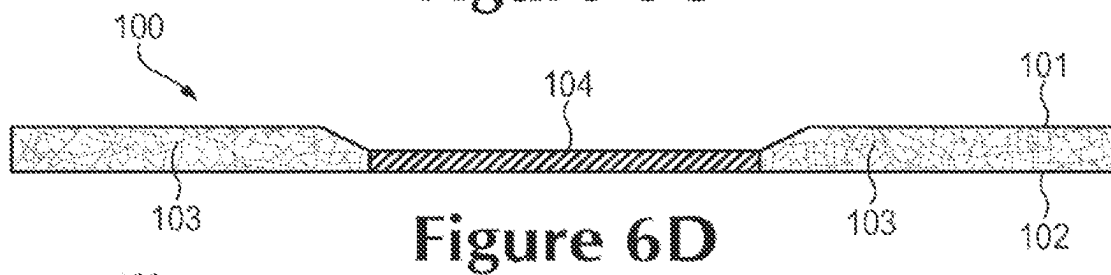
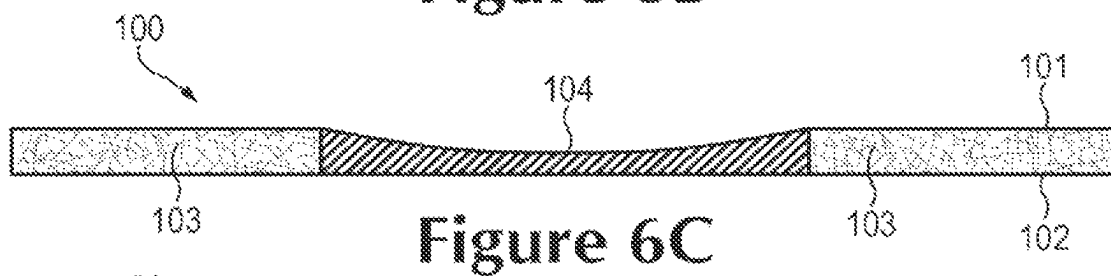
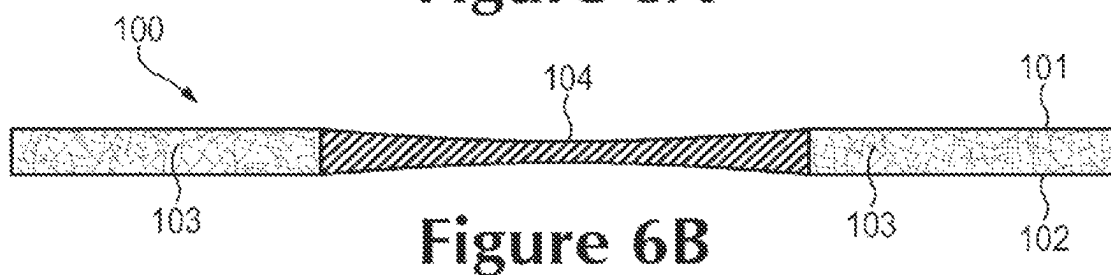
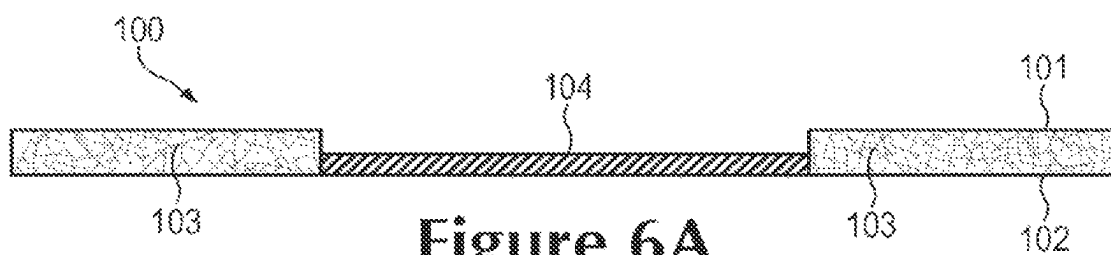
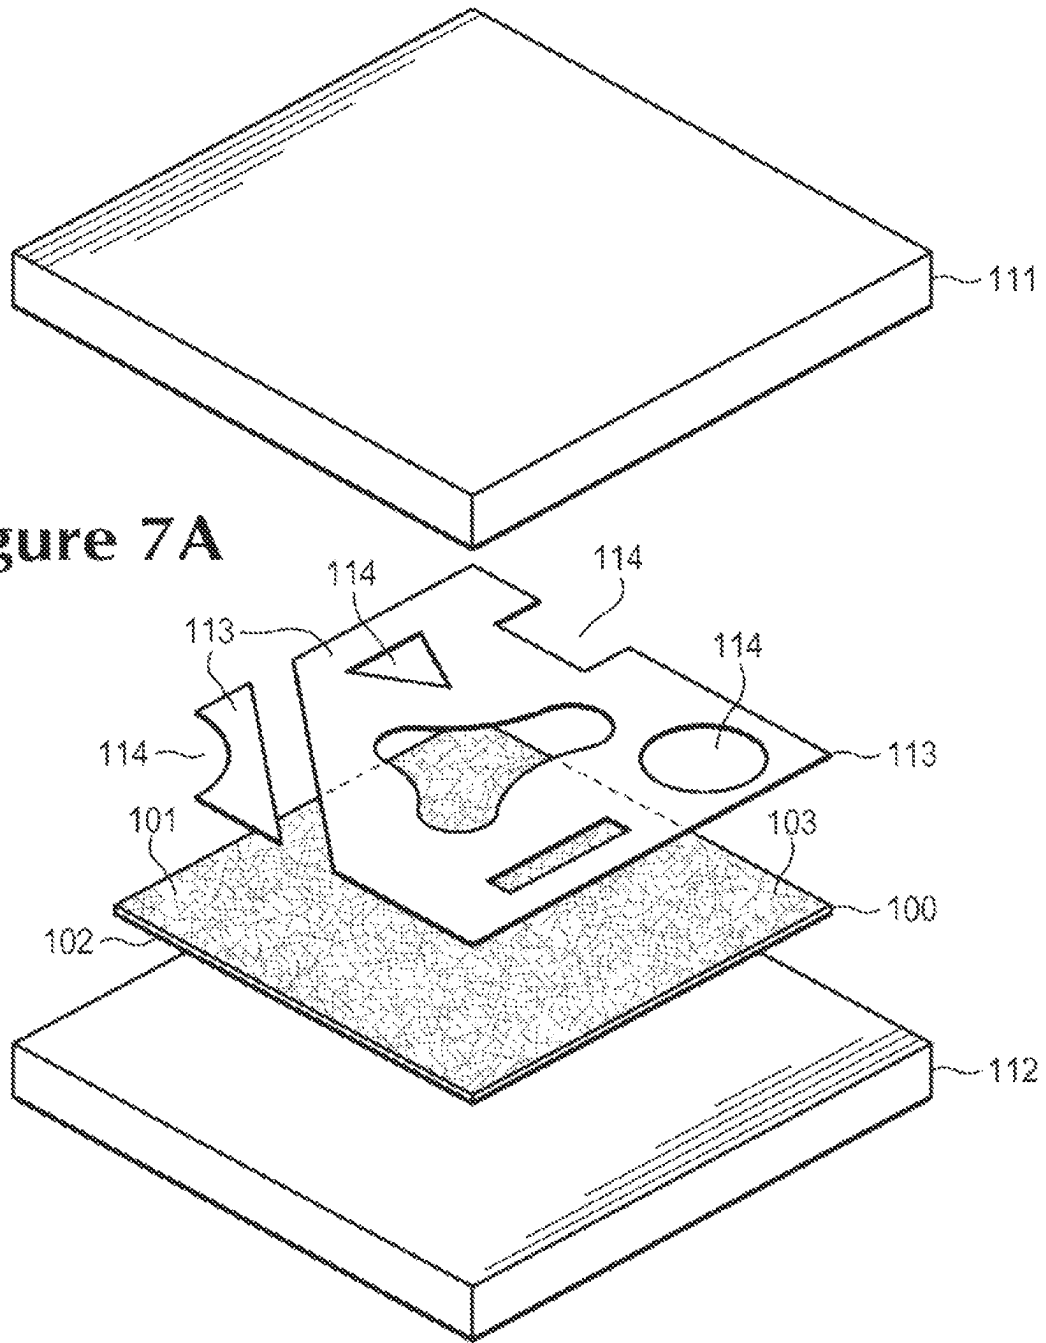


Figure 7A



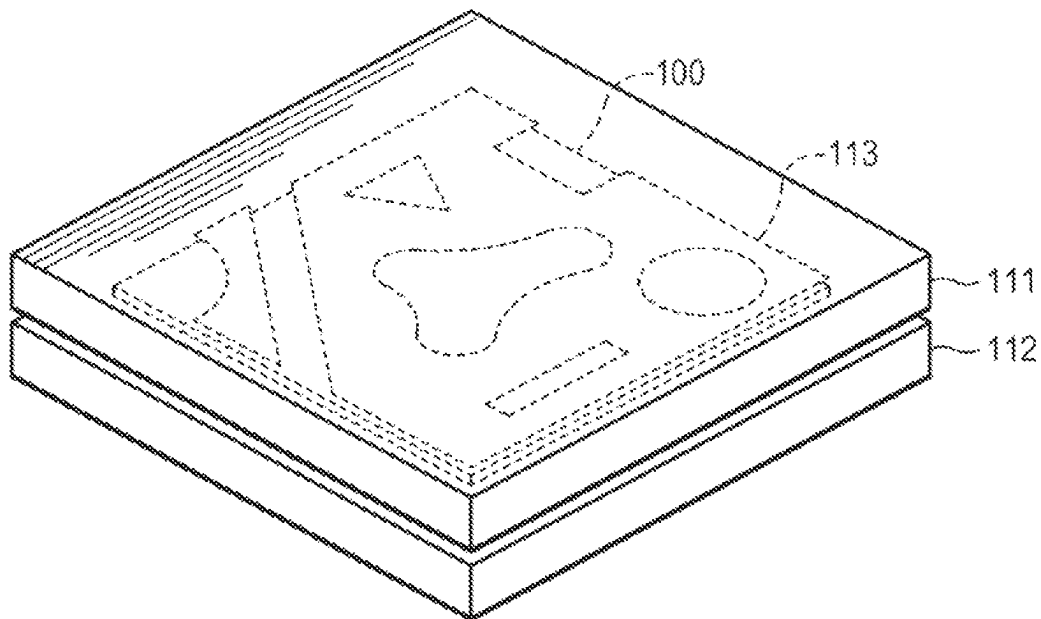
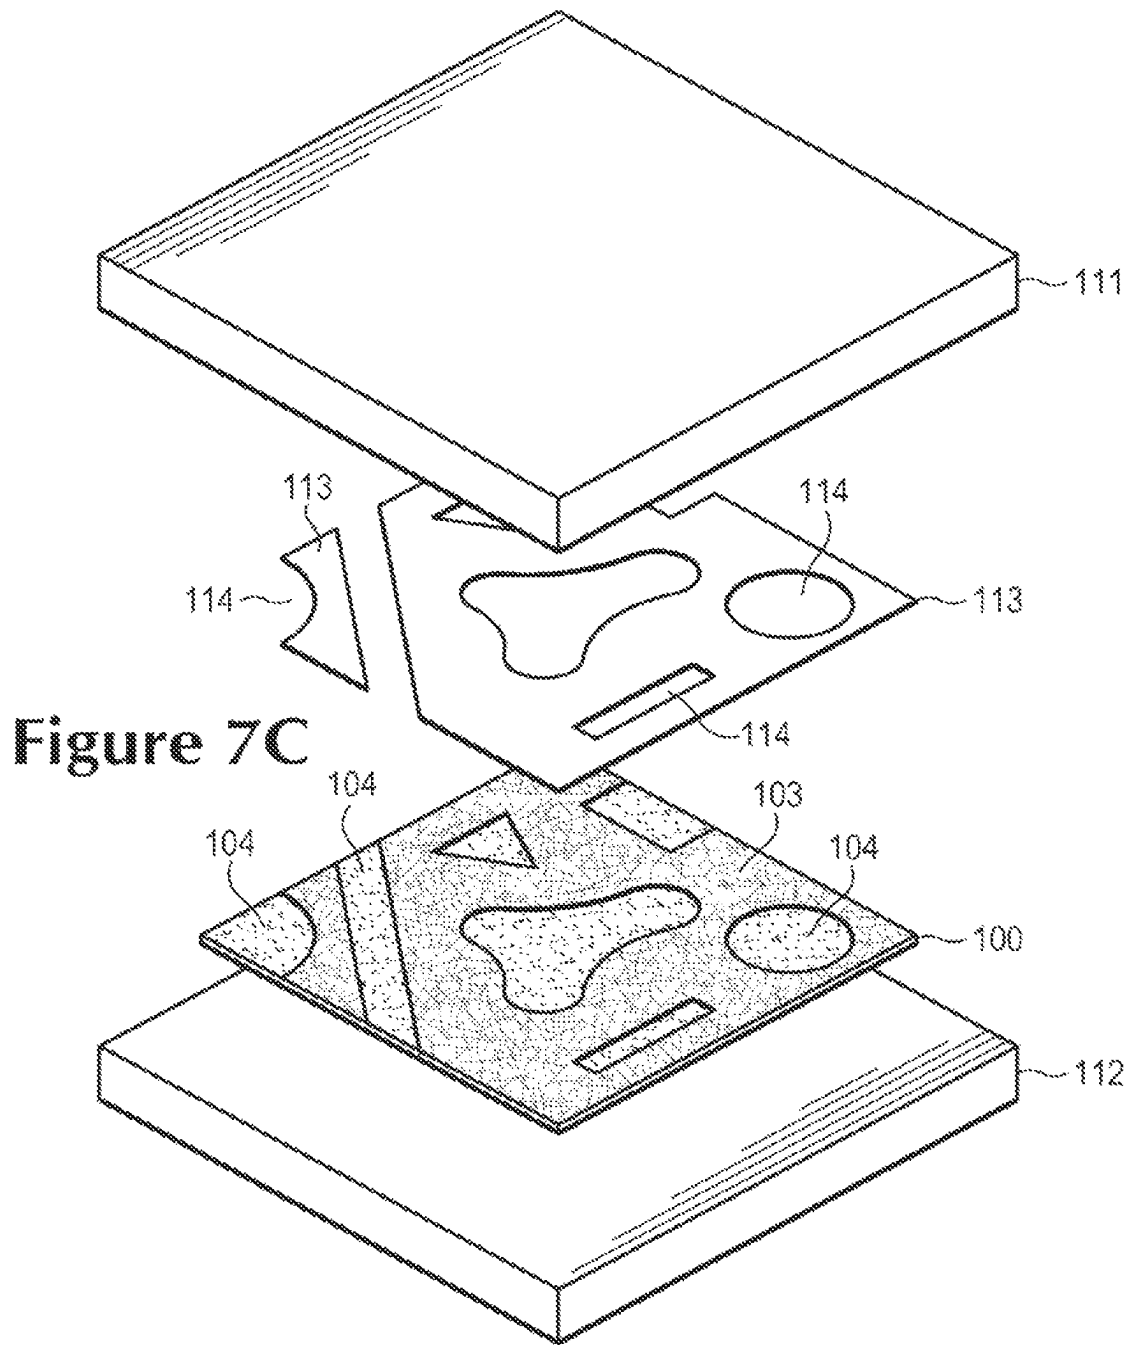
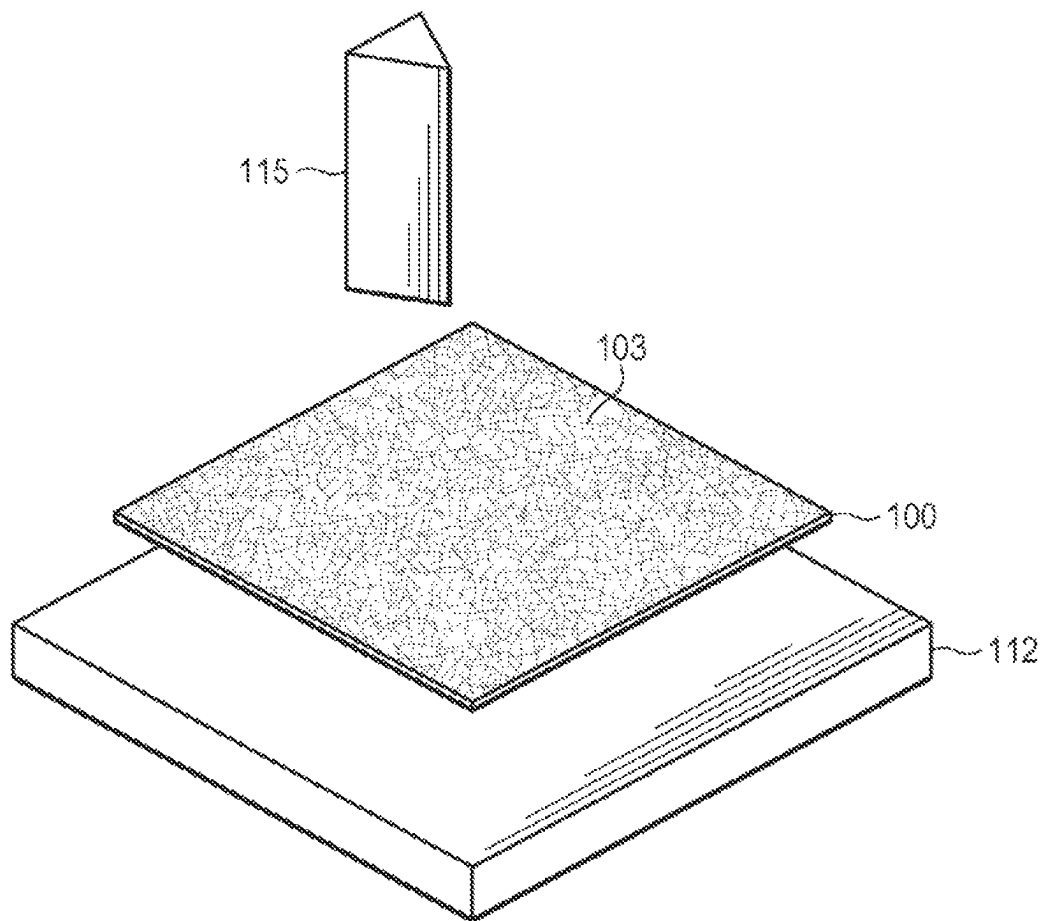
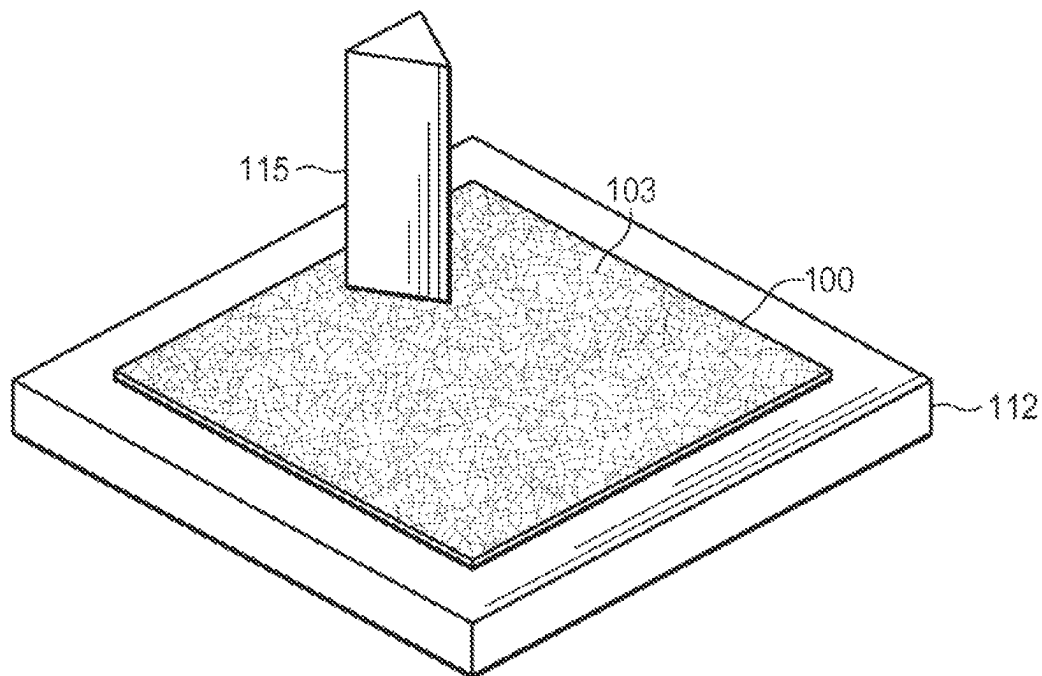


Figure 7B



**Figure 8A**

**Figure 8B**

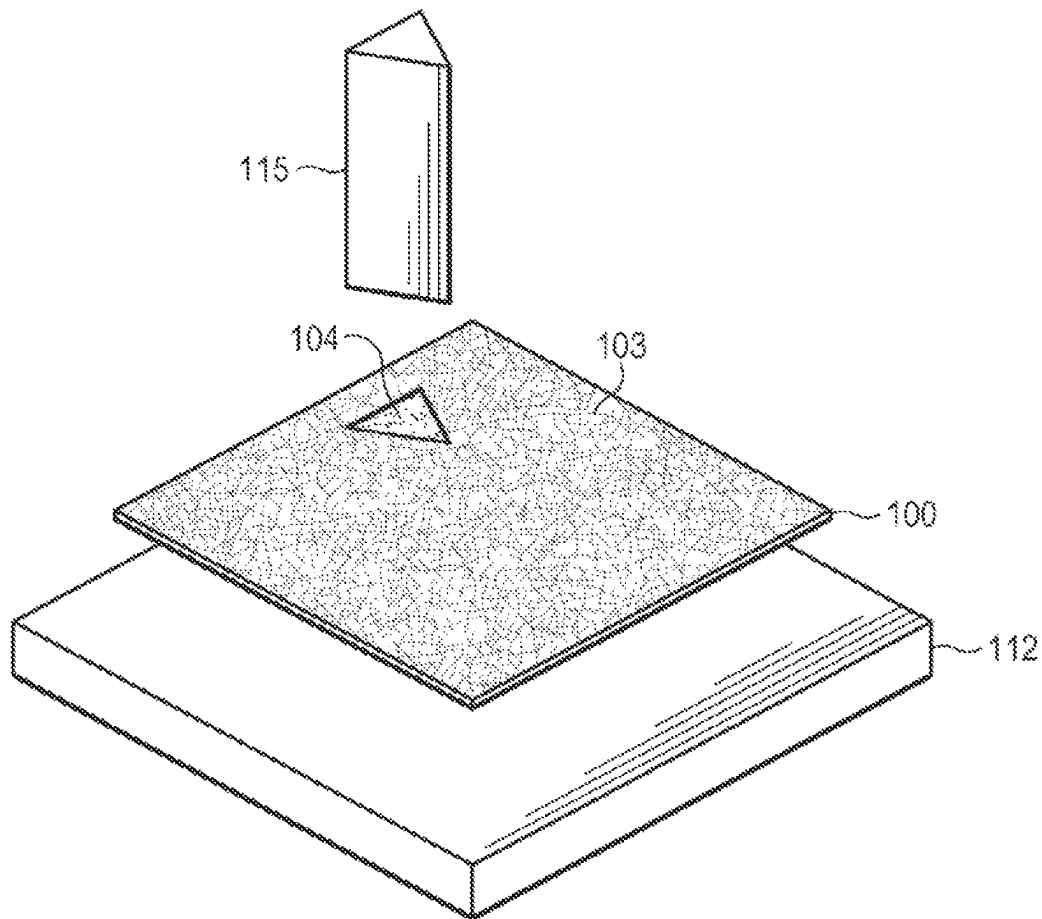
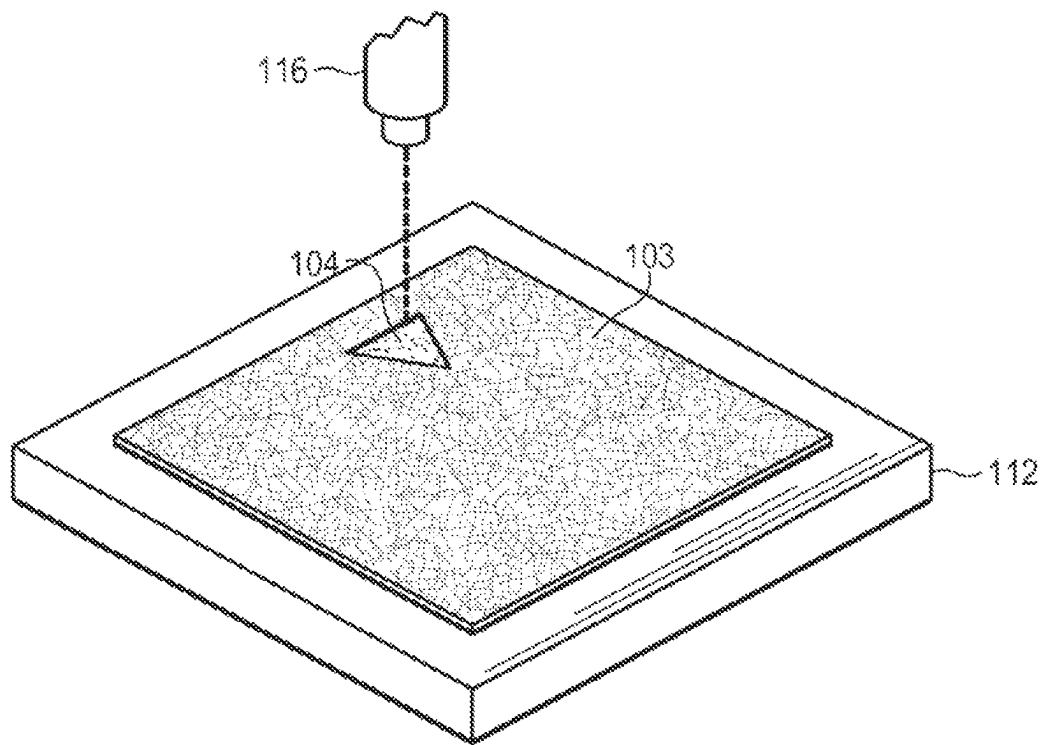


Figure 8C

**Figure 9**

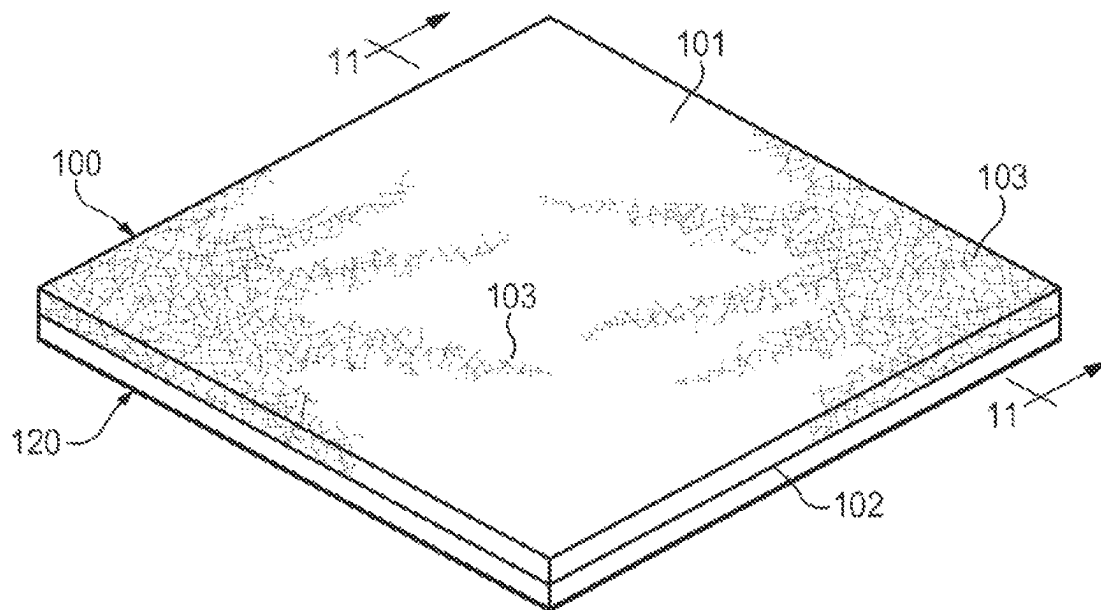


Figure 10

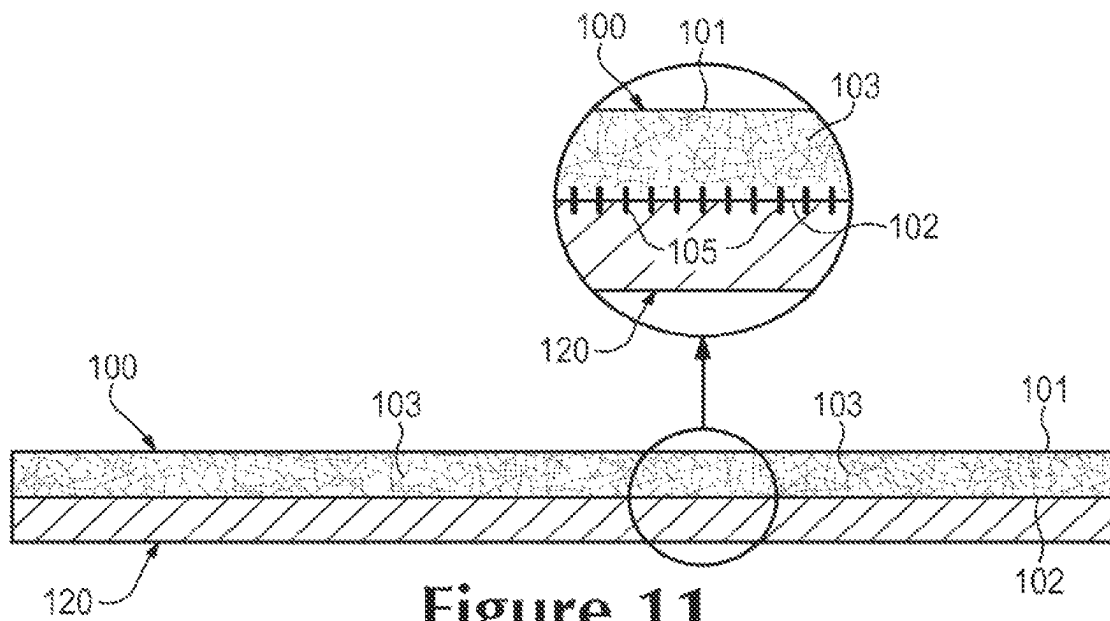
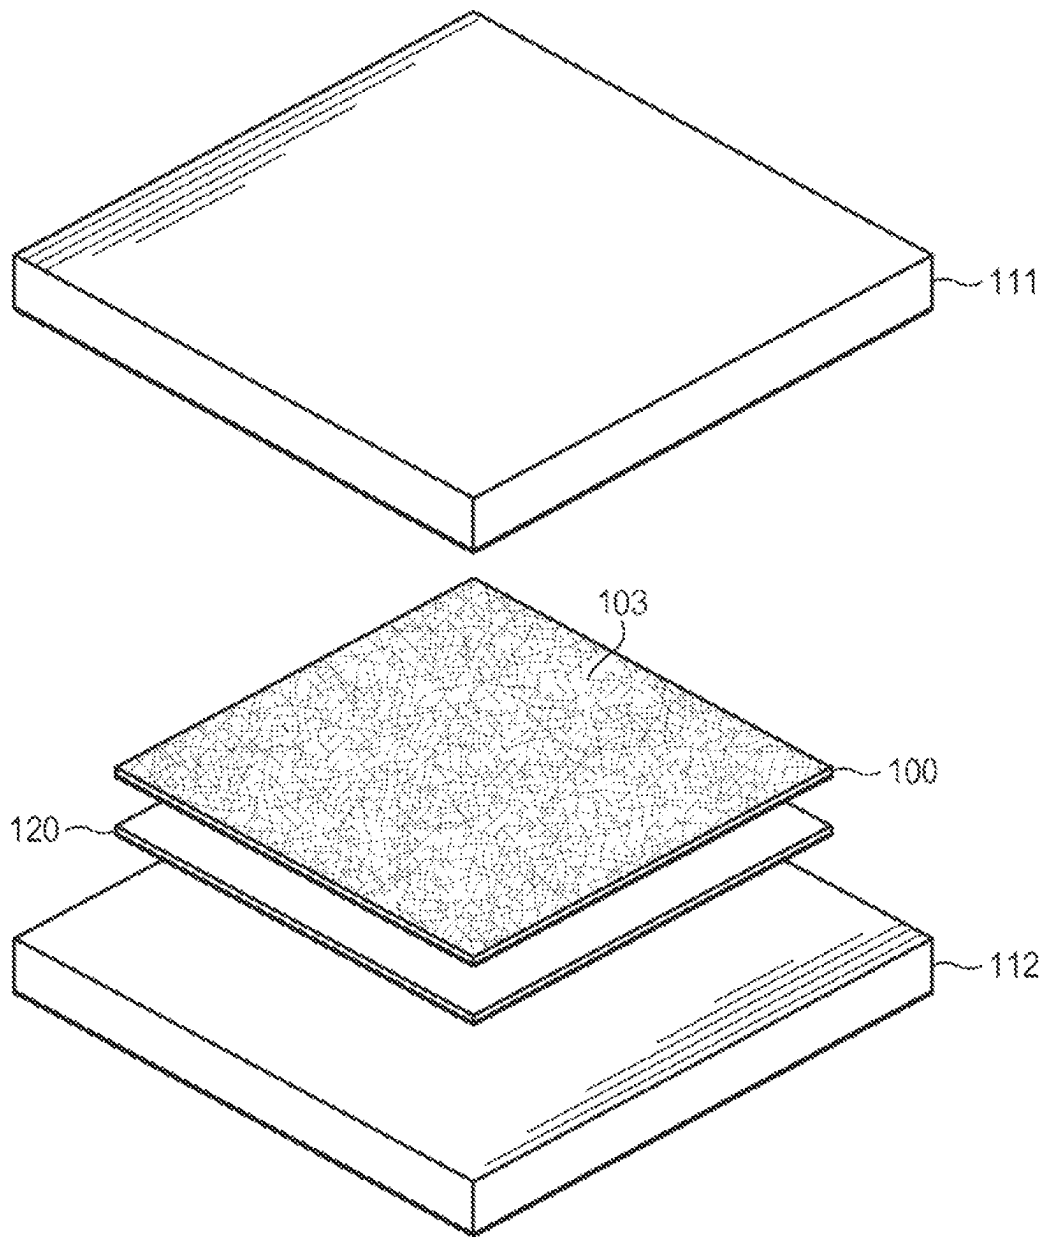


Figure 11

**Figure 12A**

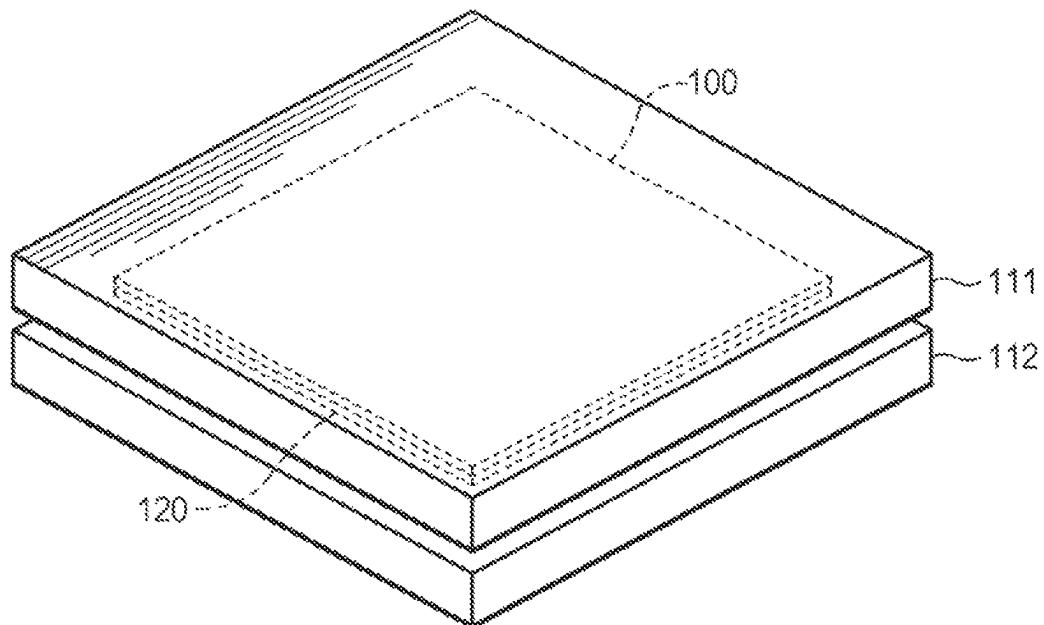
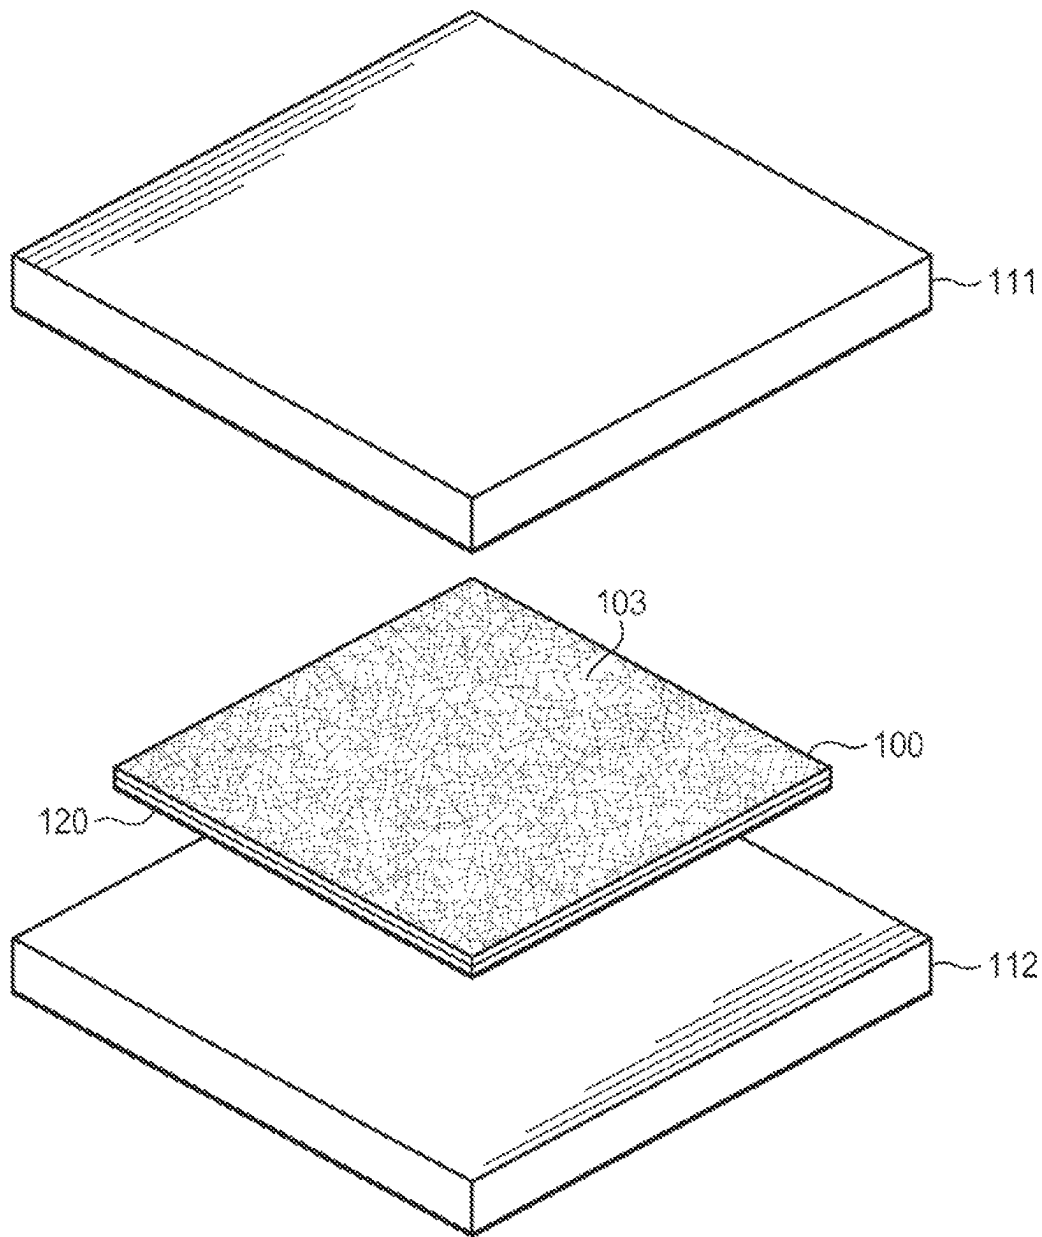


Figure 12B

**Figure 12C**

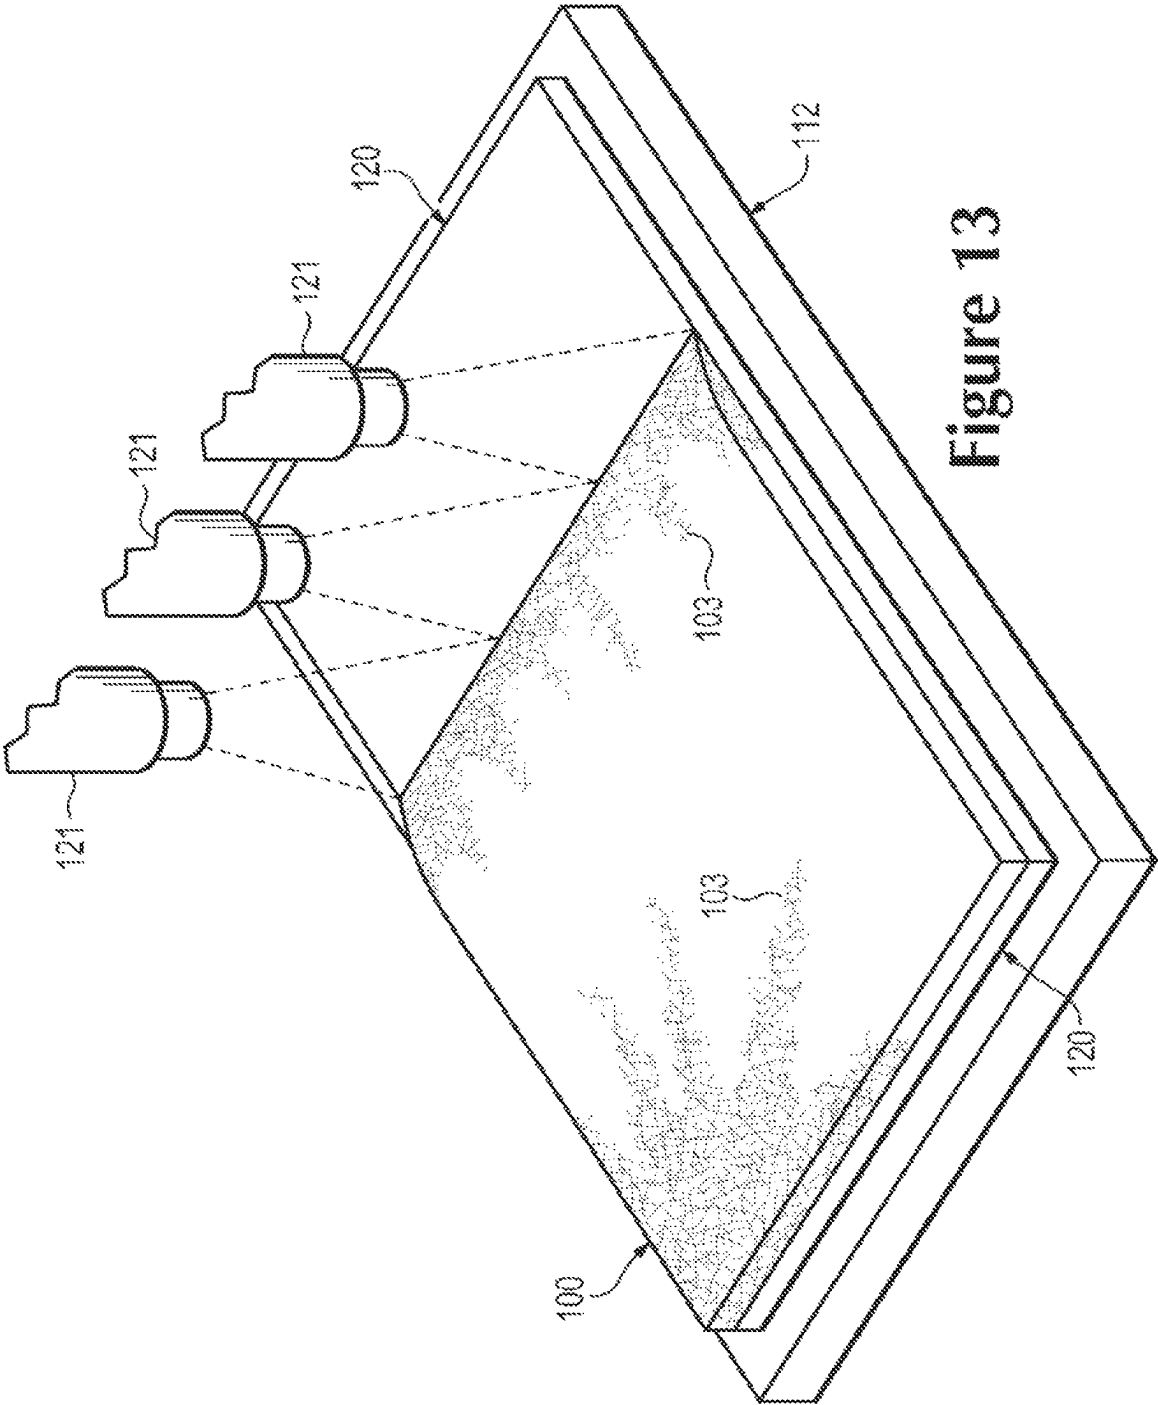


Figure 13

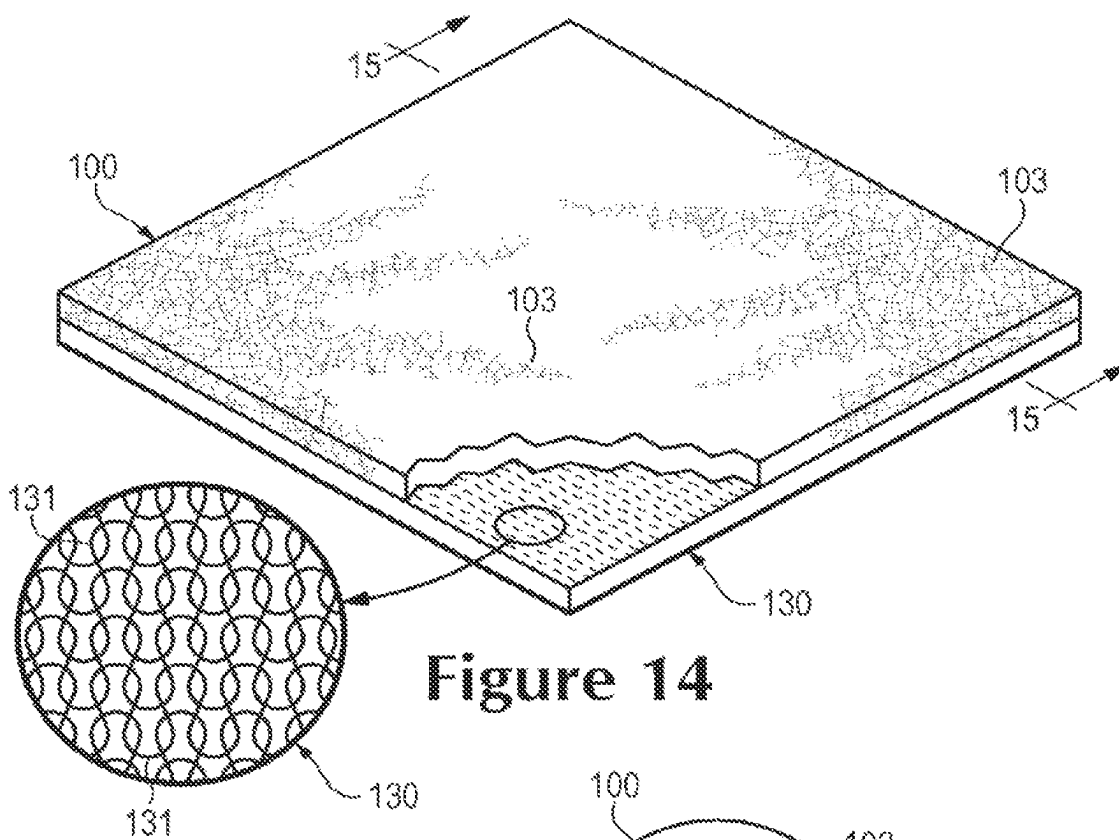


Figure 14

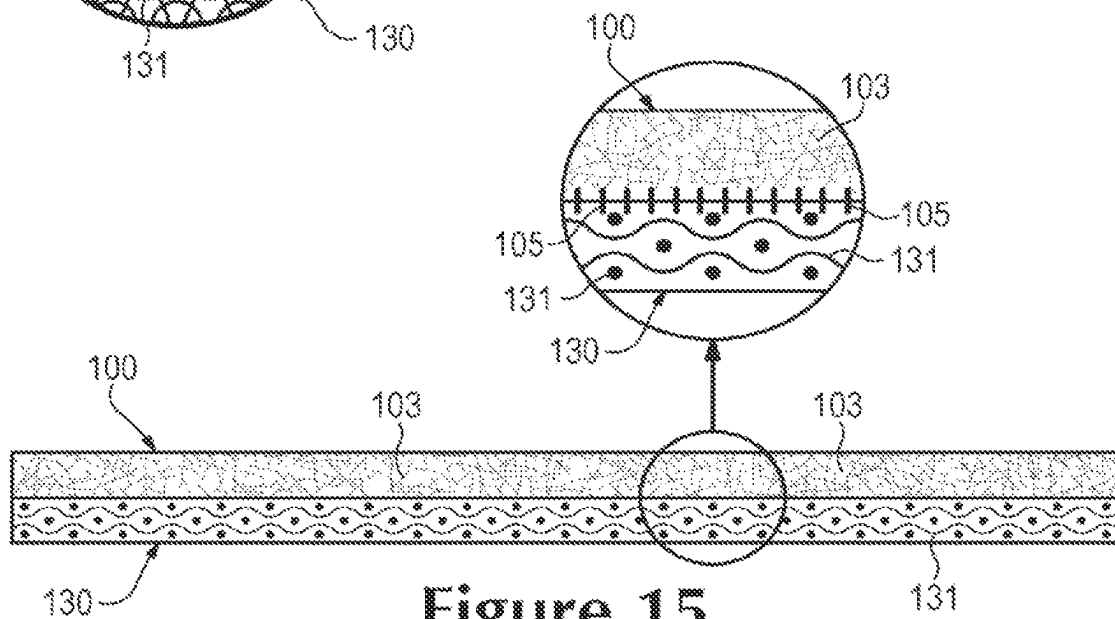


Figure 15

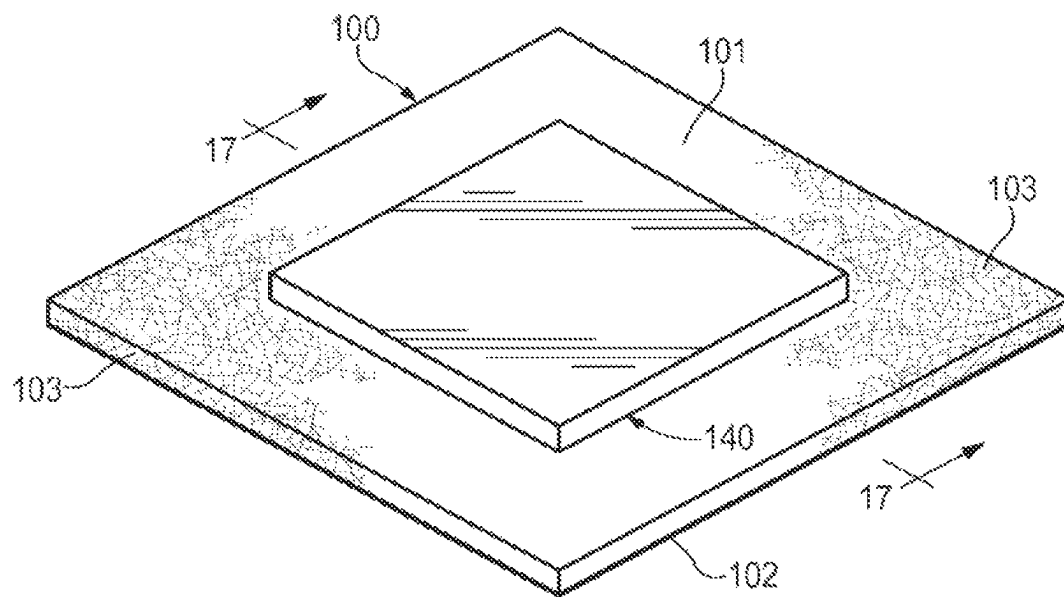


Figure 16

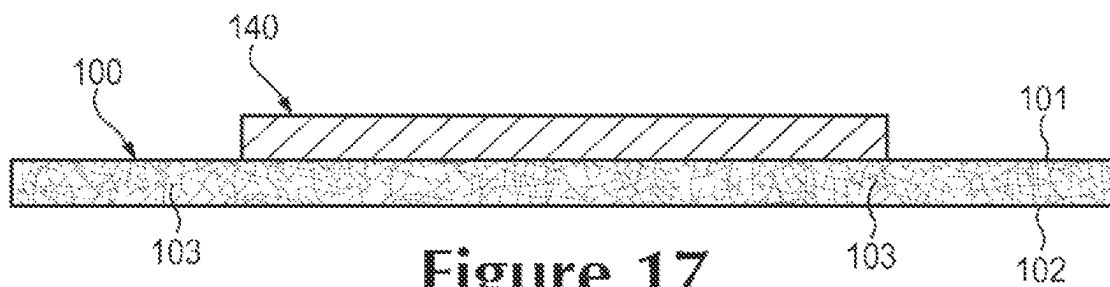


Figure 17

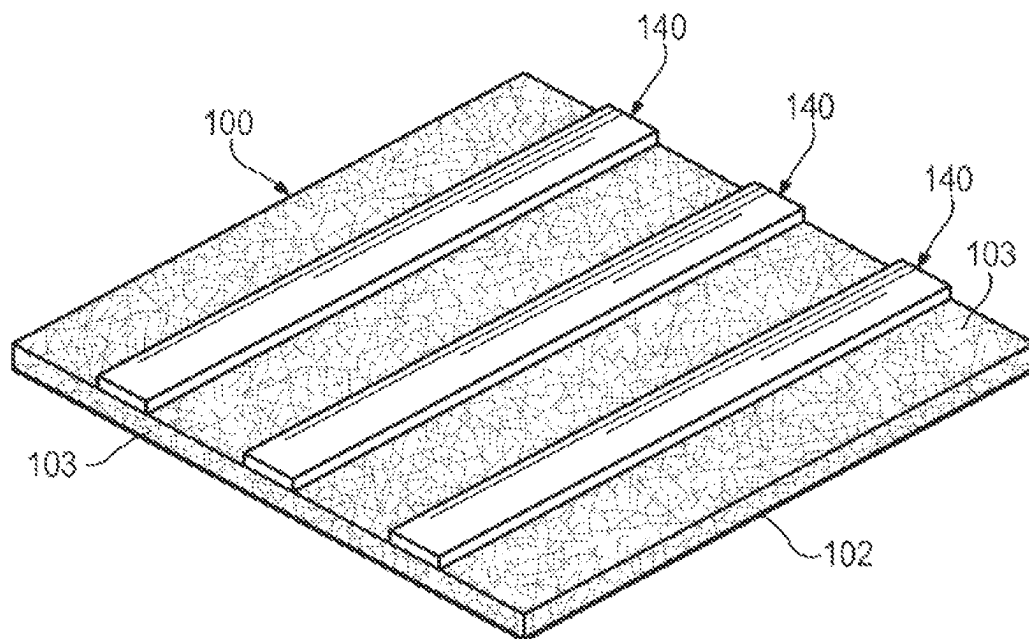


Figure 18A

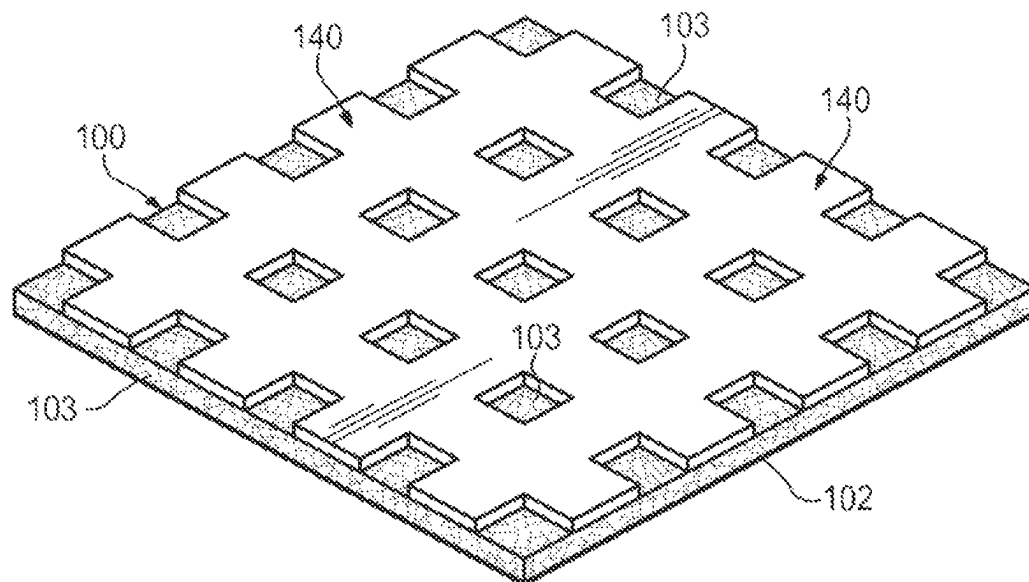
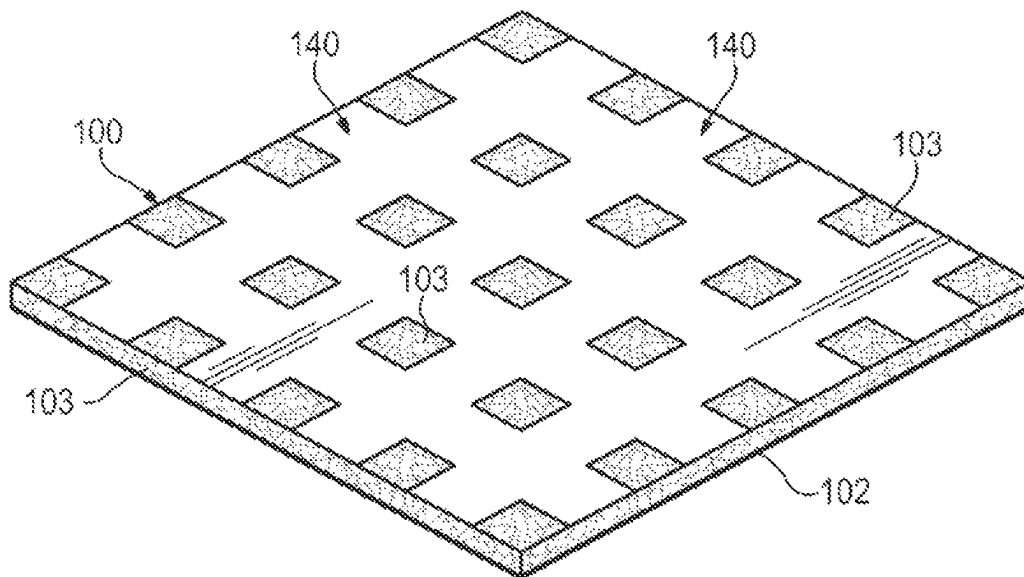


Figure 18B

**Figure 18C**

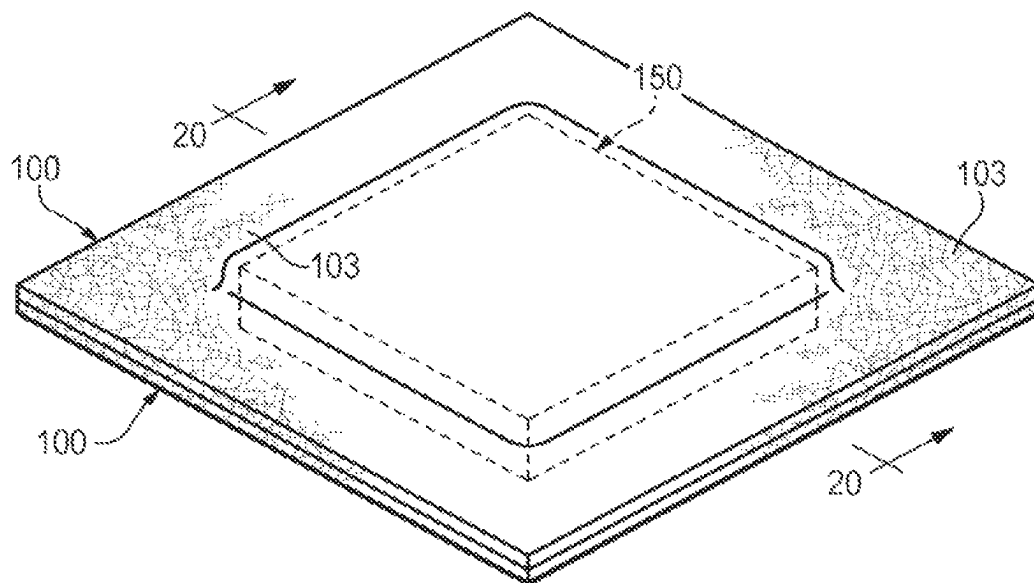


Figure 19

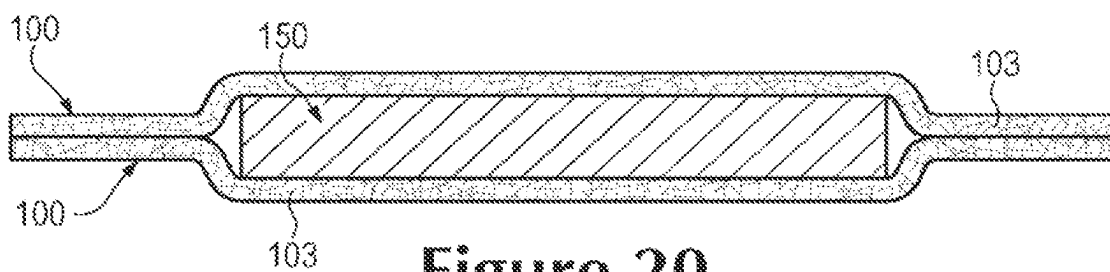


Figure 20

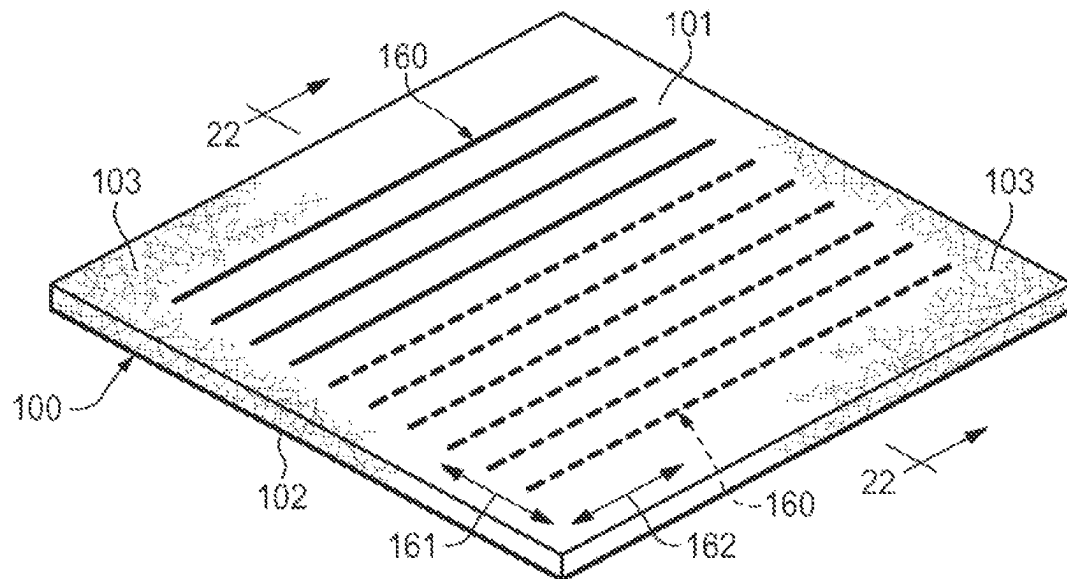


Figure 21

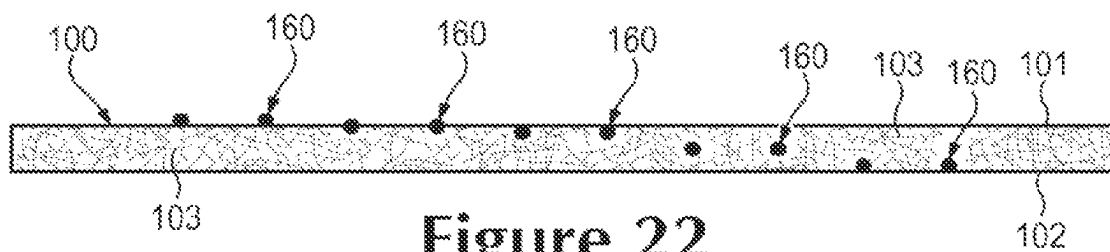


Figure 22

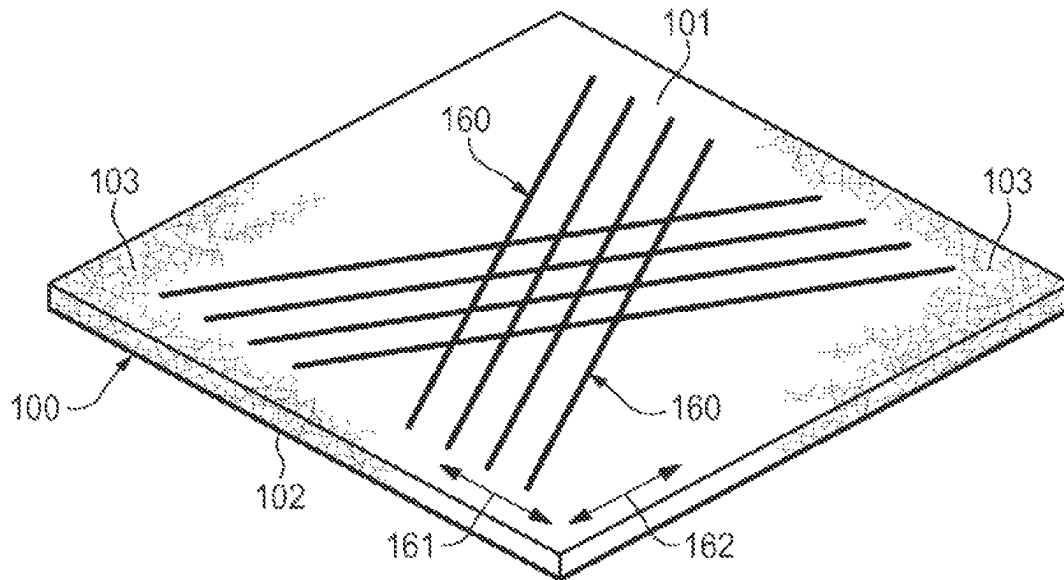


Figure 23A

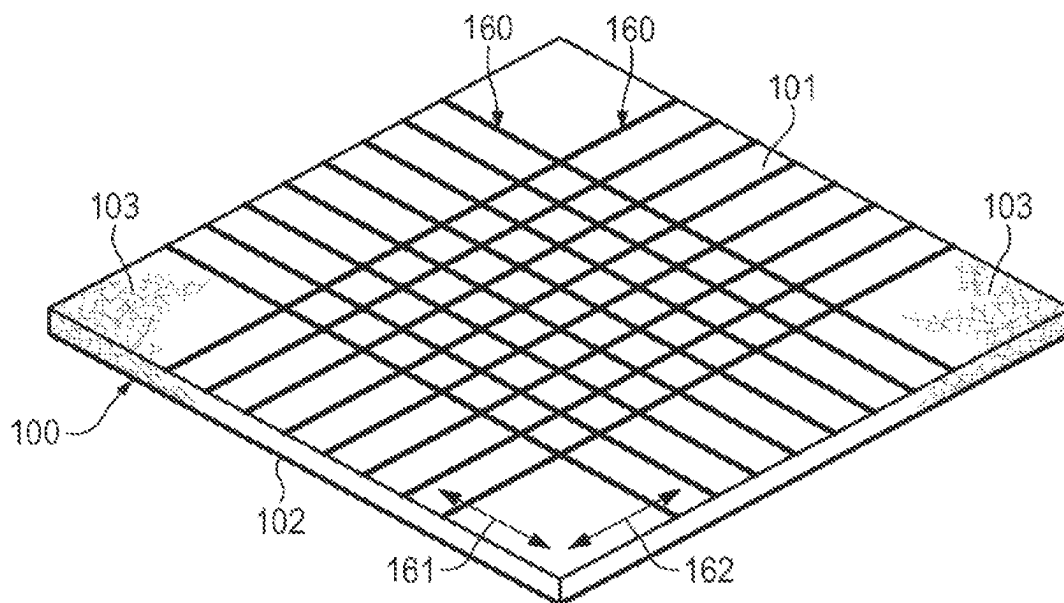


Figure 23B

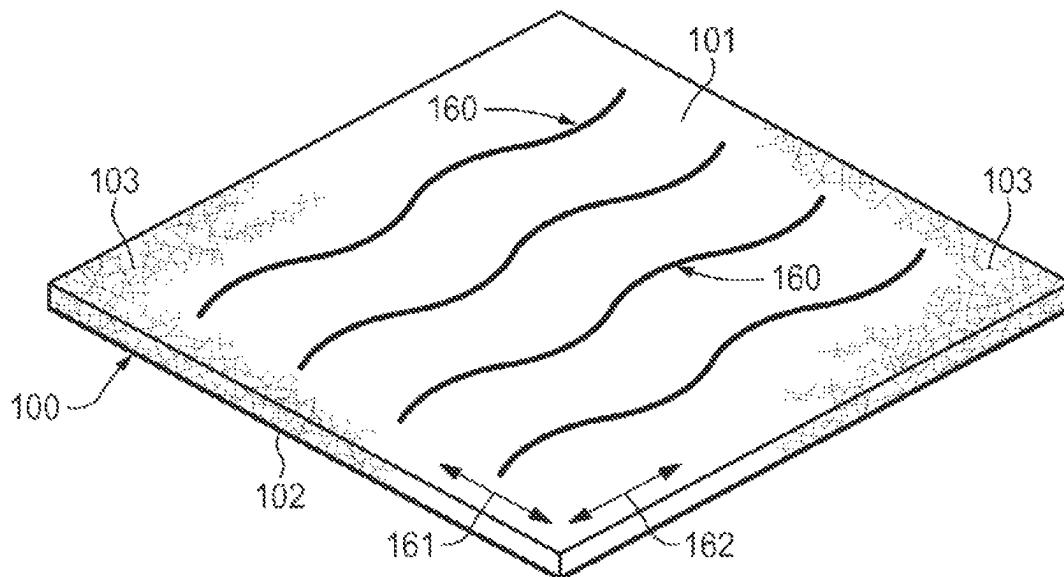


Figure 23C

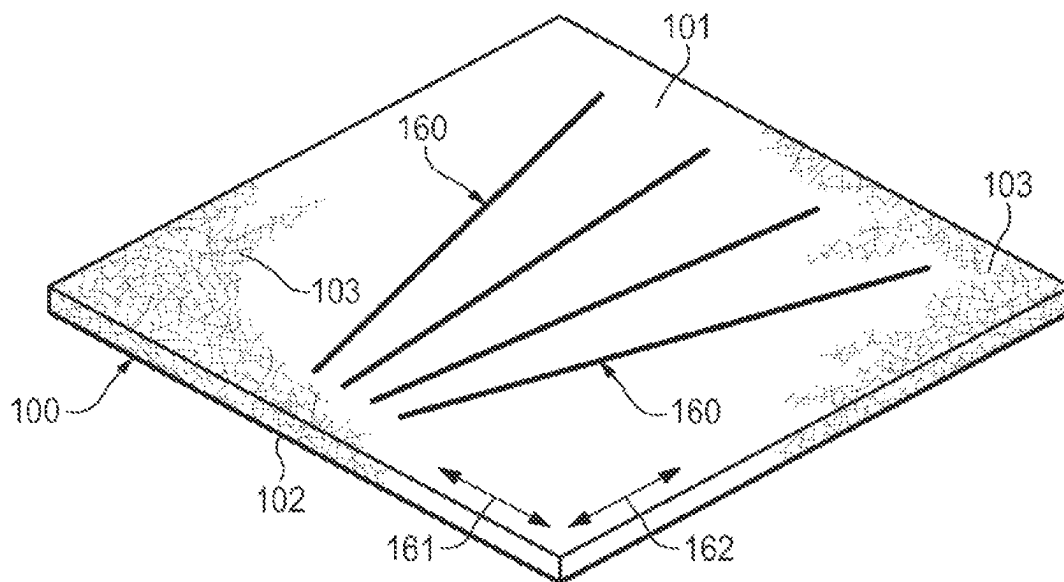


Figure 23D

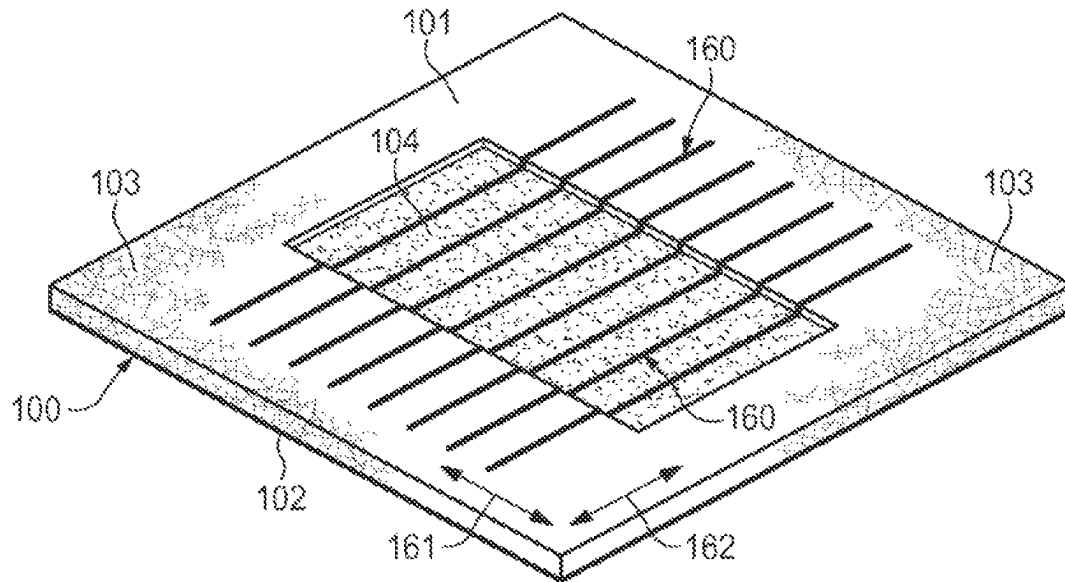


Figure 23E

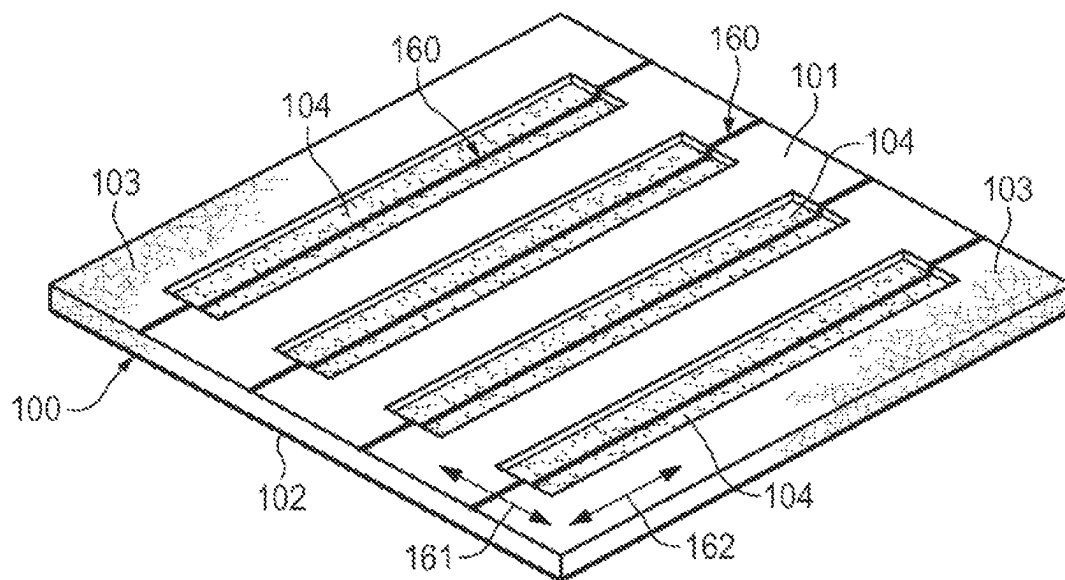


Figure 23F

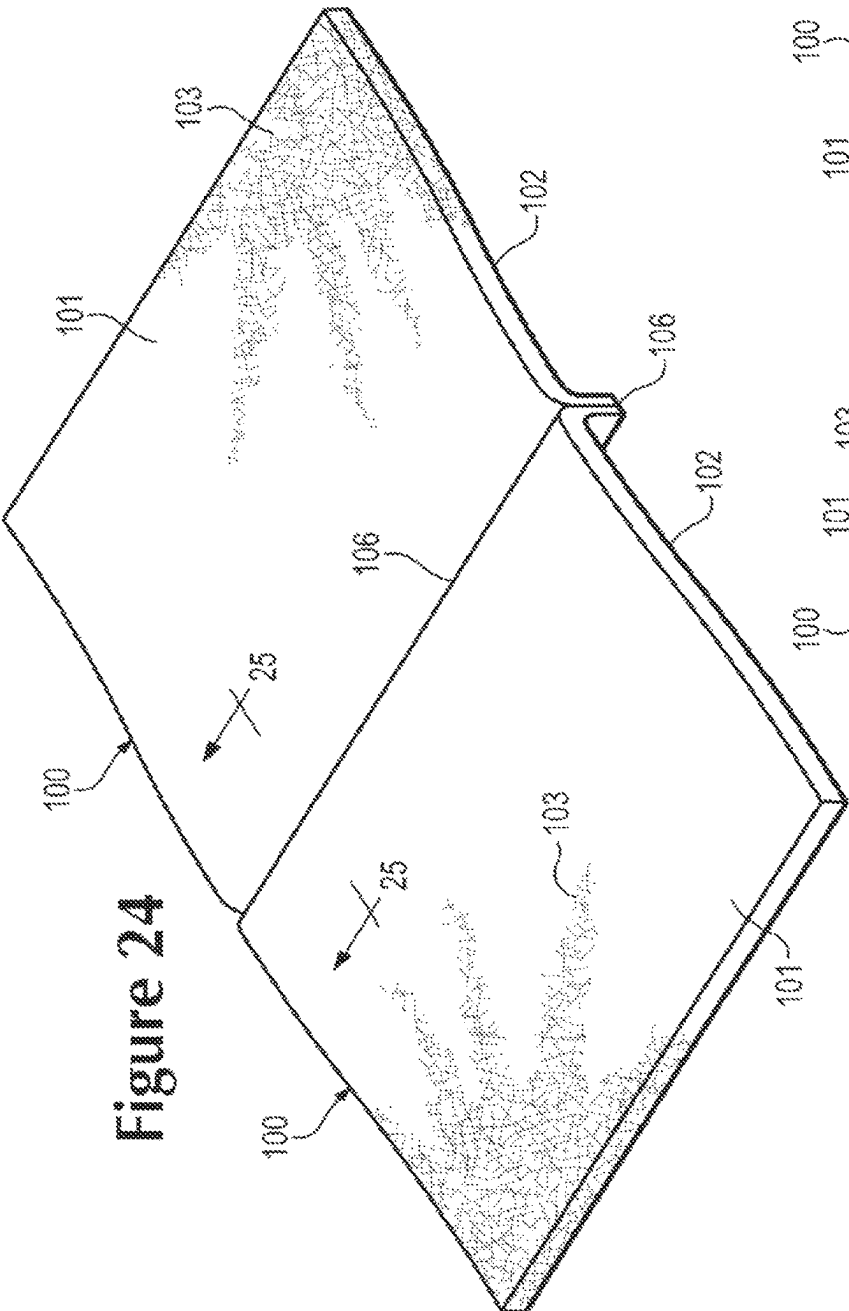


Figure 24

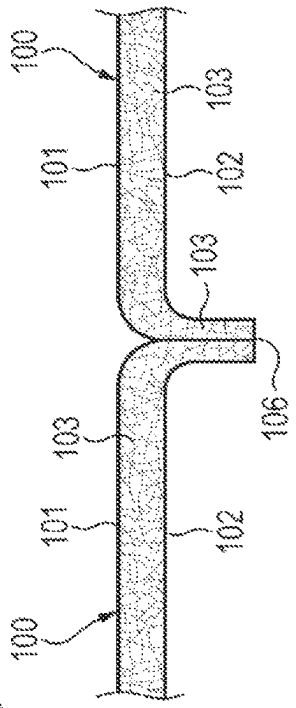
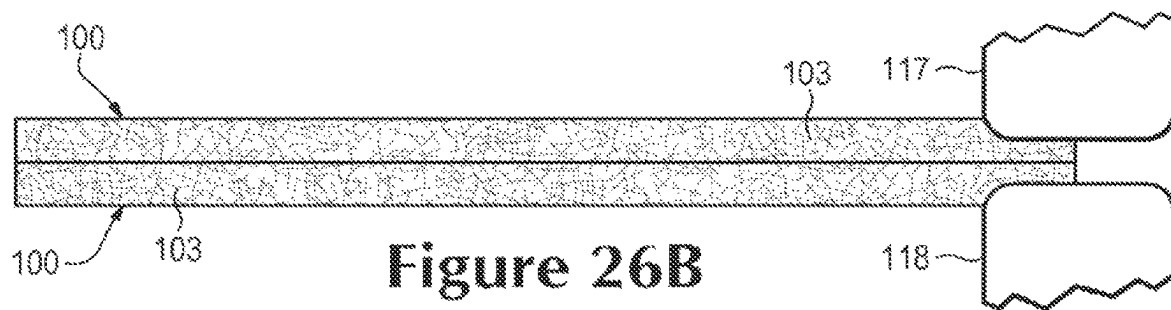
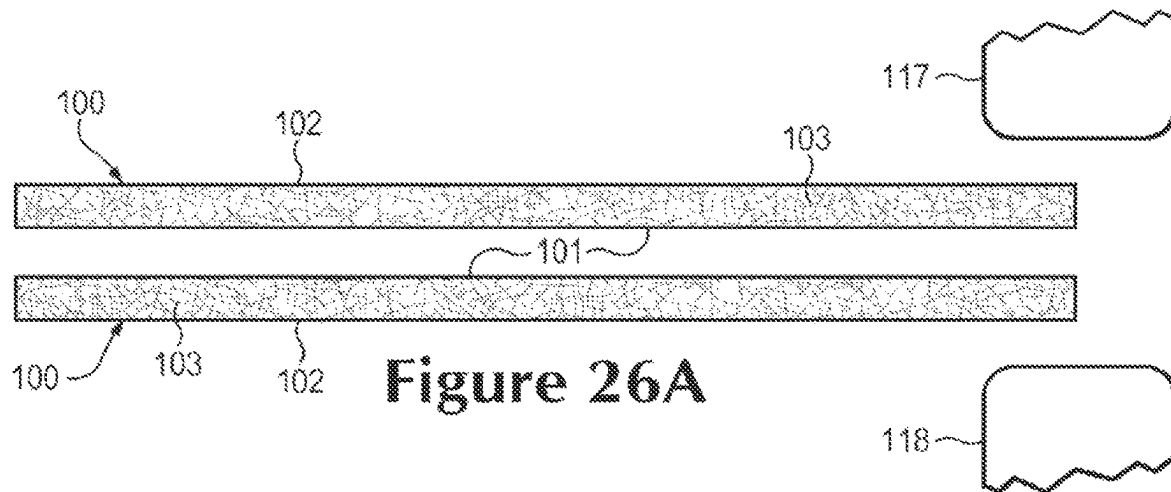


Figure 25



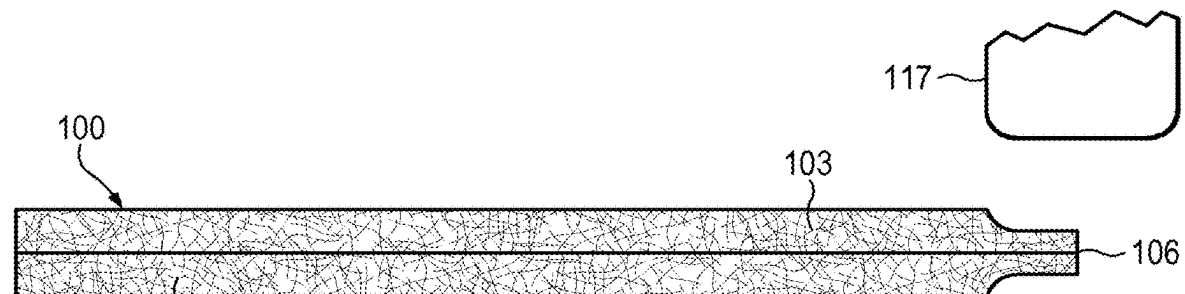


Figure 26C

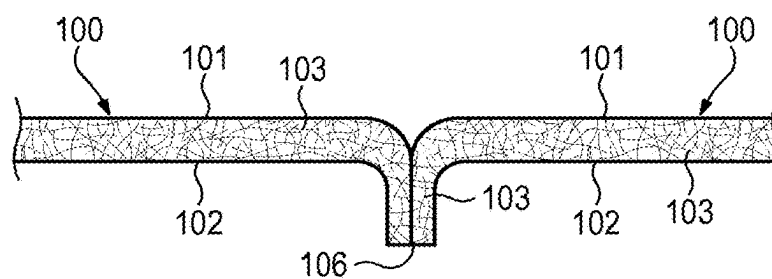


Figure 26D

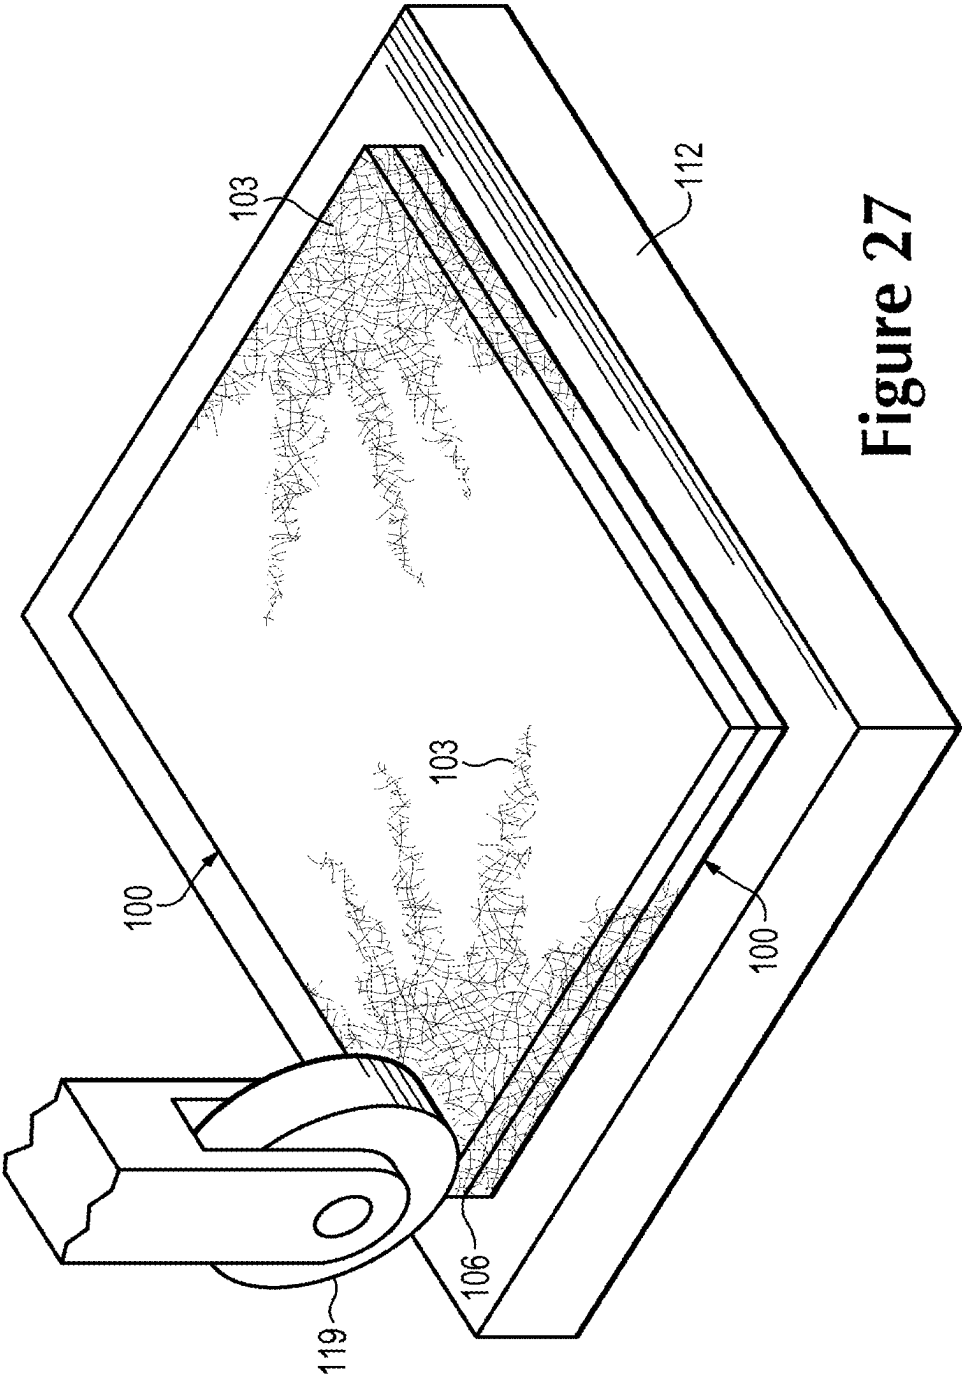
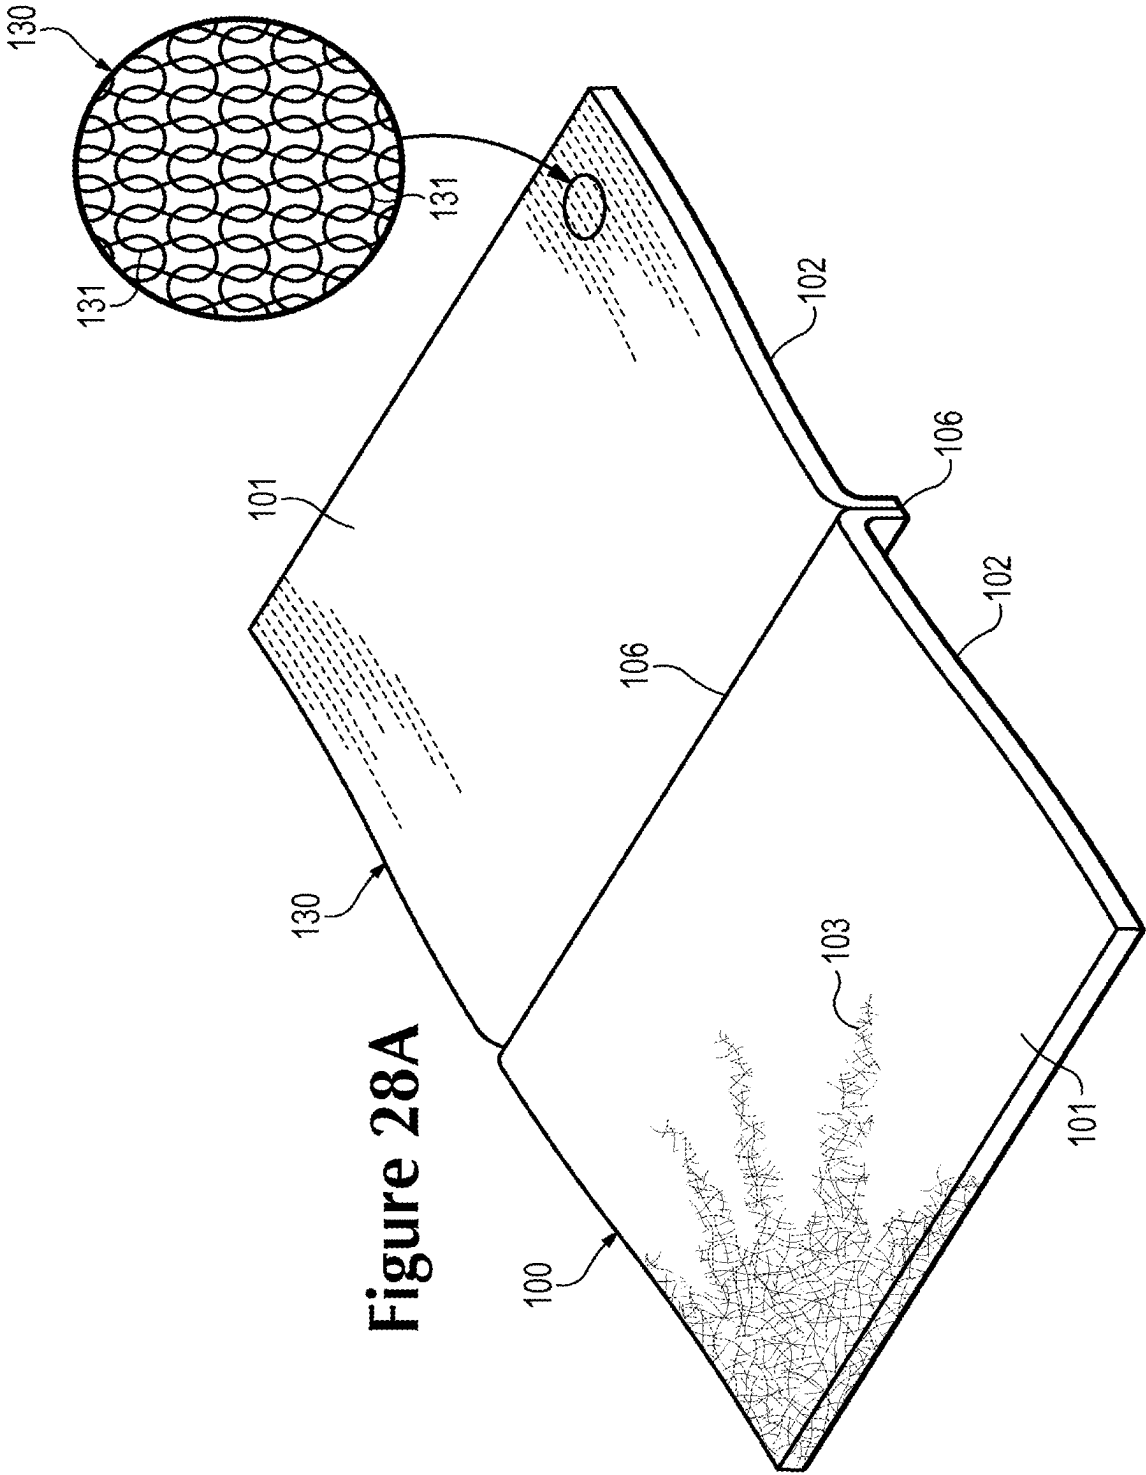


Figure 27



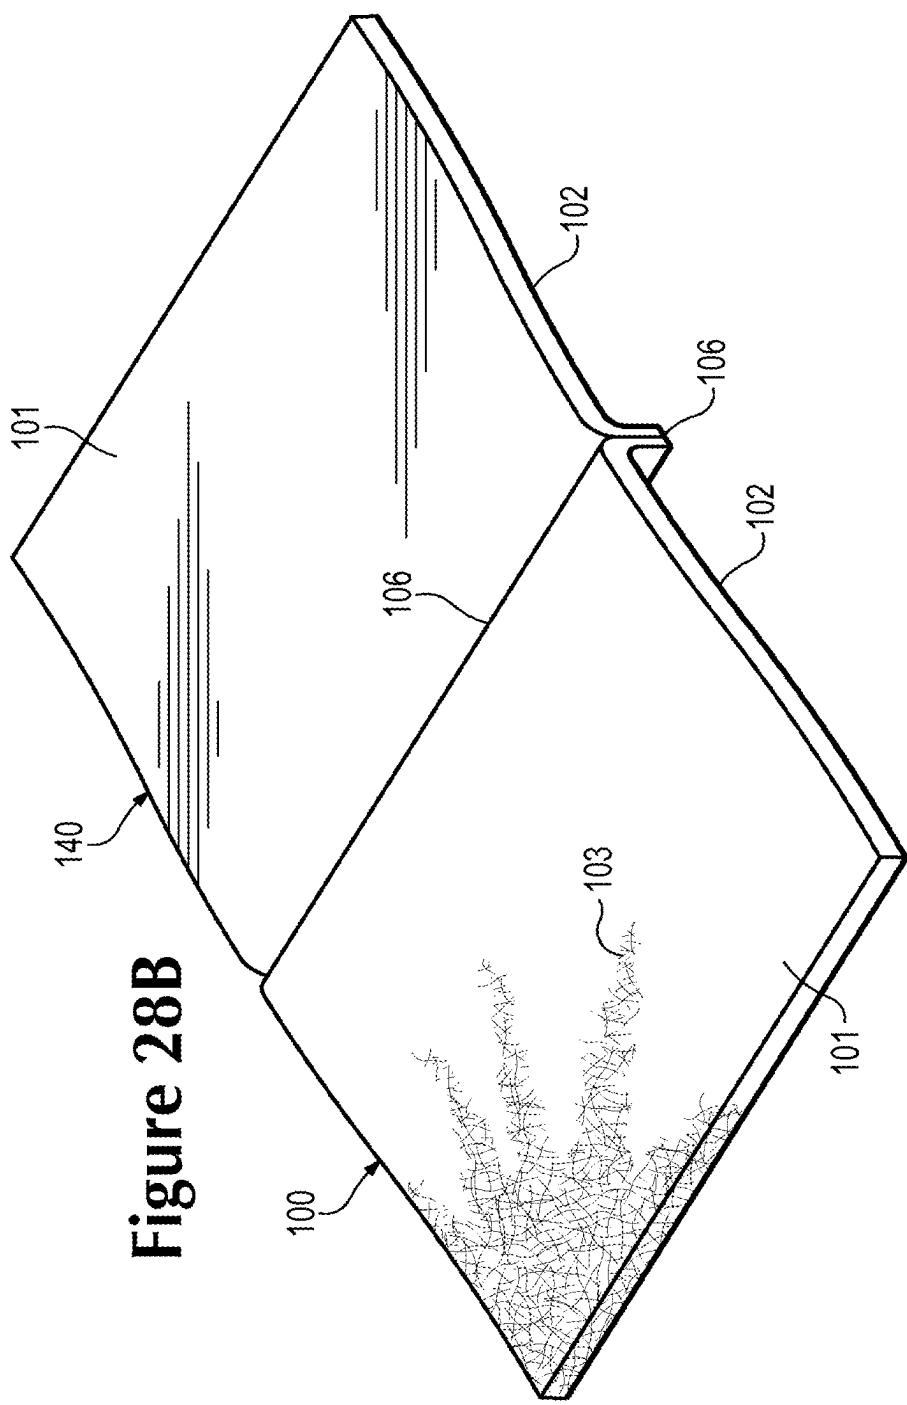


Figure 28B

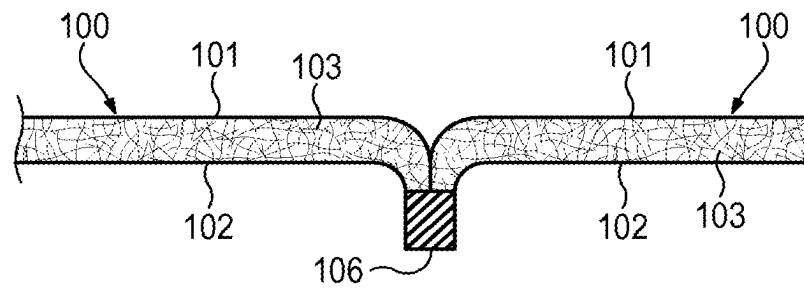


Figure 29A

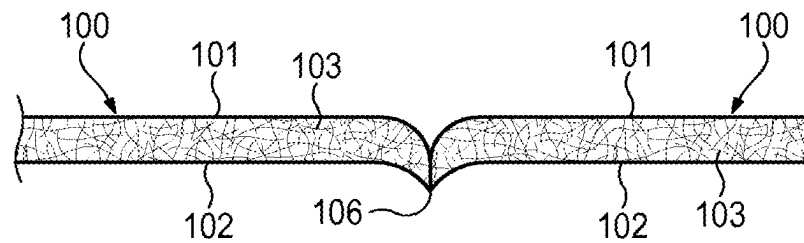


Figure 29B

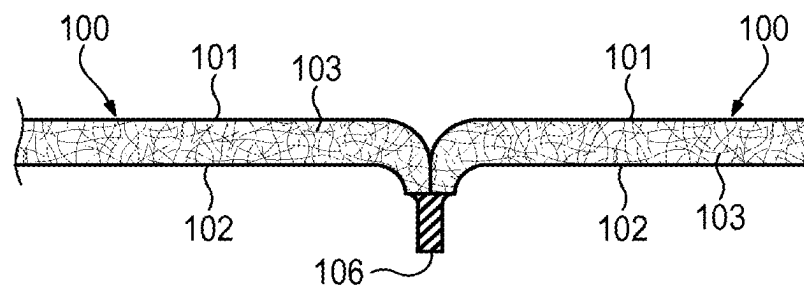


Figure 29C

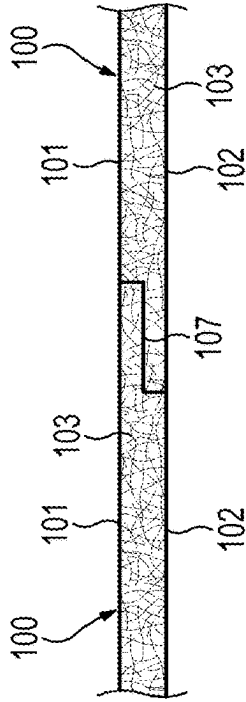
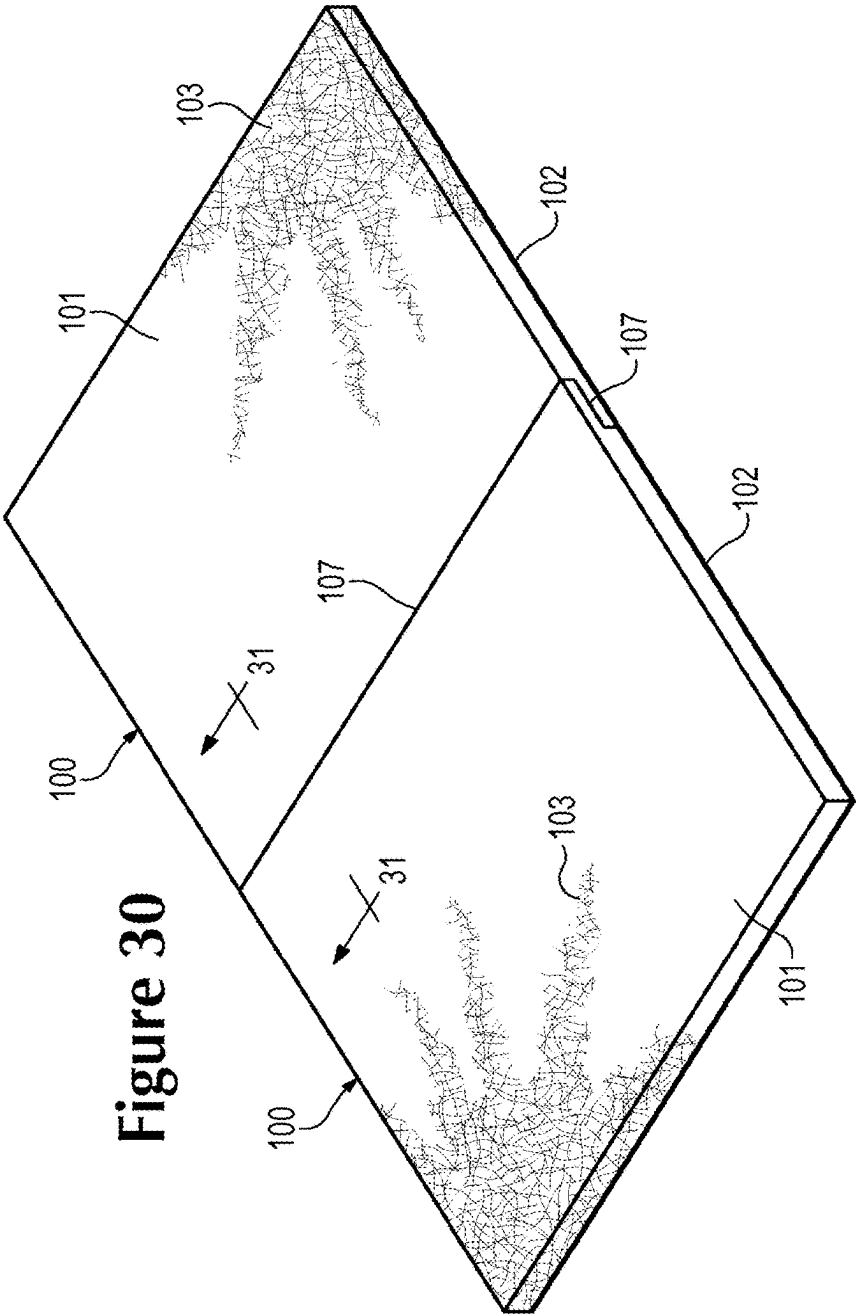


Figure 31

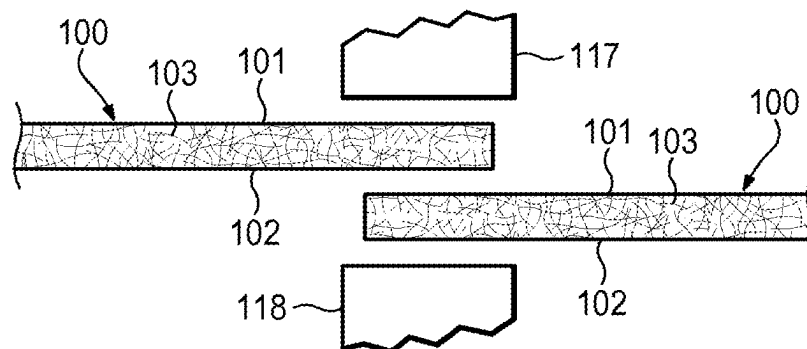


Figure 32A

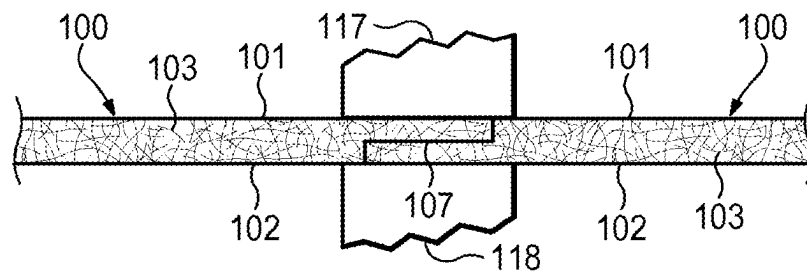


Figure 32B

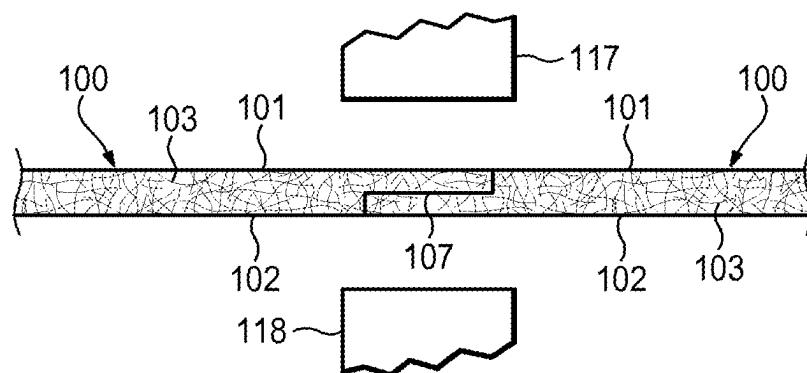


Figure 32C

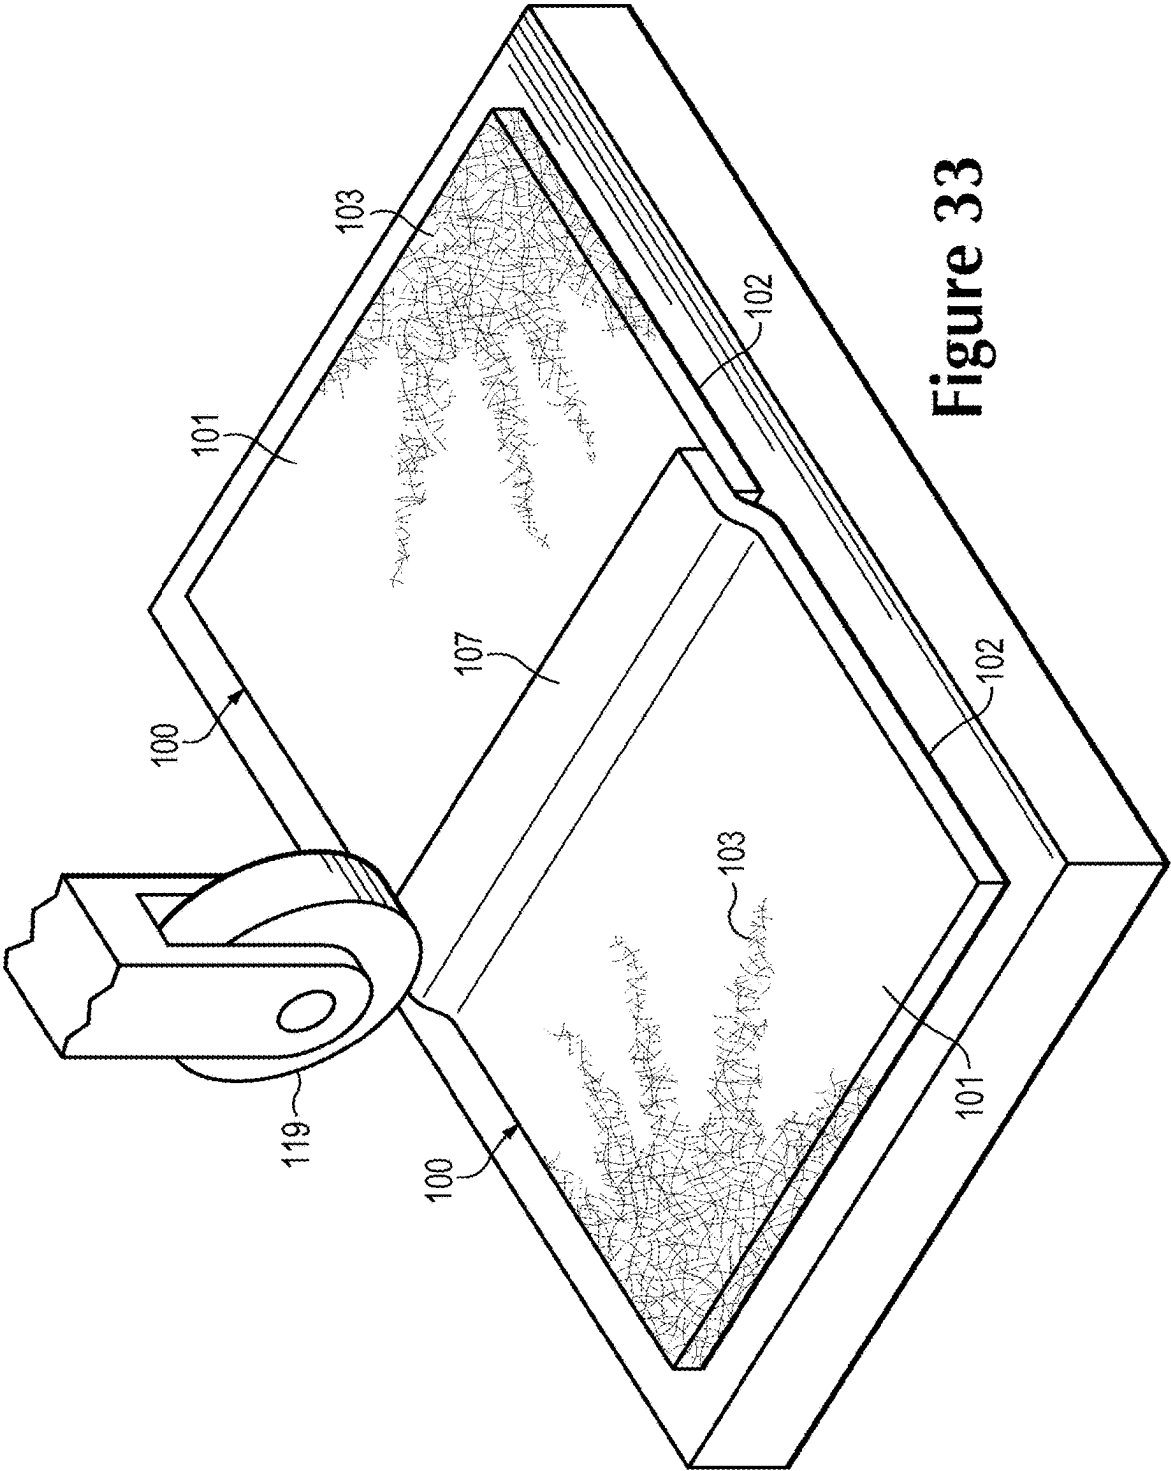


Figure 33

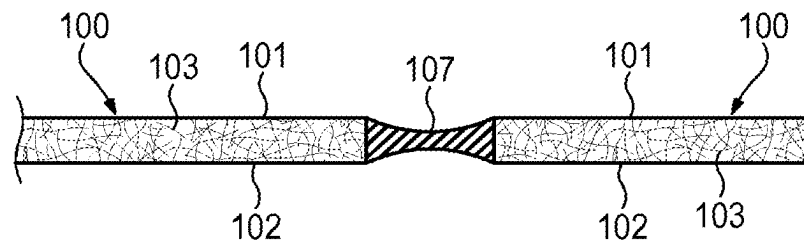


Figure 34A

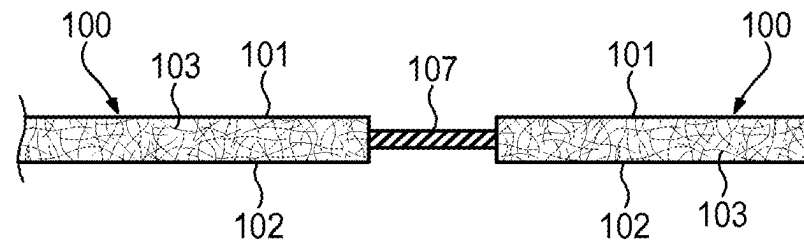


Figure 34B

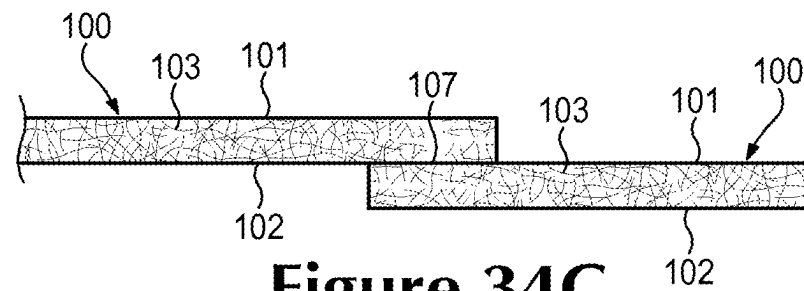
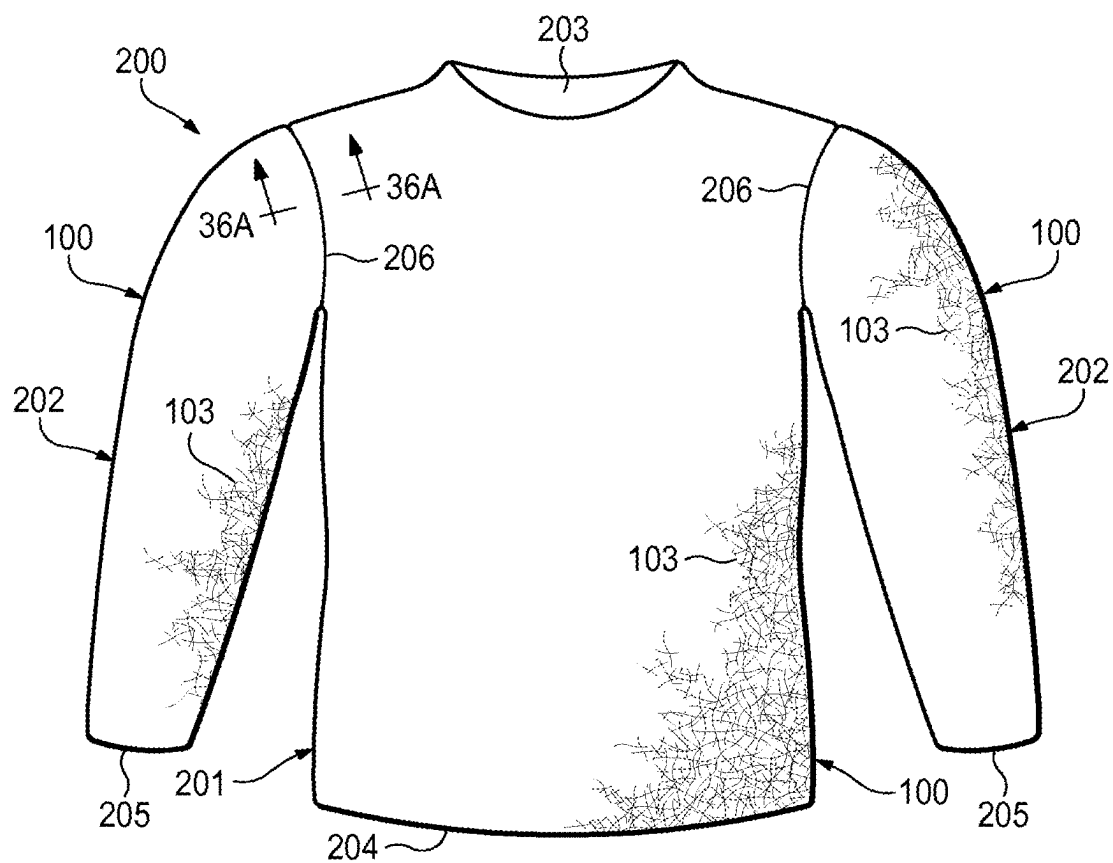


Figure 34C

**Figure 35A**

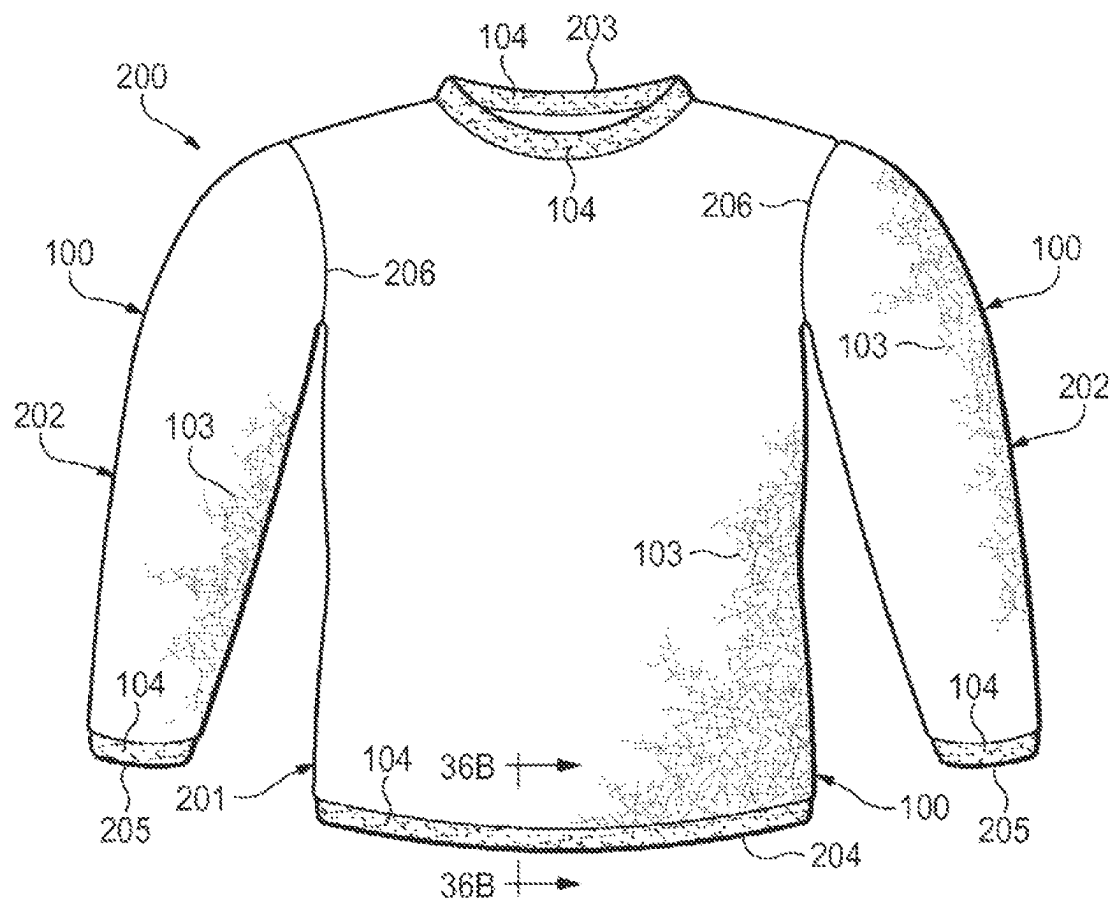


Figure 35B

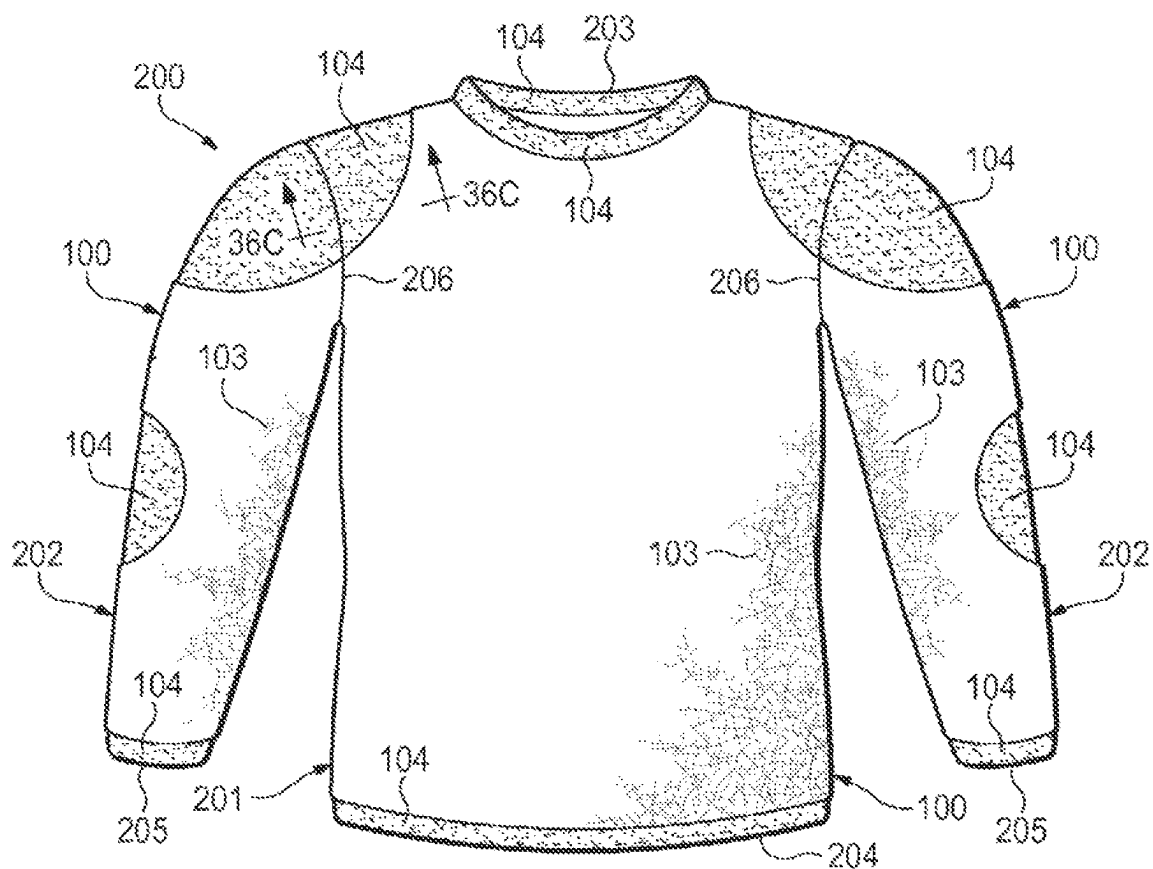


Figure 35C

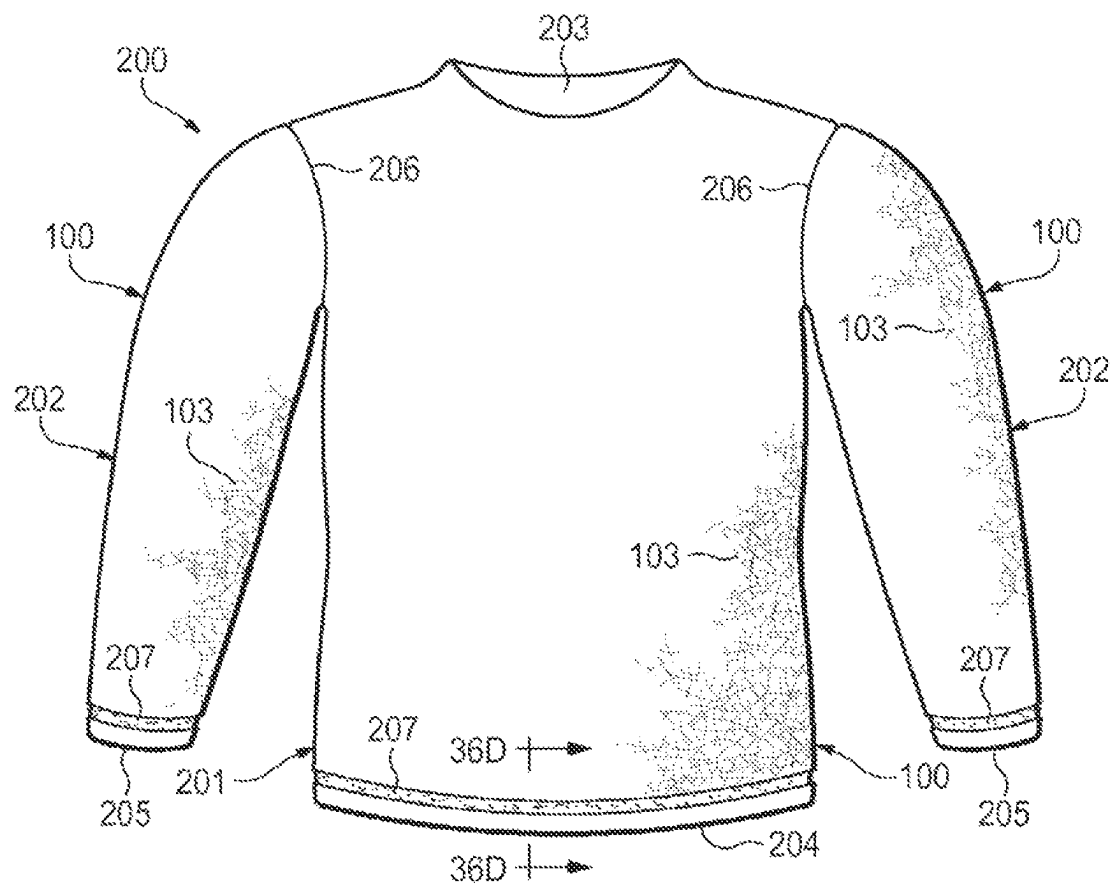


Figure 35D

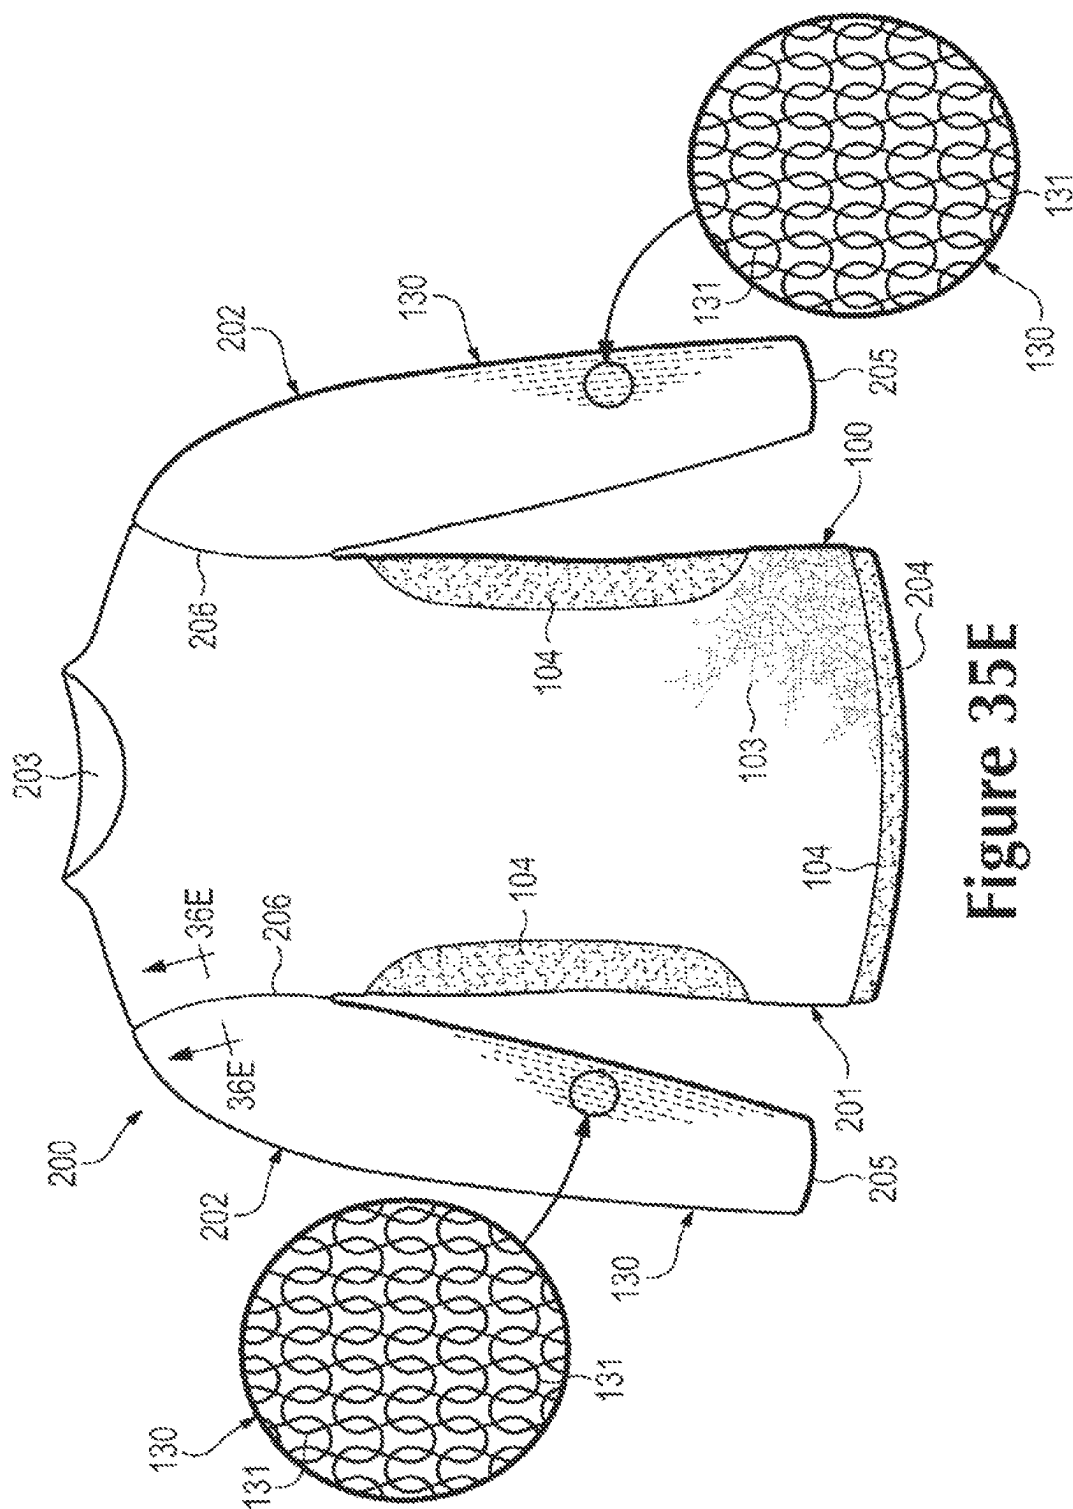
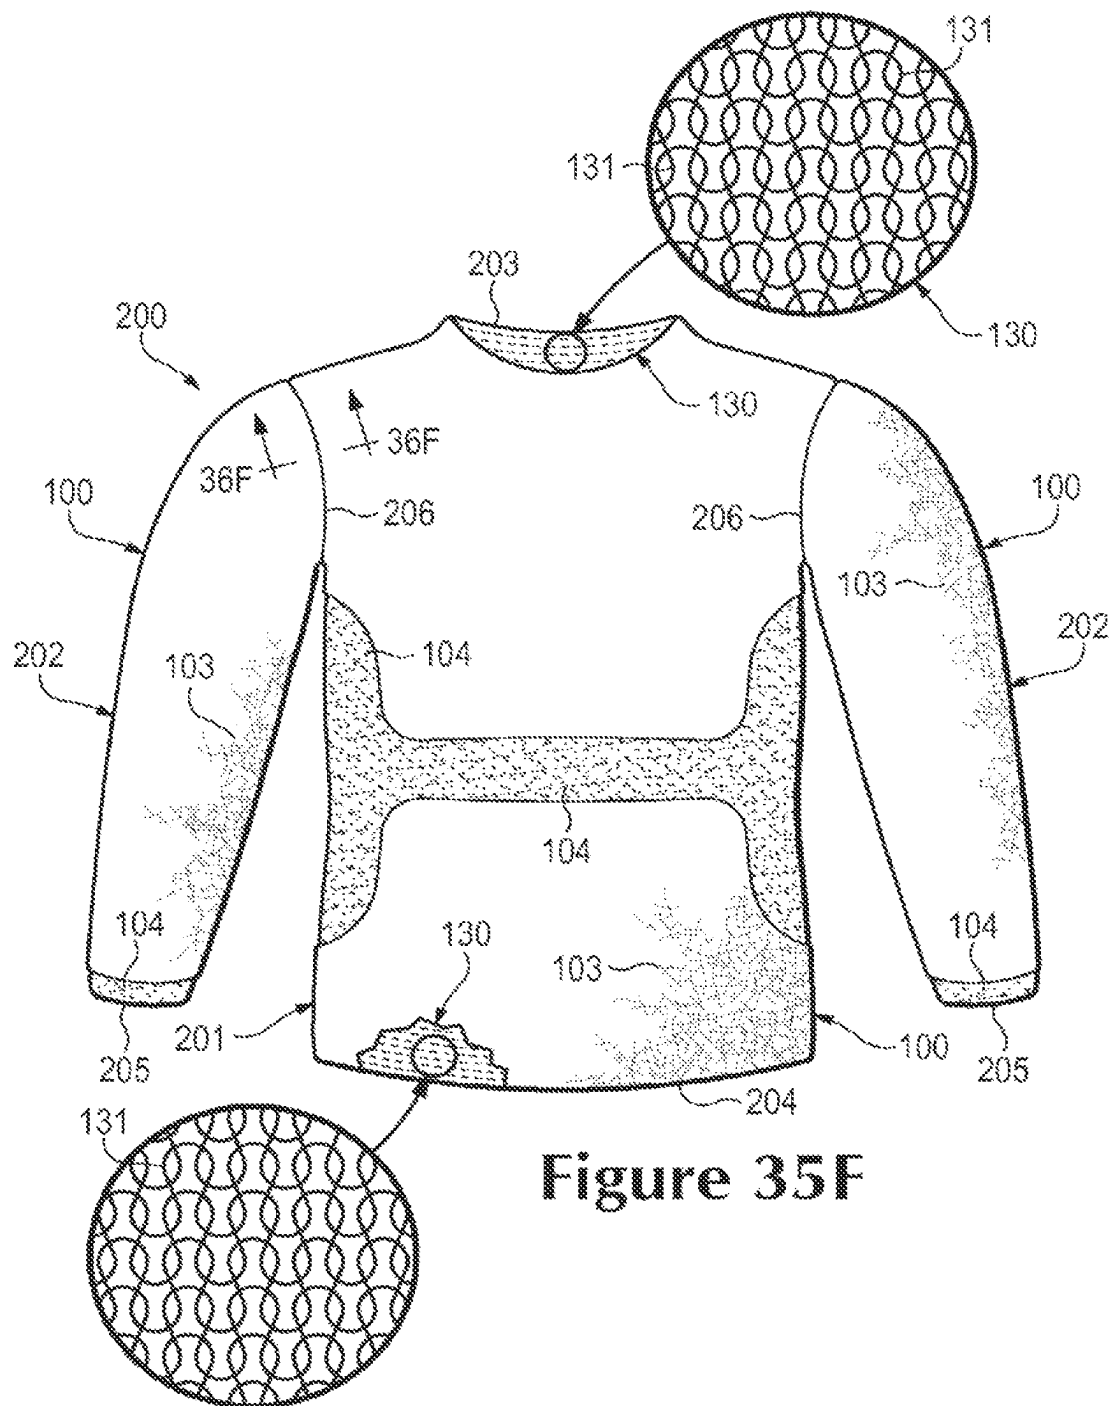


Figure 35E

**Figure 35F**

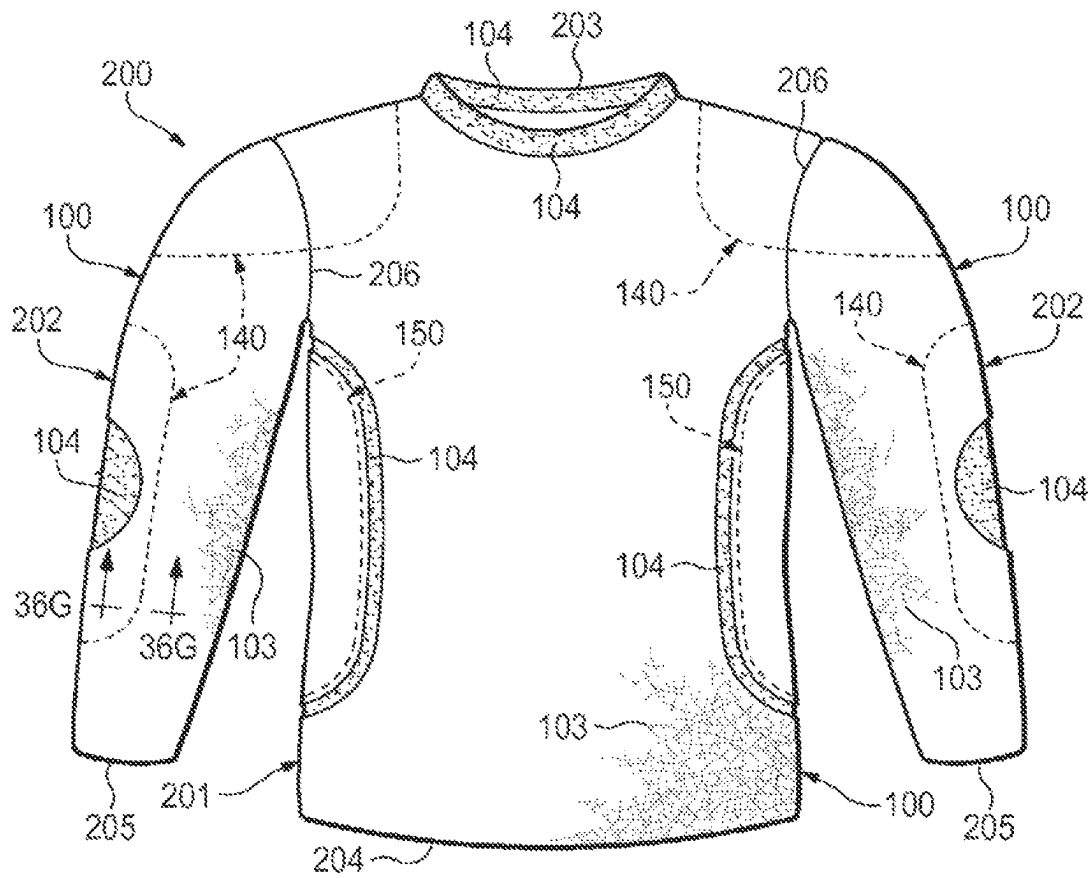
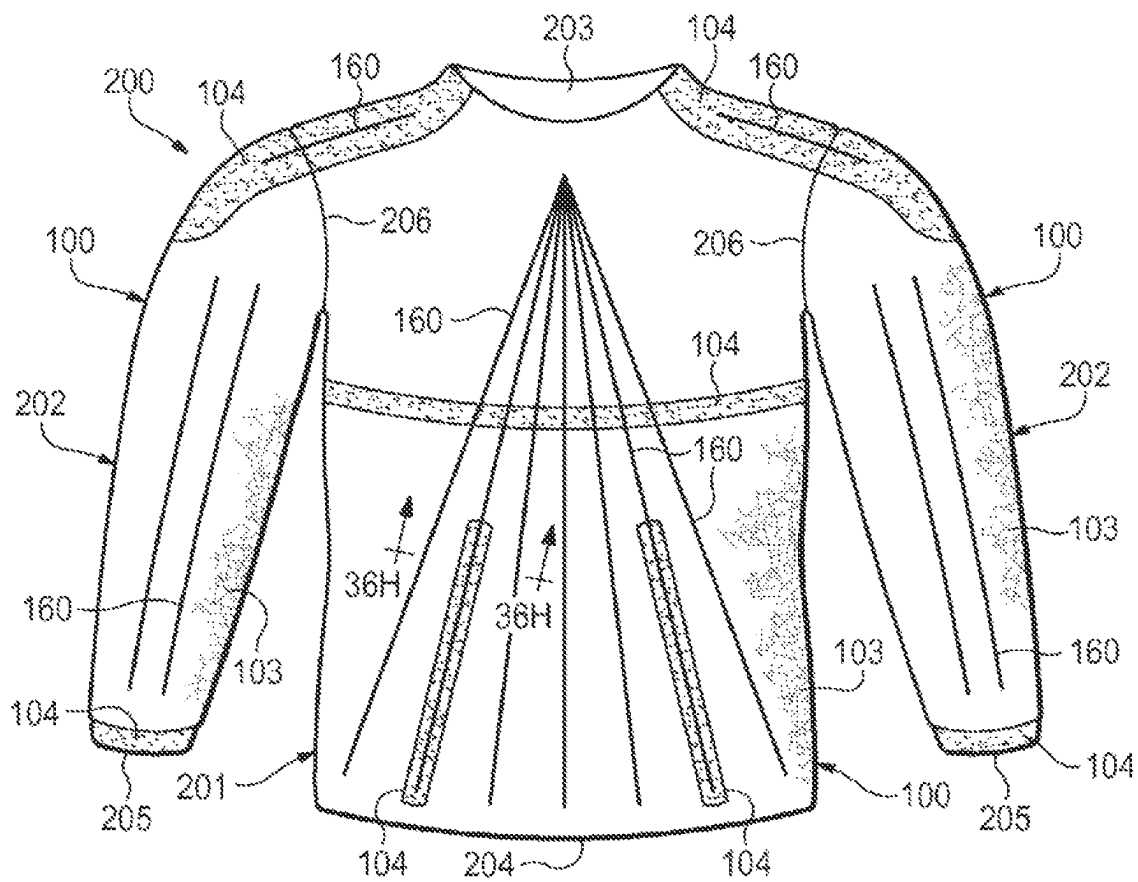
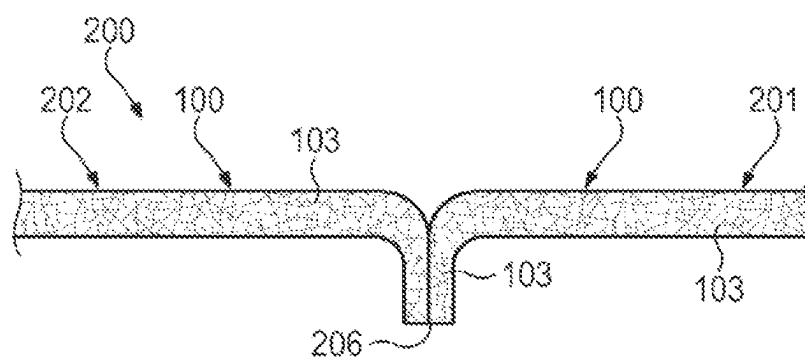
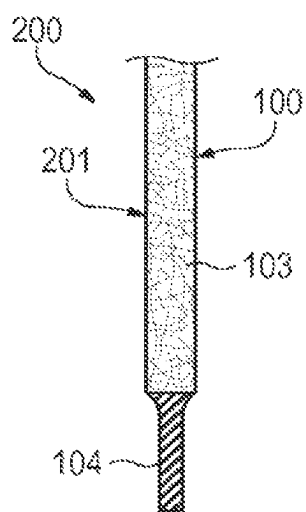


Figure 35G

**Figure 35H**

**Figure 36A****Figure 36B**

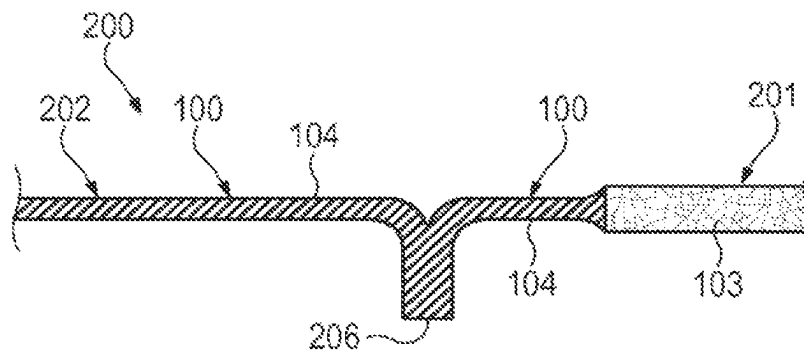


Figure 36C

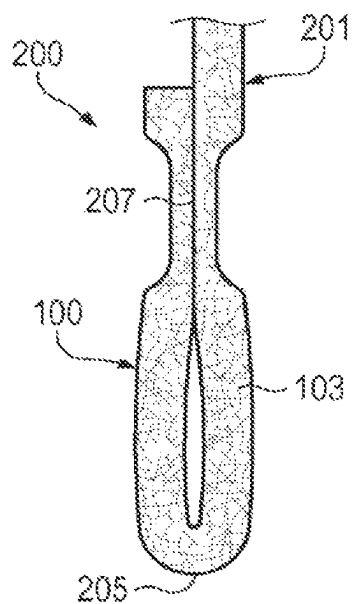


Figure 36D

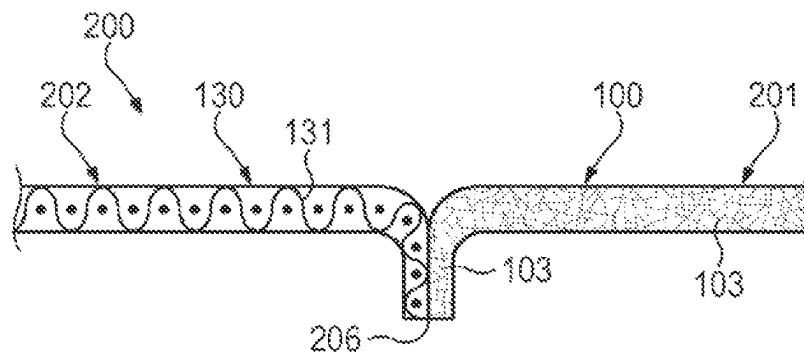


Figure 36E

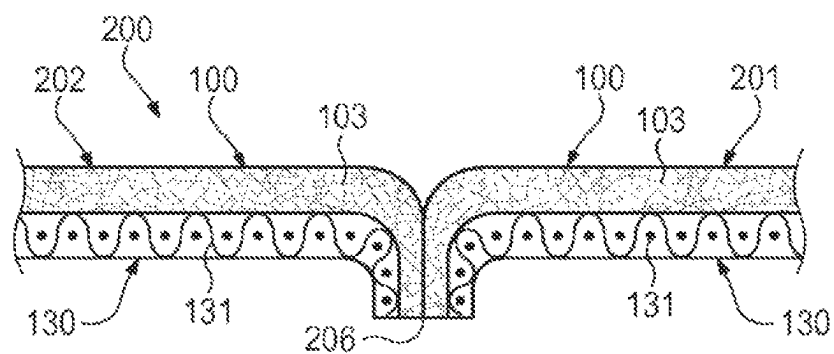


Figure 36F

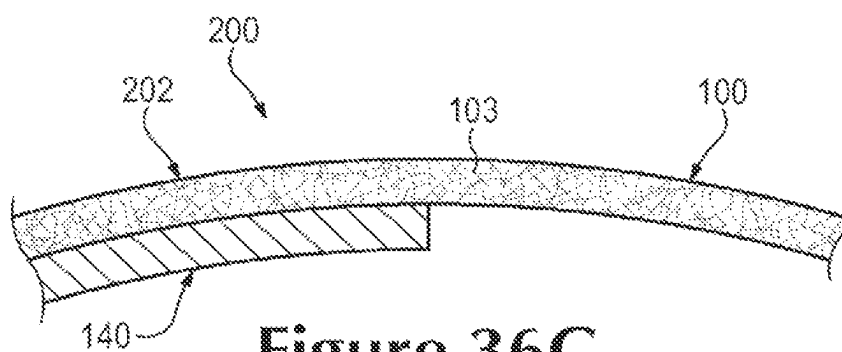


Figure 36G

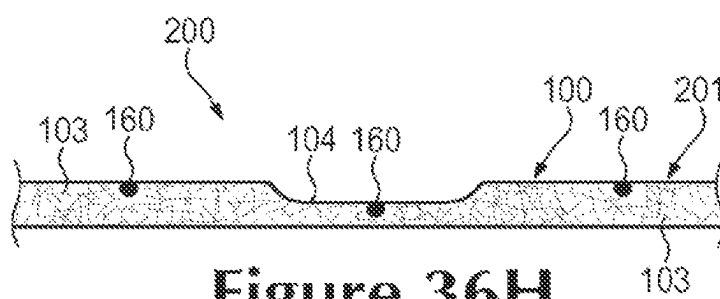
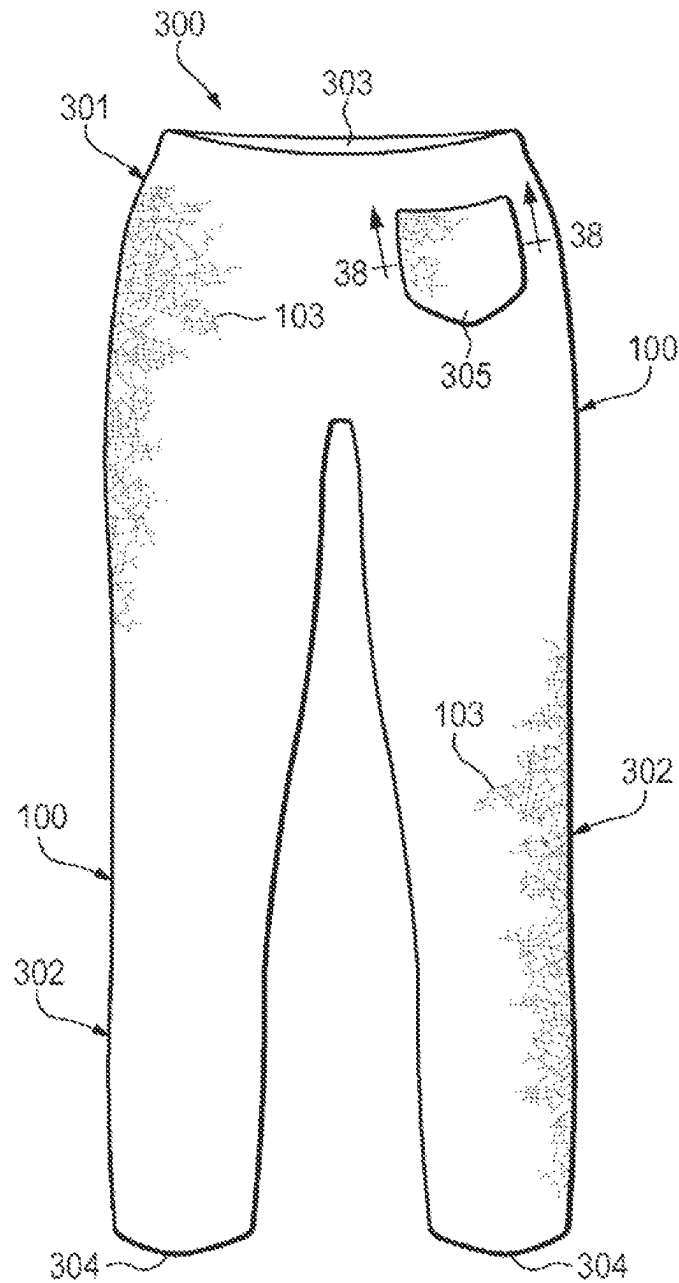


Figure 36H

**Figure 37A**

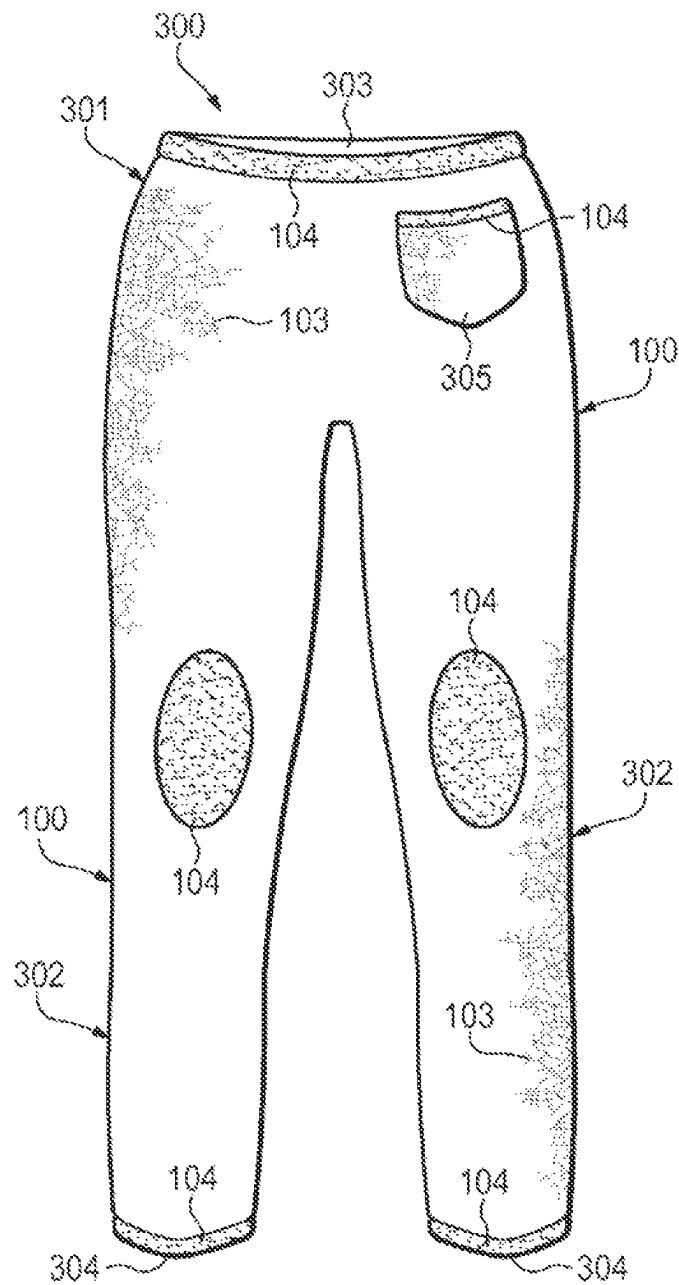


Figure 37B

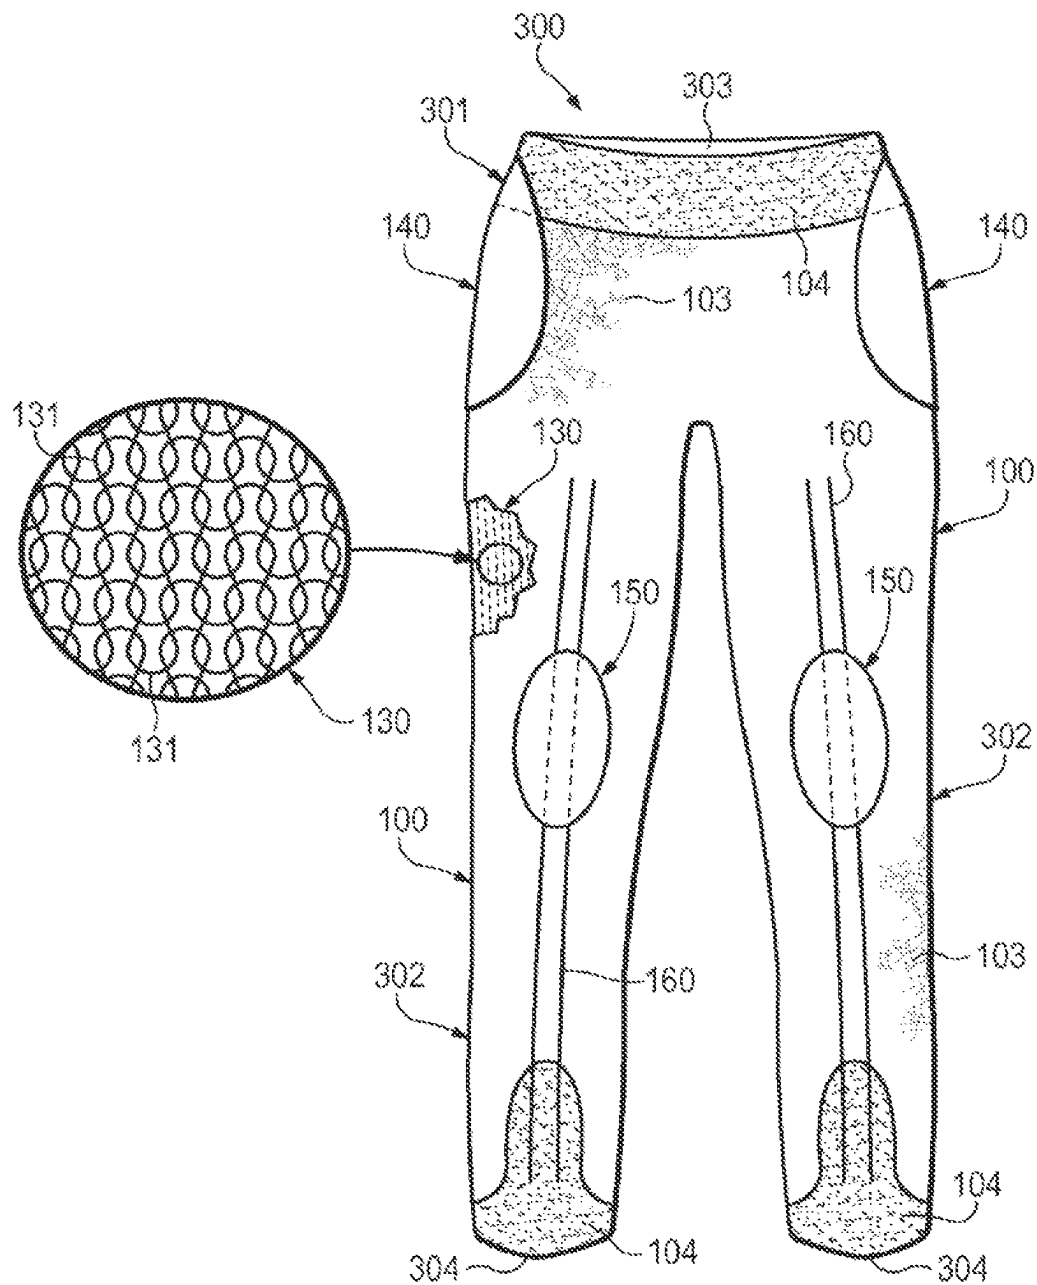
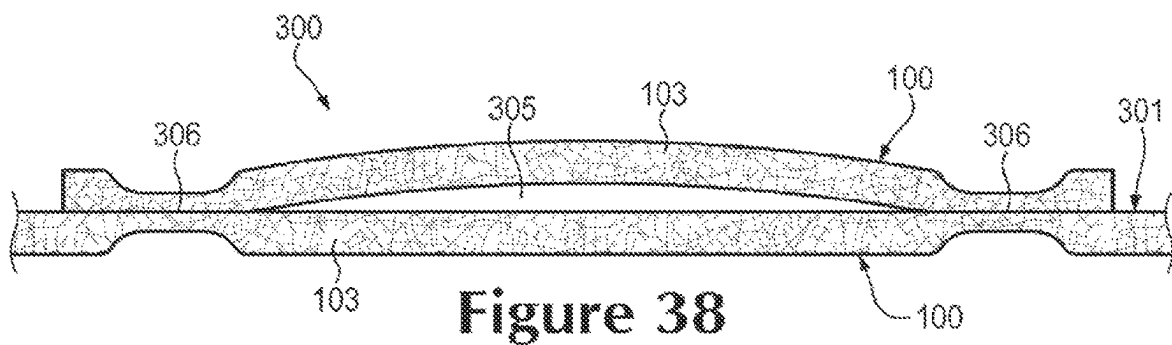


Figure 37C



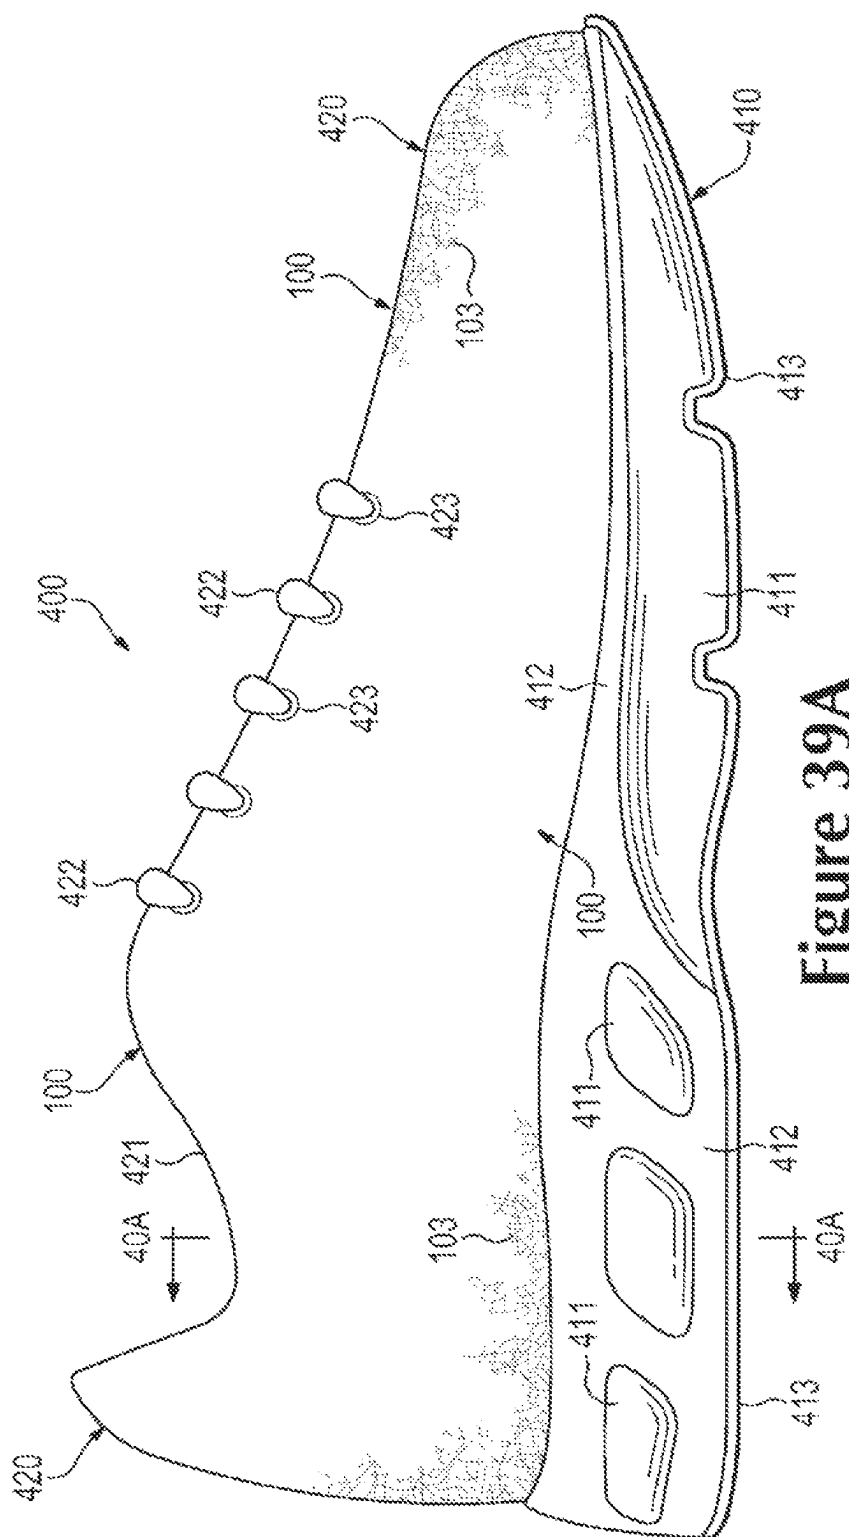


Figure 39A

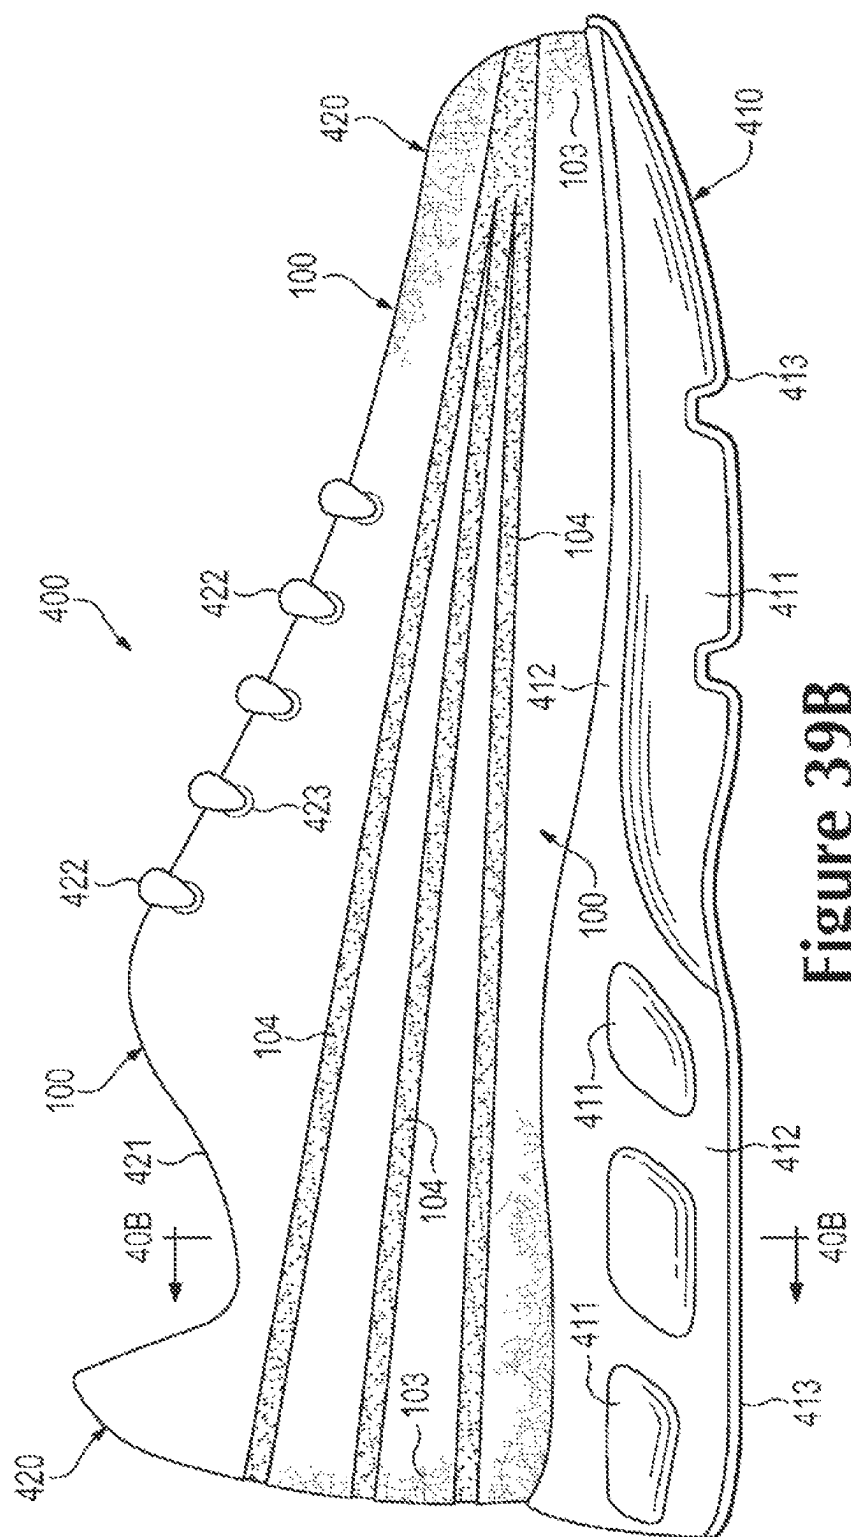


Figure 39B

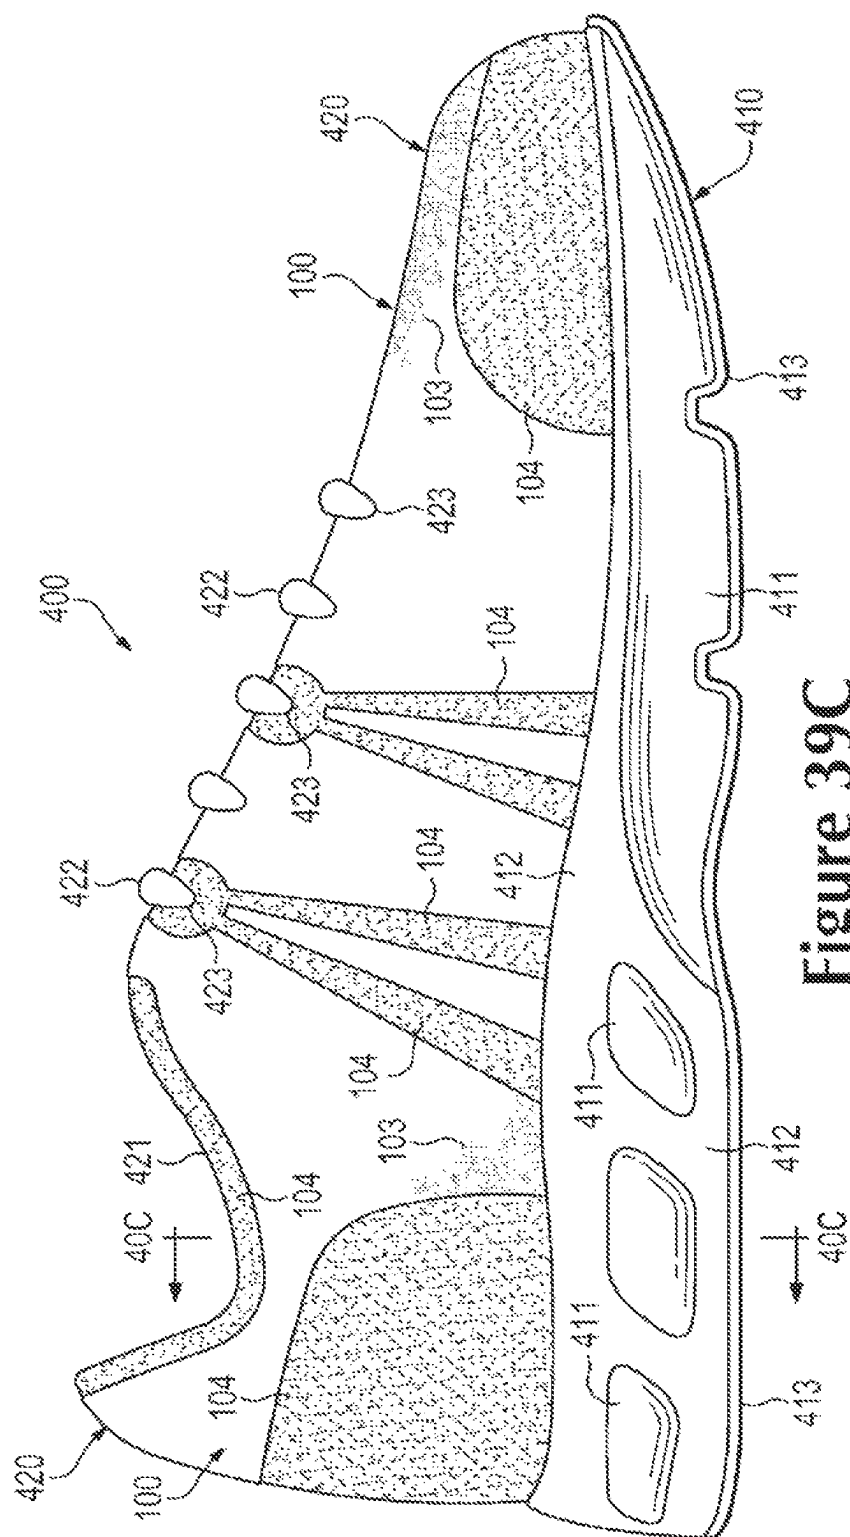


Figure 39C

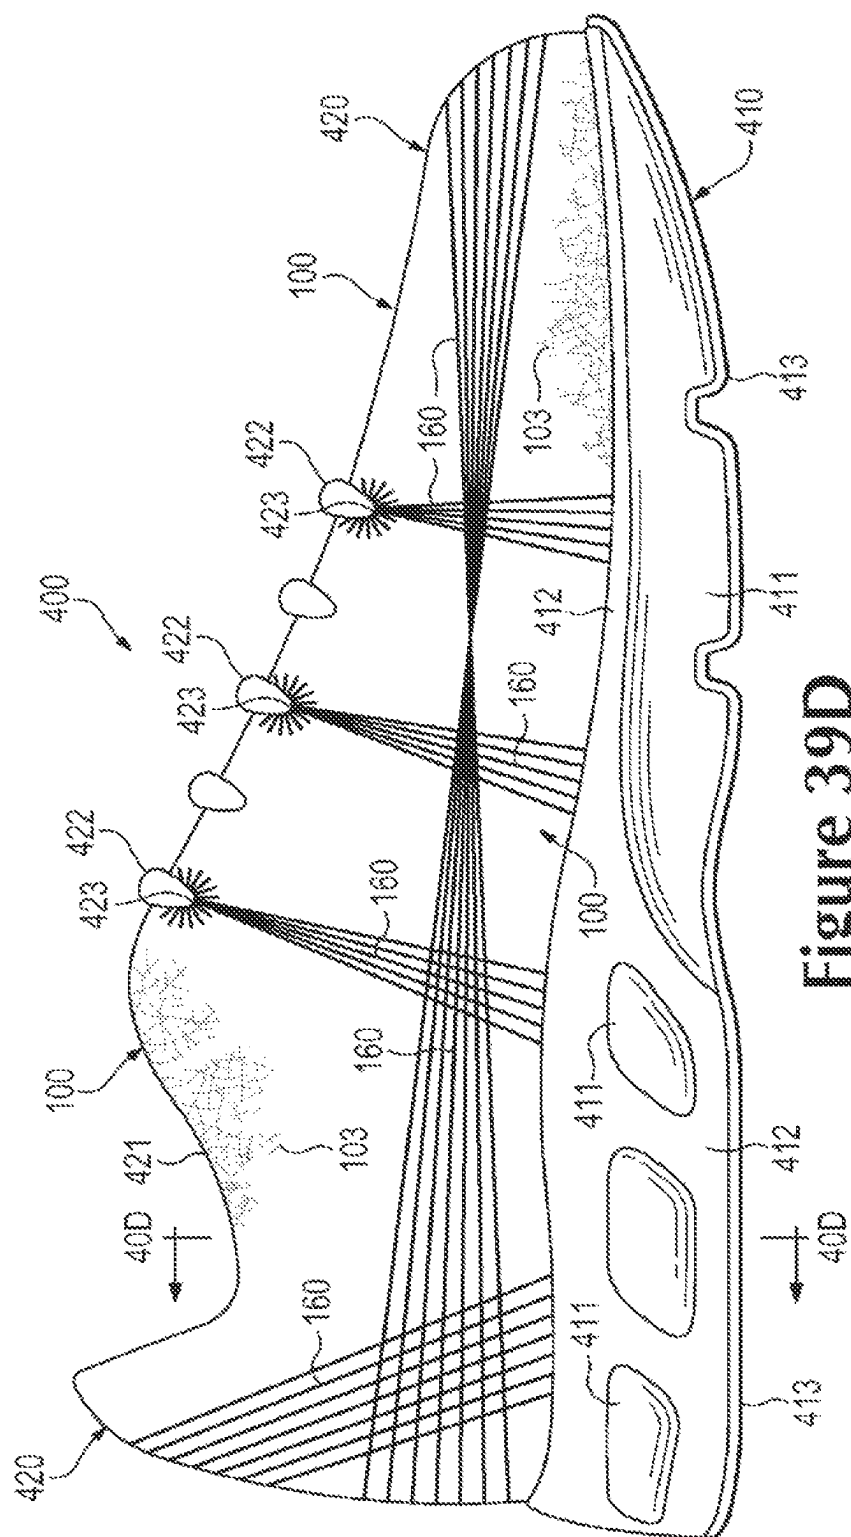


Figure 39D

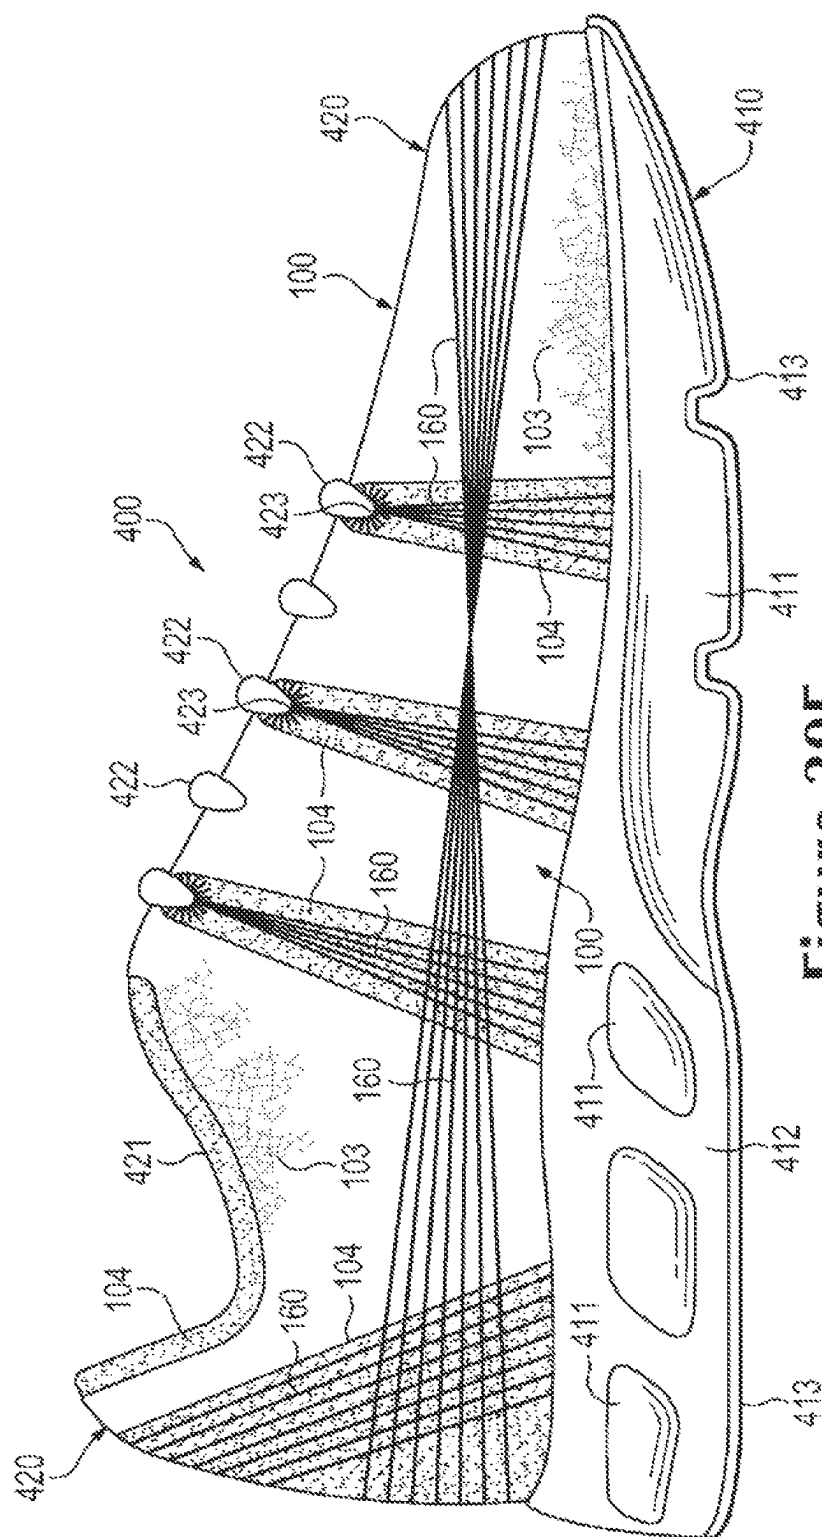


Figure 39E

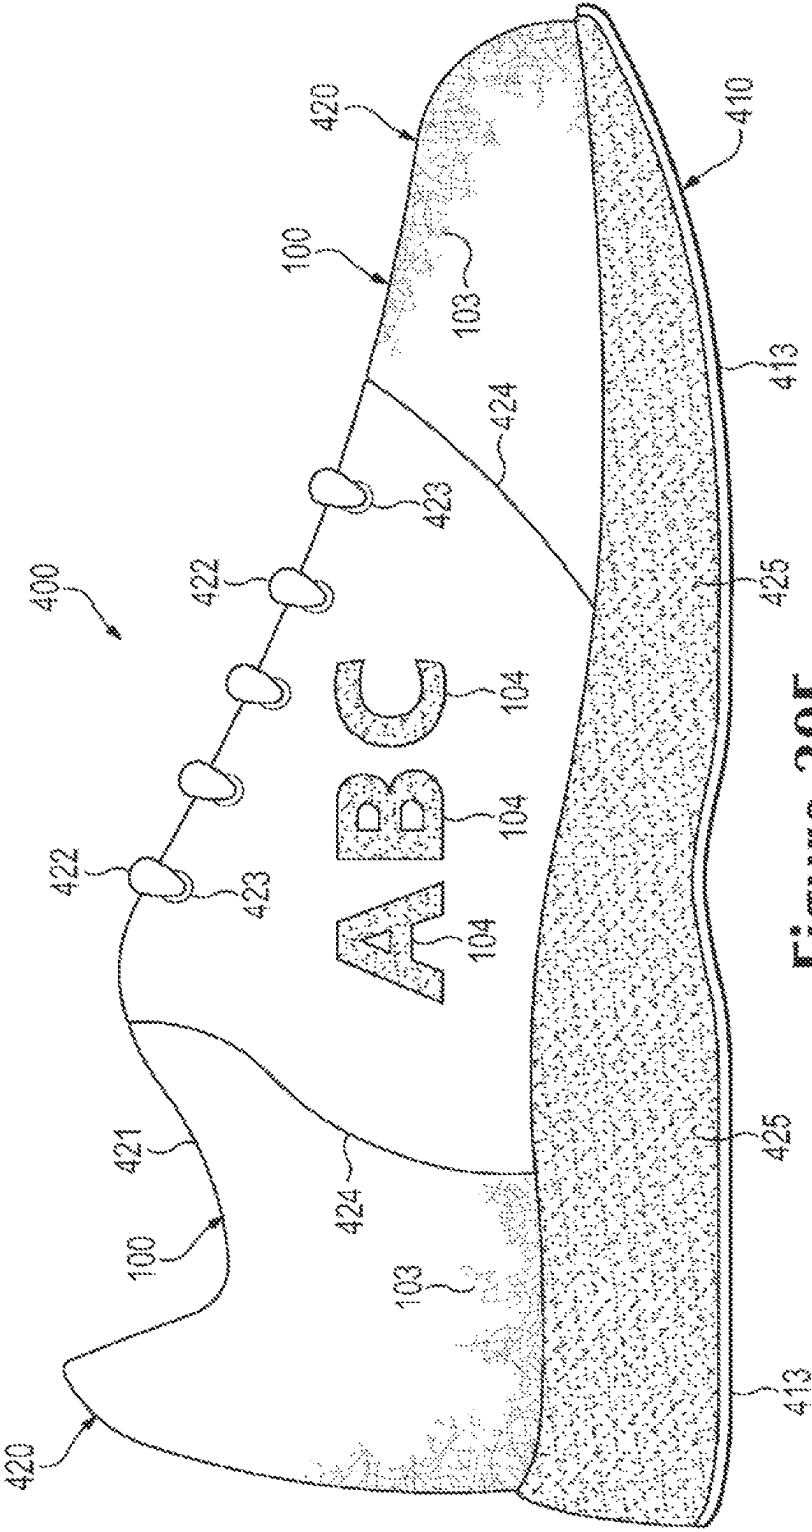


Figure 39F

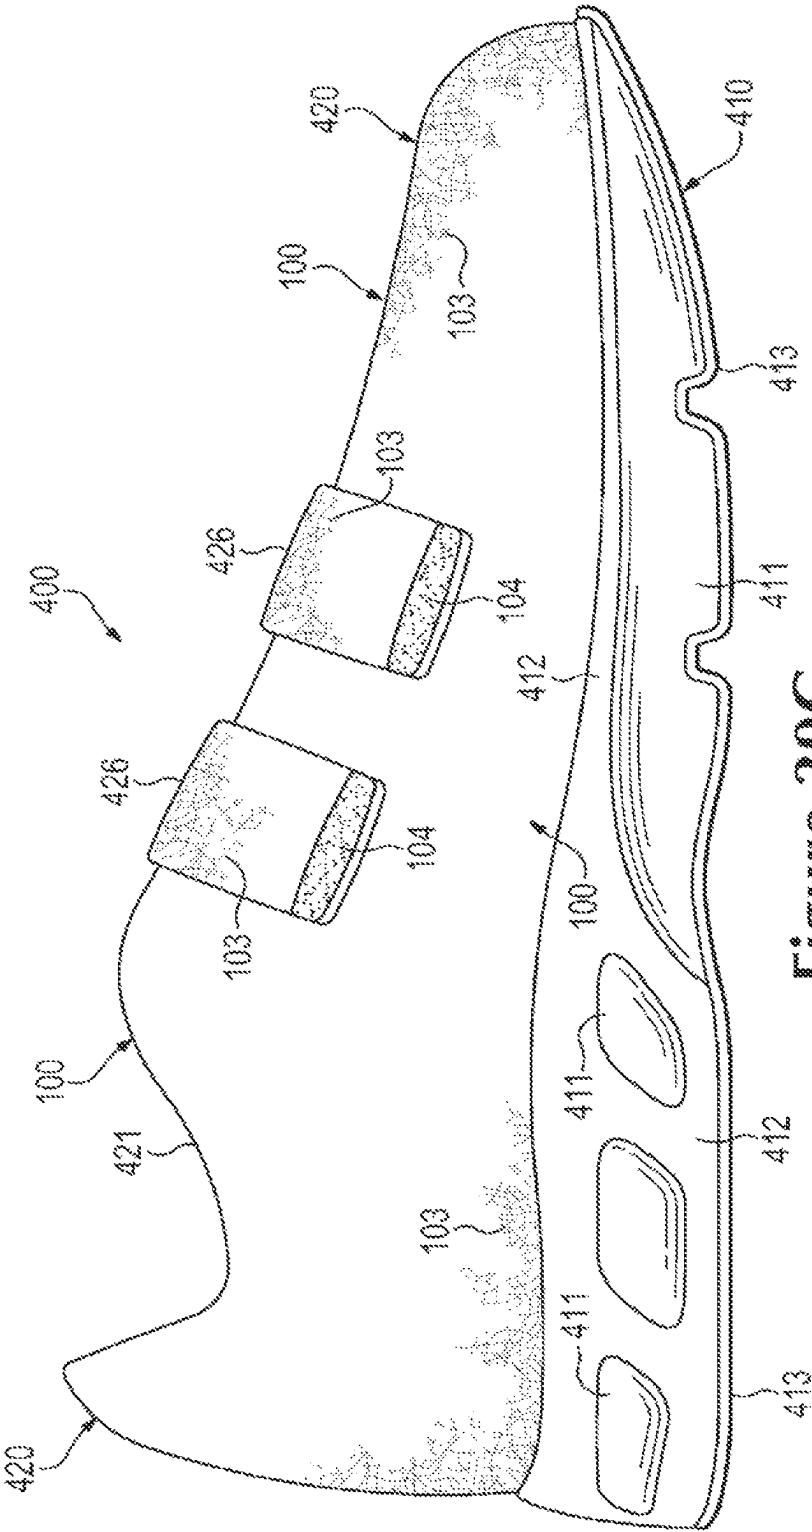
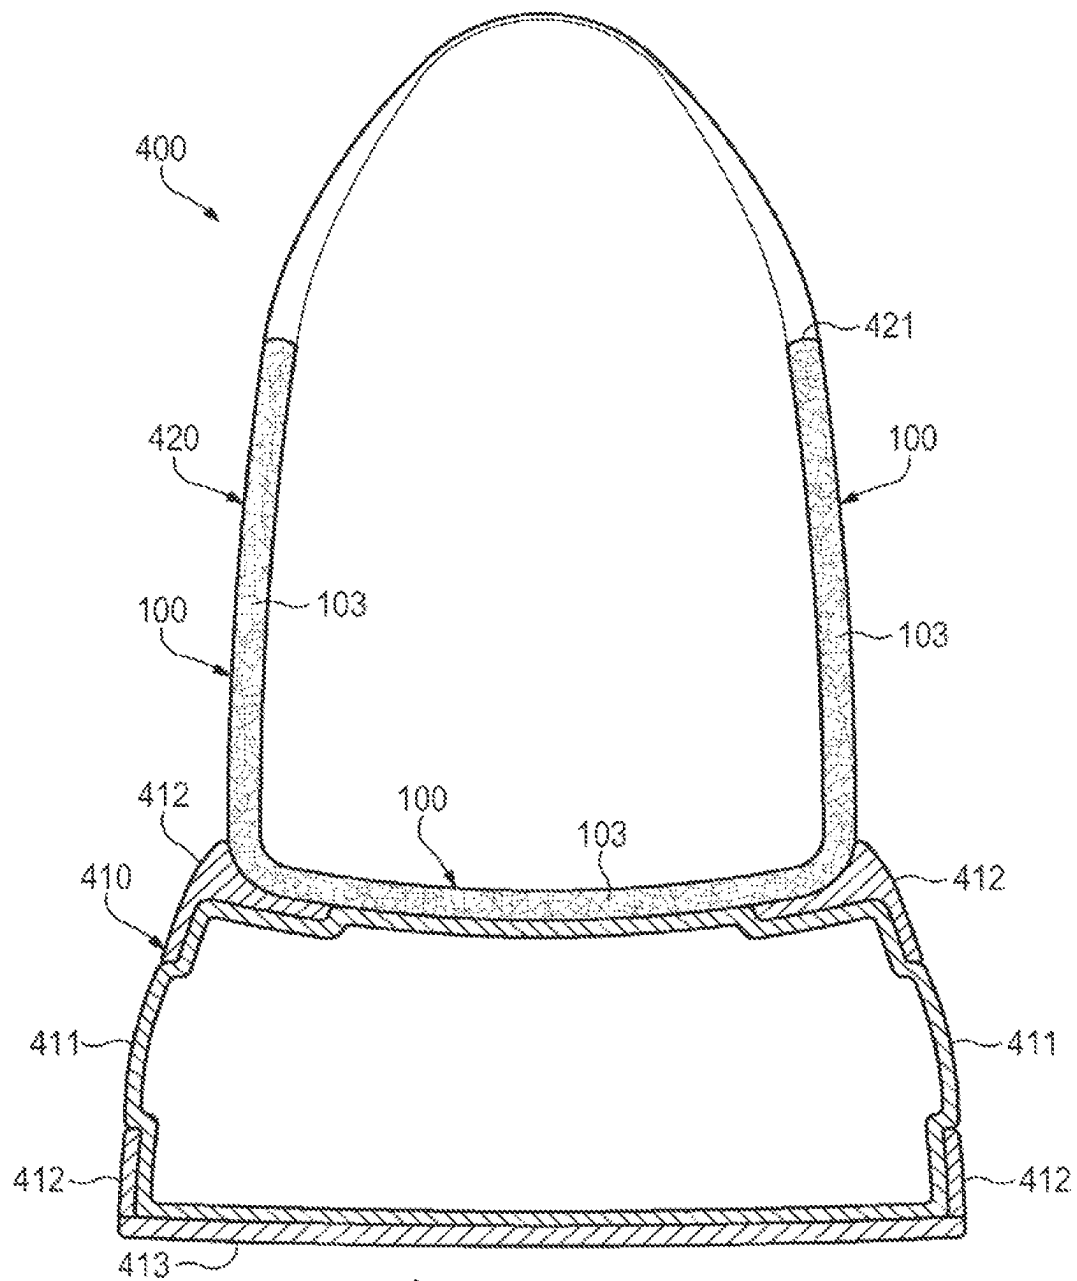


Figure 39G

**Figure 40A**

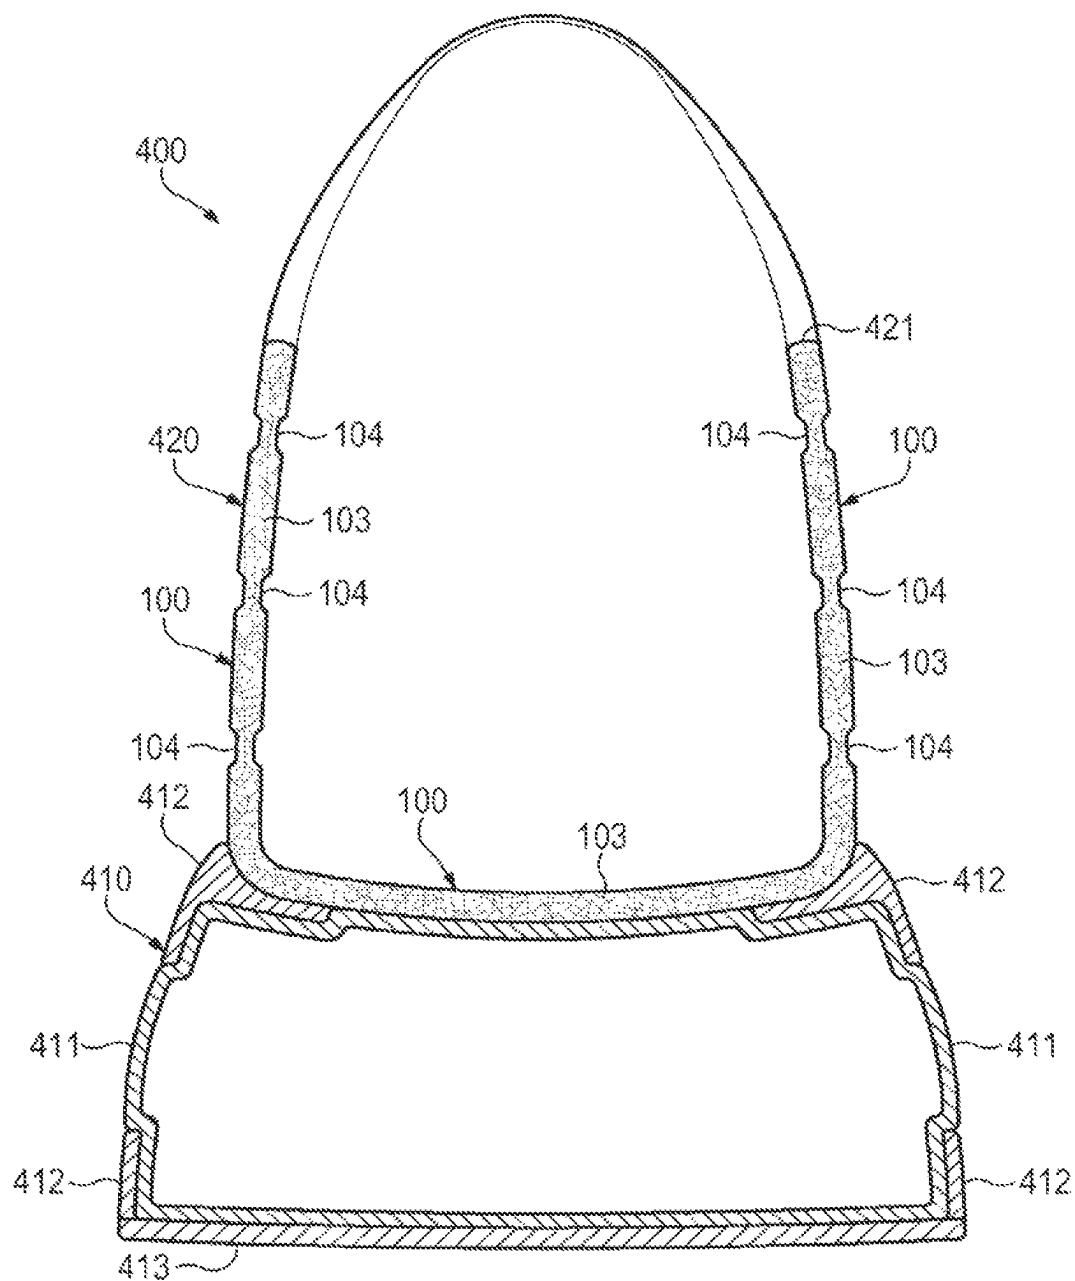


Figure 40B

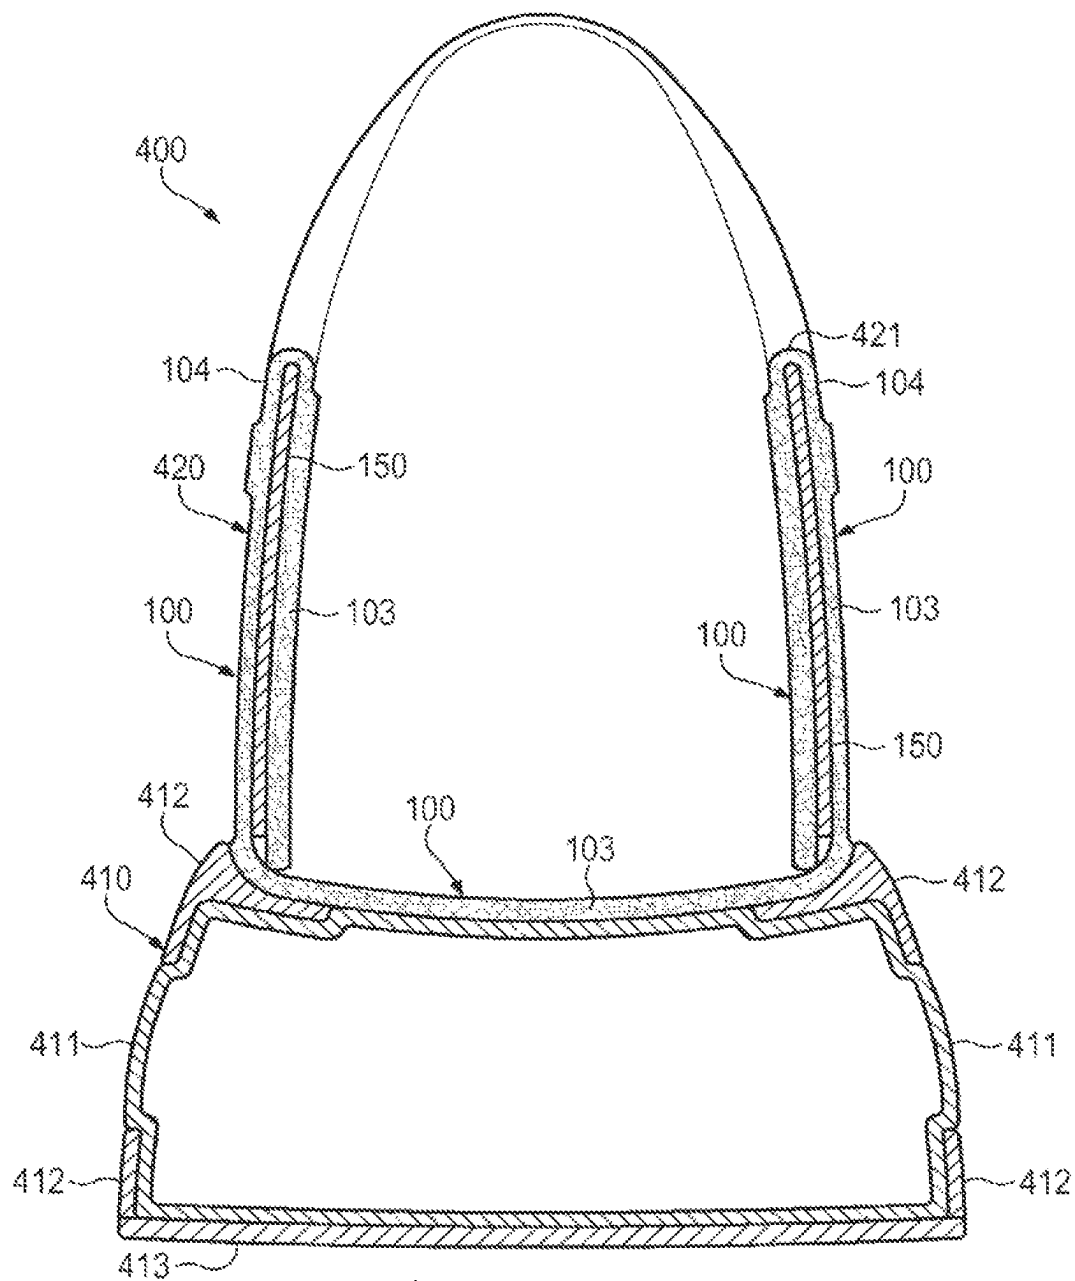


Figure 40C

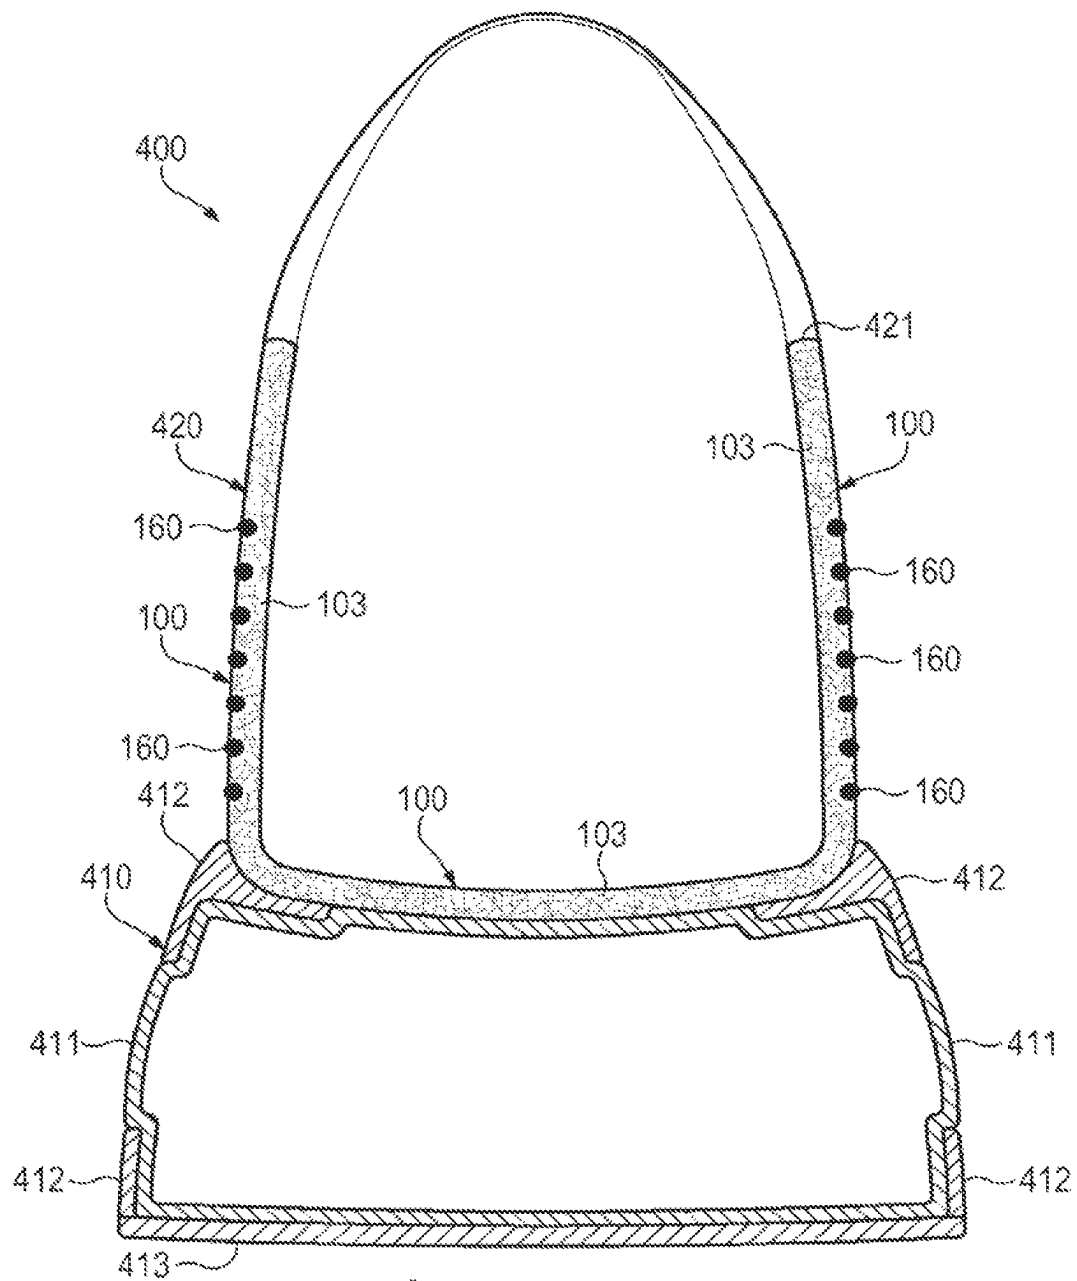
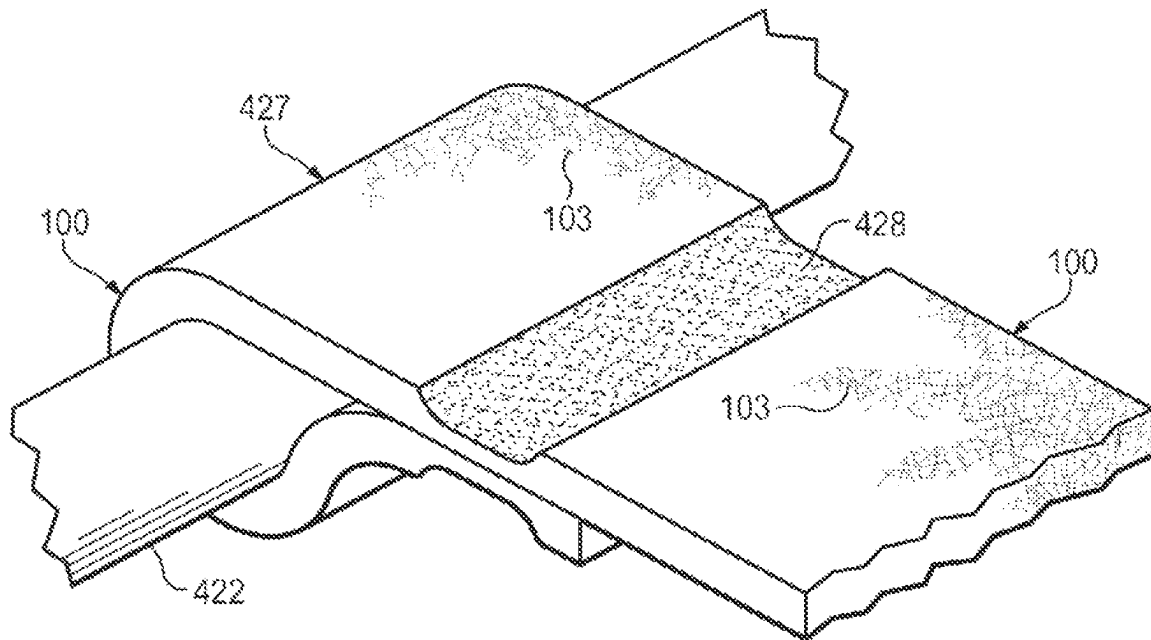


Figure 40D

**Figure 41**

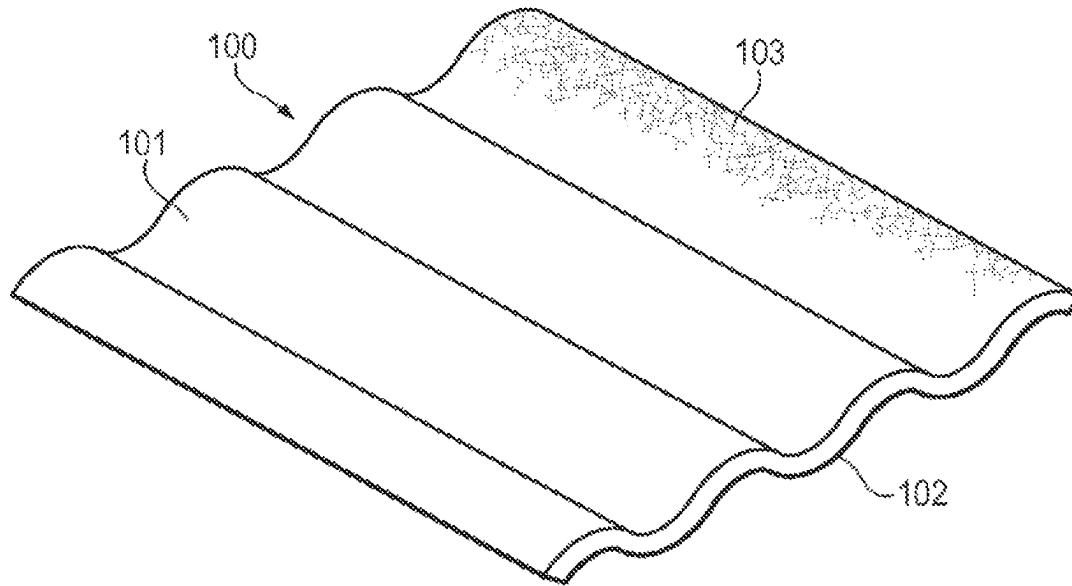


Figure 42A

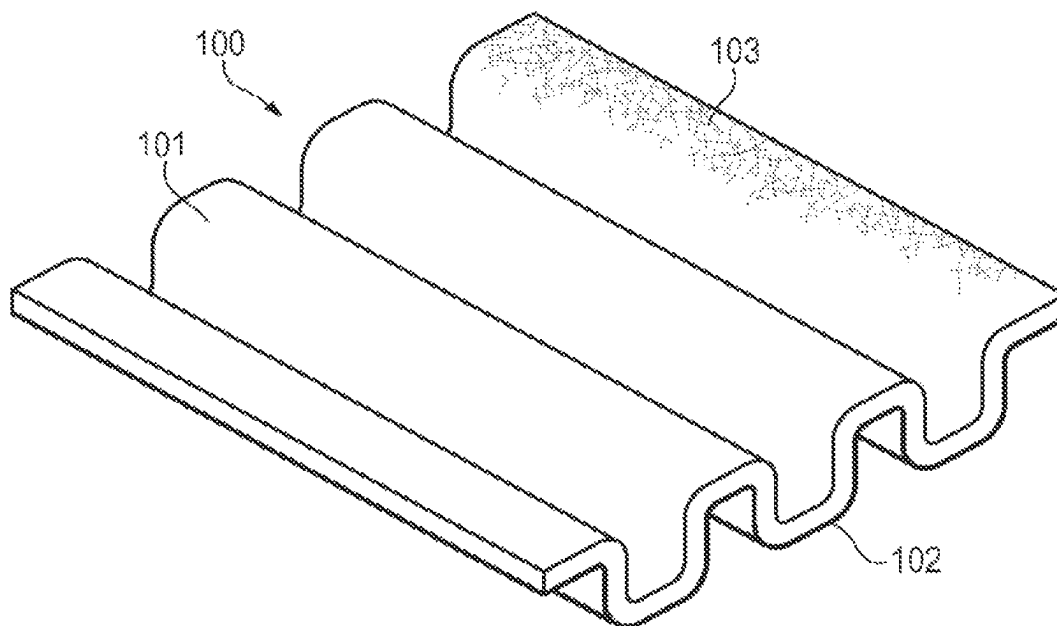
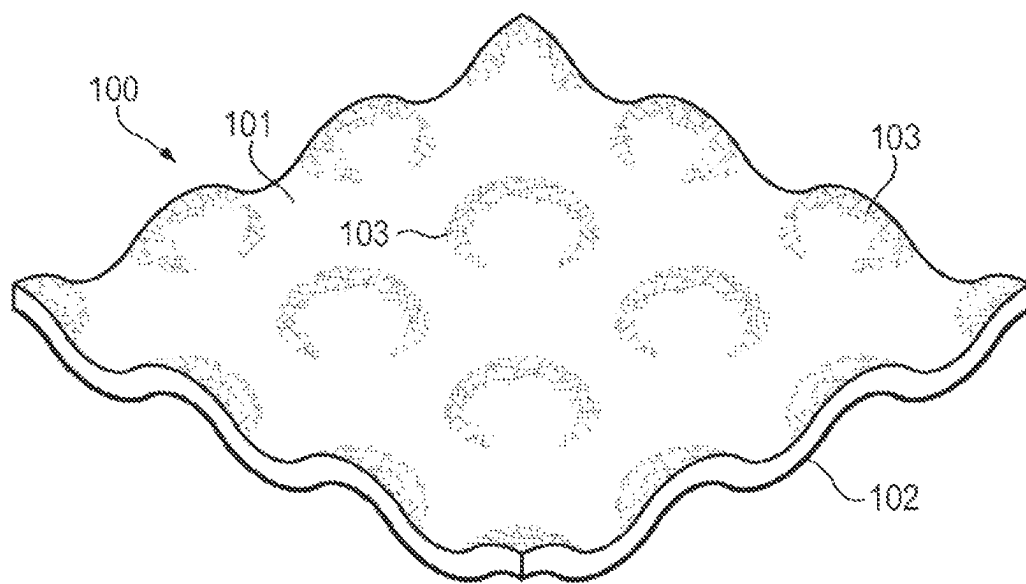
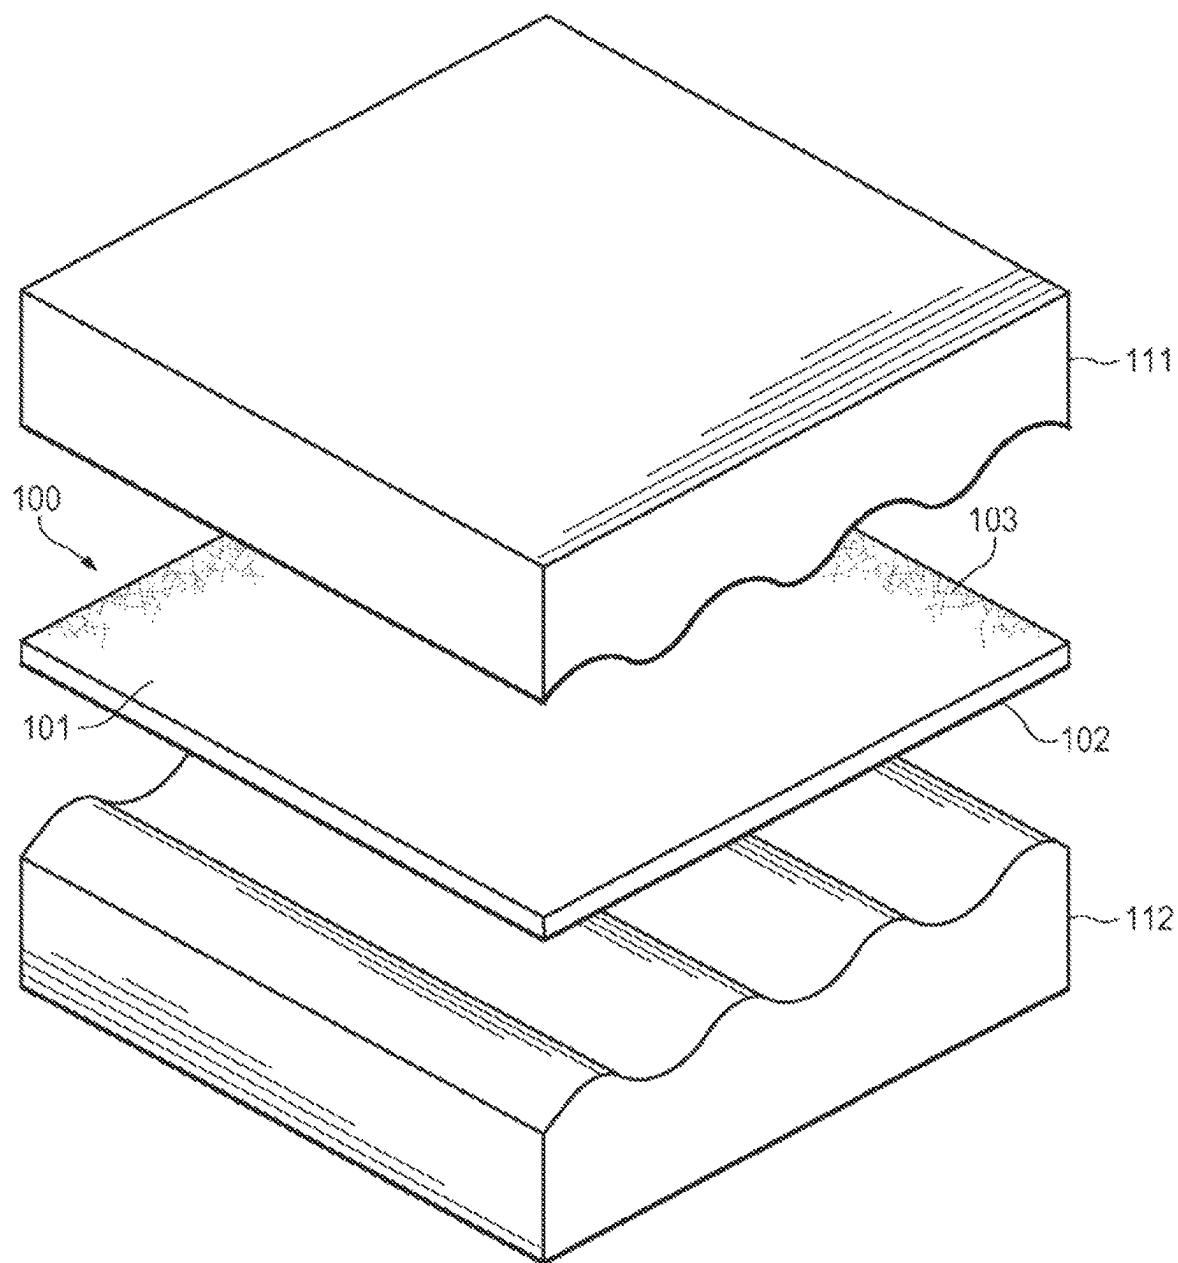


Figure 42B

**Figure 42C**

**Figure 43A**

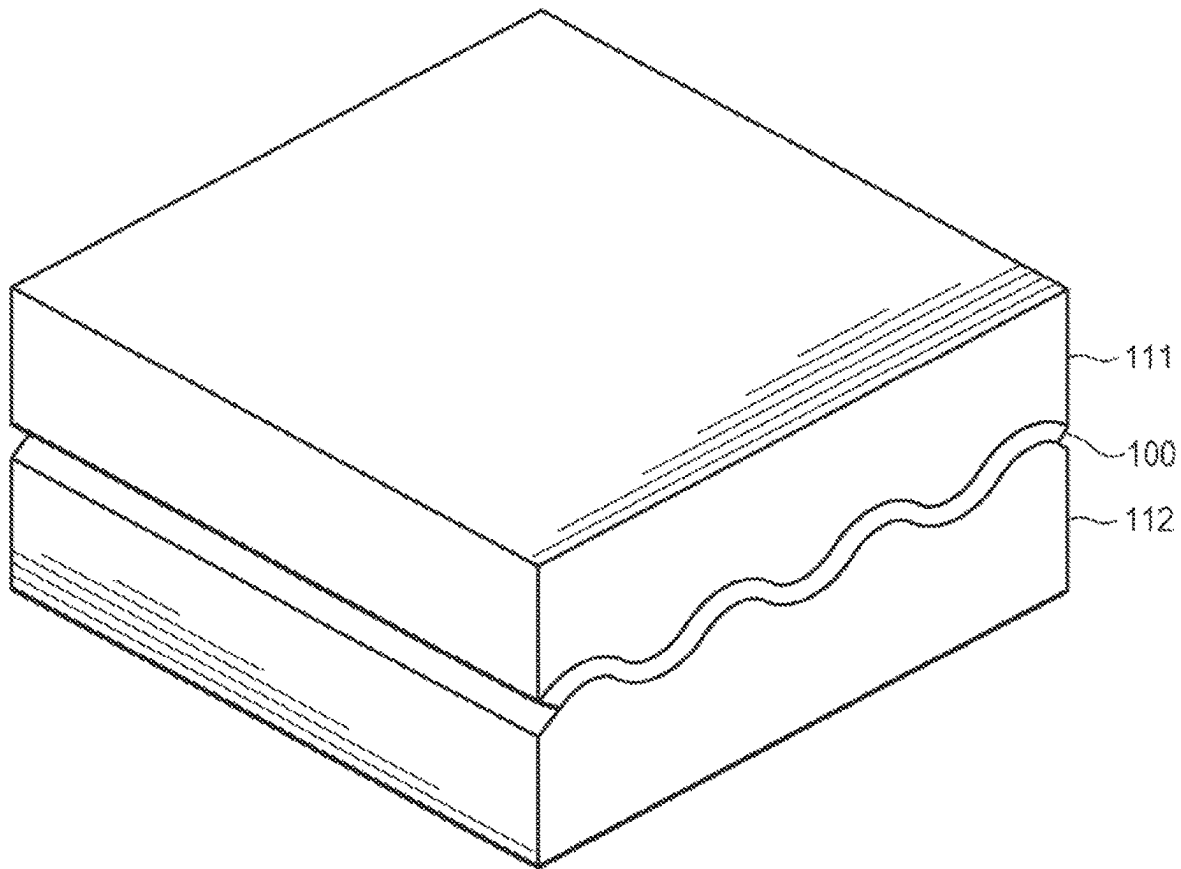
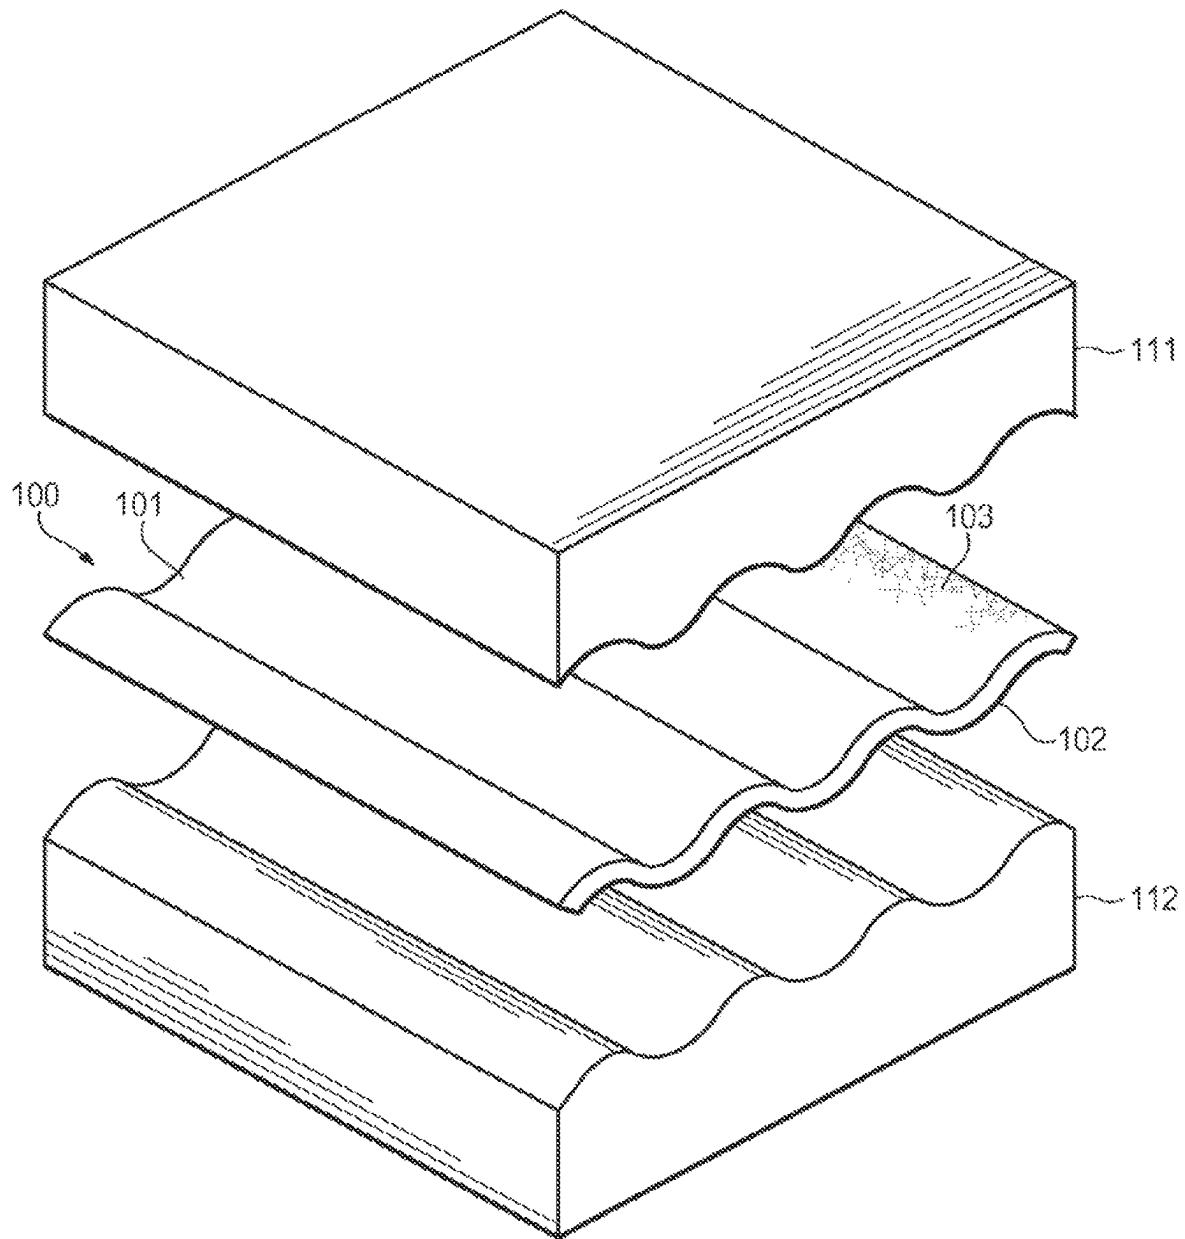
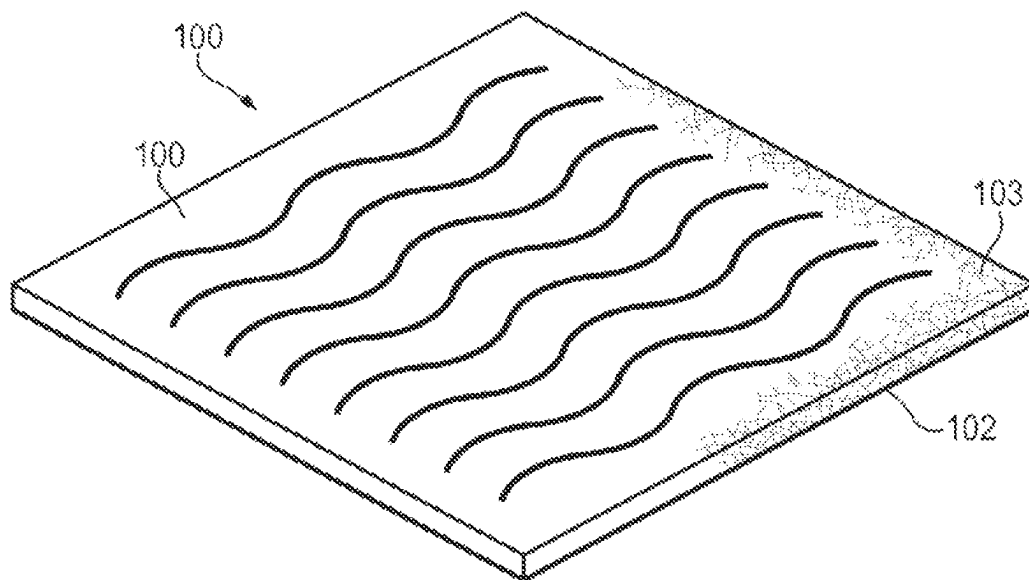
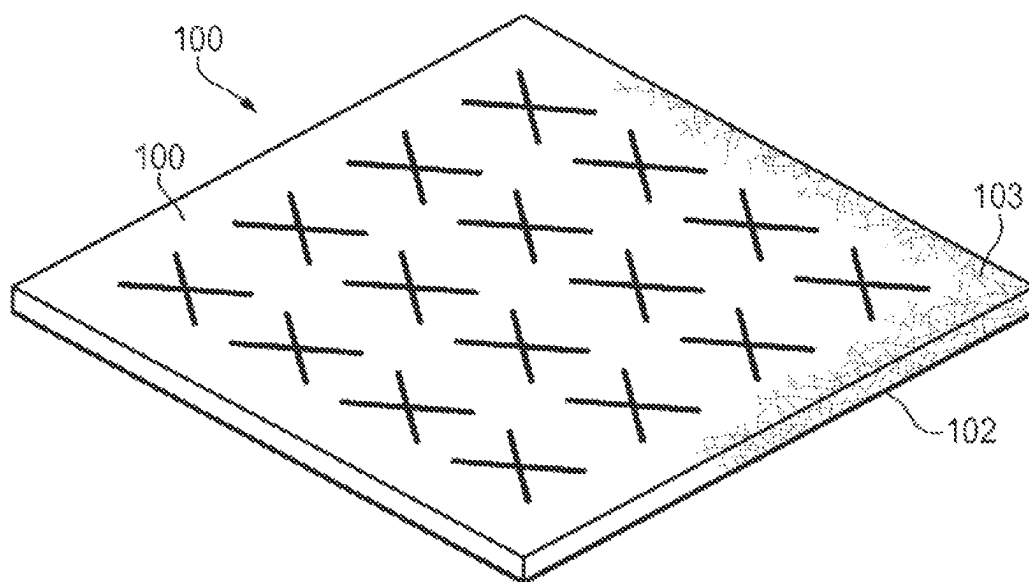


Figure 43B

**Figure 43C**

**Figure 44A****Figure 44B**

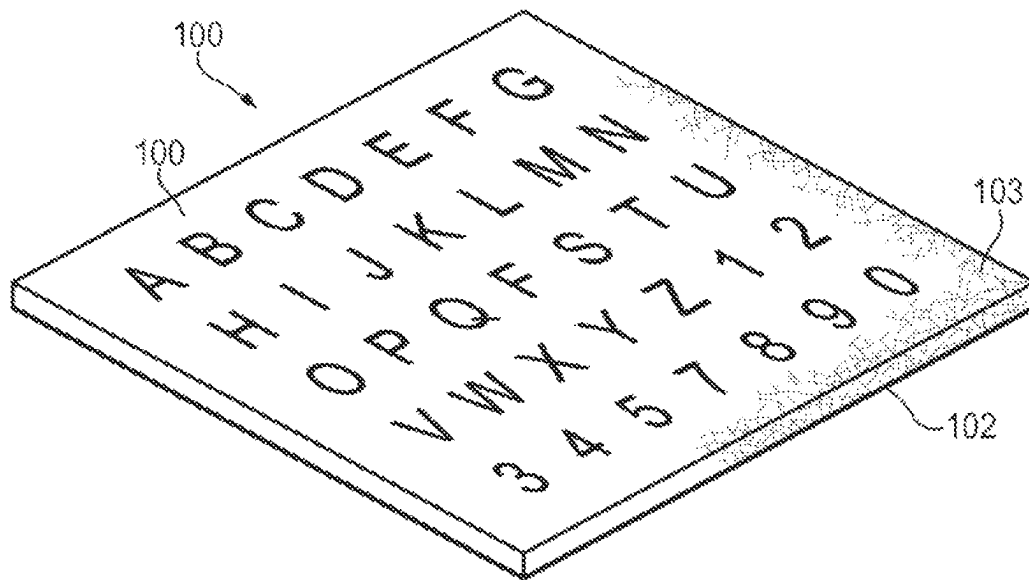


Figure 44C

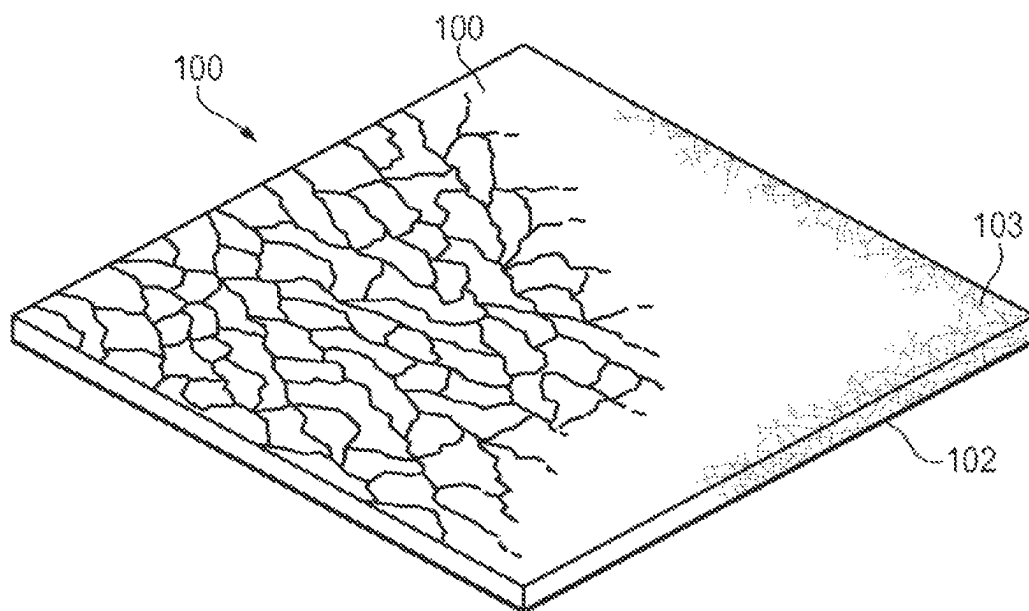
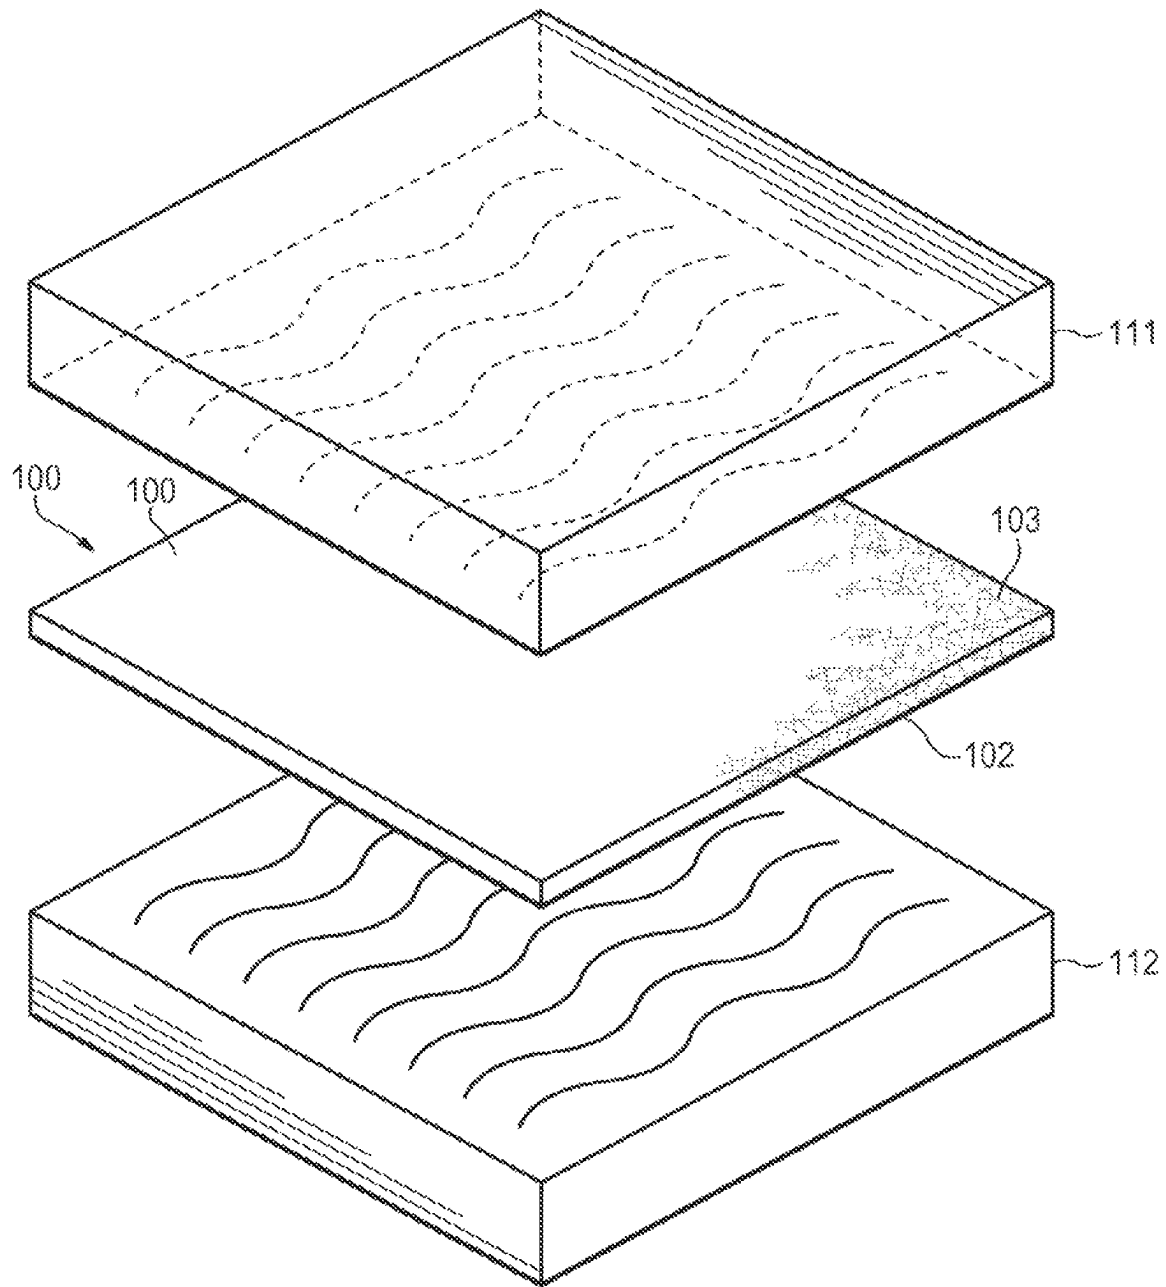


Figure 44D

**Figure 45A**

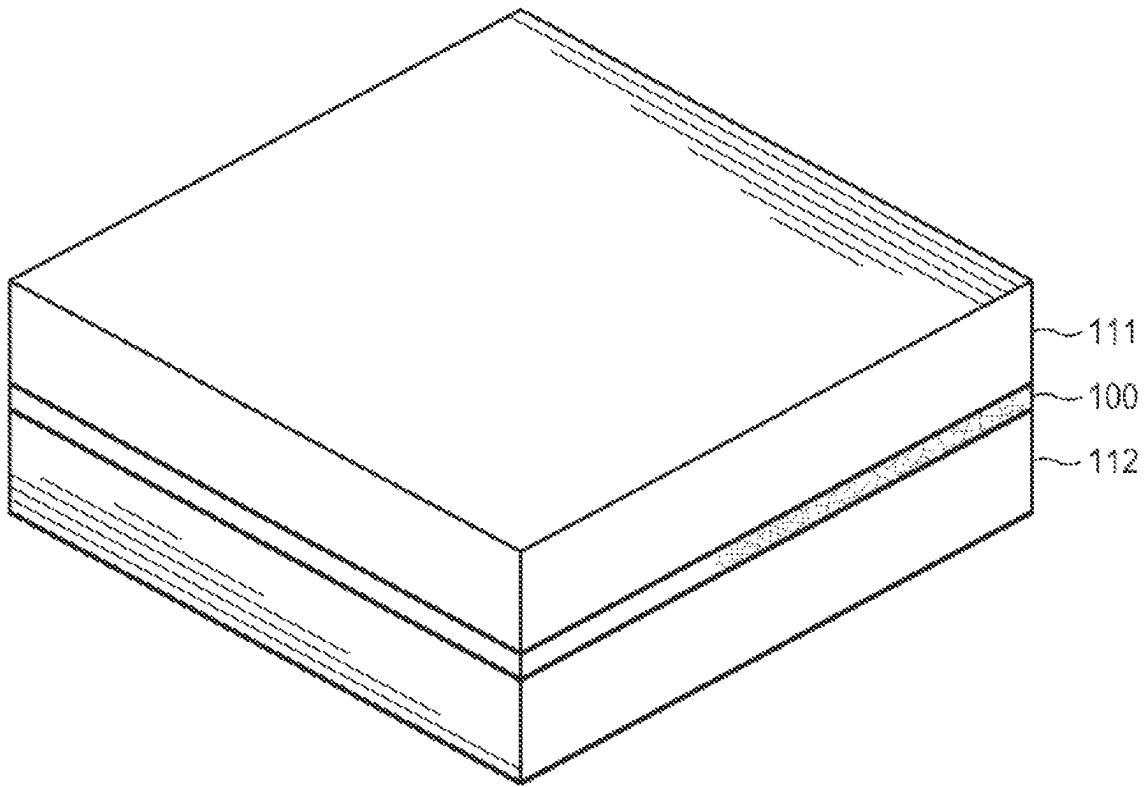
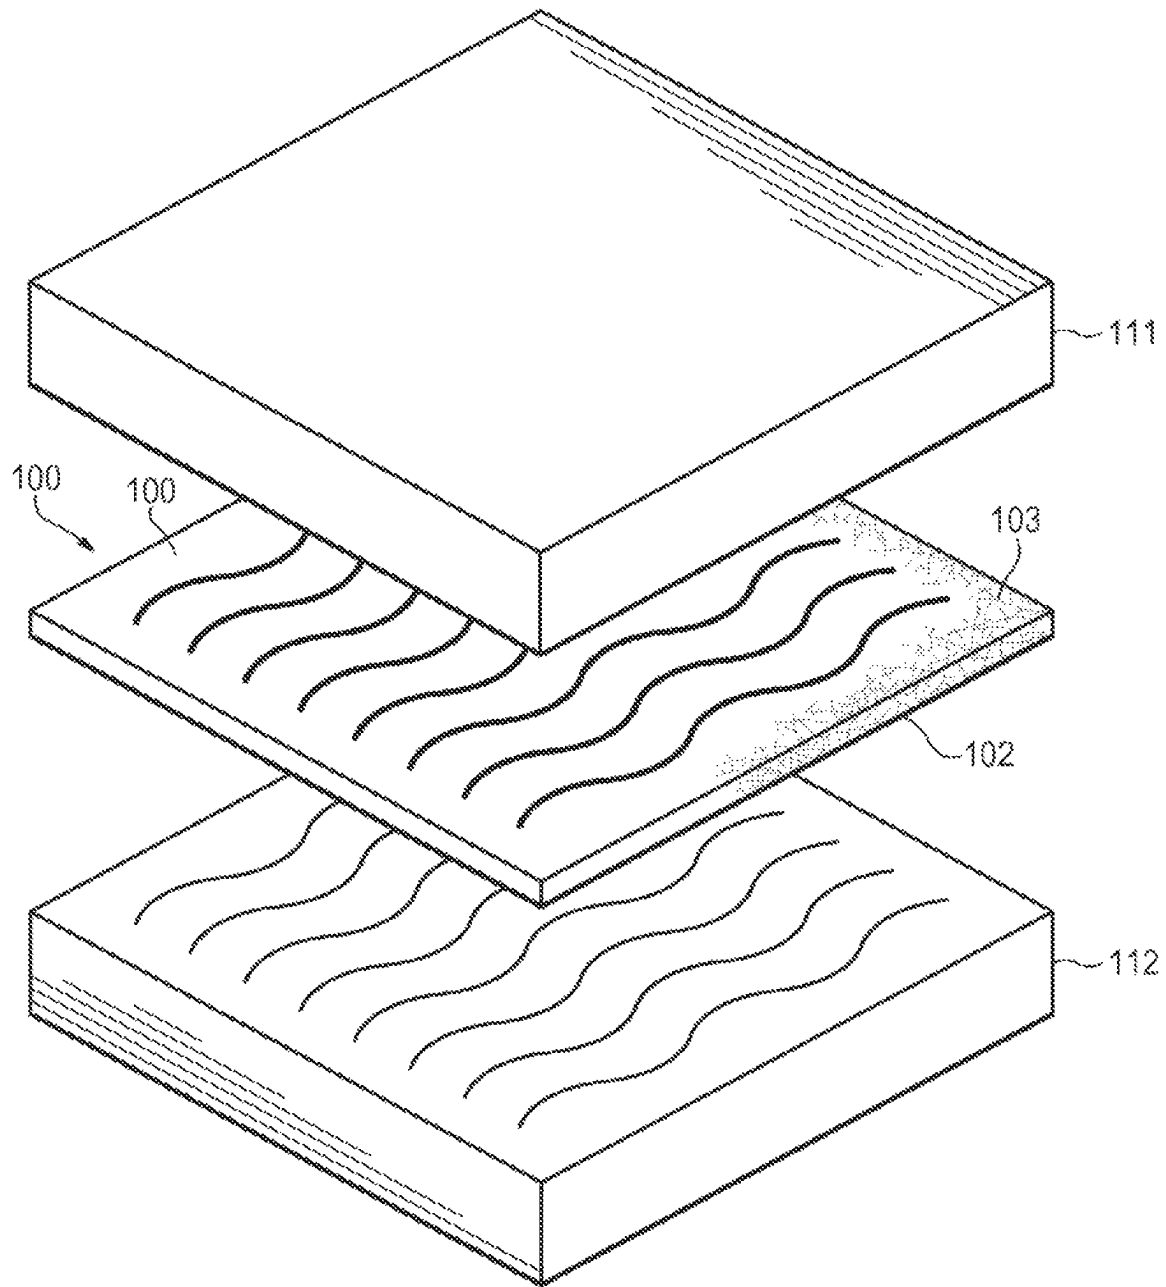


Figure 45B

**Figure 45C**

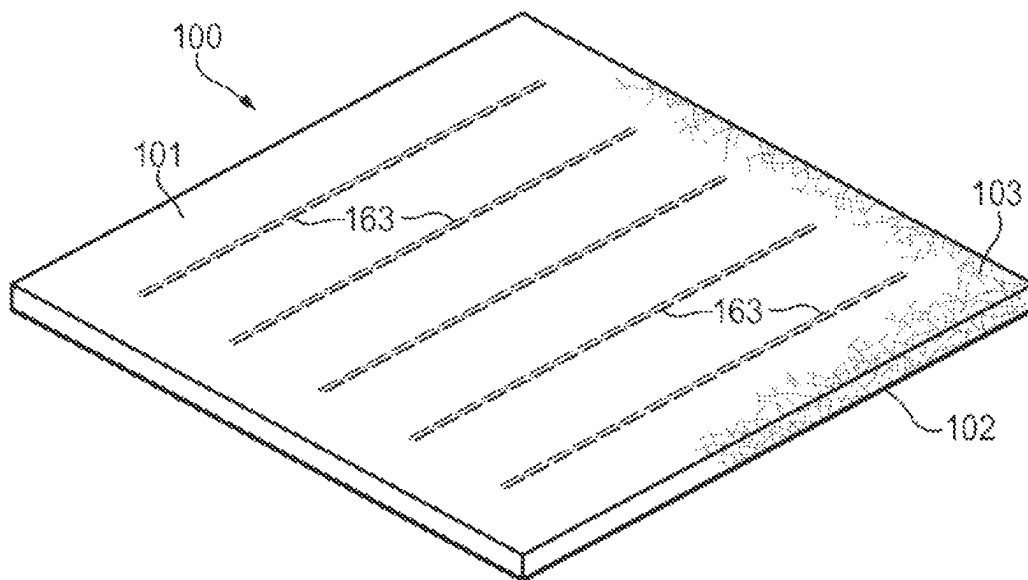


Figure 46A

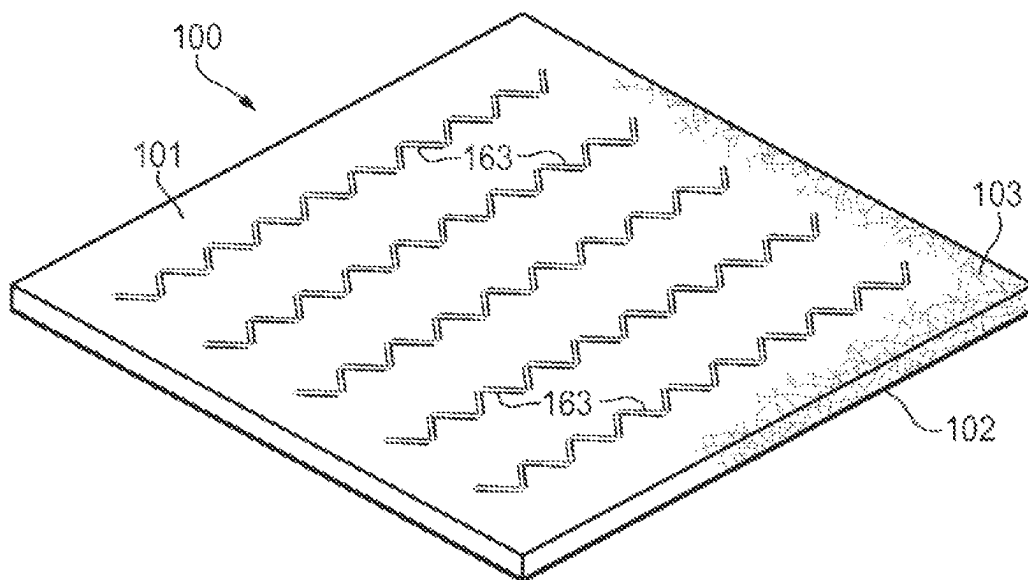


Figure 46B

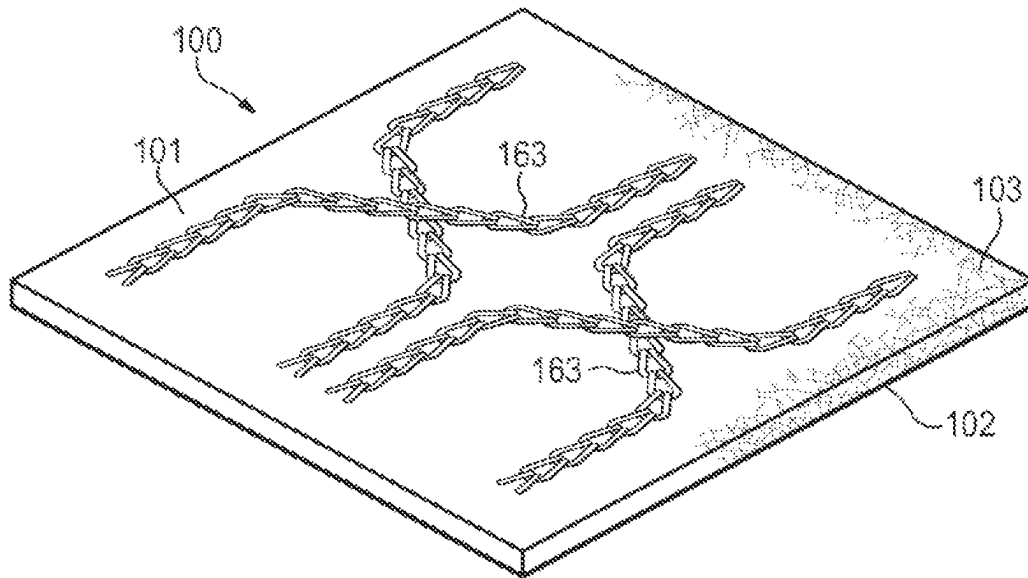


Figure 46C

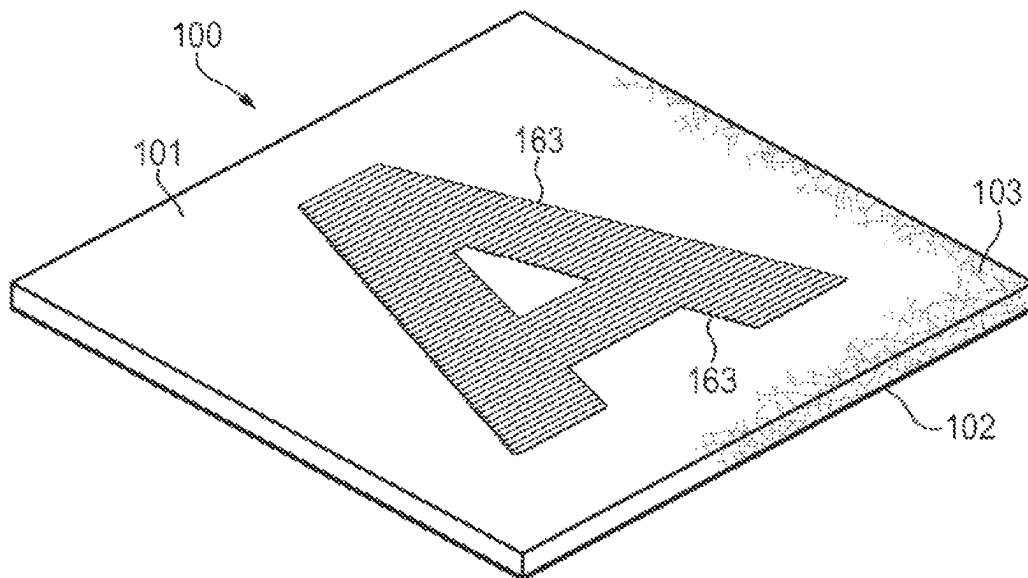


Figure 46D

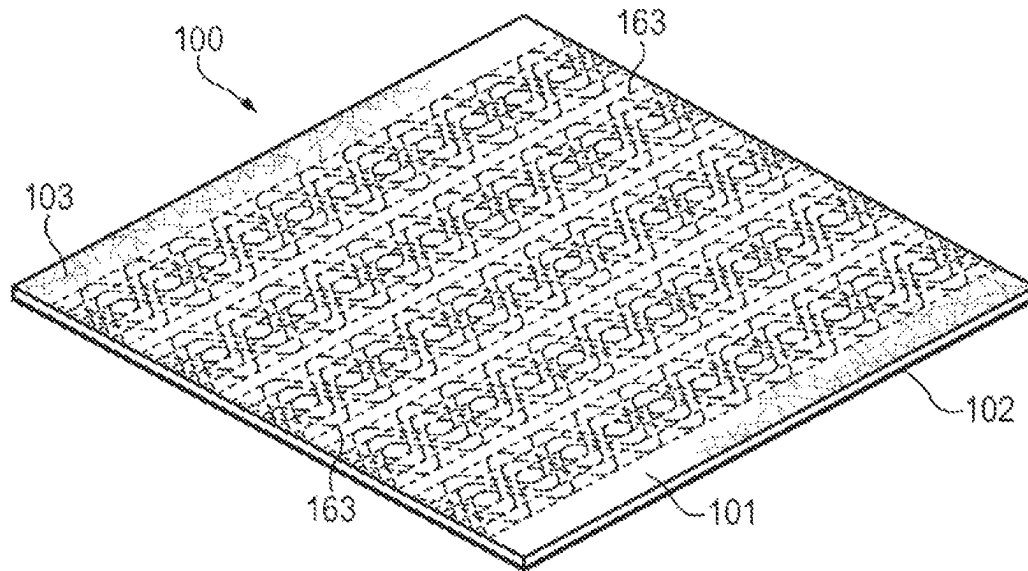


Figure 46E

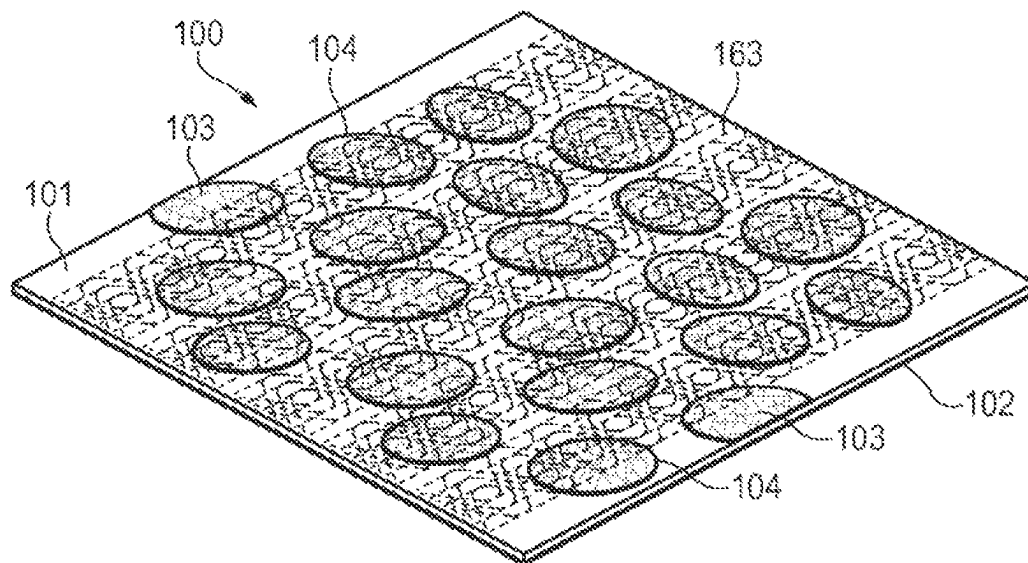


Figure 46F

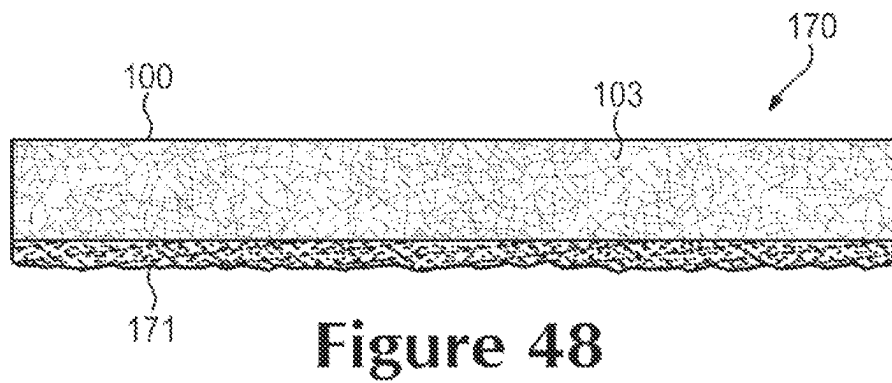
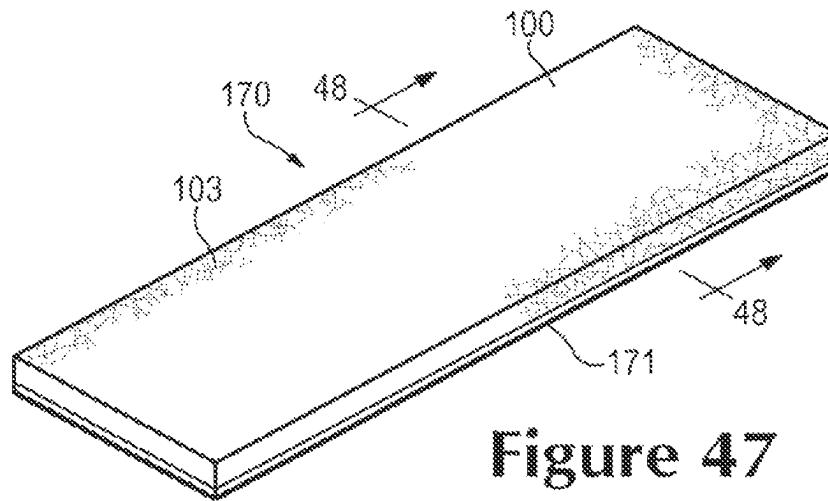


Figure 49A

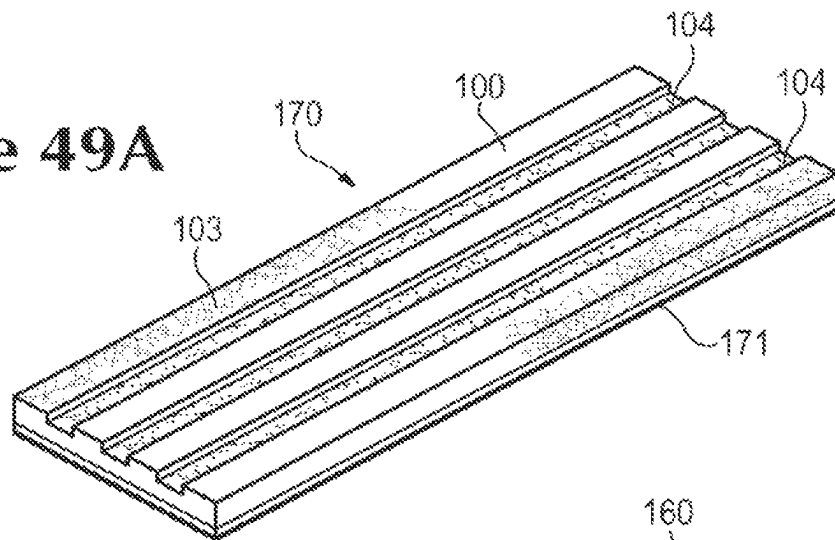


Figure 49B

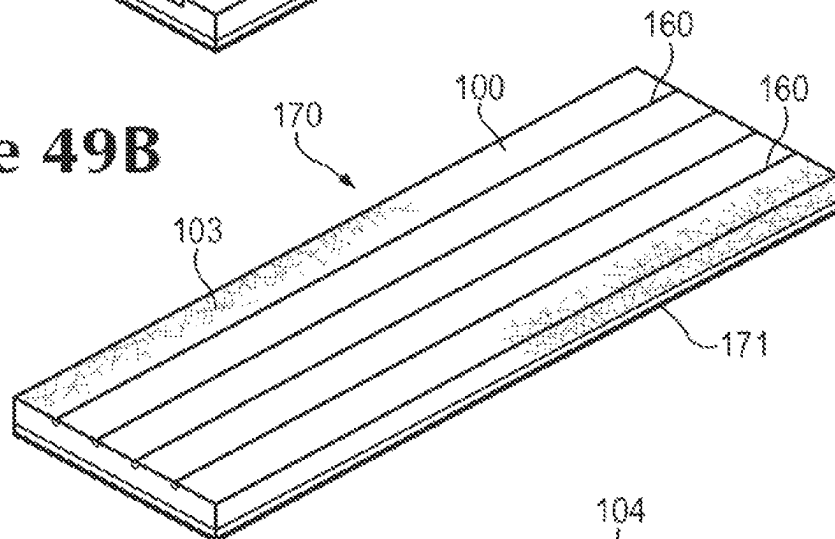
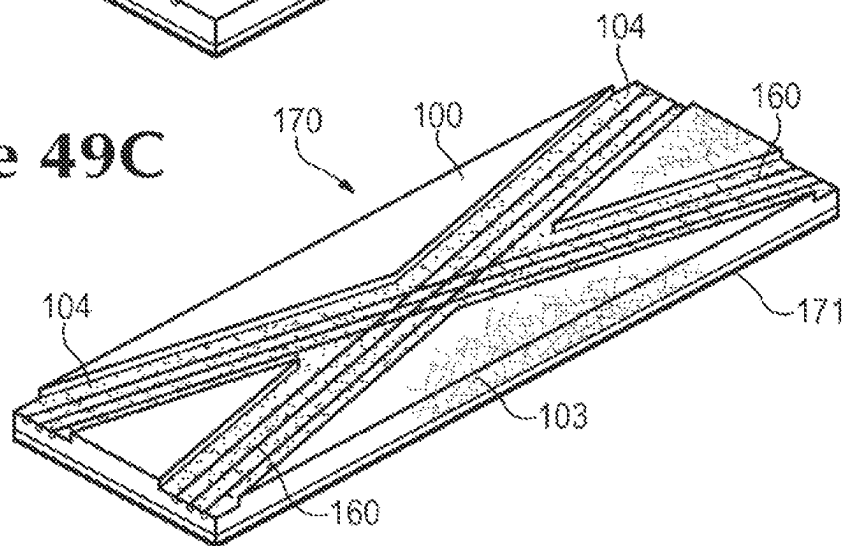
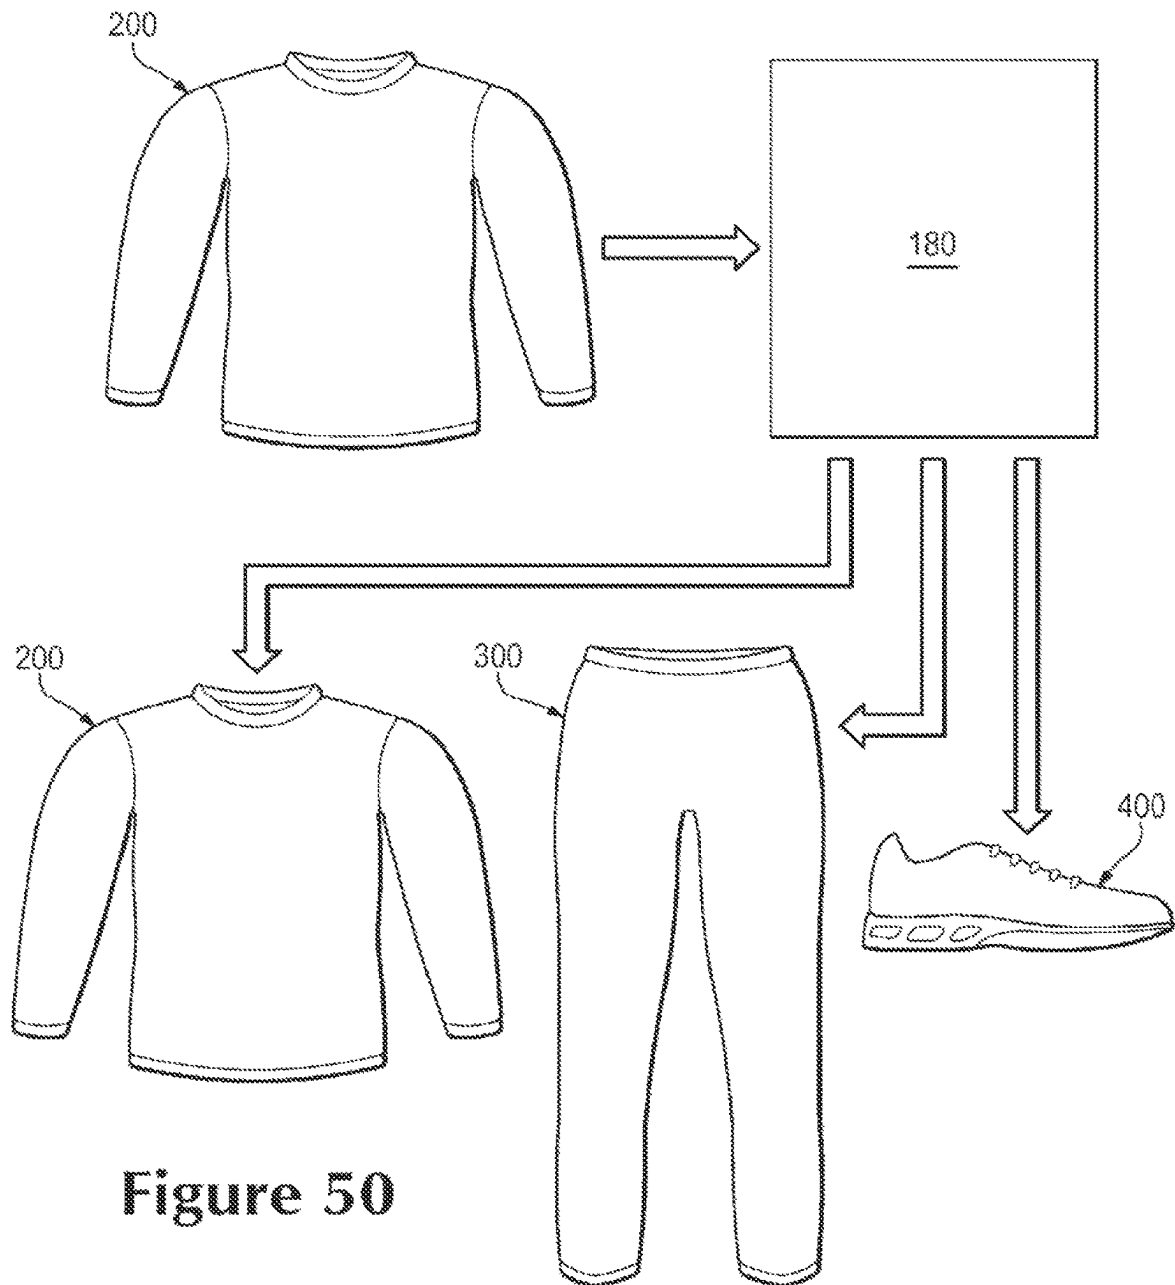


Figure 49C



**Figure 50**

THERMOPLASTIC NON-WOVEN TEXTILE ELEMENTS

CROSS-REFERENCE TO RELATED APPLICATION

This application is a continuation of U.S. patent application Ser. No. 18/308,728, filed Apr. 28, 2023, which is a continuation of U.S. patent application Ser. No. 16/160,259, filed Oct. 15, 2018, now abandoned, which is a continuation of U.S. patent application Ser. No. 13/426,361, filed Mar. 21, 2012, now abandoned, which is a divisional of U.S. patent application Ser. No. 12/367,274, filed Feb. 6, 2009, now abandoned, the contents of which are each incorporated by reference in their entirety.

BACKGROUND

A variety of products are at least partially formed from textiles. As examples, articles of apparel (e.g., shirts, pants, socks, jackets, undergarments, footwear), containers (e.g., backpacks, bags), and upholstery for furniture (e.g., chairs, couches, car seats) are often formed from various textile elements that are joined through stitching or adhesive bonding. Textiles may also be utilized in bed coverings (e.g., sheets, blankets), table coverings, towels, flags, tents, sails, and parachutes. Textiles utilized for industrial purposes are commonly referred to as technical textiles and may include structures for automotive and aerospace applications, filter materials, medical textiles (e.g. bandages, swabs, implants), geotextiles for reinforcing embankments, agrotexiles for crop protection, and industrial apparel that protects or insulates against heat and radiation. Accordingly, textiles may be incorporated into a variety of products for both personal and industrial purposes.

Textiles may be defined as any manufacture from fibers, filaments, or yarns having a generally two-dimensional structure (i.e., a length and a width that are substantially greater than a thickness). In general, textiles may be classified as mechanically-manipulated textiles or non-woven textiles. Mechanically-manipulated textiles are often formed by weaving or interlooping (e.g., knitting) a yarn or a plurality of yarns, usually through a mechanical process involving looms or knitting machines. Non-woven textiles are webs or mats of filaments that are bonded, fused, interlocked, or otherwise joined. As an example, a non-woven textile may be formed by randomly depositing a plurality of polymer filaments upon a surface, such as a moving conveyor. Various embossing or calendaring processes may also be utilized to ensure that the non-woven textile has a substantially constant thickness, impart texture to one or both surfaces of the non-woven textile, or further bond or fuse filaments within the non-woven textile to each other. Whereas spunbonded non-woven textiles are formed from filaments having a cross-sectional thickness of 10 to 100 microns, meltblown non-woven textiles are formed from filaments having a cross-sectional thickness of less than 10 microns.

Although some products are formed from one type of textile, many products may also be formed from two or more types of textiles in order to impart different properties to different areas. As an example, shoulder and elbow areas of a shirt may be formed from a textile that imparts durability (e.g., abrasion-resistance) and stretch-resistance, whereas other areas may be formed from a textile that imparts breathability, comfort, stretch, and moisture-absorption. As another example, an upper for an article of footwear may

have a structure that includes numerous layers formed from various types of textiles and other materials (e.g., polymer foam, leather, synthetic leather), and some of the layers may also have areas formed from different types of textiles to impart different properties. As yet another example, straps of a backpack may be formed from non-stretch textile elements, lower areas of a backpack may be formed from durable and water-resistant textile elements, and a remainder of the backpack may be formed from comfortable and compliant textile elements. Accordingly, many products may incorporate various types of textiles in order to impart different properties to different portions of the products.

In order to impart the different properties to different areas of a product, textile elements formed from the materials must be cut to desired shapes and then joined together, usually with stitching or adhesive bonding. As the number and types of textile elements incorporated into a product increases, the time and expense associated with transporting, stocking, cutting, and joining the textile elements may also increase. Waste material from cutting and stitching processes also accumulates to a greater degree as the number and types of textile elements incorporated into a product increases. Moreover, products with a greater number of textile elements and other materials may be more difficult to recycle than products formed from few elements and materials. By decreasing the number of elements and materials utilized in a product, therefore, waste may be decreased while increasing the manufacturing efficiency and recyclability.

SUMMARY

A non-woven textile and products incorporating the non-woven textile are disclosed below. The non-woven textile may be formed from a plurality of filaments that are at least partially formed from a thermoplastic polymer material. In some configurations of the non-woven textile, the filaments or the thermoplastic polymer material may be elastomeric or may stretch at least one-hundred percent prior to tensile failure.

The non-woven textile may have a first region and a second region, with the filaments of the first region being fused to a greater degree than the filaments of the second region. Depending upon the degree of fusing in the first region, the thermoplastic polymer material from the filaments may remain filamentous, become non-filamentous, or take an intermediate form that is partially filamentous and partially non-filamentous. Fusing within the first region may alter properties such as permeability, durability, and stretch-resistance.

A variety of products, including apparel (e.g., shirts, pants, footwear), may incorporate the non-woven textile. In some of these products, the non-woven textile may be joined with another textile element or component to form a seam. More particularly, an edge area of the non-woven textile may be heatbonded with an edge area of the other textile element or component at the seam. In other products, a surface the non-woven textile may be joined with another textile element or component (e.g., a polymer sheet, a polymer foam layer, or various strands) to form a composite element.

The advantages and features of novelty characterizing aspects of the invention are pointed out with particularity in the appended claims. To gain an improved understanding of the advantages and features of novelty, however, reference may be made to the following descriptive matter and accom-

panying figures that describe and illustrate various configurations and concepts related to the invention.

FIGURE DESCRIPTIONS

The foregoing Summary and the following Detailed Description will be better understood when read in conjunction with the accompanying figures.

FIG. 1 is a perspective view of a non-woven textile.

FIG. 2 is a cross-sectional view of the non-woven textile, as defined by section line 2-2 in FIG. 1.

FIG. 3 is a perspective view of the non-woven textile with a plurality of fused regions.

FIGS. 4A-4C are cross-sectional views, as defined by section line 4-4 in FIG. 3, depicting different configurations of the fused regions in the non-woven textile.

FIGS. 5A-5H are perspective views of further configurations of the fused regions in the non-woven textile.

FIGS. 6A-6F are cross-sectional views corresponding with FIGS. 4A-4C and depicting further configurations of the fused regions in the non-woven textile.

FIGS. 7A-7C are perspective views of a first process for forming the fused regions in the non-woven textile.

FIGS. 8A-8C are perspective views of a second process for forming the fused regions in the non-woven textile.

FIG. 9 is a perspective view of a third process for forming the fused regions in the non-woven textile.

FIG. 10 is a perspective view of a first composite element that includes the non-woven textile.

FIG. 11 is a cross-sectional view of the first composite element, as defined by section line 11-11 in FIG. 10.

FIGS. 12A-12C are perspective views of a process for forming the first composite element.

FIG. 13 is a schematic perspective view of another process for forming the first composite element.

FIG. 14 is a perspective view of a second composite element that includes the non-woven textile.

FIG. 15 is a cross-sectional view of the second composite element, as defined by section line 15-15 in FIG. 14.

FIG. 16 is a perspective view of a third composite element that includes the non-woven.

FIG. 17 is a cross-sectional view of the third composite element, as defined by section line 17-17 in FIG. 16.

FIGS. 18A-18C are perspective views of further configurations of the third composite element.

FIG. 19 is a perspective view of a fourth composite element that includes the non-woven textile.

FIG. 20 is a cross-sectional view of the fourth composite element, as defined by section line 20-20 in FIG. 19.

FIG. 21 is a perspective view of a fifth composite element that includes the non-woven textile.

FIG. 22 is a cross-sectional view of the fifth composite element, as defined by section line 22-22 in FIG. 21.

FIGS. 23A-23F are perspective views of further configurations of the fifth composite element.

FIG. 24 is a perspective view of two elements of the non-woven textile joined with a first seam configuration.

FIG. 25 is a cross-sectional view of the first seam configuration, as defined by section line 25-25 in FIG. 24.

FIGS. 26A-26D are side elevational views of a process for forming the first seam configuration.

FIG. 27 is a perspective view of another process for forming the first seam configuration.

FIGS. 28A and 28B are perspective views of elements of the non-woven textile joined with other elements to form the first seam configuration.

FIGS. 29A-29C are cross-sectional views corresponding with FIG. 25 and depicting further examples of the first seam configuration.

FIG. 30 is a perspective view of two elements of the non-woven textile joined with a second seam configuration.

FIG. 31 is a cross-sectional view of the second seam configuration, as defined by section line 31-31 in FIG. 30.

FIGS. 32A-32C are side elevational views of a process for forming the second seam configuration.

FIG. 33 is a perspective view of another process for forming the second seam configuration.

FIGS. 34A-34C are cross-sectional views corresponding with FIG. 31 and depicting further configurations of the second seam configuration.

FIGS. 35A-35H are front elevational views of various configurations of a shirt that includes the non-woven textile.

FIGS. 36A-36H are cross-sectional views of the configurations of the shirt, as respectively defined by section lines 36A-36A through 36H-36H in FIGS. 35A-35H.

FIGS. 37A-37C are front elevational views of various configurations of a pair of pants that includes the non-woven textile.

FIG. 38 is a cross-sectional view of the pair of pants, as defined by section line 38-38 in FIG. 33A.

FIGS. 39A-39G are side elevational views of various configurations of an article of footwear that includes the non-woven textile.

FIGS. 40A-40D are cross-sectional views of the configurations of the article of footwear, as respectively defined by section lines 40A-40A through 40D-40D in FIGS. 39A-39D.

FIG. 41 is a perspective view of a lace loop for the article of footwear that includes the non-woven textile.

FIGS. 42A-42C are perspective views of three-dimensional configurations of the non-woven textile.

FIGS. 43A-43C are perspective views of a process for forming the three-dimensional configurations of the non-woven textile.

FIGS. 44A-44D are perspective views of textured configurations of the non-woven textile.

FIGS. 45A-45C are perspective views of a process for forming the textured configurations of the non-woven textile.

FIGS. 46A-46F are perspective views of stitched configurations of the non-woven textile.

FIG. 47 is a perspective view of an element of tape that includes the non-woven textile.

FIG. 48 is a cross-sectional view of the tape, as defined by section line 48-48 in FIG. 47.

FIGS. 49A-49C are perspective views of additional configurations of the element of tape.

FIG. 50 is a schematic view of a recycling process.

DETAILED DESCRIPTION

The following discussion and accompanying figures disclose a non-woven textile 100 and various products incorporating non-woven textile 100. Although non-woven textile 100 is disclosed below as being incorporated into various articles of apparel (e.g., shirts, pants, footwear) for purposes of example, non-woven textile 100 may also be incorporated into a variety of other products. For example, non-woven textile 100 may be utilized in other types of apparel, containers, and upholstery for furniture. Non-woven textile 100 may also be utilized in bed coverings, table coverings, towels, flags, tents, sails, and parachutes. Various configurations of non-woven textile 100 may also be utilized for industrial purposes, as in automotive and aerospace appli-

cations, filter materials, medical textiles, geotextiles, agro-textiles, and industrial apparel. Accordingly, non-woven textile **100** may be utilized in a variety of products for both personal and industrial purposes.

I—Non-Woven Textile Configuration

Non-woven textile **100** is depicted in FIGS. **1** and **2** as having a first surface **101** and an opposite second surface **102**. Non-woven textile **100** is primarily formed from a plurality of filaments **103** that include a thermoplastic polymer material. Filaments **103** are distributed randomly throughout non-woven textile **100** and are bonded, fused, interlocked, or otherwise joined to form a structure with a relatively constant thickness (i.e., distance between surfaces **101** and **102**). An individual filament **103** may be located on first surface **101**, on second surface **102**, between surfaces **101** and **102**, or on both of surfaces **101** and **102**. Depending upon the manner in which non-woven textile **100** is formed, multiple portions of an individual filament **103** may be located on first surface **101**, different portions of the individual filament **103** may be located on second surface **102**, and other portions of the individual filament **103** may be located between surfaces **101** and **102**. In order to impart an interlocking structure, the various filaments **103** may wrap around each other, extend over and under each other, and pass through various areas of non-woven textile **100**. In areas where two or more filaments **103** contact each other, the thermoplastic polymer material forming filaments **103** may be bonded or fused to join filaments **103** to each other. Accordingly, filaments **103** are effectively joined to each other in a variety of ways to form a cohesive structure within non-woven textile **100**.

Fibers are often defined, in textile terminology, as having a relatively short length that ranges from one millimeter to a few centimeters or more, whereas filaments are often defined as having a longer length than fibers or even an indeterminate length. As utilized within the present document, the term “filament” or variants thereof is defined as encompassing lengths of both fibers and filaments from the textile terminology definitions. Accordingly, filaments **103** or other filaments referred to herein may generally have any length. As an example, therefore, filaments **103** may have a length that ranges from one millimeter to hundreds of meters or more.

Filaments **103** include a thermoplastic polymer material. In general, a thermoplastic polymer material melts when heated and returns to a solid state when cooled. More particularly, the thermoplastic polymer material transitions from a solid state to a softened or liquid state when subjected to sufficient heat, and then the thermoplastic polymer material transitions from the softened or liquid state to the solid state when sufficiently cooled. As such, the thermoplastic polymer material may be melted, molded, cooled, re-melted, re-molded, and cooled again through multiple cycles. Thermoplastic polymer materials may also be welded or heat-bonded, as described in greater detail below, to other textile elements, plates, sheets, polymer foam elements, thermoplastic polymer elements, thermoset polymer elements, or a variety of other elements formed from various materials. In contrast with thermoplastic polymer materials, many thermoset polymer materials do not melt when heated, simply burning instead. Although a wide range of thermoplastic polymer materials may be utilized for filaments **103**, examples of some suitable thermoplastic polymer materials include thermoplastic polyurethane, polyamide, polyester, polypropylene, and polyolefin. Although any of the thermo-

plastic polymer materials mentioned above may be utilized for non-woven textile **100**, an advantage to utilizing thermoplastic polyurethane relates to heatbonding and colorability. In comparison with various other thermoplastic polymer materials (e.g., polyolefin), thermoplastic polyurethane is relatively easy to bond with other elements, as discussed in greater detail below, and colorants may be added to thermoplastic polyurethane through various conventional processes.

Although each of filaments **103** may be entirely formed from a single thermoplastic polymer material, individual filaments **103** may also be at least partially formed from multiple polymer materials. As an example, an individual filament **103** may have a sheath-core configuration, wherein an exterior sheath of the individual filament **103** is formed from a first type of thermoplastic polymer material, and an interior core of the individual filament **103** is formed from a second type of thermoplastic polymer material. As a similar example, an individual filament **103** may have a bi-component configuration, wherein one half of the individual filament **103** is formed from a first type of thermoplastic polymer material, and an opposite half of the individual filament **103** is formed from a second type of thermoplastic polymer material. In some configurations, an individual filament **103** may be formed from both a thermoplastic polymer material and a thermoset polymer material with either of the sheath-core or bi-component arrangements. Although all of filaments **103** may be entirely formed from a single thermoplastic polymer material, filaments **103** may also be formed from multiple polymer materials. As an example, some of filaments **103** may be formed from a first type of thermoplastic polymer material, whereas other filaments **103** may be formed from a second type of thermoplastic polymer material. As a similar example, some of filaments **103** may be formed from a thermoplastic polymer material, whereas other filaments **103** may be formed from a thermoset polymer material. Accordingly, each filaments **103**, portions of filaments **103**, or at least some of filaments **103** may be formed from one or more thermoplastic polymer materials.

The thermoplastic polymer material or other materials utilized for non-woven textile **100** (i.e., filaments **103**) may be selected to have various stretch properties, and the materials may be considered elastomeric. Depending upon the specific product that non-woven textile **100** will be incorporated into, non-woven textile **100** or filaments **103** may stretch between ten percent to more than eight-hundred percent prior to tensile failure. For many articles of apparel, in which stretch is an advantageous property, non-woven textile **100** or filaments **103** may stretch at least one-hundred percent prior to tensile failure. As a related matter, thermoplastic polymer material or other materials utilized for non-woven textile **100** (i.e., filaments **103**) may be selected to have various recovery properties. That is, non-woven textile **100** may be formed to return to an original shape after being stretched, or non-woven textile **100** may be formed to remain in an elongated or stretched shape after being stretched. Many products that incorporate non-woven textile **100**, such as articles of apparel, may benefit from properties that allow non-woven textile **100** to return or otherwise recover to an original shape after being stretched by one-hundred percent or more.

A variety of conventional processes may be utilized to manufacture non-woven textile **100**. In general, a manufacturing process for non-woven textile **100** includes (a) extruding or otherwise forming a plurality of filaments **103** from a thermoplastic polymer material, (b) collecting, laying, or

otherwise depositing filaments **103** upon a surface, such as a moving conveyor, (c) joining filaments **103**, and (d) imparting a desired thickness through compressing or other processes. Because filaments **103** may be relatively soft or partially melted when deposited upon the surface, the polymer materials from filaments **103** that contact each other may become bonded or fused together upon cooling.

Following the general manufacturing process discussed above, various post-processing operations may be performed on non-woven textile **100**. For example, embossing or calendaring processes may be utilized to ensure that non-woven textile **100** has a substantially constant thickness, impart texture to one or both of surfaces **101** and **102**, or further bond or fuse filaments **103** to each other. Coatings may also be applied to non-woven textile **100**. Furthermore, hydrojet, hydroentanglement, needlepunching, or stitch-bonding processes may also be utilized to modify properties of non-woven textile **100**.

Non-woven textile **100** may be formed as a spunbonded or meltblown material. Whereas spunbonded non-woven textiles are formed from filaments having a cross-sectional thickness of 10 to 100 microns, meltblown non-woven textiles are formed from filaments having a cross-sectional thickness of less than 10 microns.

Non-woven textile **100** may be either spunbonded, meltblown, or a combination of spunbonded and meltblown. Moreover, non-woven textile **100** may be formed to have spunbonded and meltblown layers, or may also be formed such that filaments **103** are combinations of spunbonded and meltblown.

In addition to differences in the thickness of individual filaments **103**, the overall thickness of non-woven textile **100** may vary significantly. With reference to the various figures, the thickness of non-woven textile **100** and other elements may be amplified or otherwise increased to show details or other features associated with non-woven textile **100**, thereby providing clarity in the figures. For many applications, however, a thickness of non-woven textile **100** may be in a range of 0.5 millimeters to 10.0 millimeters, but may vary considerably beyond this range. For many articles of apparel, for example, a thickness of 1.0 to 3.0 millimeters may be appropriate, although other thicknesses may be utilized. As discussed in greater detail below, regions of non-woven textile **100** may be formed such that the thermoplastic polymer material forming filaments **103** is fused to a greater degree than in other regions, and the thickness of non-woven textile **100** in the fused regions may be substantially reduced. Accordingly, the thickness of non-woven textile **100** may vary considerably.

II—Fused Regions

Non-woven textile **100** is depicted as including various fused regions **104** in FIG. 3. Fused regions **104** are portions of non-woven textile **100** that have been subjected to heat in order to selectively change the properties of those fused regions **104**. Non-woven textile **100**, or at least the various filaments **103** forming non-woven textile **100**, are discussed above as including a thermoplastic polymer material. When exposed to sufficient heat, the thermoplastic polymer material transitions from a solid state to either a softened state or a liquid state. When sufficiently cooled, the thermoplastic polymer material then transitions back from the softened state or the liquid state to the solid state. Non-woven textile **100** or regions of non-woven textile **100** may therefore, be exposed to heat in order to soften or melt the various filaments **103**. As discussed in greater detail below, exposing

various regions (i.e., fused regions **104**) of non-woven textile **100** to heat may be utilized to selectively change the properties of those regions. Although discussed in terms of heat alone, pressure may also be utilized either alone or in combination with heat to form fused regions **104**, and pressure may be required in some configurations of non-woven textile **100** to form fused regions **104**.

Fused regions **104** may exhibit various shapes, including a variety of geometrical shapes (e.g., circular, elliptical, triangular, square, rectangular) or a variety of non-defined, irregular, or otherwise non-geometrical shapes. The positions of fused regions **104** may be spaced inward from edges of non-woven textile **100**, located on one or more edges of non-woven textile **100**, or located at a corner of non-woven textile **100**. The shapes and positions of fused regions **104** may also be selected to extend across portions of non-woven textile **100** or between two edges of non-woven textile **100**. Whereas the areas of some fused regions **104** may be relatively small, the areas of other fused regions **104** may be relatively large. As described in greater detail below, two separate elements of non-woven textile **100** may be joined together, some fused regions **104** may extend across a seam that joins the elements, or some fused regions may extend into areas where other components are bonded to non-woven textile **100**. Accordingly, the shapes, positions, sizes, and other aspects of fused regions **104** may vary significantly.

When exposed to sufficient heat, and possibly pressure, the thermoplastic polymer material of the various filaments **103** of non-woven textile **100** transitions from a solid state to either a softened state or a liquid state. Depending upon the degree to which filaments **103** change state, the various filaments **103** within fused regions **104** may (a) remain in a filamentous configuration, (b) melt entirely into a liquid that cools into a non-filamentous configuration, or (c) take an intermediate configuration wherein some filaments **103** or portions of individual filaments **103** remain filamentous and other filaments **103** or portions of individual filaments **103** become non-filamentous. Accordingly, although filaments **103** in fused regions **104** are generally fused to a greater degree than filaments **103** in other areas of non-woven textile **100**, the degree of fusing in fused regions **104** may vary significantly.

Differences between the degree to which filaments **103** may be fused in fused regions **104** are depicted in FIGS. 4A-4C. Referring specifically to FIG. 4A, the various filaments **103** within fused region **104** remain in a filamentous configuration. That is, the thermoplastic polymer material forming filaments **103** remains in the configuration of a filament and individual filaments **103** remain identifiable. Referring specifically to FIG. 4B, the various filaments **103** within fused region **104** melted entirely into a liquid that cools into a non-filamentous configuration. That is, the thermoplastic polymer material from filaments **103** melted into a non-filamentous state that effectively forms a solid polymer sheet in fused region **104**, with none of the individual filaments **103** being identifiable. Referring specifically to FIG. 4C, the various filaments **103** remain in a partially-filamentous configuration. That is, some of the thermoplastic polymer material forming filaments **103** remains in the configuration of a filament, and some of the thermoplastic polymer material from filaments **103** melted into a non-filamentous state that effectively forms a solid polymer sheet in fused region **104**. The configuration of the thermoplastic polymer material from filaments **103** in fused regions **104** may therefore, be filamentous, non-filamentous, or any combination or proportion of filamentous and non-filamentous. Accordingly, the degree of fusing in each of

fused regions 104 may vary along a spectrum that extends from filamentous on one end to non-filamentous on an opposite end.

A variety of factors relating to the configuration of non-woven textile 100 and the processes by which fused regions 104 are formed determine the degree to which filaments 103 are fused within fused regions 104. As examples, factors that determine the degree of fusing include (a) the particular thermoplastic polymer material forming filaments 103, (b) the temperature that fused regions 104 are exposed to, (c) the pressure that fused regions 104 are exposed to, and (d) the time at which fused regions 104 are exposed to the elevated temperature and/or pressure. By varying these factors, the degree of fusing that results within fused regions 104 may also be varied along the spectrum that extends from filamentous on one end to non-filamentous on an opposite end.

The configuration of fused regions 104 in FIG. 3 is intended to provide an example of the manner in which the shapes, positions, sizes, and other aspects of fused regions 104 may vary. The configuration of fused regions 104 may however, vary significantly. Referring to FIG. 5A, non-woven textile 100 includes a plurality of fused regions 104 with generally linear and parallel configurations. Similarly, FIG. 5B depicts non-woven textile 100 as including a plurality of fused regions 104 with generally curved and parallel configurations. Fused regions 104 may have a segmented configuration, as depicted in FIG. 5C. Non-woven textile 100 may also have a plurality of fused regions 104 that exhibit the configuration of a repeating pattern of triangular shapes, as in FIG. 5D, the configuration of a repeating pattern of circular shapes, as in FIG. 5E, or a repeating pattern of any other shape or a variety of shapes. In some configurations of non-woven textile 100, as depicted in FIG. 5F, one fused region 104 may form a continuous area that defines discrete areas for the remainder of non-woven textile 100. Fused regions 104 may also have a configuration wherein edges or corners contact each other, as in the checkered pattern of FIG. 5G. Additionally, the shapes of the various fused regions 104 may have a non-geometrical or irregular shape, as in FIG. 5H. Accordingly, the shapes, positions, sizes, and other aspects of fused regions 104 may vary significantly.

The thickness of non-woven textile 100 may decrease in fused regions 104. Referring to FIGS. 4A-4C, for example, non-woven textile 100 exhibits less thickness in fused region 104 than in other areas. As discussed above, fused regions 104 are areas where filaments 103 are generally fused to a greater degree than filaments 103 in other areas of non-woven textile 100. Additionally, non-woven textile 100 or the portions of non-woven textile 100 forming fused regions 104 may be compressed while forming fused regions 104. As a result, the thickness of fused regions 104 may be decreased in comparison with other areas of non-woven textile 100. Referring again to FIGS. 4A-4C, surfaces 102 and 103 both exhibit a squared or abrupt transition between fused regions 104 and other areas of non-woven textile 100. Depending upon the manner in which fused regions 104 are formed, however, surfaces 102 and 103 may exhibit other configurations. As an example, only first surface 101 has a squared transition to fused regions 104 in FIG. 6A. Although the decrease in thickness of fused regions 104 may occur through a squared or abrupt transition, a curved or more gradual transition may also be utilized, as depicted in FIGS. 6B and 6C. In other configurations, an angled transition between fused regions 104 and other areas of non-woven textile 100 may be formed, as in FIG. 6D. Although a

decrease in thickness often occurs in fused regions 104, no decrease in thickness or a minimal decrease in thickness is also possible, as depicted in FIG. 6E. Depending upon the materials utilized in non-woven textile 100 and the manner in which fused regions 104 are formed, fused regions 104 may actually swell or otherwise increase in thickness, as depicted in FIG. 6F. In each of FIGS. 6A-6F, fused regions 104 are depicted as having a non-filamentous configuration, but may also have the filamentous configuration or the intermediate configuration discussed above.

Based upon the above discussion, non-woven textile 100 is formed from a plurality of filaments 103 that include a thermoplastic polymer material. Although filaments 103 are bonded, fused, interlocked, or otherwise joined throughout non-woven textile 100, fused regions 104 are areas where filaments 103 are generally fused to a greater degree than filaments 103 in other areas of non-woven textile 100. The shapes, positions, sizes, and other aspects of fused regions 104 may vary significantly. In addition, the degree to which filaments 103 are fused may also vary significantly to be filamentous, non-filamentous, or any combination or proportion of filamentous and non-filamentous.

III—Properties of Fused Regions

The properties of fused regions 104 may be different than the properties of other regions of non-woven textile 100. Additionally, the properties of one of fused regions 104 may be different than the properties of another of fused regions 104. In manufacturing non-woven textile 100 and forming fused regions 104, specific properties may be applied to the various areas of non-woven textile 100. More particularly, the shapes of fused regions 104, positions of fused regions 104, sizes of fused regions 104, degree to which filaments 103 are fused within fused regions 104, and other aspects of non-woven textile 100 may be varied to impart specific properties to specific areas of non-woven textile 100. Accordingly, non-woven textile 100 may be engineered, designed, or otherwise structured to have particular properties in different areas.

Examples of properties that may be varied through the addition or the configuration of fused regions 104 include permeability, durability, and stretch-resistance. By forming one of fused regions 104 in a particular area of non-woven textile 100, the permeability of that area generally decreases, whereas both durability and stretch-resistance generally increases. As discussed in greater detail below, the degree to which filaments 103 are fused to each other has a significant effect upon the change in permeability, durability, and stretch-resistance. Other factors that may affect permeability, durability, and stretch-resistance include the shapes, positions, and sizes of fused regions 104, as well as the specific thermoplastic polymer material forming filaments 103.

Permeability generally relates to ability of air, water, and other fluids (whether gaseous or liquid) to pass through or otherwise permeate non-woven textile 100. Depending upon the degree to which filaments 103 are fused to each other, the permeability may vary significantly. In general, the permeability is highest in areas of non-woven textile 100 where filaments 103 are fused the least, and the permeability is lowest in areas of non-woven textile 100 where filaments 103 are fused the most. As such, the permeability may vary along a spectrum depending upon the degree to which filaments 103 are fused to each other. Areas of non-woven textile 100 that are separate from fused regions 104 (i.e., non-fused areas of non-woven textile 100) generally exhibit

a relatively high permeability. Fused regions 104 where a majority of filaments 103 remain in the filamentous configuration also exhibit a relatively high permeability, but the permeability is generally less than in areas separate from fused regions 104. Fused regions 104 where filaments 103 are in both a filamentous and non-filamentous configuration have a lesser permeability. Finally, areas where a majority or all of the thermoplastic polymer material from filaments 103 exhibits a non-filamentous configuration may have a relatively small permeability or even no permeability.

Durability generally relates to the ability of non-woven textile 100 to remain intact, cohesive, or otherwise undamaged, and may include resistances to wear, abrasion, and degradation from chemicals and light. Depending upon the degree to which filaments 103 are fused to each other, the durability may vary significantly. In general, the durability is lowest in areas of non-woven textile 100 where filaments 103 are fused the least, and the durability is highest in areas of non-woven textile 100 where filaments 103 are fused the most. As such, the durability may vary along a spectrum depending upon the degree to which filaments 103 are fused to each other. Areas of non-woven textile 100 that are separate from fused regions 104 generally exhibit a relatively low durability. Fused regions 104 where a majority of filaments 103 remain in the filamentous configuration also exhibit a relatively low durability, but the durability is generally more than in areas separate from fused regions 104. Fused regions 104 where filaments 103 are in both a filamentous and non-filamentous configuration have a greater durability. Finally, areas where a majority or all of the thermoplastic polymer material from filaments 103 exhibits a non-filamentous configuration may have a relatively high durability. Other factors that may affect the general durability of fused regions 104 and other areas of non-woven textile 100 include the initial thickness and density of non-woven textile 100, the type of polymer material forming filaments 103, and the hardness of the polymer material forming filaments 103.

Stretch-resistance generally relates to the ability of non-woven textile 100 to resist stretching when subjected to a textile force. As with permeability and durability, the stretch-resistance of non-woven textile 100 may vary significantly depending upon the degree to which filaments 103 are fused to each other. As with durability, the stretch-resistance is lowest in areas of non-woven textile 100 where filaments 103 are fused the least, and the stretch-resistance is highest in areas of non-woven textile 100 where filaments 103 are fused the most. As noted above, the thermoplastic polymer material or other materials utilized for non-woven textile 100 (i.e., filaments 103) may be considered elastomeric or may stretch at least one-hundred percent prior to tensile failure. Although the stretch-resistance of non-woven textile 100 may be greater in areas of non-woven textile 100 where filaments 103 are fused the most, fused regions 104 may still be elastomeric or may stretch at least one-hundred percent prior to tensile failure. Other factors that may affect the general stretch properties of fused regions 104 and other areas of non-woven textile 100 include the initial thickness and density of non-woven textile 100, the type of polymer material forming filaments 103, and the hardness of the polymer material forming filaments 103.

As discussed in greater detail below, non-woven textile 100 may be incorporated into a variety of products, including various articles of apparel (e.g., shirts, pants, footwear). Taking a shirt as an example, non-woven textile 100 may form a majority of the shirt, including a torso region and two arm regions. Given that moisture may accumulate within the

shirt from perspiration, a majority of the shirt may be formed from portions of non-woven textile 100 that do not include fused regions 104 in order to provide a relatively high permeability. Given that elbow areas of the shirt may be subjected to relatively high abrasion as the shirt is worn, some of fused regions 104 may be located in the elbow areas to impart greater durability. Additionally, given that the neck opening may be stretched as the shirt is put on an individual and taken off the individual, one of fused regions 104 may be located around the neck opening to impart greater stretch-resistance. Accordingly, one material (i.e., non-woven textile 100) may be used throughout the shirt, but by fusing different areas to different degrees, the properties may be advantageously-varied in different areas of the shirt.

The above discussion focused primarily on the properties of permeability, durability, and stretch-resistance. A variety of other properties may also be varied through the addition or the configuration of fused regions 104. For example, the overall density of non-woven textile 100 may be increased as the degree of fusing of filaments 103 increases. The transparency of non-woven textile 100 may also be increased as the degree of fusing of filaments 103 increases. Depending upon various factors, the darkness of a color of non-woven textile 100 may also increase as the degree of fusing of filaments 103 increases. Although somewhat discussed above, the overall thickness of non-woven textile 100 may decrease as the degree of fusing of filaments 103 increases. The degree to which non-woven textile 100 recovers after being stretched, the overall flexibility of non-woven textile 100, and resistance to various modes of failure may also vary depending upon the degree of fusing of filaments 100. Accordingly, a variety of properties may be varied by forming fused regions 104.

IV—Formation of Fused Regions

A variety of processes may be utilized to form fused regions 104. Referring to FIGS. 7A-7C, an example of a method is depicted as involving a first plate 111 and a second plate 112, which may be platens of a press. Initially, non-woven textile 100 and an insulating element 113 are located between plates 111 and 112, as depicted in FIG. 7A. Insulating element 113 has apertures 114 or other absent areas that correspond with fused regions 104. That is, insulating element 113 exposes areas of non-woven textile 100 corresponding with fused regions 104, while covering other areas of non-woven textile 100.

Plates 111 and 112 then translate or otherwise move toward each other in order to compress or induce contact between non-woven textile 100 and insulating element 113, as depicted in FIG. 7B. In order to form fused regions 104, heat is applied to areas of non-woven textile 100 corresponding with fused regions 104, but a lesser heat or no heat is applied to other areas of non-woven textile 100 due to the presence of insulating element 113. That is, the temperature of the various areas of non-woven textile 100 corresponding with fused regions 104 is elevated without significantly elevating the temperature of other areas. In this example method, first plate 111 is heated so as to elevate the temperature of non-woven textile 100 through conduction. Some areas of non-woven textile 100 are insulated, however, by the presence of insulating element 113. Only the areas of non-woven textile 100 that are exposed through apertures 114 are, therefore, exposed to the heat so as to soften or melt the thermoplastic polymer material within filaments 103. The material utilized for insulating element 113 may vary to include metal plates, paper sheets, polymer layers, foam

13

layers, or a variety of other materials (e.g., with low thermal conductivity) that will limit the heat transferred to non-woven textile **100** from first plate **111**. In some processes, insulating element **113** may be an integral portion of or otherwise incorporated into first plate **111**.

Upon separating plates **111** and **112**, as depicted in FIG. 7C, non-woven textile **100** and insulating element **113** are separated from each other. Whereas areas of non-woven textile **100** that were exposed by apertures **114** in insulating element **113** form fused regions **104**, areas covered or otherwise protected by insulating element **113** remain substantially unaffected. In some methods, insulating element **113** may be structured to allow some of fused regions **104** to experience greater temperatures than other fused regions **104**, thereby fusing the thermoplastic polymer material of filaments **103** more in some of fused regions **104** than in the other fused regions **104**. That is, the configuration of insulating element **113** may be structured to heat fused regions **104** to different temperatures in order to impart different properties to the various fused regions **104**.

Various methods may be utilized to apply heat to specific areas of non-woven textile **100** and form fused regions **104**. As noted above, first plate **111** may be heated so as to elevate the temperature of non-woven textile **100** through conduction. In some processes, both plates **111** and **112** may be heated, and two insulating elements **113** may be located on opposite sides of non-woven textile **100**. Although heat may be applied through conduction, radio frequency heating may also be used, in which case insulating element **113** may prevent the passage of specific wavelengths of electromagnetic radiation. In processes where chemical heating is utilized, insulating element **113** may prevent chemicals from contacting areas of non-woven textile **100**. In other processes where radiant heat is utilized, insulating element **113** may be a reflective material (i.e., metal foil) that prevents the radiant heat from raising the temperature of various areas of non-woven textile **100**. A similar process involving a conducting element may also be utilized. More particularly, the conducting element may be used to conduct heat directly to fused regions **104**. Whereas insulating element **113** is absent in areas corresponding with fused regions **104**, the conducting element would be present in fused regions **104** to conduct heat to those areas of non-woven textile **100**.

An example of another process that may be utilized to form fused regions **104** in non-woven textile **100** is depicted in FIGS. 8A-8C. Initially, non-woven textile **100** is placed adjacent to or upon second plate **112** or another surface, as depicted in FIG. 8A. A heated die **115** having the shape of one of fused regions **104** then contacts and compresses non-woven textile **100**, as depicted in FIG. 8B, to heat a defined area of non-woven textile **100**. Upon removal of die **115**, one of fused regions **104** is exposed. Additional dies having the general shapes of other fused regions **104** may be utilized to form the remaining fused regions **104** in a similar manner. An advantage to this process is that die **115** and each of the other dies may be heated to different temperatures, held in contact with non-woven textile **100** for different periods of time, and compressed against non-woven textile **100** with different forces, thereby varying the resulting properties of the various fused regions **104**.

An example of yet another process that may be utilized to form fused regions **104** in non-woven textile **100** is depicted in FIG. 9. In this process, non-woven textile **100** is placed upon second plate **112** or another surface, and a laser apparatus **116** is utilized to heat specific areas of non-woven textile **100**, thereby fusing the thermoplastic polymer material of filaments **103** and forming fused regions **104**. By

14

adjusting any or all of the power, focus, or velocity of laser apparatus **116**, the degree to which fused regions **104** are heated may be adjusted or otherwise varied. Moreover, different fused regions **104** may be heated to different temperatures to modify the degree to which filaments **103** are fused, thereby varying the resulting properties of the various fused regions **104**. An example of a suitable laser apparatus **116** is any of a variety of conventional CO.sub.2 or Nd:YAG laser apparatuses.

V—Composite Elements

Non-woven textile **100** may be joined with various textiles, materials, or other components to form composite elements. By joining non-woven textile **100** with other components, properties of both non-woven textile **100** and the other components are combined in the composite elements. An example of a composite element is depicted in FIGS. 10 and 11, in which a component **120** is joined to non-woven textile **100** at second surface **102**. Although component **120** is depicted as having dimensions that are similar to dimensions of non-woven textile **100**, component **120** may have a lesser or greater length, a lesser or greater width, or a lesser or greater thickness. If, for example, component **120** is a textile that absorbs water or wicks water away, then the combination of non-woven textile **100** and component **120** may be suitable for articles of apparel utilized during athletic activities where an individual wearing the apparel is likely to perspire. As another example, if component **120** is a compressible material, such as a polymer foam, then the combination of non-woven textile **100** and component **120** may be suitable for articles of apparel where cushioning (i.e., attenuation of impact forces) is advantageous, such as padding for athletic activities that may involve contact or impact with other athletes or equipment. As a further example, if component **120** is a plate or sheet, then the combination of non-woven textile **100** and component **120** may be suitable for articles of apparel that impart protection from acute impacts. Accordingly, a variety of textiles, materials, or other components may be joined with a surface of non-woven textile **100** to form composite elements with additional properties.

The thermoplastic polymer material in filaments **103** may be utilized to secure non-woven textile **100** to component **120** or other components. As discussed above, a thermoplastic polymer material melts when heated and returns to a solid state when cooled sufficiently. Based upon this property of thermoplastic polymer materials, heatbonding processes may be utilized to form a heatbond that joins portions of composite elements, such as non-woven textile **100** and component **120**. As utilized herein, the term "heatbonding" or variants thereof is defined as a securing technique between two elements that involves a softening or melting of a thermoplastic polymer material within at least one of the elements such that the materials of the elements are secured to each other when cooled. Similarly, the term "heatbond" or variants thereof is defined as the bond, link, or structure that joins two elements through a process that involves a softening or melting of a thermoplastic polymer material within at least one of the elements such that the materials of the elements are secured to each other when cooled. As examples, heatbonding may involve (a) the melting or softening of two elements incorporating thermoplastic polymer materials such that the thermoplastic polymer materials intermingle with each other (e.g., diffuse across a boundary layer between the thermoplastic polymer materials) and are secured together when cooled; (b) the melting or softening

15

of a first textile element incorporating a thermoplastic polymer material such that the thermoplastic polymer material extends into or infiltrates the structure of a second textile element (e.g., extends around or bonds with filaments or fibers in the second textile element) to secure the textile elements together when cooled; and (c) the melting or softening of a textile element incorporating a thermoplastic polymer material such that the thermoplastic polymer material extends into or infiltrates crevices or cavities formed in another element (e.g., polymer foam or sheet, plate, structural device) to secure the elements together when cooled. Heatbonding may occur when only one element includes a thermoplastic polymer material or when both elements include thermoplastic polymer materials. Additionally, heatbonding does not generally involve the use of stitching or adhesives, but involves directly bonding elements to each other with heat. In some situations, however, stitching or adhesives may be utilized to supplement the heatbond or the joining of elements through heatbonding. A needlepunching process may also be utilized to join the elements or supplement the heatbond.

Although a heatbonding process may be utilized to form a heatbond that joins non-woven textile **100** and component **120**, the configuration of the heatbond at least partially depends upon the materials and structure of component **120**. As a first example, if component **120** is at least partially formed from a thermoplastic polymer material, then the thermoplastic polymer materials of non-woven textile **100** and component **120** may intermingle with each other to secure non-woven textile **100** and component **120** together when cooled. If, however, the thermoplastic polymer material of component **120** has a melting point that is significantly higher than the thermoplastic polymer material of non-woven textile **100**, then the thermoplastic polymer material of non-woven textile **100** may extend into the structure, crevices, or cavities of component **120** to secure the elements together when cooled. As a second example, component **120** may be formed from a textile that does not include a thermoplastic polymer material, and the thermoplastic polymer material of non-woven textile **100** may extend around or bond with filaments in component **120** to secure the textile elements together when cooled. As a third example, component **120** may be a polymer foam material, polymer sheet, or plate that includes a thermoplastic polymer material, and the thermoplastic polymer materials of non-woven textile **100** and component **120** may intermingle with each other to secure non-woven textile **100** and component **120** together when cooled. As a fourth example, component **120** may be a polymer foam material, polymer sheet, or plate that does not include a thermoplastic polymer material, and the thermoplastic polymer material of non-woven textile **100** may extend into or infiltrate crevices or cavities within component **120** to secure the elements together when cooled. Referring to FIG. **11**, a plurality of heatbond elements **105** (e.g., the thermoplastic polymer material from one or both of non-woven textile **100** and component **120**) are depicted as extending between non-woven textile **100** and component **120** to join the elements together. Accordingly, a heatbond may be utilized to join non-woven textile **100** and component **120** even when component **120** is formed from a diverse range of materials or has one of a variety of structures.

A general manufacturing process for forming a composite element will now be discussed with reference to FIGS. **12A-12C**. Initially, non-woven textile **100** and component **120** are located between first plate **111** and second plate **112**, as depicted in FIG. **12A**. Plates **111** and **112** then translate or

16

otherwise move toward each other in order to compress or induce contact between non-woven textile **100** and component **120**, as depicted in FIG. **12B**. In order to form the heatbond and join non-woven textile **100** and component **120**, heat is applied to non-woven textile **100** and component **120**. That is, the temperatures of non-woven textile **100** and component **120** are elevated to cause softening or melting of the thermoplastic polymer material at the interface between non-woven textile **100** and component **120**. Depending upon the materials of both non-woven textile **100** and component **120**, as well as the overall configuration of component **120**, only first plate **111** may be heated, only second plate **112** may be heated, or both plates **111** and **112** may be heated so as to elevate the temperatures of non-woven textile **100** and component **120** through conduction. Upon separating plates **111** and **112**, as depicted in FIG. **12C**, the composite element formed from both non-woven textile **100** and component **120** may be removed and permitted to cool.

The manufacturing process discussed relative to FIGS. **12A-12C** generally involves (a) forming non-woven textile **100** and component **120** separately and (b) subsequently joining non-woven textile **100** and component **120** to form the composite element. Referring to FIG. **13**, a process wherein filaments **103** are deposited directly onto component **120** during the manufacture of non-woven textile **100** is depicted. Initially, component **120** is placed upon plate **112**, which may also be a moving conveyor. An extrusion nozzle **121** then extrudes or otherwise forms a plurality of filaments **103** from a thermoplastic polymer material. As filaments **103** fall upon component **120**, filaments **103** collect, lie, or otherwise deposit upon a surface of component **120**, thereby forming non-woven textile **100**. Once cooled, non-woven textile **100** is effectively joined to component **120**, thereby forming the composite element. Accordingly, filaments **103** may be deposited directly upon component **120** during the manufacture of non-woven textile **100**. As a similar manufacturing process, material (e.g., foam, molten polymer, a coating) may be sprayed, deposited, or otherwise applied to a surface of non-woven textile **100** to form the composite element. Moreover, a composite element that includes two or more layers of non-woven textile **100** may be formed by repeatedly depositing layers of filaments **103**. When each of the layers of filaments **103** have different properties or are formed from different polymer materials, the resulting composite element may have the combined properties of the various layers.

Although the general processes discussed above may be utilized to form a composite element from non-woven textile **100** and component **120**, other methods may also be utilized. Rather than heating non-woven textile **100** and component **120** through conduction, other methods that include radio frequency heating or chemical heating may be utilized. In some processes, second surface **102** and a surface of component **120** may be heated through radiant heating prior to being compressed between plates **111** and **112**. An advantage of utilizing radiant heating to elevate the temperature of only the surfaces forming the heatbond is that the thermoplastic polymer material within other portions of non-woven textile **100** and component **120** are not heated significantly. In some processes, stitching or adhesives may also be utilized between non-woven textile **100** and component **120** to supplement the heatbond.

Non-woven textile **100** is depicted in FIGS. **10-120** as having a configuration that does not include fused regions **104**. In order to impart varying properties to a composite element, fused regions **104** may be formed in non-woven textile **100**. In some processes fused regions **104** may be

formed prior to joining non-woven textile **100** with another component (e.g., component **120**). In other processes, however, fused regions **104** may be formed during the heatbonding process or following the heatbonding process. Accordingly, fused regions **104** may be formed at any stage of the various manufacturing process for composite elements.

VI—Composite Element Configurations

Concepts relating to the general structure of composite elements and processes for forming the composite elements were presented above. As more specific examples, the following discussion discloses various composite element configurations, wherein non-woven textile **100** is joined with each of a mechanically-manipulated textile **130**, a sheet **140**, a foam layer **150**, and a plurality of strands **160**.

An example of a composite element that includes non-woven textile **100** and mechanically-manipulated textile **130** is depicted in FIGS. **14** and **15**. Whereas non-woven textile **100** is formed from randomly-distributed filaments **103**, textile **130** is formed by mechanically-manipulating one or more yarns **131** to form a woven or interlooped structure. When manufactured with an interlooped structure, textile **130** may be formed through a variety of knitting processes, including flat knitting, wide tube circular knitting, narrow tube circular knit jacquard, single knit circular knit jacquard, double knit circular knit jacquard, warp knit jacquard, and double needle bar raschel knitting, for example. Accordingly, textile **130** may have a variety of configurations, and various weft-knitting and warp-knitting techniques may be utilized to manufacture textile **130**. Although yarns **131** of textile **130** may be at least partially formed from a thermoplastic polymer material, many mechanically-manipulated textiles are formed from natural filaments (e.g., cotton, silk) or thermoset polymer materials. In order to form a heatbond between non-woven textile **100** and textile **130**, the thermoplastic polymer material from non-woven textile **100** extends around or bonds with yarns **131** or extends into the structure of yarns **131** to secure non-woven textile **100** and textile **130** together when cooled. More particularly, various heatbond elements **105** are depicted in FIG. **15** as extending around or into yarns **131** to form the heatbond. A process similar to the process discussed above relative to FIGS. **12A-12C** may be utilized to form the heatbond between non-woven textile **100** and textile **130**. That is, the heatbond between non-woven textile **100** and textile **130** may be formed, for example, by compressing and heating the elements between plates **111** and **112**.

The combination of non-woven textile **100** and textile **130** may impart some advantages over either of non-woven textile **100** and textile **130** alone. For example, textile **130** may exhibit one-directional stretch, wherein the configuration of yarns **131** allows textile **130** to stretch in one direction, but limits stretch in a perpendicular direction. When non-woven textile **100** and textile **130** are joined, the composite element may also exhibit a corresponding one-directional stretch. As another example, the composite element may also be incorporated into various articles of apparel, with textile **130** being positioned to contact the skin of an individual wearing the apparel, and the materials selected for textile **130** and the structure of textile **130** may impart more comfort than non-woven textile **100** alone. In addition to these advantages, various fused regions **104** may be formed in non-woven textile **100** to impart different degrees of permeability, durability, and stretch-resistance to specific areas of the composite element. Accordingly, the composite element may have a configuration that imparts a

combination of properties that neither non-woven textile **100** nor textile **130** may impart alone.

Another example of a composite element, which includes non-woven textile **100** and sheet **140**, is depicted in FIGS. **16** and **17**. Sheet **140** may be formed from a sheet or plate of a polymer, suede, synthetic suede, metal, or wood material, for example, and may be either flexible or inflexible. In order to form a heatbond between non-woven textile **100** and sheet **140**, the thermoplastic polymer material of non-woven textile **100** may extend into or infiltrate crevices or cavities within sheet **140** to secure the elements together when cooled. In circumstances where sheet **140** is formed from a thermoplastic polymer material, then the thermoplastic polymer materials of non-woven textile **100** and sheet **140** may intermingle with each other (e.g., diffuse across a boundary layer between the thermoplastic polymer materials) to secure non-woven textile **100** and sheet **140** together when cooled. A process similar to the process discussed above relative to FIGS. **12A-12C** may be utilized to form the heatbond between non-woven textile **100** and sheet **140**. As an alternative, stitching or adhesives may be utilized, as well as a needle punching process to push filaments **103** into or through sheet **140** to join non-woven textile **100** and sheet **140** or to supplement the heatbond.

The combination of non-woven textile **100** and sheet **140** may be suitable for articles of apparel that impart protection from acute impacts, for example. A lack of stitching, rivets, or other elements joining non-woven textile **100** and sheet **140** forms a relatively smooth interface. When incorporated into an article of apparel, the lack of discontinuities in the area joining non-woven textile **100** and sheet **140** may impart comfort to the individual wearing the apparel. As another example, edges of sheet **140** are depicted as being spaced inward from edges of non-woven textile **100**. When incorporating the composite element into a product, such as apparel, the edges of non-woven textile **100** may be utilized to join the composite element to other textile elements or portions of the apparel. In addition to these advantages, various fused regions **104** may be formed in non-woven textile **100** to impart different degrees of permeability, durability, and stretch-resistance to areas of the composite element.

Although sheet **140** is depicted as having a solid or otherwise continuous configuration, sheet **140** may also be absent in various areas of the composite element. Referring to FIG. **18A**, sheet **140** has the configuration of various strips of material, that extend across non-woven textile **100**. A similar configuration is depicted in FIG. **18B**, wherein sheet **140** has the configuration of a grid. In addition to imparting strength and tear-resistance to the composite element, the strip and grid configurations of sheet **140** expose portions of non-woven textile **100**, thereby allowing permeability in the exposed areas. In each of FIGS. **16-18B**, sheet **140** is depicted as having a thickness that is comparable to the thickness of non-woven textile **100**. In FIG. **18C**, however, sheet **140** is depicted as having a thickness that is substantially less than the thickness of non-woven textile **100**. Even with a reduced thickness, sheet **140** may impart strength and tear-resistance, while allowing permeability.

A further example of a composite element that includes two layers of non-woven textile **100** and foam layer **150** is depicted in FIGS. **19** and **20**. Foam layer **150** may be formed from a foamed polymer material that is either thermoset or thermoplastic. In configurations where foam layer **150** is formed from a thermoset polymer material, the thermoplastic polymer material from the two layers of non-woven textile **100** may extend into or infiltrate crevices or cavities

on opposite sides of foam layer **150** to form heatbonds and secure the elements together. In configurations where foam layer **150** is formed from a thermoplastic polymer material, the thermoplastic polymer materials of the two layers of non-woven textile **100** and foam layer **150** may intermingle with each other to form heatbonds and secure the elements together.

A process similar to the process discussed above relative to FIGS. **12A-12C** may be utilized to form the heatbonds between the two layer of non-woven textile **100** and foam layer **150**. More particularly, foam layer **150** may be placed between the two layers of non-woven textile **100**, and these three elements may be located between plates **111** and **112**. Upon compressing and heating, heatbonds may form between the two layers of non-woven textile **100** and the opposite sides of foam layer **150**. Additionally, the two layers of non-woven textile **100** may be heatbonded to each other around the perimeter of foam layer **150**. That is, heatbonds may also be utilized to join the two layers of non-woven textile **100** to each other. In addition to foam layer **150**, other intermediate elements (e.g., textile **130** or sheet **140**) may be bonded between the two layers of non-woven textile **100**. A needle punching process may also be utilized to push filaments **103** into or through foam layer **150** to join non-woven textile **100** and foam layer **150** or to supplement the heatbond, as well as stitching or adhesives.

The combination of the two layers of non-woven textile **100** and foam layer **150** may be suitable for articles of apparel where cushioning (i.e., attenuation of impact forces) is advantageous, such as padding for athletic activities that may involve contact or impact with other athletes or equipment. The lack of discontinuities in the area joining the layers of non-woven textile **100** and foam layer **150** may impart comfort to the individual wearing the apparel. The edges of the two layers of non-woven textile **100** may also be utilized to join the composite element to other textile elements or portions of the apparel. In addition to these advantages, various fused regions **104** may be formed in non-woven textile **100** to impart different degrees of permeability, durability, and stretch-resistance to the composite element.

An example of a composite element that includes non-woven textile **100** and a plurality of strands **160** is depicted in FIGS. **21** and **22**. Strands **160** are secured to non-woven textile **100** and extend in a direction that is substantially parallel to either of surfaces **101** and **102**. Referring to the cross-section of FIG. **22**, the positions of strands **160** relative to surfaces **101** and **102** may vary significantly. More particularly, strands **160** may be located upon first surface **101**, strands **160** may be partially embedded within first surface **101**, strands **160** may be recessed under and adjacent to first surface **101**, strands **160** may be spaced inward from first surface **101** and located between surfaces **101** and **102**, or strands **160** may be adjacent to second surface **102**. A heatbonding process may be utilized to secure strands **160** to non-woven textile **100**. That is, thermoplastic polymer material of non-woven textile **100** may be softened or melted to form a heatbond that joins strands **160** to non-woven textile **100**. Depending upon the degree to which the thermoplastic polymer material of non-woven textile **100** is softened or melted, strands **160** may be positioned upon first surface **101** or located inward from first surface **101**.

Strands **160** may be formed from any generally one-dimensional material exhibiting a length that is substantially greater than a width and a thickness. Depending upon the material utilized and the desired properties, strands **160** may be individual filaments, yarns that include a plurality of

filaments, or threads that include a plurality of yarns. As discussed in greater detail below, suitable materials for strands **160** include rayon, nylon, polyester, polyacrylic, silk, cotton, carbon, glass, aramids (e.g., para-aramid fibers and meta-aramid fibers), ultra high molecular weight polyethylene, and liquid crystal polymer, for example. In some configurations, strands **160** may also be metal wires or cables.

In comparison with the thermoplastic polymer material forming non-woven textile **100**, many of the materials noted above for strands **160** exhibit greater tensile strength and stretch-resistance. That is, strands **160** may be stronger than non-woven textile **100** and may exhibit less stretch than non-woven textile **100** when subjected to a tensile force. The combination of non-woven textile **100** and strands **160** imparts a structure wherein the composite element may stretch in one direction and is substantially stretch-resistant and has more strength in another direction. Referring to FIG. **21**, two perpendicular directions are identified with arrows **161** and **162**. When the composite element is subjected to a tensile force (i.e., stretched) in the direction of arrow **161**, non-woven textile **100** may stretch significantly. When the composite element is subjected to a tensile force (i.e., stretched) in the direction of arrow **162**, however, strands **160** resist the force and are more stretch-resistant than non-woven textile **100**. Accordingly, strands **160** may be oriented to impart strength and stretch-resistance to the composite element in particular directions. Although strands **160** are discussed herein as imparting stretch-resistance, strands **160** may be formed from materials that stretch significantly. Strands **160** may also be utilized to impart other properties to the composite element. For example, strands **160** may be electrically-conductive to allow the transmission of power or data, or strands **160** may be located within non-woven textile **100** to impart a particular aesthetic.

Strands **160** are depicted as being substantially parallel to each other in FIG. **21**, and ends of strands **160** are depicted as being spaced inward from edges of non-woven textile **100**. In other composite element configurations, strands **160** may be arranged in other orientations and may extend entirely or only partially across non-woven textile **100**. Referring to FIG. **23A**, strands **160** are depicted as crossing each other. Given the angle that strands **160** are oriented relative to each other, strands **160** may only partially limit the stretch in the direction of arrow **161**, but the composite element may be substantially stretch-resistant in the direction of arrow **162**. A similar configuration is depicted in FIG. **23B**, wherein strands **160** cross each other at right angles. In this configuration, strands **160** may impart stretch-resistance in the directions of both arrows **161** and **162**. That is, the composite element may be stretch-resistant in all directions due to the orientation of strands **160**. As another matter, whereas ends of strands **160** are spaced inward from edges of non-woven textile **100** in FIG. **23A**, the ends of strands **160** extend to the edges of non-woven textile **100** in FIG. **23B**. Strands **160** are depicted as having a wave-like or non-linear configuration in FIG. **23C**. In this configuration, strands **160** may permit some stretch in the direction of arrow **162**. Once strands **160** straighten due to the stretch, however, then strands **160** may substantially resist stretch and provide strength in the direction of arrow **162**. Another configuration is depicted in FIG. **23D**, wherein strands **160** are arranged in a non-parallel configuration to radiate outward.

In some configurations of the composite element, fused regions **104** may be added to further affect the properties of

the composite element. Referring to FIG. 23E, a single fused region 104 extends across non-woven textile 100 in the direction of arrow 161. Given that fused regions 104 may exhibit more stretch-resistance than other areas of non-woven textile 100, the fused region in FIG. 23E may impart some stretch-resistance in the direction of arrow 161, and strands 160 may impart stretch-resistance to the direction of arrow 162. In some configurations, fused regions may extend along strands 160 and in the direction of arrow 162, as depicted in FIG. 23F. Accordingly, fused regions 104 may be utilized with strands 160 to impart specific properties to a composite element.

The material properties of strands 160 relate to the specific materials that are utilized within strands 160. Examples of material properties that may be relevant in selecting specific materials for strands 160 include tensile strength, tensile modulus, density, flexibility, tenacity, and durability. Each of the materials noted above as being suitable for strands 160 exhibit different combinations of material properties. Accordingly, the material properties for each of these materials may be compared in selecting particular materials for strands 160. Tensile strength is a measure of resistance to breaking when subjected to tensile (i.e., stretching) forces. That is, a material with a high tensile strength is less likely to break when subjected to tensile forces than a material with a low tensile strength. Tensile modulus is a measure of resistance to stretching when subjected to tensile forces. That is, a material with a high tensile modulus is less likely to stretch when subjected to tensile forces than a material with a low tensile modulus. Density is a measure of mass per unit volume. That is, a particular volume of a material with a high density has more weight than the same volume of a material with a low density.

Nylon has a relatively low tensile strength, a relatively low tensile modulus, and an average density when compared to each of the other materials. Steel has an average tensile strength, a moderately high tensile modulus, and a relatively high density when compared to the other materials. While nylon is less dense than steel (i.e., lighter than steel), nylon has a lesser strength and a greater propensity to stretch than steel. Conversely, while steel is stronger and exhibits less stretch, steel is significantly more dense (i.e., heavier than nylon). Each of the engineering fibers (e.g., carbon fibers, aramid fibers, ultra high molecular weight polyethylene, and liquid crystal polymer) exhibit tensile strengths and tensile moduli that are comparable to steel. In addition, the engineering fibers exhibit densities that are comparable to nylon. That is, the engineering fibers have relatively high tensile strengths and tensile moduli, but also have relatively low densities. In general, each of the engineering fibers have a tensile strength greater than 0.60 gigapascals, a tensile modulus greater than 50 gigapascals, and a density less than 2.0 grams per centimeter cubed.

In addition to material properties, the structural properties of various configurations of strands 160 may be considered when selecting a particular configuration for a composite element. The structural properties of strands 160 relate to the specific structure that is utilized to form strands 160. Examples of structural properties that may be relevant in selecting specific configurations for strands 160 include denier, number of plies, breaking force, twist, and number of individual filaments, for example.

Based upon the above discussion, non-woven textile 100 may be heatbonded or otherwise joined (e.g., through stitching or adhesive bonding) to a variety of other components to form composite elements. An advantage of joining non-

woven textile 100 to the other components is that the composite elements generally include combined properties from both non-woven textile 100 and the other components. As examples, composite elements may be formed by joining non-woven textile 100 to any of textile 130, sheet 140, foam layer 150, and strands 160.

VII—Seam Formation

In order to incorporate non-woven textile 100 into a product, non-woven textile 100 is often joined with other elements of the product to form a seam. For example, non-woven textile 100 may be joined with other non-woven textile elements, various mechanically-manipulated textile elements, or polymer sheets. Although stitching and adhesive bonding may be utilized to join non-woven textile 100 to the other elements of the product, the seam may also be formed through a heatbonding process.

As an example of the manner in which non-woven textile 100 may be joined to another element, FIGS. 24 and 25 depict a pair of elements of non-woven textile 100 that are joined to form a seam 106. That is, an edge area of one non-woven textile 100 is joined with an edge area of the other non-woven textile 100 at seam 106. More particularly, seam 106 is formed by heatbonding first surface 101 of one non-woven textile 100 with first surface 101 of the other non-woven textile 100. As with some conventional stitched seams, first surfaces 101 from each non-woven textile 100 are turned inward at seam 106 to face each other, and first surfaces 101 are joined to each other. In contrast with some conventional stitched seams, a heatbond is utilized to join first surfaces 101 from each non-woven textile 100 to each other. In some configurations, however, stitching or adhesive bonding may also be utilized to reinforce seam 106.

A general manufacturing process for forming seam 106 will now be discussed with reference to FIGS. 26A-26D. Initially, the pair of elements of non-woven textile 100 are located between a first seam-forming die 117 and a second seam-forming die 118, as depicted in FIG. 26A. Seam-forming dies 117 and 118 then translate or otherwise move toward each other in order to compress or induce contact between edge areas of the pair of elements of non-woven textile 100, as depicted in FIG. 26B. In order to form the heatbond and join the edge areas of the elements of non-woven textile 100, seam-forming dies 117 and 118 apply heat to the edge areas. That is, seam-forming dies 117 and 118 elevate the temperatures of the edge areas of the pair of elements of non-woven textile 100 to cause softening or melting of the thermoplastic polymer material at the interface between the edge areas. Upon separating seam-forming dies 117 and 118, as depicted in FIG. 26C, seam 106 is formed between the edge areas of the pair of elements of non-woven textile 100. After being permitted to cool, the pair of elements of non-woven textile 100 may be unfolded, as depicted in FIG. 26D. After forming, seam 106 may also be trimmed to limit the degree to which the end areas of the pair of elements of non-woven textile 100 extend downward at seam 106.

Although the general process discussed above may be utilized to form seam 106, other methods may also be utilized. Rather than heating the edge areas of elements of non-woven textile 100 through conduction, other methods that include radio frequency heating, chemical heating, or radiant heating may be utilized. In some processes, stitching or adhesives may also be utilized between the pair of elements of non-woven textile 100 to supplement the heatbond. As an alternate method, the pair of elements of

23

non-woven textile **100** may be placed upon a surface, such as second plate **112**, and a heated roller **119** may form seam **106**, as depicted in FIG. 27.

As with the formation of fused regions **104**, the formation of seam **106** involves softening or melting the thermoplastic polymer material in various filaments **103** that are located in the area of seam **106**. Depending upon the degree to which filaments **103** change state, the various filaments **103** in the area of seam **106** may (a) remain in a filamentous configuration, (b) melt entirely into a liquid that cools into a non-filamentous configuration, or (c) take an intermediate configuration wherein some filaments **103** or portions of individual filaments **103** remain filamentous and other filaments **103** or portions of individual filaments **103** become non-filamentous. Referring to FIG. 25, filaments **103** are depicted as remaining in the filamentous configuration in the area of seam **106**, but may be melted into a non-filamentous configuration or may take the intermediate configuration. Accordingly, although filaments **103** in the area of seam **106** are generally fused to a greater degree than filaments **103** in other areas of non-woven textile **100**, the degree of fusing may vary significantly.

In forming seam **106** between the pair of elements of non-woven textile **100**, the thermoplastic polymer materials from the various filaments **103** intermingle with each other and are secured together when cooled. Non-woven textile **100** may also be joined with other types of elements to form a similar seam **106**. As a first example, non-woven textile **100** is depicted as being joined with mechanically-manipulated textile **130** at seam **106** in FIG. 28A. Although yarns **131** of textile **130** may be at least partially formed from a thermoplastic polymer material, many mechanically-manipulated textiles are formed from natural filaments (e.g., cotton, silk) or thermoset polymer materials. In order to form a heatbond between non-woven textile **100** and textile **130** at seam **106**, the thermoplastic polymer material from non-woven textile **100** extends around or bonds with yarns **131** or extends into the structure of yarns **131** to secure the non-woven textile **100** and textile **130** together at seam **106** when cooled. As a second example, non-woven textile **100** is depicted as being joined with sheet **140** at seam **106** in FIG. 28B. In some configurations, sheet **140** may be a flexible polymer sheet. In order to form a heatbond between non-woven textile **100** and sheet **140** at seam **106**, the thermoplastic polymer material of non-woven textile **100** may extend into or infiltrate crevices or cavities within sheet **140** to secure the elements together when cooled. In circumstances where sheet **140** is formed from a thermoplastic polymer material, then the thermoplastic polymer materials of non-woven textile **100** and sheet **140** may intermingle with each other to secure non-woven textile **100** and sheet **140** together at seam **106** when cooled.

The thicknesses of elements of non-woven textile **100** are depicted as being substantially uniform, even in the areas of seam **106**. Depending upon the temperature and pressure used to form seam **106**, the configuration of seam **106** may vary to include a variety of other configurations. Referring to FIG. 29A, elements of non-woven textile **100** exhibit reduced thicknesses in the areas of seam **106**, and the thermoplastic polymer material of filaments **103** is depicted as being in a non-filamentous configuration. Seam **106** may also exhibit a pointed configuration, as depicted in FIG. 29B. The temperature and pressure used to form seam **106** may also impart a stepped structure, as depicted in FIG. 29C. Accordingly, the configuration of the pair of elements of non-woven textile **100** at seam **106** may vary significantly. Moreover, similar configurations for seam **106** may result

24

when non-woven textile **100** is joined with other elements, such as textile **130** or sheet **140**.

As another example of the manner in which non-woven textile **100** may be joined to another element, FIGS. 30 and 31 depict a pair of elements of non-woven textile **100** that are joined to form a seam **107**. In this configuration, an edge area of one non-woven textile **100** overlaps and is joined with an edge of the other non-woven textile **100** at seam **107**. Although a heatbond is utilized to join the pair of elements of non-woven textile **100** to each other, stitching or adhesive bonding may also be utilized to reinforce seam **107**. Moreover, a single non-woven textile **100** may also be joined with other types of elements, including textile **130** and sheet **140**, to form a similar seam **107**.

A general manufacturing process for forming seam **107** will now be discussed with reference to FIGS. 32A-32C. Initially, the pair of elements of non-woven textile **100** are positioned in an overlapping configuration between first seam-forming die **117** and second seam-forming die **118**, as depicted in FIG. 32A. Seam-forming dies **117** and **118** then translate or otherwise move toward each other in order to compress or induce contact between edge areas of the pair of non-woven textile elements **100**, as depicted in FIG. 32B. In order to form the heatbond and join the edge areas of the elements of non-woven textile **100**, seam-forming dies **117** and **118** apply heat to the edge areas. That is, seam-forming dies **117** and **118** elevate the temperatures of the edge areas of the pair of elements of non-woven textile **100** to cause softening or melting of the thermoplastic polymer material at the interface between the edge areas. Upon separating seam-forming dies **117** and **118**, as depicted in FIG. 32C, seam **107** is formed between the edge areas of the pair of elements of non-woven textile **100**.

Although the general process discussed above may be utilized to form seam **107**, other methods may also be utilized. Rather than heating the edge areas of elements of non-woven textile **100** through conduction, other methods that include radio frequency heating, chemical heating, or radiant heating may be utilized. In some processes, stitching or adhesives may also be utilized between the pair of elements of non-woven textile **100** to supplement the heatbond. As an alternate method, the pair of elements of non-woven textile **100** may be placed upon a surface, such as second plate **112**, and heated roller **119** may form seam **107**, as depicted in FIG. 33. Referring to FIG. 31, filaments **103** are depicted as remaining in the filamentous configuration in the area of seam **107**, but may be melted into a non-filamentous configuration or may take the intermediate configuration. Accordingly, although filaments **103** in the area of seam **107** are generally fused to a greater degree than filaments **103** in other areas of non-woven textile **100**, the degree of fusing may vary significantly.

First surfaces **101** of the pair of elements of non-woven textile **100** are depicted as being co-planar or flush with each other in FIGS. 30 and 31. Similarly, second surfaces **102** of the pair of elements of non-woven textile **100** are also depicted as being coplanar or flush with each other. Depending upon the temperature and pressure used to form seam **107**, the configuration of seam **107** may vary to include a variety of other configurations. Referring to FIG. 34A, surfaces **101** and **102** bow inward at seam **107**, and the thermoplastic polymer material is depicted as having a non-filamentous configuration. Surfaces **101** and **102** angle inward more-abruptly in FIG. 34B, which may be caused from pressure exerted by seam-forming dies **117** and **118**. As another configuration, FIG. 34C depicts the pair of elements of non-woven textile **100** as being joined at **107** in a

non-coplanar configuration. Accordingly, the configuration of the pair of elements of non-woven textile **100** at seam **107** may vary significantly. Moreover, similar configurations for seam **107** may result when non-woven textile **100** is joined with other elements, such as textile **130** or sheet **140**.

VIII—General Product Configurations

Non-woven textile **100**, multiple elements of non-woven textile **100**, or various composite element configurations may be utilized in articles of apparel (e.g., shirts, jackets and other outerwear, pants, footwear), containers, and upholstery for furniture. Various configurations of non-woven textile **100** may also be utilized in bed coverings, table coverings, towels, flags, tents, sails, and parachutes, as well as industrial purposes that include automotive and aerospace applications, filter materials, medical textiles, geotextiles, agrotiles, and industrial apparel. Accordingly, non-woven textile **100** may be utilized in a variety of products for both personal and industrial purposes.

Although non-woven textile **100** may be utilized in a variety of products, the following discussion provides examples of articles of apparel that incorporate non-woven textile **100**. That is, the following discussion demonstrates various ways in which non-woven textile **100** may be incorporated into a shirt **200**, a pair of pants **300**, and an article of footwear **400**. Moreover, examples of various configurations of shirt **200**, pants **300**, and footwear **400** are provided in order to demonstrate various concepts associated with utilizing non-woven textile **100** in products. Accordingly, while the concepts outlined below are specifically applied to various articles of apparel, the concepts may be applied to a variety of other products.

IX—Shirt Configurations

Various configurations of shirt **200** are depicted in FIGS. **35A-35H** as including a torso region **201** and a pair of arm regions **202** that extend outward from torso region **201**. Torso region **201** corresponds with a torso of a wearer and covers at least a portion of the torso when worn. An upper area of torso region **201** defines a neck opening **203** through which the neck and head of the wearer protrude when shirt **200** is worn. Similarly, a lower area of torso region **201** defines a waist opening **204** through which the waist or pelvic area of the wearer protrudes when shirt **200** is worn. Arm regions **202** respectively correspond with a right arm and a left arm of the wearer and cover at least a portion of the right arm and the left arm when shirt **200** is worn. Each of arm regions **202** define an arm opening **205** through which the hands, wrists, or arms of the wearer protrude when shirt **200** is worn. Shirt **200** has the configuration of a shirt-type garment, particularly a long-sleeved shirt. In general, shirt-type garments cover a portion of a torso of the wearer and may extend over arms of the wearer. In further examples, apparel having the general structure of shirt **200** may have the configuration of other shirt-type garments, including short-sleeved shirts, tank tops, undershirts, jackets, or coats.

A first configuration of shirt **200** is depicted in FIGS. **35A** and **36A**. A majority of shirt **200** is formed from non-woven textile **100**. More particularly, torso region **201** and each of arm regions **202** are primarily formed from non-woven textile **100**. Although shirt **200** may be formed from a single element of non-woven textile **100**, shirt **200** is generally formed from multiple joined elements of non-woven textile **100**. As depicted, for example, at least a front area of torso

region **201** is formed one element of non-woven textile **100**, and each of arm regions **202** are formed from different elements of non-woven textile **100**. A pair of seams **206** extends between torso region **201** and arm regions **202** in order to join the various elements of non-woven textile **100** together. In general, seams **206** define regions where edge areas of the elements of non-woven textile **100** are heat-bonded with each other. Referring to FIG. **36A**, one of seams **206** is depicted as having the general configuration of seam **106**, but may also have the configuration of seam **107** or another type of seam. Stitching and adhesive bonding may also be utilized to form or supplement seams **206**.

A second configuration of shirt **200** is depicted in FIGS. **35B** and **36B**. As with the configuration of FIG. **35A**, a majority of shirt **200** is formed from non-woven textile **100**. In order to impart different properties to specific areas of shirt **200**, various fused regions **104** are formed in non-woven textile **100**. More particularly, fused regions **104** are formed around neck opening **203**, waist opening **204**, and each of arm openings **205**. Given that each of openings **203-205** may be stretched as shirt **200** is put on an individual and taken off the individual, fused regions **104** are located around openings **203-205** in order to impart greater stretch-resistance to these areas. Filaments **103** in fused regions **104** of shirt **200** are generally fused to a greater degree than filaments **103** in other areas of shirt **200** and may exhibit a non-filamentous configuration, as depicted in FIG. **36B**. Filaments **103** in fused regions **104** of shirt **200** may also exhibit a filamentous configuration or the intermediate configuration. In addition to providing greater stretch-resistance, fused regions **104** impart enhanced durability to the areas around openings **203-205**.

A third configuration of shirt **200** is depicted in FIGS. **35C** and **36C** as including further fused regions **104**. Given that elbow areas of shirt **200** may be subjected to relatively high abrasion as shirt **200** is worn, some of fused regions **104** may be located in the elbow areas to impart greater durability. Also, backpack straps that extend over shoulder areas of shirt **200** may abrade and stretch the shoulder areas. Additional fused regions **104** are, therefore, located in the shoulder areas of shirt **200** to impart both durability and stretch-resistance. The areas of non-woven textile **100** that are located in the shoulder areas and around seams **206** effectively form both seams **206** and the fused regions **104** in the shoulder areas, as depicted in FIG. **36C**. Two separate processes may be utilized to form these areas. That is, a first heatbonding process may form seams **206**, and a second heating process may form the fused regions **104** in the shoulder areas. As an alternative, however, seams **206** and the fused regions **104** in the shoulder areas may be formed through a single heatbonding/heating process.

Although the size of fused regions **104** in shirt **200** may vary significantly, some of fused regions **104** generally have a continuous area of at least one square centimeter. As noted above, various embossing or calendaring processes may be utilized during the manufacturing process for non-woven textile **100**. Some embossing or calendaring processes may form a plurality of relatively small areas (i.e., one to ten square millimeters) where filaments **103** are somewhat fused to each other. In contrast with the areas formed by embossing or calendaring, some of fused regions **104** have a continuous area of at least one square centimeter. As utilized herein, "continuous area" or variants thereof is defined as a relatively unbroken or uninterrupted region. As examples, and with reference to FIG. **35C**, the fused region **104** around neck opening **203** individually forms a continuous area, each of the fused regions **104** in the elbow areas of shirt **200**

individually form a continuous area, and each of the fused regions **104** in the shoulder areas of shirt **200** individually form a continuous area. All of fused regions **104** (i.e., around neck openings **203-205** and in the shoulder and elbow areas) are not collectively one continuous area because portions of non-woven textile **100** without significant fusing extend between these fused regions **104**.

A fourth configuration of shirt **200** is depicted in FIGS. **35D** and **36D**. Referring to FIGS. **35B** and **36B**, fused regions **104** are utilized to provide stretch-resistance to the areas around openings **203-205**. Another structure that may be utilized to provide stretch-resistance, as well as a different aesthetic, involves folding non-woven textile **100** and heat-bonding or otherwise securing non-woven textile **100** to itself at various bond areas **207**, as generally depicted in FIG. **36D**. Although this structure may be utilized for any of openings **203-205**, bond areas **207** where textile **100** is heatbonded to itself are depicted as extending around waist opening **204** and arm openings **205**.

A fifth configuration of shirt **200** is depicted in FIGS. **35E** and **36E**. Whereas the configurations of shirt **200** depicted in FIGS. **35A-35D** are primarily formed from non-woven textile **100**, arm regions **202** in this configuration of shirt **200** are formed from textile **130**, which is a mechanically-manipulated textile. As discussed above, seams having the configuration of seams **106** and **107** may join non-woven textile **100** with a variety of other materials, including textile **130**. Seams **206** join, therefore, non-woven textile from torso region **201** with elements of textile **130** from arm regions **202**. Utilizing various types of textile materials within shirt **200** may for example, enhance the comfort, durability, or aesthetic qualities of shirt **200**. Although arm regions **202** are depicted as being formed from textile **130**, other areas may additionally or alternatively be formed from textile **130** or other materials. For example, a lower portion of torso region **201** may be formed from textile **130**, only an area around neck opening **203** may be formed from textile **130**, or the configuration of FIG. **35E** may be reversed such that torso region **201** is formed from textile **130** and each of arm regions **202** are formed from non-woven textile **100**. Although textile **130** is utilized as an example, elements formed from the materials of sheet **140** or foam layer **150** may also be incorporated into shirt **200** and joined with non-woven textile **100**. Accordingly, an article of apparel, such as shirt **200**, may incorporate both non-woven textile **100** and various other textiles or materials. Various fused regions **104** are also formed in the non-woven textile **100** of torso region **201** in order to impart different properties to specific areas of shirt **200** that incorporate non-woven textile **100**.

A sixth configuration of shirt **200** is depicted in FIGS. **35F** and **36F**, in which a majority of shirt **200** is formed from a composite element of non-woven textile **100** and textile **130**. More particularly, the material forming shirt **200** has a layered structure including an outer layer of non-woven textile **100** and an inner layer of textile **130**. The combination of non-woven textile **100** and textile **130** may impart some advantages over either of non-woven textile **100** and textile **130** alone. For example, textile **130** may exhibit one-directional stretch that imparts one-directional stretch to the composite element. Textile **130** may also be positioned to contact the skin of an individual wearing shirt **200**, and the materials selected for textile **130** and the structure of textile **130** may impart more comfort than non-woven textile **100** alone. As an additional matter, the presence of non-woven textile **100** permits elements to be joined through heatbonding. Referring to FIG. **36F**, surfaces of the composite mate-

rial that include non-woven textile **100** are heatbonded to each other to join elements from torso region **201** and one of arm regions **202**. Various fused regions **104** are also formed in regions **201** and **202** in order to impart different properties to specific areas of shirt **200**.

A seventh configuration of shirt **200** is depicted in FIGS. **35G** and **36G**. In order to provide protection to a wearer, various sheets **140** and foam layers **150** are heatbonded to an interior surface of non-woven textile **100**. More particularly, two sheets **140** are located in the shoulder areas of shirt **200**, two sheets **140** are located in arm regions **202**, and two foam layers **150** are located on sides of torso region **201**. Various fused regions **104** are also formed in non-woven textile **100**. More particularly, a pair of fused regions **104** extend around the areas where foam layers **150** are located in torso region **201**, and a pair of fused regions **104** extend over the areas where sheets **140** are located in arm regions **202**. These fused regions **104** may be utilized to reinforce or add stretch-resistance to areas surrounding foam layers **150** or provide greater durability to areas over sheets **140**, for example.

An eighth configuration of shirt **200** is depicted in FIGS. **35H** and **36H**. In addition to various fused regions **104** that are formed in non-woven textile **100**, a plurality of strands **160** are also embedded within non-woven textile **100** to, for example, impart stretch-resistance or additional strength to specific areas of shirt **200**. More particularly, seven strands **160** radiate outward and downward from a point in an upper portion of torso region **201**, two strands **160** extend in parallel along each of arm regions **202**, and at least one strand **160** extends across seams **206** in shoulder areas of shirt **200**. Some of strands **160** extend through various fused regions **104** that may impart additional stretch-resistance or durability, for example, to the areas surrounding strands **160**. In torso region **201**, each of strands **160** pass through one of fused regions **104**, while two of strands **160** extend along a pair of fused regions **104**. In the shoulder areas of shirt **200**, a pair of strands **160** are located entirely within fused regions **104**. Accordingly, strands **160** may be utilized alone or coupled with fused regions **104**.

Based upon the above discussion, non-woven textile **100** may be utilized in an article of apparel, such as shirt **200**. In some configurations, seams **206** having the configuration of either of seams **106** or **107** may be used to join textile elements, including elements of non-woven textile **100**. In order to impart different properties to areas of shirt **200**, various fused regions **104** may be formed, different types of textiles may be incorporated into shirt **200**, and composite elements may be formed by joining one or more of textile **130**, sheet **140**, foam layer **150**, strands **160**, or various other components to non-woven textile **100**. By forming fused regions **104** in non-woven textile **100** and combining non-woven textile **100** with other components to form composite elements, various properties and combinations of properties may be imparted to different areas of shirt **200**. That is, the various concepts disclosed herein may be utilized individually or in combination to engineer the properties of shirt **200** and tailor shirt **200** to a specific purpose. Given that non-woven textile **100** incorporates a thermoplastic polymer material, seams **206** and the composite elements may be formed through heatbonding.

X—Pants Configurations

Various configurations of pants **300** are depicted in FIGS. **37A-37C** as including a pelvic region **301** and a pair of leg regions **302** that extend downward from pelvic region **301**.

Pelvic region 301 corresponds with a lower torso and pelvis bone of a wearer and covers at least a portion of the lower torso when worn. An upper area of pelvic region 301 defines a waist opening 303 through which the torso extends when pants 300 are worn. Leg regions 302 respectively correspond with a right leg and a left leg of the wearer and cover at least a portion of the right leg and the left leg when pants 300 are worn. Each of leg regions 302 define an ankle opening 304 through which the ankle and feet of the wearer protrude when pants 300 are worn. Pants 300 have the configuration of a pants-type garment, particularly a pair of athletic pants. In general, pants-type garments cover the lower torso of the wearer and may extend over legs of the wearer. In further examples, apparel having the general structure of pants 300 may have the configuration of other pants-type garments, including shorts, jeans, briefs, swim-suits, and undergarments.

A first configuration of pants 300 is depicted in FIG. 37A. A majority of pants 300 is formed from non-woven textile 100. More particularly, pelvic region 301 and each of leg regions 302 are primarily formed from non-woven textile 100. Although pants 300 may be formed from a single element of non-woven textile 100, pants 300 is generally formed from multiple joined elements of non-woven textile 100. Although not depicted, seams similar to seams 106, 107, or 206 may be utilized to join the various elements of non-woven textile 100 together. Stitching and adhesive bonding may also be utilized to form or supplement the seams.

A pocket 305 is formed in pants 300 and may be utilized to hold or otherwise contain relatively small objects (e.g., keys, wallet, identification card, mobile phone, portable music player). Two overlapping layers of non-woven textile 100 are utilized to form pocket 305, as depicted in FIG. 38. More particularly, a bond area 306 is utilized to heatbond the layers of non-woven textile 100 to each other. A central area of one of the layers of non-woven textile 100 remains unbonded, however, to form the areas within pocket 305 for containing the objects. A pocket similar to pocket 305 may also be formed in other products and articles of apparel, including shirt 200.

A second configuration of pants 300 is depicted in FIG. 37B. As with the configuration of FIG. 37A, a majority of pants 300 is formed from non-woven textile 100. In order to impart different properties to specific areas of pants 300, various fused regions 104 are formed in non-woven textile 100. More particularly, fused regions 104 are formed around waist opening 303 and each of leg openings 304. Another fused region 104 is formed at an opening for pocket 305. Given that each of openings 303 and 304, as well as the opening to pocket 305, may be stretched, fused regions 104 may be utilized to impart greater stretch-resistance to these areas. That is, filaments 103 in fused regions 104 of pants 300 are generally fused to a greater degree than filaments 103 in other areas of pants 300 and may have any of the filamentous, non-filamentous, or intermediate configurations discussed above. In addition to providing greater stretch-resistance, fused regions 104 impart enhanced durability. Given that knee areas of pants 300 may be subjected to relatively high abrasion as pants 300 are worn, additional fused regions 104 may be located in the knee areas to impart greater durability.

A third configuration of pants 300 is depicted in FIG. 37C. As with shirt 200, fused regions 104, textile 130, sheet 140, foam layer 150, and strands 160 may be utilized to impart properties to various areas of pants 300. In leg regions 302, for example, textile 130 is heatbonded to an interior surface

of non-woven textile 100. A pair of sheets 140 are heatbonded to pants 300 in side areas of pelvic region 301, and portions of the fused region 104 around waist opening 303 extend under sheets 140. A pair of foam layers 150 are also located in the knee areas of pants 300, and strands 160 that extend along leg regions 302 extend under foam layers 150 (e.g., between non-woven textile 100 and foam layers 150). End areas of strands 160 also extend into fused regions 104 in lower areas of leg regions 302. Accordingly, fused regions 104, textile 130, sheet 140, foam layer 150, and strands 160 may be utilized or combined in a variety of ways to impart properties to different various areas of pants 300. Whereas various elements of sheet 140 and foam layer 150 are heatbonded with an interior surface of shirt 200 in FIG. 35G, various elements of sheet 140 and foam layer 150 are heatbonded with an exterior surface of pants 300 in FIG. 37C. Depending upon various structural and aesthetic factors, composite elements and apparel including the composite elements may be formed with components (e.g., textile 130, sheet 140, foam layer 150, strands 160) located on an exterior or an interior of non-woven textile 100.

Based upon the above discussion, non-woven textile 100 may be utilized in an article of apparel, such as pants 300. Seams of various types may be used to join textile elements, including elements of non-woven textile 100. In order to impart different properties to areas of pants 300, various fused regions 104 may be formed, different types of textiles may be incorporated into shirt 200, and composite elements may be formed by joining one or more of textile 130, sheet 140, foam layer 150, strands 160, or various other components to non-woven textile 100. By forming fused regions 104 in non-woven textile 100 and combining non-woven textile 100 with other components to form composite elements, various properties and combinations of properties may be imparted to different areas of pants 300. That is, the various concepts disclosed herein may be utilized individually or in combination to engineer the properties of pants 300 and tailor pants 300 to a specific purpose. Given that non-woven textile 100 incorporates a thermoplastic polymer material, the seams and composite elements may be formed through heatbonding.

XI—Footwear Configurations

Various configurations of footwear 400 are depicted in FIGS. 39A-39G as including a sole structure 410 and an upper 420. Sole structure 410 is secured to upper 420 and extends between the foot of a wearer and the ground when footwear 400 is placed upon the foot. In addition to providing traction, sole structure 410 may attenuate ground reaction forces when compressed between the foot and the ground during walking, running, or other ambulatory activities. As depicted, sole structure 410 includes a fluid-filled chamber 411, a reinforcing structure 412 that is bonded to and extends around an exterior of chamber 411, and an outsole 413 that is secured to a lower surface of chamber 411, which is similar to a sole structure that is disclosed in U.S. Pat. No. 7,086,179 to Dojan, et al., which is incorporated by reference herein. The configuration of sole structure 410 may vary significantly to include a variety of other conventional or nonconventional structures. As an example, sole structure 410 may incorporate a polymer foam element in place of chamber 411 and reinforcing structure 412, and the polymer foam element may at least partially encapsulate a fluid-filled chamber, as disclosed in either of U.S. Pat. No. 7,000,335 to Swigart, et al. and U.S. Pat. No. 7,386,946 to Goodwin, which are incorporated by reference herein. As

another example, sole structure **410** may incorporate a fluid-filled chamber with an internal foam tensile member, as disclosed in U.S. Pat. No. 7,131,218 to Schindler, which is incorporated by reference herein. Accordingly, sole structure **410** may have a variety of configurations. Upper **420** defines a void within footwear **400** for receiving and securing the foot relative to sole structure **410**. More particularly, upper **420** is structured to extend along a lateral side of the foot, along a medial side of the foot, over the foot, and under the foot, such that the void within upper **420** is shaped to accommodate the foot. Access to the void is provided by an ankle opening **421** located in at least a heel region of footwear **400**. A lace **422** extends through various lace apertures **423** in upper **420** and permits the wearer to modify dimensions of upper **420** to accommodate the proportions of the foot. Lace **422** also permits the wearer to loosen upper **420** to facilitate entry and removal of the foot from the void. Although not depicted, upper **420** may include a tongue that extends under lace **422** to enhance the comfort or adjustability of footwear **400**.

A first configuration of footwear **400** is depicted in FIGS. **39A** and **40A**. Portions of upper **420** that extend along sides of the foot, over the foot, and under the foot may be formed from various elements of non-woven textile **100**. Although not depicted, seams similar to seams **106** and **107** may be used to join the elements of non-woven textile **100**. In many articles of footwear, stitching or adhesives are utilized to join the upper and sole structure. Sole structure **410**, however, may be at least partially formed from a thermoplastic polymer material. More particularly, chamber **411** and reinforcing structure **412** may be at least partially formed from a thermoplastic polymer material that joins to upper **420** with a heatbond. That is, a heatbonding process may be utilized to join sole structure **410** and upper **420**. In some configurations, stitching or adhesives may be utilized to join sole structure **410** and upper **420**, or the heatbond may be supplemented with stitching or adhesives.

A relatively large percentage of footwear **400** may be formed from thermoplastic polymer materials. As discussed above, non-woven textile **100**, chamber **411**, and reinforcing structure **412** may be at least partially formed from thermoplastic polymer materials. Although lace **422** is not generally joined to upper **420** through bonding or stitching, lace **422** may also be formed from a thermoplastic polymer material. Similarly, outsole **413** may also be formed from a thermoplastic polymer material. Depending upon the number of elements of footwear **400** that incorporate thermoplastic polymer materials or are entirely formed from thermoplastic polymer materials, the percentage by mass of footwear **400** that is formed from the thermoplastic polymer materials may range from thirty percent to one-hundred percent. In some configurations, at least sixty percent of a combined mass of upper **420** and sole structure **410** may be from the thermoplastic polymer material of non-woven textile **100** and thermoplastic polymer materials of at least one of (a) other elements of upper **420** (i.e., lace **422**) and (b) the elements of sole structure **410** (i.e., chamber **411**, reinforcing structure **412**, outsole **413**). In further configurations, at least eighty percent or even at least ninety percent of a combined mass of upper **420** and sole structure **410** may be from the thermoplastic polymer material of non-woven textile **100** and thermoplastic polymer materials of at least one of (a) other elements of upper **420** and (b) the elements of sole structure **410**. Accordingly, a majority or even all of footwear **400** may be formed from one or more thermoplastic polymer materials.

A second configuration of footwear **400** is depicted in FIGS. **39B** and **40B**, in which three generally linear fused regions **104** extend from a heel area to a forefoot area of footwear **400**. As discussed in detail above, the thermoplastic polymer material forming filaments **103** of non-woven textile **100** is fused to a greater degree in fused regions **104** than in other areas of non-woven textile **100**. The thermoplastic polymer material from filaments **103** may also be fused to form a non-filamentous portion of non-woven textile **100**. The three fused regions **104** form, therefore, areas where filaments **103** are fused to a greater degree than in other areas of upper **420**. Fused regions **104** have generally greater stretch-resistance than other areas of non-woven textile **100**. Given that fused regions **104** extend longitudinally between the heel area and the forefoot area of footwear **400**, fused regions **104** may reduce the amount of longitudinal stretch in footwear **400**. That is, fused regions **104** may impart greater stretch-resistance to footwear **400** in the direction between the heel area and the forefoot area. Fused regions **104** may also increase the durability of upper **420** and decrease the permeability of upper **420**.

A third configuration of footwear **400** is depicted in FIGS. **39C** and **40C**. Various fused regions **104** are formed in non-woven textile **100**. One of fused regions **104** extends around and is proximal to ankle opening **421**, which may add greater stretch-resistance to the area around ankle opening **421** and assists with securely-retaining the foot within upper **420**. Another fused region **104** is located in the heel region and extends around a rear area of the footwear to form a heel counter that resists movement of the heel within upper **420**. A further fused region **104** is located in the forefoot area and adjacent to the sole structure, which adds greater durability to the forefoot area. More particularly, the forefoot area of upper **420** may experience greater abrasiveness than other portions of upper **420**, and the addition to fused region **104** in the forefoot area may enhance the abrasion-resistance of footwear **400** in the forefoot area. Additional fused regions **104** extend around some of lace apertures **423**, which may enhance the durability and stretch-resistance of areas that receive lace **422**. Fused regions **104** also extend downward from an area that is proximal to lace apertures **423** to an area that is proximal to sole structure **410** in order to enhance the stretch-resistance along the sides of footwear **400**. More particularly, tension in lace **422** may place tension in the sides of upper **420**. By forming fused regions **104** that extend downward along the sides of upper **420**, the stretch in upper **420** may be reduced.

The size of fused regions **104** in footwear **400** may vary significantly, but fused regions **104** generally have a continuous area of at least one square centimeter. As noted above, various embossing or calendaring processes may be utilized during the manufacturing process for non-woven textile **100**. Some embossing or calendaring processes may form a plurality of relatively small areas (i.e., one to ten square millimeters) where filaments **103** are somewhat fused to each other. In contrast with the areas formed by embossing or calendaring, fused regions **104** have a continuous area, as defined above, of at least one square centimeter.

Although a majority of upper **420** may be formed from a single layer of non-woven textile **100**, multiple layers may also be utilized. Referring to FIG. **40C**, upper **420** includes an intermediate foam layer **150** between two layers of non-woven textile **100**. An advantage to this configuration is that foam layer imparts additional cushioning to the sides of upper **420**, thereby protecting and imparting greater comfort to the foot. In general, the portions of upper **420** that incorporate foam layer **150** may be formed to have the

general configuration of the composite element discussed above relative to FIGS. 19 and 20. Moreover, a heatbonding process similar to the process discussed above relative to FIGS. 12A-12C may be utilized to form the portions of upper 420 that incorporate foam layer 150. As an alternative to foam layer 150, textile 130 or sheet 140 may also be heatbonded to non-woven textile 100 in footwear 400. Accordingly, incorporating various composite elements into footwear 400 may impart a layered configuration with different properties.

A fourth configuration of footwear 400 is depicted in FIGS. 39D and 40D, in which various strands 160 are embedded within non-woven textile 100. In comparison with the thermoplastic polymer material forming non-woven textile 100, many of the materials noted above for strands 160 exhibit greater tensile strength and stretch-resistance. That is, strands 160 may be stronger than non-woven textile 100 and may exhibit less stretch than non-woven textile 100 when subjected to a tensile force. When utilized within footwear 400, therefore, strands 160 may be utilized to impart greater strength and stretch-resistance than non-woven textile 100.

Strands 160 are embedded within non-woven textile 100 or otherwise bonded to non-woven textile 100. Many of strands 160 extend in a direction that is substantially parallel to a surface of non-woven textile 100 for a distance of at least five centimeters. An advantage to forming at least some of strands 160 to extend through the distance of at least five centimeters is that tensile forces upon one area of footwear 400 may be transferred along strands 160 to another area of footwear 400. One group of strands 160 extends from the heel area to the forefoot area of footwear 400 to increase strength and reduce the amount of longitudinal stretch in footwear 400. That is, these strands 160 may impart greater strength and stretch-resistance to footwear 400 in the direction between the heel area and the forefoot area. Another group of strands 160 extends downward from an area that is proximal to lace apertures 423 to an area that is proximal to sole structure 410 in order to enhance the strength and stretch-resistance along the sides of footwear 400. More particularly, tension in lace 422 may place tension in the sides of upper 420. By positioning strands 160 to extend downward along the sides of upper 420, the stretch in upper 420 may be reduced, while increasing the strength. A further group of strands 160 is also located in the heel region to effectively form a heel counter that enhances the stability of footwear 400. Additional details concerning footwear having a configuration that includes strands similar to strands 160 are disclosed in U.S. Patent Application Publication US2007/0271821 to Meschter, which is incorporated by reference herein.

A fifth configuration of footwear 400 is depicted in FIG. 39E. In contrast with the configuration of FIGS. 39D and 40D, various fused regions 104 are formed in non-woven textile 100. More particularly, fused regions 104 are located in the areas of the groups of strands 160 that (a) extend downward from an area that is proximal to lace apertures 423 to an area that is proximal to sole structure 410 and (b) are located in the heel region. At least a portion of strands 160 extend through the fused regions 104, which imparts additional stretch-resistance and greater durability to the areas of upper 420 that incorporate strands 160, thereby providing greater protection to strands 160. Fused regions 104 may have a continuous area of at least one square centimeter, and the thermoplastic polymer material from

filaments 103 within fused regions 104 may be either, filamentous, non-filamentous, or a combination of filamentous and non-filamentous.

A sixth configuration of footwear 400 is depicted in FIG. 39F. Three fused regions 104 in the side of footwear 400 have the shapes of the letters "A," "B," and "C." As discussed above, fused regions 104 may be utilized to modify various properties of non-woven textile 100, including the properties of permeability, durability, and stretch-resistance. In general, various aesthetic properties may also be modified by forming fused regions 104, including the transparency and the darkness of a color of non-woven textile 100. That is, the color of fused regions 104 may be darker than the color of other portions of non-woven textile 100. Utilizing this change in aesthetic properties, fused regions 104 may be utilized to form indicia in areas of footwear 400. That is, fused regions 104 may be utilized to form a name or logo of a team or company, the name or initials of an individual, or an esthetic pattern, drawing, or element in non-woven textile 100. Similarly, fused regions 104 may be utilized to form indicia in shirt 200, pants 300, or any other product incorporating non-woven textile 100.

Fused regions 104 may be utilized to form indicia in the side of footwear 400, as depicted in FIG. 39F, and also in shirt 200, pants 300, or a variety of other products incorporating non-woven textile 100. As a related matter, elements of non-woven textile 100 may be heatbonded or otherwise joined to various products to form indicia. For example, elements of non-woven textile 100 having the shapes of the letters "A," "B," and "C" may be heatbonded to the sides of an article of footwear where the upper is primarily formed from synthetic leather. Given that non-woven textile 100 may be heatbonded to a variety of other materials, elements of non-woven textile 100 may be heatbonded to products in order to form indicia.

Seams similar to seams 106 and 107 may be used to join the elements of non-woven textile 100 in any configuration of footwear 400. Referring to FIG. 39F, a pair of seams 424 extend in a generally diagonal direction through upper 420 to join different elements of non-woven textile 100. Although heatbonding may be utilized to form seams 424, stitching or adhesives may also be utilized. As noted above, sole structure 410 may also have various structures, in addition to the structure that includes chamber 411 and reinforcing structure 412. Referring again to FIG. 39F, a thermoplastic polymer foam material 425 is utilized in place of chamber 411 and reinforcing structure 412, and upper 420 may be heatbonded to foam material 425 to join sole structure 410 to upper 420. Heatbonds may also be utilized when a thermoset polymer foam material is utilized within sole structure 410.

A seventh configuration of footwear 400 is depicted in FIG. 39G, wherein non-woven textile 100 is utilized to form a pair of straps 426 that replace or supplement lace 422. In general, straps 426 permit the wearer to modify dimensions of upper 420 to accommodate the proportions of the foot. Straps 426 also permit the wearer to loosen upper 420 to facilitate entry and removal of the foot from the void. One end of straps 426 may be permanently secured to upper 420, whereas a remainder of straps 426 may be joined with a hook-and-loop fastener, for example. This configuration allows straps to be adjusted by the wearer. As discussed above, non-woven textile 100 may stretch and return to an original configuration after being stretched. Utilizing this property, the wearer may stretch straps 426 to impart ten-

sion, thereby tightening upper **420** around the foot. By lifting straps, the tension may be released to allow entry and removal of the foot.

In addition to forming the portion of upper **420** that extends along and around the foot to form the void for receiving the foot, non-woven textile **100** may also form structural elements of footwear **400**. As an example, a lace loop **427** is depicted in FIG. **41**. Lace loop **427** may be incorporated into upper **420** as a replacement or alternative for one or more of the various lace apertures **423**. Whereas lace apertures **423** are openings through upper **420** that receive lace **422**, lace loop **427** is a folded or overlapped area of non-woven textile **100** that defines a channel through which lace **422** extends. In forming lace loop **427**, non-woven textile **100** is heatbonded to itself at a bond area **428** to form the channel.

Based upon the above discussion, non-woven textile **100** may be utilized in apparel having the configuration of an article of footwear, such as footwear **400**. In order to impart different properties to areas of footwear **400**, various fused regions **104** may be formed, different types of textiles may be incorporated into footwear **400**, and composite elements may be formed by joining one or more of textile **130**, sheet **140**, foam layer **150**, strands **160**, or various other components to non-woven textile **100**. Given that non-woven textile **100** incorporates a thermoplastic polymer material, a heatbonding process may be utilized to join upper **420** to sole structure **410**.

XII—Forming, Texturing, and Coloring the Non-Woven Textile

The configuration of non-woven textile **100** depicted in FIG. **1** has a generally planar configuration. Non-woven textile **100** may also exhibit a variety of three-dimensional configurations. As an example, non-woven textile **100** is depicted as having a wavy or undulating configuration in FIG. **42A**. A similar configuration with squared waves is depicted in FIG. **42B**. As another example, non-woven textile may have waves that extend in two directions to impart an egg crate configuration, as depicted in FIG. **42C**. Accordingly, non-woven textile **100** may be formed to have a variety of non-planar or three-dimensional configurations.

A variety of processes may be utilized to form a three-dimensional configuration in non-woven textile **100**. Referring to FIGS. **43A-43C**, an example of a method is depicted as involving first plate **111** and second plate **112**, which each have surfaces that correspond with the resulting three-dimensional aspects of non-woven textile **100**. Initially, non-woven textile **100** is located between plates **111** and **112**, as depicted in FIG. **43A**. Plates **111** and **112** then translate or otherwise move toward each other in order to contact and compress non-woven textile **100**, as depicted in FIG. **43B**. In order to form the three-dimensional configuration in non-woven textile **100**, heat from one or both of plates **111** and **112** is applied to non-woven textile **100** so as to soften or melt the thermoplastic polymer material within filaments **103**. Upon separating plates **111** and **112**, as depicted in FIG. **43C**, non-woven textile **100** exhibits the three-dimensional configuration from the surfaces of plates **111** and **112**. Although heat may be applied through conduction, radio frequency or radiant heating may also be used. As another example of a process that may be utilized to form a three-dimensional configuration in non-woven textile **100**, filaments **103** may be directly deposited upon a three-dimensional surface in the process for manufacturing non-woven textile **100**.

In addition to forming non-woven textile **100** to have three-dimensional aspects, a texture may be imparted to one or both of surfaces **101** and **102**. Referring to FIG. **44A**, non-woven textile **100** has a configuration wherein first surface **101** is textured to include a plurality of wave-like features. Another configuration is depicted in FIG. **44B**, wherein first surface **101** is textured to include a plurality of x-shaped features. Textures may also be utilized to convey information, as in the series of alpha-numeric characters that are formed in first surface **101** in FIG. **44C**. Additionally, textures may be utilized to impart the appearance of other materials, such as the synthetic leather texture in FIG. **44D**.

A variety of processes may be utilized to impart a texture to non-woven textile **100**. Referring to FIGS. **45A-45C**, an example of a method is depicted as involving first plate **111** and second plate **112**, which each have textured surfaces. Initially, non-woven textile **100** is located between plates **111** and **112**, as depicted in FIG. **45A**. Plates **111** and **112** then translate or otherwise move toward each other in order to contact and compress non-woven textile **100**, as depicted in FIG. **45B**. In order to impart the textured configuration in non-woven textile **100**, heat from one or both of plates **111** and **112** is applied to non-woven textile **100** so as to soften or melt the thermoplastic polymer material within filaments **103**. Upon separating plates **111** and **112**, as depicted in FIG. **45C**, non-woven textile **100** exhibits the texture from the surfaces of plates **111** and **112**. Although heat may be applied through conduction, radio frequency or radiant heating may also be used. As another example of a process that may be utilized to form textured surfaces in non-woven textile **100**, a textured release paper may be placed adjacent to non-woven textile **100**. Upon compressing and heating, the texture from the release paper may be transferred to non-woven textile **100**.

Depending upon the type of polymer material utilized for non-woven textile **100**, a variety of coloring processes may be utilized to impart color to non-woven textile **100**. Digital printing, for example, may be utilized to deposit dye or a colorant onto either if surfaces **101** and **102** to form indicia, graphics, logos, or other aesthetic features. Instructions, size identifiers, or other information may also be printed onto non-woven textile **100**. Moreover, coloring processes may be utilized before or after non-woven textile **100** is incorporated into a product. Other coloring processes, including screen printing and laser printing, may be used to impart colors or change the overall color of portions of non-woven textile **100**.

Based upon the above discussion, three-dimensional, textured, and colored configurations of non-woven textile **100** may be formed. When incorporated into products (e.g., shirt **200**, pants **300**, footwear **400**), these features may provide both structural and aesthetic enhancements to the products. For example, the three-dimensional configurations may provide enhanced impact force attenuation and greater permeability by increasing surface area. Texturing may increase slip-resistance, as well as providing a range of aesthetic possibilities. Moreover, coloring non-woven textile **100** may be utilized to convey information and increase the visibility of the products.

XIII—Stitch Configurations

Stitching may be utilized to join an element of non-woven textile **100** to other elements of non-woven textile **100**, other textiles, or a variety of other materials. As discussed above, stitching may be utilized alone, or in combination with heatbonding or adhesives to join non-woven textile **100**.

Additionally, stitching, embroidery, or stitchbonding may be used to form a composite element and provide structural or aesthetic elements to non-woven textile 100. Referring to FIG. 46A, a thread 163 is stitched into non-woven textile 100 to form a plurality of parallel lines that extend across non-woven textile 100. Whereas strands 160 extend in a direction that is substantially parallel to either of surfaces 101 and 102, thread 163 repeatedly extends between surfaces 101 and 102 (i.e., through non-woven textile 100) to form a stitched configuration. Like strand 160, however, thread 163 may impart stretch-resistance and enhance the overall strength of non-woven textile 100. Thread 163 may also enhance the overall aesthetics of non-woven textile 100. When incorporated into products having non-woven textile 100 (e.g., shirt 200, pants 300, footwear 400), thread 163 may provide both structural and aesthetic enhancements to the products.

Thread 163 may be stitched to provide a variety of stitch configurations. As an example, thread 163 has the configuration of a zigzag stitch in FIG. 46B and the configuration of a chain stitch in FIG. 46C. Whereas thread 163 forms generally parallel lines of stitches in FIGS. 46A and 46B, the stitches formed by thread 163 are non-parallel and cross each other in FIG. 46C. Thread 163 may also be embroidered to form various configurations, as depicted in FIG. 46D. Stitching may also be utilized to form more complicated configurations with thread 163, as depicted in FIG. 46E. Non-woven textile 100 may also include various fused regions 104, with the stitches formed by thread 163 extending through both fused and non-fused areas of non-woven textile 100, as depicted in FIG. 46F. Accordingly, thread 163 may be utilized to form a variety of stitch types that may impart stretch-resistance, enhance strength, or enhance the overall aesthetics of non-woven textile 100. Moreover, fused regions 104 may also be formed in non-woven textile 100 to modify other properties.

XIV—Adhesive Tape

An element of tape 170 is depicted in FIGS. 47 and 48 as having the configuration of a composite elements that includes non-woven textile 100 and an adhesive layer 171. Tape 170 may be utilized for a variety of purposes, including as packing tape, as painting tape, or as medical or therapeutic tape. An advantage to utilizing tape 170 as medical or therapeutic tape, for example, is that the permeability and stretch-resistance, among other properties, may be controlled. With regard to permeability, when tape 170 is adhered to the skin of an individual (i.e., with adhesive layer 171), air and water may pass through tape 170 to impart breathability and allow the underlying skin to be washed or otherwise cleansed. Tape 170 may also resist stretch when adhered to the skin of the individual to provide support for surrounding soft tissue. Examples of suitable materials for adhesive layer 171 include any of the conventional adhesives utilized in tape-type products, including medical-grade acrylic adhesive.

A variety of structures that be utilized to impart specific degrees of stretch-resistance to tape 170. As an example, the stretch-resistance to tape 170 may be controlled through the thickness of non-woven textile 100 or the materials forming filaments 103 in non-woven textile 100. Referring to FIG. 49A, fused regions 104 may also be formed in tape 170 to control stretch-resistance. Strands 160 may also be incorporated into tape 170 to impart a higher level of stretch-resistance, as depicted in FIG. 49B. Additionally, some

configurations of tape 170 may include both fused regions 104 and strands 160, as depicted in FIG. 49C.

XV—Recycling the Non-Woven Textile

Filaments 103 of non-woven textile 100 include a thermoplastic polymer material. In some configurations of non-woven textile 100, a majority or substantially all of filaments 103 are formed from the thermoplastic polymer material. Given that many configurations of shirt 200 and pants 300 are primarily formed from non-woven textile 100, then a majority or substantially all of shirt 200 and pants 300 are formed from the thermoplastic polymer material. Similarly, a relatively large percentage of footwear 400 may also be formed from thermoplastic polymer materials. Unlike many articles of apparel, the materials of shirt 200, pants 300, and footwear 400 may be recycled following their useful lives.

Utilizing shirt 200 as an example, the thermoplastic polymer material from shirt 200 may be extracted, recycled, and incorporated into another product (e.g., apparel, container, upholstery) as a non-woven textile, a polymer foam, or a polymer sheet. This process is generally shown in FIG. 50, in which shirt 200 is recycled in a recycling center 180, and thermoplastic polymer material from shirt 200 is incorporated into one or more of another shirt 200, pants 300, or footwear 400. Moreover, given that a majority or substantially all of shirt 200 is formed from the thermoplastic polymer material, then a majority or substantially all of the thermoplastic polymer material may be utilized in another product following recycling. Although the thermoplastic polymer material from shirt 200 was initially utilized within non-woven textile 100, for example, the thermoplastic polymer material from shirt 200 may be subsequently utilized in another element of non-woven textile 100, another textile that includes a thermoplastic polymer material, a polymer foam, or a polymer sheet. Pants 300, footwear 400, and other products incorporating non-woven textile 100 may be recycled through a similar process. Accordingly, an advantage of forming shirt 200, pants 300, footwear 400, or other products with the various configurations discussed above relates to recyclability.

XVI—Conclusion

Non-woven textile 100 includes a plurality of filaments 103 that are at least partially formed from a thermoplastic polymer material. Various fused regions 104 may be formed in non-woven textile 100 to modify properties that include permeability, durability, and stretch-resistance. Various components (textiles, polymer sheets, foam layers, strands) may also be secured to or combined with non-woven textile 100 (e.g., through heatbonding) to impart additional properties or advantages to non-woven textile 100. Moreover, fused regions 104 and the components may be combined to impart various configurations to non-woven textile 100.

The invention is disclosed above and in the accompanying figures with reference to a variety of configurations. The purpose served by the disclosure, however, is to provide an example of the various features and concepts related to the invention, not to limit the scope of the invention. One skilled in the relevant art will recognize that numerous variations and modifications may be made to the configurations described above without departing from the scope of the present invention, as defined by the appended claims.

What is claimed:

1. An article of footwear, comprising:

an upper comprising a textile that defines at least a top area, a rear area, and a lateral area of the upper, wherein the textile includes a plurality of filaments, wherein the textile comprises:

(i) a first fused region forming a heel counter at the rear area;

(ii) a second fused region at the lateral area;

(iii) a plurality of lace apertures formed adjacent to the lateral area; and

(iv) a tongue positioned adjacent to the top area;

a sole structure extending between an upper surface and a lower surface, the sole structure comprising a foam, the upper surface of the sole structure being thermally coupled to the upper;

an outsole coupled to the lower surface of the sole structure on an opposite side of the sole structure relative to the upper;

a plurality of apertures at least partially formed in the sole structure;

and a lace coupled to the upper at the textile and received through the plurality of lace apertures;

wherein each of the plurality of filaments of the textile, the foam of the sole structure, the outsole, and the lace comprises a thermoplastic polymer material such that substantially all of the article of footwear comprises the thermoplastic polymer material, wherein the thermoplastic polymer material comprises a thermoplastic polyamide, and at least a portion of the thermoplastic polyamide comprises a material extracted or recycled from another article of footwear;

and wherein the plurality of filaments positioned at the first fused region and the second fused region are fused together to form non-filamentous portions along the upper, and the textile has a smaller thickness at the first fused region and/or the second fused region relative to remaining regions of the textile.

2. The article of footwear of claim 1, wherein the non-filamentous portions are configured to increase a stretch-resistance of the textile at the first fused region and the second fused region relative to remaining regions of the textile.

3. The article of footwear of claim 1, wherein the non-filamentous portions are configured to increase a durability of the textile at the first fused region and the second fused region relative to remaining regions of the textile.

4. The article of footwear of claim 1, wherein the non-filamentous portions are configured to decrease a permeability of the textile at the first fused region and the second fused region relative to remaining regions of the textile.

5. The article of footwear of claim 1, wherein the thermoplastic polyamide constitutes at least ninety-five percent of the article of footwear.

6. An article of footwear, comprising:

an upper comprising a textile including a plurality of filaments that compositionally comprise a thermoplastic polymer material;

wherein the textile comprises:

a first set of fused regions positioned along a rear area of the upper, the first set of fused regions forms a heel counter at the rear area that enhances a stretch-resistance of the upper at the rear area; and

a second set of fused regions positioned along a side area of the upper, the upper at the second set of fused regions has a smaller thickness than adjacent regions at the side area;

a sole structure comprising a foam element that comprises the thermoplastic polymer material, the sole structure is thermally coupled to the upper; and

an outsole coupled to the sole structure on an opposing side from the upper, the outsole comprises the thermoplastic polymer material;

wherein the thermoplastic polymer material comprises a thermoplastic polyamide such that at least ninety percent of the article of footwear by weight comprises the thermoplastic polyamide.

7. The article of footwear of claim 6, wherein the article of footwear by weight that comprises the thermoplastic polyamide equals at least ninety-five percent.

8. The article of footwear of claim 6, further comprising a lace coupled to the upper through a plurality of apertures formed through the textile, wherein the lace comprises the thermoplastic polymer material.

9. The article of footwear of claim 6, the textile further comprising a third set of fused regions positioned along a forefoot area of the upper, wherein the third fused region is configured to increase a durability of the textile at the forefoot area and resist abrasion of the textile during use of the article of footwear.

10. The article of footwear of claim 9, the textile further comprising a fourth set of fused regions positioned around an ankle opening of the upper, the fourth set of fused regions is configured to increase a stretch-resistance of the textile and securely retain a foot received within the article of footwear through the ankle opening.

11. The article of footwear of claim 6, wherein at least a portion of the thermoplastic polyamide comprises a material extracted or recycled from a mixture of another article of footwear and a shirt.

12. The article of footwear of claim 6, further comprising a plurality of apertures formed through a surface of the sole structure.

13. The article of footwear of claim 6, wherein the plurality of filaments positioned at the first fused region and the second fused region are fused together to form non-filamentous portions along the upper.

14. An article of footwear, comprising:

an upper defined by a textile that comprises a plurality of filaments formed of a first thermoplastic polymer material, wherein the textile comprises a first set of fused regions positioned at a rear of the upper and a second set of fused regions positioned at a side of the upper, the textile has a smaller thickness at the first set of fused regions and/or the second set of fused regions relative to remaining regions of the textile;

a sole structure defined by a foam layer that is formed of a second thermoplastic polymer material, the sole structure is coupled to the upper without an adhesive or stitching positioned between the sole structure and the upper;

an outsole coupled to the sole structure opposite from the upper, wherein the outsole is formed of a third thermoplastic polymer material; and

a lace formed of a fourth thermoplastic polymer material, wherein the lace is coupled to the upper and extends at least partially through the textile;

wherein the first thermoplastic polymer material, the second thermoplastic polymer material, the third thermoplastic polymer material, and the fourth thermoplastic polymer material comprise a single material, and a percentage of a combined mass of the upper, the sole structure, the outsole, and the lace that are formed of the single material equals at least ninety percent.

15. The article of footwear of claim 14, wherein the first set of fused regions comprises a heel counter configured to increase a stretch-resistance of the textile.

16. The article of footwear of claim 15, wherein the heel counter is configured to inhibit movement of a foot received within the article of footwear relative to the upper, the sole structure, and the outsole during use of the article of footwear. 5

17. The article of footwear of claim 14, wherein the first set of fused regions comprises one or more strands extending along the upper from the rear towards the side. 10

18. The article of footwear of claim 17, wherein the one or more strands are configured to increase a tensile strength of the textile and transfer tensile forces applied to at least one of the rear or the side to the other. 15

19. The article of footwear of claim 18, wherein the one or more strands are embedded or thermally bonded to the textile, and at least partially define a heel counter of the upper.

20. The article of footwear of claim 14, wherein a transparency or a color of the textile on at least one of the first set of fused regions and the second set of fused regions varies relative to one or more remaining regions of the upper. 20

* * * * *

25